

EMC TEST REPORT

FCC 47 CFR Part 15B
Industry Canada RSS-Gen

Electromagnetic compatibility - Unintentional radiators

Report Reference No. : G0M-1408-4062-EF0315B-V01

Testing Laboratory : Eurofins Product Service GmbH

Address : Storkower Str. 38c
15526 Reichenwalde
Germany

Accreditation :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01
FCC Filed Test Laboratory, Reg.-No.: 96970
IC OATS Filing assigned code: 3470A

Applicant's name : Sonetics Corporation

Address : 7340 SW Durham Road
OR 97224 Portland
USA

Test specification:

Standard : 47 CFR Part 15 Subpart B
RSS-Gen, Issue 3, 2010-12
ANSI C63.4:2009

Equipment under test (EUT):

Product description	Communication Headsets	
Model No.	APX375	
Additional Models	None	
Hardware version	APX375 Rev A (See Additional Information)	
Firmware / Software version	Revision A (See attached list)	
	FCC-ID: V9N950325400V1	FCC-ID: V9N950325400V1

Test result : **Passed**

Test Report No.: G0M-1408-4062-EF0315B-V01

Eurofins Product Service GmbH
Storkower Str. 38c, D-15526 Reichenwalde, Germany

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2014-09-22

Date (s) of performance of tests: 2014-11-18 – 2014-11-20

Compiled by: Jens Marquardt

Tested by (+ signature).....: Jens Marquardt



Approved by (+ signature): Marcus Klein



Date of issue: 2014-12-19

Total number of pages: 31

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.

Additional comments:

Additional comments:

Page 1 of 2



Subject: Hardware Software/Firmware Declaration
Date: December 01, 2014
Model Number: APX379 DECT & Bluetooth Headset, Revision A

The APX379 Headset shares the same common hardware and software as represented in table A

Muff Features	300 Series Model Number		
	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	X	X	X
Identical Materials and Headset Muff Design	X	X	X
Waterproof Design	X	X	X
Wired Aux Line In	X	X	X
Internal Sound Dosimeter	X	X	X
Stereo Listen Thru	X	X	X
Automatic Noise Gate	X	X	X
Passive Noise Reduction	X	X	X
Automatic Active Noise Reduction	X	X	X
Voice Prompts	X	X	X
Wireless Bluetooth (Line in)	X		X
Wireless DECT (2 way radio)	X	X	

Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing, has the following firmware and hardware installed.

APX379 DECT & Bluetooth Headset Revision A (No Headband P/N: 950-3257-00 Revision A)					
Item Reference	Part Number	Description	Qty	BOQ Version Revision	Firmware Radio Related?
10	490-4006-00	Firmware, QEN-3 BOOT LOADER	1	A	No
15	490-4016-00	Firmware, APX379, DECT, BT	1	A	Yes
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes
25	490-4012-00	Firmware, RTX1040 RADIO RTX Release Ver 7.0	1	A	Yes
35	490-4015-00	Firmware, VOICEPROMPTS_PP_ENGLISH-	1	A	No
40	490-4017-00	Firmware, APX379, CONFIGURATION	1	A	No
5	121-4038-G1	PCBA, APX379, HS, MAIN BOARD	1	G	Hardware
0	121-4031-J1	PCBA, HS-7X, BATTERY BOARD	1	J	Hardware

The above is declares accurate and true as of 12 01, 2014.
Sincerely,



Michael Heade
Quality Assurance Engineer
Regulatory & Product Compliance Engineer
Sonetics Corporation
Phone: 800-833-4558 ext. 122
Direct: 503-608-3422
Email: michael.heade@soneticscorp.com
www.soneticscorp.com
www.firecom.com

7340 SW Durham Road • Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943

Page 1 of 2



Subject: Hardware Software/Firmware Declaration
Date: December 01, 2014
Model Number: APX375 Bluetooth Headset, Revision A

The APX375 and APX379 Headsets share the same common hardware and software as represented in table A and as described as Hardware and Software Differences below:

Muff Features	300 Series Model Number		
	APX379	APX377	APX375
Convertible Design: Overhead and Underhelmet	X	X	X
Identical Materials and Headset Muff Design	X	X	X
Waterproof Design	X	X	X
Wired Aux Line In	X	X	X
Internal Sound Dosimeter	X	X	X
Stereo Listen Thru	X	X	X
Automatic Noise Gate	X	X	X
Passive Noise Reduction	X	X	X
Automatic Active Noise Reduction	X	X	X
Voice Prompts	X	X	X
Wireless Bluetooth (Line in)	X		X
Wireless DECT (2 way radio)	X	X	

Sonetics Corporation hereby declares that the above referenced model, submitted to Eurofins for FCC and IC testing has the following firmware installed:

APX375 Bluetooth (only) Headset Revision A		(No Headband P/N: 950-3254-00 Revision A)	Qty	BOM Version Revision	Firmware Radio Related?
Item Reference	Part Number	Description			
10	490-4006-00	Firmware, GEN-3 BOOT LOADER	1	A	No
15	490-4020-00	Firmware, APX375, BLUETOOTH ONLY	1	A	Yes
20	490-4009-00	Firmware, BLUETOOTH CONFIG	1	A	Yes
25	490-4015-00	Firmware, VOICEPROMPTS, PP, ENGLISH-	1	A	Yes
30	490-4021-00	FW, APX375, CONFIGURATION	1	A	No
5	121-4036-G1	PCBA, APX375, HS, MAIN BOARD	1	G	Hardware
0	121-4031-J1	PCBA, HS-7X, BATTERY BOARD	1	J	Hardware

Hardware and Software Differences: between APX375 and APX379:

The APX 375 is the same physically as APX 379 with the exception that the 490-4012-00-00 and 490-4014-00 DECT Firmware is not loaded and the 490-4020-00 firmware which replaces the 490-0016-00 firmware is the same but deletes un-used DECT menus which are not used in the APX375.

The 121-4036-G1 Mainboard in the APX375 is physically the same PCBA as the APX379 except the following DECT related components are omitted from the PCBA: C1, C2, C3, C4, C5, C6, C9, C10, C13, C15, C16, C17, C19, C20, C23, C24, C26, C27, C106, C166, E1, J1, J6, J10, L1, L2, L6, L10, L14, L16, L86, L90, R5, R19, R20, R23, R24, R27, R28, R39, R40, R43, R54, R72, R74, R75, R78, R82, R138, R169, R286, R290, S1, U1, U7, U10, U11

7340 SW Durham Road • Portland, Oregon U.S.A. 97224 • 503/684-7080 • Fax 503/620-2943

Test Report No.: G0M-1408-4062-EF0315B-V01

Eurofins Product Service GmbH
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

Page 4 of 31

Version History

Version	Issue Date	Remarks	Revised by
V01	2014-12-17	Initial Release	

REPORT INDEX

1 EQUIPMENT (TEST ITEM) DESCRIPTION	7
1.1 Photos – Equipment external	8
1.2 Photos – Equipment internal	10
1.3 Photos – Test setup	12
1.4 Supporting Equipment Used During Testing	13
1.5 Input / Output Ports	13
1.6 Operating Modes and Configurations	14
1.7 Test Equipment Used During Testing	15
1.8 Sample emission level calculation	16
2 RESULT SUMMARY	17
3 TEST CONDITIONS AND RESULTS	18
3.1 Test Conditions and Results – Radiated emissions	18
3.2 Test Conditions and Results – AC power line conducted emissions	28

1 Equipment (Test item) Description

Description	Communication Headsets
Model	APX375
Additional Models	None
Serial number	None
Hardware version	APX375 Rev A (See Additional Information)
Software / Firmware version	Revision A (See Additional Information)
FCC-ID	V9N950325400V1
IC	7895A-95032540
Power supply	120 VAC (AC/DC adapter)
AC/DC-Adaptor	Model : YMC06-3U Manufacturer : Ji Ming Input : 110 - 240 VAC 50/60 Hz Output : 12VDC / 0.5A
Manufacturer	Sonetics Corporation 7340 SW Durham Road OR 97224 Portland USA
Highest emission frequency	Fmax [MHz] = 2483.5
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
			None	

***Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or
 SIM : Simulator (Not Subjected to Test)
 CABL : Connecting cables

1.5 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	DC Power	DC	-	no	
2					
3					

***Note:** Use the following abbreviations:

AC : AC power port
 DC : DC power port
 N/E : Non electrical
 I/O : Signal input or output port
 TP : Telecommunication port

1.6 Operating Modes and Configurations

Mode #	Description
1	charging

Configuration #	EUT Configuration
1	EUT connected to AC/DC adapter

1.7 Test Equipment Used During Testing

Measurement Software					
Description	Manufacturer	Name		Version	
EMC Test Software	Dare Instruments	Radimation		2014.1.15	

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2014-01	2015-01

Conducted emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH3-Z5	EF00036	2012-11	2014-11
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

1.8 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{lll} \text{Reading} + \text{AF} = & \text{Net Reading} : & \text{Net reading} - \text{FCC limit} = \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} + 26 \text{ dB} = & 47.5 \text{ dB}\mu\text{V/m} : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} = -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	PASS	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen			Verdict: PASS			
Laboratory Parameters:	Required prior to the test		During the test			
Ambient Temperature	15 to 35 °C		23°C			
Relative Humidity	30 to 60 %		43%			
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	Fmax [MHz] = 2483.5					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 13 GHz					
Operating mode configuration	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dB μ V/m]	Result	Average [dB μ V/m]	Result	Peak [dB μ V/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Test Procedure:

The test site is in accordance with ANSI C63.4:2009 requirements and is listed by FCC.
The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Rohde & Schwarz HK 116, Horizontal
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 8

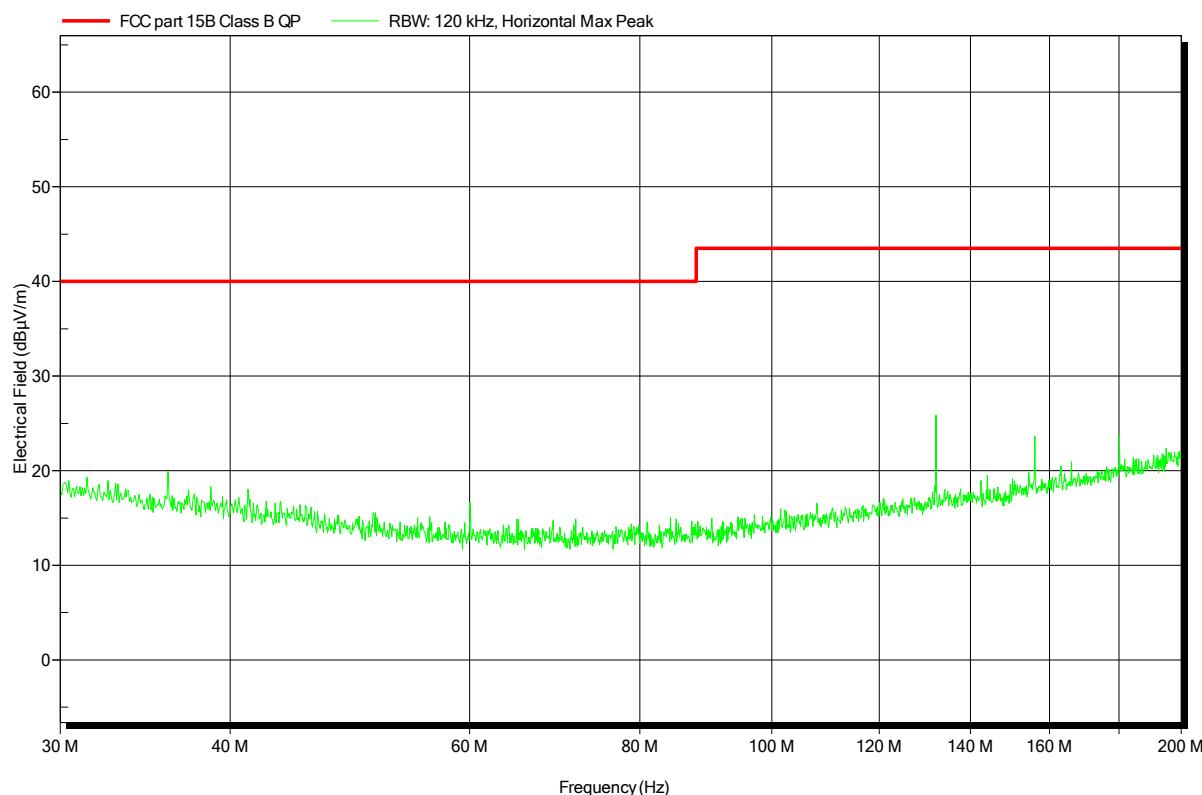


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Rohde & Schwarz HK 116, Vertical
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 7

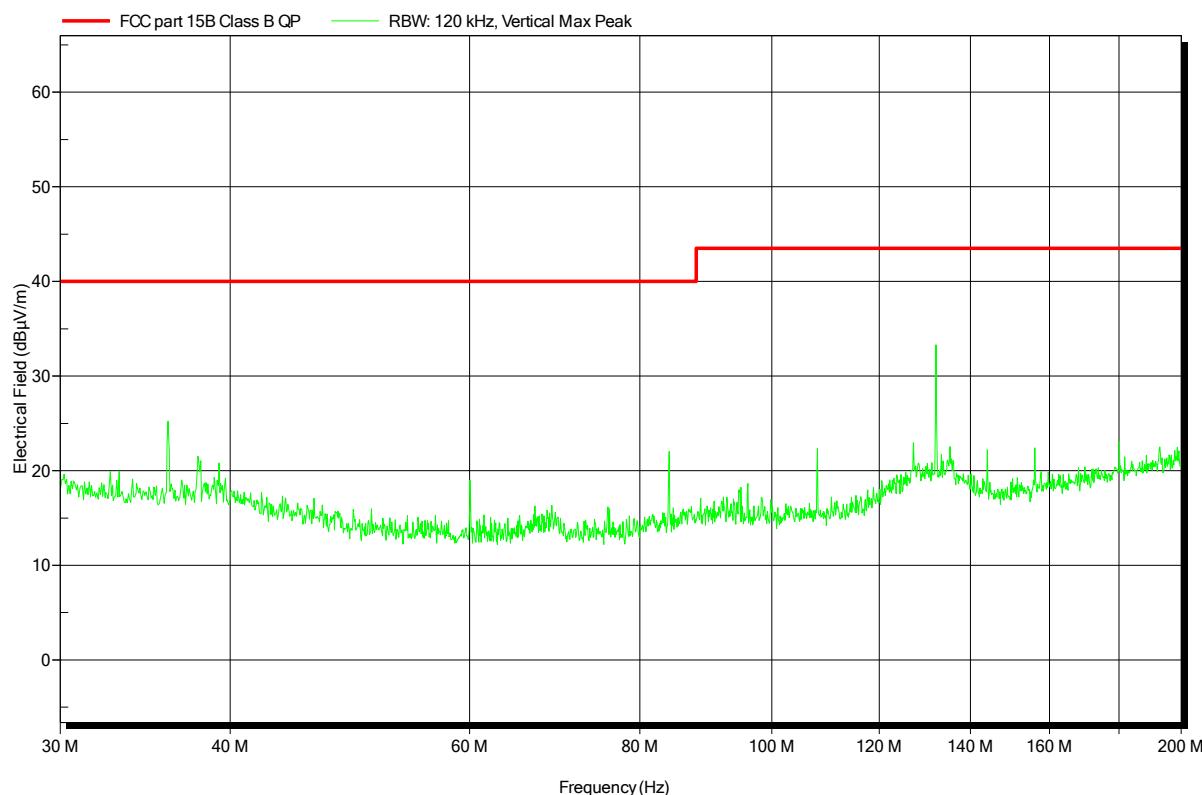


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Rohde & Schwarz HL 223, Horizontal
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 9

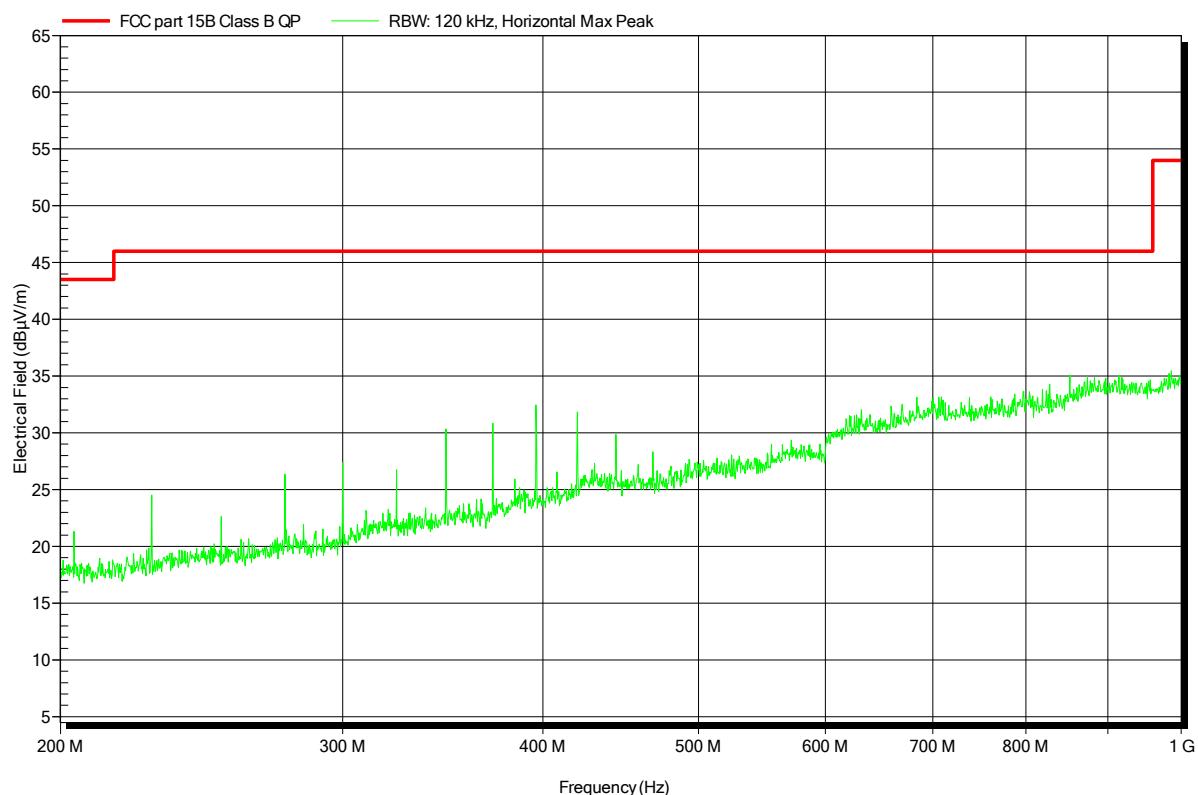


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Rohde & Schwarz HL 223, Vertical
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 10

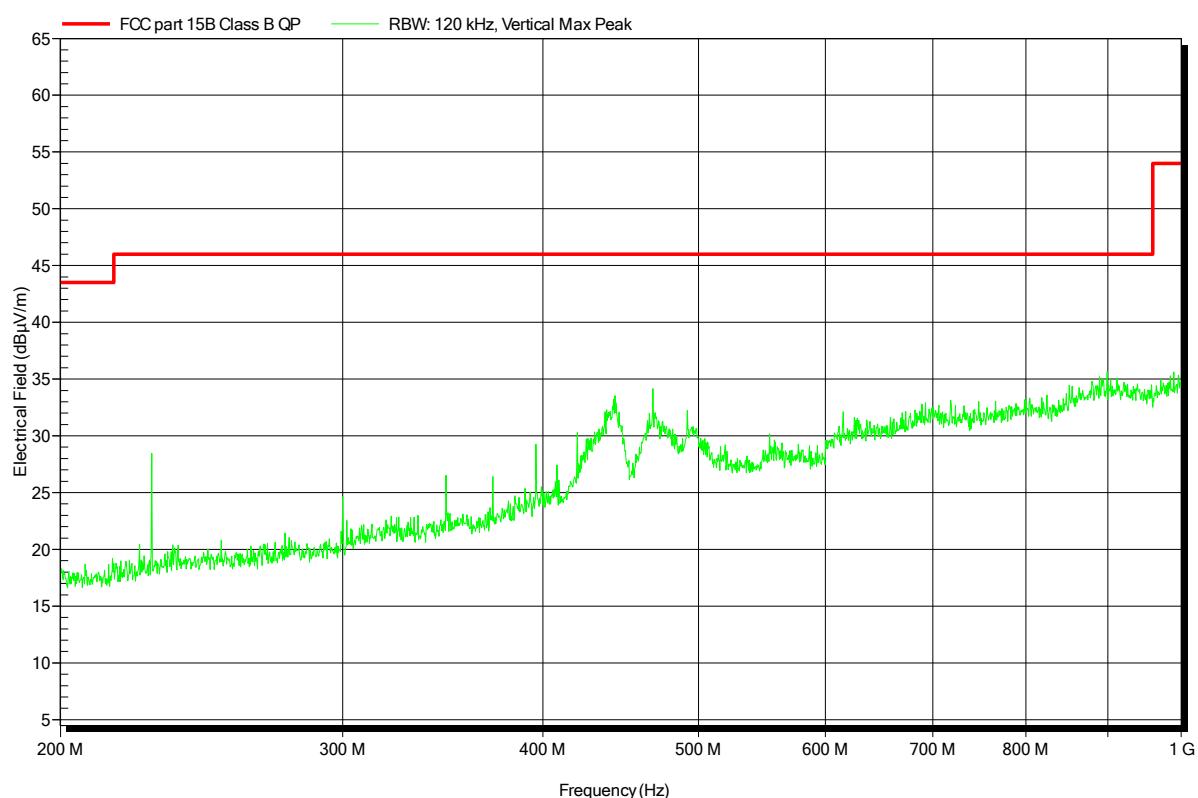


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 20

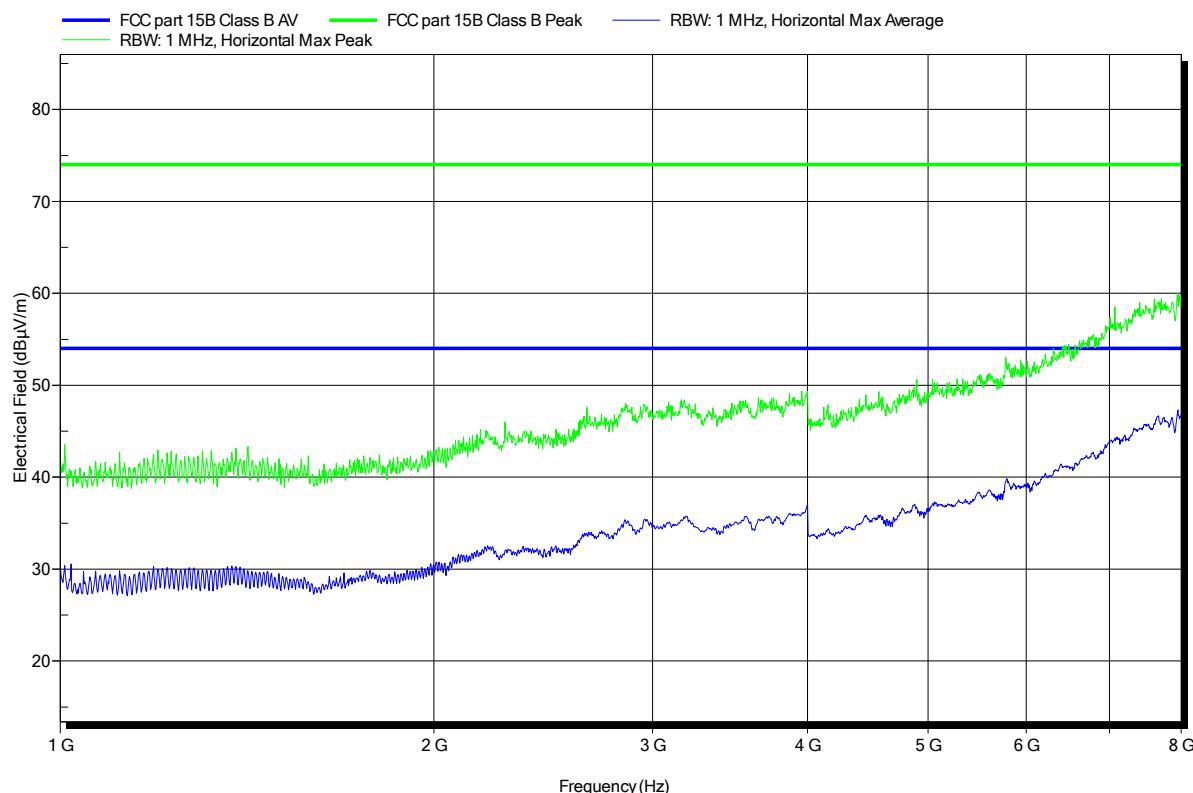


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 19

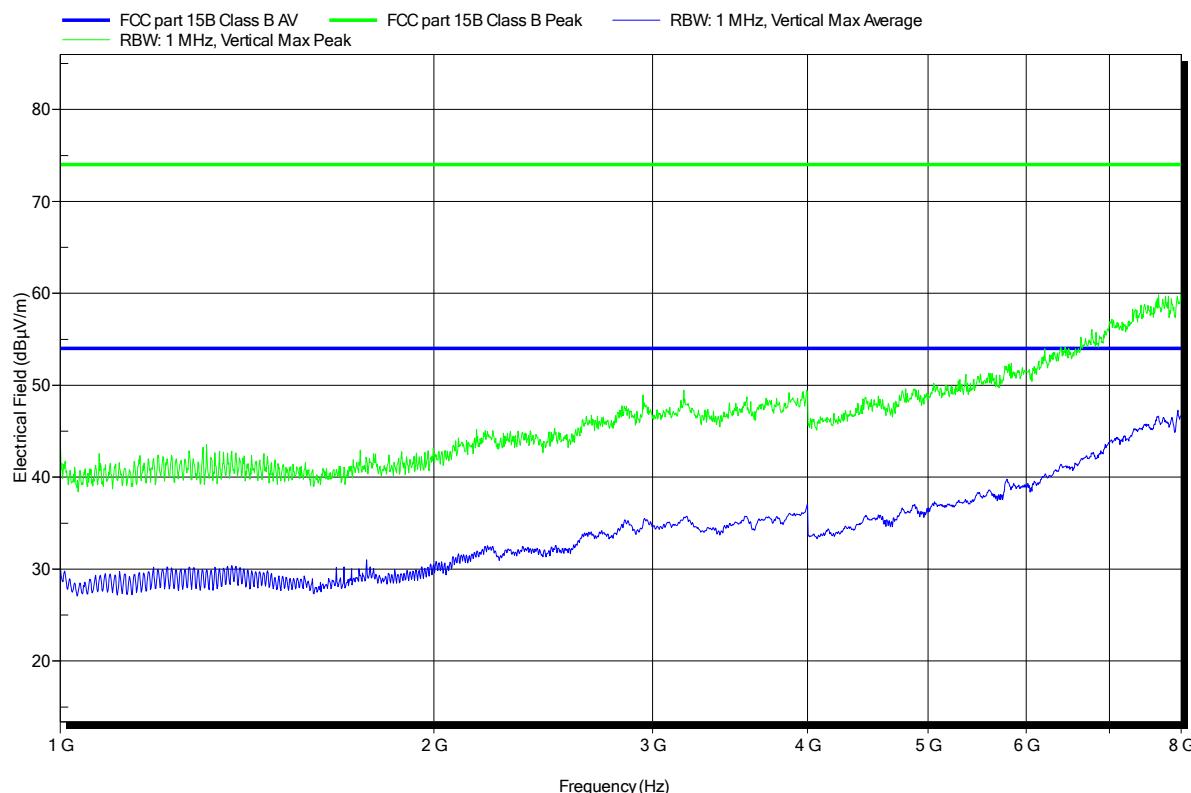


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Schwarzbeck BBHA 9120D, Horizontal
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 26

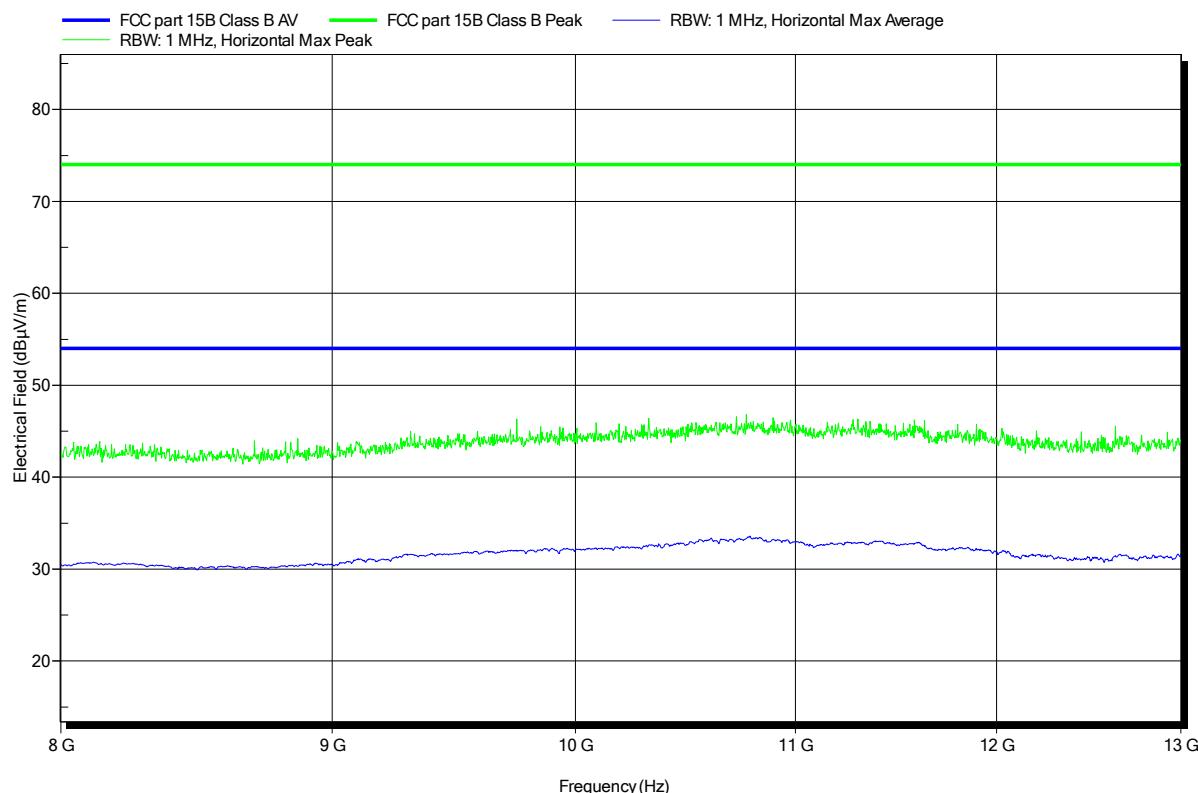


Spurious emissions under normal conditions according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
Antenna: Schwarzbeck BBHA 9120D, Vertical
Measurement distance: 3m
Mode: charging
Test Date: 2014-11-20
Note:

Index 25

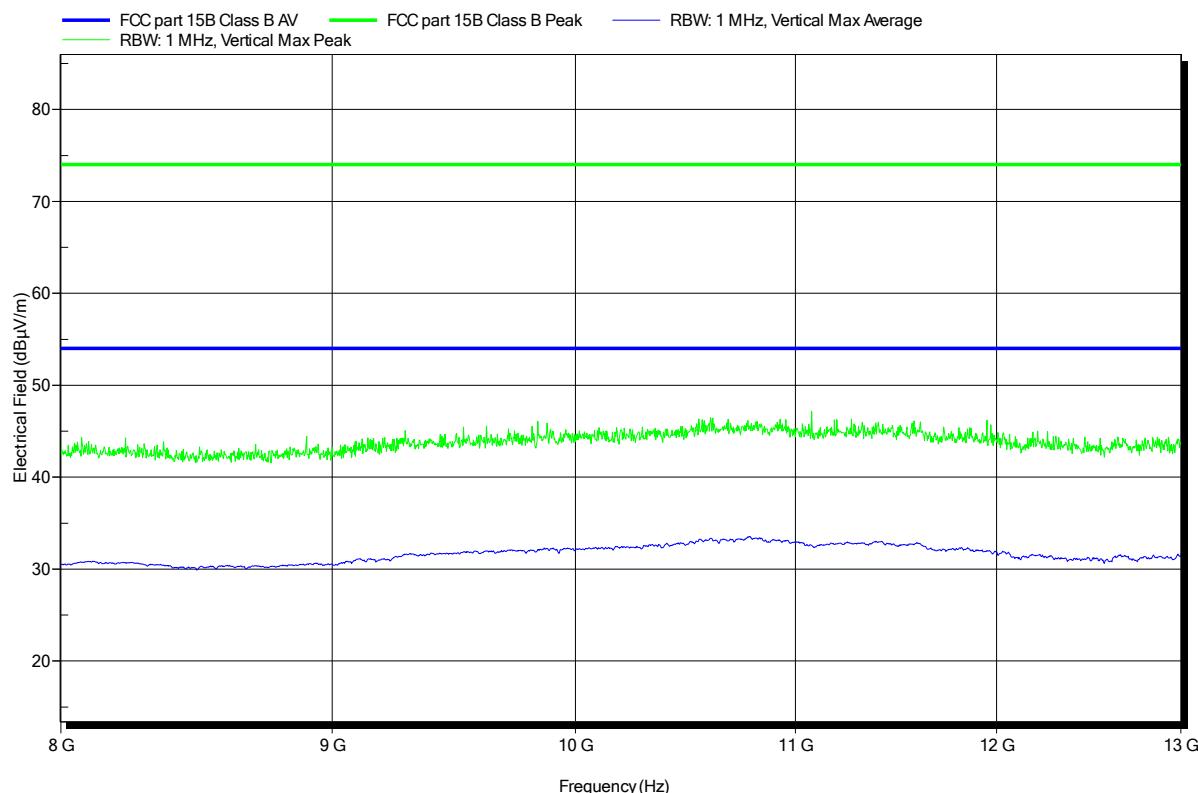

3.2 Test Conditions and Results – AC power line conducted emissions

Conducted emissions acc. FCC 47 CFR 15.107 / IC RSS-Gen			Verdict: PASS	
Laboratory Parameters:	Required prior to the test	During the test		
Ambient Temperature	15 to 35 °C	23°C		
Relative Humidity	30 to 60 %	43%		
Test according referenced standards	Reference Method			
	ANSI C63.4			
Fully configured sample scanned over the following frequency range	Frequency range			
	0.15 MHz to 30 MHz			
Sample is tested with respect to the requirements of the equipment class	Equipment class			
	Class B			
Points of Application	Application Interface			
AC Mains	LISN			
Operating mode and configuration	1			
Limits and results Class B				
Frequency [MHz]	Quasi-Peak [dB μ V]	Result	Average [dB μ V]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

Test Procedure:


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
 EUT Name: Communication Headsets
 Model: APX375
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Marquardt
 Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
 LISN: ESH2-Z5 N
 Mode: charging
 Test Date: 2014-11-20
 Note:

Index 21

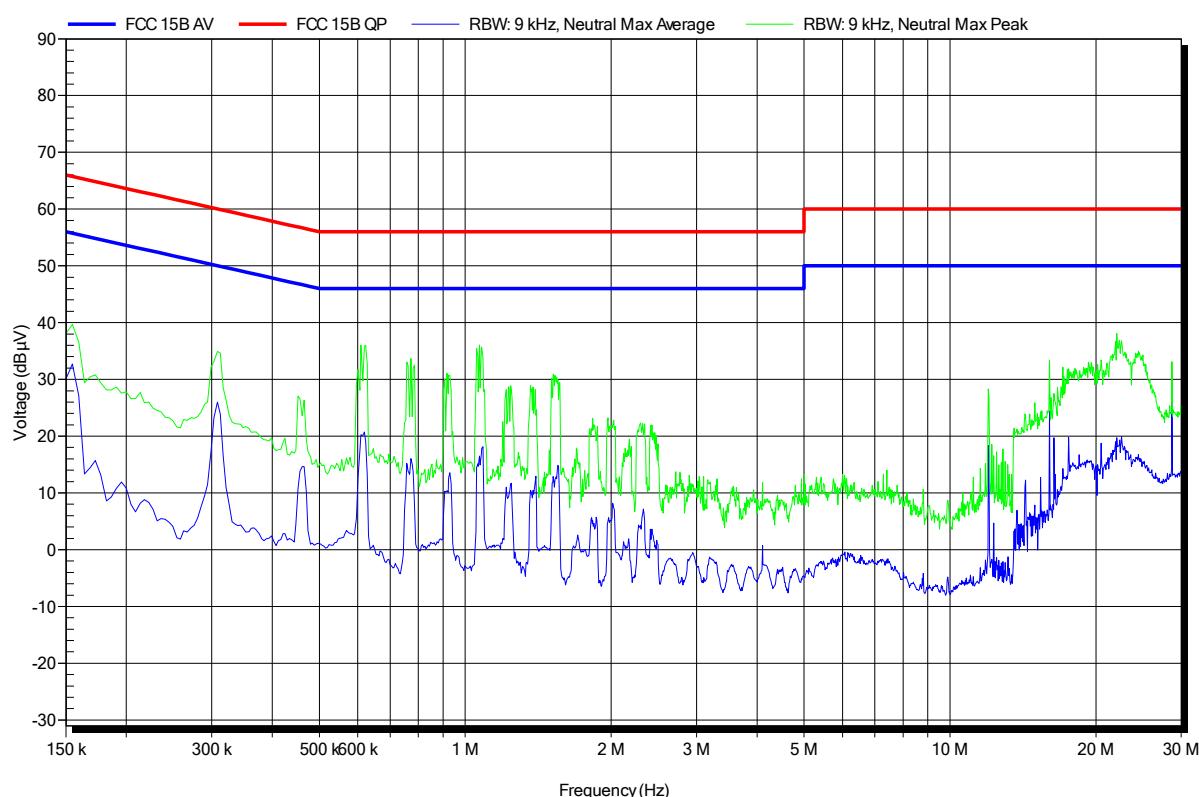

EMI voltage test in the ac-mains according to FCC 15B

Project number: G0M-1408-4062

Manufacturer: Sonetics Corporation
EUT Name: Communication Headsets
Model: APX375
Test Site: Eurofins Product Service GmbH
Operator: Mr. Marquardt
Test Conditions: $T_{nom}: 23^{\circ}\text{C}$, $U_{nom}: 120 \text{ VAC}$ (AC/DC adapter)
LISN: ESH2-Z5 L
Mode: charging
Test Date: 2014-11-20
Note:

Index 22

