



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*
3162 BELICK STREET • SANTA CLARA, CA 95054-2401 • PHONE (408) 748-3585 • FAX (510) 489-6372

SRI International
333 Ravenswood Avenue
BLDG 320-81
Menlo Park, CA 94025-3493

April 17, 2008

Dear Patrick Young,

Enclosed is the EMC test report for compliance testing of the SRI International, PMX-3.0, tested to the requirements of Title 47 of the Code of Federal Regulations (CFR), Part 15 Subpart B for a Class A Digital Device.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Kanesa Pogi
Documentation Department

Reference: (SRI International\EMCS80811-FCC)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*
3162 BELICK STREET • SANTA CLARA, CA 95054-2401 • PHONE (408) 748-3585 • FAX (510) 489-6372

**Electromagnetic Compatibility
Test Report**

For the

**SRI International
PMX-3.0**

Tested under

**Title 47 of the Code of Federal Regulations (CFR),
Part 15 Subpart B
for a Class A Digital Device**

MET Report: EMCS80811-FCC

April 17, 2008

Prepared For:

**SRI International
333 Ravenswood Avenue
BLDG 320-81
Menlo Park, CA 94025-3493**

**Prepared By:
MET Laboratories, Inc.**
3162 Belick Street
Santa Clara, CA 95054



Electromagnetic Compatibility Test Report

For the

**SRI International
PMX-3.0**

Tested under

**Title 47 of the Code of Federal Regulations (CFR),
Part 15 Subpart B
for a Class A Digital Device**

MET Report: EMCS80811-FCC

Edmund Cruz
Project Engineer, Electromagnetic Compatibility Lab

Kanesa Pogi
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the applicable limits. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Title 47 of the CFR, Part 15, Subpart B for a Class A Digital Device under normal use and maintenance.

Tony Permsombut,
Manager, Electromagnetic Compatibility Lab



Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	April 17, 2008	Initial Issue.



Table of Contents

1.0 Testing Summary	1
2.0 Equipment Configuration.....	2
2.1 Overview	2
2.2 Test Site	2
2.3 Description of Test Sample	2
2.4 Equipment Configuration.....	3
2.5 Support Equipment	3
2.6 Ports and Cabling Information	4
2.7 Mode of Operation	6
2.8 Method of Monitoring EUT Operation	6
2.9 Modifications	6
2.9.1 Modifications to EUT	6
2.9.2 Modifications to Test Standard	6
2.10 Disposition of EUT	6
3.0 Electromagnetic Compatibility Emission Criteria	7
3.1 Conducted Emission Limits	7
3.2 Radiated Emission Limits	13
4.0 Test Equipment	19
5.0 Compliance Information.....	20
5.1 Verification Information	20
5.2 Label and User’s Manual Information	25



List of Tables

Table 1. Summary of Test Results	1
Table 2. EUT Overview	2
Table 3. Equipment Configuration	3
Table 4. Support Equipment.....	3
Table 5. Ports and Cabling Information	4
Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b).....	7
Table 7. Conducted Emissions - Voltage, AC Power, Phase Line 120Vac with Shielding.....	8
Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line 120Vac with Shielding.....	8
Table 9. Conducted Emissions - Voltage, AC Power, Phase Line 120Vac without Shielding	10
Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line 120Vac without Shielding	10
Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	13
Table 12. Radiated Emissions Limits Test Results, 1GHz-3GHz with Shielding.....	14
Table 13. Radiated Emissions Limits Test Results, 30 MHz to 1GHz PMX 3.0 with Shielding	15
Table 14. Radiated Emissions Limits Test Results, 1GHz to 3GHz without Shielding	16
Table 15. Radiated Emissions Limits Test Results, 30 MHz to 1GHz PMX 3.0 without Shielding.....	17
Table 16. Test Equipment	19

List of Figures

Figure 1. Block Diagram of Test Configuration.....	5
--	---

List of Photographs

Photograph 1. Conducted Emissions Test Setup.....	12
Photograph 2. Radiated Emission Limits Test Setup	18



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
ANSI	American National Standards Institute
Cal	Calibration
d	Measurement Distance
dB	Deci Bels
dBΦV	Deci-Bels above one micro Volt
dBΦV/m	Deci-Bels above one micro Volt per meter
DC	Direct Current
DCF	Distance Correction Factor
E	Electric Field
EUT	Equipment Under Test
f	Frequency
FCC	Federal Communications Commission
GHz	Giga Hertz
Hz	Hertz
kHz	kilohertz
kPa	kilopascal
kV	kilo Volt
LISN	Line Impedance Stabilization Network
MHz	MegaHertz
ΦH	micro Henry
ΦF	micro Farad
Φs	micro seconds
RF	Radio Frequency
RMS	Root-Mean-Square



1.0 Testing Summary

Title 47 of the CFR, Part 15, Subpart B, Reference and Test Description	Results	Comments
15.107 (a) Conducted Emission Limits for a Class A Digital Device	Compliant	Measured emissions were below applicable limits.
15.109 (a) Radiated Emission Limits for a Class A Digital Device	Compliant	Measured emissions were below applicable limits.

Table 1. Summary of Test Results



2.0 Equipment Configuration

2.1 Overview

MET Laboratories, Inc. was contracted by SRI International to perform testing on the PMX-3.0, under SRI International purchase order number 20-002690 (v2).

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the SRI International, PMX-3.0.

In accordance with §2.955(a) (3), the following data is presented in support of the verification of the SRI International, PMX-3.0. SRI International should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the PMX-3.0 has been permanently discontinued, as per §2.955(b).

The results obtained relate only to the item(s) tested.

Model(s) Tested:	PMX-3.0
Model(s) Covered:	PMX-3.0
Primary Power as Tested:	120Vac
Equipment Emissions Class:	A
Highest Clock Frequency:	433 MHz
Evaluated by:	Edmund Cruz
Report Date:	April 17, 2008

Table 2. EUT Overview

2.2 Test Site

All testing was performed at MET Laboratories, Inc., 3162 Belick Street Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

2.3 Description of Test Sample

The PMX-3.0, Equipment Under Test (EUT), refers to the Portable Mesh Exchange wireless router unit version 3.0. This unit is a dual radio wireless mesh node that is installed in a fixed location to support mesh network systems.



2.4 Equipment Configuration

The EUT was set up as outlined in Figure 1. All equipment incorporated as part of the EUT is included in the following list.

Ref. ID	Slot #	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	--	Portable Mesh Exchange Shielded	PMX 3.0	100-2000	-0013	1
B	--	Portable Mesh Exchange Unshielded	PMX 3.0	100-2000	-0015	1

Table 3. Equipment Configuration

Ref. ID	Aware Name (Laptop)	Antenna Configuration	Power Supply	Circuit Board	Installed Radios	Packaging	Other
A	gdm-test-shield	Mobile Mark ECO9-5500 (5-6 GHz 9dBi)	Jentec AH1815-B	PCEngines Alix 3c1	Ubiquity XR5	Mini-Box	Installed Cu shielding inside enclosure
		Mobile Mark ECO9-4900 (4.9 GHz 9dBi)	15v/1.2A/18W	AMD LX 700	Ubiquity SR4	Wrap Box 2a-1e	
B	gdm-test-no-shield	Mobile Mark ECO9-5500 (5-6 GHz 9dBi)	Jentec AH1815-B	PCEngines Alix 3c1	Ubiquity XR5	Mini-Box	No shielding installed
		Mobile Mark ECO9-4900 (4.9 GHz 9dBi)	15v/1.2A/18W	AMD LX 700	Ubiquity SR4	Wrap Box 2a-1e	

Table 3a: Detailed Hardware Configuration for UUT

2.5 Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
C	Camera with Power supply	Axis	Axis 207	N/A
D	AC/DC Power supply with POE Injector	Jentech Technologies	AH 1815-B 15V/1.2A/18Watt	N/A
E	Test Laptop Used to view mesh video with product software	Dell	Inspiron 2200	N/A

Table 4. Support Equipment

* The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.



2.6 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
1	A, POE	CAT 5* – Power to PMX 3.0	2	10m	N	C, POE Injector
2	C, LAN	CAT5** - Crossover IP Video link to PMX 3.0	2	1m	N	C, POE Injector
3	D, DC Input	AC to DC power cable Power to POE Injector	2	2m	N	110Vac Output

Table 5. Ports and Cabling Information

* Cat 5: Belkin 5E Patch cable #R7J304 UTP 4PR 24 AWG Type CM

**Cat 5: Belkin 5E Crossover cable #R7J304 UTP 4PR 24 AWG Type CM

User Guide: PMXUsersGuide_RevA.doc

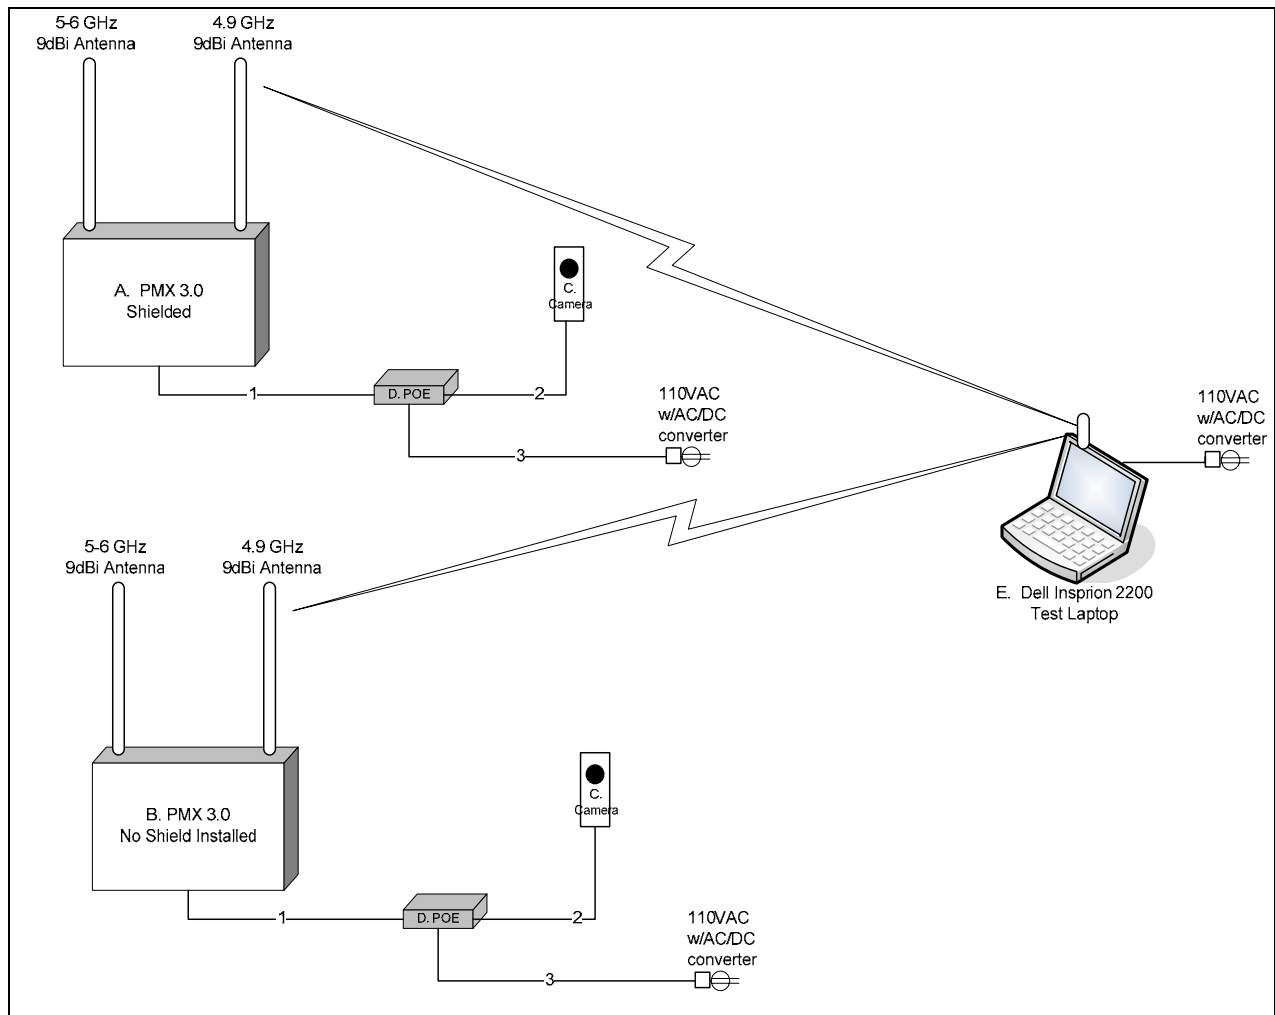


Figure 1. Block Diagram of Test Configuration



2.7 Mode of Operation

Wireless router transmitting video and data in a mesh network topology. The unit will form a mesh network on the 4.9GHz spectrum and has a 5GHz 802.11a backhaul capability in the dual radio configuration. Both radios 4.9 and 5 GHz radios transmit continuously during normal operation. When the PMX unit is configured for “camera mode” continuous video is transmitted via the mesh network.

2.8 Method of Monitoring EUT Operation

Loss of node on Network Topology between UUT and laptop unit as observed in the “PacketHop Manager” application. Screen is found under “Advanced” tab, under Mesh Details, select “View Topology”. Loss of node is defined when wireless connection is permanently lost (bi-directional black arrow, transitions to red arrow and finally permanent loss of arrow which indicates loss of wireless connectivity).

Loss of live video feed in “Aware” application on laptop. In “Aware” application, under “Chooser” menu, select “Videos” and click on available video source. Loss of live video will appear as a black screen in the video window for the selected camera.

2.9 Modifications

2.9.1 Modifications to the EUT

No modifications were made to the EUT.

2.9.2 Modifications to the Test Standard

No modifications were made to the test standard.

2.10 Disposition of EUT

The test sample including all support equipment (if any), submitted to the Electro-Magnetic Compatibility Lab for testing was returned to SRI International upon completion of testing.



3.0 Electromagnetic Compatibility Emission Criteria

3.1 Conducted Emission Limits

Test Requirement(s): **15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

15.107 (b) “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 6. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dBµV)		15.107(a), Class B Limits (dBµV)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 – 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Table 6. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50Ω/50µH LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were remeasured using a quasi-peak and/or average detector as appropriate.

Test Results: The EUT was compliant with the Class A requirement(s) of this section.

Test Engineer(s): Edmund Cruz

Test Date(s): 03/31/08



Conducted Emissions - Voltage, AC Power, Phase Line 120Vac with Shielding

Freq (MHz)	QP Amplitude	QP Limit	Delta	Results	Average Amplitude	Average Limit	Delta	Results
.166	57.6	79	-21.4	Pass	41.8	66	-24.2	Pass
.703	47.1	73	-25.9	Pass	40.7	60	-19.3	Pass
23.13	44.01	73	-28.99	Pass	41.9	60	-18.1	Pass

Table 7. Conducted Emissions - Voltage, AC Power, Phase Line 120Vac with Shielding


Conducted Emissions - Voltage, AC Power, Neutral Line 120Vac with Shielding

Freq (MHz)	QP Amplitude	QP Limit	Delta	Results	Average Amplitude	Average Limit	Delta	Results
.162	56.1	79	-22.9	Pass	43.2	66	-22.8	Pass
.706	46.4	73	-26.6	Pass	41.5	60	-18.5	Pass
25.7	42.3	73	-30.7	Pass	40.3	60	-19.7	Pass


Table 8. Conducted Emissions - Voltage, AC Power, Neutral Line 120Vac with Shielding



Conducted Emissions - Voltage, Worst Case Emissions, AC Power

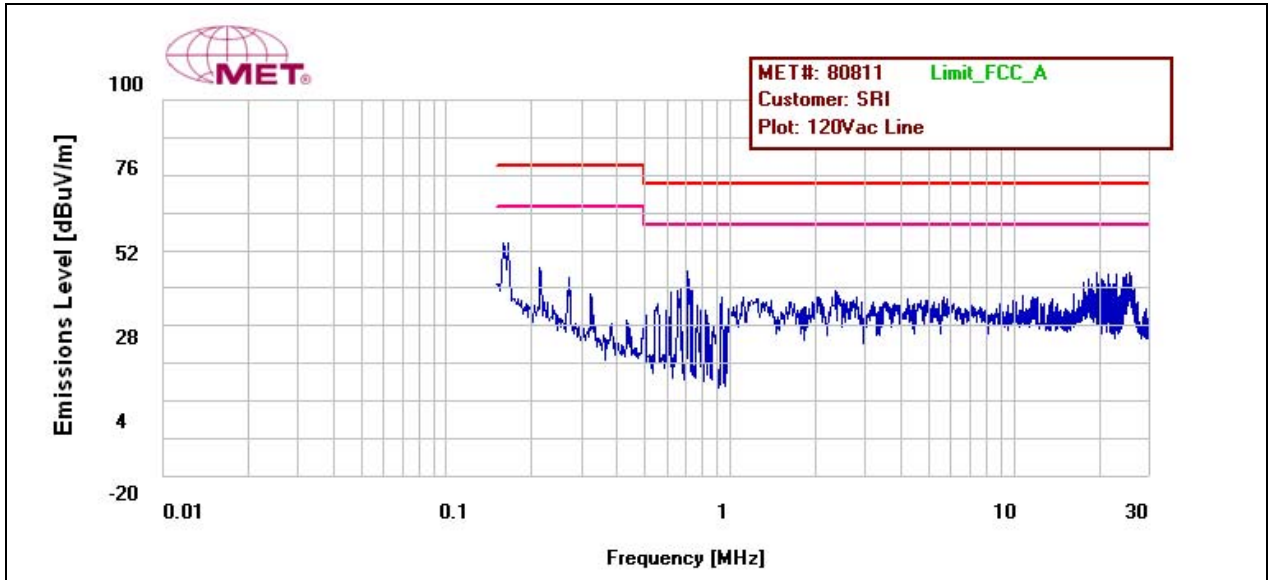

Conducted Emission, Phase Line Plot 120Vac with Shielding

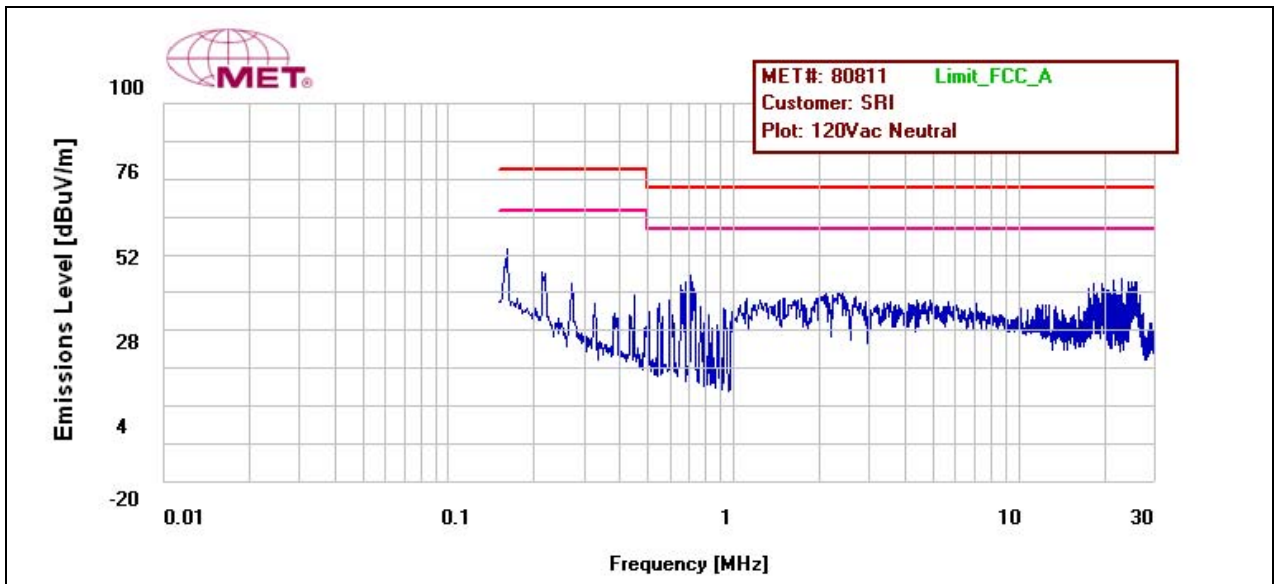

Conducted Emission, Neutral Line Plot 120Vac with Shielding



Conducted Emissions - Voltage, AC Power, Phase Line 120Vac without Shielding

Freq (MHz)	QP Amplitude	QP Limit	Delta	Results	Average Amplitude	Average Limit	Delta	Results
.162	55.6	79	-23.4	Pass	42.3	66	-23.7	Pass
.215	47.6	79	-31.4	Pass	33.3	66	-32.7	Pass
.704	45.8	73	-27.2	Pass	37.8	60	-22.2	Pass

Table 9. Conducted Emissions - Voltage, AC Power, Phase Line 120Vac without Shielding


Conducted Emissions - Voltage, AC Power, Neutral Line 120Vac without Shielding

Freq (MHz)	QP Amplitude	QP Limit	Delta	Results	Average Amplitude	Average Limit	Delta	Results
.166	58.1	79	-20.9	Pass	43.1	66	-22.9	Pass
.223	50.1	79	-28.9	Pass	34.9	66	-31.1	Pass
.704	45.8	73	-27.2	Pass	36.95	60	-23.05	Pass


Table 10. Conducted Emissions - Voltage, AC Power, Neutral Line 120Vac without Shielding



Conducted Emissions - Voltage, Worst Case Emissions, AC Power

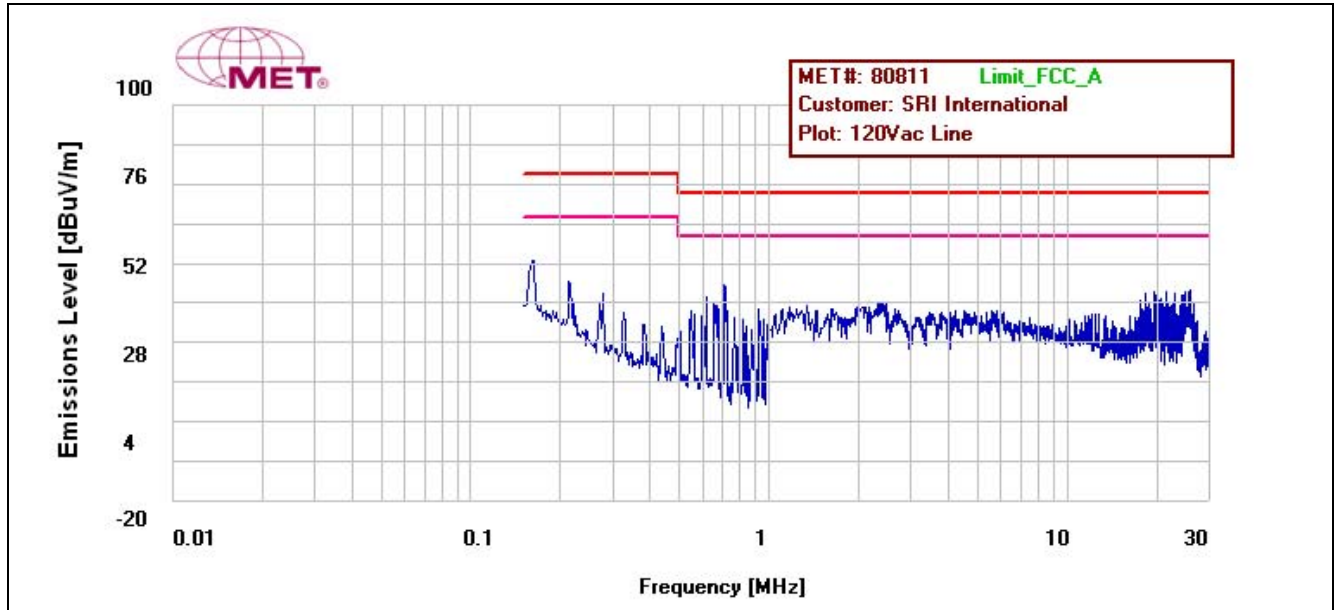


Conducted Emission, Phase Line Plot, 120Vac without Shielding

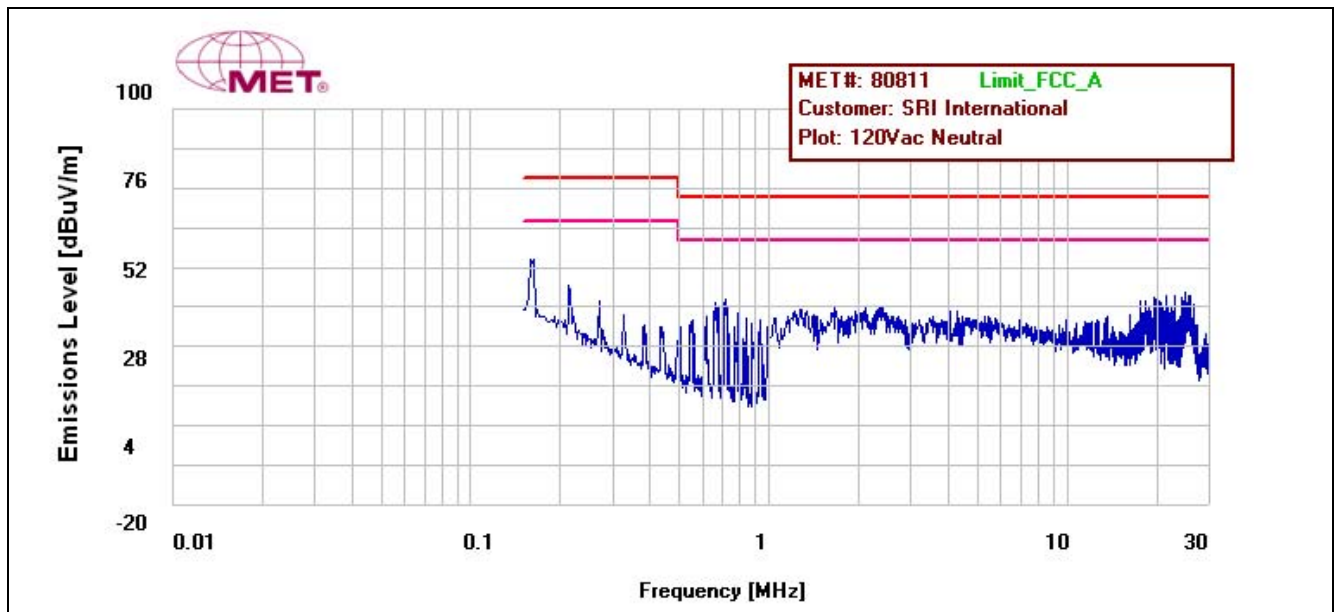

Conducted Emission, Neutral Line Plot, 120Vac without Shielding

Conducted Emission Limits Test Setup

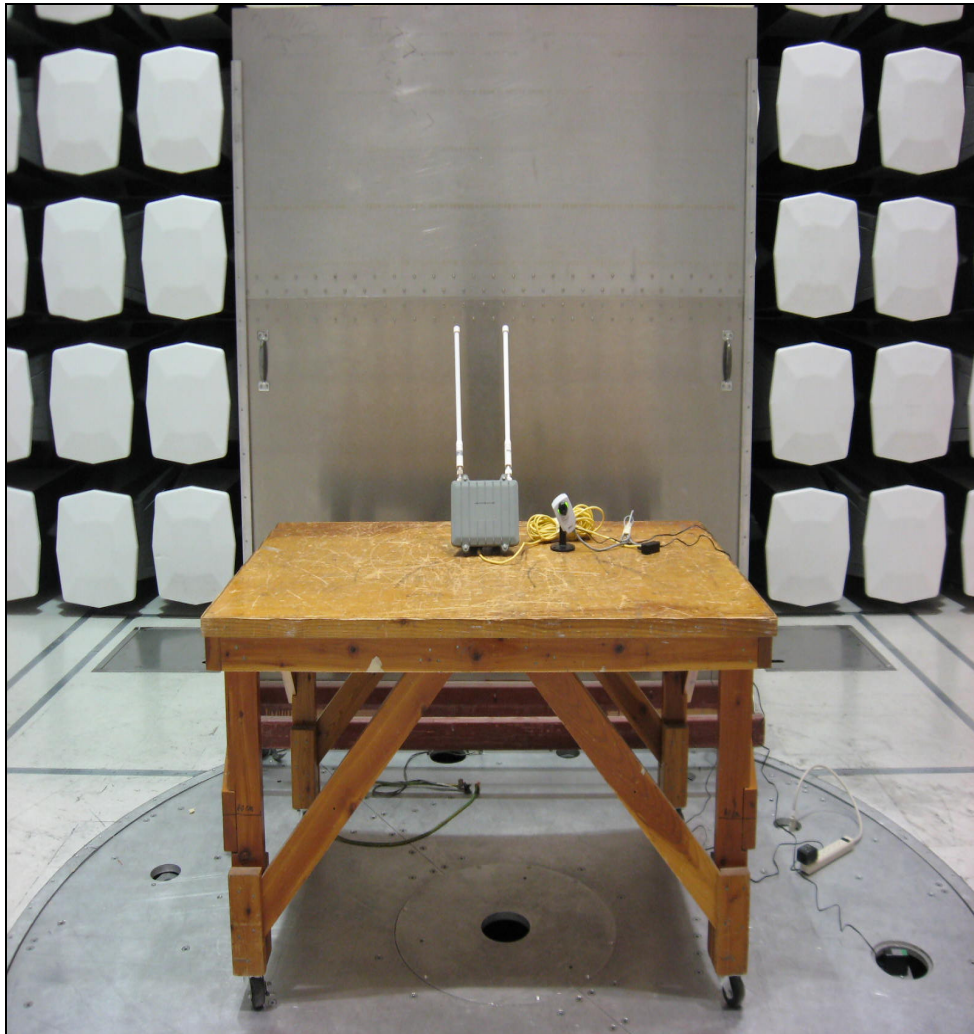

Photograph 1. Conducted Emissions Test Setup



3.2 Radiated Emission Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 11.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 11.

Frequency (MHz)	Field Strength (dBµV/m)	
	§15.109 (b), Class A Limit (dBµV) @ 10m	§15.109 (a), Class B Limit (dBµV) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 11. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures: The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Emissions measured at 3m were normalized using an inverse proportionality factor of 20dB per decade for comparison to the 10 m limit.

Test Results: The EUT was compliant with the Class A requirement(s) of this section.

Test Engineer(s): Edmund Cruz

Test Date(s): 03/31/08



Radiated Emissions Limits Test Results, Class A, 1GHz-3GHz with Shielding

Freq.	Azimuth	Antenna Polarity	Height	Raw Amp. @ 3 m	P. Amp	Ant. Cor. Factor	Cable Loss	Dist. Cor. Factor	EUT Field Strength Final Amp.	Limit per FCC pt.15 @ 3 m	Delta
(GHz)	(Degrees)	(H/V)	(m)	(Avg)	(dB)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
1.008	58	H	100	50.8	35.94	24.01	3.17	10.46	31.58	49.5	-17.92
1.03	64	H	100	41.2	35.89	24.05	3.23	10.46	22.13	49.5	-27.37
1.03	210	V	100	37.16	35.89	23.87	3.23	10.46	17.91	49.5	-31.59
1.39	45	V	100	35.66	35.08	24.84	4.37	10.46	19.33	49.5	-30.17
3	0	H	100	30.56	34.80	30.00	6.86	10.46	22.16	49.5	-27.34
3	0	V	100	30.7	34.80	30.00	6.86	10.46	22.30	49.5	-27.20

Table 12. Radiated Emissions Limits Test Results, 1GHz-3GHz with Shielding


Note (s): The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.



Radiated Emissions Limits Test Results, Class A, 30 Mhz to 1GHz PMX 3.0 with Shielding

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
43.77	V	0	100	3.5	11.138	0	0.846	15.484	39	-23.516
66.32	V	0	114	16.5	5.632	0	0.975	23.107	39	-15.893
101.89	V	152	139	17.1	11.613	0	1.319	30.032	43.5	-13.468
101.85	H	162	400	20.7	10.596	0	1.318	32.614	43.5	-10.886
141.16	V	163	100	5	12.654	0	1.554	19.208	43.5	-24.292
141.16	H	182	400	15.7	11.9	0	1.554	29.154	43.5	-14.346

Table 13. Radiated Emissions Limits Test Results, 30 MHz to 1GHz PMX 3.0 with Shielding

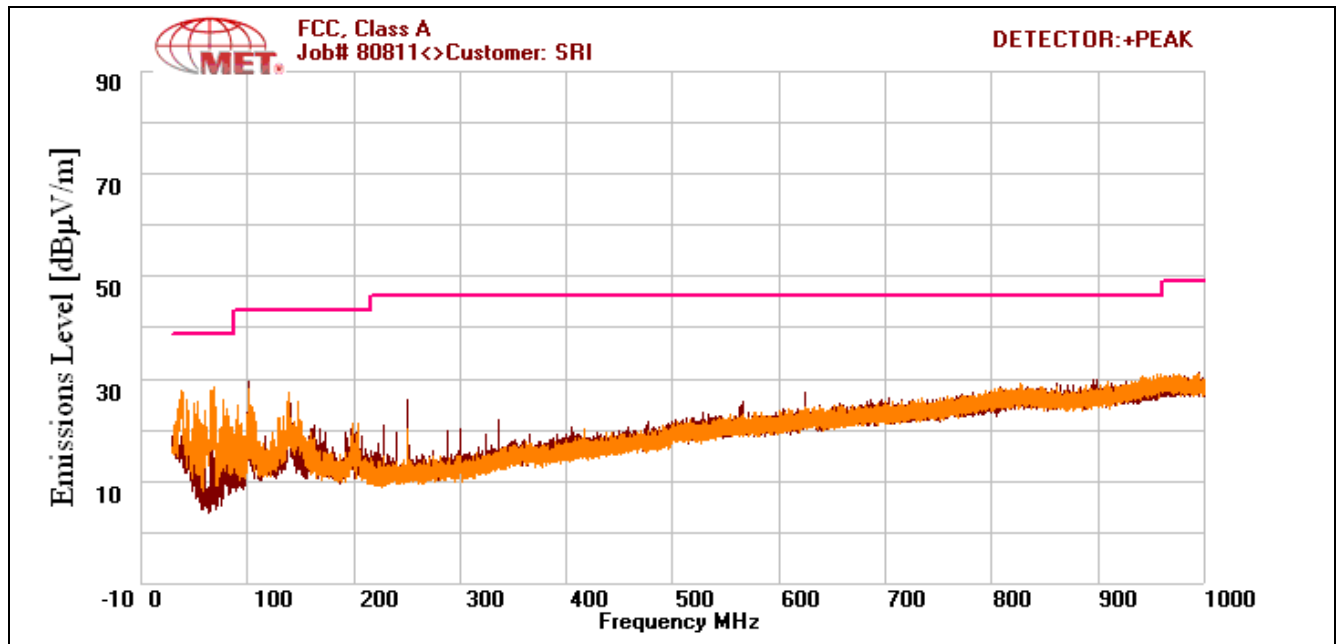



Radiated Emissions Limits Test Results, Class A, 1GHz to 3GHz without Shielding

Freq.	Azimuth	Antenna Polarity	Height	Raw Amp. @ 3 m	P. Amp	Ant. Cor. Factor	Cable Loss	Dist. Cor. Factor	EUT Field Strength Final Amp.	Limit per FCC pt.15 @ 3 m	Delta
(GHz)	(Degrees)	(H/V)	(m)	(Avg)	(dB)	(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
1.03	15	H	100	37.17	35.89	24.05	13.88	10.46	28.75	49.5	-20.75
1.03	25	V	100	37.3	35.89	23.87	0.00	10.46	14.82	49.5	-34.68
1.26	150	V	100	37.31	35.35	24.45	0.00	10.46	15.95	49.5	-33.55
1.266	147	H	100	37.3	35.34	24.54	0.00	10.46	16.04	49.5	-33.46
3	0	H	100	30.31	34.80	30.00	0.00	10.46	15.05	49.5	-34.45
3	0	V	100	30.36	34.80	30.00	6.86	10.46	21.96	49.5	-27.54

Table 14. Radiated Emissions Limits Test Results, 1GHz to 3GHz without Shielding


Note (s): The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20 \log(3 \text{ m}/10 \text{ m})$ as expressed in the 'Distance Correction' column.




Radiated Emissions Limits Test Results, Class A, 30 MHz to 1GHz PMX 3.0 without Shielding

Frequency (MHz)	Antenna Polarity	EUT Azimuth (Degrees)	Antenna Height (cm)	Uncorrected Amplitude (dBuV)	ACF (dB/m)	Pre Amp Gain (dB)	CBL (dB)	DCF (dB)	Corrected Amplitude (dBuV)	Limit (dBuV)	Margin (dB)
101.88	H	140	400	20.2	10.601	0	1.319	0	32.12	43.5	-11.38
139.17	H	188	393	17.8	11.933	0	1.549	0	31.282	43.5	-12.218
139.2	V	298	115	8.5	12.732	0	1.549	0	22.781	43.5	-20.719
250	H	28	339	11.9	12.8	0	2.308	0	27.008	46.4	-19.392
250	V	0	100	2.5	12.7	0	2.308	0	17.508	46.4	-28.892
675.23	H	0	400	10.9	21.291	0	4.243	0	36.434	46.4	-9.966

Table 15. Radiated Emissions Limits Test Results, 30 MHz to 1GHz PMX 3.0 without Shielding

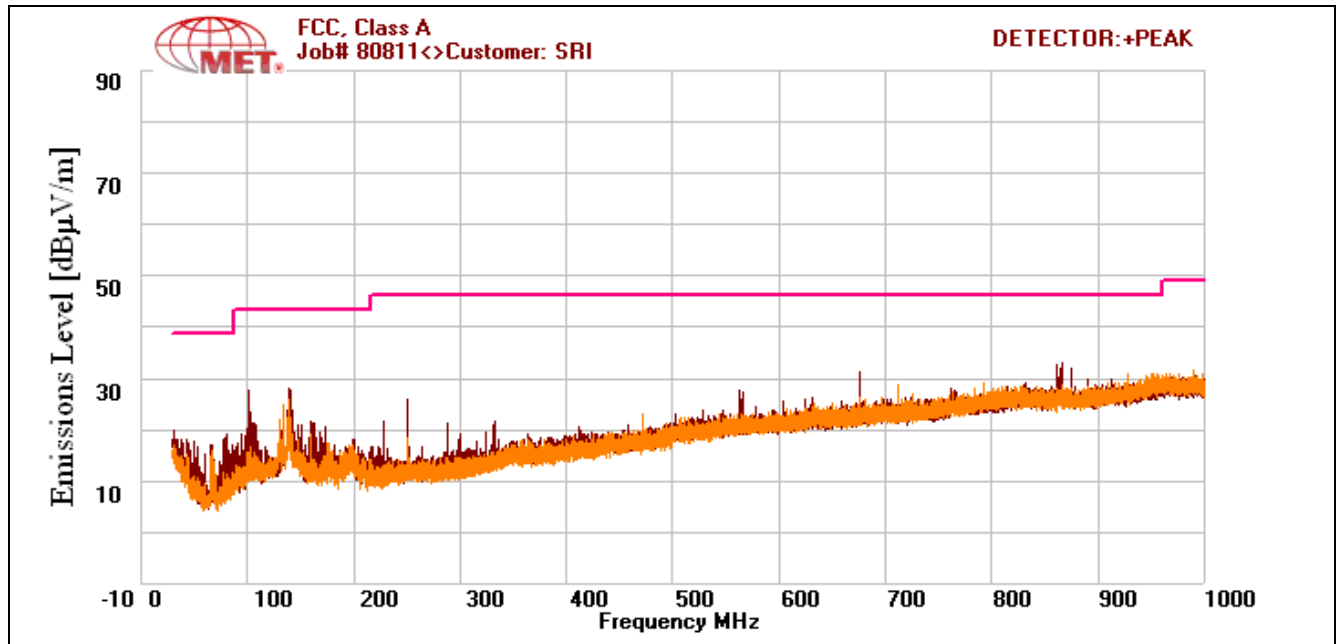

Radiated Emission Limits Test Setup

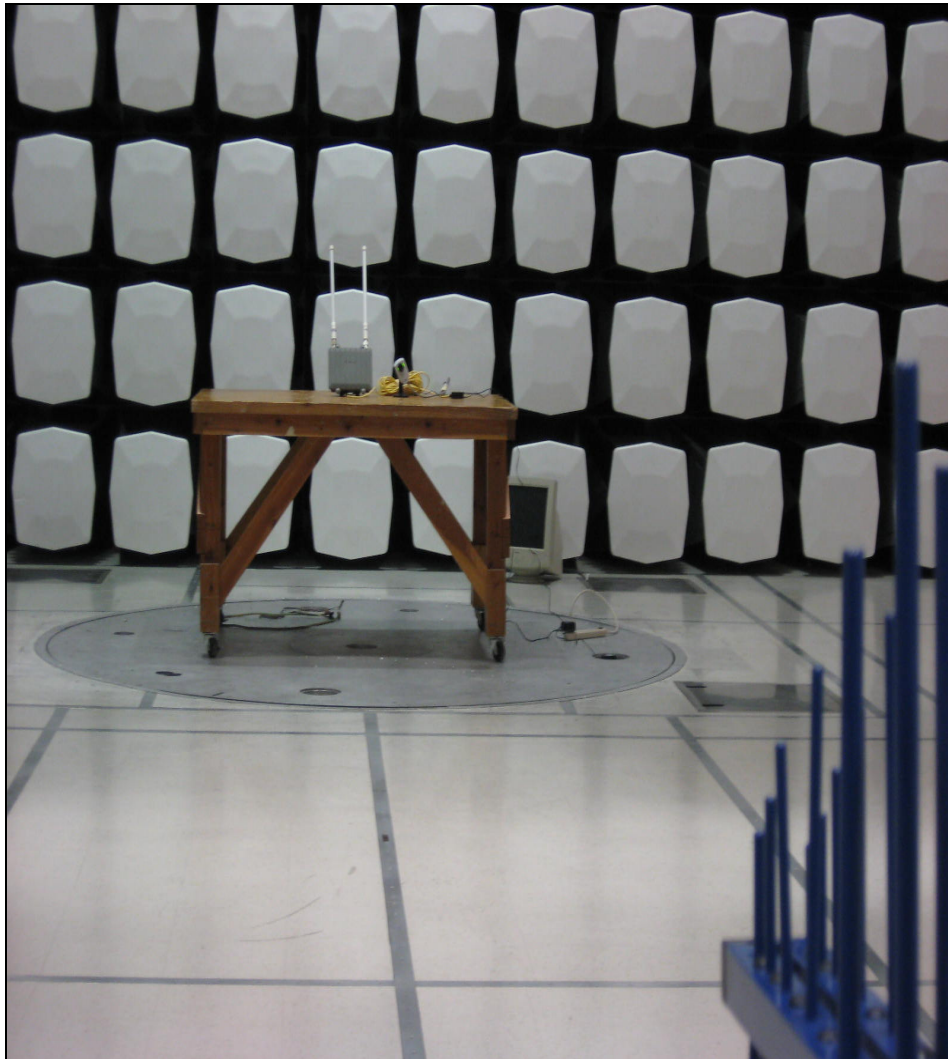

Photograph 2. Radiated Emission Limits Test Setup



4.0 Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:1999.

Test Name: Conducted Emissions				Test Date(s): 03/31/08	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2109	EMI Receiver (Receiver Section)	Hewlett Packard	85462A	10/24/2007	10/24/2008
1S2372	Custom 50A A/C LISN	FCC	Custom Made	1/31/08	1/31/09
1S2481	10m Chamber	ETS-Lindgren	DKE 8X8 DBL	12/26/2007	12/26/2008
Test Name: Radiated Emissions				Test Date(s): 03/31/08	
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI Test Receiver	Rohde & Schwarz	ESIB7	3/23/2007	4/15/2008
1S2185	Bilog Antenna	Chase	CBL61111	6/29/2007	6/29/2008
1S2481	10m Chamber	ETS-Lindgren	DKE 8X8 DBL	12/26/2007	12/26/2008
1S2121	PreAmplifier	HP	8449B	10/25/2007	10/25/2008
1S2501	Spectrum Analyzer	Rohde & Schwarz	ESU40	1/16/2008	1/16/2009
1S2198	Horn Antenna	EMCO	3115	8/31/2007	8/31/2008

Table 16. Test Equipment



5.0 Compliance Information

5.1 Verification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



- (e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:
- (i) *Compliance testing;*
 - (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
 - (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
 - (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.
- (e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.
- (f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a provision that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.*
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.902 Verification.

- (a) *Verification is a procedure where the manufacturer² makes measurements or takes the necessary steps to insure that the equipment complies with the appropriate technical standards. Submission of a sample unit or representative data to the Commission demonstrating compliance is not required unless specifically requested by the Commission pursuant to § 2.957, of this part.*
- (b) Verification attaches to all items subsequently marketed by the manufacturer or importer which are identical as defined in § 2.908 to the sample tested and found acceptable by the manufacturer.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

² In this case, MET Laboratories, Inc. is acting as an agent of the manufacturer.



§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

§ 2.952 Limitation on verification.

- (a) Verification signifies that the manufacturer or importer has determined that the equipment has been shown to be capable of compliance with the applicable technical standards if no unauthorized change is made in the equipment and if the equipment is properly maintained and operated. Compliance with these standards shall not be construed to be a finding by the manufacturer or importer with respect to matters not encompassed by the Commission's rules.
- (b) Verification of the equipment by the manufacturer or importer is effective until a termination date is otherwise established by the Commission.
- (c) No person shall, in any advertising matter, brochure, etc., use or make reference to a verification in a deceptive or misleading manner or convey the impression that such verification reflects more than a determination by the manufacturer or importer that the device or product has been shown to be capable of compliance with the applicable technical standards of the Commission's rules.



§ 2.953 Responsibility for compliance.

- (a) In verifying compliance, the responsible party, as defined in §2.909 warrants that each unit of equipment marketed under the verification procedure will be identical to the unit tested and found acceptable with the standards and that the records maintained by the responsible party continue to reflect the equipment being produced under such verification within the variation that can be expected due to quantity production and testing on a statistical basis.
- (b) The importer of equipment subject to verification may upon receiving a written statement from the manufacturer that the equipment complies with the appropriate technical standards rely on the manufacturer or independent testing agency to verify compliance. The test records required by §2.955 however should be in the English language and made available to the Commission upon a reasonable request, in accordance with §2.956.
- (c) In the case of transfer of control of equipment, as in the case of sale or merger of the grantee, the new manufacturer or importer shall bear the responsibility of continued compliance of the equipment.
- (d) Verified equipment shall be re-verified if any modification or change adversely affects the emanation characteristics of the modified equipment. The party designated in §2.909 bears responsibility for continued compliance of subsequently produced equipment.

§ 2.954 Identification.

Devices subject only to verification shall be uniquely identified by the person responsible for marketing or importing the equipment within the United States. However, the identification shall not be of a format which could be confused with the FCC Identifier required on certified, notified or type accepted equipment. The importer or manufacturer shall maintain adequate identification records to facilitate positive identification for each verified device.

§ 2.955 Retention of records.

- (a) For each equipment subject to verification, the responsible party, as shown in §2.909 shall maintain the records listed as follows:
 - (1) A record of the original design drawings and specifications and all changes that have been made that may affect compliance with the requirements of §2.953.
 - (2) A record of the procedures used for production inspection and testing (if tests were performed) to insure the conformance required by §2.953. (Statistical production line Emission testing is not required.)
- (b) The records listed in paragraph (a) of this section shall be retained for two years after the manufacture of said equipment item has been permanently discontinued, or until the conclusion of an investigation or a proceeding if the manufacturer or importer is officially notified that an investigation or any other administrative proceeding involving his equipment has been instituted.



§ 2.956 FCC inspection and submission of equipment for testing.

- (a) Each responsible party shall upon receipt of reasonable request:
- (1) Submit to the Commission the records required by §2.955.
 - (2) Submit one or more sample units for measurements at the Commission's Laboratory.
 - (i) Shipping costs to the Commission's Laboratory and return shall be borne by the responsible party.
 - (ii) In the event the responsible party believes that shipment of the sample to the Commission's Laboratory is impractical because of the size or weight of the equipment, or the power requirement or for any other reason, the responsible party may submit a written explanation why such shipment is impractical and should not be required.

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

- (a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*
- (1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.
 - (2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.
 - (3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



- (4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.
- (5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

- (a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

- (b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/ TV technician for help.