

TEST REPORT

1. Applicant

Name : SEGI LIMITED
Address : Room 1808, 18/F, Tower 2, Admiralty Center, 18
Harcourt road, Hongkong City, 186, CHINA

2. Products

Name : Security/Remote Control transceiver(Car Alarm System)
Model/Type : MR702
Manufacturer : SEGI LIMITED

3. Test Standard

: FCC CFR 47 Part 15, Subpart C section 15.231 &
IC RSS 210 Annex I - 2007

4. Test Method

: ANSI C63.4-2003

5. Test Result

: Positive

6. Date of Application

: September 03, 2008

7. Date of Issue

: October 23, 2008

Tested by



Sung-Kyu Cho

Telecommunication Team
Engineer

Approved by



Seok-Jin Kim

Telecommunication Team
Manager

The test results contained apply only to the test sample(s) supplied by the applicant, and this test report shall not be reproduced in full or in part without approval of the KTL in advance.

Korea Testing Laboratory

TABLE OF CONTENTS

| | |
|------------------------------------|----|
| I. GENERAL INFORMATION..... | 3 |
| 1. Applicant (client) | |
| 2. Equipment (EUT) | |
| 3. Testing Laboratory | |
| II. SUMMARY OF TEST RESULTS..... | 4 |
| III. TEST FACILITY..... | 5 |
| IV. TEST RESULTS..... | 6 |
| 4.1 Transmission Requirements | |
| 4.2 Field Strength Measurements | |
| 4.3 Bandwidth of Momentary Signals | |
| 4.4 Receiver Spurious Emission | |
| APPENDIX I | 14 |

I . GENERAL INFORMATIONS

1.1 Applicant (Client)

| | |
|----------------|---|
| Name | SEGI LIMITED |
| Address | Room 1808, 18/F, Tower 2, Admiralty Center, 18 Harcourt road, Hongkong City, 186, CHINA |
| Contact Person | Yuong Soo Lim |
| Telephone No. | +86-769-8322-4133(175) |
| Facsimile No. | +86-769-8322-4130 |
| E-mail address | yuongsoo@magicar.com |

1.2 Equipment (EUT)

| | |
|------------------------|--|
| Type of equipment | Security/Remote Control transceiver(Car Alarm System) |
| Model Name | MR702 |
| FCC ID | VA5JR702F433 |
| IC Number | 7087A-R702F433 |
| Operating Frequency | 433.92 MHz |
| Antenna Type | Internal |
| EUT Modes of Operation | Transceiver |
| Type of Modulation | FSK |
| Power Source | DC 1.5 V Battery |
| Manufacturer Name | SEGI LIMITED |
| Manufacturer Address | Chenjiapucun, Liaobu Town, Dongguan City, Guangdong Province, P.R.China(523-408) |

1.3 Testing Laboratory

| | |
|------------------|---|
| Testing Place | Korea Testing Laboratory (KTL) 516 Hae-an-ro, Sa-dong, Sangnok-gu, Ansan-si, Gyeonggi-do, 426-901, KOREA |
| Test Engineer | Sungkyu Cho |
| Telephone number | +82 31 500 0312 |
| Facsimile number | +82 31 500 0159 |
| E-mail address | skcho@ktl.re.kr |
| Other Comments | |

II. SUMMARY OF TEST RESULTS

Testing performed for : SEGI Limited

Equipment Under Test : MR702

Receipt of Test Sample : September 02, 2008

Test Start Date : September 03, 2008

Test End Date : September 29, 2008

The following table represents the list of measurements required under the FCC CFR47 Part 15.231 & RSS 210 Annex I.

| FCC | IC | DESCRIPTION OF TEST | Result |
|-----------|--------|---|--------|
| 15.231(a) | A1.1.1 | Transmission Requirements | Pass |
| 15.231(b) | A1.1.2 | Transmitter Radiated Emissions – Fundamental, Harmonic and Spurious | Pass |
| 15.231(c) | A1.1.3 | 20 dB & 99% Bandwidth | Pass |

Note 1 : Test results reported in this document relate only to the items tested

Note 2 : The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3 : Test results apply only to the item(s) tested

*** Modifications required for compliance**

No modifications were implemented by KTL.

All results in this report pertain to the un-modified sample provided to KTL.

III. TEST FACILITY

3.1 Korea Testing Laboratory test location

All tests were conducted at Korea Testing Laboratory. The site address is 516 Hae-an-ro, Sa-dong, Sangnok-gu, Ansan-si, Gyeonggi-do, 426-901, KOREA. The radiated emission test site is a 10-meter semi-anechoic chamber. The chamber meets the characteristics of CISPR 16-1:1993 and ANSI C63.4: 1992. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters.



The FCC registration number is 408324. The Industry Canada filing number for this site is 6298.

3.2 Test Equipment

| No. | Equipment | Manufacturer | Model | S/N | Effective Cal.Duration |
|-----|--|--------------|----------|------------|------------------------|
| 1 | EMI Receiver | R&S | ESIB26 | 100280 | 08/17/2009 |
| 2 | Pre-Amplifier (0.5 GHz ~ 26.5 GHz) | Agilent | 83017A | MY39500982 | 04/02/2009 |
| 3 | Biconi-Log Ant. (30 MHz ~ 1000 MHz) | Schwarzbeck | VULB9168 | 9168-179 | 04/06/2009 |
| 4 | Horn Ant. (1 GHz ~ 18 GHz) | ETS | ETS 3106 | 00023791 | 07/13/2009 |
| 5 | Antenna Mast | Frankonia | FAM4 | 1101F4006 | -- |
| 6 | Spectrum Analyzer | Agilent | E4407B | US41443316 | 12/01/2008 |

IV. TEST RESULTS


4.1 Transmission Requirements (FCC Part 15.231(a) & RSS-210 A1.1.1)

4.1.1 Limit of Transmission Time

- According to 15.231(a)(1), a manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being release.
- According to 15.231(a)(2), a transmitter activated automatically shall cease transmission within 5 seconds after activation.

4.1.2 Test Results

After 750 ms, the transmitter was automatically deactivated.

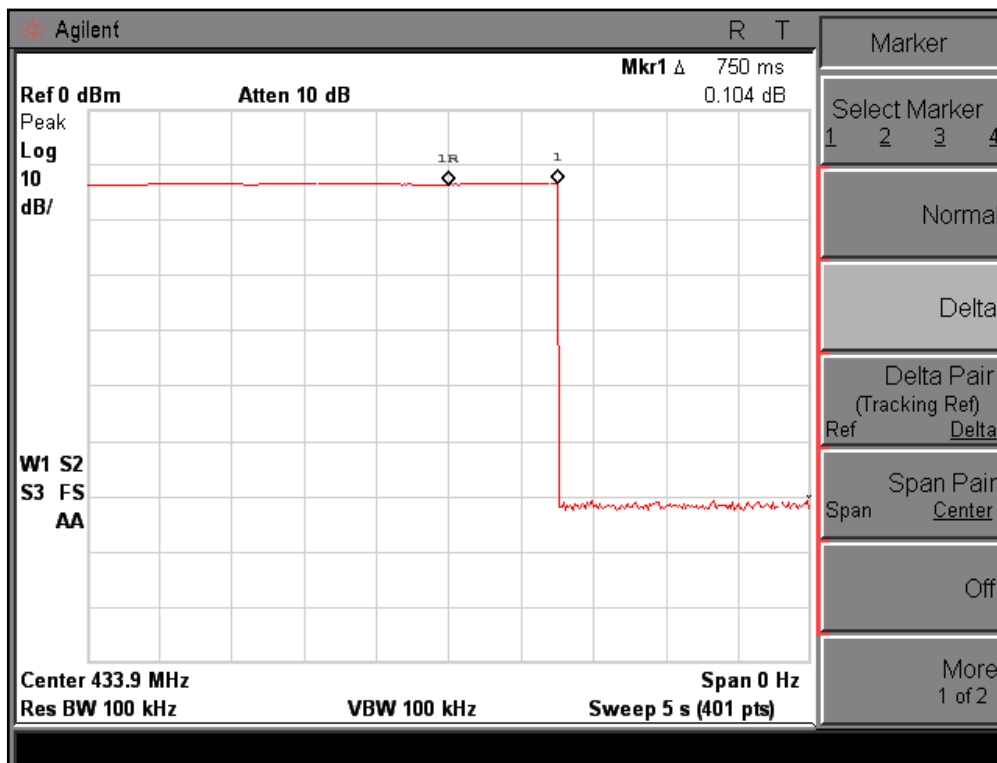

– Deactivation time –

4.2 Field Strength Measurements (FCC Part 15.231(b) & RSS-210 A1.1.2)

4.2.1 Test procedure

- Measurements were made over the frequency range of 30 MHz to ten times the highest frequency operating within the device.
- The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.
- From 30 to 1000 MHz, a quasi-peak detector was used for measurement. Above 1000 MHz, average Measurements were performed.
- The antenna is adjusted between 1m and 4m in height above the ground plane for maximum field-strength readings.
- The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.
- The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.
- The EUT was placed on a wooden table 80 cm above the ground reference plane.
- Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4.
- Peak readings were taken in three orthogonal planes.
- The bandwidths of the fundamental emissions were measured 20 dB down from the modulated carrier using the ANSI C63.4 specified bandwidths. The bandwidth measurement was performed using a peak detector and the peak-hold function of the analyzer.
- The readings obtained from the measurement receiver were corrected for antenna factor, cable loss, and pre-amp gain.

4.2.2 Field strength calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

Where : FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL + AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

4.2.3 Limits

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

| Fundamental Frequency (MHz) | Field Strength of Fundamental (microvolts/meter) | Field Strength of Spurious Emission (microvolts/meter) |
|-----------------------------|--|--|
| 40.66-40.70 | 2,250 | 225 |
| 70-130 | 1,250 | 125 |
| 130-174 | 1,250 to 3,750** | 125 to 375** |
| 174-260 | 3,750 | 375 |
| 260-470 | 3,750 to 12,500** | 375 to 1,250** |
| Above 470 | 12,500 | 1,250 |

** linear interpolations

4.2.4. Test Results

The MR702 met the field strength and bandwidth requirements of FCC § 15.231 for fundamental and spurious emissions. See Table 4-1 for the measured fundamental and spurious emissions. The peak value of the fundamental and spurious emissions did not exceed the limits of FCC § 15.231 (5)(b). Additionally, there were no radiated emissions from the device in the restricted bands of § 15.205 which exceeded the limit of § 15.209. All other spurious emissions not shown below were greater than 20 dB bandwidth of the fundamental emission was less than 0.25% of the carrier frequency.

| Frequency (MHz) | * D.M. | * A.P. | Measured Value (dB μ V) | * A.F. + C.L. (dB/m) | * A.G. (dB) | * D.C.F. | Emission Level | | Limit | | ** Avg Margin (dB) |
|---|--------|--------|-----------------------------|----------------------|-------------|----------|---------------------|------------------------|---------------------|------------------------|--------------------|
| | | | | | | | Peak (dB μ V/m) | Average (dB μ V/m) | Peak (dB μ V/m) | Average (dB μ V/m) | |
| 433.9 | P | H | 55.8 | 18.9 | 0.0 | 0.0 | 74.7 | 74.7 | 100.8 | 80.8 | -6.1 |
| 433.9 | P | V | 59.7 | 18.9 | 0.0 | 0.0 | 78.6 | 78.6 | 100.8 | 80.8 | -2.2 |
| 867.8 | P | H | 44.4 | 26.5 | -37.8 | 0.0 | 33.1 | 33.1 | 80.8 | 60.8 | -27.7 |
| 867.8 | P | V | 60.1 | 26.5 | -37.8 | 0.0 | 48.8 | 48.8 | 80.8 | 60.8 | -12.1 |
| 1301.8 | P | V | 41.5 | 31.4 | -35.4 | 0.0 | 37.5 | 37.5 | 74.0 | 54.0 | -16.5 |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| <p>Note</p> <p>The observed EMI receiver(ESIB26) noise floor level was 2.0 dBμV. And all other emissions not reported on data were more than 25 dB below the permitted level.</p> <p>* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average) A.P. : Antenna Polarization (H : Horizontal, V : Vertical) A.F. : Antenna Factor C.L. : Cable Loss A.G. : Amplifier Gain D.C.F. : Duty Cycle Correction Factor < : Less than</p> <p>** Margin (dB) = Emission Level (dB) - Limit (dB)</p> | | | | | | | | | | | |

Table 4-1. Fundamental and Spurious Radiation

Note ;

- (1) Fundamental emissions from the intentional radiators were not located within any of frequency bands described in section 15.205(a) listed below ;

| MHz | MHz | MHz | GHz |
|-------------------|---------------------|---------------|-------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.25 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.1775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2655-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | |
| 13.36-13.41 | | | |

The field strength of emissions appearing within above frequency bands did not exceed the limits shown in section 15.209. At frequency equal to or less than 1000MHz, compliance with the limits section 15.209 was demonstrated using measurement employing a CISPR quasi-peak detector. Above 1000MHz, demonstrated based on the average value of the measured emissions.

- (2) If the intentional radiator was operated under the radiated emission limits of the general requirements of section 15.209, it's fundamental emissions were not located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-860MHz.
- (3) The level of any unwanted emissions from an intentional radiator did not exceed the level of the fundamental emission.
- (4) Radiated and spurious emissions were checked from 30MHz to 3GHz. And all other emissions not reported on data were more than 20 dB below the permitted level.

4.3 Bandwidth of Momentary Signals (FCC Part 15.231(c) & A1.1.3)


4.3.1 Limit

The bandwidth of emission shall be no wider than 0.25% of the centre frequency for devices operating between 70~900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency.

1. Carrier Frequency = 433.92 MHz
2. The bandwidth of emission shall be no wider than 0.25 % of center frequency.
3. Limit : less than 1.0848 MHz (433.92×0.0025)

4.3.2 Test result (FCC Part 15.231(c))


| Frequency (MHz) | Result (kHz) | Limit (MHz) | Verdict |
|-----------------|--------------|-------------|---------|
| 433.92 | 155.0 | 1.0848 | Pass |

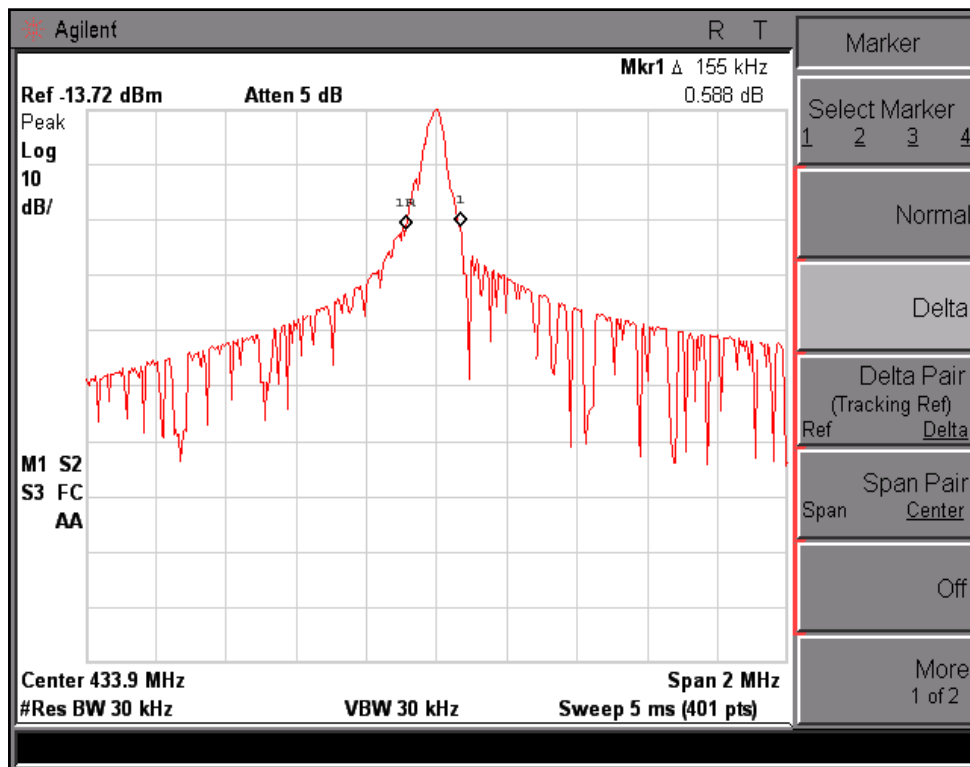

– 20 dB Bandwidth –

4.3.3 Test result (RSS-210 A1.1.3)

| Frequency (MHz) | Result (kHz) | Limit (MHz) | Verdict |
|-----------------|--------------|-------------|---------|
| 433.92 | 233.3 | 1.0848 | Pass |

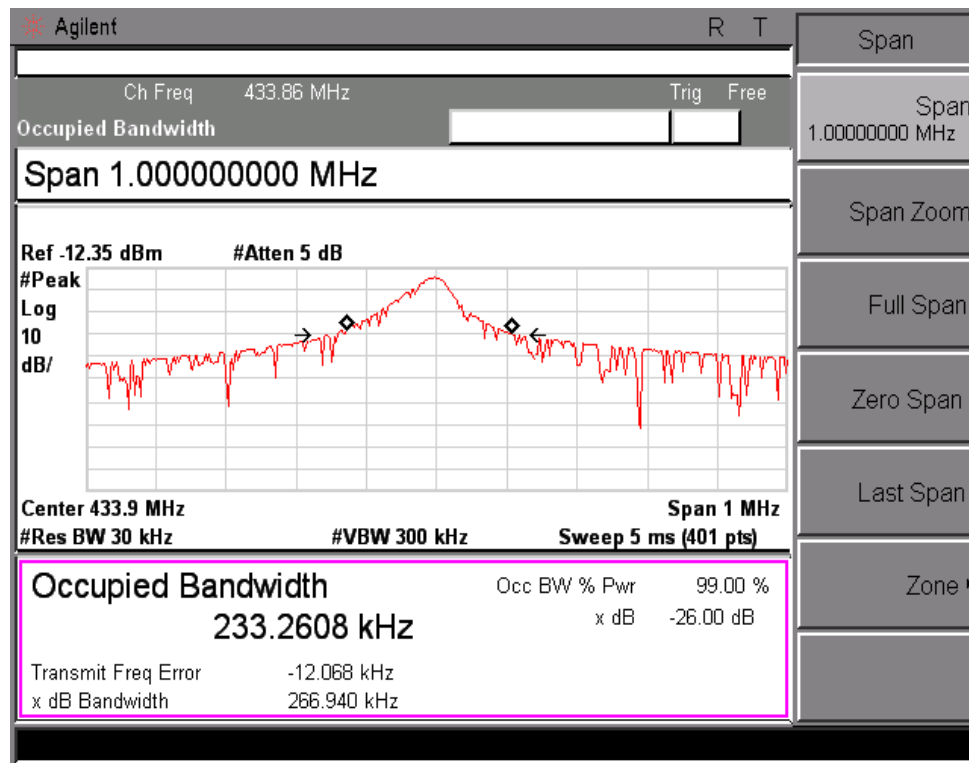

– 20 dB Bandwidth –

4.4 Receiver Spurious Emission (FCC Part15.109 & RSS-210 Table 2)

The MR702 met the field strength and bandwidth requirements of FCC § 15.109 for fundamental and spurious emissions. See Table 4-1 for the measured fundamental and spurious emissions. The peak value of the fundamental and spurious emissions did not exceed the limits of FCC § 15.109.

| Frequency (MHz) | * D.M. | * A.P. | Measured Value (dB μ V) | * A.F. + C.L. (dB/m) | * A.G. (dB) | * D.C.F. (dB) | Emission Level (dB μ V/m) | Limit (dB μ V/m) | ** Margin (dB) |
|-----------------|--------|--------|-----------------------------|----------------------|-------------|---------------|-------------------------------|----------------------|----------------|
| 42.6 | Q | V | 25.90 | 14.0 | -33.0 | 0.0 | 18.50 | 40.0 | -21.5 |
| 675.0 | Q | V | 36.30 | 23.6 | -32.7 | 0.0 | 26.50 | 46.0 | -19.5 |
| 675.0 | Q | H | 23.70 | 23.6 | -32.7 | 0.0 | 27.50 | 46.0 | -18.5 |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Note

The observed Spectrum analyzer(E4407B) noise floor level was 2.0 dB μ V. And all other emissions not reported on data were more than 25 dB below the permitted level.

* D.M. : Detect Mode (P : Peak, Q : Quasi-Peak, A : Average)
 A.P. : Antenna Polarization (H : Horizontal, V : Vertical)
 A.F. : Antenna Factor
 C.L. : Cable Loss
 A.G. : Amplifier Gain
 D.C.F. : Distance Correction Factor
 < : Less than

** Margin (dB) = Emission Level (dB) - Limit (dB)

Table 4-2. Receiver Spurious Emission

Appendix I



– Test setup photo –