



**FCC CFR47 PART 15 SUBPART C  
RSS-GEN / RSS-210**

**Keyless Entry System**

**CERTIFICATION TEST REPORT**

**FOR**

**433.92 MHz Security/Remote Control Transmitter**

**MODEL NUMBER : 1WG15R-FM**

**FCC ID: VA5REH500-1WFX**

**IC ID: 7087A-1WREH500FX**

**REPORT NUMBER: 4788072726-E1V1**

**ISSUE DATE: July 24 , 2017**

*Prepared for*

**SEGI LIMITED**

**UNIT S, 3-F, HARIBEST INDUSTRIAL BUILDING,  
45-47, AU PUI WAN STREET, SHATIN, NT,  
HONGKONG**

*Prepared by*

**UL Korea, Ltd. Suwon Laboratory  
218 Maeyeong-ro, Yeongtong-gu,  
Suwon-si, Gyeonggi-do, 16675, Korea**

**TEL: (031) 337-9902**

**FAX: (031) 213-5433**



**ACCREDITED**

**TL-637**

Revision History

<u>Rev.</u>	<u>Issue Date</u>	<u>Revisions</u>	<u>Revised By</u>
-	-	Initial issue	-

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS .....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION .....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>5</i>
4.2. <i>SAMPLE CALCULATION .....</i>	<i>5</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>7</i>
5.2. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>9</b>
<b>7. SUMMARY TABLE .....</b>	<b>10</b>
<b>8. ANTENNA PORT TEST RESULTS .....</b>	<b>11</b>
8.1. <i>99% &amp; 20 dB BANDWIDTH .....</i>	<i>11</i>
8.2. <i>AUTOMATICALLY DEACTIVATE.....</i>	<i>12</i>
<b>9. RADIATED TEST RESULTS.....</b>	<b>13</b>
9.1. <i>LIMITS AND PROCEDURE.....</i>	<i>13</i>
9.2. <i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>15</i>
9.3. <i>TRANSMITTER BELOW 1 GHz.....</i>	<i>17</i>
<b>10. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>19</b>
<b>11. SETUP PHOTOS .....</b>	<b>20</b>
<b>APPENDIX I – DUTY CYCLE REDUCTION FACTOR .....</b>	<b>21</b>

# 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** SEGI LIMITED  
**EUT DESCRIPTION:** Keyless Entry System  
**MODEL NUMBER:** 1WG15R-FM  
**DATE TESTED:** July 17, 2017 - July 19, 2017 (Original Test)

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
RSS-GEN / RSS-210	

UL Korea, Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Korea, Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Korea, Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Korea, Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by IAS, any agency of the Federal Government, or any agency of any government.

Approved & Released For  
UL Korea, Ltd. By:



Changyoung Choi  
Lead Test Engineer  
UL Korea, Ltd.

Tested By:



Hyunsik Yun  
Laboratory Engineer  
UL Korea, Ltd.

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with following methods.

1. FCC CFR 47 Part 2.
2. FCC CFR 47 Part 15.231
3. IC RSS-GEN Issue 4
4. IC RSS-210 Issue 9
5. ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 218 Maeyeong-ro, Yeongtong-gu, Suwon-si, Gyeonggi-do, 16675, Korea. Line conducted emissions are measured only at the 218 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

218 Maeyeong-ro	
<input checked="" type="checkbox"/>	Chamber 1
<input type="checkbox"/>	Chamber 2

UL Korea, Ltd. is accredited by IAS, Laboratory Code TL-637. The full scope of accreditation can be viewed at <http://www.iasonline.org/PDF/TL/TL-637.pdf>.

IC test site registration number: 2324M-1

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	2.32 dB
Radiated Disturbance, Below 1GHz	4.14 dB
Radiated Disturbance, Above 1 GHz	5.97 dB

Uncertainty figures are valid to a confidence level of 95%.

## **5. EQUIPMENT UNDER TEST**

### **5.1. DESCRIPTION OF EUT**

The EUT is a Keyless Entry System and operating under FCC Part 15.231 & RSS-210 Annex A

### **5.2. WORST-CASE CONFIGURATION AND MODE**

Radiated emission below 1GHz was performed with the EUT set to transmit at the channel with highest output power as worst-case scenario.

Radiated emission above 1GHz was performed with the EUT set to transmit single frequency(433.92 MHz).

Power line conducted emission was not performed since this device using un-rechargeable battery.


The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z it was determined that Z orientation was worst-case orientation; therefore, all final radiated testing was performed with the EUT in Z orientation.

### 5.3. DESCRIPTION OF TEST SETUP


#### TEST SETUP

The EUT is a stand-alone unit during the tests.

#### SETUP DIAGRAM FOR CONDUCTION TESTS

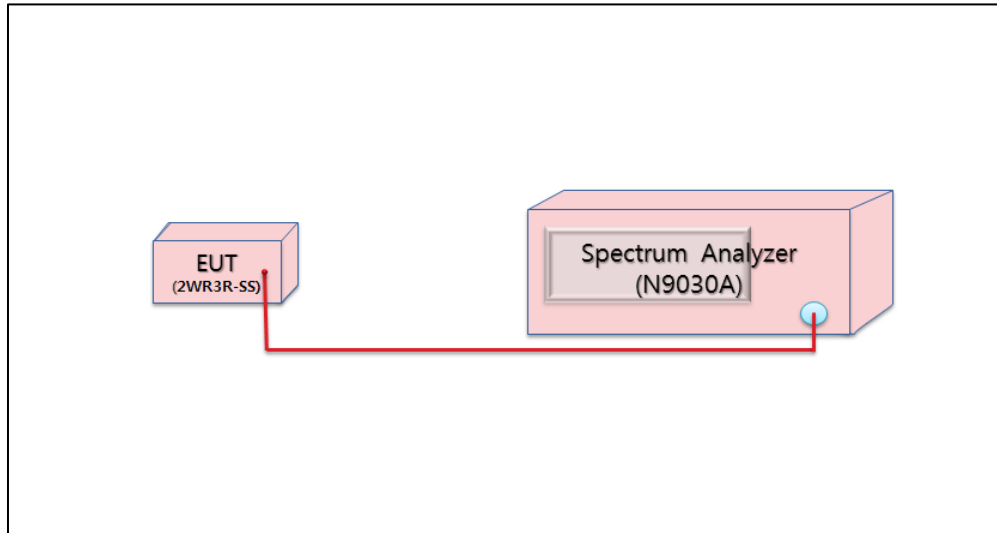

#### SETUP DIAGRAM FOR RADIATION TESTS

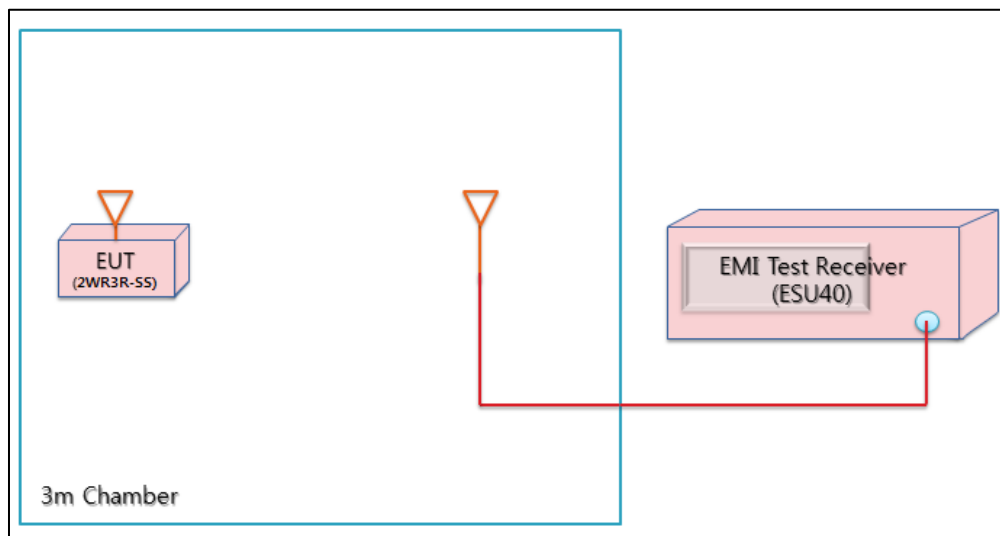



## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List				
Description	Manufacturer	Model	S/N	Cal Due
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	750	10-14-18
Antenna, Bilog, 30MHz-1GHz	SCHWARZBECK	VULB9163	749	04-14-19
Antenna, Horn, 18 GHz	ETS	3115	00167211	10-14-18
Antenna, Horn, 18 GHz	ETS	3117	00168724	05-31-19
Antenna, Horn, 18 GHz	ETS	3117	00168717	05-31-19
Preamplifier, 1000 MHz	Sonoma	310N	341282	08-17-17
Preamplifier, 1000 MHz	Sonoma	310N	351741	08-16-17
Preamplifier	ETS	3115-PA	00167475	08-17-17
Preamplifier, 18 GHz	Miteq	AFS42-00101800-25-S-42	1896138	08-16-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54170614	08-17-17
Spectrum Analyzer, 44 GHz	Agilent / HP	N9030A	MY54490312	08-16-17
EMI Test Receive, 40 GHz	R&S	ESU40	100439	08-17-17
EMI Test Receive, 40 GHz	R&S	ESU40	100457	08-16-17
EMI Test Receive, 3 GHz	R&S	ESR3	101832	08-16-17
Attenuator / Switch driver	HP	11713A	3748A04272	N/A
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	009	08-17-17
Low Pass Filter 5GHz	Micro-Tronics	LPS17541	015	08-16-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	010	08-17-17
High Pass Filter 3GHz	Micro-Tronics	HPM17543	015	08-16-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	009	08-17-17
High Pass Filter 6GHz	Micro-Tronics	HPM17542	016	08-16-17
Antenna, Loop, 9kHz-30MHz	R&S	HFH2-Z2	100418	11-25-17
UL Software				
Description	Manufacturer	Model	Version	
Radiated software	UL	UL EMC	Ver 9.5	

## 7. SUMMARY TABLE

FCC Part Section	IC Section	Test Description	Test Condition	Test Result	Worst Case
15.231 (c)	-	20 dB bandwidth	Conducted	Pass	62.94 kHz
-	RSS-210[A1.3]	Occupied bandwidth		Pass	71.63 kHz
15.231 (a)	RSS-210[A1.1]	Automatically deactivate		Pass	791 ms
15.231 (b)	RSS-210 [A1.2]	Field strength of fundamental and spurious emissions	Radiated	Pass	97.92 dBuV/m
15.205 15.209	RSS-GEN[8.9] RSS-GEN[8.10]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)		Pass	46.95 dBuV/m
15.207	RSS-GEN[8.8]	AC Power Line Conducted Emission	-	N/A	-

## 8. ANTENNA PORT TEST RESULTS

### 8.1. 99% & 20 dB BANDWIDTH

#### LIMITS

The bandwidth of the emission shall be no wider than 0.25 % of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than


#### TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth and to 1% of the span. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

#### RESULTS

Channel	Frequency [MHz]	20 dB Bandwidth [kHz]	99 % Bandwidth [kHz]	Limit [kHz]
Single channel	433.92	62.94	71.63	1084.80

#### 20 dB & 99% BANDWIDTH PLOTS

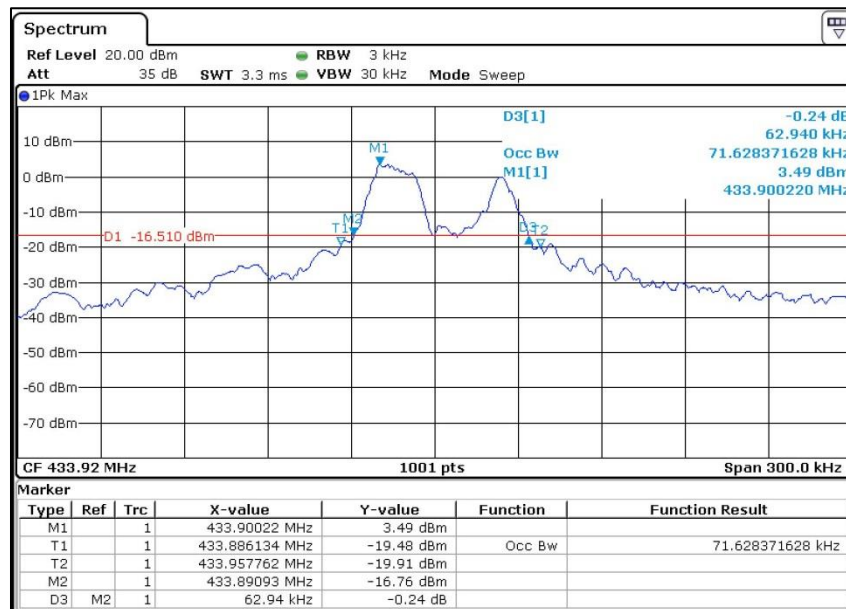

## 8.2. AUTOMATICALLY DEACTIVATE


### LIMITS

FCC §15.231 (a) & RSS-210 Annex A.1.1


A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

### RESULTS

#### Single operational time

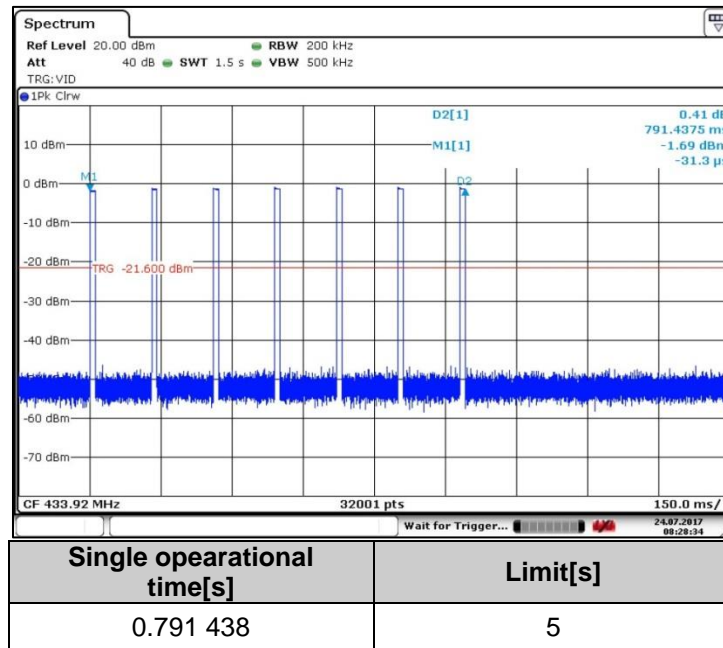

#### Monitoring(300s)

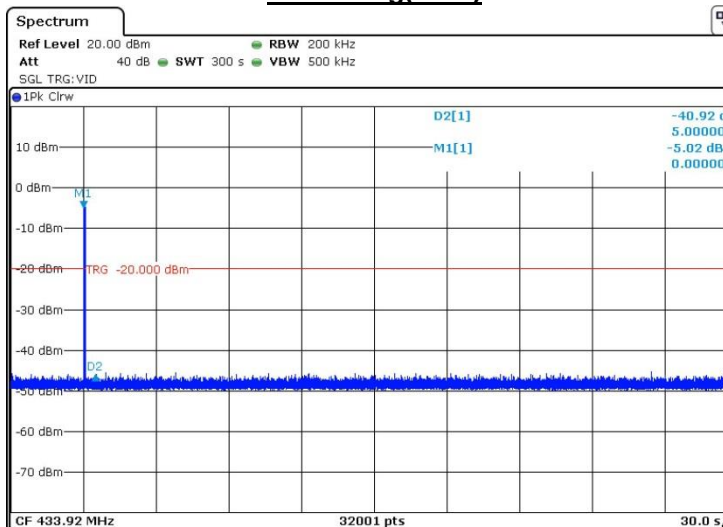

## 9. RADIATED TEST RESULTS

### 9.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205, §15.209, §15.231 (b), RSS-210 Annex A1.2

Limits for radiated disturbance of an intentional radiator		
Frequency range (MHz)	Limits (µV/m)	Measurement Distance (m)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 – 88	100**	3
88 - 216	150**	3
216 – 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g. §§ 15.231 and 15.241.

FCC §15.231 & RSS-210 Annex A1.2		
Fundamental Frequency (MHz)		Field strength of fundamental (µV/m)
For FCC	For IC(RSS-Gen)	
40.66-40.70	-	2,250
70-130	70-130	1,250
130-174	130-174	1,250 to 3,750*
174-260	174-260	3,750
260-470	260-470	3,750 to 12,500*
Above 470	Above 470	12,500

\* Linear interpolation.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz and 150 cm for above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and add duty cycle factor for average measurements(See the APPENDIX I in this test report).

Pre-scans to detect harmonic and spurious emissions, the resolution bandwidth is set to 1 MHz; the video bandwidth is set to 30 KHz for peak measurements.

The spectrum from 30MHz to 1GHz is investigated with the transmitter set to 433.92 MHz.

(From 1 GHz to 5 GHz, test was performed with the EUT set to transmit at the position with highest output power)

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

Unwanted emissions within Restricted Bands are measured using traditional radiated procedures.

Note : Emission was pre-scanned from 9KHz to 30MHz; No emissions were detected which was at least 20dB below the specification limit (consider distance correction factor).  
Per FCC part 15.31(o), test results were not reported.


Formula for converting the filed strength from uV/m to dBuV/m is:  
Limit (dBuV/m) = 20 log limit (uV/m)

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site.  
Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the one of tests made in an open field based on KDB 414788.


## 9.2. TRANSMITTER ABOVE 1 GHz

### HARMONICS AND SPURIOUS EMISSIONS

#### 433.92 MHz HARMONICS HORIZONTAL

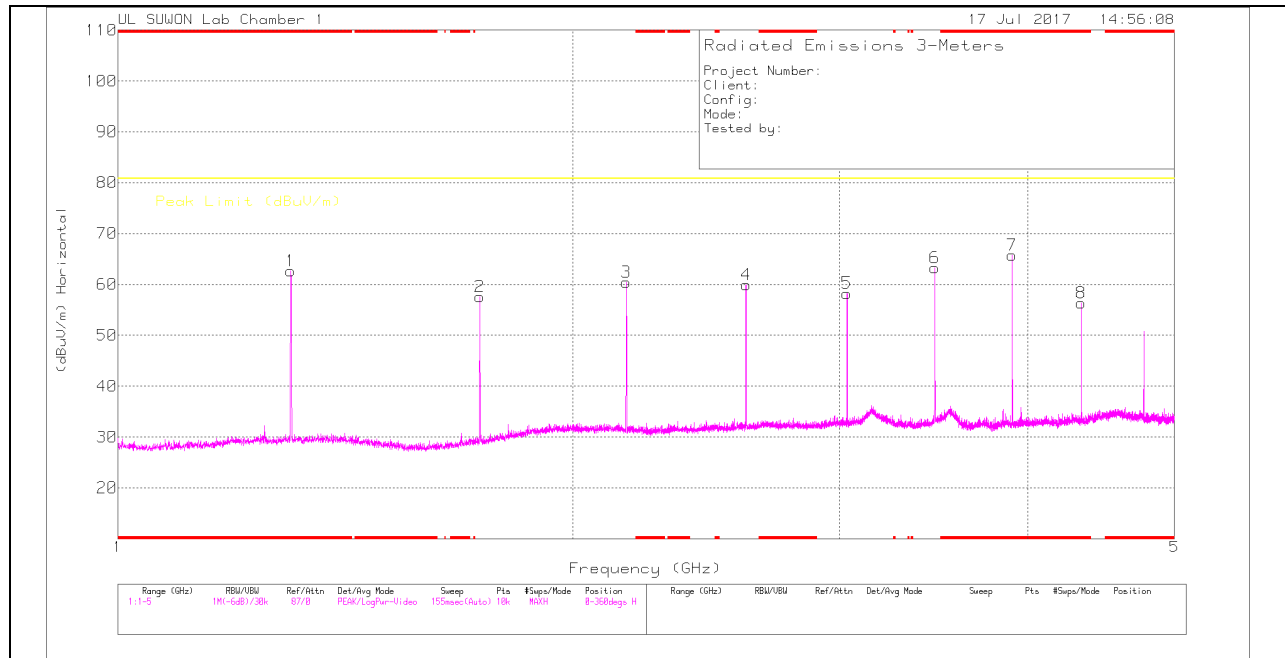

#### 433.92 MHz HARMONICS VERTICAL

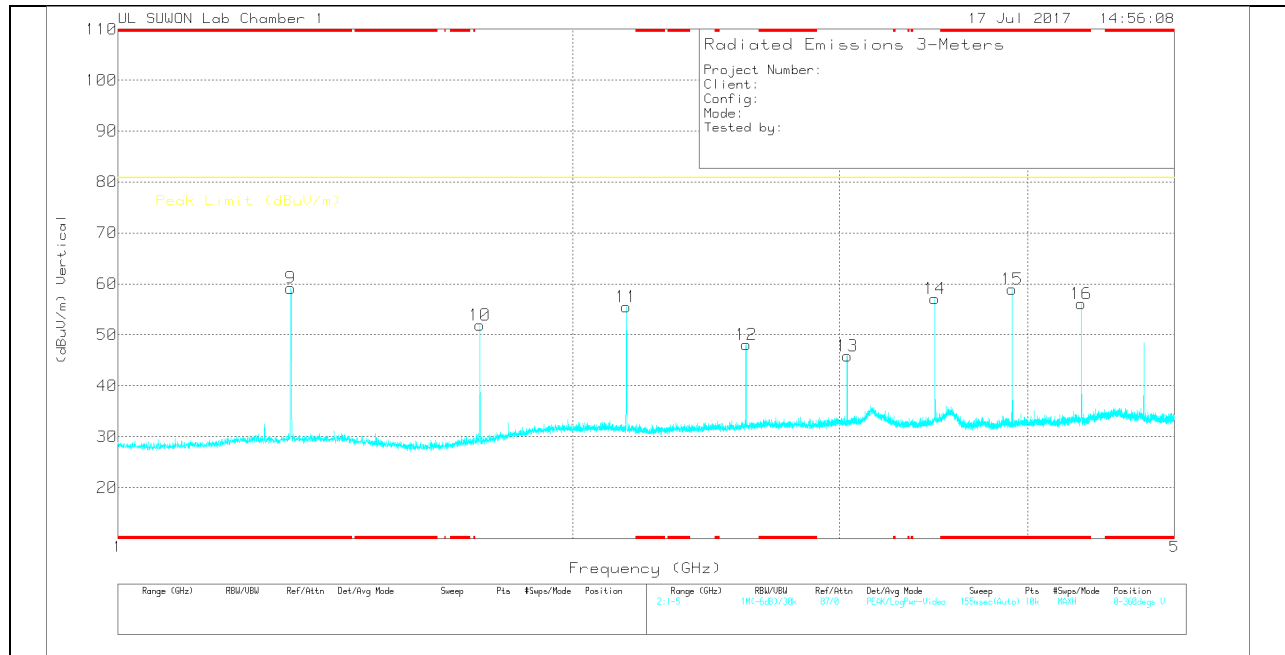

Note: Emission was scanned up to 5 GHz

**433.92 MHz HARMONICS DATA**

**Pre-Scan**

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_0016_8717	1-18G(dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 1.302	73.20	PK	29.4	-39.9	62.70	74.0	-11.30	0-360	250	H
2	1.736	67.90	PK	29.0	-39.3	57.60	80.8	-23.20	0-360	150	H
3	2.170	67.83	PK	31.4	-38.8	60.43	80.8	-20.37	0-360	250	H
4	2.604	66.61	PK	31.9	-38.6	59.91	80.8	-20.89	0-360	250	H
5	3.037	63.67	PK	32.4	-37.8	58.27	80.8	-22.53	0-360	250	H
6	3.472	67.00	PK	32.5	-36.2	63.30	80.8	-17.50	0-360	150	H
7	* 3.905	68.01	PK	33.1	-35.3	65.81	74.0	-8.19	0-360	150	H
8	* 4.339	57.79	PK	33.4	-34.8	56.39	74.0	-17.61	0-360	250	H
9	* 1.302	69.64	PK	29.4	-39.9	59.14	74.0	-14.86	0-360	250	V
10	1.736	62.15	PK	29.0	-39.3	51.85	80.8	-28.95	0-360	250	V
11	2.170	62.85	PK	31.4	-38.8	55.45	80.8	-25.35	0-360	250	V
12	2.604	54.79	PK	31.9	-38.6	48.09	80.8	-32.71	0-360	250	V
13	3.038	51.10	PK	32.4	-37.7	45.80	80.8	-35.00	0-360	150	V
14	3.472	60.77	PK	32.5	-36.2	57.07	80.8	-23.73	0-360	150	V
15	* 3.905	61.17	PK	33.1	-35.3	58.97	74.0	-15.03	0-360	150	V
16	* 4.339	57.48	PK	33.4	-34.8	56.08	74.0	-17.92	0-360	150	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band

**Radiated Emissions**

Frequency (GHz)	Meter Reading (dBuV)	Det	20170531_3117_0016_8717	1-18G(dB)	Duty Cycle Reduction Factor(dB)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
* 1.302	73.69	Pk	29.4	-39.9	-	63.19	74.0	-10.81	271	242	H
* 1.302	73.69	Pk	29.4	-39.9	-18.86	44.33	54.0	-9.67	271	242	H
1.736	68.34	Pk	29.0	-39.3	-	58.04	80.8	-22.76	127	161	H
2.170	68.71	Pk	31.4	-38.8	-	61.31	80.8	-19.49	264	251	H
2.170	68.71	Pk	31.4	-38.8	-18.86	42.45	60.8	-18.35	264	251	H
2.604	66.75	Pk	31.9	-38.6	-	60.05	80.8	-20.75	262	246	H
3.037	64.14	Pk	32.4	-37.8	-	58.74	80.8	-22.06	261	240	H
3.472	67.76	Pk	32.5	-36.2	-	64.06	80.8	-16.74	131	150	H
3.472	67.76	Pk	32.5	-36.2	-18.86	45.20	60.8	-15.60	131	150	H
* 3.905	68.45	Pk	33.1	-35.3	-	66.25	74.0	-7.75	126	151	H
* 3.905	68.45	Pk	33.1	-35.3	-18.86	47.39	54.0	-6.61	126	151	H
* 4.339	58.40	Pk	33.4	-34.8	-	57.00	74.0	-17.00	260	247	H
* 4.339	58.40	Pk	33.4	-34.8	-18.86	38.14	54.0	-15.86	260	247	H
* 1.302	70.36	Pk	29.4	-39.9	-	59.86	74.0	-14.14	261	246	V
* 1.302	70.36	Pk	29.4	-39.9	-18.86	41.00	54.0	-13.00	261	246	V
1.736	62.64	Pk	29.0	-39.3	-	52.34	80.8	-28.46	264	252	V
2.170	62.98	Pk	31.4	-38.8	-	55.58	80.8	-25.22	267	249	V
2.604	55.24	Pk	31.9	-38.6	-	48.54	80.8	-32.26	261	247	V
3.038	52.00	Pk	32.4	-37.7	-	46.70	80.8	-34.10	114	154	V
3.472	60.98	Pk	32.5	-36.2	-	57.28	80.8	-23.52	114	154	V
* 3.905	61.74	Pk	33.1	-35.3	-	59.54	74.0	-14.46	121	151	V
* 3.905	61.74	Pk	33.1	-35.3	-18.86	40.68	54.0	-13.32	121	151	V
* 4.339	58.10	Pk	33.4	-34.8	-	56.70	74.0	-17.30	124	153	V
* 4.339	58.10	Pk	33.4	-34.8	-18.86	37.84	54.0	-16.16	124	153	V

\* - indicates frequency in CFR15.205/IC7.2.2 Restricted Band


Note. If non-restricted band's Peak measurement data meet the average limit(60.8 dBuV/m), average data was omitted(if peak data exceed average limit, average data was noted).




### 9.3. TRANSMITTER BELOW 1 GHz

#### FUNDAMENTAL AND SPURIOUS EMISSIONS

#### 433.92 MHz FUNDAMENTAL & HARMONICS HORIZONTAL

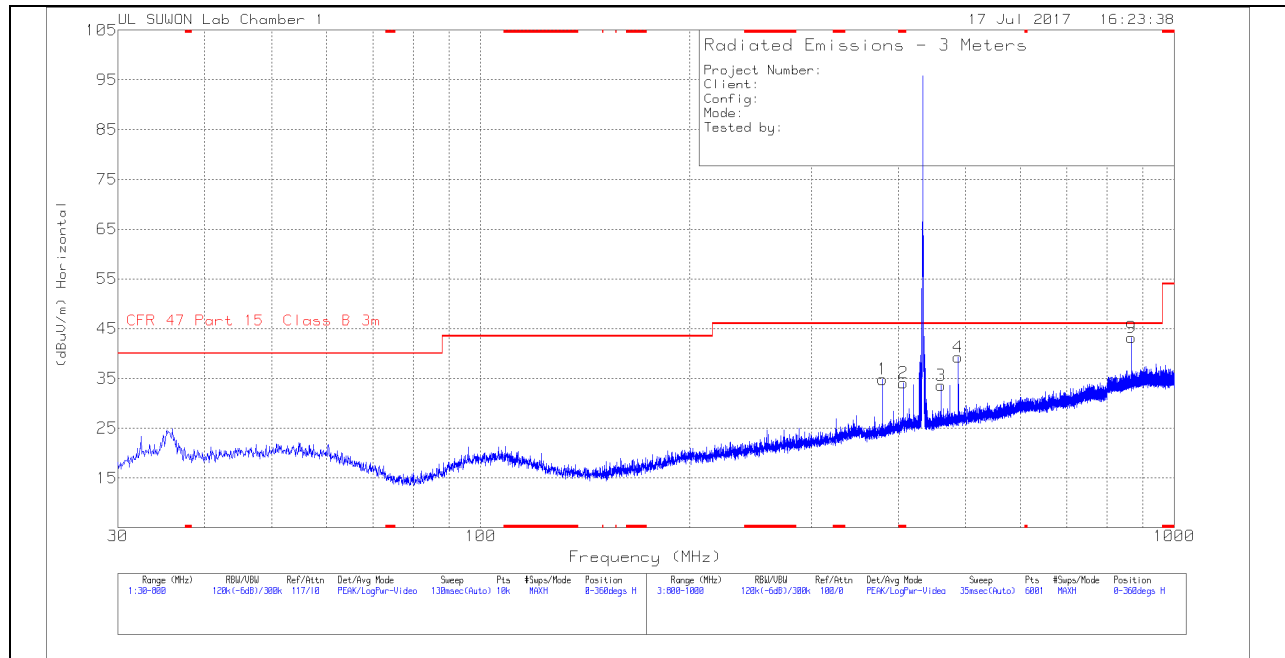

#### 433.92 MHz FUNDAMENTAL & HARMONICS VERTICAL

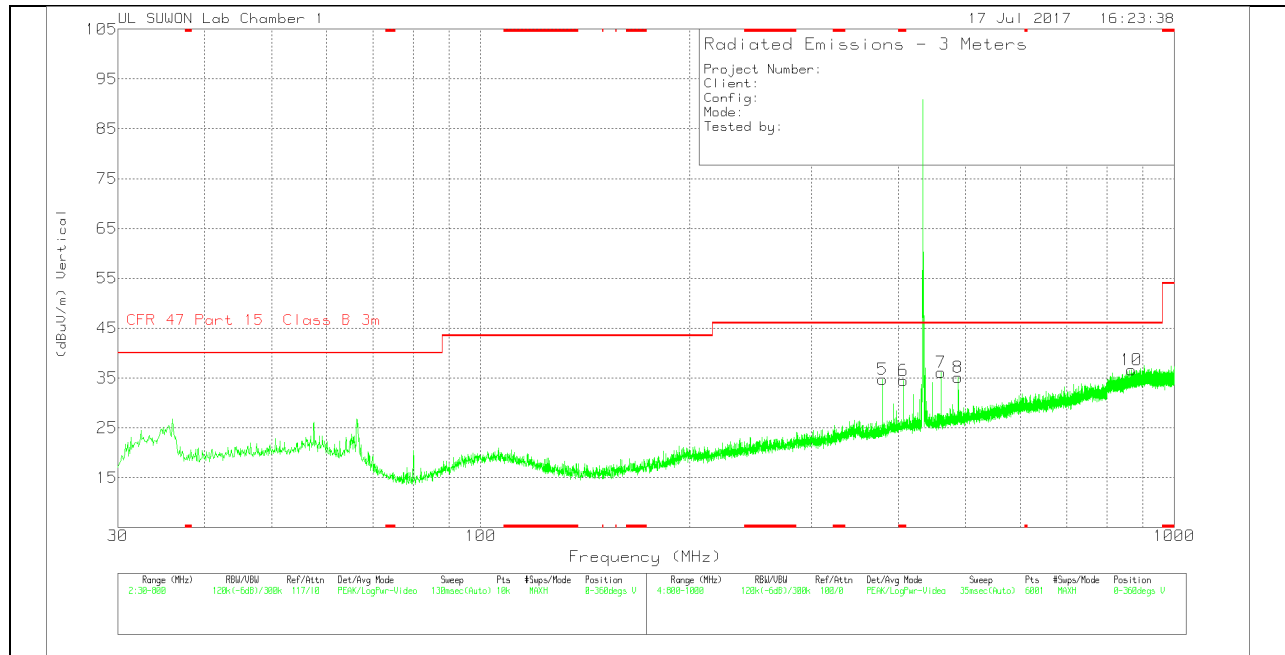

**BELOW 1 GHz TABLE**

**Fundamental measurement data**

Axis	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163 _750(dB)	30-1000MHz[dB]	Duty Cycle Reduction Factor(dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
X	433.943	76.02	Pk	15.9	6.0	-	97.92	100.8	-2.88	260	200	H
	433.943	76.02	Pk	15.9	6.0	-18.86	79.06	80.8	-1.74	260	200	H
	433.947	68.28	Pk	15.9	6.0	-	90.18	100.8	-10.62	186	219	V
	433.947	68.28	Pk	15.9	6.0	-18.86	71.32	80.8	-9.48	186	219	V
Y	433.943	73.76	Pk	15.9	6.0	-	95.66	100.8	-5.14	187	237	H
	433.943	73.76	Pk	15.9	6.0	-18.86	76.8	80.8	-4.00	187	237	H
	433.944	66.08	Pk	15.9	6.0	-	87.98	100.8	-12.82	96	251	V
	433.944	66.08	Pk	15.9	6.0	-18.86	69.12	80.8	-11.68	96	251	V
Z	433.900	60.66	Pk	15.9	6.0	-	82.56	100.8	-18.24	325	100	H
	433.900	60.66	Pk	15.9	6.0	-18.86	63.7	80.8	-17.10	325	100	H
	433.899	75.23	Pk	15.9	6.0	-	97.13	100.8	-3.67	245	121	V
	433.899	75.23	Pk	15.9	6.0	-18.86	78.27	80.8	-2.53	245	121	V

**1 GHz under harmonics data**

Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	VULB9163 _750(dB)	30-1000MHz[dB]	Corrected Reading (dBuV/m)	CFR 47 Part 15 Class B 3m	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	379.657	46.6	PK	14.6	-26.4	34.8	46.02	-11.22	0-360	100	H
2	* 406.761	44.83	PK	15.6	-26.3	34.13	46.02	-11.89	0-360	100	H
3	461.046	43.61	PK	16	-26	33.61	46.02	-12.41	0-360	100	H
4	488.15	48.52	PK	16.8	-26	39.32	46.02	-6.7	0-360	200	H
5	379.657	46.51	PK	14.6	-26.4	34.71	46.02	-11.31	0-360	300	V
6	* 406.838	45.17	PK	15.6	-26.3	34.47	46.02	-11.55	0-360	300	V
7	461.046	46.1	PK	16	-26	36.1	46.02	-9.92	0-360	200	V
8	488.15	44.36	PK	16.8	-26	35.16	46.02	-10.86	0-360	200	V
9	867.7993	29.55	PK	21.5	-7.9	43.15	46.02	-2.87	0-360	100	H
10	867.866	23.04	PK	21.5	-7.9	36.64	46.02	-9.38	0-360	400	V

Pk - Peak detector

Note1: Only peak measurement was performed. Because peak measurement result of unwanted emission is less than Quasi-Peak limit.

Note2: The test was processed 433.92 MHz

## 10. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.10.


The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

### RESULTS: N/A

**Note. EUT use Non-rechargeable battery.**

## APPENDIX I – DUTY CYCLE REDUCTION FACTOR

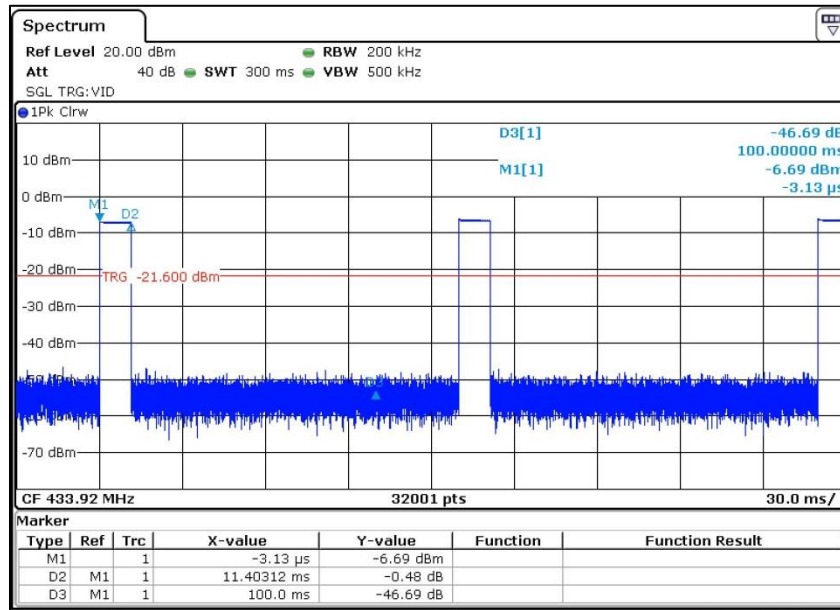

Measured worst case transmit time per 100 ms	11.40312 ms
Declared worst case transmit time per 100 ms	10 ms
Duty cycle reduction factor	$20 \times \log(11.40312/100) = -18.86 \text{ dB}$

Note. The worst duty cycle has been provide by the manufacturer’s operational description.

**END OF REPORT**