


FCC TEST REPORT

Product : Wireless Flash
Trade mark : **Cactus**
Model/Type reference : RF60
FCC ID : VAAFLARF60
Report Number : EESZG01140002-1
Date : Apr. 23, 2014
Regulations : See below

Test Standards	Results
<input checked="" type="checkbox"/> 47 CFR FCC Part 15 Subpart C 15.249: 2013	PASS

Prepared for
Harvest One Limited
9D On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fo Tan, N.T.,
Hong Kong

Prepared by
Centre Testing International (Shenzhen) Corporation
Hongwei Industrial Zone, 70 Area, Bao'an District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested by: 

Reviewed by: 

Approved by: 

Date: Apr. 23, 2014



Check No.: 1022590361

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. TEST SUMMARY	3
3. MEASUREMENT UNCERTAINTY	3
4. TEST EQUIPMENT LIST	4
5. SUPPORT EQUIPMENT LIST	4
6. PRODUCT INFORMATION	4
7. 20DB BANDWIDTH MEASUREMENT	5
7.1 LIMITS	5
7.2 BLOCK DIAGRAM OF TEST SETUP	5
7.3 TEST PROCEDURE	5
7.4 TEST RESULT	5
8. RADIATED EMISSIONS MEASUREMENT	8
8.1 LIMITS	8
8.2 BLOCK DIAGRAM OF TEST SETUP	8
8.4 TEST RESULT	10
9. BAND EDGE EMISSION MEASUREMENT	15
9.1 LIMITS	15
9.2 BLOCK DIAGRAM OF TEST SETUP	15
9.3 TEST PROCEDURE	15
9.4 TEST RESULT	15
10. CONDUCTED EMISSION TEST	18
10.1 LIMITS	18
10.2 BLOCK DIAGRAM OF TEST SETUP	18
10.3 PROCEDURE OF CONDUCTED EMISSION TEST	18
10.4 GRAPHS AND DATA	19
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	21
APPENDIX 2 PHOTOGRAPHS OF EUT	23
<i>(Note: N/A means not applicable)</i>	

1. GENERAL INFORMATION

Applicant: Harvest One Limited
 9D On Shing Industrial Building, 2-16 Wo Liu Hang Road, Fo
 Tan, N.T., Hong Kong

FCC ID: VAAFLARF60

Product: Wireless Flash

Trade mark: **Cactus**

Model/Type reference: RF60

Serial Number: N/A

Report Number: EESZG01140002-1

Sample Received Date: Jan. 16, 2014

Sample tested Date: Jan. 16, 2014 to Apr. 23, 2014

The above equipment was tested by Centre Testing International for compliance with the requirements set forth in the FCC Rules and Regulations Part 15 and the measurement procedure according to ANSI C63.4:2009.

2. TEST SUMMARY

The complete list of measurements is given below:

No.	Test Item	Rule	Result
1	20dB Bandwidth	FCC 15.215(c)	PASS
2	Radiated Emission	FCC 15.209	PASS
3	Out of Band Emission	FCC 15.249 (d)	PASS
4	Antenna Requirements *	FCC 15.203	PASS
5	Conducted Emission (CE)	FCC 15.207	PASS

*: According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The EUT has a built in antenna which is a short wire solder on the PCB, this is permanently attached antenna and meets the requirements of this section.

3. MEASUREMENT UNCERTAINTY

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement items	Uncertainty
Conducted Emission Test	3.2 dB
Radiated Emissions / Bandedge Emission	4.5 dB

4. TEST EQUIPMENT LIST

Equipment	Manufacturer	Model Number	Serial Number	Due Date
3M Chamber & Accessory Equipment	ETS-LINDGREN	FACT-3	3510	07/12/2016
Spectrum Analyzer	Agilent	E4443A	MY45300910	01/18/2015
Receiver	R&S	ESCI	100435	07/19/2014
TRILOG Broadband Antenna	schwarzbeck	VULB 9163	618	06/25/2014
Multi device Controller	ETS-LINGREN	2090	00057230	N/A
Horn Antenna	ETS-LINGREN	3117	00057407	07/19/2014
Receiver	R&S	ESCI	100009	07/19/2014
LISN	R&S	ENV216	100098	07/19/2014

5. SUPPORT EQUIPMENT LIST

No.	Device Type	Brand	Model	Series No.	Data Cable	Remark
1.	Notebook	DELL	Vostro 3400	GYQTVP1	N/A	FCC DOC
2.	Mouse	L.Selectron	M004	02284699	Un-shielded 1.2M	FCC DOC

6. PRODUCT INFORMATION


Items	Description
Rating	DC 6V
Intentional Transceiver	Intentional Transceiver
Modulation	MSK
Frequency Range	2.445796783~2.480988190GHz
Channel Number	12
Frequency list	2.445796783GHz, 2.448996002GHz, 2.452195221GHz, 2.455394440GHz, 2.458593658GHz, 2.461792877GHz, 2.464992096GHz, 2.468191315GHz, 2.471390533GHz, 2.474589752GHz, 2.477788971GHz, 2.480988190GHz
Type	PCB Antenna
Antenna gain	0dBi
Connector	fixed on board

7. 20DB BANDWIDTH MEASUREMENT

7.1 LIMITS

None

7.2 BLOCK DIAGRAM OF TEST SETUP

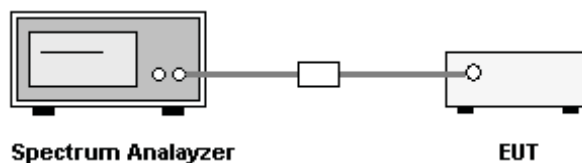


7.3 TEST PROCEDURE

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Set spectrum analyzer's RBW and VBW to applicable value with Peak in Max Hold.
3. A PEAK output reading and 20dB BW function in spectrum analyzer were taken.


7.4 TEST RESULT

20dB Bandwidth:


Channel	Frequency (GHz)	20 dB BW (MHz)
Low	2.445796783	1.08
Middle	2.458593658	1.04
High	2.480988190	1.14

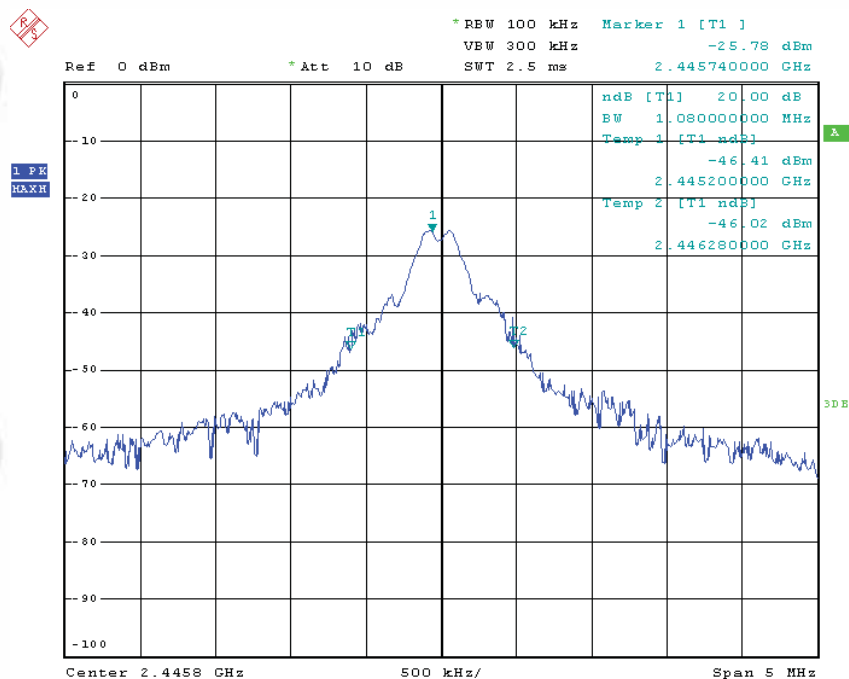

Channel low

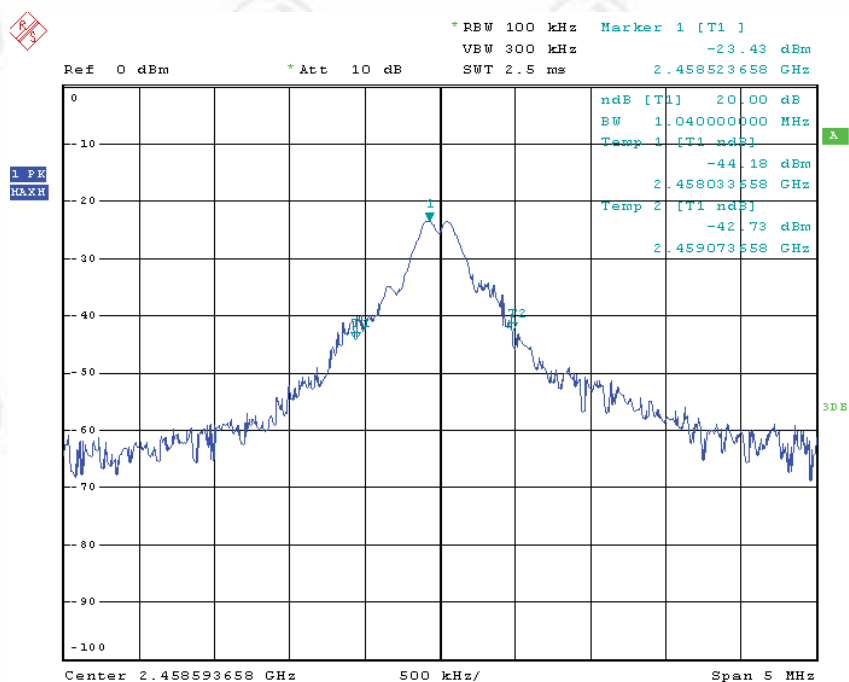

Channel middle

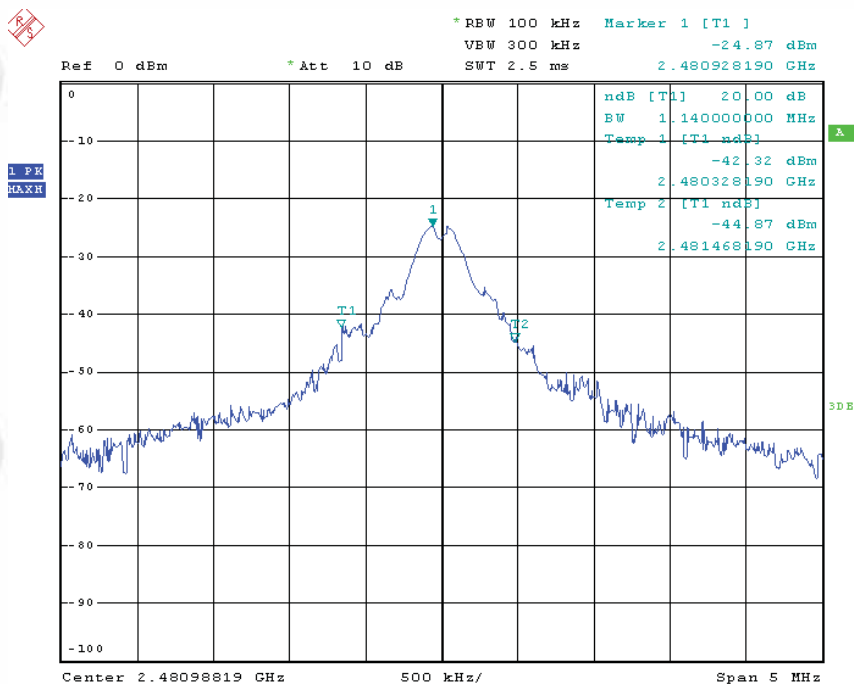

Channel high

8. RADIATED EMISSIONS MEASUREMENT

8.1 LIMITS

(1) The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/ meter)	Field strength of harmonics (microvolts/ meter)
902–928 MHz	50	500
2400–2483.5 MHz	50	500
5725–5875 MHz	50	500
24.0–24.25 GHz	250	2500


(2) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209 as the following , whichever is the lesser attenuation.

Frequency (MHz)	Field strength (mV/m)	Distance (m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Note: the tighter limit applies at the band edges.

8.2 BLOCK DIAGRAM OF TEST SETUP


For radiated emissions from 9kHz to 30MHz

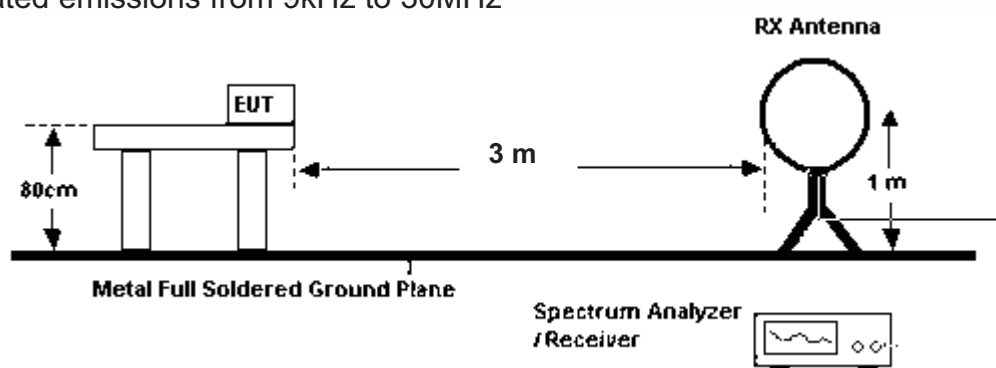

For radiated emissions from 30 - 1000MHz

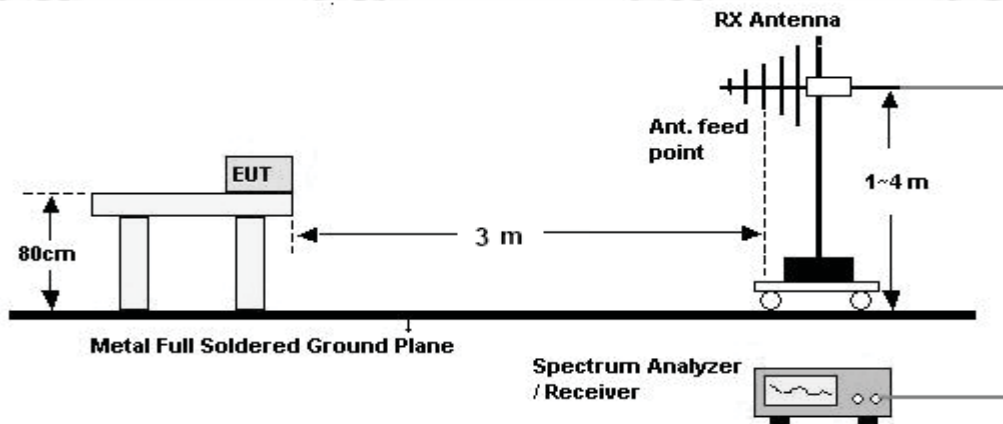

For radiated emissions from 1GHz to 25GHz

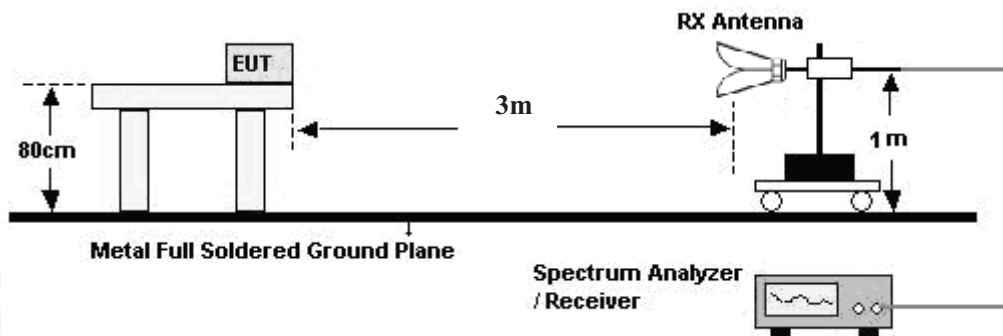

8.3 TEST PROCEDURE

Below 30MHz

- The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 1 meter away from the antenna (loop antenna). The maximum values of the field strength are recorded by adjusting the polarizations of the test antenna and rotating the turntable.
- For each suspected emission, the EUT was arranged to its worst case and then turn table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test frequency analyzer system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

30MHz ~ 1GHz:

- The Product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 100 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its QP value (120 kHz RBW): vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then

set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Above 1GHz:

- a. The product was placed on the non-conductive turntable 0.8m above the ground at a chamber.
- b. Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, set 1MHz RBW. Record the maximum PK field strength in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- c. For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

8.4 TEST RESULT

Note: Limit dB μ V/m @3m = Limit dB μ V/m @300m+ 80
Limit dB μ V/m @3m = Limit dB μ V/m @30m + 40

Remark : The radiation measurements are performed in X, Y, Z axis positioning , only the worst case mode is recorded in the report.

A. Below 30MHz:


The test data below 30MHz are very low, so they are not recorded.

B. 30MHz ~ 1GHz:

The test data of low channel, middle channel and high channel are almost same in frequency bands 30MHz to 1GHz, and the data of low channel are chosen as representative in below:

H:


76.9 dBuV/m

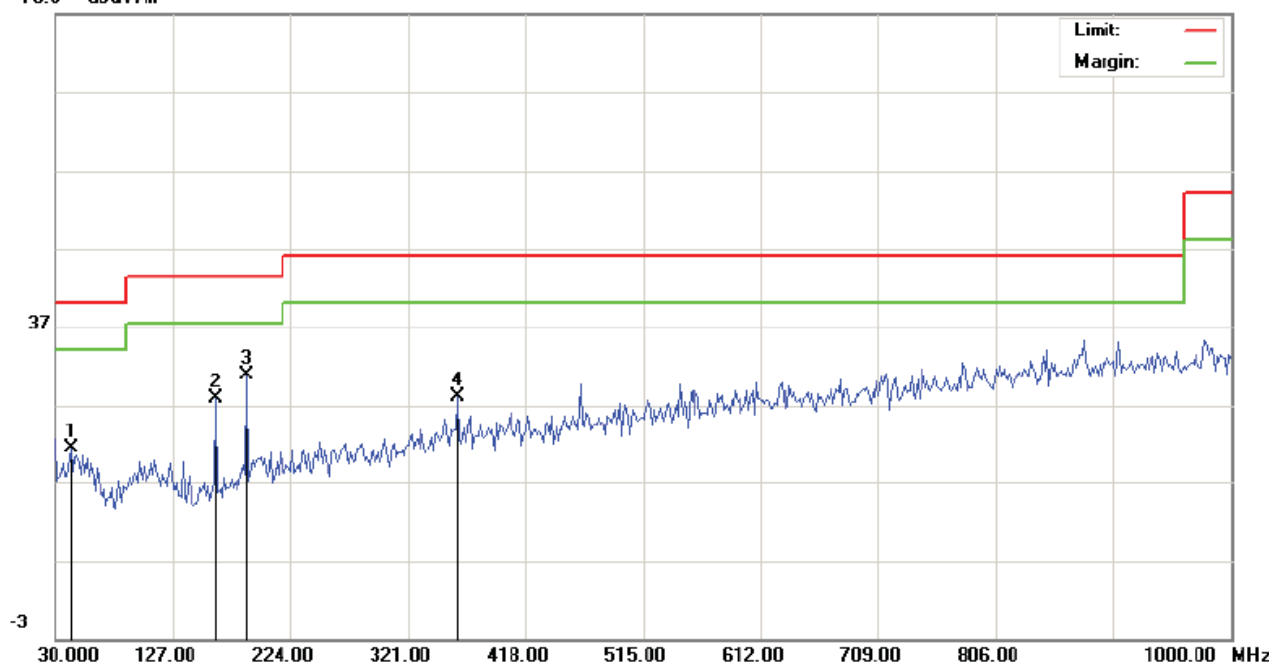

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	42.9333	6.44			14.89	21.33			40.00		-18.67		P	
2	162.5667	16.38			11.43	27.81			43.50		-15.69		P	
3	188.4333	17.68			13.14	30.82			43.50		-12.68		P	
4	361.4167	10.08			17.86	27.94			46.00		-18.06		P	

V:

76.9 dBuV/m

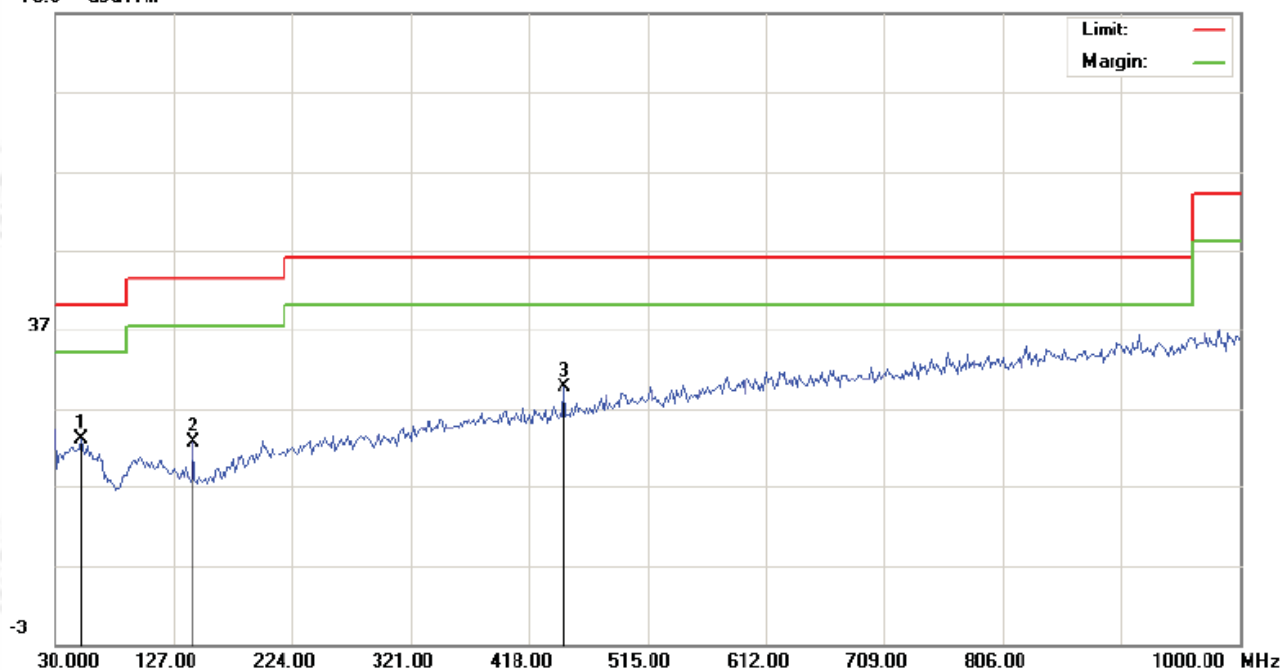

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV/m)			Limit (dBuV/m)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	51.0167	7.55			15.45	23.00			40.00		-17.00		P	
2	143.1667	11.63			11.05	22.68			43.50		-20.82		P	
3	447.1000	10.52			19.06	29.58			46.00		-16.42		P	

C. Above 1GHz:

Test Results-(Measurement Distance: 3m)_Channel low							
Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
2445.8*	93.02	---	---	114	94	H	P
4891.6	45.12	---	---	74	54	H	P
7337.4	39.69	---	---	74	54	H	P
2445.8*	92.21	---	---	114	94	V	P
4891.6	44.13	---	---	74	54	V	P
7337.4	30.23	---	---	74	54	V	P

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel middle							
Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
2458.6*	90.24	---	---	114	94	H	P
4917.2	41.27	---	---	74	54	H	P
7375.8	38.21	---	---	74	54	H	P
2458.6*	89.36	---	---	114	94	V	P
4917.2	40.19	---	---	74	54	V	P

*: fundamental frequency

Test Results-(Measurement Distance: 3m)_Channel high							
Frequency (GHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
2481.0*	90.63	---	---	114	94	H	P
4962.0	44.21	---	---	74	54	H	P
7443.0	36.98	---	---	74	54	H	P
2481.0*	90.22	---	---	114	94	V	P
4962.0	42.63	---	---	74	54	V	P
7443.0	35.68	---	---	74	54	V	P

*: fundamental frequency

Remark:

1. For above 1GHz, except fundamental frequency:

PK detector: RBW=1MHz, VBW=1MHz

For above 1GHz, fundamental frequency:

PK detector: RBW=3MHz, VBW=3MHz


2. According to the emissions below 18GHz, the data curve is lower than the limit, and the data between 18GHz to 25GHz will be lower than the limit, so they are not recorded in the report.

9. BAND EDGE EMISSION MEASUREMENT

9.1 LIMITS

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § FCC 15.209 & , whichever is the lesser attenuation.

9.2 BLOCK DIAGRAM OF TEST SETUP

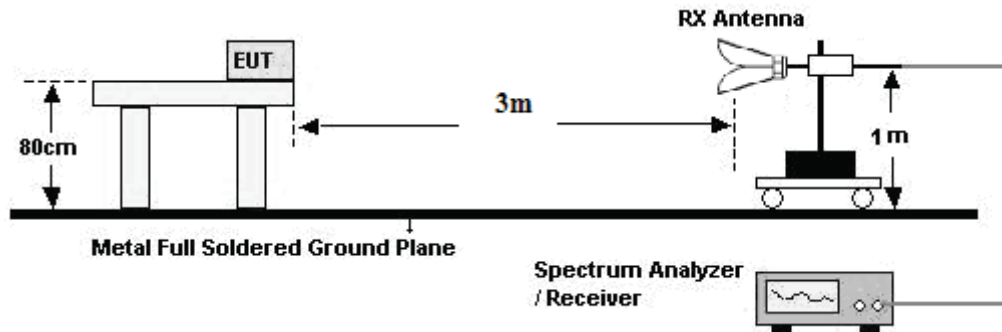


9.3 TEST PROCEDURE

- The EUT was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where EUT radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.


9.4 TEST RESULT

PASS

2.445796783GHz:

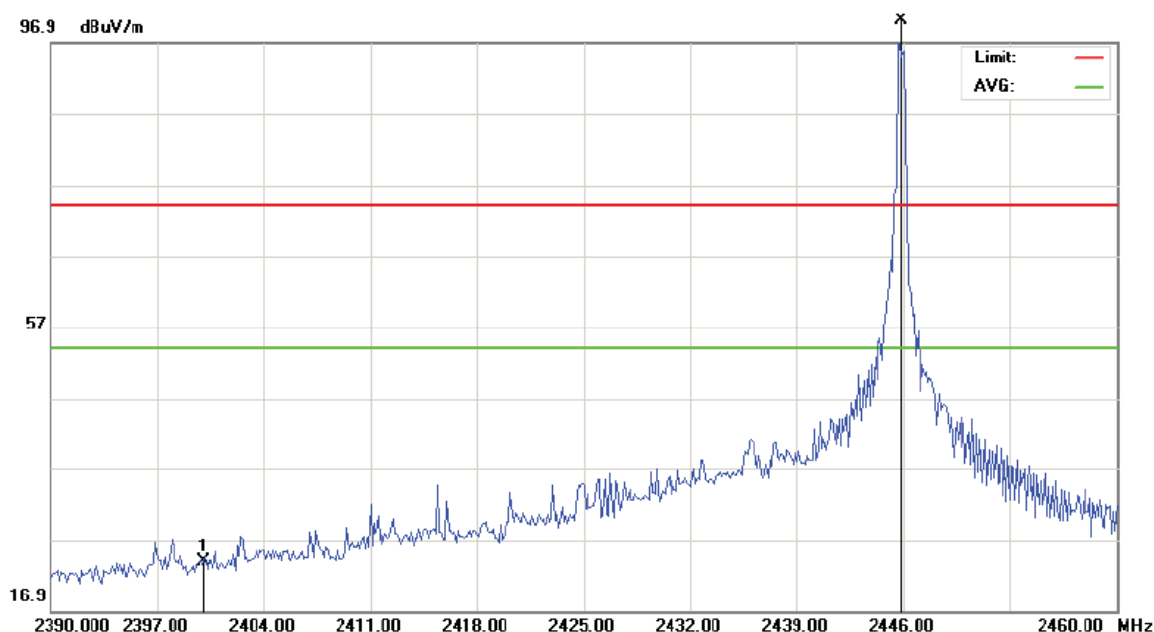

Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dBμV/m)	AV factor (dB)	AV (dBμV/m)	PK (dBμV/m)	AV (dBμV/m)	(H/V)	(P/F)
2400.000	23.86	---	---	74	54	H	P

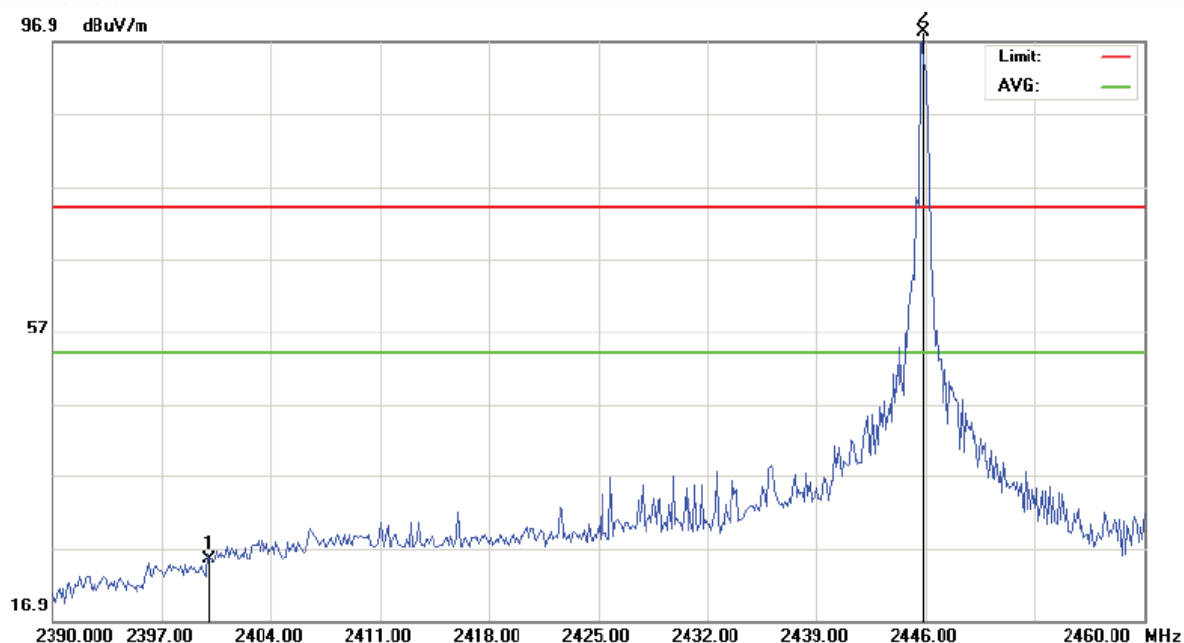

Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dBμV/m)	AV factor (dB)	AV (dBμV/m)	PK (dBμV/m)	AV (dBμV/m)	(H/V)	(P/F)
2400.000	25.34	---	---	74	54	V	P

2.480988190GHz:



Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
2483.500	42.90	---	---	74	54	H	P



Frequency (MHz)	Measurement value			Limit		Antenna	Result
	PK (dB μ V/m)	AV factor (dB)	AV (dB μ V/m)	PK (dB μ V/m)	AV (dB μ V/m)	(H/V)	(P/F)
2483.500	44.33	---	---	74	54	V	P


10. CONDUCTED EMISSION TEST

10.1 LIMITS

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

NOTE: 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.


10.2 BLOCK DIAGRAM OF TEST SETUP

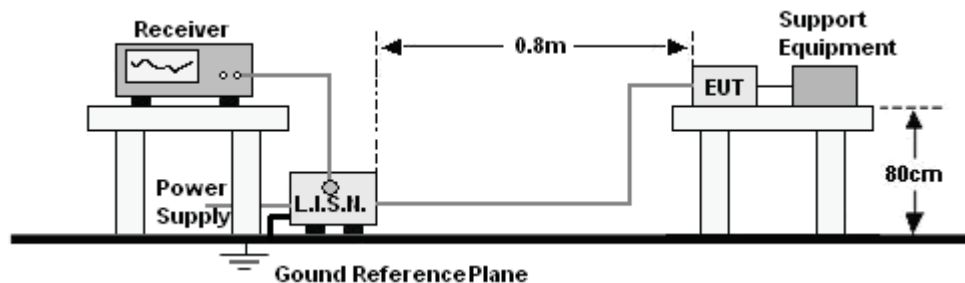

10.3 PROCEDURE OF CONDUCTED EMISSION TEST

- The Product was placed on a nonconductive table above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.


10.4 GRAPHS AND DATA

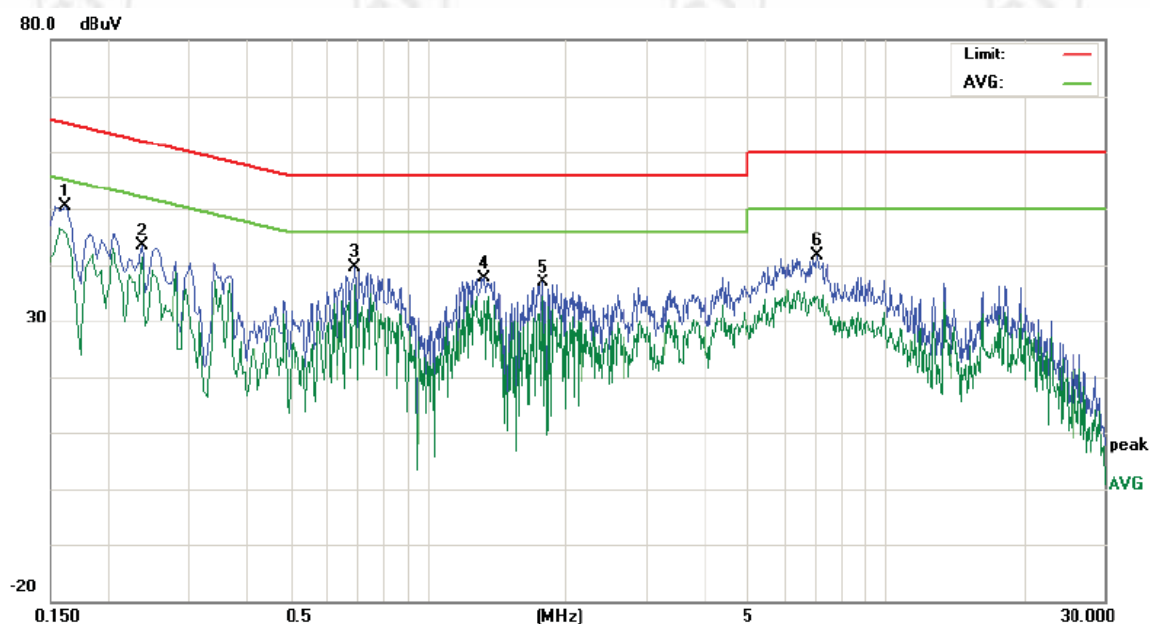

Site site #1
Limit: FCC CE
EUT: Wireless Flash
M/N: RF60
Mode: Keeping TX
Note:

Phase: **L1**
Power: AC 120V/60Hz
Temperature: 18
Humidity: 51 %

No.	Freq. MHz	Reading_Level (dBμV)			Correct Factor dB	Measurement (dBμV)			Limit (dBμV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	40.63		36.09	9.76	50.39		45.85	65.36	55.36	-14.97	-9.51	P	
2	0.2380	33.56		31.58	9.80	43.36		41.38	62.16	52.16	-18.80	-10.78	P	
3	0.6940	29.86		26.53	9.80	39.66		36.33	56.00	46.00	-16.34	-9.67	P	
4	1.3260	27.85		23.67	9.83	37.68		33.50	56.00	46.00	-18.32	-12.50	P	
5	1.7900	27.01		24.39	9.88	36.89		34.27	56.00	46.00	-19.11	-11.73	P	
6	7.0700	31.67		24.43	10.00	41.67		34.43	60.00	50.00	-18.33	-15.57	P	

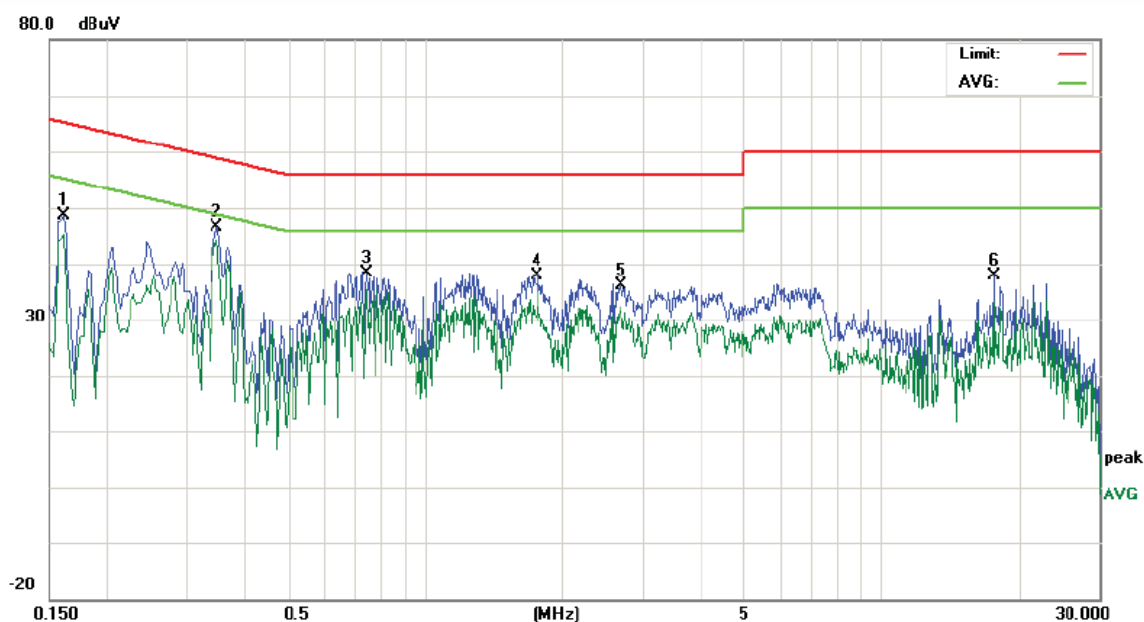

Site site #1

Phase: **N**

Temperature: 18

Limit: FCC CE

Power: AC 120V/60Hz

Humidity: 51 %

EUT: Wireless Flash

M/N: RF60

Mode: Keeping TX

Note:

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	38.85		35.40	9.76	48.61		45.16	65.36	55.36	-16.75	-10.20	P	
2	0.3500	36.91		34.37	9.80	46.71		44.17	58.96	48.96	-12.25	-4.79	P	
3	0.7460	28.67		25.66	9.80	38.47		35.46	56.00	46.00	-17.53	-10.54	P	
4	1.7660	28.02		24.98	9.88	37.90		34.86	56.00	46.00	-18.10	-11.14	P	
5	2.7060	26.31		22.42	9.92	36.23		32.34	56.00	46.00	-19.77	-13.66	P	
6	17.6940	27.62		22.83	10.26	37.88		33.09	60.00	50.00	-22.12	-16.91	P	

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP



TEST SETUP OF CONDUCTED EMISSION



TEST SETUP OF RADIATED EMISSION (30MHz~1GHz)



TEST SETUP OF RADIATED EMISSION (Above1GHz)

APPENDIX 2 PHOTOGRAPHS OF EUT



View of external EUT-1



View of external EUT-2



View of external EUT-3



View of external EUT-4



View of external EUT-5



View of external EUT-6



View of internal EUT-1



View of internal EUT-2



View of internal EUT-3




View of internal EUT-4



View of internal EUT-5



View of internal EUT-6

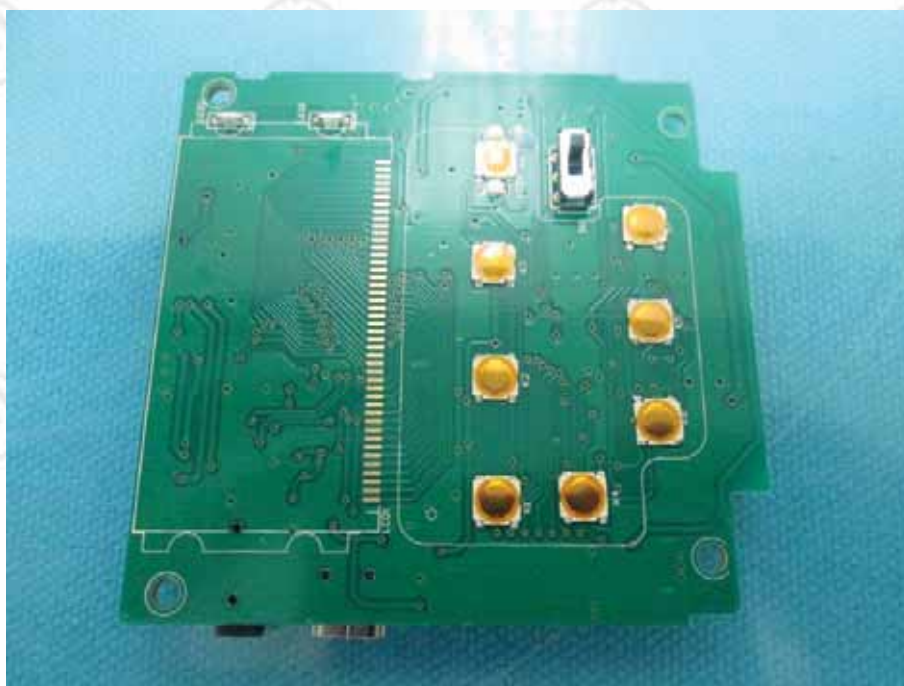

View of internal EUT-7



View of internal EUT-8



View of internal EUT-9

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.