

**FCC PART 15.239**  
**MEASUREMENT AND TEST REPORT**  
**FOR**

**NewLift Technologies Ltd.**

**Flat/Rm 13, 6/F, Harry Ondustrial Building, 49-51 Au Pui Wan Street, Fo  
Tan, NT, HK**

**FCC ID: VB8-NT-076MFI**

<b>Report Concerns:</b> Original Report	<b>Equipment Type:</b> FM Transmitter
<b>Model:</b> <u>NT-076MFI</u>	
<b>Report No.:</b> <u>STR10118090I</u>	
<b>Test Date:</b> <u>2010-11-09 to 2010-11-25</u>	
<b>Issue Date:</b> <u>2010-11-24</u>	
<b>Tested By:</b> <u>Jason Chen / Engineer</u> 	
<b>Reviewed By:</b> <u>Lahm Peng / EMC Manager</u> 	
<b>Approved &amp; Authorized By:</b> <u>Jandy so / PSQ Manager</u> 	
<b>Prepared By:</b> <b>SEM.Test Compliance Service Co., Ltd</b> 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: <a href="http://www.semtest.com.cn">www.semtest.com.cn</a>	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION .....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	3
1.3 RELATED SUBMITTAL(S)/GRANT(S) .....	3
1.4 TEST METHODOLOGY .....	4
1.5 TEST FACILITY .....	4
1.6 EUT EXERCISE SOFTWARE .....	4
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS .....	4
1.8 EUT CABLE LIST AND DETAILS .....	4
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>5</b>
<b>3. §15.203 - ANTENNA REQUIREMENT .....</b>	<b>6</b>
3.1 STANDARD APPLICABLE.....	6
3.2 TEST RESULT.....	6
<b>4. §15.209, §15.239 (B)(C)- RADIATED EMISSION .....</b>	<b>7</b>
4.1 MEASUREMENT UNCERTAINTY .....	7
4.2 STANDARD APPLICABLE.....	7
4.3 TEST EQUIPMENT LIST AND DETAILS .....	7
4.4 TEST PROCEDURE.....	7
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	8
4.6 ENVIRONMENTAL CONDITIONS .....	8
4.7 SUMMARY OF TEST RESULTS/PLOTS .....	8
<b>5. §15.239(A) EMISSION BANDWIDTH TESTING.....</b>	<b>15</b>
5.1 STANDARD APPLICABLE.....	15
5.2 TEST EQUIPMENT LIST AND DETAILS .....	15
5.3 TEST PROCEDURE.....	15
5.4 ENVIRONMENTAL CONDITIONS .....	15
5.5 SUMMARY OF TEST RESULTS/PLOTS .....	15
<b>6. §15.239(C) OUT OF BAND EMISSIONS .....</b>	<b>18</b>
6.1 STANDARD APPLICABLE.....	18
6.2 TEST EQUIPMENT LIST AND DETAILS .....	18
6.3 TEST PROCEDURE.....	18
6.4 ENVIRONMENTAL CONDITIONS .....	18
6.5 SUMMARY OF TEST RESULTS/PLOTS .....	18

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

Applicant: Newlift Technologies Ltd.  
Address of applicant: Flat/Rm 13, 6/F, Harry Industrial Building, 49-51 Au Pui Wan Street, Fo Tan, NT, HK

Manufacturer: Newlift Technologies Ltd.  
Address of manufacturer: 6th Floor, C Building, Junyi Industrial Base, Fanshen Lu, 47th Qu, Bao'an Qu, Shenzhen City, Guangdong Province, China

#### General Description of E.U.T

Items	Description
EUT Description:	FM Transmitter
Trade Name:	iPDA
Model No.:	NT-076MFI
Rated Voltage:	DC 3.3V
Output Power:	<48dBuv/m
Frequency Range:	88.1MHz~107.9MHz
Antenna Type:	Integral Antenna
Size:	4.8x3.5x1.3cm
Comment:	Manual Operation Device
For more information refer to the circuit diagram form and the user's manual.	

*The test data gathered are from a production sample, provided by the manufacturer.*

### 1.2 Test Standards

The following report of is prepared on behalf of the NewLift Technologies Ltd. in accordance with FCC Part 15, Subpart C, and section 15.239, 15.203 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.239, 15.203 and 15.209 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

### 1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

## 1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

## 1.5 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

## 1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the EUT system is on.

## 1.7 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
Multimedia Player	iPod	A1285	YM846TS52ME
/	/	/	/

## 1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/
/	/	/	/

## 2. SUMMARY OF TEST RESULTS

---

<b>Description of Test</b>	<b>Result</b>
§15.203 Antenna Requirement	Compliant
§15.209 General Requirement	Compliant
§15.239 (c) Out of band emission Testing	Compliant
§15.239 (a) Emission Bandwidth Testing	Compliant
§15.239 (b) Radiated Emission	Compliant

### **3. §15.203 - ANTENNA REQUIREMENT**

---

#### **3.1 Standard Applicable**

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has a permanent antenna, fulfill the requirement of this section.

## 4. §15.209, §15.239 (b)(c)- RADIATED EMISSION

---

### 4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 4.2 Standard Applicable

According to §15.239(b), The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

According to §15.239(c), The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in §15.209.


### 4.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-04-16	2011-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2010-08-12	2011-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2010-08-12	2011-08-11
RF Switch	EM	EMSW18	SW060023	2010-08-12	2011-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2010-08-12	2011-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-08-12	2011-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2010-07-21	2011-07-20
Horn Antenna	ETS	3117	00086197	2010-07-21	2011-07-20

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.239(b) and FCC Part 15.209 Limit.

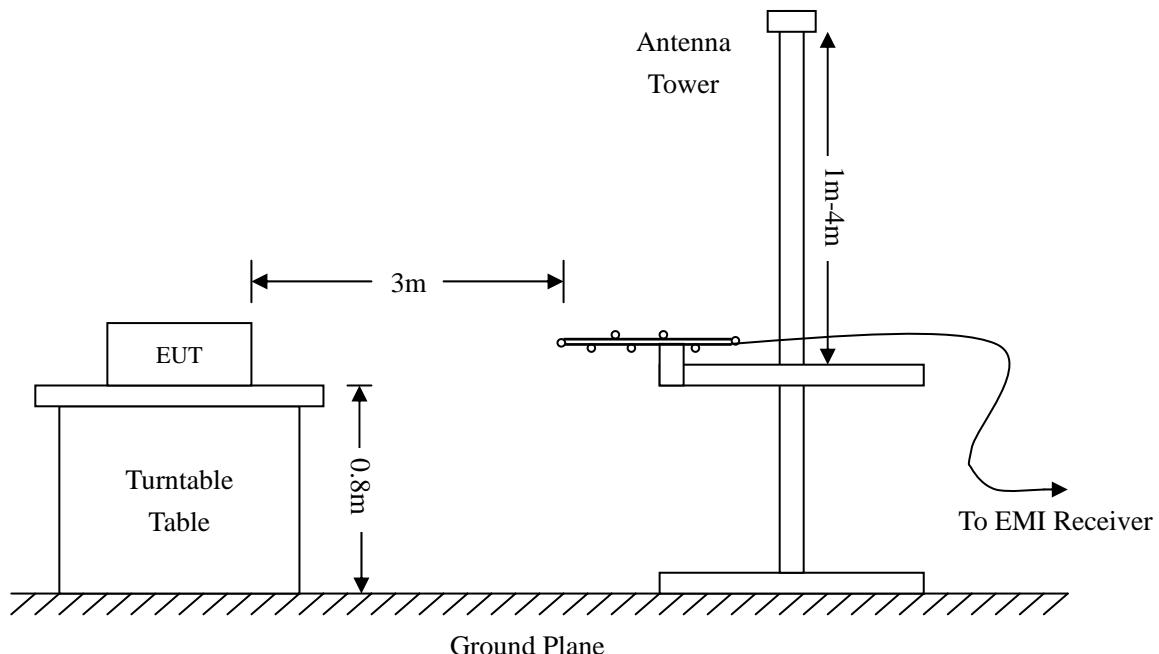

#### 4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant.Loss} + \text{Cab. Loss} - \text{Ampl.Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.239 Limit}$$

#### 4.6 Environmental Conditions

Temperature:	21° C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

#### 4.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.209 and 15.239 standards, and had the worst margin of:

- 4.57 dB $\mu$ V at 88.1 MHz** in the **Horizontal polarization, Low Channel, 30 MHz to 1 GHz, 3Meters**
- 2.13 dB $\mu$ V at 98.0 MHz** in the **Horizontal polarization, Mid Channel, 30 MHz to 1 GHz, 3Meters**
- 2.63 dB $\mu$ V at 107.9 MHz** in the **Horizontal polarization, High Channel, 30 MHz to 1 GHz, 3Meters**

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


**Plot of Radiation Emissions Test**

Low CH (Horizontal):

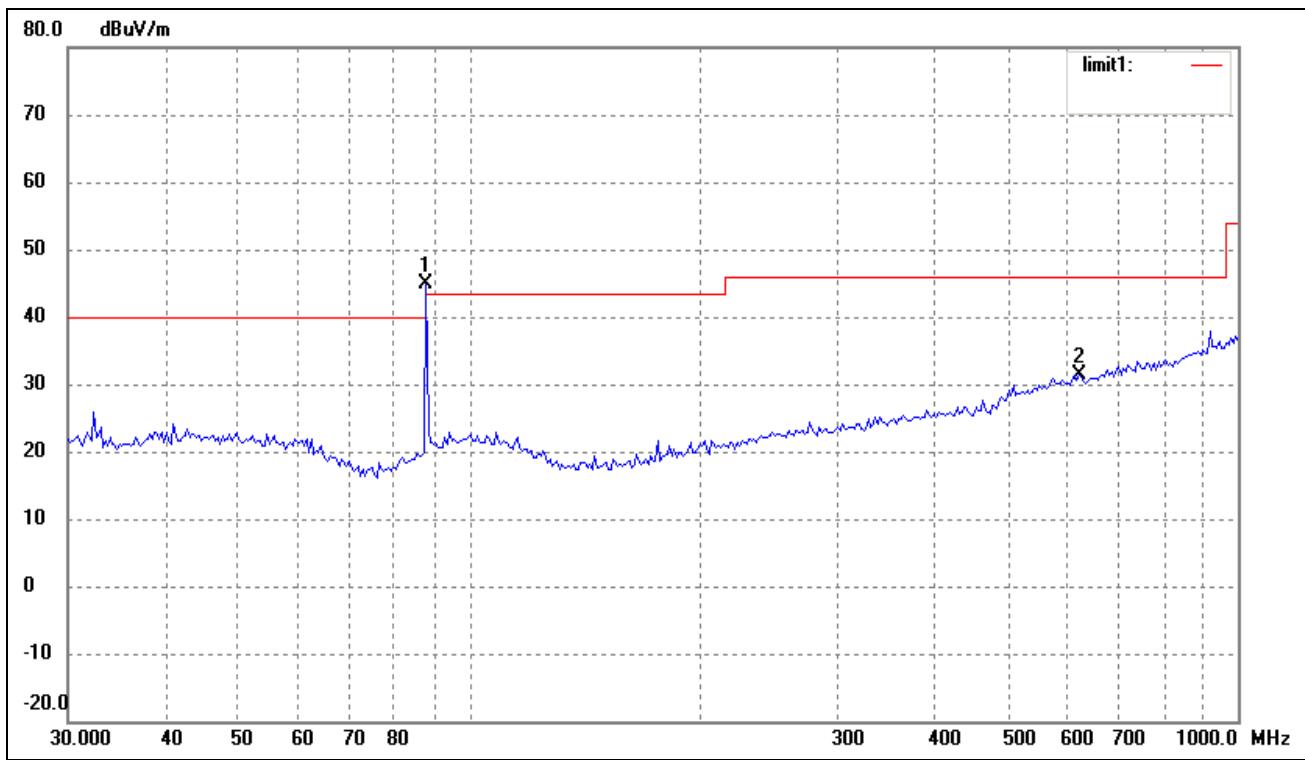


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	88.1000	39.18	5.81	44.99	68.00	-23.01	360	200	peak
	88.1000	37.62	5.81	43.43	48.00	-4.57	360	200	Ave
2	620.7096	16.34	15.16	31.50	46.00	-14.50	0	100	peak

Low CH (Vertical):

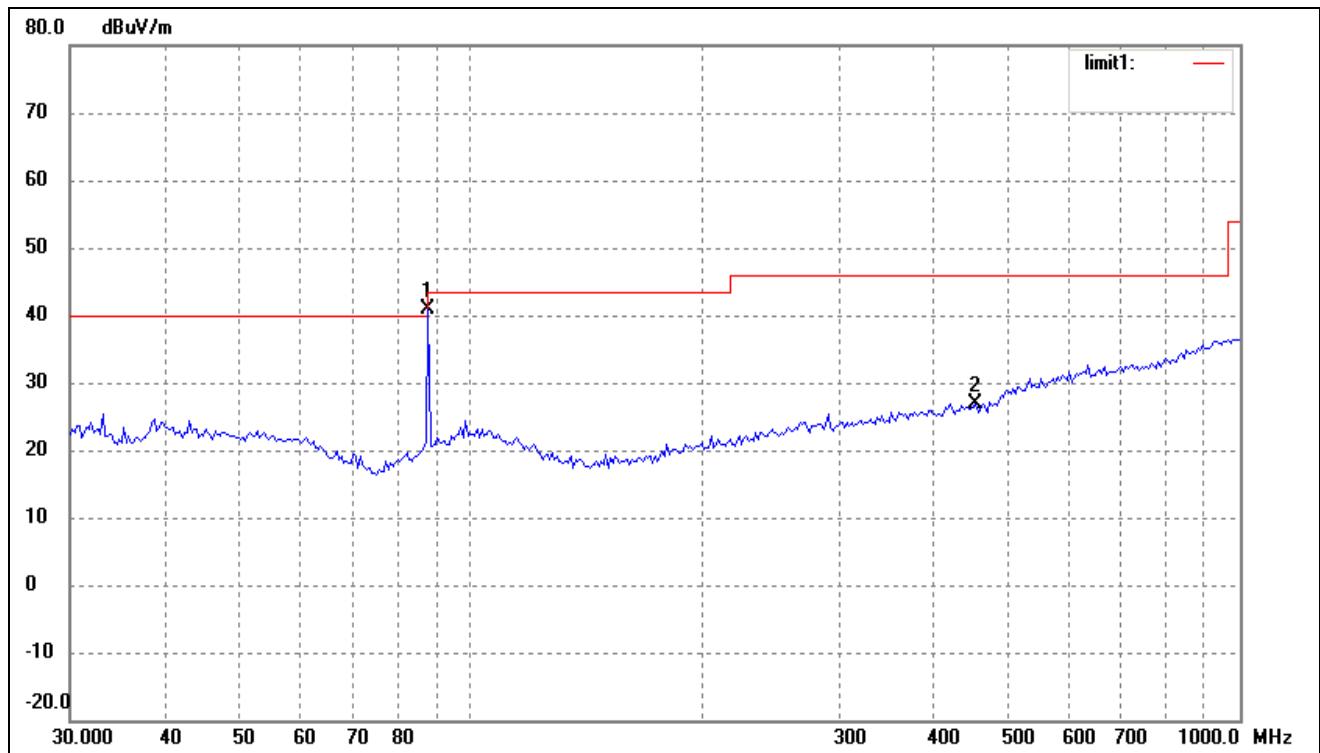


No.	Frequency	Reading	Correct	Result	Limit	Margin	Degree	Height	Remark
	(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	( ° )	(cm)	
1	88.1000	35.07	5.81	40.88	68.00	-27.12	360	200	peak
	88.1000	32.19	5.81	38.00	48.00	-10.00	360	200	Ave
2	452.7197	16.49	10.51	27.00	46.00	-19.00	0	100	peak

## Mid Channel (Horizontal):

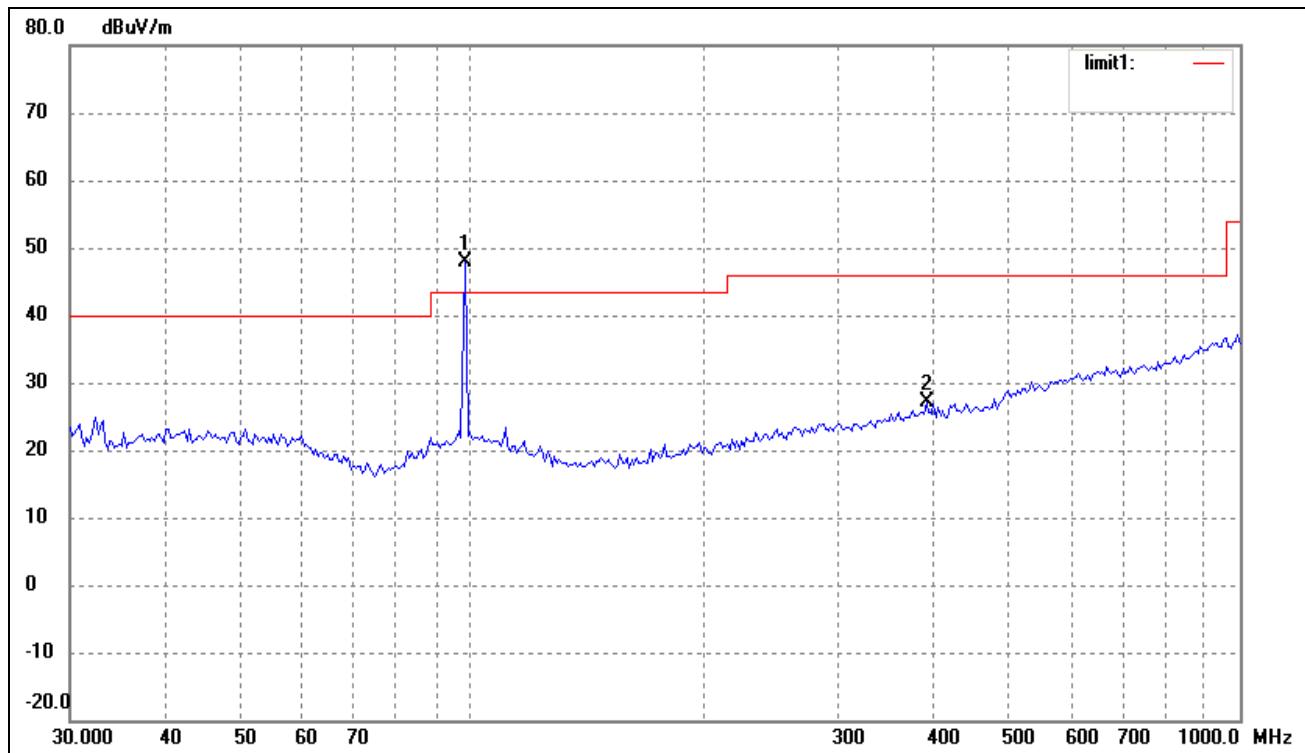


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	98.0000	40.29	7.69	47.98	68.00	-20.02	360	200	peak
	98.0000	38.18	7.69	45.87	48.00	-2.13	360	200	Ave
2	390.7226	17.17	10.01	27.18	46.00	-18.82	0	100	peak

Low CH (Vertical):

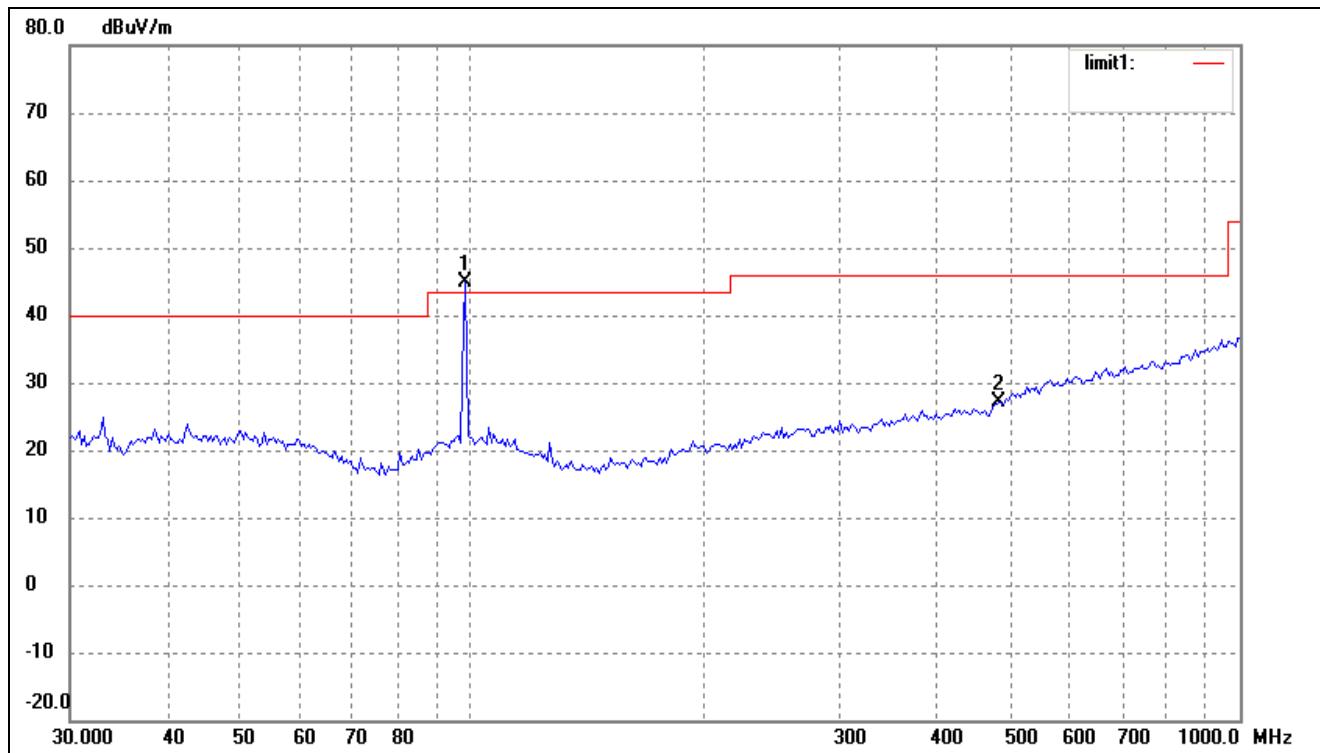


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	98.0000	37.31	7.69	45.00	68.00	-23.00	360	200	peak
	98.0000	34.68	7.69	42.37	48.00	-5.63	360	200	Ave
2	485.6093	15.47	11.55	27.02	46.00	-18.98	360	200	peak

High Channel(Horizontal):

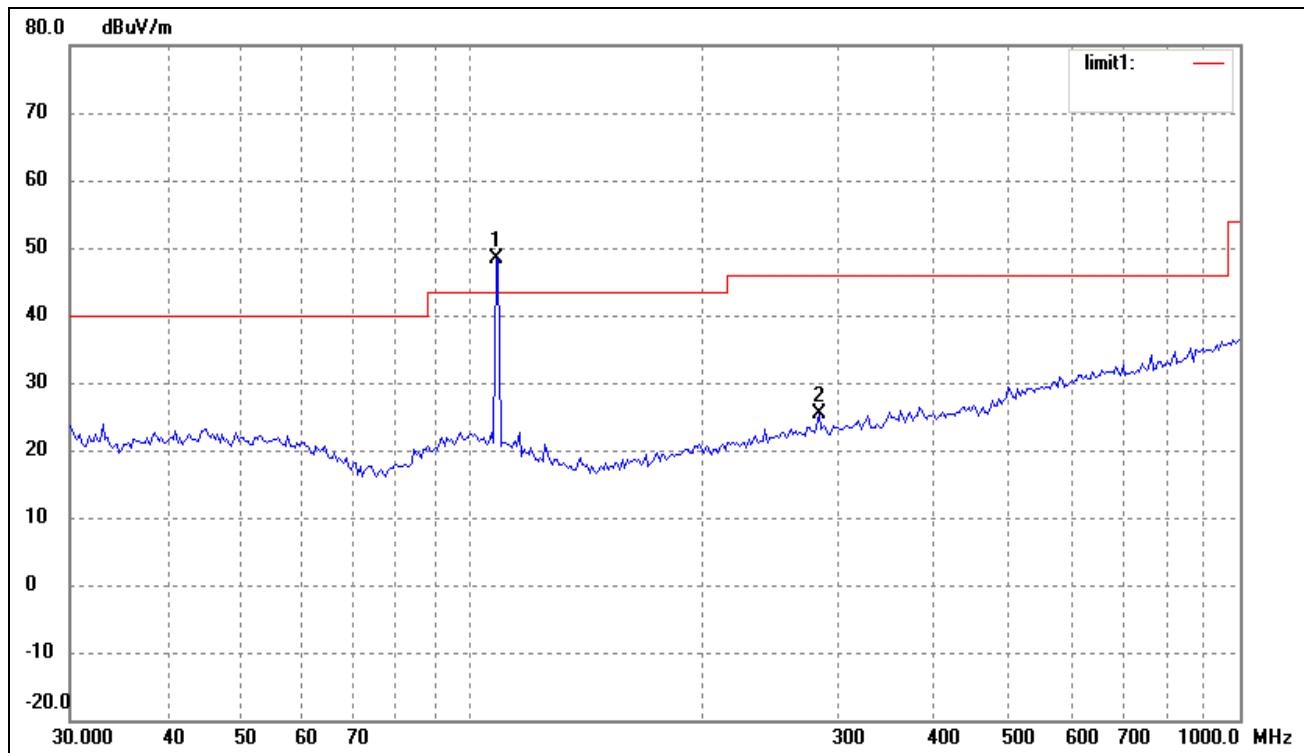

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	107.9000	41.31	7.16	48.47	68.00	-19.53	360	200	peak
	107.9000	38.21	7.16	45.87	48.00	-2.63	360	200	Ave
2	282.9852	16.88	8.48	25.36	46.00	-20.64	0	100	peak

Low CH (Vertical):

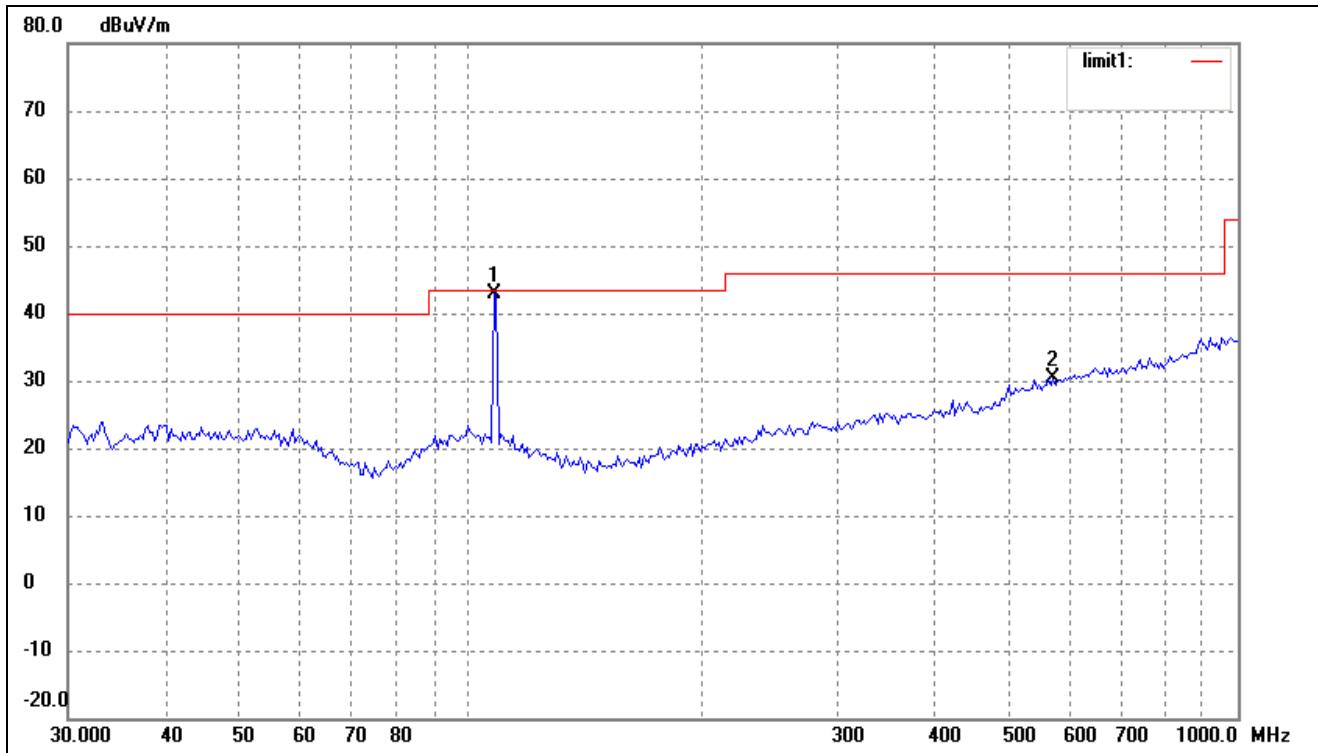

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	107.9000	35.65	7.16	42.81	68.00	-25.19	360	200	peak
	107.9000	33.51	7.16	40.67	48.00	-7.33	360	200	Ave
2	574.6258	15.94	14.49	30.43	46.00	-15.57	0	200	peak

*Note: The EUT was tested in all three orthogonal planes and frequency rang 30MHz to the tenth harmonics. Emissions attenuated closely to the noise base are not reported.*

## 5. §15.239(a) EMISSION BANDWIDTH TESTING

### 5.1 Standard Applicable

According to FCC 15.239(a), Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88–108 MHz.

### 5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-08-12	2011-08-11
Attenuator	ATTEN	DC-4GHz	ATS100-4-20	2010-08-12	2011-08-11

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 5.3 Test Procedure

With the EUT's antenna attached, the EUT's 26dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

### 5.4 Environmental Conditions

Temperature:	21° C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


### 5.5 Summary of Test Results/Plots

Frequency MHz	Emission Bandwidth KHz	Limit KHz
88.1	162.1	200
98.0	163.3	200
107.9	187.0	200


**Test Result Pass**

Refer to the attached plots.


Low Channel

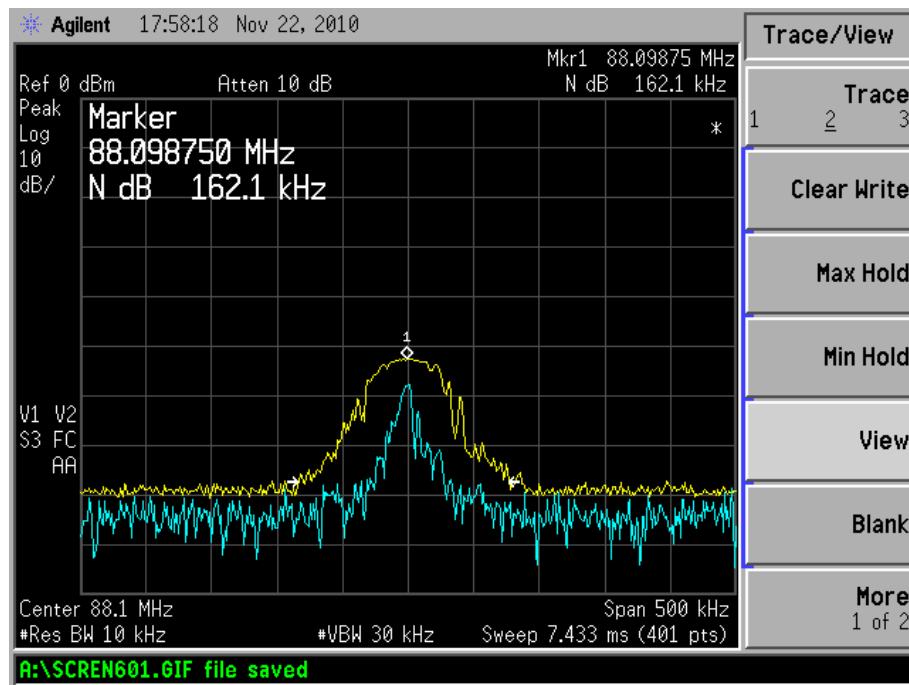

Middle Channel

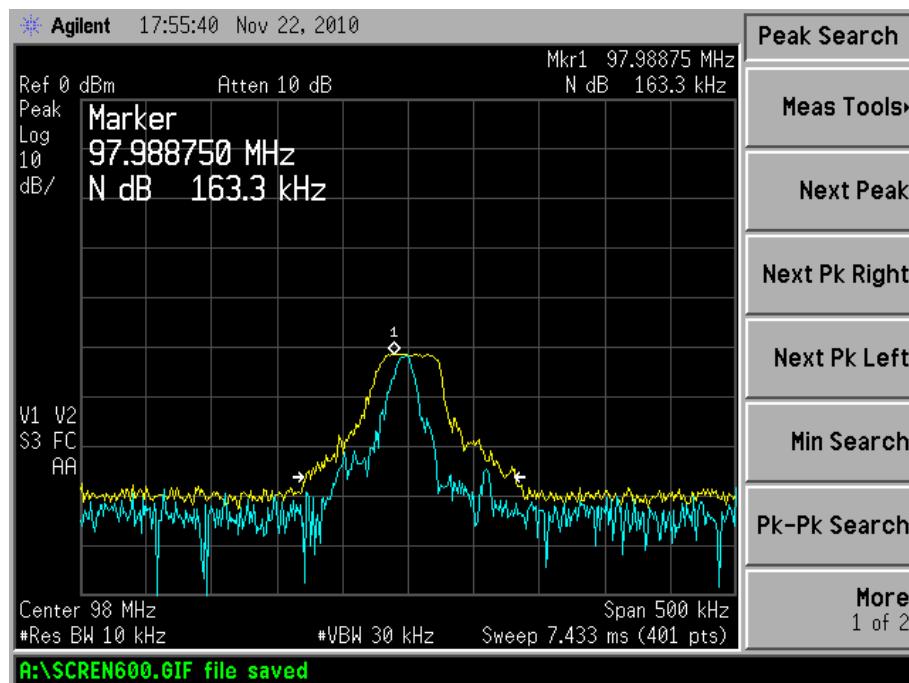

## High Channel

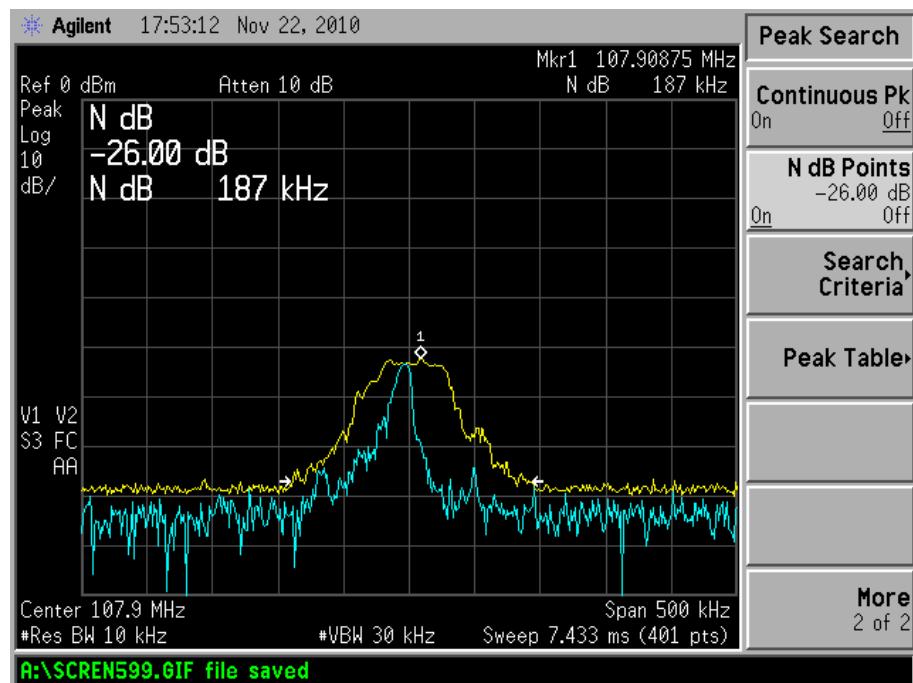

## 6. §15.239(c) OUT OF BAND EMISSIONS

### 6.1 Standard Applicable

According to §15.239(c), The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in §15.209.

### 6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-04-16	2011-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2010-08-12	2011-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2010-08-12	2011-08-11
RF Switch	EM	EMSW18	SW060023	2010-08-12	2011-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2010-08-12	2011-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-08-12	2011-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2010-07-21	2011-07-20
Horn Antenna	ETS	3117	00086197	2010-07-21	2011-07-20

**Statement of Traceability:** All calibrations have been performed per the NVLAP requirements traceable to the NIST.

### 6.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 88MHz to 108MHz, than mark the higher-level emission for comparing with the FCC rules.

### 6.4 Environmental Conditions

Temperature:	22° C
Relative Humidity:	54%
ATM Pressure:	1012 mbar


### 6.5 Summary of Test Results/Plots

Frequency MHz	Emission dB $\mu$ V/m	Limit dB $\mu$ V/m
88	38.74	40
108	40.46	43.5

**Test Result Pass**


Refer to the attached plots.

Lower Bandedge

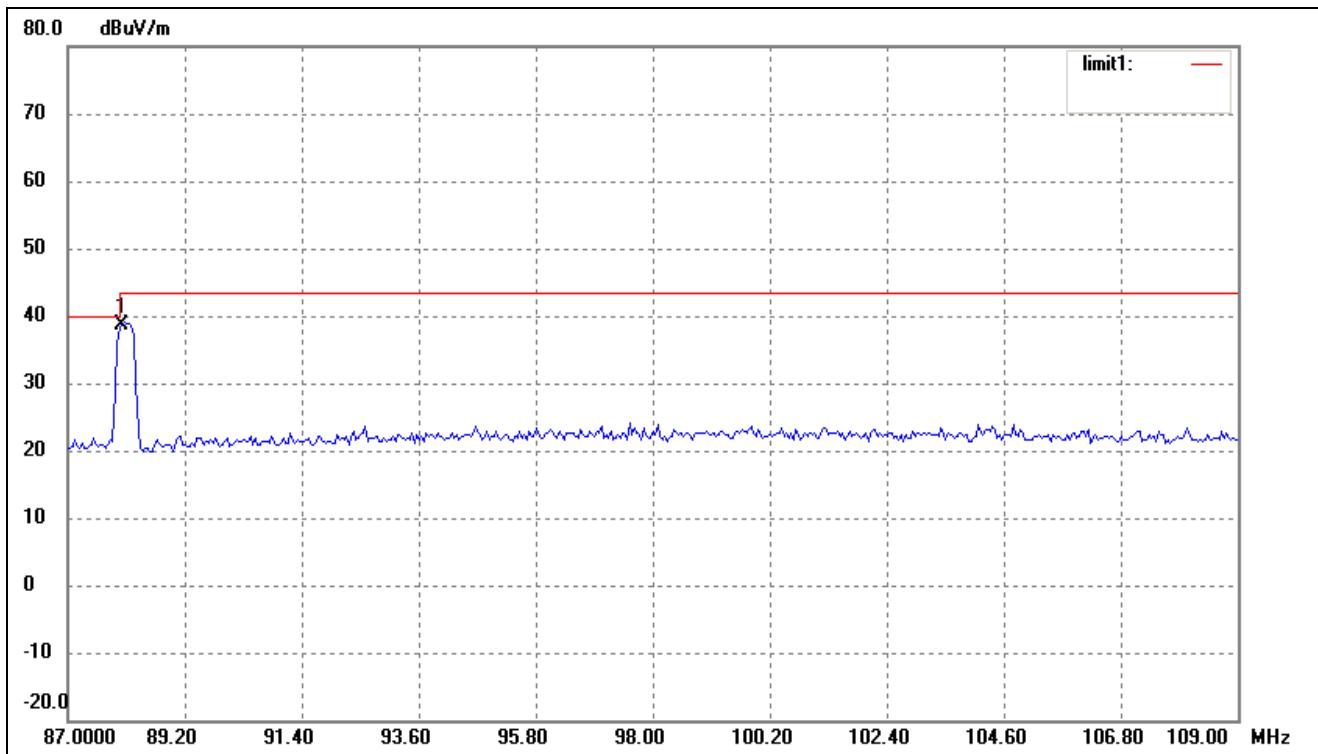

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	88.0000	32.85	5.89	38.74	40.00	-1.26	206	200	peak

## Upper Bandedge

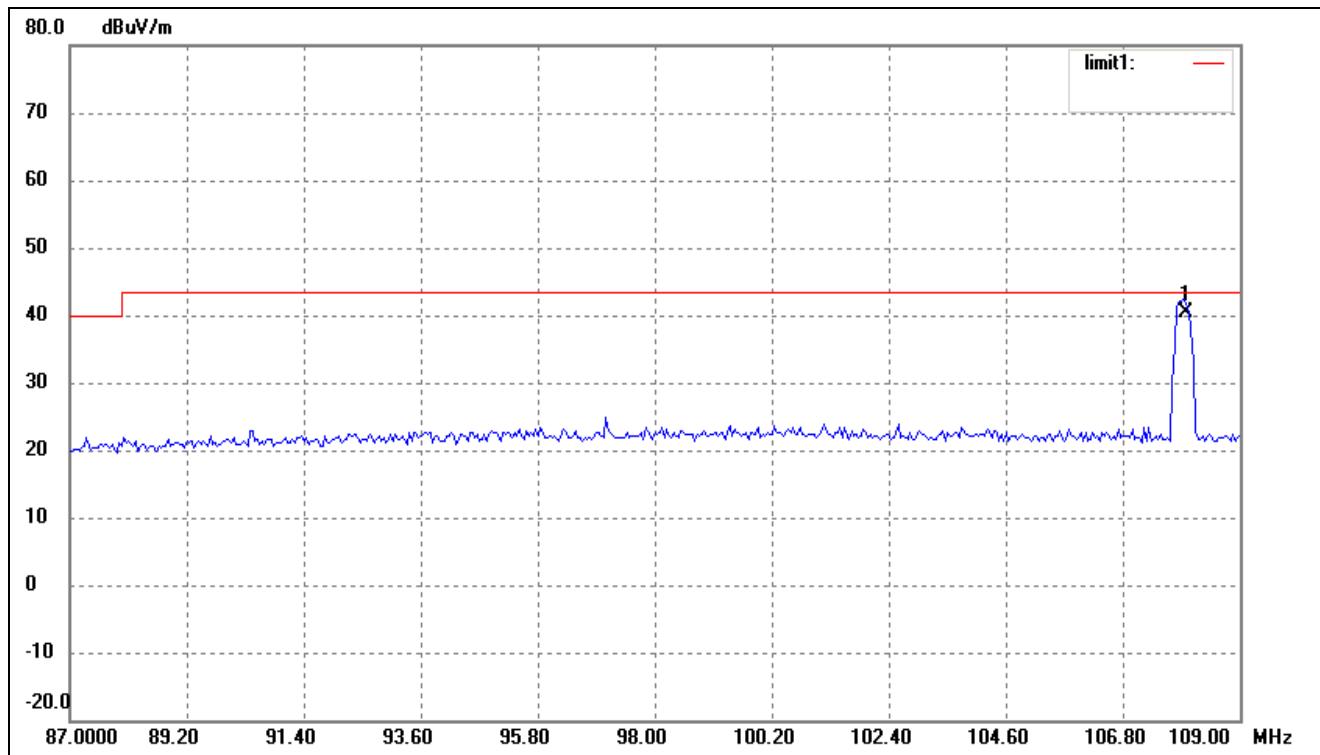

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	108.0000	33.35	7.11	40.46	43.50	-3.04	120	100	peak

\*\*\*\*\* END OF REPORT \*\*\*\*\*