

## EMC TEST REPORT

**No. SH09021052-001**

Applicant : Everflourish Electrical Co.,Ltd.  
Renjiu Village, Wuxiang Town, Yinzhou, Ningbo  
315111, China

Manufacturer : Everflourish Electrical Co.,Ltd.  
Renjiu Village, Wuxiang Town, Yinzhou, Ningbo  
315111, China

Equipment : Remote control transmitter

Type/Model : EMW200T, EMW200TA

### SUMMARY

The equipment complies with the requirements according to the following standard(s):

**47CFR Part 15 (2007):** Radio Frequency Devices

**ANSI C63.4 (2003):** American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

**RSS-210 Issue 7 (June 2007):** Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment

**RSS-Gen Issue 2 (June 2007):** General Requirements and Information for the Certification of Radiocommunication Equipment

Date of issue: March 30, 2009

Prepared by:



Wakeyou Wang (*Project Engineer*)

Reviewed by:



Daniel Zhao (*Reviewer*)



**FCC ID: VBA-200ULRF**  
**IC: 7098A-200ULRF**

## **Description of Test Facility**

Name: Intertek Testing Services Limited Shanghai  
Address: Building No.86, 1198 Qinzhou Road(North), Shanghai 200233, P.R. China

FCC Registration Number: 236597  
IC Assigned Code: 2042B-1

Name of contact: Steve Li  
Tel: +86 21 64956565 ext. 214  
Fax: +86 21 54262335 ext. 214

## Content

<b>SUMMARY</b> .....	<b>1</b>
<b>DESCRIPTION OF TEST FACILITY</b> .....	<b>2</b>
<b>1. GENERAL INFORMATION</b> .....	<b>4</b>
1.1 Applicant Information.....	4
1.2 Identification of the EUT .....	4
1.3 Technical specification .....	5
1.4 Mode of operation during the test / Test peripherals used.....	5
<b>2. TEST SPECIFICATION</b> .....	<b>6</b>
2.1 Instrument list .....	6
2.2 Test Standard .....	6
<b>3. FUNDAMENTAL &amp; SPURIOUS EMISSION &amp; RESTRICT BAND RADIATED EMISSION</b> .....	<b>8</b>
3.1 Test limit .....	8
3.2 Test Configuration .....	9
3.3 Test procedure and test setup.....	9
3.4 Test protocol .....	10
3.5 Measurement uncertainty .....	10
<b>4. DEACTIVATING TIME</b> .....	<b>11</b>
4.1 Test limit .....	11
4.2 Test Configuration .....	12
4.3 Test procedure and test setup.....	12
4.4 Test protocol .....	12
4.5 Measurement uncertainty .....	12
<b>5. POWER LINE CONDUCTED EMISSION</b> .....	<b>13</b>
5.1 Limit.....	13
5.2 Test configuration .....	13
5.3 Test procedure and test set up.....	14
5.4 Test protocol .....	15
5.5 Measurement Uncertainty .....	15
<b>6. EMISSION BANDWIDTH</b> .....	<b>16</b>
6.1 Test limit .....	16
6.2 Test Configuration .....	16
6.3 Test procedure and test setup.....	16
6.4 Test protocol .....	17
6.5 Measurement uncertainty .....	17
<b>7. OCCUPIED BANDWIDTH</b> .....	<b>18</b>
7.1 Test limit .....	18
7.2 Test Configuration .....	18
7.3 Test procedure and test setup.....	18
7.4 Test protocol .....	19
7.5 Measurement uncertainty .....	19



## **1. General Information**

### **1.1 Applicant Information**

Applicant: Everflourish Electrical Co.,Ltd.  
Renjiu Village, Wuxiang Town, Yinzhou, Ningbo  
315111, China

Name of contact: Lena Zhang

Tel: 86 574 88328270

Fax: 86 574 88330999

Manufacturer: Everflourish Electrical Co.,Ltd.  
Renjiu Village, Wuxiang Town, Yinzhou, Ningbo  
315111, China

Sample received date : Feb 20, 2009

Date of test : Feb 20, 2009 ~ March 20, 2009

### **1.2 Identification of the EUT**

Equipment: Remote control transmitter

Type/model: EMW200T, EMW200TA

FCC ID: VBA-200ULRF

IC: 7098A-200ULRF



### 1.3 Technical specification

Operation Frequency Band:	433.92MHz
Modulation:	PSK
Antenna Designation:	Internal antenna, non-user removable.
Rating:	Built-in Battery: DC 12V Working frequency: 433.92MHz
Description of EUT:	There are two models. They are electrically identical except for different outside view. As a result, the model EMW200T was chosen to perform test as representative. The EUT is a transmitter to transmit wireless signal so as to control the on/off condition of receiver.
Channel Description:	There is one channel only and working at the central frequency of 433.92MHz.

### 1.4 Mode of operation during the test / Test peripherals used

Within this test report, EUT was tested with modulation and tested under its rating voltage and frequency.

The EUT is a portable device, so three axes were observed.



## 2. Test Specification

### 2.1 Instrument list

Equipment	Type	Manu.	Internal no.	Cal. Date	Due date
Test Receiver	ESIB 26	R&S	EC 3045	2008-6-1	2009-5-31
Semi-anechoic chamber	-	Albatross project	EC 3048	2008-6-1	2009-5-31
A.M.N.	ESH2-Z5	R&S	EC 3119	2009-1-23	2010-1-22
Test Receiver	ESCS 30	R&S	EC 2107	2009-1-23	2010-1-22
Ultra-broadband antenna	HL 562	R&S	EC 3046-1	2008-6-30	2009-6-29
Horn antenna	HF 906	R&S	EC 3049	2008-6-30	2009-6-29
Pre-amplifier	Pre-amp 18	R&S	EC 3222	2008-6-30	2009-6-29

### 2.2 Test Standard

47CFR Part 15 (2007)

ANSI C63.4: 2003

RSS-210 Issue 7 (June 2007)

RSS-Gen Issue 2 (June 2007)



### 2.3 Test Summary

**This report applies to tested sample only. This report shall not be reproduced in part without written approval of Intertek Testing Service Shanghai Limited.**

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Fundamental & spurious emission	15.231(b)	RSS-210 Issue 7 Annex A1.1.2	Pass
Restrict band radiated emission	15.205	RSS-210 Issue 7 Clause 2	Pass
Power line conducted emission	15.207	RSS-Gen Issue 2 Clause 7.2.2	NA
Emission bandwidth	15.231(c)	RSS-Gen Issue 2 Annex A1.1.3	Pass
Deactivating time	15.231(a)(1)	RSS-210 Issue 7 Annex A1.1.1	Pass
Occupied bandwidth	-	RSS-Gen Issue 2 Clause 4.6.1	Tested



3. Fundamental & Spurious Emission & Restrict band radiated emission

Test result: PASS

3.1 Test limit

3.1.1 The emission shall test through the 10th harmonic or to 40GHz, whichever is lower. It must comply with the limits below:

Table with 3 columns: Fundamental Frequency (MHz), Fundamental limit (uV/m), and Spurious limit (uV/m). Rows include frequency ranges from 40.66-40.70 to Above 470.

The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, uV/m at 3 meters = 56.81818(Frequency) - 6136.3636; for the band 260-470 MHz, uV/m at 3 meters = 41.6667(Frequency) - 7083.3333. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.

For that the EUT use fundamental frequency of 433.92MHz, after calculation, the limit is:

Fundamental limit = 41.6667 \* 433.92 - 7083.3333 = 10996.68 uV/m = 81dBuV/m
Spurious limit = 81 - 20 = 61 dBuV/m


Separator line of slashes

3.1.2 The radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) showed as below:

Table with 3 columns: Frequency (MHz), Field Strength (dBuV/m), and Measurement Distance (m). Rows include frequency ranges 30-88, 88-216, 216-960, and Above 960.



### 3.2 Test Configuration

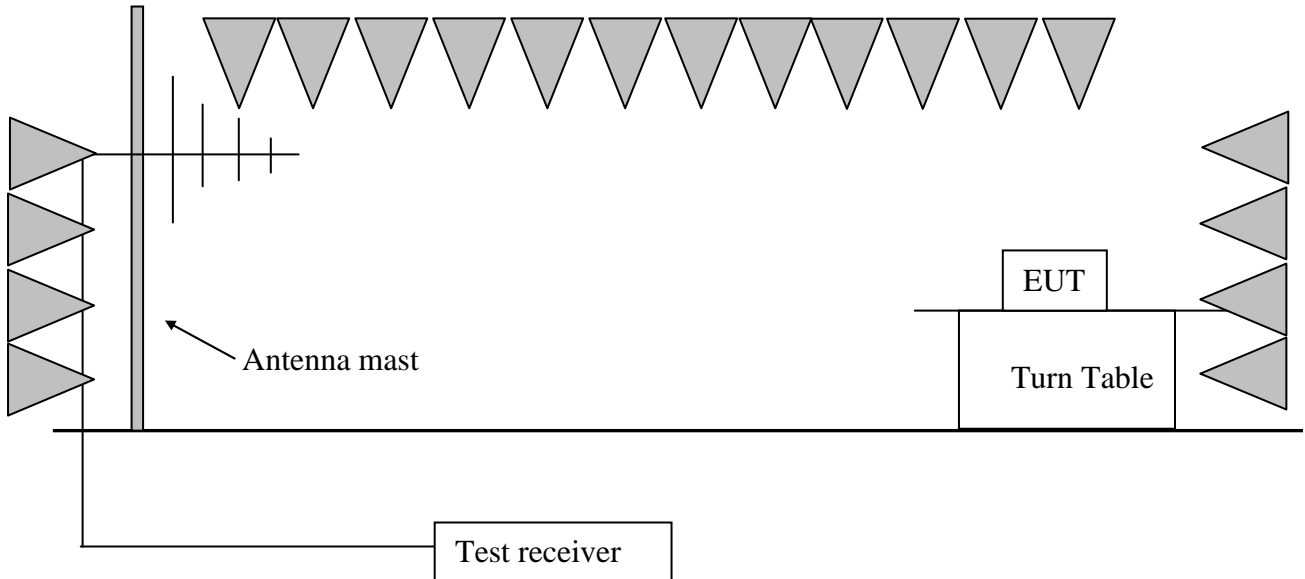

### 3.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber. While testing for spurious emission higher than 1GHz, the pre-amplifier is equipped just at the output terminal of the antenna.

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

### 3.4 Test protocol

30MHz ~ 1GHz

Channel	Antenna	Frequency (MHz)	Correct Factor (dB/m)	Corrected Reading (dBuV/m)	Emission Type	Limit (dBuV/m)	Detector
1	H	433.92	18.20	78.60	Fundamental	81.00	PK
1	H	30.00	16.30	21.40	Spurious	61.00	PK
1	H	854.20	23.20	37.20	Spurious	61.00	PK
1	H	867.84	23.40	40.50	Spurious	61.00	PK
1	V	410.00	16.50	22.80	Restrict	46.00	PK
1	H	1301.28	0.30	44.70	Restrict	54.00	PK
1	H	1472.95	0.30	44.50	Restrict	54.00	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz)

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. If the PK reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10dBuV.

Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m; Corrected Reading = 10dBuV + 0.20dB/m = 10.20dBuV/m

### 3.5 Measurement uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty of radiated emission is:  $\pm 5.31\text{dB}$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.




## 4. Deactivating time

Test result: PASS

### 4.1 Test limit

- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in (1) and (2) above, provided such transmission are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

#### 4.2 Test Configuration

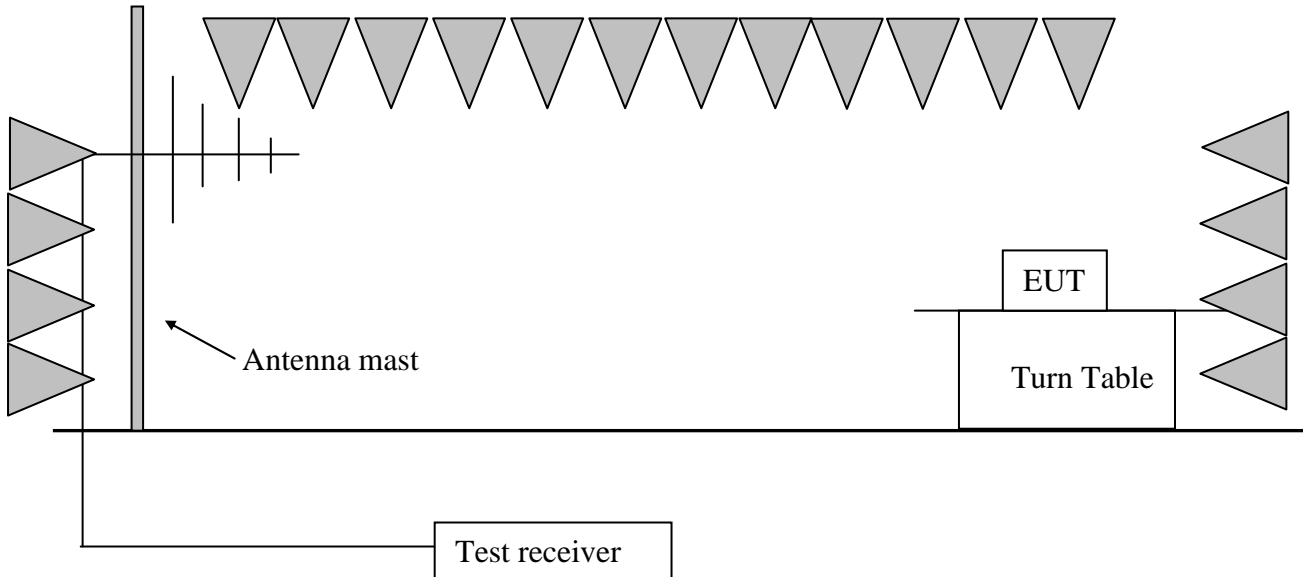

#### 4.3 Test procedure and test setup

The measurement was applied in a semi-anechoic chamber.

The central frequency of test receiver was set as the operating frequency of EUT and the Span was set as 0.

The EUT was switched once. The test receiver recorded the whole time from the triggered moment to the time of stopping radiating. For manual switching, to avoid uncertainty, the operating above would be repeated five times and the worst data is recorded.

#### 4.4 Test protocol

Whole time from the triggered moment to the time of stopping radiating: 159ms.

As a result, the EUT complies with the limit of 5s' deactivating time.

#### 4.5 Measurement uncertainty

Measurement uncertainty is: 10ms.

## 5. Power line conducted emission


Test result: NA

### 5.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 5.2 Test configuration

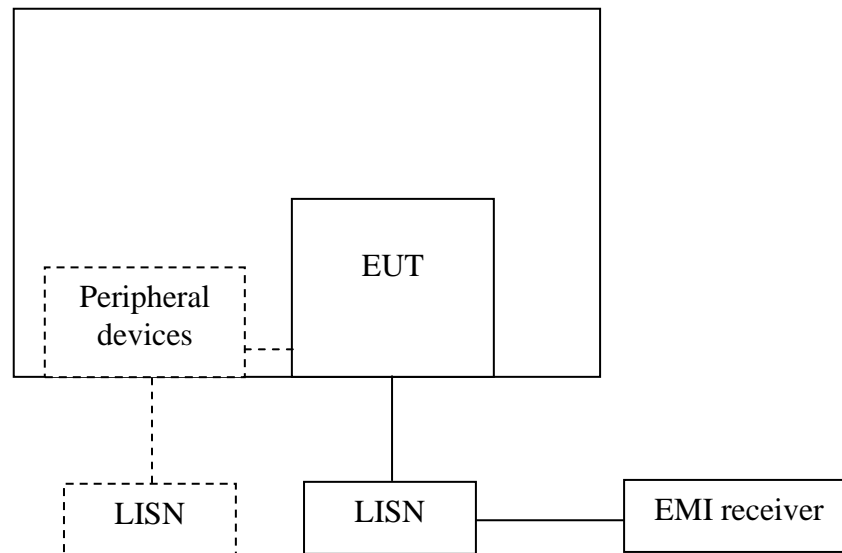

- For table top equipment, wooden support is 0.8m height table
- For floor standing equipment, wooden support is 0.1m height rack.

### **5.3 Test procedure and test set up**

The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 $\Omega$ /50 $\mu$ H coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 $\Omega$ /50 $\mu$ H coupling impedance with 50 $\Omega$  termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement. The bandwidth of the test receiver is set at 9 kHz.

### 5.4 Test protocol

Power line: L

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).  
2. Margin (dB) = Limit - Corrected Reading.  
3. If the margin higher than 20dB, it would be marked as \*.

Power line: N

Frequency	Correct Factor (dB)	Corrected Reading (dBuV)		Limit (dBuV)		Margin (dB)	
		QP	AV	QP	AV	QP	AV
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-

Remark: 1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB).  
2. Margin (dB) = Limit - Corrected Reading.  
3. If the margin higher than 20dB, it would be marked as \*.

### 5.5 Measurement Uncertainty

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty at mains terminal:  $\pm 1.99\text{dB}$

The measurement uncertainty is given with a confidence of 95%,  $k=2$ .

The measurement uncertainty is traceable to internal procedure TI-036.

## 6. Emission Bandwidth


**Test Status: Pass**

### 6.1 Test limit

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20dB down from the modulated carrier.

The limit for the EUT =  $0.25\% * 433.92\text{MHz} = 1085\text{kHz}$

### 6.2 Test Configuration

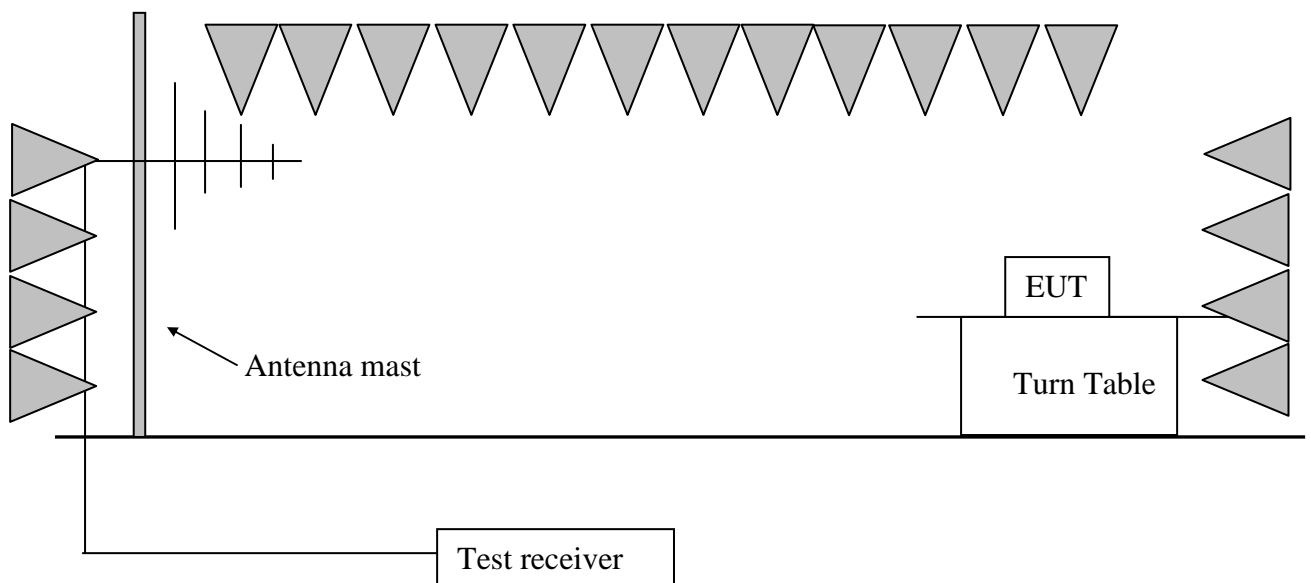

### 6.3 Test procedure and test setup

The EUT and simulators were placed on a 0.8m high wooden turntable above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

The central frequency of test receiver was set near the operating frequency of EUT.





#### 6.4 Test protocol

Temperature : 22 °C  
Relative Humidity : 43 %

Channel	Emission Bandwidth (kHz)	Limit (kHz)
1	58	1085

#### 6.5 Measurement uncertainty

The measurement uncertainty is  $\pm 100\text{Hz}$ .


## 7. Occupied Bandwidth

Test Status: Tested

### 7.1 Test limit

None

### 7.2 Test Configuration

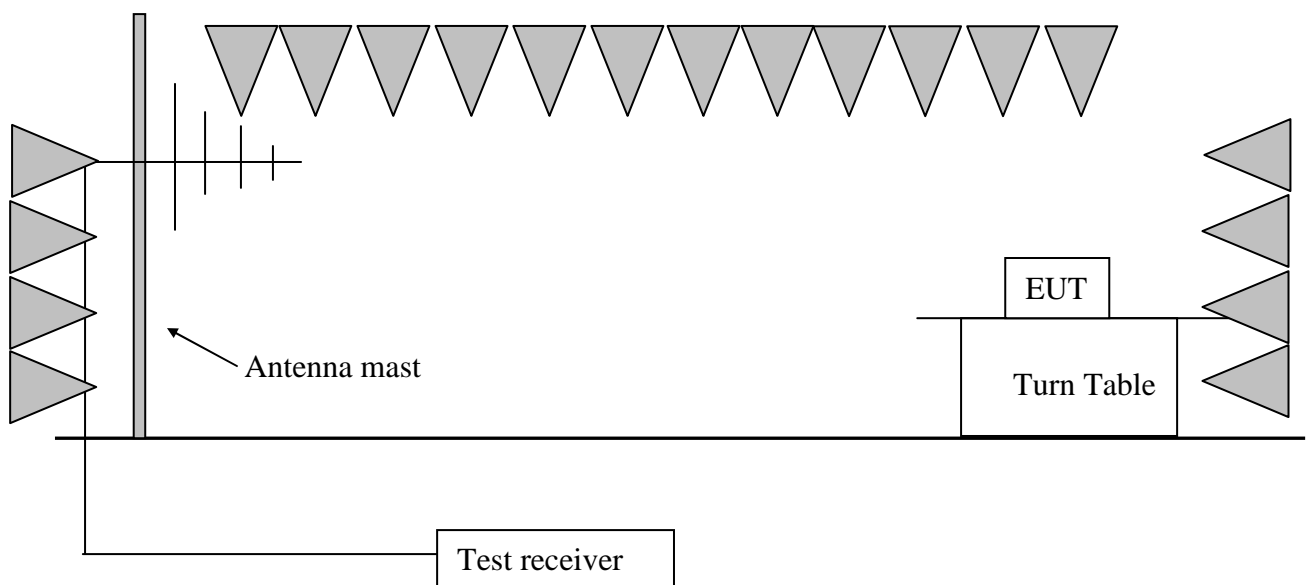

### 7.3 Test procedure and test setup

The occupied bandwidth per RSS-Gen Issue 2 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions bandwidth set at 10kHz, the video bandwidth set at 30kHz.

#### 7.4 Test protocol

Temperature : 22 °C  
Relative Humidity : 43 %

Channel	Occupied Bandwidth (kHz)	Max. Value (kHz)
1	87.50	87.50

**Remark: “Max. Value” is the maximum test result of all the measured occupied bandwidth.**

#### 7.5 Measurement uncertainty

The measurement uncertainty is  $\pm 100\text{Hz}$ .