

Ningbo EverFlourish Smart Technology Corp.,Ltd

RF TEST REPORT

Report Type:

FCC Part 15.247 & ISED RSS-247 RF report

Model:

ES26WF-GP, ES26WF-OP, ES26WF-G,
ES26WF-O, ES26WF-P

REPORT NUMBER:

200600858SHA-001

ISSUE DATE:

Dec 12, 2020

DOCUMENT CONTROL NUMBER:

TTRF15.247-03_V1 © 2018 Intertek



Applicant: Ningbo EverFlourish Smart Technology Corp.,Ltd
77 Wuxiang East Road,Yinzhou,Ningbo,315111,China

Manufacturer: Ningbo EverFlourish Smart Technology Corp.,Ltd
77 Wuxiang East Road,Yinzhou,Ningbo,315111,China

FCC ID: VBA-EFES26WF
IC: 7098A-EFES26WF

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2019): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2013): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

RSS-247 Issue 2 (February 2017): Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

RSS-Gen Issue 5 (April 2018): General Requirements for Compliance of Radio Apparatus

PREPARED BY:

REVIEWED BY:



Project Engineer
Stephanie Zhang

Reviewer
Wakeyou Wang

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY..... 5

MEASUREMENT RESULT SUMMARY 6

1 GENERAL INFORMATION 7

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) 7

1.2 TECHNICAL SPECIFICATION 7

1.3 DESCRIPTION OF TEST FACILITY 9

2 TEST SPECIFICATIONS..... 10

2.1 STANDARDS OR SPECIFICATION 10

2.2 MODE OF OPERATION DURING THE TEST..... 10

2.3 TEST SOFTWARE LIST 11

2.4 TEST PERIPHERALS LIST 11

2.5 TEST ENVIRONMENT CONDITION:..... 11

2.6 INSTRUMENT LIST 12

2.7 MEASUREMENT UNCERTAINTY 13

3 MINIMUM 6DB BANDWIDTH..... 14

3.1 LIMIT 14

3.2 MEASUREMENT PROCEDURE 14

3.3 TEST CONFIGURATION 14

3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH 14

4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P..... 15

4.1 LIMIT 15

4.2 MEASUREMENT PROCEDURE 15

4.3 TEST CONFIGURATION 15

4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER..... 15

5 POWER SPECTRUM DENSITY 16

5.1 LIMIT 16

5.2 MEASUREMENT PROCEDURE 16

5.3 TEST CONFIGURATION 17

5.4 TEST RESULTS OF POWER SPECTRUM DENSITY 17

6 EMISSION OUTSIDE THE FREQUENCY BAND 18

6.1 LIMIT 18

6.2 MEASUREMENT PROCEDURE 18

6.3 TEST CONFIGURATION 19

6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND..... 19

7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS..... 20

7.1 LIMIT 20

7.2 MEASUREMENT PROCEDURE 20

7.3 TEST CONFIGURATION 22

7.4 TEST RESULTS OF RADIATED EMISSIONS 24

8 POWER LINE CONDUCTED EMISSION..... 29

8.1 LIMIT 29

8.2 TEST CONFIGURATION 29

8.3 MEASUREMENT PROCEDURE 30

8.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION..... 31

TEST REPORT

9 OCCUPIED BANDWIDTH 33

9.1 LIMIT33

9.2 MEASUREMENT PROCEDURE33

9.3 TEST CONFIGURATION33

9.4 THE RESULTS OF OCCUPIED BANDWIDTH33

10 ANTENNA REQUIREMENT..... 34

APPENDIX A: TEST RESULTS 35

Revision History

Report No.	Version	Description	Issued Date
200600858SHA-001	Rev. 01	Initial issue of report	Dec 12, 2020

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	Wi-Fi Junction box
Type/Model:	ES26WF-GP, ES26WF-OP, ES26WF-G, ES26WF-O, ES26WF-P
Description of EUT:	The EUT is a Junction box, containing wifi 2.4GHz module. All the models are electrically identical expect for with/without GFCI or with/without light output. Therefore the model ES26WF-GP which with GFCI and light output functions was chosen to perform test as representative.
Rating:	Power rating: 125V~ 60Hz Power load: GFCI, 1875W; light output 625W
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample ID:	0200901-19
Sample received date:	Sep 1, 2020
Date of test:	Sep 1, 2020 – Oct 29, 2020

1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20) 7 Channels for 802.11n(HT40)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7
Channel Separation:	5 MHz

TEST REPORT

1.3 Antenna information

Antenna No.	Model	Antenna type	Antenna Gain	Note
1	/	PCB	2dBi	

Mode	Tx/Rx Function	Beamforming function	CDD function
802.11b	1Tx/1Rx	NO	NO
802.11g	1Tx/1Rx	NO	NO
802.11n(HT20)	1Tx/1Rx	NO	NO
802.11n(HT40)	1Tx/1Rx	NO	NO

TEST REPORT

1.4 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2019)
 ANSI C63.10 (2013)
 KDB 558074 D01(v05r02)
 RSS-247 Issue 2 (February 2017)
 RSS-Gen Issue 5 (April 2018)

2.2 Mode of operation during the test

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Power setting	Version	Supplied by
Wi-Fi test tool	Default value in the test tool	V1.4.2	Manufacturer

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462
	802.11n(HT40)	2422	2437	2452

Data rate VS Power:

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rata as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
2400-2483.5	802.11b	1Mbps
	802.11g	6Mbps
	802.11n(HT20)	MCS0
	802.11n(HT40)	MCS0

The EUT will use two types antenna, and there have the following test mode:

Radiated test mode:

Mode 1: EUT transmitted signal with internal antenna;

Conducted test mode:

Mode 2: EUT transmitted signal from PCBA RF port connected to SPA directly;

We have verified all test modes, and choose the worst mode 1 for radiated test and mode 2 for conducted test as representatively to list the results in this report.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

2.4 Test peripherals list

Item No.	Name	Band and Model	Description
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz
2	Resistor	/	1800W
3	Lamp	/	100W

2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	22°C	55% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	22°C	55% RH
Power line conducted emission	22°C	55% RH

2.6 Instrument list

Conducted Emission/Disturbance Power/Tri-loop Test/CDN method					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2021-07-8
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2020-11-10
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2020-10-15
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2020-9-25
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	AFS42-00101800-25-S-42	EC5262	2021-06-11
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2021-1-17
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2021-03-16
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2021-03-16
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2021-03-16
<input checked="" type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	Ec6209	2020-12-30
<input checked="" type="checkbox"/>	RF cable	Huber+Suhner	0.2m	/	/
Tet Site					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2021-01-12
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2021-07-14
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2021-03-3
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 4620	2021-09-8

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Power spectrum density	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB
Minimum 6dB Bandwidth	± 0.84 × 10 ⁻⁷
Occupied bandwidth	± 0.84 × 10 ⁻⁷

TEST REPORT

3 Minimum 6dB bandwidth

Test result: Pass

3.1 Limit


For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of “KDB558074 D01v05r02 15.247 Meas Guidance” (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

3.3 Test Configuration

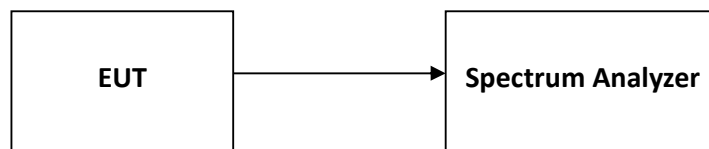

3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A


TEST REPORT**4 Maximum conducted output power and e.i.r.p.****Test result: Pass****4.1 Limit**

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01v05r02 15.247 Meas Guidance” (clause 8.3.2.2) for compliance requirements.

4.3 Test Configuration**4.4 Test Results of Maximum conducted output power**

Please refer to Appendix A

Conclusion: The maximum EIRP = 15.59dBm = 0.036W which is lower than the limit of 4W listed in RSS-247.

TEST REPORT**5 Power spectrum density****Test result: Pass****5.1 Limit**

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and 8+ (6 –antenna gain-beam forming gain).


5.2 Measurement Procedure

The power output was tested according to DTS test procedure of “KDB558074 D01v05r02 15.247 Meas Guidance” (clause 8.4) for compliance requirements.

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 x DTS bandwidth.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

5.3 Test Configuration



5.4 Test Results of Power spectrum density

Please refer to Appendix A

6 Emission outside the frequency band

Test result: Pass

6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01v05r02 15.247 Meas Guidance” (clause 8.5) for compliance requirements.

Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to ≥ 1.5 times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

6.3 Test Configuration



6.4 The results of Emission outside the frequency band

Please refer to Appendix A

7 Radiated Emissions in restricted frequency bands

Test result: Pass

7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters (0.1 meters for floor-standing device) above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

TEST REPORT**For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) or 0.1 meters (for floor-standing device) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or $3 \times \text{RBW}$ (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

7.3 Test Configuration


For Radiated emission below 30MHz:

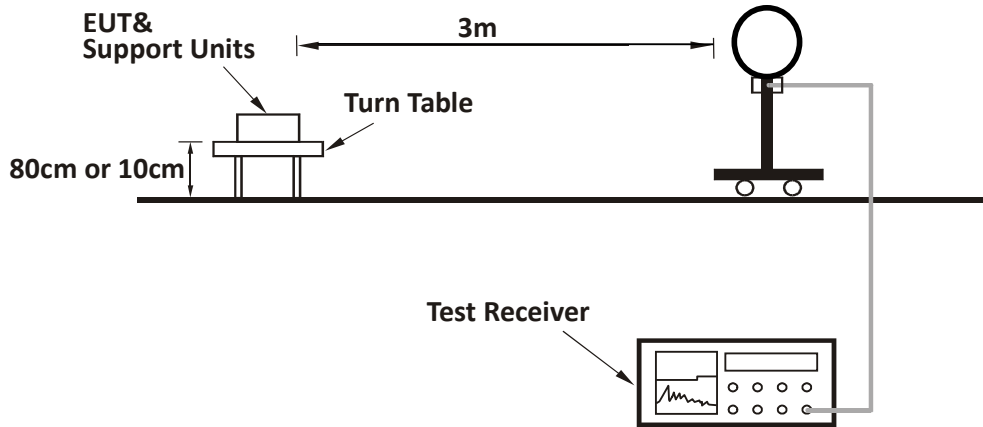

For Radiated emission 30MHz to 1GHz:

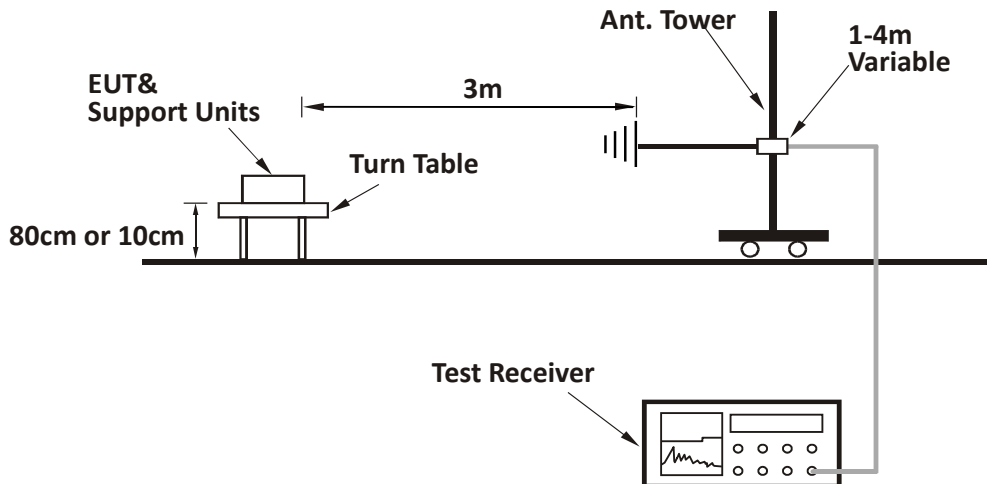

For Radiated emission above 1GHz:

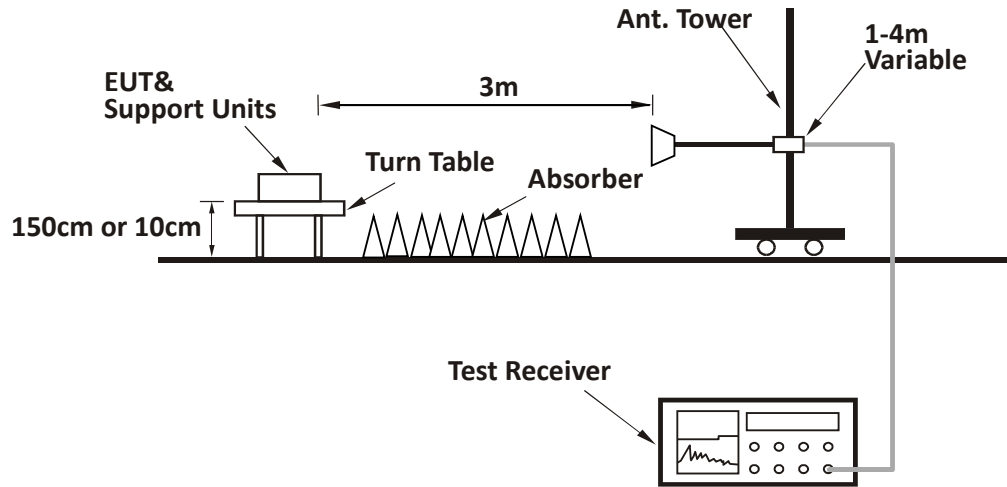


TEST REPORT

7.4 Test Results of Radiated Emissions


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below:

Horizontal

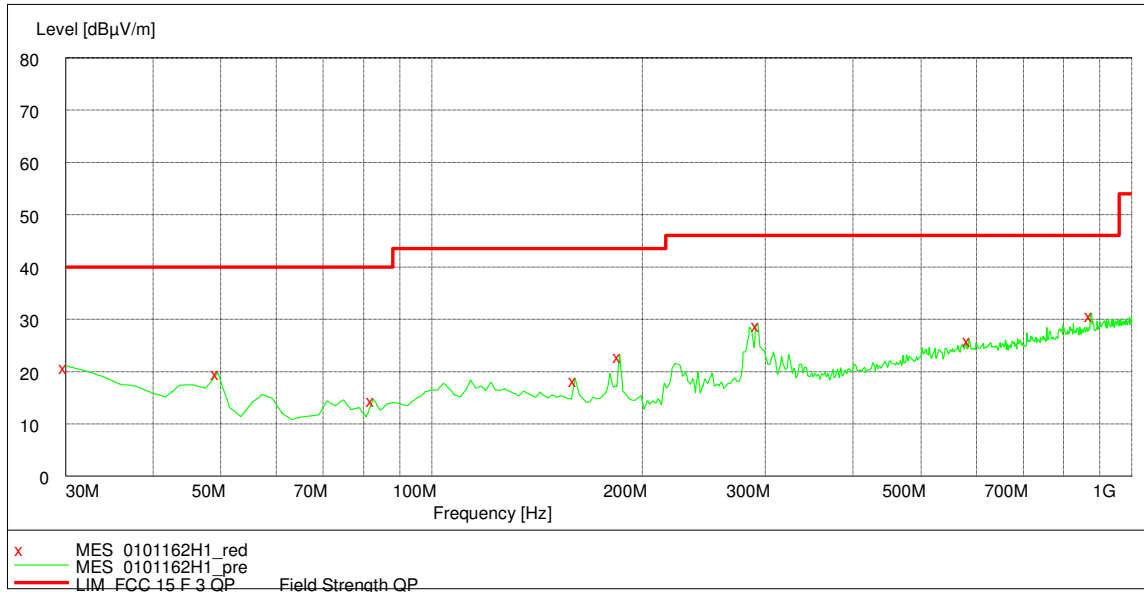

Vertical

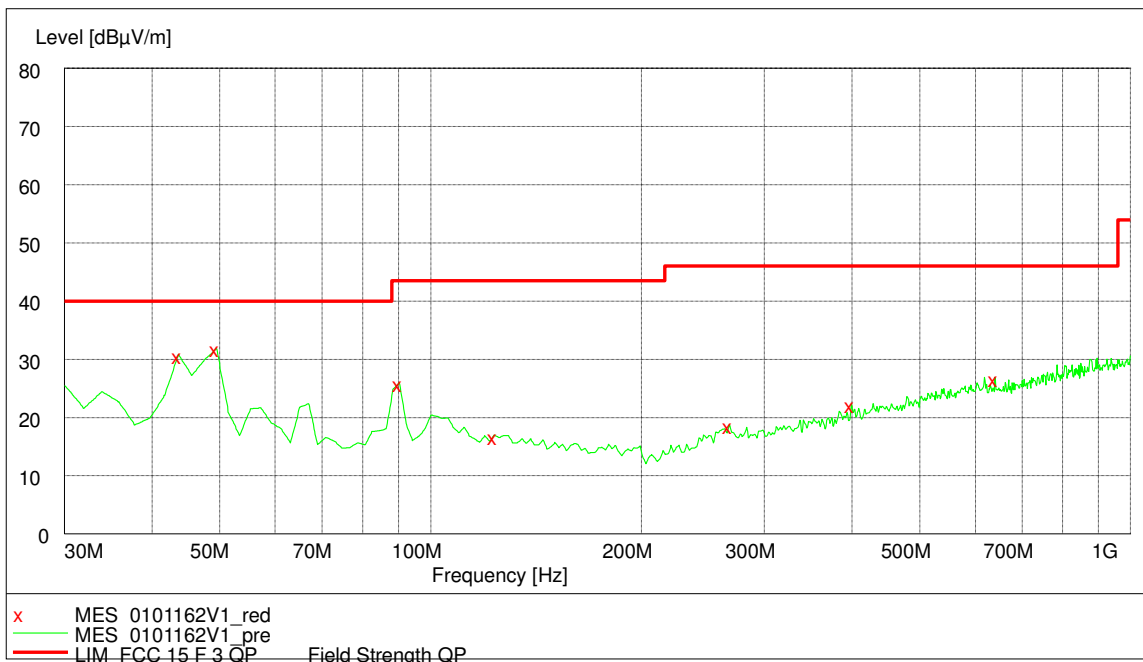

TEST REPORT

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	21.10	18.80	40.00	18.90	PK
H	49.44	19.80	9.00	40.00	20.20	PK
H	160.24	18.60	11.30	43.50	24.90	PK
H	292.42	29.10	14.80	46.00	16.90	PK
H	585.95	26.20	20.70	46.00	19.80	PK
H	875.59	30.90	23.50	46.00	15.10	PK
V	43.61	30.80	11.70	40.00	9.20	PK
V	49.44	31.90	9.00	40.00	8.10	PK
V	90.26	26.00	10.10	43.50	17.50	PK
V	123.31	16.90	13.20	43.50	26.60	PK
V	399.34	22.30	17.70	46.00	23.70	PK
V	640.38	26.90	21.20	46.00	19.10	PK

Note: The worst test result (30MHz to 1GHz) of 802.11G channel L (2437MHz) was chosen to list in the report as representative.

TEST REPORT
Test result above 1GHz:

The emission was conducted from 1GHz to 25GHz

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	52.17	31.20	74.00	21.83	PK
	H	2390.00	43.15	31.20	54.00	10.85	AV
	H	4824.00	52.90	2.70	74.00	21.1	PK
	H	4824.00	47.27	2.70	54.00	6.73	AV
M	H	4874.00	50.91	2.67	74.00	23.09	PK
	H	4874.00	45.12	2.67	54.00	8.88	AV
H	H	2483.50	54.28	31.19	74.00	19.72	PK
	H	2483.50	45.43	31.19	54.00	8.57	AV
	H	4924.00	53.82	2.77	74.00	20.18	PK
	H	4924.00	48.11	2.77	54.00	5.89	AV

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	52.42	31.20	74.00	21.58	PK
	H	2390.00	43.85	31.20	54.00	10.15	AV
	H	4824.00	51.93	2.70	74.00	22.07	PK
	H	4824.00	46.86	2.70	54.00	7.14	AV
M	H	4874.00	48.64	2.67	74.00	25.36	PK
	H	4874.00	42.75	2.67	54.00	11.25	AV
H	H	2483.50	54.62	31.19	74.00	19.38	PK
	H	2483.50	45.88	31.19	54.00	8.12	AV
	H	4924.00	52.05	2.77	74.00	21.95	PK
	H	4924.00	47.51	2.77	54.00	6.49	AV

TEST REPORT

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	53.14	31.20	74.00	20.86	PK
	H	2390.00	44.27	31.20	54.00	9.73	AV
	H	4824.00	49.82	2.70	74.00	24.18	PK
	H	4824.00	43.23	2.70	54.00	10.77	AV
M	H	4874.00	48.81	2.67	74.00	25.19	PK
	H	4874.00	43.15	2.67	54.00	10.85	AV
H	H	2483.50	54.31	31.19	74.00	19.69	PK
	H	2483.50	45.69	31.19	54.00	8.31	AV
	H	4924.00	52.22	2.77	74.00	21.78	PK
	H	4924.00	46.72	2.77	54.00	7.28	AV

802.11n(HT40)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2390.00	60.52	31.20	74.00	13.48	PK
	H	2390.00	52.67	31.20	54.00	1.33	AV
	H	4844.00	47.73	2.90	74.00	26.27	PK
	H	4844.00	41.86	2.90	54.00	12.14	AV
M	H	4874.00	46.74	2.67	74.00	27.26	PK
	H	4874.00	40.73	2.67	54.00	13.27	AV
H	H	2483.50	61.27	31.19	74.00	12.73	PK
	H	2483.50	52.79	31.19	54.00	1.21	AV
	H	4904.00	46.25	2.73	74.00	27.75	PK
	H	4904.00	40.44	2.73	54.00	13.56	AV

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
 2. Corrected Reading = Original Receiver Reading + Correct Factor
 3. Margin = Limit - Corrected Reading

TEST REPORT

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;
Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;
Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

8 Power line conducted emission


Test result: Pass

8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

8.2 Test Configuration

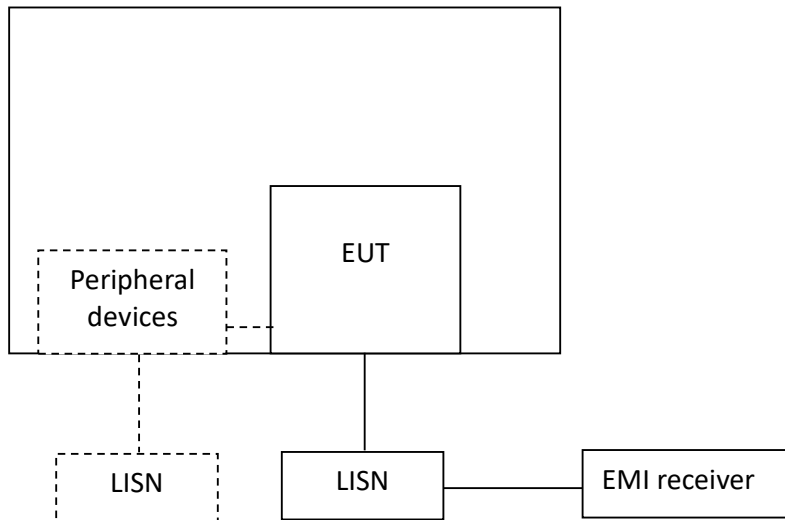


TEST REPORT**8.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.


The bandwidth of the test receiver is set at 9 kHz.

8.4 Test Results of Power line conducted emission

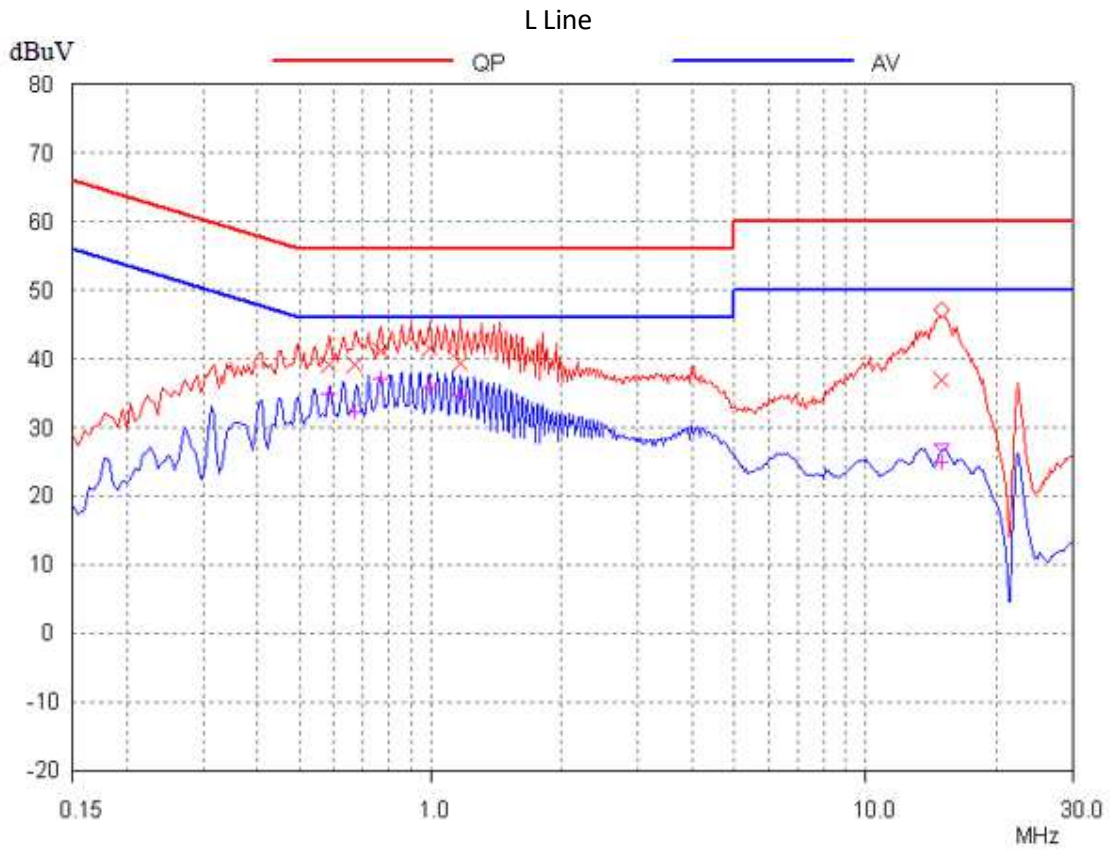

Frequency MHz	QP Corrected Reading (dBuV)	Limit dBuV	Delta dB	AV Corrected Reading (dBuV)	Limit dBuV	Delta dB
0.582	39.10	56.00	16.90	34.90	46.00	11.10
0.6675	39.03	56.00	16.97	32.19	46.00	13.81
0.7665	41.13	56.00	14.87	37.17	46.00	8.83
0.9915	41.60	56.00	14.40	35.89	46.00	10.11
1.1715	39.32	56.00	16.68	34.72	46.00	11.28
14.8515	36.98	60.00	23.02	24.96	50.00	25.04

TEST REPORT

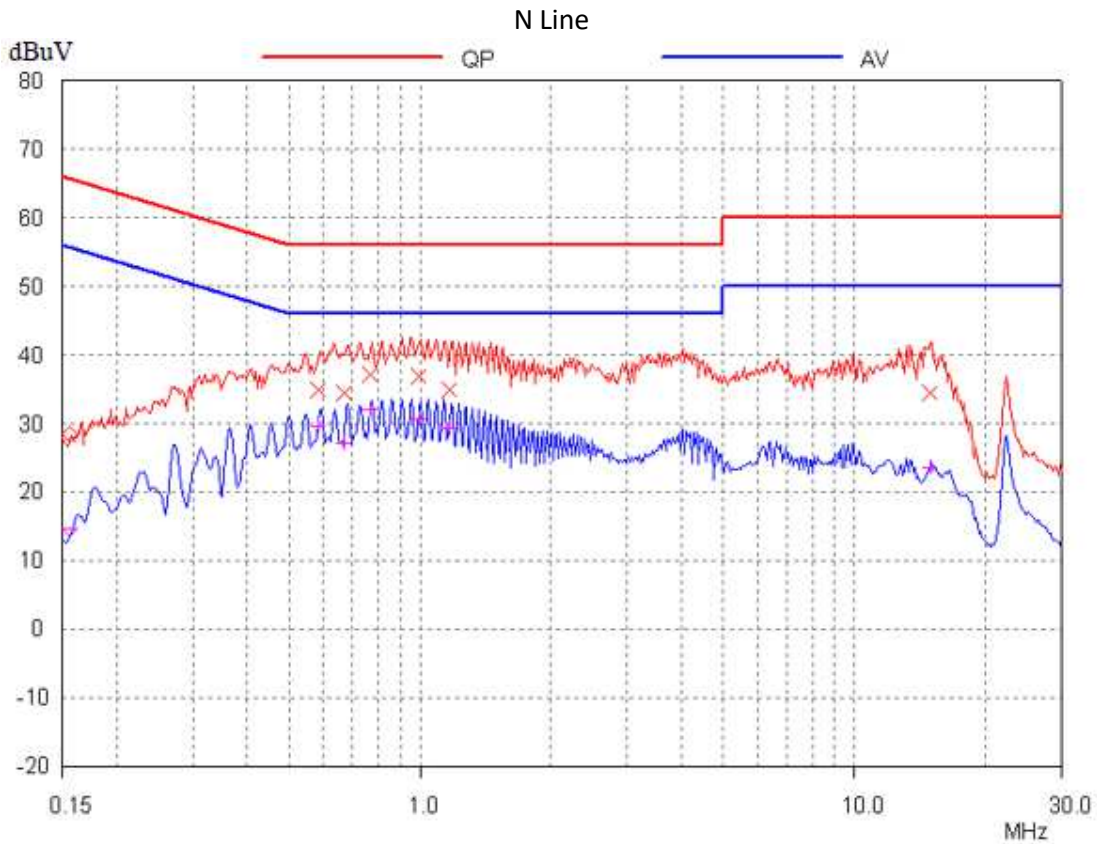

Frequency MHz	QP Corrected Reading (dBuV)	Limit dBuV	Delta dB	AV Corrected Reading (dBuV)	Limit dBuV	Delta dB
0.582	34.90	56.00	21.10	29.50	46.00	16.50
0.6675	34.43	56.00	21.57	27.14	46.00	18.86
0.7665	37.09	56.00	18.91	31.95	46.00	14.05
0.9915	36.92	56.00	19.08	30.62	46.00	15.38
1.1715	35.00	56.00	21.00	29.35	46.00	16.65
14.8515	34.40	60.00	25.60	23.60	50.00	26.40

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Delta = Limit - Corrected Reading

9 Occupied Bandwidth

Test result: Tested

9.1 Limit

None


9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen Issue 5 Clause 6.6 was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

9.3 Test Configuration



9.4 The results of Occupied Bandwidth

Please refer to Appendix A

10 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses a PCB antenna to the intentional radiator, so it can comply with the provisions of this section.

TEST REPORT

Appendix A: Test results

1. Duty Cycle

1.1 Test Data

WLAN Duty Cycle				
Mode	Test Frequency (MHz)	Ant	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11b	2412	Ant0	99.76	0.00
802.11b	2437	Ant0	99.76	0.00
802.11b	2462	Ant0	99.76	0.00
802.11g	2412	Ant0	99.29	0.00
802.11g	2437	Ant0	99.29	0.00
802.11g	2462	Ant0	99.84	0.00
802.11n (HT20)	2412	Ant0	99.49	0.00
802.11n (HT20)	2437	Ant0	99.49	0.00
802.11n (HT20)	2462	Ant0	99.49	0.00
802.11n (HT40)	2422	Ant0	96.05	0.00
802.11n (HT40)	2437	Ant0	96.05	0.00
802.11n (HT40)	2452	Ant0	96.05	0.00


TEST REPORT


2. Minimum 6dB bandwidth

2.1 Test Data

WLAN Occupied 6dB Bandwidth				
Mode	Test Frequency (MHz)	Ant	Occupied Bandwidth (MHz)	Result
802.11b	2412	Ant0	9.11	Pass
802.11b	2437	Ant0	9.11	Pass
802.11b	2462	Ant0	9.09	Pass
802.11g	2412	Ant0	11.31	Pass
802.11g	2437	Ant0	12.60	Pass
802.11g	2462	Ant0	12.59	Pass
802.11n (HT20)	2412	Ant0	10.13	Pass
802.11n (HT20)	2437	Ant0	11.32	Pass
802.11n (HT20)	2462	Ant0	11.36	Pass
802.11n (HT40)	2422	Ant0	30.12	Pass
802.11n (HT40)	2437	Ant0	30.10	Pass
802.11n (HT40)	2452	Ant0	30.11	Pass

2.2 Test Plots

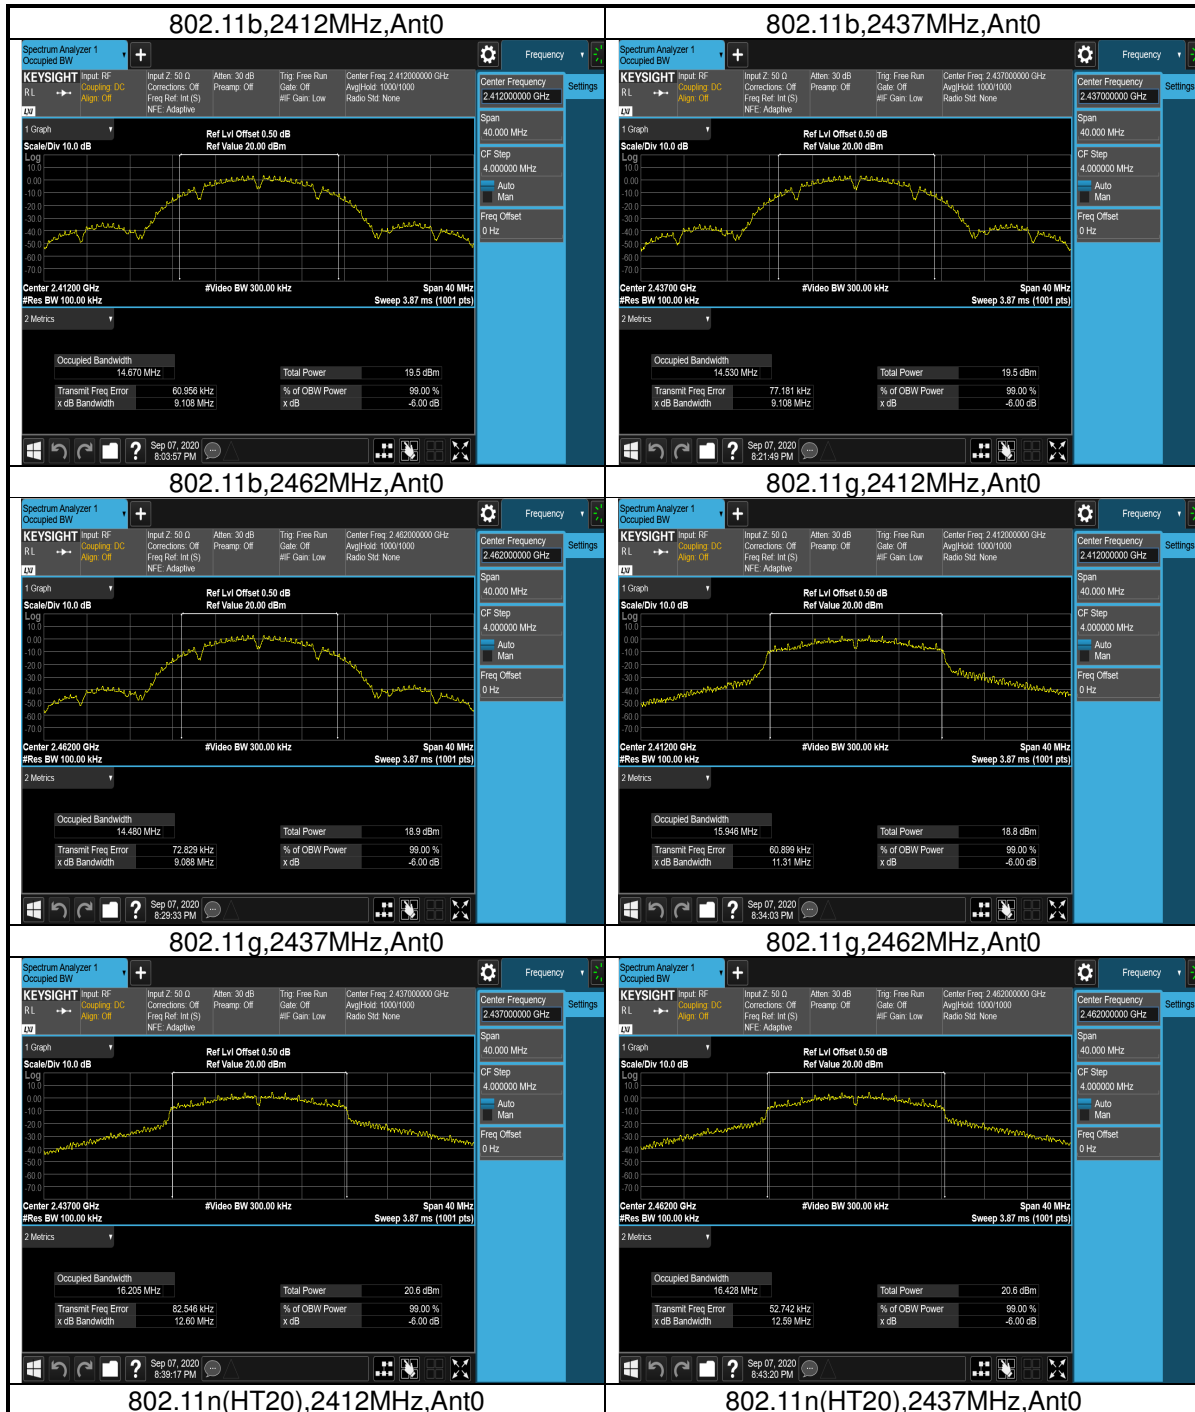

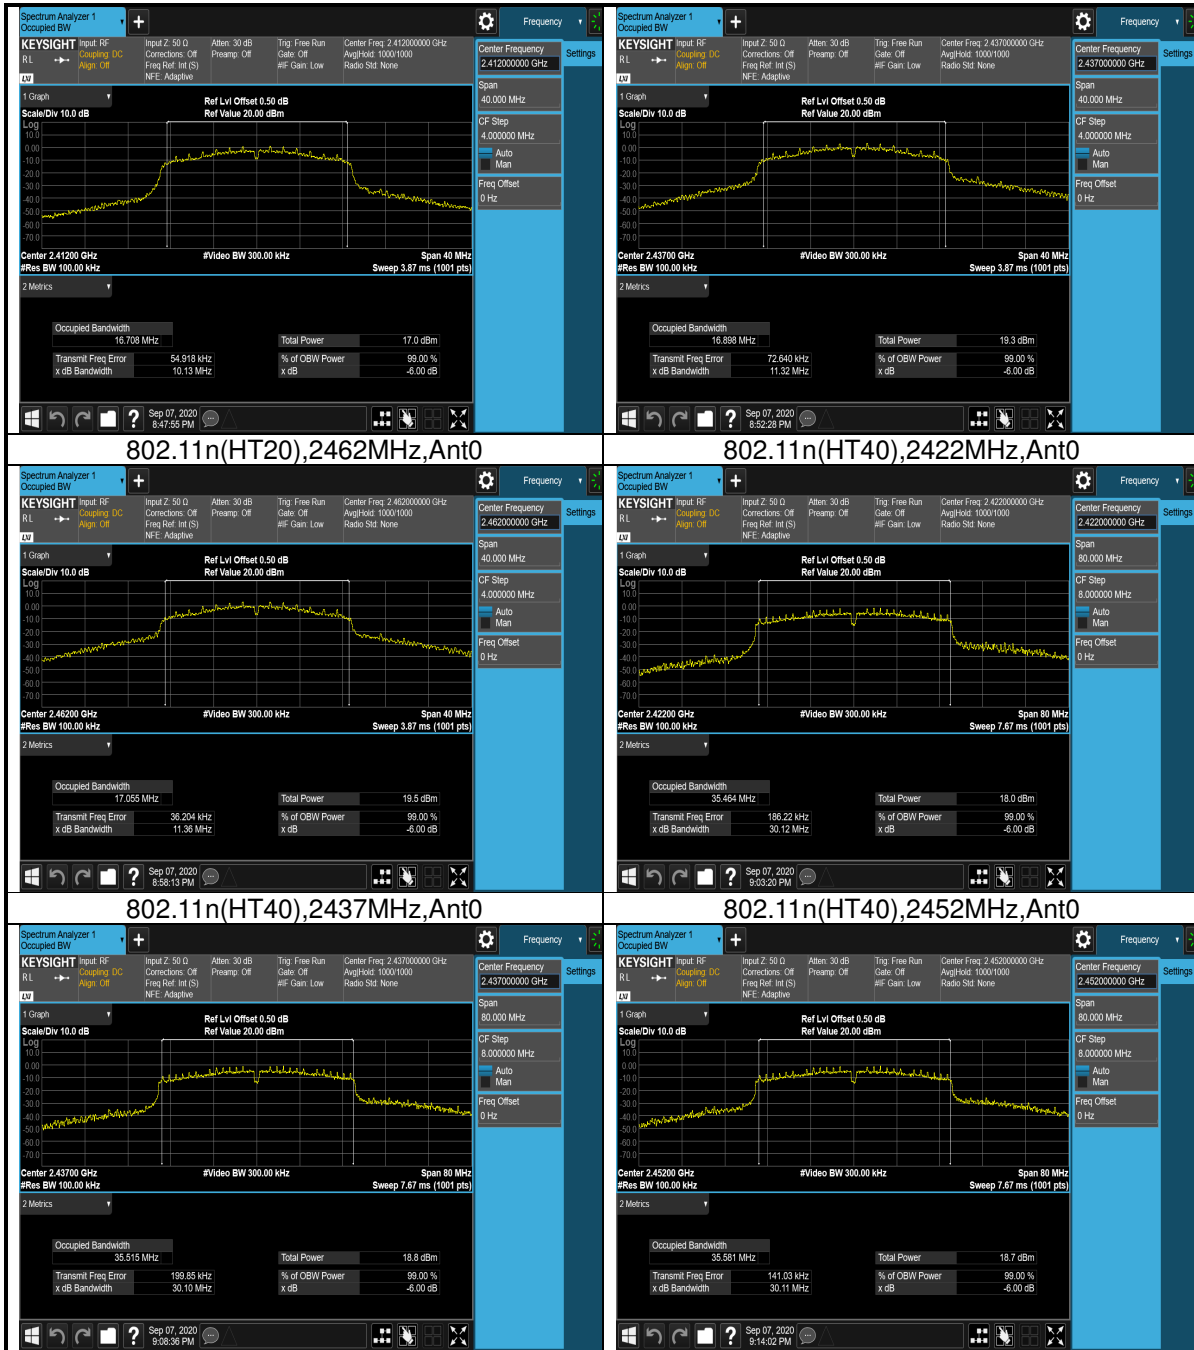


TEST REPORT

3. Occupied Bandwidth


3.1 Test Data

WLAN 99% Occupied Bandwidth				
Mode	Test Frequency (MHz)	Ant	99% Occupied Bandwidth (MHz)	Result
802.11b	2412	Ant0	14.635	Pass
802.11b	2437	Ant0	14.522	Pass
802.11b	2462	Ant0	14.448	Pass
802.11g	2412	Ant0	15.995	Pass
802.11g	2437	Ant0	16.271	Pass
802.11g	2462	Ant0	16.567	Pass
802.11n (HT20)	2412	Ant0	16.806	Pass
802.11n (HT20)	2437	Ant0	17.005	Pass
802.11n (HT20)	2462	Ant0	17.173	Pass
802.11n (HT40)	2422	Ant0	35.846	Pass
802.11n (HT40)	2437	Ant0	35.946	Pass
802.11n (HT40)	2452	Ant0	35.968	Pass

3.2 Test Plots

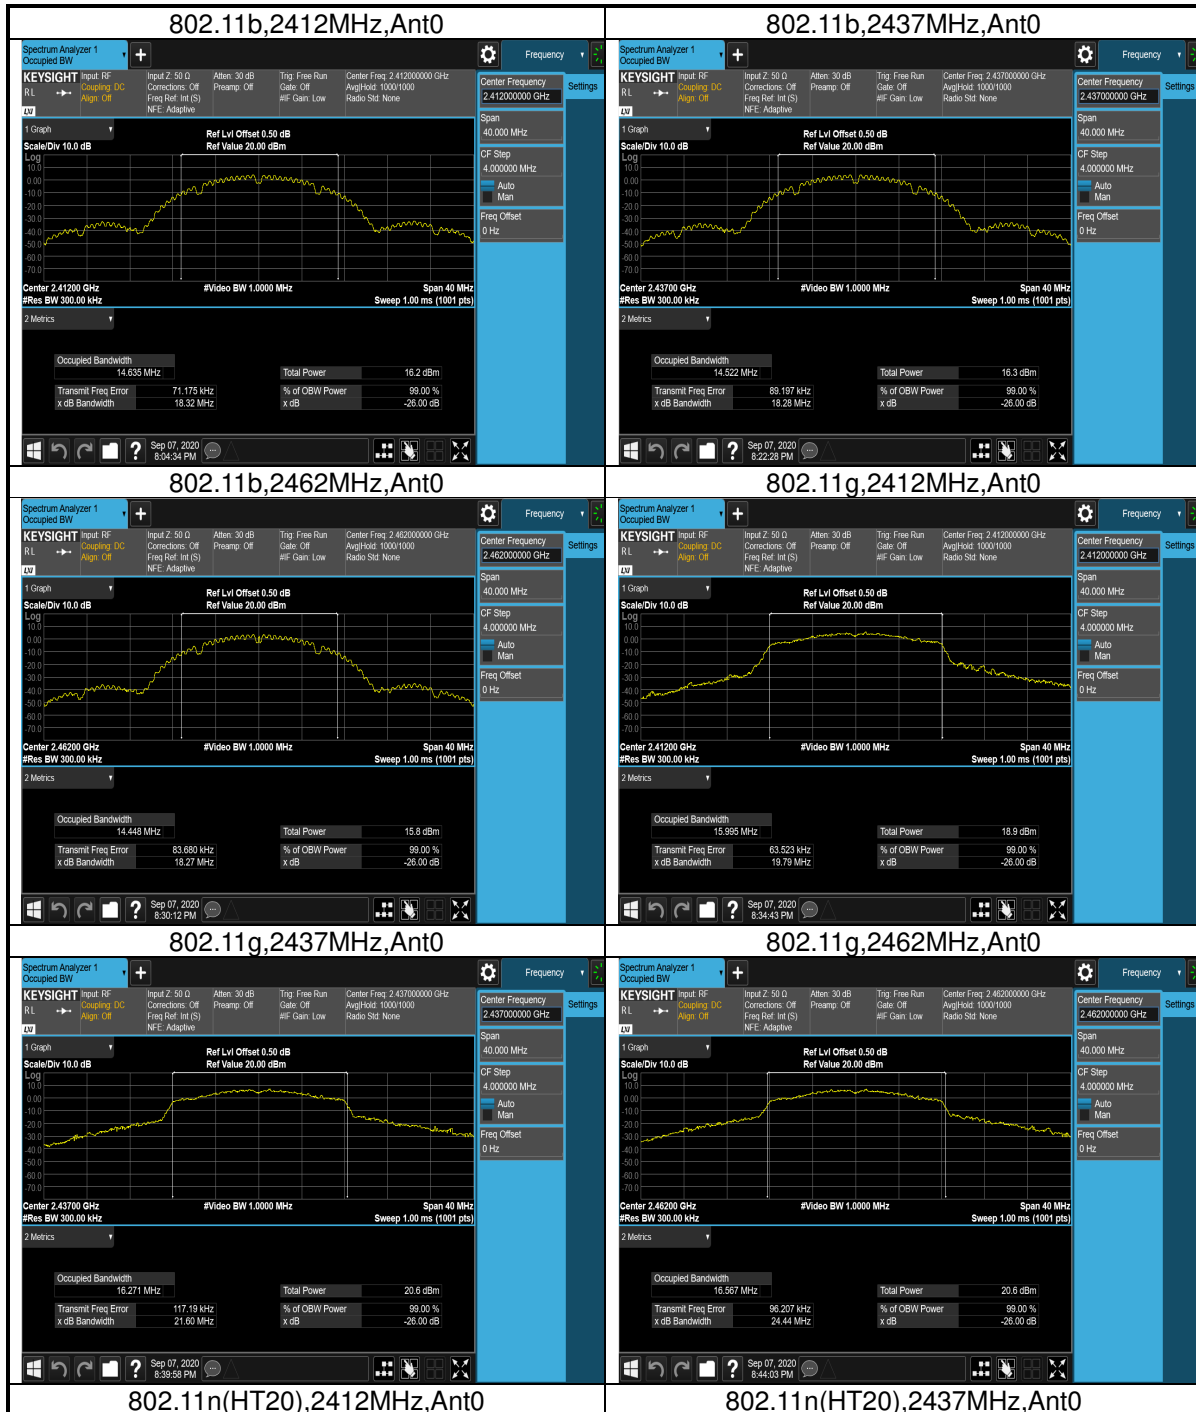

TEST REPORT

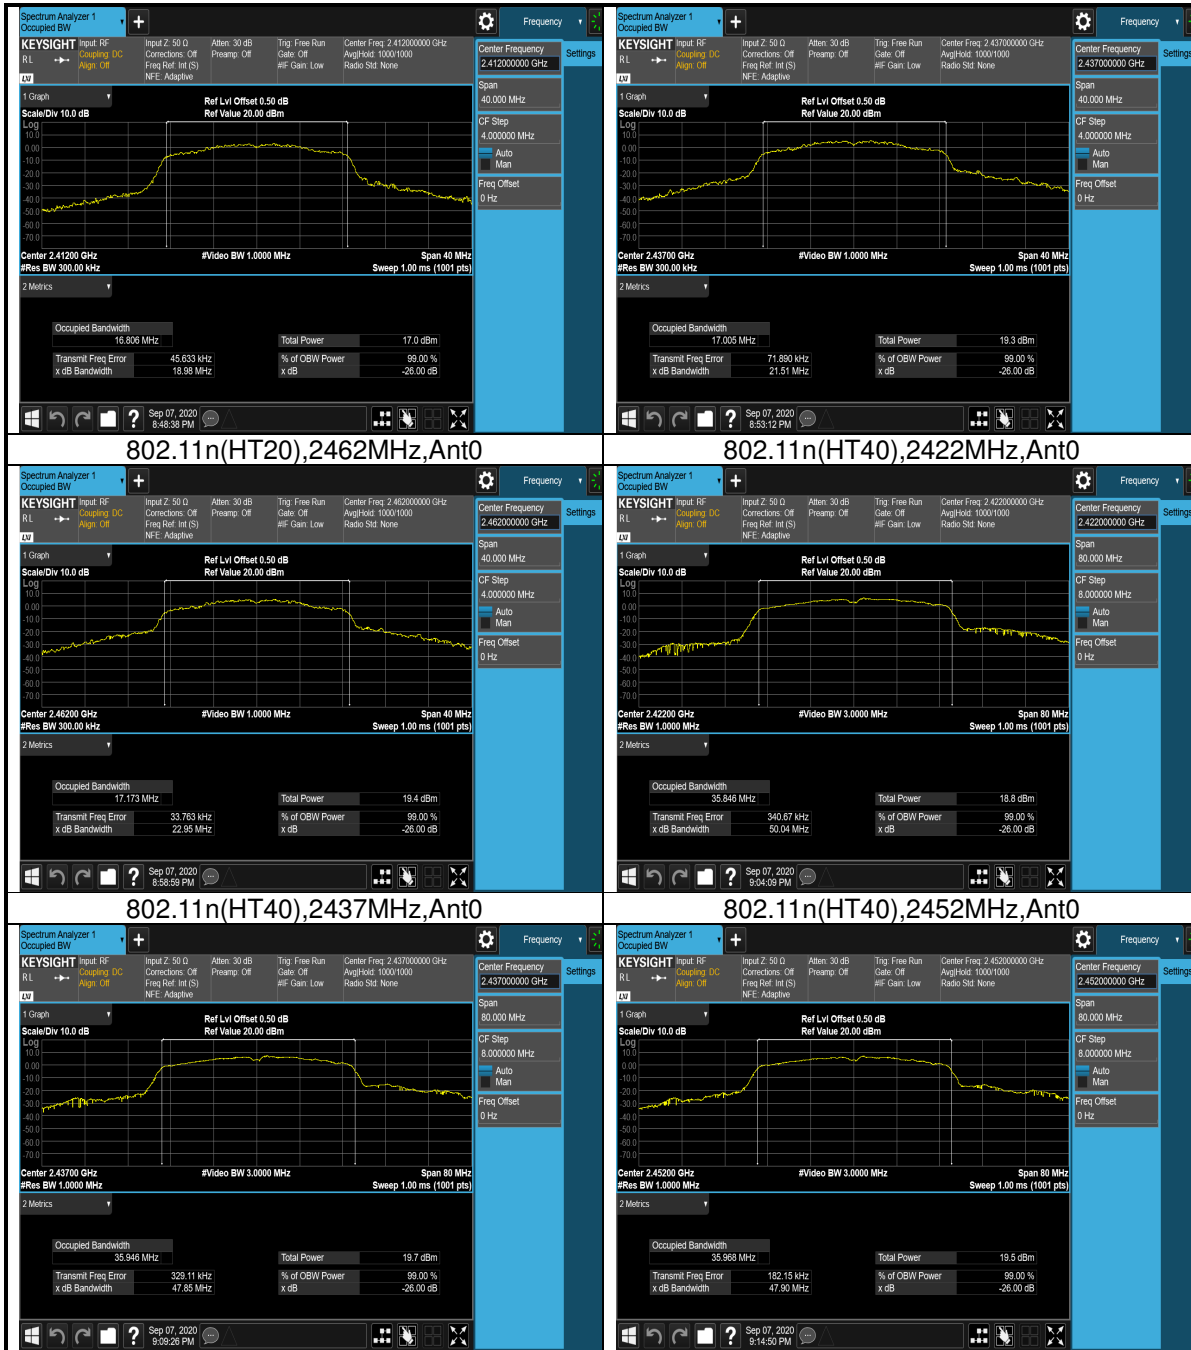

802.11n(HT20),2462MHz,Ant0

802.11n(HT40),2422MHz,Ant0

802.11n(HT40),2437MHz,Ant0

802.11n(HT40),2452MHz,Ant0


TEST REPORT

4. Maximum conducted output power and e.i.r.p

4.1 Test Data

WLAN AVGSA Output Power							
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Limit (dBm)	EIRP (dBm)	Result
802.11b	2412	Ant0	0.00	12.03	30	14.03	Pass
802.11b	2437	Ant0	0.00	12.26	30	14.26	Pass
802.11b	2462	Ant0	0.00	11.85	30	13.85	Pass
802.11g	2412	Ant0	0.00	11.91	30	13.91	Pass
802.11g	2437	Ant0	0.00	13.59	30	15.59	Pass
802.11g	2462	Ant0	0.00	13.50	30	15.50	Pass
802.11n (HT20)	2412	Ant0	0.00	10.31	30	12.31	Pass
802.11n (HT20)	2437	Ant0	0.00	12.33	30	14.33	Pass
802.11n (HT20)	2462	Ant0	0.00	12.51	30	14.51	Pass
802.11n (HT40)	2422	Ant0	0.35	11.09	30	13.09	Pass
802.11n (HT40)	2437	Ant0	0.35	11.99	30	13.99	Pass
802.11n (HT40)	2452	Ant0	0.35	11.83	30	13.83	Pass

4.2 Test Plots

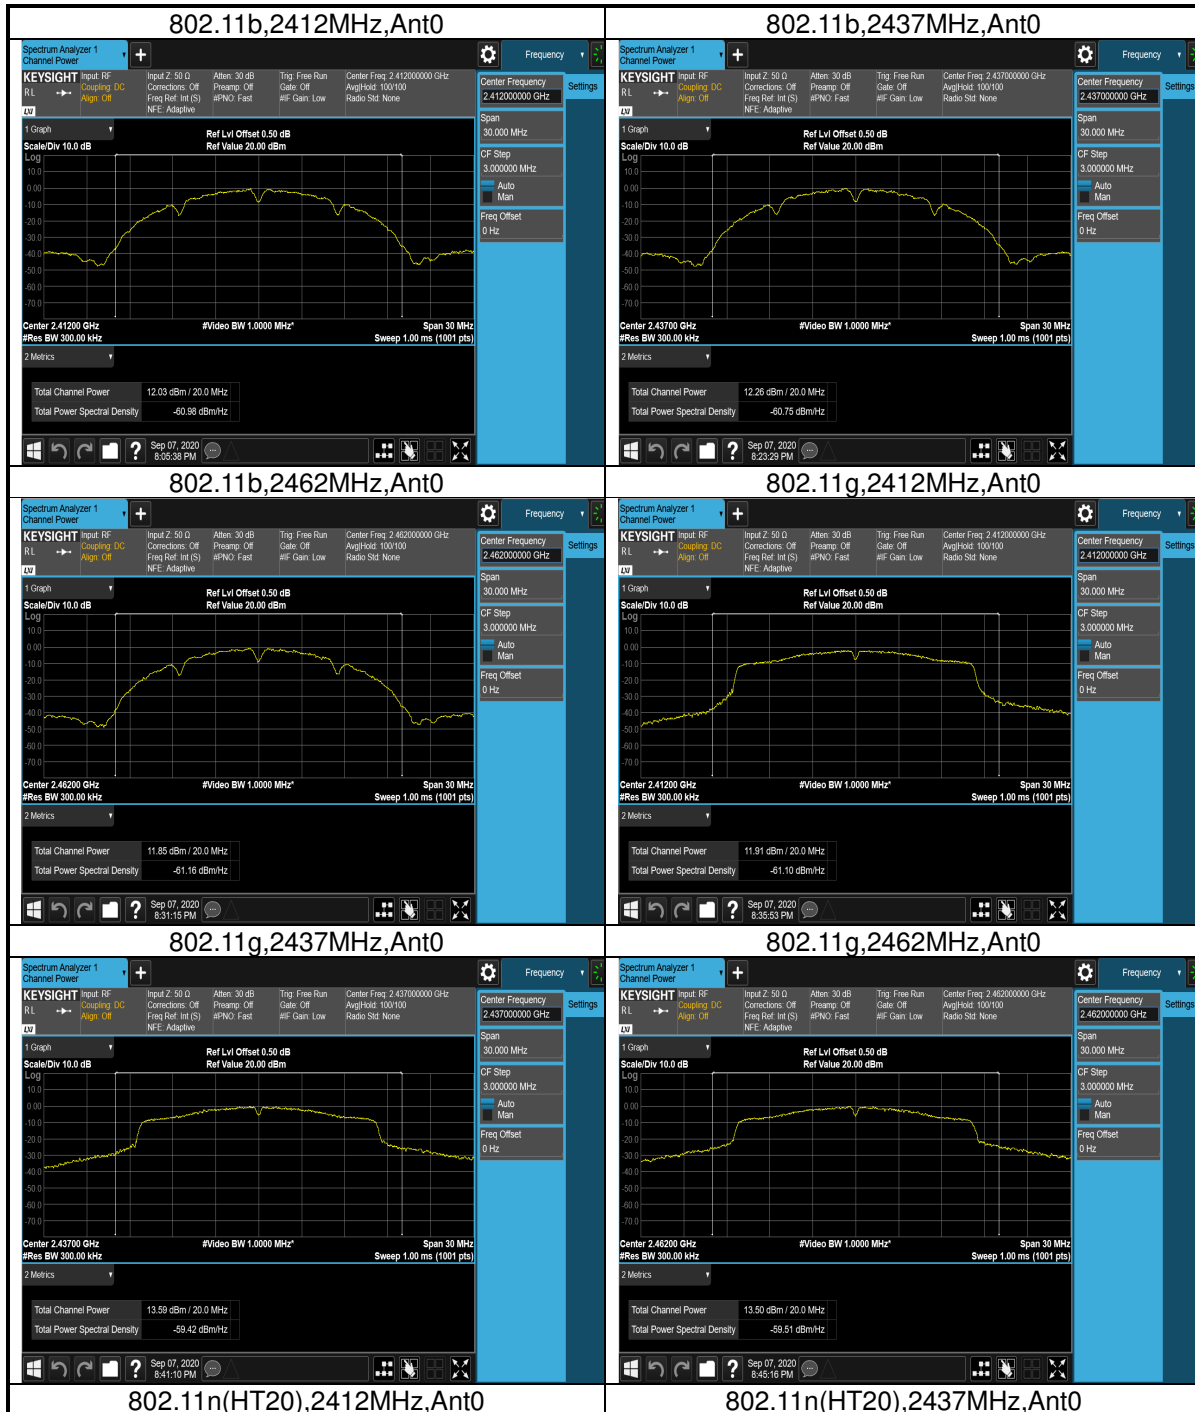

TEST REPORT



TEST REPORT

5. Power spectrum density


5.1 Test Data

WLAN AVGSA Power Spectral Density							
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	PSD (dBm)	RBW (kHz)	Limit (dBm)	Result
802.11b	2412	Ant0	0.00	-4.424	100	8	Pass
802.11b	2437	Ant0	0.00	-4.928	100	8	Pass
802.11b	2462	Ant0	0.00	-4.767	100	8	Pass
802.11g	2412	Ant0	0.00	-5.095	100	8	Pass
802.11g	2437	Ant0	0.00	-3.660	100	8	Pass
802.11g	2462	Ant0	0.00	-4.310	100	8	Pass
802.11n (HT20)	2412	Ant0	0.00	-7.197	100	8	Pass
802.11n (HT20)	2437	Ant0	0.00	-5.508	100	8	Pass
802.11n (HT20)	2462	Ant0	0.00	-4.686	100	8	Pass
802.11n (HT40)	2422	Ant0	0.35	-10.287	100	8	Pass
802.11n (HT40)	2437	Ant0	0.35	-8.930	100	8	Pass
802.11n (HT40)	2452	Ant0	0.35	-9.727	100	8	Pass

5.2 Test Plots



TEST REPORT

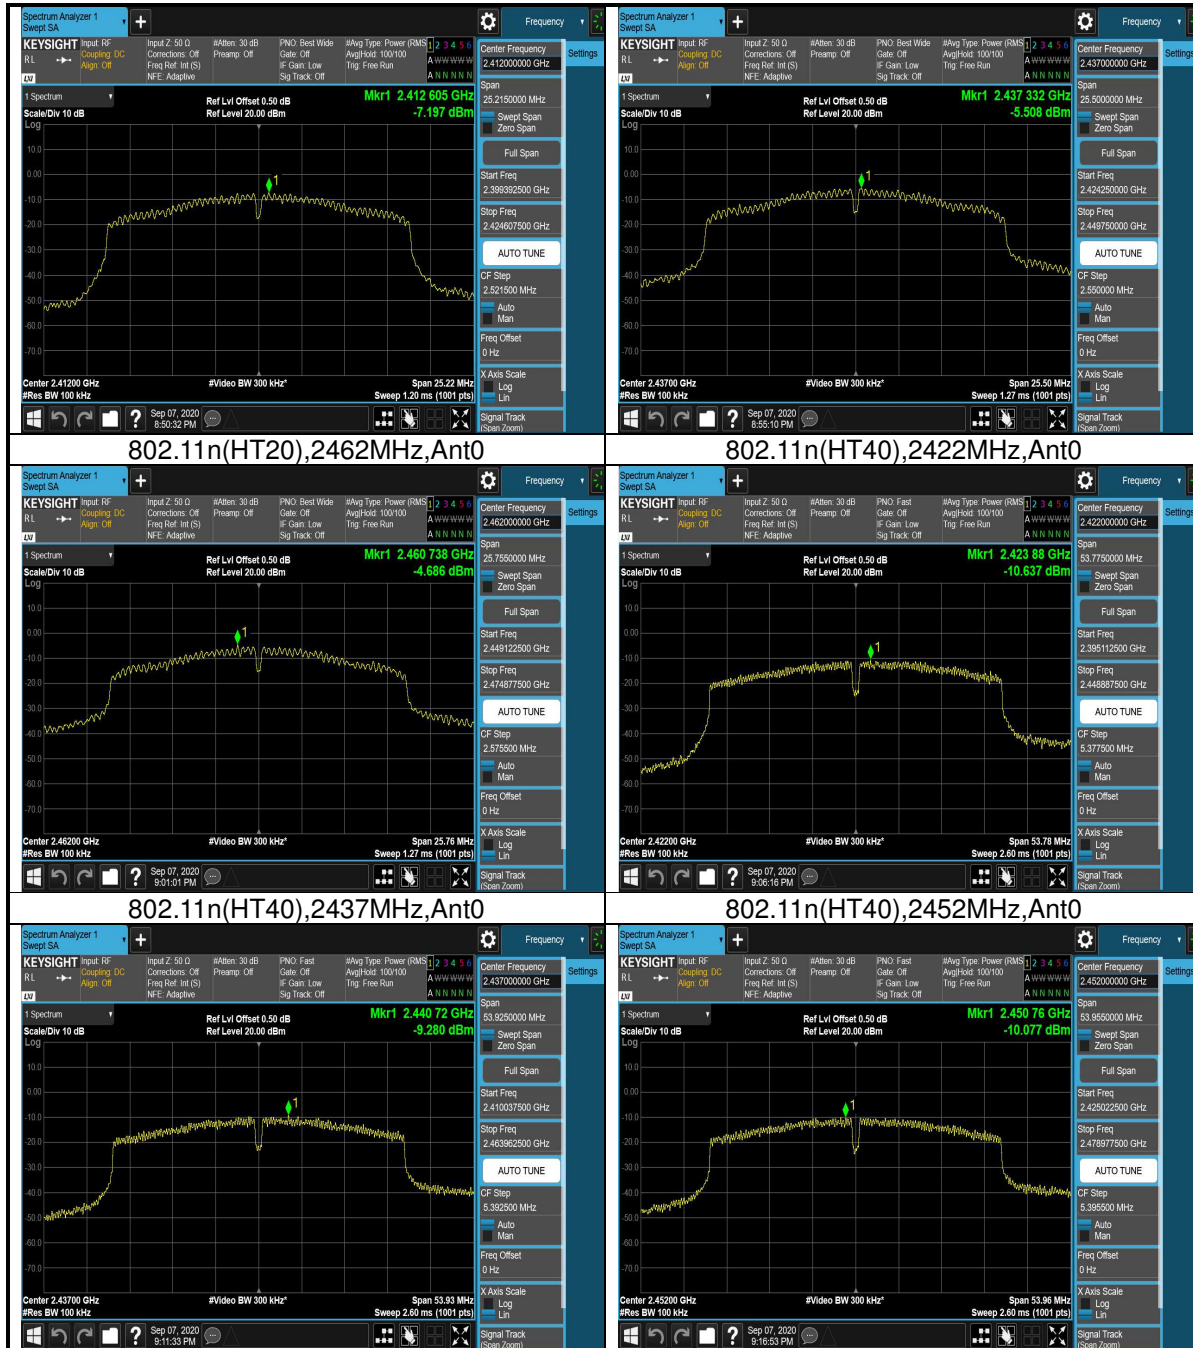

6. Emission outside the frequency band

6.1 Test Data

WLAN Transmitter Spurious Emission						
Mode	Test Frequency (MHz)	Ant	Plot No.	Frequency Range	Emission (dBm)	Result
802.11b	2412	Ant0	1	Reference Level	6.59	Pass
802.11b	2412	Ant0	2	Band Edge	-41.32	Pass
802.11b	2412	Ant0	3	30MHz~2310MHz	-54.41	Pass
802.11b	2412	Ant0	4	2500MHz~5000MHz	-55.64	Pass
802.11b	2412	Ant0	5	5000MHz~15000MHz	-54.20	Pass
802.11b	2412	Ant0	6	15000MHz~25000MHz	-51.00	Pass
802.11b	2437	Ant0	1	Reference Level	6.62	Pass
802.11b	2437	Ant0	2	Band Edge	-52.03	Pass
802.11b	2437	Ant0	3	30MHz~2310MHz	-54.14	Pass
802.11b	2437	Ant0	4	2500MHz~5000MHz	-55.17	Pass
802.11b	2437	Ant0	5	5000MHz~15000MHz	-53.34	Pass
802.11b	2437	Ant0	6	15000MHz~25000MHz	-51.31	Pass
802.11b	2462	Ant0	1	Reference Level	6.73	Pass
802.11b	2462	Ant0	2	Band Edge	-51.98	Pass
802.11b	2462	Ant0	3	30MHz~2310MHz	-54.76	Pass
802.11b	2462	Ant0	4	2500MHz~5000MHz	-53.47	Pass
802.11b	2462	Ant0	5	5000MHz~15000MHz	-54.42	Pass
802.11b	2462	Ant0	6	15000MHz~25000MHz	-51.32	Pass
802.11g	2412	Ant0	1	Reference Level	3.81	Pass
802.11g	2412	Ant0	2	Band Edge	-37.53	Pass
802.11g	2412	Ant0	3	30MHz~2310MHz	-56.74	Pass
802.11g	2412	Ant0	4	2500MHz~5000MHz	-55.37	Pass
802.11g	2412	Ant0	5	5000MHz~15000MHz	-54.32	Pass
802.11g	2412	Ant0	6	15000MHz~25000MHz	-51.01	Pass
802.11g	2437	Ant0	1	Reference Level	2.68	Pass
802.11g	2437	Ant0	2	Band Edge	-53.98	Pass

TEST REPORT

802.11g	2437	Ant0	3	30MHz~2310MHz	-54.37	Pass
802.11g	2437	Ant0	4	2500MHz~5000MHz	-55.18	Pass
802.11g	2437	Ant0	5	5000MHz~15000MHz	-54.61	Pass
802.11g	2437	Ant0	6	15000MHz~25000MHz	-51.48	Pass
802.11g	2462	Ant0	1	Reference Level	2.78	Pass
802.11g	2462	Ant0	2	Band Edge	-49.98	Pass
802.11g	2462	Ant0	3	30MHz~2310MHz	-52.09	Pass
802.11g	2462	Ant0	4	2500MHz~5000MHz	-54.80	Pass
802.11g	2462	Ant0	5	5000MHz~15000MHz	-54.15	Pass
802.11g	2462	Ant0	6	15000MHz~25000MHz	-50.84	Pass
802.11n (HT20)	2412	Ant0	1	Reference Level	1.11	Pass
802.11n (HT20)	2412	Ant0	2	Band Edge	-39.98	Pass
802.11n (HT20)	2412	Ant0	3	30MHz~2310MHz	-57.39	Pass
802.11n (HT20)	2412	Ant0	4	2500MHz~5000MHz	-54.98	Pass
802.11n (HT20)	2412	Ant0	5	5000MHz~15000MHz	-53.76	Pass
802.11n (HT20)	2412	Ant0	6	15000MHz~25000MHz	-49.89	Pass
802.11n (HT20)	2437	Ant0	1	Reference Level	1.18	Pass
802.11n (HT20)	2437	Ant0	2	Band Edge	-56.31	Pass
802.11n (HT20)	2437	Ant0	3	30MHz~2310MHz	-57.15	Pass
802.11n (HT20)	2437	Ant0	4	2500MHz~5000MHz	-54.78	Pass
802.11n (HT20)	2437	Ant0	5	5000MHz~15000MHz	-53.83	Pass
802.11n (HT20)	2437	Ant0	6	15000MHz~25000MHz	-51.24	Pass
802.11n (HT20)	2462	Ant0	1	Reference Level	1.00	Pass
802.11n (HT20)	2462	Ant0	2	Band Edge	-54.50	Pass
802.11n (HT20)	2462	Ant0	3	30MHz~2310MHz	-54.93	Pass
802.11n (HT20)	2462	Ant0	4	2500MHz~5000MHz	-55.53	Pass
802.11n (HT20)	2462	Ant0	5	5000MHz~15000MHz	-54.63	Pass
802.11n (HT20)	2462	Ant0	6	15000MHz~25000MHz	-51.82	Pass

TEST REPORT

802.11n (HT40)	2422	Ant0	1	Reference Level	-1.28	Pass
802.11n (HT40)	2422	Ant0	2	Band Edge	-43.58	Pass
802.11n (HT40)	2422	Ant0	3	30MHz~2310MHz	-56.98	Pass
802.11n (HT40)	2422	Ant0	4	2500MHz~5000MHz	-54.97	Pass
802.11n (HT40)	2422	Ant0	5	5000MHz~15000MHz	-54.11	Pass
802.11n (HT40)	2422	Ant0	6	15000MHz~25000MHz	-51.30	Pass
802.11n (HT40)	2437	Ant0	1	Reference Level	-1.33	Pass
802.11n (HT40)	2437	Ant0	2	Band Edge	-42.81	Pass
802.11n (HT40)	2437	Ant0	3	30MHz~2310MHz	-56.17	Pass
802.11n (HT40)	2437	Ant0	4	2500MHz~5000MHz	-54.73	Pass
802.11n (HT40)	2437	Ant0	5	5000MHz~15000MHz	-54.31	Pass
802.11n (HT40)	2437	Ant0	6	15000MHz~25000MHz	-51.44	Pass
802.11n (HT40)	2452	Ant0	1	Reference Level	-1.46	Pass
802.11n (HT40)	2452	Ant0	2	Band Edge	-51.73	Pass
802.11n (HT40)	2452	Ant0	3	30MHz~2310MHz	-54.85	Pass
802.11n (HT40)	2452	Ant0	4	2500MHz~5000MHz	-54.81	Pass
802.11n (HT40)	2452	Ant0	5	5000MHz~15000MHz	-54.39	Pass
802.11n (HT40)	2452	Ant0	6	15000MHz~25000MHz	-50.15	Pass