



www.nemko.com



Test Report: 86202-1R1TRFWL

Applicant: Johny Tiedown Inc
176, 13e Rue
Rouyn-Noranda, QC
Canada
J9X 2H8

Apparatus: JT0705256USB1

FCC ID: VBB-JT0705256USB1

In Accordance With: FCC Part 15 Subpart C, 15.231
Periodic operation in the band 40.66-40.70MHz and
above 70 MHz.

Tested By: Nemko Canada Inc.
303 River Road
Ottawa, Ontario
K1V 1H2

Authorized By:

A handwritten signature in blue ink.

Jason Nixon, Telecom Specialist

Date: July 25, 2007

Total Number of Pages: 18

Report Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C. Radiated tests were conducted in accordance with ANSI C63.4-2003. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

The assessment summary is as follows:

Apparatus Assessed: JT0705256USB1

Specification: FCC Part 15 Subpart C, 15.231

Compliance Status: Complies

Exclusions: None

Non-compliances: None

Report Release History: Original Release

Author: Heng Lin EMC / Wireless Specialist

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025.

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

Report Summary	2
Section 1 : Equipment Under Test	4
1.1 Product Identification	4
1.2 Samples Submitted for Assessment.....	4
1.3 Technical Specifications of the EUT	4
Section 2 : Test Conditions	5
2.1 Specifications	5
2.2 Deviations From Laboratory Test Procedures	5
2.3 Test Environment	5
2.4 Test Equipment.....	5
Section 3 : Observations	6
3.1 Modifications Performed During Assessment.....	6
3.2 Record Of Technical Judgements	6
3.3 EUT Parameters Affecting Compliance	6
3.4 Test Deleted.....	6
3.5 Additional Observations	6
Section 4 : Results Summary	7
4.1 FCC Part 15 Subpart C : Test Results	8
Appendix A : Test Results	9
Clause 15.231(a) Conditions for intentional radiators to comply with periodic operation	9
Clause 15.231(b) Radiated Emissions	12
Clause 15.231(c) 20dB Bandwidth.....	16
Appendix B : Setup Photographs	17
Appendix C : Block Diagram of Test Setups	18

Section 1 : Equipment Under Test

1.1 Product Identification

The Equipment Under Test was identified as follows:

JT0705256USB1

1.2 Samples Submitted for Assessment

The following samples of the apparatus have been submitted for type assessment:

Sample No.	Description	Serial No.
5	Wireless Strap Monitor (Transmitter)	None

The first samples were received on: May 07, 2007

1.3 Technical Specifications of the EUT

Operating Frequency: 433.92 MHz

Emission Designator: F1D

Modulation: FSK

Antenna Data: 0 dBi

Antenna Connector: Integrated

Power Source: 12VDC Battery

Section 2 : Test Conditions

2.1 Specifications

The apparatus was assessed against the following specifications:

FCC Part 15 Subpart C, 15.231

Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

2.2 Deviations From Laboratory Test Procedures

No deviations were made from laboratory test procedures.

2.3 Test Environment

All tests were performed under the following environmental conditions:

Temperature range	:	15 – 30 °C
Humidity range	:	20 - 75 %
Pressure range	:	86 - 106 kPa
Power supply range	:	+/- 5% of rated voltages

2.4 Test Equipment

Equipment	Manufacturer	Model No.	Asset/Serial No.	Next Cal.
Spectrum Analyzer	Rohde & Schwarz	FSU	FA001877	Jan. 16/08
Receiver	Rohde & Schwarz	ESVS-30	FA001445	July 14/07
Biconical (2) Antenna	EMCO	3109	FA000904	Sept. 12/07
Log Periodic Antenna #2	EMCO	3148	FA001355	May 16/07
Horn Antenna #1	EMCO	3115	FA000649	Feb. 26/08
Horn Antenna #2	EMCO	3115	FA000825	Jan. 30/08
1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	Aug. 02/07
2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	Aug. 02/07
4.0 – 8.0 GHz Amplifier	JCA	48-600	FA001497	Aug. 02/07

COU – Calibrate on Use

NCR – No Calibration Required

Section 3 : Observations

3.1 Modifications Performed During Assessment

No modifications were performed during assessment.

3.2 Record Of Technical Judgements

No technical judgements were made during the assessment.

3.3 EUT Parameters Affecting Compliance

The user of the apparatus could not alter parameters that would affect compliance.

3.4 Test Deleted

No Tests were deleted from this assessment.

3.5 Additional Observations

There were no additional observations made during this assessment.

Section 4 : Results Summary

This section contains the following:

FCC Part 15 Subpart C : Test Results

The column headed 'Required' indicates whether the associated clauses were invoked for the apparatus under test. The following abbreviations are used:

N No : not applicable / not relevant.

Y Yes : Mandatory i.e. the apparatus shall conform to these tests.

N/T Not Tested, mandatory but not assessed. (See section 3.4 Test deleted)

The results contained in this section are representative of the operation of the apparatus as originally submitted.

4.1 FCC Part 15 Subpart C : Test Results

Part 15	Test Description	Required	Result
15.31(e)	Variation of Power source	Y	PASS
15.207(a)	Powerline Conducted Emissions	N	
15.209(a)	Radiated Emissions within Restricted Bands	Y	PASS
15.231(a)(1)	Manually operated transmitter	N	
15.231(a)(2)	Automatically activated transmitter	N	
15.231(a)(3)	Periodic transmissions at regular predetermined intervals	Y	PASS
15.231(a)(4)	Radiators used in cases of emergency	N	
15.231(a)(5)	Set-up information for security systems	N	
15.231(b)	Radiated Emissions	Y	PASS
15.231(c)	20dB Bandwidth	Y	PASS
15.231(d)	Devices operating within the frequency band 40.66-40.70 MHz	N	
15.231(e)	Radiated emissions for Periodic radiators	N	

Notes:

Appendix A : Test Results

Clause 15.231(a) Conditions for intentional radiators to comply with periodic operation

The provisions of this section are restricted to periodic operation within the band 40.66-40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Continuous transmissions, voice, video and the radio control of toys are not permitted. Data is permitted to be sent with a control signal. The following conditions shall be met to comply with the provisions for this periodic operation:

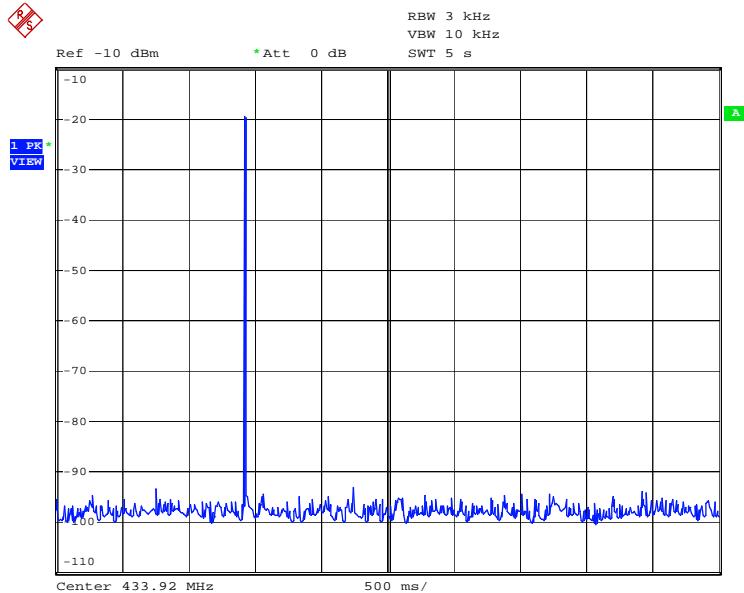
- (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.
- (2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.
- (3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions, including data, to determine system integrity of transmitters used in security or safety applications are allowed if the total duration of transmissions does not exceed more than two seconds per hour for each transmitter. There is no limit on the number of individual transmissions, provided the total transmission time does not exceed two seconds per hour.
- (4) Intentional radiators, which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.
- (5) Transmission of set-up information for security systems may exceed the transmission duration limits in paragraphs (a)(1) and (a)(2) of this section, provided such transmissions are under the control of a professional installer and do not exceed ten seconds after a manually operated switch is released or a transmitter is activated automatically. Such set-up information may include data.

Test Conditions:

Sample Number:	5	Temperature (°C):	19
Date:	May 15, 2007	Humidity (%):	55
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:

- (1) The EUT is not manually operated.
- (2) The EUT pulse is only for 13.94ms long.
- (3) The apparatus periodically transmits every hour for 0.84 Secs, see attached plot.
- (4) The EUT is not intended for security applications.
- (5) The EUT does not transmit setup information.

Duration of Periodic transmission

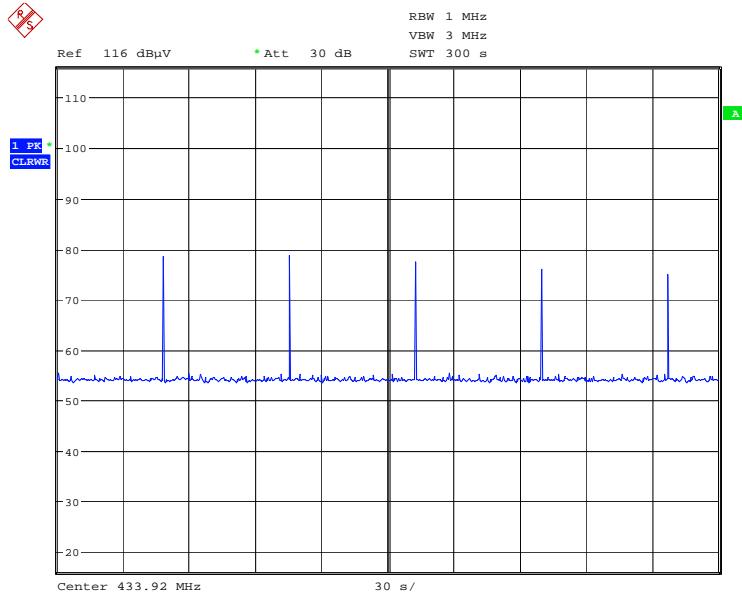
Date: 17.MAY.2007 13:44:22



Date: 20.JUL.2007 10:21:17

Transmission Time per Hour

Pulses in 300 seconds:



Date: 20.JUL.2007 09:42:22

Total Transmission Time per Hour:

$$\begin{aligned} &= \text{The pulse duration} \times \text{Pulses per hour} \\ &= 13.94\text{ms} \times 5 \times (3600 / 300) \\ &= 0.84 \text{ s} \end{aligned}$$

Clause 15.231(b) Radiated Emissions

In addition to the provisions of 15.205, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	1,250 to 3,750	125 to 375
174-260	3,750	375
260-470	3,750 to 12,500	375 to 1,250
Above 470	12,500	1,250

Test Conditions:

Sample Number:	5	Temperature (°C):	19
Date:	May 15, 2007	Humidity (%):	55
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:

See Attached Table for Results

Additional Observations:

The Spectrum was searched from 30MHz to the 10th Harmonic.

The EUT was measured on three orthogonal axes.

All measurements were performed using a Peak Detector with 100kHz RBW/VBW below 1 GHz and a 1 MHz RBW/VBW above 1 GHz at a distance of 3 meters.

Average Results

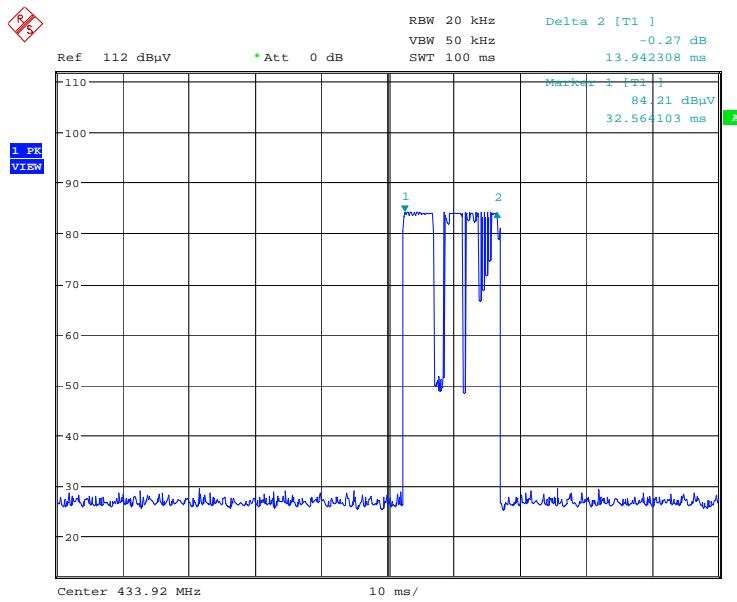
Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dB μ V)	Ant. Factor (dB)	Amp. Gain (dB)	Duty Cycle Corr. (dB)	Cable Loss (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
433.9200	LP1	H	70.2	16.8	N/A	-17.1	2.1	71.9	80.8	8.9
433.9200	LP1	V	76.8	16.1	N/A	-17.1	2.1	77.8	80.8	3.0
867.8400	LP1	V	44.0	22.1	N/A	-17.1	3.0	52.9	60.8	7.9
867.8400	LP1	V	52.7	22.1	N/A	-17.1	3.0	60.7	60.8	0.1
1301.7600	Horn2	H	35.2	25.2	N/A	-17.1	3.9	47.2	54.0	6.8
1301.7600	Horn2	V	32.9	25.2	N/A	-17.1	3.9	44.9	54.0	9.1
1735.6800	Horn2	H	40.9	27.3	N/A	-17.1	4.5	55.6	60.8	5.2
1735.6800	Horn2	V	29.2	27.4	N/A	-17.1	4.5	44.0	60.8	16.8
2169.6000	Horn2	H	92.2	28.4	58.6	-17.1	5.1	49.9	60.8	10.9
2169.6000	Horn2	V	94.4	28.3	58.6	-17.1	5.1	52.1	60.8	8.7
2603.5200	Horn2	H	71.7	29.9	59.8	-17.1	5.6	30.2	60.8	30.6
2603.5200	Horn2	V	76.1	30.0	59.8	-17.1	5.6	34.7	60.8	26.1
3037.4400	Horn2	H	84.4	31.1	59.6	-17.1	6.3	45.1	60.8	15.7
3037.4400	Horn2	V	89.4	31.1	59.6	-17.1	6.3	50.1	60.8	10.7
3471.3600	Horn2	H	79.2	31.3	59.0	-17.1	6.8	41.2	60.8	19.6
3471.3600	Horn2	V	83.5	31.2	59.0	-17.1	6.8	45.4	60.8	15.4
3905.2800	Horn2	H	77.2	32.5	57.6	-17.1	7.3	42.2	54.0	11.8
3905.2800	Horn2	V	80.9	32.6	57.6	-17.1	7.3	46.0	54.0	8.0
4339.2000	Horn2	H	66.3	32.2	55.3	-17.1	7.9	34.0	54.0	20.0
4339.2000	Horn2	V	70.0	32.5	55.3	-17.1	7.9	38.0	54.0	16.0

Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

Peak Results

Freq. (MHz)	Ant	Pol. V/H	RCVD Signal (dB μ V)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
433.9200	LP1	H	70.2	16.8	N/A	2.1	89.1	100.8	11.7
433.9200	LP1	V	76.8	16.1	N/A	2.1	94.9	100.8	5.9
867.8400	LP1	H	44.0	23.1	N/A	3.0	70.0	80.8	10.8
867.8400	LP1	V	52.7	22.1	N/A	3.0	77.8	80.8	3.0
1301.7600	Horn2	V	35.2	25.2	N/A	3.9	64.3	74.0	9.7
1301.7600	Horn2	H	32.9	25.2	N/A	3.9	62.0	74.0	12.0
1735.6800	Horn2	V	40.9	27.4	N/A	4.5	72.8	80.8	8.0
1735.6800	Horn2	H	29.2	27.3	N/A	4.5	61.0	80.8	19.8
2169.6000	Horn2	H	92.2	28.4	58.6	5.1	67.1	80.8	13.7
2169.6000	Horn2	V	94.4	28.3	58.6	5.1	69.3	80.8	11.5
2603.5200	Horn2	H	71.7	29.9	59.8	5.6	47.3	80.8	33.5
2603.5200	Horn2	V	76.1	30.0	59.8	5.6	51.8	80.8	29.0
3037.4400	Horn2	H	84.4	31.1	59.6	6.3	62.2	80.8	18.6
3037.4400	Horn2	V	89.4	31.1	59.6	6.3	67.2	80.8	13.6
3471.3600	Horn2	H	79.2	31.3	59.0	6.8	58.3	80.8	22.5
3471.3600	Horn2	V	83.5	31.2	59.0	6.8	62.5	80.8	18.3
3905.2800	Horn2	H	77.2	32.5	57.6	7.3	59.3	74.0	14.7
3905.2800	Horn2	V	80.9	32.6	57.6	7.3	63.2	74.0	10.8
4339.2000	Horn2	H	66.3	32.2	55.3	7.9	51.1	74.0	22.9
4339.2000	Horn2	V	70.0	32.5	55.3	7.9	55.1	74.0	18.9

Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole

Duty Cycle:

Date: 20.JUL.2007 10:21:17

Duty cycle Correction Factor: = $20\log(13.9423\text{msecs} / 100 \text{msecs})$

$$= 20\log(0.139423)$$

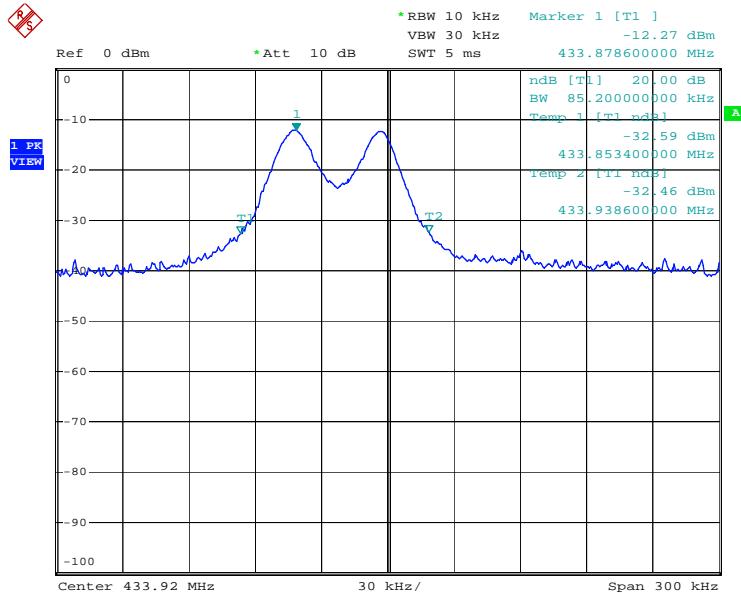
$$= -17.11 \text{ dB}$$

Clause 15.231(c) 20dB Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Conditions:

Sample Number:	5	Temperature (°C):	19
Date:	May 15, 2007	Humidity (%):	55
Modification State:	0	Tester:	Heng Lin
		Laboratory:	Ottawa

Test Results:**20dB Bandwidth:**

Date: 15.MAY.2007 10:13:24

Appendix B : Setup Photographs

Spurious Emissions Setup:



Appendix C : Block Diagram of Test Setups**Test Site For Radiated Emissions**