

Global Product Compliance Laboratory  
600-700 Mountain Avenue  
Room 5B-108  
Murray Hill, New Jersey 07974-0636 USA



TESTING  
NVLAP LAB CODE: 100275-0

## **FCC Certification Part 30 Test Report**

### **Product Evaluated**

**AEUA / AEUF 28 GHz 3<sup>rd</sup> Gen 8 CC  
FCC ID: VBNAEUA-01**

### **Customer**

**Nokia Solutions and Networks US LLC  
6000 Connection Drive  
Irving, Texas 75039 USA**

### **Test Laboratory**

#### **Nokia Bell Labs**

#### **Nokia, Global Product Compliance Laboratory**

**600-700 Mountain Avenue, Rm 5B-108  
Murray Hill, New Jersey 07974-0636 USA**

**Date: June 5, 2020**

This report shall not be reproduced, in whole or in part without the approval of Nokia Global Product Compliance Laboratory. This report must not be used by the recipient to claim product endorsement by NVLAP or any other agency of the U.S. Government.

**Revisions**

| Date      | Revision | Section | Change          |
|-----------|----------|---------|-----------------|
| 6/05/2020 | 0        |         | Initial Release |
|           |          |         |                 |
|           |          |         |                 |

*Nokia Global Product Compliance Laboratory represents to the client that testing was done in accordance with standard procedures as applicable, and that reported test results are accurate within generally accepted commercial ranges of accuracy in accordance with the scope of our NVLAP Accreditation. Nokia Global Product Compliance reports only apply to the specific samples tested. This report is the property of the client. This report shall not be reproduced except in full without the written approval of the Nokia Global Product Compliance Laboratory.*

*Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.*

*Nokia Global Product Compliance Laboratory represents to the client that the laboratory's accreditation or any of its calibration or test reports in no way constitutes or implies product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.*

Prepared & Reviewed By: W. Steve Majkowski NCE



6/5/2020

Product Certification Filing Lead  
Nokia Bell Labs  
Nokia, Global Product Compliance Laboratory

Approved By: Ray Johnson



6/5/2020

Technical Manager  
Nokia Bell Labs  
Nokia, Global Product Compliance Laboratory

Prepared By: Mark Nguyen



6/5/2020

Compliance Engineer  
Nokia Bell Labs  
Nokia, Global Product Compliance Laboratory

## Table of Contents

|                                                                                            |           |
|--------------------------------------------------------------------------------------------|-----------|
| <b>1. ATTESTATION OF TEST RESULTS .....</b>                                                | <b>5</b>  |
| <b>2. SUMMARY OF THE TEST RESULTS .....</b>                                                | <b>7</b>  |
| 2.1 MEASUREMENT UNCERTAINTY.....                                                           | 7         |
| <b>3. GENERAL INFORMATION .....</b>                                                        | <b>8</b>  |
| 3.1 PRODUCT DESCRIPTIONS .....                                                             | 8         |
| 3.2 EIRP/ PSD COMPLIANCE AND ANTENNA INFORMATION. ....                                     | 9         |
| 3.3 ANTENNA FAR FIELD DETERMINATION DISTANCE .....                                         | 9         |
| <b>4. REQUIRED MEASUREMENTS AND RESULTS.....</b>                                           | <b>10</b> |
| 4.1 SECTION 2.1046 MEASUREMENT REQUIRED: RF POWER OUTPUT .....                             | 11        |
| 4.1.1 <i>RF Power Output Measurement</i> .....                                             | 11        |
| 4.1.1.1 RF Power Output Results .....                                                      | 11        |
| 4.2 SECTION 2.1047 MEASUREMENT REQUIRED: MODULATION CHARACTERISTICS .....                  | 15        |
| 4.2.1 <i>Modulation Characteristics Measurement</i> .....                                  | 15        |
| 4.2.2 <i>Modulation Measurements Results:</i> .....                                        | 15        |
| 4.3 SECTION 2.1049 MEASUREMENT REQUIRED: OCCUPIED BANDWIDTH AND EDGE OF BAND EMISSIONS .   | 17        |
| 4.3.1 <i>Results Occupied Bandwidth (Signal Bandwidth)</i> .....                           | 17        |
| 4.3.1.1 99% Signal Bandwidth 10 MHz RBW Plots.....                                         | 18        |
| 4.3.2 <i>Occupied Bandwidth-Edge of Block Emissions</i> .....                              | 20        |
| 4.3.3 <i>Requirements 28 GHz Emissions Limits</i> .....                                    | 20        |
| 4.3.4 <i>Measurement Offset and MIMO</i> .....                                             | 20        |
| 4.3.5 <i>Mask Parameters</i> .....                                                         | 21        |
| 4.3.6 <i>Measurement Path Corrections</i> .....                                            | 21        |
| 4.3.7 <i>Edge of Band Measurements</i> .....                                               | 22        |
| 4.3.7.1 Results - Occupied Bandwidth-Edge of Block Emissions .....                         | 22        |
| 4.4 SECTION 2.1051 MEASUREMENT REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS ..... | 25        |
| 4.4.1 <i>Section 2.1051 Spurious Emissions at Antenna Terminals</i> .....                  | 25        |
| 4.4.2 <i>Required Limit</i> .....                                                          | 25        |
| 4.5 SECTION 2.1053 MEASUREMENT REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION .....        | 26        |
| 4.5.1 <i>Spurious Radiation and Radiated Emissions Requirements.</i> .....                 | 26        |
| 4.5.2 <i>Radiated Spurious Emissions Measurements: 40 GHz - 100 GHz</i> .....              | 27        |
| 4.5.2.1 Bandwidth Limits and Corrections: Radiated Measurements 40 GHz - 100 GHz.....      | 28        |
| 4.5.2.2 Resolution Bandwidth and # of Points: .....                                        | 28        |
| 4.5.2.3 Part 30 Limit:.....                                                                | 28        |
| 4.5.2.4 Emissions Corrections .....                                                        | 28        |
| 4.5.3 <i>Field Strength of Spurious Radiation Results:</i> .....                           | 30        |
| 4.5.4 <i>Transmitter Measurements of Radiated Spurious Emissions</i> .....                 | 32        |
| 4.6 SECTION 2.1055 MEASUREMENT NOT REQUIRED: FREQUENCY STABILITY .....                     | 45        |
| 4.6.1 <i>Frequency Stability Results:</i> .....                                            | 45        |
| 4.7 LIST OF TEST EQUIPMENT.....                                                            | 46        |
| 4.7.1 <i>List of Radio Measurements and Radiated Emissions Test Equipment</i> .....        | 46        |
| 4.8 PHOTOGRAPHS OF THE TEST SETUPS .....                                                   | 47        |
| 4.9 FACILITIES AND ACCREDITATION .....                                                     | 51        |

5. APPENDIX A - CALIBRATION CERTIFICATES..... 53

## 1. ATTESTATION OF TEST RESULTS

|                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Company Name</b>          | Nokia Solutions and Networks, OY<br>2000 Lucent Lane<br>Naperville, Illinois 60563                                                                                                                                                                                                                                                                                                                                                                  |
| <b>FCC ID</b>                | 2AD8UAEUB01                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Product Name</b>          | AEUA / AEUF 28 GHz 3rd Gen 8 CC                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Model Name</b>            | AEUA / AEUF                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Part No</b>               | 474864A.X21                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| <b>Serial Number(s)</b>      | AC/DC Model: L1182710698                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Test Standard(s)</b>      | <ul style="list-style-type: none"> <li>• 47 CFR FCC Parts 2</li> <li>• KDB 971168 D01 Power Measurement License Digital Systems v03r01 April 9, 2018</li> <li>• KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013</li> <li>• KDB 842590 D01 Upper Microwave Flexible Use Service v01 – April 2019</li> <li>• Procedures on TRP Compliance for Out of Band and Spurious Emissions C63.26 mmWave JTG - Version # 1 July 14th 2018</li> </ul> |
| <b>Reference(s)</b>          | <ul style="list-style-type: none"> <li>• 47 CFR FCC Part 2 and Part 30</li> <li>• ANSI C63.26 (2015)</li> <li>• ANSI C63.4 (2014)</li> <li>• TR 14-1001, MMW Measurements with Harmonic Mixers (April-4-2014)</li> </ul>                                                                                                                                                                                                                            |
| <b>Frequency Band</b>        | (Tx: 27.5 – 28.35 GHz), NR Band n261                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>Technology</b>            | 5G-New Radio, LTE-TDD: 97M5G7W,                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>Test Frequency Range</b>  | 10MHz – 100GHz                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>Operation Mode(s)</b>     | 2x 57dBm EIRP, 60 dBm EIRP Total. 5 – 8 carriers MIMO                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Submission Type</b>       | Class II Permissive Change                                                                                                                                                                                                                                                                                                                                                                                                                          |
| <b>FCC Part 15 Subpart B</b> | Compliance with Class B                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Test Date</b>             | May 18, 2020 to June 5, 2020                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>Test Laboratory</b>       | Nokia Global Product Compliance Laboratory<br>600-700 Mountain Avenue, Rm 5B-108<br>Murray Hill, New Jersey 07974-0636 USA<br><b>NVLAP Lab Code: 100275-0 FCC Registration Number: 395774</b>                                                                                                                                                                                                                                                       |

This is to certify that the above product has been evaluated and found to be in compliance with the Rules and Regulations set forth in the above standard(s). The data and the descriptions about the test setup, procedures and configuration presented in this report are accurate. The results of testing in this report apply only to the product/system which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**FCC Certification Test Report**  
**FCC ID: VBNAEUA-01**

**Nokia, Global Product Compliance Laboratory**  
Report No. : **TR-2020-0063-FCC Part 2-30**  
Product: **AEUA / AEUF 28 GHz 3rd Gen 8 CC**

Per the requirement of Section 2.911(d) Certification of Technical Test Data, I hereby certify that the technical test data are the results of tests either performed or supervised by me.

W. Steve Majkowski NCE  
Member of Technical Staff  
Nokia, Global Product Compliance Laboratory

## 2. SUMMARY OF THE TEST RESULTS

| 47 CFR FCC Sections | Description of Tests                                 | Compliance Results |
|---------------------|------------------------------------------------------|--------------------|
| 2.1046, 30.202 (a)  | RF Power Output                                      | Pass               |
| 2.1047,             | Modulation Characteristics                           | Pass               |
| 2.1049, 30.203      | (a) Occupied Bandwidth<br>(b) Edge-of-Band Emissions | Pass               |
| 2.1051, 30.203      | Spurious Emissions at Antenna Terminals - Radiated   | Pass               |
| 2.1053, 30.203      | Field Strength of Spurious Radiation                 | Pass               |
| 2.1055,             | Measurement of Frequency Stability                   | Note 1             |

Note 1: The measurement of frequency stability was performed during the original filing tests. There has been no change to the frequency generating and stabilizing circuitry. Additional frequency stability testing is therefore not required.

### 2.1 Measurement Uncertainty

The results of the calculations to estimate uncertainties for the several test methods and standards are shown in the Tables below. These are the worst-case values.

**Worst-Case Estimated Measurement Uncertainties**

| Standard, Method or Procedure                                                     | Condition                                       | Frequency MHz        | Expanded Uncertainty (k=2) |
|-----------------------------------------------------------------------------------|-------------------------------------------------|----------------------|----------------------------|
| a. Classical Emissions, (e.g., ANSI C63.4, CISPR 11, 14, 22, etc., using ESHS 30, | Conducted Emissions                             | 0.009 - 30           | ±3.5 dB                    |
|                                                                                   | Radiated Emissions (AR-8 Semi-Anechoic Chamber) | 30 MHz – 200MHz H    | ±5.4 dB                    |
|                                                                                   |                                                 | 30 MHz – 200 MHz V   | ±5.4 dB                    |
|                                                                                   |                                                 | 200 MHz – 1000 MHz H | ±4.7 dB                    |
|                                                                                   |                                                 | 200 MHz – 1000 MHz V | ±4.7 dB                    |
|                                                                                   | 1 GHz- 18 GHz                                   | ±3.3 dB              |                            |

| Antenna Port Test                 | Signal Bandwidth                                      | Frequency Range                                                            | Expanded Uncertainty (k=2), Amplitude |
|-----------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------|---------------------------------------|
| Occupied Bandwidth, Edge of Band, | 10 Hz<br>100 Hz<br>10 kHz to 1 MHz<br>1MHz to 100 MHz | 9 kHz to 20 MHz<br>20 MHz to 1 GHz<br>1 GHz to 10 GHz<br>10 GHz to 40 GHz: | ±2.2 dB                               |
| Conducted Spurious Emissions      | 30 kHz to 100 MHz                                     | 10 MHz to 40 GHz:                                                          | ±2.8 dB                               |
| RF Power, Channel Power           | 10 Hz to 100 MHz                                      | 10 MHz to 40 GHz                                                           | ±1.4 dB                               |

### 3. GENERAL INFORMATION

#### 3.1 Product Descriptions

The equipment under test (EUT) has the following specifications.

**Table 3.1.1 Product Specifications**

| Specification Items       | Description                                          |
|---------------------------|------------------------------------------------------|
| Product Type              | Compact Base Station LTE Module (2Tx, 2Rx), 2x2 MIMO |
| Radio Type                | Intentional Transceiver                              |
| Power Type                | 115 VAC & -48 VDC                                    |
| Modulation                | 5G New Radio LTE-TDD with QPSK, 16QAM and 64QAM      |
| Operating Frequency Range | TDD (Tx/Rx: 27.5-28.35 GHz)                          |
| Channel Bandwidth         | 100 MHz, 8 carriers                                  |
| Max Radiated Power (EIRP) | 57 dBm EIRP / polarizations. 60 dBm EIRP Total       |
| Antenna Gain              | 29 dBi                                               |
| Operating Mode            | 2x2 MIMO (2 duplex Tx/Rx Ports)                      |
| Software Version          | FLF17SP                                              |
| Hardware Version          | 474864A.X21                                          |
| Serial Number             | AC/DC Model: L1182710698                             |
| Antenna(s)                | Refer to Section 3.2                                 |

The EUT supports the following carrier configurations:

**Table 3.1.2 EUT Supported Configurations**

| Carrier Bandwidth (MHz) | Carriers per Path | MIMO Modes | Signal Type   | Modulation          |
|-------------------------|-------------------|------------|---------------|---------------------|
| 100                     | 1                 | 2x         | 5G-NR LTE-TDD | QPSK, 16QAM & 64QAM |

The operating band consists of the following channels and spectrum:

**Table 3.1.3 TDD Reference Center Frequencies, for n261 with 100 MHz Carriers**

| TDD Center Reference Frequency (GHz) | Raster Delta, MHz |
|--------------------------------------|-------------------|
| 27.55056                             | 99.96             |
| 27.65052                             | 99.96             |
| 27.75048                             | 99.96             |
| 27.85044                             | 99.96             |
| 27.95040                             | 99.96             |
| 28.05036                             | 99.96             |
| 28.15032                             | 99.96             |
| 28.25028                             | 99.96             |



### 3.2 EIRP/ PSD Compliance and Antenna Information.

The product incorporates integrated antennas. Externally mounted antennas cannot be attached to the unit or mounted remotely. The units integrated antennas are electronically steerable with a maximum gain of 29 dBi. There are two antenna assemblies inside the product. Each antenna assembly is a 16x16 matrix (256 elements). One assembly is vertically polarized and the second is horizontally polarized. The antennas RF drive level is 29 dBm. The 28 dBm RF power and 29 dBi gain results in a 57 dBm EIRP per assembly. The sum of the two 57 dBm EIRP beams results in a maximum EIRP of 60 dBm. Antenna Gain vs frequency is detailed in Exhibit 6 of the filing package.

### 3.3 Antenna Far Field Determination Distance

Calculations and low power measurements were performed to determine the far field boundary location for the antenna per the Fraunhofer distance calculated from

$$d_{ff} = 2D^2/\lambda$$

where  $d_{ff}$  = Far Field distance in meters,

D is the maximum size of the radiating array

$\lambda$  = wavelength of the operating signal in meters

The antenna patch height is 15 mm high and 7.6 mm wide.


At 28 GHz the 15 mm dimension results in a Fraunhofer calculated far field distance  $d_{ff}$  of 4.54 meters.

At 28 GHz the 7.6 mm dimension results in a Fraunhofer calculated far field distance  $d_{ff}$  of 1.07 meters.

The Moongilan Test (1) was performed to determine the far field boundary location using calculations and low power measurements. The test experimentally determines the boundary distance for the far field. Measurements for the Moongilan Test were performed at low power using a standard gain horn antenna. In the horizontal polarization the determined boundary was 3.5 m.

To eliminate any inconsistency all Power, OBW and OBE measurements were made at 4 m.

*(1) The Moongilan Test is named in honor of the late Dheena Moongilan who discovered it and formulated its use into C63.26.*

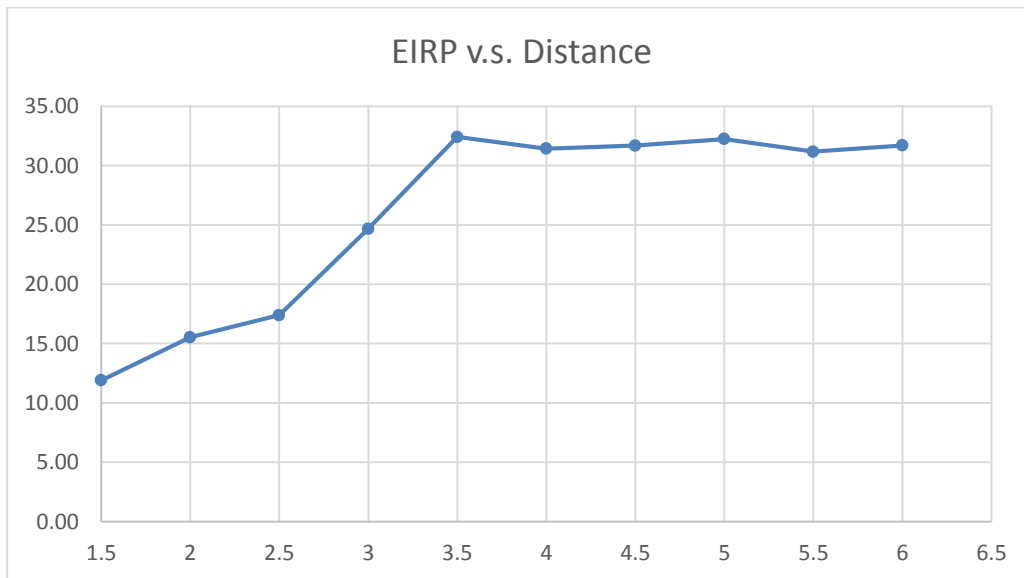

#### 4. REQUIRED MEASUREMENTS AND RESULTS

Per 47CFR FCC Section 2.1033(c)(14), the following certification tests are required by Section 2.1046 through Section 2.1057. These tests are identified in Table 4.0a below.

**Table 4.0a Required Certification Measurements**

| 47 CFR FCC Sections                             | Description of Tests                                | Test Required for Class II Authorization |
|-------------------------------------------------|-----------------------------------------------------|------------------------------------------|
| 2.1046, 30.202 (a)                              | RF Power Output<br>(a) Power Limits, EIRP, PSD      | Yes                                      |
| 2.1047,                                         | Modulation Characteristics                          | Yes                                      |
| 2.1049, 30.203                                  | (a) Occupied Bandwidth<br>(b) Out-of-Band Emissions | Yes                                      |
| 2.1051, 30.203                                  | Spurious Emissions at Antenna Terminals             | Yes                                      |
| 2.1053, 30.203,<br>30.204, 15.109(a)<br>Class B | Field Strength of Spurious Radiation                | Yes                                      |
| 2.1055,                                         | Measurement of Frequency Stability                  | No                                       |

Note: The measurement of frequency stability was performed during the original filing tests. There has been no change to the frequency generating and stabilizing circuitry. Additional frequency stability testing is therefore not required

The measurements were conducted in accordance with the procedures set out in Section 2.1041 and as appropriate per the test Standards listed in Table 4.0b below. The comprehensive list of tests performed included measurements at Left, Center and Right side of the Part 30 Band. These tests are presented to demonstrate compliance with FCC requirements.

**Table 4.0b Test Standards Used for Radiated Measurements of Radio Performance**

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Test Standard(s)</b> | <ul style="list-style-type: none"> <li>• 47 CFR FCC Parts 2</li> <li>• KDB 971168 D01 Power Measurement License Digital Systems v03r01 April 9, 2018</li> <li>• KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013</li> <li>• KDB 842590 D01 Upper Microwave Flexible Use Service v01r01 – April 2020 Procedures on TRP Compliance for Out of Band and Spurious Emissions C63.26 mmWave JTG - Version # 1 July 14th 2018</li> </ul> |
| <b>Reference(s)</b>     | <ul style="list-style-type: none"> <li>• 47 CFR FCC Part 2 and Part 30</li> <li>• ANSI C63.26 (2015)</li> <li>• ANSI C63.4 (2014)</li> <li>• TR 14-1001, MMW Measurements with Harmonic Mixers (April-4-2014)</li> </ul>                                                                                                                                                                                                                    |

#### 4.1 Section 2.1046 MEASUREMENT REQUIRED: RF POWER OUTPUT

This test is a measurement of the total Radiated Power level transmitted at the antenna-transmitting terminal. The product was configured for test as shown in Figure 4.1.1 below and allowed to warm up and stabilize per KDB 971168 D01 and ANSI C63.26.

The VBNAEUA-01 LTE TDD transmit carrier operation, the **Nokia AirScale 28 GHz Radio Unit (AEUA), FCC ID: VBNAEUA-01**, is specified to provide a maximum power output of 57 dBm EIRP/500 W EIRP per transmit polarization for a sum total of 60 dBm EIRP /1000W EIRP per unit. Under Part 30 the average power of the sum of all antenna elements is limited to an equivalent isotopically radiated power (EIRP) density of +75dBm/100 MHz.

The product incorporates internal antennas and substitution of antennas is not possible. The product is designed to operate under Part 30 rules for Band n261 and its radiated power is under digital control.

##### 4.1.1 RF Power Output Measurement

Power measurements of the 5G New Radio transmit signal were conducted with an ESU and FSW Spectrum Analyzers per KDB 971168 D01. Measurements were performed at 4 m distance. The path loss, cable loss and measurement antenna gain were offset and displayed on the screen. The transmitted signals were TDD LTE based and had the general modulation characteristics of QPSK, 16 QAM and 64QAM.

The maximum rated average EIRP at the 4m boundary distance was measured at the Left, Center and Right side of the 27.5-28.35 GHz frequency range for a 100 MHz bandwidth carrier in three different Modulations modes. These were 3GPP standard base station test models for QPSK+16QAM and 64QAM modulation. This power level was documented on each data sheet for Channel Power.

##### 4.1.1.1 RF Power Output Results


Power output measurements verified the expected performance of 57 dBm EIRP per polarization for a Total Power of 60 dBm. The maximum measured level was 57.44 dBm for a single polarization and 60.35 dBm total. This level is well within the maximum Part 30.202a limit of 75 dBm EIRP. Measurements were performed for each modulation.

The measured performance was in full compliance with the Rules of the Commission. The data plots are detailed below.

**Table 4.1.1.1 – Channel Power Measurements**



| Location in Band | # of carriers | Modulation | Polarization                       |          |                       |
|------------------|---------------|------------|------------------------------------|----------|-----------------------|
|                  |               |            | Horizontal                         | Vertical | Horizontal + Vertical |
|                  |               |            | Total Measured Channel Power (dBm) |          | Total Power (dBm)     |
| Left             | 5             | QPSK       | 57.09                              | 57.26    | 60.19                 |
| Middle           | 6             | 16QAM      | 57.30                              | 57.26    | 60.29                 |
| Right            | 7             | 64QAM      | 57.24                              | 57.44    | 60.35                 |
| All              | 8             | QPSK       | 57.26                              | 57.39    | 60.34                 |
| All              | 8             | 16QAM      | 57.34                              | 57.28    | 60.32                 |
| All              | 8             | 64QAM      | 57.26                              | 57.41    | 60.35                 |

**Figure 4.1.1 Test Set-Up for Measurement of Radio Transmitter Performance**


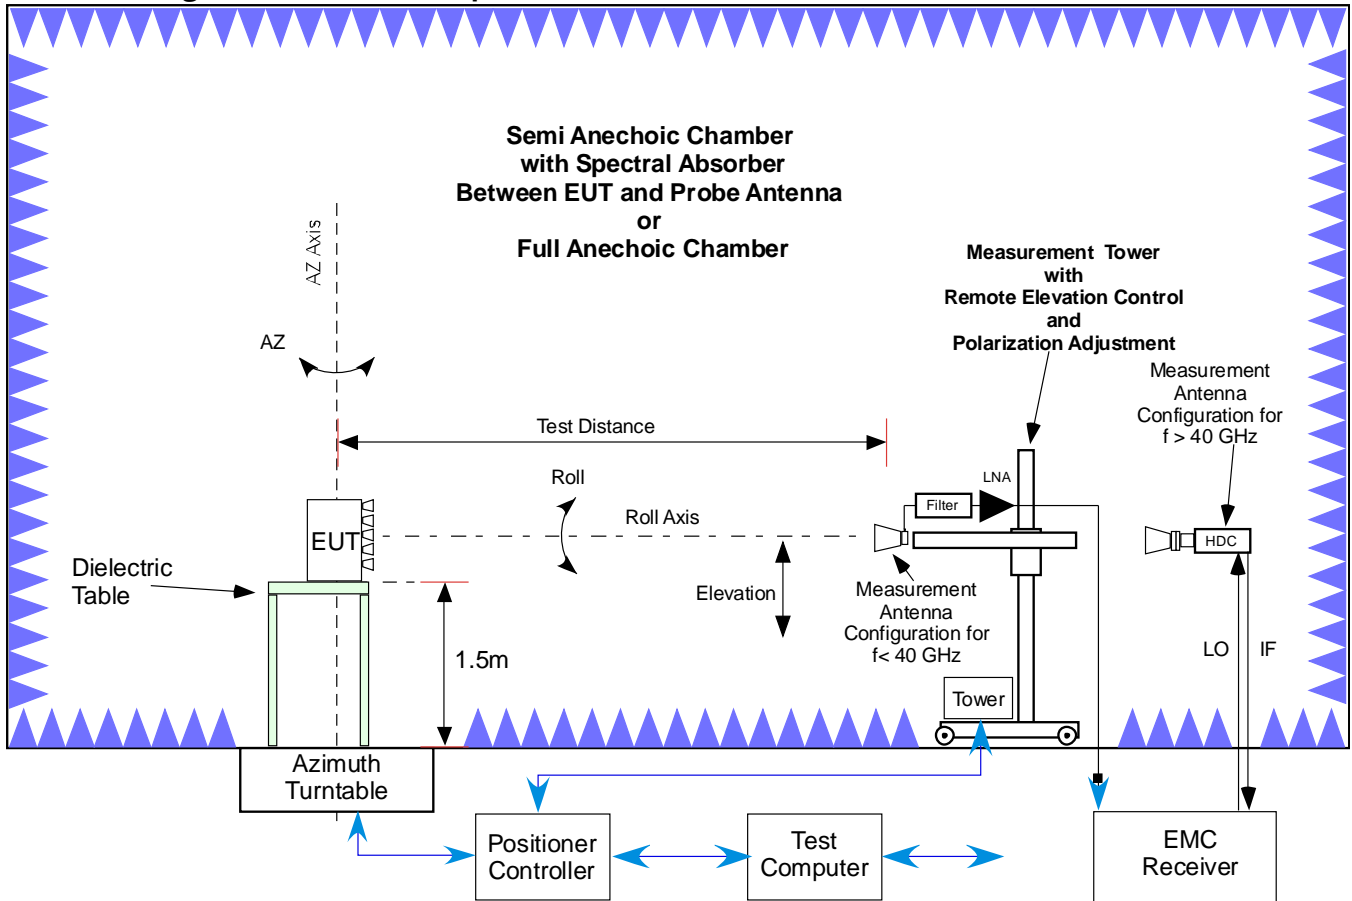


4.1.1.1.1 Channel Power Measurement Plots



Channel Power Measurements, 4m, 5 Carrier - QPSK - Left Side of Band  
 Horizontal  
 Vertical

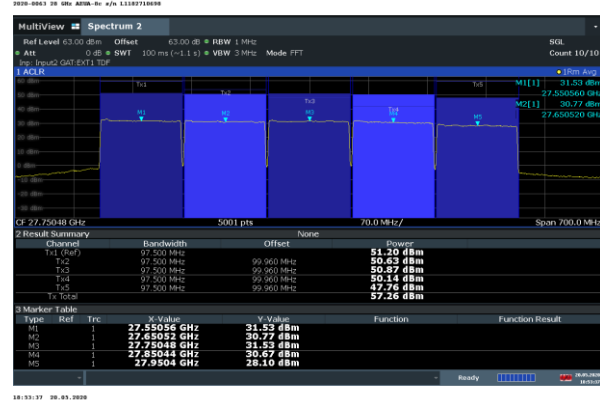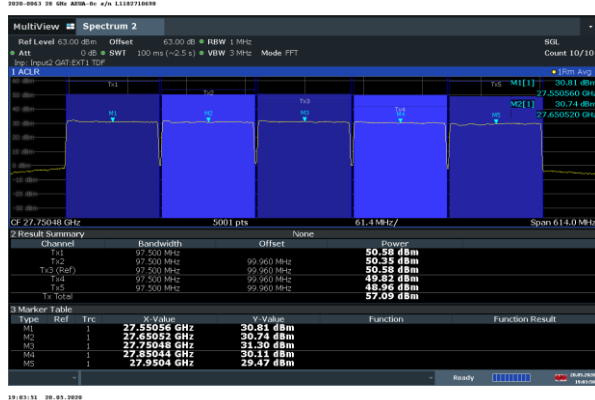



Channel Power Measurements, 4m, 6 Carrier - 16QAM - Middle of Band  
 Horizontal  
 Vertical

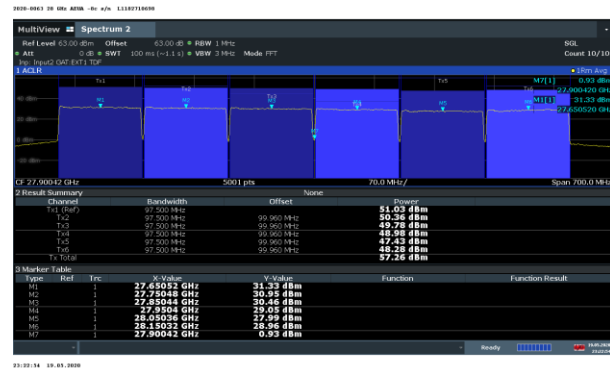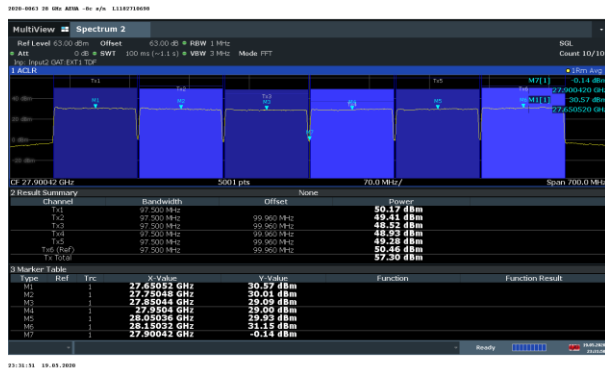



Channel Power Measurements, 4m, 7 Carrier - 64QAM - Right Side of Band  
 Horizontal  
 Vertical

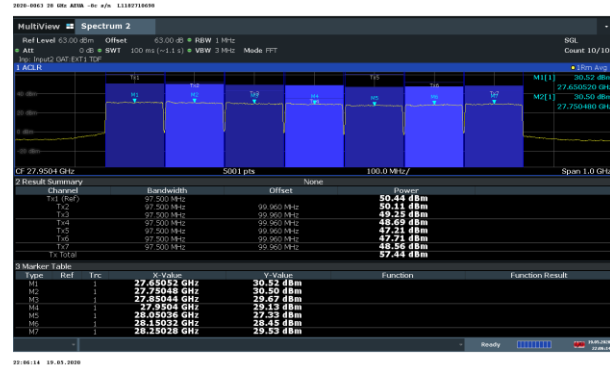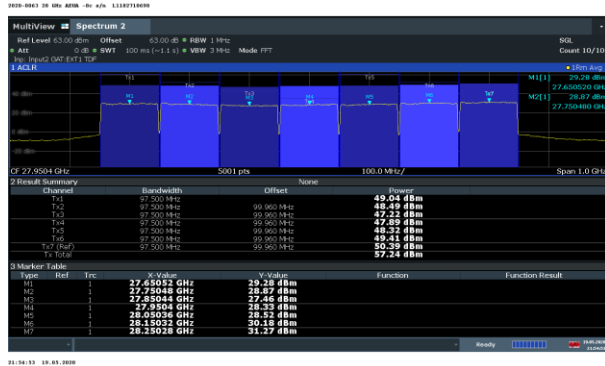



### Channel Power Measurements, 4m, 8 Carrier – QPSK – All of Band Horizontal

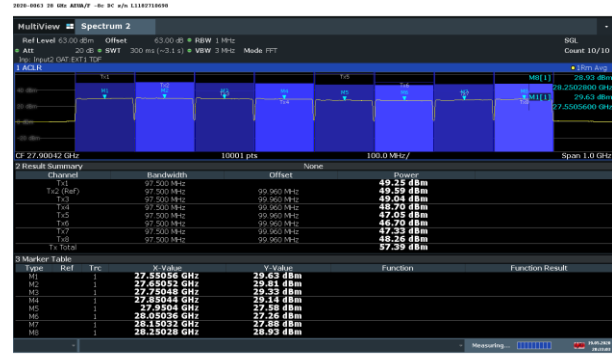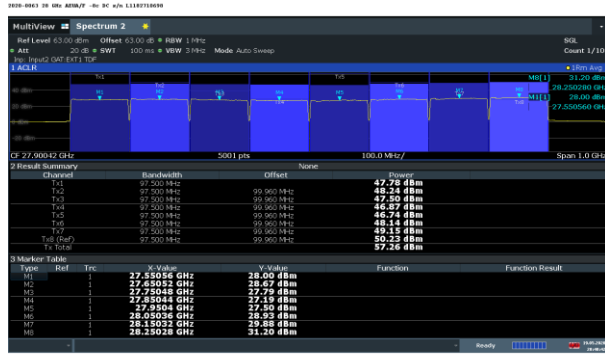

### Channel Power Measurements, 4m, 8 Carrier – 16QAM – All of Band Horizontal

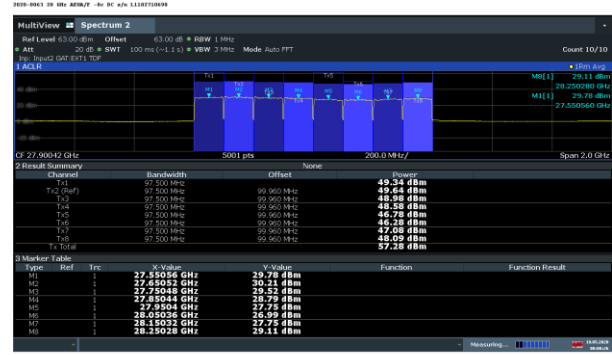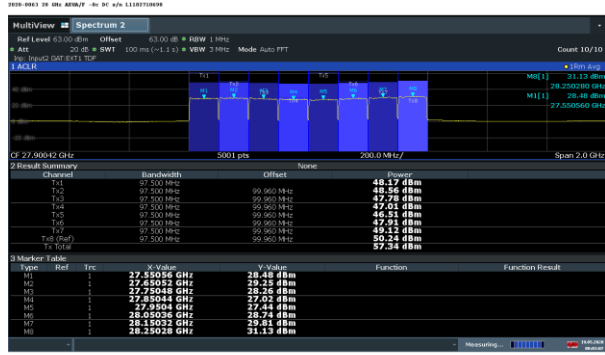

### Channel Power Measurements, 4m, 8 Carrier – 64QAM – All of Band Horizontal

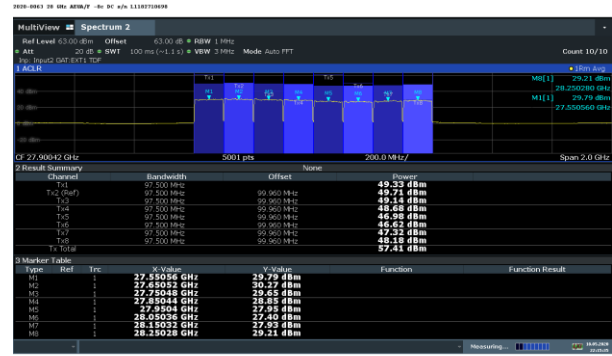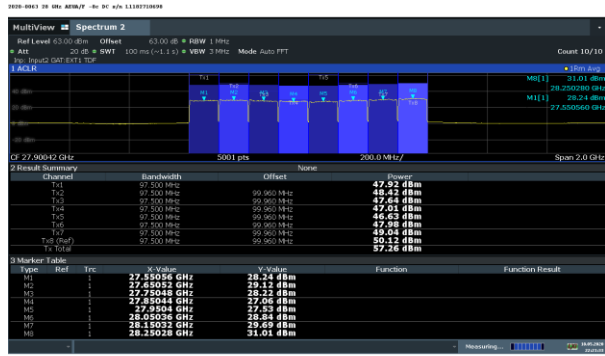

## 4.2 Section 2.1047 MEASUREMENT REQUIRED: MODULATION CHARACTERISTICS

The VBNAEUA-01 supports the 5G New Radio Modulation Format based upon LTE TDD technologies. LTE utilizes Orthogonal Frequency Division Multiplexing (OFDM) which splits the carrier frequency bandwidth into many small subcarriers. Each individual subcarrier can be modulated with a QPSK, 16QAM or 64QAM digital modulation formats.

In QPSK, there are 4 possible symbol states and each symbol carries 2 bits of information. In 16QAM, there are 16 possible symbol states and each 16QAM symbol carries 4 bits of information. In 64QAM, there are 64 possible symbol states and each 64QAM symbol carries 6 bits of information. The higher-order modulations, where the constellations become more dense, are more sensitive to poor channel conditions than the lower-order modulation.

The modulation characteristics measurement of LTE carriers measures the difference between the ideal symbols and the measured symbols after the equalization. The constellations were used to assess that the subcarrier configurations were achieved.

There are no FCC Limits for Modulation and all of the formats above look spectrally the same from a channel edge and regrowth standpoint.

### 4.2.1 Modulation Characteristics Measurement


The measurements were performed at a distance of 4 m from the unit utilizing the test configuration in Figure 4.4.1 utilizing a 44 GHz MXA Signal analyzer. Representative screen plots of the modulation measurement are attached below for the various subcarrier configurations and Various Polarizations.

### 4.2.2 Modulation Measurements Results:


The typical measured modulation characteristics of the EUT are shown below:

Figure 4.2 Modulation Results


Sample QPSK 27.6GHz Vertical Polarization

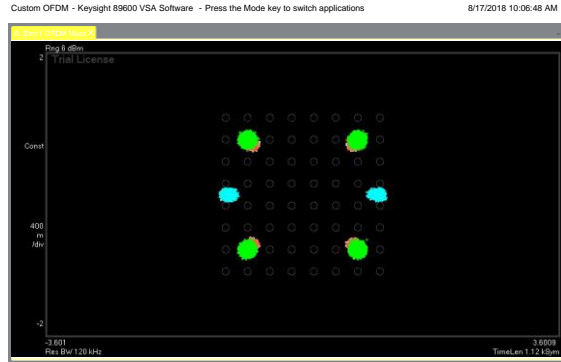


Sample QPSK 27.6GHz Horizontal Polarization

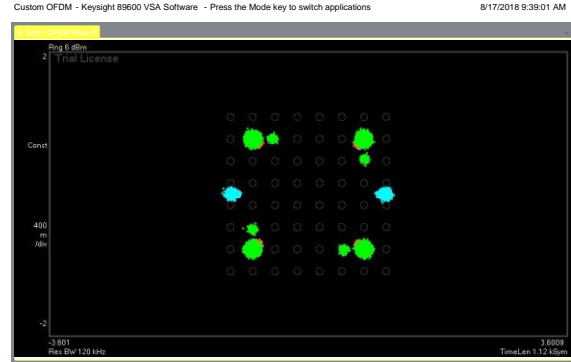


Sample 16QAM 27.6 GHz Vertical Polarization

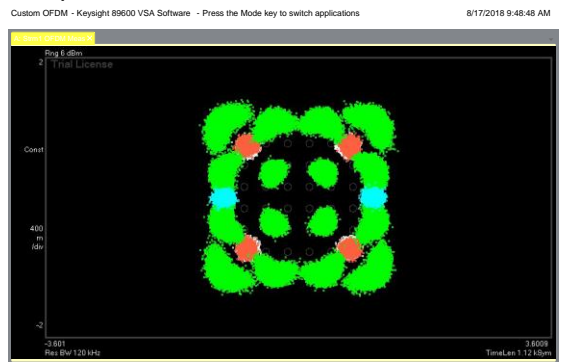


Sample 16QAM 27.6 GHz Horizontal Polarization

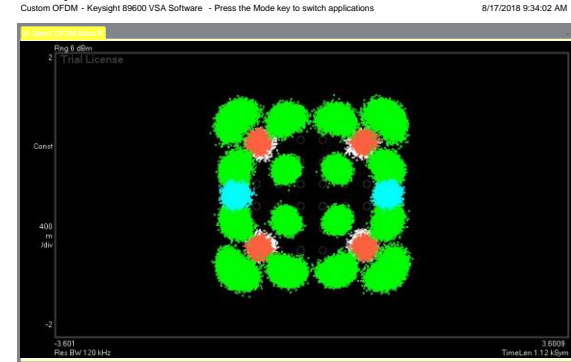

Sample 64QAM 27.6 GHz Vertical Polarization

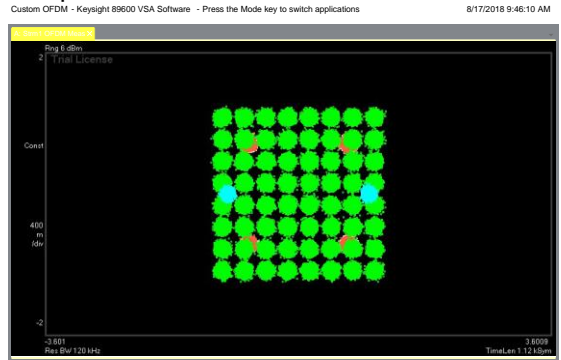

Sample 64QAM 27.6 GHz Horizontal Polarization

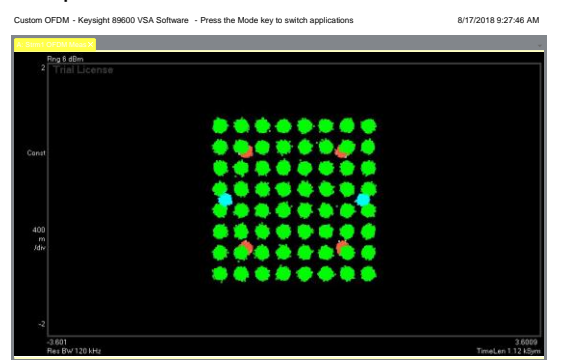



### 4.3 Section 2.1049 MEASUREMENT REQUIRED: OCCUPIED BANDWIDTH and EDGE of BAND EMISSIONS

This test measures the Occupied Bandwidth of the transmitting carrier and the Edge of-Block Emissions in the frequency spectrum immediately outside and adjacent to the transmitting carrier(s).

The occupied bandwidth (OBW) is usually defined either as the 99% power OBW or a relative OBW. The 99% OBW is the signal bandwidth such that, below its lower and above its upper frequency limits, the mean power radiated or conducted are each equal to 0.5 percent of the total mean power radiated or conducted by a given emission. The relative OBW is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated by at least X dB below the transmitter power, where the value of X is typically specified as 26.

Per KDB 971168 D01 v02, the relative OBW must be measured and reported when it is specified in the applicable rule part; otherwise, the 99% OBW shall be measured and reported. The OBW shall be measured when modulated by an input signal such that its amplitude and symbol rate represent the maximum rated conditions under which the equipment is operated.

#### 4.3.1 Results Occupied Bandwidth (Signal Bandwidth)


The measured 99% occupied bandwidth was measured with a Rohde & Schwarz ESU 40 GHz spectrum signal analyzer for the 97M5G7W emission designator. The results are presented below and shows that the measured signals are within the parameters of the 97M5G7W of the emissions designator

Tabular Data – Occupied Bandwidth


| Location in Band | Carrier Frequencies (GHz) | Number of Carriers | Modulation | Horizontal Polarization Occupied Signal Bandwidth (MHz) | Vertical Polarization Occupied Signal Bandwidth (MHz) |
|------------------|---------------------------|--------------------|------------|---------------------------------------------------------|-------------------------------------------------------|
| Left             | 27.55056 to 27.95040      | 5                  | QPSK       | 493.371                                                 | 491.523                                               |
| Middle           | 27.65052 to 28.15032      | 6                  | 16QAM      | 593.458                                                 | 592.608                                               |
| Right            | 27.65052 to 28.25028      | 7                  | 64QAM      | 691.789                                                 | 690.913                                               |
| All              | 27.55056 to 28.25028      | 8                  | QPSK       | 790.060                                                 | 788.811                                               |
| All              | 27.55056 to 28.25028      | 8                  | 16QAM      | 790.336                                                 | 788.902                                               |
| All              | 27.55056 to 28.25028      | 8                  | 64QAM      | 790.107                                                 | 788.679                                               |

### 4.3.1.1 99% Signal Bandwidth 10 MHz RBW Plots


#### 5 Carrier QPSK Horizontal

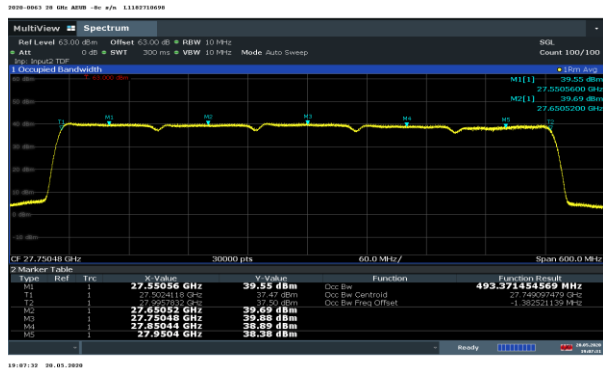


#### Vertical

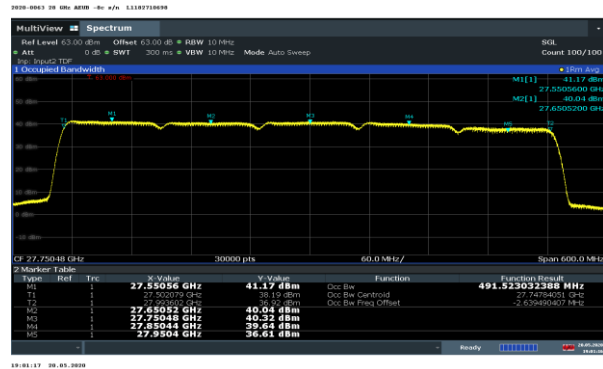


#### 6 Carrier 16QAM Horizontal

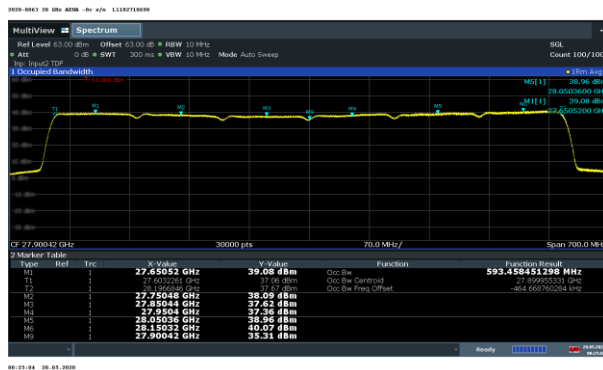


#### Vertical

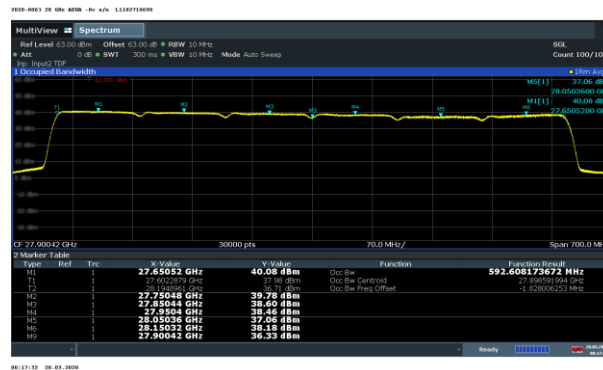

#### 7 Carrier 64QAM Horizontal

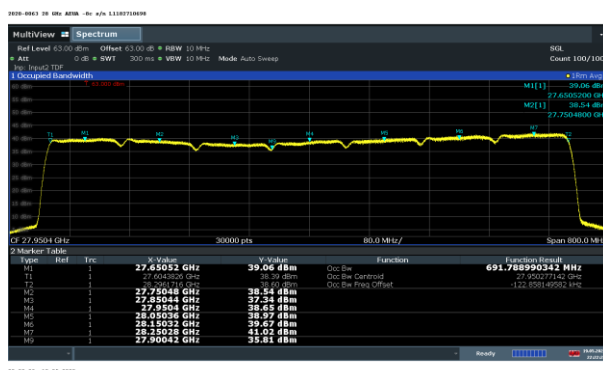

#### Vertical

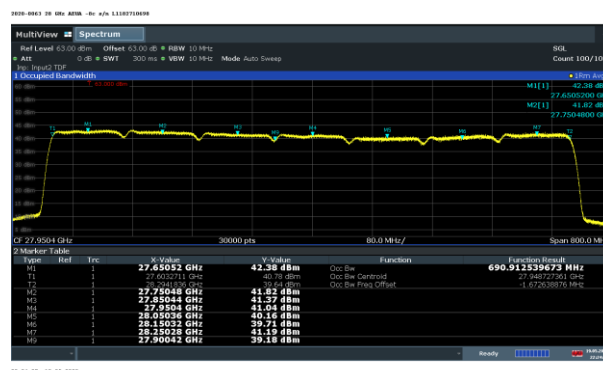

### 8 Carrier QPSK Horizontal



### Vertical



### 8 Carrier 16QAM Horizontal



### Vertical



### 8 Carrier 64QAM Horizontal



### Vertical



### 4.3.2 Occupied Bandwidth-Edge of Block Emissions

Classical Occupied Bandwidth – Edge of Block Emissions is an evaluation of the transmit carrier compliance with edge of block/edge of band requirements. This measurement documents the product’s ability to maintain compliance with FCC Parts 2 and Part 30.203 limitations on emissions outside the block of operation.

The **VBNAEUA-01** 28 GHz Radio Unit presently supports single 5G-New Radio LTE TDD technologies. This evaluation addresses 2x2 MIMO operation with 100 MHz carriers. In each test configuration the carriers were configured at the left side, center and right side of the band as appropriate. Power was set to the total per polarization maximum and channel power measurements were performed prior to other measurements. The measurements are described below.

The occupied bandwidth of each of the signals identified in Table 4.3.6.1 was measured using a Rohde & Schwarz FSW Spectrum analyzer, a remote PC based instrumentation controller and the same calibrated RF attenuation path used for channel power. The measurement process meets the requirements of ANSI C63.26 and ISO17025. The test setup was as shown in Figure 4.1.1. Measurements were performed at 4 m for both vertical and horizontal polarizations.

Plots are provided using the triggered functionality of the test analyzer and demonstrate compliance with edge of band limits.

These sheets contain data for multiple mixed carrier configurations for “Left Edge of Block”, and “Right Edge of Block” across the Part 30 Upper Microwave Flexible Use Service spectrum.

### 4.3.3 Requirements 28 GHz Emissions Limits

The Limit in 47 CFR 30.203 for Emissions Limits is as follows:

- (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be  $-13$  dBm/MHz or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be  $-5$  dBm/MHz or lower.
- (b)(1) Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater.
- (2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the licensee's frequency block edges as the design permits.
- (3) The measurements of emission power can be expressed in peak or average values.

In order to address the limit as imposed for the requirement in 47CFR 96.41 we evaluated emissions per the requirements in ANSI C63.26 and per KDB 940660 D01 Part 30 CBRS Equipment.

The average detector function was used for all MXA measurements and the Peak detector function were used for EMC receiver measurements.

### 4.3.4 Measurement Offset and MIMO

The typical MIMO adjustments were imposed to adjust for multiple signals which could add to generate additional interference. When considered these signals were the same polarization. The cross polarization eliminates that possibility and so no MIMO adjustment was used.

For the 5G-NR LTE system there is no carrier without modulation. Since the 5G-NR LTE signal is broadband and is 100 MHz wide, all of the measurements performed at narrower resolution bandwidths need to be evaluated with limits adjusted for the reduction in signal energy. The following relationship was used to provide the correct level for an unmodulated carrier vs. the modulated signal.

$$10 \cdot \log(\text{Resolution Bandwidth} / \text{Transmit Bandwidth}) = \text{Signal Offset (1)}$$

### 4.3.5 Mask Parameters

The mask parameters are in units as stated in Part 30 and are listed in Table 4.3.5

**Table 4.3.5 - Mask Parameters Out Of Band / Edge of Band Emissions**

| Frequency | Part 30 Limit |
|-----------|---------------|
| GHz       | dBm           |
| 26.50     | -13           |
| 27.49     | -13           |
| 27.49     | -5            |
| 27.50     | -5            |
| 27.50     | 57            |
| 28.35     | 57            |
| 28.35     | -5            |
| 28.36     | -5            |
| 28.36     | -13           |
| 29.00     | -13           |
| 40.00     | -13           |

### 4.3.6 Measurement Path Corrections

The measured power at the spectrum analyzer input was corrected for calculated free space loss, cable loss measurement antenna gain and the product antenna gain over its applicable frequency range as documented in Exhibit 6 of the filing and the table below. This is the same procedure as was previously used in other filings filed under Part 30. This is appropriate for Out Of Band Emissions / Edge of Band emissions only for the frequency range that the transmit antenna has documentable and consistent gain. Since different products have different gain responses vs frequency, the documentable antenna gain of the product applies only for the operational frequency range of the products antenna gain.

This adjustment was not used outside the OOBE/EoB frequency range. Table 4.3.6 below lists the offset and correction factors used for the measurement distance of 4m including the AEUA product gain.

**Table 4.3.6 Offset and Correction Factors**

| Frequency | Free Space Path Loss, PL | Measurement Antenna Gain, G1 | Measurement Cable Loss, L1 | PL-G1+L1 | AEUA Antenna Gain | Total |
|-----------|--------------------------|------------------------------|----------------------------|----------|-------------------|-------|
| GHz       | dB                       | dBi                          | dB                         | dB       | dBi               | dB    |
| 26.00     | 72.78                    | 22.81                        | 12.58                      | 62.56    | 27.70             | 34.86 |
| 26.50     | 72.95                    | 22.91                        | 12.61                      | 62.65    | 28.20             | 34.45 |
| 27.00     | 73.11                    | 22.82                        | 12.63                      | 62.92    | 28.50             | 34.42 |
| 27.50     | 73.27                    | 23.25                        | 12.77                      | 62.79    | 28.55             | 34.24 |
| 28.00     | 73.43                    | 23.12                        | 12.90                      | 63.21    | 28.65             | 34.56 |
| 28.50     | 73.58                    | 23.42                        | 13.03                      | 63.19    | 28.55             | 34.64 |
| 29.00     | 73.73                    | 23.50                        | 13.15                      | 63.39    | 28.50             | 34.89 |
| 29.50     | 73.88                    | 23.66                        | 13.26                      | 63.48    | 28.40             | 35.08 |
| 30.00     | 74.03                    | 23.64                        | 13.36                      | 63.74    | 28.25             | 35.49 |
| 30.50     | 74.17                    | 23.83                        | 13.51                      | 63.84    | 26.90             | 36.94 |
| 31.00     | 74.31                    | 23.88                        | 13.63                      | 64.06    | 25.70             | 38.36 |
| 31.50     | 74.45                    | 23.95                        | 13.76                      | 64.26    | 22.30             | 41.96 |
| 32.00     | 74.59                    | 23.95                        | 13.89                      | 64.53    | 18.80             | 45.73 |

**Sample calculation:**

Offset Value = Free Space Path Loss – Measurement Antenna Gain + Cable Loss – Product Gain.

The following sample calculation is the correction for 30 GHz;

$$\text{Offset Value} = 35.49 \text{ dB} = 74.03 \text{ dB} - 23.64 \text{ dBi} + 13.36 \text{ dB} - 29.90 \text{ dBi}$$

The measurements were made using a flat offset of 34 dB with a transducer factor table used for the delta values which across the majority of the range was within +/- 0.9 dB.

### 4.3.7 Edge of Band Measurements

The measurements were performed with an FSW spectrum analyzer in compliance with the procedure and requirements of ANSI C63.26. The test set-up diagram in Figure 4.1.1 is used for RF Power, Modulation, Occupied Bandwidth, Edge-of-Band emissions and Radiated Spurious Emissions.

Testing was performed for the 100 MHz carrier configurations at the left side, center and right side of the Part 30 Band.

Mask parameters were as stated in Table 4.3.5. Mask Edge Offsets = 1/2 the Resolution Bandwidth of the measurement were not used.

#### 4.3.7.1 Results - Occupied Bandwidth-Edge of Block Emissions

The occupied bandwidth plots for operation at the left side, center and the right side of the band for the 100 MHz signal bandwidth are below. The mask accurately depicts the limits for the Part 30 NAR Band to determine compliance with FCC requirements. The mask limits include the appropriate considerations for operation.


From the out-of-band emissions plots attached below, it can be seen that all the emissions are under the required emission masks.

The measurement results of the occupied bandwidth and the out-of-band emissions as documented in the plots and Table 4.3.6.1 demonstrate the full compliance with the Rules of the Commission for the operating band.


The Occupied Bandwidth and Edge-of-Band emissions measurements were made as a radiated measurement at a distance of 4m.

4.3.7.1.1 Occupied Bandwidth Edge of Band Plots


5 Carrier - QPSK  
 OOBE/EoB – Horizontal Polarization

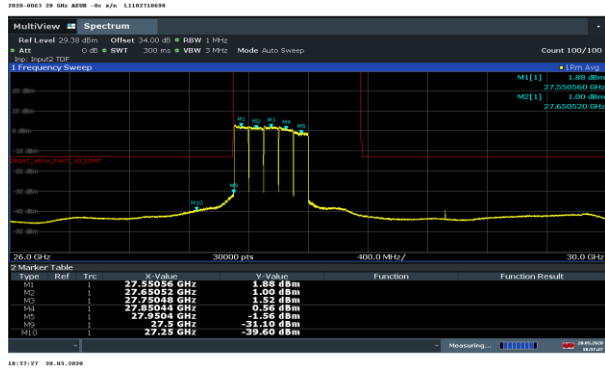


OOBE/EoB – Vertical Polarization

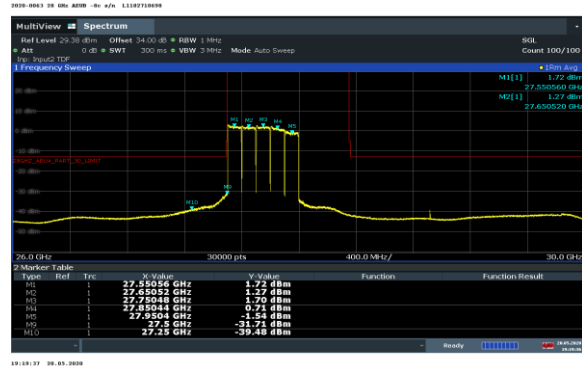


6 Carrier – 16QAM  
 OOBE/EoB – Horizontal Polarization

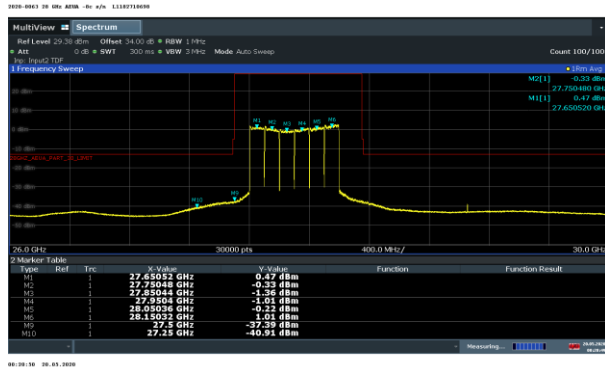


OOBE/EoB – Vertical Polarization

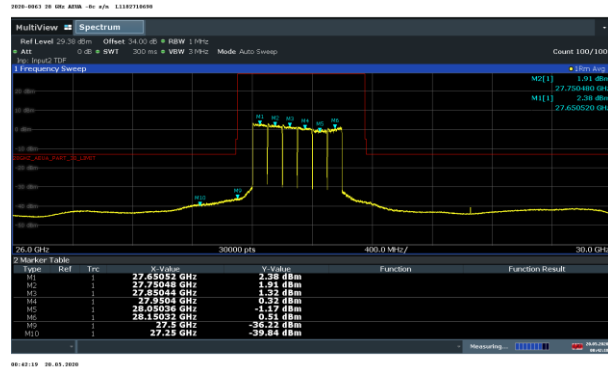


7 Carrier – 64QAM  
 OOBE/EoB – Horizontal Polarization

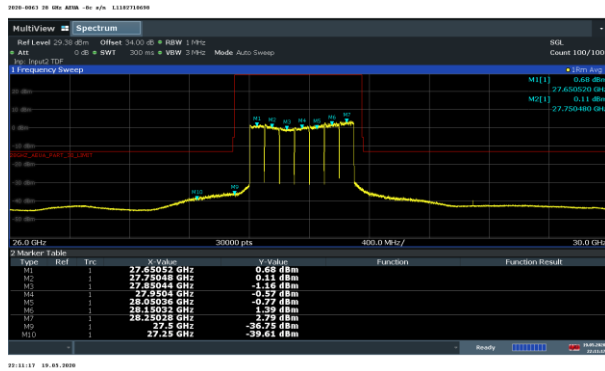


OOBE/EoB – Vertical Polarization

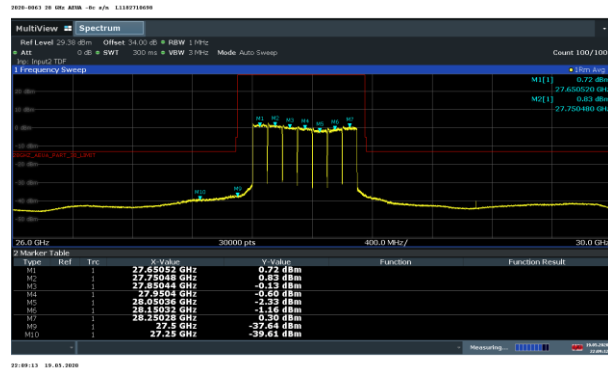


8 Carrier - QPSK  
 OOBE/EoB – Horizontal Polarization

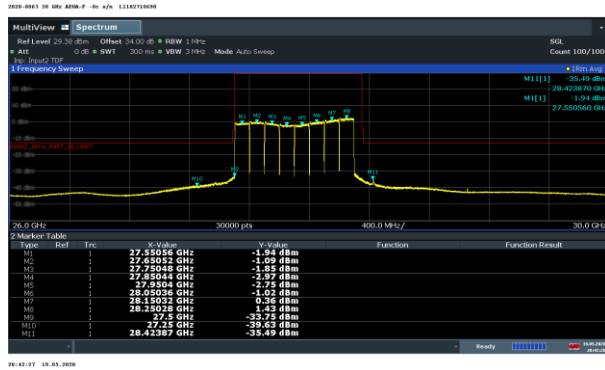


OOBE/EoB – Vertical Polarization

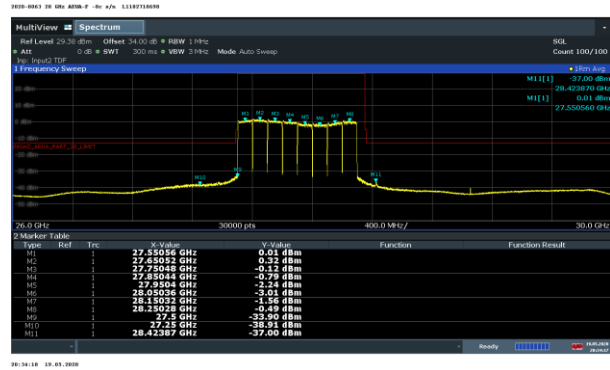


8 Carrier – 16QAM  
 OOBE/EoB – Horizontal Polarization

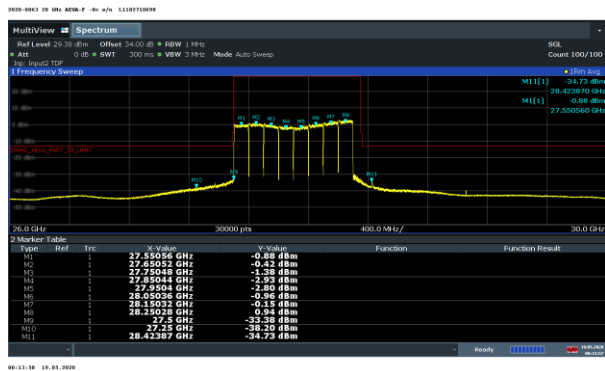


OOBE/EoB – Vertical Polarization

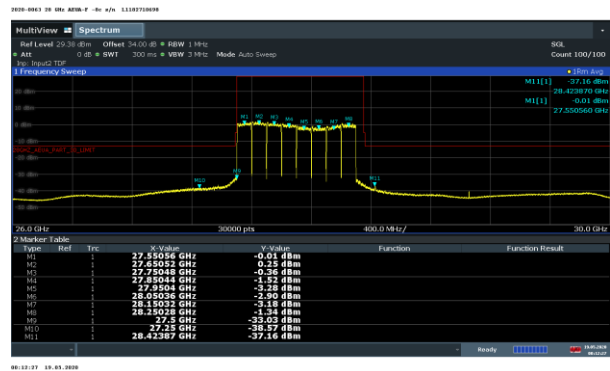

8 Carrier – 64QAM  
 OOBE/EoB – Horizontal Polarization

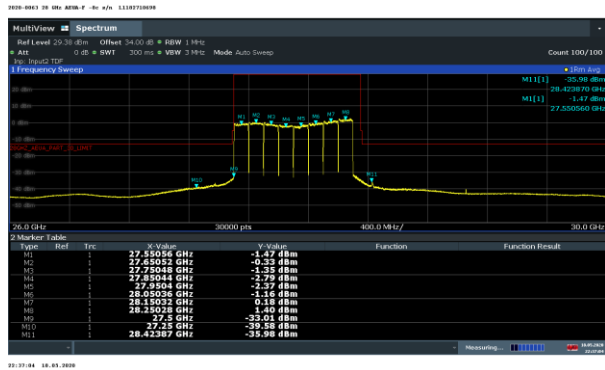

OOBE/EoB – Vertical Polarization

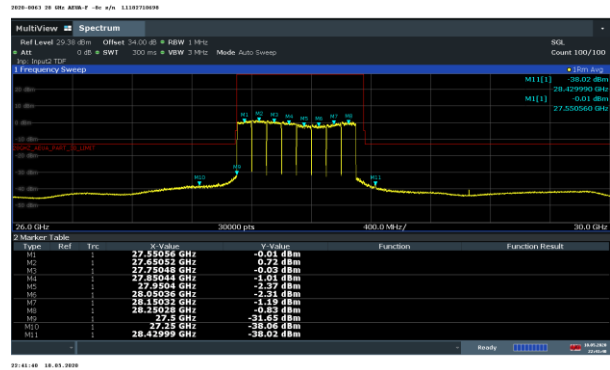



#### 4.4 Section 2.1051 MEASUREMENT REQUIRED: SPURIOUS EMISSIONS AT THE ANTENNA TERMINALS

This test measures the emissions of spurious signals which may come from harmonic, parasitic, intermodulation and frequency conversion products and are outside the necessary bandwidth but excludes Edge-of-Band emissions.

##### 4.4.1 Section 2.1051 Spurious Emissions at Antenna Terminals

Spurious Emissions were investigated per 47CFR Section 2.1057(a)(1) over the frequency range of 30 MHz to 100 GHz as specified in 2.1057(a)(2).

2.1057(a)(2) If the equipment operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.

Since there is no antenna terminal, all measurements were performed as radiated measurements and standard radiated emissions. These latter are documented in Section 4.5 "*Section 2.1053 Measurement Required: Field Strength of Spurious Radiation*". The test configuration is shown in Figure 4.4.1 documents the test set up used for the measurements.

The measurements were performed in compliance with ANSI C63.26, C63.26 mmWave JTG and our ISO17025 process. The measurement meets the ANSI C63.26 requirements in paragraphs 5.2.4.4.1 and 5.7 which requires that the number of points in the sweep be  $> 2 \times \text{Span}/\text{RBW}$ . The ESU spectrum analyzer measurements examine the 30 MHz to 40 GHz range. The FSW based mmWave transmitter test system overlaps the transmit band for 27-29 GHz and extends the frequency range to examine the 40 GHz to 100 GHz range.

##### 4.4.2 Required Limit

The required emission limitation specified in **47CFR 30.203 (a)** was applied to these tests. Based upon the criterion given in Section 30 of the Code and as developed in 4.3.3, the required emission limit for emissions outside a licensee's frequency block is:

47CFR 30.203 (a) (a) The conductive power or the total radiated power of any emission outside a licensee's frequency block shall be  $-13 \text{ dBm/MHz}$  or lower. However, in the bands immediately outside and adjacent to the licensee's frequency block, having a bandwidth equal to 10 percent of the channel bandwidth, the conductive power or the total radiated power of any emission shall be  $-5 \text{ dBm/MHz}$  or lower.

Therefore, the limit for emissions  $>1 \text{ MHz}$  outside a licensee's frequency block when measured with a RBW of 1 MHz is:

$$-40 \text{ dBm} - 3.01 \text{ dB} = -43.01 \text{ dBm for 2x MIMO}$$

#### 4.5 Section 2.1053 MEASUREMENT REQUIRED: FIELD STRENGTH OF SPURIOUS RADIATION

The field strength measurements of radiated spurious emissions were made in an FCC registered five meter semi-anechoic chamber AR-5, (FCC Registration Number: 395774) NVLAP Lab Code: 100275-0 and IC (Filing Number: 6933F-5) which is maintained by Nokia Bell Labs in Murray Hill, New Jersey.

The VBNAEUA-01 (EUT) was configured in semi-anechoic chamber AR-5 in a manner simulating a normal field installation. The product’s field installation hardware was used to mount the product to a wooden pole with the bottom of the product 1.5m above the turntable ground plane. The recommendations of ANSI C63.4–2014, C63.26-2015 and C63.26 mmWave JTG were followed for EUT testing setup and cabling. The EUT was configured to operate in a 5G-NR test model per the constraints identified in section 4.2. A photograph of this setup is in Exhibit 12 of the filing package.

The base station was configured into the full power forward beam transmit configuration to transmit two 57dBm EIRP 100 MHz bandwidth 5G-NR carriers, one Vertical and one Horizontal polarization, with the total transmit power of 60 dBm EIRP. This configuration provides the highest Power Spectral Density transmit signal for the product. The product in the below configurations was evaluated over the 30 MHz to 100 GHz frequency range as required by.

**Table 4.5.1 EUT Configurations**

| AEUA Tx Reference Frequencies GHz | Transmit Active Polarization | Signal Bandwidth, MHz | Modulation | Total Power, dBm EIRP | Radiated Emissions Pass / Fail |
|-----------------------------------|------------------------------|-----------------------|------------|-----------------------|--------------------------------|
| 27.55056 to 28.25028              | H & V                        | 100                   | 64QAM      | 60                    | Pass                           |

##### 4.5.1 Spurious Radiation and Radiated Emissions Requirements.

This product meets Part 15B, and Part 30.203 requirements. FCC Part 15 Class B require emissions to be below 54.5 dBµV/m at 3m. Part 30.203 requires emissions to be below the value generated by a conducted emission of -13 dBm. This is a standard value for wireless products typically defined as  $-43+10\text{Log}P=-13$  dBm.

The emissions at the Edge of Band were adjusted by the 29 dBi gain of the transmit antenna as the product is designed to operate globally over the 26.5 to 29.5 GHz frequency band. Emissions removed from the transmit band were evaluated identically to other wireless products.

Measurements were performed in compliance with Section 2.1053, FCC publication 442401 and clause 5.5 of ANSI C63.26. For this case the evaluation of acceptable radiated field strength is as follows.

The calculated emission levels were found by:

$$P_{\text{meas}} \text{ (dBm)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB)} + 107 \text{ (dB}\mu\text{V/dBm)} - \text{Amplifier Gain (dB)} = \text{Field Strength (dB}\mu\text{V/m)}$$

Title 47CFR section 30.203 and 2.1053 contains the requirements for the levels of spurious radiation as a function of the EIRP of the modulated carrier with 100 MHz of bandwidth. The reference level for the modulated carrier is calculated as the field produced by an isotropic radiator excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 27-7, 6th edition, IT&T Corp.

$$E = (120\pi P)^{1/2} = [(30 * P)^{1/2}] / R$$

$$20 \log (E * 10^6) - (43 + 10 \log P) = 82.23 \text{ dB } \mu\text{V/meter}$$

Where: E = Field Intensity in Volts/ meter      R = Distance in meters = 3 m  
P = Transmitted Power, Watts = 1000 W

The field strength of radiated spurious emissions measured was determined by

$$E (\text{dB}\mu\text{V/m}) = V_{\text{meas}} (\text{dB}\mu\text{V}) + \text{Cable Loss (dB)} + \text{Antenna Factor (dBi/m)}.$$

Field strength measurements of radiated spurious emissions were made in the 10m semi-anechoic chamber, AR-8 as detailed above. The recommendations of ANSI C63.4 and ANSI C63.26 were followed for EUT testing setup, cabling, and measurement approach and procedures. All the measurement equipment used, including antennas, was calibrated in accordance with ISO 9001 process. The EUT setup diagram is given in the Figure 4.5. The minimum margins to the Part 30.203 limit is as measured in accordance with 2.1053. The test data follows.

#### 4.5.2 Radiated Spurious Emissions Measurements: 40 GHz - 100 GHz

The radiated spurious emissions spectrum was investigated per 47CFR Section 2.1057(a)(1) for spurious emissions over the frequency range of 40 GHz to 100 GHz. The procedure and methodology followed the recommendations of ANSI C63.4-2014, C63.26-2015 and C63.26 mmWave JTG.

A Rohde & Schwarz FSW 85 was employed with external three port harmonic down converters and 23 dB Standard Gain Horns. Operation of the harmonic down converters utilizes a swept LO with a fixed IF frequency of 1.325 GHz. The IF cable loss for the 6m of cable was 2.06 dB and was corrected internally to the FSW along with the Conversion loss for the harmonic down converters.

Cable loss compensation for the LO cable loss was necessary to enable scan heights from 1-3 meters. The experience of this test indicated that a 3m maximum test height with this product is adequate for evaluation (0.5 m above the top of product). This allows for a reduction of the test cables length, will reduce the amount of LO amplification required and reduce IF images which occurred at multiples of the 1.325 GHz IF frequency.

The harmonic down converters provided coverage for 40-60 GHz (U), 60-90 GHz (E) and 90-140 GHz (F) bands. Operation was verified prior to testing by bore-sighting a mmWave signal generator or mmWave source module with an antenna identical to the measurement antenna at the test distance. The location of the maximum beams had previously been ascertained for both vertical and horizontal polarizations. The beam is extremely narrow and radiated power is down 18 dB at just + 5 degrees off center. All of the emissions and harmonics were found to be centered on the beam as well.

Based upon previous testing full coverage scanning of the product utilizing parametric scanning at different angles and heights. For this measurement the scan was started at the beam peak location of 13 degrees azimuth, and nominal elevations of 174 cm for the Vertical and 148 cm for Horizontal. The elevation was then swept down to 1m and back up back to 3m and returned to the beam peak. The product was then rotated continuously to 360 degrees back to 0 degrees and back to 13 degrees. For all of the measurements no emissions were found outside the steerable angle of the beam. There were >56 scans recorded of the emissions. The plots presented for emissions above 40 GHz are the maximum levels and provide the clearest representation for emissions in these bands.

#### 4.5.2.1 Bandwidth Limits and Corrections: Radiated Measurements 40 GHz - 100 GHz

All corrections were made to the signal level as detailed below.

#### 4.5.2.2 Resolution Bandwidth and # of Points:

For measurements above 40 GHz we performed scans with the required 1 MHz resolution bandwidth and a 10 MHz resolution bandwidth. In all cases the resolution bandwidth and span limitations of ANSI C63.26 were followed so that the # of Points  $\geq 2(\text{Span}/\text{RBW})$ .

The FSW-85 is limited to 10001 data points. Multiple spans were used when necessary to evaluate the peak spurious emissions detected. The assessment of out of beam spurious was performed with a 1 MHz RBW.

#### 4.5.2.3 Part 30 Limit:

The -13 dBm emissions limit was not adjusted in any way.

#### 4.5.2.4 Emissions Corrections

The measured signal was corrected by the FSW for the harmonic downconverter (HDC) conversion loss. In addition, a correction consisting of the radiated path loss, the gain of the measurement antenna and a 1 dB IF cable loss (at 1.3 GHz) was applied. There was no correction applied for the product antenna gain as these measurements are outside the transmit frequency range.

$$\text{Emissions Correction} = \text{Path Loss} - \text{Antenna Gain} + \text{IF Cable loss (1 dB)}$$

$$\text{Where Free Space Path Loss} = ((4\pi d)/\lambda)^2$$

Table 4.5.2.4 details the correction for the three bands.

**Table 4.5.2.4a Radiated Emissions Corrections for 40-60 GHz at 4m**

| Frequency | $\lambda$ | Measurement Distance, d | Path Loss | Measurement Antenna Gain | IF Cable Loss | Emissions Correction Total |
|-----------|-----------|-------------------------|-----------|--------------------------|---------------|----------------------------|
| GHz       | m         | m                       | dB        | dB                       | dB            | dB                         |
| 40.0      | 0.0075    | 4                       | 76.52     | 21.80                    | 1.03          | 55.75                      |
| 42.5      | 0.0071    | 4                       | 77.05     | 22.20                    | 1.03          | 55.87                      |
| 45.0      | 0.0067    | 4                       | 77.55     | 22.50                    | 1.03          | 56.07                      |
| 47.5      | 0.0063    | 4                       | 78.02     | 22.70                    | 1.03          | 56.34                      |
| 50.0      | 0.0060    | 4                       | 78.46     | 23.00                    | 1.03          | 56.49                      |
| 52.5      | 0.0057    | 4                       | 78.89     | 23.30                    | 1.03          | 56.61                      |
| 55.0      | 0.0055    | 4                       | 79.29     | 23.40                    | 1.03          | 56.91                      |
| 57.5      | 0.0052    | 4                       | 79.68     | 23.60                    | 1.03          | 57.10                      |
| 60.0      | 0.0050    | 4                       | 80.05     | 23.70                    | 1.03          | 57.37                      |

**Table 4.5.2.4b Radiated Emissions Corrections for 60-90 GHz at 4m**

| Frequency | $\lambda$ | Measurement Distance, d | Path Loss | Measurement Antenna Gain | IF Cable Loss | Emissions Correction Total |
|-----------|-----------|-------------------------|-----------|--------------------------|---------------|----------------------------|
| GHz       | m         | m                       | dB        | dB                       | dB            | dB                         |
| 60.0      | 0.0050    | 4                       | 80.05     | 21.80                    | 1.03          | 59.276                     |
| 65.0      | 0.0046    | 4                       | 80.74     | 22.30                    | 1.03          | 59.471                     |
| 70.0      | 0.0043    | 4                       | 81.38     | 22.70                    | 1.03          | 59.715                     |
| 75.0      | 0.0040    | 4                       | 81.98     | 23.00                    | 1.03          | 60.014                     |
| 80.0      | 0.0038    | 4                       | 82.54     | 23.40                    | 1.03          | 60.175                     |
| 85.0      | 0.0035    | 4                       | 83.07     | 23.60                    | 1.03          | 60.501                     |
| 90.0      | 0.0033    | 4                       | 83.57     | 23.80                    | 1.03          | 60.798                     |

**Table 4.5.2.4c Radiated Emissions Corrections for 90-100GHz at 4m**

| Frequency | $\lambda$ | Measurement Distance, d | Path Loss | Measurement Antenna Gain | IF Cable Loss | Emissions Correction Total |
|-----------|-----------|-------------------------|-----------|--------------------------|---------------|----------------------------|
| GHz       | m         | m                       | dB        | dB                       | dB            | dB                         |
| 90.0      | 0.0033    | 4                       | 83.57     | 21.90                    | 1.03          | 62.698                     |
| 95.0      | 0.0032    | 4                       | 84.04     | 22.30                    | 1.03          | 62.767                     |
| 100.0     | 0.0030    | 4                       | 84.48     | 22.60                    | 1.03          | 62.913                     |
| 105.0     | 0.0029    | 4                       | 84.91     | 22.95                    | 1.03          | 62.987                     |
| 110.0     | 0.0027    | 4                       | 85.31     | 23.30                    | 1.03          | 63.041                     |
| 115.0     | 0.0026    | 4                       | 85.70     | 23.60                    | 1.03          | 63.127                     |
| 120.0     | 0.0025    | 4                       | 86.07     | 23.85                    | 1.03          | 63.247                     |
| 125.0     | 0.0024    | 4                       | 86.42     | 24.05                    | 1.03          | 63.401                     |
| 130.0     | 0.0023    | 4                       | 86.76     | 24.18                    | 1.03          | 63.612                     |
| 135.0     | 0.0022    | 4                       | 87.09     | 24.35                    | 1.03          | 63.770                     |
| 140.0     | 0.0021    | 4                       | 87.41     | 24.50                    | 1.03          | 63.936                     |

#### 4.5.3 Field Strength of Spurious Radiation Results:

This product meets Part 15B limits below 10 GHz and Part 30 Requirements. For the Title 47CFR section 30.203 and 2.1053 test, the field strength of any spurious radiation, measured at 3m, is required to be less than 82.23 dB $\mu$ V/meter. Emissions equal to or less than 62.23 dB $\mu$ V/meter are not reportable.


Presented results show the three mmWave bands as measured with a 1 MHz Resolution Bandwidth. In these measurements the limit is the -13 dBm limit as specified in Part 30.203. Corrections to the emissions levels consisted of only the HDC conversion loss, the Free space Path Loss and measurement antenna gain as detailed in Table 4.5.2.4.

Over the out of band spectrum investigated from 30 MHz to 100 GHz, reportable spurious emissions were detected and determined to be compliant with the Part 30 limit. The worst case Part 30 margin was 12.6 dB at 28500.922 MHz. Additionally, from 30 MHz to 26.5 GHz all emissions were below 54.5 dB $\mu$ V/m. This demonstrates that the **AirScale 28 GHz Radio Unit (AEUA) Band 30, FCC ID: VBNAEUA-01**, the subject of this application, complies with FCC Part 15 Class B, and FCC Sections 2.1053, 30.203 and 2.1057 of the Rules.


Photographs of the measurement setup are in the filing exhibits.

Figure 4.5 Radiated Emissions Product Setup

**Radiated Emissions Setup  
Nokia AirScale 28 GHz Radio Unit (AEUA)**

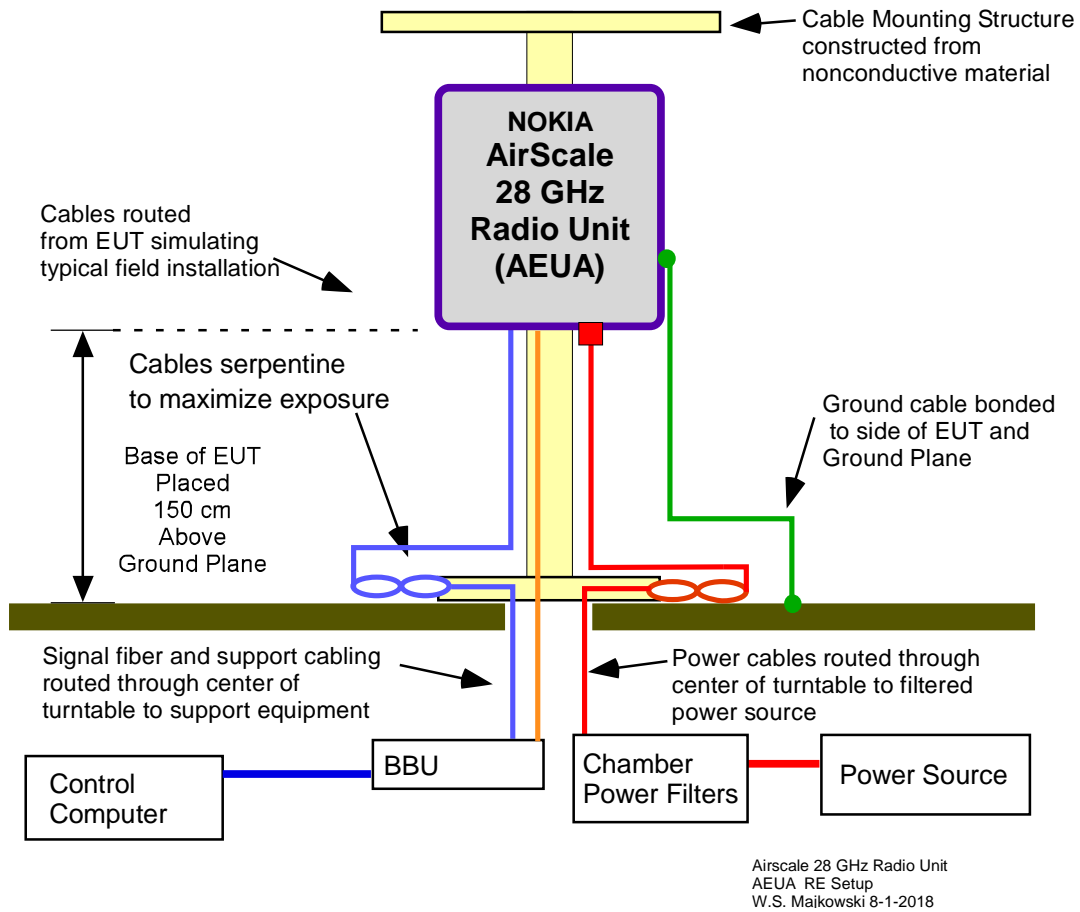

### 4.5.4 Transmitter Measurements of Radiated Spurious Emissions

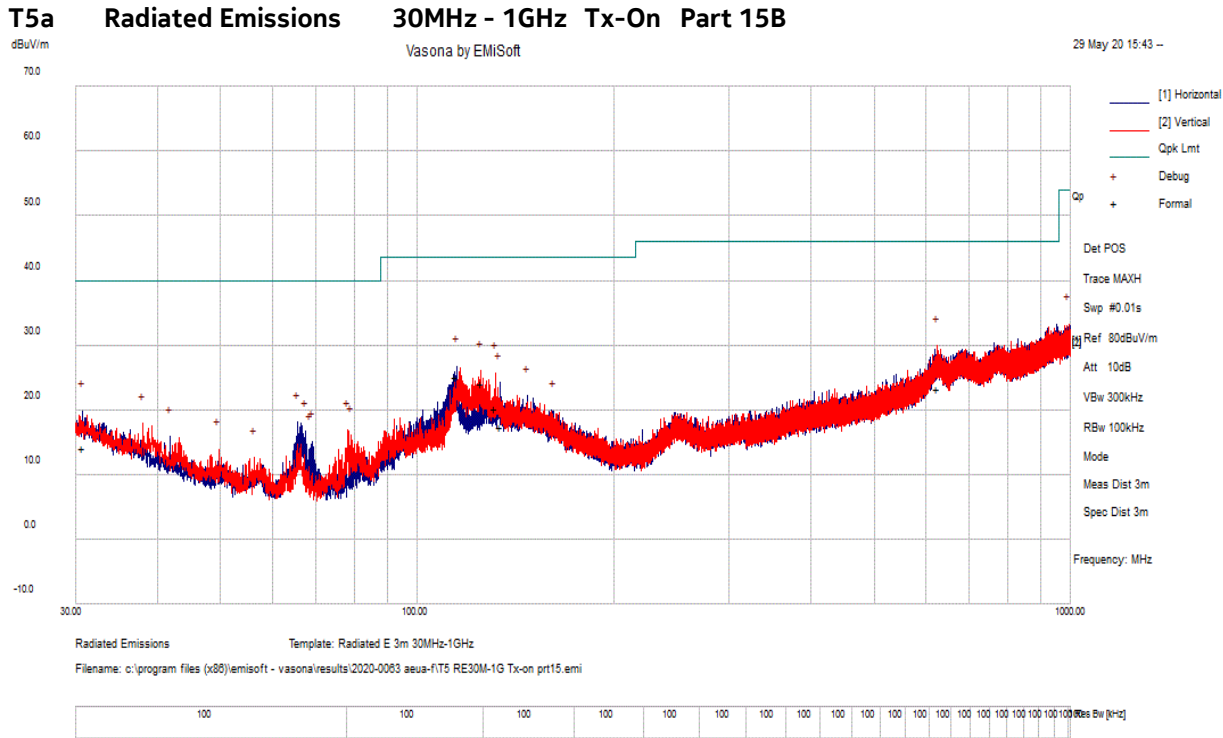

#### Test Information

|                        |                                                                                                                                                              |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated Emissions 3m 30MHz-1GHz                                                                                                                             |
| <b>File Name</b>       | T5a RE30M-1G Tx-on prt15 Final.emi                                                                                                                           |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                |
| <b>Test Engineer</b>   | WSM / MJS                                                                                                                                                    |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                             |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                               |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698. With LMI board cable disconnected.                                                                                     |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E566, Preamp- E813, Analyzer E1H69-ESU, and LPF - E980. RE 30M-1 GHz. To FCC Part 15B limits @3-Meters. Tx -on testing. |
| <b>Date</b>            | 2020-05-29 18:49:11                                                                                                                                          |

#### Formal Data


| Freq. MHz | Raw dBµV | Cable dB | Factor dB | Level dBµV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBµV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 114.834   | 34.82    | 1.45     | -11.15    | 25.12        | QuasiMax      | H       | 139    | 145      | 43.50        | -18.38    | Pass       |          |
| 125.007   | 32.12    | 1.51     | -9.55     | 24.08        | QuasiMax      | V       | 236    | 327      | 43.50        | -19.42    | Pass       |          |
| 625.376   | 23.11    | 3.34     | -3.04     | 23.41        | QuasiMax      | V       | 164    | 139      | 46.00        | -22.59    | Pass       |          |
| 131.392   | 28.12    | 1.55     | -9.44     | 20.23        | QuasiMax      | V       | 249    | 355      | 43.50        | -23.27    | Pass       |          |
| 30.798    | 23.21    | 0.80     | -9.76     | 14.25        | QuasiMax      | H       | 246    | 44       | 40.00        | -25.75    | Pass       |          |
| 134.103   | 25.30    | 1.57     | -9.39     | 17.47        | QuasiMax      | H       | 182    | 179      | 43.50        | -26.03    | Pass       |          |



Preview Data

| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 624.960   | 29.55    | 3.34     | -3.01     | 29.88        | Debug         | V       | 350    | 270      | 46.00        | -16.12    | Pass       |          |
| 115.008   | 36.37    | 1.45     | -11.12    | 26.70        | Debug         | H       | 102    | 135      | 43.50        | -16.80    | Pass       |          |
| 125.064   | 34.01    | 1.51     | -9.55     | 25.97        | Debug         | V       | 202    | 180      | 43.50        | -17.53    | Pass       |          |
| 131.904   | 33.56    | 1.56     | -9.43     | 25.69        | Debug         | V       | 302    | 0        | 43.50        | -17.81    | Pass       |          |
| 133.800   | 31.97    | 1.57     | -9.40     | 24.14        | Debug         | H       | 102    | 135      | 43.50        | -19.36    | Pass       |          |
| 30.720    | 28.73    | 0.80     | -9.72     | 19.81        | Debug         | H       | 350    | 180      | 40.00        | -20.19    | Pass       |          |
| 992.885   | 29.71    | 5.09     | -1.60     | 33.20        | Debug         | V       | 302    | 270      | 54.00        | -20.80    | Pass       |          |
| 147.384   | 29.65    | 1.64     | -9.18     | 22.11        | Debug         | H       | 150    | 180      | 43.50        | -21.39    | Pass       |          |
| 65.568    | 37.49    | 1.12     | -20.55    | 18.06        | Debug         | H       | 250    | 135      | 40.00        | -21.94    | Pass       |          |
| 38.064    | 30.64    | 0.88     | -13.63    | 17.90        | Debug         | V       | 202    | 315      | 40.00        | -22.10    | Pass       |          |
| 78.360    | 34.83    | 1.21     | -19.23    | 16.81        | Debug         | V       | 102    | 315      | 40.00        | -23.19    | Pass       |          |
| 67.464    | 36.23    | 1.13     | -20.60    | 16.76        | Debug         | H       | 150    | 315      | 40.00        | -23.24    | Pass       |          |
| 161.904   | 29.02    | 1.72     | -10.93    | 19.81        | Debug         | H       | 250    | 135      | 43.50        | -23.69    | Pass       |          |
| 79.272    | 33.89    | 1.22     | -19.08    | 16.02        | Debug         | V       | 102    | 180      | 40.00        | -23.98    | Pass       |          |
| 41.856    | 30.42    | 0.92     | -15.48    | 15.87        | Debug         | H       | 350    | 315      | 40.00        | -24.13    | Pass       |          |
| 69.216    | 34.60    | 1.14     | -20.65    | 15.10        | Debug         | H       | 250    | 315      | 40.00        | -24.90    | Pass       |          |
| 68.688    | 34.16    | 1.14     | -20.64    | 14.67        | Debug         | H       | 250    | 0        | 40.00        | -25.33    | Pass       |          |
| 49.656    | 31.34    | 0.99     | -18.47    | 13.85        | Debug         | V       | 102    | 135      | 40.00        | -26.15    | Pass       |          |
| 56.376    | 31.29    | 1.05     | -19.76    | 12.57        | Debug         | V       | 102    | 225      | 40.00        | -27.43    | Pass       |          |

**T3a Radiated Emissions 1GHz - 10GHz Tx-On**

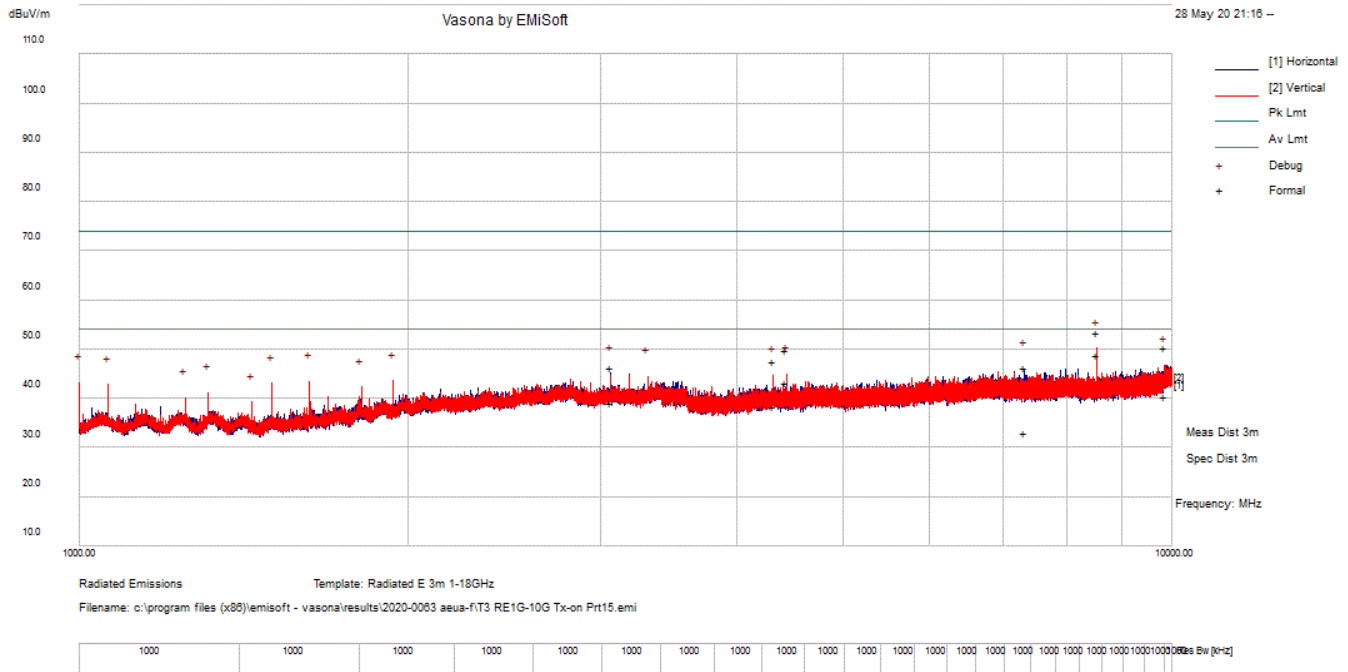

**Test Information**

|                        |                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated Emissions 3m 1-18GHz                                                                                                                                           |
| <b>File Name</b>       | T3a RE1G-10G Tx-on Prt15.emi                                                                                                                                            |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                           |
| <b>Test Engineer</b>   | MJS                                                                                                                                                                     |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                                        |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                                          |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698                                                                                                                                    |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E1074, Preamp- E447, Analyzer E1H69-ESU, and Notch Filter - E1315. RE 1g-10 GHz. To FCC Part 15B limits @3-Meters. Tx -on testing. |
| <b>Date</b>            | 2020-05-28 22:34:29                                                                                                                                                     |

**Formal Data**


| Freq. MHz   | Raw dBµV | Cable dB | Factor dB | Level dBµV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBµV/m | Margin dB | Pass /Fail | Comments |
|-------------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 8532.221    | 45.19    | 6.48     | -2.66     | 49.01        | AvgMax        | V       | 172    | 273      | 54.00        | -4.99     | Pass       |          |
| 4437.459    | 42.89    | 4.67     | -4.14     | 43.42        | AvgMax        | V       | 123    | 273      | 54.00        | -10.58    | Pass       |          |
| 9830.345    | 35.82    | 6.82     | -2.05     | 40.60        | AvgMax        | V       | 110    | 322      | 54.00        | -13.40    | Pass       |          |
| 3062.352    | 41.32    | 3.89     | -6.08     | 39.13        | AvgMax        | H       | 171    | 52       | 54.00        | -14.87    | Pass       |          |
| 4312.527    | 38.27    | 4.60     | -4.30     | 38.57        | AvgMax        | V       | 162    | 299      | 54.00        | -15.43    | Pass       |          |
| 8532.221    | 49.54    | 6.48     | -2.66     | 53.37        | PeakMax       | V       | 172    | 273      | 74.00        | -20.63    | Pass       |          |
| 7329.887275 | 29.73    | 6.04     | -2.59     | 33.18        | AvgMax        | H       | 127    | 341      | 54.00        | -20.82    | Pass       |          |
| 9830.345    | 45.70    | 6.82     | -2.05     | 50.48        | PeakMax       | V       | 110    | 322      | 74.00        | -23.52    | Pass       |          |
| 4437.459    | 49.45    | 4.67     | -4.14     | 49.98        | PeakMax       | V       | 123    | 273      | 74.00        | -24.02    | Pass       |          |
| 4312.527    | 47.27    | 4.60     | -4.30     | 47.57        | PeakMax       | V       | 162    | 299      | 74.00        | -26.43    | Pass       |          |
| 3062.352    | 48.59    | 3.89     | -6.08     | 46.40        | PeakMax       | H       | 171    | 52       | 74.00        | -27.60    | Pass       |          |
| 7329.887275 | 42.78    | 6.04     | -2.59     | 46.23        | PeakMax       | H       | 127    | 341      | 74.00        | -27.77    | Pass       |          |

**Preview Data**

| Freq. MHz   | Raw dBµV | Cable dB | Factor dB | Level dBµV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBµV/m | Margin dB | Pass /Fail | Comments |
|-------------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 8532.49567  | 46.33    | 6.48     | -2.66     | 50.15        | Debug         | V       | 175    | 270      | 54.00        | -3.85     | Pass       |          |
| 9830.24548  | 41.94    | 6.82     | -2.05     | 46.71        | Debug         | V       | 175    | 0        | 54.00        | -7.29     | Pass       |          |
| 7329.887275 | 42.55    | 6.04     | -2.59     | 46.01        | Debug         | H       | 175    | 225      | 54.00        | -7.99     | Pass       |          |
| 3062.30194  | 47.33    | 3.89     | -6.08     | 45.14        | Debug         | H       | 175    | 270      | 54.00        | -8.86     | Pass       |          |
| 4437.771505 | 44.47    | 4.67     | -4.14     | 45.01        | Debug         | V       | 175    | 270      | 54.00        | -8.99     | Pass       |          |
| 4312.236595 | 44.34    | 4.60     | -4.30     | 44.65        | Debug         | V       | 175    | 225      | 54.00        | -9.35     | Pass       |          |
| 3312.56962  | 46.04    | 4.03     | -5.69     | 44.39        | Debug         | V       | 175    | 225      | 54.00        | -9.61     | Pass       |          |
| 1937.70166  | 48.37    | 3.13     | -7.90     | 43.60        | Debug         | V       | 175    | 225      | 54.00        | -10.40    | Pass       |          |
| 1625.067595 | 50.78    | 2.87     | -10.26    | 43.39        | Debug         | V       | 175    | 315      | 54.00        | -10.61    | Pass       |          |
| 1000.000    | 53.15    | 2.43     | -12.39    | 43.19        | Debug         | V       | 175    | 225      | 54.00        | -10.81    | Pass       |          |
| 1500.13429  | 51.61    | 2.76     | -11.33    | 43.04        | Debug         | V       | 175    | 270      | 54.00        | -10.96    | Pass       |          |
| 1062.366385 | 52.57    | 2.48     | -12.23    | 42.82        | Debug         | V       | 175    | 225      | 54.00        | -11.18    | Pass       |          |
| 1812.367285 | 48.04    | 3.04     | -8.80     | 42.28        | Debug         | V       | 175    | 270      | 54.00        | -11.72    | Pass       |          |
| 1312.634065 | 50.15    | 2.65     | -11.68    | 41.12        | Debug         | V       | 175    | 352      | 54.00        | -12.88    | Pass       |          |
| 1250.067145 | 49.27    | 2.61     | -11.81    | 40.07        | Debug         | V       | 175    | 352      | 54.00        | -13.93    | Pass       |          |
| 1437.767905 | 47.93    | 2.72     | -11.44    | 39.21        | Debug         | V       | 175    | 315      | 54.00        | -14.79    | Pass       |          |

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

**T4 Radiated Emissions 10GHz - 18GHz Tx-On**

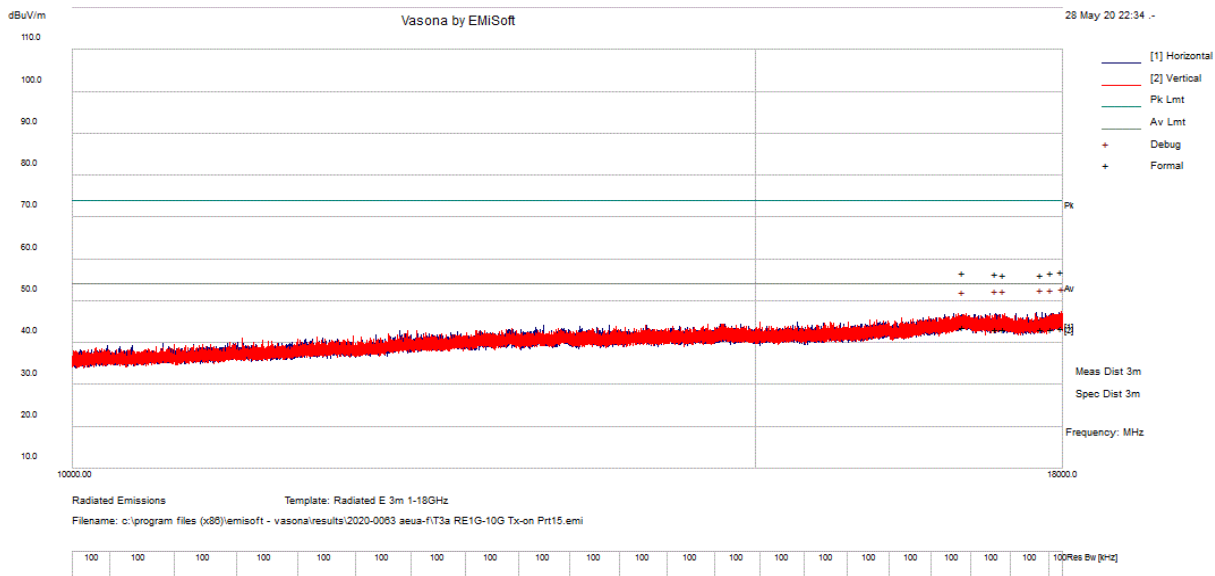

**Test Information**

|                        |                                                                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated Emissions 3m 1-18GHz                                                                                                                                            |
| <b>File Name</b>       | T4 RE10G-18G Tx-on Prt15.emi                                                                                                                                             |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                            |
| <b>Test Engineer</b>   | MJS / JY                                                                                                                                                                 |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                                         |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                                           |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698                                                                                                                                     |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E1074, Preamp- E447, Analyzer E1H69-ESU, and Notch Filter - E1315. RE 10g-18 GHz. To FCC Part 15B limits @3-Meters. Tx -on testing. |
| <b>Date</b>            | 2020-05-29 10:42:39                                                                                                                                                      |

**Formal Data**


| Freq. MHz | Raw dBµV | Cable dB | Factor dB | Level dBµV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBµV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 16962.970 | 29.70    | 9.28     | 4.80      | 43.77        | AvgMax        | V       | 205    | 297      | 54.00        | -10.23    | Pass       |          |
| 17981.867 | 29.67    | 9.69     | 4.15      | 43.50        | AvgMax        | V       | 155    | 245      | 54.00        | -10.50    | Pass       |          |
| 17878.821 | 29.62    | 9.63     | 4.15      | 43.39        | AvgMax        | H       | 215    | 249      | 54.00        | -10.61    | Pass       |          |
| 17298.891 | 29.70    | 9.23     | 4.43      | 43.37        | AvgMax        | H       | 148    | 300      | 54.00        | -10.63    | Pass       |          |
| 17773.940 | 29.64    | 9.58     | 4.14      | 43.36        | AvgMax        | H       | 101    | 83       | 54.00        | -10.64    | Pass       |          |
| 17385.133 | 29.78    | 9.20     | 4.30      | 43.29        | AvgMax        | V       | 241    | 351      | 54.00        | -10.71    | Pass       |          |
| 17981.867 | 43.33    | 9.69     | 4.15      | 57.17        | PeakMax       | V       | 155    | 245      | 74.00        | -16.83    | Pass       |          |
| 16962.970 | 42.76    | 9.28     | 4.80      | 56.84        | PeakMax       | V       | 205    | 297      | 74.00        | -17.16    | Pass       |          |
| 17878.821 | 42.90    | 9.63     | 4.15      | 56.67        | PeakMax       | H       | 215    | 249      | 74.00        | -17.33    | Pass       |          |
| 17298.891 | 42.96    | 9.23     | 4.43      | 56.63        | PeakMax       | H       | 148    | 300      | 74.00        | -17.37    | Pass       |          |
| 17385.133 | 42.88    | 9.20     | 4.30      | 56.38        | PeakMax       | V       | 241    | 351      | 74.00        | -17.62    | Pass       |          |
| 17773.940 | 42.62    | 9.58     | 4.14      | 56.34        | PeakMax       | H       | 101    | 83       | 74.00        | -17.66    | Pass       |          |

**Preview Data**

| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 17993.679 | 33.50    | 9.69     | 4.15      | 47.34        | NoTune        | V       | 100    | 176      | 54.00        | -6.66     | Pass       |          |
| 16962.970 | 32.54    | 9.28     | 4.80      | 46.62        | Debug         | V       | 99     | 352      | 54.00        | -7.38     | Pass       |          |
| 17385.133 | 33.21    | 9.20     | 4.30      | 46.71        | Debug         | V       | 99     | 352      | 54.00        | -7.29     | Pass       |          |
| 17298.891 | 33.10    | 9.23     | 4.43      | 46.76        | Debug         | H       | 99     | 352      | 54.00        | -7.24     | Pass       |          |
| 17773.940 | 33.43    | 9.58     | 4.14      | 47.15        | Debug         | H       | 99     | 352      | 54.00        | -6.85     | Pass       |          |
| 17878.821 | 33.16    | 9.63     | 4.15      | 46.94        | Debug         | H       | 99     | 352      | 54.00        | -7.06     | Pass       |          |

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

**T2 Radiated Emissions 18GHz – 26.5GHz Tx-On**

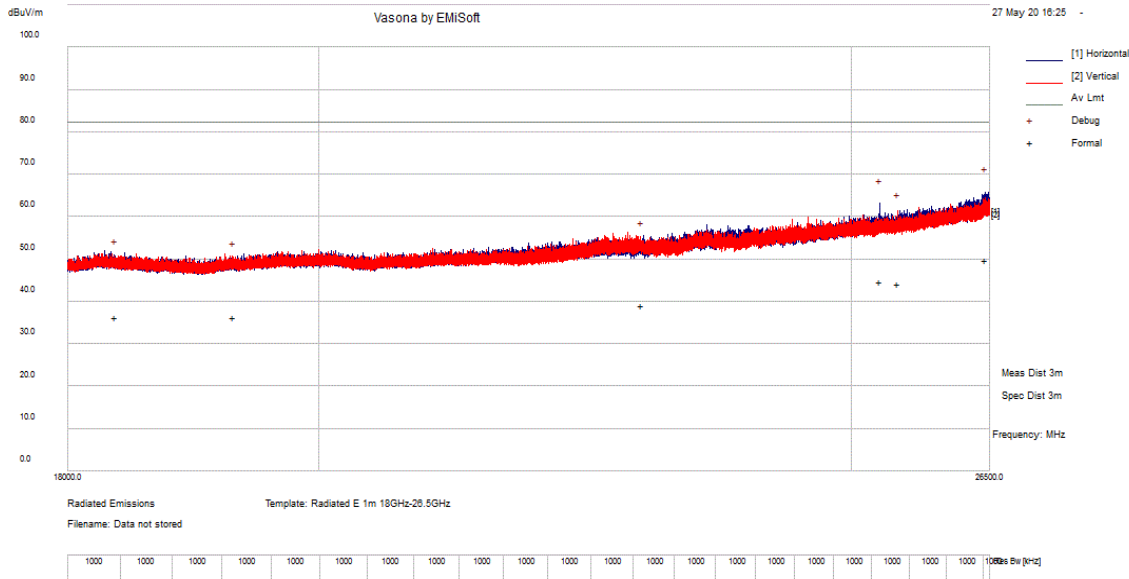

**Test Information**

|                        |                                                                                                                                                                         |
|------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated Emissions 3m 18GHz-26.5GHz                                                                                                                                     |
| <b>File Name</b>       | T2 RE18G-26.5G Tx-on Prt30.emi                                                                                                                                          |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                           |
| <b>Test Engineer</b>   | JY / MJS                                                                                                                                                                |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                                        |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                                          |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698                                                                                                                                    |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E513, Preamp- E1387, Analyzer E1384, and Notch Filter - E1315. RE 18GHz-26.5 GHz. To FCC Part 30 limits @3-Meters. Tx -on testing. |
| <b>Date</b>            | 2020-05-27 16:29:01                                                                                                                                                     |


**Formal Data**

| Freq. MHz | Raw dBµV | Cable dB | Factor dB | Level dBµV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBµV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 26452.810 | 42.28    | 11.94    | -4.33     | 49.89        | AvgMax        | H       | 135    | 9        | 82.23        | -32.34    | Pass       |          |
| 25309.233 | 38.53    | 11.23    | -5.07     | 44.69        | AvgMax        | H       | 102    | 6        | 82.23        | -37.54    | Pass       |          |
| 25494.102 | 37.84    | 11.30    | -4.99     | 44.14        | AvgMax        | V       | 102    | 46       | 82.23        | -38.09    | Pass       |          |
| 22895.595 | 34.32    | 10.67    | -5.85     | 39.13        | AvgMax        | V       | 162    | 0        | 82.23        | -43.10    | Pass       |          |
| 18362.133 | 34.34    | 10.05    | -7.96     | 36.42        | AvgMax        | V       | 150    | 106      | 82.23        | -45.81    | Pass       |          |
| 19301.528 | 33.51    | 9.87     | -7.06     | 36.32        | AvgMax        | V       | 101    | 70       | 82.23        | -45.91    | Pass       |          |

**Preview Data**

| Freq. MHz | Raw dBµV | Cable dB | Factor dB | Level dBµV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBµV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 26452.810 | 58.14    | 11.94    | -4.33     | 65.75        | Debug         | H       | 150    | 22       | 82.23        | -16.48    | Pass       |          |
| 25309.233 | 56.90    | 11.23    | -5.07     | 63.06        | Debug         | H       | 100    | 22       | 82.23        | -19.17    | Pass       |          |
| 19301.528 | 45.35    | 9.87     | -7.06     | 48.15        | Debug         | V       | 100    | 352      | 82.23        | -34.08    | Pass       |          |
| 25494.102 | 53.42    | 11.30    | -4.99     | 59.73        | Debug         | V       | 100    | 352      | 82.23        | -22.50    | Pass       |          |
| 18362.133 | 46.62    | 10.05    | -7.96     | 48.71        | Debug         | V       | 100    | 352      | 82.23        | -33.52    | Pass       |          |
| 22895.595 | 48.40    | 10.67    | -5.85     | 53.22        | Debug         | V       | 100    | 352      | 82.23        | -29.01    | Pass       |          |

**T6a Radiated Emissions 26.5-27.0 GHz Tx-On**

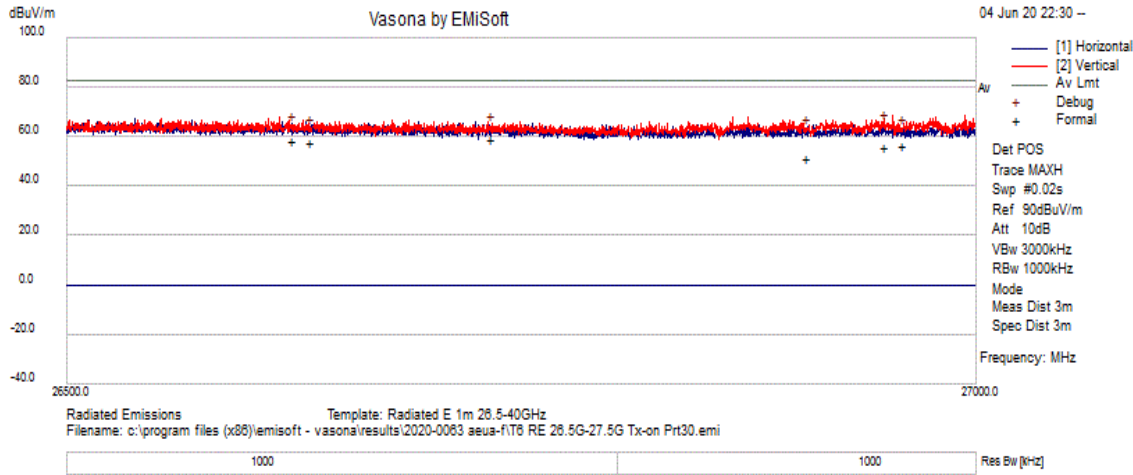

**Test Information**

|                        |                                                                                                                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated Emissions 3m 26.5-27GHz                                                                                                                                                                                         |
| <b>File Name</b>       | T6a RE 26.5G-27.0G Tx-on Prt30.emi                                                                                                                                                                                       |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                                                                            |
| <b>Test Engineer</b>   | WSM / MJS                                                                                                                                                                                                                |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                                                                                         |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                                                                                           |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698. With LMI board cable connected.                                                                                                                                                    |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E1373, Preamp- E1469, Analyzer EI69, and Notch Filter - E1315. RE 26.5GHz-27.0 GHz. To FCC Part 30 limits @3-Meters. (1MHz RBW/ 3000 KHz VBW); Formal BW (1MHz RBW) Tx -on testing. |
| <b>Date</b>            | 2020-06-04 23:06:04                                                                                                                                                                                                      |


**Formal Data**

| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 26732.087 | 46.79    | 12.23    | -0.11     | 58.92        | AvgMax        | V       | 176    | 12       | 82.23        | -23.31    | Pass       |          |
| 26622.881 | 46.12    | 12.18    | -0.02     | 58.28        | AvgMax        | V       | 168    | 9        | 82.23        | -23.95    | Pass       |          |
| 26632.836 | 45.47    | 12.18    | -0.03     | 57.62        | AvgMax        | H       | 144    | 13       | 82.23        | -24.61    | Pass       |          |
| 26959.403 | 43.83    | 12.35    | 0.05      | 56.24        | AvgMax        | H       | 153    | 11       | 82.23        | -25.99    | Pass       |          |
| 26949.327 | 43.47    | 12.35    | 0.02      | 55.84        | AvgMax        | H       | 161    | 11       | 82.23        | -26.39    | Pass       |          |
| 26906.291 | 39.32    | 12.32    | -0.08     | 51.56        | AvgMax        | V       | 171    | 33       | 82.23        | -30.67    | Pass       |          |

**Preview Data**

| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 26959.403 | 48.85    | 12.35    | 0.05      | 61.25        | Debug         | H       | 150    | 51       | 82.23        | -20.98    | Pass       |          |
| 26632.836 | 49.22    | 12.18    | -0.03     | 61.37        | Debug         | H       | 176    | 13       | 82.23        | -20.86    | Pass       |          |
| 26949.327 | 50.65    | 12.35    | 0.02      | 63.02        | Debug         | H       | 176    | 1        | 82.23        | -19.21    | Pass       |          |
| 26906.291 | 48.98    | 12.32    | -0.08     | 61.22        | Debug         | V       | 176    | 1        | 82.23        | -21.01    | Pass       |          |
| 26622.881 | 50.51    | 12.18    | -0.02     | 62.67        | Debug         | V       | 176    | 1        | 82.23        | -19.56    | Pass       |          |
| 26732.087 | 50.21    | 12.23    | -0.11     | 62.34        | Debug         | V       | 176    | 1        | 82.23        | -19.89    | Pass       |          |

Note: Preview data was measured using a peak detector to identify frequencies of interest for formal measurement. Formal data consist of all frequencies in the preview list within 6 dB of specification limit or the top six frequencies. Failure in preview data does not necessarily constitute failure in formal data.

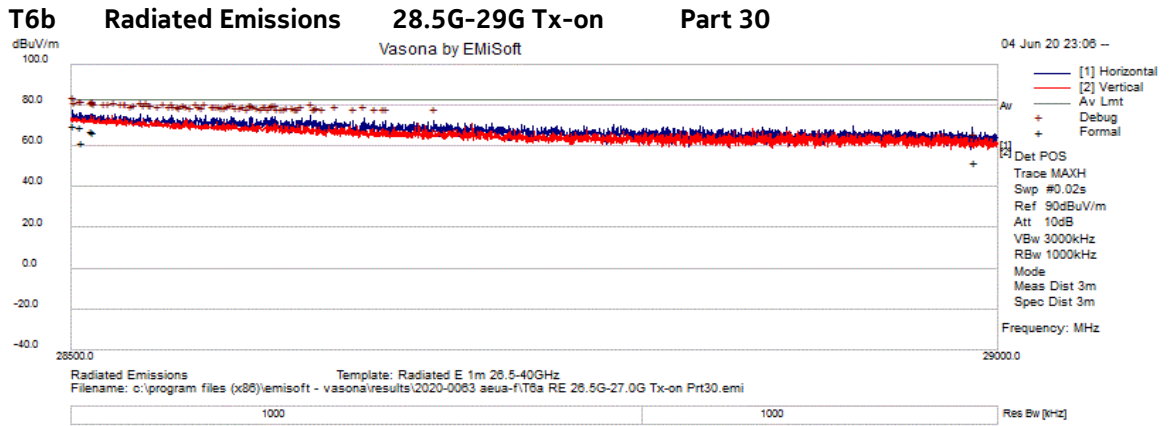

**Test Information**

|                        |                                                                                                                                                                                                                          |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated Emissions 3m 28.5-29GHz                                                                                                                                                                                         |
| <b>File Name</b>       | T6b RE28.5G-29G Tx-on Prt30.emi                                                                                                                                                                                          |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                                                                            |
| <b>Test Engineer</b>   | WSM / MJS                                                                                                                                                                                                                |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                                                                                         |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                                                                                           |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698. With LMI board cable connected.                                                                                                                                                    |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E1373, Preamp- E1469, Analyzer EI69, and Notch Filter - E1315. RE 28.5GHz-29.0 GHz. To FCC Part 30 limits @3-Meters. (1MHz RBW/ 3000 KHz VBW); Formal BW (1MHz RBW) Tx -on testing. |
| <b>Date</b>            | 2020-06-05 17:16:22                                                                                                                                                                                                      |

**Formal Data**


| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 28500.922 | 41.26    | 28.55    | -0.17     | 69.63        | AvgMax        | H       | 157    | 12       | 82.23        | -12.60    | Pass       |          |
| 28504.459 | 41.21    | 28.27    | -0.17     | 69.31        | AvgMax        | H       | 153    | 14       | 82.23        | -12.92    | Pass       |          |
| 28510.455 | 39.85    | 27.79    | -0.18     | 67.46        | AvgMax        | H       | 144    | 10       | 82.23        | -14.77    | Pass       |          |
| 28511.223 | 39.42    | 27.73    | -0.18     | 66.97        | AvgMax        | H       | 147    | 9        | 82.23        | -15.26    | Pass       |          |
| 28505.381 | 33.62    | 28.19    | -0.17     | 61.64        | AvgMax        | H       | 106    | 6        | 82.23        | -20.59    | Pass       |          |
| 28987.142 | 39.33    | 12.92    | -0.25     | 51.99        | AvgMax        | V       | 170    | 22       | 82.23        | -30.24    | Pass       |          |

**Preview Data**

| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 28500.922 | 49.24    | 28.55    | -0.17     | 77.61        | Debug         | H       | 150    | 22       | 82.23        | -4.62     | Pass       |          |
| 28504.459 | 47.89    | 28.27    | -0.17     | 75.99        | Debug         | H       | 150    | 22       | 82.23        | -6.24     | Pass       |          |
| 28505.381 | 47.85    | 28.19    | -0.17     | 75.87        | Debug         | H       | 150    | 22       | 82.23        | -6.36     | Pass       |          |
| 28511.223 | 48.22    | 27.73    | -0.18     | 75.77        | Debug         | H       | 150    | 22       | 82.23        | -6.46     | Pass       |          |
| 28510.455 | 47.84    | 27.79    | -0.18     | 75.45        | Debug         | H       | 150    | 22       | 82.23        | -6.78     | Pass       |          |
| 28501.384 | 47.12    | 28.51    | -0.17     | 75.45        | Debug         | H       | 150    | 22       | 82.23        | -6.78     | Pass       |          |
| 28523.062 | 48.72    | 26.79    | -0.18     | 75.32        | Debug         | H       | 150    | 22       | 82.23        | -6.91     | Pass       |          |
| 28537.053 | 49.76    | 25.68    | -0.19     | 75.25        | Debug         | H       | 150    | 22       | 82.23        | -6.98     | Pass       |          |
| 28540.589 | 49.88    | 25.40    | -0.19     | 75.09        | Debug         | H       | 150    | 22       | 82.23        | -7.14     | Pass       |          |
| 28511.531 | 47.50    | 27.70    | -0.18     | 75.03        | Debug         | H       | 150    | 22       | 82.23        | -7.20     | Pass       |          |
| 28519.526 | 47.87    | 27.07    | -0.18     | 74.76        | Debug         | H       | 150    | 22       | 82.23        | -7.47     | Pass       |          |
| 28987.142 | 47.15    | 12.92    | -0.25     | 59.82        | Debug         | V       | 124    | 138      | 82.23        | -22.41    | Pass       |          |



**T1a Radiated Emissions 29GHz – 40GHz Tx On Part 30**

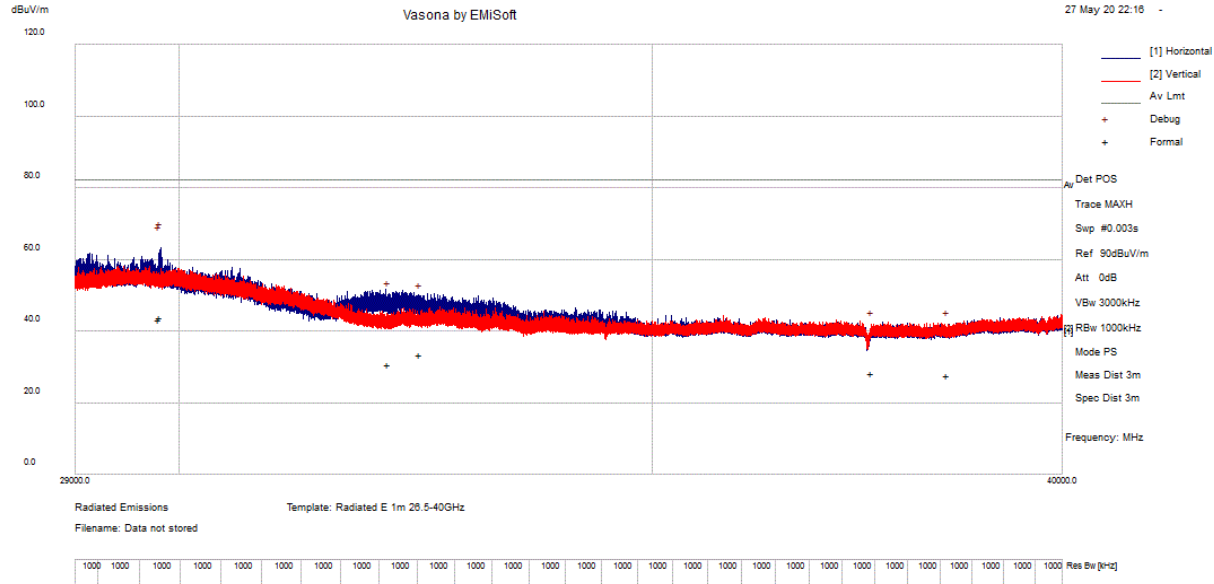

**Test Information**

|                        |                                                                                                                                                                            |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Results Title</b>   | Radiated E 1m 26.5-40GHz                                                                                                                                                   |
| <b>File Name</b>       | T1a RE29g-40G Tx-on Prt30.emi                                                                                                                                              |
| <b>Test Laboratory</b> | Global Product Compliance Lab                                                                                                                                              |
| <b>Test Engineer</b>   | MJS                                                                                                                                                                        |
| <b>Test Software</b>   | Vasona by EMISoft, version 6.061                                                                                                                                           |
| <b>Equipment</b>       | Nokia Wireless                                                                                                                                                             |
| <b>EUT Details</b>     | 28 GHz AEUA & AEUF -8C SNL1182710698                                                                                                                                       |
| <b>Configuration</b>   | Powered by -48VDC, RTM1.1, Antenna - E1373, Preamp- E1387, Analyzer E1384, and Notch Filter - E1315. RE 26.5GHz-27.5 GHz. To FCC Part 30 limits @3-Meters. Tx -on testing. |
| <b>Date</b>            | 2020-05-27 22:19:56                                                                                                                                                        |

**Formal Data**


| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 29816.983 | 46.17    | 12.30    | -14.43    | 44.03        | AvgMax        | H       | 148    | 4        | 82.23        | -38.20    | Pass       |          |
| 29805.486 | 45.45    | 12.30    | -14.44    | 43.32        | AvgMax        | H       | 156    | 4        | 82.23        | -38.91    | Pass       |          |
| 32444.421 | 35.00    | 13.38    | -14.84    | 33.54        | AvgMax        | H       | 171    | 50       | 82.23        | -48.69    | Pass       |          |
| 32112.258 | 32.14    | 13.33    | -14.67    | 30.80        | AvgMax        | V       | 102    | 1        | 82.23        | -51.43    | Pass       |          |
| 37586.804 | 32.53    | 13.80    | -18.09    | 28.24        | AvgMax        | V       | 148    | 41       | 82.23        | -53.99    | Pass       |          |
| 38522.950 | 31.84    | 14.01    | -18.18    | 27.67        | AvgMax        | V       | 159    | 37       | 82.23        | -54.56    | Pass       |          |

**Preview Data**

| Freq. MHz | Raw dBμV | Cable dB | Factor dB | Level dBμV/m | Emission Type | Pol H/V | Ht. cm | Az. Deg. | Limit dBμV/m | Margin dB | Pass /Fail | Comments |
|-----------|----------|----------|-----------|--------------|---------------|---------|--------|----------|--------------|-----------|------------|----------|
| 29816.983 | 65.49    | 12.30    | -14.43    | 63.35        | Debug         | H       | 150    | 22       | 82.23        | -18.88    | Pass       |          |
| 29805.486 | 64.68    | 12.30    | -14.44    | 62.55        | Debug         | H       | 150    | 22       | 82.23        | -19.68    | Pass       |          |
| 32112.258 | 48.27    | 13.33    | -14.67    | 46.93        | Debug         | V       | 100    | 352      | 82.23        | -35.30    | Pass       |          |
| 32444.421 | 47.65    | 13.38    | -14.84    | 46.19        | Debug         | H       | 151    | 352      | 82.23        | -36.04    | Pass       |          |
| 38522.950 | 42.98    | 14.01    | -18.18    | 38.81        | Debug         | V       | 100    | 352      | 82.23        | -43.42    | Pass       |          |
| 37586.804 | 43.09    | 13.80    | -18.09    | 38.80        | Debug         | V       | 100    | 352      | 82.23        | -43.43    | Pass       |          |

Maximum Measured Radiated Emissions -U Band 40GHz-60GHz  
 Vertical Polarization - 1 MHz RBW


2020-0063 28 GHz AEUA-F SW L1182710698

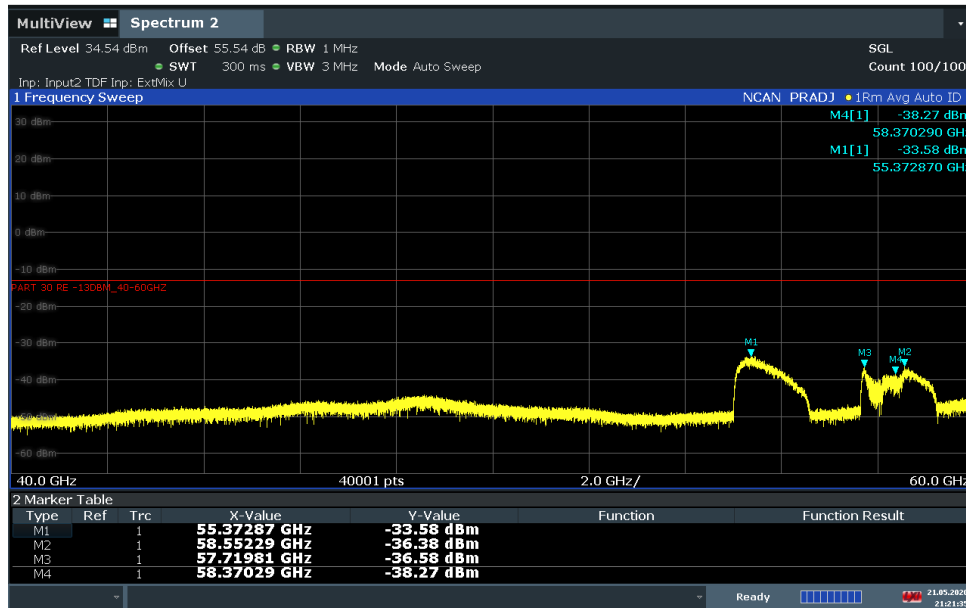

21:21:35 21.05.2020

Horizontal Polarization - 1 MHz RBW

2020-0063 28 GHz AEUA-F SW L1182710698

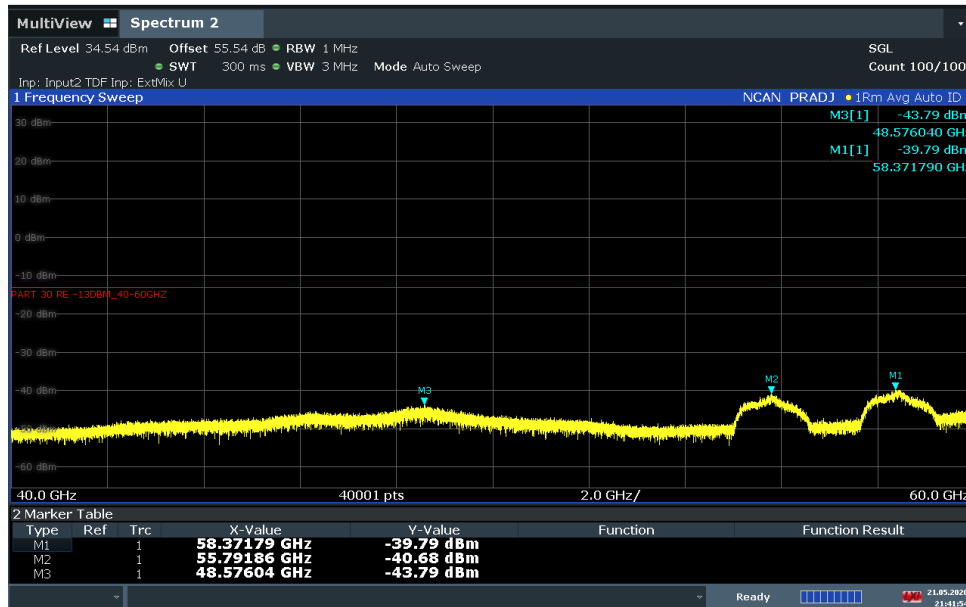


21:41:54 21.05.2020

Maximum Measured Radiated Emissions -U Band 60GHz-90GHz  
 Vertical Polarization - 1 MHz RBW

FCC B Part 30


2020-0063 28 GHz AEUA-F SHL1182710698

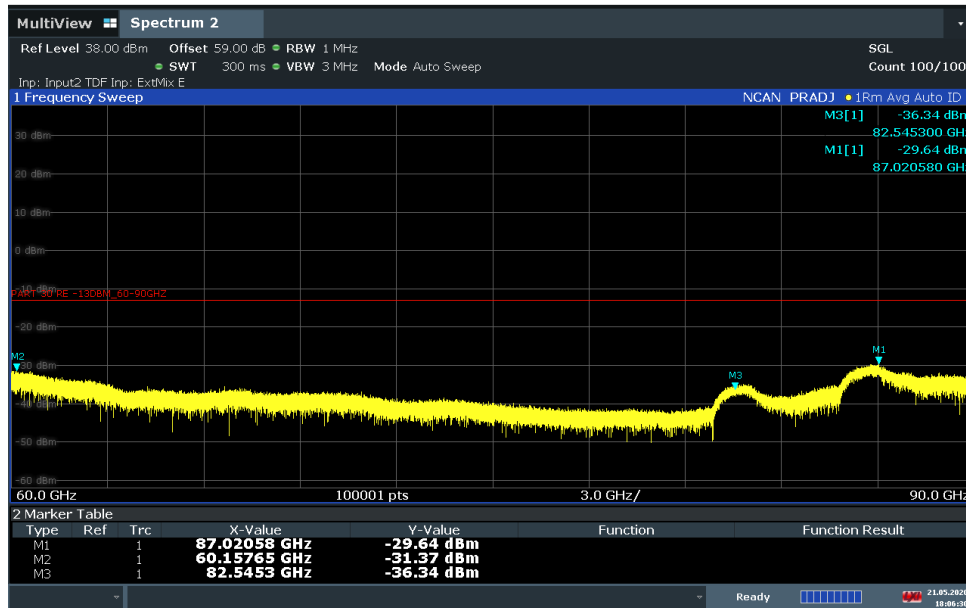

18:06:30 21.05.2020

Horizontal Polarization - 1 MHz RBW


2020-0063 28 GHz AEUA-F SHL1182710698

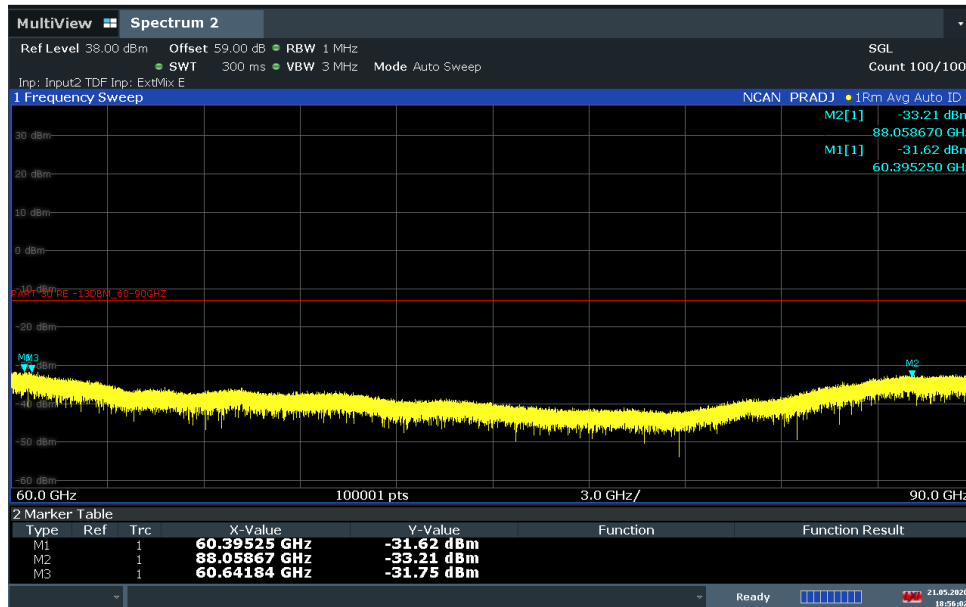

18:56:02 21.05.2020

Maximum Measured Radiated Emissions -U Band 90GHz-100GHz      FCC B Part 30  
 Vertical Polarization - 1 MHz RBW


2020-0063 28 GHz AEUA-F SN L1182710698

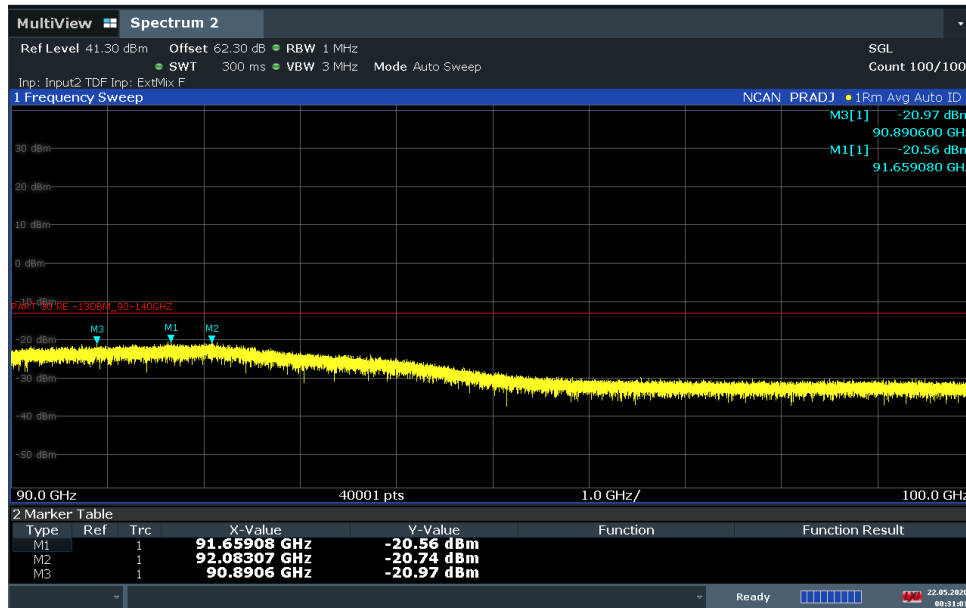

00:31:02 22.05.2020

Horizontal Polarization - 1 MHz RBW

2020-0063 28 GHz AEUA-F SN L1182710698

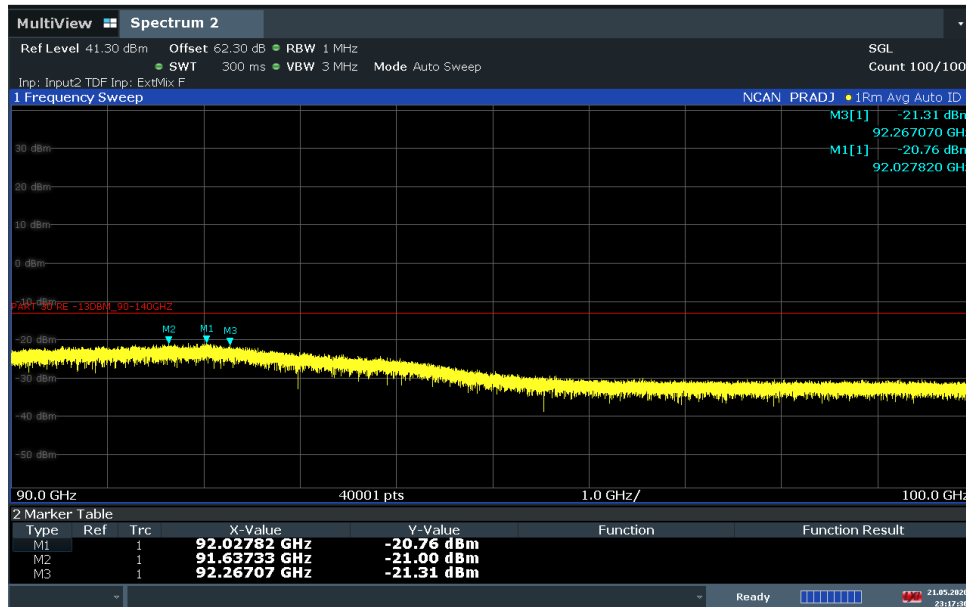

23:17:37 21.05.2020

#### 4.6 Section 2.1055 MEASUREMENT NOT REQUIRED: FREQUENCY STABILITY

The measurement of frequency stability was performed during the original filing tests. There has been no change to the frequency generating and stabilizing circuitry. Additional frequency stability testing is therefore not required. The original results are below:

##### 4.6.1 Frequency Stability Results:

The worst case Frequency Stability over temperature and voltage for the product with DC power was **-645.61 Hz** which is **-0.0231 ppm**.

The worst case Frequency Stability over temperature and voltage for the product with AC power was **-648.06 Hz** which is **-0.0232 ppm**.

This are within the +/- 0.05ppm desired performance required for 5G-NR operation.

## 4.7 List of Test Equipment

### 4.7.1 List of Radio Measurements and Radiated Emissions Test Equipment

The following equipment was used for the measurement of Radio parameters and Radiated Emissions.

| Asset ID | Manufacturer               | Type               | Description                                               | Model          | Serial     | Calibration Date                       | Calibration Due         |
|----------|----------------------------|--------------------|-----------------------------------------------------------|----------------|------------|----------------------------------------|-------------------------|
| E1373    | A-Info                     | Horn Antenna       | 26.5-40GHz WR28 25 dB                                     | LB-28-25-C2-KF | J202062735 | 2018-12-05                             | 2021-12-05              |
| E1321    | Extech                     | Data Logger        | Barometric Pressure/Humidity/Temp.                        | SD700          | A075782    | 2018-11-07                             | 2020-11-07              |
| E1384    | Rohde & Schwarz            | Spectrum Analyzer  | 2 Hz to 85 GHz (with R&S@FSW-B90G option: 2 Hz to 90 GHz) | FSW85          | 101537     | 2018-12-17                             | 2019-12-17 <sup>1</sup> |
| E1H69    | Rohde & Schwarz            | Test Receiver      | EMI 20Hz - 40GHz                                          | ESU40          | 100247     | 2018-05-22                             | 2020-05-22              |
| E588     | Sunol Sciences             | Controller         | Measurement Tower Controller                              | SC99V          | 32802-1    | CNR                                    | CNR                     |
| E766     | A.H. Systems Inc.          | Biological Antenna | 25 - 2000 MHz                                             | SAS-521-2      | 457        | 2019-02-13                             | 2021-02-13              |
| E513     | EMC Test Systems           | Horn Antenna       | Double Ridged Horn 18-40 GHz                              | 3116           | 2539       | 2019-08-26                             | 2021-08-26              |
| E1074    | ETS Lindgren               | Horn Antenna       | Double Ridged Horn 1-18 GHz                               | 3117           | 00135194   | 2019-05-01                             | 2021-05-01              |
| E447     | Hewlett Packard            | Pre-Amplifier      | Preamplifier 1-26.5 GHz                                   | 8449B          | 3008A01384 | 2018-04-10                             | 2020-06-10              |
| E1387    | Miteq                      | Pre-Amplifier      | 18 GHz-40 GHz, 45dB                                       | TTA1840-35-HG  | 2034       | 2018-08-08                             | 2020-08-08              |
| E1469    | A.H. Systems Inc.          | Pre-Amplifier      | 18 GHz-40 GHz, 37 dB                                      | PAM-1840VH     | 185        | 2020-06-01                             | 2021-06-01              |
| E1315    | RS Microwave Company, Inc. | Filter, Microwave  | DC - 40 GHz, 20W, 2.5dB                                   | P/N 60733A     | 007        | CNR-V                                  | CNR-V                   |
| E1H69    | Rohde & Schwarz            | Test Receiver      | EMI 20Hz - 40GHz                                          | ESU40          | 100247     | 2018-05-22                             | 2020-05-22              |
| E1338    | KeySight                   | Analyzer           | MXA Signal Analyzer                                       | N9020B         | MY57430927 | 2019-11-14                             | 2021-11-14              |
| E1308    | Rohde & Schwarz            | Harmonic Mixer     | Harmonic Down Converter 90-140GHz                         | FS-Z140        | 101008     | 2017-04-06<br>in Service<br>2018-07-01 |                         |
| E1311    | Rohde & Schwarz            | Harmonic Mixer     | Harmonic Down Converter 40-60GHz                          | FS-Z60         | 100977     | 2017-12-21<br>in Service<br>2018-07-01 |                         |
| E1312    | Rohde & Schwarz            | Harmonic Mixer     | Harmonic Down Converter 60-90GHz                          | FS-Z90         | 101719     | 2017-08-09<br>in Service<br>2018-07-01 |                         |
| E1332    | Sage Millimeter, Inc.      | Horn Antenna       | E-band pyramidal horn antenna - 60 to 90 GHz.             | SAR-2309-12-S2 | 14853-01   |                                        |                         |
| E1335    | Sage Millimeter, Inc.      | Horn Antenna       | F-band pyramidal horn antenna - 90 to 140 GHz             | SAR-2309-08-S2 | 14853-02   |                                        |                         |
| E1330    | Sage Millimeter, Inc.      | Horn Antenna       | U-band pyramidal horn antenna - 40 to 60 GHz              | SAR-2309-19-S2 | 14853-01   |                                        |                         |
| E980     | Trilithic                  | Low Pass Filter    | PCS 0.01-2 GHz                                            | 10LC1790-3-AA  | PCS-LPF-12 | CNR-V                                  | CNR-V                   |

CNR: Calibration Not Required, CNR-V: Calibration Not Required, Must Be Verified, <sup>1</sup> Processing for Calibration

#### 4.8 PHOTOGRAPHS OF THE TEST SETUPS


**Response:**

The photographs of the test setups for the VBNAEUA-01 Band 25, FCC ID: VBNAEUA-01 are provided in the Filing exhibits.


30 MHz- 1 GHz




1 GHz- 18 GHz

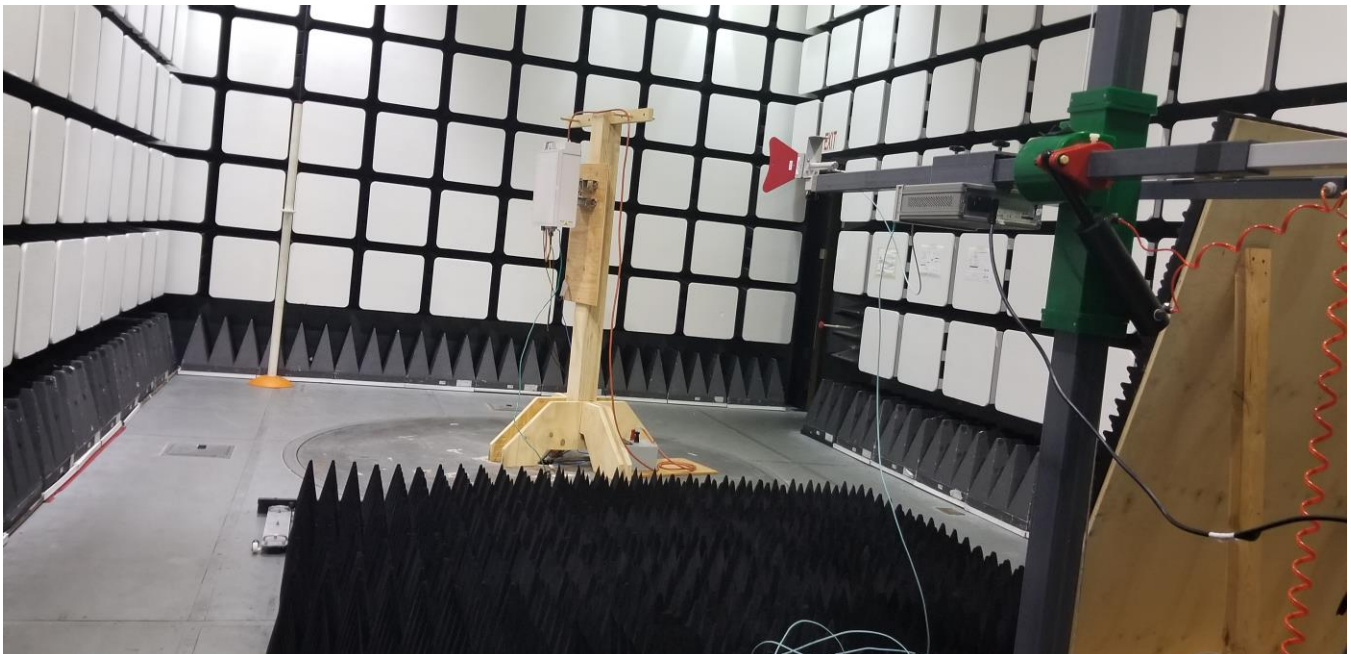

18 GHz- 26.5 GHz

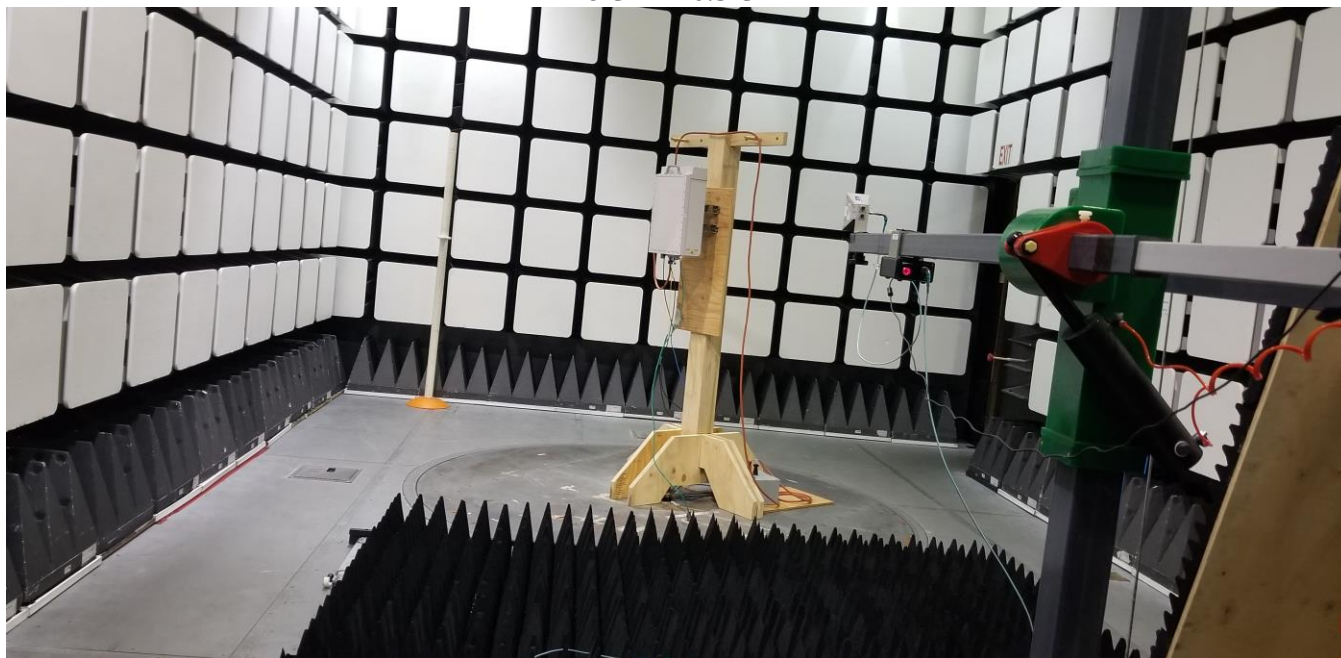


29 GHz- 40 GHz

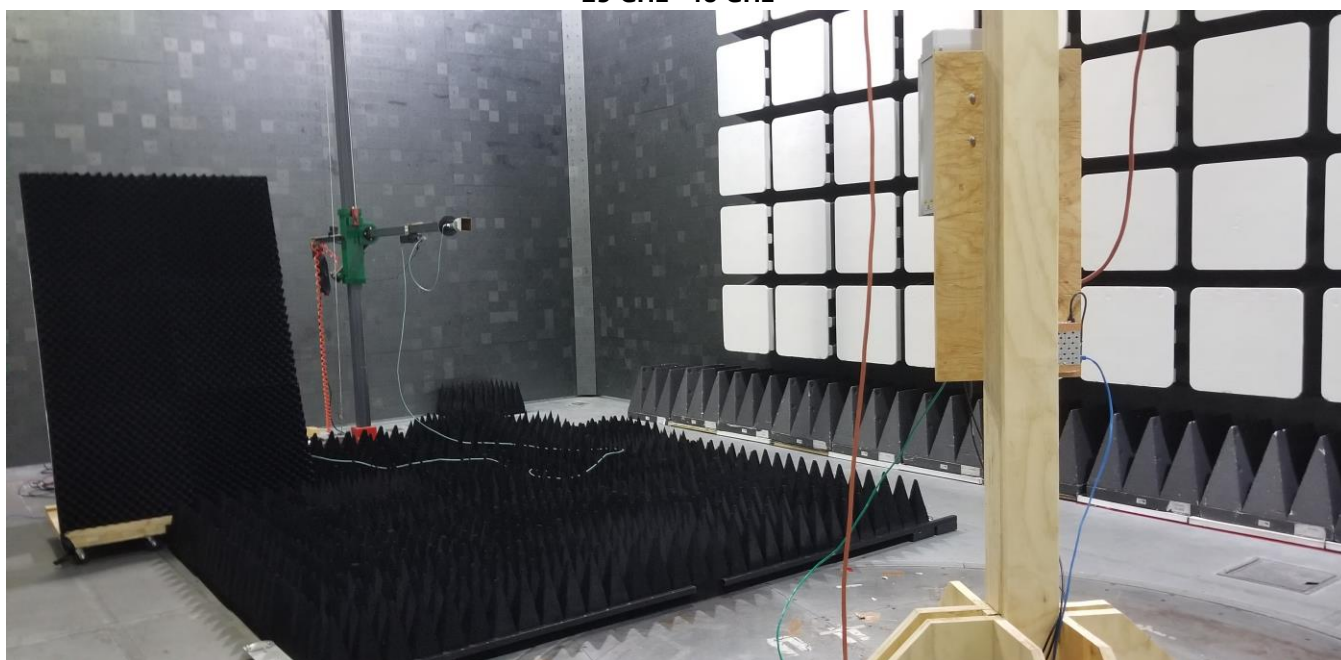




40 GHz- 100 GHz

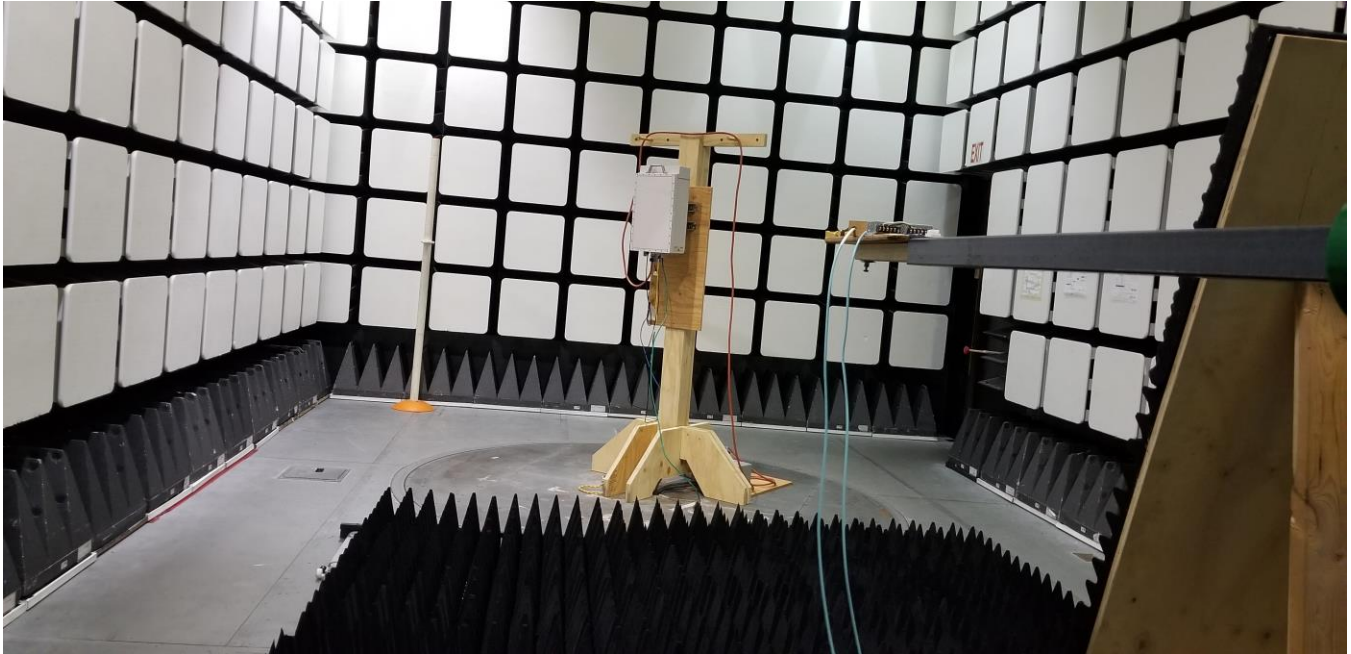

Setup for Radio Testing

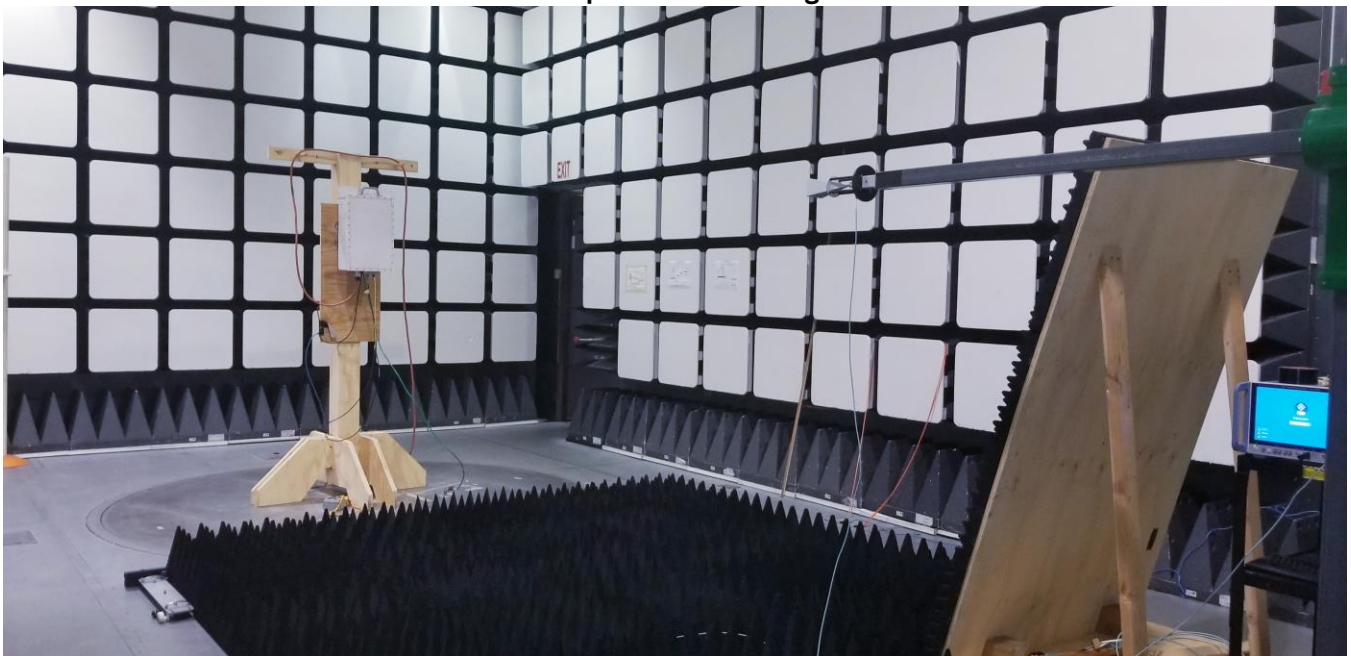

Equipment Label



#### 4.9 FACILITIES AND ACCREDITATION

Measurement facilities at Nokia, Global Product Compliance Laboratory (GPCL) a member of the Nokia family of companies, was used to collect the measurement data in the test report. The laboratory, which is part of Nokia Bell Labs, is located at 600-700 Mountain Avenue, Murray Hill, New Jersey 07974-0636 USA.

The field strength measurements of radiated spurious emissions were made in a FCC registered five meter semi-anechoic chamber AR-5, (FCC Registration Number: 395774) NVLAP Lab Code: 100275-0 and IC (Filing Number: 6933F-5) which is maintained by Nokia Bell Labs in Murray Hill, New Jersey. The sites were constructed and are continuously in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

Nokia Global Product Compliance Laboratory FCC OET Accredited Test Firm Scope List is accessible at:

[https://apps.fcc.gov/oetcf/eas/reports/ViewTestFirmAccredScopes.cfm?calledFromFrame=N&RequestTimeout=500&regnum\\_specified=N&test\\_firm\\_id=7007](https://apps.fcc.gov/oetcf/eas/reports/ViewTestFirmAccredScopes.cfm?calledFromFrame=N&RequestTimeout=500&regnum_specified=N&test_firm_id=7007)

and is as listed in the Table below.

**OET Accredited Test Firm Scope List**  
**Test Firm: Nokia, Global Product Compliance Lab**

| Scope                                         | FCC Rule Parts                                                                                                      | Maximum Assessed Frequency, MHz | Status   | Expiration Date | Recognition Date |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------------------------------|----------|-----------------|------------------|
| Unintentional Radiators                       | FCC Part15, Subpart B                                                                                               | 40000                           | Approved | 9/30/2020       | 7/6/2017         |
| Intentional Radiators                         | FCC Part 15 Subpart C                                                                                               | 40000                           | Approved | 9/30/2020       | 6/5/2018         |
| U-NII without DFS Intentional Radiators       | FCC Part 15, Subpart E                                                                                              | 40000                           | Approved | 9/30/2020       | 6/5/2018         |
| U-NII with DFS Intentional Radiators          | FCC Part 15, Subpart E                                                                                              | 40000                           | Approved | 9/30/2020       | 6/5/2018         |
| Commercial Mobile Services                    | Part 22 (cellular), Part 24, Part 25 (below 3 GHz), Part 27                                                         | 40000                           | Approved | 9/30/2020       | 6/5/2018         |
| General Mobile Radio Services                 | Part 22 (non-cellular), Part 90 (below 3 GHz), Part 95 (below 3 GHz), Part 97 (below 3 GHz), Part 101 (below 3 GHz) | 40000                           | Approved | 9/30/2020       | 6/5/2018         |
| Citizens Broadband Radio Services             | Part 30                                                                                                             | 40000                           | Approved | 9/30/2020       | 7/6/2017         |
| Microwave and Millimeter Bands Radio Services | Part 25, Part30, Part 74, Part 90 (90M DSRC, Y, Z), Part 95 (M & L), Part 101                                       | 200000                          | Approved | 9/30/2020       | 7/6/2017         |

Nokia Global Product Compliance Laboratory is accredited with the US Department of Commerce National Institute of Standards and Technology's National Voluntary Laboratory Accreditation Program (NVLAP) for satisfactory compliance with criteria established in Title 15, Part 7 Code of Federal Regulations for offering test services for selected test methods in Electromagnetic Compatibility; Voluntary Control Council for Interference (VCCI), Japan; Australian Communications and Media Authority (ACMA). The laboratory is ISO 9001:2008 Certified.

**United States Department of Commerce  
National Institute of Standards and Technology**



---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 100275-0

**Nokia, Global Product Compliance Lab**  
Murray Hill, NJ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

---

2019-09-20 through 2020-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*

## 5. APPENDIX A - CALIBRATION CERTIFICATES.

The attached Calibration certificates represent the Harmonic Downconverters used in this testing.



# Calibration Certificate

Kalibrierschein

Certificate Number **24-0060-100977-01**

Zertifikatsnummer

## Unit Data

Item  
Gegenstand **Harmonic Mixer, 40 GHz to 60 GHz**

Manufacturer  
Hersteller **RPG**

Type  
Typ **RPG FS-Z60**

Material Number  
Materialnummer **1048.0171.02**      Serial Number  
Seriennummer **100977**

Asset Number  
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor  $k = 2$ ). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

## Order Data

Customer  
Auftraggeber

Order Number  
Bestellnummer

Date of Receipt  
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit  $k = 2$ ). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

## Performance

Place and Date of Calibration  
Ort und Datum der Kalibrierung

**Meckenheim, 2017-12-21**

Scope of Calibration  
Umfang der Kalibrierung

**Standard Calibration**

Statement of Compliance  
(Incoming)  
Konformitätsaussage  
(Anlieferung)

**New device**

Statement of Compliance  
(Outgoing)  
Konformitätsaussage  
(Auslieferung)

**All measured values are within the data sheet specifications.**

Extend of Calibration Documents  
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate  
5 pages Outgoing Results**

## Radiometer Physics GmbH; Meckenheim

Date of Issue  
Ausstellungsdatum

**2017-12-21**

Head of Laboratory  
Laborleitung

Schulze

Person Responsible  
Bearbeiter

Wildfang

Page (Seite) **1/2**  
Vers2010-05-05/  
RPG2014-02-28

Calibration Method  
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity 20 % - 80 %  
Relative Luftfeuchte

Ambient Temperature  
Umgebungstemperatur

(23 <sup>+7</sup>/<sub>-3</sub>) °C

| Working standards used (having a significant effect on the accuracy)<br>Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit) |              |                               |                                                         |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------|---------------------------------------------------------|-------------------------|
| Item<br>Gegenstand                                                                                                                                   | Type<br>Typ  | Serial Number<br>Seriennummer | Calibration Certificate Number<br>Kalibrierscheinnummer | Cal. Due<br>Kalibr. bis |
| Vector Network Analyzer                                                                                                                              | R&S® ZVA67   | 101097                        | 20-300432406                                            | 2020-07-21              |
| Powersensor                                                                                                                                          | R&S® NRP-Z55 | 140093                        | 20-300426315                                            | 2018-05-17              |
| Powersensor                                                                                                                                          | R&S® NRP-Z57 | 101423                        | 20-541799                                               | 2019-04-27              |

**UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

**UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

#### Notes

Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

# Outgoing Results

## The following abbreviations may be used in this document

- {a} No measurement uncertainty stated because the errors always add together.  
So it is sure that a measurement result evaluated as "PASS" is pass.
- {b} The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
- {c} Functional test, therefore no measurement uncertainty is stated.
- {d} Typical value, refer to performance test.
- {e} The measurement uncertainty is taken into account when setting the measuring system.
- DL or DT Data Limit for symmetrical tolerance limits
- DLL Datasheet Lower Limit
- DUL Datasheet Upper Limit
- MU Measurement Uncertainty
- MLL or MLV Measurement Uncertainty Lower Value
- MUL or MUV Measurement Uncertainty Upper Value
- Nom. Nominal Value
- Dev. Deviation
- MErr. Measurement Error
- Act. Actual Value
- UGB Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
- UGB1 Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
- UGB2 Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
- DU Datasheet Uncertainty

## Explanation of charts

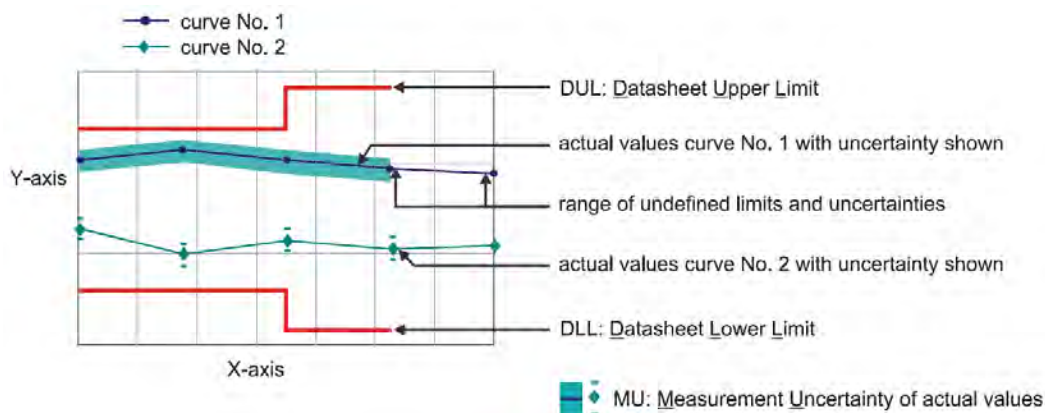



**Software used for measurement**

**Item Type**

Measurement Studio Professional Edition  
MixerCertification


**Version**

2013  
7\_07

**Remark**

### 1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

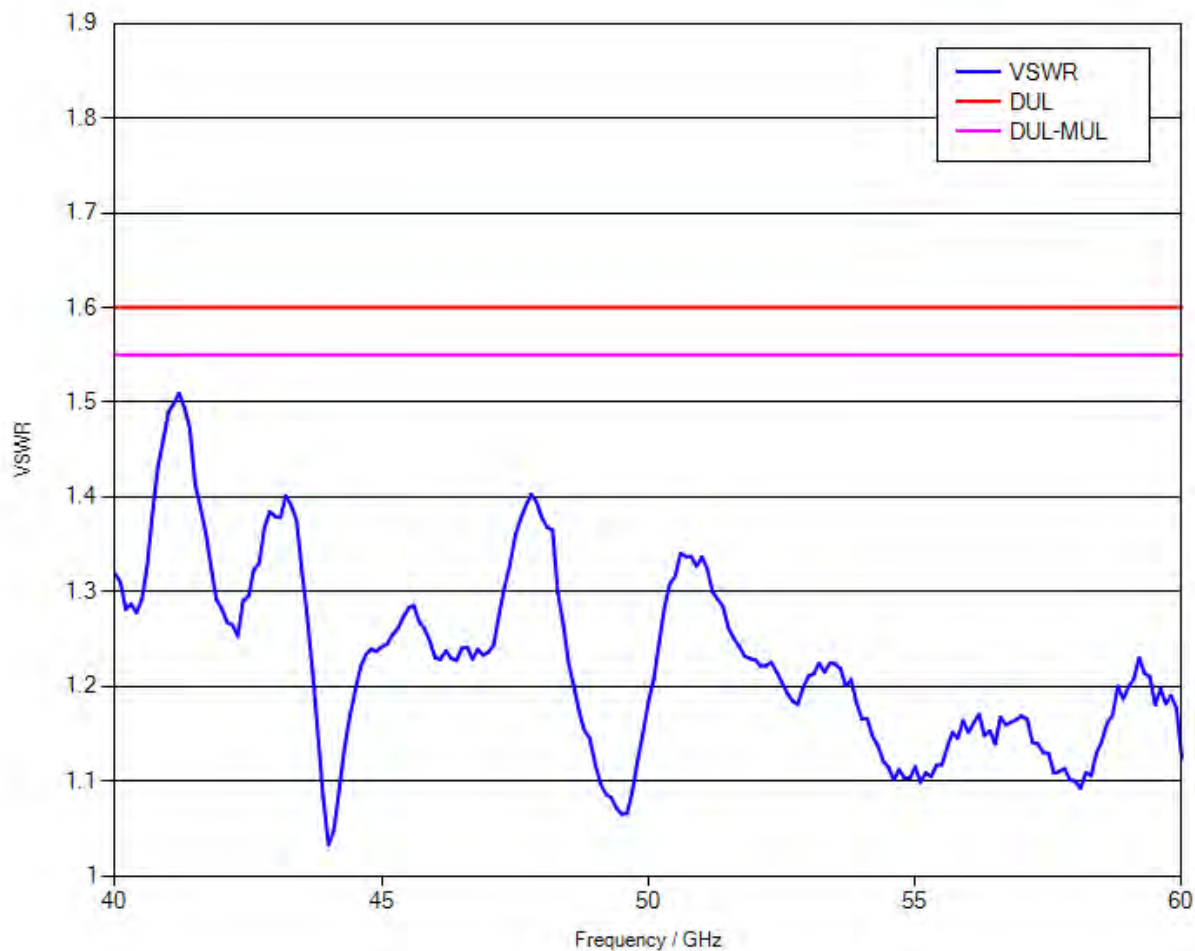

## 1.2 Conversion loss

LO level                    +13 dBm nominal  
Bias                        0 A

Measurement uncertainty:    1.5 dB

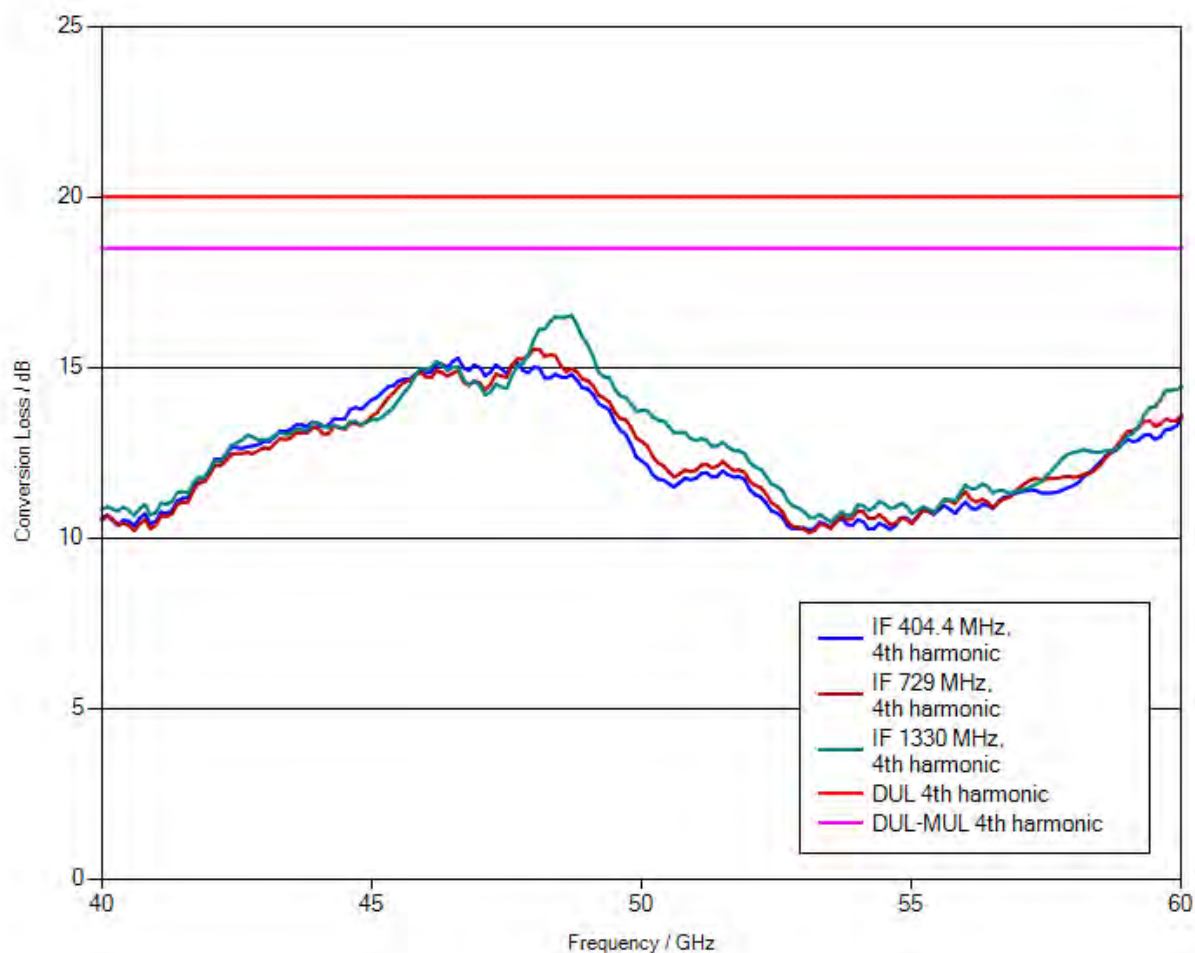

**Note:** Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

**The file has been renamed for safety reasons.**

**When downloading the file onto your PC, please delete the “.file” extension and unzip the data.**

### 1.3 Frequency response within 1 GHz

|                                 | DUL  | Actual<br>(worst case) | Evaluation |
|---------------------------------|------|------------------------|------------|
| IF = 404.4 MHz,<br>4th harmonic | 4 dB | 2.02 dB                | PASS       |
| IF = 729 MHz,<br>4th harmonic   | 4 dB | 1.78 dB                | PASS       |
| IF = 1330 MHz,<br>4th harmonic  | 4 dB | 2.35 dB                | PASS       |

# Calibration Certificate

Kalibrierschein

Certificate Number **24-0090-101719-01**

Zertifikatsnummer

## Unit Data

**Item**  
Gegenstand  
**Harmonic Mixer, 60 GHz to 90 GHz**

**Manufacturer**  
Hersteller  
**ROHDE & SCHWARZ**

**Type**  
Typ  
**R&S® FS-Z90**

**Material Number**  
Materialnummer  
**1048.0371.02**

**Serial Number**  
Seriennummer  
**101719**

**Asset Number**  
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor  $k = 2$ ). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

## Order Data

**Customer**  
Auftraggeber

**Order Number**  
Bestellnummer

**Date of Receipt**  
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit  $k = 2$ ). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

## Performance

**Place and Date of Calibration**  
Ort und Datum der Kalibrierung

**Meckenheim, 2017-08-09**

**Scope of Calibration**  
Umfang der Kalibrierung

**Standard Calibration**

**Statement of Compliance (Incoming)**  
Konformitätsaussage (Anlieferung)

**New device**

**Statement of Compliance (Outgoing)**  
Konformitätsaussage (Auslieferung)

**All measured values are within the data sheet specifications.**

**Extend of Calibration Documents**  
Umfang des Kalibrierdokuments


**2 pages Calibration Certificate  
5 pages Outgoing Results**

## Radiometer Physics GmbH; Meckenheim

**Date of Issue**  
Ausstellungsdatum

**2017-08-11**

**Head of Laboratory**  
Laborleitung



Ceru

**Person Responsible**  
Bearbeiter



Heinze

Page (Seite) **1/2**  
Vers2010-05-05/  
RPG2014-02-28

Calibration Method  
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity 20 % - 80 %  
Relative Luftfeuchte

Ambient Temperature  
Umgebungstemperatur

(23 <sup>+7</sup>/<sub>-3</sub>) °C

| Working standards used (having a significant effect on the accuracy)<br>Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit) |              |                               |                                                         |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------|---------------------------------------------------------|-------------------------|
| Item<br>Gegenstand                                                                                                                                   | Type<br>Typ  | Serial Number<br>Seriennummer | Calibration Certificate Number<br>Kalibrierscheinnummer | Cal. Due<br>Kalibr. bis |
| Vector Network Analyzer                                                                                                                              | R&S® ZVA67   | 101097                        | 20-300432406                                            | 2020-07-21              |
| Powersensor                                                                                                                                          | R&S® NRP-Z55 | 140093                        | 20-300426315                                            | 2018-05-17              |
| Powersensor                                                                                                                                          | R&S® NRP-Z58 | 101063                        | 20-611482                                               | 2018-07-21              |
| Calibration kit                                                                                                                                      | WR12         | E10001                        | RPG-PAQA-TN-2014-005                                    | 2019-02-01              |

**UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

**UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

#### Notes

Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

## Outgoing Results

### The following abbreviations may be used in this document

|            |                                                                                                                                                                                                                                                                            |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| {a}        | No measurement uncertainty stated because the errors always add together.<br>So it is sure that a measurement result evaluated as "PASS" is pass.                                                                                                                          |
| {b}        | The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification. |
| {c}        | Functional test, therefore no measurement uncertainty is stated.                                                                                                                                                                                                           |
| {d}        | Typical value, refer to performance test.                                                                                                                                                                                                                                  |
| {e}        | The measurement uncertainty is taken into account when setting the measuring system.                                                                                                                                                                                       |
| DL or DT   | Data Limit for symmetrical tolerance limits                                                                                                                                                                                                                                |
| DLL        | Datasheet Lower Limit                                                                                                                                                                                                                                                      |
| DUL        | Datasheet Upper Limit                                                                                                                                                                                                                                                      |
| MU         | Measurement Uncertainty                                                                                                                                                                                                                                                    |
| MLL or MLV | Measurement Uncertainty Lower Value                                                                                                                                                                                                                                        |
| MUL or MUV | Measurement Uncertainty Upper Value                                                                                                                                                                                                                                        |
| Nom.       | Nominal Value                                                                                                                                                                                                                                                              |
| Dev.       | Deviation                                                                                                                                                                                                                                                                  |
| MErr.      | Measurement Error                                                                                                                                                                                                                                                          |
| Act.       | Actual Value                                                                                                                                                                                                                                                               |
| UGB        | Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.                                                                                                                                                                                             |
| UGB1       | Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.                                                                                                                                                                                  |
| UGB2       | Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.                                                                                                                                                                              |
| DU         | Datasheet Uncertainty                                                                                                                                                                                                                                                      |

### Explanation of charts

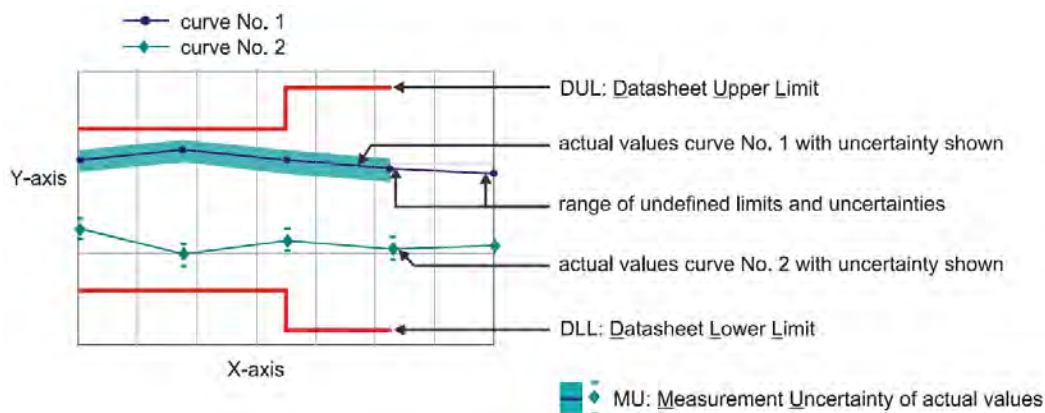

**Software used for measurement**

**Item Type**

Measurement Studio Professional Edition  
MixerCertification

**Version**


2013  
only

**Remark**



### 1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

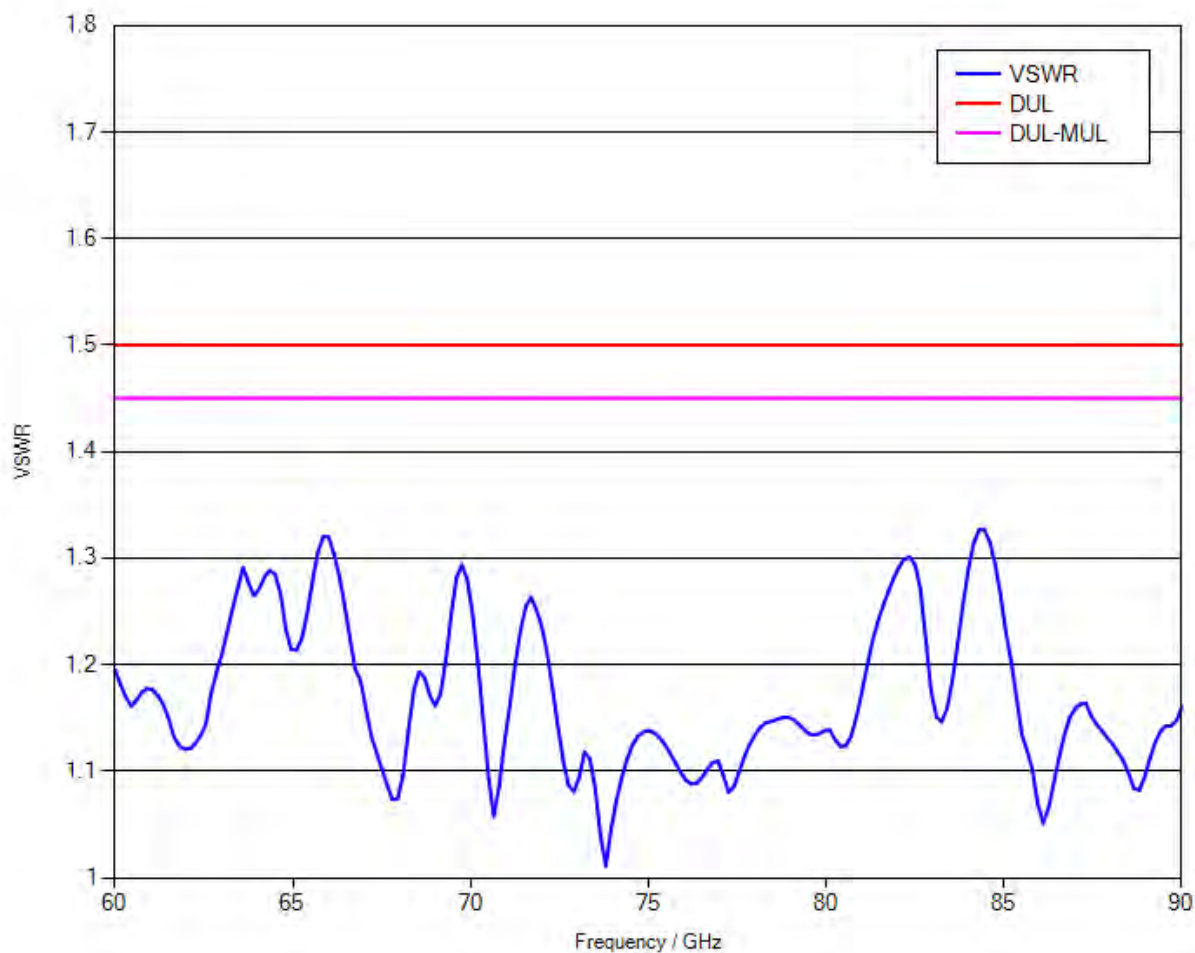

## 1.2 Conversion loss

LO level +14 dBm nominal  
 Bias 0 A

Measurement uncertainty: 1.5 dB

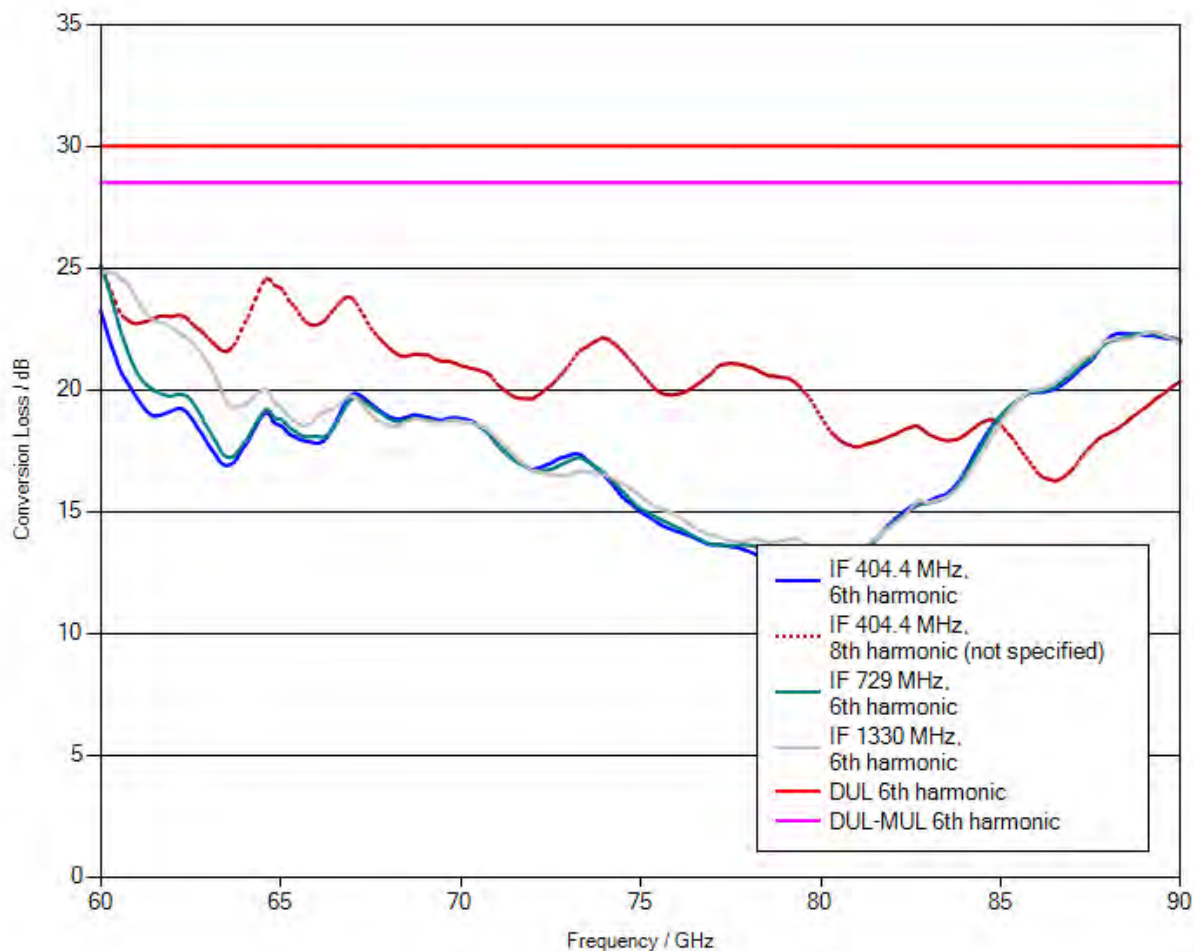

**Note:** Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons. When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

### 1.3 Frequency response within 1 GHz

|                                 | DUL           | Actual<br>(worst case) | Evaluation    |
|---------------------------------|---------------|------------------------|---------------|
| IF = 404.4 MHz,<br>6th harmonic | 6 dB          | 3.33 dB                | PASS          |
| IF = 404.4 MHz,<br>8th harmonic | not specified | 2.73 dB                | not specified |
| IF = 729 MHz,<br>6th harmonic   | 6 dB          | 4.12 dB                | PASS          |
| IF = 1330 MHz,<br>6th harmonic  | 6 dB          | 2.32 dB                | PASS          |



# Calibration Certificate

**Certificate Number 24-0140-101008-01**

Kalibrierschein

Zertifikatsnummer

## Unit Data

**Item** Harmonic Mixer, 90 GHz to 140 GHz  
Gegenstand

**Manufacturer** RPG  
Hersteller

**Type** RPG FS-Z140  
Typ

**Material Number** 3622.0708.02    **Serial Number** 101008  
Materialnummer                      Seriennummer

**Asset Number**  
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor  $k = 2$ ). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

## Order Data

**Customer**  
Auftraggeber

**Order Number**  
Bestellnummer

**Date of Receipt**  
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit  $k = 2$ ). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

## Performance

**Place and Date of Calibration**  
Ort und Datum der Kalibrierung

**Meckenheim, 2017-04-06**

**Scope of Calibration**  
Umfang der Kalibrierung

**Standard Calibration**

**Statement of Compliance (Incoming)**  
Konformitätsaussage (Anlieferung)

**New device**

**Statement of Compliance (Outgoing)**  
Konformitätsaussage (Auslieferung)

**All measured values are within the data sheet specifications.**

**Extend of Calibration Documents**  
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate  
5 pages Outgoing Results**

## Radiometer Physics GmbH; Meckenheim

**Date of Issue**  
Ausstellungsdatum

**2017-04-07**

**Head of Laboratory**  
Laborleitung

Ceru

**Person Responsible**  
Bearbeiter

Heinze

**Page (Seite) 1/2**  
Vers2010-05-05/  
RPG2014-02-28

Calibration Method  
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity 20 % - 80 %  
Relative Luftfeuchte

Ambient Temperature  
Umgebungstemperatur

(23 <sup>+7</sup>/<sub>-3</sub>) °C

| Working standards used (having a significant effect on the accuracy)<br>Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit) |              |                               |                                                         |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------|---------------------------------------------------------|-------------------------|
| Item<br>Gegenstand                                                                                                                                   | Type<br>Typ  | Serial Number<br>Seriennummer | Calibration Certificate Number<br>Kalibrierscheinnummer | Cal. Due<br>Kalibr. bis |
| Vector Network Analyzer                                                                                                                              | R&S® ZVA67   | 101097                        | 10-300319061                                            | 2017-08-06              |
| Powersensor                                                                                                                                          | R&S® NRP-Z55 | 140093                        | 20-541556                                               | 2017-05-12              |

**UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

**UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.


Notes  
Anmerkungen

# Outgoing Results

## The following abbreviations may be used in this document

- {a} No measurement uncertainty stated because the errors always add together.  
So it is sure that a measurement result evaluated as "PASS" is pass.
- {b} The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification.
- {c} Functional test, therefore no measurement uncertainty is stated.
- {d} Typical value, refer to performance test.
- {e} The measurement uncertainty is taken into account when setting the measuring system.
- DL or DT Data Limit for symmetrical tolerance limits
- DLL Datasheet Lower Limit
- DUL Datasheet Upper Limit
- MU Measurement Uncertainty
- MLL or MLV Measurement Uncertainty Lower Value
- MUL or MUV Measurement Uncertainty Upper Value
- Nom. Nominal Value
- Dev. Deviation
- MErr. Measurement Error
- Act. Actual Value
- UGB Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.
- UGB1 Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.
- UGB2 Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.
- DU Datasheet Uncertainty


## Explanation of charts

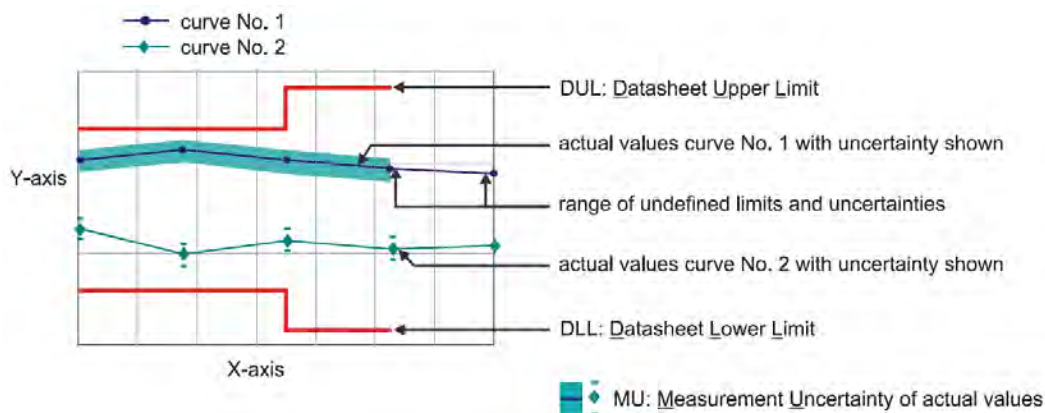

**Software used for measurement****Item Type**Measurement Studio Professional Edition  
MixerCertification**Version**2013  
7\_04**Remark**

### 1.1 RF Input – VSWR

Measurement uncertainty: 0.05 (VSWR)

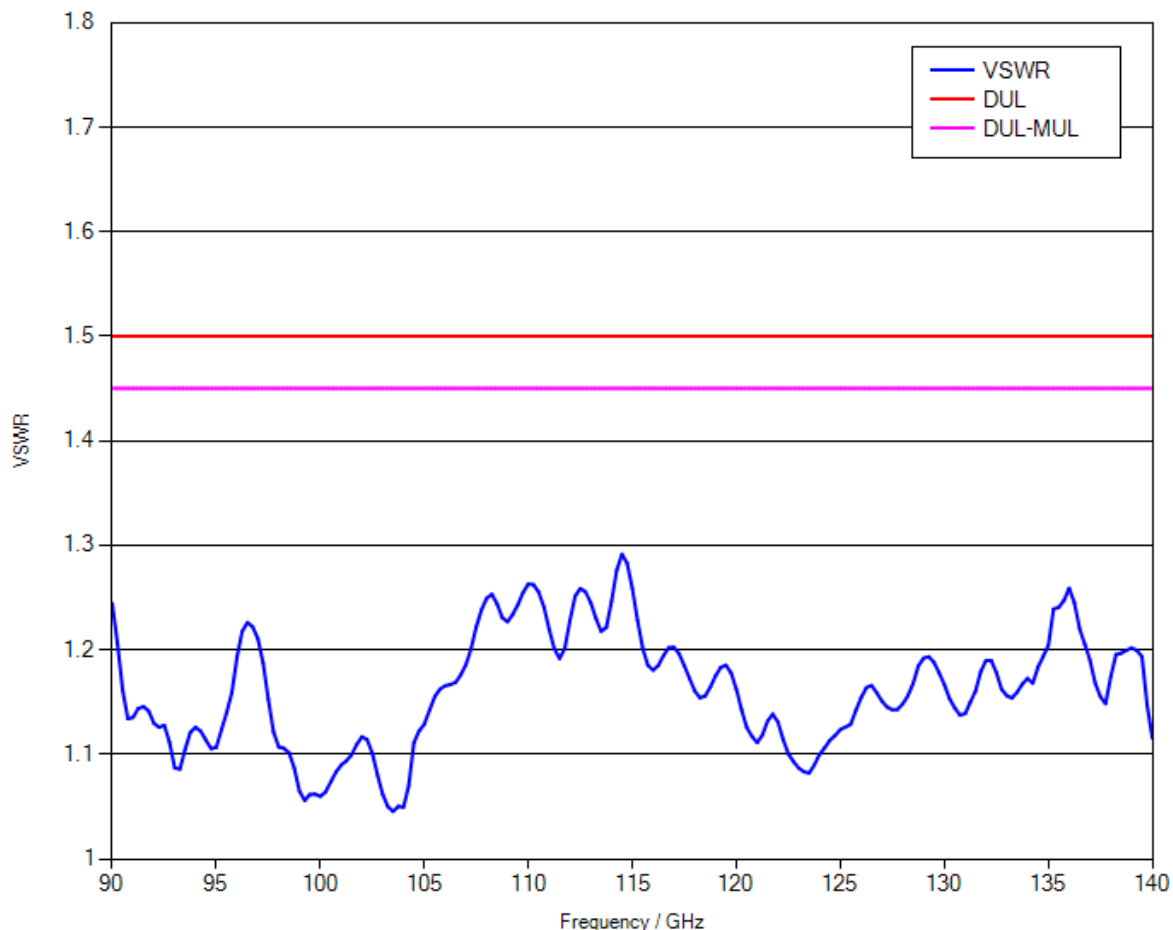




## 1.2 Conversion loss

LO level +14 dBm nominal  
Bias 0 A

Measurement uncertainty: 3.5 dB

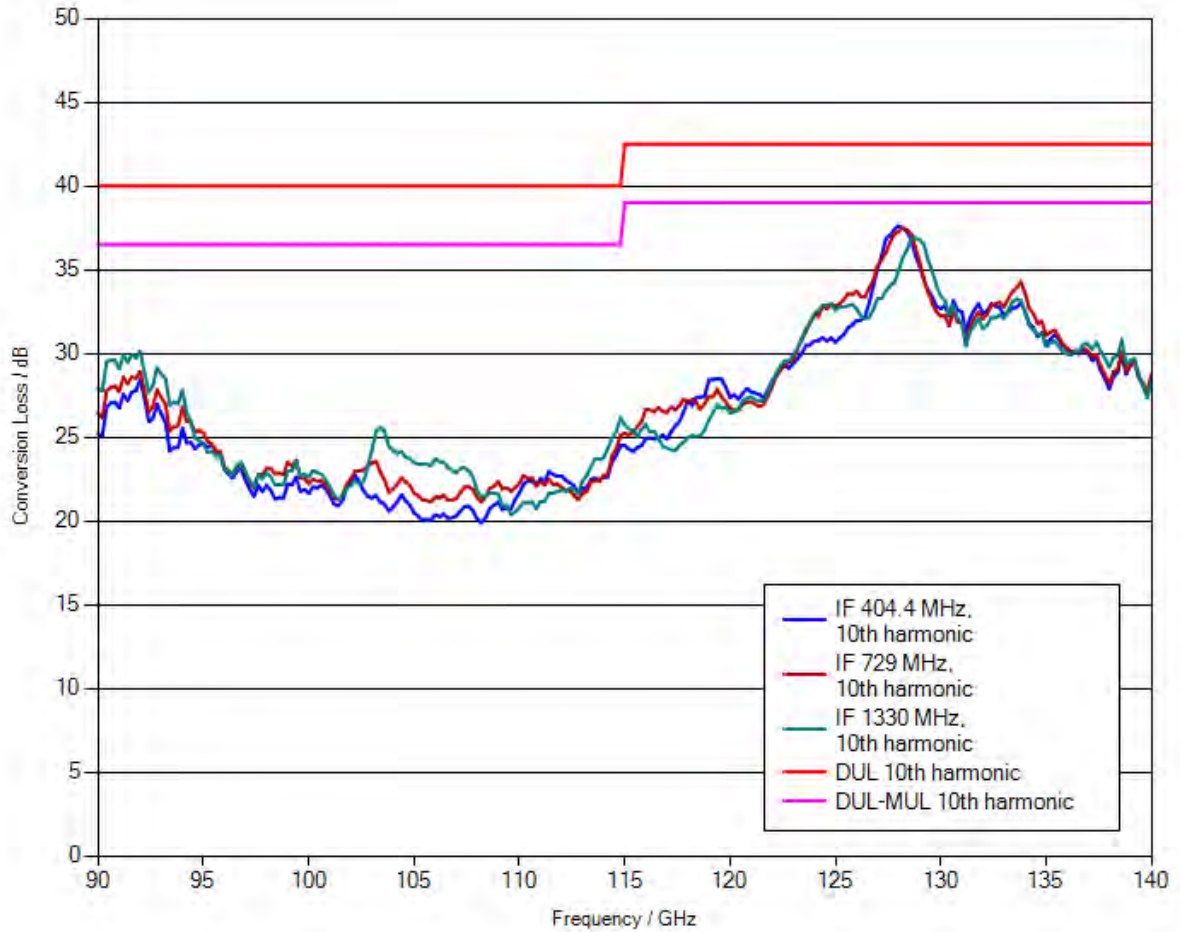

**Note:** Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons.

When downloading the file onto your PC, please delete the “.file” extension and unzip the data.

### 1.3 Frequency response within 1 GHz

|                                  | DUL  | Actual<br>(worst case) | Evaluation |
|----------------------------------|------|------------------------|------------|
| IF = 404.4 MHz,<br>10th harmonic | 6 dB | 3.86 dB                | PASS       |
| IF = 729 MHz,<br>10th harmonic   | 6 dB | 3.48 dB                | PASS       |
| IF = 1330 MHz,<br>10th harmonic  | 6 dB | 3.19 dB                | PASS       |



# Calibration Certificate

Kalibrierschein

**Certificate Number 24-0220-100960-01**

Zertifikatsnummer

## Unit Data

**Item** Harmonic Mixer, 140 GHz to 220 GHz  
Gegenstand

**Manufacturer** RPG  
Hersteller

**Type** RPG FS-Z220  
Typ

**Material Number** 3593.3250.02      **Serial Number** 100960  
Materialnummer                                  Seriennummer

**Asset Number**  
Inventarnummer

This calibration certificate documents, that the named item is tested and measured against defined specifications. Measurement results are located usually in the corresponding interval with a probability of approx. 95% (coverage factor  $k = 2$ ). Calibration is performed with test equipment and standards directly or indirectly traceable by means of approved calibration techniques to the PTB/DKD or other national/international standards, which realize the physical units of measurement according to the International System of Units (SI). In all cases where no standards are available, measurements are referenced to standards of the R&S laboratories. Principles and methods of calibration correspond with EN ISO/IEC 17025. This calibration certificate may not be reproduced other than in full. Calibration certificates without signatures are not valid. The user is obliged to have the object recalibrated at appropriate intervals.

## Order Data

**Customer**  
Auftraggeber

**Order Number**  
Bestellnummer

**Date of Receipt**  
Eingangsdatum

Dieser Kalibrierschein dokumentiert, dass der genannte Gegenstand nach festgelegten Vorgaben geprüft und gemessen wurde. Die Messwerte lagen im Regelfall mit einer Wahrscheinlichkeit von annähernd 95% im zugeordneten Werteintervall (Erweiterte Messunsicherheit mit  $k = 2$ ). Die Kalibrierung erfolgte mit Messmitteln und Normalen, die direkt oder indirekt durch Ableitung mittels anerkannter Kalibriertechniken rückgeführt sind auf Normale der PTB/DKD oder anderer nationaler/internationaler Standards zur Darstellung der physikalischen Einheiten in Übereinstimmung mit dem Internationalen Einheitensystem (SI). Wenn keine Normale existieren, erfolgt die Rückführung auf Bezugsnormale der R&S-Laboratorien. Grundsätze und Verfahren der Kalibrierung beziehen sich auf EN ISO/IEC 17025. Dieser Kalibrierschein darf nur vollständig und unverändert weiterverbreitet werden. Kalibrierscheine ohne Unterschriften sind ungültig. Für die Einhaltung einer angemessenen Frist zur Wiederholung der Kalibrierung ist der Benutzer verantwortlich.

## Performance

**Place and Date of Calibration**  
Ort und Datum der Kalibrierung

**Meckenheim, 2018-01-17**

**Scope of Calibration**  
Umfang der Kalibrierung

**Standard Calibration**

**Statement of Compliance (Incoming)**  
Konformitätsaussage (Anlieferung)

**New device**

**Statement of Compliance (Outgoing)**  
Konformitätsaussage (Auslieferung)

**All measured values are within the data sheet specifications.**

**Extend of Calibration Documents**  
Umfang des Kalibrierdokuments

**2 pages Calibration Certificate  
5 pages Outgoing Results**

## Radiometer Physics GmbH; Meckenheim

**Date of Issue**  
Ausstellungsdatum

**2018-01-19**

**Head of Laboratory**  
Laborleitung

Ceru

**Person Responsible**  
Bearbeiter

Dick

Calibration Method  
Kalibrieranweisung

RPG-PAQA-TN-2014-002

Relative Humidity 20 % - 80 %  
Relative Luftfeuchte

Ambient Temperature  
Umgebungstemperatur

(23 <sup>+7</sup>/<sub>-3</sub>) °C

| Working standards used (having a significant effect on the accuracy)<br>Verwendete Gebrauchsnormale (mit signifikantem Einfluss auf die Genauigkeit) |              |                               |                                                         |                         |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------|---------------------------------------------------------|-------------------------|
| Item<br>Gegenstand                                                                                                                                   | Type<br>Typ  | Serial Number<br>Seriennummer | Calibration Certificate Number<br>Kalibrierscheinnummer | Cal. Due<br>Kalibr. bis |
| Vector Network Analyzer                                                                                                                              | R&S® ZVA67   | 101097                        | 20-300432406                                            | 2020-07-21              |
| Powersensor                                                                                                                                          | R&S® NRP-Z55 | 140093                        | 20-300426315                                            | 2018-05-17              |

**UGB1 A compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

**UGB2 A non-compliance statement may be possible where a confidence level of less than 95 % is acceptable.**  
Die Bestätigung der Nicht-Konformität ist möglich, sofern ein Grad des Vertrauens von weniger als 95 % akzeptabel ist.

Ref.: ILAC-G8:03/2009 'Guidelines on the Reporting of Compliance with Specification'.

#### Notes

Anmerkungen


If the new product is stored under the climate conditions as specified in the data sheet upon delivery, the product's accuracy is not significantly affected within 12 month after its calibration in our factory. In this case, the recommended calibration interval starts on the date when the product is actually put into operation.

# Outgoing Results

## The following abbreviations may be used in this document

|            |                                                                                                                                                                                                                                                                            |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| {a}        | No measurement uncertainty stated because the errors always add together.<br>So it is sure that a measurement result evaluated as "PASS" is pass.                                                                                                                          |
| {b}        | The measurement uncertainty depends on the measurement result. The stated measurement uncertainty is valid for the close area around the specification. Measurement results outside the close area have a higher measurement uncertainty but are within the specification. |
| {c}        | Functional test, therefore no measurement uncertainty is stated.                                                                                                                                                                                                           |
| {d}        | Typical value, refer to performance test.                                                                                                                                                                                                                                  |
| {e}        | The measurement uncertainty is taken into account when setting the measuring system.                                                                                                                                                                                       |
| DL or DT   | Data Limit for symmetrical tolerance limits                                                                                                                                                                                                                                |
| DLL        | Datasheet Lower Limit                                                                                                                                                                                                                                                      |
| DUL        | Datasheet Upper Limit                                                                                                                                                                                                                                                      |
| MU         | Measurement Uncertainty                                                                                                                                                                                                                                                    |
| MLL or MLV | Measurement Uncertainty Lower Value                                                                                                                                                                                                                                        |
| MUL or MUV | Measurement Uncertainty Upper Value                                                                                                                                                                                                                                        |
| Nom.       | Nominal Value                                                                                                                                                                                                                                                              |
| Dev.       | Deviation                                                                                                                                                                                                                                                                  |
| MErr.      | Measurement Error                                                                                                                                                                                                                                                          |
| Act.       | Actual Value                                                                                                                                                                                                                                                               |
| UGB        | Uncertainty Guard Band: Measuring uncertainty violates the data (spec.) limit.                                                                                                                                                                                             |
| UGB1       | Measurement results marked as UGB1 show conformity with a probability of >50 % and <95 %.                                                                                                                                                                                  |
| UGB2       | Measurement results marked as UGB2 show non-conformity with a probability of >50 % and <95 %.                                                                                                                                                                              |
| DU         | Datasheet Uncertainty                                                                                                                                                                                                                                                      |

## Explanation of charts

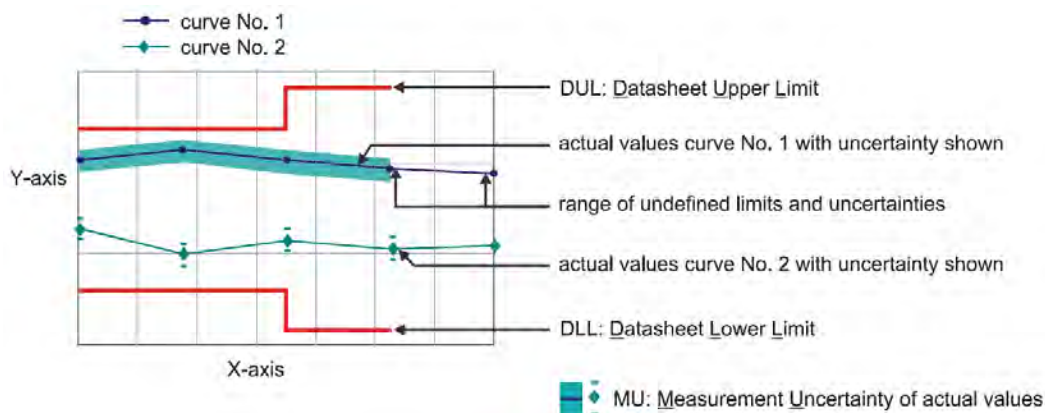

**Software used for measurement**

**Item Type**

Measurement Studio Professional Edition  
MixerCertification


**Version**

2013  
7\_08

**Remark**

### 1.1 RF Input – VSWR


Measurement uncertainty: 0.05 (VSWR)

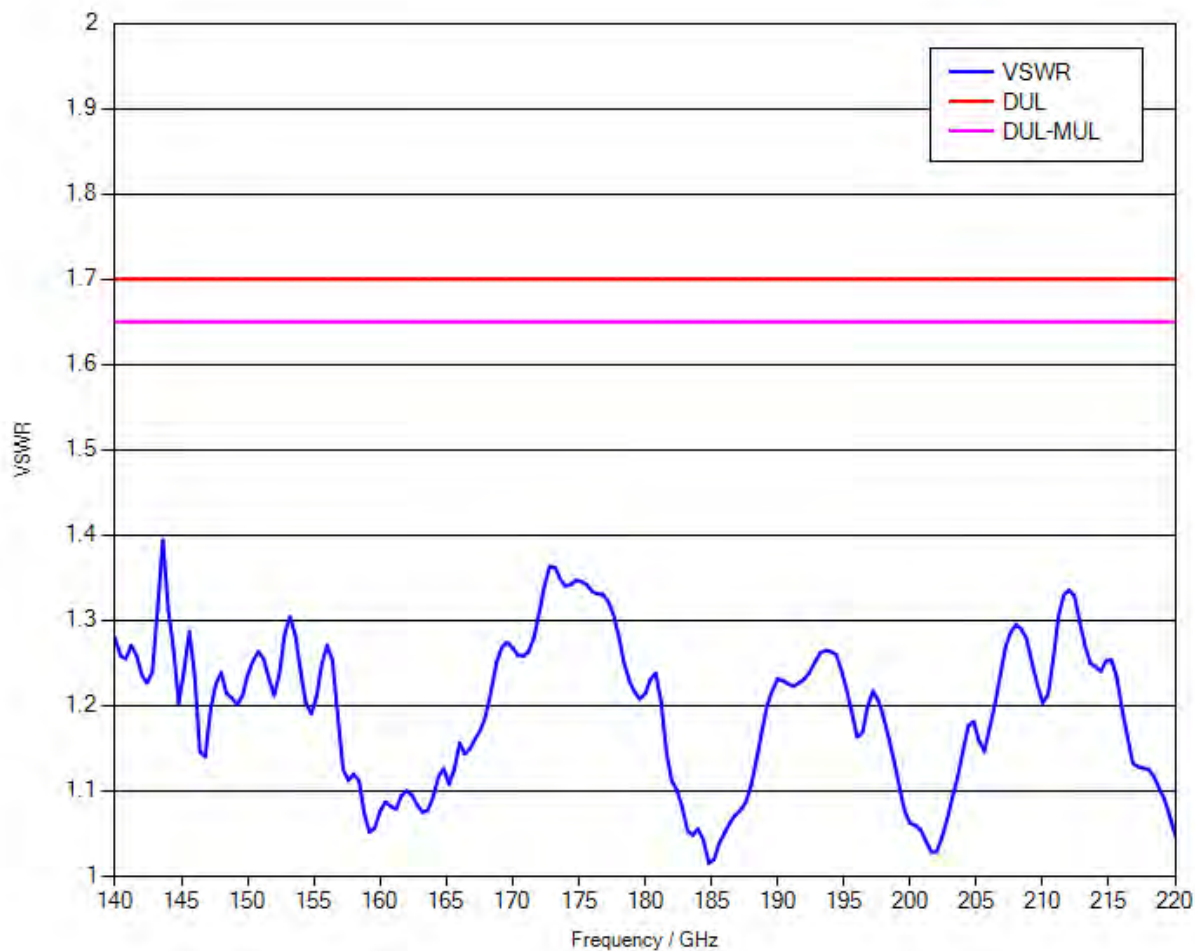

## 1.2 Conversion loss

LO level +13 dBm nominal  
 Bias 0 A

Measurement uncertainty: 4 dB

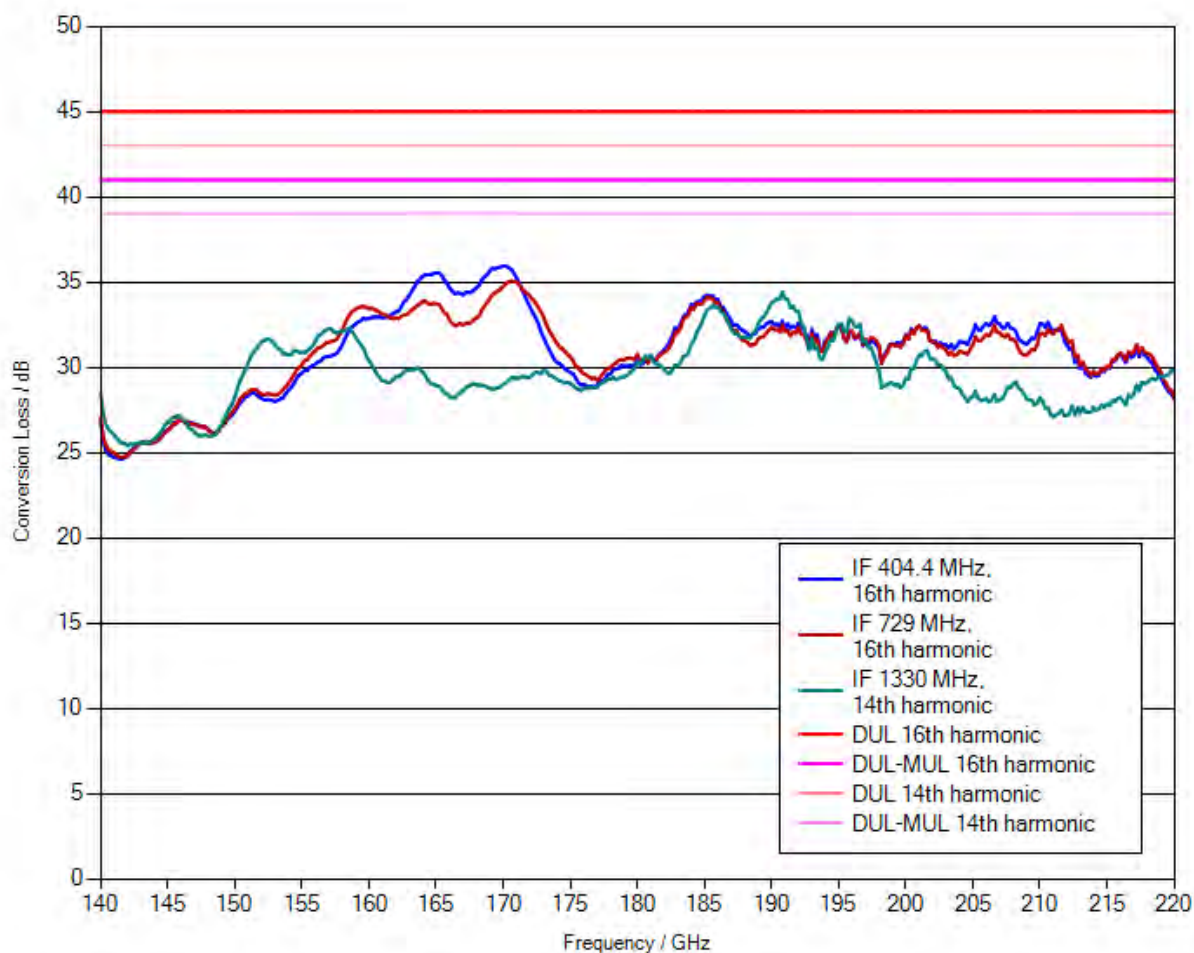

**Note:** Numeric calibration data can be found attached to the PDF file of the calibration certificate. Click the “paper clip” symbol to display the file.

The file has been renamed for safety reasons. When downloading the file onto your PC, please delete the “.file” extension and unzip the data.



### 1.3 Frequency response within 1 GHz

|                                  | DUL  | Actual<br>(worst case) | Evaluation |
|----------------------------------|------|------------------------|------------|
| IF = 404.4 MHz,<br>16th harmonic | 6 dB | 2.1 dB                 | PASS       |
| IF = 729 MHz,<br>16th harmonic   | 6 dB | 2.05 dB                | PASS       |
| IF = 1330 MHz,<br>14th harmonic  | 6 dB | 2.48 dB                | PASS       |