

SPURIOUS CONDUCTED EMISSIONS - BAND n66



XMIT 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	27-Feb-20	27-Feb-21
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Generator - Signal	Keysight	N5171B-506	TEW	2-May-18	2-May-21

TEST DESCRIPTION

The antenna port spurious emissions were measured at the RF output terminal of the EUT through 4 different attenuation configurations which continues through to the RF input of the spectrum analyzer. Analyzer plots utilizing a resolution bandwidth called out by the client's test plan were made for each modulation type from 9 KHz to 22 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than the limits also called out by the client's test plan shown below.

The measurement methods are detailed in KDB971168 D01v03 section 6 and ANSI C63.26-2015.

Per FCC 2.1057(a)(1), the upper level of measurement is the 10th harmonic of the highest fundamental frequency.

These measurements are for frequency band after the first 1.0 MHz bands immediately outside and adjacent to the frequency block.

Per section FCC 27.53(h)(1), the power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm for a 1 MHz measurement bandwidth. The limit is adjusted to -19 dBm [-13 dBm -10 log (4)] per FCC KDB 662911D01 v02r01 because the BTS may operate as a 4 port MIMO transmitter. The conducted emissions limits are shown in Table 2.

The limit for the 9kHz to 150kHz frequency range was adjusted to -49dBm to correct for a spectrum analyzer RBW of 1kHz versus required RBW of 1MHz [i.e.: -49dBm = -19dBm -10log(1MHz/1kHz)]. The limit for the 150kHz to 20MHz frequency range was adjusted to -39dBm to correct for a spectrum analyzer RBW of 10kHz versus required RBW of 1MHz [i.e.: -39dBm = -19dBm -10log(1MHz/10kHz)]. The required limit of -19dBm with a RBW of > 1MHz was used for all other frequency ranges.

RF conducted emissions testing was performed only on one port. The testing was performed on the same version of hardware (AHFIG) as the original certification test. The AHFIG antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in the original certification testing) and antenna port 4 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraph 5.7.2i.

5G NR carrier bandwidths of 5MHz, 10MHz, 15MHz, and 20MHz with QPSK, 16QAM, 64QAM and 256QAM modulation types were verified under this effort. The 5G NR carriers/modulation types for this testing are set up according to 3GPP TS 38.141-1 Test Models and are NR-FR1-TM 1.1 (QPSK modulation type), NR-FR1-TM 3.1 (16QAM modulation type), NR-FR1-TM 3.1 (64QAM modulation type), and NR-FR1-TM 3.1a (256QAM modulation type).

SPURIOUS CONDUCTED EMISSIONS - BAND n66



TS&T 2020.06.06.0 BETA XMI 2020.03.25.0


EUT: AHFIG		Work Order: NOKI0016					
Serial Number: K9191322351		Date: 22-Jun-20					
Customer: Nokia Solutions and Networks		Temperature: 22.9 °C					
Attendees: Mitchell Hill, John Rattanavong		Humidity: 50.7% RH					
Project: None		Barometric Pres.: 1015 mbar					
Tested by: Brandon Hobbs		Power: 54 VDC					
Job Site: TX05		Test Method					
FCC 27:2020		ANSI C63.26:2015					
COMMENTS							
All measurement path losses were accounted for in the reference level offset including any attenuators, filters and DC blocks. The carrier was set to maximum for all testing.							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1,2,3,4	Signature					
		Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
Port 4, Band n66, 2110 MHz - 2200 MHz							
5 MHz Bandwidth							
QPSK Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-69.7	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.7	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2635.7	-25.0	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3708.75	-38.2	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	14363	-34.8	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	21975	-25.7	-19	Pass
16-QAM Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-71.6	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.6	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2735.9	-25.2	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3836.5	-38.0	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	14652	-36.6	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	19105	-26.1	-19	Pass
64-QAM Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-70.8	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.6	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2633.09	-24.6	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3724.5	-38.8	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	14199	-35.3	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	21470	-26.2	-19	Pass
256-QAM Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-70.6	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.6	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2680.77	-24.8	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3711.38	-38.2	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	13691	-36.0	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	19479.5	-25.8	-19	Pass
10 MHz Bandwidth							
256-QAM Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-71.5	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.7	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2679.28	-25.4	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3805	-38.3	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	15237	-36.5	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	20990.5	-25.7	-19	Pass
15 MHz Bandwidth							
256-QAM Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-70.9	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.7	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2635.7	-24.9	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3784	-38.0	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	14470	-36.1	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	19171.5	-25.9	-19	Pass
20 MHz Bandwidth							
256-QAM Modulation							
		Mid Channel 2155 MHz	9 kHz - 150 kHz	0.01	-70.4	-49	Pass
		Mid Channel 2155 MHz	150 kHz - 20 MHz	1.18	-55.6	-39	Pass
		Mid Channel 2155 MHz	20 MHz - 3 GHz	2758.25	-25.6	-19	Pass
		Mid Channel 2155 MHz	3 GHz - 10 GHz	3849.63	-37.9	-19	Pass
		Mid Channel 2155 MHz	10 GHz - 18 GHz	16599	-36.6	-19	Pass
		Mid Channel 2155 MHz	18 GHz - 22 GHz	21809	-26.6	-19	Pass

SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-69.65	-49	Pass	

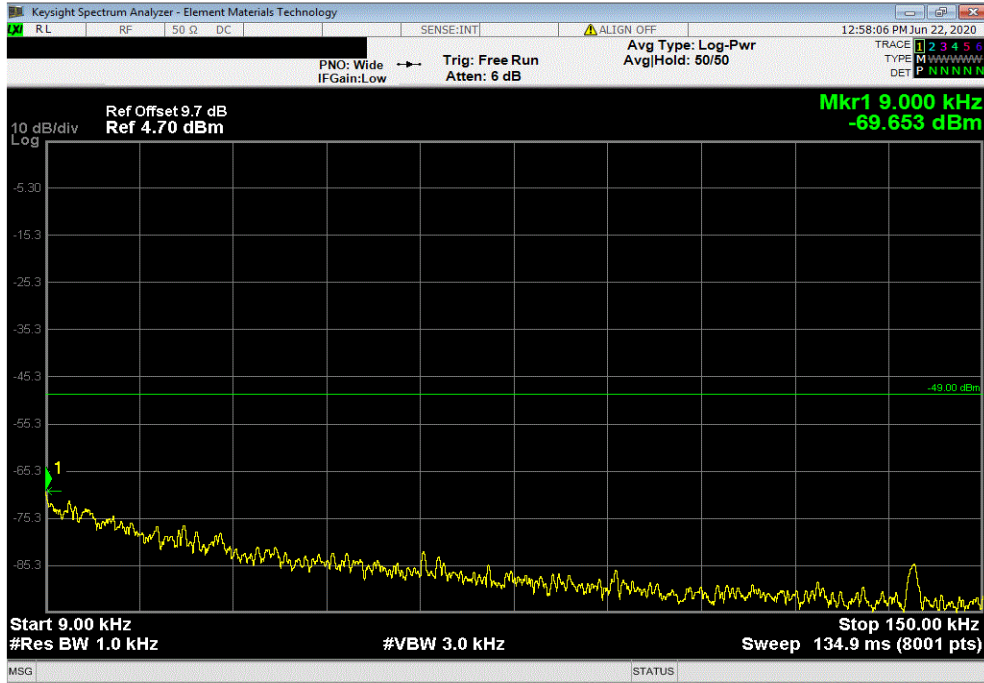

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.66	-39	Pass	

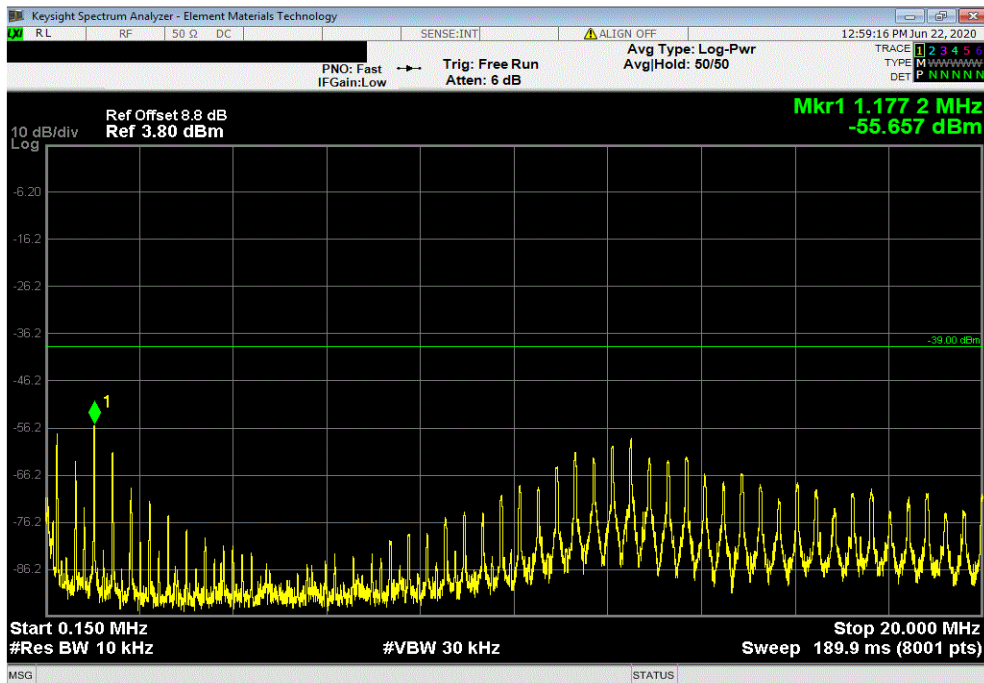


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2635.7	-25	-19	Pass	

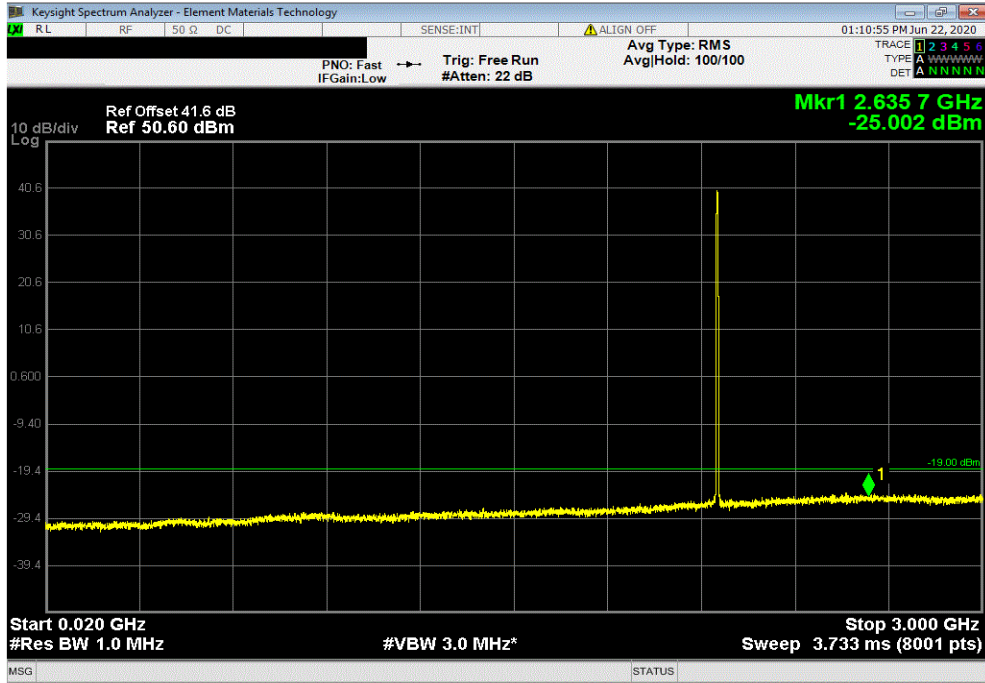

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3708.75	-38.18	-19	Pass	

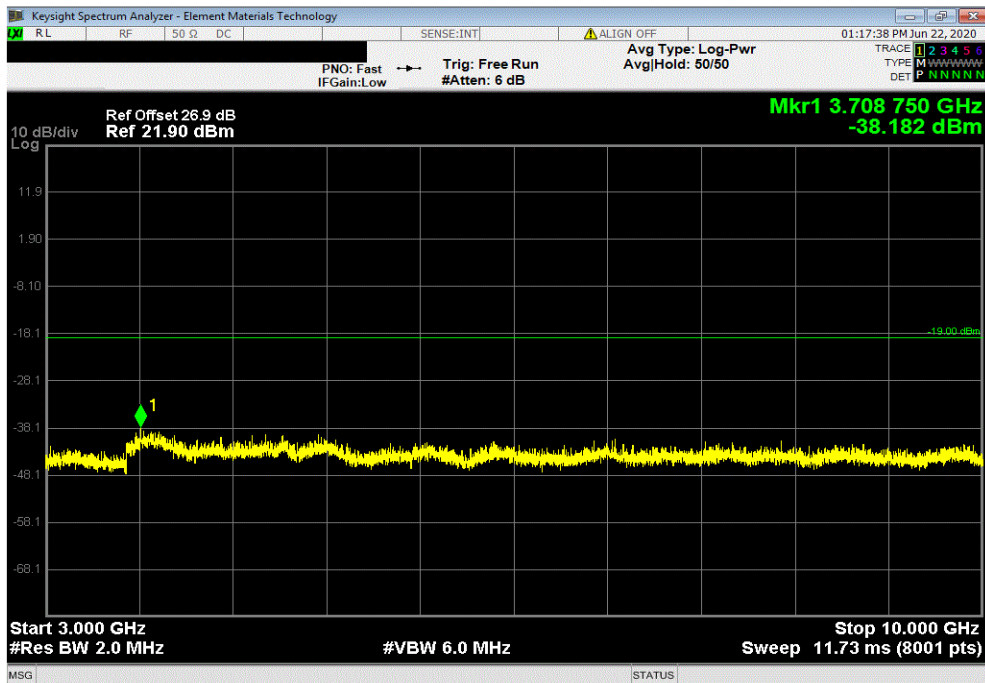


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	14363	-34.84	-19	Pass

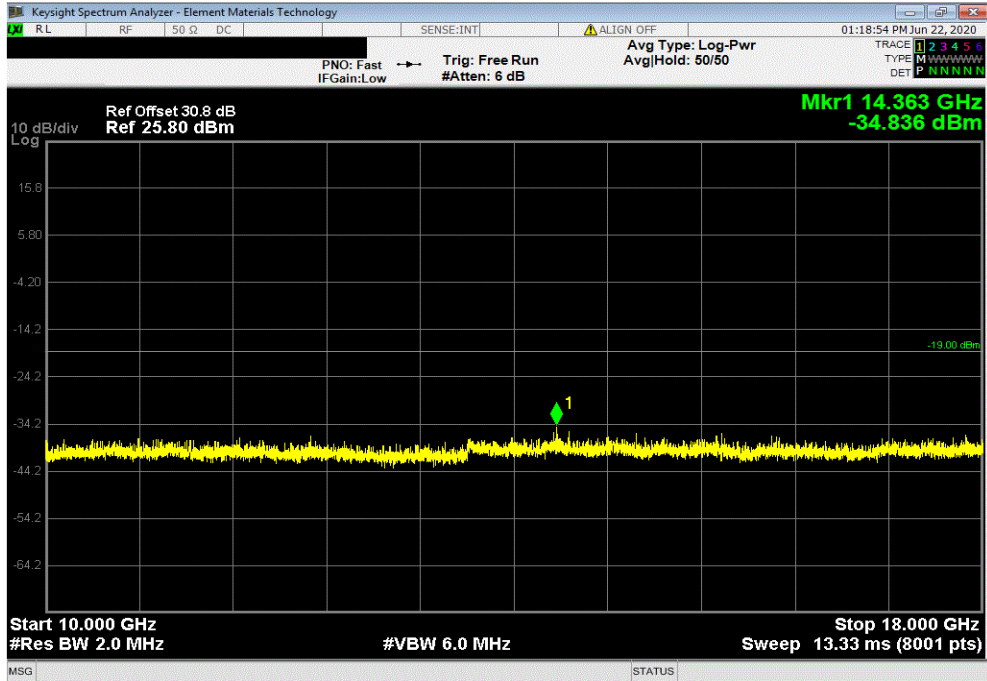

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	21975	-25.74	-19	Pass

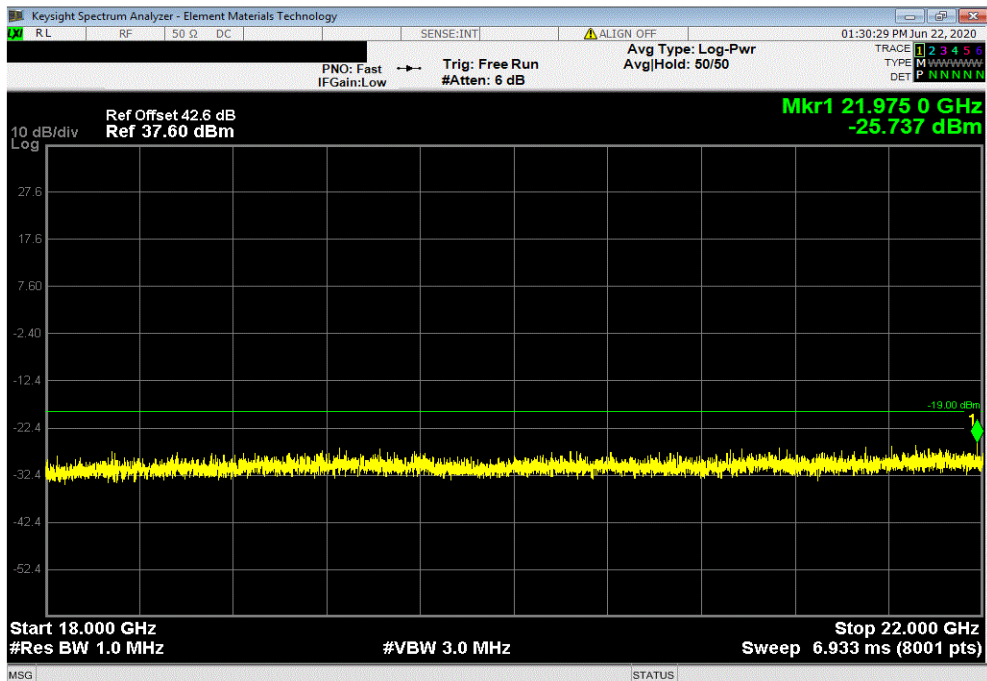


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-71.61	-49	Pass	

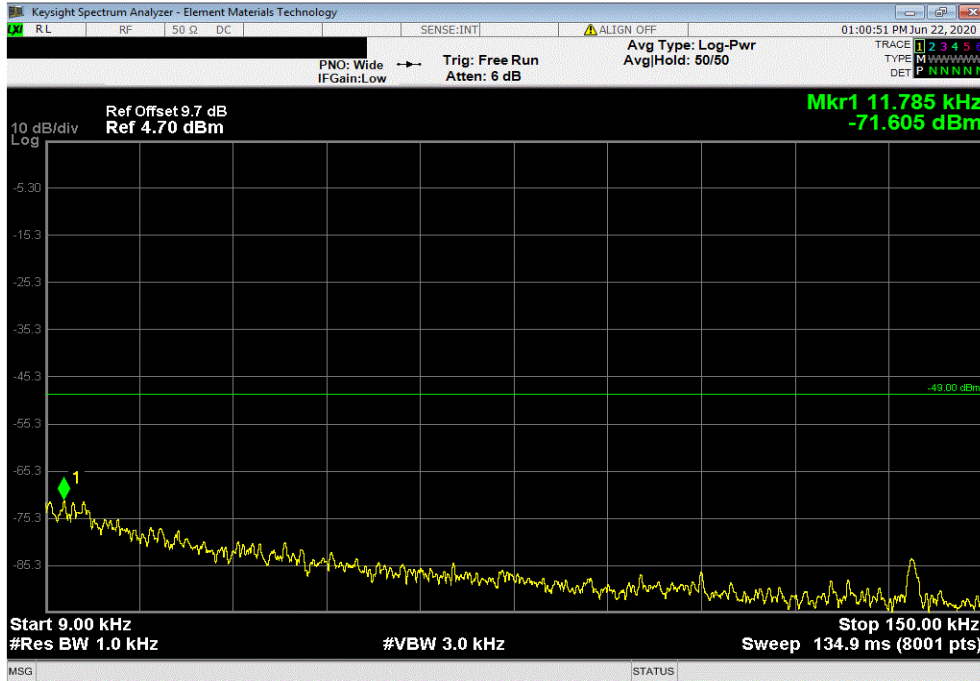

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.56	-39	Pass	

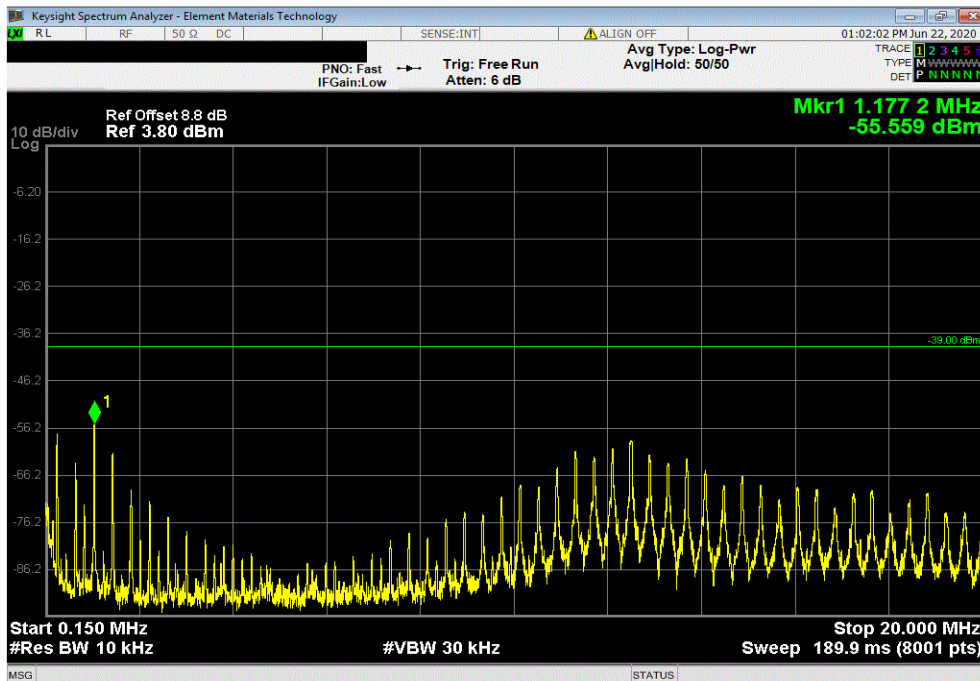


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2735.9	-25.17	-19	Pass	

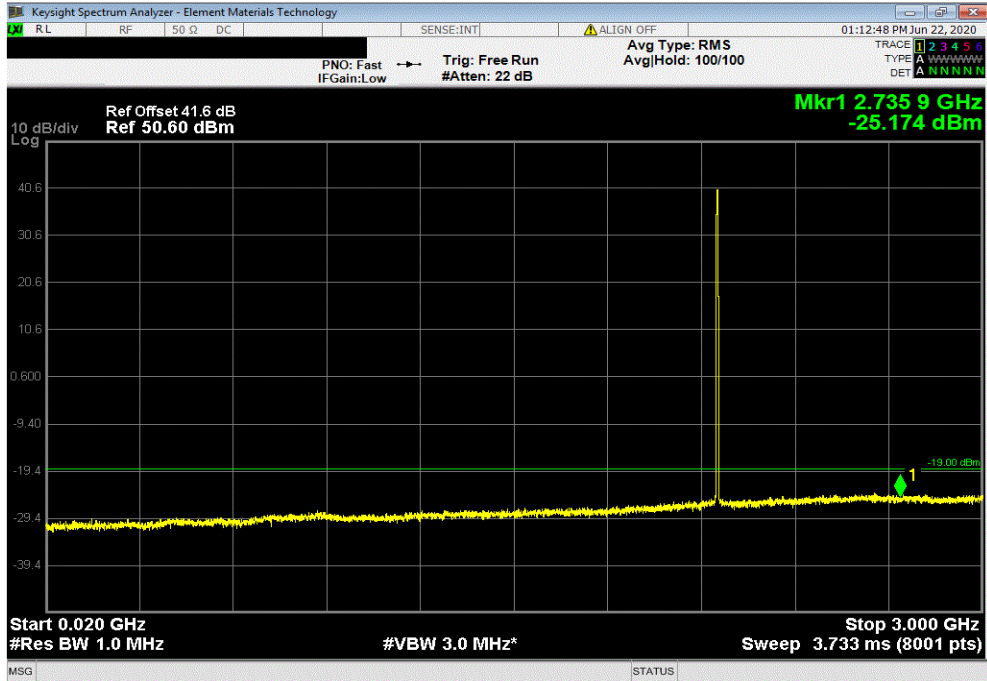

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3836.5	-37.95	-19	Pass	

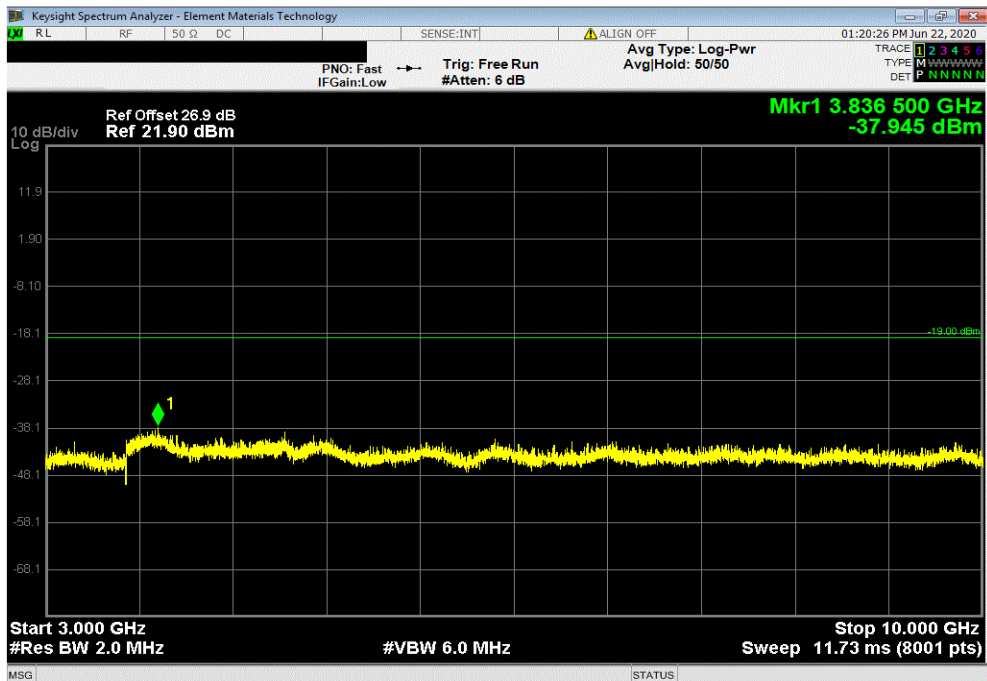


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	14652	-36.58	-19	Pass

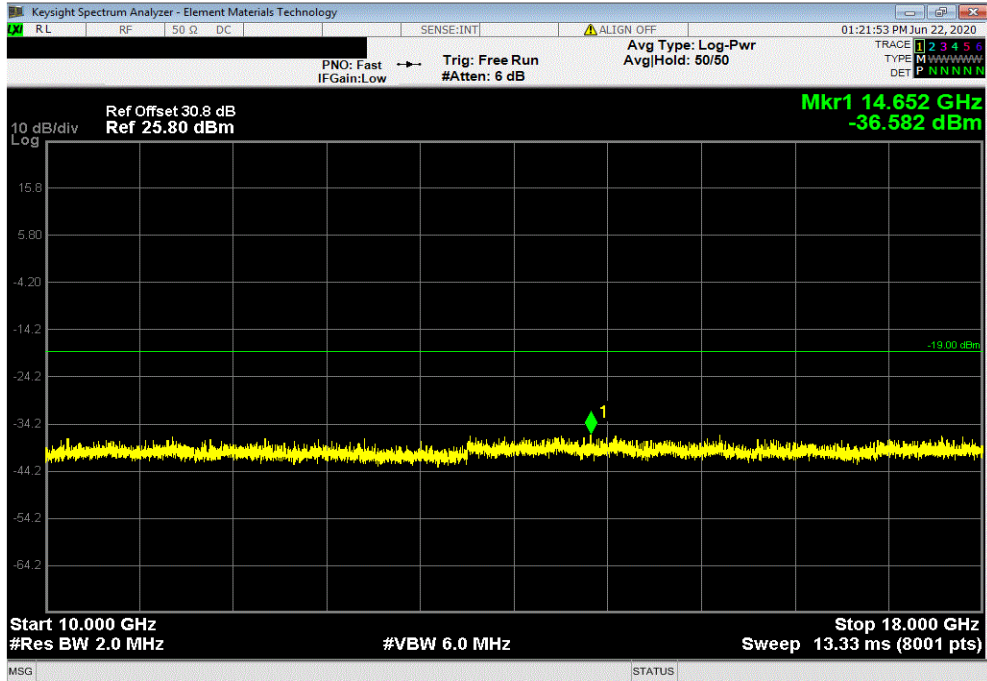

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	19105	-26.12	-19	Pass

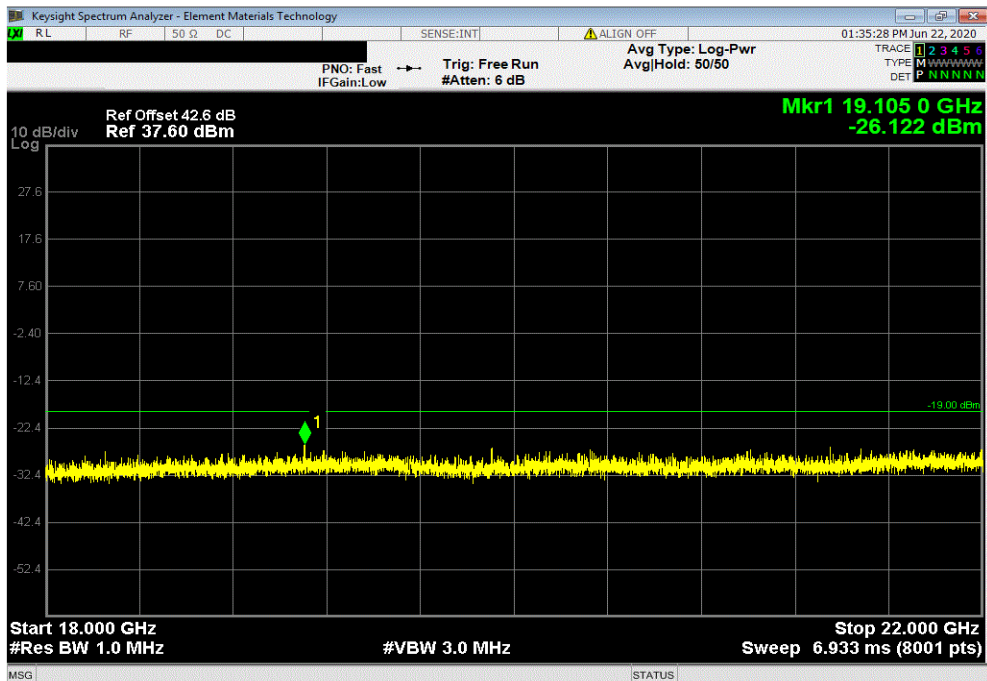


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-70.83	-49	Pass	

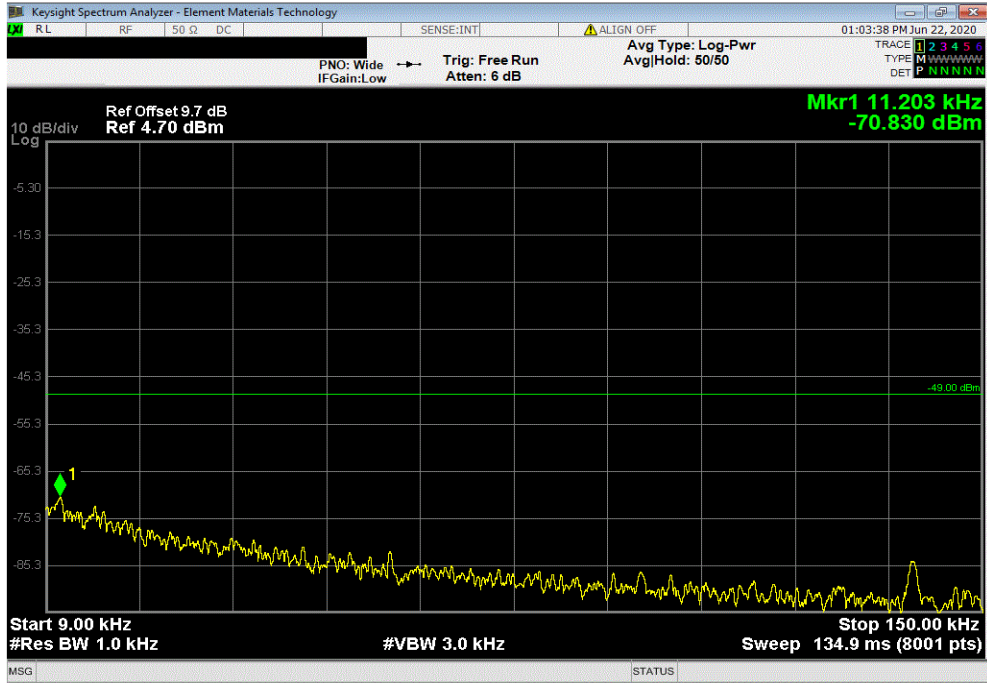

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.62	-39	Pass	

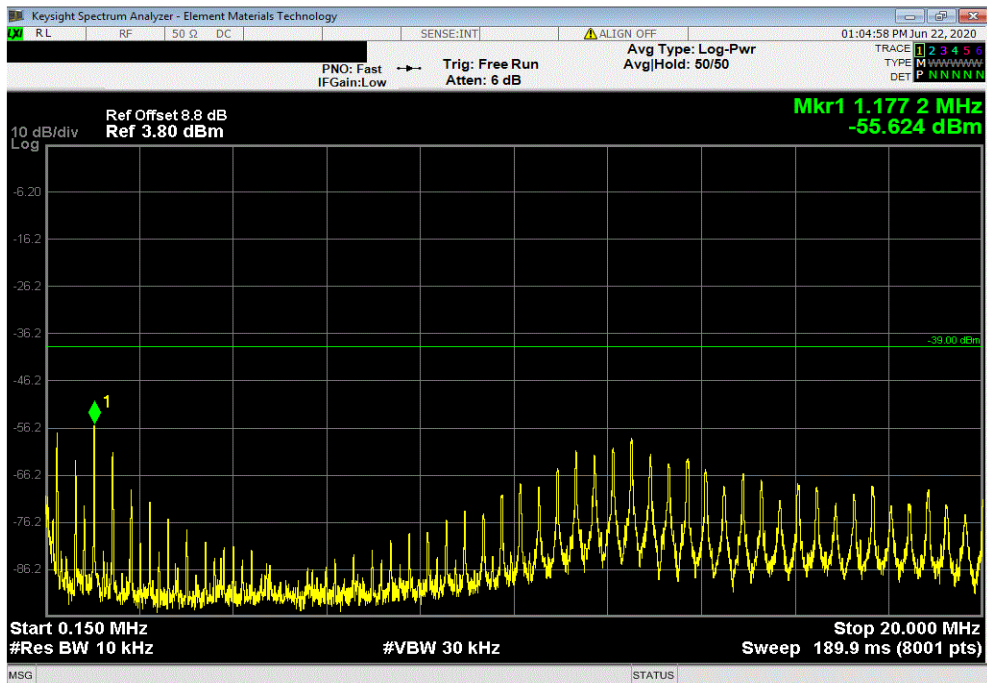


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2633.09	-24.64	-19	Pass	

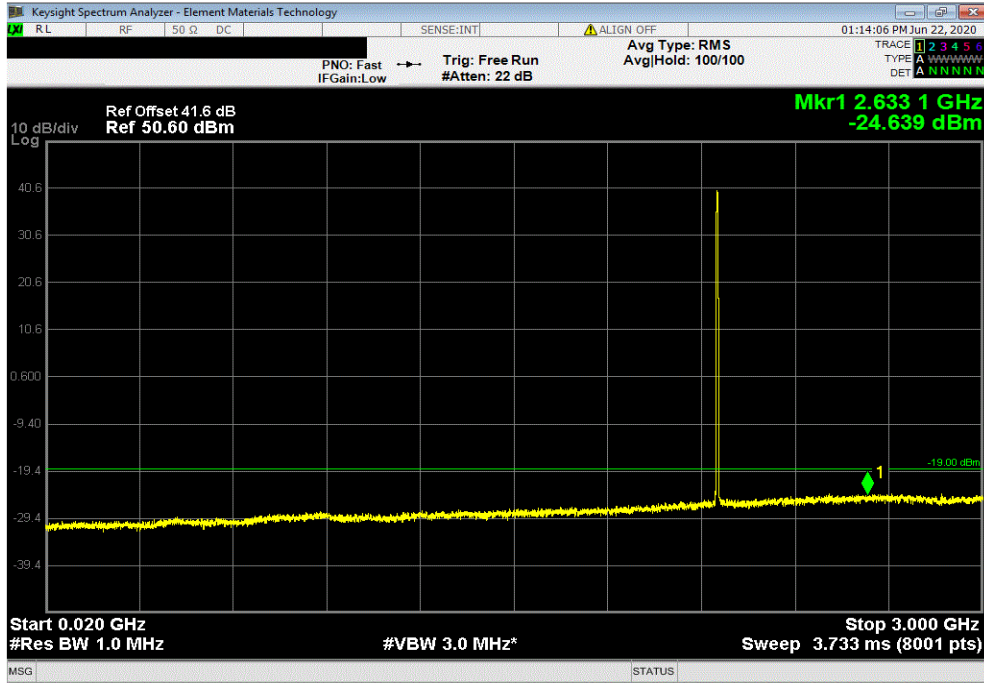

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3724.5	-38.8	-19	Pass	

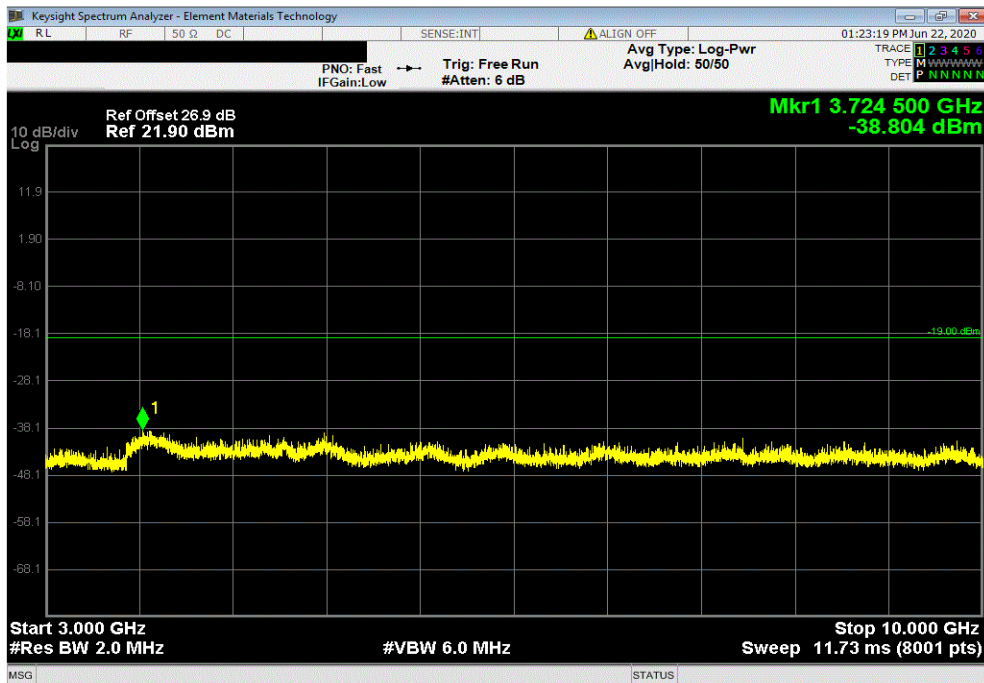


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	14199	-35.29	-19	Pass

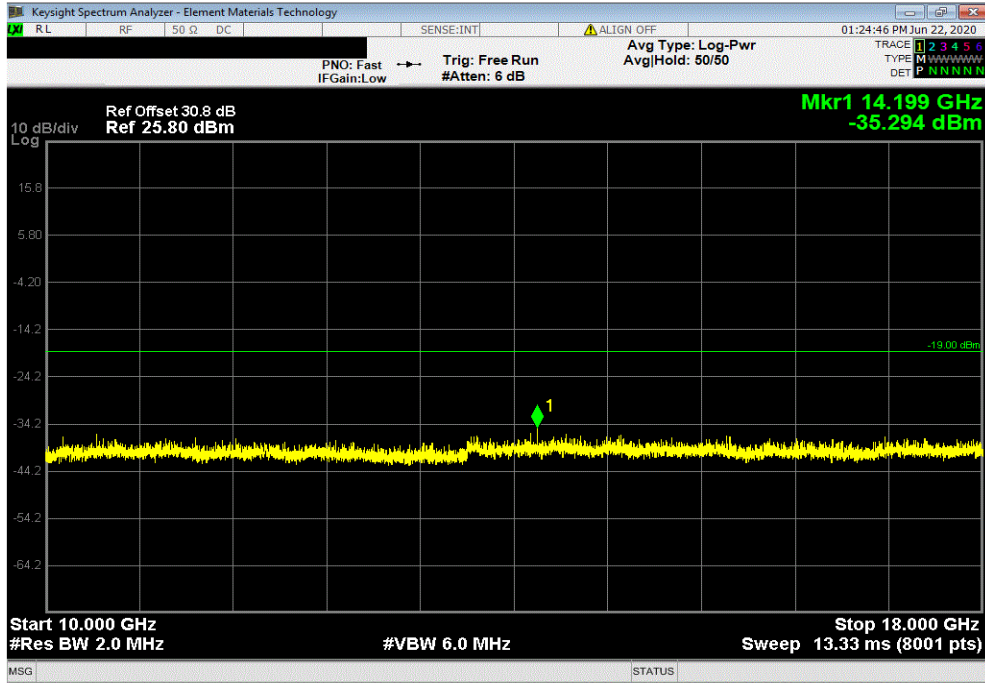

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	21470	-26.21	-19	Pass

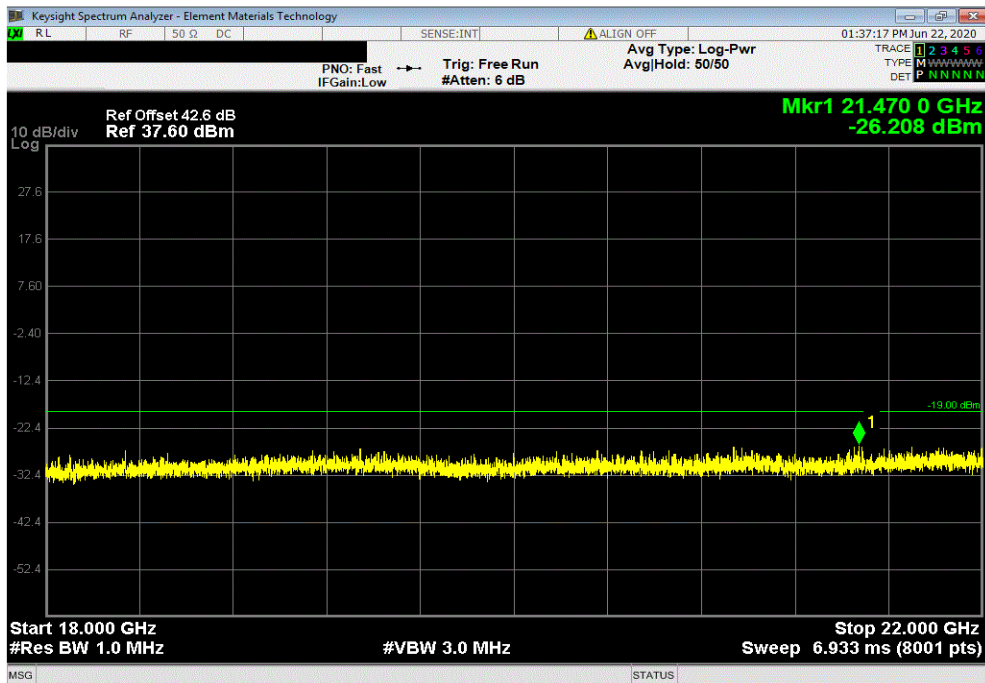


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-70.59	-49	Pass	

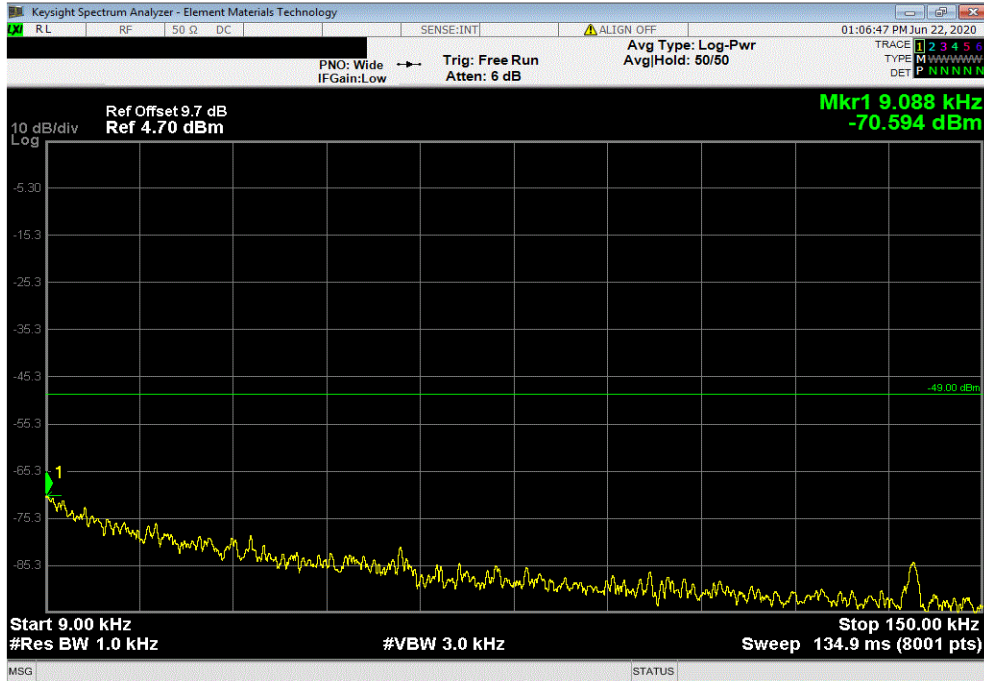

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.57	-39	Pass	

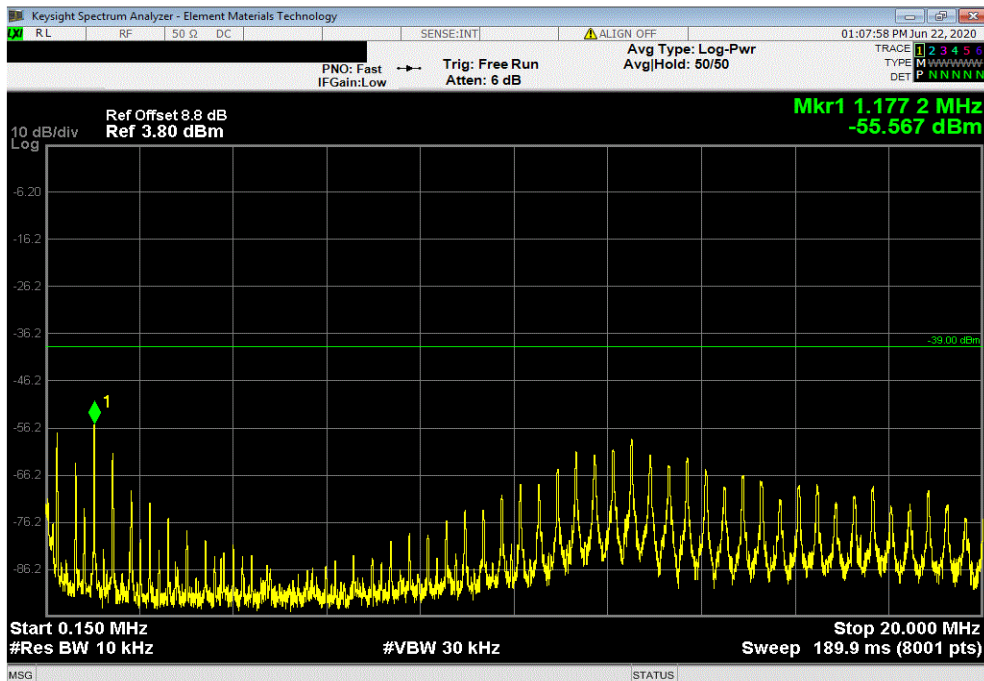


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2680.77	-24.75	-19	Pass	

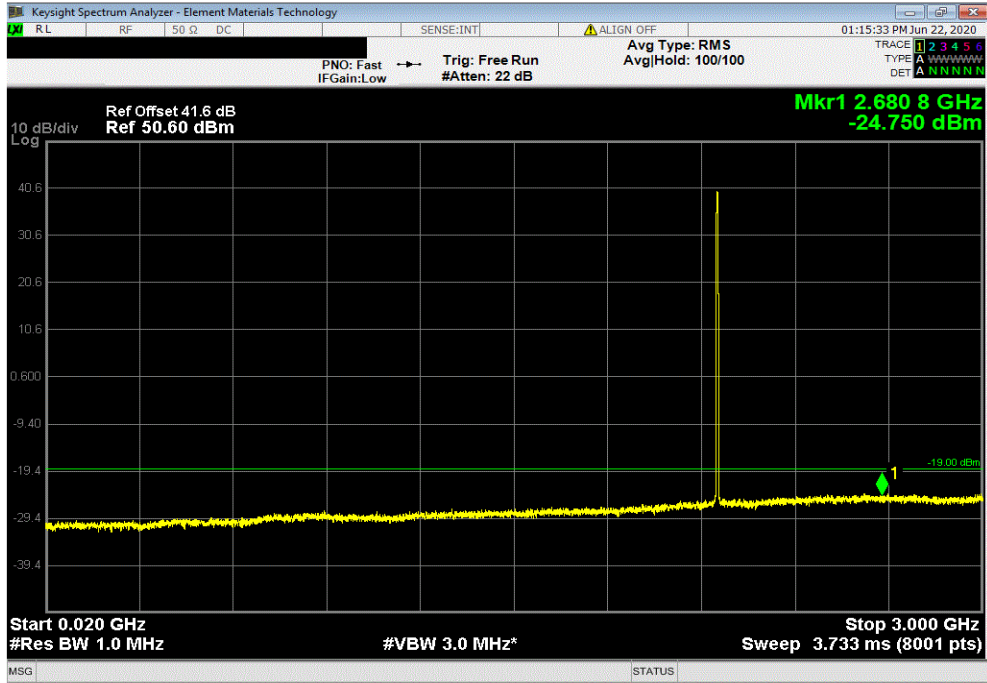

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3711.38	-38.24	-19	Pass	

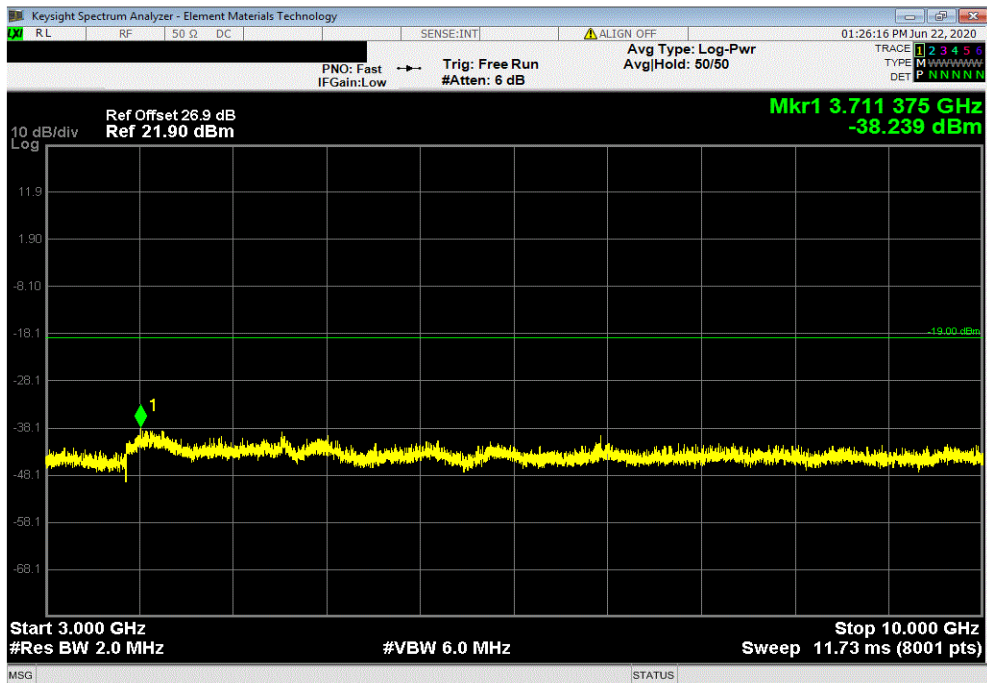


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	13691	-36.01	-19	Pass

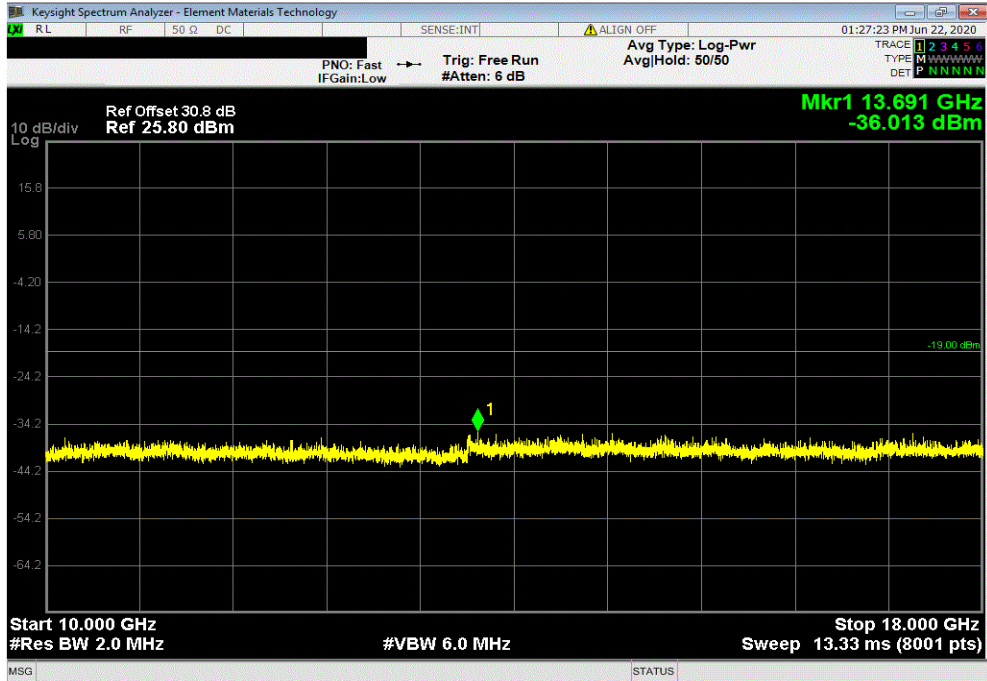

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	19479.5	-25.84	-19	Pass

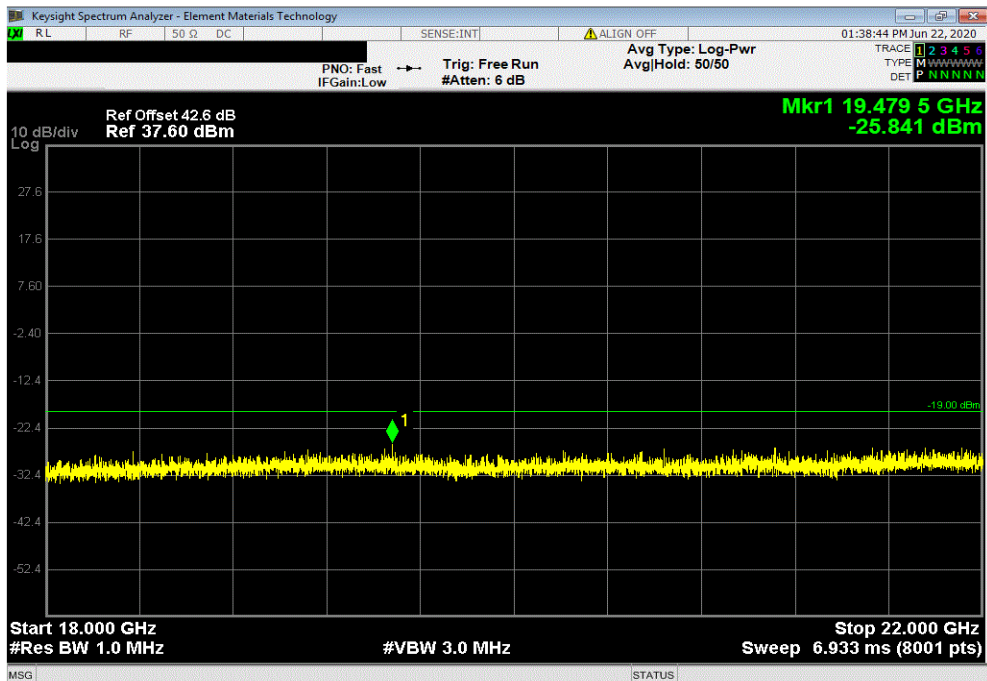


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-71.49	-49	Pass	

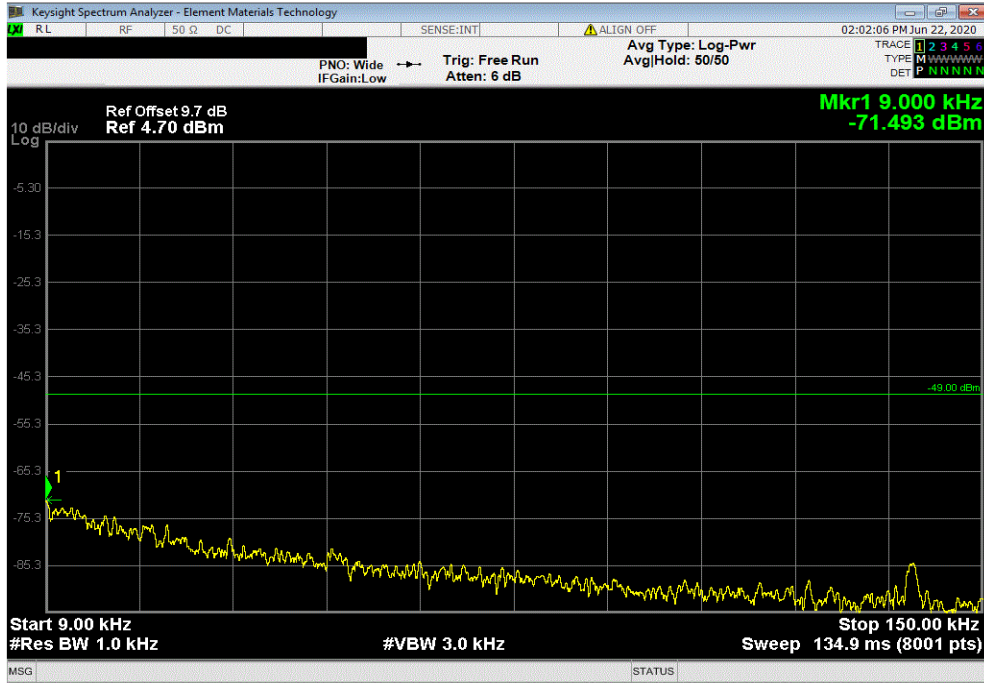

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.66	-39	Pass	

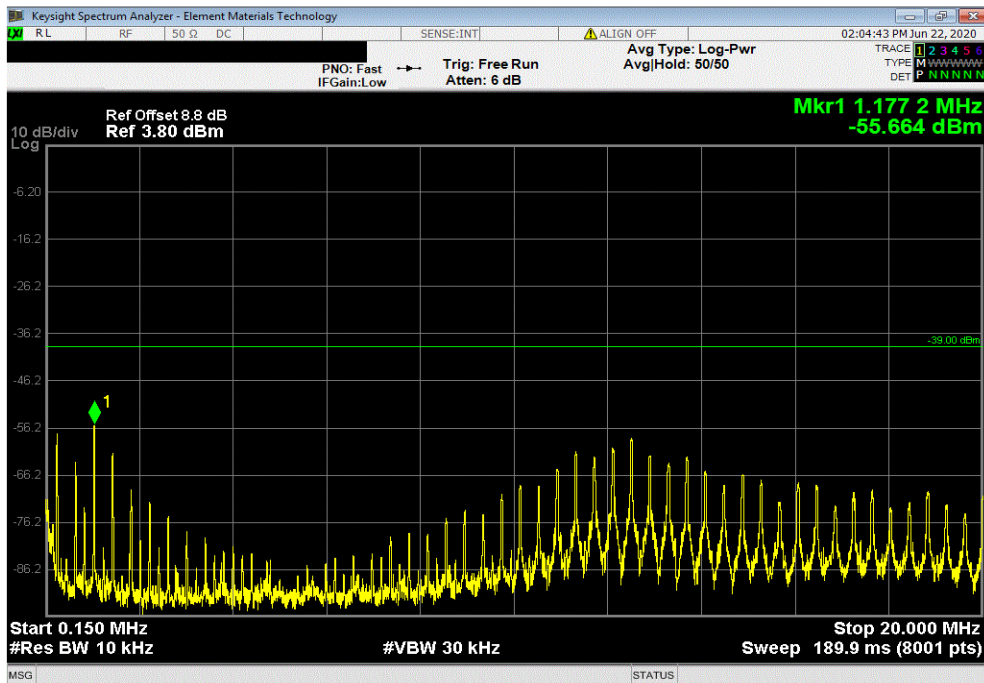


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2679.28	-25.37	-19	Pass	

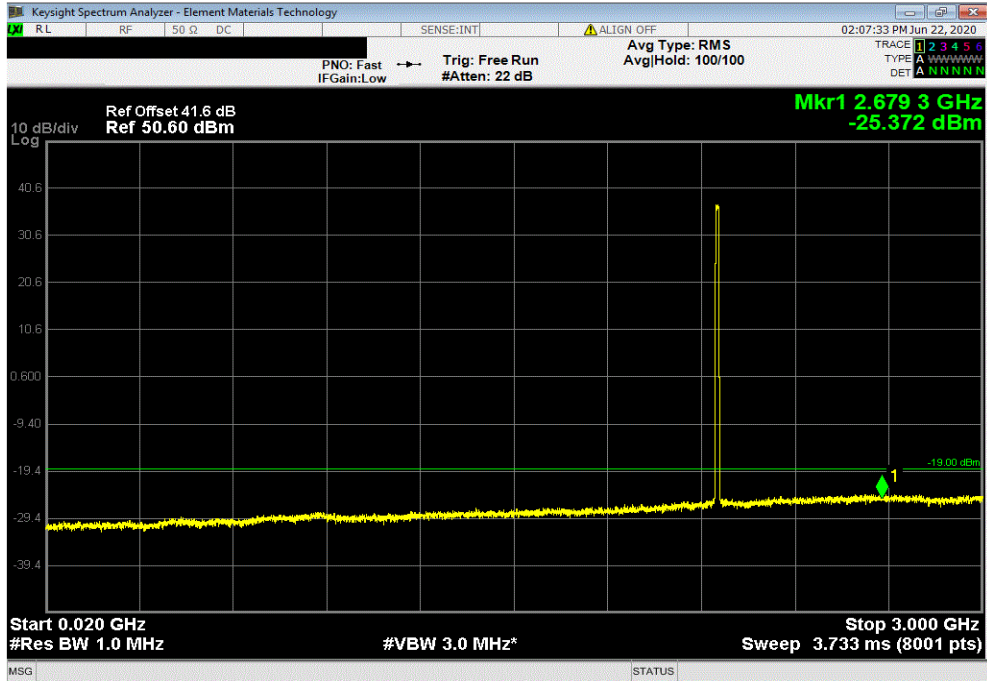

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3805	-38.28	-19	Pass	

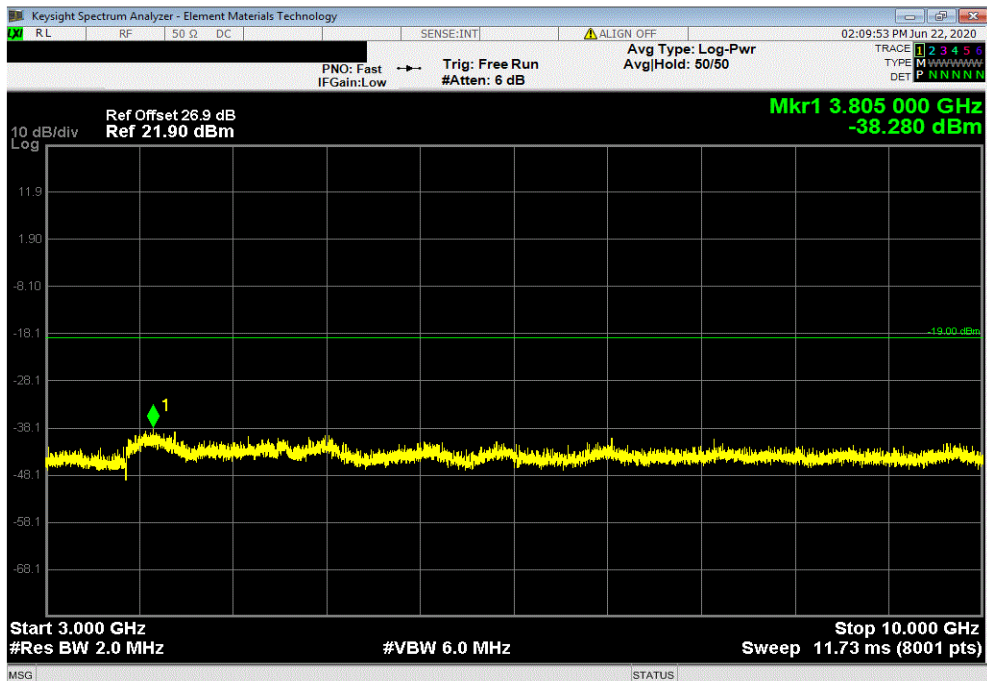


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	15237	-36.49	-19	Pass

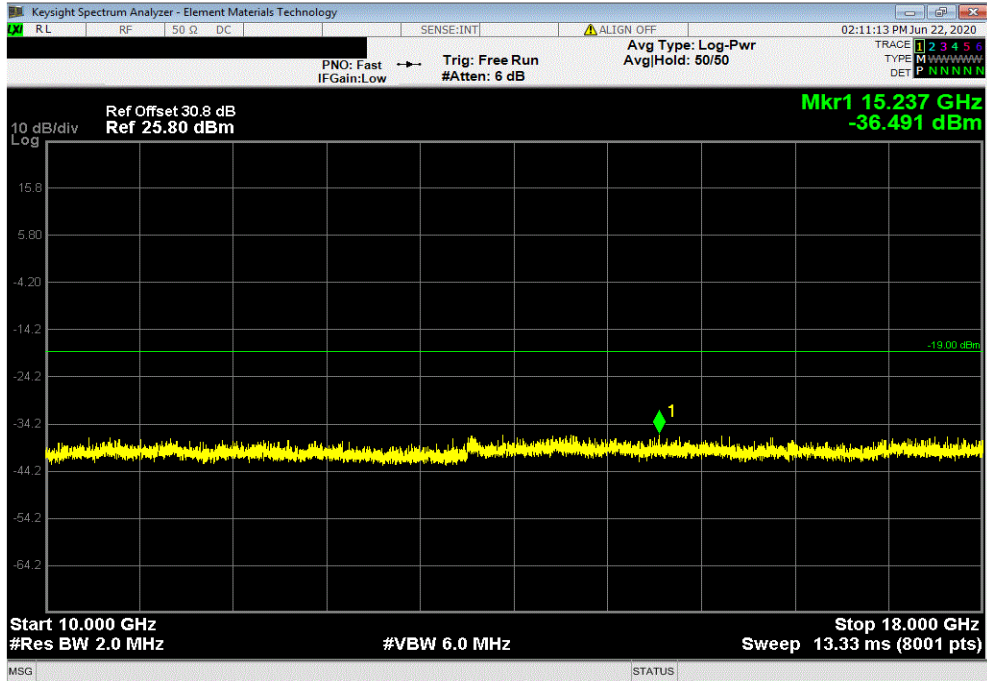

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	20990.5	-25.71	-19	Pass

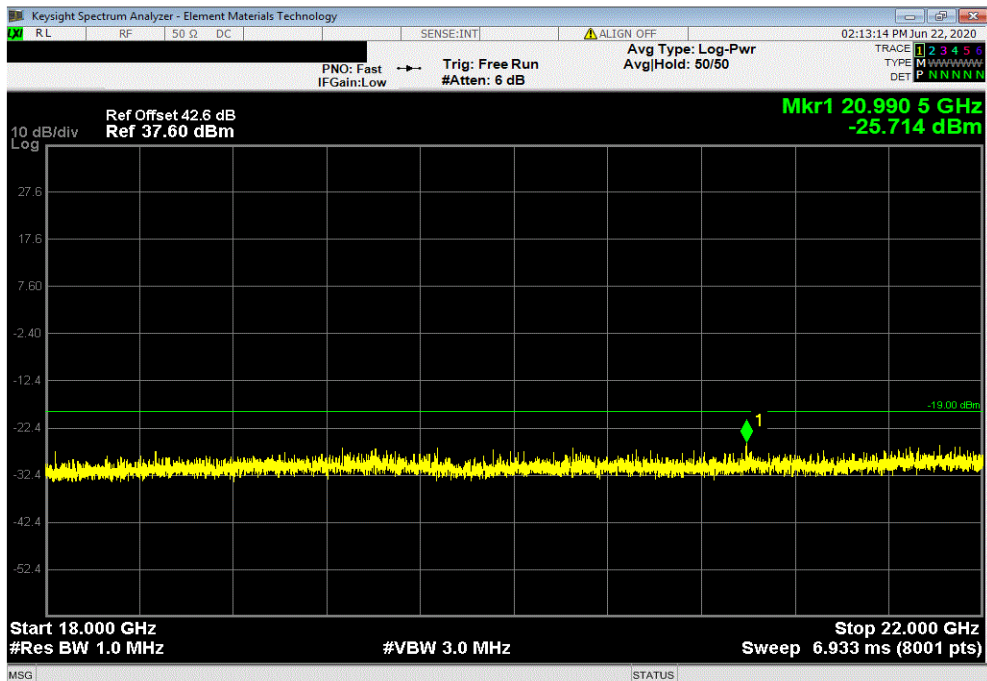


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-70.86	-49	Pass	

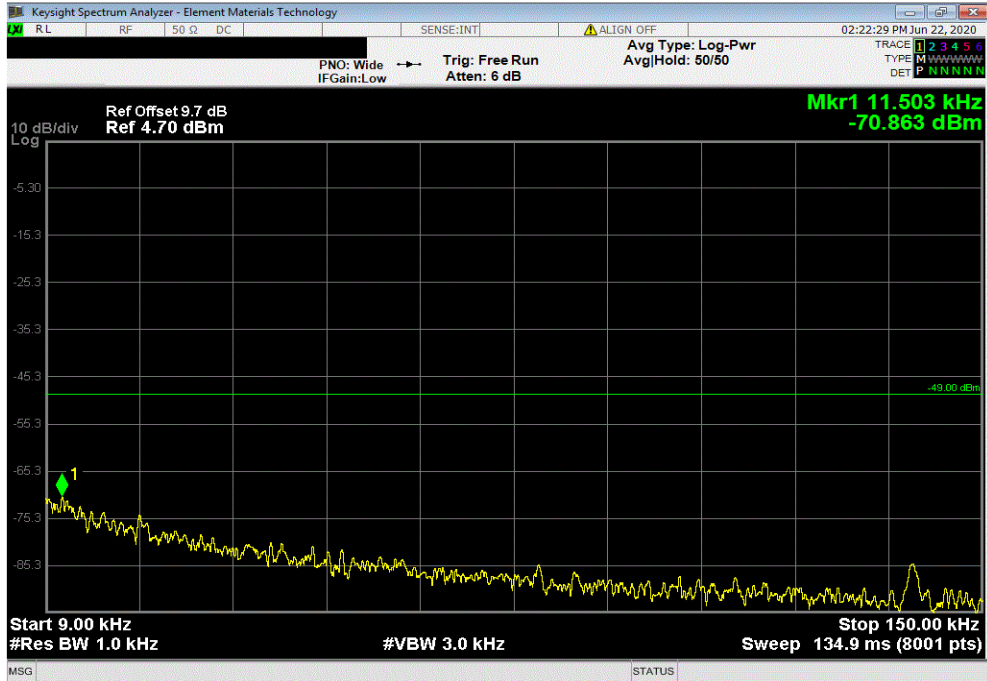

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.66	-39	Pass	

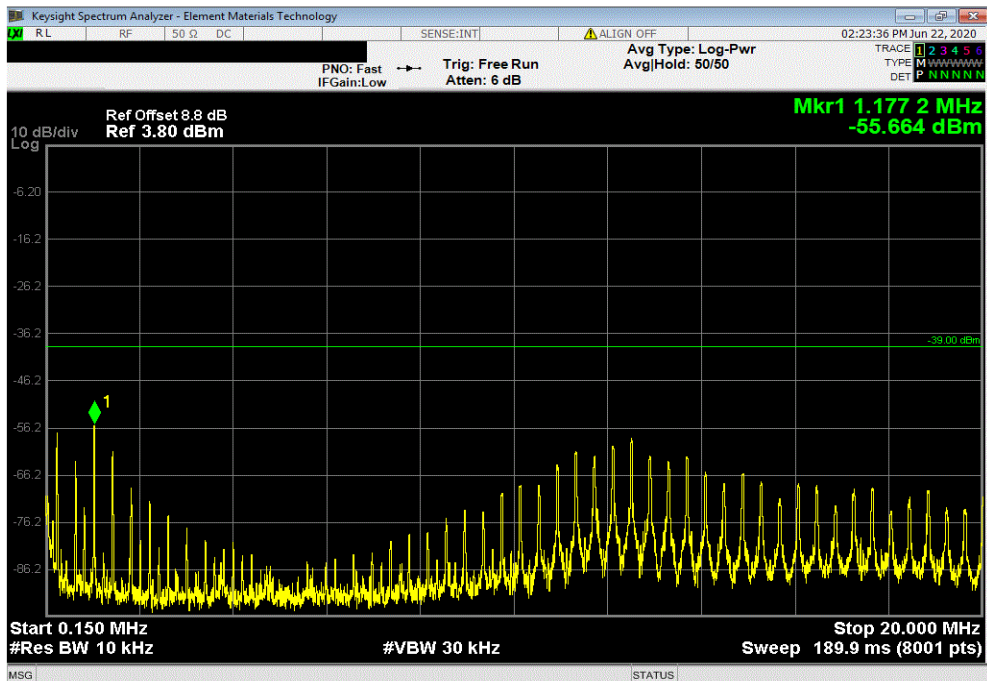


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2635.7	-24.86	-19	Pass	

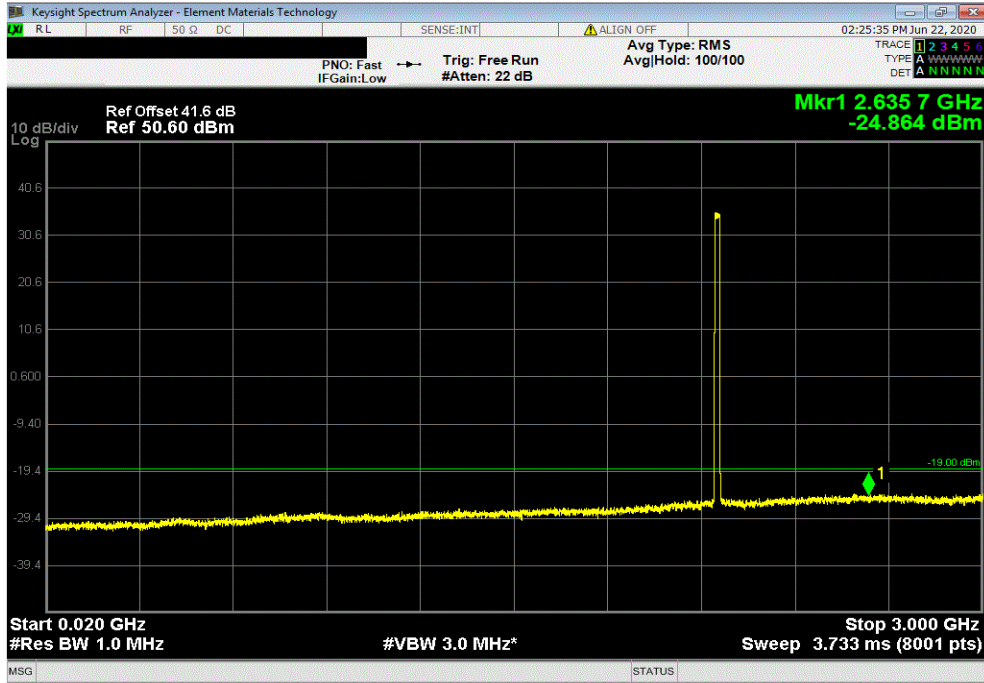

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3784	-38.03	-19	Pass	

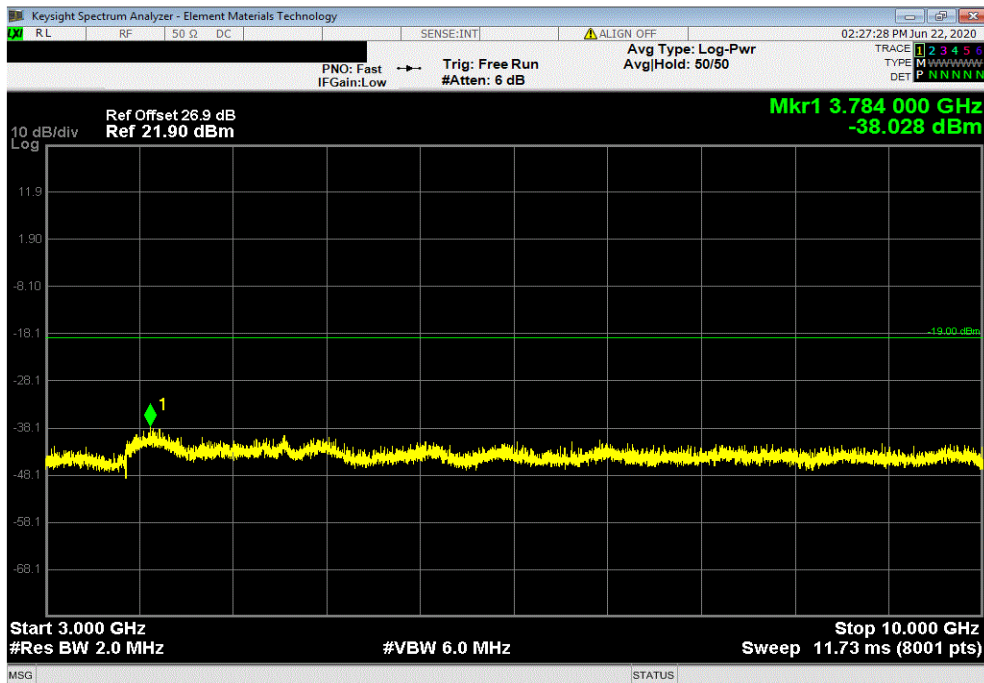


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	14470	-36.13	-19	Pass

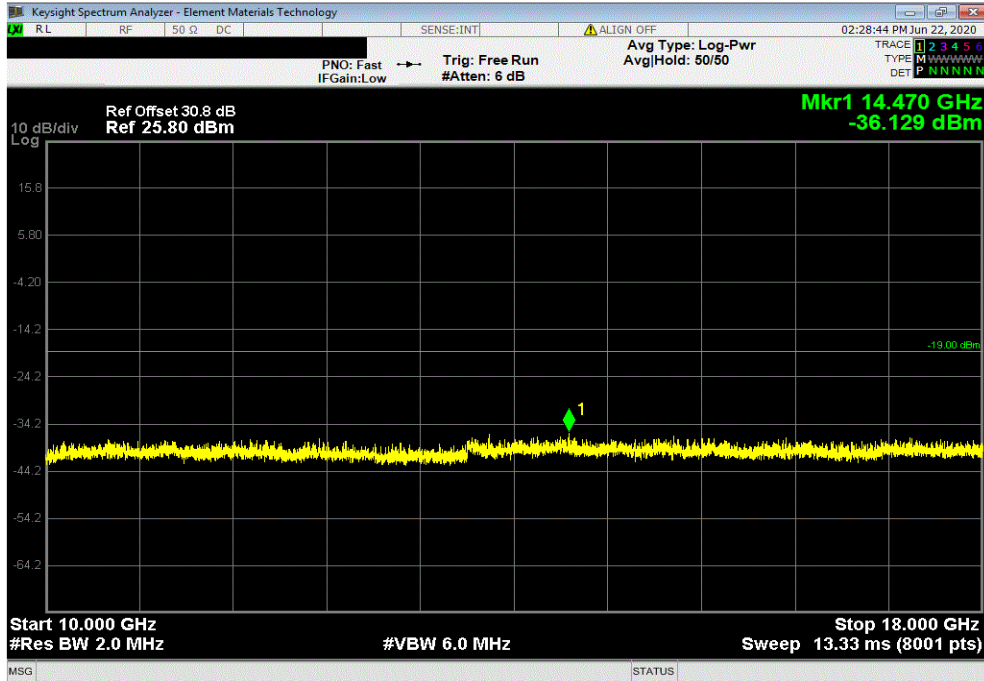

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	19171.5	-25.86	-19	Pass

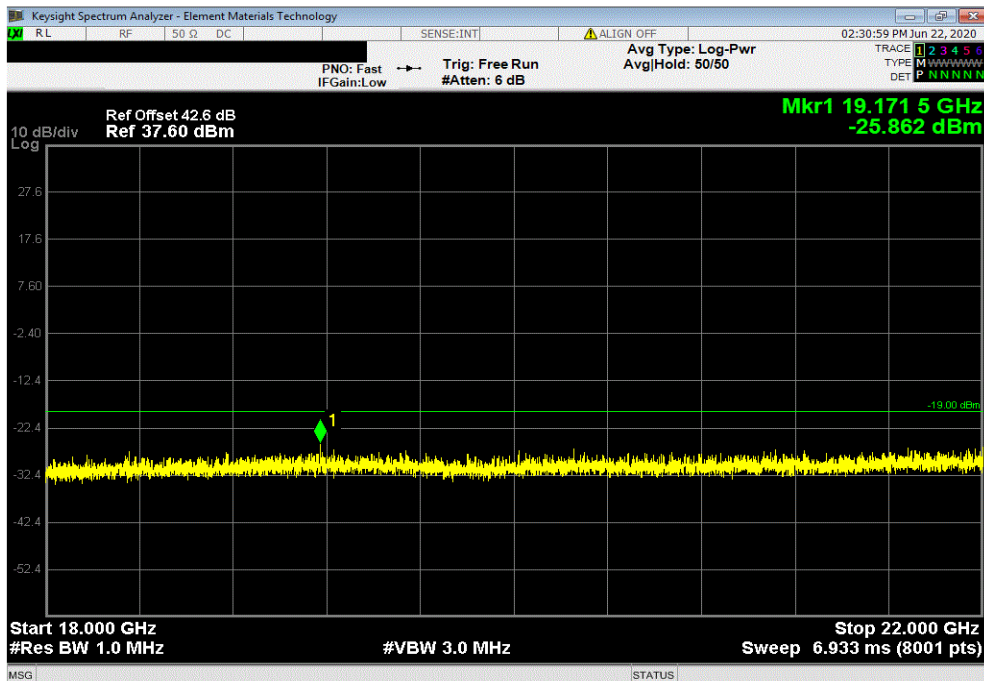


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
9 kHz - 150 kHz	0.01	-70.43	-49	Pass	

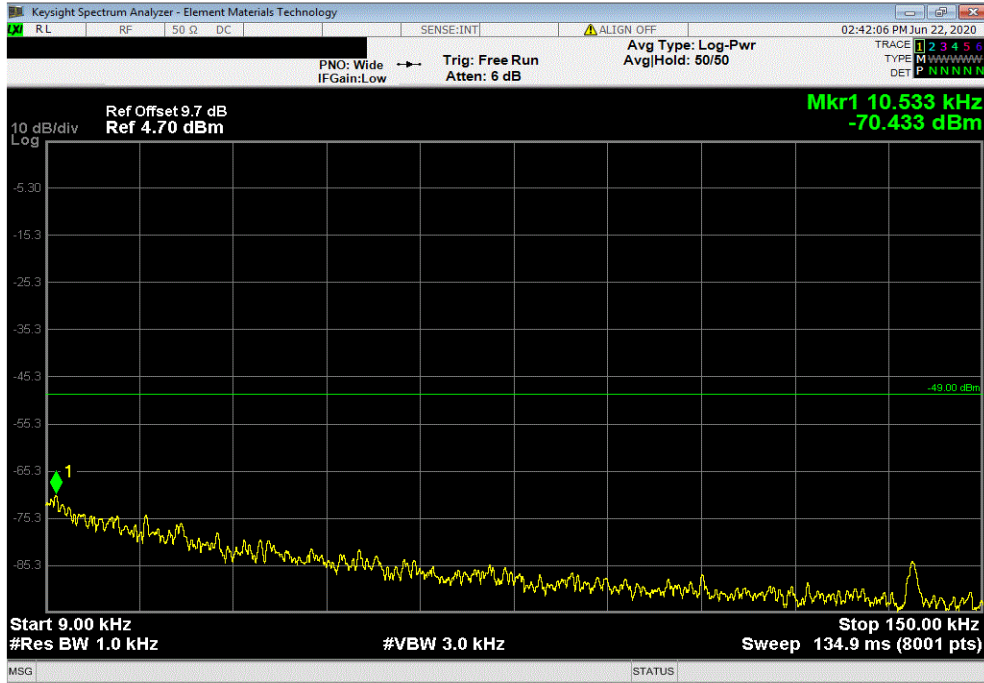

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
150 kHz - 20 MHz	1.18	-55.56	-39	Pass	

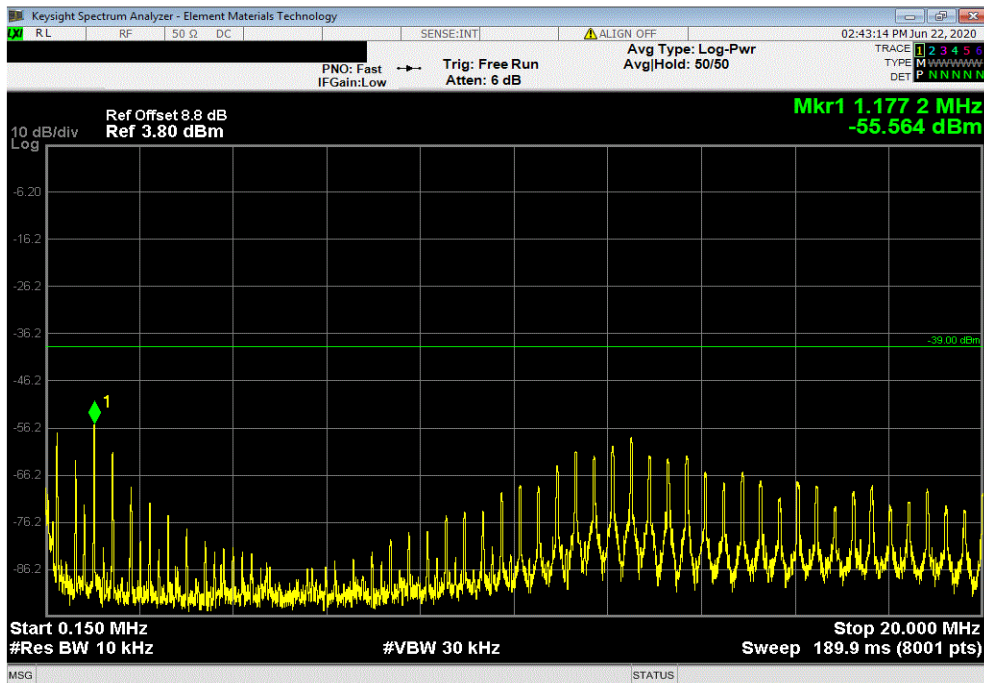


SPURIOUS CONDUCTED EMISSIONS - BAND n66




TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
20 MHz - 3 GHz	2758.25	-25.57	-19	Pass	

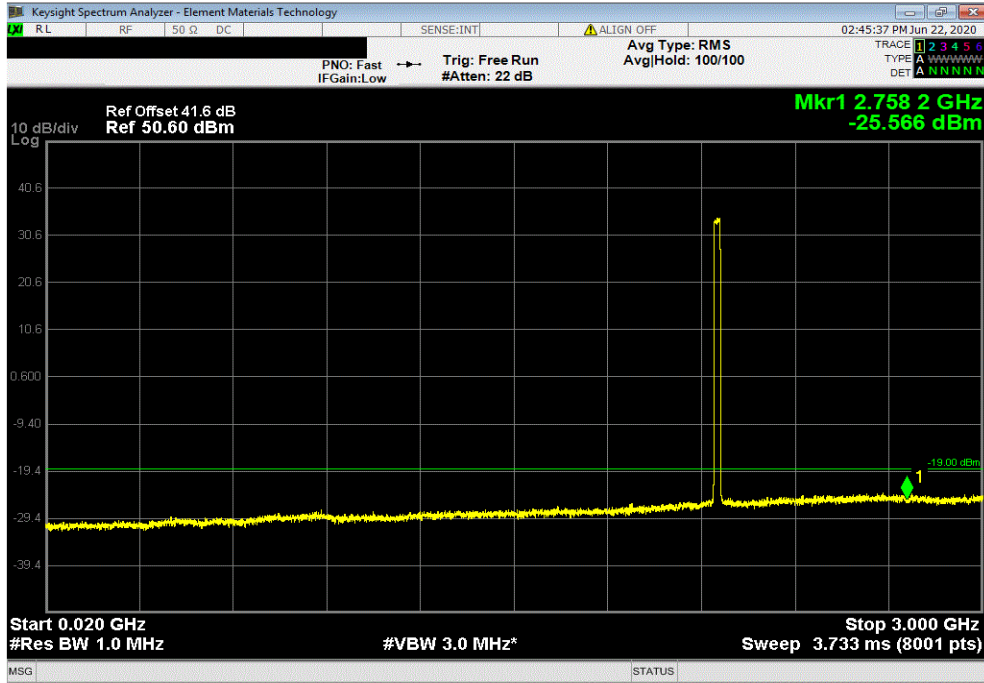

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz					
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result	
3 GHz - 10 GHz	3849.63	-37.88	-19	Pass	

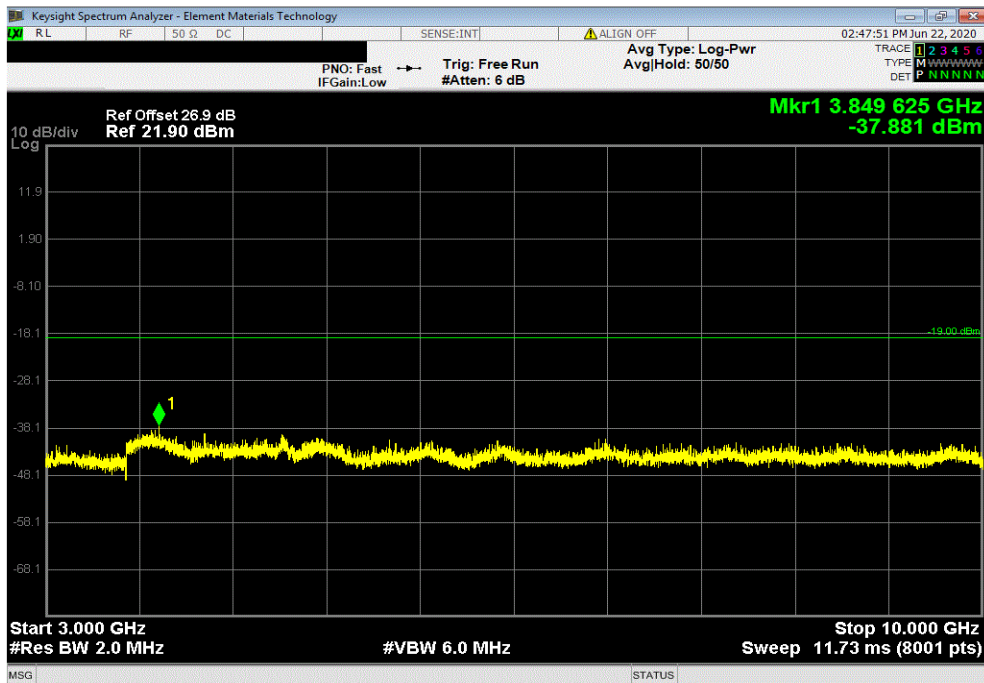


SPURIOUS CONDUCTED EMISSIONS - BAND n66



TMTX 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
10 GHz - 18 GHz	16599	-36.64	-19	Pass

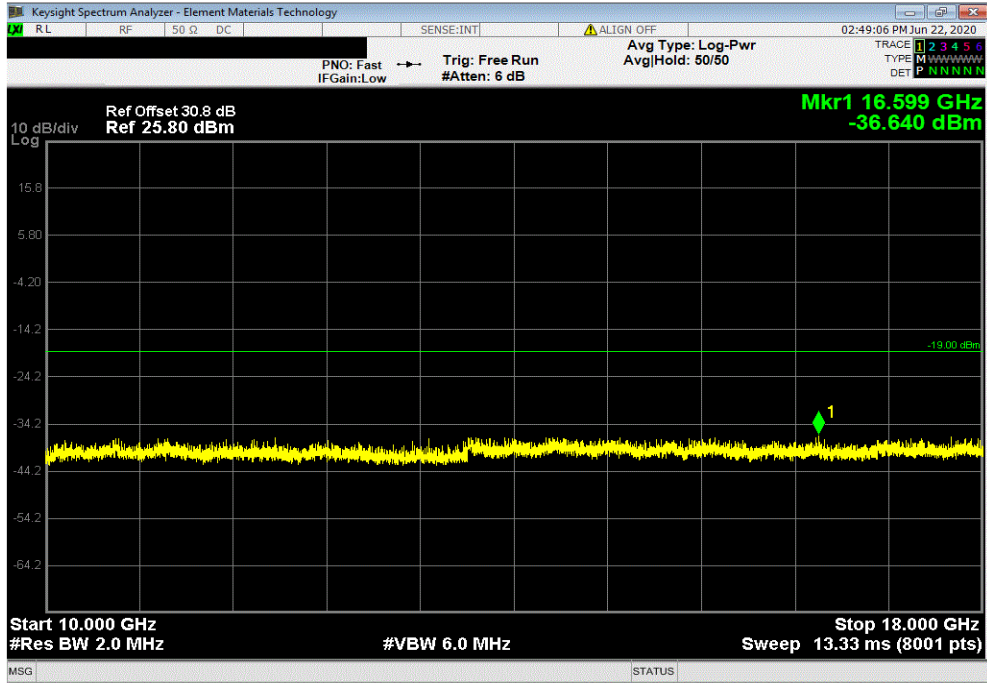

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz				
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result
18 GHz - 22 GHz	21809	-26.62	-19	Pass

