

PEAK TO POWER AVERAGE (PAPR) CCDF



XMIT 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	2020-07-17	2023-07-17
Block - DC	Fairview Microwave	SD3379	AMT	2021-09-14	2022-09-14
Receiver	Rohde & Schwarz	ESR26	ARQ	2021-05-11	2022-05-11

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Power Ratio (PAPR) was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed the rule part defined limit.

The PAPR measurement method is described in ANSI C63.26 section 5.2.3.4.
The PAPR was measured using the CCDF function of the spectrum analyzer.

Per FCC part 24.232(d) and RSS 133 6.4, the PAPR limit shall not exceed 13 dB for more than the ANSI described 0.1% of the time.

Per FCC part 27.50(d)(5), RSS-139 6.5, and RSS-170 5.3.1, the peak-to-average power ratio (PAPR) shall not exceed 13dB.

RF conducted emissions testing was performed only on one port. All four AHFII antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in this certification testing) and antenna port 1 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraphs 5.2.5.3, 5.7.2i, and 6.4.

PEAK TO POWER AVERAGE (PAPR) CCDF



TM21 2021.12.14.1 XMI 2022.02.07.0


EUT: AHFII Remote Radio Head		Work Order: NOKI0037	
Serial Number: YK214000036		Date: 28-Feb-22	
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C	
Attendees: David Le, John Rattanavong		Humidity: 23.7% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Mark Baytan	Power: 54 VDC	Job Site: TX09	
TEST SPECIFICATIONS		Test Method	
FCC 24E:2022		ANSI C63.26:2015	
RSS-133 Issue 6:2013+A1:2018		RSS-133 Issue 6:2013+A1:2018	
COMMENTS			
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. Band 25 carriers enabled at maximum power is 80 watts/carrier.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature <i>M. Baytan</i>	
		PAPR Value (dB)	PAPR Limit (dB) Results
Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier			
Port 1			
1.4 MHz Bandwidth			
256-QAM Modulation			
	Low Channel, 1930.7 MHz	7.22	13 Pass
	Mid Channel, 1962.5 MHz	7.22	13 Pass
	High Channel, 1989.3 MHz	7.21	13 Pass
3 MHz Bandwidth			
256-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.23	13 Pass
	Low Channel, 1931.5 MHz	7.22	13 Pass
	High Channel, 1988.5 MHz	7.22	13 Pass
5 MHz Bandwidth			
QPSK Modulation			
	Mid Channel, 1962.5 MHz	7.24	13 Pass
16-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.23	13 Pass
64-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.24	13 Pass
256-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.25	13 Pass
	Low Channel, 1932.5 MHz	7.24	13 Pass
	High Channel, 1992.5 MHz	7.24	13 Pass
10 MHz Bandwidth			
256-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.21	13 Pass
	Low Channel, 1935 MHz	7.28	13 Pass
	High Channel, 1990 MHz	7.22	13 Pass
15 MHz Bandwidth			
256-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.19	13 Pass
	Low Channel, 1937.5 MHz	7.36	13 Pass
	High Channel, 1987.5 MHz	7.24	13 Pass
20 MHz Bandwidth			
256-QAM Modulation			
	Mid Channel, 1962.5 MHz	7.16	13 Pass
	Low Channel, 1940 MHz	7.39	13 Pass
	High Channel, 1985 MHz	7.22	13 Pass

PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1930.7 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

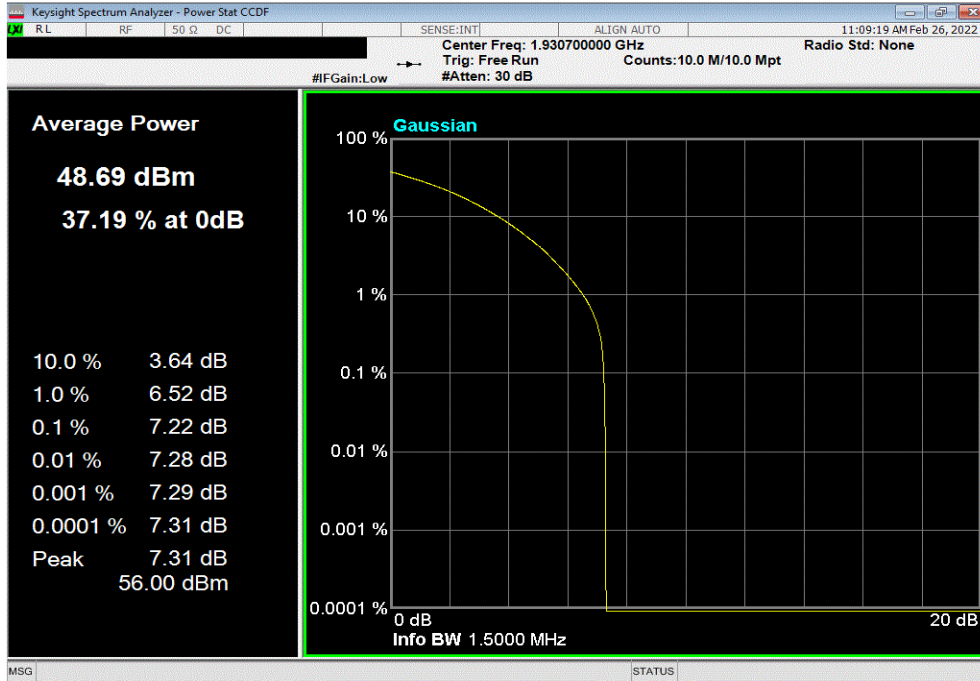

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

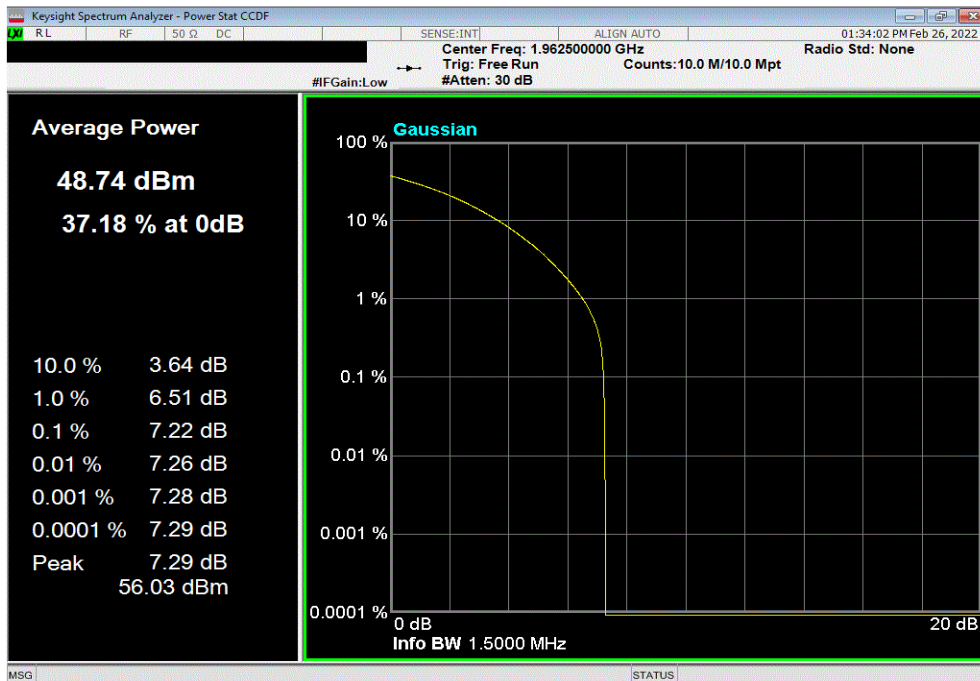


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, High Channel, 1989.3 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.21	13	Pass			

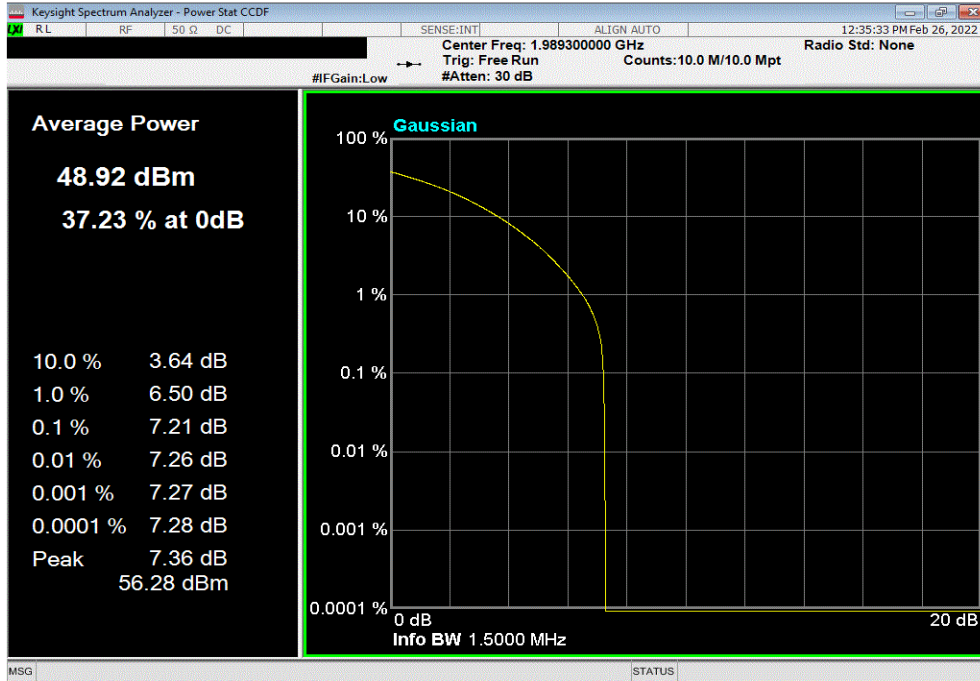

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.23	13	Pass			

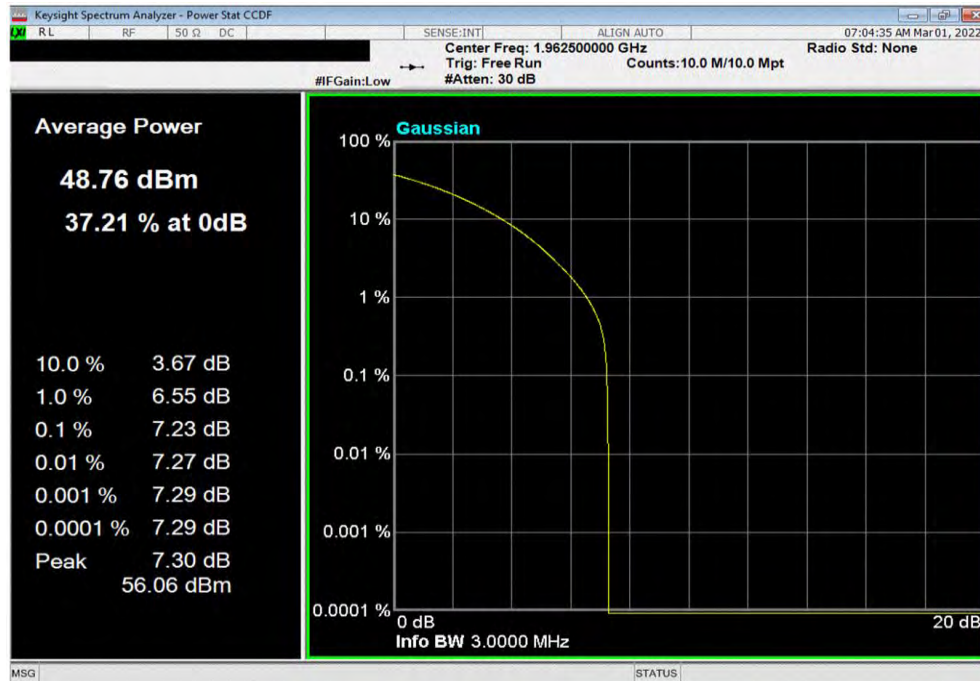


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1931.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

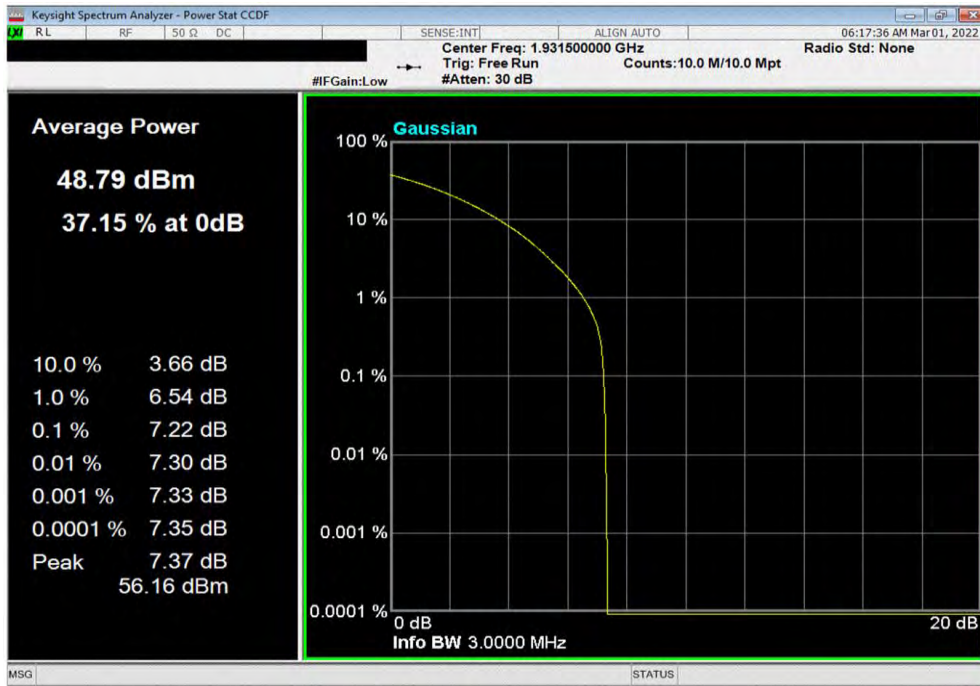

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, High Channel, 1988.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

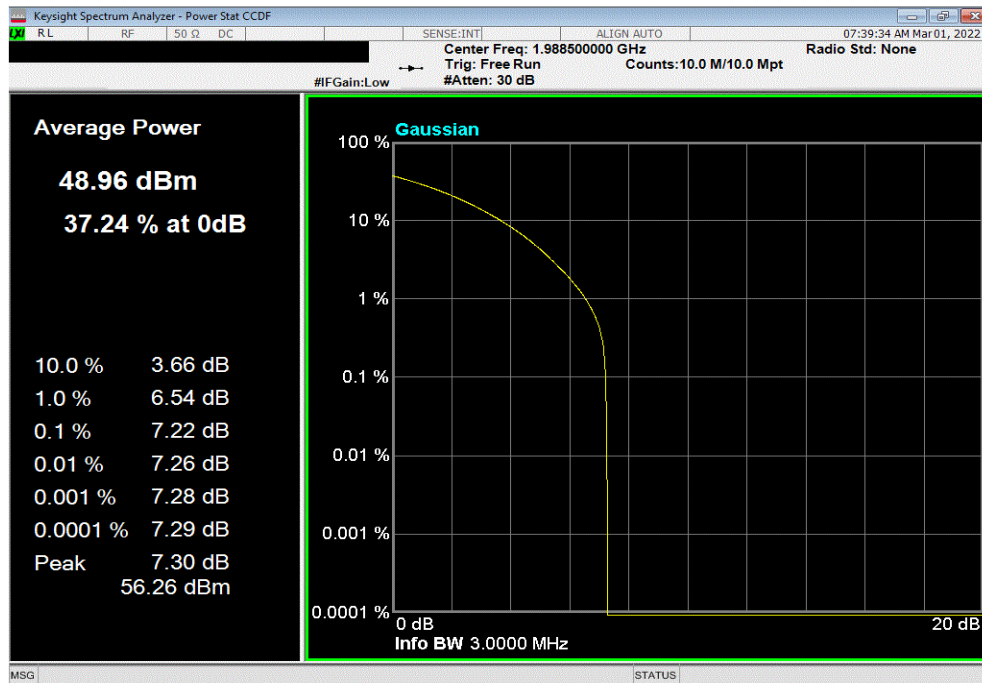


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, QPSK Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.24	13	Pass			

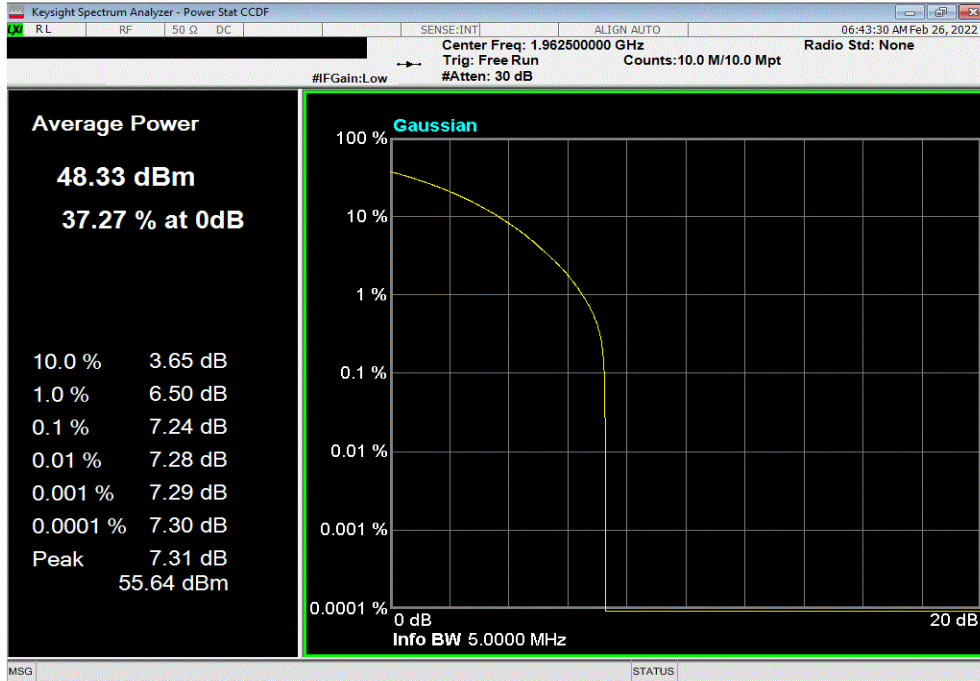

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.23	13	Pass			

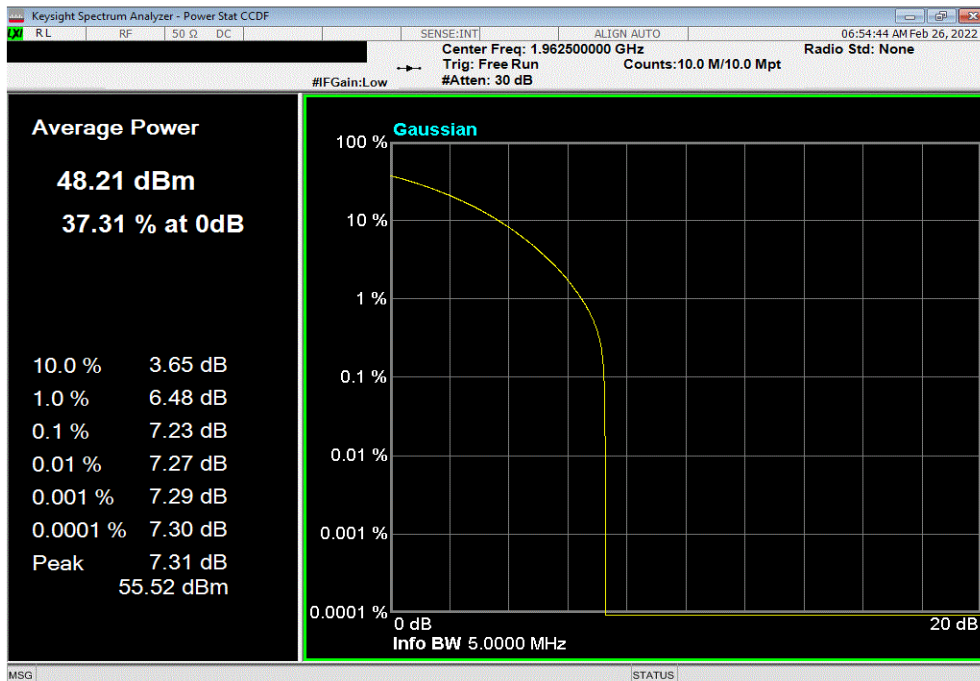


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMit 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.24	13	Pass			

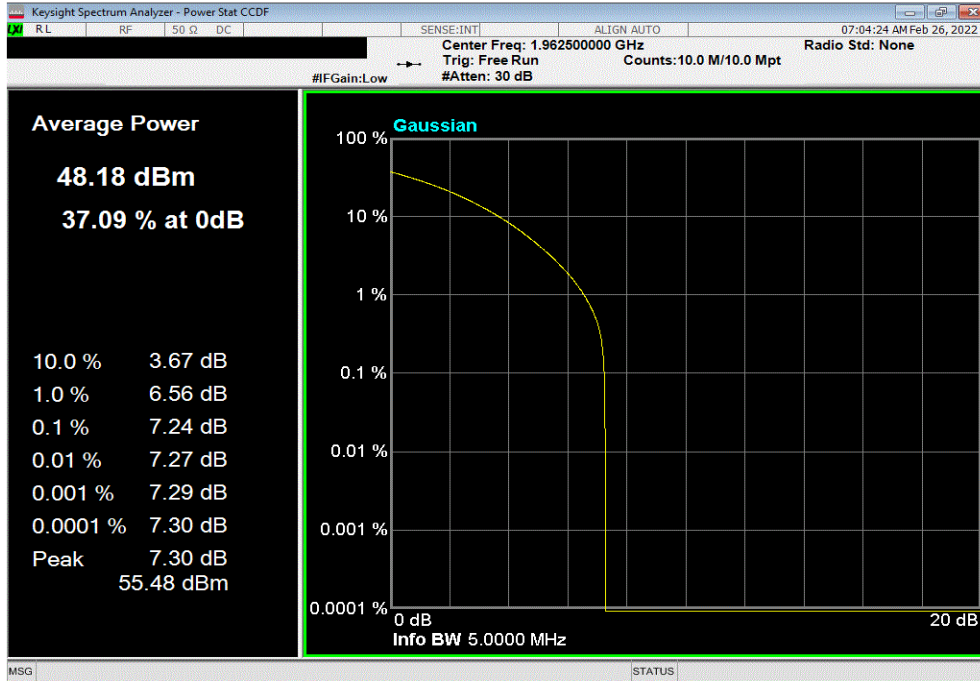

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.25	13	Pass			

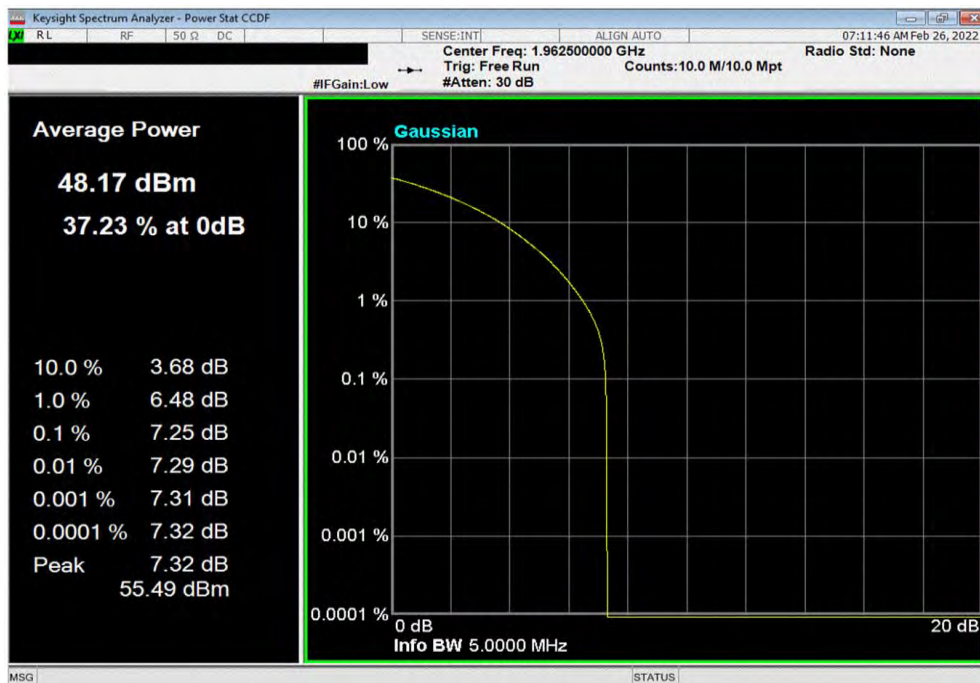


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1932.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.24	13	Pass			

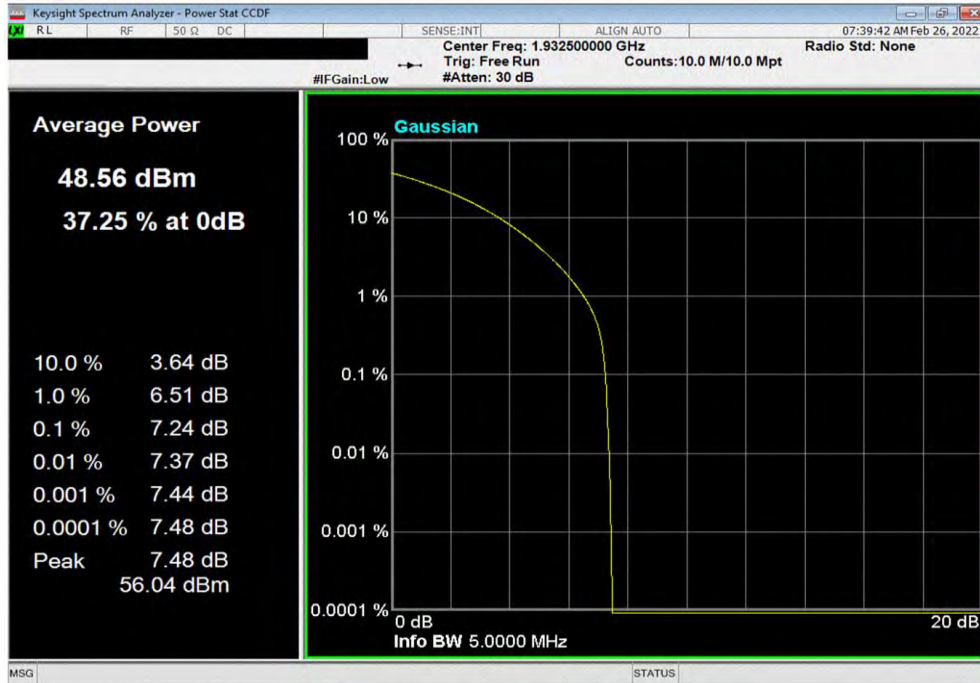

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, High Channel, 1992.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.24	13	Pass			

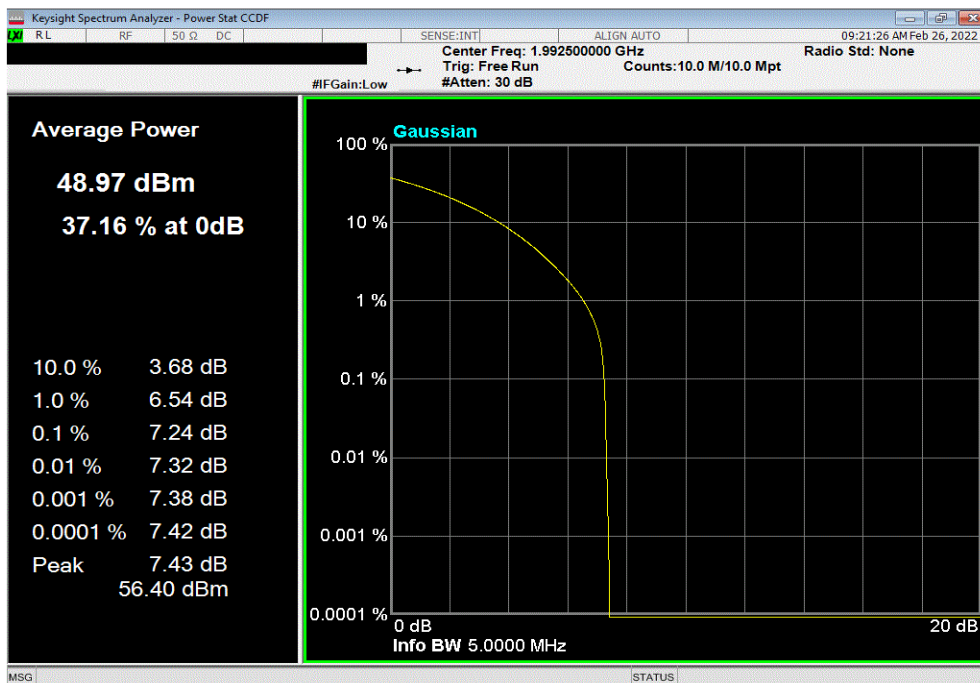


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.21	13	Pass			

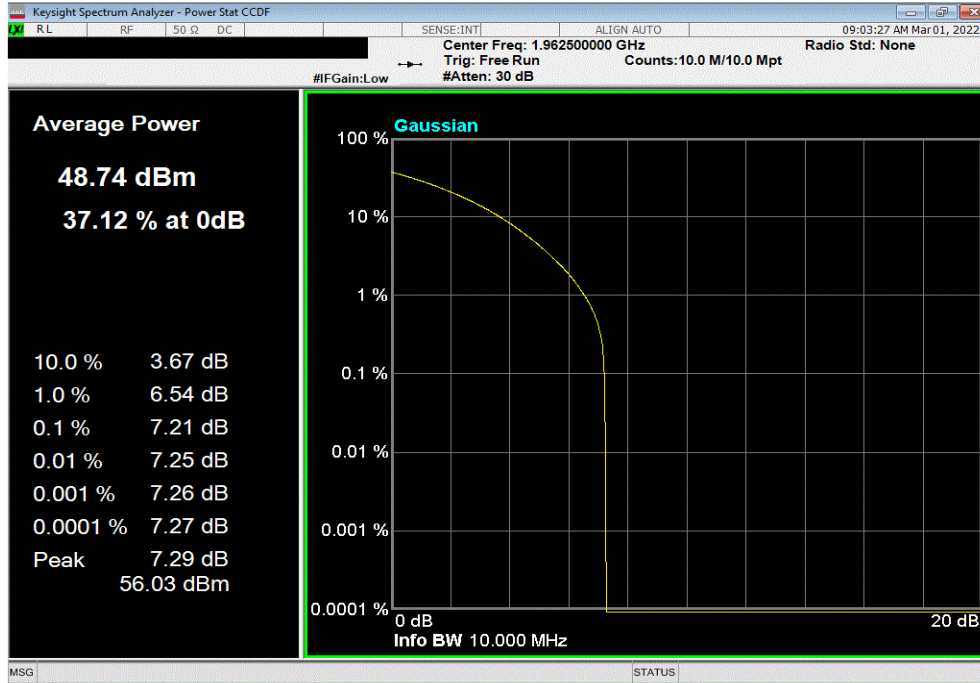

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1935 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.28	13	Pass			

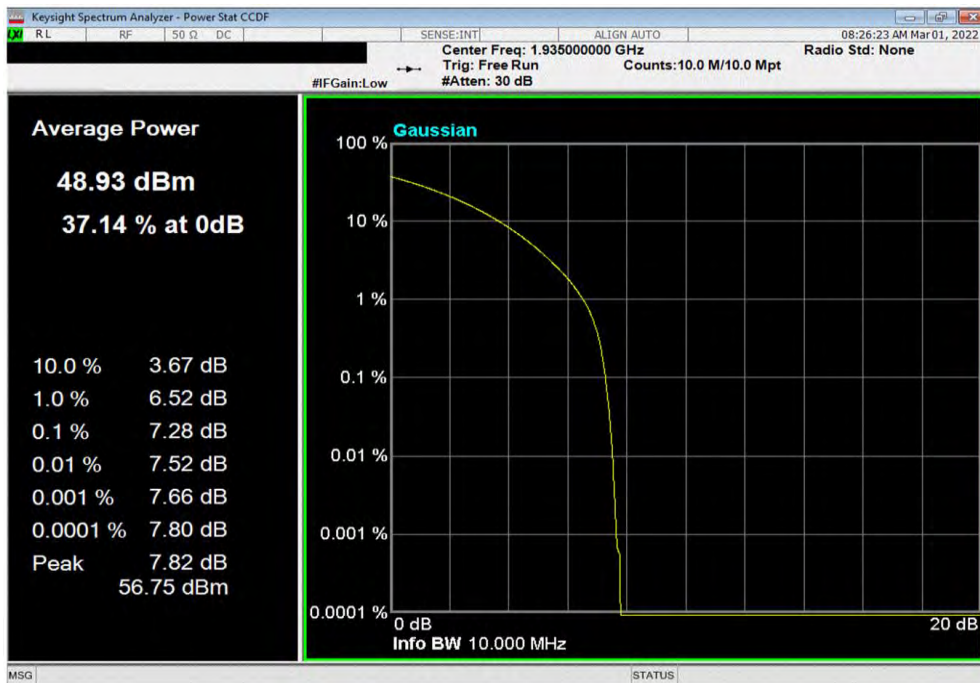


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, High Channel, 1990 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

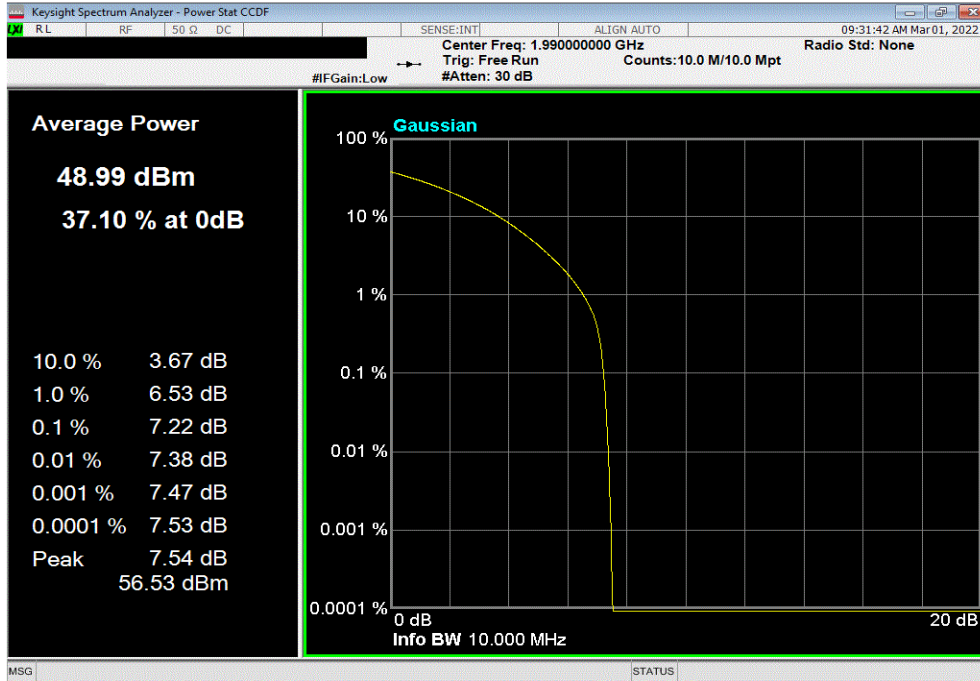

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.19	13	Pass			

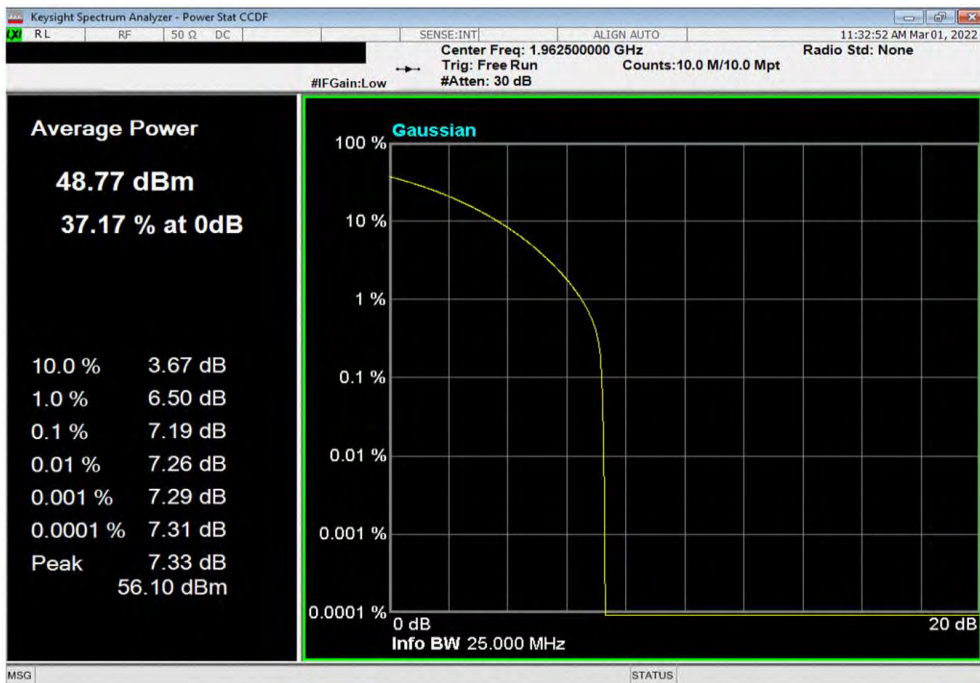


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1937.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.36	13	Pass

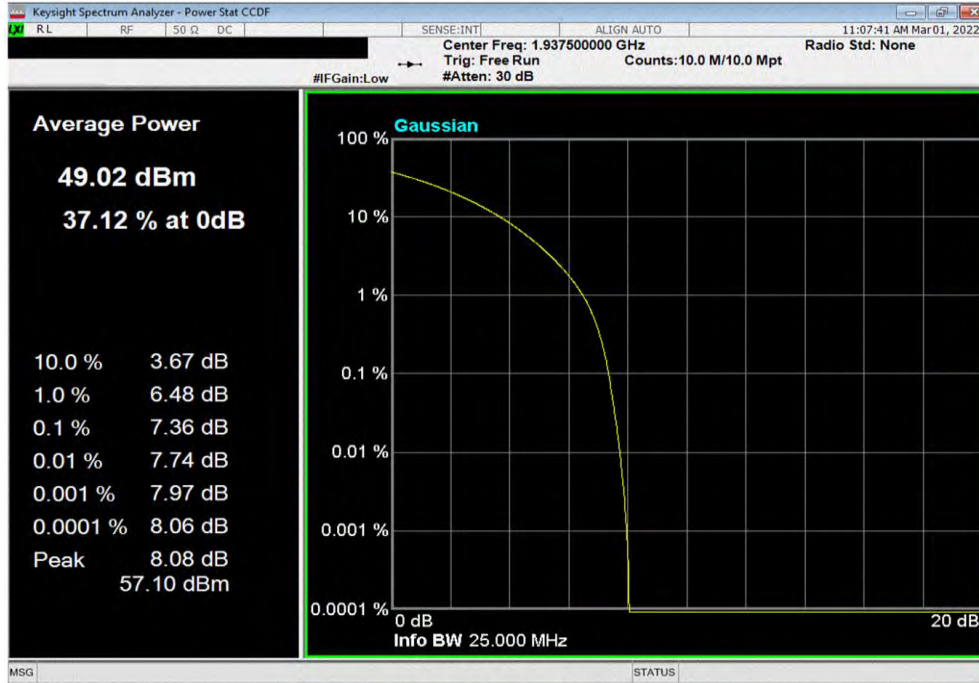

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, High Channel, 1987.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.24	13	Pass

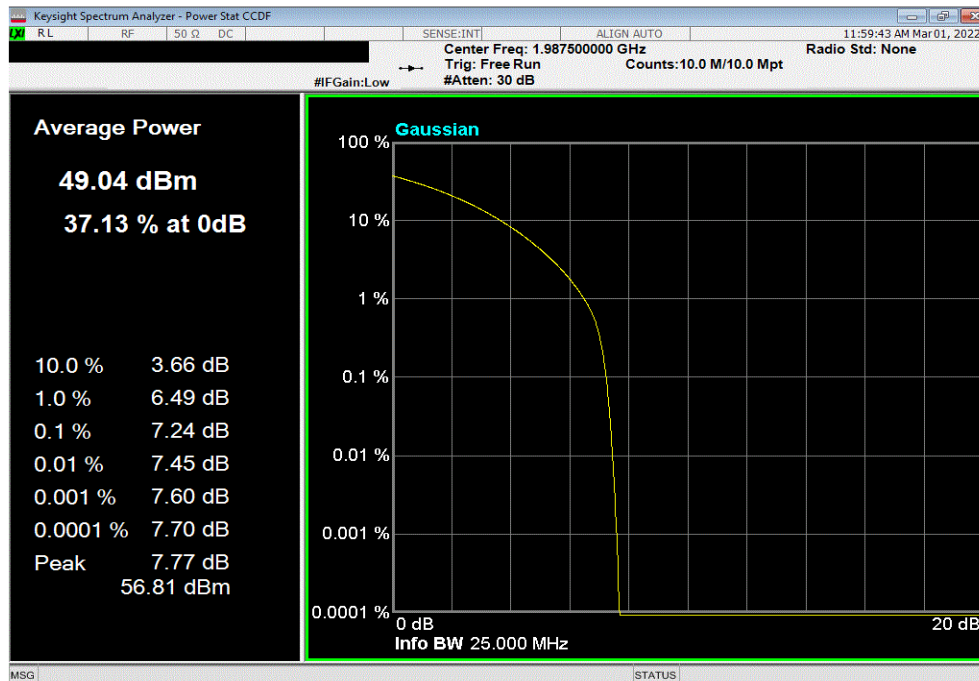


PEAK TO POWER AVERAGE (PAPR) CCDF




TbTx 2021.12.14.1 XMit 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.16	13	Pass			

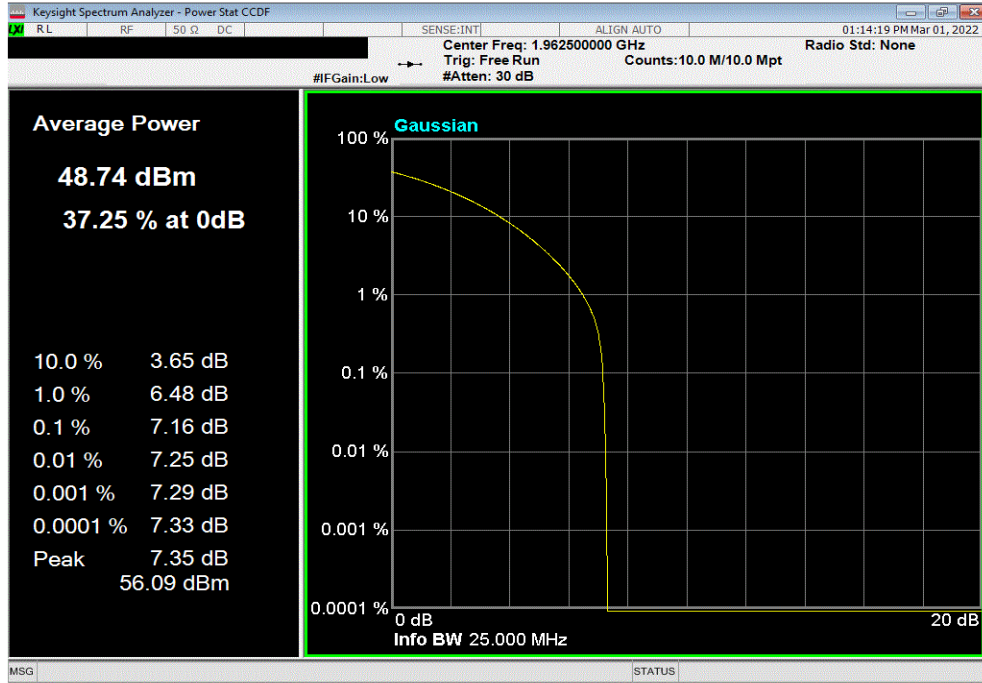

Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Low Channel, 1940 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.39	13	Pass			

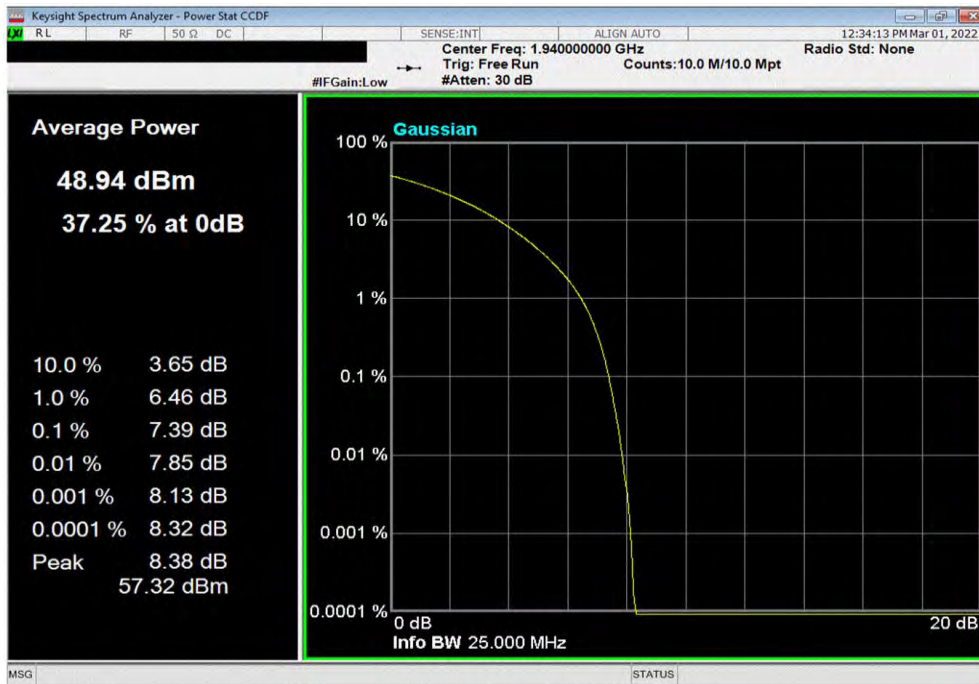


PEAK TO POWER AVERAGE (PAPR) CCDF



TbTx 2021.12.14.1 XMI 2022.02.07.0


Band 25, 1930 MHz - 1995 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, High Channel, 1985 MHz						
		PAPR Value (dB)	PAPR Limit (dB)	Results		
		7.22	13	Pass		

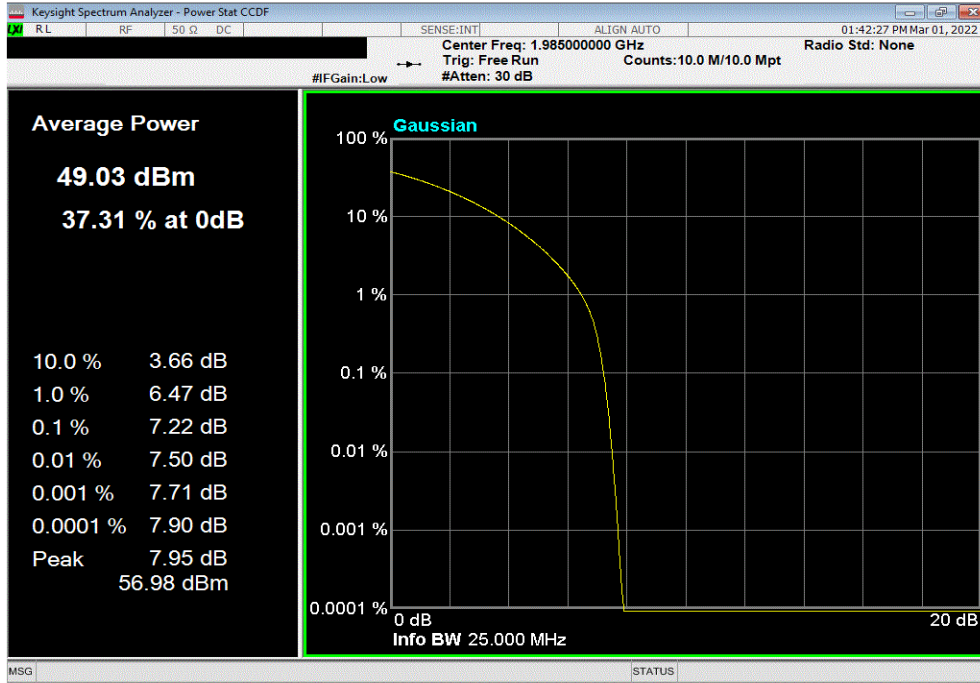

PEAK TO AVERAGE POWER (PAPR) CCDF



TelTx 2021.12.14.1 XMt 2022.02.07.0


EUT: AHFII Remote Radio Head		Work Order: NOKI0037		
Serial Number: YK214000036		Date: 28-Feb-22		
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C		
Attendees: David Le, John Rattanaovong		Humidity: 23.7% RH		
Project: None		Barometric Pres.: 1026 mbar		
Tested by: Mark Baytan		Power: 54 VDC		
		Job Site: TX09		
TEST SPECIFICATIONS				
FCC 27:2022		ANSI C63.26:2015		
RSS-139 Issue 3:2015		RSS-139 Issue 3:2015		
RSS-170 Issue 3:2015		RSS-170 Issue 3:2015		
COMMENTS				
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. Band 66 carriers enabled at maximum power is 80 watts/carrier.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	2	Signature 		
		PAPR Value (dB)	PAPR Limit (dB)	Results
Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier				
Port 1				
1.4 MHz Bandwidth				
256-QAM Modulation				
Low Channel, 2110.7 MHz		7.27	13	Pass
Mid Channel, 2155 MHz		7.27	13	Pass
High Channel, 2199.3 MHz		7.27	13	Pass
3 MHz Bandwidth				
256-QAM Modulation				
Low Channel, 2111.5 MHz		7.26	13	Pass
Mid Channel, 2155 MHz		7.26	13	Pass
High Channel, 2198.5 MHz		7.24	13	Pass
5 MHz Bandwidth				
QPSK Modulation				
Mid Channel, 2155 MHz		7.25	13	Pass
16-QAM Modulation				
Mid Channel, 2155 MHz		7.25	13	Pass
64-QAM Modulation				
Mid Channel, 2155 MHz		7.22	13	Pass
256-QAM Modulation				
Low Channel, 2112.5 MHz		7.22	13	Pass
Mid Channel, 2155 MHz		7.23	13	Pass
High Channel, 2197.5 MHz		7.22	13	Pass
10 MHz Bandwidth				
256-QAM Modulation				
Low Channel, 2115 MHz		7.22	13	Pass
Mid Channel, 2155 MHz		7.22	13	Pass
High Channel, 2195 MHz		7.21	13	Pass
15 MHz Bandwidth				
256-QAM Modulation				
Low Channel, 2117.5 MHz		7.20	13	Pass
Mid Channel, 2155 MHz		7.20	13	Pass
High Channel, 2192.5 MHz		7.20	13	Pass
20 MHz Bandwidth				
256-QAM Modulation				
Low Channel, 2120 MHz		7.24	13	Pass
Mid Channel, 2155 MHz		7.19	13	Pass
High Channel, 2190 MHz		7.23	13	Pass

PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2110.7 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.27	13	Pass			

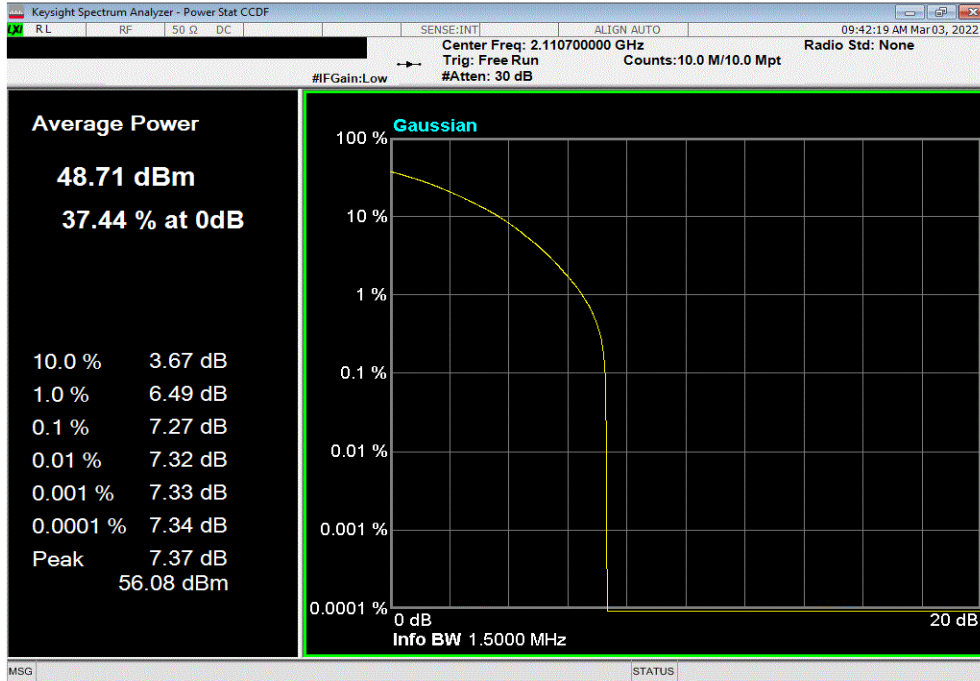

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.27	13	Pass			

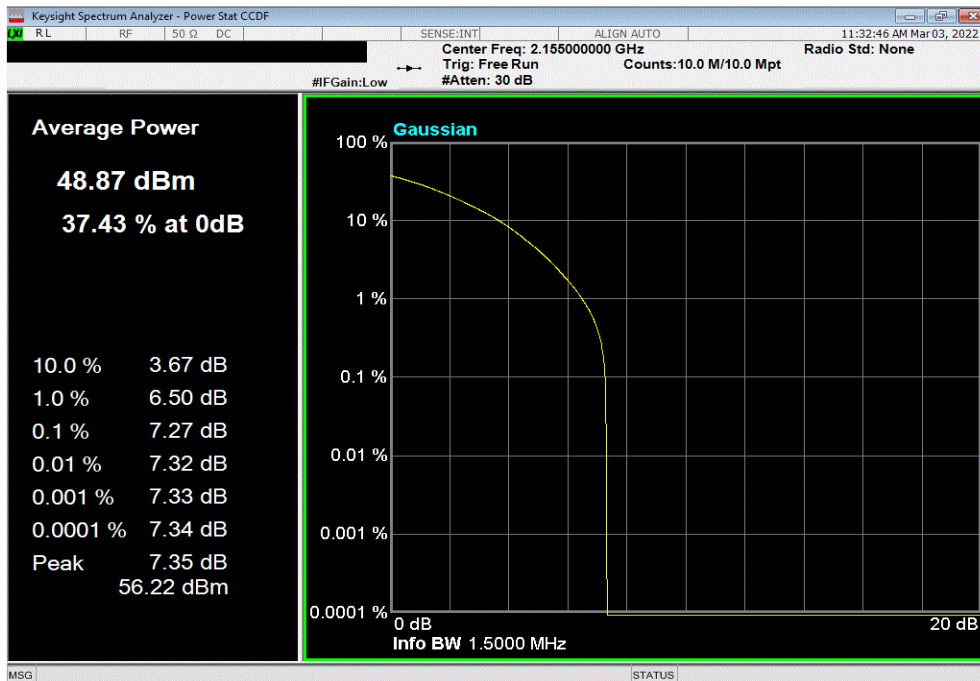


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 1.4 MHz Bandwidth, 256-QAM Modulation, High Channel, 2199.3 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.27	13	Pass			

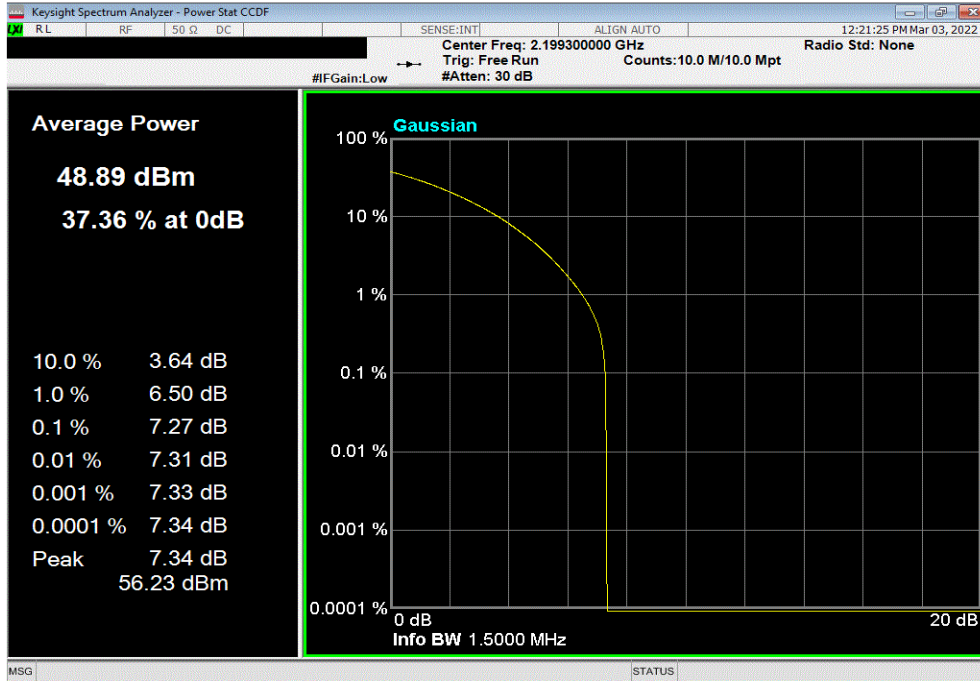

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2111.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.26	13	Pass			

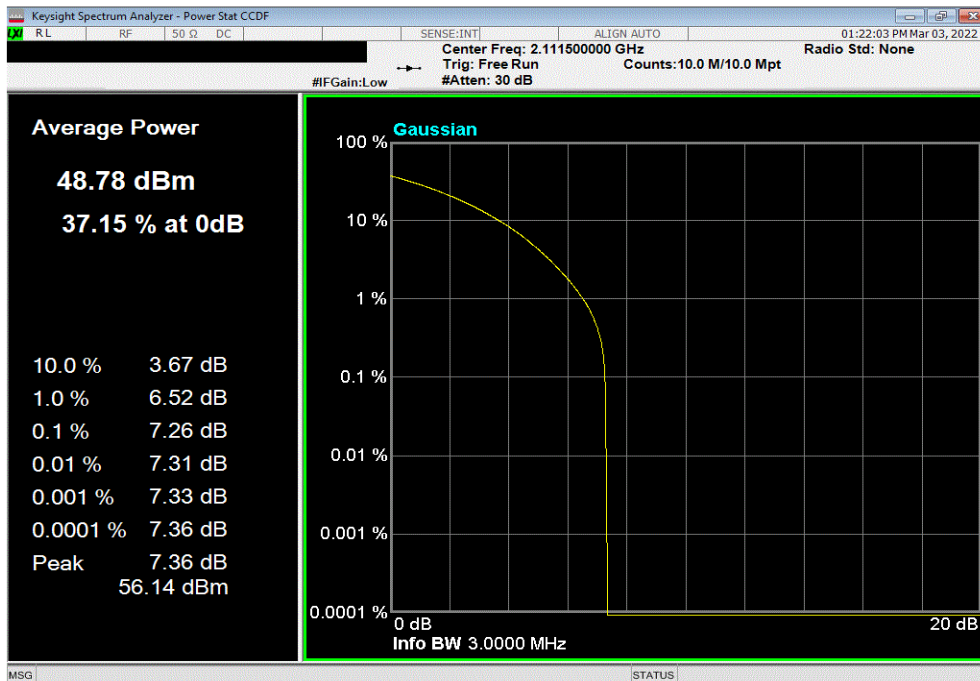


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.26	13	Pass			

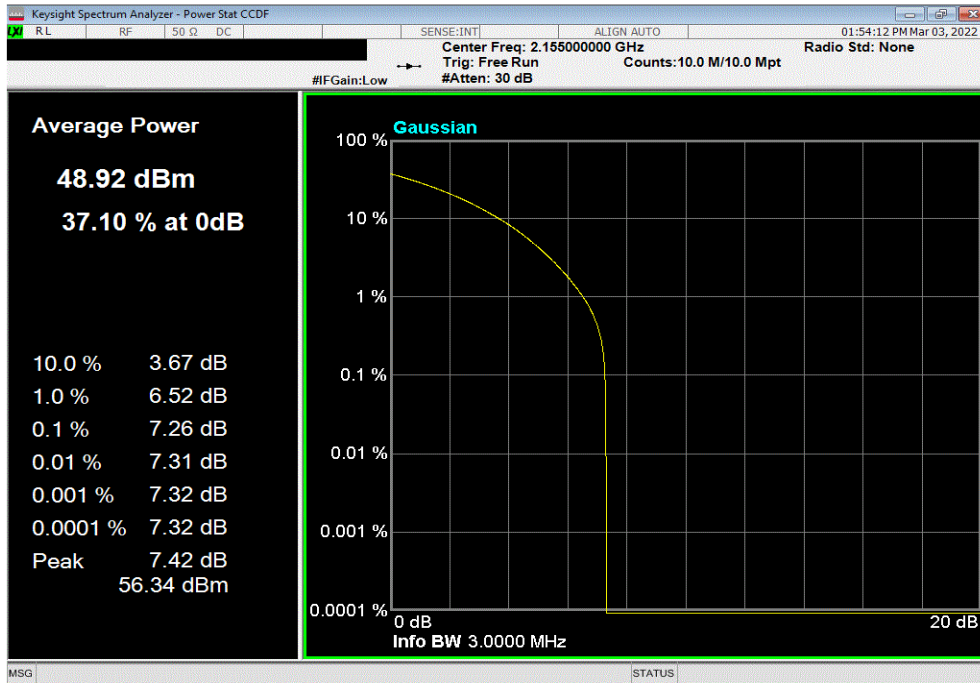

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 3 MHz Bandwidth, 256-QAM Modulation, High Channel, 2198.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.24	13	Pass			

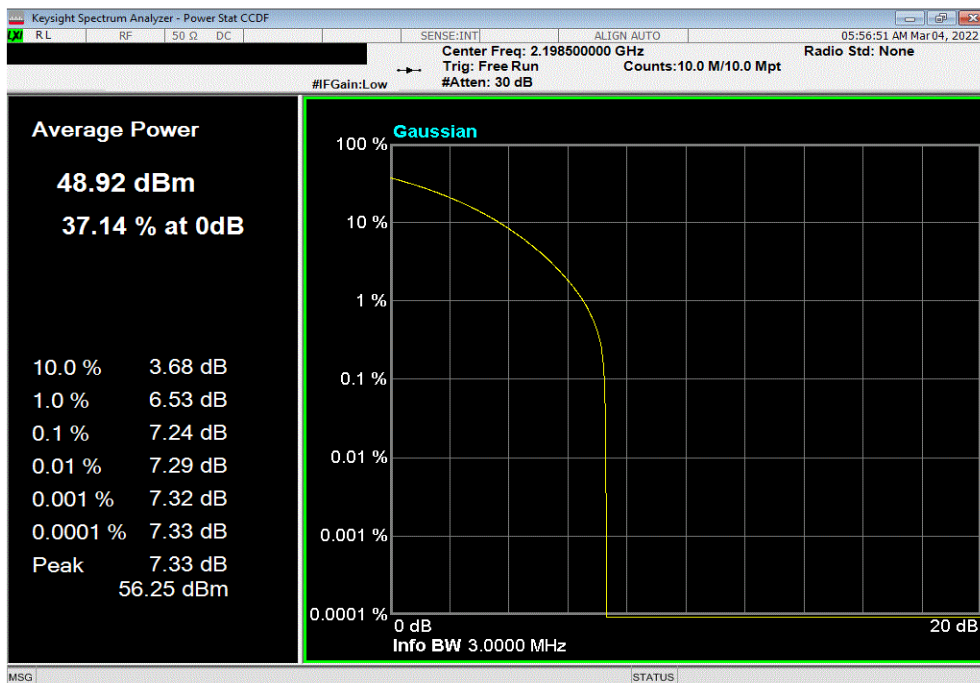


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, QPSK Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.25	13	Pass			

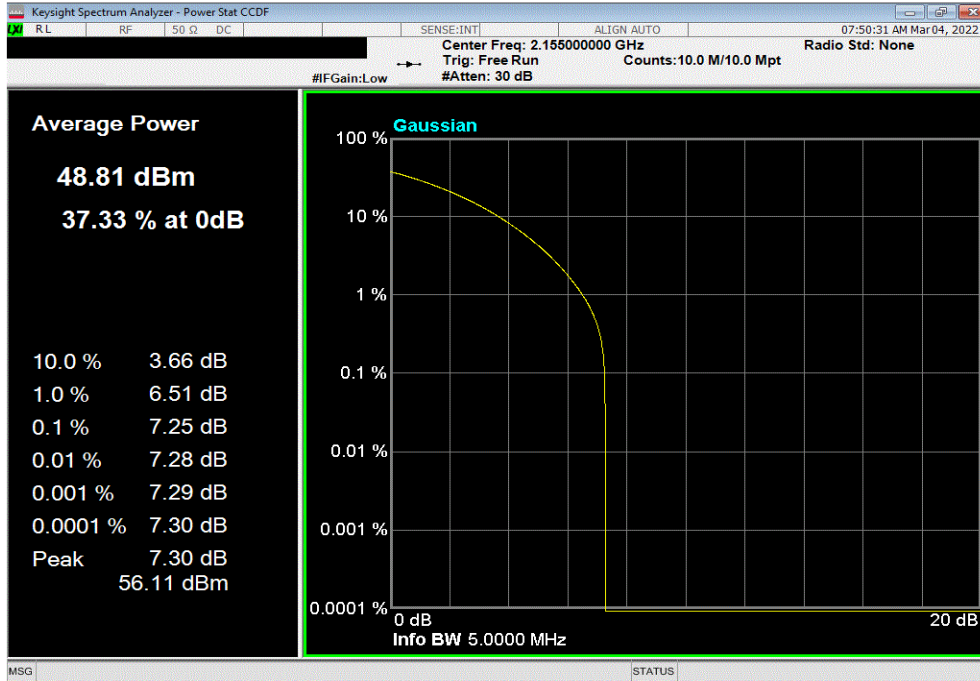

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.25	13	Pass			

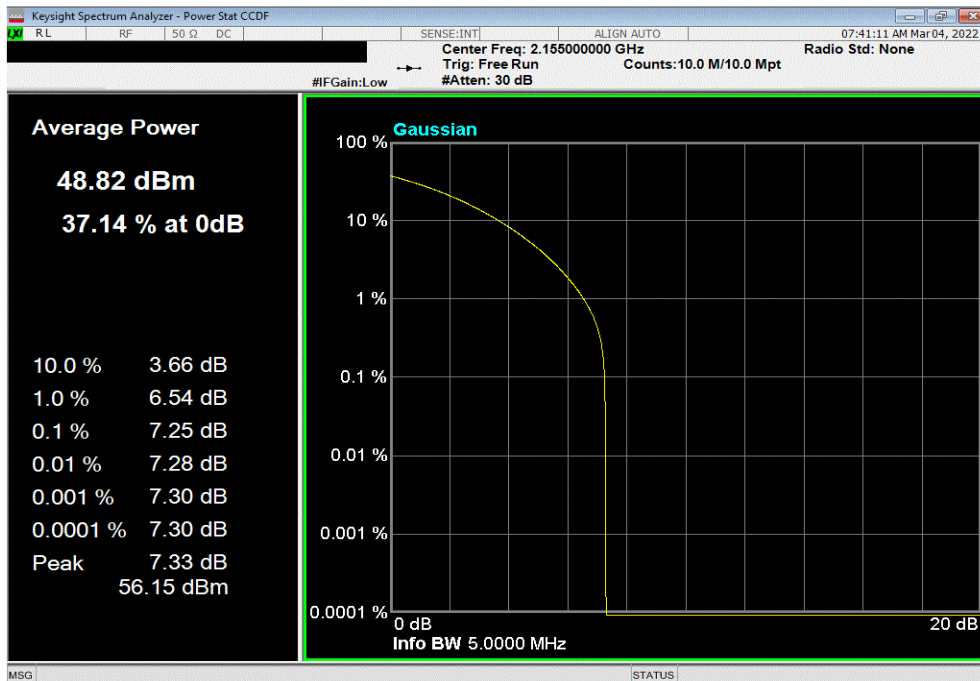


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

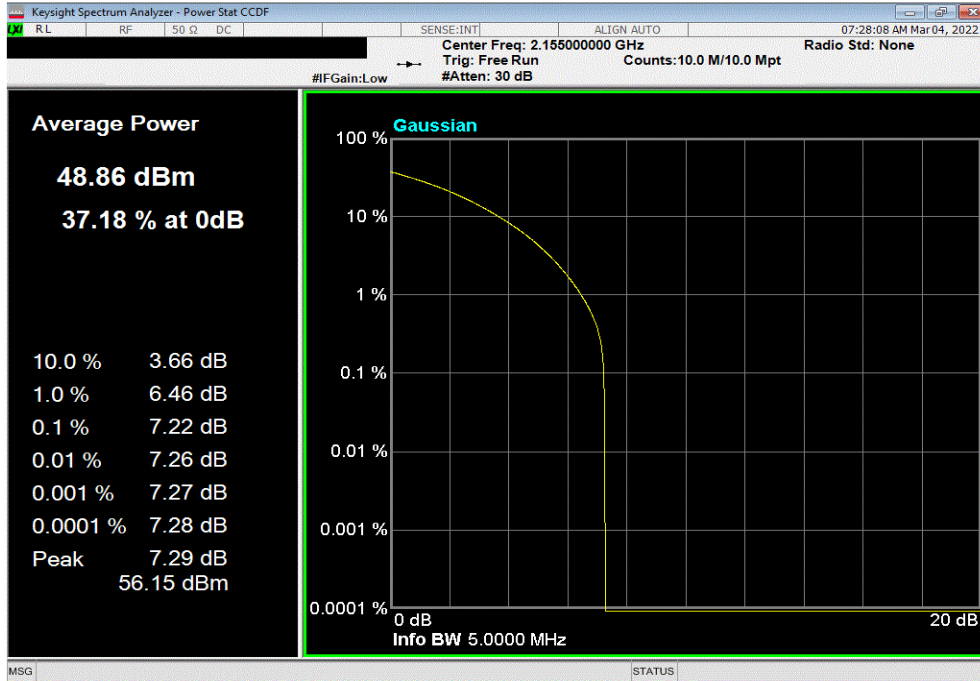

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2112.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

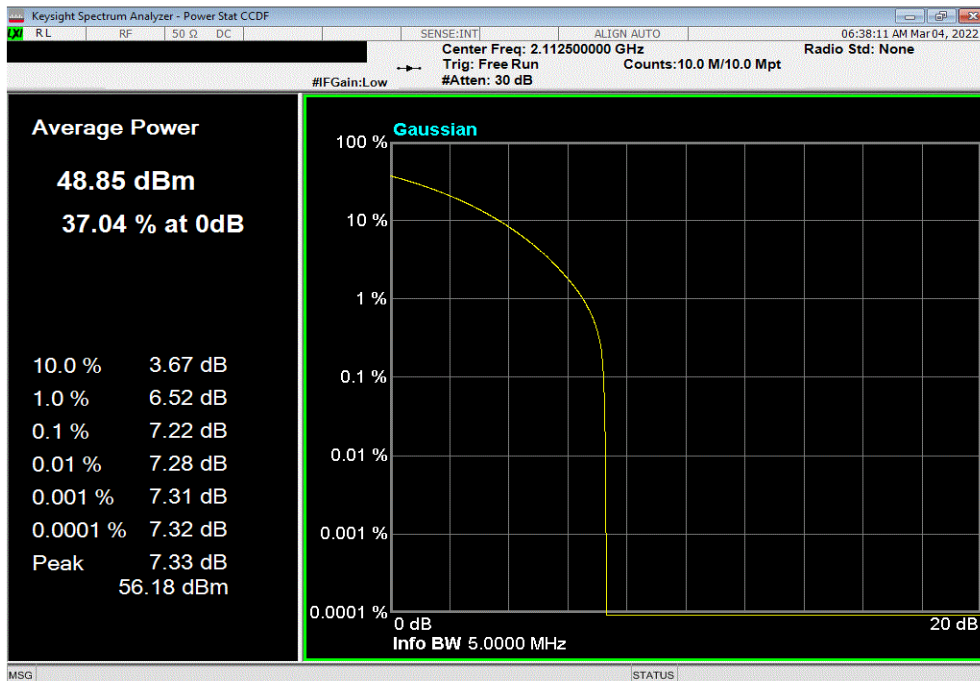


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.23	13	Pass			

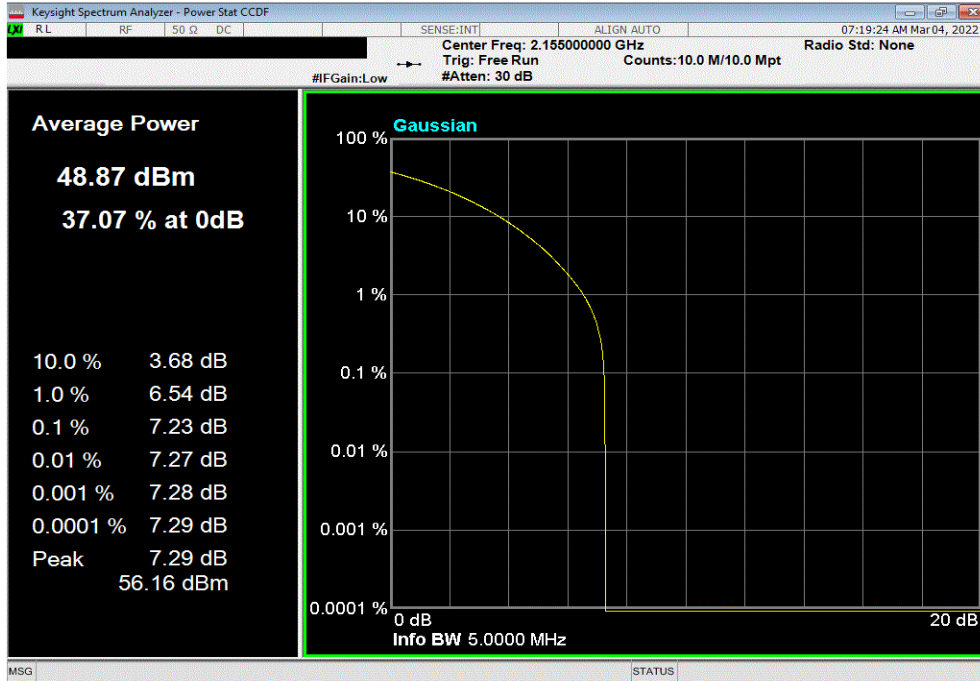

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 5 MHz Bandwidth, 256-QAM Modulation, High Channel, 2197.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

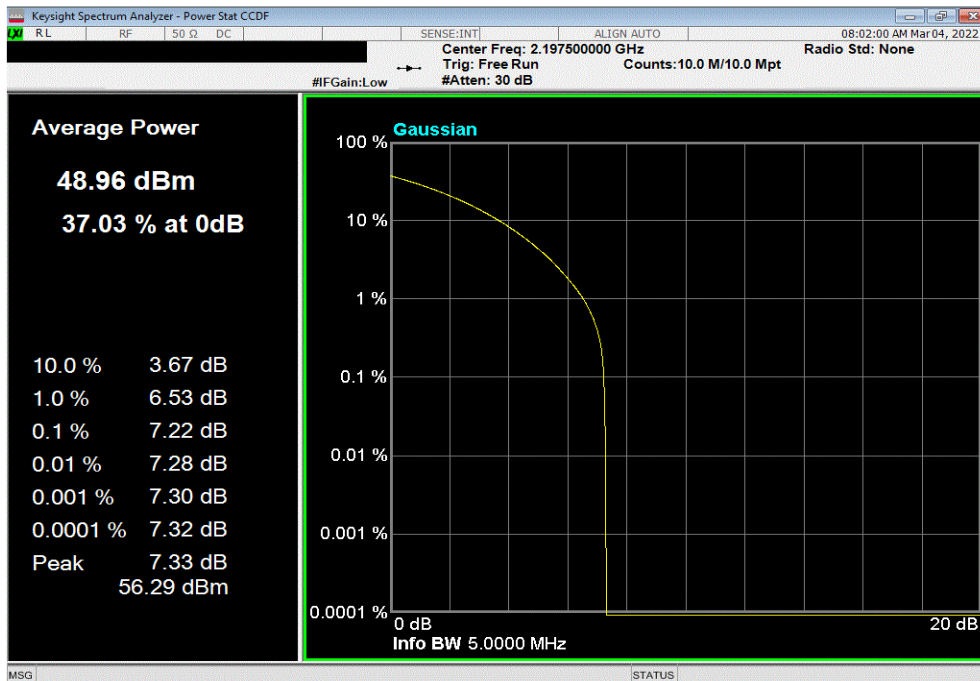


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2115 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

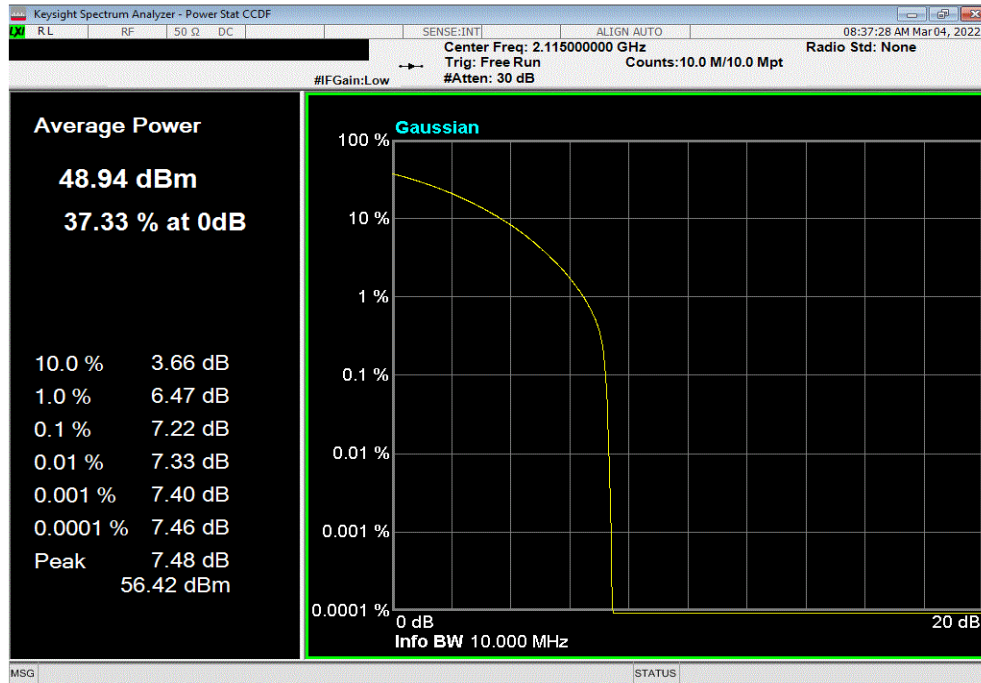

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.22	13	Pass			

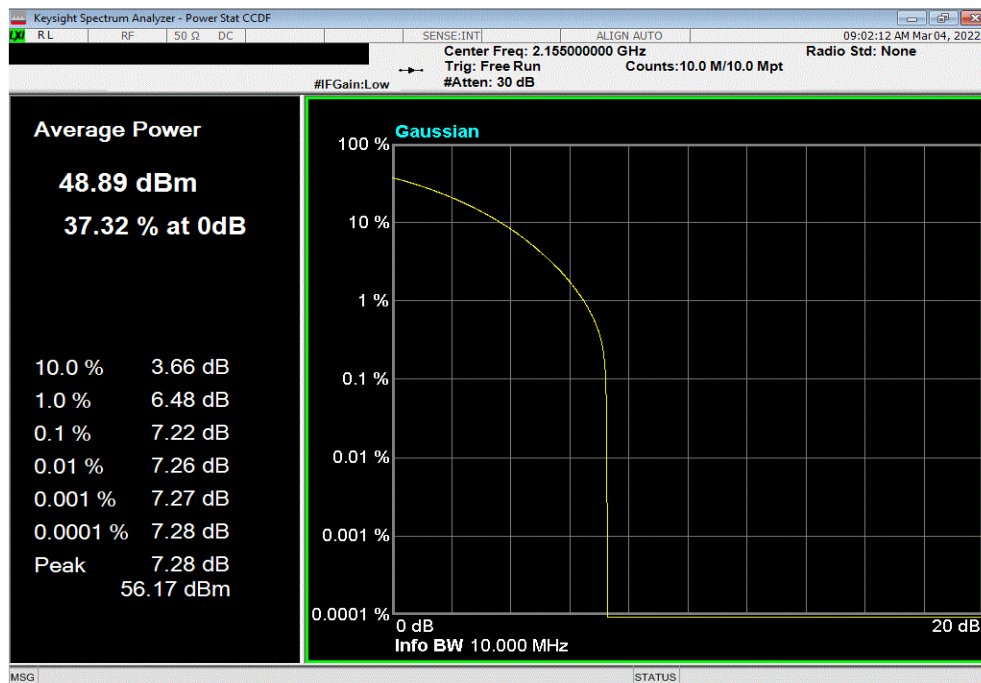


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 10 MHz Bandwidth, 256-QAM Modulation, High Channel, 2195 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.21	13	Pass			

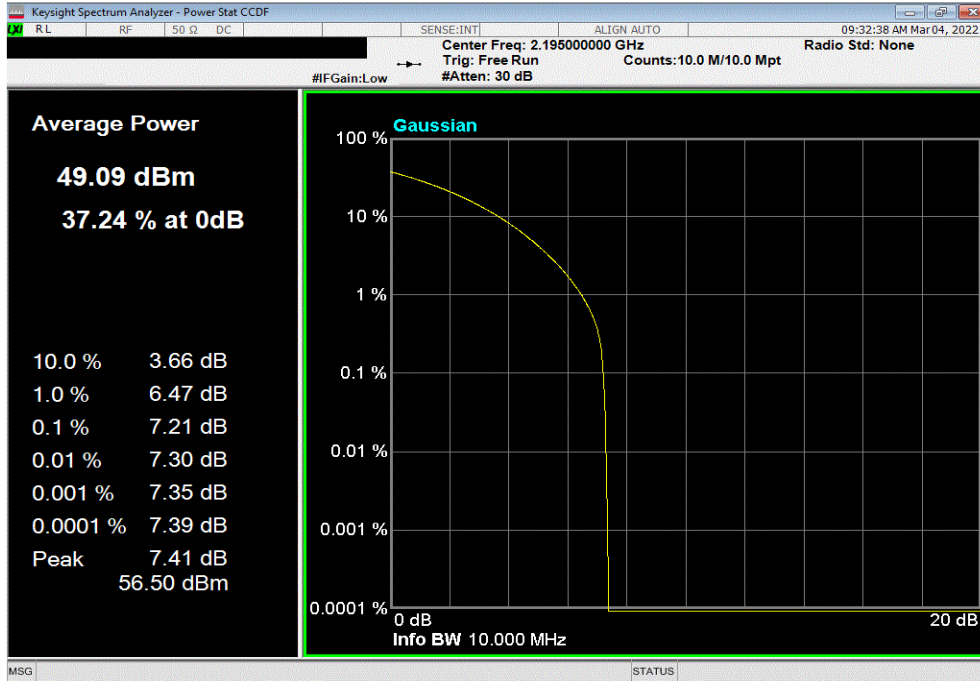

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2117.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.20	13	Pass			

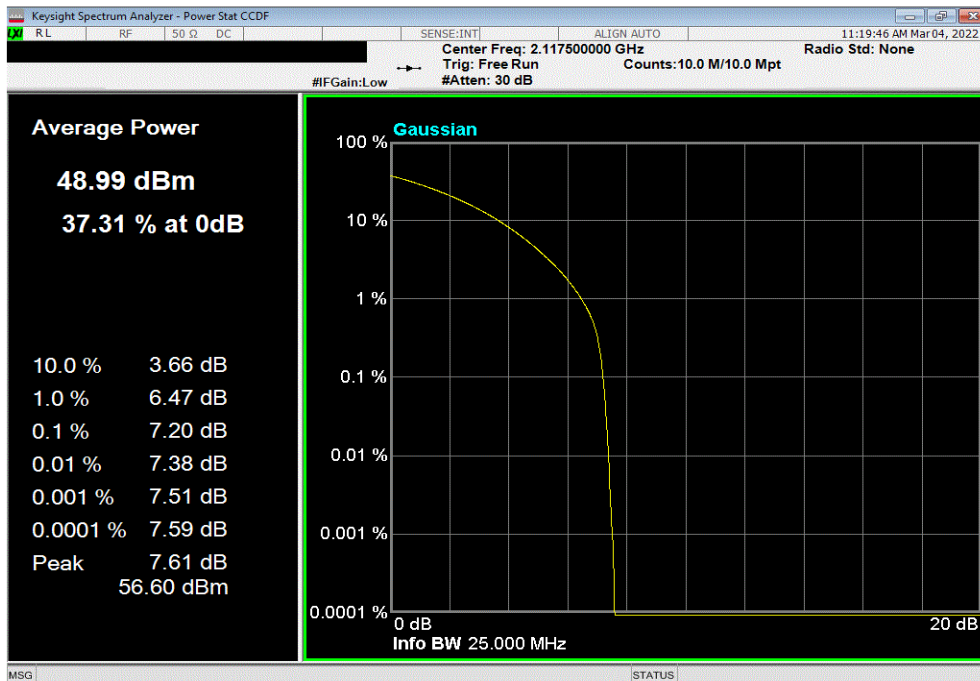


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz.						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.20	13	Pass			

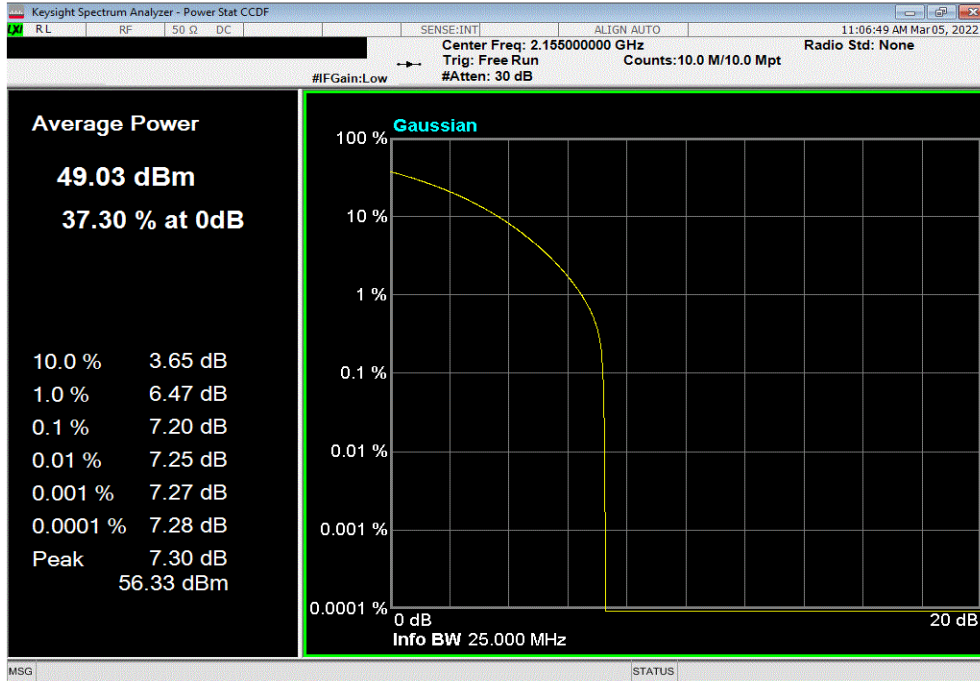

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 15 MHz Bandwidth, 256-QAM Modulation, High Channel, 2192.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.20	13	Pass			

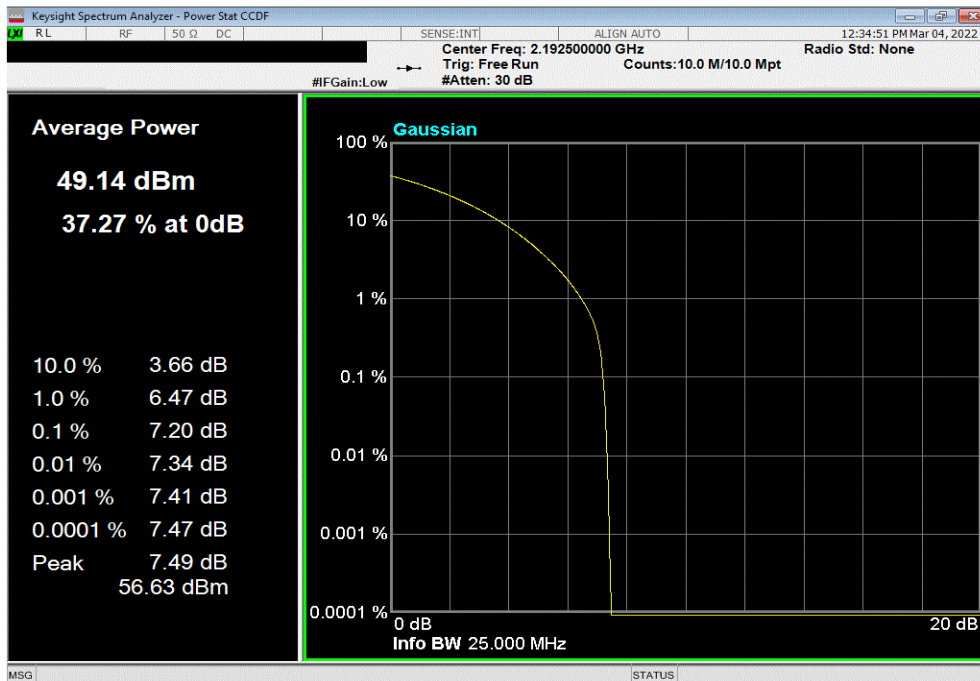


PEAK TO AVERAGE POWER (PAPR) CCDF




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Low Channel, 2120 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.24	13	Pass			

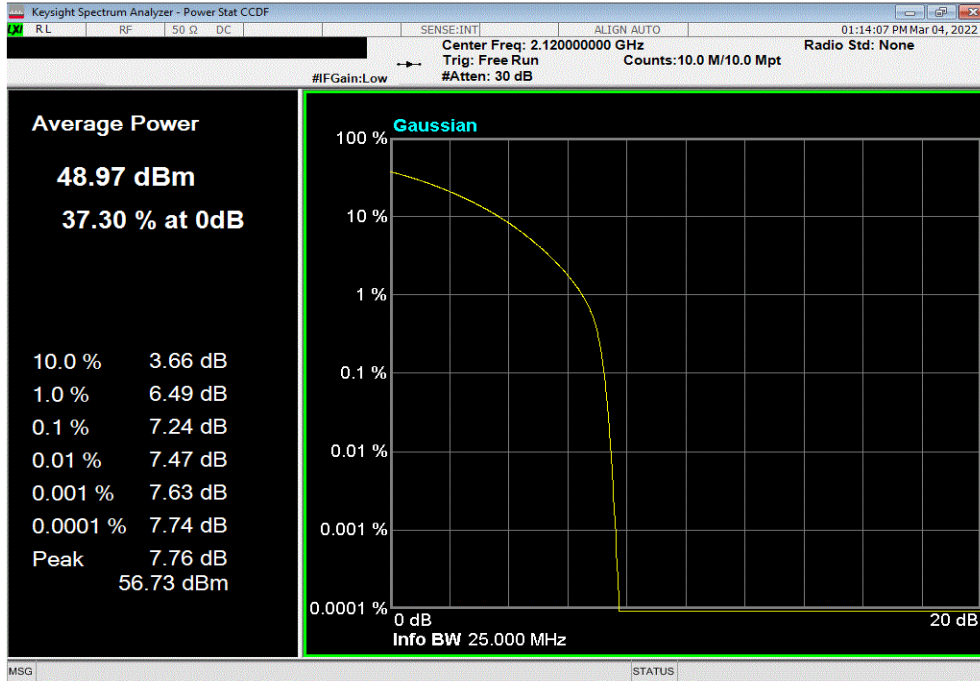

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel, 2155 MHz..						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.19	13	Pass			

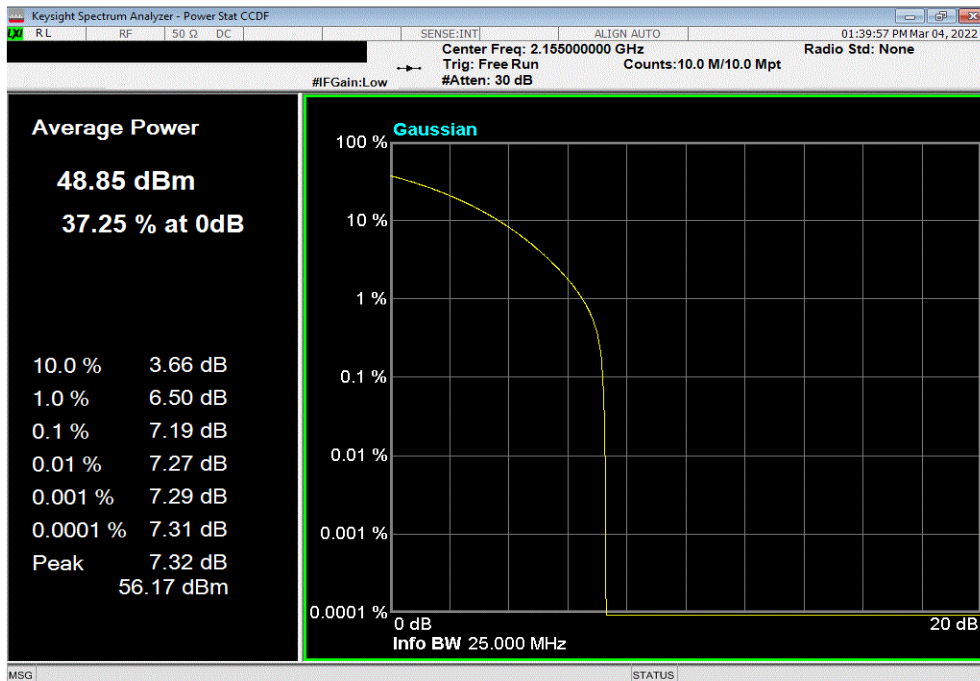


PEAK TO AVERAGE POWER (PAPR) CCDF



TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Single Carrier, Port 1, 20 MHz Bandwidth, 256-QAM Modulation, High Channel, 2190 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.23	13	Pass

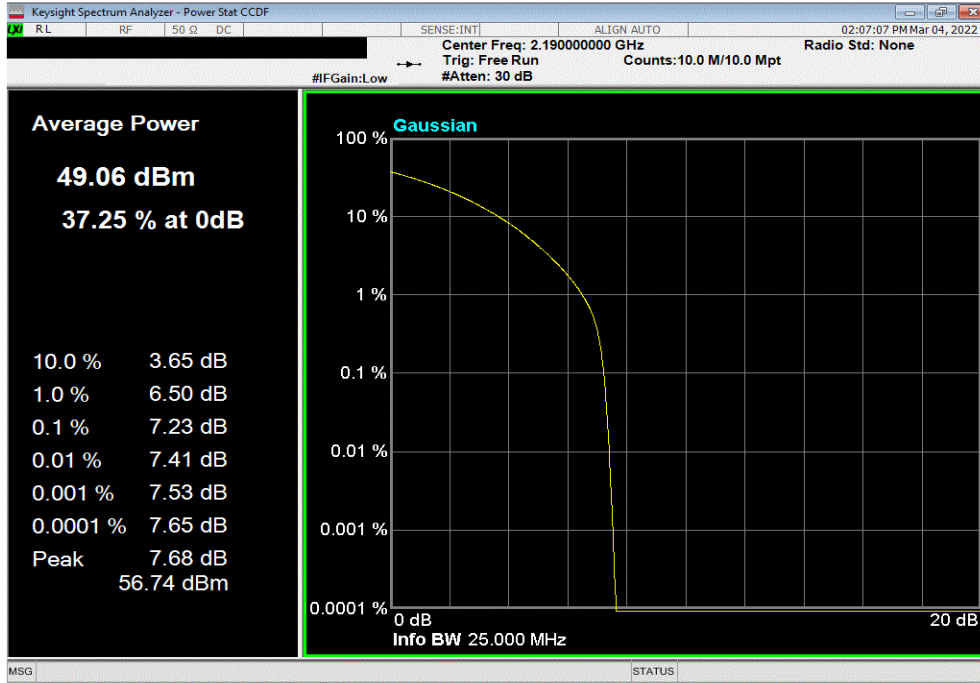

			13	Pass
--	--	--	----	------

PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND



element

XMIT 2022.02.07.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Generator - Signal	Agilent	N5173B	TIW	2020-07-17	2023-07-17
Block - DC	Fairview Microwave	SD3379	AMT	2021-09-14	2022-09-14
Receiver	Rohde & Schwarz	ESR26	ARQ	2021-05-11	2022-05-11

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Power Ratio (PAPR) was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed the rule part defined limit.

The PAPR measurement method is described in ANSI C63.26 section 5.2.3.4.

The PAPR was measured using the CCDF function of the spectrum analyzer.

Per FCC part 24.232(d) and RSS 133 6.4, the PAPR limit shall not exceed 13 dB for more than the ANSI described 0.1% of the time.


Per FCC part 27.50(d)(5), RSS-139 6.5, and RSS-170 5.3.1, the peak-to-average power ratio (PAPR) shall not exceed 13dB.

RF conducted emissions testing was performed only on one port. All four AHFII antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in this certification testing) and antenna port 1 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraphs 5.2.5.3, 5.7.2i, and 6.4.

PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND



TelTx 2021.12.14.1 XMI 2022.02.07.0


EUT: AHFII Remote Radio Head		Work Order: NOKI0037	
Serial Number: YK214000036		Date: 28-Feb-22	
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C	
Attendees: David Le, John Rattanavong		Humidity: 23.7% RH	
Project: None		Barometric Pres.: 1026 mbar	
Tested by: Mark Baytan		Power: 54 VDC	Job Site: TX09
TEST SPECIFICATIONS			
FCC 24E:2022		Test Method	
RSS-133 Issue 6:2013+A1:2018		ANSI C63.26:2015	
		RSS-133 Issue 6:2013+A1:2018	
COMMENTS			
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. Band 25 carriers enabled at maximum power is 80 watts/carrier.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature 	
		PAPR Value (dB)	PAPR Limit (dB) Results
Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band			
Port 1			
10 MHz Bandwidth			
E-TM1.1 with N-TM			
	Low Channel, 1935 MHz	7.19	13 Pass
	Mid Channel, 1962.5 MHz	7.07	13 Pass
	High Channel, 1990 MHz	7.12	13 Pass
15 MHz Bandwidth			
E-TM1.1 with N-TM			
	Low Channel, 1937.5 MHz	7.12	13 Pass
	Mid Channel, 1962.5 MHz	6.84	13 Pass
	High Channel, 1987.5 MHz	6.96	13 Pass
20 MHz Bandwidth			
E-TM1.1 with N-TM			
	Low Channel, 1940 MHz	7.38	13 Pass
	Mid Channel, 1962.5 MHz	7.09	13 Pass
	High Channel, 1985 MHz	7.20	13 Pass

PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 10 MHz Bandwidth, E-TM1.1 with N-TM, Low Channel, 1935 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.19	13	Pass			

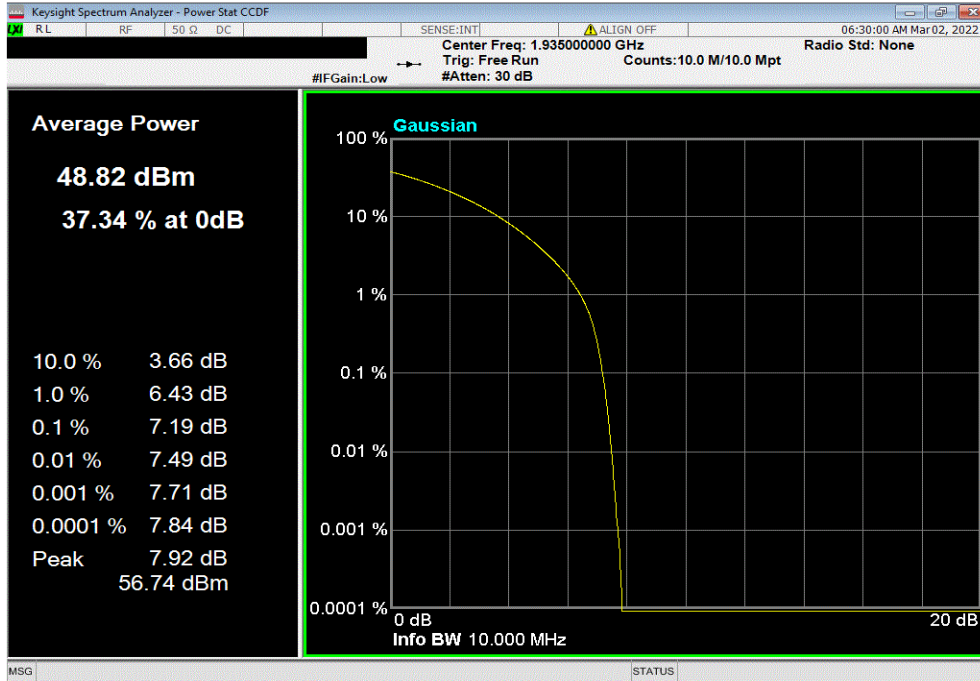

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 10 MHz Bandwidth, E-TM1.1 with N-TM, Mid Channel, 1962.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.07	13	Pass			

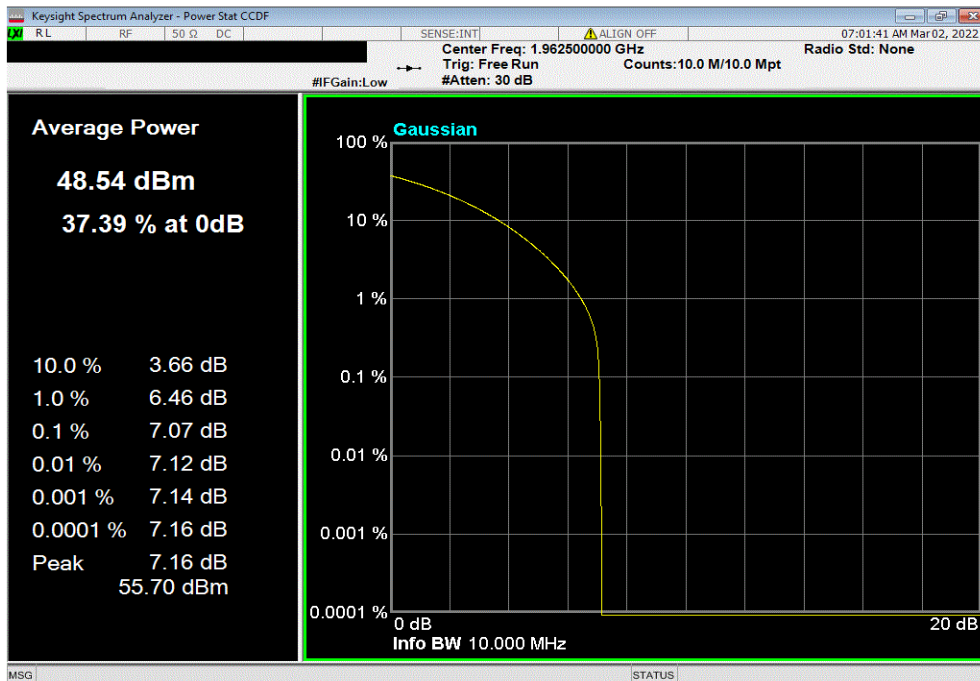


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 10 MHz Bandwidth, E-TM1.1 with N-TM, High Channel, 1990 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.12	13	Pass			

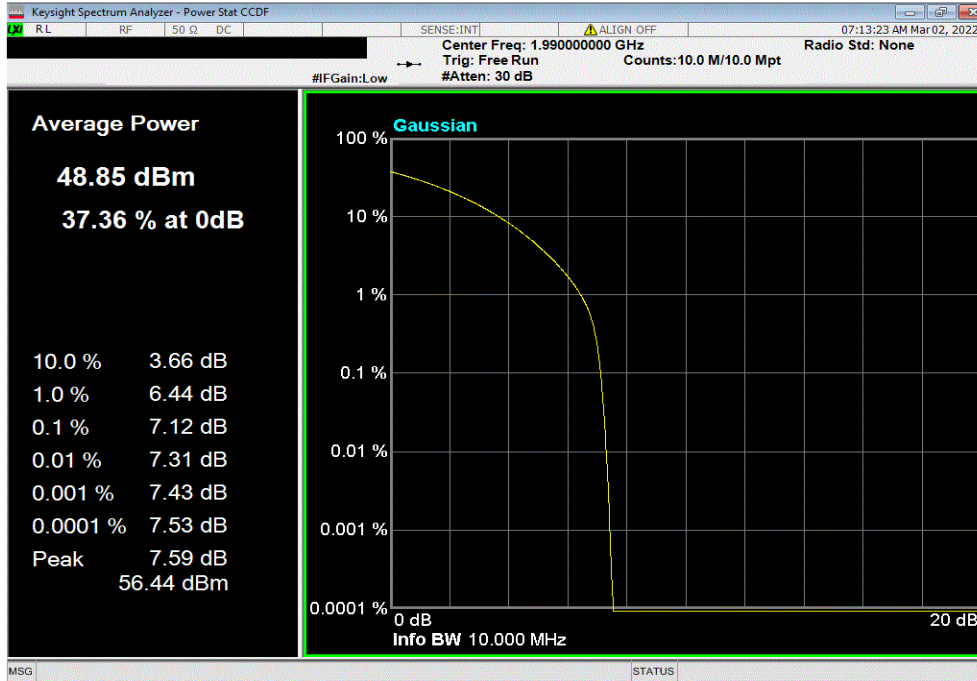

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 15 MHz Bandwidth, E-TM1.1 with N-TM, Low Channel, 1937.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.12	13	Pass			

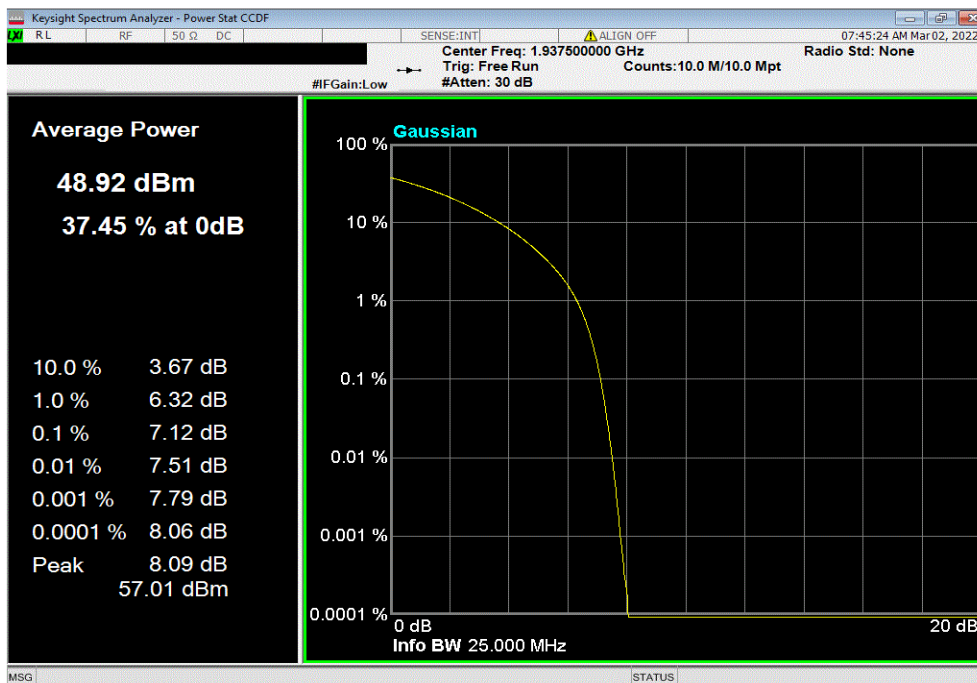


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 15 MHz Bandwidth, E-TM1.1 with N-TM, Mid Channel, 1962.5 MHz.						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	6.84	13	Pass			

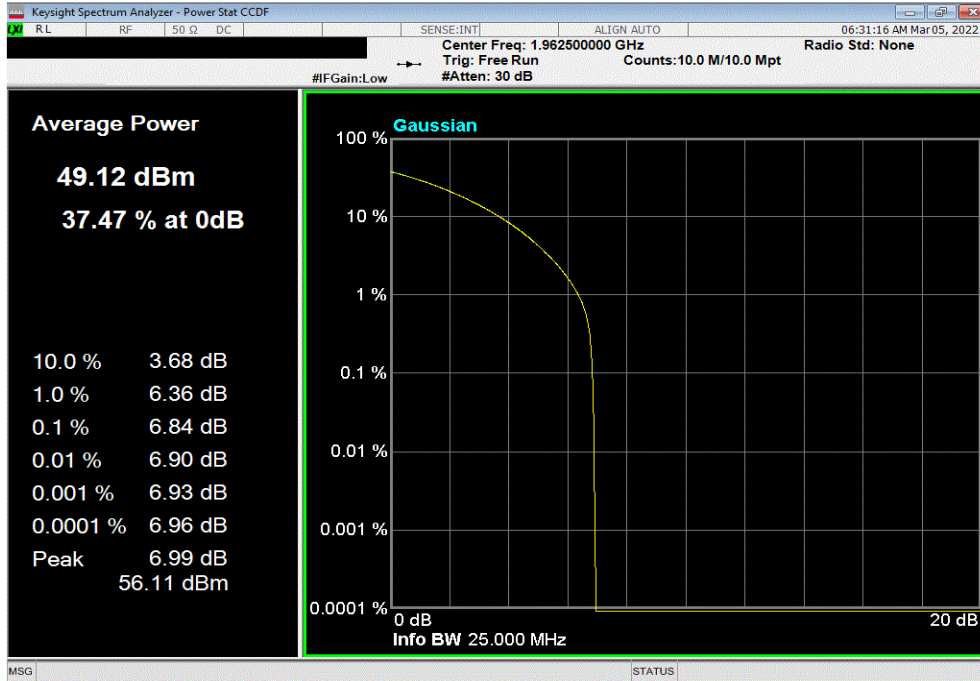

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 15 MHz Bandwidth, E-TM1.1 with N-TM, High Channel, 1987.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	6.96	13	Pass			

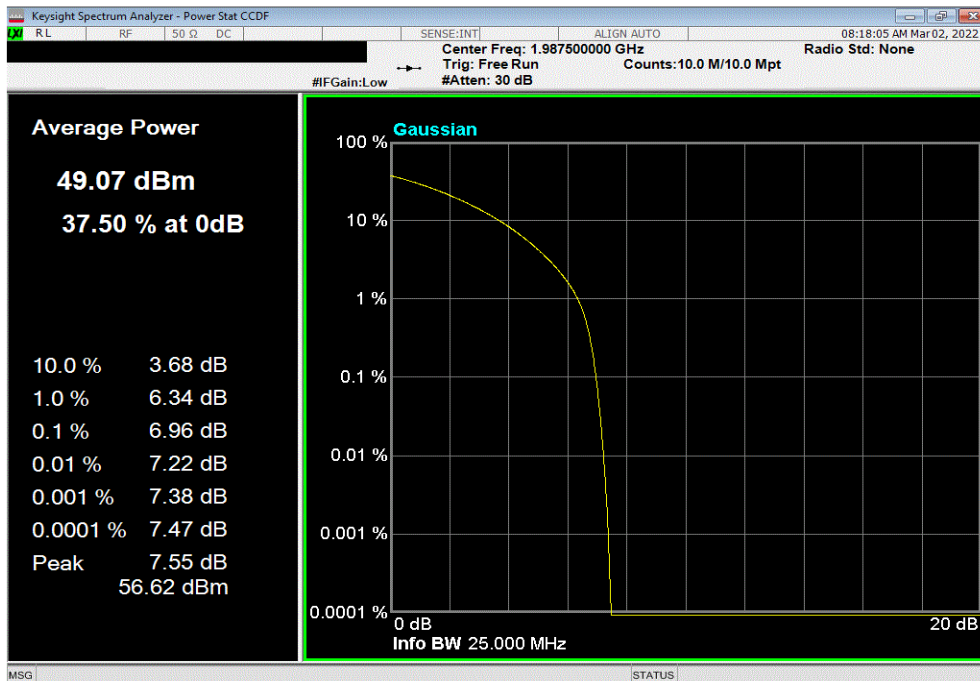


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 20 MHz Bandwidth, E-TM1.1 with N-TM, Low Channel, 1940 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.38	13	Pass			

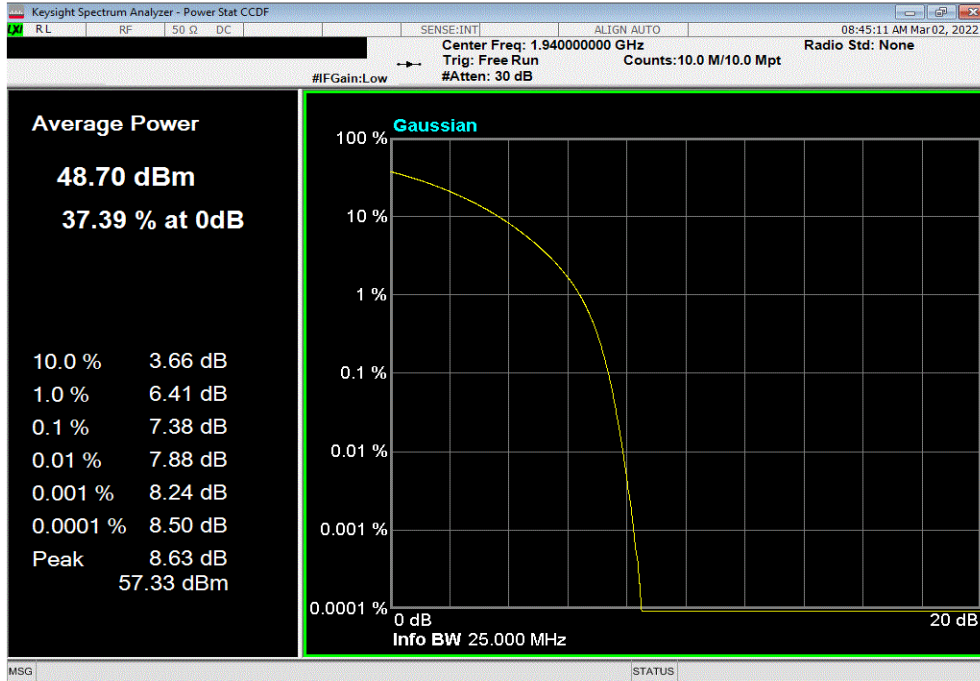

Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 20 MHz Bandwidth, E-TM1.1 with N-TM, Mid Channel, 1962.5 MHz..						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.09	13	Pass			

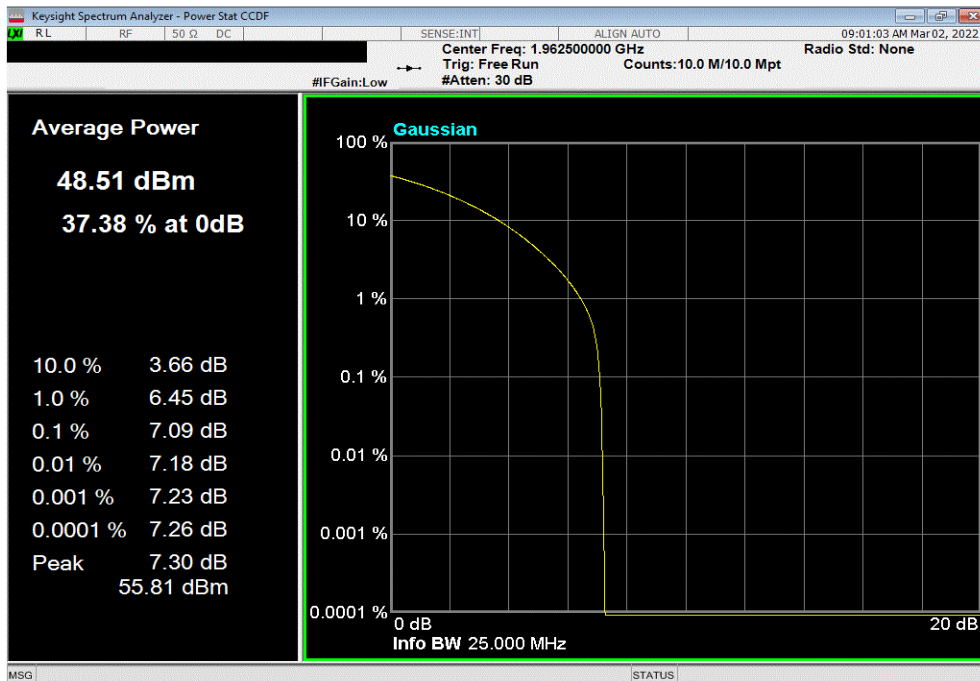


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND



TbTx 2021.12.14.1 XMI 2022.02.07.0


Band 25, 1930 MHz - 1995 MHz, LTE Narrow Band IoT Guard Band, Port 1, 20 MHz Bandwidth, E-TM1.1 with N-TM, High Channel, 1985 MHz						
		PAPR Value (dB)	PAPR Limit (dB)	Results		
		7.20	13	Pass		

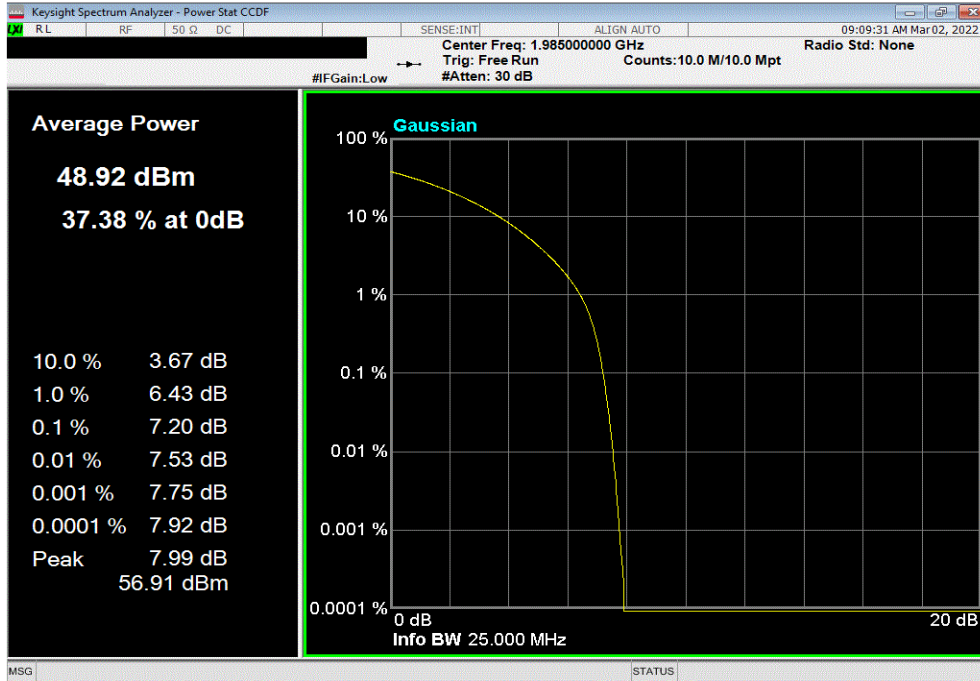

PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND



TelTx 2021.12.14.1 XMI 2022.02.07.0


EUT: AHFII Remote Radio Head		Work Order: NOKI0037		
Serial Number: YK214000036		Date: 28-Feb-22		
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C		
Attendees: David Le, John Rattanaovong		Humidity: 23.7% RH		
Project: None		Barometric Pres.: 1026 mbar		
Tested by: Mark Baytan	Power: 54 VDC	Job Site: TX09		
TEST SPECIFICATIONS				
FCC 27:2022		ANSI C63.26:2015		
RSS-139 Issue 3:2015		RSS-139 Issue 3:2015		
RSS-170 Issue 3:2015		RSS-170 Issue 3:2015		
COMMENTS				
All measurement path losses accounted for in the reference level offset including any attenuators, filters, and DC blocks. Band 66 carriers enabled at maximum power is 80 watts/carrier.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	2	Signature 		
		PAPR Value (dB)	PAPR Limit (dB)	Results
Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band				
Port 1				
10 MHz Bandwidth				
E-TM1.1 with N-TM				
Low Channel, 2115 MHz		7.10	13	Pass
Mid Channel, 2155 MHz		7.08	13	Pass
High Channel, 2195 MHz		7.08	13	Pass
15 MHz Bandwidth				
E-TM1.1 with N-TM				
Low Channel, 2117.5 MHz		6.92	13	Pass
Mid Channel, 2155 MHz		6.84	13	Pass
High Channel, 2192.5 MHz		6.89	13	Pass
20 MHz Bandwidth				
E-TM1.1 with N-TM				
Low Channel, 2120 MHz		7.17	13	Pass
Mid Channel, 2155 MHz..		7.10	13	Pass
High Channel, 2190 MHz		7.14	13	Pass

PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 10 MHz Bandwidth, E-TM1.1 with N-TM, Low Channel, 2115 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.10	13	Pass			

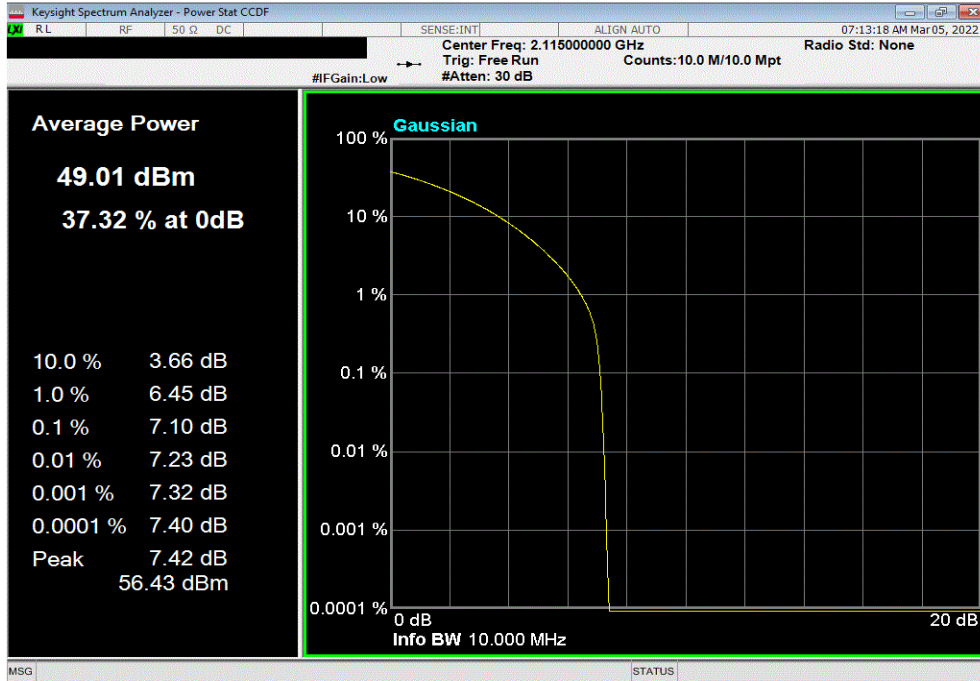

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 10 MHz Bandwidth, E-TM1.1 with N-TM, Mid Channel, 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.08	13	Pass			

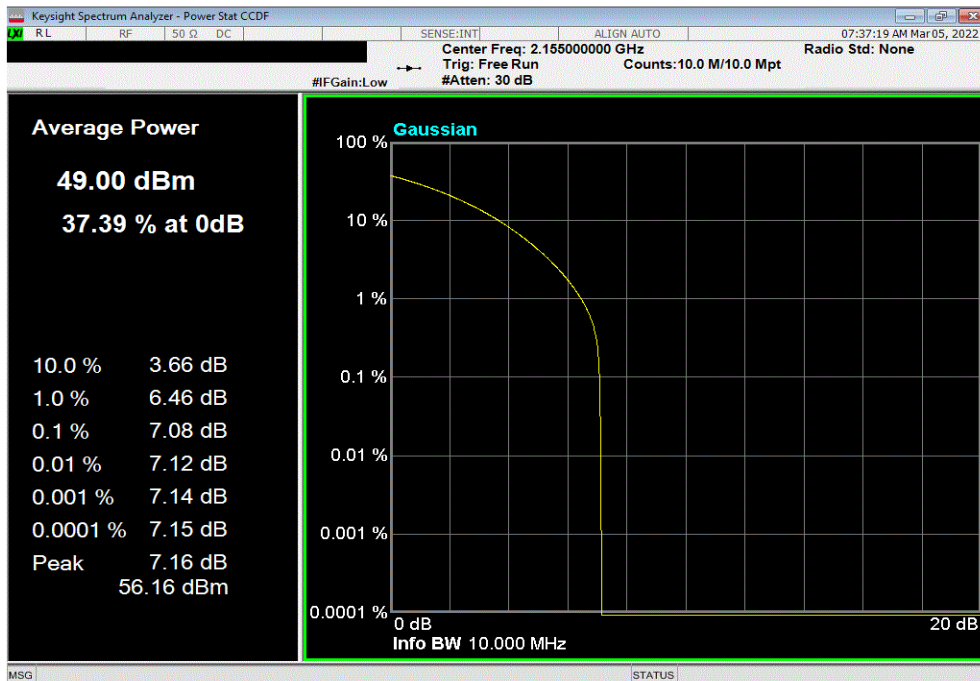


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 10 MHz Bandwidth, E-TM1.1 with N-TM, High Channel, 2195 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.08	13	Pass			

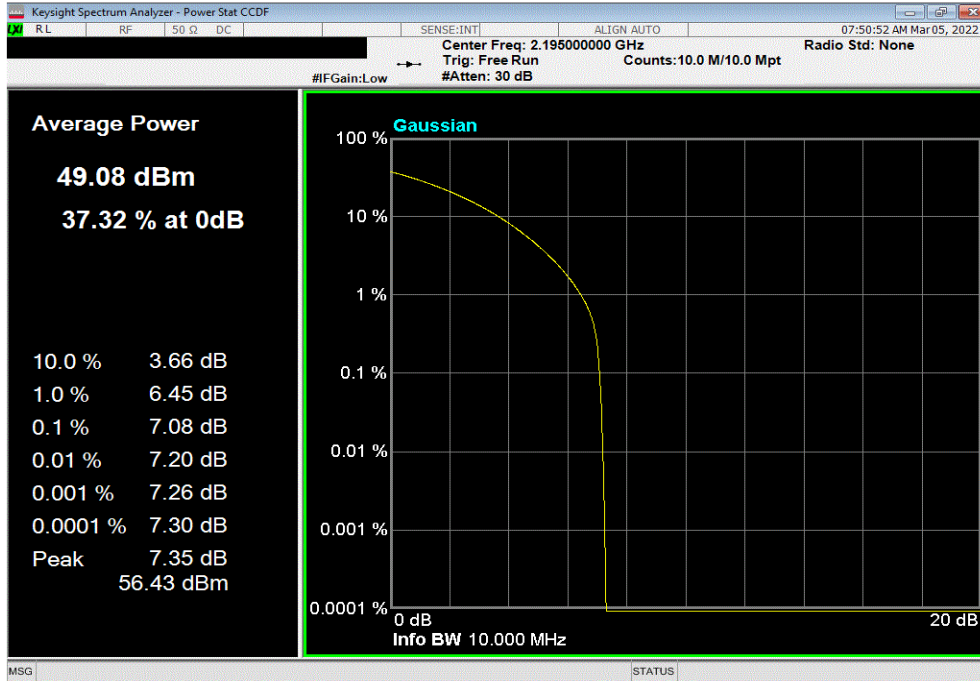

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 15 MHz Bandwidth, E-TM1.1 with N-TM, Low Channel, 2117.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	6.92	13	Pass			

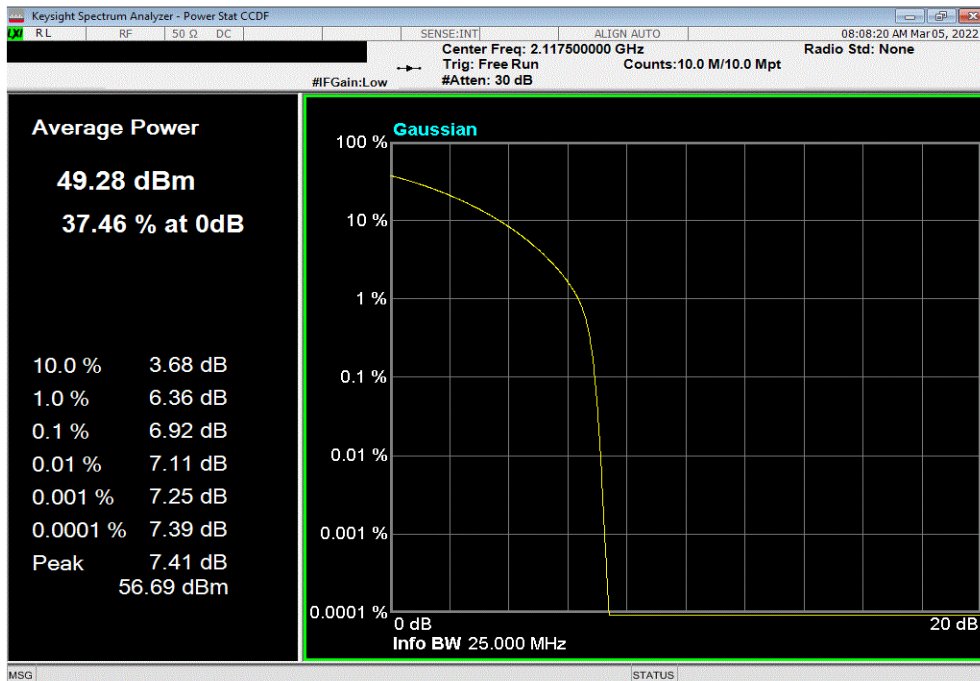


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 15 MHz Bandwidth, E-TM1.1 with N-TM, Mid Channel, 2155 MHz.						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	6.84	13	Pass			

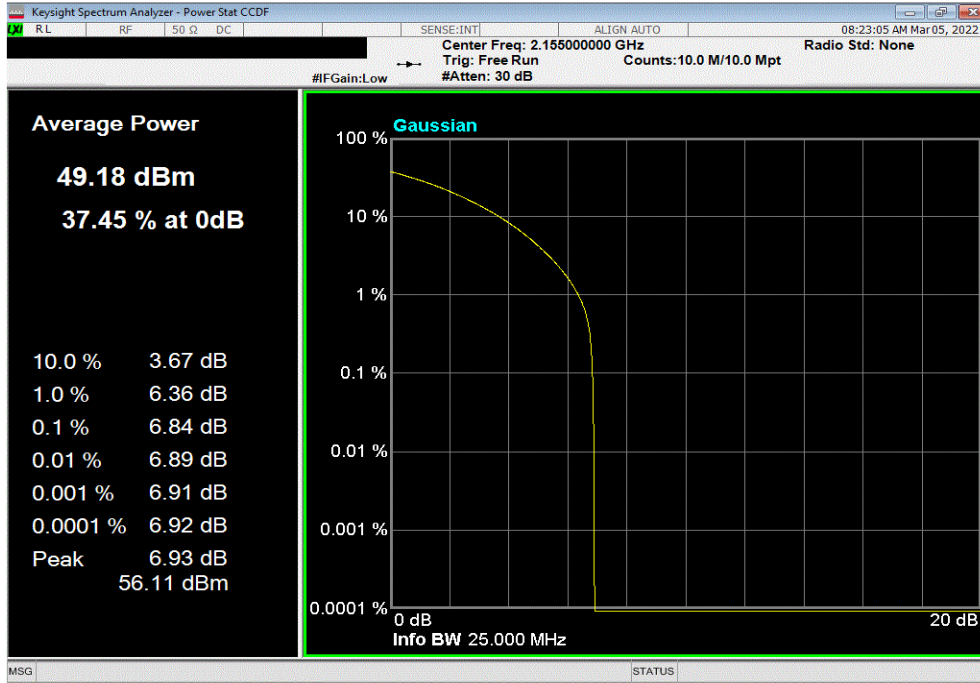

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 15 MHz Bandwidth, E-TM1.1 with N-TM, High Channel, 2192.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	6.89	13	Pass			

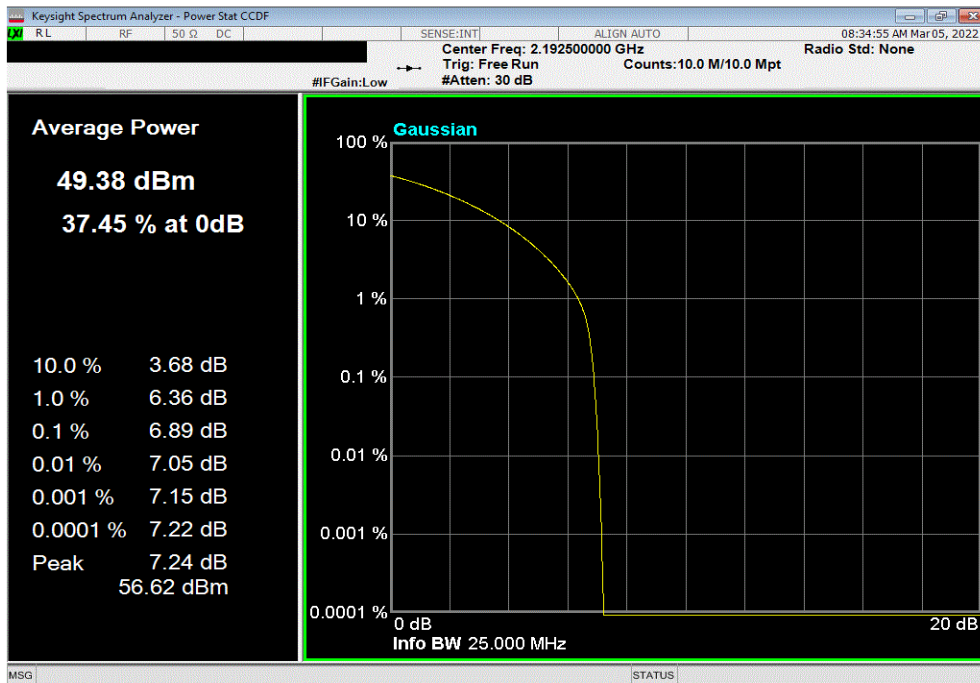


PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND




TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 20 MHz Bandwidth, E-TM1.1 with N-TM, Low Channel, 2120 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.17	13	Pass			

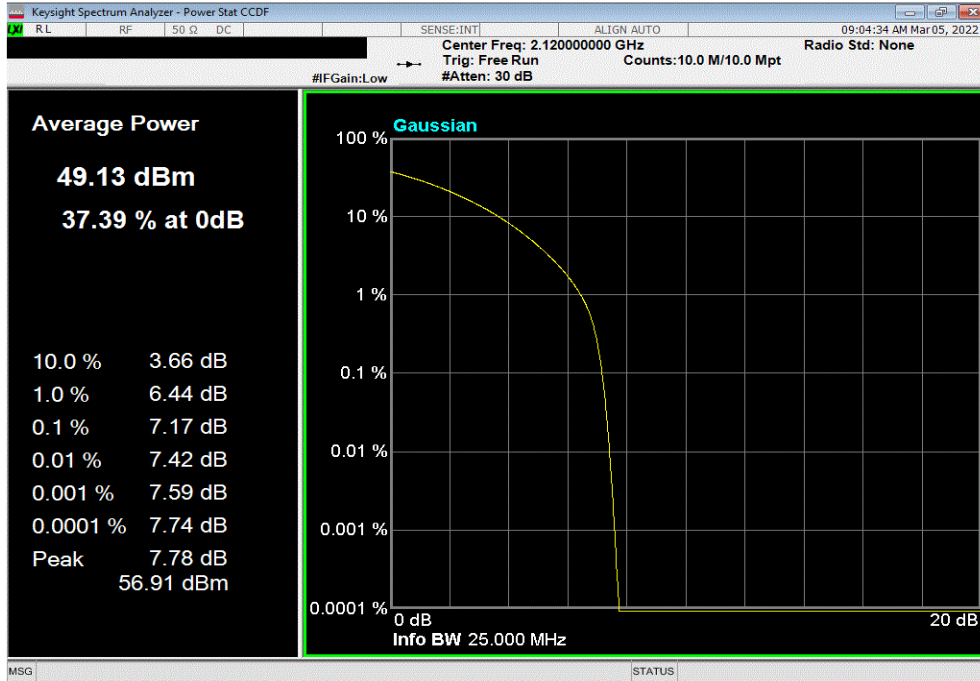

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 20 MHz Bandwidth, E-TM1.1 with N-TM, Mid Channel, 2155 MHz..						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.10	13	Pass			

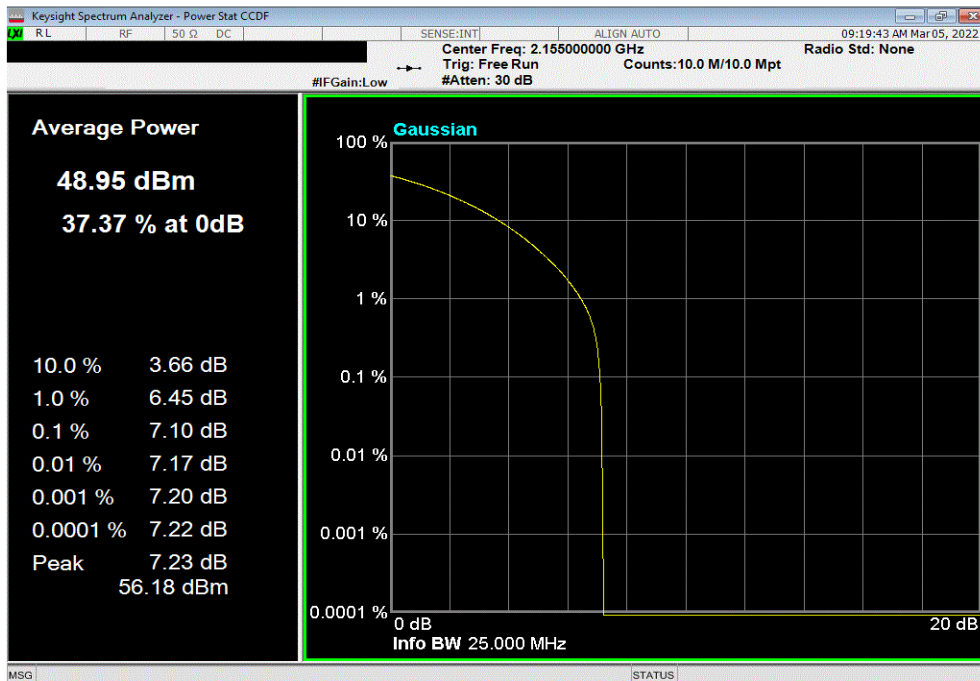

PEAK TO AVERAGE POWER (PAPR) CCDF - GUARD BAND



TbTx 2021.12.14.1 XMI 2022.02.07.0

Band 66, 2110 MHz - 2200 MHz, LTE Narrow Band IoT Guard Band, Port 1, 20 MHz Bandwidth, E-TM1.1 with N-TM, High Channel, 2190 MHz						
		PAPR Value (dB)	PAPR Limit (dB)	Results		
		7.14	13	Pass		

