


Global Product Compliance Laboratory  
600-700 Mountain Avenue  
Room 5B-108  
Murray Hill, New Jersey 07974-0636 USA

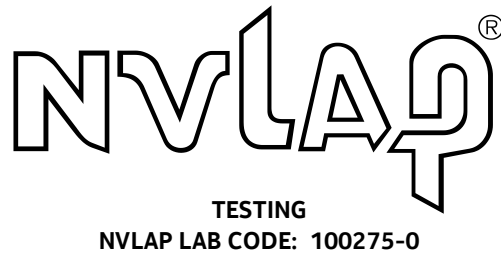

# **Title 47 Code of Federal Regulations Test Report**

Regulation:

FCC Part 2 and 27

Client:

Nokia Solutions and Networks

Product Evaluated:

AHHB

Report Number:

TR-2020-0095-FCC2-27

Date Issued:

September 1, 2020

This report shall not be reproduced, in whole or in part without the approval of Nokia Global Product Compliance Laboratory. This report must not be used by the recipient to claim product endorsement by NVLAP or any other agency of the U.S. Government.

# Table of Contents

- 1. SYSTEM INFORMATION AND REQUIREMENTS ..... 4**
  - 1.1 INTRODUCTION ..... 5
  - 1.2 PURPOSE AND SCOPE ..... 5
  - 1.3 EUT DETAILS ..... 5
  - 1.4 TEST REQUIREMENTS..... 7
  - 1.5 STANDARDS & PROCEDURES ..... 7
  - 1.6 EXECUTIVE SUMMARY ..... 9
  - 1.7 TEST CONFIGURATION FOR ALL ANTENNA PORT MEASUREMENTS. .... 9
- 2. FCC SECTION 2.1046 - RF POWER OUTPUT ..... 10**
  - 2.1 RF POWER OUTPUT..... 10
- 3. FCC SECTION 2.1047 - MODULATION CHARACTERISTICS ..... 14**
  - 3.1 MODULATION CHARACTERISTICS ..... 14
- 4. FCC SECTION 2.1049 – OCCUPIED BANDWIDTH/EDGE OF BAND EMISSIONS..... 15**
  - 4.1 OCCUPIED BANDWIDTH..... 15
  - 4.2 EDGE OF BAND EMISSIONS..... 18
- 5. FCC SECTION 2.1051 - SPURIOUS EMISSIONS AT TRANSMIT ANTENNA PORT..... 23**
  - 5.1 MEASUREMENT OF SPURIOUS EMISSIONS AT TRANSMIT ANTENNA PORT..... 23
- 6. FCC SECTION 2.1053 - FIELD STRENGTH OF SPURIOUS RADIATION. .... 28**
  - 6.1 SECTION 2.1053 FIELD STRENGTH OF SPURIOUS EMISSIONS ..... 28
  - 6.2 FIELD STRENGTH OF SPURIOUS EMISSIONS - LIMITS ..... 28
- 7. NVLAP CERTIFICATE OF ACCREDITATION ..... 29**

Revisions

Date	Revision	Section	Change
9/1/2020	0		Initial Release

*Nokia Global Product Compliance Laboratories is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP®) for specific services, listed on the Scope of Accreditation, for: Electromagnetic Compatibility and Telecommunications. This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated January 2009). NVLAP LAB CODE: 100275-0.*

*Nokia Global Product Compliance Laboratory represents to the client that the laboratory’s accreditation or any of its calibration or test reports in no way constitutes or implies product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. government.*

Prepared By:



Signed: \_\_\_\_\_ 9/1/2020

Ann Chang  
 Compliance Engineer  
 NVLAP Signatory  
 ann.chang@nokia-bell-labs.com

Approved By:



Signed: \_\_\_\_\_ 9/1/2020

Raymond Johnson  
 Technical Manager  
 NVLAP Signatory  
 ray.johnson@nokia-bell-labs.com

Reviewed By:



Signed: \_\_\_\_\_ 9/1/2020

Steve Gordon  
 Compliance Engineer  
 NVLAP Signatory  
 Steve.gordon@nokia-bell-labs.com

## 1. System Information and Requirements

Report copies and other information not contained in this report are held by either the product engineer or in an identified file at the Global Product Compliance Laboratory in Murray-Hill, NJ.

<b>Equipment Under Test (EUT):</b>	AHHB
<b>FCC ID:</b>	VBNAHHB-01
<b>Serial Number:</b>	See Section 1.3.2
<b>Hardware Version:</b>	See Section 1.3.2
<b>Software Version:</b>	5G20A
<b>Frequency Range:</b>	2620-2690 MHz
<b>GPCL Project Number:</b>	2020-0095
<b>Manufacturer:</b>	NOKIA SOLUTIONS AND NETWORKS OY KARAKAARI 7, FI-02610 ESPOO FINLAND
<b>Applicant:</b>	Nokia Solutions and Networks 3201 Olympus Blvd Dallas, Texas 75019
<b>Test Requirement(s):</b>	Title 47 CFR Parts 2 and 27
<b>Test Standards:</b>	<ul style="list-style-type: none"> <li>• Title 47 CFR Parts 2 and 27</li> <li>• KDB 971168 D01 Power Measurement License Digital Systems v03r01 April 9, 2018.</li> <li>• KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013</li> <li>• ANSI C63.26 (2015)</li> <li>• ANSI C63.4 (2014)</li> </ul>
<b>Measurement Procedure(s):</b>	<ul style="list-style-type: none"> <li>• FCC-IC-OB - GPCL Occupied Bandwidth and Power Measurement Test Procedure 12-4-2017</li> <li>• FCC-IC-SE - GPCL Spurious Emissions Test Procedure 12-4-2017</li> </ul>
<b>Test Date(s):</b>	7/31/2020 – 8/25/2020
<b>Test Performed By:</b>	Nokia Global Product Compliance Laboratory 600-700 Mountain Ave. P.O. Box 636 Murray Hill, NJ 07974-0636
<b>Product Engineer(s):</b>	Ron Remy
<b>Lead Engineer:</b>	Steve Gordon
<b>Test Engineer (s):</b>	Nilesh Patel
<b>Test Results:</b> The EUT, <i>as tested</i> met the above listed requirements. Report copies and other information not contained in this report are held by either the product engineer or in an identified file at the Global Product Compliance Laboratory in New Providence, NJ.	

### 1.1 Introduction

This Conformity test report applies to the **AHHB**, hereinafter referred to as the Equipment Under Test (EUT).

### 1.2 Purpose and Scope

The purpose of this document is to provide the testing data required for qualifying the EUT in compliance with FCC Parts 2 and 27 measured in accordance with the procedures set out in Section 2.1033 (c) (14) of the Rules.


AHHB have been tested previously and documented in the FCC filings for VBNAHHB-01. This testing demonstrates compliance for an FCC Class II permissive change for 5G-NR modes of operation for 5 MHz, 10 MHz, 15 MHz and 20 MHz Bandwidths and 20+20 MHz Multicarrier Operation.

### 1.3 EUT Details

#### 1.3.1 Specifications

Specification Items	Description
Radio Access Technology	E-UTRA
Duplex Mode	Frequency Division Duplex (FDD)
Modulation Type(s)	QPSK, 16QAM, 64QAM, 256QAM
Operation Frequency Range	2620-2690 MHz
Channel Bandwidth	5,10,15,20 MHz
Number of Tx Ports per Unit	4
Number of Rx Ports Per Unit	4
MIMO	Yes
Conducted Power per Antenna Port	40W Single Carrier / 20W Dual Carrier
Deployment Environment	Outdoor
Power Source	-48VDC

### 1.3.2 Photographs

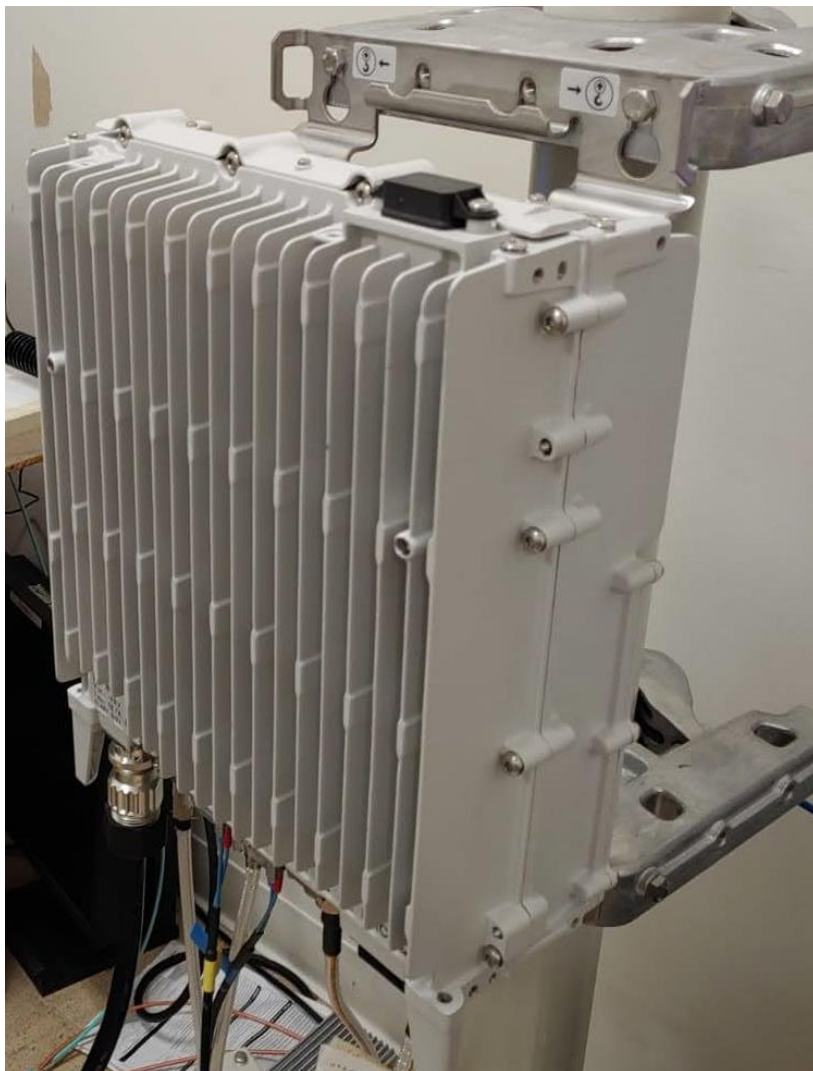

### 1.4 Test Requirements

Each required measurement is listed below:

47 CFR FCC Sections	Description of Tests	Test Required
2.1046, 27.53	RF Power Output	Yes
2.1047, 27.53	Modulation Characteristics	Yes
2.1049, 27.53	(a) Occupied Bandwidth (b) Out-of-Band Emissions	Yes
2.1051, 27.53	Spurious Emissions at Antenna Terminals	Yes
2.1053, 27.53	Field Strength of Spurious Radiation	Yes
2.1055, 27.53	Frequency Stability	No*

\*Note-The measurement of frequency stability was performed during the original filing tests. There has been no change to the frequency generating and stabilizing circuitry. Additional frequency stability testing is therefore not required.

### 1.5 Standards & Procedures

#### 1.5.1 Standards

- Title 47 Code of Federal Regulations, Federal Communications Commission Part 2.
- Title 47 Code of Federal Regulations, Federal Communications Commission Part 27.
- ANSI C63.26, American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

#### 1.5.2 Procedures

1. FCC-IC-OB and FCC-IC-SE
2. ANSI C63.4 (2014) entitled: “American National Standard for Methods of Measurement of Radio-Noise Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz”, American National Standards Institute, Institute of Electrical and Electronic Engineers, Inc., New York, NY 10017-2394, USA.
3. FCC KDB 971168 D01 Power Measurement License Digital Systems v03r01 April 9, 2018.  
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01 Oct 2013

### 1.5.3 MEASUREMENT UNCERTAINTY

The results of the calculations to estimate uncertainties for the several test methods and standards are shown in the Table below. These are the worst-case values.

**Worst-Case Estimated Measurement Uncertainties**

Standard, Method or Procedure	Condition	Frequency MHz	Expanded Uncertainty (k=2)
a. Classical Emissions, (e.g., ANSI C63.4, CISPR 11, 14, 22, etc., using ESHS 30,	Conducted Emissions	0.009 - 30	±3.5 dB
	Radiated Emissions (AR-6 Semi-Anechoic Chamber)	30 MHz – 200MHz H 30 MHz – 200 MHz V 200 MHz – 1000 MHz H 200 MHz – 1000 MHz V 1 GHz - 18 GHz	±5.1 dB ±5.1 dB ±4.7 dB ±4.7 dB ±3.3 dB

Antenna Port Test	Signal Bandwidth	Frequency Range	Expanded Uncertainty (k=2), Amplitude
Occupied Bandwidth, Edge of Band, Conducted Spurious Emissions	10 Hz	9 kHz to 20 MHz	1.78 dB
	100 Hz	20 MHz to 1 GHz	
	10 kHz to 1 MHz	1 GHz to 10 GHz	
	1MHz	10 GHz to 40 GHz:	
RF Power	10 Hz to 20 MHz	50 MHz to 18 GHz	0.5 dB




### 1.6 Executive Summary

Requirement	Description	Result
47 CFR FCC Parts 2 and 27		
2.1046, 27.53	RF Power Output Peak to Average Power Ratio	COMPLIES
2.1047, 27.53	Modulation Characteristics	COMPLIES
2.1049, 27.53	(a) Occupied Bandwidth (b) Edge of Band Emissions	COMPLIES
2.1051, 27.53	Spurious Emissions at Antenna Terminals	COMPLIES
2.1053, 27.53	Field Strength of Spurious Radiation	COMPLIES
2.1055, 27.53	Frequency Stability	NT

1. **COMPLIES** - Passed all applicable tests.
2. **N/A** - Not Applicable.
3. **NT** - Not Tested.

### 1.7 Test Configuration for all Antenna Port Measurements.

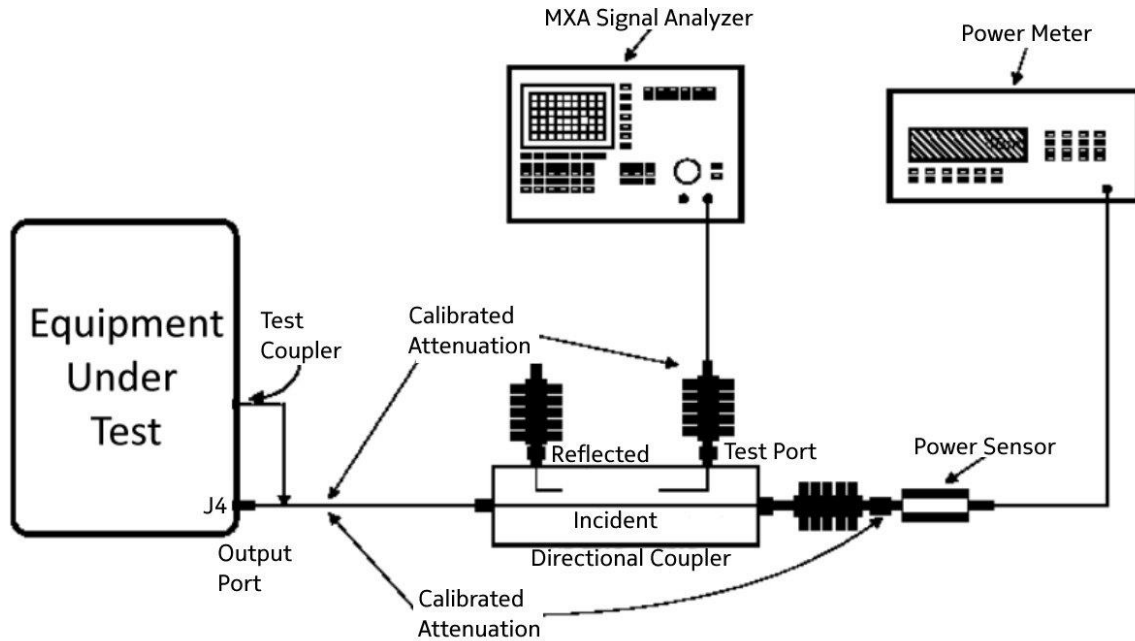

## 2. FCC Section 2.1046 - RF Power Output

### 2.1 RF Power Output

This test is a measurement of the total RF power level transmitted at the antenna-transmitting terminal. The product was configured for test as shown in section above and allowed to warm up and stabilize per KDB 971168 D01 and ANSI C63.26.

Power measurements were made with an MXA Signal Analyzer

Tabular Raw Data – Channel RF Power


# of Carriers	Test Model	Modulation	TX Port	Channel Frequency MHz	Signal BW MHz	Channel Power dBm
1	3.2	QPSK/16QAM	1	2622	5	45.49
1	3.2	QPSK/16QAM	2	2622	5	45.71
1	3.2	QPSK/16QAM	3	2622	5	45.46
1	3.2	QPSK/16QAM	4	2622	5	45.28
1	3.1a	256QAM	1	2655	5	45.88
1	3.1a	256QAM	2	2655	5	45.97
1	3.1a	256QAM	3	2655	5	45.75
1	3.1a	256QAM	4	2655	5	45.63
1	3.1a	256QAM	1	2687	5	45.49
1	3.1a	256QAM	2	2687	5	45.83
1	3.1a	256QAM	3	2687	5	45.7
1	3.1a	256QAM	4	2687	5	45.4
1	3.2	QPSK/16QAM	1	2625	10	45.53
1	3.2	QPSK/16QAM	2	2625	10	45.85
1	3.2	QPSK/16QAM	3	2625	10	45.72
1	3.2	QPSK/16QAM	4	2625	10	45.42
1	3.1	64QAM	1	2655	10	45.94
1	3.1	64QAM	2	2655	10	46.09
1	3.1	64QAM	3	2655	10	45.94
1	3.1	64QAM	4	2655	10	45.66
1	3.1a	256QAM	1	2685	10	45.62
1	3.1a	256QAM	2	2685	10	46.03
1	3.1a	256QAM	3	2685	10	45.72
1	3.1a	256QAM	4	2685	10	45.49
1	3.1a	256QAM	1	2627	15	45.86
1	3.1a	256QAM	2	2627	15	46.1
1	3.1a	256QAM	3	2627	15	45.89
1	3.1a	256QAM	4	2627	15	45.62
1	3.1a	256QAM	1	2655	15	45.98
1	3.1a	256QAM	2	2655	15	46.11
1	3.1a	256QAM	3	2655	15	45.88
1	3.1a	256QAM	4	2655	15	45.61

# of Carriers	Test Model	Modulation	TX Port	Channel Frequency MHz	Signal BW MHz	Channel Power dBm
1	3.1a	256QAM	1	2682	15	45.75
1	3.1a	256QAM	2	2682	15	46.13
1	3.1a	256QAM	3	2682	15	46.01
1	3.1a	256QAM	4	2682	15	45.63
1	3.1a	256QAM	1	2630	20	45.97
1	3.1a	256QAM	2	2630	20	46.23
1	3.1a	256QAM	3	2630	20	46.01
1	3.1a	256QAM	4	2630	20	45.81
1	3.1a	256QAM	1	2655	20	45.98
1	3.1a	256QAM	2	2655	20	46.17
1	3.1a	256QAM	3	2655	20	45.99
1	3.1a	256QAM	4	2655	20	45.78
1	3.1a	256QAM	1	2680	20	46.03
1	3.1a	256QAM	2	2680	20	46.32
1	3.1a	256QAM	3	2680	20	46.13
1	3.1a	256QAM	4	2680	20	45.87
2	3.1a	256QAM	1	2630+2650	20+20	46.11
2	3.1a	256QAM	2	2630+2650	20+20	46.22
2	3.1a	256QAM	3	2630+2650	20+20	46.08
2	3.1a	256QAM	4	2630+2650	20+20	46.08
2	3.1a	256QAM	1	2635+2655	20+20	45.97
2	3.1a	256QAM	2	2635+2655	20+20	45.57
2	3.1a	256QAM	3	2635+2655	20+20	45.65
2	3.1a	256QAM	4	2635+2655	20+20	46.21
2	3.1a	256QAM	1	2660+2680	20+20	45.7
2	3.1a	256QAM	2	2660+2680	20+20	46.18
2	3.1a	256QAM	3	2660+2680	20+20	46.23
2	3.1a	256QAM	4	2660+2680	20+20	45.93
2	3.1a	256QAM	1	2630+2680	20+20	45.74
2	3.1a	256QAM	2	2630+2680	20+20	45.85
2	3.1a	256QAM	3	2630+2680	20+20	46.27
2	3.1a	256QAM	4	2630+2680	20+20	45.94


### 2.1.1 Channel RF Power - Plots.

NOTE: Only the worst-case plots in each scenario are used in this report. The full suite of raw data resides at the MH, New Jersey location.


1 Carrier / 256QAM / 5MBW / 2655MHz / TX2

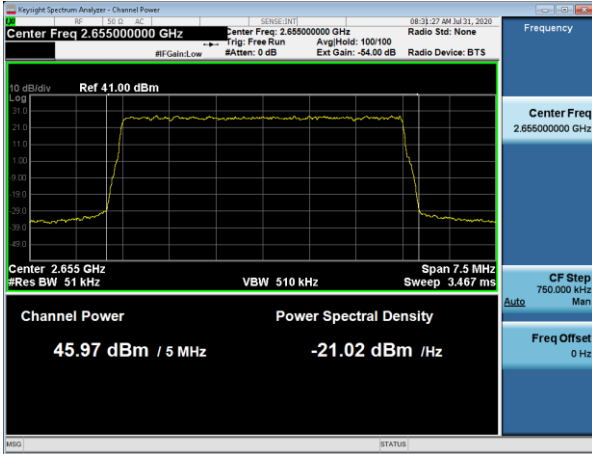


1 Carrier / 64QAM / 10MBW / 2655MHz / TX2

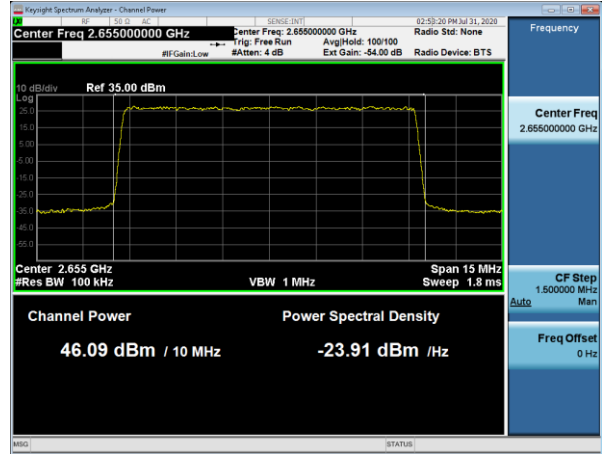


1 Carrier / 256QAM / 15MBW / 2682 MHz / TX2

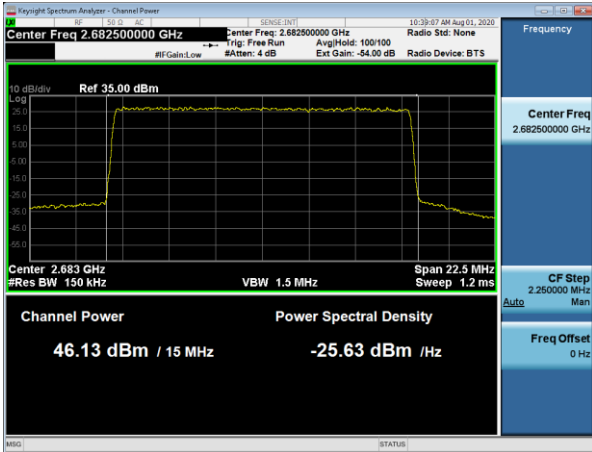

1 Carrier / 256QAM / 20MBW / 2655MHz / TX2

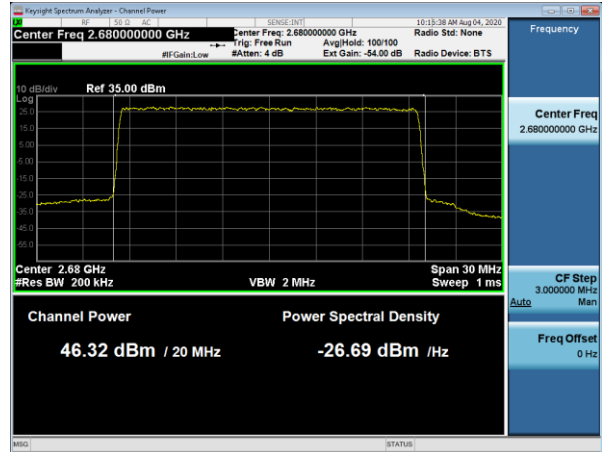

2 Carrier / 256QAM / 20+20MBW / 2630+2680 MHz / TX3

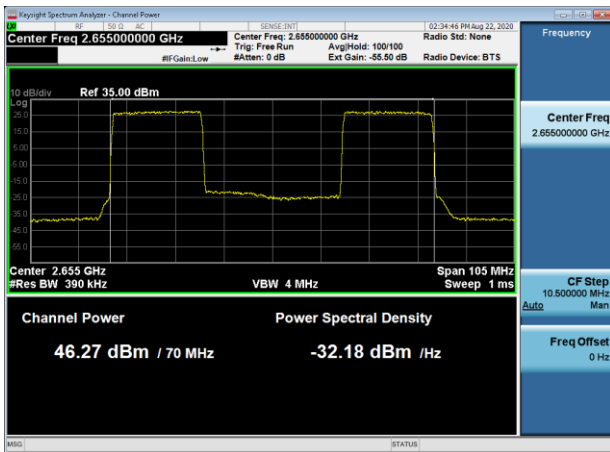


### 2.1.2 Peak-to-Average Power Ratio (PAPR) - Plots


The Peak-to-Average Power Ratio (PAPR) was evaluated per KDB 971168. The PAPR values of all carriers measured are below 13dB.

NOTE: Only the worst-case plots in each scenario are used in this report. The full suite of raw data resides at the MH, New Jersey location.


1 Carrier / QPSK/16QAM / 5MBW / 2622MHz / TX2

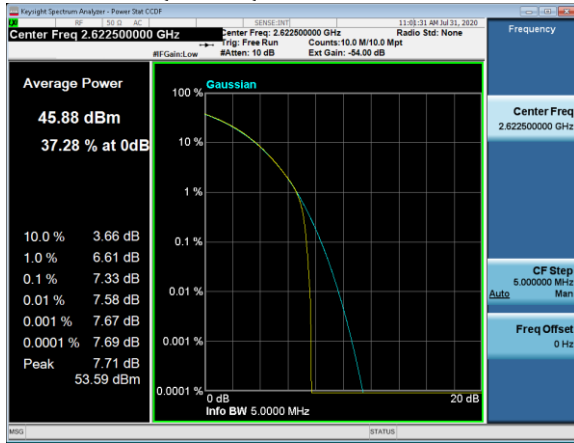


1 Carrier / QPSK/16QAM / 10MBW / 2625MHz / TX2

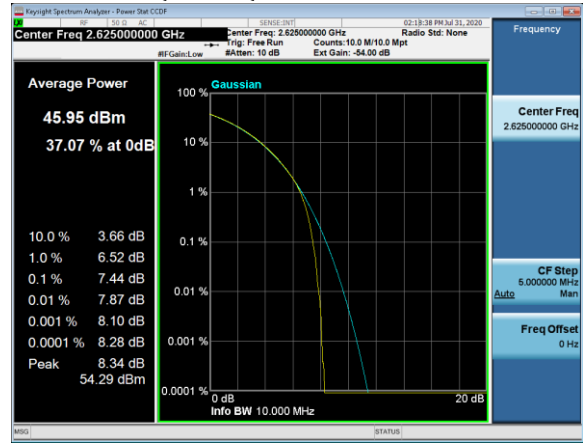


1 Carrier / 256QAM / 15MBW / 2682 MHz / TX1

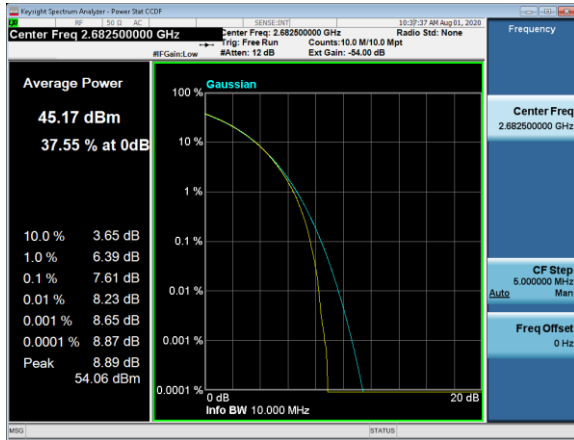

1 Carrier / 256QAM / 20MBW / 2630MHz / TX3

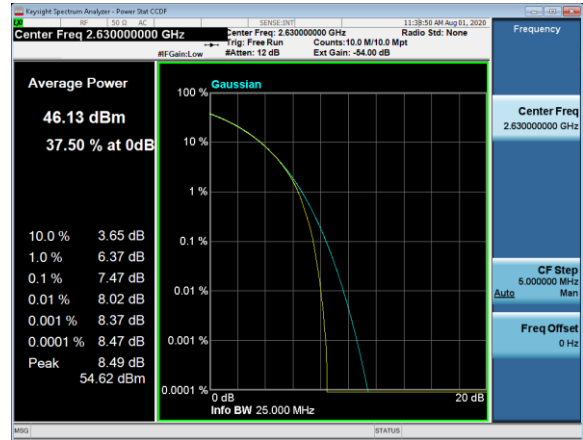

2 Carrier / 256QAM / 20+20MBW / 2660+2680 MHz / TX1

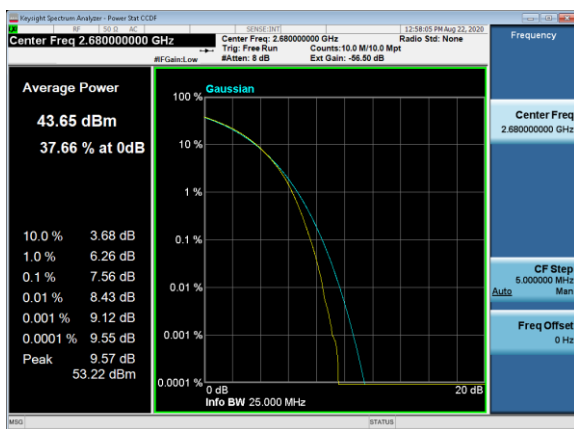


### 3. FCC Section 2.1047 - Modulation Characteristics

#### 3.1 Modulation Characteristics

The RF signal at the antenna port was demodulated and verified for correctness of the modulation signal used before each test was performed. For these products the operation with QPSK, 16QAM, 64QAM and 256QAM modulation was evaluated and verified to demonstrate proper operation before testing.

##### 3.1.1 Modulation Characteristics – Plots.

NOTE: Only a sample of the plots are used in this report. The full suite of raw data resides at the MH, New Jersey location.

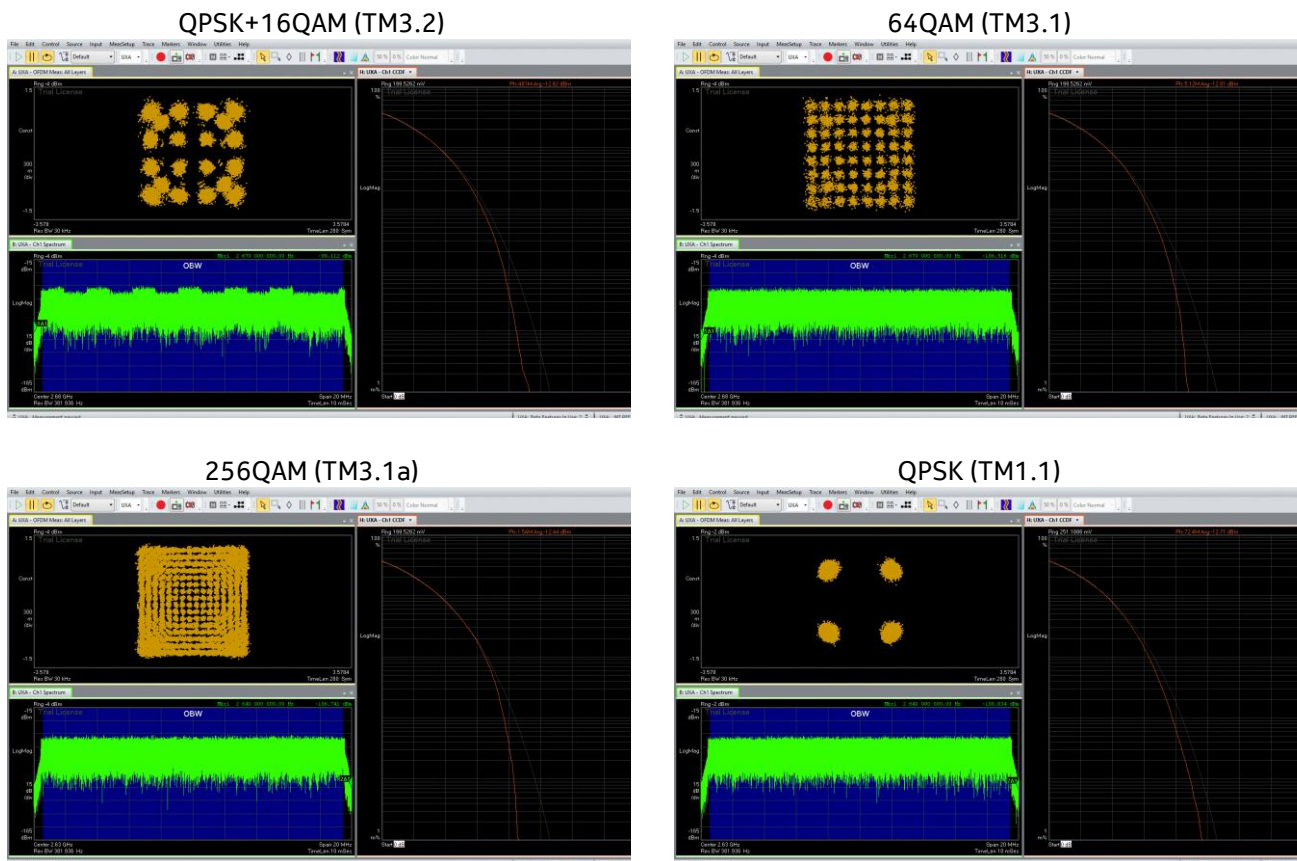

## 4. FCC Section 2.1049 – Occupied Bandwidth/Edge of Band Emissions

### 4.1 Occupied Bandwidth

In 47CFR 2.1049 the FCC requires:

“The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the following conditions as applicable.”

This required measurement is the 99% Occupied Bandwidth, also called the designated signal bandwidth and needs to be within the parameters of the products specified emissions designator. During these measurements it is customary to evaluate the Edge of Band emissions at block/band edges.

The transmitted signal occupied bandwidth was measured using a Keysight MXA Signal Analyzer. All emissions were within the parameters as required.

Tabular Data – Occupied Bandwidth


# of Carriers	Test Model	Modulation	TX Port	Channel Frequency MHz	Signal BW MHz	Channel Power dBm
1	3.2	QPSK/16QAM	1	2622	5	4.4784
1	3.1a	256QAM	1	2655	5	4.4583
1	3.1a	256QAM	1	2687	5	4.4576
1	3.2	QPSK/16QAM	1	2625	10	9.2235
1	3.1	64QAM	1	2655	10	9.2713
1	3.1a	256QAM	1	2685	10	9.2626
1	3.1a	256QAM	1	2627	15	14.074
1	3.1a	256QAM	1	2655	15	14.077
1	3.1a	256QAM	1	2682	15	14.085
1	3.1a	256QAM	1	2630	20	18.896
1	3.1a	256QAM	1	2655	20	18.921
1	3.1a	256QAM	1	2680	20	18.893
2	3.1a	256QAM	1	2630+2650	20+20	38.674
2	3.1a	256QAM	1	2635+2655	20+20	38.698
2	3.1a	256QAM	1	2660+2680	20+20	38.678
2	3.1a	256QAM	1	2630+2680	20+20	18.967 + 18.951

### 4.1.1 Occupied Bandwidth – Plots.


NOTE: Only a sample of the plots are used in this report. The full suite of raw data resides at the MH, New Jersey location.

#### 1Carrier Data


QPSK/16QAM / 5MBW / 2622MHz / TX1

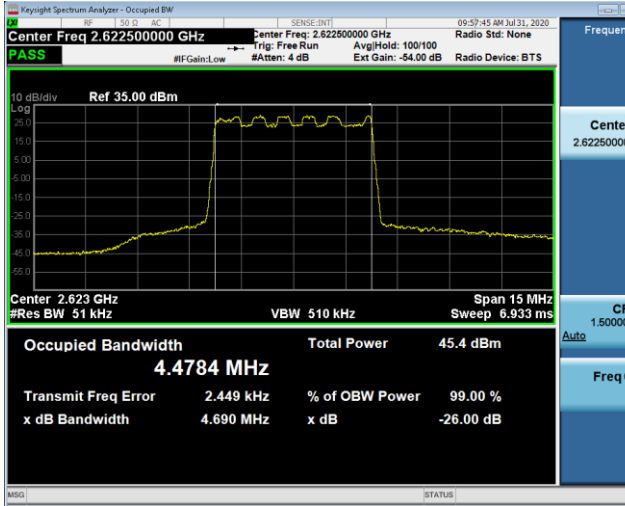


QPSK/16QAM / 10MBW / 2625MHz / TX1

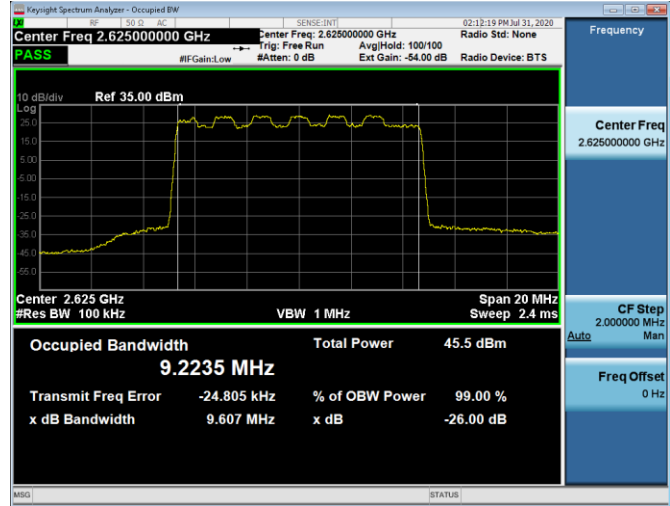

256QAM / 15MBW / 2682 MHz / TX1

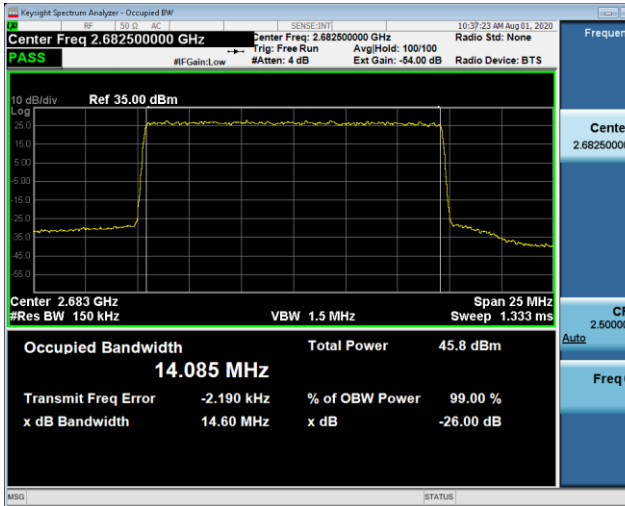


256QAM / 20MBW / 2655MHz / TX1

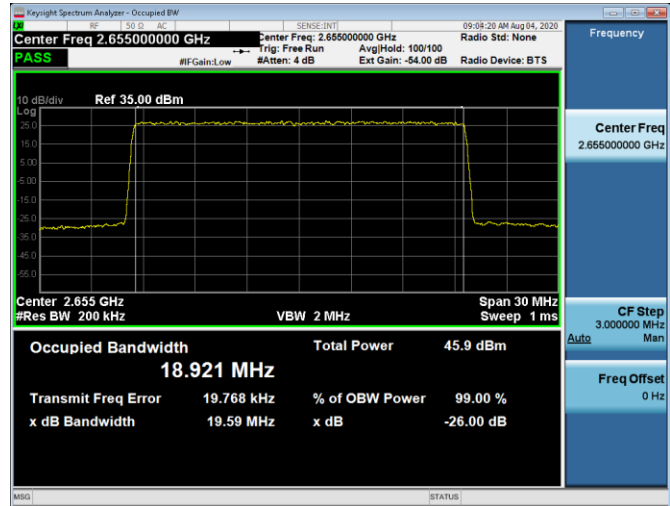




2 Carrier Data

256QAM / 20+20MBW / 2635+2655 / TX1

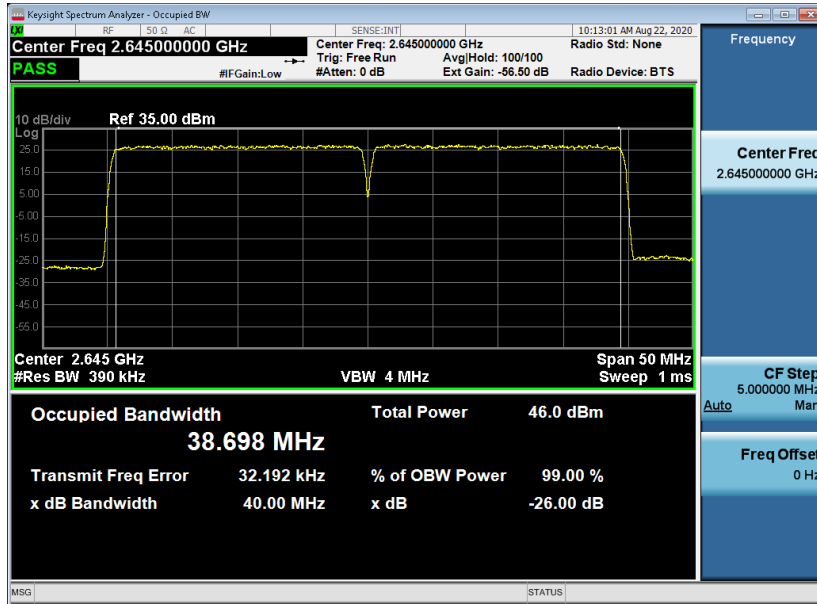

256QAM / 20+20MBW / 2630+2680 / TX1

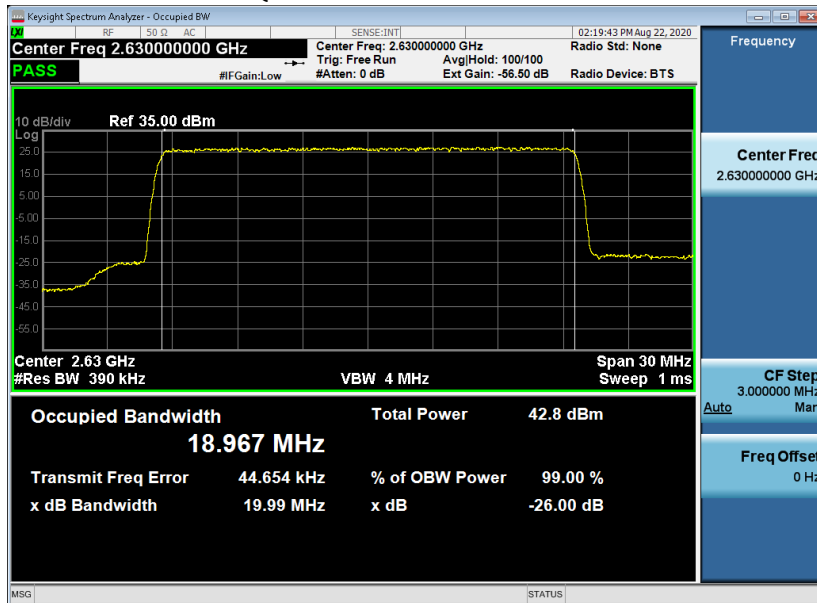

### 4.2 Edge of band Emissions

The Edge of Band emissions of the EUT at the external antenna connector (EAC) were measured using a Keysight MXA Signal Analyzer. The RF power level was continuously measured using a RF broadband power meter. The RF output from the EAC port to spectrum analyzer was reduced (to an amplitude usable by the spectrum analyzer) by using a calibrated attenuator and test coupler. The path attenuation was offset on the display and the signal for single carrier was adjusted to the corrected RF power level for the resolution bandwidth used for the transmit signal. All mask values were adjusted based upon the designated signal bandwidth and measurement bandwidths. The Top of Mask corresponds to the set rated power level as confirmed by the RF power meter.


#### 4.2.1 Edge of Band Emissions - Plots.

All of the measurements met the requirements of Part 27.53 when measured per Part 2.1049. limit is derived using the 10 Log (n) rule for limits with n=64


NOTE: Only a sample of the plots are used in this report. The full suite of raw data resides at the MH, New Jersey location.

1Carrier Data – 5MHz BW, TX1


QPSK/16QAM, 2622.5 MHz CF

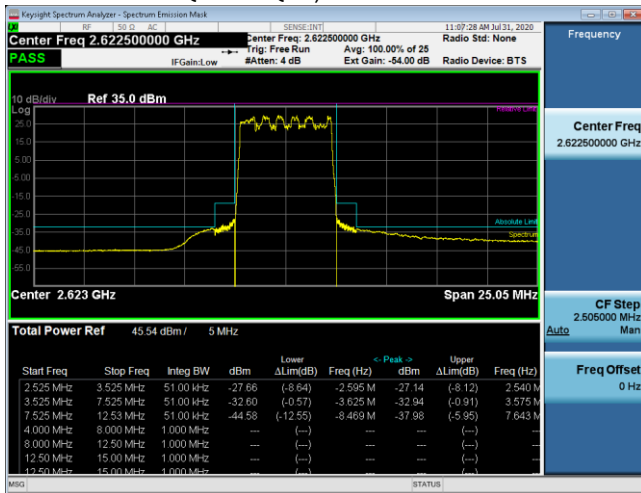

256QAM, 2655 MHz CF

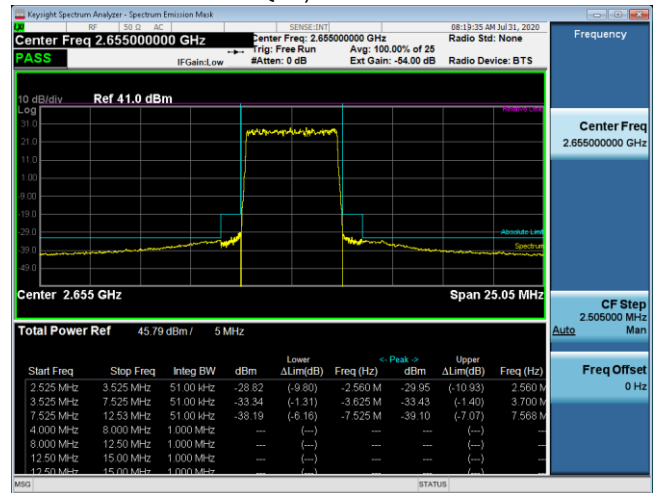


256QAM, 2687.5 MHz CF

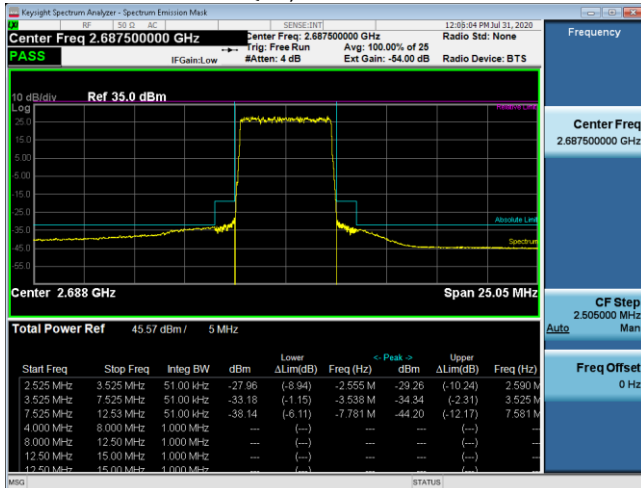


1 Carrier Data – 10MHz BW, TX1


QPSK/16QAM, 2625 MHz CF

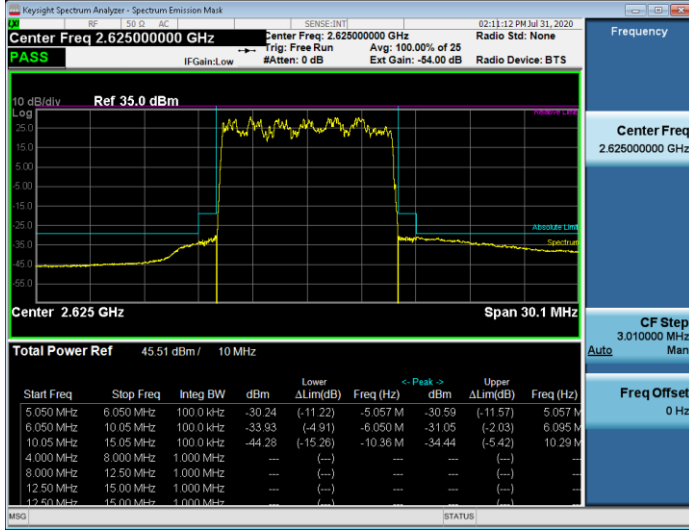

64QAM, 2655 MHz CF

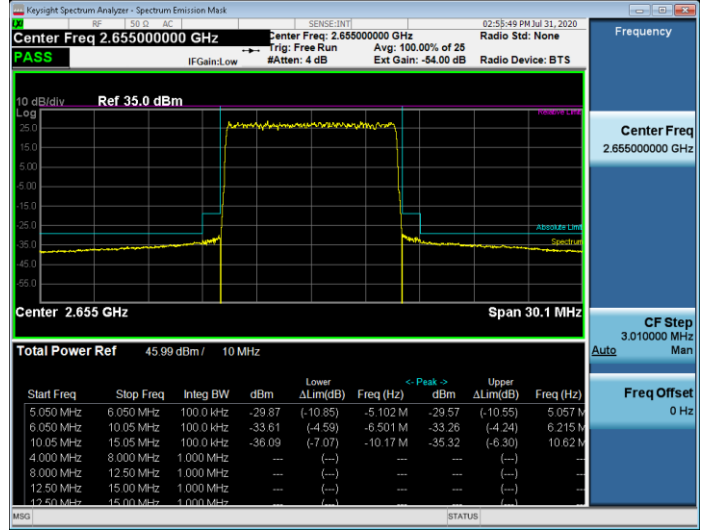


256QAM, 2685 MHz CF

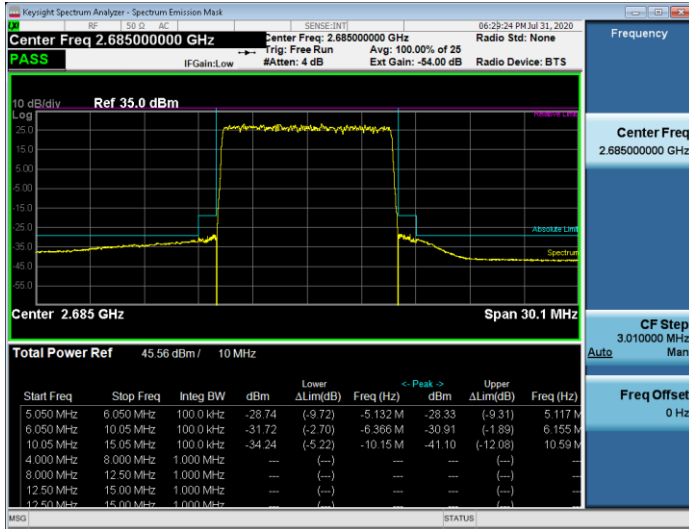


1 Carrier Data – 15MHz BW, 256QAM, TX1


2627.5 MHz CF

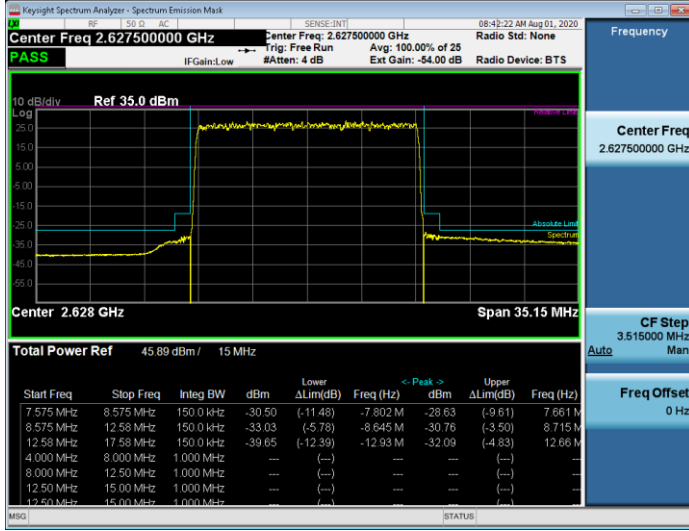

2655 MHz CF

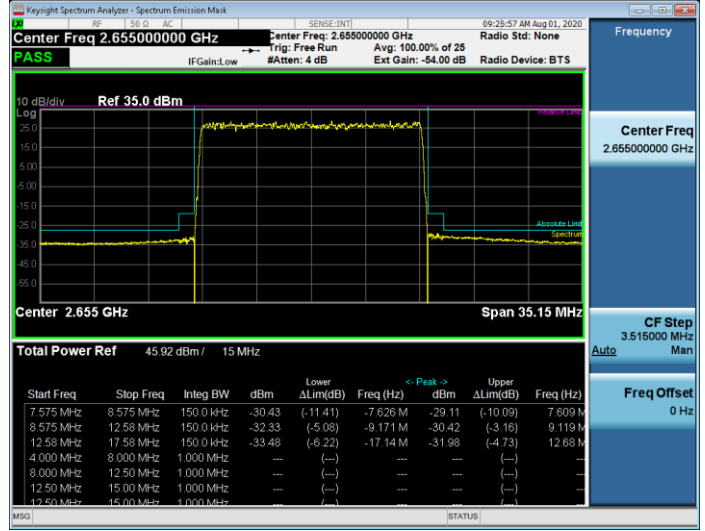


2682.5 MHz CF

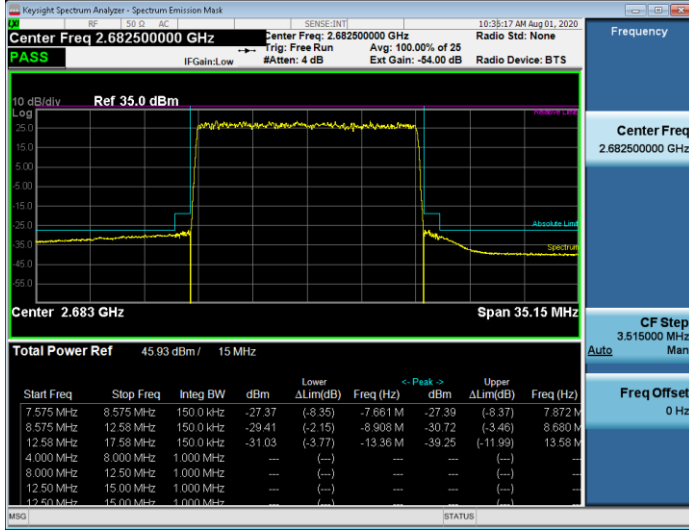


1 Carrier Data – 20MHz BW, 256QAM, TX1


2630 MHz CF

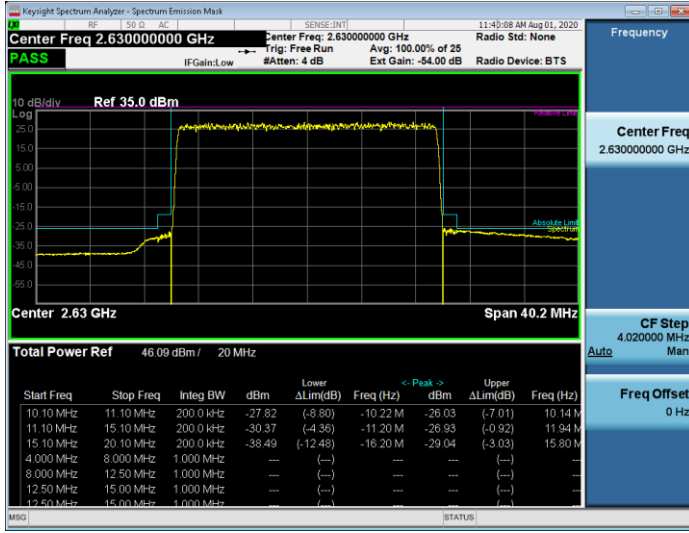

2655 MHz CF

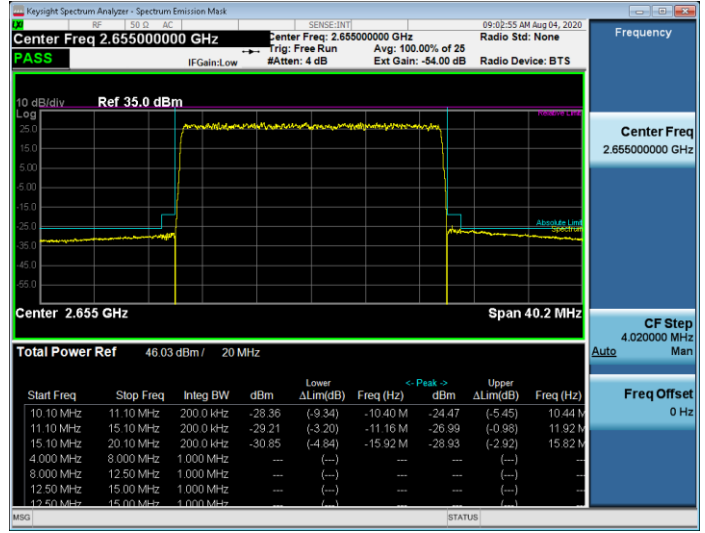


2680 MHz CF

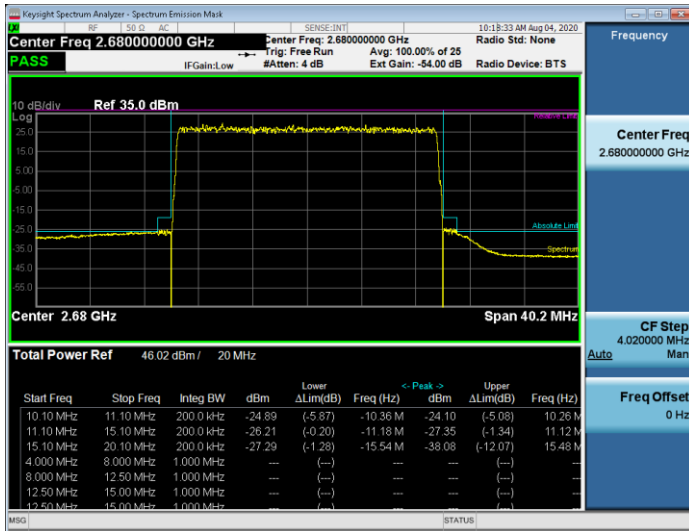


2 Carrier Data – 20+20 MHz, 256QAM, TX1


2630+2650 MHz

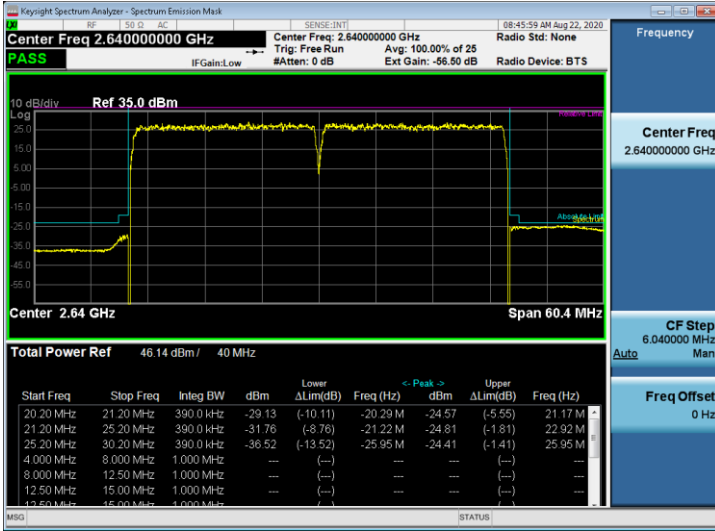


2635+2655 MHz

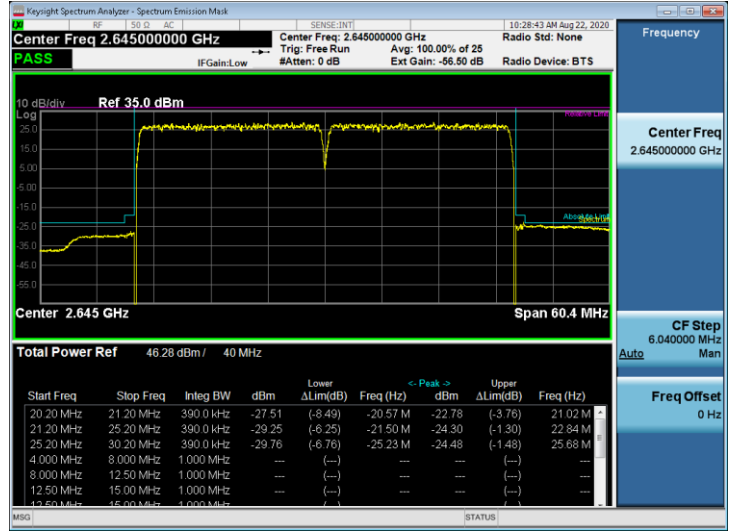

2660+2680 MHz

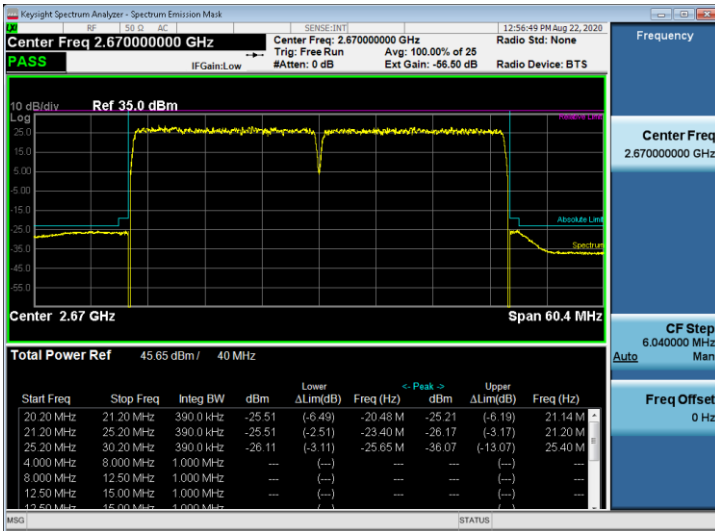

2630+2680 MHz

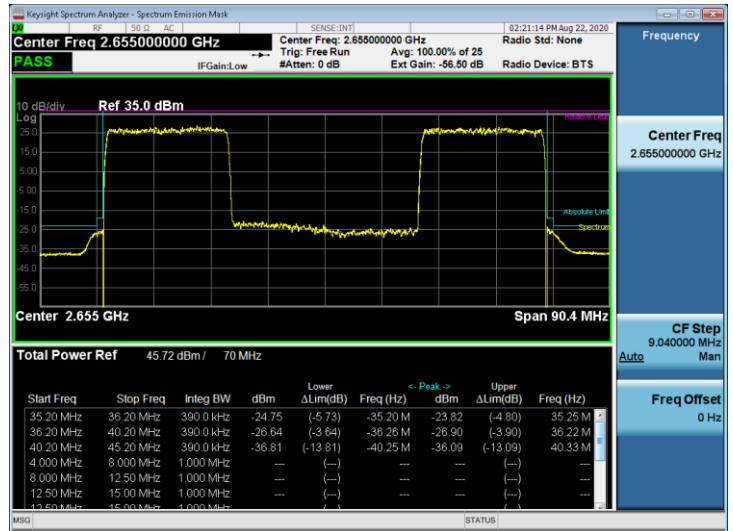

## 5. FCC Section 2.1051 - Spurious Emissions at Transmit Antenna Port

### 5.1 Measurement of Spurious Emissions at Transmit Antenna Port

Spurious Emissions at the transmit-antenna terminals were investigated over the frequency range of 10 MHz to beyond the 10th harmonic of the specific transmit band. Carrier Bandwidth is exempt. For this band of operation, the measurements were performed up to 10 GHz. Measurements were made using a Keysight MXA Signal Analyzer. The RF output from the transmitter was reduced (to an amplitude usable by the receivers) using calibrated attenuators. The RF power level was continuously monitored via a coupled RF Power Meter.


The required emission limitation is specified as appropriate in 27.53. The measured spurious emission levels were plotted for the frequency range as specified in 2.1057. There were no reportable emissions. Data below documents performance up to 27 GHz. The limit is derived using the 10 Log (n) rule for limits with n=4 ports or -19 dBm.

### 5.1.1 Spurious Emissions at Tx Port - Plots


NOTE: Only a sample of the plots are used in this report. The full suite of raw data resides at the MH, New Jersey location.

#### 1 Carrier Data


Spurious\_TM3\_2\_1C\_5MBW\_2622\_TX1\_0\_to\_0

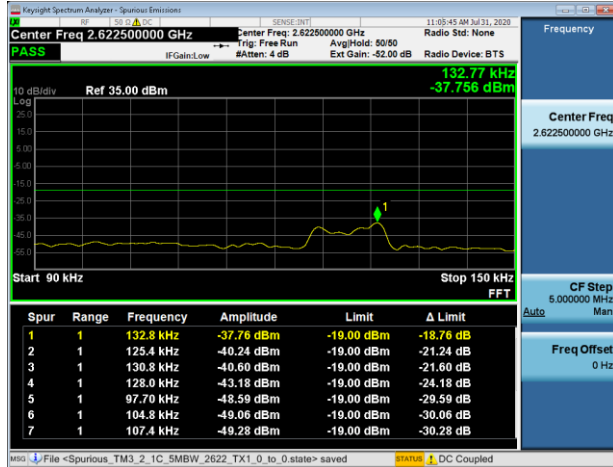


Spurious\_TM3\_2\_1C\_5MBW\_2622\_TX1\_0\_to\_30

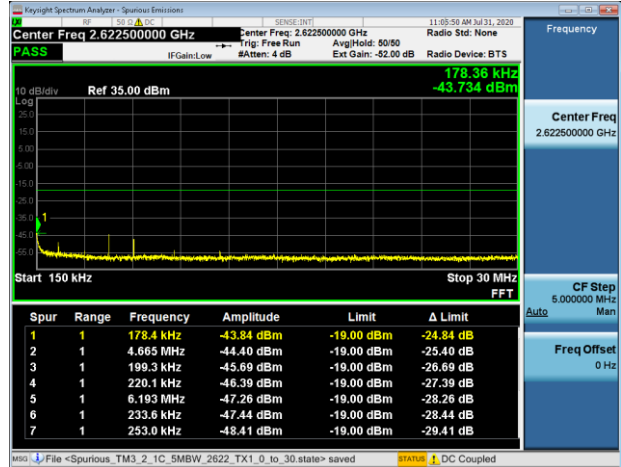


Spurious\_TM3\_2\_1C\_5MBW\_2622\_TX1\_30\_to\_1000

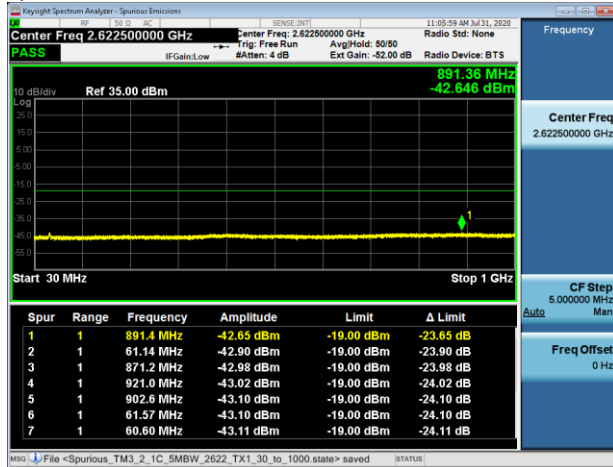


Spurious\_TM3\_2\_1C\_5MBW\_2622\_TX1\_1000\_to\_2620

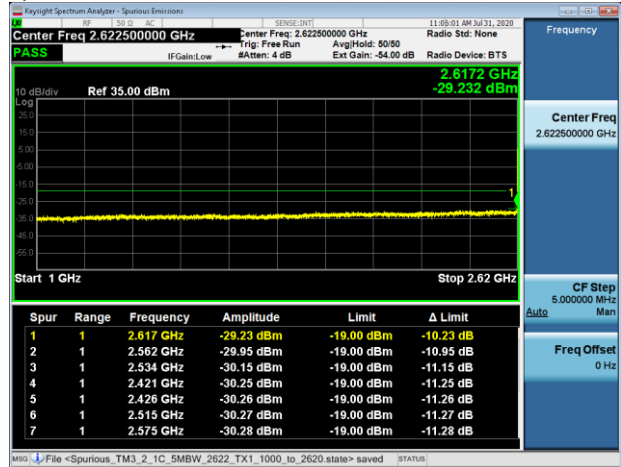

Spurious\_TM3\_2\_1C\_5MBW\_2622\_TX1\_2690\_to\_10000

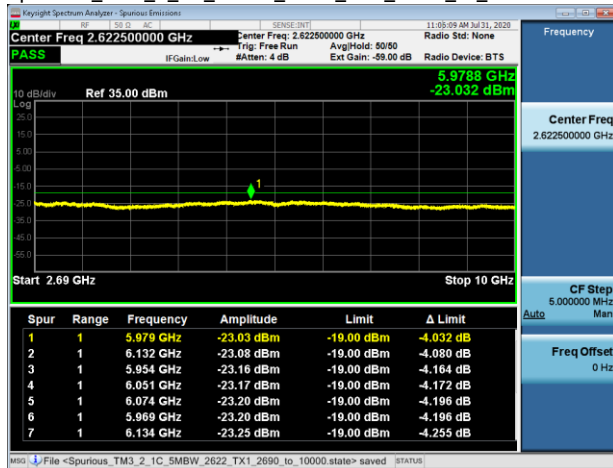


Spurious\_TM3\_2\_1C\_5MBW\_2622\_TX1\_10000\_to\_27000

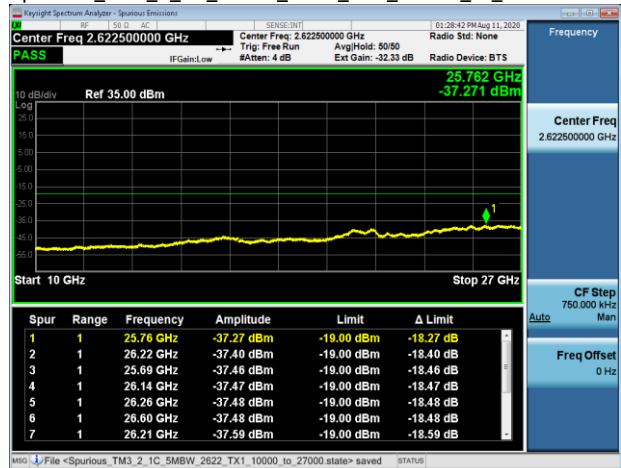




2 Carrier Data


Spurious\_TM3\_1a\_2C\_20+20MBW\_2630\_2680\_TX1\_0\_to\_0

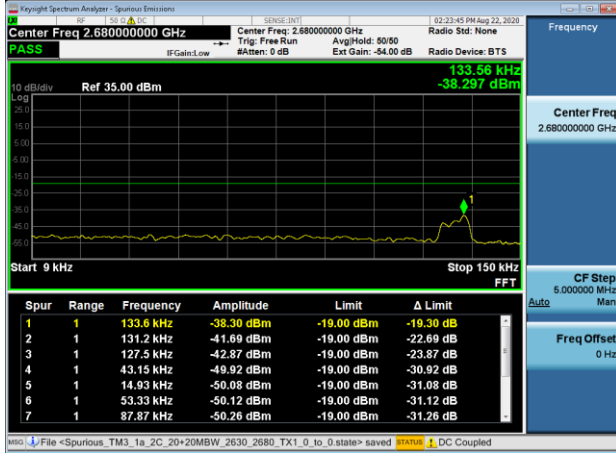


Spurious\_TM3\_1a\_2C\_20+20MBW\_2630\_2680\_TX1\_0\_to\_30

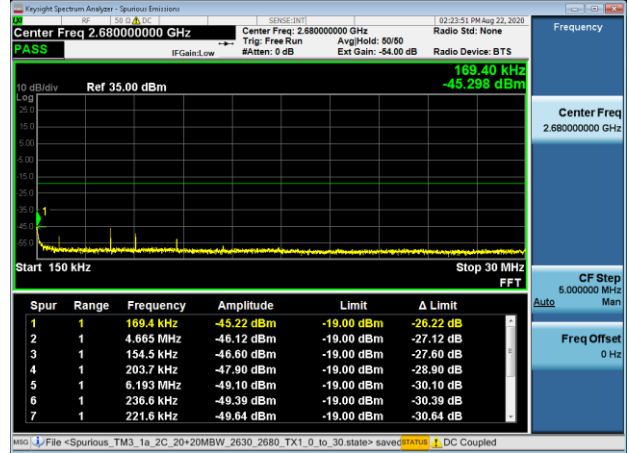


Spurious\_TM3\_1a\_2C\_20+20MBW\_2630\_2680\_TX1\_30\_to\_1000

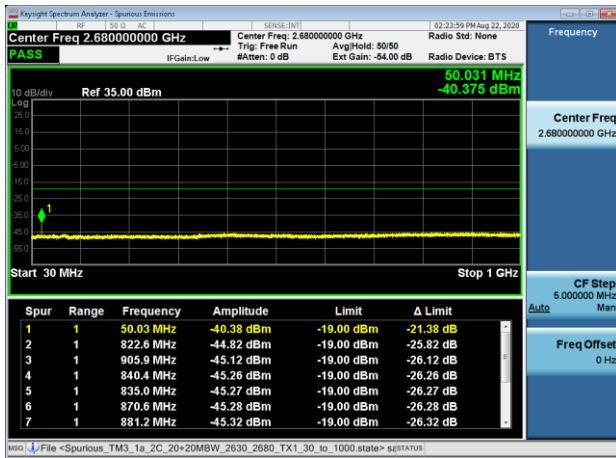

Spurious\_TM3\_1a\_2C\_20+20MBW\_2630\_2680\_TX1\_1000\_to\_2620

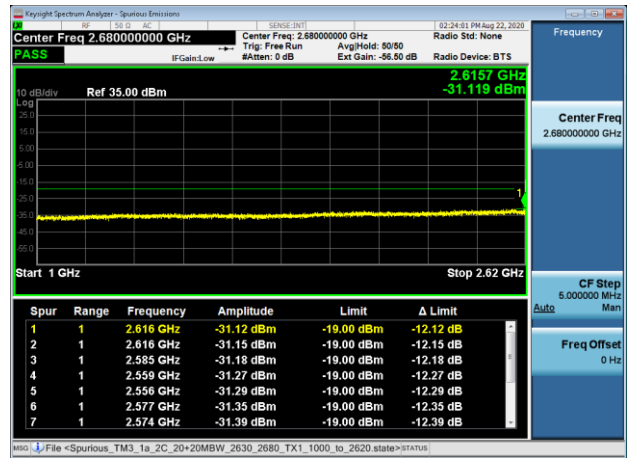


Spurious\_TM3\_1a\_2C\_20+20MBW\_2630\_2680\_TX1\_2690\_to\_10000

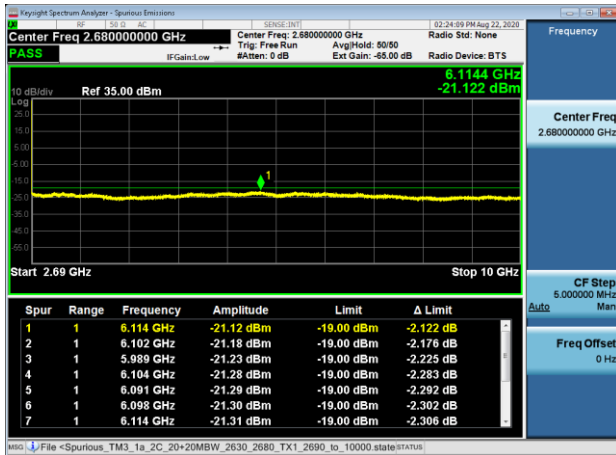

Spurious\_TM3\_1a\_2C\_20+20MBW\_2630\_2680\_TX1\_10000\_to\_27000



## Photographs

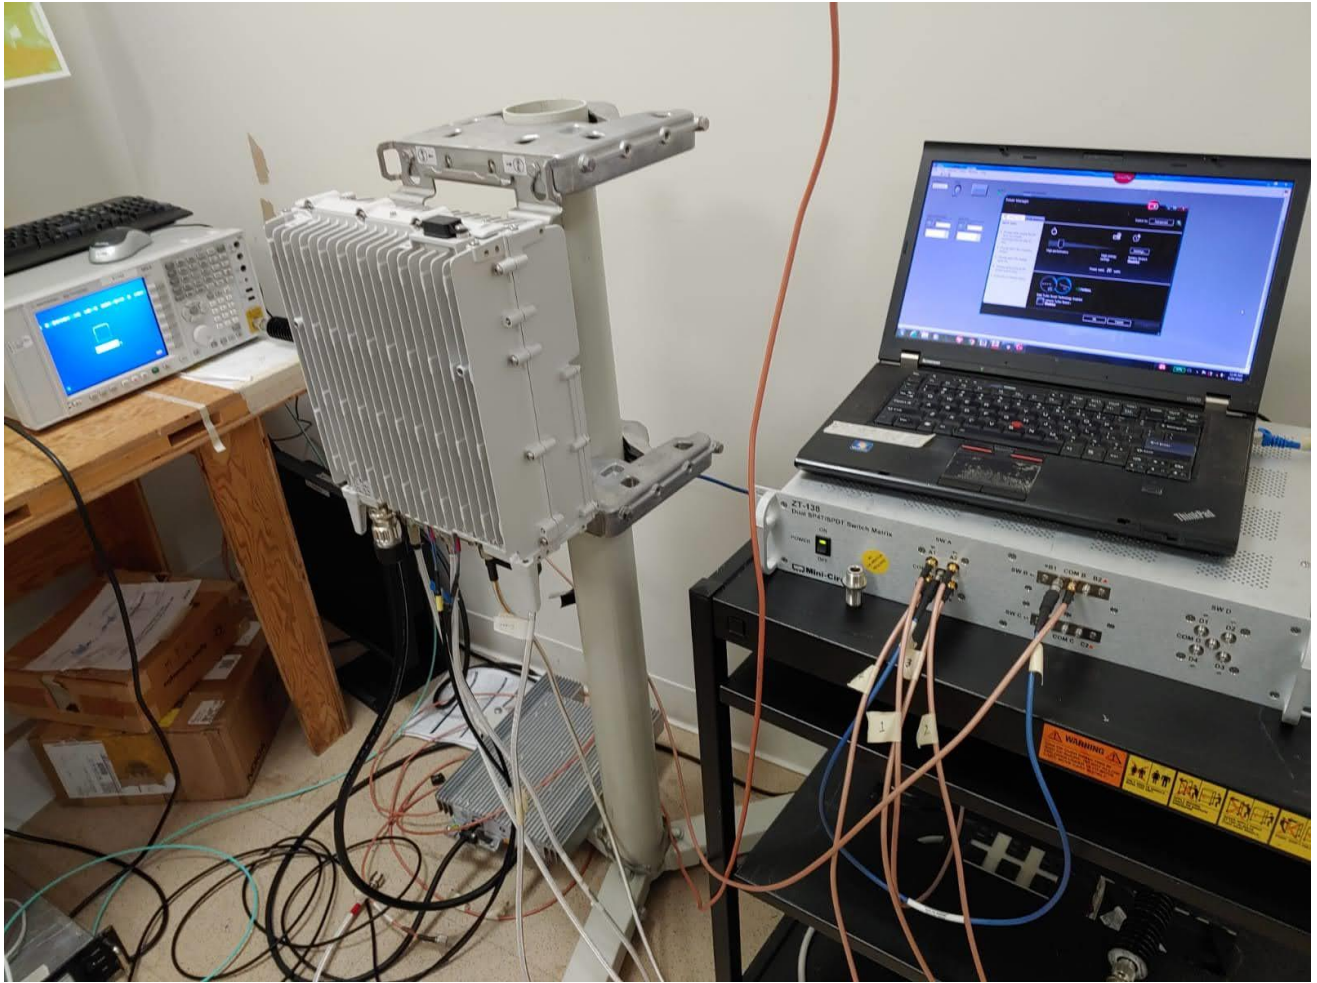

## Test Equipment

Asset ID	Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due
E831	Agilent Technologies	MXA Signal Analyzer	20Hz-26.5GHz	N9020A	MY48011791	2020-06-16	2022-06-16
E896	Agilent Technologies	Network Analyzer	10 MHz - 40 GHz	N5230C	MY49000897	2019-01-31	2021-01-31
E1152	Agilent Technologies	MXA Signal Analyzer	20Hz-26.5GHz Analyzer	N9020A	MY53420147	2019-04-24	2021-04-24
E1022	Weinschel	Attenuator	10dB DC-18GHz 25W	46-10-34-LIM	BN3118	CNR-V	CNR-V
E1043	Weinschel	Attenuator	30dB 50W DC-8.5GHz	24-30-43		CNR-V	CNR-V
E1344	Macom	Attenuator	3 dB, DC - 4 GHz, 2W	2082-6171-03	N/A	CNR-V	CNR-V
E1212	RLC Electronics	Filter, High Pass	10 - 30 GHz, 2W, 5dB	F-19414	1444002	CNR-V	CNR-V
E1155	Weinschel	Attenuator	10dB 25W 0.05- 26GHz	74-10-12	1068	CNR-V	CNR-V
E1154	Weinschel	Attenuator	30dB 25W 0.05GHz-26GHz	74-30-12	1065	CNR-V	CNR-V
E1250	Weinschel	Attenuator	3dB Attenuator 100W	24-3-43	BB9072	CNR-V	CNR-V
E1251	Weinschel	Attenuator	0dB 150W DC-18GHz	66-30-33	BV1667	CNR-V	CNR-V

## Customer Provided Equipment

Manufacturer	Type	Description	Model	Serial	Calibration Date	Calibration Due
Weinschel	Attenuator	20dB DC-8.5GHz 50W	24-20-34	CG3752	CNR-V	CNR-V
Weinschel	Attenuator	20dB DC-8.5GHz 50W	24-20-34	CG3747	CNR-V	CNR-V
Weinschel	Attenuator	20dB DC-8.5GHz 50W	24-20-34	CG3790	CNR-V	CNR-V
Weinschel	Attenuator	20dB DC-18GHz 100W	48-20-43	BC7107	CNR-V	CNR-V

CNR-V: Calibration Not Required; Must be Verified

## 6. FCC Section 2.1053 - Field strength of spurious radiation.

### 6.1 Section 2.1053 Field Strength of Spurious Emissions

Field strength measurements of radiated spurious emissions were made in an FCC registered 3m Semi-Anechoic Chamber which is maintained by Nokia Bell Labs in Murray Hill, New Jersey. A complete description and full measurement data for the site is on file with the Commission (Site Registration Number: 515091).

The spectrum from 30 MHz to beyond the tenth harmonic of the carrier, 27 GHz, was searched for spurious radiation. Measurements were made using both horizontally and vertically polarized broadband antennas. Per FCC regulations, the comparison of out of band spurious emissions directly to the limit is appropriately made using the substitution method. However, when the emissions are more than 20 dB below the specification limit, the use of field strength measurements for compliance determination is acceptable and those emissions are considered not reportable (Section 2.1053 and the FCC Interpretive database for 2.1053). For this case the evaluation of acceptable radiated field strength is as follows.

### 6.2 Field Strength of Spurious Emissions - Limits

Sections 2.1053 and 27.53 contain the requirements for the levels of spurious radiation as a function of the level of the unmodulated carrier. The reference level for the unmodulated carrier is calculated as the field produced by an ideal dipole excited by the transmitter output power according to the following relation taken from Reference Data for Radio Engineers, page 676, 4<sup>th</sup> edition, IT&T Corp.

$$E = [(30 \cdot P)^{1/2}] / R$$

$$20 \log (E \cdot 10^6) - (43 + 10 \log P) = 82.23 \text{ dB}\mu\text{V}/\text{meter}$$

Where:

E = Field Intensity in Volts/meter

P = Transmitted Power in Watts

R = Measurement distance in meters = 3 m

The Part 27 Limit is 82.23 dBuV/m at 3m and 91.77 dBuV/m at 1m

The Part 27 non-report level is 62.23 dBuV/m at 3m.

The calculated emission levels were found by:

$$\text{Measured level (dB}\mu\text{V)} + \text{Cable Loss(dB)} + \text{Antenna Factor(dB)} = \text{Field Strength (dB}\mu\text{V}/\text{m)}$$

#### RESULTS:

For compliance with 47CFR Parts 2 and 27, the field strength of any spurious radiation, measured at 3m, is required to be less than 82.23 dBuV/meter (82.23 @ 3m). Emissions equal to or less than 62.23 dBuV/meter at 3m are not reportable and may be verified using field strength measurements and broadband antennas. Over the out of band spectrum investigated from 30 MHz to beyond the tenth harmonic of the carrier (up to 27 GHz), no reportable spurious emissions were detected.

## 7. NVLAP Certificate of Accreditation

United States Department of Commerce  
National Institute of Standards and Technology



---

**Certificate of Accreditation to ISO/IEC 17025:2005**

---

NVLAP LAB CODE: 100275-0

**Nokia, Global Product Compliance Lab**  
Murray Hill, NJ

*is accredited by the National Voluntary Laboratory Accreditation Program for specific services,  
listed on the Scope of Accreditation, for:*

**Electromagnetic Compatibility & Telecommunications**

*This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality  
management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).*

---

2019-09-20 through 2020-09-30  
*Effective Dates*



  
*For the National Voluntary Laboratory Accreditation Program*