


# AWMFIA product label location

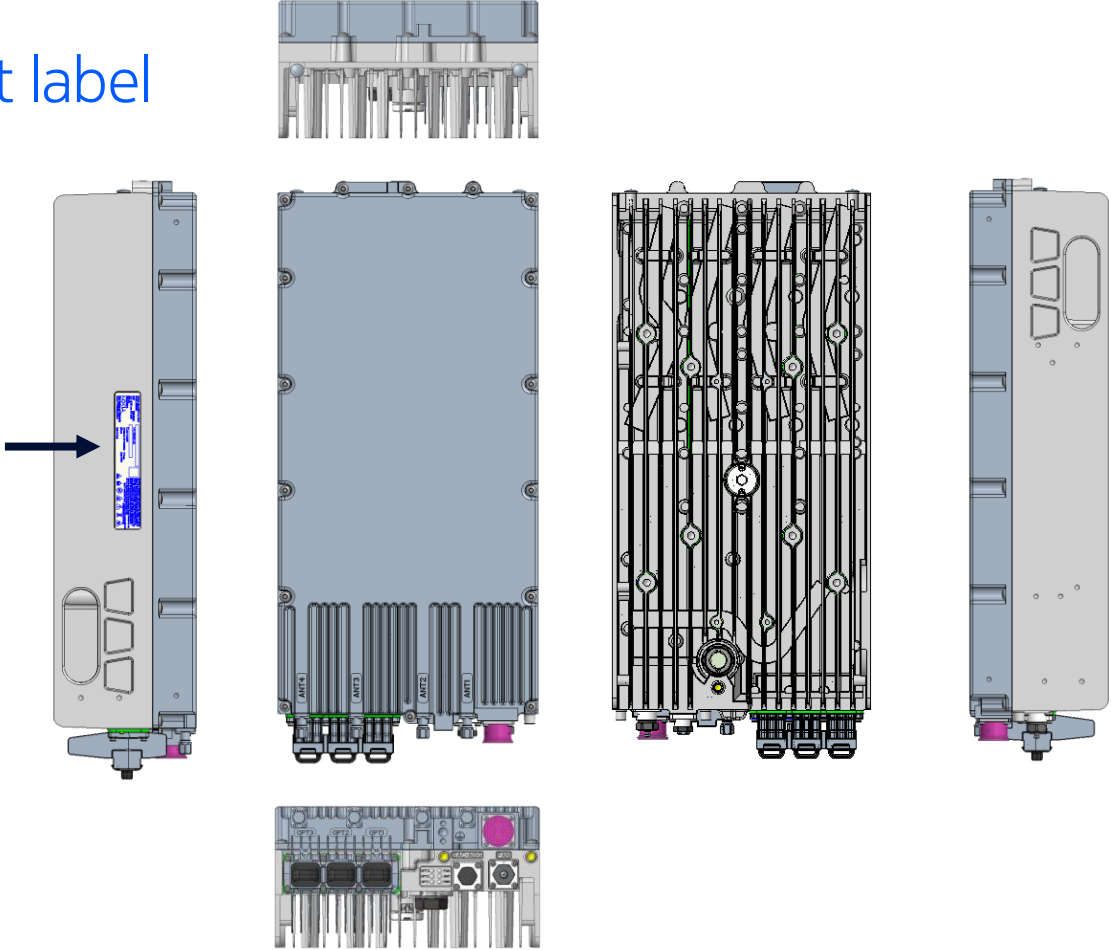

# AWMFIA label drawing

1	2	3	4
<b>REVISION HISTORY</b>			
<b>REV</b>	<b>ZONE</b>	<b>DESCRIPTION</b>	<b>DATE</b>
X1	ALL	INITIAL RELEASE	5/26/2023
X2	ALL	X2 RELEASE	10/04/2023
00	ALL	RELEASE FOR PRODUCTION	1/24/2024
01	ALL	UPDATED FCC AND IC ID'S	2/13/2024

**NOTES:**  
 CHARACTERISTICS (UNLESS OTHERWISE SPECIFIED):  
 1. PARTS MUST BE CLEAN AND FREE OF SCRATCHES, BLEMISHES AND IMPERFECTIONS.  
 2. PACKAGING DESIGN MUST BE APPROVED BY NOKIA BEFORE PROCEEDING WITH PRODUCTION RUN OF PARTS.  
 3. SAMPLE PARTS MUST BE APPROVED BY NOKIA BEFORE PROCEEDING WITH PRODUCTION RUN.  
 4. A REFERENCE DIMENSION (X.XX) IS A DIMENSION WITHOUT TOLERANCE AND IS USED FOR INFORMATION PURPOSES ONLY.  
 5. ALL DIMENSIONS SHOWN ACROSS A CENTERLINE SHALL BE CENTRALIZED WITHIN ONE HALF THEIR TOTAL TOLERANCE.  
 6. A CRITICAL DIMENSION IS DENOTED WITH A BOX X SYMBOL.  
 7. ALL DIMENSIONS SHOWN ARE IN MILLIMETERS, UNLESS OTHERWISE SPECIFIED.  
 TOLERANCES FOR DIMENSIONS SHOWN ON DRAWING ARE AS FOLLOWS: ZERO (X) OR ONE PLACE (X.X) +/-0.3, TWO PLACE (X.XX) +/-0.13.  
 8. MATERIAL: NOKIA CODE B3517A.  
 9. ARTWORK TO BE FURNISHED BY NOKIA. INK TO BE UV RESISTANT.  
 10. LABELS MUST SATISFY UL CATEGORY PGDQ2 AND UL969. LABELS ARE INTENDED FOR OUTDOOR USE AND MUST BE CAPABLE OF WITHSTANDING THE FOLLOWING ENVIRONMENTAL CONDITIONS: OPERATING TEMPERATURE RANGE: -40° C TO +85° C, STORAGE TEMPERATURE RANGE: -40° C TO +105° C, SALT FOG PER GR-487-CORE, ISSUE 3, SECTION 3.34 AND WIND DRIVEN RAIN PER TELCORDIA GR-487-CORE. PARTS MUST BE SUITABLE FOR USE ON ALUMINUM, POLYESTER PAINT, AND ACRYLONITRILE BUTADIENE STYRENE (ABS) PLASTIC TO THE ENVIRONMENTAL CONDITIONS DEFINED ABOVE. PARTS SHOULD BE SUITABLE FOR OTHER SUBSTRATES AND TEMPERATURES AS REQUIRED BY THE INDIVIDUAL UL PGDQ2 FILE THAT IS APPLICABLE.  
 11. FLAMMABILITY RATING: ALL MATERIALS MUST HAVE A RATING OF UL 94V-2 OR HIGHER.  
 12. NOKIA PART CODE, PART REVISION (SEE DRAWING FOR CODE AND REVISION), MANUFACTURE DATE CODE (WK/YR), AND VENDOR ID MUST BE PERMANENTLY AND LEGIBLY MARKED ON RELEASE LINER. REVISION LABELS MUST REFLECT CURRENT COMPONENT REVISION AT TIME OF MANUFACTURE. CHARACTERS MUST BE 2.0MM TO 4.0MM HIGH.  
 13. EXCEPTIONS: NO CHANGE SHALL BE ALLOWED ON PRODUCTION MATERIAL REGARDLESS OF WHETHER SUCH CHANGE AFFECTS REQUIREMENTS SPECIFIED, WITHOUT PRIOR WRITTEN APPROVAL BY NOKIA.  
 14. THE RECOGNIZED COMPANY'S FULL TRADE NAME OR TRADEMARK, FACTORY IDENTIFICATION, AND LABEL DESIGNATION SHALL BE MARKED ON EACH LABEL PACKAGE, ROLL CORE, OR RELEASE LINER OF THE LABEL.  
 15. THE SUPPLIER MUST HAVE A CURRENT UL FILE NUMBER UNDER THE FOLLOWING CATEGORIES: PGDQ2 (MARKING AND LABELING SYSTEMS)  
 16. 1D LINEAR BARCODES: CODE TYPE CODE128 WITH DATA IDENTIFIERS ENCODED. DATA STRUCTURE ISO 15418. X-DIMENSION: 0.21 mm (600dpi ONLY). HEIGHT OF CODE: 4 mm  
 17. 2D DATA MATRIX: CODE TYPE DATA MATRIX ECC200. MATRIX GRID 36x36. DATA STRUCTURE ISO 15434. X-DIMENSION: 0.26 mm (600dpi ONLY). EXTERNAL SIZE OF CODE: 9.1x5.1mm  
 18. FONT: ALL FONTS SHALL BE ARIAL NARROW 4.5pt UNLESS OTHERWISE NOTED  
 19. INK COLOR: BLACK UNLESS OTHERWISE NOTED

Material: <b>SEE NOTE B</b>	Tolerance 1:	Tolerance 2:	MASS: <b>0.0 g</b>
Finish:	Item ver: <b>A</b>	DES: <b>A. HAWE</b>	Volume: <b>cm<sup>3</sup></b>
Item code: <b>838735</b>		PREP: <b>A. HAWE</b>	Scales(s): <b>1:1</b>
Drawing code: <b>P635760</b>	Drawing ver: <b>01</b>	CHK: <b>FRENDEISS</b>	
Title: <b>AWMFIA Product Label DC B25/B66</b>		APP: <b>FRENDEISS</b>	
		<b>NOKIA</b>	
		Dimension in mm Sheet(s): <b>1 / 1</b>	

© Nokia Solutions And Networks CONFIDENTIAL - ALL RIGHTS RESERVED