

RF exposure compliance assessment

Nokia Solutions and Networks AirScale Base Transceiver Station Remote Radio Head, model AZQW

Commscope NNH4S4-65B-R7

Author	Kamil Bechta
Owner	Christophe Grangeat
Organization	MN RAN Arch
Approver	Jaimeen Kamdar
Document Type	Final test report
Document ID	LPITPN2I4Q5L-1109616211-1792
Document location	https://nokia.sharepoint.com/:f/r/sites/EMFProductManagement/Shared%20Documents/General/Products- RF-exposure-assessment/AZQW?csf=1&web=1&e=FZOgo3

Change History

Version	Status	Date	Author	Owner	Reviewed by	Reviewed date	Approver	Approval date	Description of changes
1.0	Final	27-04-2021	K. Bechta	C. Grangeat	C. Grangeat	27-04-2021	J. Kamdar	27-04-2021	

This material, including documentation and any related computer programs, is protected by copyright controlled by Nokia. All rights are reserved. Copying, including reproducing, storing, adapting or translating, any or all of this material requires the prior written consent of Nokia. This material also contains confidential information, which may not be disclosed to others without the prior written consent of Nokia.

Contents

1	General content	5
2	References.....	5
2.1	Applicable RF exposure standards and regulations	5
2.2	Product and assessment method.....	6
3	RF exposure limits	6
4	Description of the equipment under test (EUT)	7
5	RF exposure assessment method.....	10
6	RF exposure computation results.....	11
6.1	Regions of application: EU/ICNIRP, Australia/NZ and US/related.....	11
6.2	Regions of application: Canada	14
7	Conclusion and installation recommendations.....	16

List of Tables

Table 1 – Applicable RF exposure levels in n77 band expressed in power density	6
Table 2 – AZQW and NNH4S4-65B-R7 general technical characteristics	7
Table 3 – Reference system used in this report (from NGMN white paper [16])	8
Table 4 – Models of antenna patterns for RF exposure assessment.....	9
Table 5 – Antenna gain characteristics for various beam steering directions used during EMF evaluation	10
Table 6 – Validation of the antenna model at 3700 MHz	11
Table 7 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged maximum transmitted power of 339 W (corresponding to 320 W rated max transmitted power) for EU/ICNIRP, Australia/NZ and US/related.....	17
Table 8 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged maximum transmitted power of 339 W (corresponding to 320 W rated max transmitted power) for Canada	17
Table 9 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged actual maximum transmitted power of 85 W (corresponding to 320 W rated max transmitted power) for EU/ICNIRP, Australia/NZ and US/related.....	18

Table 10 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged actual maximum transmitted power 85 W (corresponding to 320 W rated max transmitted power) for Canada	18
--	----

List of Figures

Figure 1 – Shape of the compliance boundary used for the RF exposure compliance assessment (from [4]).....	10
Figure 2 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related).....	11
Figure 3 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related)	12
Figure 4 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = +10° (EU/ICNIRP, Australia/NZ and US/related).....	12
Figure 5 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = +10° (EU/ICNIRP, Australia/NZ and US/related)	12
Figure 6 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related).....	13
Figure 7 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related)	13
Figure 8 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = -40° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related).....	13
Figure 9 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = -40° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related)	14
Figure 10 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = 0° (Canada)	14
Figure 11 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (Canada).....	14
Figure 12 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth =0° & elevation = +10° (Canada).....	15

Figure 13 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = +10° (Canada)	15
Figure 14 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth =0° & elevation = 0° (Canada).....	15
Figure 15 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (Canada).....	15
Figure 16 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = -40° & elevation = 0° (Canada)	16
Figure 17 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = -40° & elevation = 0° (Canada).....	16

1 General content

This test report is addressing human exposure to radiofrequency electromagnetic fields (RF-EMF) transmitted by the following Nokia AirScale High Power Remote Radio Head (RRH) Product with associated antenna (see §2.2):

- Nokia Solutions and Networks AirScale Base Transceiver Station Remote Radio Head, model AZQW
- Commscope NNH4S4-65B-R7

It provides the RF exposure compliance boundaries for these products regarding both general population and occupational exposure. Outside of these compliance boundaries, human exposure to RF-EMF is below the limits defined by the US Federal Communications Commission (FCC), Canada Safety Code 6, Australia ARPANSA and European regulations (see §2.1 and 3).

2 References

2.1 Applicable RF exposure standards and regulations

- [1] EU 1999/519/EC, "Council Recommendation on the limitation of exposure of the general public to electromagnetic fields (0 Hz to 300 GHz)", July 1999
- [2] EU 2013/35/EU, "Directive of the European Parliament and of the Council on the minimum health and safety requirements regarding the exposure of workers to the risks arising from physical agents (electromagnetic fields) (20th individual Directive within the meaning of Article 16(1) of Directive 89/391/EEC) and repealing Directive 2004/40/EC", June 2013
- [3] EN 50385:2017, "Product standard to demonstrate the compliance of base station equipment with radiofrequency electromagnetic field exposure limits (110 MHz - 100 GHz), when placed on the market", July 2017
- [4] IEC/EN 62232:2017, "Determination of RF field strength, power density and SAR in the vicinity of radiocommunication base stations for the purpose of evaluating human exposure", September 2017.
- [5] AS/NZS 2772.2, "Radiofrequency fields Part 2: Principles and methods of measurement and computation-3 kHz to 300 GHz", 2016
- [6] ARPANSA "Maximum Exposure Levels to Radiofrequency Fields — 3 kHz to 300 GHz", Radiation Protection Series Publication No. 3, 2016
- [7] Canada Safety Code 6, "Limits of Human Exposure to Radiofrequency Electromagnetic Energy in the Frequency Range from 3 kHz to 300 GHz", June 2015

- [8] Canada RSS-102, "Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Issue 5, March 2015,
- [9] US FCC 47CFR 1.1310 "Radiofrequency radiation exposure limits", August 1997.
- [10] US FCC OET Bulletin 65, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields and its supplements", edition 97-01, August 1997.

2.2 Product and assessment method

- [11] Nokia, "Massive MIMO Adaptive Antenna Product Description" DN207523773, Issue 07, 08-06-2020.
- [12] Microwave Vision Group (MVG), "EMF Visual User Manual", SEWB/EMF-VISUAL-UM.1/v2020.2.
- [13] Z. Altman, B. Begasse, C. Dale, A. Karwowski, J. Wiart, M. Wong and L. Gattoufi, "Efficient models for base station antennas for human exposure assessment", IEEE Trans. Electromagnetic Compatibility, Nov 2002, vol.44, pp. 588-592.
- [14] P. Baracca, A. Weber, T. Wild and C. Grangeat, "A Statistical Approach for RF Exposure Compliance Boundary Assessment in Massive MIMO Systems", WSA 2018, <https://arxiv.org/abs/1801.08351>.
- [15] IEC TR62669, "Case studies supporting the implementation of IEC 62232", (106/463/CD, July 2018).
- [16] NGMN white paper, "Recommendation on Base Station Active Antenna System Standards v1.0", July 2020,
https://www.ngmn.org/wp-content/uploads/Publications/2020/NGMN_BASTA-AA_WP_1_0.pdf
- [17] Commscope, Planar Array Antenna, 2300-2690 MHz, 90° HPBW, 1xIntRET (T4-90A-R1-V2)

3 RF exposure limits

The applicable RF exposure limits are defined by [1] and [2] to in Europe and ICNIRP countries, by [5] in Australia and New Zealand, by [7] in Canada and by [9] in the US and related countries such as Bolivia, Estonia, Mexico and Panama. The applicable power density limits are recalled in Table 1 for the frequency range applicable to the equipment under test.



Table 1 – Applicable RF exposure levels in n77 band expressed in power density

Region of application	General Population / Uncontrolled Exposures	Occupational / Controlled Exposures
EU/ICNIRP, Australia/NZ, US/related	10 W/m ²	50 W/m ²
Canada	7.2 W/m ²	39.2 W/m ²

4 Description of the equipment under test (EUT)

The main technical characteristics of AZQW and NNH4S4-65B-R7 are reproduced in Table 2.

Table 2 – AZQW and NNH4S4-65B-R7 general technical characteristics

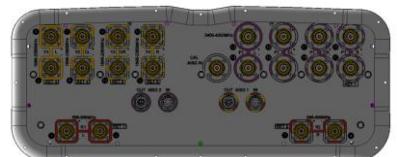Product name	Nokia Solutions and Networks AirScale Base Transceiver Station Remote Radio Head, model AZQW
Model number	475742A
Rated max Tx power	320 W
Number of TXRX	8TX8RX
Beamforming	Yes
SW supported techno.	3GPP compliant, TDD
Frequency range	3700~3980MHz (3GPP n77)
Technology duty cycle factor	75 %
Product name	Commscope NNH4S4-65B-R7
Antenna array	4 (column) x 2 (polarization)
Max Antenna Gain	21.2 dBi
Azimuth scanning range	±40°
Down-tilt range	0° to +10°
Dimensions of T4-90A-R1-V2	<p>Height: 1848 mm Width: 498 mm Depth: 197 mm</p>  
Transmitted power tolerance	1.5 dB
Total max EIRP	76.25 dBm

The pattern models used for the RF exposure assessment are derived from the model of the antenna array (pattern and gain) using the real beamforming weights (BFW) specified in the antenna datasheet [17]. The pattern models are validated with the information provided in the antenna datasheet [17]. Table 4 includes the pattern models generated for RF exposure

assessment. Selected patterns ensure that maximum compliance distance, applicable to evaluated product, is obtained.

Azimuth and elevation angles indicated in this report are provided according to the reference system used in product data sheets (see Table 3), unless otherwise stated.

Table 3 – Reference system used in this report (from NGMN white paper [16])

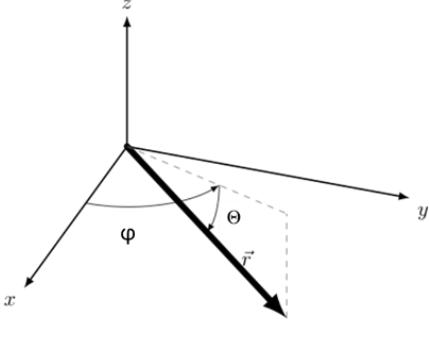
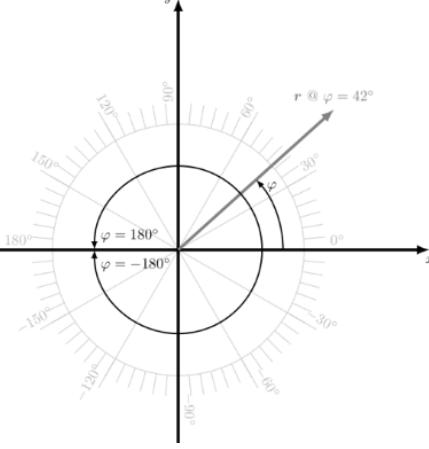
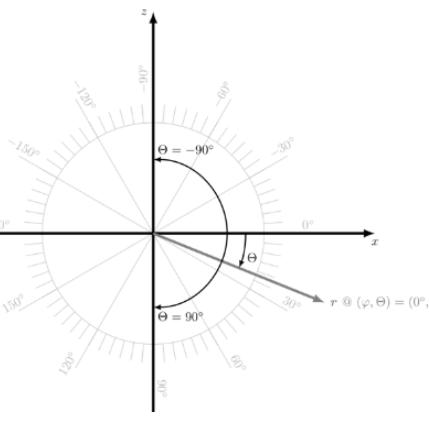
<p>3D view Definition of azimuth φ and elevation θ</p>	
<p>Top view (horizontal cut) Definition of azimuth φ</p>	
<p>Side view (vertical cut) Definition of elevation θ</p>	

Table 4 – Models of antenna patterns for RF exposure assessment

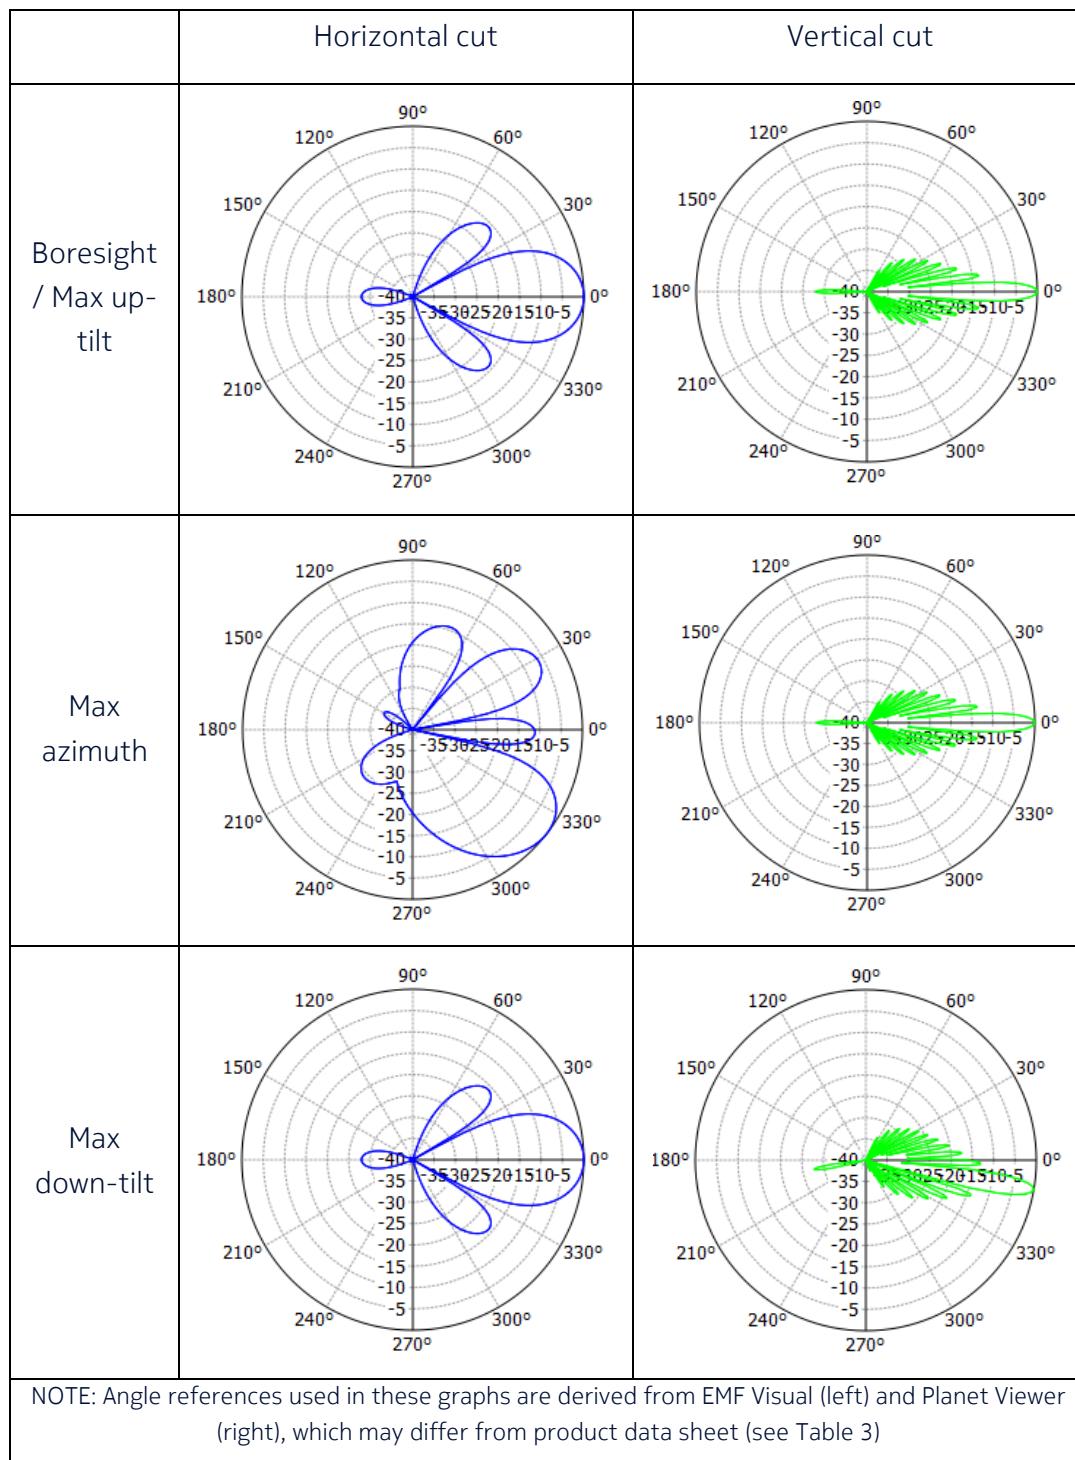


Table 5 – Antenna gain characteristics for various beam steering directions used during EMF evaluation

	Azimuth	Elevation	Gain (dBi)
			3700 MHz
Boresight / Max up-tilt	0°	0°	21.2
Max azimuth	-40°	0°	20.2
Max down-tilt	0°	+10°	21.2

The compliance boundary is defined by the box shape perimeter shown in Figure 4 of IEC 62232:2017 [4] and displayed in Figure 1. The distances D_f , D_s , $D_{a,u}$ and $D_{a,d}$ are taken from the nearest point of the antenna. For convenience, the distances D_{sc} , D_{uc} and D_{dc} (respectively) taken from antenna center are also provided.

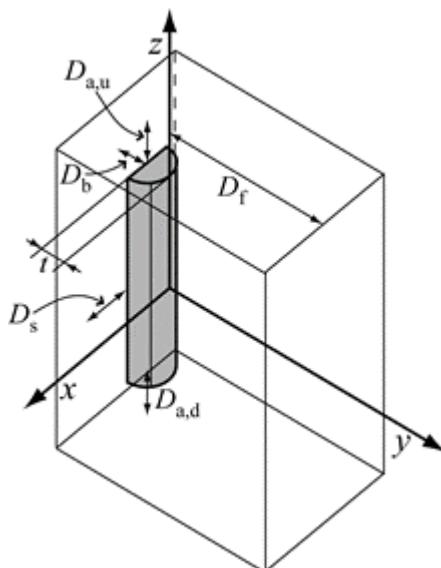


Figure 1 – Shape of the compliance boundary used for the RF exposure compliance assessment (from [4]).

5 RF exposure assessment method

RF exposure assessment is performed using the synthetic model computation method defined in B.4.4.1 of IEC 62232:2017. Calculations are performed with the “EMF Visual” software release OKTAL 2020.2 Version 4.0 (see [12] and [13]).

The validation of the model is performed in the configuration with the beam in front (azimuth = 0° and elevation = 0°). The validation results are provided in Table 6.

Table 6 – Validation of the antenna model at 3700 MHz

	Product model	EMF Visual model	Deviation
Gain	21.2 dBi	21.2 dBi	0.0 dB
Horizontal half-power beamwidth	25.0°	25.0°	0.0°
Vertical half-power beamwidth	5.7°	5.5°	0.2°

For each configuration, the directivity pattern is derived from the simulation model and the antenna gain is adjusted to match exactly the simulated values for accurate scaling.

The RF compliance distances are provided for the time-averaged maximum transmitted power of 339 W and, for information, the time-averaged actual maximum transmitted power of 85 W taking a 95th percentile approach as defined in [4], [14] and [15]. These values include a technology duty cycle factor of 75 % (see Table 2) for time averaging and a power tolerance of 1.5 dB due to electronic component dispersion and operational environmental conditions (temperature).

6 RF exposure computation results

6.1 Regions of application: EU/ICNIRP, Australia/NZ and US/related

The computed power density 3D distributions are displayed in Figure 2 to Figure 9 for RF exposure limits defined in [1], [2] for EU/ICNIRP countries, [5] for Australia/NZ and [9] for US/related countries.

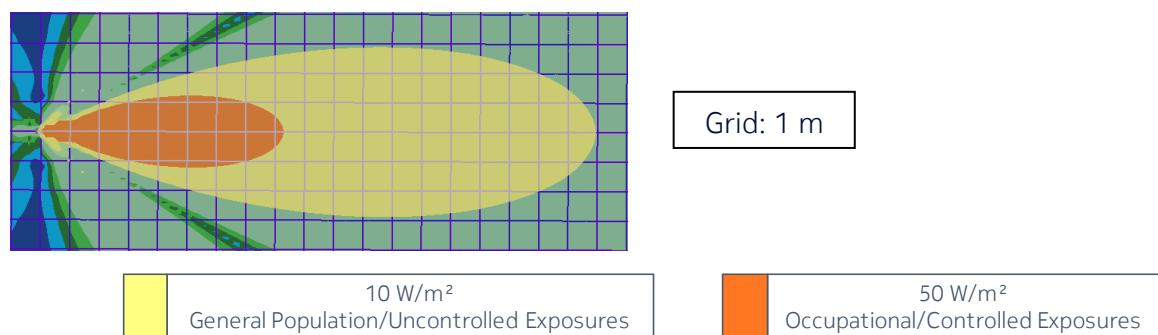


Figure 2 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related)



Figure 3 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related)

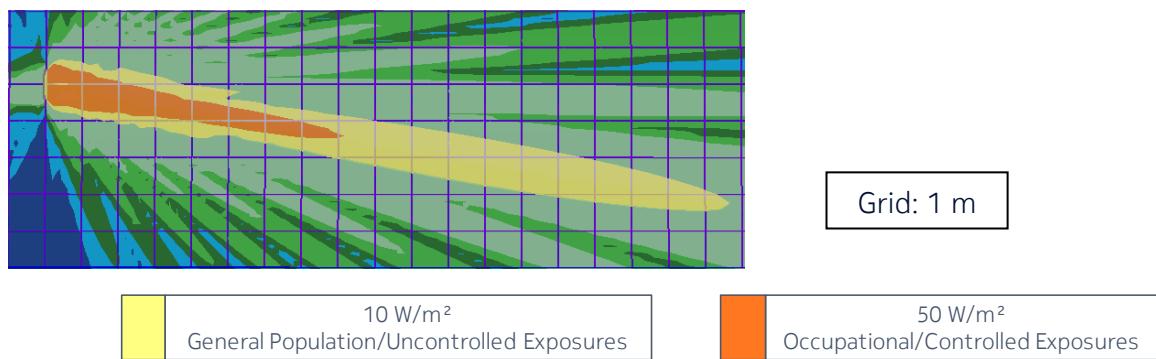


Figure 4 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = +10° (EU/ICNIRP, Australia/NZ and US/related)



Figure 5 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = +10° (EU/ICNIRP, Australia/NZ and US/related)

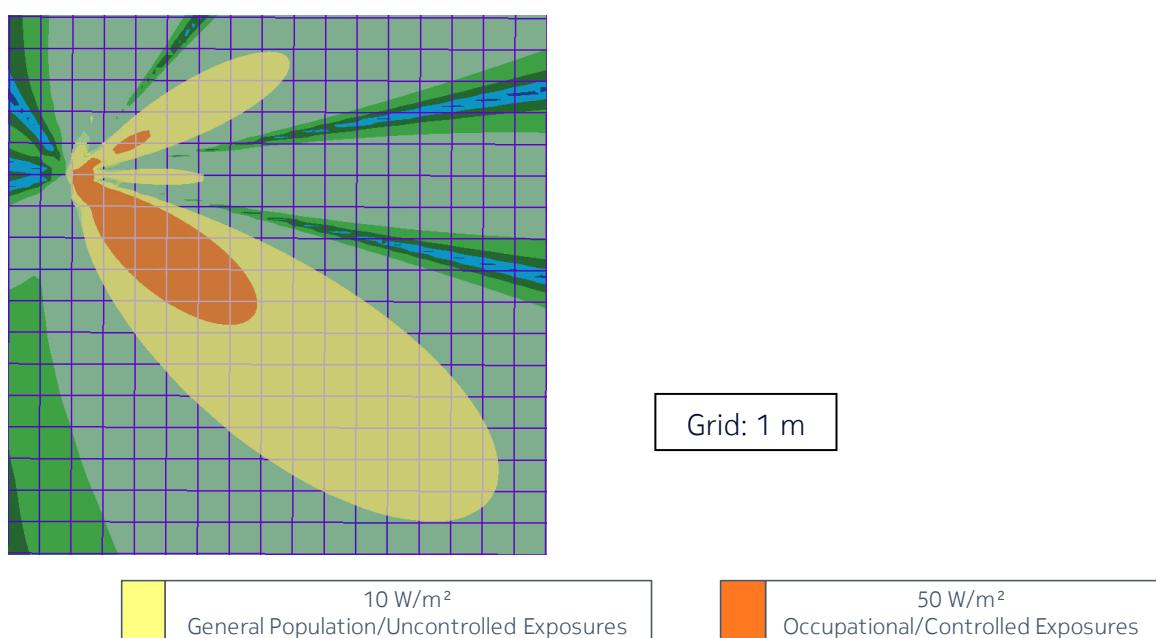
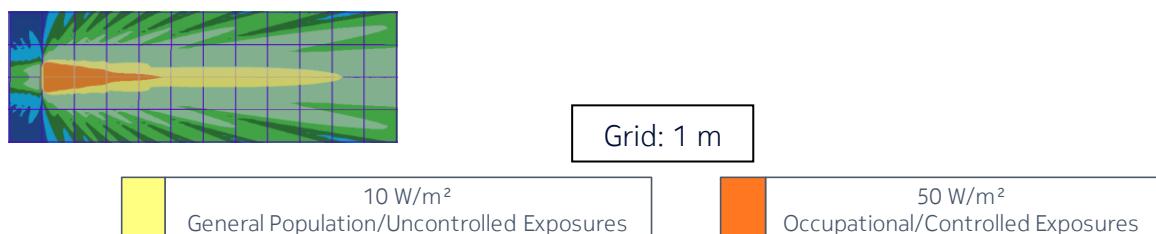
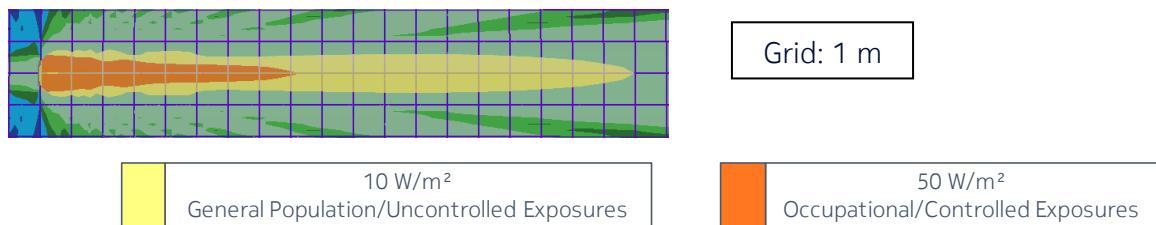




Figure 9 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = -40° & elevation = 0° (EU/ICNIRP, Australia/NZ and US/related)

6.2 Regions of application: Canada

The computed power density distributions are displayed in Figure 10 to Figure 17 for RF exposure limits defined in [7] for Canada.

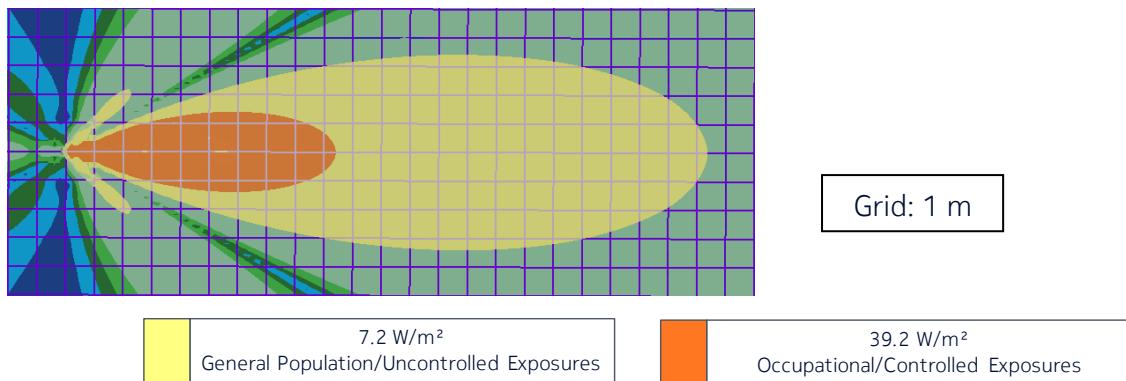


Figure 10 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = 0° & elevation = 0° (Canada)



Figure 11 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (Canada)

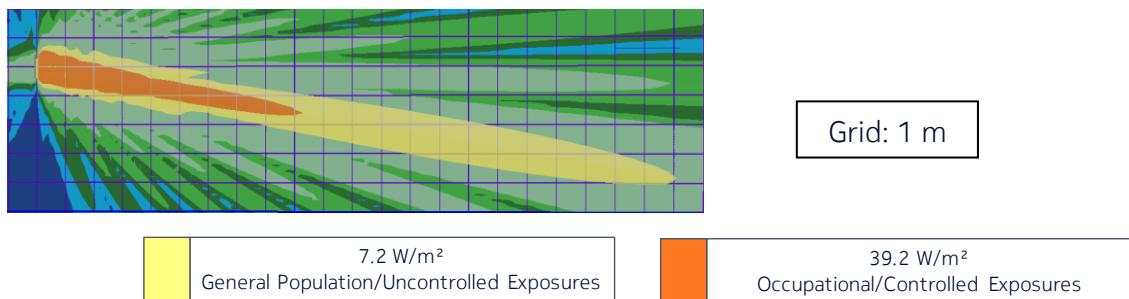


Figure 12 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth =0° & elevation = +10° (Canada)



Figure 13 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = +10° (Canada)

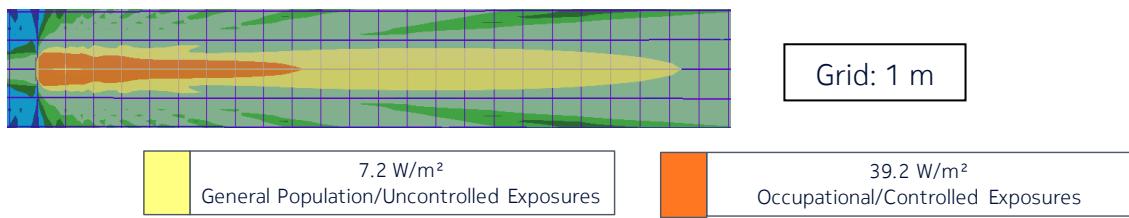


Figure 14 – Side view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth =0° & elevation = 0° (Canada)

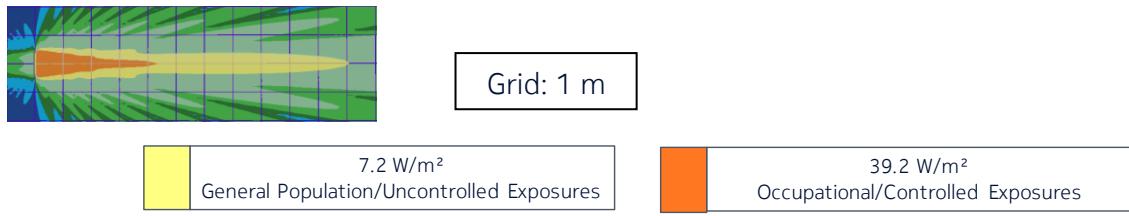


Figure 15 – Side view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = 0° & elevation = 0° (Canada)

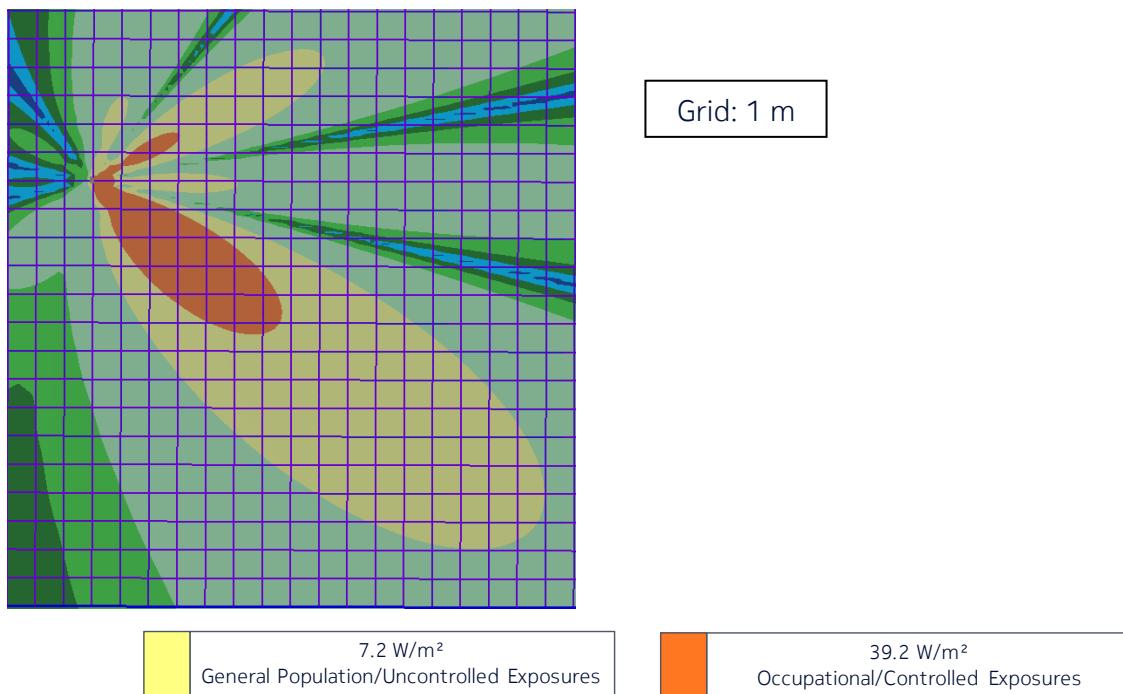


Figure 16 – Top view of the power density for the time-averaged maximum transmitted power of 339 W and the beam oriented in azimuth = -40° & elevation = 0° (Canada)

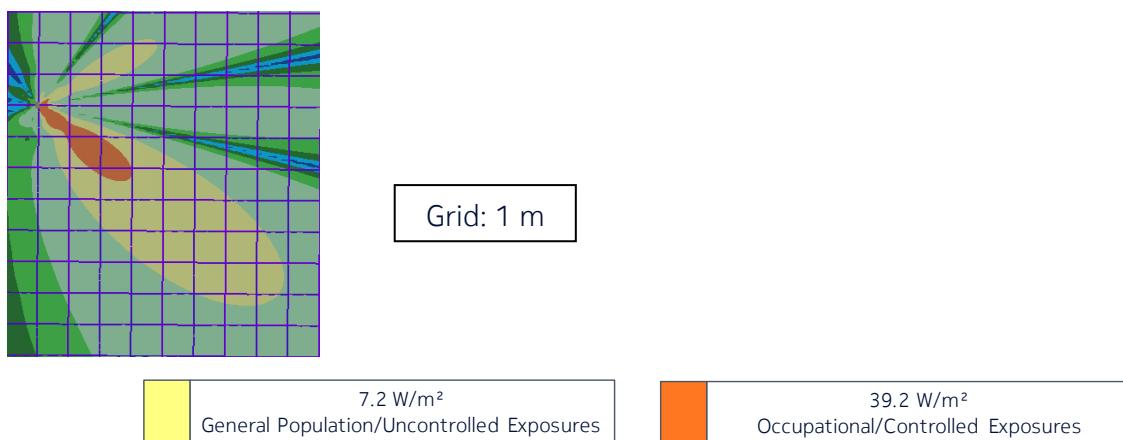


Figure 17 – Top view of the power density for the time-averaged actual maximum transmitted power of 85 W and the beam oriented in azimuth = -40° & elevation = 0° (Canada)

7 Conclusion and installation recommendations

The RF exposure compliance distances for the Nokia AZQW AirScale RRH 8T8R n77 320W with Commscope NNH4S4-65B-R7 antenna are summarized in Table 7 for EU/ICNIRP [1][2], Australia/NZ [5] and US/related [9] requirements and in Table 8 for Canada [7] requirements.

Table 7 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged maximum transmitted power of 339 W (corresponding to 320 W rated max transmitted power) for EU/ICNIRP, Australia/NZ and US/related

Region of application: EU/ICNIRP, Australia/NZ and US/related	General Population/Uncontrolled Exposures	Occupational/Controlled Exposures
RF-EMF power density exposure limits	10 W/m ²	50 W/m ²
Distance in front (Df)	19.0 m	8.4 m
Distance to the side (Ds)	10.8 m	4.6 m
Distance below (Da,d)	2.6 m	0.6 m
Distance above (Da,u)	0.0 m	0.0 m
Distance to the side (Dsc)	11.0 m	4.8 m
Distance below (Ddc)	3.5 m	1.5 m
Distance above (Duc)	0.9 m	0.7 m

Table 8 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged maximum transmitted power of 339 W (corresponding to 320 W rated max transmitted power) for Canada

Region of application: Canada	General Population/Uncontrolled Exposures	Occupational/Controlled Exposures
RF-EMF power density exposure limits	7.2 W/m ²	39.2 W/m ²
Distance in front (Df)	22.3 m	9.5 m
Distance to the side (Ds)	12.8 m	5.3 m
Distance below (Da,d)	3.2 m	0.9 m
Distance above (Da,u)	0.1 m	0.0 m
Distance to the side (Dsc)	13.0 m	5.5 m
Distance below (Ddc)	4.1 m	1.8 m
Distance above (Duc)	1.0 m	0.8 m

The RF exposure compliance distances based on the actual maximum transmitted power considering a 95th percentile approach are summarized in Table 9 and Table 10. These values are provided for information about the RF exposure levels that may be reached in operational conditions considering a time-averaging window of 6 minutes according to [4], [14] and [15].

Table 9 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged actual maximum transmitted power of 85 W (corresponding to 320 W rated max transmitted power) for EU/ICNIRP, Australia/NZ and US/related

For information in EU/ICNIRP, Australia/NZ and US/related countries based on IEC/EN 62232:2017 [4] and IEC TR62669 [15]	General Population/Uncontrolled Exposures	Occupational/Controlled Exposures
RF-EMF power density exposure limits	10 W/m ²	50 W/m ²
Distance in front (Df)	9.5 m	4.0 m
Distance to the side (Ds)	5.2 m	1.8 m
Distance below (Da,d)	0.9 m	0.0 m
Distance above (Da,u)	0.0 m	0.0 m
Distance to the side (Dsc)	5.4 m	2.0 m
Distance below (Ddc)	1.8 m	0.8 m
Distance above (Duc)	0.7 m	0.5 m

Table 10 – AZQW with NNH4S4-65B-R7 RF exposure compliance distances based on the time-averaged actual maximum transmitted power 85 W (corresponding to 320 W rated max transmitted power) for Canada

For information in Canada based on IEC/EN 62232:2017 [4] and IEC TR62669 [15]	General Population/Uncontrolled Exposures	Occupational/Controlled Exposures
RF-EMF power density exposure limits	7.2 W/m ²	39.2 W/m ²
Distance in front (Df)	11.2 m	4.5 m
Distance to the side (Ds)	6.3 m	2.3 m
Distance below (Da,d)	1.1 m	0.0 m
Distance above (Da,u)	0.0 m	0.0 m
Distance to the side (Dsc)	6.5 m	2.5 m
Distance below (Ddc)	2.0 m	0.8 m
Distance above (Duc)	0.8 m	0.6 m

Installation of the Nokia AZQW AirScale RRH 8T8R n77 320W with Commscope NNH4S4-65B-R7 antenna shall be performed in accordance with all applicable manufacturer's recommendations and national laws and regulations related to human exposure to radiofrequency fields. In particular:

- The operator or entity putting the equipment into service shall take the necessary measures to ensure that the general population cannot access the area within the general population/uncontrolled compliance boundary in the vicinity of the transmitting antennas (see Table 7 and Table 8).
- Depending on the site installation configuration, the operator or the entity putting the equipment into service determines the most suitable place to display the appropriate warning signs and any other necessary information or precautionary measures.
- Workers that are required to operate in the close proximity of the transmitting antennas connected to the equipment, for example installation and maintenance personnel, need to be informed about the potential risks of human exposure to RF fields and how to protect against them. They should strictly follow instructions provided by their employer. They should stand-off the occupational/controlled exposure compliance boundary defined in the vicinity of transmitting antennas (see Table 7 and Table 8). If it is necessary to operate within this compliance boundary, workers shall make sure that the transmitters contributing to exposure in this area are all switched off, or they must contact the relevant operator(s) to switch off emissions during operation period.

----- end of the test report -----