



Nemko Test Report: 33241RUS2


Applicant: Nokia Siemens Networks
6000 Connection Drive
Irving, TX 75039
USA

**Equipment Under Test:
(E.U.T.)** EXTB

FCC ID: VBNEXTB-01


In Accordance With: **CFR 47, Part 22, Subpart H**
Cellular Base Stations

Tested By: Nemko USA, Inc.
802 N. Kealy
Lewisville, TX 75057-3136

TESTED BY: 

David Light, Senior Wireless Engineer

DATE: 06 October 2009

APPROVED BY: 

Tom Tidwell, Telecom Direct

DATE: 28 October 2009

Table of Contents

Section 1. Summary of Test Results..... 3

Section 2. General Equipment Specification..... 5

Section 3. RF Power Output 6

Section 4. Occupied Bandwidth 8

Section 5. Spurious Emissions at Antenna Terminals 11

Section 6. Field Strength of Spurious 40

Section 7. Frequency Stability 41

Section 8. Test Equipment List 43

ANNEX A - TEST DETAILS 44

ANNEX B - TEST DIAGRAMS 50

EQUIPMENT: **EXTB**

Section 1. Summary of Test Results

Manufacturer: Nokia Siemens Networks

Model No.: EXTB

Serial No.: L9093200200

General: **All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 22, Subpart H.

- | | | | |
|-------------------------------------|----------------------------|-------------------------------------|---------------------|
| <input checked="" type="checkbox"/> | New Submission | <input checked="" type="checkbox"/> | Production Unit |
| <input type="checkbox"/> | Class II Permissive Change | <input type="checkbox"/> | Pre-Production Unit |

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

EQUIPMENT: **EXTB**

Summary Of Test Data

NAME OF TEST	PARA. NO.	SPEC.	RESULT
RF Power Output	22.913(a)	1640 W	Complies
Occupied Bandwidth	22.917	Not defined	Complies
Spurious Emissions at Antenna Terminals	22.917	-13 dBm	Complies
Field Strength of Spurious Emissions	22.917	-13 dBm E.R.P.	Complies
Frequency Stability	22.355	1.5 ppm	Complies

Footnotes For N/A's:

EQUIPMENT: **EXTB**

Section 2. General Equipment Specification

Supply Voltage Input:	-48 Vdc nominal		
Frequency Band:	869 to 894 MHz		
Type of Modulation and Designator:	GSM 300KGXW	EDGE 300KG7W	
Maximum No. of Carriers:	1		
Output Impedance:	50 ohms		
RF Output (Rated):	50.0 W	GMSK: Combiner Bypass	
	89.0 W	GMSK: Double Combining	
	31.6 W	8PSK: Combiner Bypass	
	56.2 W	8PSK: Double Combining	
Band Selection:	Software <input checked="" type="checkbox"/>	Duplexer <input type="checkbox"/>	Fullband <input type="checkbox"/>

System Description

The EXTB is an 850 MHz Base Station Transceiver. The configurations tested consisted of 3 modules: System Module, Dual Duplex filter module, Dual Transceiver module, and Wideband combiner module (needed for double power). Two types of RF outputs were measured: Combiner Bypass and Double Power Combining. Combiner Bypass consisted of a single carrier and Double Power Combining consisted of two carriers on the same channel combined with phase adjustment in order to increase the transmitted RF output power.

EQUIPMENT: **EXTB**

Section 3. RF Power Output

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
TESTED BY: David Light	DATE: 02 October 2009

Test Results: Complies.

Measurement Data: Refer to table on next page.

Equipment Used: 1036-1082-1054-1064-1065

Measurement Uncertainty: +/- 1.7 dB

Temperature: 22 °C

Relative Humidity: 35 %

EQUIPMENT: **EXTB**

Test Data – RF Power Output

Double Power Combining Mode

Modulation Type	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (W)
GMSK	869.2	30.4	1.1
GMSK	869.4	48.3	67.6
GMSK	881.6	49.5	89.0
GMSK	893.8	34.5	2.8
GMSK	893.6	48.6	72.4
8PSK	869.2	35.5	3.5
8PSK	869.4	47.3	53.7
8PSK	881.6	47.5	56.2
8PSK	893.8	41.6	14.5
8PSK	893.6	47.5	56.2

Combiner Bypass Mode

Modulation Type	Frequency (MHz)	Measured Output Power (dBm)	Measured Output Power (W)
GMSK	869.2	31.5	1.4
GMSK	869.4	45.5	35.5
GMSK	881.6	47.0	50.0
GMSK	893.8	32.5	1.8
GMSK	893.6	44.5	28.2
8PSK	869.2	37.4	5.5
8PSK	869.4	45.0	31.6
8PSK	881.6	45.0	31.6
8PSK	893.8	37.7	5.9
8PSK	893.6	45.0	31.6

Note: The peak power needs to be lowered at the lowest and highest frequencies per above to ensure compliance at the band edges. Refer to band edge plots in section 5.

Supply voltage was varied +/- 15%. No fluctuation in output power resulted.

EQUIPMENT: **EXTB**

Section 4. Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
TESTED BY: David Light	DATE: 02 October 2009

Test Results: Complies.

Test Data: See attached plot(s).

Equipment Used: 1036-1054-1082-1065-1064

Measurement Uncertainty: +/- 1.6 dB

Temperature: 22 °C

Relative Humidity: 35 %


EQUIPMENT: **EXTB**

Test Data – Occupied Bandwidth

8PSK (EDGE)



Ref Lvl	Delta 1 [T1]	RBW	3 kHz	RF Att	30 dB
60 dBm	2.44 dB	VBW	3 kHz		
	300.60120240 kHz	SWT	280 ms	Unit	dBm

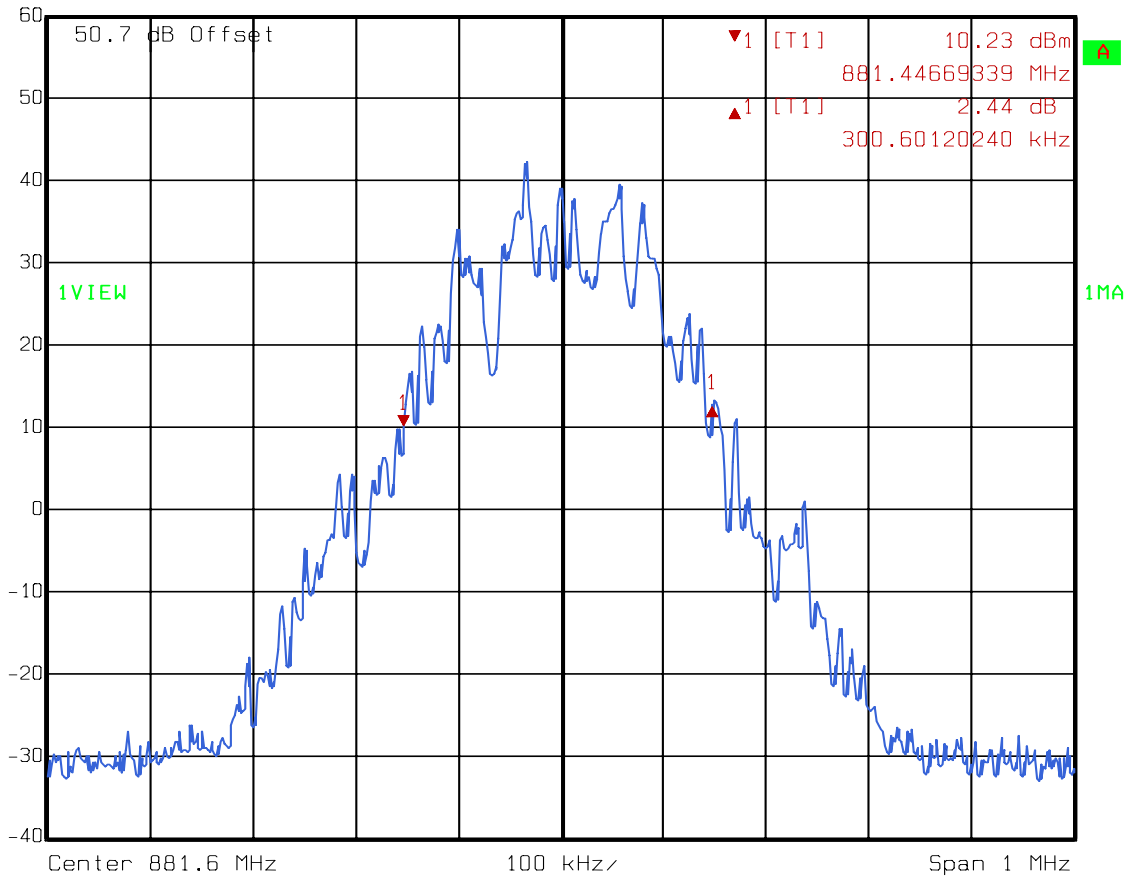

Date: 02.OCT.2009 09:03:50


EQUIPMENT: EXTB

Test Data – Occupied Bandwidth

GMSK (GSM))



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 14.91 dBm VBW 3 kHz
50 dBm 881.46272545 MHz SWT 280 ms Unit dBm

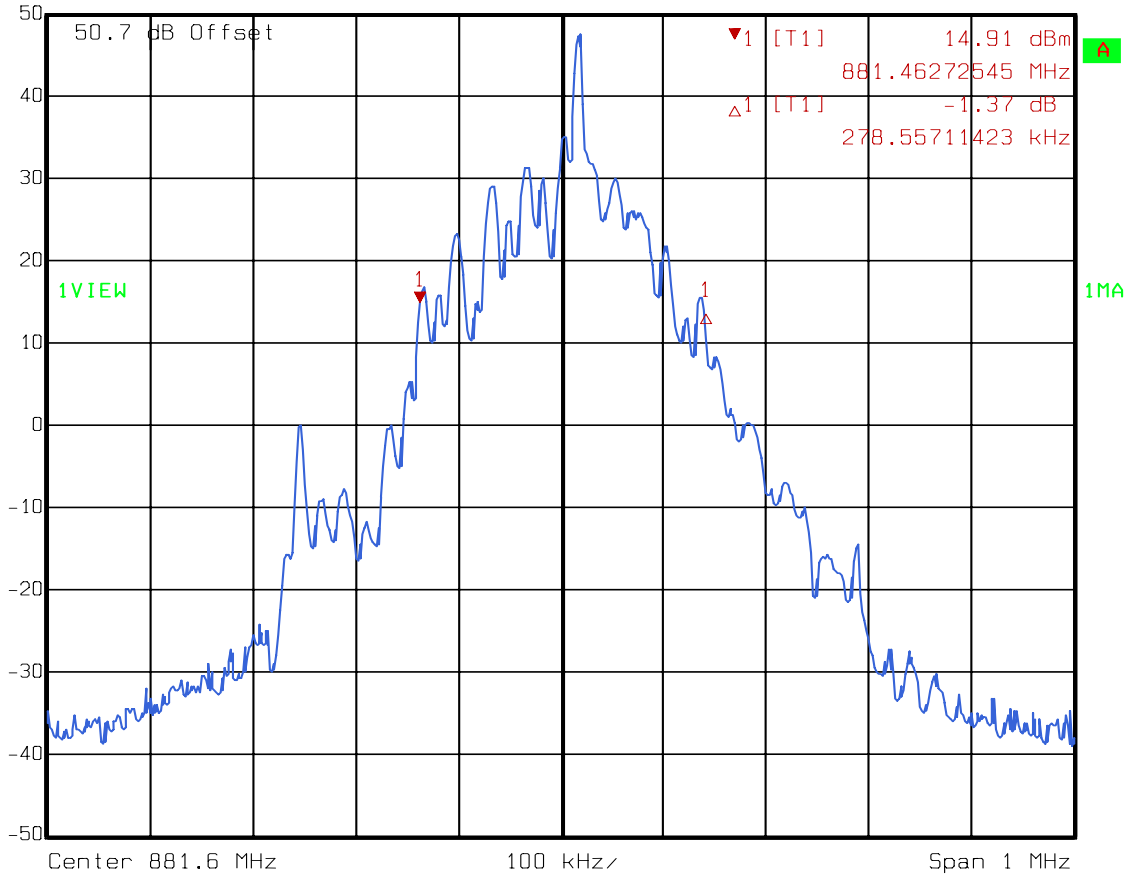

Date: 02.OCT.2009 10:04:18

EQUIPMENT: **EXTB**

Section 5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 02 October 2009

Test Results: Complies.

Test Data: Refer to plots below

Equipment Used: 1036-1082-1064-1065-1054-1054-1058

Measurement Uncertainty: +/- 1.7 dB

Temperature: 22 °C

Relative Humidity: 35 %

EQUIPMENT: EXTB

Test Data – Spurious Emissions

Low Band Edge


8PSK (EDGE)

Double Power Combining Mode

Transmit Frequency: 869.2 MHz

Transmit power reduced

Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -13.11 dBm VBW 3 kHz
50 dBm 868.94689379 MHz SWT 280 ms Unit dBm

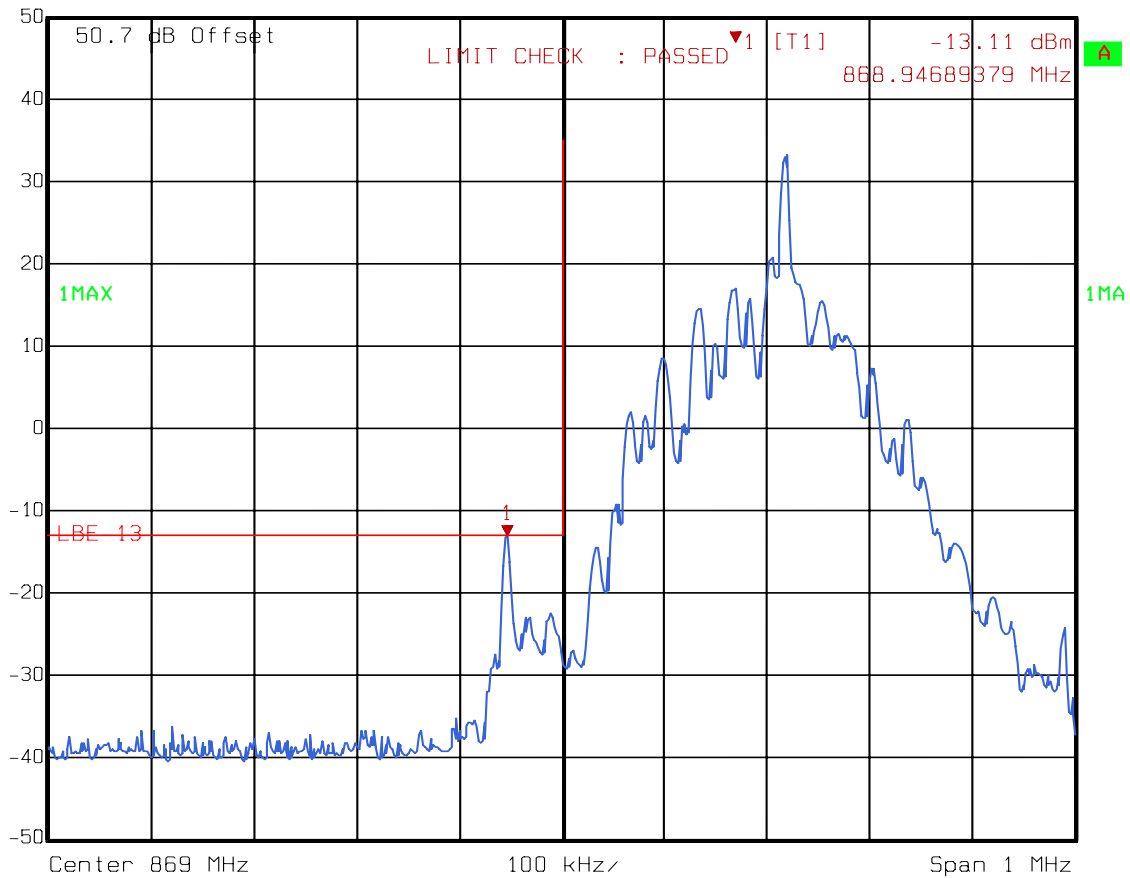


Date: 02.OCT.2009 09:57:25

EQUIPMENT: EXTB

Test Data – Spurious Emissions

Low Band Edge
8PSK (EDGE)
Double Power Combining Mode
Transmit Frequency: 869.4 MHz
Transmit power maximum

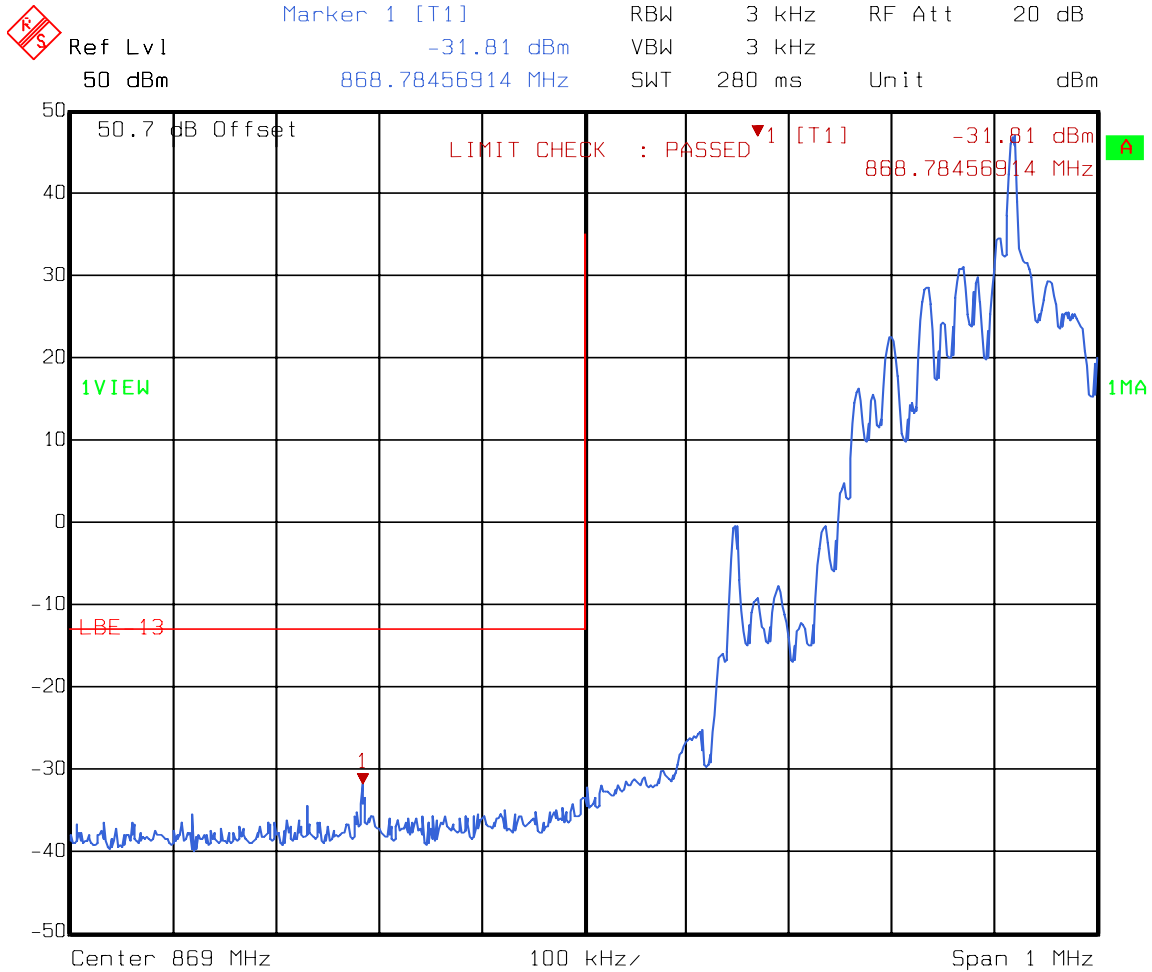


Date: 02.OCT.2009 10:01:52

EQUIPMENT: EXTB

Test Data – Spurious Emissions

Upper Band Edge
8PSK (EDGE)
Double Power Combining Mode
Transmit Frequency: 893.8 MHz
Transmit power reduced

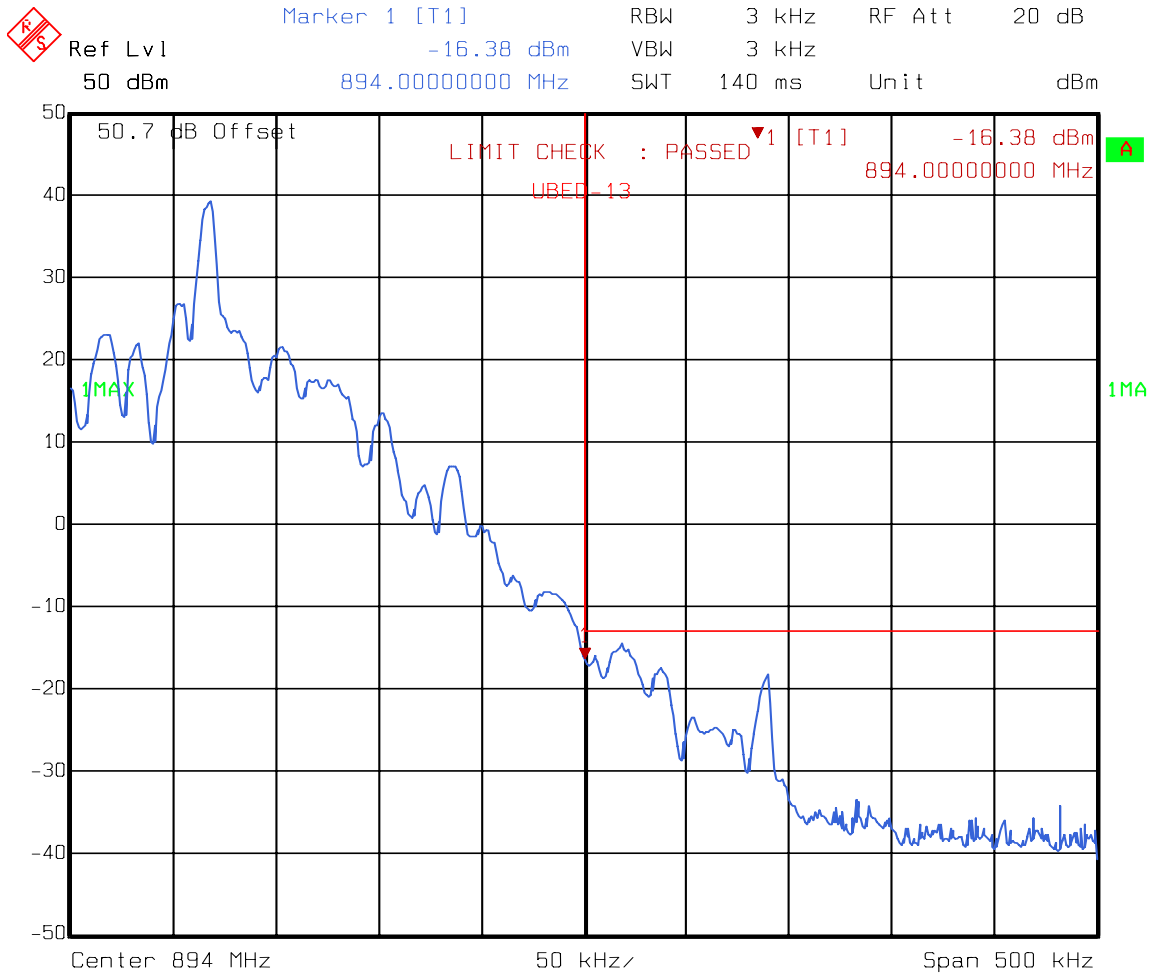


Date: 02.OCT.2009 10:20:17

EQUIPMENT: EXTB

Test Data – Spurious Emissions

Upper Band Edge
8PSK (EDGE)
Double Power Combining Mode
Transmit Frequency: 893.6 MHz
Transmit power maximum

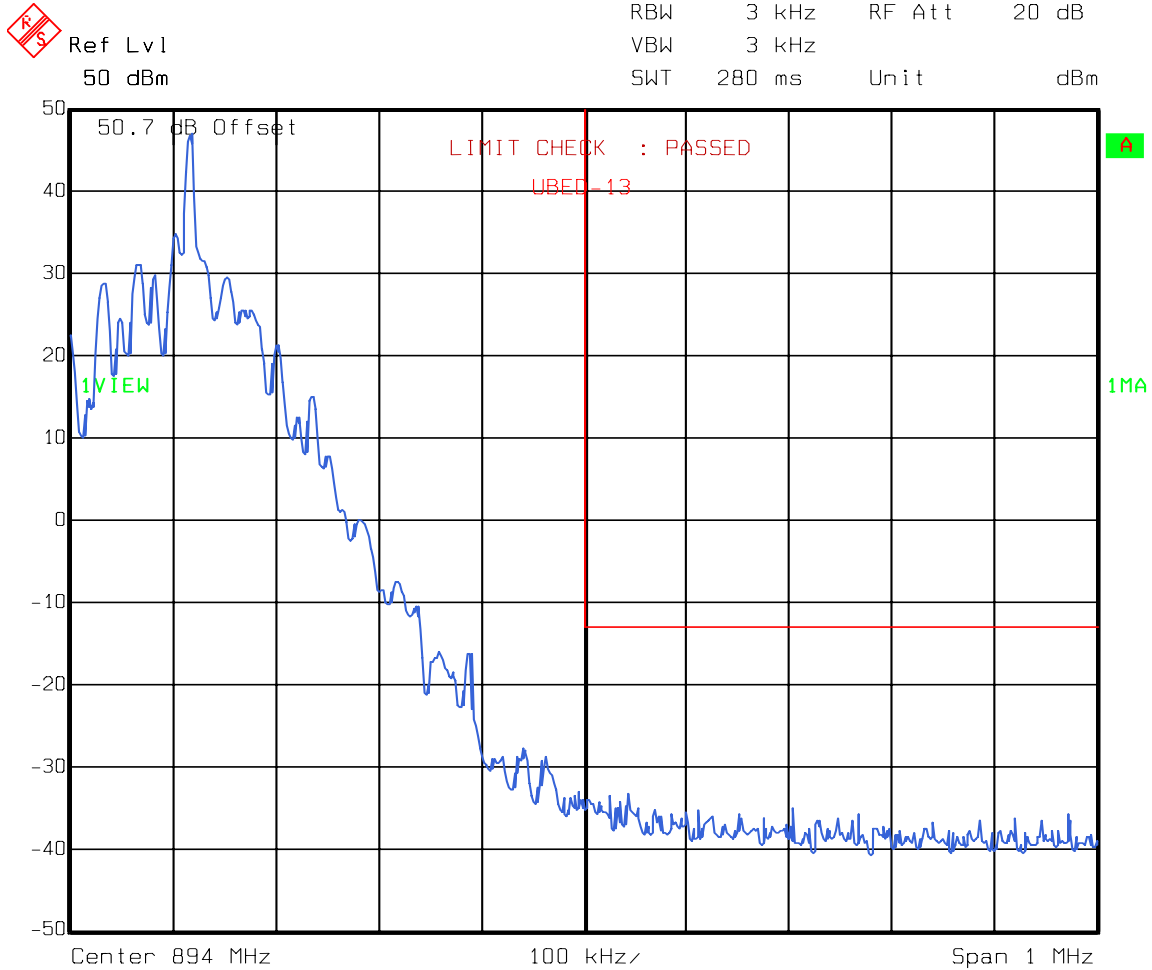

Date: 02.OCT.2009 10:23:33

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Spurs

Double Power Combining Mode



Ref Lvl 40 dBm
Marker 1 [T1] 883.36673347 MHz
RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 5 ms Unit dBm

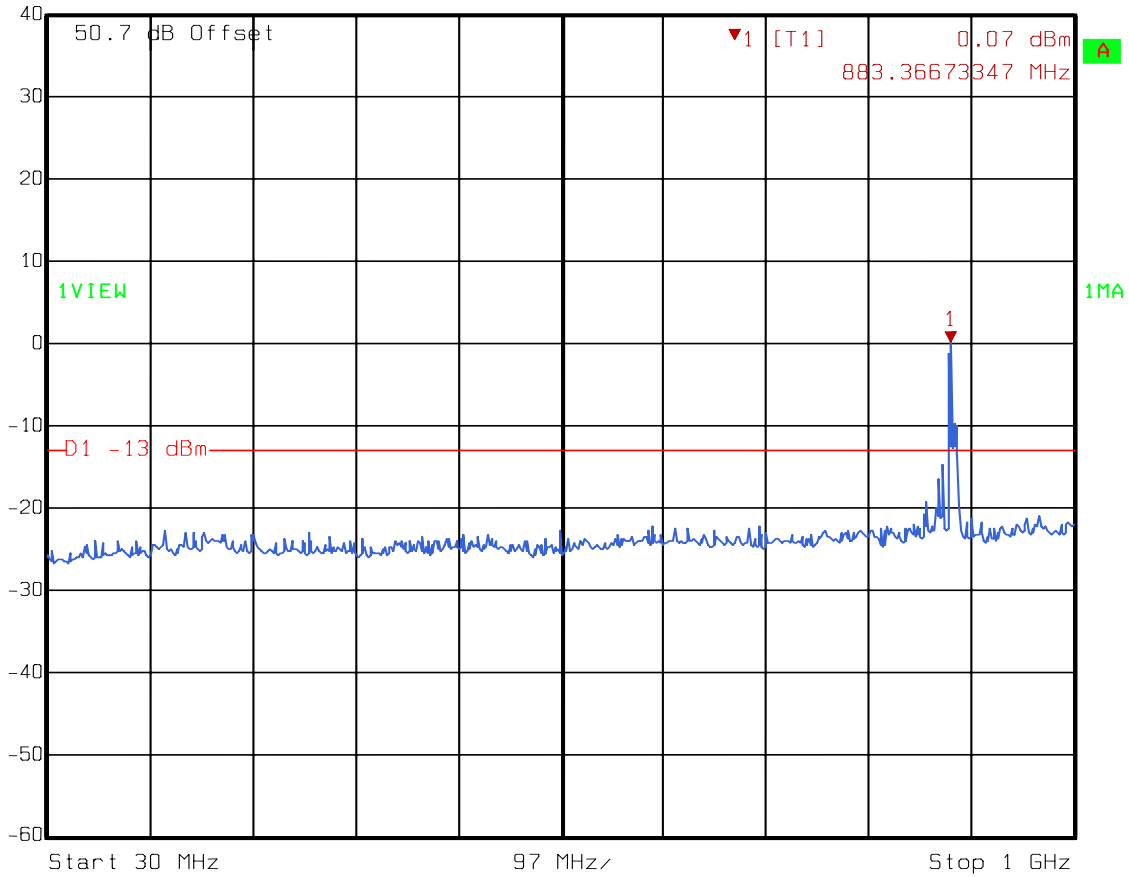

Date: 02.OCT.2009 10:05:43

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Spurs

Double Power Combining Mode



Ref Lvl 40 dBm
Marker 1 [T1] -19.10 dBm
1.97394790 GHz
RBW 1 MHz RF Att 10 dB
VBW 1 MHz
SWT 7.5 ms Unit dBm

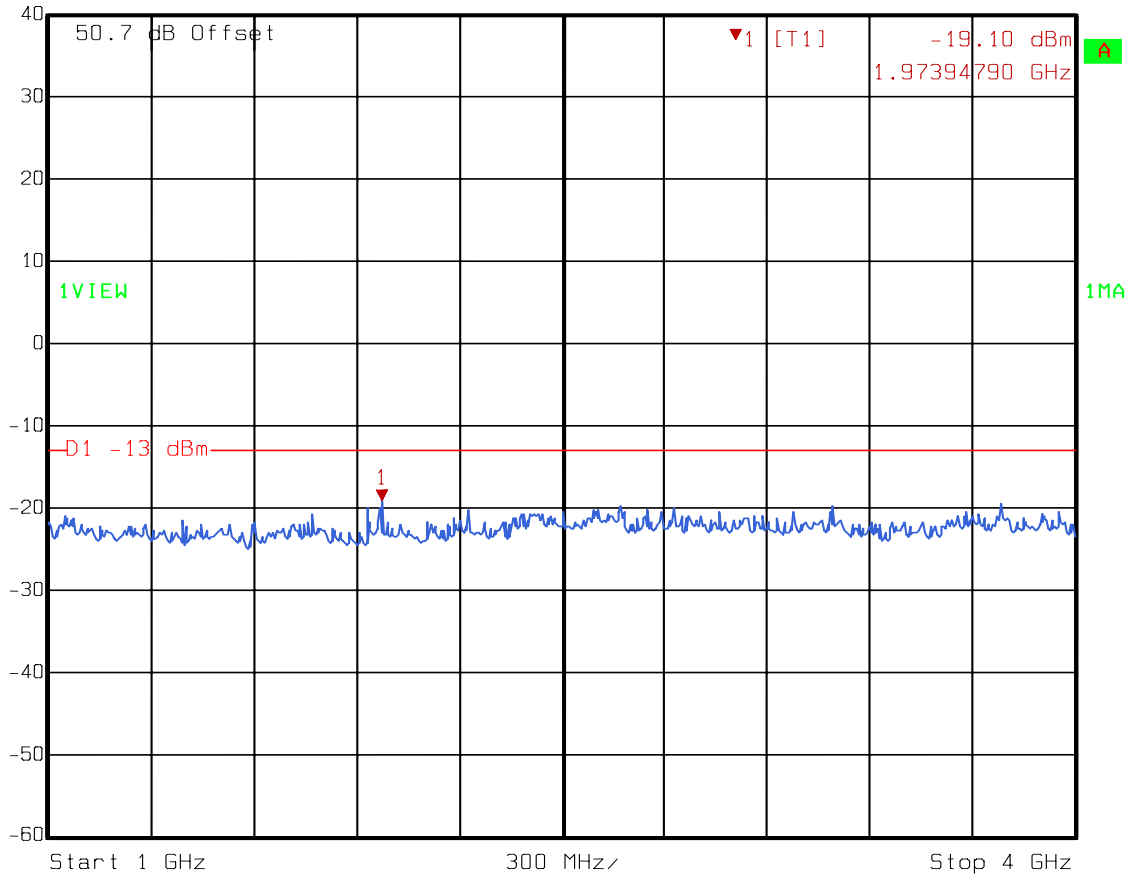

Date: 02.OCT.2009 10:08:47

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Spurs

Double Power Combining Mode



Ref Lvl 42.3 dBm
Marker 1 [T1] -23.32 dBm
RBW 1 MHz RF Att 0 dB
VBW 1 MHz
SWT 60 ms Unit dBm

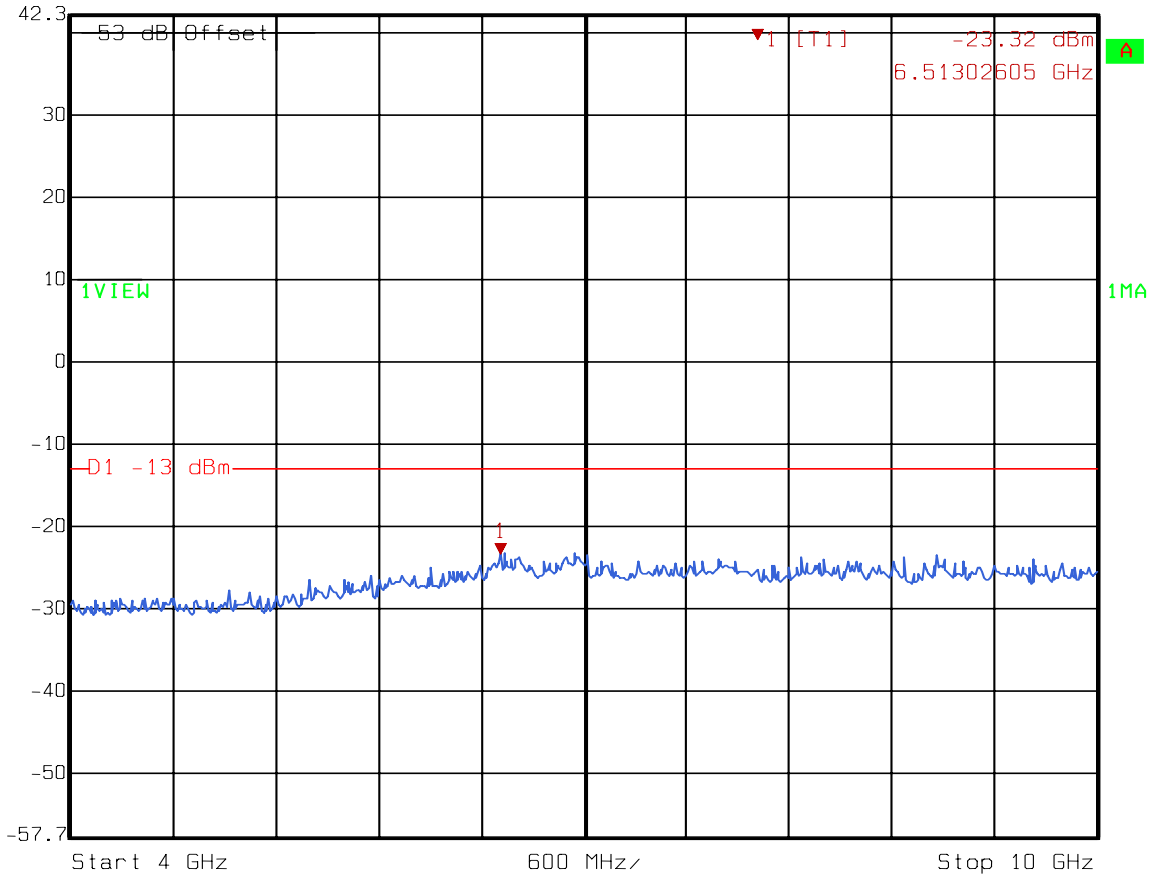

Date: 02.OCT.2009 10:11:57

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Low Power Mode

Combiner Bypass Mode



Ref Lvl 50 dBm
Marker 1 [T1] 868.99098196 MHz
RBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 280 ms Unit dBm

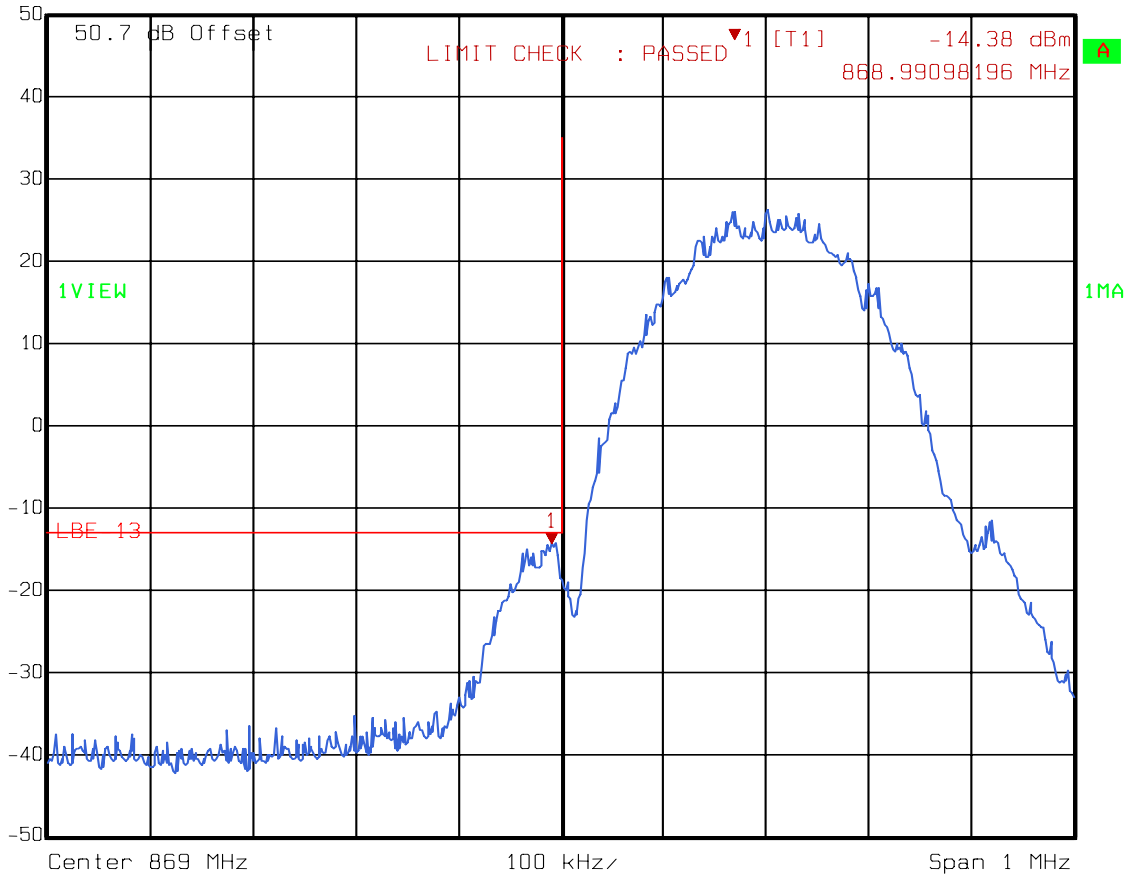

Date: 02.OCT.2009 10:59:50

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Combiner Bypass Mode

Lower Band Edge



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 32.44 dBm VBW 3 kHz
50 dBm 869.4000000 MHz SWT 280 ms Unit dBm

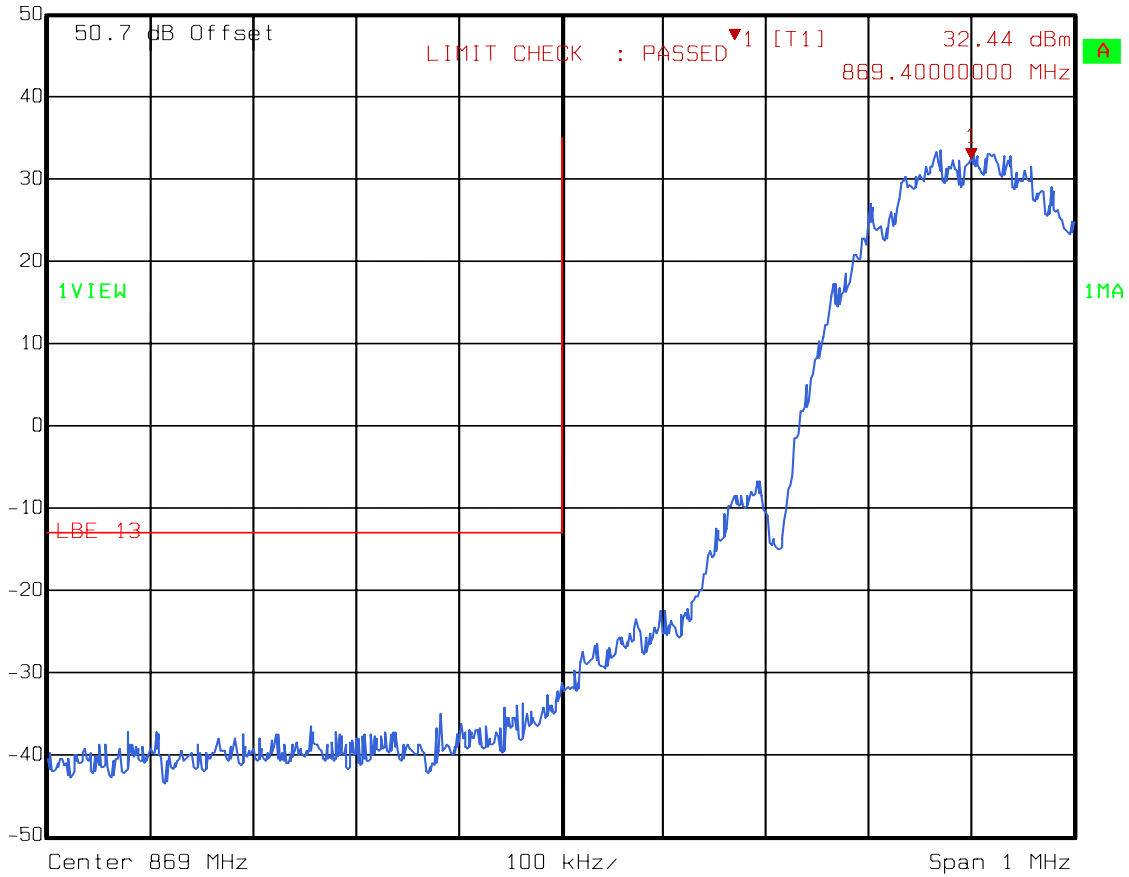

Date: 02.OCT.2009 11:01:16

EQUIPMENT: EXTB


Test Data – Spurious Emissions

8PSK (EDGE)

Combiner Bypass Mode

Upper Band Edge

FS
Ref Lvl 50 dBm
Marker 1 [T1] 894.02104208 MHz
RBW 3 kHz
RF Att 20 dB
VBW 3 kHz
SWT 280 ms
Unit dBm

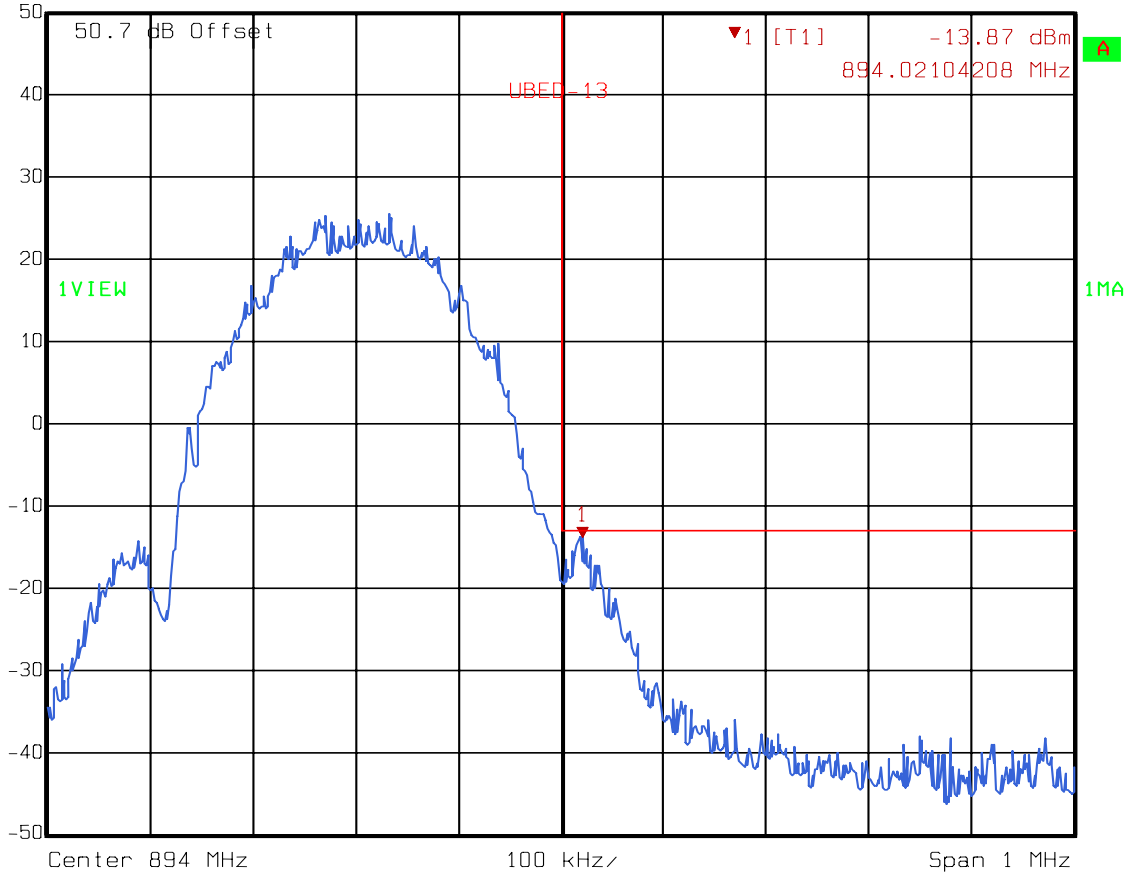

Date: 02.OCT.2009 12:25:33


EQUIPMENT: EXTB


Test Data – Spurious Emissions

8PSK (EDGE)

Combiner Bypass Mode

Upper Band Edge

 Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 34.00 dBm VBW 3 kHz
50 dBm 893.6000000 MHz SWT 280 ms Unit dBm

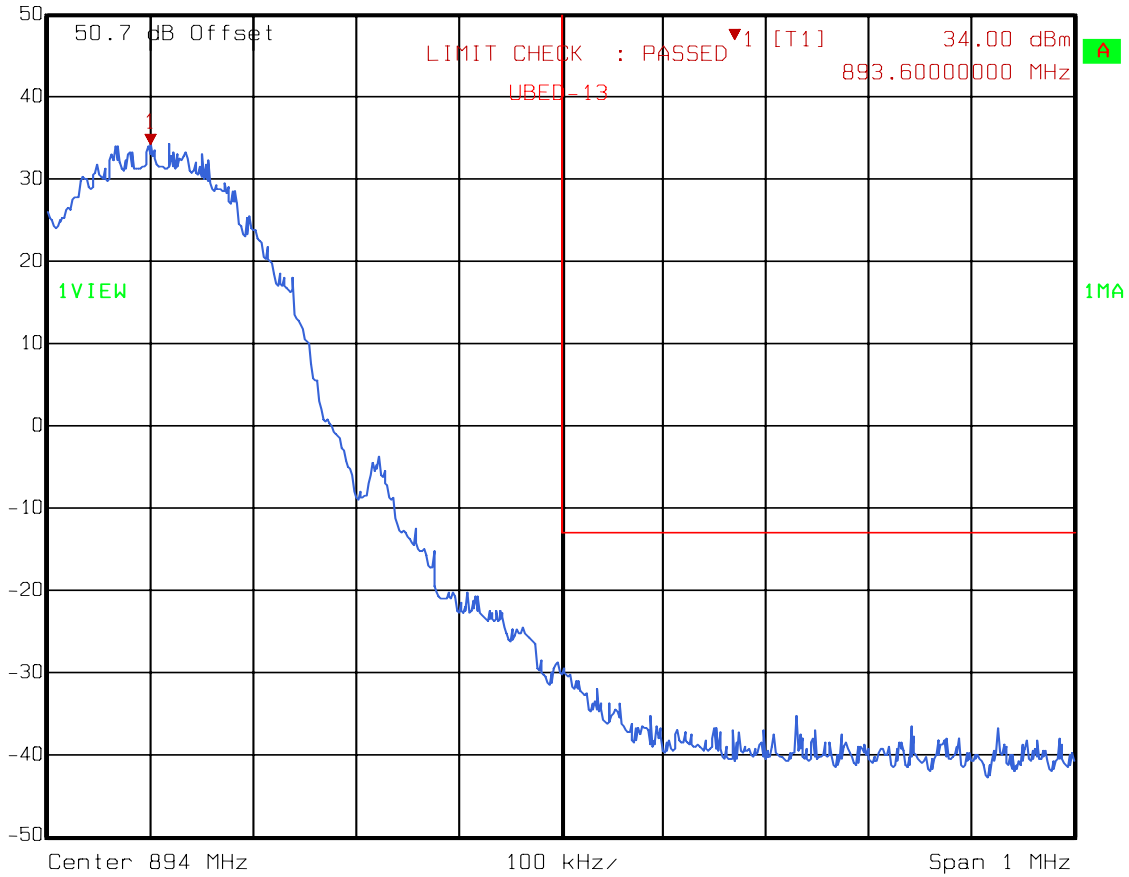

Date: 02.OCT.2009 12:28:08

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Combiner Bypass Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -8.22 dBm VBW 1 MHz
40 dBm 889.19839679 MHz SWT 5 ms Unit dBm

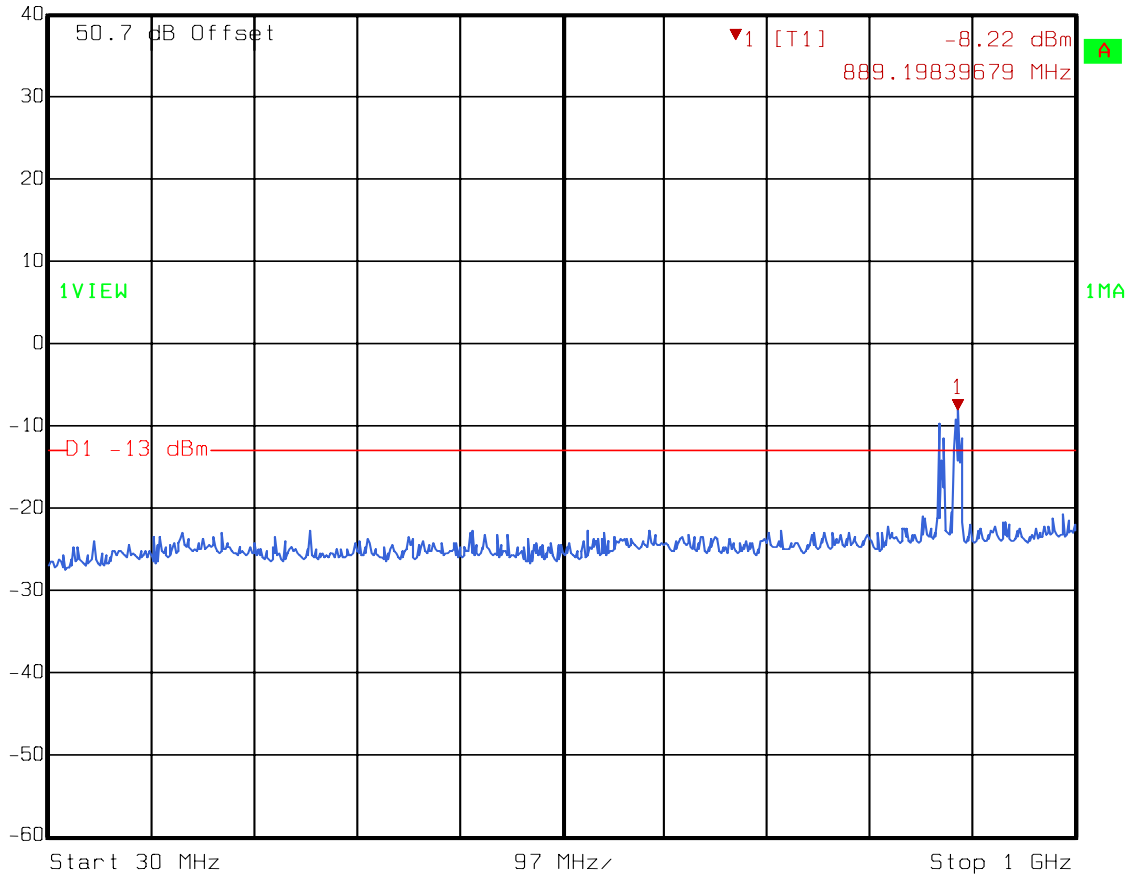

Date: 02.OCT.2009 12:11:44

EQUIPMENT: **EXTB**

Test Data – Spurious Emissions


8PSK (EDGE)

Combiner Bypass Mode

Spurs



Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	10 dB
40 dBm	-15.16 dBm	VBW	1 MHz		
	1.96793587 GHz	SWT	7.5 ms	Unit	dBm

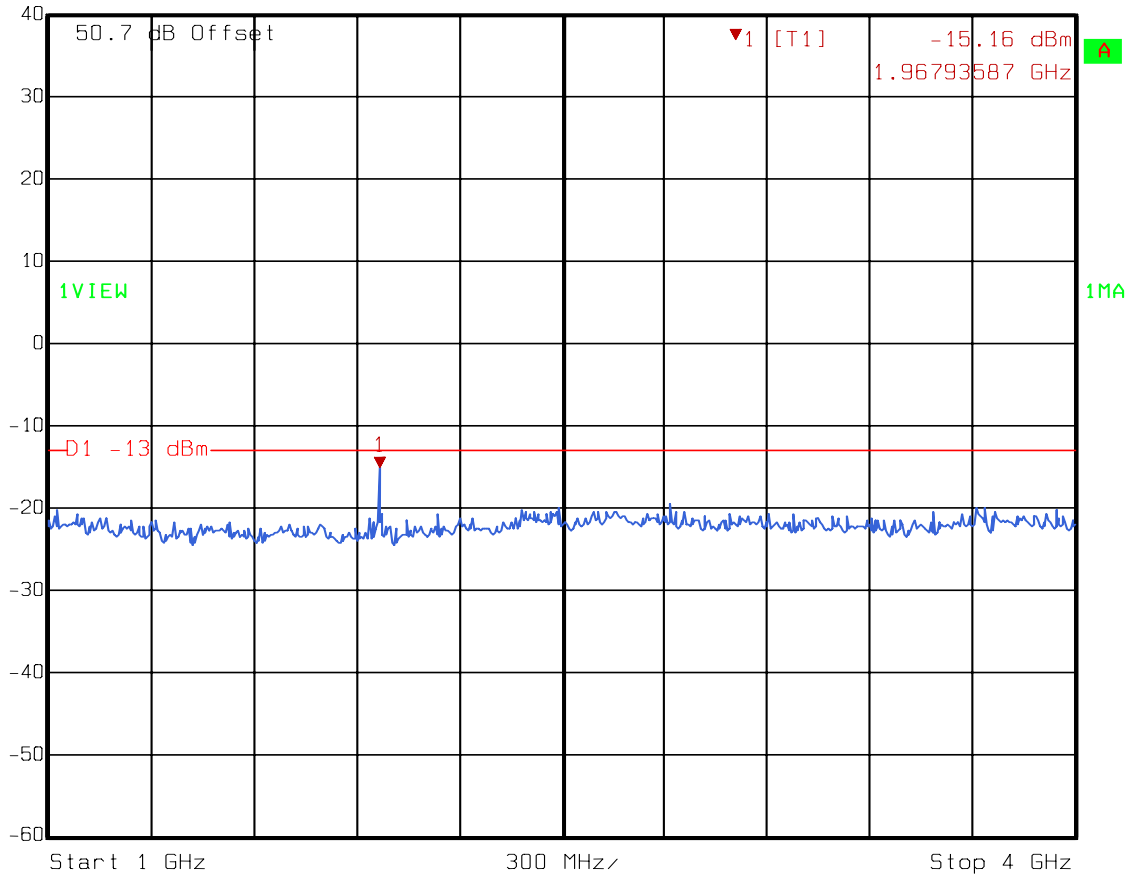

Date: 02.OCT.2009 12:15:30

EQUIPMENT: EXTB

Test Data – Spurious Emissions


8PSK (EDGE)

Combiner Bypass Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -22.04 dBm VBW 1 MHz
42.3 dBm 6.62124248 GHz SWT 60 ms Unit dBm

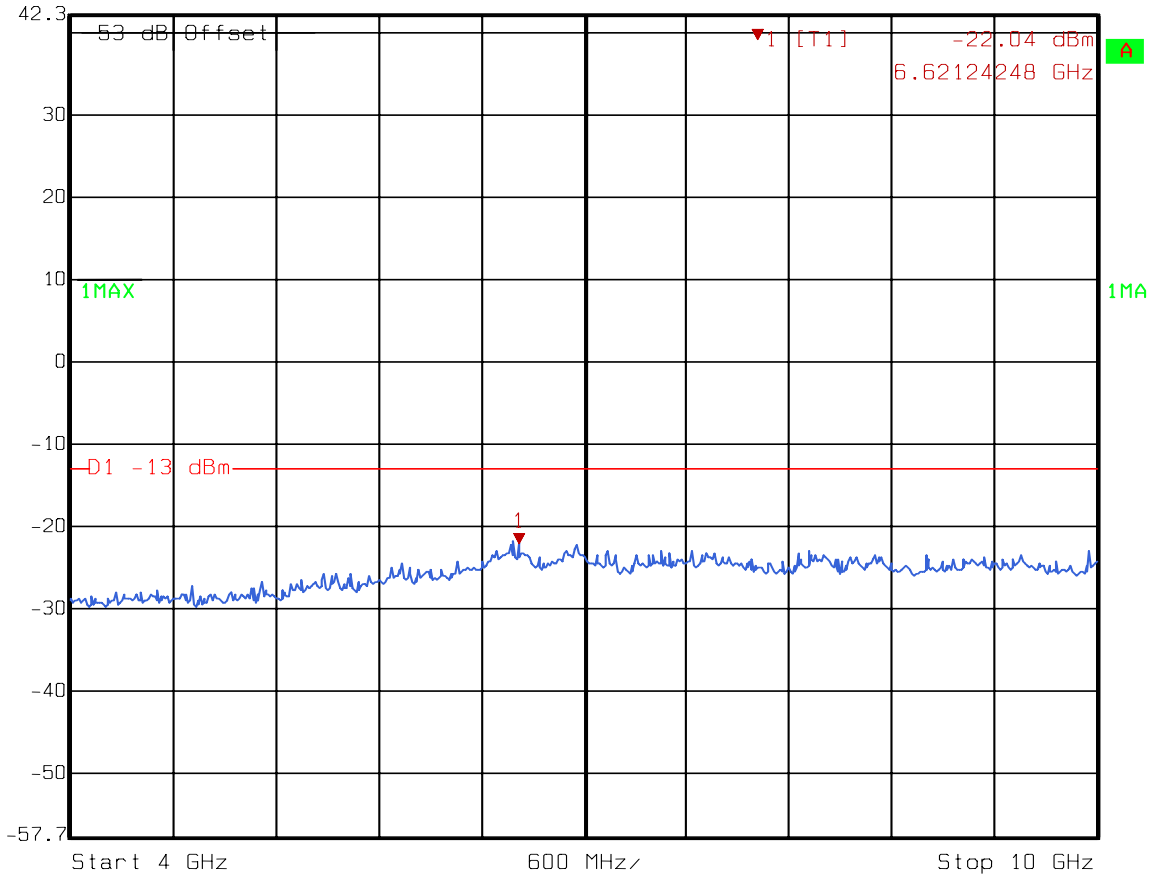

Date: 02.OCT.2009 12:18:03

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Double Power Combining Mode

Lower Band Edge



Marker 1 [T1] RBW 3 kHz RF Att 30 dB
Ref Lvl -14.42 dBm VBW 3 kHz
60 dBm 868.99749499 MHz SWT 280 ms Unit dBm

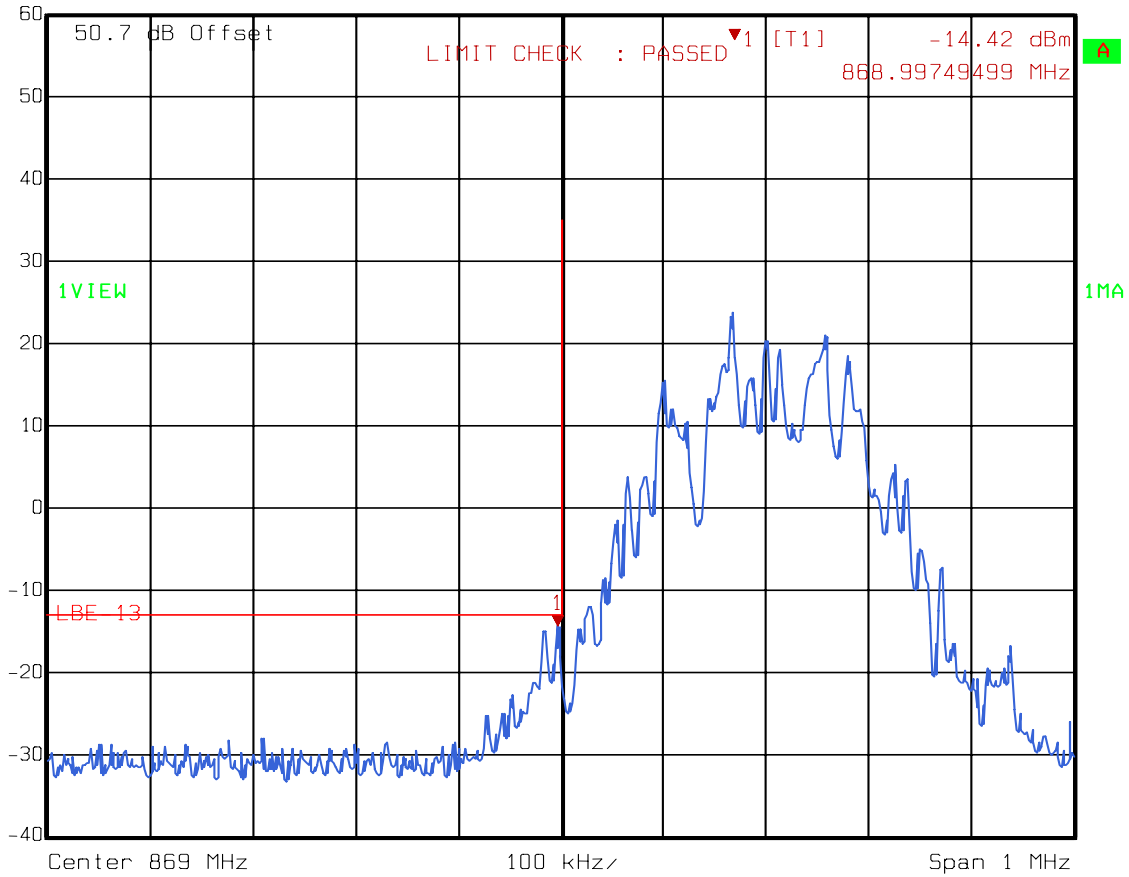

Date: 02.OCT.2009 08:56:40

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Double Power Combining Mode

Lower Band Edge



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 41.75 dBm VBW 3 kHz
50 dBm 869.36673347 MHz SWT 560 ms Unit dBm

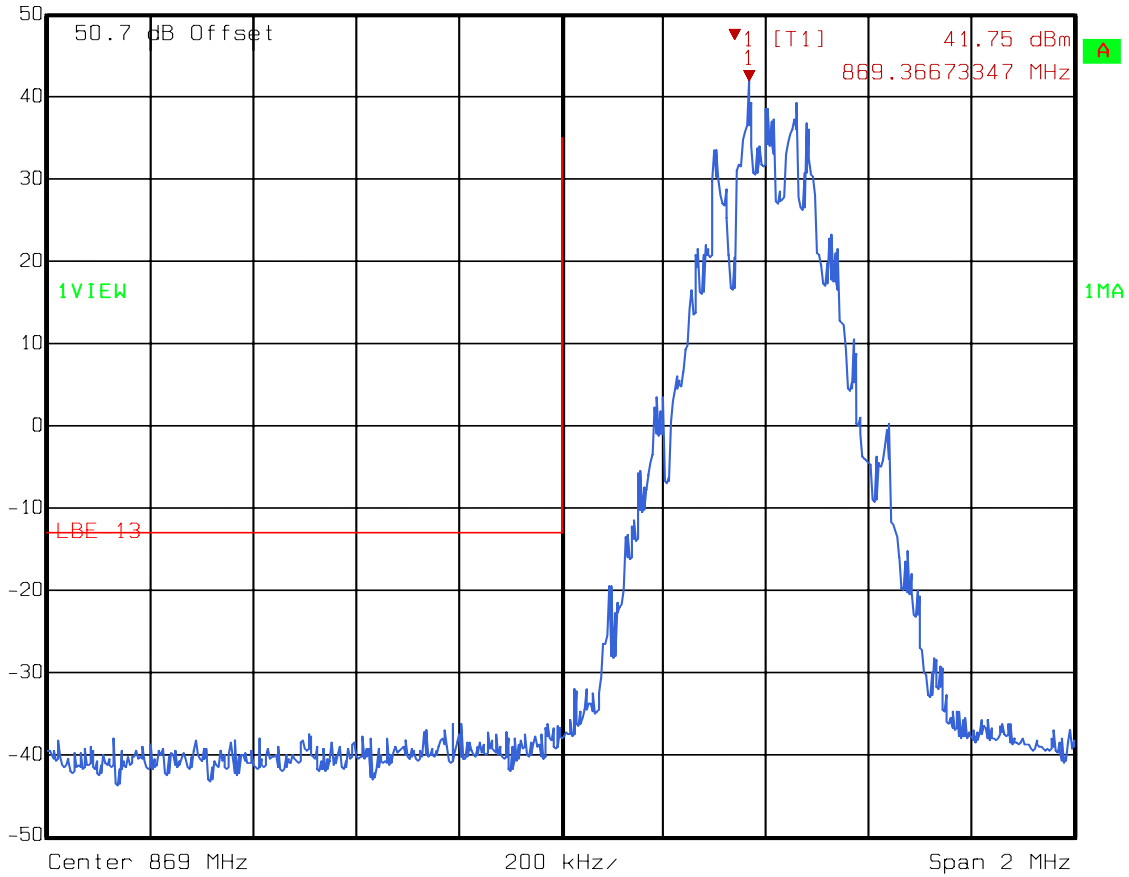

Date: 02.OCT.2009 09:32:18

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Double Power Combining Mode

Upper Band Edge



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -13.77 dBm VBW 3 kHz
50 dBm 894.03732465 MHz SWT 280 ms Unit dBm

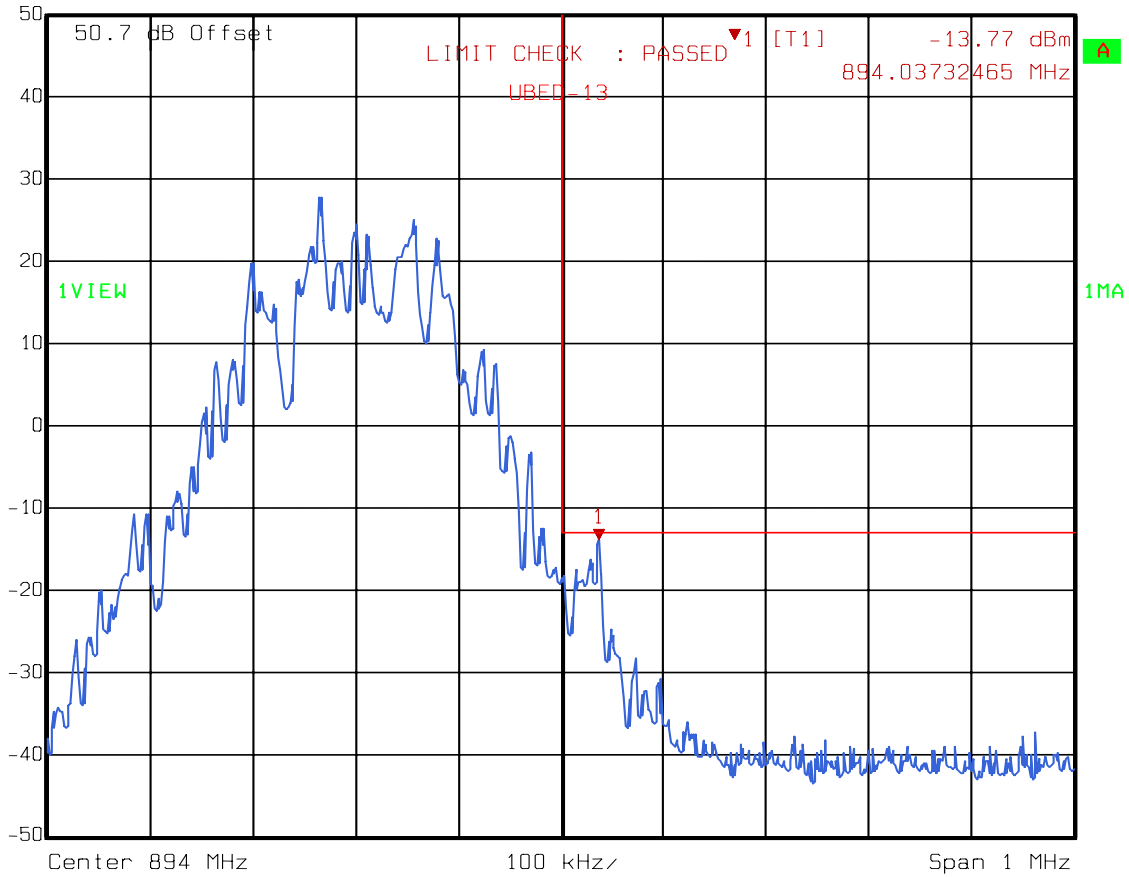

Date: 02.OCT.2009 09:38:34

EQUIPMENT: EXTB


Test Data – Spurious Emissions

GMSK (GSM)

Double Power Combining Mode



Ref Lvl 50 dBm
Marker 1 [T1] 38.51 dBm
893.6000000 MHz
RBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 280 ms Unit dBm

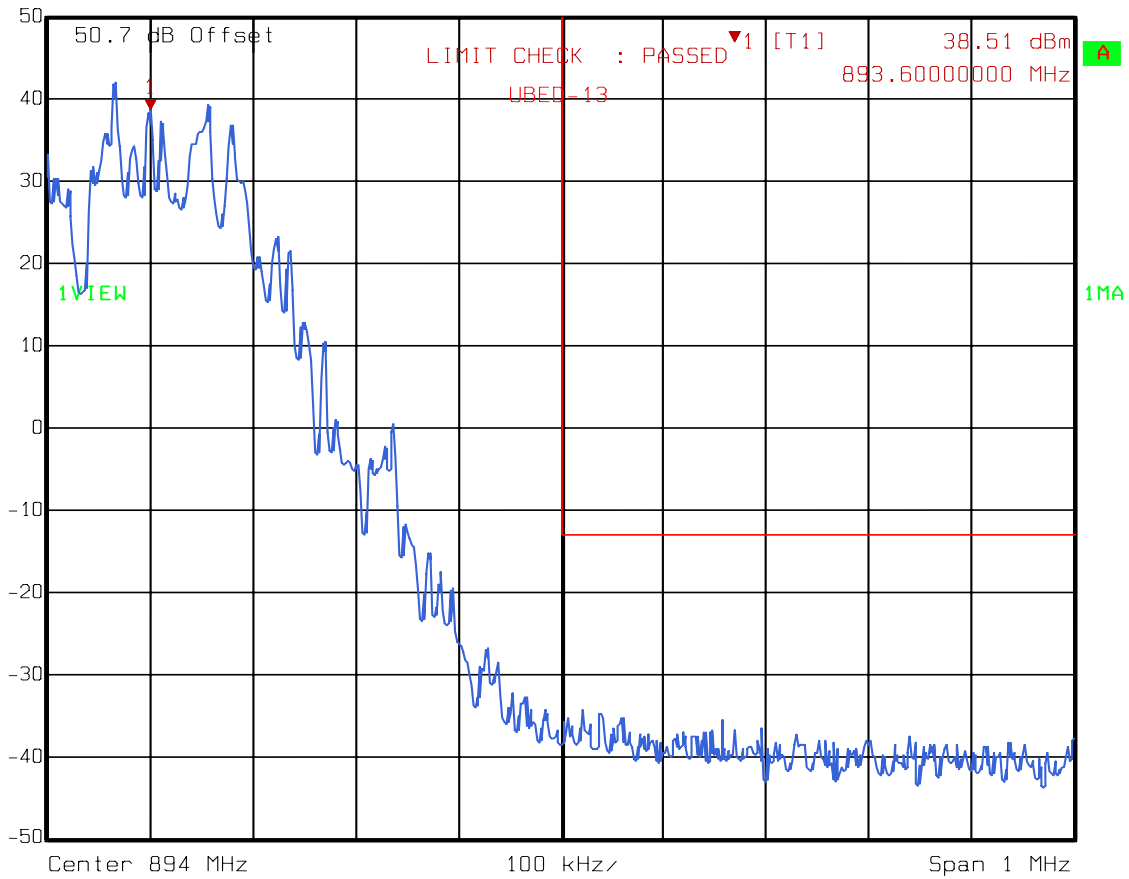

Date: 02.OCT.2009 09:41:19

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Double Power Combining Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 3.26 dBm VBW 1 MHz
40 dBm 883.36673347 MHz SWT 5 ms Unit dBm

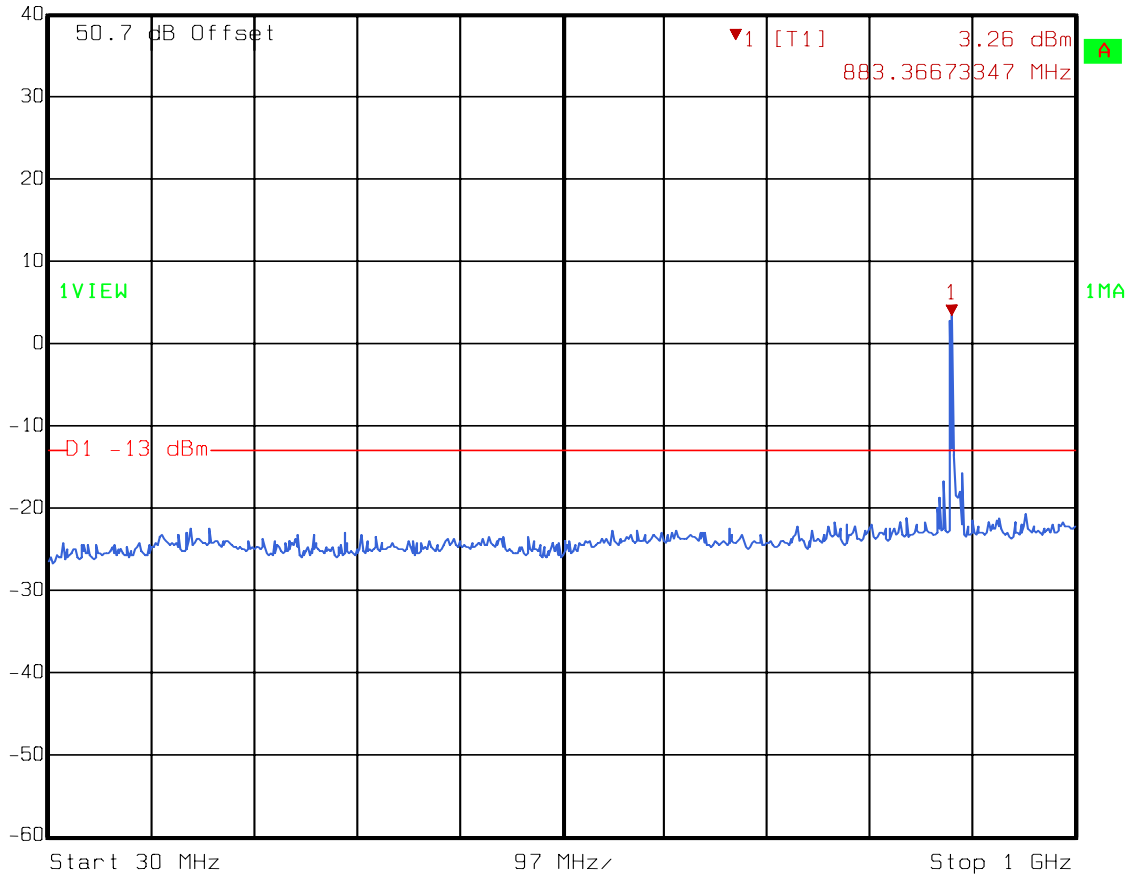

Date: 02.OCT.2009 09:09:20

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Double Power Combining Mode

Spurious



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -19.21 dBm VBW 1 MHz
40 dBm 2.41282565 GHz SWT 7.5 ms Unit dBm

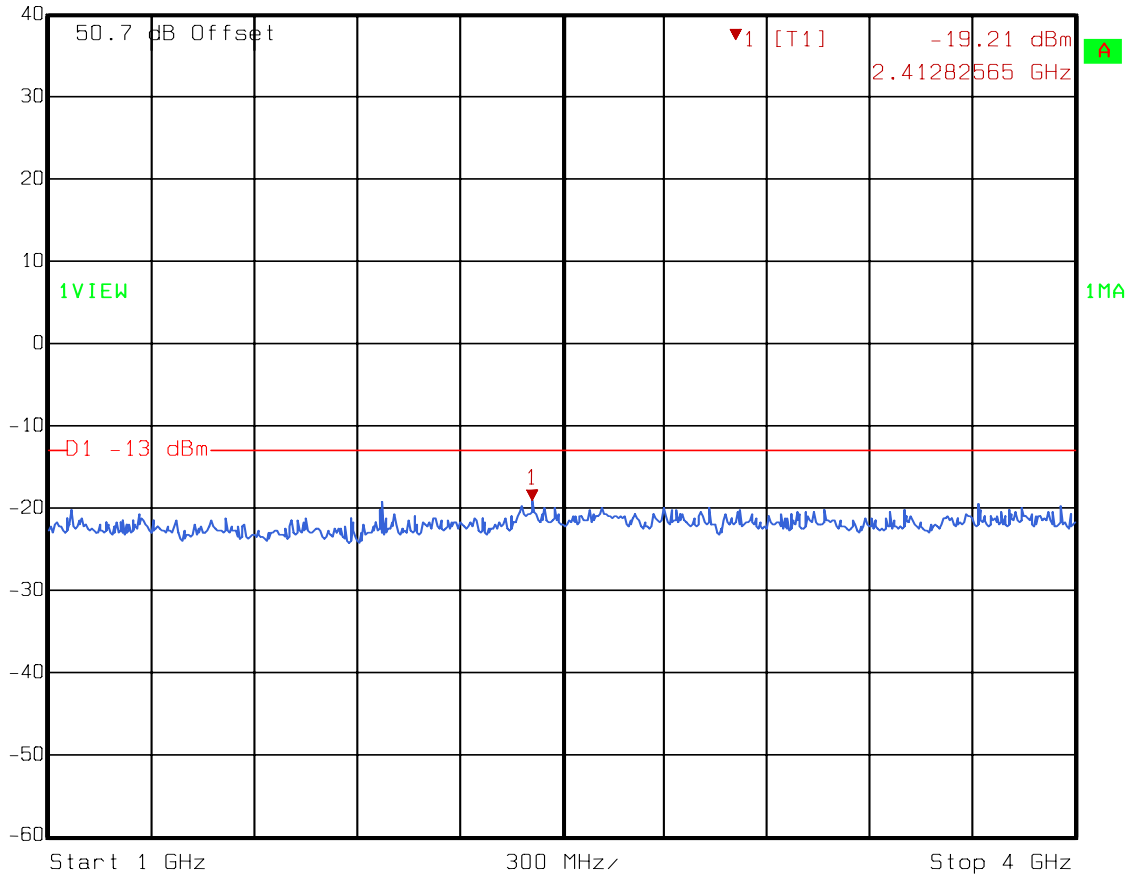

Date: 02.OCT.2009 09:16:32

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Double Power Combining Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -22.76 dBm VBW 1 MHz
42.3 dBm 6.99398798 GHz SWT 60 ms Unit dBm

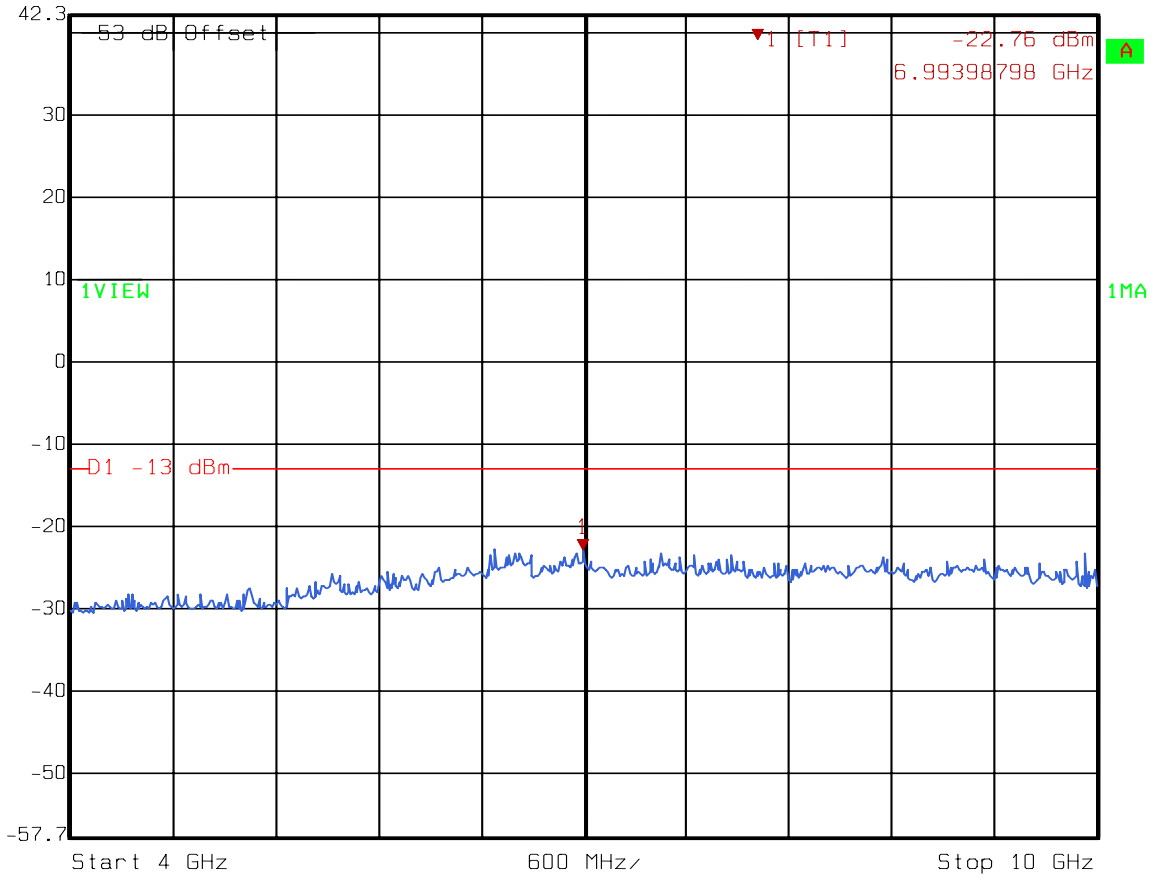

Date: 02.OCT.2009 09:26:41


EQUIPMENT: EXTB

Test Data – Spurious Emissions

GMSK (GSM)
Combiner Bypass Mode
Lower band Edge



Ref Lvl 50 dBm
RBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 280 ms Unit dBm

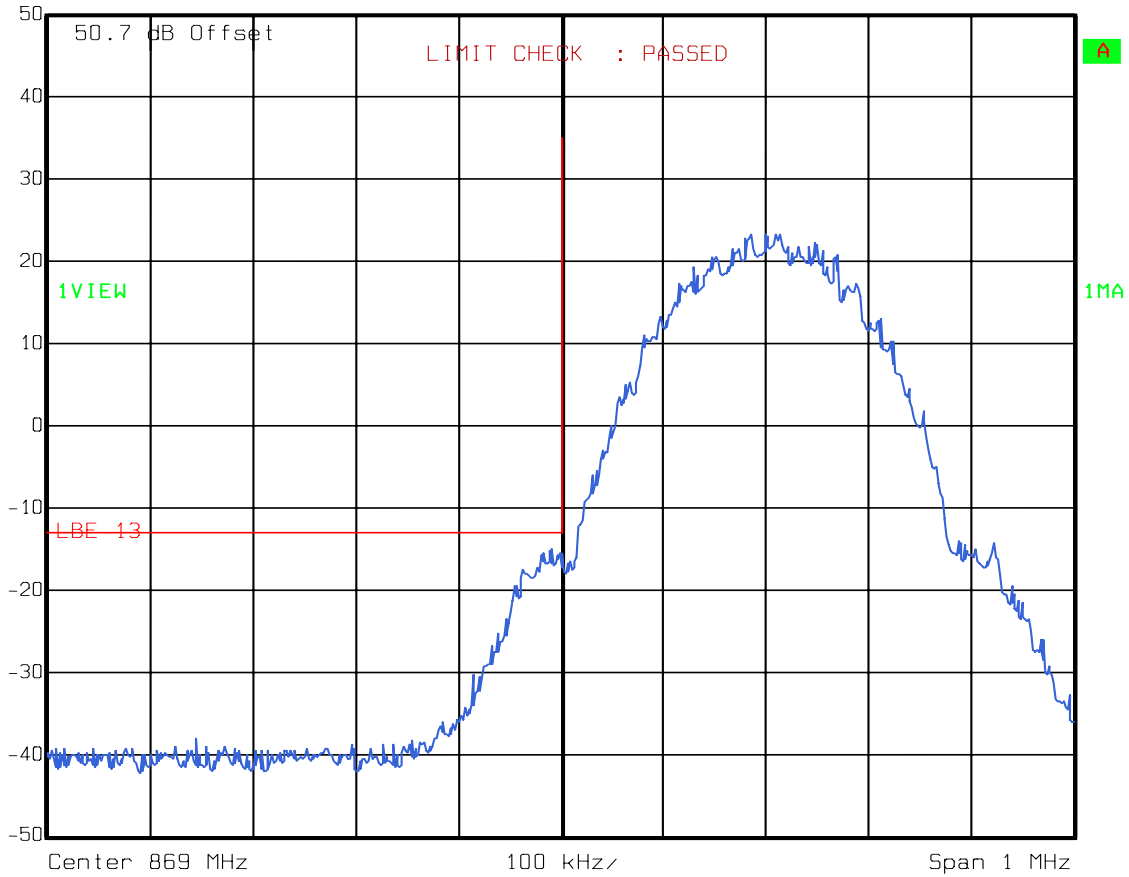

Date: 02.OCT.2009 10:36:49


EQUIPMENT: EXTB

Test Data – Spurious Emissions

GMSK (GSM)
Combiner Bypass Mode
Lower Band Edge



Ref Lvl 50 dBm
RBW 3 kHz RF Att 20 dB
VBW 3 kHz
SWT 280 ms Unit dBm

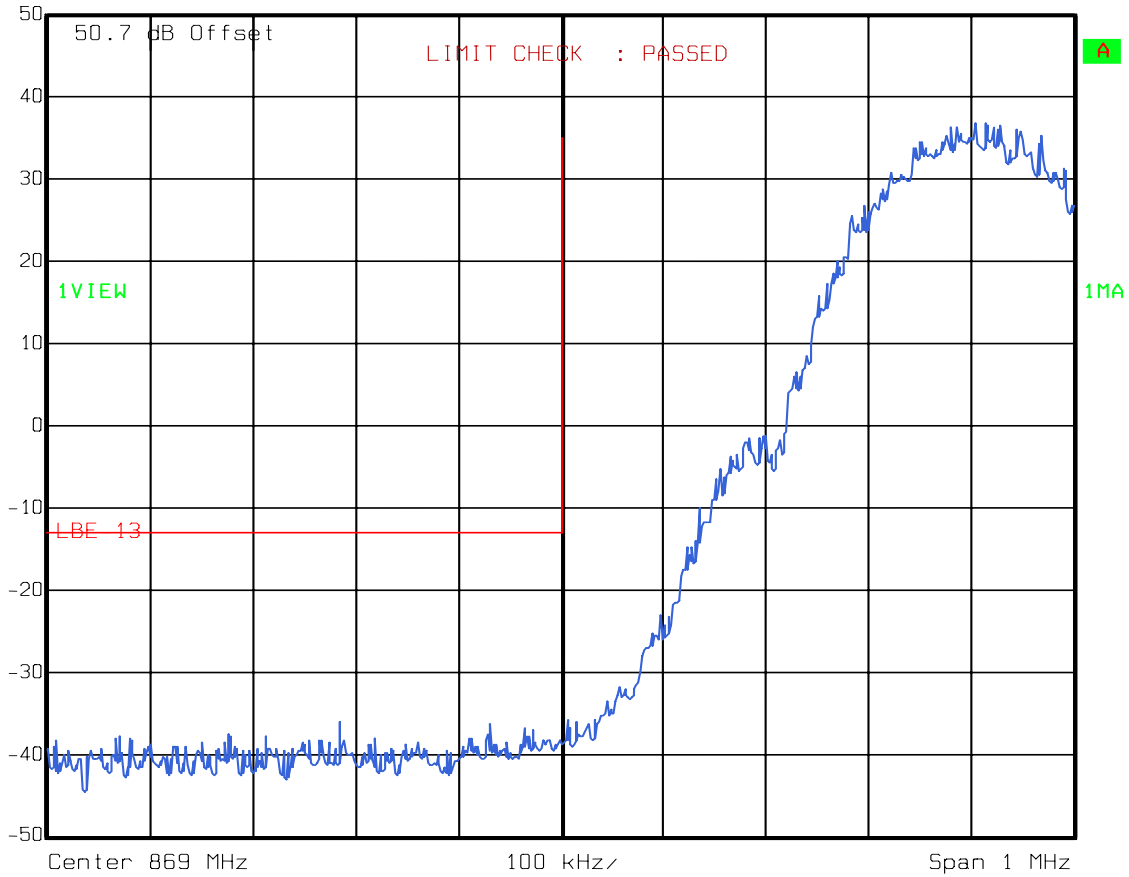

Date: 02.OCT.2009 10:39:03

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Combiner Bypass Mode

Upper Band Edge



Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl -13.64 dBm VBW 3 kHz
50 dBm 894.01903808 MHz SWT 280 ms Unit dBm

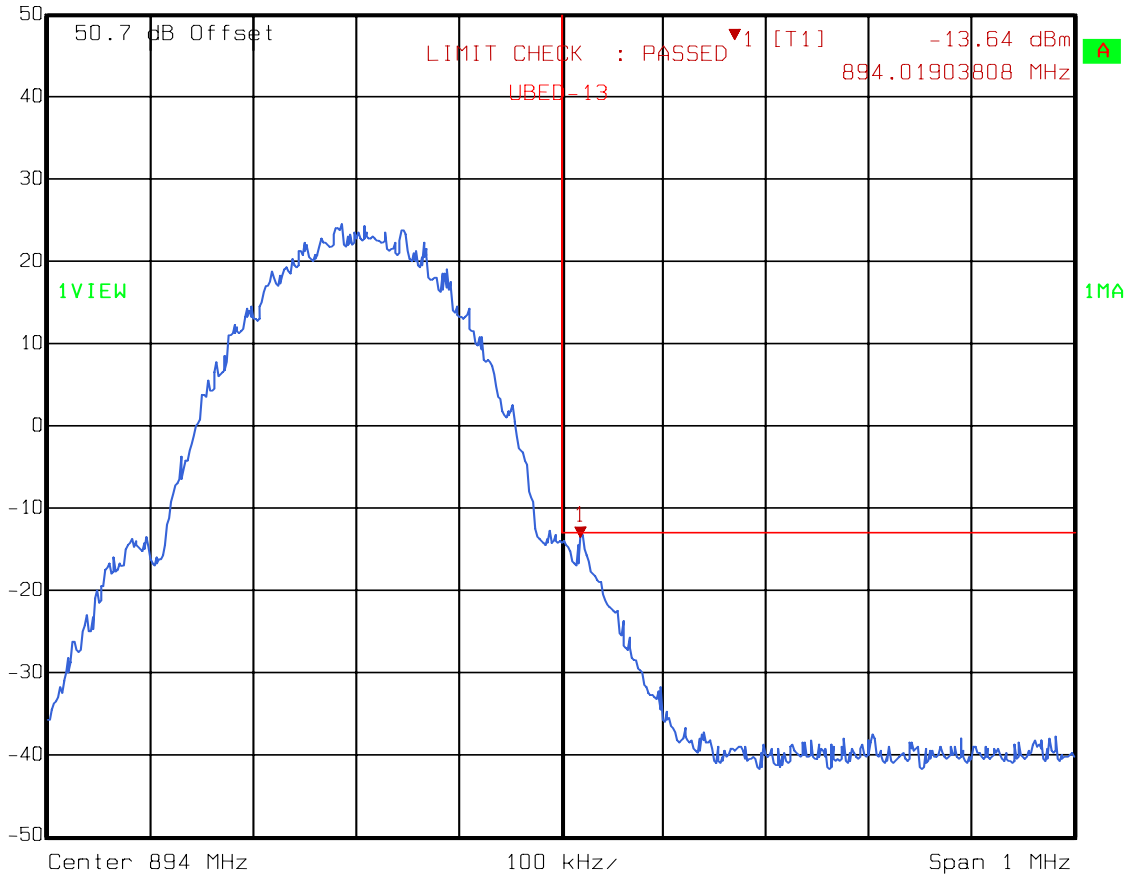

Date: 02.OCT.2009 10:54:25

EQUIPMENT: EXTB


Test Data – Spurious Emissions

GMSK (GSM)

Combiner Bypass Mode

Upper Band Edge

Marker 1 [T1] RBW 3 kHz RF Att 20 dB
Ref Lvl 33.60 dBm VBW 3 kHz
50 dBm 893.6000000 MHz SWT 280 ms Unit dBm

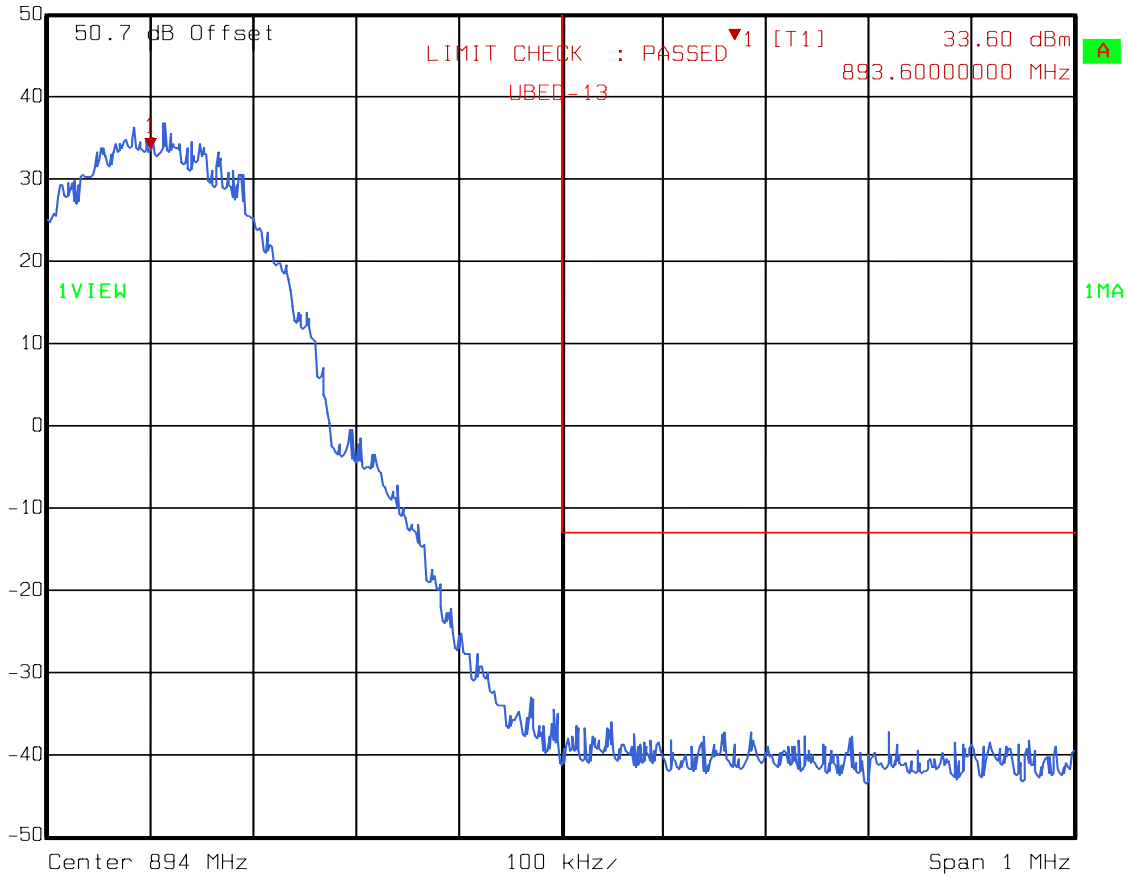

Date: 02.OCT.2009 10:55:44

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Combiner Bypass Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl 0.80 dBm VBW 1 MHz
40 dBm 883.36673347 MHz SWT 5 ms Unit dBm

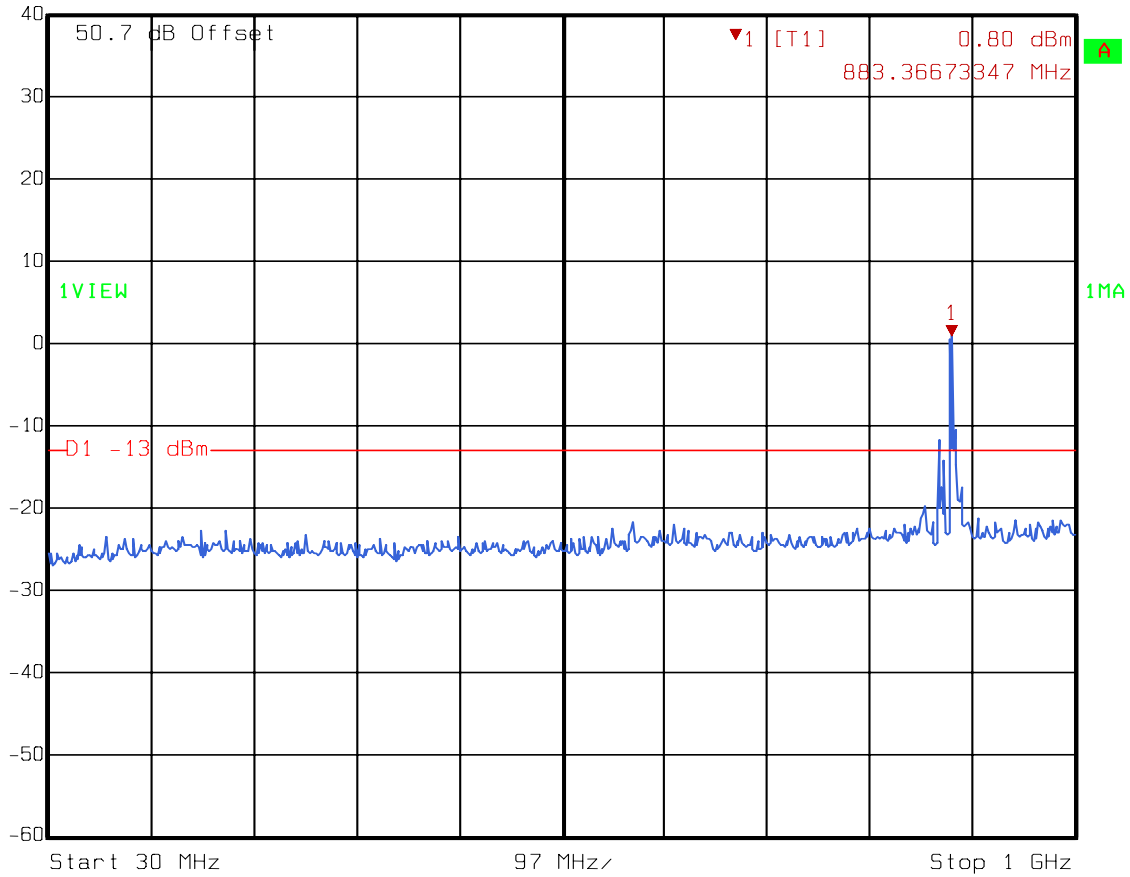

Date: 02.OCT.2009 10:43:55

EQUIPMENT: **EXTB**

Test Data – Spurious Emissions


GMSK (GSM)

Combiner Bypass Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 10 dB
Ref Lvl -15.46 dBm VBW 1 MHz
40 dBm 1.96793587 GHz SWT 7.5 ms Unit dBm

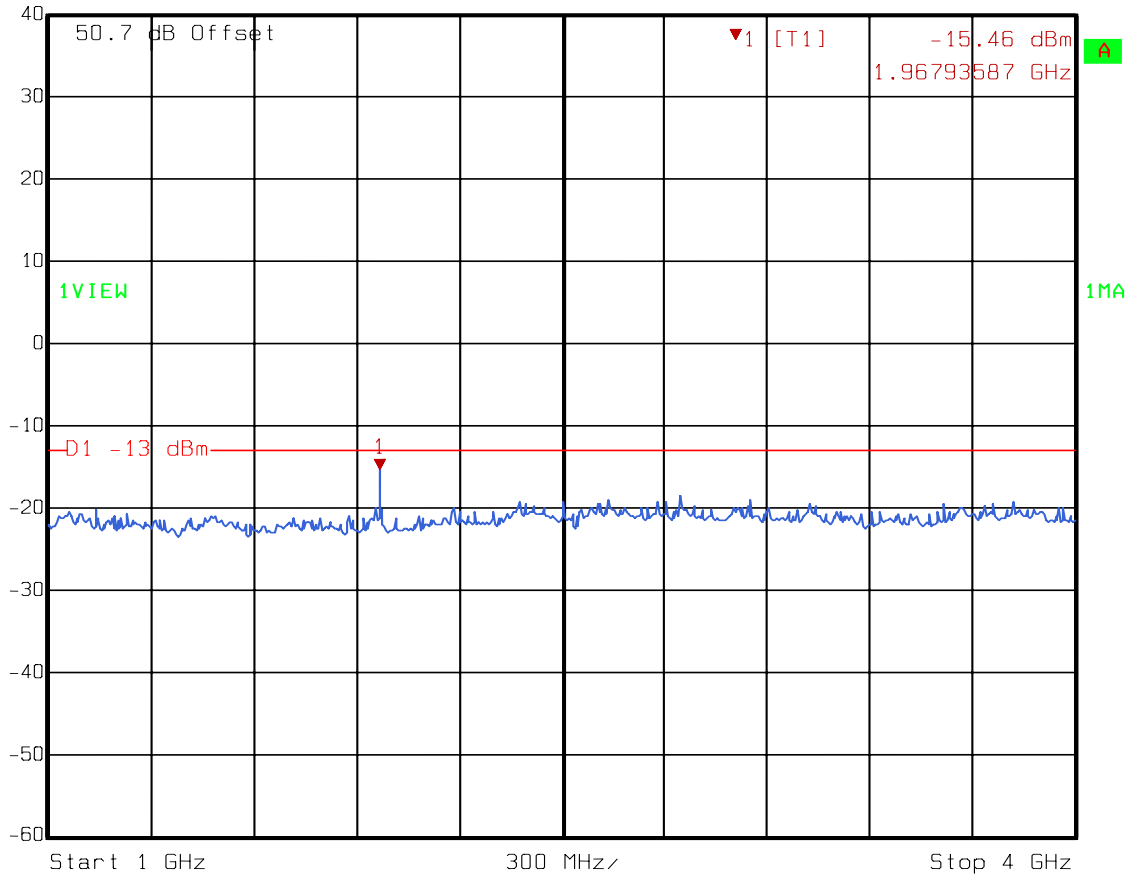

Date: 02.OCT.2009 10:46:11

EQUIPMENT: EXTB

Test Data – Spurious Emissions


GMSK (GSM)

Combiner Bypass Mode

Spurs



Marker 1 [T1] RBW 1 MHz RF Att 0 dB
Ref Lvl -23.06 dBm VBW 1 MHz
42.3 dBm 6.58517034 GHz SWT 60 ms Unit dBm

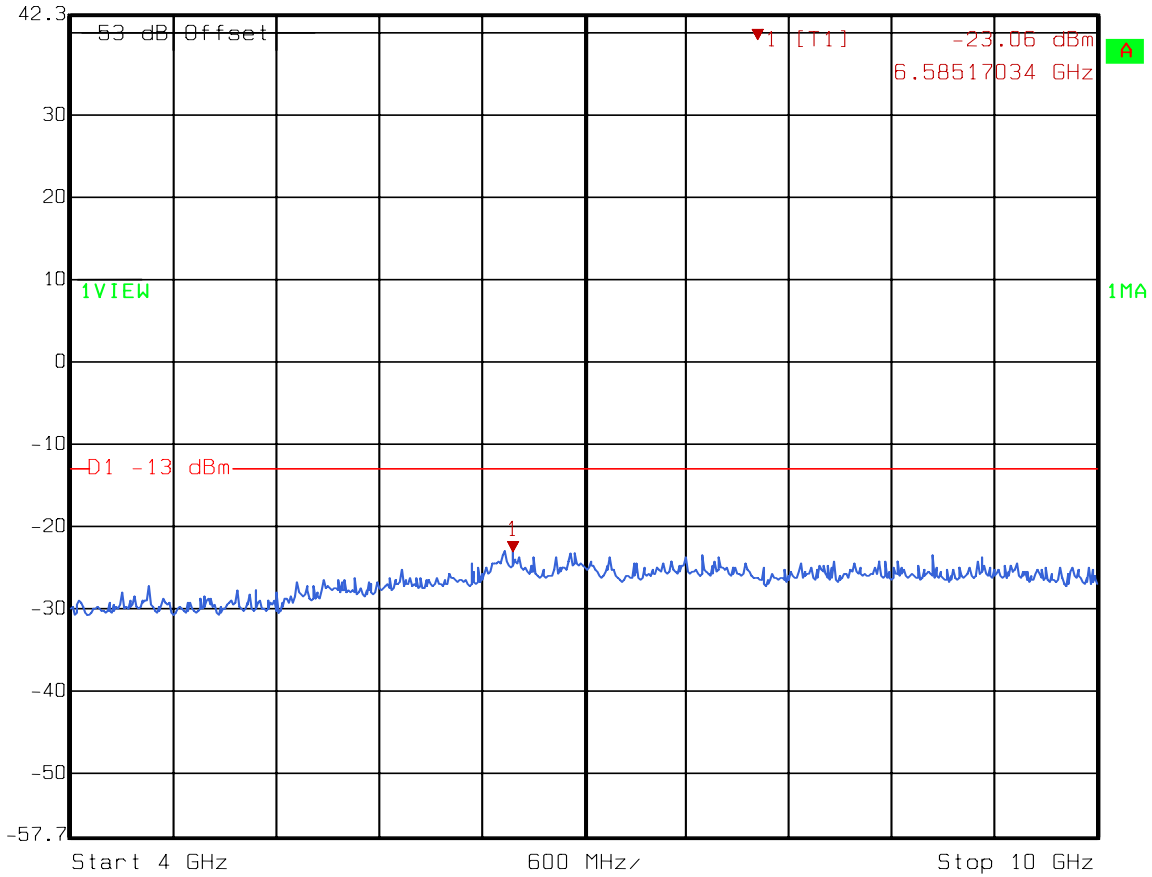

Date: 02.OCT.2009 10:48:31

EQUIPMENT: **EXTB**

Section 6. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious Emissions	PARA. NO.: 2.1051
TESTED BY: David Light	DATE: 05 October 2009

Test Results: Complies.

Test Data: The spectrum was searched from 30 MHz to the tenth harmonic of the carrier. There were no emissions detected above the noise floor which was at least 20 dB below the specification limit.

RBW/VBW=100 kHz < 1000 MHz
RBW/VBW=1 MHz > 1000 MHz
Detector = Peak
Sweep Time = Auto
.

Equipment Used: 1783-1763-791-1016-993-1767

Measurement Uncertainty: +/- 1.7 dB

Temperature: 23 °C

Relative Humidity: 40 %

EQUIPMENT: **EXTB**

Section 7. Frequency Stability

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
TESTED BY: David Light	DATE: 05 October 2009

Test Results: Complies

Measurement Data: Standard Test Frequency: 1960 MHz
Standard Test Voltage: -48 Vdc

Equipment Used: 1036-1082-1064-1065-283

Measurement Uncertainty: +/- 1.7 dB

Temperature: 23 °C

Relative Humidity: 40 %

EQUIPMENT: **EXTB**

Test Data – Frequency Stability

Measurement							
Uncertainty: <u>1x10⁻¹⁷ppm</u>		Standard Test Frequency <u>881.667696</u> MHz					
Temp (°C)	Measured Frequency (MHz)		Test Voltage	Frequency Error (Hz)	Limit (+/-Hz)	Error (ppm)	Comment
20	881.667696		-48	0	1322.5	0	
20	881.667696		-40.8	0	1322.5	0.0	
20	881.667696		-50.2	0	1322.5	0.0	
50	881.667721		-48	25	1322.5	0.0	
40	881.667721		-48	25	1322.5	0.0	
30	881.667691		-48	-5	1322.5	0.0	
10	881.667695		-48.0	-1	1322.5	0.0	
0	881.667691		-48.0	-5	1322.5	0.0	
-10	881.667691		-48.0	-5	1322.5	0.0	
-20	881.667681		-48	-15	1322.5	0.0	
-30	881.667691		-48	-5	1322.5	0.0	
Notes:							

EQUIPMENT: **EXTB**

Section 8. Test Equipment List

Nemko ID	Description	Manufacturer Model Number	Serial Number	Calibration Date	Calibration Due
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	01/19/09	01/20/11
1082	CABLE 2m	Astrolab 32027-2-29094-72TC	N/A	CBU	N/A
1064	ATTENUATOR	NARDA 776B-20	NONE	CBU	N/A
1065	ATTENUATOR	NARDA 776B-10	NONE	CBU	N/A
1054	DUAL DIRECTIONAL COUPLER	NARDA 3020A	34366	CBU	N/A
1055	DUAL DIRECTIONAL COUPLER	NARDA 3022	73393	CBU	N/A
1058	DUAL DIRECTIONAL COUPLER	HEWLETT PACKARD 11692D	1212A03366	CBU	N/A
1783	Cable	Nemko? 0	0	10/02/09	10/02/10
1763	Bilog Antenna	Schaffner CBL 6111D	22926	11/04/08	11/04/09
791	PREAMP, 25dB	Nemko USA, Inc. LNA25	398	05/28/09	05/28/10
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	06/23/09	06/23/10
993	Horn antenna	A.H. Systems SAS-200/571	XXX	09/09/09	09/09/11
1767	MI Test Receiver 20Hz - 26.5 GHz - 150 - +30 dBm LC	ROHDE & SCHWARZ ESIB26	837491/0002	10/20/07	10/20/09
283	Environmental Chamber with controller # 1189006	ENVIROTRONICS SH27 & 2030-22844	129010083	06/07/09	06/07/10

ANNEX A - TEST DETAILS

EQUIPMENT: **EXTB**

NAME OF TEST: RF Power Output

PARA. NO.: 2.1046

Minimum Standard: Para. No. 22.913(a). The maximum effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 watts.

Method Of Measurement:

Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter. Power output is measured with the maximum rated input level.

Integral Antenna:

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting erp is the signal level fed to the reference antenna corrected for gain referenced to a dipole.

EQUIPMENT: **EXTB**

NAME OF TEST: Occupied Bandwidth

PARA. NO.: 2.1049

Minimum Standard: Not defined

Method Of Measurement:

CDMA

Spectrum analyzer settings:

RBW=VBW=30 kHz

Span: 5 MHz

Sweep: Auto

GSM / EDGE

RBW=VBW= 3 kHz

Span: 1 MHz

Sweep: Auto

TDMA

RBW=VBW= 1 kHz

Span: 1 MHz

Sweep: Auto

W-CDMA

RBW=VBW= 100 kHz

Span: 10 MHz

Sweep: Auto

EQUIPMENT: **EXTB**

**NAME OF TEST: Spurious Emission at Antenna
Terminals**

PARA. NO.: 2.1051

Minimum Standard:

Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Method Of Measurement:

Method Of Measurement:

Spectrum analyzer settings:

CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 30 kHz (< 1MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: 6 Sweeps

GSM / EDGE

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: Disabled

TDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 3 kHz (< 1 MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: Disabled

W-CDMA

RBW: 1 MHz (> 1 MHz from Band Edge)
RBW: 100 kHz (< 1MHz from Band Edge)
VBW: \geq RBW
Sweep: Auto
Video Avg: 6 Sweeps

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 2.1053
---	--------------------------

Minimum Standard:

Para. No. 22.917(e). The mean power of emissions must be attenuated below the mean power of the unmodulated carrier on any frequency twice or more than twice the fundamental emission by at least $43 + 10 \log P$. This is equivalent to -13 dBm absolute power.

Method of Measurement

TIA/EIA-603-1992

The antenna substitution method is used to determine the equivalent radiated power at spurious frequencies. The spurious emissions are measured at a distance of 3 meters. The EUT is then replaced with a reference substitution antenna with a known gain referenced to a dipole. This antenna is fed with a signal at the spurious frequency. The level of the signal is adjusted to repeat the previously measured level. The resulting erp is the signal level fed to the reference antenna corrected for gain referenced to a dipole.

EQUIPMENT: **EXTB**

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
--	--------------------------

Minimum Standard: Para. No. 22.355. The transmitter carrier frequency shall remain within the tolerances given in Table C-1.

Table C-1

Freq. Range (MHz)	Base, fixed	Mobile > 3 W	Mobile ≤ 3 W
821 to 896	1.5	2.5	2.5

Method Of Measurement:

Frequency Stability With Voltage Variation:

The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. The frequency counter and signal generator are phase locked with the same 10 MHz reference frequency by connecting the 10 MHz ref. out of the counter to the 10 MHz ref, in of the signal generator. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency is measured in 30 second intervals for a period of 5 minutes. This procedure is repeated at 100% S.T.V. and 115% S.T.V.


Frequency Stability With Temperature Variation:

The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency is measured in 30 second intervals for a period of 5 minutes.


ANNEX B - TEST DIAGRAMS

EQUIPMENT: **EXTB**

Para. No. 2.985 - R.F. Power Output

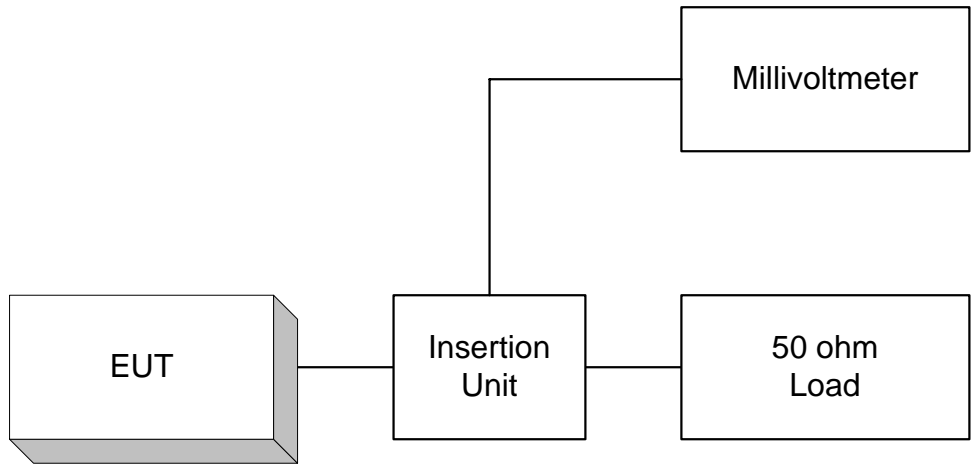


Para. No. 2.989 - Occupied Bandwidth

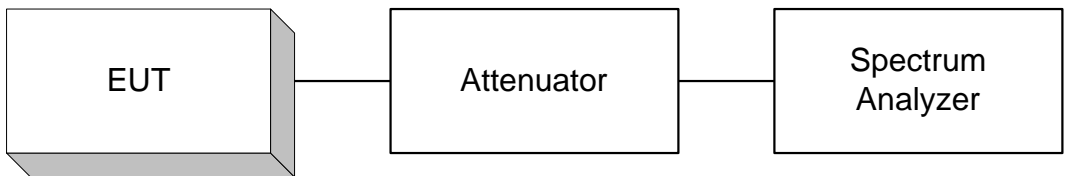


EQUIPMENT: **EXTB**

Para. No. 2.991 Spurious Emissions at Antenna Terminals

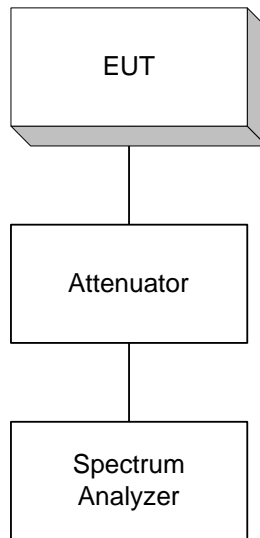

Para. No. 2.993 - Field Strength of Spurious Radiation

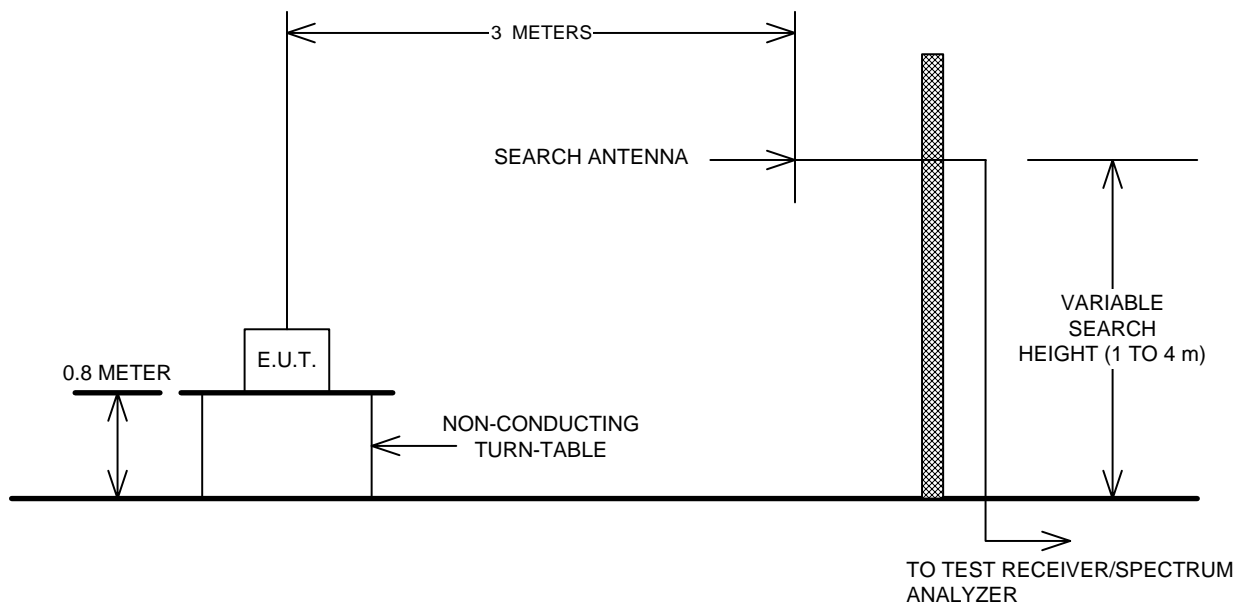

EQUIPMENT: **EXTB**

Para. No. 2.995 - Frequency Stability

