



Date: ESPOO 23.05.2007

Page: 1 (40)

Appendices -

Number:
No. 1 / 1

86417b

Date of handing in: 11.05.2007

Measured by:

Timo Hietala, Test Engineer

Reviewed by:

Timo Leismala, Test Manager

SORT OF EQUIPMENT:

WCDMA Base Station RF module

MARKETING NAME:

Nokia Flexi BTS RF module 1900MHz

TYPE:

FRFB

MANUFACTURER:

Nokia Siemens Networks Oy

FCC ID:

VBNFRFB-01

CLIENT:

Nokia Siemens Networks Oy

ADDRESS:

P.O.Box 319, FI-90651 OULU, FINLAND

TELEPHONE:

+358 7180 08000

TEST LABORATORY:

Nokia Siemens Networks/Oulu

FCC REG. NO.

411251

REFERENCE:

FCC Part 24, SUBPART E

SUMMARY:

In regard to the performed tests the equipment under test fulfils the requirements defined in the test specifications, see page 4 for details.

The test results are valid for the tested unit only. Without a written permission of Nemko Oy it is allowed to copy this report as a whole, but not partially.

Contents

1. EUT and Accessory Information	3
1.1 EUT description	3
1.2 EUT and accessories.....	3
Summary of Test Data	4
2. General Equipment Specification.....	5
3. RF Power Output	7
4. 99% Occupied Bandwidth	12
5. Spurious Emissions at Antenna Terminals	15
6. Field Strength of Spurious	29
7. Frequency stability	33
8. List of test equipment.....	35
9. Photographs of Test Setup	36
10.ANNEX A, TEST DETAILS	37
11.ANNEX B, TEST DIAGRAMS.....	39

1. EUT and Accessory Information

1.1 EUT description

The EUT is a WCDMA Base station RF module 1900 MHz with 1 power amplifiers.

1.2 EUT and accessories

Manufacturer: Nokia Siemens Networks Oy

Model: FRFB, s/n: L9071800361

Other Units: System module, FSMB
Transmission module, FTIA

General: All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 24, Subpart E.

<input checked="" type="checkbox"/>	New Submission	<input checked="" type="checkbox"/>	Production Unit
<input type="checkbox"/>	Class II Permissive Change	<input type="checkbox"/>	Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. **NONE**

Nemko Oy authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Oy accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

Summary of Test Data

NAME OF TEST	SECTION IN CFR 47	SPEC.	RESULT
RF Power Output	24.232(a), 2.1046	1640 W EIRP	Complies
99% Occupied Bandwidth	2.1049 (i)	Unspecified	Complies
Spurious Emissions at Antenna Terminals	24.238, 2.1051	- 13 dBm	Complies
Field Strength of Spurious Emissions	24.238, 2.1053	- 13 dBm EIRP	Complies
Frequency stability	24.235, 2.1055	$\pm 0.05 \text{ ppm}^1$	Complies

Note ¹⁾ Limit is the manufacturer's specification

Measurement uncertainty is expressed to a confidence level of 95%.

2. General Equipment Specification

Supply Voltage Input:	48 Vdc		
Frequency Bands: TX:	<input checked="" type="checkbox"/>	Block A : 1930 – 1945 MHz	
	<input checked="" type="checkbox"/>	Block B : 1950 – 1965 MHz	
	<input checked="" type="checkbox"/>	Block C : 1975 – 1990 MHz	
	<input checked="" type="checkbox"/>	Block D : 1945 – 1950 MHz	
	<input checked="" type="checkbox"/>	Block E : 1965 – 1970 MHz	
	<input checked="" type="checkbox"/>	Block F : 1970 – 1975 MHz	
Frequency Bands: RX:	<input checked="" type="checkbox"/>	Block A : 1850 – 1865 MHz	
	<input checked="" type="checkbox"/>	Block B : 1870– 1885 MHz	
	<input checked="" type="checkbox"/>	Block C : 1895 – 1910 MHz	
	<input checked="" type="checkbox"/>	Block D : 165 – 1870 MHz	
	<input checked="" type="checkbox"/>	Block E : 1885 – 1890 MHz	
	<input checked="" type="checkbox"/>	Block F : 1890 – 1895 MHz	
Type of Modulation and Designator:	W-CDMA (4M00F9W) <input checked="" type="checkbox"/>	GSM (200KG7W) <input type="checkbox"/>	NADC 40K0DXW) <input type="checkbox"/>
Maximum No. of Carriers:	2		
Output Impedance:	50 ohms.		
RF Output:	Per channel: 40 W or 2x20W.		
Band Selection:	Software <input checked="" type="checkbox"/>	Duplexer <input type="checkbox"/>	Fullband <input type="checkbox"/>

System Description


The BTS performs the radio function of the Base Station System (BSS), and is connected to the Radio Network Controller (RNC) via the Iub interface, and to Mobile Stations (MS) via the Air interface (Antenna). The RNC is further connected to Serving GPRS Support Node (SGSN) or it can be connected to the Mobile Switching Centre (MSC) via IWU (Inter Working Unit).

Setup for testing single carrier: The transmitter was set up according to 3GPP TS 25.141 Test Model 1 and 5 for all tests. Test model 1: 64 DPCHs at 30 ksps (SF=128) distributed randomly across the code space, at random power levels and random timing offsets, were defined to simulate a realistic operating scenario which may have high PAR (Peak-to-Average Ratio). Test model 5: 30 DPCHs at 30 ksps (SF=128) together with 8 HS-PDSCHs at 240 ksps (SF=16). Each DPCH is modulated by QPSK and each HS-PDCH is modulated by 16QAM modulation.

Setup for testing multi carrier:

The transmitter was set up according to 3GPP TS 25.141 Test Model 1 and 5 for all tests. Test model 1: 32 DPCHs at 30 ksps (SF=128) distributed randomly across the code space, at random power levels and random timing offsets, were defined to simulate a realistic operating scenario which may have high PAR (Peak-to-Average Ratio). Test model 5: 14 DPCHs at 30 ksps (SF=128) together with 4 HS-PDSCHs at 240 ksps (SF=16). Each DPCH is modulated by QPSK and each HS-PDCH is modulated by 16QAM modulation.

System Diagram

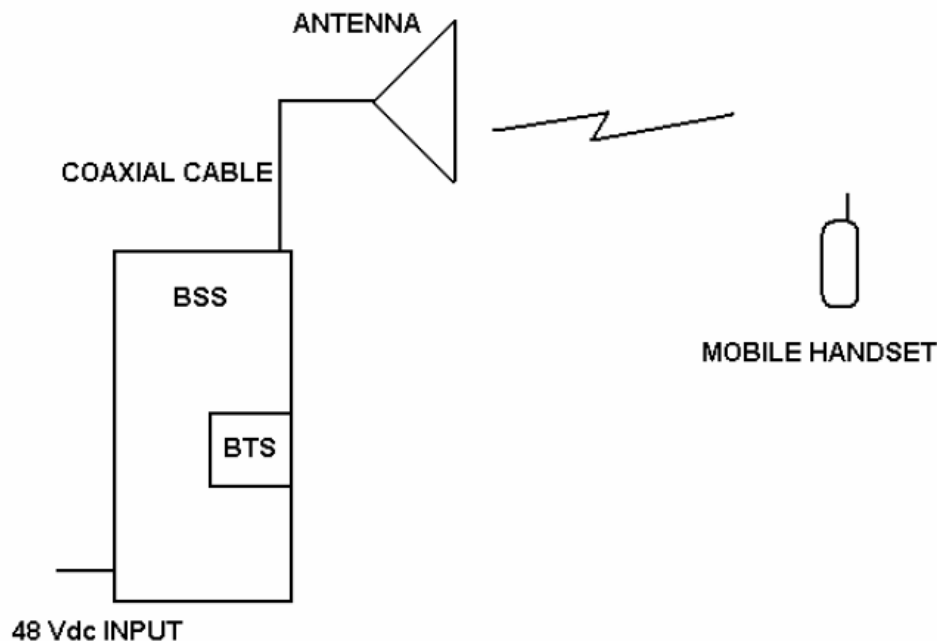

3. RF Power Output

NAME OF TEST: RF Power Output	PARA.NO.: 24.232(a) & 2.1046
TESTED BY: Timo Hietala	DATE: 11-14/05/2007

Test Results: Complies.

Measurement Data: Refer to attached plot.

Single carrier

Modulation Type	Frequency (MHz)	Measured Output Peak Power	
		Power (dBm)	Power (W)
QPSK	1932.4	45.52	35.65
QPSK	1960.0	45.55	35.89
QPSK	1987.6	45.63	36.56
16QAM	1932.4	45.50	35.48
16QAM	1960.0	45.67	36.90
16QAM	1987.6	45.63	36.56

Multi carrier

Modulation Type	Frequency (MHz)	Measured Output Peak Power		
		Power/carr. (dBm)	Power/carr. (W)	Total power (dBm) / (W)
QPSK	1932.4 and 1937.4	42.63/42.63	18.32/18.32	45.64/36.64
QPSK	1960.0 and 1965.0	42.57/42.54	18.07/17.95	45.47/35.26
QPSK	1982.6 and 1987.6	42.86/42.69	19.32/18.58	45.79/37.9
16QAM	1932.4 and 1937.4	42.73/42.69	18.75/18.58	45.72/37.33
16QAM	1960.0 and 1965.0	42.55/42.54	17.99/17.95	45.56/35.94
16QAM	1982.6 and 1987.6	42.85/42.67	19.28/18.49	45.77/37.77

Equipment used: 1, 2, 4, 8, 9, 14

Measurement Uncertainty: ± 0.7 dB.


Temperature: 23 °C.

Relative Humidity: 20 %.

Test Data – RF Power Output

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page 1 of 4				Preliminary: <u> </u>
Job No.:	86417	Date:	11/05/2007	
Specification:	PT24	Temperature (°C):	23	
Tested By:	Timo Hietala	Relative Humidity (%):	20	
E.U.T.:	WCDMA TRANSMITTER			
Configuration:	TX FULL POWER CENTER CHANNEL			
Sample Number:	1			
Location:	NSN Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	14	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ±0.7 dB </u>			

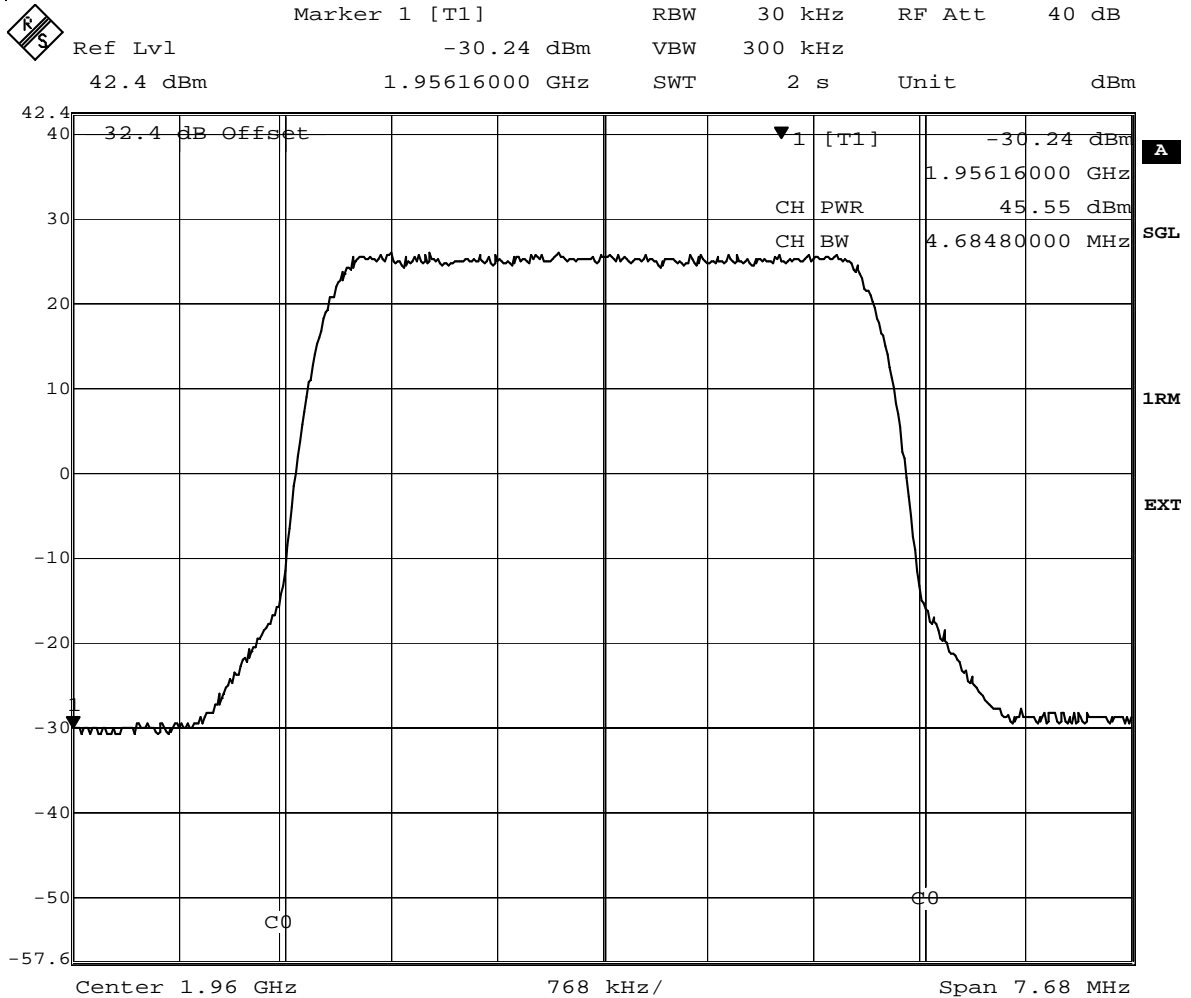


Date: 14.MAY.2007 11:07:21

Notes: QPSK

Nemko Oy, Finland


Data Plot		RF POWER OUTPUT	
Page 2 of 4			
Job No.:	86417	Date:	11/05/2007
Specification:	PT24	Temperature (°C):	23
Tested By:	Timo Hietala	Relative Humidity (%):	20
E.U.T.:	WCDMA TRANSMITTER		
Configuration:	TX FULL POWER CENTER CHANNEL		

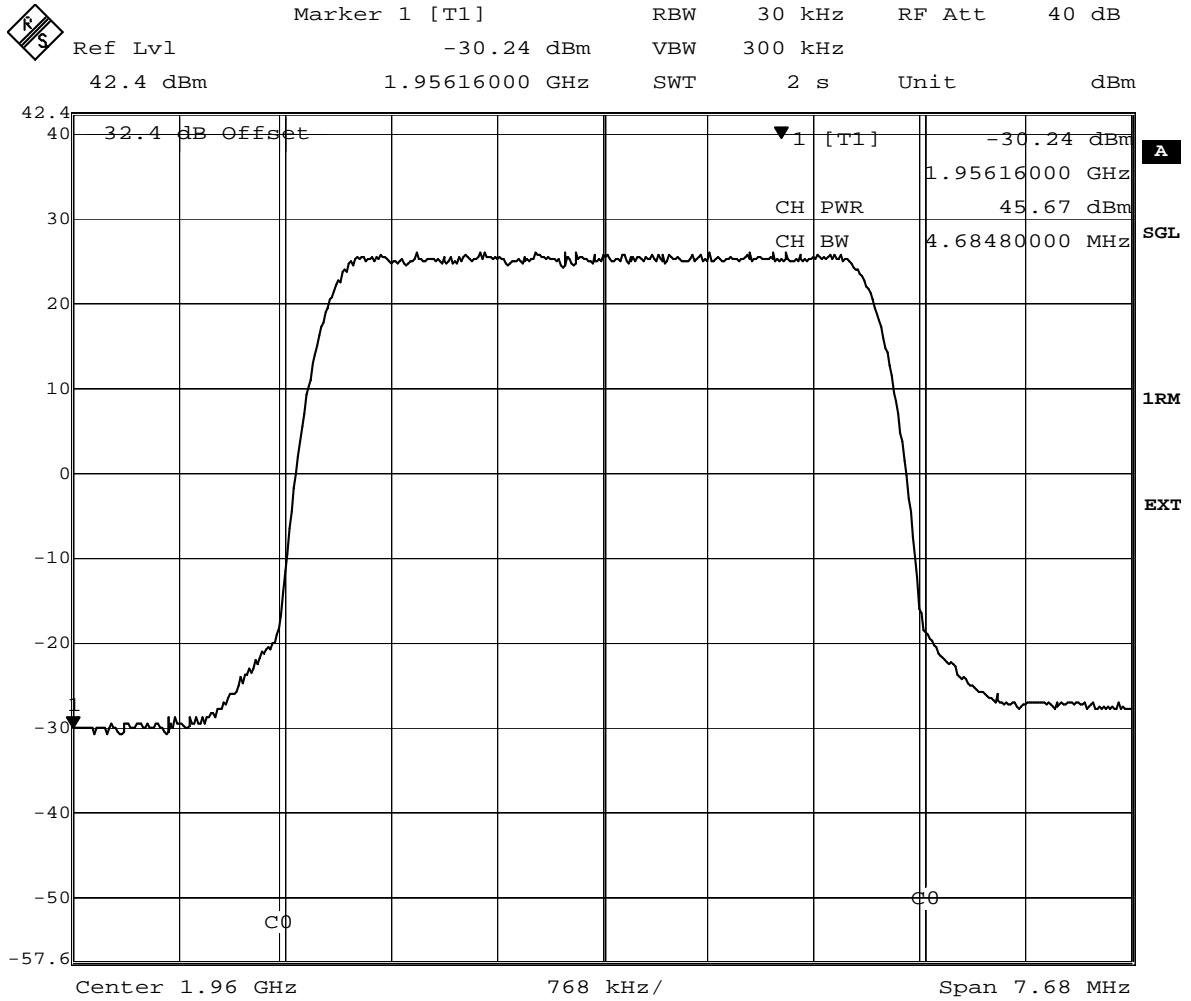


Date: 14.MAY.2007 11:05:33

Notes: 16QAM

Test Data – RF power, multi carrier QPSK

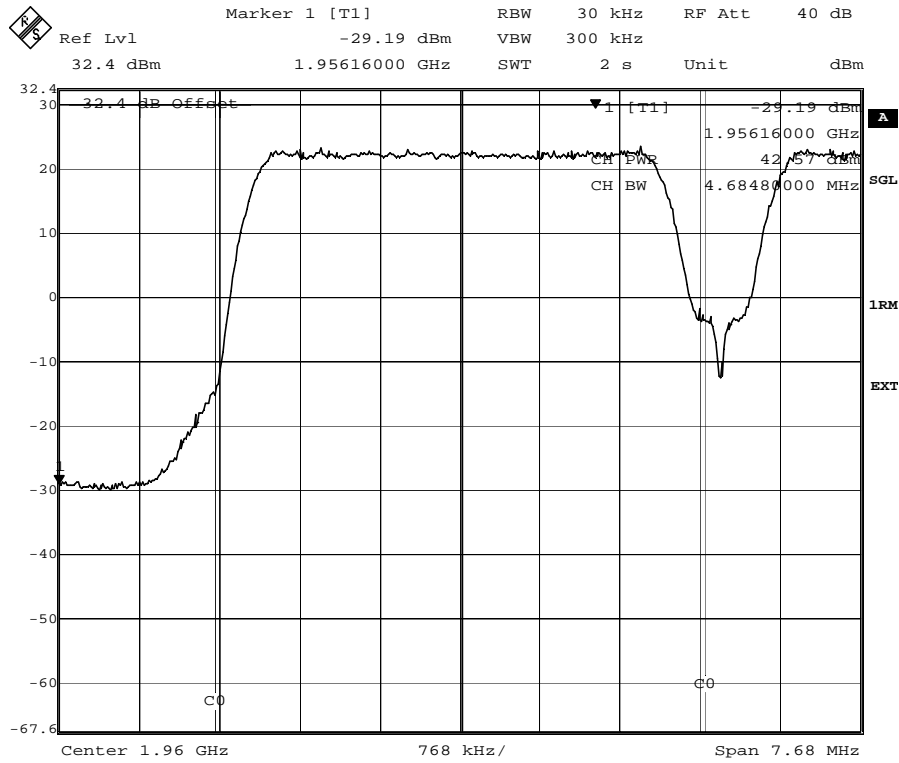


Date: 14.MAY.2007 14:11:31

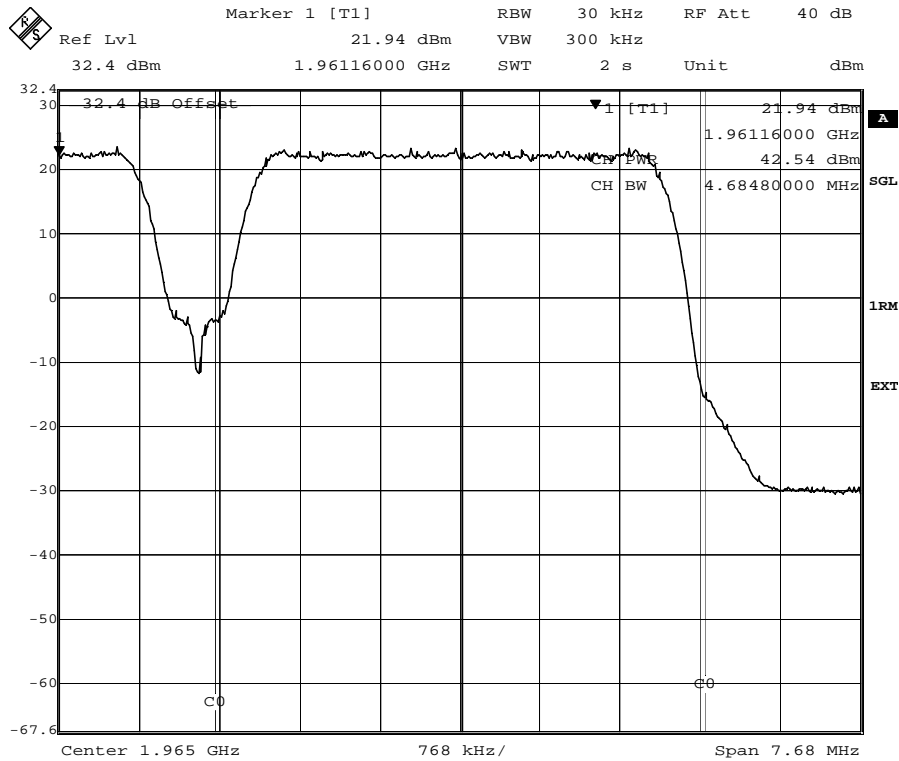


Date: 14.MAY.2007 14:12:33

Notes: 1960.0 and 1965.0 MHz QPSK

Test Data – RF power, multi carrier 16QAM

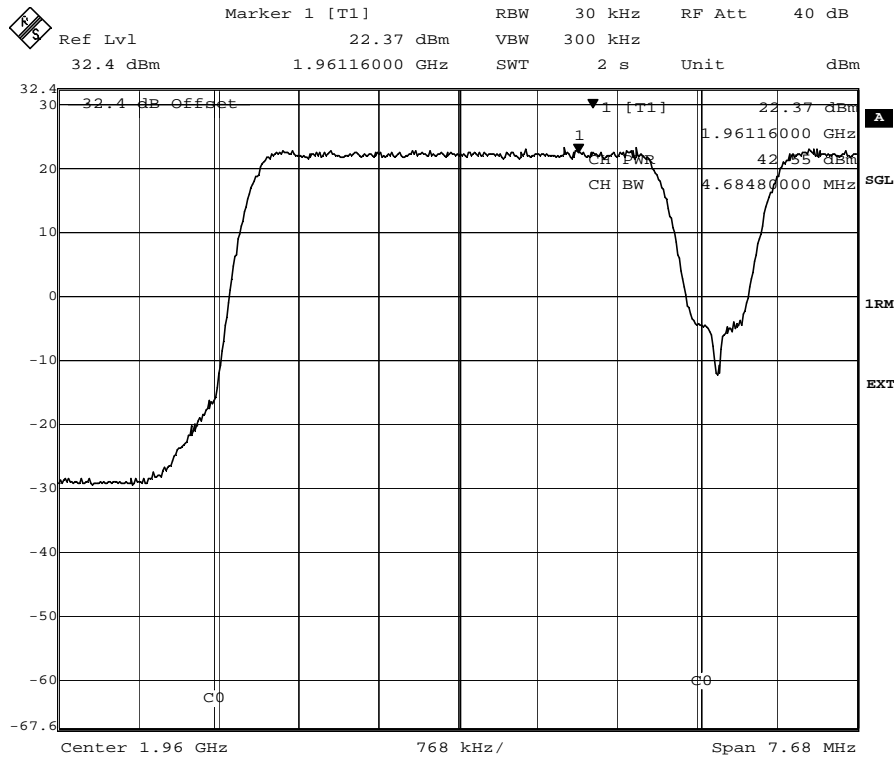

Date: 14.MAY.2007 14:15:56

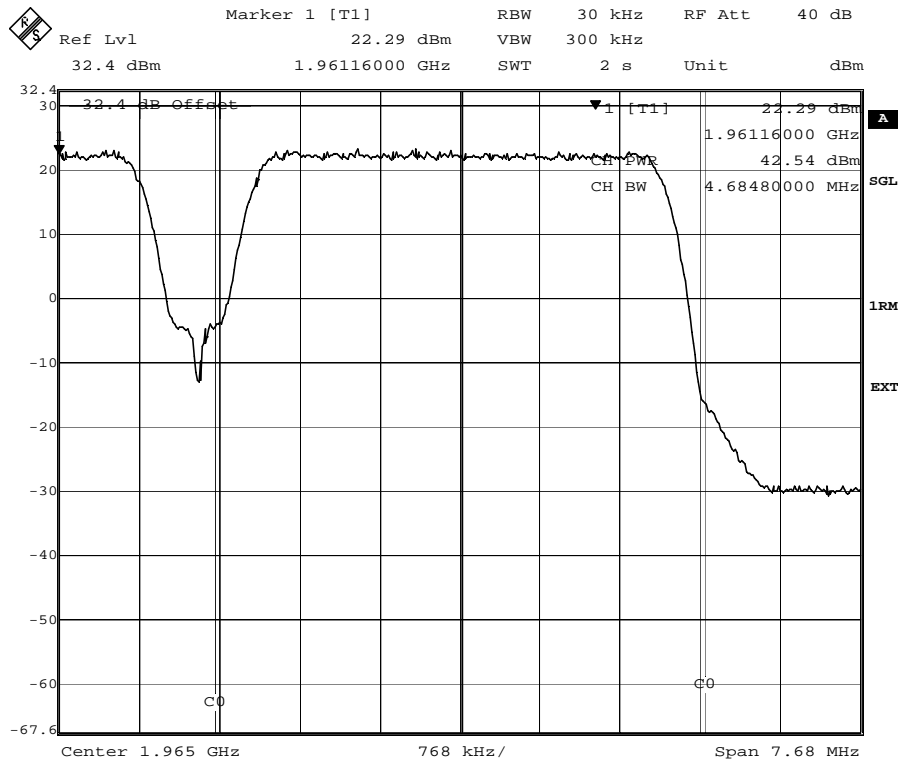

Date: 14.MAY.2007 14:14:55

Notes: 1960.0 and 1965.0 MHz 16QAM

4. 99% Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA.NO.: 2.1049, (i)
TESTED BY: Timo Hietala	DATE: 14/05/2007

Test Results: Complies.

Test Data: See attached plot(s).

Modulation Type	Frequency (MHz)	Measured 99% Occupied Bandwidth (MHz)
QPSK	1932.4	3.9679
QPSK	1960.0	3.9679
QPSK	1987.6	3.9478
16QAM	1932.4	3.9679
16QAM	1960.0	3.9478
16QAM	1987.6	3.9679

Equipment used: 1, 2, 4, 8, 9, 14.

Measurement Uncertainty: ± 0.7 dB.


Temperature: 23 °C.

Relative Humidity: 20 %.

Test Data – 99% Occupied Bandwidth

Nemko Oy, Finland

Data Plot		99% Occupied Bandwidth	
Page 1 of 2		Complete <u> x </u>	
Job No.: 86417	Date: 14/05/2007	Preliminary: <u> </u>	
Specification: PT24	Temperature (°C): <u> 23 </u>		
Tested By: <u> Timo Hietala </u>	Relative Humidity (%): <u> 20 </u>		
E.U.T.: <u> WCDMA TRANSMITTER </u>			
Configuration: <u> TX FULL POWER CENTER CHANNEL </u>			
Sample Number: <u> 1 </u>			
Location: <u> NSN Oulu </u>	RBW: <u> Refer to plots </u>	Measurement	
Detector type: <u> Rms </u>	VBW: <u> Refer to plots </u>	Distance: <u> N/A </u> m	
Test Equipment Used			
Antenna: <u> </u>	Directional Coupler: <u> </u>		
Pre-Amp: <u> </u>	Cable #1: <u> </u>		
Filter: <u> </u>	Cable #2: <u> </u>		
Receiver: <u> 1 </u>	Cable #3: <u> </u>		
Attenuator #1: <u> 14 </u>	Cable #4: <u> </u>		
Attenuator #2: <u> </u>	Mixer: <u> </u>		
Additional equipment used: <u> </u>			
Measurement Uncertainty: <u> ±0.7 dB </u>			

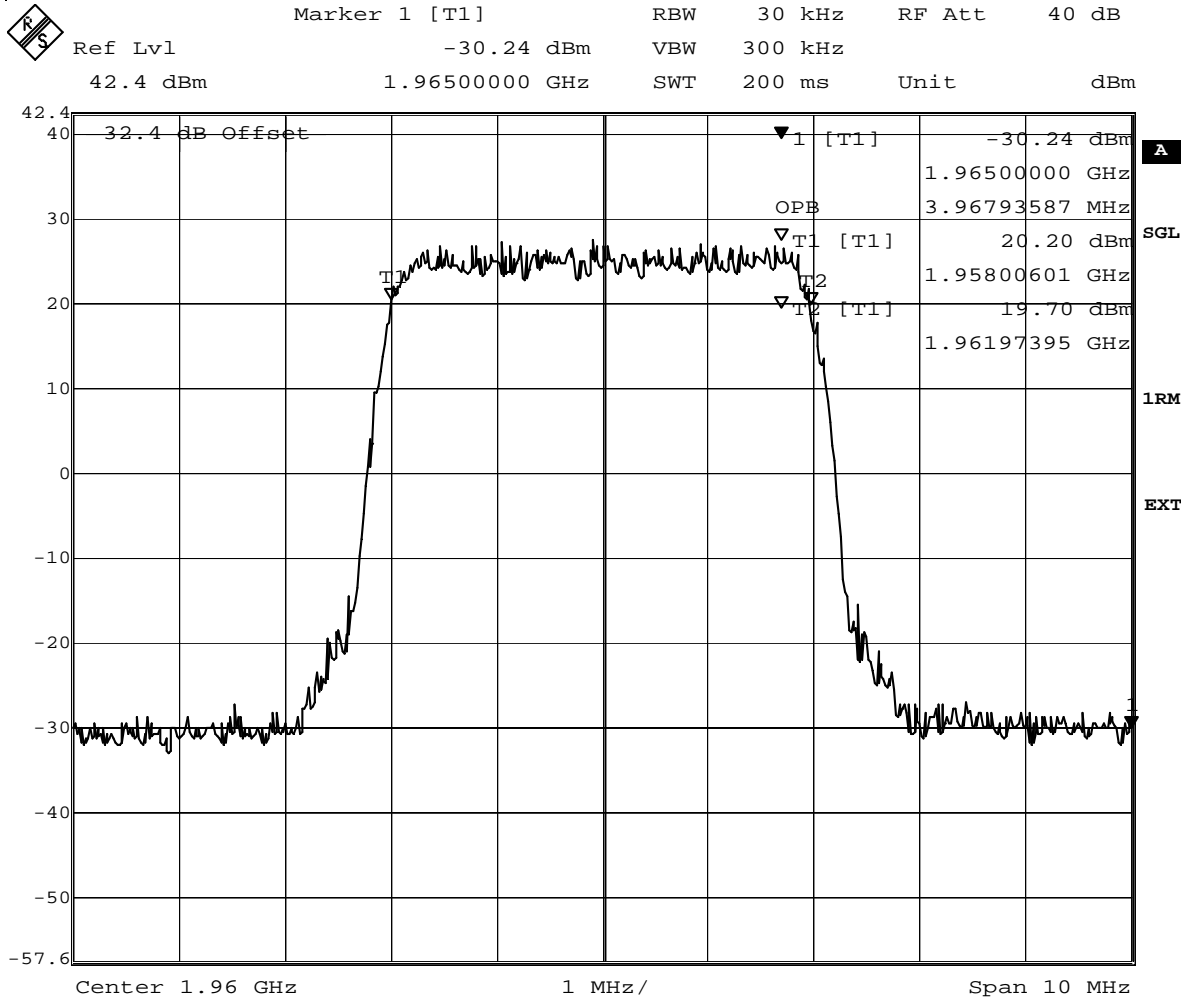


Date: 14.MAY.2007 11:02:27

Notes: QPSK

Nemko Oy, Finland

Data Plot		99% Occupied Bandwidth	
Page 2 of 2			
Job No.:	86417	Date:	14/05/2007
Specification:	PT24	Temperature (°C):	23
Tested By:	Timo Hietala	Relative Humidity (%):	20
E.U.T.:	WCDMA TRANSMITTER		
Configuration:	TX FULL POWER CENTER CHANNEL		

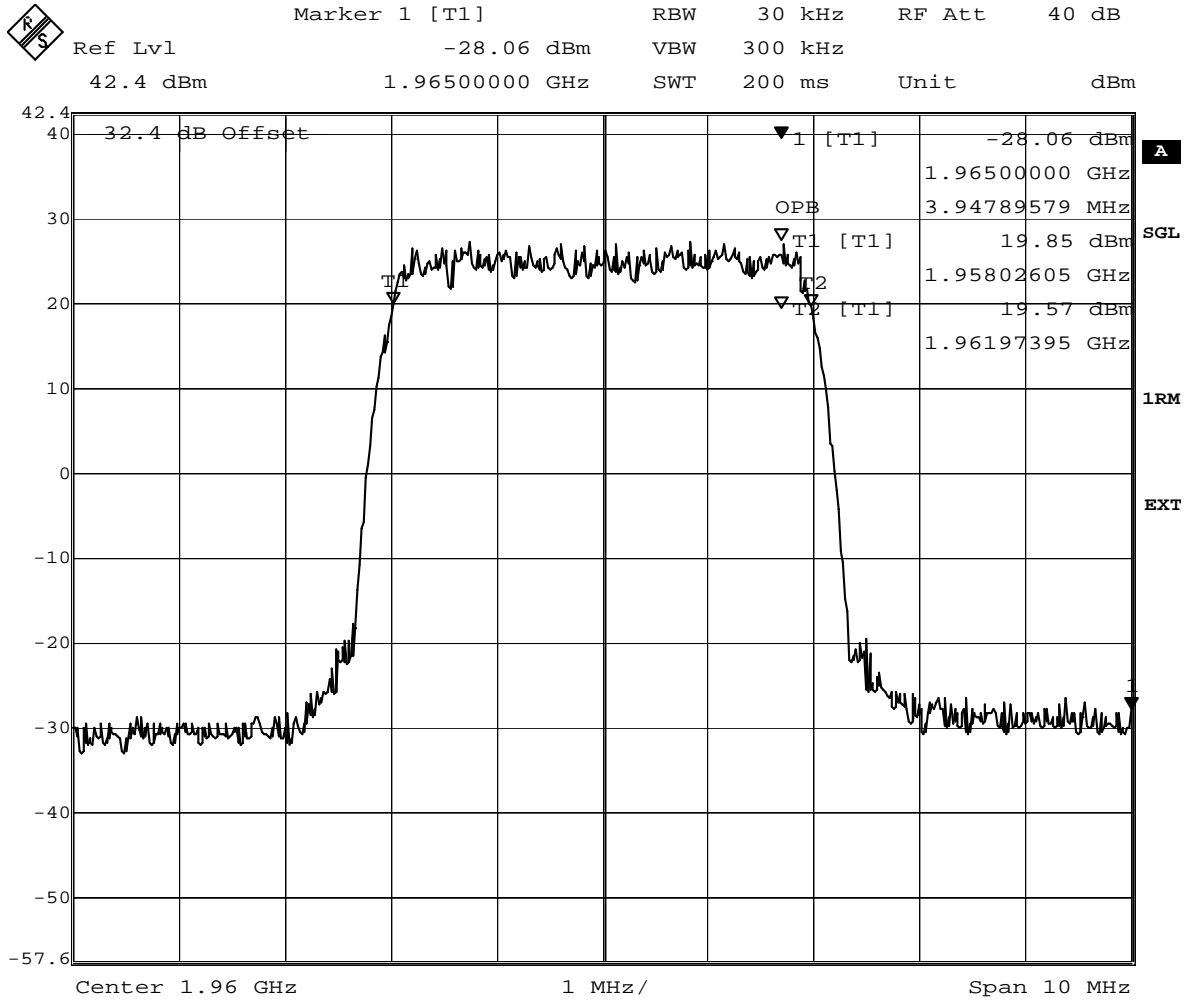

Date: 14.MAY.2007 11:03:51

Notes: 16QAM

5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA.NO.: 24.238(a), 2.1051
TESTED BY: Timo Hietala	DATE: 14/05/2007

Test Results: Complies.

Test Data: See attached plots.

Single carrier

Frequency (MHz)	Modulation	Spurious Emission (dBm) rms det.
928.7	QPSK	-29.66
5861.7	QPSK	-29.90
928.7	16QAM	-30.18
5861.7	16QAM	-32.64

Multi carrier

Frequency (MHz)	Modulation	Spurious Emission (dBm) rms det.
1692.5	QPSK	-32.21
5861.7	QPSK	-26.55
1763.9	16QAM	-31.99
5861.7	16QAM	-28.19

Lower Band Edge, Single carrier

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1930.0	QPSK	-15.71
1930.0	16QAM	-17.93

Upper Band Edge, Single carrier

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1990.0	QPSK	-14.96
1990.0	16QAM	-18.20

Lower Band Edge, Multi carrier

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1930.0	QPSK	-13.54
1930.0	16QAM	-14.83

Upper Band Edge, Multi carrier

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1990.0	QPSK	-14.60
1990.0	16QAM	-15.91

Lower Band Edge, Multi carrier 3rd order IM

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1927.4	QPSK	-18.6 ¹⁾
1927.4	16QAM	-18.2 ¹⁾

Upper Band Edge, Multi carrier 3rd order IM

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1992.6	QPSK	-22.9 ¹⁾
1992.6	16QAM	-24.7 ¹⁾

In Band, Multi carrier 3rd order IM¹⁾

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
1955.0	QPSK	-17.0 ²⁾
1955.0	16QAM	-17.4 ²⁾
1970.0	QPSK	-19.0 ²⁾
1970.0	16QAM	-19.0 ²⁾

Notes: ¹⁾ Measurement band integration 10dB (100kHz to 1MHz) has been used.
²⁾ Measurement band integration 13dB (50kHz to 1MHz) has been used.

Equipment used: 1, 2, 3, 4, 8, 9, 12, 13, 14

Measurement Uncertainty: ± 0.7 dB.


Temperature: 23 °C.

Relative Humidity: 20 %.

Test Data – Spurious Emissions

Nemko Oy, Finland


Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 1 of 12				Preliminary: <u> </u>
Job No.:	86417	Date:	14/05/2007	
Specification:	PT24	Temperature (°C):	23	
Tested By:	Timo Hietala	Relative Humidity (%):	20	
E.U.T.:	WCDMA TRANSMITTER			
Configuration:	TX FULL POWER LOWEST CHANNEL			
Sample Number:	1			
Location:	NSN Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	14	Cable #4:	_____	
Attenuator #2:	13	Mixer:	_____	
Additional equipment used:	12			
Measurement Uncertainty:	±0.7 dB			

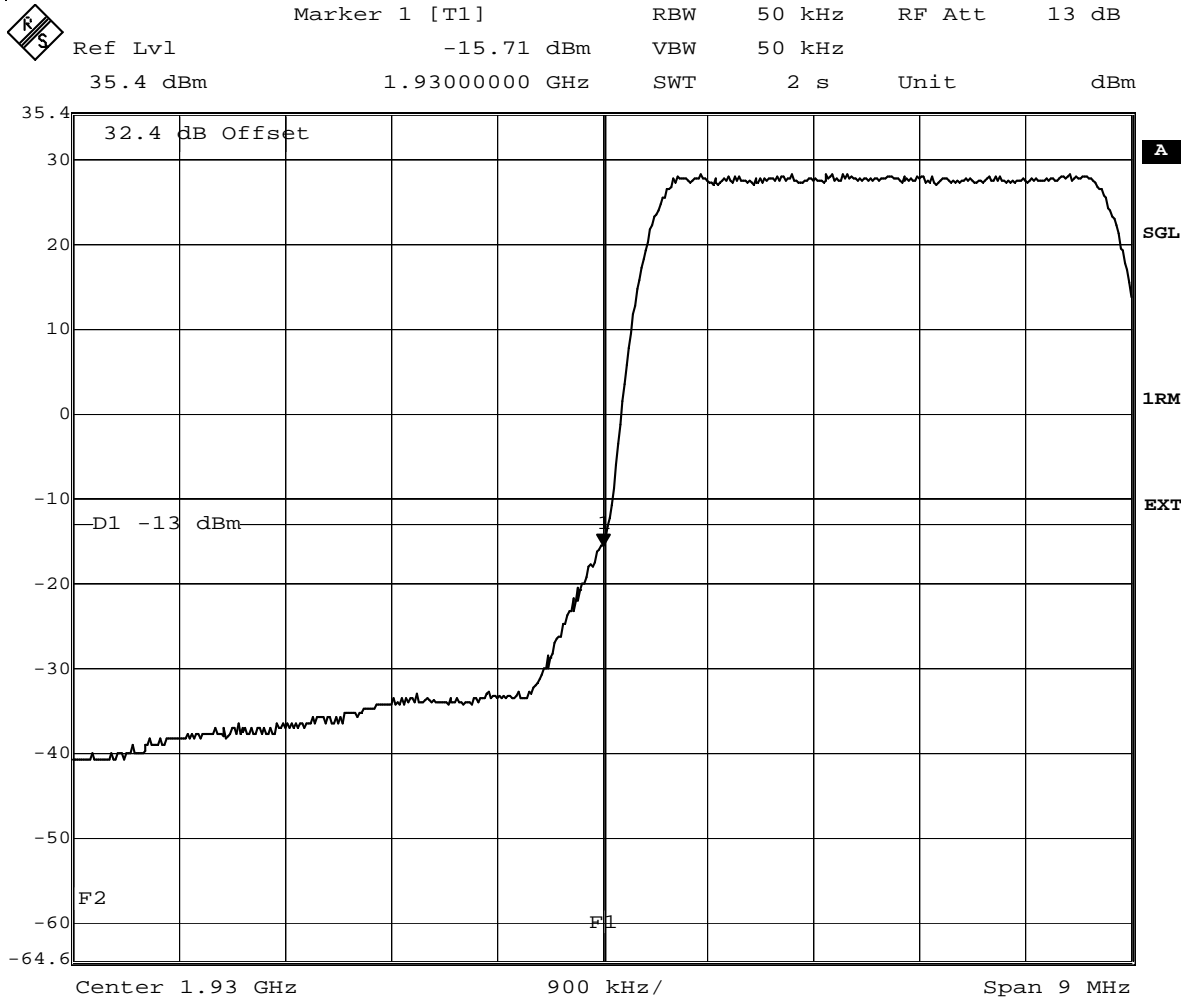


Date: 14.MAY.2007 10:46:29

Notes: Tx 1932.4 MHz, QPSK, LOWER BANDEDGE

Test Data – Spurious Emissions


	Marker 1 [T1]	RBW	50 kHz	RF Att	13 dB	
	Ref Lvl	-14.96 dBm	VBW	50 kHz		
	35.5 dBm	1.99000902 GHz	SWT	2 s	Unit	dBm

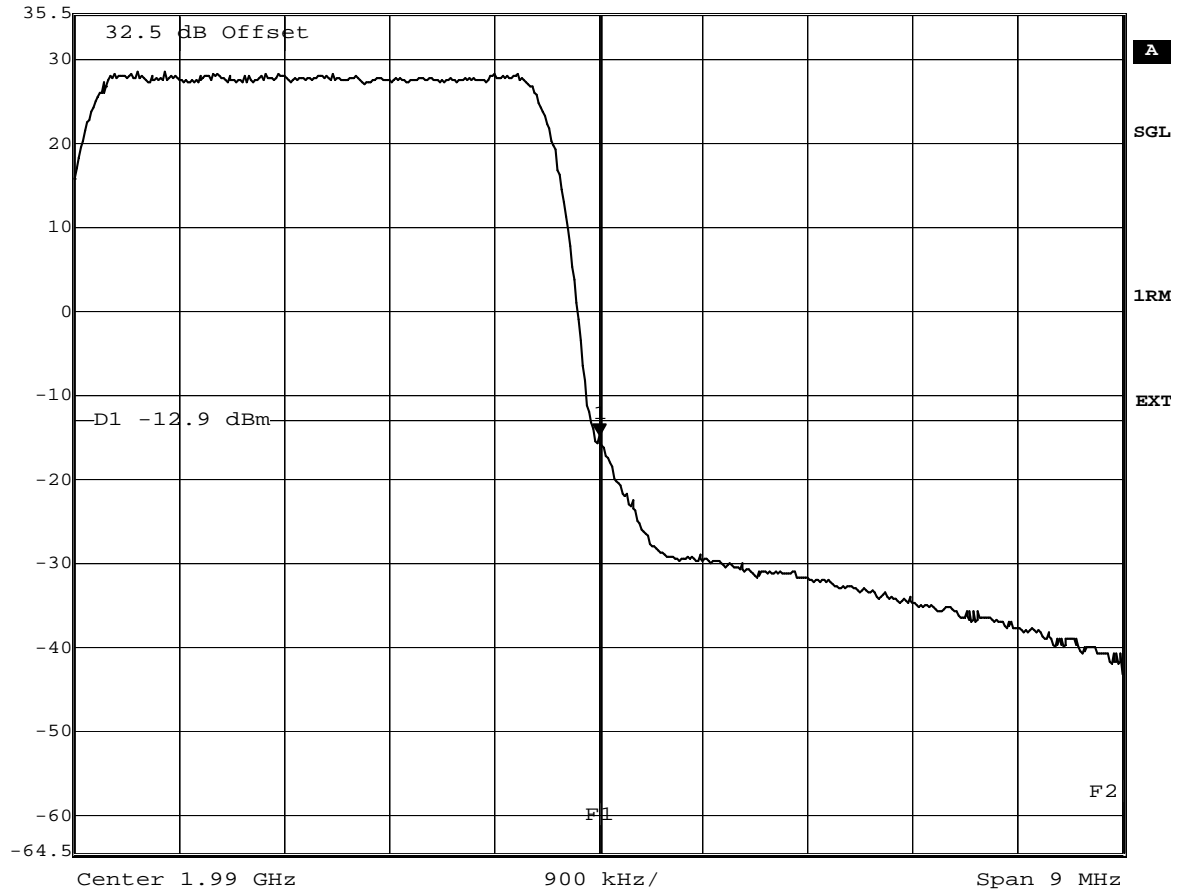


Date: 14.MAY.2007 10:52:34

Notes: Tx 1987.6 MHz, QPSK, UPPER BANDEDGE

Test Data – Spurious Emissions

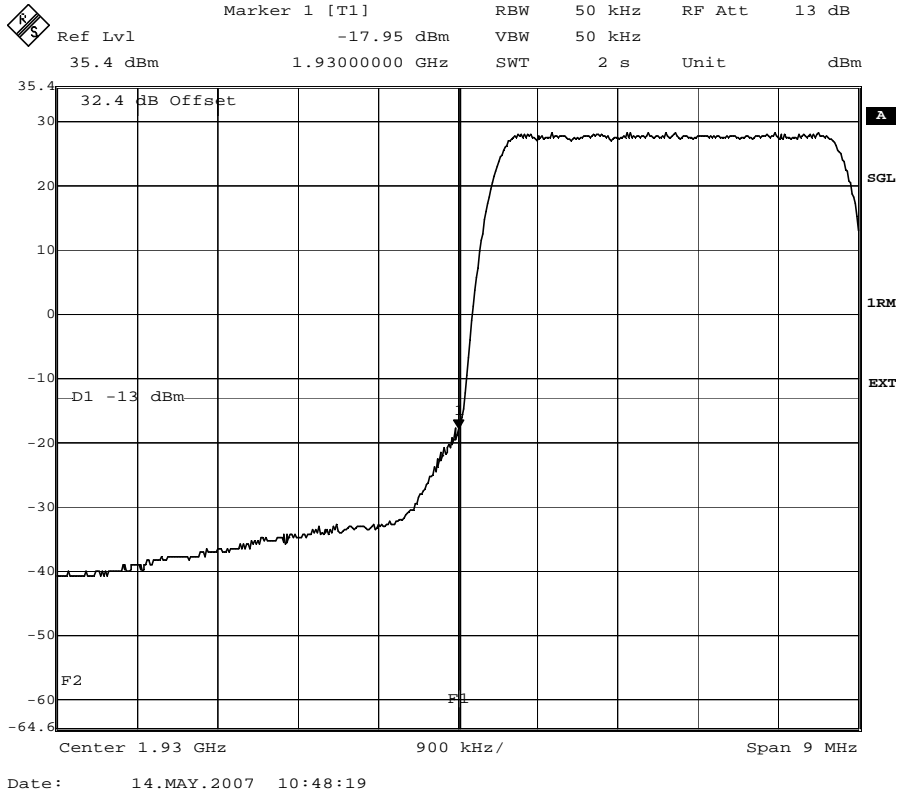


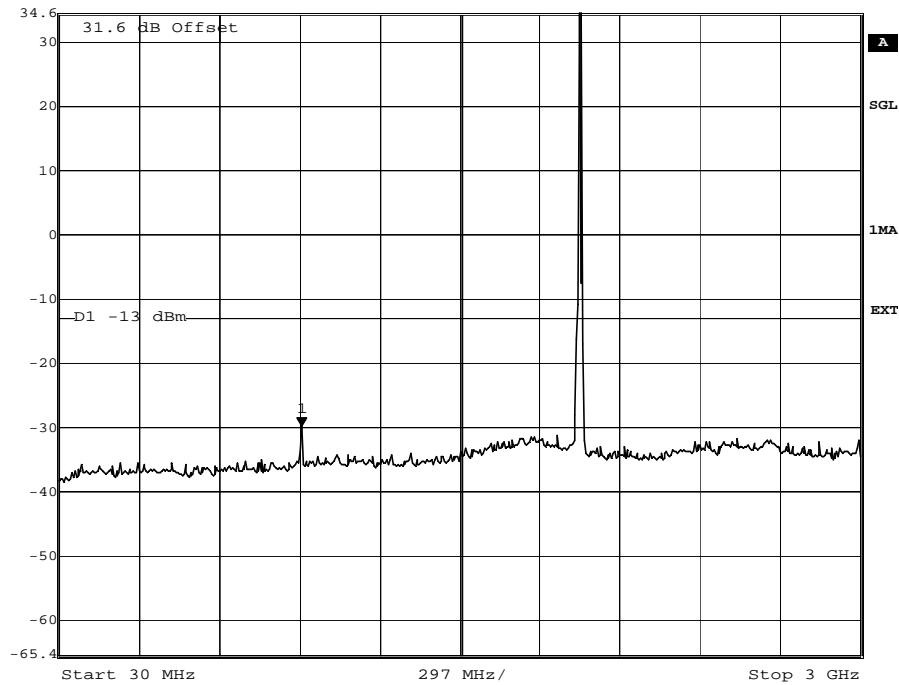
Notes: Tx 1932.4 MHz, 16QAM, LOWER BANDEDGE

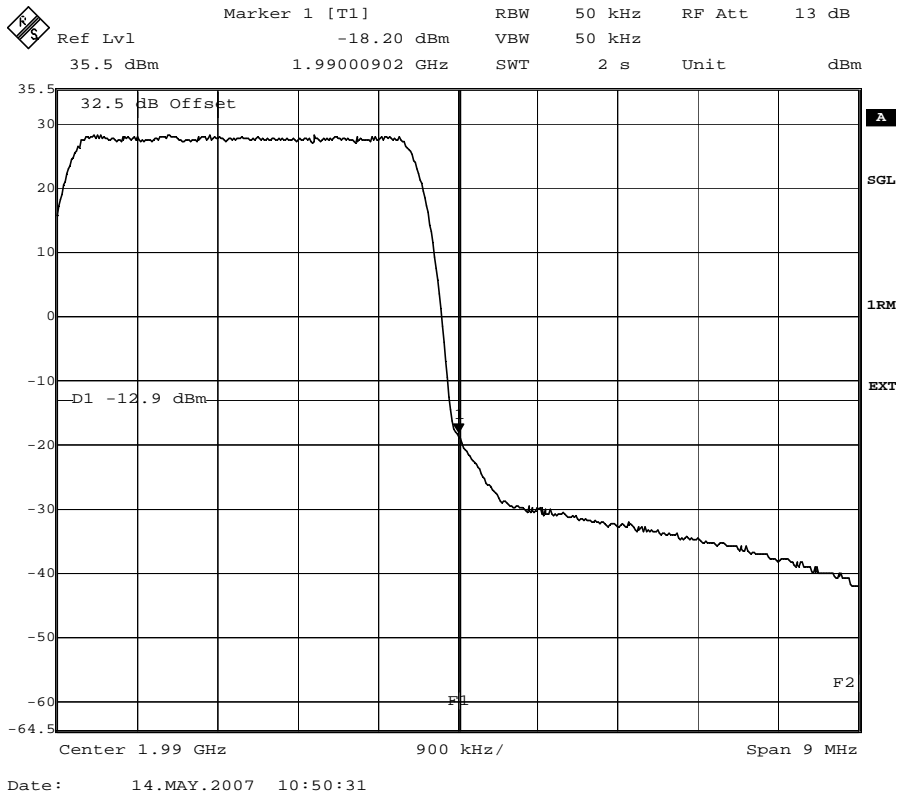

Notes: Tx 1987.6 MHz, 16QAM, UPPER BANDEDGE


Test Data – Spurious Emissions



 Marker 1 [T1] RBW 1 MHz RF Att 13 dB
 Ref Lvl -29.66 dBm VBW 1 MHz
 34.6 dBm 928.73747495 MHz SWT 5 s Unit dBm



Date: 14.MAY.2007 09:48:13

Notes: Tx 1960.0 MHz QPSK

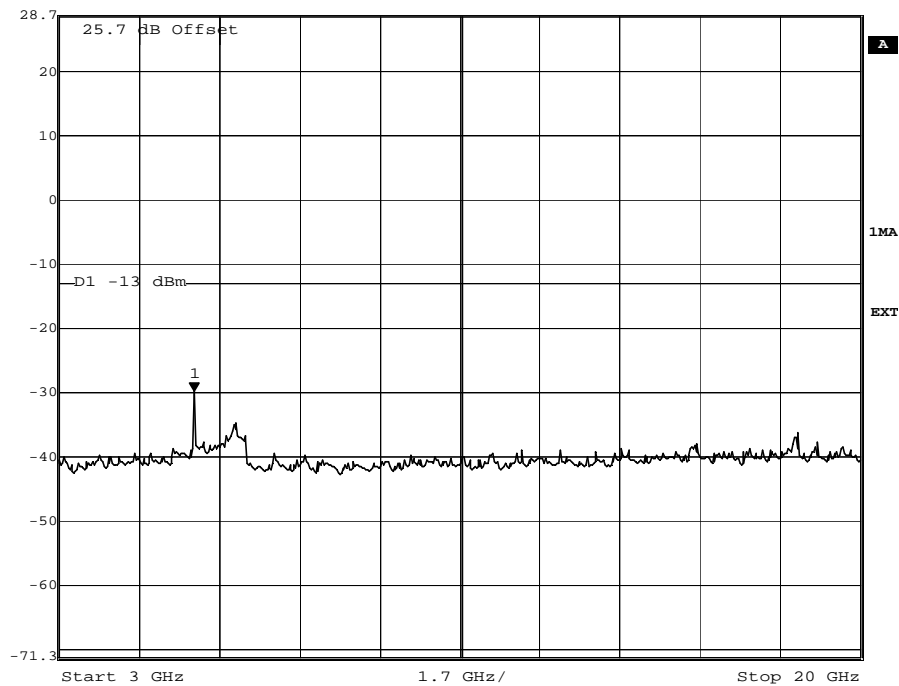

 Marker 1 [T1] RBW 1 MHz RF Att 13 dB
 Ref Lvl -29.90 dBm VBW 1 MHz
 28.7 dBm 5.86172345 GHz SWT 5 s Unit dBm




Date: 14.MAY.2007 09:37:27


Notes: Tx 1960.0 MHz QPSK


Test Data – Spurious Emissions


 Marker 1 [T1] RBW 1 MHz RF Att 13 dB
 Ref Lvl -30.18 dBm VBW 1 MHz
 34.6 dBm 928.73747495 MHz SWT 5 s Unit dBm

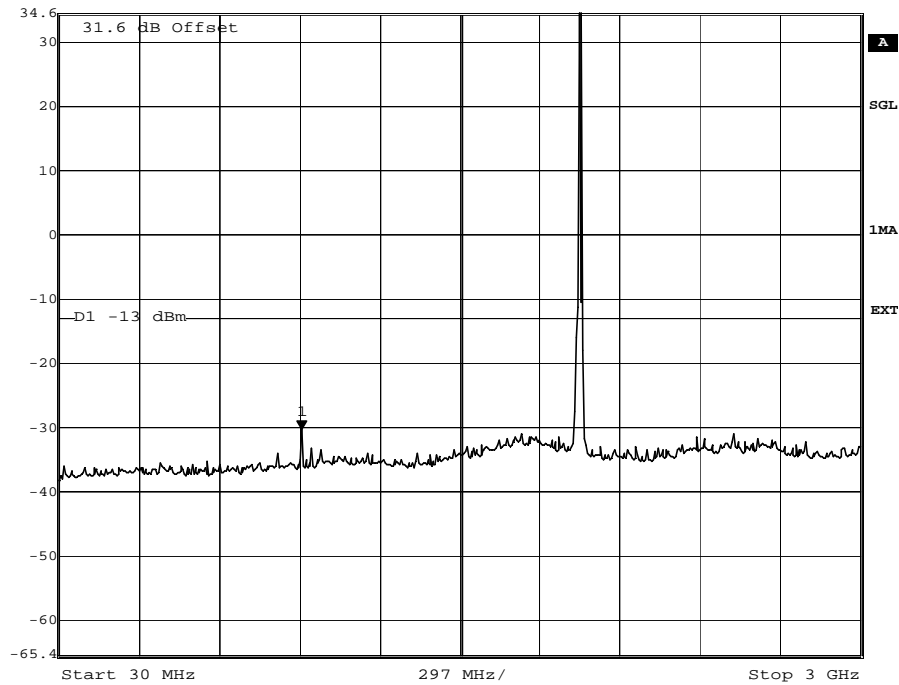


Notes: Tx 1960.0 MHz 16QAM



 Marker 1 [T1] RBW 1 MHz RF Att 13 dB
 Ref Lvl -32.64 dBm VBW 1 MHz
 28.7 dBm 5.86172345 GHz SWT 5 s Unit dBm

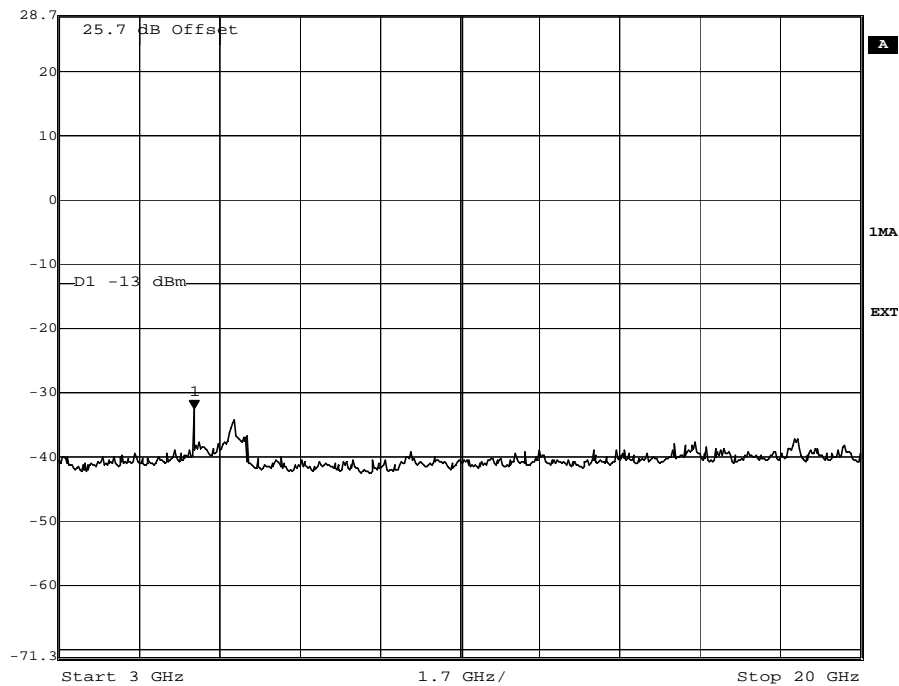

Notes: Tx 1960.0 MHz 16QAM


Test Data – Spurious Emissions, multi carrier


 Ref Lvl 32.5 dBm Marker 1 [T1] 1.92698798 GHz RBW 100 kHz RF Att 12 dB
 -28.58 dBm VBW 100 kHz
 32.5 dBm 1.92698798 GHz SWT 2 s Unit dBm

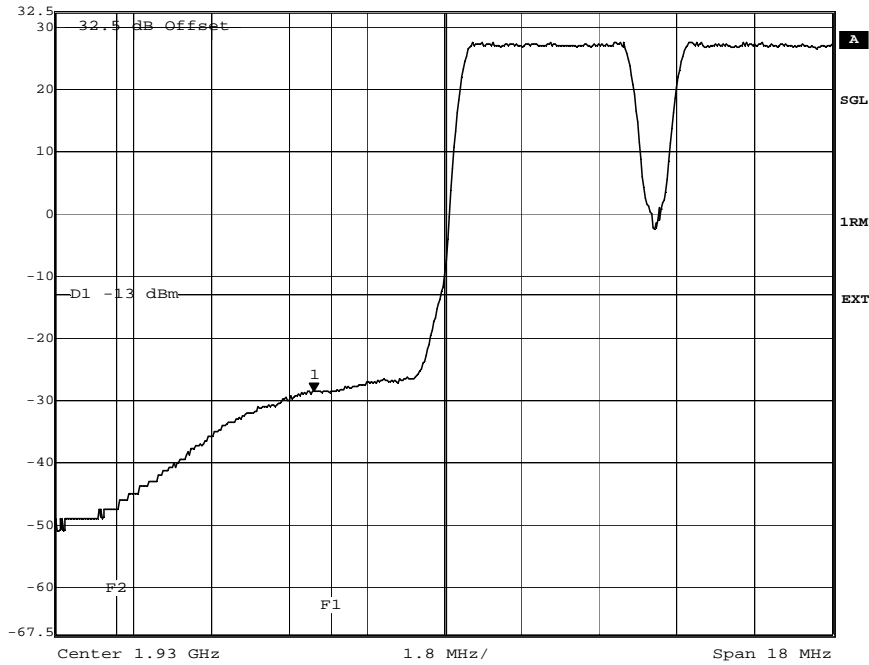

Date: 14.MAY.2007 12:11:16

Notes: Tx 1932.4 and 1937.4 MHz, QPSK, 3rd order IM LOWER BANDEDGE

 Ref Lvl 32.5 dBm Marker 1 [T1] 1.99261523 GHz RBW 100 kHz RF Att 11 dB
 -32.96 dBm VBW 100 kHz
 32.5 dBm 1.99261523 GHz SWT 2 s Unit dBm

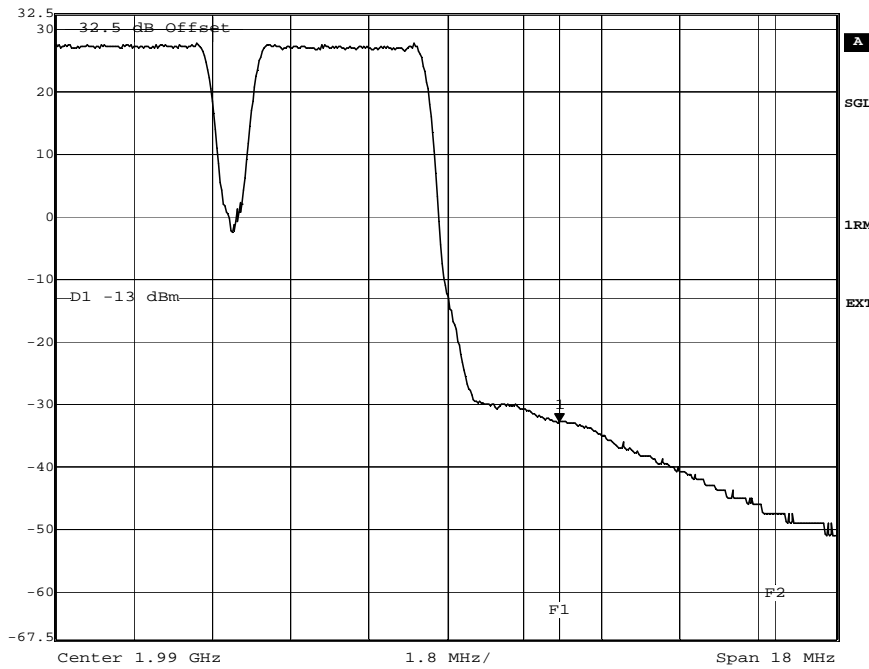


Date: 14.MAY.2007 12:02:56

Notes: Tx 1982.6 and 1987.6 MHz, QPSK, 3rd order IM UPPER BANDEDGE

Measurement band integration 10dB (from 100kHz to 1MHz)

Test Data – Spurious Emissions, multi carrier


	Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	12 dB
	32.5 dBm	-28.26 dBm	VBW	100 kHz		
		1.92727655 GHz	SWT	2 s	Unit	dBm

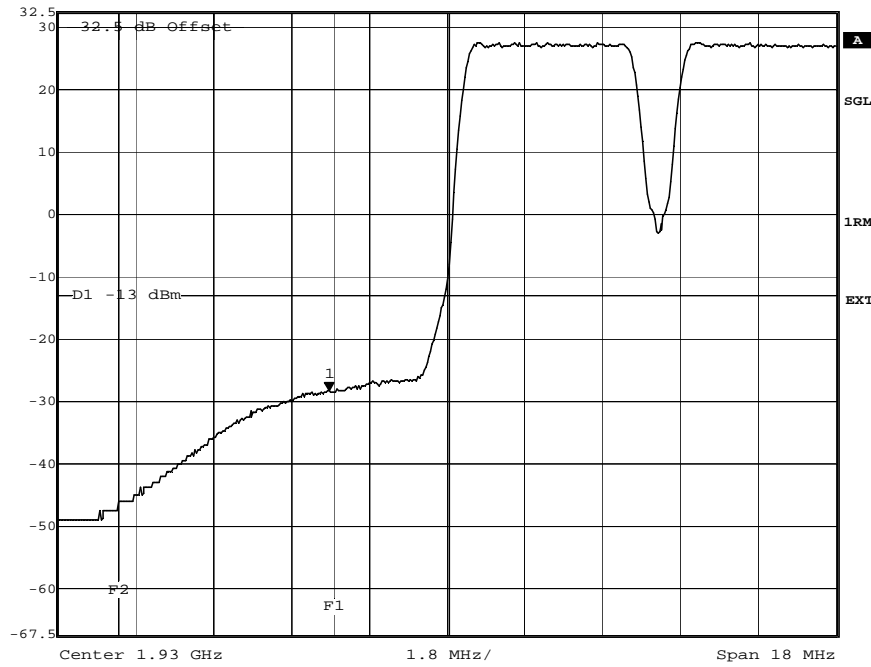

Date: 14.MAY.2007 12:14:01

Notes: Tx 1932.4 and 1937.4 MHz, 16QAM, 3rd order IM LOWER BANDEDGE

	Ref Lvl	Marker 1 [T1]	RBW	100 kHz	RF Att	11 dB
	32.5 dBm	-34.77 dBm	VBW	100 kHz		
		1.99261523 GHz	SWT	2 s	Unit	dBm

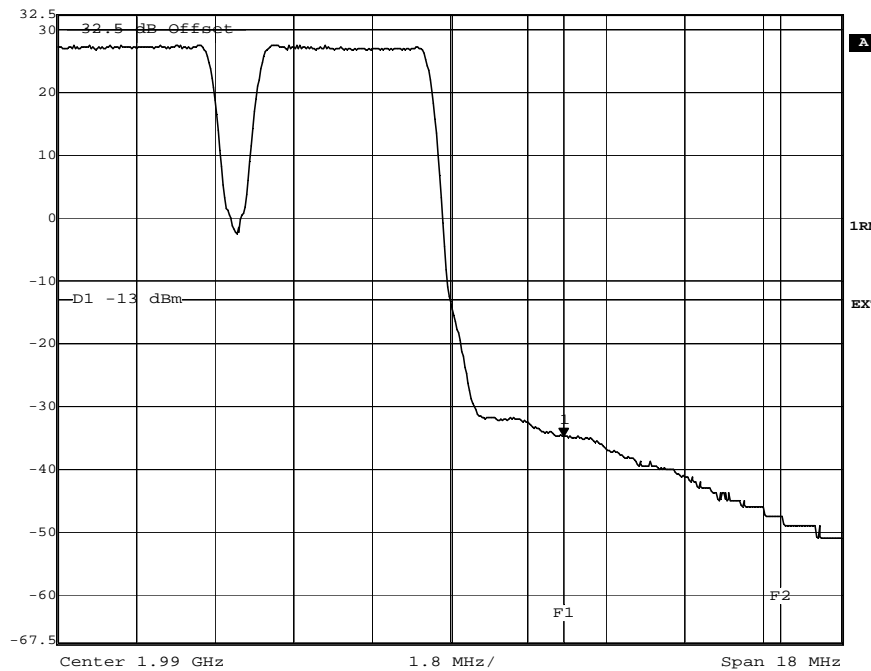


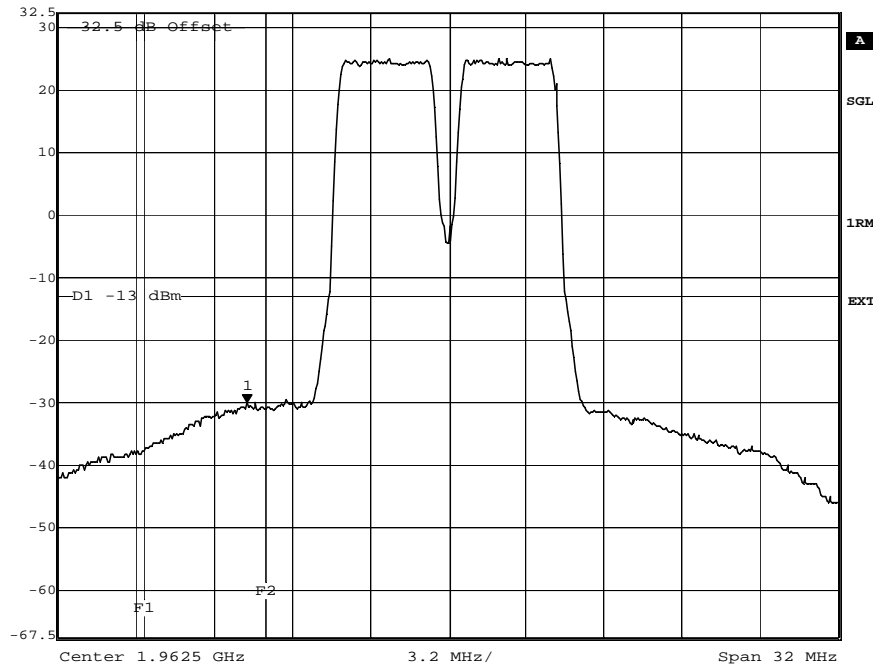
Date: 14.MAY.2007 12:00:19

Notes: Tx 1982.6 and 1987.6 MHz, 16QAM, 3rd order IM UPPER BANDEDGE

Measurement band integration 10dB (from 100kHz to 1MHz)


Test Data – Spurious Emissions, multi carrier


	Ref Lvl	Marker 1 [T1]	RBW	50 kHz	RF Att	12 dB
	32.5 dBm	-30.00 dBm	VBW	50 kHz		
		1.95425952 GHz	SWT	2 s	Unit	dBm



Date: 14.MAY.2007 13:48:43

Notes: Tx 1960.0 and 1965.0 MHz, QPSK 3rd order IM inband

	Ref Lvl	Marker 1 [T1]	RBW	50 kHz	RF Att	12 dB
	32.5 dBm	-30.40 dBm	VBW	50 kHz		
		1.95438778 GHz	SWT	2 s	Unit	dBm

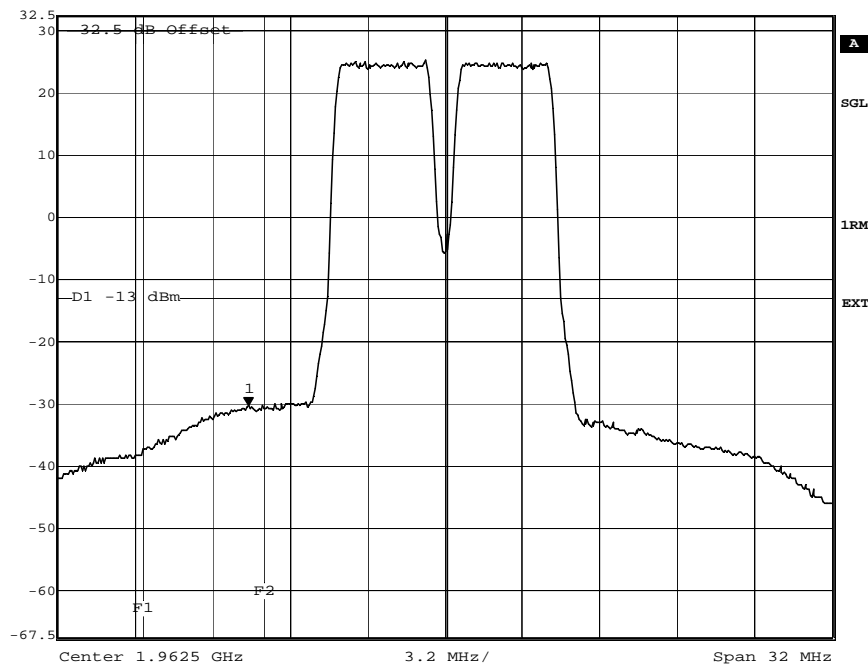

Date: 14.MAY.2007 13:52:01

Notes: Tx 1960.0 and 1965.0 MHz, 16QAM 3rd order IM inband

Measurement band integration 13dB (from 50kHz to 1MHz)

6. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious Emissions	PARA.NO.: 24.238(a), 2.1053
TESTED BY: Timo Hietala	DATE: 15/05/2007

Test Results: Complies.

Test Data: See attached table.

Frequency (MHz)	Spurious Emission EIRP (dBm) ave
All	More than 20 dB below limit -13 dBm

Equipment used: 15, 16, 17, 18, 19, 23, 24, 25, 26

Measurement Uncertainty: ± 5.2 dB.

Temperature: 23 °C.

Relative Humidity: 20 %.

NOTE: _____

The spectrum was searched from 30 MHz to the 10th harmonic of the carrier.

Test Data – Radiated Emissions


Nemko Oy, Finland

<u>Data Plot</u>	<u>Radiated Emissions Substitution Method</u>	
Page 1 of 2		Complete <u> x </u>
Job No.: 86417	Date: <u>15/05/2007</u>	Preliminary: <u> </u>
Specification: PT24	Temperature (°C): <u>23</u>	
Tested By: Timo Hietala	Relative Humidity (%): <u>20</u>	
E.U.T.: <u>WCDMA TRANSMITTER</u>		
Configuration: <u>TX FULL POWER</u>		
Sample Number: <u>1</u>		
Location: <u>NSN Oulu</u>	RBW: <u>1 MHz</u>	Measurement
Detector type: <u>Ave</u>	VBW: <u>1 MHz</u>	Distance: <u>3</u> m
<u>Test Equipment Used</u>		
Antenna: <u>17 and 18</u>	Directional Coupler:	
Pre-Amp: <u>24</u>	Cable #1: <u> </u>	
Filter: <u> </u>	Cable #2: <u> </u>	
Receiver: <u>16</u>	Cable #3: <u> </u>	
Attenuator #1: <u>-</u>	Cable #4: <u> </u>	
Attenuator #2: <u> </u>	Mixer: <u> </u>	
Additional equipment used: <u>19,23,25 and 26</u>		
Measurement Uncertainty: <u>± 5.2 dB</u>		

Frequency	Meter	Correction	Gen.	Substitution	EIRP	EIRP	Polarity	Comments
(MHz)	Reading	Factor	Level	Antenna Gain	(dBm)	(µW)		
	(dBm)	(dB)	(dBm)	(dBi)				


Notes: Pre measurement in stack installation FRFA Tx 1932.4 and 1960.0 MHz together with
 FRFB Tx 1987.6 MHz, transmitters full power terminated 50Ω

Test Data – Radiated Emissions 30 MHz - 1 GHz

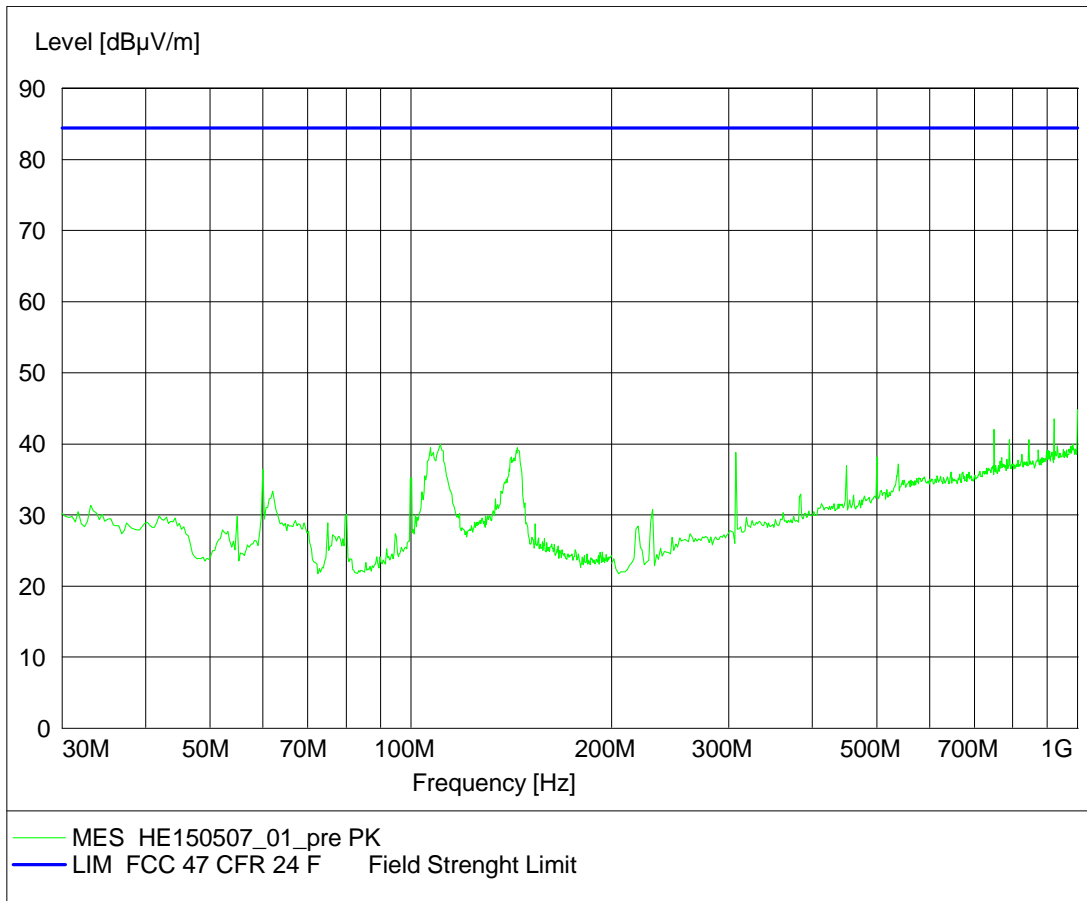

Notes: Limit line (84.4 dBuV/m) is converted from substitution limit (-13 dBm) to unit dBuV/m in 3 meter measurement distance

Test Data – Radiated Emissions 1 GHz -20 GHz

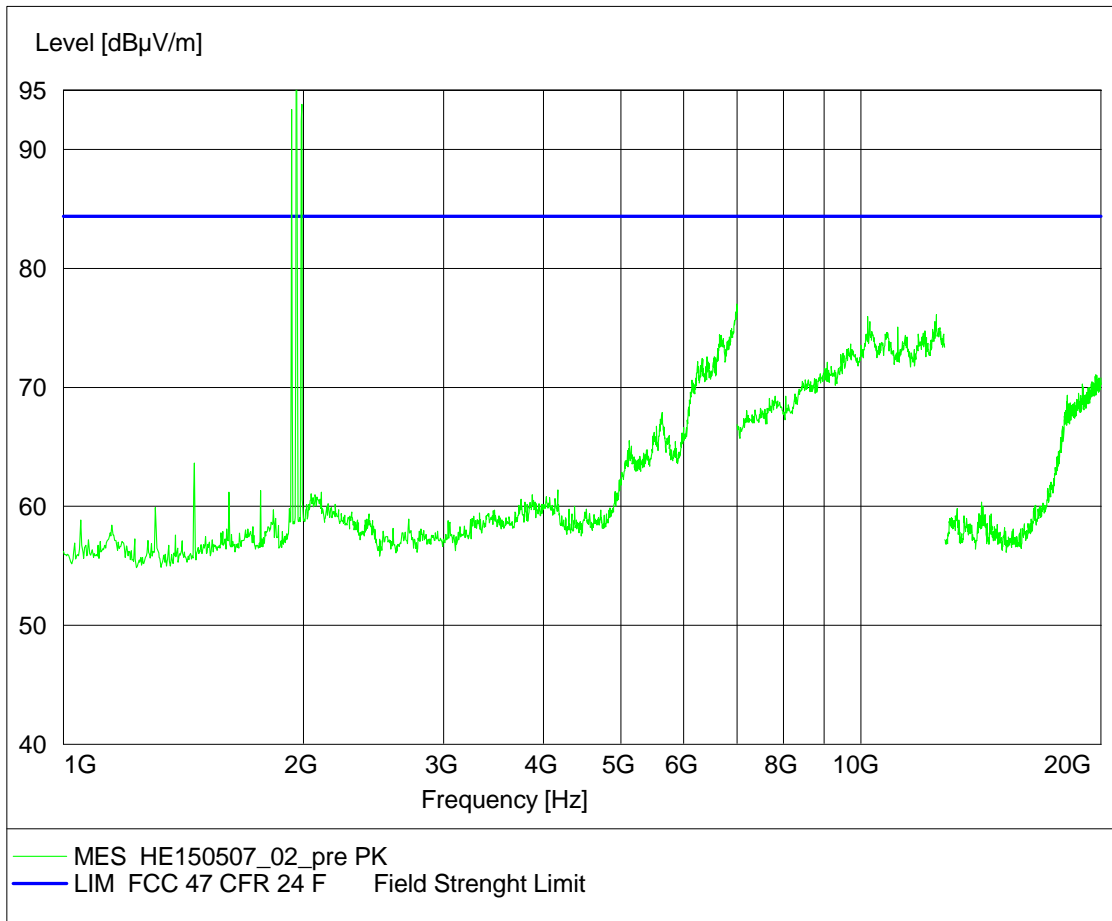

Notes: Limit line (84.4 dBuV/m) is converted from substitution limit (-13 dBm) to unit dBuV/m in 3 meter measurement distance

7. Frequency stability

NAME OF TEST: Frequency stability	PARA.NO.: 2.1055
TESTED BY: Timo Hietala	DATE: 16/05/2007

Test Results: Complies.

Standard Test Frequency: 1960.0 MHz.

Standard Test Voltage: 48 V DC.

Equipment used: 1, 5, 6, 7, 8, 9, 10, 11, 14

EUT: WCDMA TRANSMITTER.

Configuration: TX FULL POWER MIDDLE CHANNEL.

Measurement Data: Frequency stability with voltage variation.

Test Condition			QPSK	QPSK	16QAM	16QAM
Voltage (V DC)	Temp (°C)	Rated (Hz/ppm)	Deviation (Hz)	Deviation (ppm)	Deviation (Hz)	Deviation (ppm)
48.0	20	98 / 0.05	17.9	0.0091	19.8	0.0101
55.2	20	98 / 0.05	22.8	0.0117	19.7	0.0100
40.8	20	98 / 0.05	16.7	0.0085	17.9	0.0091

Measurement Uncertainty: ± 0.001 ppm (± 2.0 Hz).

Relative Humidity: 20 %.

NAME OF TEST: Frequency stability	PARA.NO.: 2.1055
TESTED BY: Timo Hietala	DATE: 16/05/2007

Test Results: Complies.

Standard Test Frequency: 1960.0 MHz.

Standard Test Voltage: 48 V DC.

Equipment used: 1, 5, 6, 7, 8, 9, 10, 11, 14

EUT: WCDMA TRANSMITTER.

Configuration: TX FULL POWER MIDDLE CHANNEL.

Measurement Data: Frequency stability with temperature variation.

Test Condition			QPSK	QPSK	16QAM	16QAM
Voltage (V DC)	Temp (°C)	Rated (Hz/ppm)	Deviation (Hz)	Deviation (ppm)	Deviation (Hz)	Deviation (ppm)
48.0	50	98 / 0.05	-22.9	-0.0117	-18.9	-0.0096
48.0	40	98 / 0.05	-10.2	-0.0052	-9.4	-0.0048
48.0	30	98 / 0.05	7.2	0.0037	5.7	0.0029
48.0	10	98 / 0.05	30.8	0.0157	27.4	0.0140
48.0	0	98 / 0.05	33.4	0.0170	30.8	0.0157
48.0	-10	98 / 0.05	29.3	0.0149	36.2	0.0185
48.0	-20	98 / 0.05	34.2	0.0174	35.2	0.0180
48.0	-30	98 / 0.05	34.1	0.0174	29.1	0.0149

Measurement Uncertainty: ± 0.001 ppm (± 2.0 Hz).


Relative Humidity: 20 %.

8. List of test equipment

Each active test equipment is calibrated annually.

Nr.	Equipment	Name of equipment	Serial number
1	Signal analyzer	Rohde & Schwarz:FSIQ26	836702/020
2	Network analyzer	Hewlett-Packard:HP8753E	US38431868
3	Network analyzer	Hewlett-Packard:HP8720ES	US39172107
4	Calibration kit	Hewlett-Packard:HP85032B	2919A04843
5	Enviromental chamber	Weiss technick	59226012320010
6	Frequency standard	Datum 8040	23006282
7	Interface Unit	Orbis TX SSU2100A	SSU-0346-999
8	DC power	Sörensen	9950C0085
9	Temperature/humidity meter	VAISALA HMI 31	P3730008
10	Signal analyzer	Rohde & Schwarz:FSIQ26	833370/009
11	Frequency standard	Datum 8040	0030007339
12	High Pass filter	Reactel 9HSX-3/20-S11	0531
13	Attenuator	MCE/Weinschel 67-20-33	BM0633
14	Attenuator	Narda FSCM 99899	08275
15	Semianechoic chamber	Siemens Matsushita 9m × 5m × 6m (room 0039)	Product No S&M B83317- C6019-T232
16	EMI Test Receiver	R&S ESIB 26	100335
17	Horn Antenna	Emco 3115	00075697
18	Bilog Antenna	Chase CBL6112B	2694
19	Horn Antenna	Emco 3115	0102A06346
20	Biconical Antenna	R&S HK116	836891/009
21	Dipole VHF	Mess-Elektronik VHA9103	
22	Dipole UHF	Mess-Elektronik UHA9105	
23	Signal Generator	R&S SMR 20	1715
24	Amplifier	Miteq AFSX4	791117
25	Antenna Mast	Deisel HD240	2401323194
26	Mast Controller	Deisel HD100	1001331

9. Photographs of Test Setup

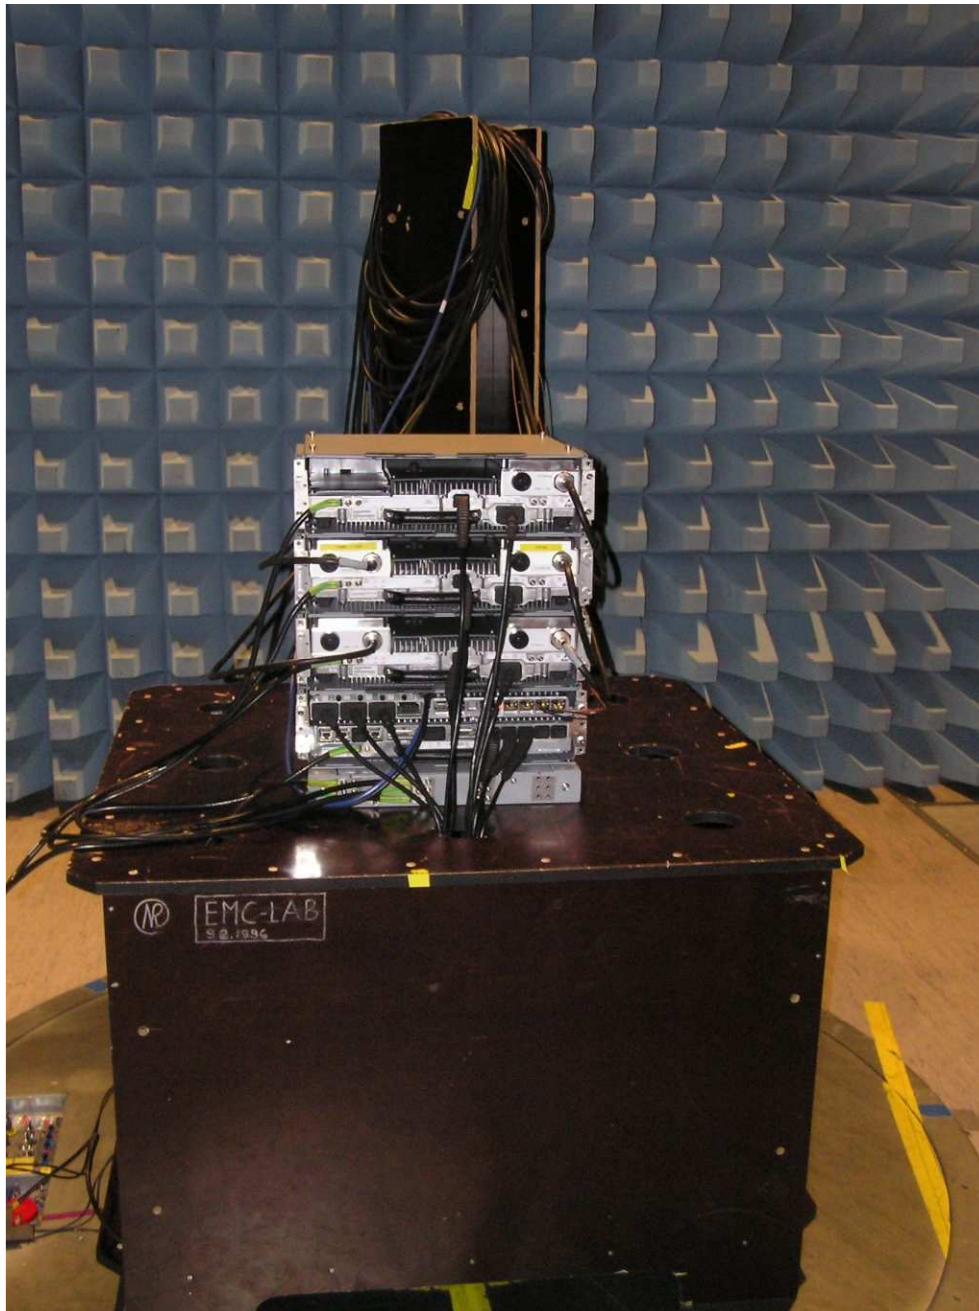

10. ANNEX A, TEST DETAILS

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
--------------------------------------	--------------------------

Minimum Standard: Para. No. 24.232(a). Base stations are limited to 1640 watts peak E.I.R.P. with an antenna height up to 300 meters HAAT.

Method Of Measurement:

CDMA Per ANSI/J-STD-014
TDMA Per ANSI/J-STD-010

Detachable Antenna:

The peak power at antenna terminals is measured using an in-line peak power meter or a spectrum analyzer.

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
---	--------------------------

Minimum Standard: Para. No. 2.1049. The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0.5% of the emitted power.

Method Of Measurement:

The 99% occupied bandwidth of the carrier emission is measured using a spectrum analyzer with Resolution Bandwidth set to 1% of the necessary bandwidth of the transmitted carrier.

NAME OF TEST: Spurious Emission at Antenna Terminals	PARA. NO.: 2.1051
---	--------------------------

Minimum Standard: Para. No. 24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Method Of Measurement:

Spectrum analyzer settings:

RBW: 1 MHz

VBW: 1 MHz

Within 1 MHz of the upper and lower edges of the assigned band of operation the resolution bandwidth is lowered to 1 % of the 26 dB occupied bandwidth of the transmitted carrier. A pre-measurement was performed with the max peak detector and spurious emissions closer than 20 dB to the limit was measured with rms detector.

NAME OF TEST: Field Strength of Spurious Radiation**PARA. NO.: 2.1053**

Minimum Standard: Para. No. 24.238(a). On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power by at least $43 + 10 \log (P)$ dB.

Test Method:

TIA/EIA-603-C-2004, Section 2.2.12

The test was performed in a semi-anechoic shielded room. The EUT was placed on a non-conductive 0.8 m high table standing on the turntable. During the test in the frequency range 30-22000 MHz the distance from the EUT to the measuring antenna was 3 m. In order to find the maximum levels of the disturbance radiation the angle of the turntable, the height of the measuring antenna were varied during the tests. The test was performed with the measuring antenna being both in horizontal and vertical polarizations.

Vertical and horizontal polarizations in the frequency range 30 – 20000 MHz was first measured by using the peak detector. During the peak detector scan the turntable was rotated from 0° to 360° with 30° step with the antenna heights 1.0 m and 2.5 m.

The limit of -13 dBm has been calculated to correspond 84.4 dB(μV/m).
Spurious emissions closer than 20 dB to the limit was measured with average detector.

The antenna substitution method was used to determine the equivalent radiated power at spurious frequencies. The EUT was replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator $G_{Antenna[dBi]}$. This antenna was fed with a signal at the spurious frequency $P_{Gen[dBm]}$. The level of the signal was adjusted to repeat the previously measured level. The resulting EIRP is the signal level fed to the reference antenna corrected for gain referenced to an isotropic. The formula below was used to calculate the EIRP of the EUT.

$$P_{EIRP[dbm]} = P_{Gen[dbm]} - L_{Cable[db]} + G_{Antenna[dBi]}$$

NAME OF TEST: Frequency Stability**PARA. NO.: 2.1055**

Minimum Standard: The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Method Of Measurement:Frequency Stability With Voltage Variation


The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency error is measure. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation


The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency error is measured.

11. ANNEX B, TEST DIAGRAMS


RF Power Output PARA. NO.: 2.1046




Occupied Bandwidth PARA. NO.: 2.1049



Spurious Emission at Antenna Terminals PARA. NO.: 2.1051




Field Strength of Spurious Radiation PARA. NO.: 2.1053

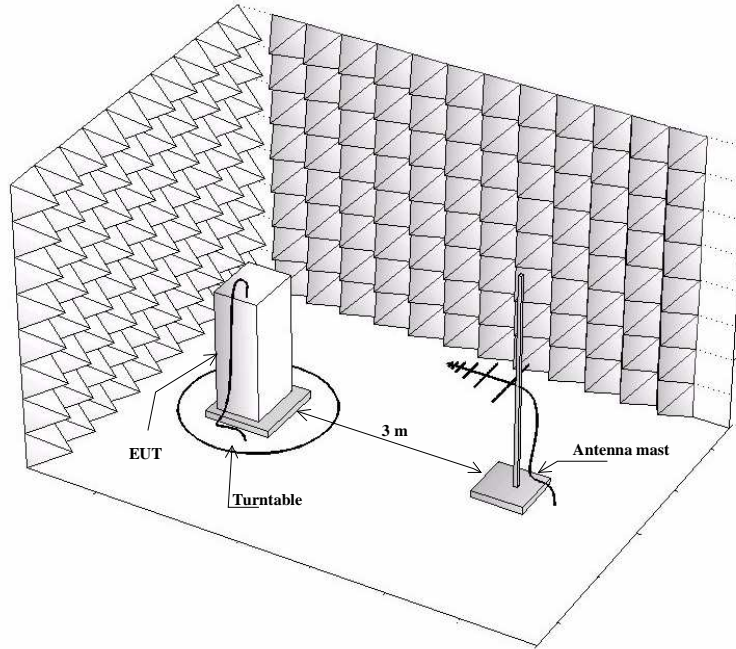

Frequency Stability PARA. NO.: 2.1055

Frequency Stability With Voltage Variation

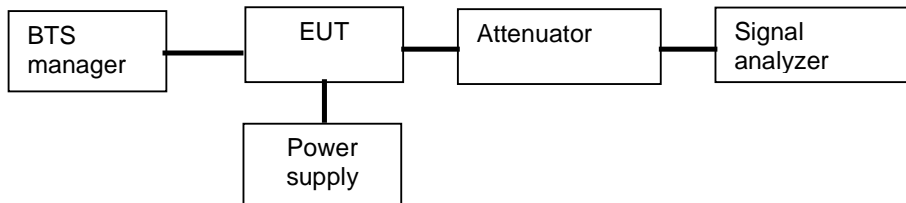

Frequency Stability With Temperature Variation

