



Nemko

TEST REPORT

Date: ESPOO 23.02.2009

Page: 1 (63)

Appendices -

Number:
No. 1 / 1

123182

Date of handing in: 03.02.2009

Measured by:

Jari Veijola

Nokia Siemens Networks

Reviewed by:

Timo Hietala, Test Engineer

SORT OF EQUIPMENT:

WiMAX Base Station RF module

MARKETING NAME:

Flexi WiMAX Base Station

TYPE:

Flexi WiMAX BTS 2.5G

MANUFACTURER:

Nokia Siemens Networks Oy

FCC ID:

VBNFYRF-01

CLIENT:

Nokia Siemens Networks

ADDRESS:

P.O.Box 319, FI-90651 OULU, FINLAND

TELEPHONE:

+358 7180 08000

TEST LABORATORY:

NSN/Oulu

FCC REG. NO.

411251

REFERENCE:

FCC Part 27, SUBPART M

SUMMARY:

In regard to the performed tests the equipment under test fulfils the requirements defined in the test specifications, see page 4 for details

The test results are valid for the tested unit only. Without a written permission of Nemko Oy it is allowed to copy this report as a whole, but not partially.

Contents

1. EUT and Accessory Information	3
1.1 EUT description	3
1.2 EUT and accessories.....	3
Summary of Test Data	4
2. General Equipment Specification.....	5
3. RF Power Output	8
4. 99% Occupied Bandwidth	27
5. Spurious Emissions at Antenna Terminals	30
6. Field Strength of Spurious	49
7. Frequency stability	55
8. List of test equipment.....	57
9. Photographs of Test Setup	58
10.ANNEX A, TEST DETAILS	59
11.ANNEX B, TEST DIAGRAMS.....	62

1. EUT and Accessory Information

1.1 EUT description

The EUT is a WiMAX Base station RF module 2.5 GHz with 2 power amplifiers.

1.2 EUT and accessories

Manufacturer: Nokia Siemens Networks
Model: FYRF, s/n: L9090200273
Other Units: System module, FYSB, s/n: L9080100305

General: All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 27, Subpart M.

<input type="checkbox"/>	New Submission	<input checked="" type="checkbox"/>	Production Unit
<input checked="" type="checkbox"/>	Class II Permissive Change	<input type="checkbox"/>	Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE. **NONE**

Nemko Oy authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Oy accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

Summary of Test Data

NAME OF TEST	SECTION IN CFR 47	SPEC.	RESULT
RF Power Output	27.50 (h), 2.1046	33 dBW+ 10log(X/Y) dBW	Complies
99% Occupied Bandwidth	2.1049, (i)	Unspecified	Complies
Spurious Emissions at Antenna Terminals	27.53(l)(2)(6), 2.1051	- 13 dBm	Complies
Field Strength of Spurious Emissions	27.53(l)(2), 2.1053	- 13 dBm E.I.R.P	Complies
Frequency stability	27.54, 2.1055	$\pm 0.05 \text{ ppm}^1$	Complies

Note ¹⁾ Limit is the manufacturer's specification

Measurement uncertainty is expressed to a confidence level of 95%.

2. General Equipment Specification

Supply Voltage Input:	48 Vdc
Frequency Bands: TX:	<input checked="" type="checkbox"/> 2583 – 2690 MHz Lowest tunable freq. 2588.000 MHz Middle freq. 2636.000 MHz Highest tunable freq. 2685.000 MHz
Frequency Bands: RX:	<input checked="" type="checkbox"/> 2583 – 2690 MHz
Emission Designator:	WiMAX (10M0W7D)
Maximum No. of Carriers:	2
Output Impedance:	50 ohms.
RF Power Output:	43 dBm (20 W) conducted
Duty Cycle:	1:1 to 3:1
Duplex Mode:	Time Division Duplex (TDD)
Channel Bandwidth:	10 MHz
Modulation:	QPSK 16QAM 64QAM
MIMO	Wimax MIMO Matrix A

System Description

Flexi WiMAX Base Station is based on WiMAX TDD (Time Division Duplex) system and is designed according to IEEE 802.16e-2005 radio access technology. This is a licensed base transceiver station and is designed for use with antennas that are fixed mounted on outdoor permanent structures.

Test setup

NSN BTS Site Manager is used for the BTS's configuration. The AHTI is used for sending test model and PER measure messages.

NSN BTS Site Manager has the following features:

- BTS set-up management (e.g. parameter settings, software downloading).
- BTS status monitoring.

The AHTI has the following features:

- BTS Testing.

All RF tests were performed in normal temperature by repeating the Frequency Stability in environmental chamber.

Frequency Stability was performed also over a variation in the primary supply voltage 85 percent to 115 percent of the rated supply voltage at a temperature of 20° Celsius.

The test configurations were as close to normal intended use as possible. Cable connections were accordance with the instruction of the manufacturer.

Grounding of the equipment was performed in accordance with the guideline of the manufacturer.

All measurements were performed on the base station downlink signal, when having the base station transmitter active at maximum power level. For all tests test model 198157 was used.

Test model 198157

The WiMAX system protocol utilizes three modulations with various code rates.

Test model 198157 includes MIMO functionality and modulation types; QPSK, 16-QAM and 64-QAM. The code rate doesn't change the transmitted RF signal, therefore it's not necessary to measure all possible variations.

In Test model 198157 the modulation mode is switched continuously at maximum speed permitted by the system and all the supported modulation schemes are used. Test model 198157 duty cycle was 60%.

Test model 198157 has been specified worst case frame structure and the information presented in this test report is believed to represent a worst case scenario.

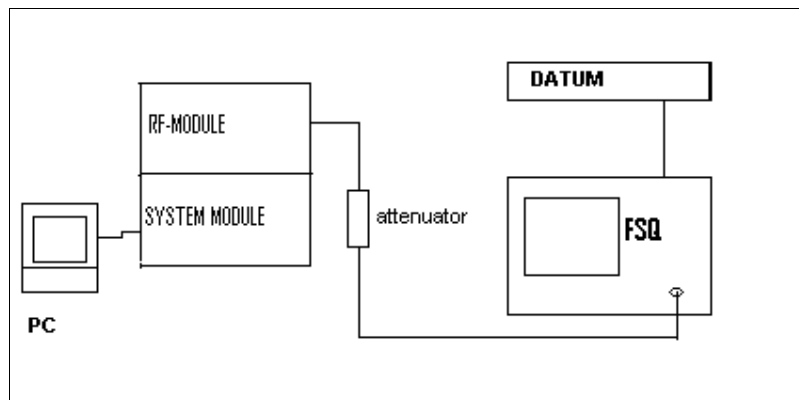


Figure TX test setup

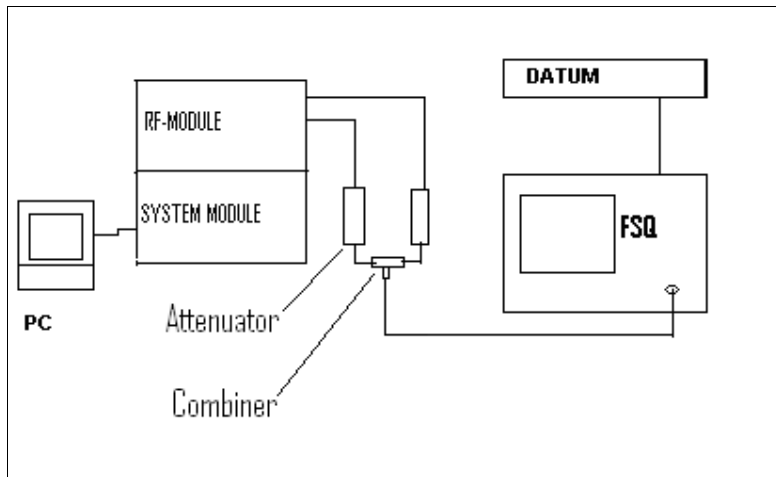


Figure TX test setup combined output

The BTS under test (System Module + RF Module) was DC powered and configuration of 2 carrier with rated output power 20 W each.

The BTS System Module contains the Transport functional block (Transport Sub-module), the Control & Clock functional block and the BB functional block, whereas the RF Module contains the RF functional block.

For transmitter measurements, Signal Analyzer Rohde & Schwarz FSQ 26 with K93 WiMAX- and K94 MIMO-option was used.

3. RF Power Output

NAME OF TEST: RF Power Output	PARA.NO.: 27.50 (h) & 2.1046
TESTED BY: Jari Veijola	DATE: 10-11/02/2009

Test Results: Complies.

Measurement Data: TX1 Refer to attached plot.

Modulation Type	Frequency (MHz)	Measured Output Power (dBm)	Power (W)
Test model 198157	2588	42.89	19.45
Test model 198157	2636	43.03	20.09
Test model 198157	2685	43.18	20.80

Measurement Data: TX2 Refer to attached plot.

Modulation Type	Frequency (MHz)	Measured Output Power (dBm)	Power (W)
Test model 198157	2588	43.03	20.09
Test model 198157	2636	42.76	18.88
Test model 198157	2685	43.16	20.70

Measurement Data: Mathematically combined power TX1+TX2

Modulation Type	Frequency (MHz)	Measured Output Power (dBm)	Power (W)
Test model 198157	2588	45.97	39.54
Test model 198157	2636	45.91	38.97
Test model 198157	2685	46.18	41.50

Note: Test model 198157 includes modulation types; QPSK, 16-QAM and 64-QAM, duty cycle 60%


Equipment used: 1, 7,10
Measurement Uncertainty: ± 0.7 dB.
Temperature: 24.5 °C.
Relative Humidity: 15 %.

Test Data – RF Power Output TX1

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page 1 of 12				Preliminary: <u> </u>
Job No.:	123182	Date:	11/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WiMAX TRANSMITTER			
Configuration:	TX FULL POWER BOTTOM CHANNEL TX1			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

IEEE 802.16e-2005 MIMO				
Frequency/Fs:	2.588 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att:	20 dBm / 24.4 dB	
Zone/Seg:	DL-PUSC, ID=B, Seg=0	MIMO Meas Setup:	2 TX x 1 RX	
		Zone Offset / Len:	9 / 20 Symbols	
Adjacent Channel Power Relative				
Channel	Bandwidth	Spacing	Lower	Upper
TX	9.5 MHz	...	42.89 dBm	
Adjacent	9.5 MHz	10 MHz	-52.85 dB	-50.69 dB
Alternate1	9.5 MHz	20 MHz	-57.56 dB	-58.27 dB
Alternate2	9.5 MHz	30 MHz	-59.14 dB	-59.46 dB
Alternate3
Alternate4

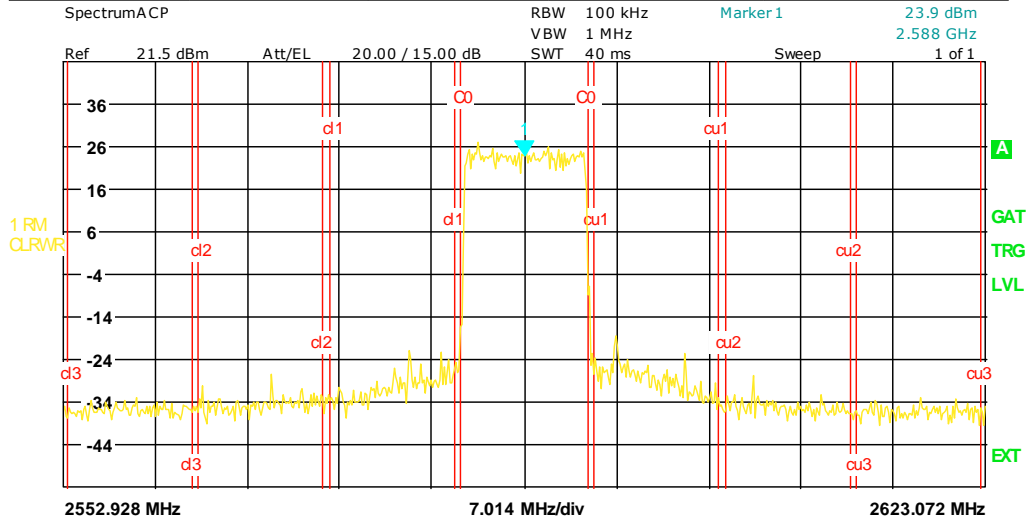

Running ...

Date: 11.FEB.2009 12:51:45


Notes: _____

Test Data – RF Power Output TX2

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page 2 of 12				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WiMAX TRANSMITTER			
Configuration:	TX FULL POWER BOTTOM CHANNEL TX2			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

IEEE 802.16e-2005 MIMO			
Frequency/Fs:	2.588 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. At	20.7 dBm / 25.7 dB
Zone/Seg:	DL-PUSC, ID=B, Seg=0	MIMO Meas Setup:	1 TX x 1 RX
		Zone Offset / Len:	9 / 20 Symbols
Adjacent Channel Power Relative			
Channel	Bandwidth	Spacing	Lower / Upper
TX	9.5 MHz	...	43.03 dBm
Adjacent	9.5 MHz	10 MHz	-51.29 dB / -48.70 dB
Alternate1	9.5 MHz	20 MHz	-56.91 dB / -56.55 dB
Alternate2	9.5 MHz	30 MHz	-57.98 dB / -57.75 dB
Alternate3
Alternate4

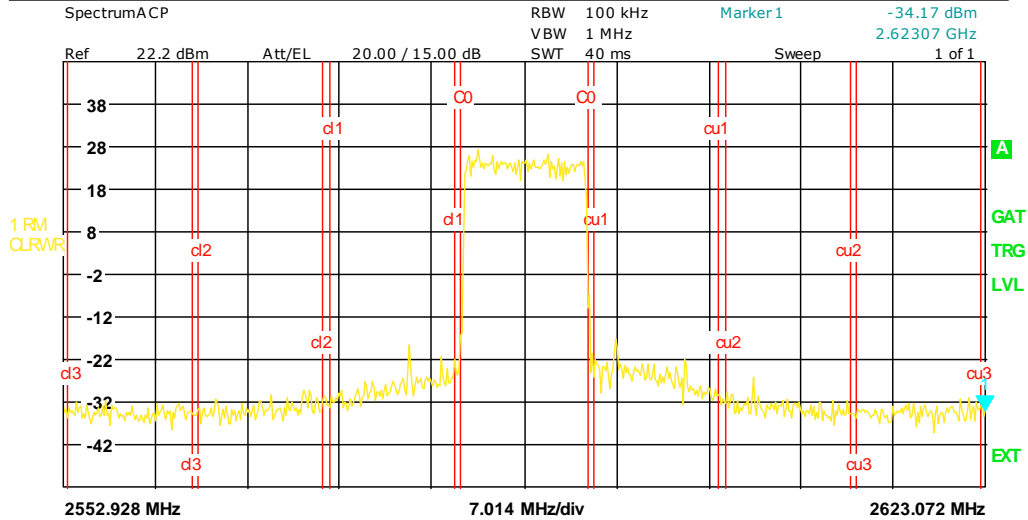

Running ...


Date: 10.FEB.2009 12:55:17

Test Data – RF Power Output TX1

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page 3 of 12				Preliminary: <u> </u>
Job No.:	123182	Date:	11/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WiMAX TRANSMITTER			
Configuration:	TX FULL POWER CENTER CHANNEL TX1			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	± 0.7 dB			

IEEE 802.16e-2005 MIMO				
Frequency/Fs:	2.6365 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att:	20 dBm / 24.3 dB	
Zone/Seg:	DL-PUSC, ID=B, Seg=0	MIMO Meas Setup:	2 TX x 1 RX	
		Zone Offset / Len:	9 / 20 Symbols	
Adjacent Channel Power Relative				
Channel	Bandwidth	Spacing	Lower	Upper
TX	9.5 MHz	...	43.03 dBm	
Adjacent	9.5 MHz	10 MHz	-50.67 dB	-48.78 dB
Alternate1	9.5 MHz	20 MHz	-56.65 dB	-56.81 dB
Alternate2	9.5 MHz	30 MHz	-59.48 dB	-59.21 dB
Alternate3
Alternate4

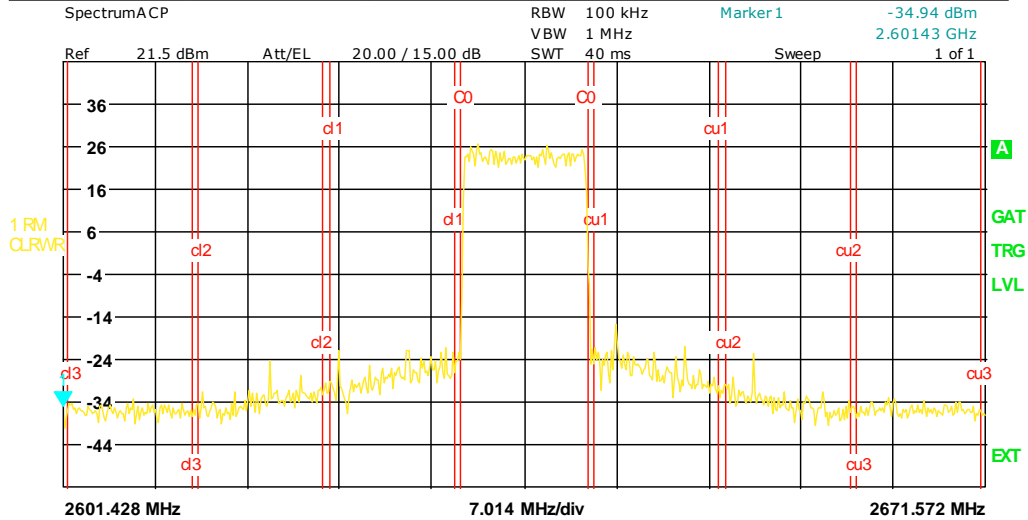

Running ...

Date: 11.FEB.2009 12:55:13


Notes: _____

Test Data – RF Power Output TX2

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page <u>4</u> of <u>12</u>				Preliminary: <u> </u>
Job No.: 123182		Date: 10/02/2009		
Specification: PT27		Temperature (°C): 24.5		
Tested By: Jari Veijola		Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER				
Configuration: TX FULL POWER CENTER CHANNEL TX2				
Sample Number: 1				
Location: NSN/ Oulu		RBW: Refer to plots	Measurement	
Detector type: Rms		VBW: Refer to plots	Distance: <u> N/A </u> m	
Test Equipment Used				
Antenna: <u> </u>		Directional Coupler: <u> </u>		
Pre-Amp: <u> </u>		Cable #1: <u> </u>		
Filter: <u> </u>		Cable #2: <u> </u>		
Receiver: 1		Cable #3: <u> </u>		
Attenuator #1: 17		Cable #4: <u> </u>		
Attenuator #2: <u> </u>		Mixer: <u> </u>		
Additional equipment used: <u> </u>				
Measurement Uncertainty: <u> ± 0.7 dB </u>				

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.6365 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. At 20.7 dBm / 25.6 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 1 TX x 1 RX	Zone Offset / Len: 9 / 20 Symbols	
Adjacent Channel Power Relative			
Channel	Bandwidth	Spacing	Lower / Upper
TX	9.5 MHz	...	42.76 dBm
Adjacent	9.5 MHz	10 MHz	-51.01 dB / -49.23 dB
Alternate1	9.5 MHz	20 MHz	-56.59 dB / -56.20 dB
Alternate2	9.5 MHz	30 MHz	-57.78 dB / -57.83 dB
Alternate3
Alternate4

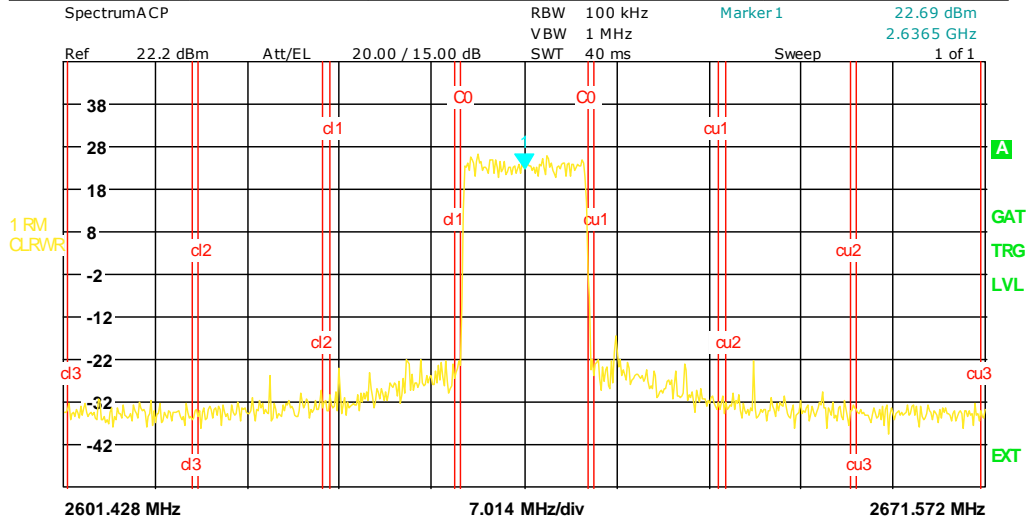

Running ...


Date: 10.FEB.2009 12:47:16

Test Data – RF Power Output TX1

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page <u> 5 </u> of <u> 12 </u>				Preliminary: <u> </u>
Job No.: 123182		Date: 11/02/2009		
Specification: PT27		Temperature (°C): 24.5		
Tested By: Jari Veijola		Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER				
Configuration: TX FULL POWER HIGHEST CHANNEL TX1				
Sample Number: 1				
Location: NSN/ Oulu		RBW: Refer to plots	Measurement	
Detector type: Rms		VBW: Refer to plots	Distance: <u> N/A </u> m	
Test Equipment Used				
Antenna: _____		Directional Coupler: _____		
Pre-Amp: _____		Cable #1: _____		
Filter: _____		Cable #2: _____		
Receiver: 1		Cable #3: _____		
Attenuator #1: 17		Cable #4: _____		
Attenuator #2: _____		Mixer: _____		
Additional equipment used: _____				
Measurement Uncertainty: <u> ± 0.7 dB </u>				

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.685 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.3 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x 1 RX	Zone Offset / Len: 9 / 20 Symbols	
Adjacent Channel Power Relative			
Channel	Bandwidth	Spacing	Lower / Upper
TX	9.5 MHz	...	43.18 dBm
Adjacent	9.5 MHz	10 MHz	-53.15 dB / -50.09 dB
Alternate1	9.5 MHz	20 MHz	-58.01 dB / -58.78 dB
Alternate2	9.5 MHz	30 MHz	-59.26 dB / -59.52 dB
Alternate3
Alternate4

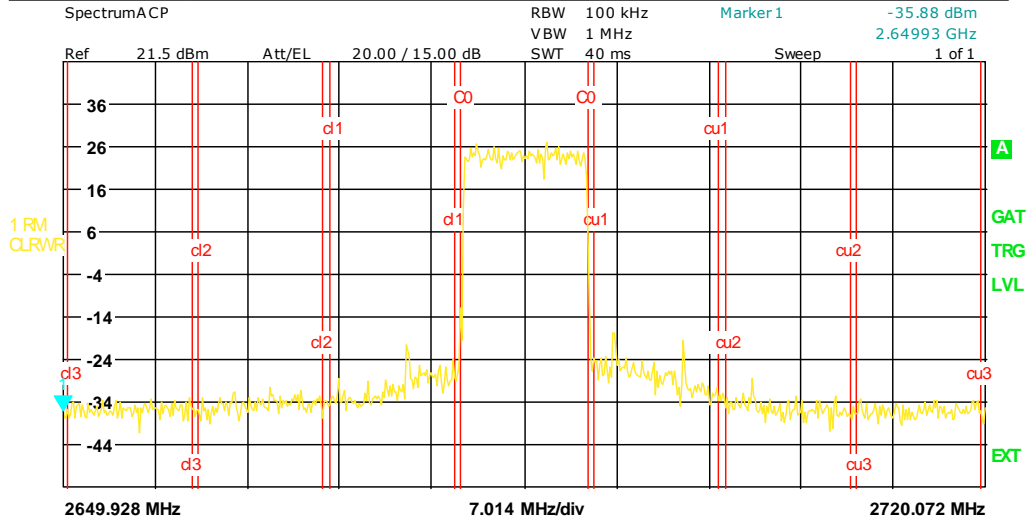

Running ...

Date: 11.FEB.2009 12:58:24


Notes: _____

Test Data – RF Power Output TX2

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT		Complete <u> x </u>
Page <u>6</u> of <u>12</u>	Job No.: <u>123182</u>	Date: <u>10/02/2009</u>	Preliminary: <u> </u>	
Specification: <u>PT27</u>	Temperature (°C): <u>24.5</u>			
Tested By: <u>Jari Veijola</u>	Relative Humidity (%): <u>15</u>			
E.U.T.: <u>WiMAX TRANSMITTER</u>				
Configuration: <u>TX FULL POWER HIGHEST CHANNEL TX2</u>				
Sample Number: <u>1</u>				
Location: <u>NSN/ Oulu</u>	RBW: <u>Refer to plots</u>	Measurement		
Detector type: <u>Rms</u>	VBW: <u>Refer to plots</u>	Distance: <u>N/A</u> m		
Test Equipment Used				
Antenna: <u> </u>	Directional Coupler: <u> </u>			
Pre-Amp: <u> </u>	Cable #1: <u> </u>			
Filter: <u> </u>	Cable #2: <u> </u>			
Receiver: <u>1</u>	Cable #3: <u> </u>			
Attenuator #1: <u>17</u>	Cable #4: <u> </u>			
Attenuator #2: <u> </u>	Mixer: <u> </u>			
Additional equipment used: <u> </u>				
Measurement Uncertainty: <u>± 0.7 dB</u>				

IEEE 802.16e-2005 MIMO			
Frequency/Fs: <u>2.685 GHz / 11.2 MHz</u>	Signal Lvl. Setting/Ext. Att: <u>21 dBm / 25.7 dB</u>	Capture Time/No.Samples: <u>28 ms / 313601</u>	
Zone/Seg: <u>DL-PUSC, ID=A, Seg=0</u>	MIMO Meas Setup: <u>1 TX x 1 RX</u>	Zone Offset / Len: <u>1 / 8 Symbols</u>	
Adjacent Channel Power Relative			
Channel	Bandwidth	Spacing	Lower / Upper
TX	9.5 MHz	...	43.16 dBm
Adjacent	9.5 MHz	10 MHz	-49.44 dB / -46.94 dB
Alternate1	9.5 MHz	20 MHz	-56.39 dB / -56.37 dB
Alternate2	9.5 MHz	30 MHz	-58.00 dB / -57.95 dB
Alternate3
Alternate4

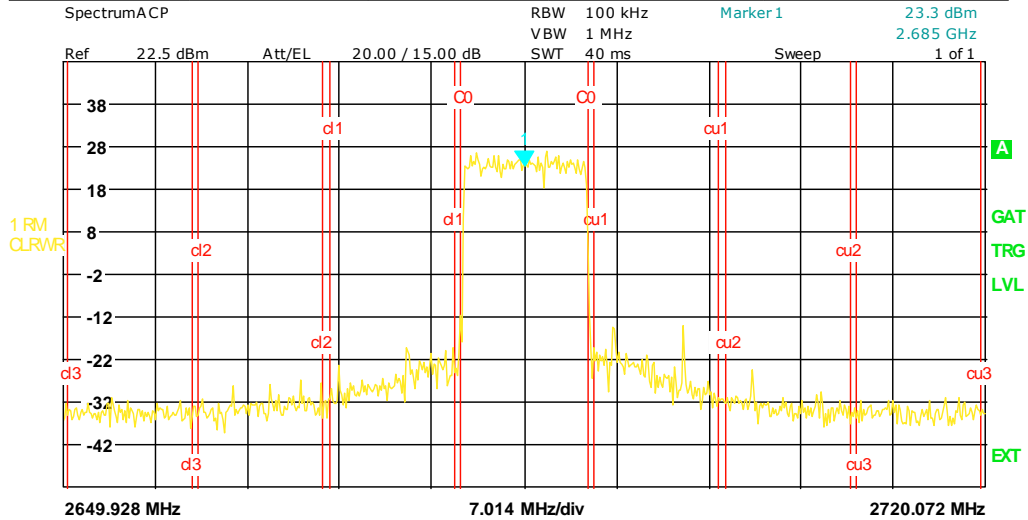


Running ...

Date: 10.FEB.2009 13:10:42

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT	
Page Z of 12		Complete <u> x </u>	
Job No.: 123182	Date: 11/02/2009	Preliminary: <u> </u>	
Specification: PT27	Temperature (°C): 24.5		
Tested By: Jari Veijola	Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER			
Configuration: TX FULL POWER BOTTOM CHANNEL TX1			
Sample Number: 1			
Location: NSN/ Oulu	RBW: Refer to plots	Measurement	
Detector type: Rms	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: _____		
Filter: _____	Cable #2: _____		
Receiver: 1	Cable #3: _____		
Attenuator #1: 17	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: ± 0.7 dB			

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.588 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.4 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=A, Seg=0	MIMO Meas Setup: 1 TX x1 RX	Zone Offset / Len: 1 / 8 Symbols	

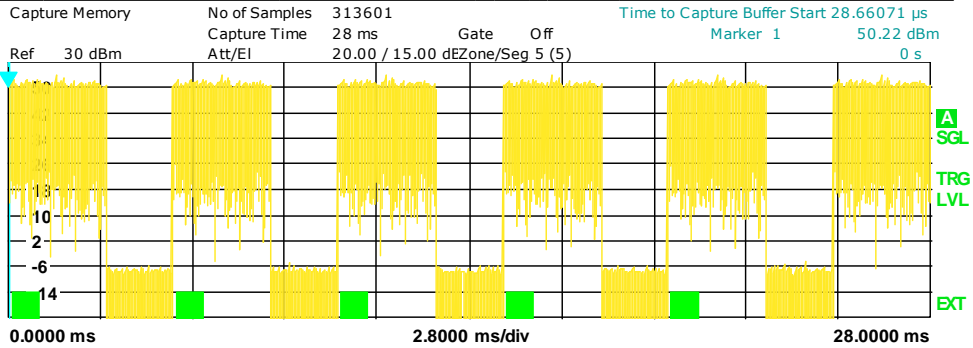


Burst Summary

Zone/Segment ID = A							
Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]	
1	0	MAP	QPSK	4	43.13	-35.61	
1	1	FCH	QPSK	52	43.12	-33.05	
1	2	Data	64QAM	60	43.35	-32.24	
Overall				116	43.20	-33.41	
2	0	MAP	QPSK	4	43.13	-36.99	
2	1	FCH	QPSK	52	43.12	-35.16	
2	2	Data	64QAM	60	43.35	-35.79	
Overall				116	43.20	-35.92	
3	0	MAP	QPSK	4	43.14	-37.33	
3	1	FCH	QPSK	52	43.13	-37.27	

Measurement Complete

Date: 11.FEB.2009 10:57:45

IEEE 802.16e-2005 MIMO			
Frequency/Fs:	2.588 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.4 dB	Capture Time/No.Samples: 28 ms / 313601
Zone/Seg:	DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x1 RX	Zone Offset / Len: 9 / 20 Symbols

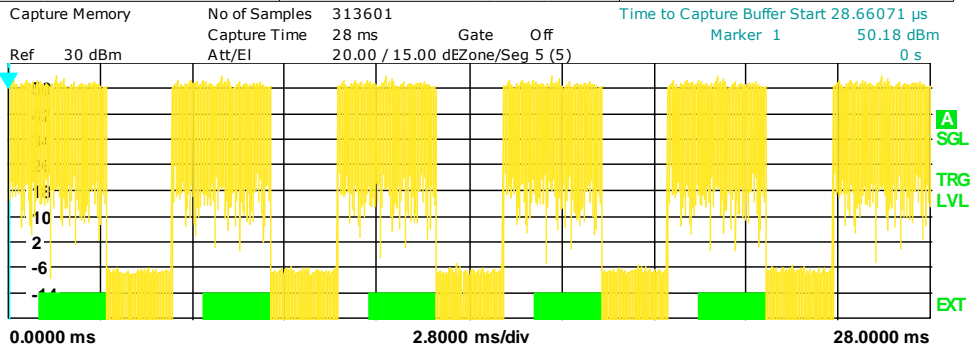

Burst Summary

Zone/Segment ID = B

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	32	Data	QPSK	104	43.17	-34.09
1	33	Data	QPSK	68	43.16	-34.18
1	34	Data	QPSK	102	43.17	-34.65
1	35	Data	16QAM	26	43.32	-36.24
Overall				300	43.21	-34.71
2	32	Data	QPSK	104	43.16	-34.26
2	33	Data	QPSK	68	43.15	-33.90
2	34	Data	QPSK	102	43.17	-35.32
2	35	Data	16QAM	26	43.32	-36.23
Overall				300	43.20	-34.83

Measurement Complete


Date: 11.FEB.2009 10:55:06

Notes: _____

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT	
Page 8 of 12		Complete <u> x </u>	
Job No.: 123182	Date: 11/02/2009	Preliminary: <u> </u>	
Specification: PT27	Temperature (°C): 24.5		
Tested By: Jari Veijola	Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER			
Configuration: TX FULL POWER BOTTOM CHANNEL TX2			
Sample Number: 1			
Location: NSN/ Oulu	RBW: Refer to plots	Measurement	
Detector type: Rms	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: _____		
Filter: _____	Cable #2: _____		
Receiver: 1	Cable #3: _____		
Attenuator #1: 17	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: ± 0.7 dB			

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.588 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 25.7 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=A, Seg=0	MIMO Meas Setup: 1 TX x1 RX	Zone Offset / Len: 1 / 8 Symbols	

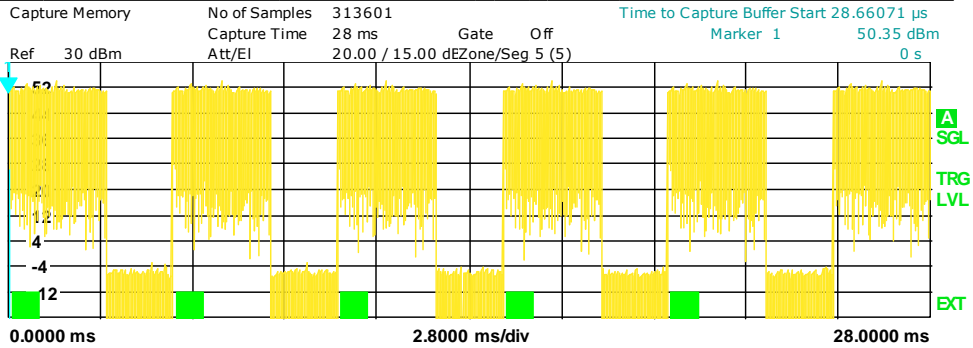


Burst Summary

Zone/Segment ID = A							
Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]	
1	0	MAP	QPSK	4	43.22	-30.43	
1	1	FCH	QPSK	52	43.28	-31.45	
1	2	Data	64QAM	60	43.49	-33.78	
Overall				116	43.33	-31.67	
2	0	MAP	QPSK	4	43.21	-34.67	
2	1	FCH	QPSK	52	43.27	-34.19	
2	2	Data	64QAM	60	43.47	-35.23	
Overall				116	43.32	-34.68	
3	0	MAP	QPSK	4	43.21	-33.54	
3	1	FCH	QPSK	52	43.27	-32.64	

Measurement Complete

Date: 11.FEB.2009 11:51:26

IEEE 802.16e-2005 MIMO			
Frequency/Fs:	2.588 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 25.7 dB	Capture Time/No.Samples: 28 ms / 313601
Zone/Seg:	DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x1 RX	Zone Offset / Len: 9 / 20 Symbols
Capture Memory	No of Samples 313601	Gate Off	Time to Capture Buffer Start 28.75000 µs
Ref 30 dBm	Capture Time 28 ms	Att/EI 20.00 / 15.00 dEZone/Seg 5 (5)	Marker 1 50.36 dBm

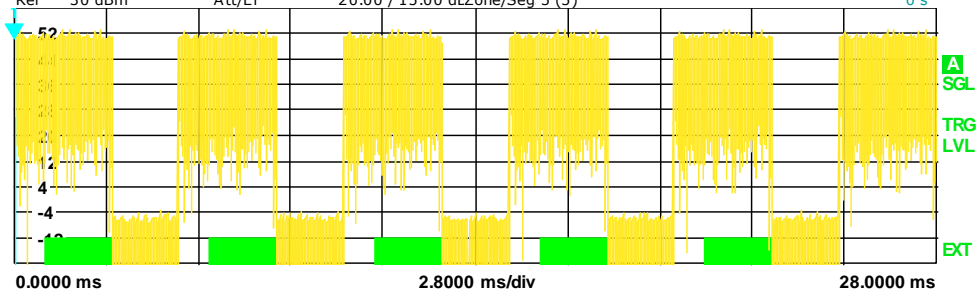

Burst Summary

Zone/Segment ID = B

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	32	Data	QPSK	104	43.23	-33.06
1	33	Data	QPSK	68	43.26	-34.17
1	34	Data	QPSK	102	43.26	-32.65
1	35	Data	16QAM	26	43.38	-33.48
Overall				300	43.28	-33.30
2	32	Data	QPSK	104	43.23	-32.64
2	33	Data	QPSK	68	43.26	-33.88
2	34	Data	QPSK	102	43.27	-32.32
2	35	Data	16QAM	26	43.38	-34.14
Overall				300	43.29	-33.17

Measurement Complete


Date: 11.FEB.2009 12:45:37

Notes: _____

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT	
Page 9 of 12		Complete <u> x </u>	
Job No.: 123182	Date: 11/02/2009	Preliminary: <u> </u>	
Specification: PT27	Temperature (°C): 24.5		
Tested By: Jari Veijola	Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER			
Configuration: TX FULL POWER CENTER CHANNEL TX1			
Sample Number: 1			
Location: NSN/ Oulu	RBW: Refer to plots	Measurement	
Detector type: Rms	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: _____		
Filter: _____	Cable #2: _____		
Receiver: 1	Cable #3: _____		
Attenuator #1: 17	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: ± 0.7 dB			

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.6365 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.3 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=A, Seg=0	MIMO Meas Setup: 1 TX x1 RX	Zone Offset / Len: 1 / 8 Symbols	

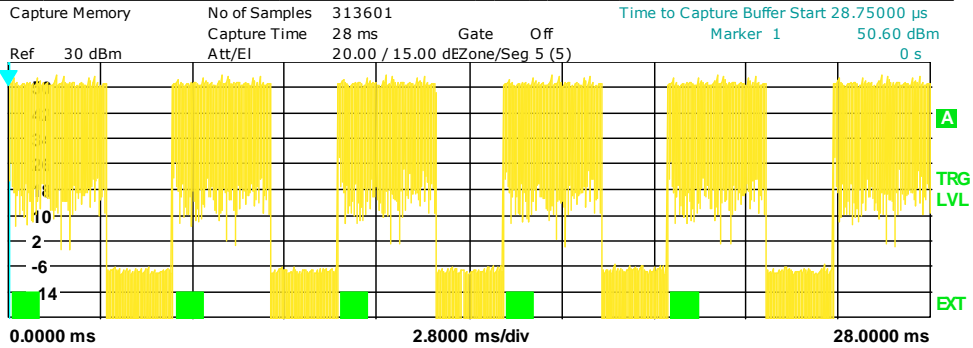


Burst Summary

Zone/Segment ID = A							
Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]	
1	0	MAP	QPSK	4	43.30	-35.94	
1	1	FCH	QPSK	52	43.32	-36.79	
1	2	Data	64QAM	60	43.53	-35.94	
Overall				116	43.39	-36.20	
2	0	MAP	QPSK	4	43.31	-35.97	
2	1	FCH	QPSK	52	43.32	-36.21	
2	2	Data	64QAM	60	43.53	-37.31	
Overall				116	43.39	-36.46	
3	0	MAP	QPSK	4	43.31	-37.31	
3	1	FCH	QPSK	52	43.32	-37.39	

Running ...

Date: 11.FEB.2009 08:54:05

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.6365 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.3 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x1 RX	Zone Offset / Len: 9 / 20 Symbols	

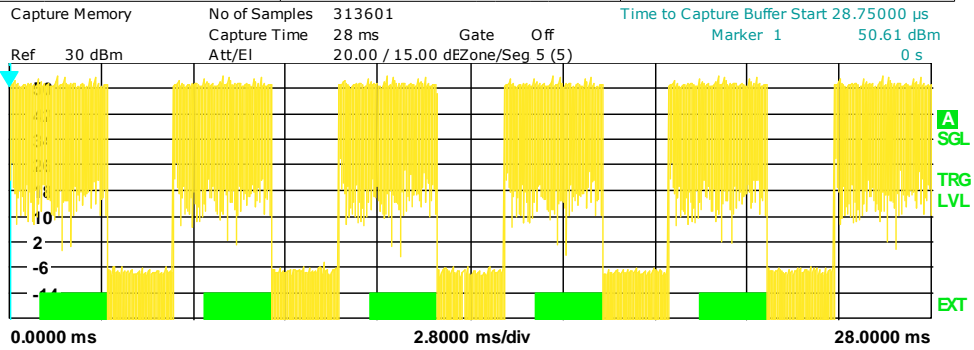

Burst Summary

Zone/Segment ID = B

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	32	Data	QPSK	104	43.34	-32.85
1	33	Data	QPSK	68	43.35	-32.44
1	34	Data	QPSK	102	43.35	-32.83
1	35	Data	16QAM	26	43.48	-31.87
Overall				300	43.38	-32.48
2	32	Data	QPSK	104	43.35	-33.35
2	33	Data	QPSK	68	43.36	-35.00
2	34	Data	QPSK	102	43.36	-33.16
2	35	Data	16QAM	26	43.49	-36.67
Overall				300	43.39	-34.33

Measurement Complete


Date: 11.FEB.2009 09:07:24

Notes: _____

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT	
Page 10 of 12		Complete <u> x </u>	
Job No.: 123182	Date: 10-11/02/2009	Preliminary: <u> </u>	
Specification: PT27	Temperature (°C): 24.5		
Tested By: Jari Veijola	Relative Humidity (%): 15		
E.U.T.: WIMAX TRANSMITTER			
Configuration: TX FULL POWER CENTER CHANNEL TX2			
Sample Number: 1			
Location: NSN/ Oulu	RBW: Refer to plots	Measurement	
Detector type: Rms	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: _____		
Filter: _____	Cable #2: _____		
Receiver: 1	Cable #3: _____		
Attenuator #1: 17	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: ± 0.7 dB			

IEEE 802.16e-2005 MIMO		
Frequency/Fs: 2.6365 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 25.7 dB	Capture Time/No.Samples: 28 ms / 313601
Zone/Seg: DL-PUSC, ID=A, Seg=0	MIMO Meas Setup: 1 TX x 1 RX	Zone Offset / Len: 1 / 8 Symbols

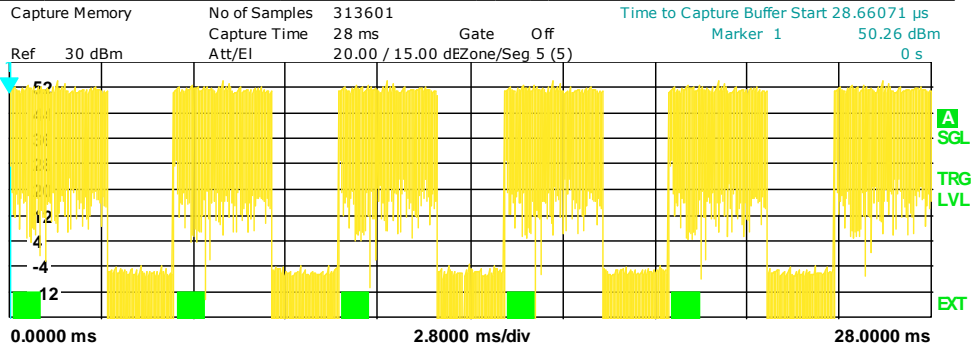

Burst Summary


Zone/Segment ID = A

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	0	MAP	QPSK	4	43.19	-37.72
1	1	FCH	QPSK	52	43.21	-36.59
1	2	Data	64QAM	60	43.42	-35.96
Overall				116	43.27	-36.70
2	0	MAP	QPSK	4	43.19	-37.71
2	1	FCH	QPSK	52	43.21	-37.41
2	2	Data	64QAM	60	43.42	-34.18
Overall				116	43.28	-36.12
3	0	MAP	QPSK	4	43.20	-38.66
3	1	FCH	QPSK	52	43.21	-38.08

Measurement Complete

Date: 10.FEB.2009 11:46:26

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.6365 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 25.6 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x1 RX	Zone Offset / Len: 9 / 20 Symbols	

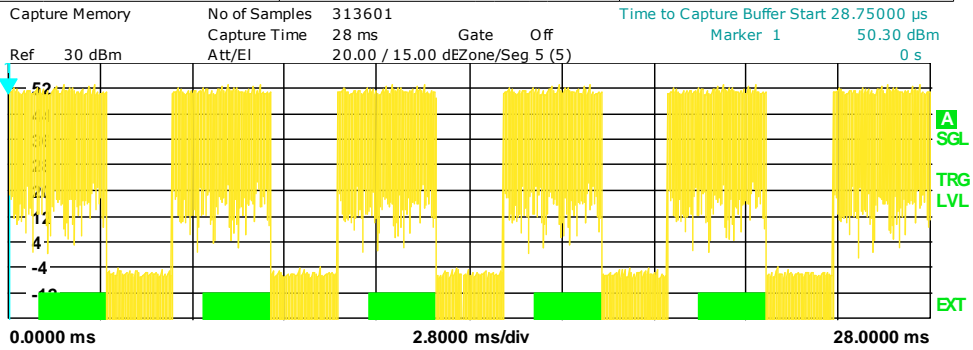

Burst Summary

Zone/Segment ID = B

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	32	Data	QPSK	104	43.13	-35.06
1	33	Data	QPSK	68	43.14	-36.54
1	34	Data	QPSK	102	43.15	-34.97
1	35	Data	16QAM	26	43.27	-38.67
Overall				300	43.17	-36.07
2	32	Data	QPSK	104	43.13	-33.82
2	33	Data	QPSK	68	43.14	-32.68
2	34	Data	QPSK	102	43.15	-35.62
2	35	Data	16QAM	26	43.27	-35.98
Overall				300	43.17	-34.31

Measurement Complete


Date: 11.FEB.2009 11:22:46

Notes: _____

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT	
Page 11 of 12		Complete <u> x </u>	
Job No.: 123182	Date: 11/02/2009	Preliminary: <u> </u>	
Specification: PT27	Temperature (°C): 24.5		
Tested By: Jari Veijola	Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER			
Configuration: TX FULL POWER HIGHEST CHANNEL TX1			
Sample Number: 1			
Location: NSN/Oulu	RBW: Refer to plots	Measurement	
Detector type: Rms	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: _____		
Filter: _____	Cable #2: _____		
Receiver: 1	Cable #3: _____		
Attenuator #1: 17	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: ± 0.7 dB			

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.685 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.3 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=A, Seg=0	MIMO Meas Setup: 1 TX x1 RX	Zone Offset / Len: 1 / 8 Symbols	

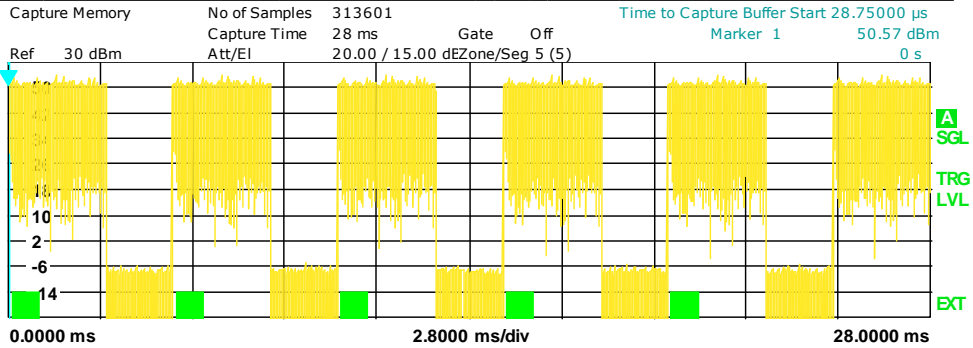


Burst Summary

Zone/Segment ID = A							
Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]	
1	0	MAP	QPSK	4	43.47	-36.71	
1	1	FCH	QPSK	52	43.49	-32.63	
1	2	Data	64QAM	60	43.73	-32.27	
Overall				116	43.57	-33.46	
2	0	MAP	QPSK	4	43.49	-37.59	
2	1	FCH	QPSK	52	43.51	-38.03	
2	2	Data	64QAM	60	43.73	-38.16	
Overall				116	43.58	-37.92	
3	0	MAP	QPSK	4	43.48	-39.30	
3	1	FCH	QPSK	52	43.50	-40.18	

Measurement Complete

Date: 11.FEB.2009 08:39:43

IEEE 802.16e-2005 MIMO			
Frequency/Fs:	2.685 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 24.3 dB	Capture Time/No.Samples: 28 ms / 313601
Zone/Seg:	DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x1 RX	Zone Offset / Len: 9 / 20 Symbols

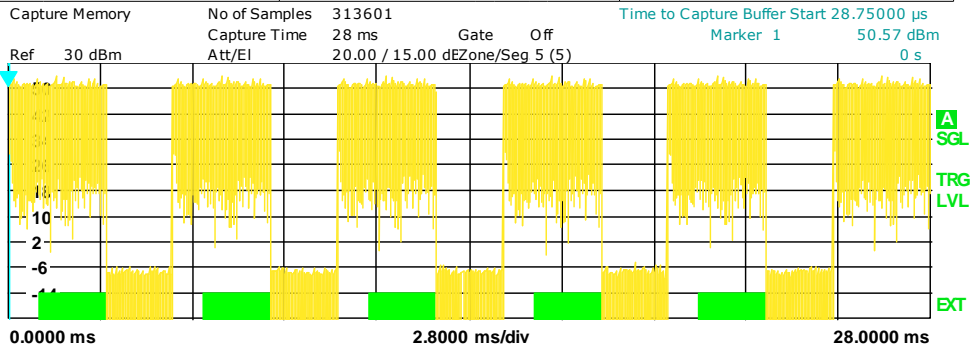

Burst Summary

Zone/Segment ID = B

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	32	Data	QPSK	104	43.52	-37.71
1	33	Data	QPSK	68	43.54	-37.82
1	34	Data	QPSK	102	43.55	-37.99
1	35	Data	16QAM	26	43.67	-38.08
Overall				300	43.57	-37.90
2	32	Data	QPSK	104	43.52	-32.54
2	33	Data	QPSK	68	43.54	-31.92
2	34	Data	QPSK	102	43.55	-34.42
2	35	Data	16QAM	26	43.67	-36.99
Overall				300	43.57	-33.56

Measurement Complete


Date: 11.FEB.2009 08:37:47

Notes: _____

Nemko Oy, Finland

Data Plot		RF POWER OUTPUT	
Page 12 of 12		Complete <u> x </u>	
Job No.: 123182	Date: 10-11/02/2009	Preliminary: <u> </u>	
Specification: PT27	Temperature (°C): 24.5		
Tested By: Jari Veijola	Relative Humidity (%): 15		
E.U.T.: WiMAX TRANSMITTER			
Configuration: TX FULL POWER HIGHEST CHANNEL TX2			
Sample Number: 1			
Location: NSN/Oulu	RBW: Refer to plots	Measurement	
Detector type: Rms	VBW: Refer to plots	Distance: N/A m	
Test Equipment Used			
Antenna: _____	Directional Coupler: _____		
Pre-Amp: _____	Cable #1: _____		
Filter: _____	Cable #2: _____		
Receiver: 1	Cable #3: _____		
Attenuator #1: 17	Cable #4: _____		
Attenuator #2: _____	Mixer: _____		
Additional equipment used: _____			
Measurement Uncertainty: ± 0.7 dB			

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.685 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 25.7 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=A, Seg=0	MIMO Meas Setup: 1 TX x1 RX	Zone Offset / Len: 1 / 8 Symbols	

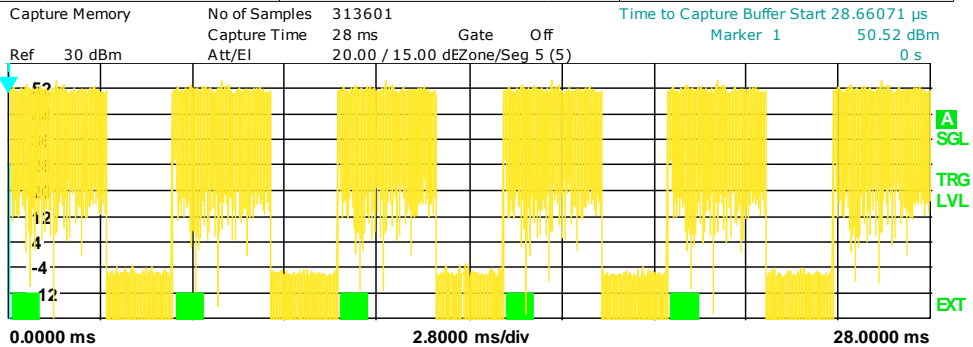

Burst Summary


Zone/Segment ID = A

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	0	MAP	QPSK	4	43.44	-36.85
1	1	FCH	QPSK	52	43.45	-35.09
1	2	Data	64QAM	60	43.66	-35.92
Overall				116	43.52	-35.90
2	0	MAP	QPSK	4	43.44	-33.35
2	1	FCH	QPSK	52	43.45	-30.25
2	2	Data	64QAM	60	43.66	-32.83
Overall				116	43.52	-31.92
3	0	MAP	QPSK	4	43.43	-37.11
3	1	FCH	QPSK	52	43.44	-37.96

Measurement Complete

Date: 10.FEB.2009 13:09:07

IEEE 802.16e-2005 MIMO			
Frequency/Fs: 2.685 GHz / 11.2 MHz	Signal Lvl. Setting/Ext. Att: 20 dBm / 25.7 dB	Capture Time/No.Samples: 28 ms / 313601	
Zone/Seg: DL-PUSC, ID=B, Seg=0	MIMO Meas Setup: 2 TX x1 RX	Zone Offset / Len: 9 / 20 Symbols	

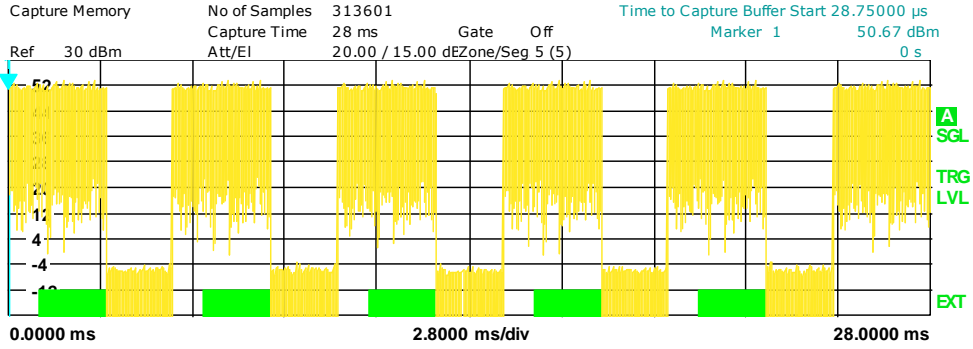

Burst Summary

Zone/Segment ID = B

Frame	Burst ID	Type	Modulation	No.of Slots	Power[dBm]	EVM[dB]
1	32	Data	QPSK	104	43.53	-36.88
1	33	Data	QPSK	68	43.53	-36.94
1	34	Data	QPSK	102	43.54	-36.05
1	35	Data	16QAM	26	43.68	-34.55
Overall				300	43.57	-35.99
2	32	Data	QPSK	104	43.54	-33.81
2	33	Data	QPSK	68	43.54	-37.40
2	34	Data	QPSK	102	43.54	-32.88
2	35	Data	16QAM	26	43.68	-36.04
Overall				300	43.57	-34.68

Measurement Complete

Date: 11.FEB.2009 12:41:00

Notes: _____

4. 99% Occupied Bandwidth

NAME OF TEST: Occupied Bandwidth	PARA.NO.: 2.1049, (i)
TESTED BY: Jari Veijola	DATE: 10-11/02/2009

Test Results: Complies.

Test Data: See attached plot(s).

Modulation Type	Frequency (MHz)	Measured 99% Occupied Bandwidth (MHz)
TX1 Test model 198157	2636.0	9.143
TX2 Test model 198157	2636.0	9.199

Note: Test model 198157 includes modulation types; QPSK, 16-QAM and 64-QAM, duty cycle 60%

Equipment used: 1, 7, 10

Measurement Uncertainty: ± 0.7 dB.


Temperature: 24.5 °C.

Relative Humidity: 15 %.

Test Data – 99% Occupied Bandwidth

Nemko Oy, Finland

Data Plot		99% Occupied Bandwidth		Complete <u> x </u>	
Page 1 of 2				Preliminary: <u> </u>	
Job No.:	123182	Date:	11/02/2009		
Specification:	PT27	Temperature (°C):	24.5		
Tested By:	Jari Veijola	Relative Humidity (%):	15		
E.U.T.:	WiMAX TRANSMITTER				
Configuration:	TX FULL POWER CENTER CHANNEL TX1				
Sample Number:	1				
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement	
Detector type:	Rms	VBW:	Refer to plots	Distance:	N/A m
Test Equipment Used					
Antenna:		Directional Coupler:			
Pre-Amp:		Cable #1:			
Filter:		Cable #2:			
Receiver:	1	Cable #3:			
Attenuator #1:	17	Cable #4:			
Attenuator #2:		Mixer:			
Additional equipment used:					
Measurement Uncertainty:	± 0.7 dB				

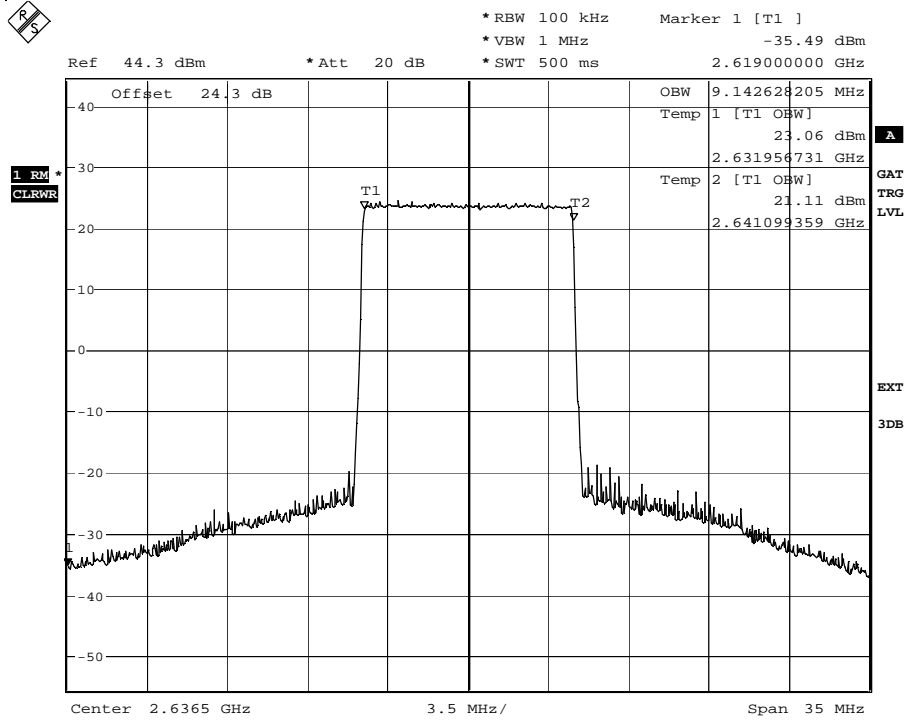


Date: 11.FEB.2009 08:03:42

Notes: _____

Nemko Oy, Finland

Data Plot		99% Occupied Bandwidth			
Page 2 of 2				Complete <u> x </u>	
Job No.:	123182	Date:	10/02/2009	Preliminary:	<u> </u>
Specification:	PT27	Temperature (°C):	24.5		
Tested By:	Jari Veijola	Relative Humidity (%):	15		
E.U.T.:	WiMAX TRANSMITTER				
Configuration:	TX FULL POWER CENTER CHANNEL TX2				
Sample Number:	1				
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement	
Detector type:	Rms	VBW:	Refer to plots	Distance:	N/A m
Test Equipment Used					
Antenna:	<u> </u>	Directional Coupler:	<u> </u>		
Pre-Amp:	<u> </u>	Cable #1:	<u> </u>		
Filter:	<u> </u>	Cable #2:	<u> </u>		
Receiver:	1	Cable #3:	<u> </u>		
Attenuator #1:	17	Cable #4:	<u> </u>		
Attenuator #2:	<u> </u>	Mixer:	<u> </u>		
Additional equipment used:	<u> </u>				
Measurement Uncertainty:	± 0.7 dB				

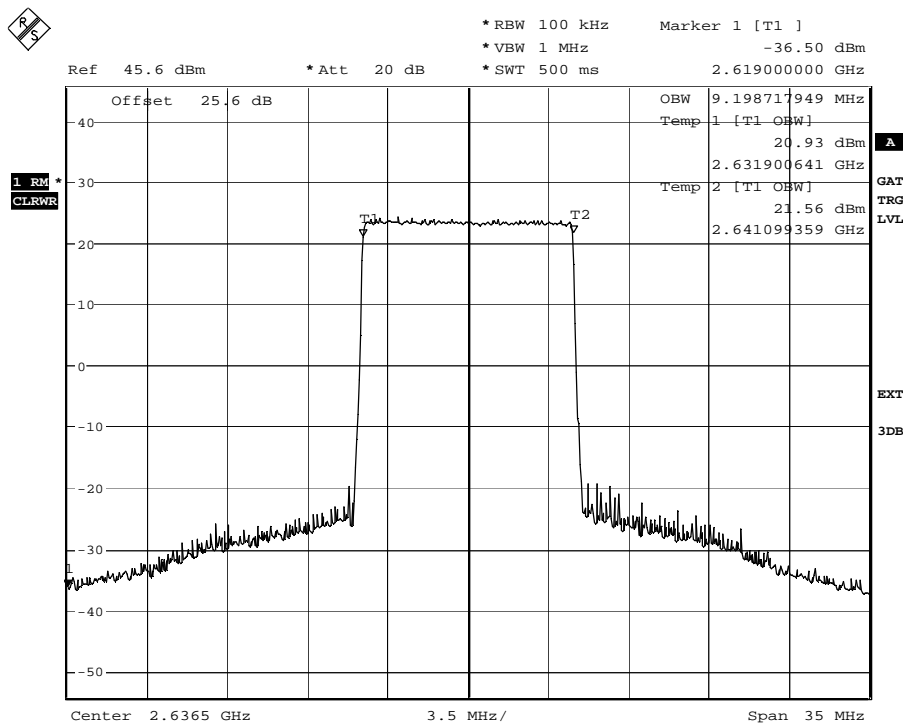

Date: 10.FEB.2009 13:21:35

Notes: _____

5. Spurious Emissions at Antenna Terminals

NAME OF TEST: Spurious Emissions @ Antenna Terminals	PARA.NO.: 27.53(I), 2.1051
TESTED BY: Jari Veijola	DATE: 10-18/02/2009

Test Results: Complies.

Test Data: See attached plots.

Frequency (MHz)	Modulation	Spurious Emission (dBm) rms det.
Tx1 325.327	Test model 198157	-37.77
Tx2 325.327	Test model 198157	-37.82
Tx1+TX2 325.327	Test model 198157	-30.62

Lower Band Edge

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
TX1 2583.000	Test model 198157	-26.45
TX2 2583.000	Test model 198157	-21.86
TX1+TX2 2583.000	Test model 198157	-19.20

Upper Band Edge

Frequency (MHz)	Modulation	Peak Emission Level (dBm) rms det.
TX1 2690.000	Test model 198157	-23.16
TX2 2691.163	Test model 198157	-27.74
TX1+TX2 2690.000	Test model 198157	-18.91

Equipment used: 1, 7, 9, 10, 15, 16, 17, 33

Measurement Uncertainty: ± 0.7 dB.

Temperature: 24.5 °C.

Relative Humidity: 14 %.


Note: Test model 198157 includes modulation types; QPSK, 16-QAM and 64-QAM, duty cycle 60%

The spectrum was searched from 9 kHz to the 10th harmonic of the carrier.

Test Data – Spurious Emissions

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 1 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	18/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER LOWEST CHANNEL TX1			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

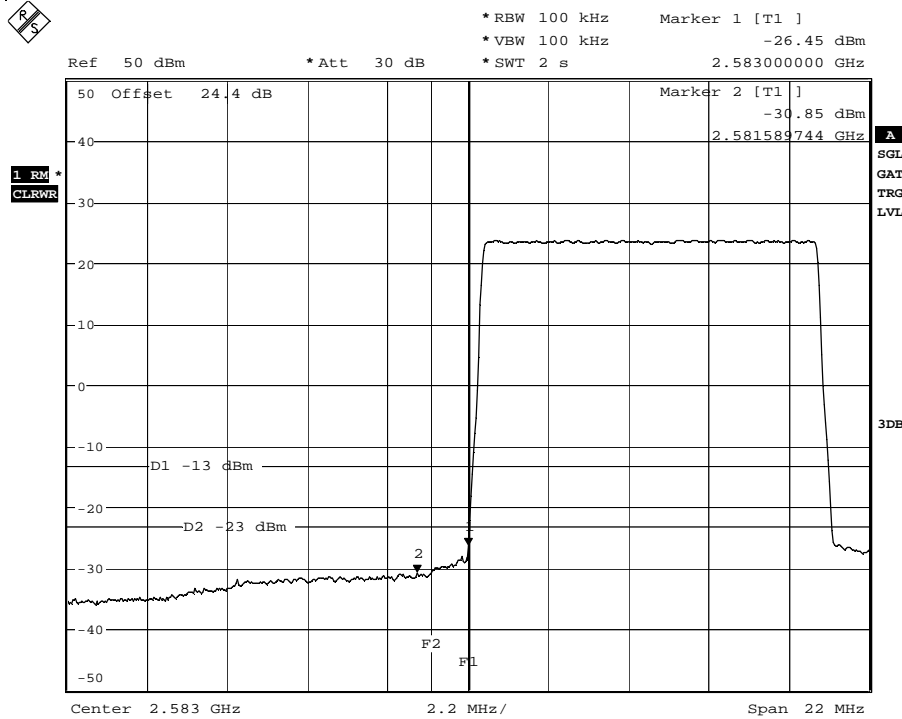


Date: 18.FEB.2009 07:59:18

Notes: Tx 2588 MHz, LOWER BANDEDGE. RBW of 100kHz was used 1-11MHz from band edge and the limit was adjusted from -13dBm to -23dBm for compensate the reduced bandwidth.

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 2 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	18/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER LOWEST CHANNEL TX2			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	± 0.7 dB			

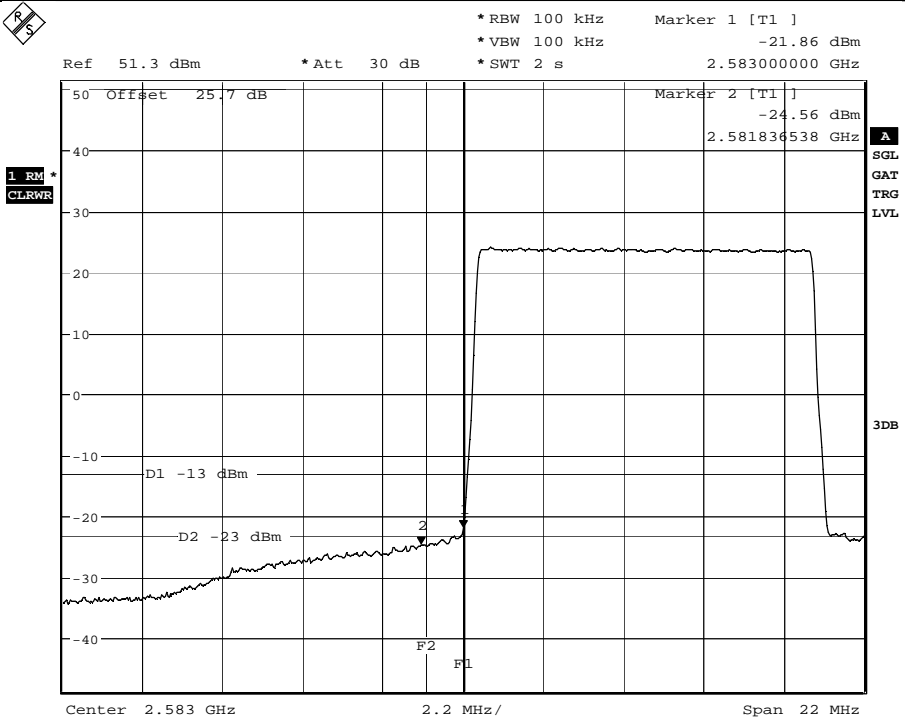


Date: 18.FEB.2009 08:08:07

Notes: Tx 2588 MHz, LOWER BANDEDGE. RBW of 100kHz was used 1-11MHz from band edge and the limit was adjusted from -13dBm to -23dBm for compensate the reduced bandwidth.

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 3 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	18/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER LOWEST CHANNEL Combined			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	Refer to plots	Measurement
Detector type:	Rms	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

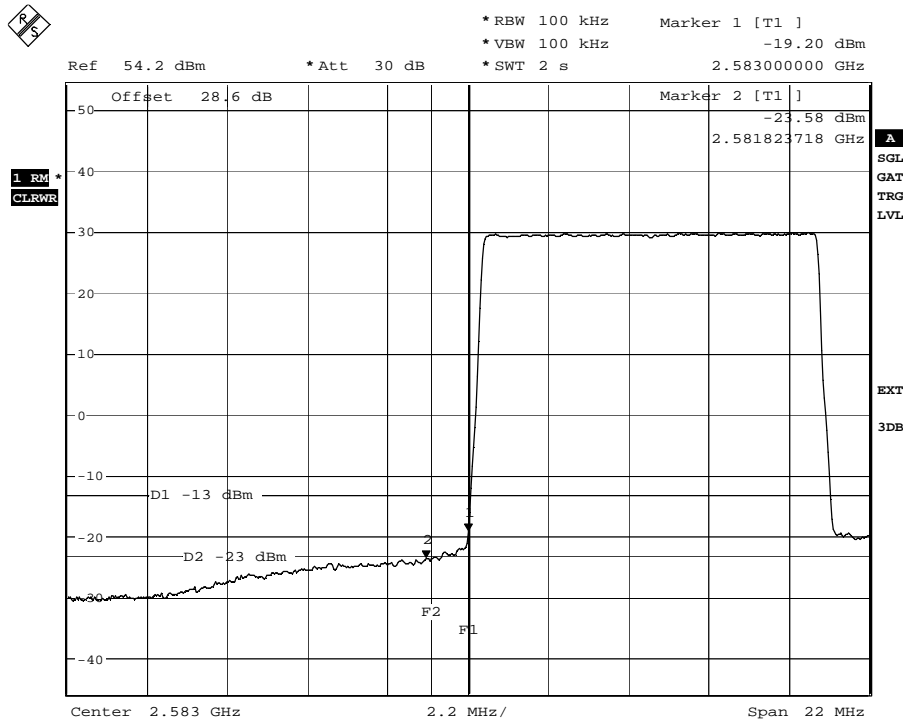


Date: 18.FEB.2009 08:25:55

Notes: Tx 2588 MHz, LOWER BANDEDGE. RBW of 100kHz was used 1-11MHz from band edge and the limit was adjusted from -13dBm to -23dBm for compensate the reduced bandwidth.

Test Data – Spurious Emissions

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <input checked="" type="checkbox"/>
Page 4 of 17				Preliminary: <input type="checkbox"/>
Job No.:	123182	Date:	12/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER HIGHEST CHANNEL TX1			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	Refer to plots	Measurement Distance: N/A m
Detector type:	RMS	VBW:	Refer to plots	
Test Equipment Used				
Antenna:		Directional Coupler:		
Pre-Amp:		Cable #1:		
Filter:		Cable #2:		
Receiver:	1	Cable #3:		
Attenuator #1:	17	Cable #4:		
Attenuator #2:		Mixer:		
Additional equipment used: _____				
Measurement Uncertainty: ± 0.7 dB				

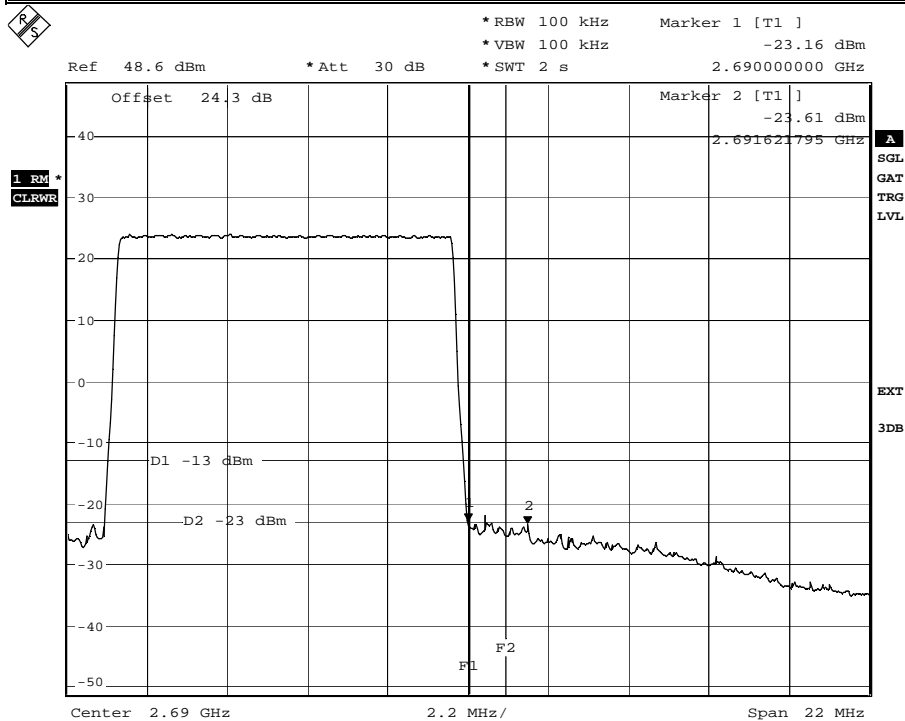


Date: 12.FEB.2009 07:01:23

Notes: Tx 2685 MHz, UPPER BANDEDGE . RBW of 100kHz was used 1-11MHz from band edge and the limit was adjusted from -13dBm to -23dBm for compensate the reduced bandwidth.

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 5 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	18/02/2009	
Specification:	PT27	Temperature (°C):	24.5	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER HIGHEST CHANNEL TX2			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	Refer to plots	Measurement Distance: <u> N/A </u> m
Detector type:	RMS	VBW:	Refer to plots	
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	± 0.7 dB			

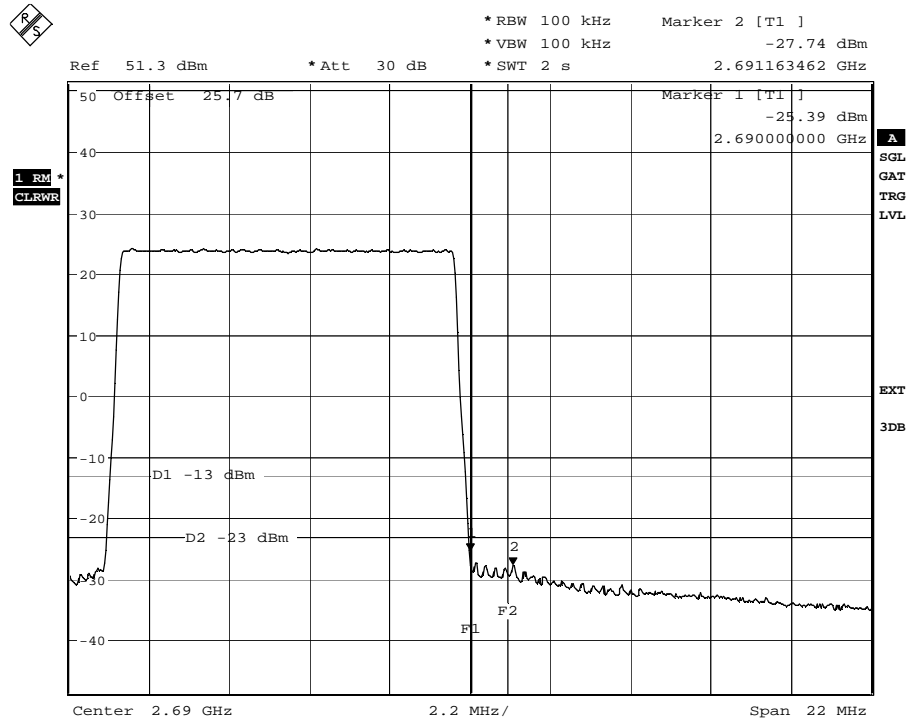


Date: 18.FEB.2009 08:15:39

Notes: Tx 2685 MHz, UPPER BANDEDGE . RBW of 100kHz was used 1-11MHz from band edge and the limit was adjusted from -13dBm to -23dBm for compensate the reduced bandwidth.

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 6 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	18/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	15	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER HIGHEST CHANNEL Combined			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

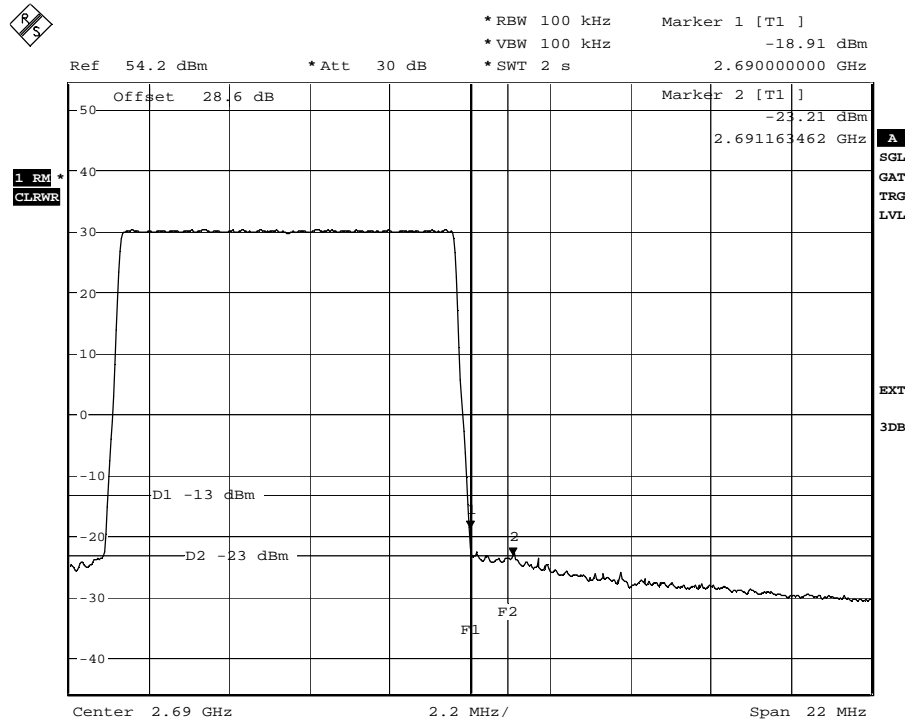


Date: 18.FEB.2009 08:21:12

Notes: Tx 2685 MHz, UPPER BANDEDGE . RBW of 100kHz was used 1-11MHz from band edge and the limit was adjusted from -13dBm to -23dBm for compensate the reduced bandwidth.

Test Data – Spurious Emissions

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 3 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX1			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement Distance: <u> N/A </u> m
Detector type:	RMS	VBW:	Refer to plots	
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	± 0.7 dB			

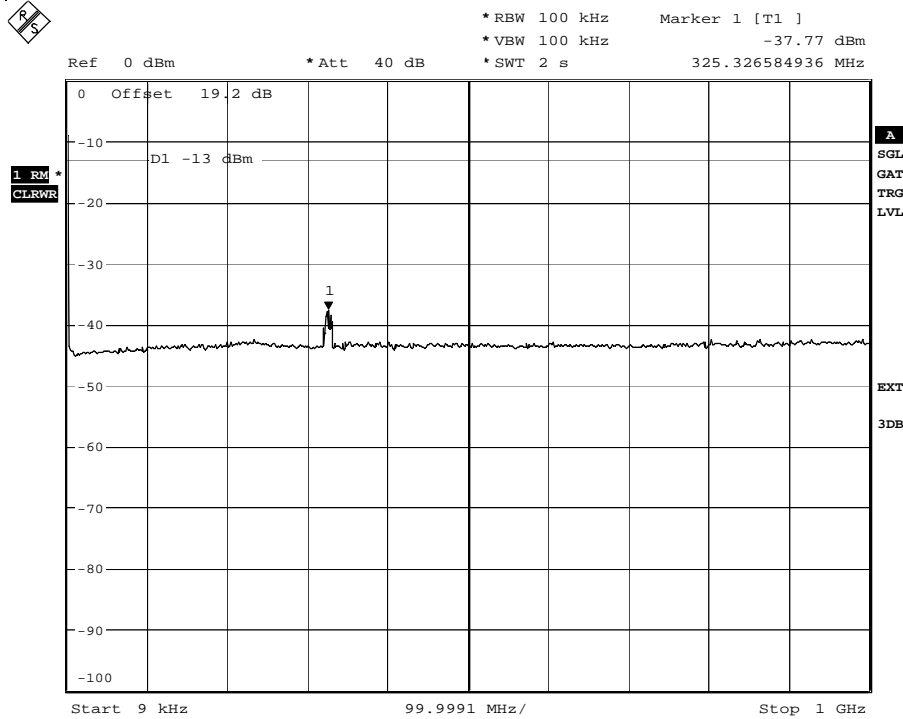


Date: 10.FEB.2009 11:21:42

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 7 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX2			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

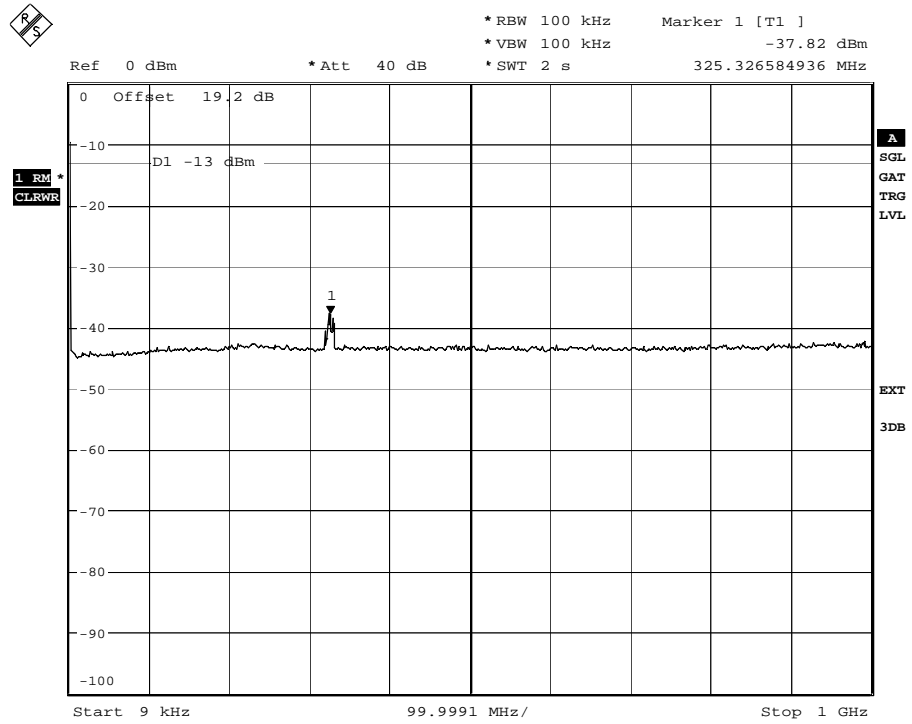


Date: 10.FEB.2009 11:16:19

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 8 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL Combined			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	_____	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

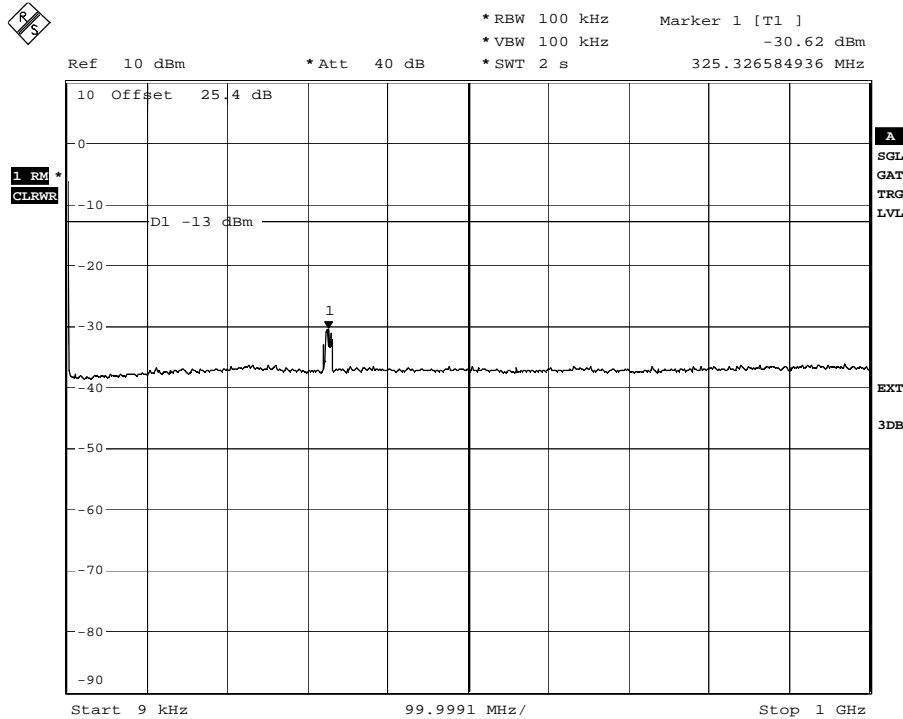


Date: 10.FEB.2009 08:10:05

Notes: Tx 2636 MHz

Test Data – Spurious Emissions

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 9 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX1			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:		Directional Coupler:		
Pre-Amp:		Cable #1:		
Filter:	-	Cable #2:		
Receiver:	1	Cable #3:		
Attenuator #1:	17	Cable #4:		
Attenuator #2:		Mixer:		
Additional equipment used:				
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

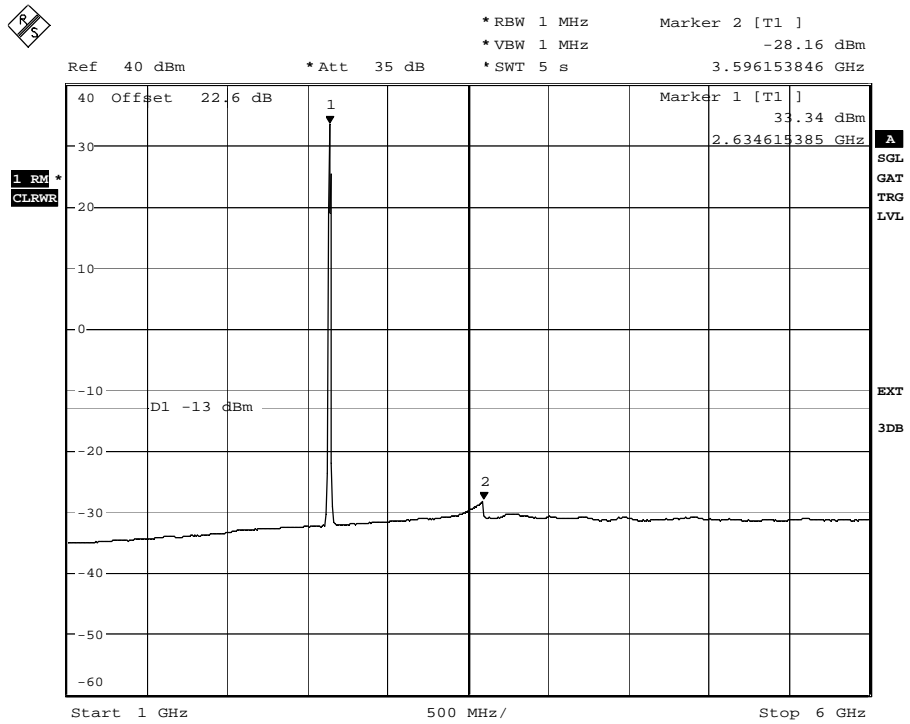


Date: 10.FEB.2009 10:54:27

Notes: Tx 2636 MHz

Test Data – Spurious Emissions

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 10 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX2			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement Distance: <u> N/A </u> m
Detector type:	RMS	VBW:	Refer to plots	
Test Equipment Used				
Antenna:		Directional Coupler:		
Pre-Amp:		Cable #1:		
Filter:	-	Cable #2:		
Receiver:	1	Cable #3:		
Attenuator #1:	17	Cable #4:		
Attenuator #2:		Mixer:		
Additional equipment used:				
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

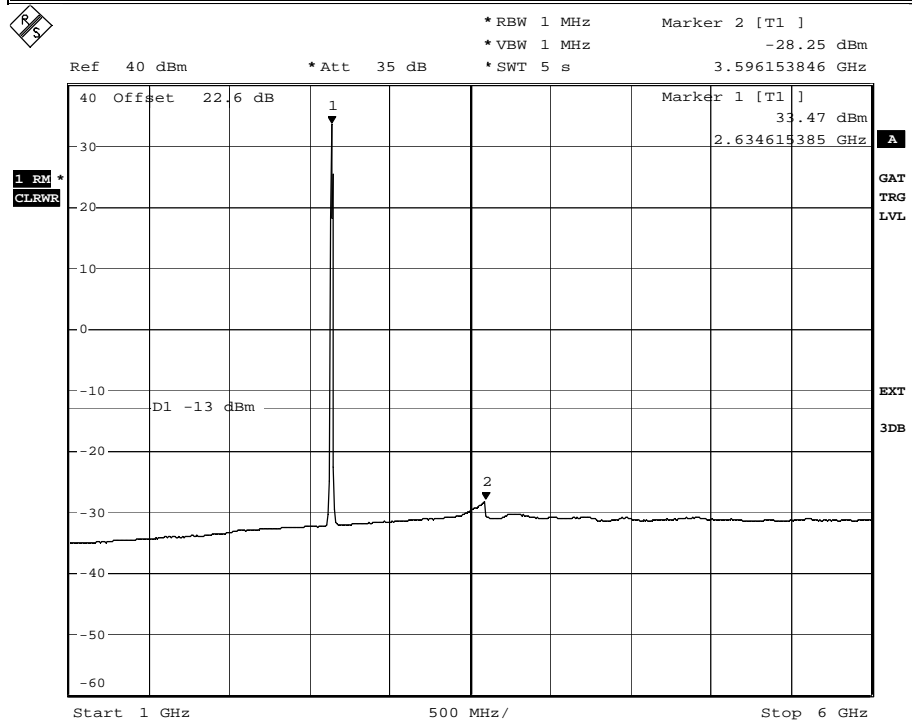


Date: 10.FEB.2009 11:04:26

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 11 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL Combined			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	-	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	17	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

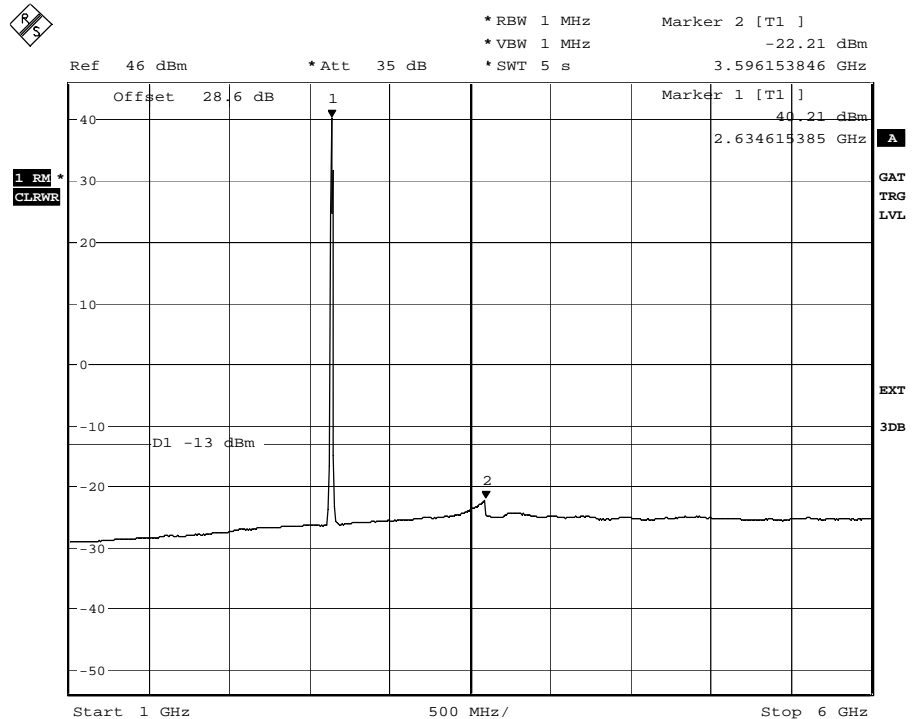


Date: 10.FEB.2009 08:19:34

Notes: Tx 2636 MHz

Test Data – Spurious Emissions

Nemko Oy, Finland

<u>Data Plot</u>		<u>Spurious Emissions at Antenna Terminals</u>		Complete <u>x</u>
Page <u>12</u> of <u>17</u>				Preliminary: _____
Job No.: <u>123182</u>		Date: <u>10/02/2009</u>		
Specification: <u>PT27</u>		Temperature (°C): <u>25</u>		
Tested By: <u>Jari Veijola</u>		Relative Humidity (%): <u>14</u>		
E.U.T.: <u>WIMAX TRANSMITTER</u>				
Configuration: <u>TX FULL POWER MIDDLE CHANNEL TX1</u>				
Sample Number: <u>1</u>				
Location: <u>NSN/ Oulu</u>		RBW: <u>Refer to plots</u>		Measurement
Detector type: <u>RMS</u>		VBW: <u>Refer to plots</u>		Distance: <u>N/A</u> m
Test Equipment Used				
Antenna: _____		Directional Coupler: _____		
Pre-Amp: _____		Cable #1: _____		
Filter: <u>13</u>		Cable #2: _____		
Receiver: <u>1</u>		Cable #3: _____		
Attenuator #1: <u>15</u>		Cable #4: _____		
Attenuator #2: _____		Mixer: _____		
Additional equipment used: _____				
Measurement Uncertainty: <u>±0.7 dB</u>				

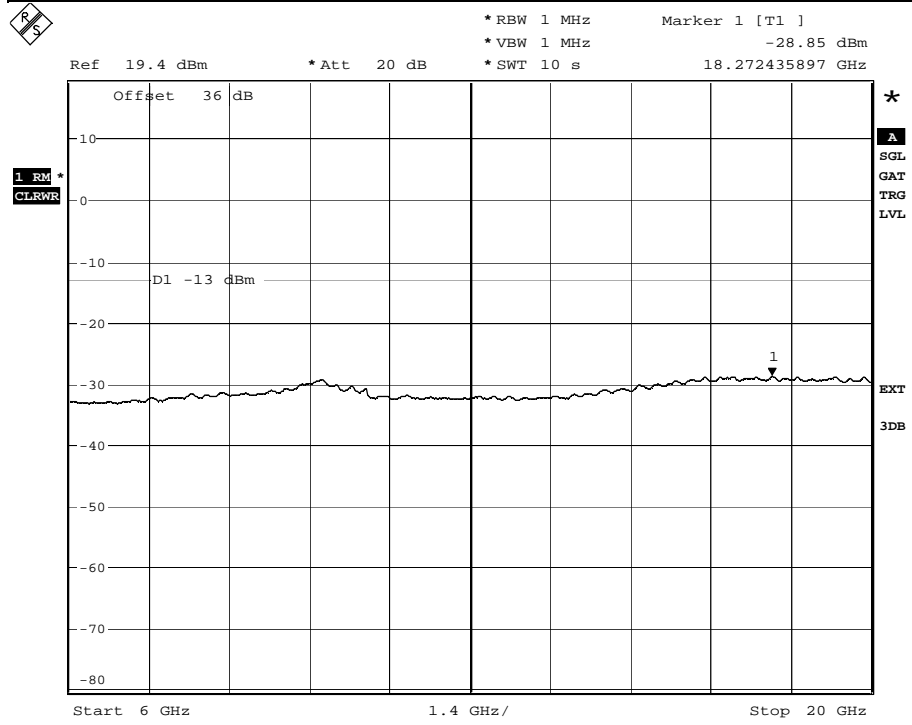


Date: 10.FEB.2009 09:20:50

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 13 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX2			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	13	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	15	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

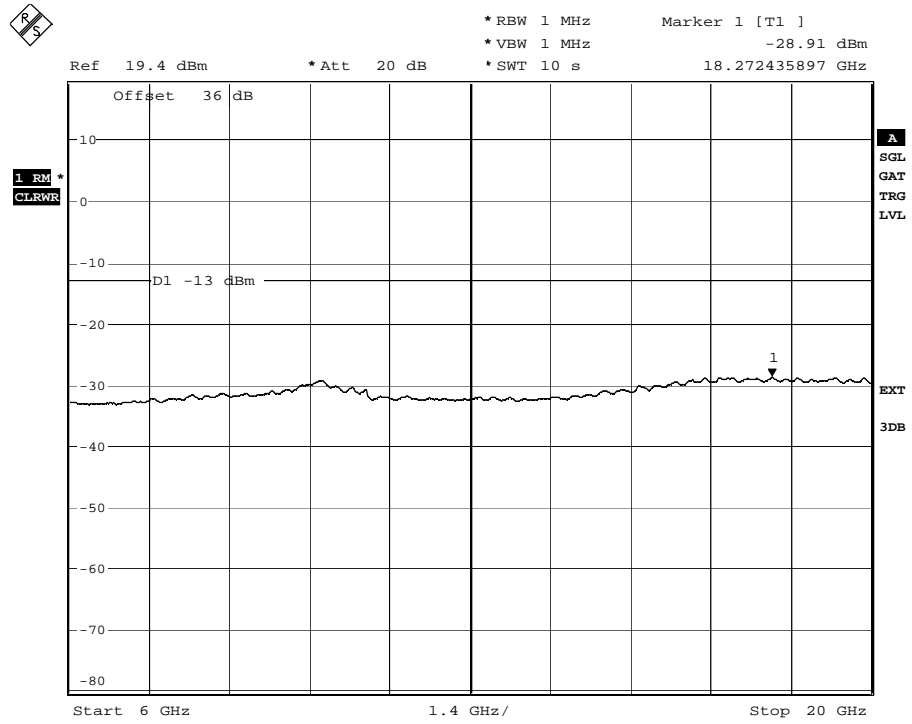


Date: 10.FEB.2009 09:14:44

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 14 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL Combined			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	13	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	15	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

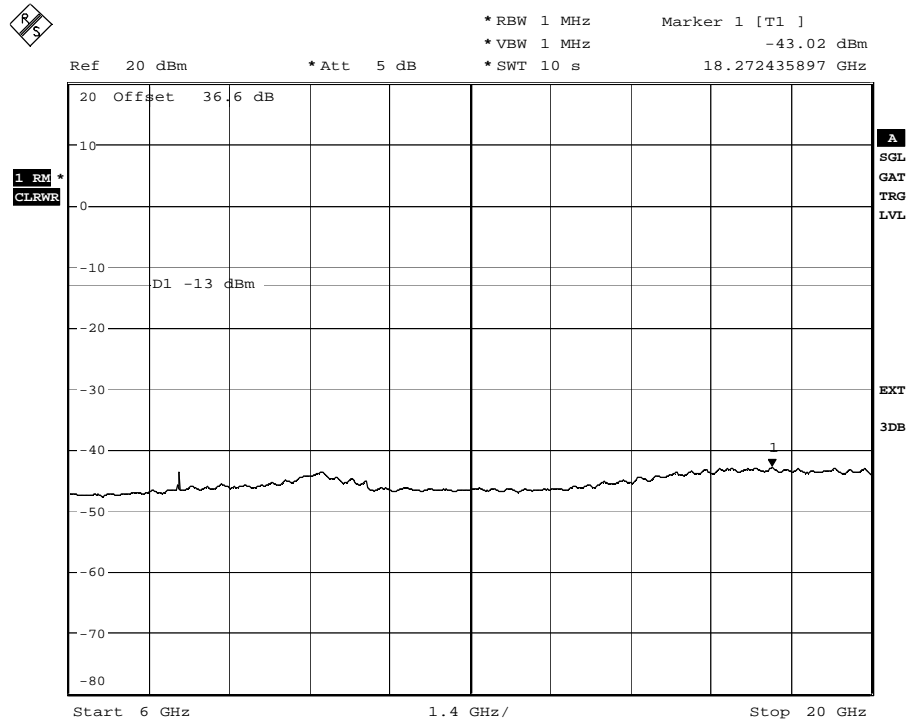


Date: 10.FEB.2009 08:22:52

Notes: Tx 2636 MHz

Test Data – Spurious Emissions

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <input checked="" type="checkbox"/>
Page 15 of 17				Preliminary: <input type="checkbox"/>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX1			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: N/A m
Test Equipment Used				
Antenna:		Directional Coupler:		
Pre-Amp:		Cable #1:		
Filter:	13	Cable #2:		
Receiver:	1	Cable #3:		
Attenuator #1:	15	Cable #4:		
Attenuator #2:		Mixer:		
Additional equipment used:				
Measurement Uncertainty:	±0.7 dB			

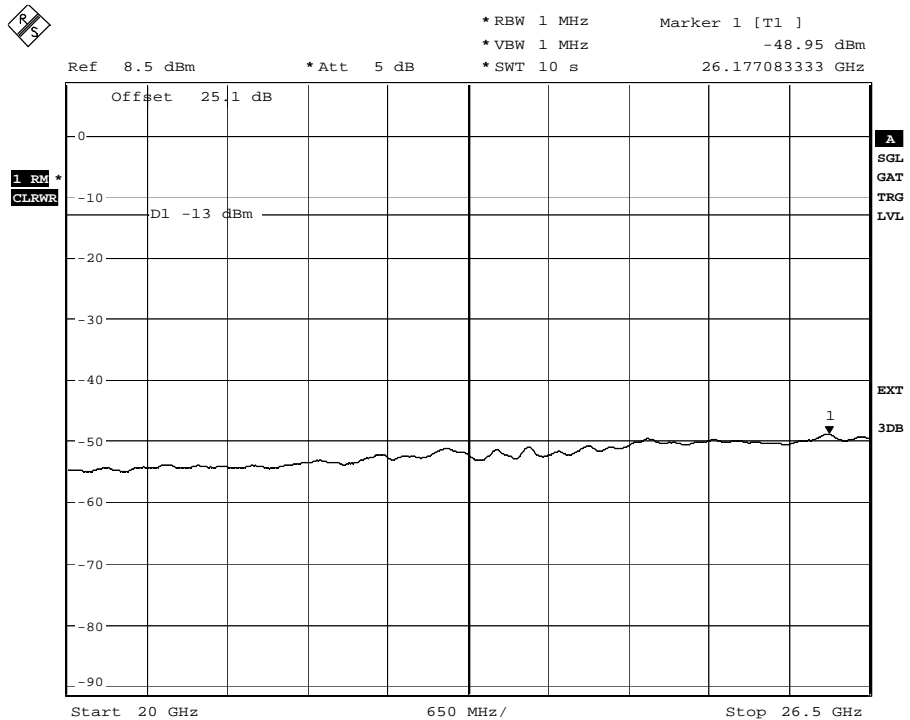


Date: 10.FEB.2009 08:48:11

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 16 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL TX2			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	13	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	15	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

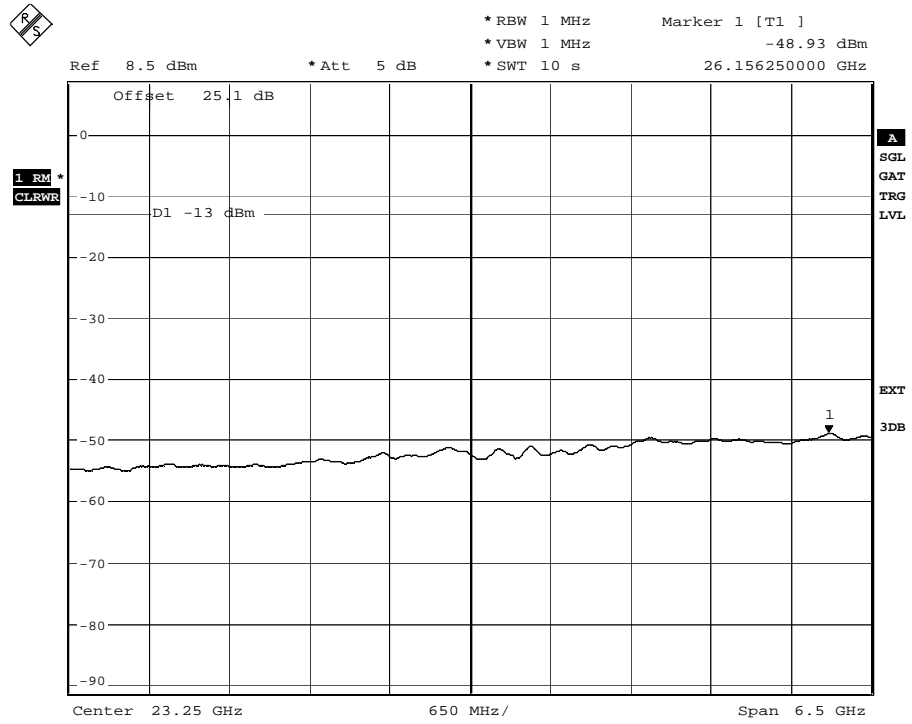


Date: 10.FEB.2009 08:52:46

Notes: Tx 2636 MHz

Nemko Oy, Finland

Data Plot		Spurious Emissions at Antenna Terminals		Complete <u> x </u>
Page 17 of 17				Preliminary: <u> </u>
Job No.:	123182	Date:	10/02/2009	
Specification:	PT27	Temperature (°C):	25	
Tested By:	Jari Veijola	Relative Humidity (%):	14	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL Combined			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	Refer to plots	Measurement
Detector type:	RMS	VBW:	Refer to plots	Distance: <u> N/A </u> m
Test Equipment Used				
Antenna:	_____	Directional Coupler:	_____	
Pre-Amp:	_____	Cable #1:	_____	
Filter:	13	Cable #2:	_____	
Receiver:	1	Cable #3:	_____	
Attenuator #1:	15	Cable #4:	_____	
Attenuator #2:	_____	Mixer:	_____	
Additional equipment used:	_____			
Measurement Uncertainty:	<u> ± 0.7 dB </u>			

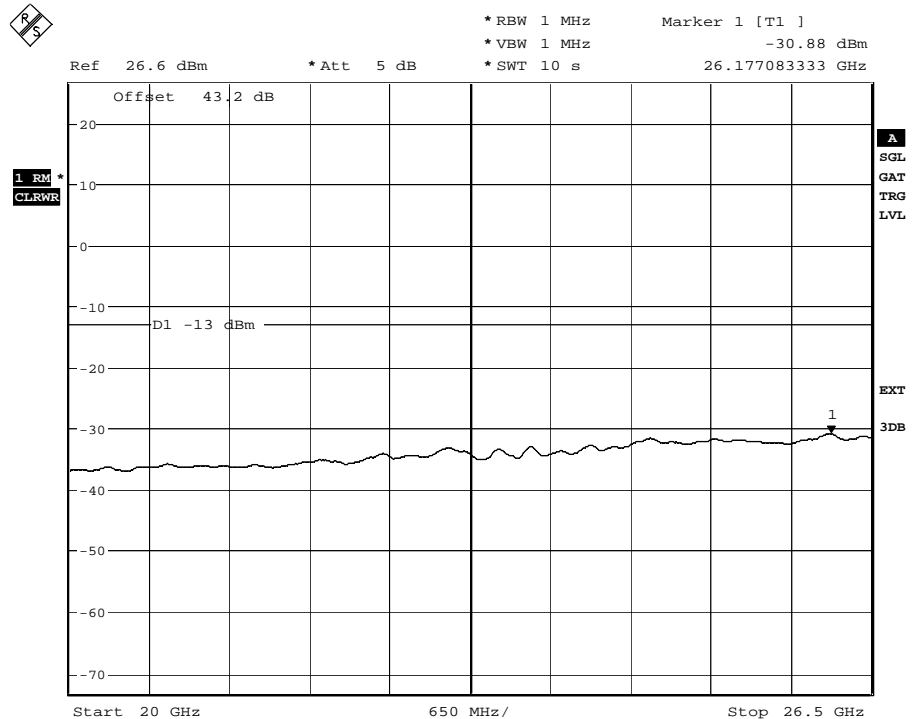

Date: 10.FEB.2009 08:25:52

Notes: Tx 2636 MHz

6. Field Strength of Spurious

NAME OF TEST: Field Strength of Spurious Emissions	PARA.NO.: 27.53(I), 2.1053
TESTED BY: Jarmo Koskela	DATE: 19/02/2009

Test Results: Complies.

Test Data: See attached table.

Frequency (MHz)	Spurious Emission EIRP (dBm) ave
All	More than 20 dB below limit -13 dBm

Equipment used: 19, 20, 21, 22, 24, 29, 30, 31,32

Measurement Uncertainty: ± 5.2 dB.

Temperature: 23 °C.

Relative Humidity: 10 %.

Note: Test model 198157 includes modulation types; QPSK, 16-QAM and 64-QAM, duty cycle 60%

The spectrum was searched from 30 MHz to the 10th harmonic of the carrier.

Test Data – Radiated Emissions

Nemko Oy, Finland


<u>Data Plot</u>	<u>Radiated Emissions Substitution Method</u>	Complete <u> x </u>						
Page 1 of 5		Preliminary: <u> </u>						
Job No.: 123182	Date: <u>19/02/2009</u>							
Specification: PT27	Temperature (°C): <u>23</u>							
Tested By: Jarmo Koskela	Relative Humidity (%): <u>10</u>							
E.U.T.: <u>WIMAX TRANSMITTER</u>								
Configuration: <u>TX FULL POWER MIDDLE CHANNEL</u>								
Sample Number: <u>1</u>								
Location: <u>NSN/ Oulu</u>	RBW: <u>1 MHz</u>	Measurement						
Detector type: <u>Ave</u>	VBW: <u>1 MHz</u>	Distance: <u>3</u> m						
Test Equipment Used								
Antenna: <u>21, 22, 24</u>	Directional Coupler:							
Pre-Amp: <u>29, 30</u>	Cable #1: <u> </u>							
Filter: <u> </u>	Cable #2: <u> </u>							
Receiver: <u>19</u>	Cable #3: <u> </u>							
Attenuator #1: <u>-</u>	Cable #4: <u> </u>							
Attenuator #2: <u> </u>	Mixer: <u> </u>							
Additional equipment used: <u>31, 32</u>								
Measurement Uncertainty: <u>± 5.2 dB</u>								
Frequency	Meter	Correction	Gen.	Substitution	EIRP	EIRP	Polarity	Comments
(MHz)	Reading	Factor	Level	Antenna Gain	(dBm)	(µW)		
(dB)	(dBm)	(dB)	(dBm)	(dBi)	(dBm)	(µW)		
-								

Notes: Pre measurement in stack installation Tx 2636 MHz, transmitters full power terminated 50Ω

Test Data – Radiated Emissions 30 MHz -26.5 GHz

Nemko Oy, Finland


Data Plot		Radiated Emissions Substitution Method		Complete <u> x </u>
Page <u>2</u> of <u>5</u>				Preliminary: <u> </u>
Job No.:	<u>123182</u>	Date:	<u>19/02/2009</u>	
Specification:	<u>PT27</u>	Temperature (°C):	<u>23</u>	
Tested By:	<u>Jarmo Koskela</u>	Relative Humidity (%):	<u>10</u>	
E.U.T.:	<u>WIMAX TRANSMITTER</u>			
Configuration:	<u>TX FULL POWER MIDDLE CHANNEL Combined Output</u>			
Sample Number:	<u>1</u>			
Location:	<u>NSN/ Oulu</u>	RBW:	<u>120 kHz</u>	Measurement Distance: <u> 3 </u> m
Detector type:	<u>Peak</u>	VBW:	<u> </u>	
Test Equipment Used				
Antenna:	<u>22</u>	Directional Coupler:		
Pre-Amp:	<u> </u>	Cable #1:	<u> </u>	
Filter:	<u> </u>	Cable #2:	<u> </u>	
Receiver:	<u>20</u>	Cable #3:	<u> </u>	
Attenuator #1:	<u>-</u>	Cable #4:	<u> </u>	
Attenuator #2:	<u> </u>	Mixer:	<u> </u>	
Additional equipment used:	<u>31, 32</u>			
Measurement Uncertainty:	<u>± 5.2 dB</u>			

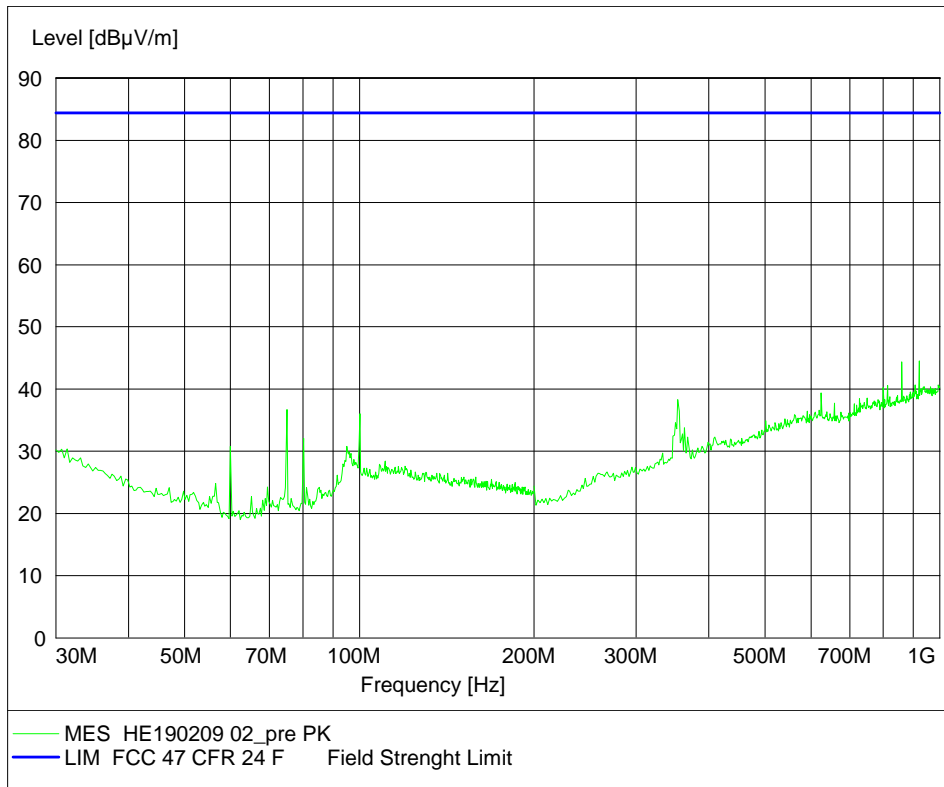

Notes: Limit line (84.4 dBµV/m) is converted from substitution limit (-13 dBm) to unit dBµV/m in 3 meter measurement distance

Nemko Oy, Finland


Data Plot		Radiated Emissions Substitution Method		Complete <u> x </u>
Page 3 of 5				Preliminary: <u> </u>
Job No.:	123182	Date:	19/02/2009	
Specification:	PT27	Temperature (°C):	23	
Tested By:	Jarmo Koskela	Relative Humidity (%):	10	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL Combined Output			
Sample Number:	1			
Location:	NSN/ Oulu	RBW:	1 MHz	Measurement Distance: <u> 3 </u> m
Detector type:	Peak	VBW:	1 MHz	
Test Equipment Used				
Antenna:	24	Directional Coupler:		
Pre-Amp:	29	Cable #1:		
Filter:		Cable #2:		
Receiver:	20	Cable #3:		
Attenuator #1:	-	Cable #4:		
Attenuator #2:		Mixer:		
Additional equipment used:	31, 32			
Measurement Uncertainty:	± 5.2 dB			

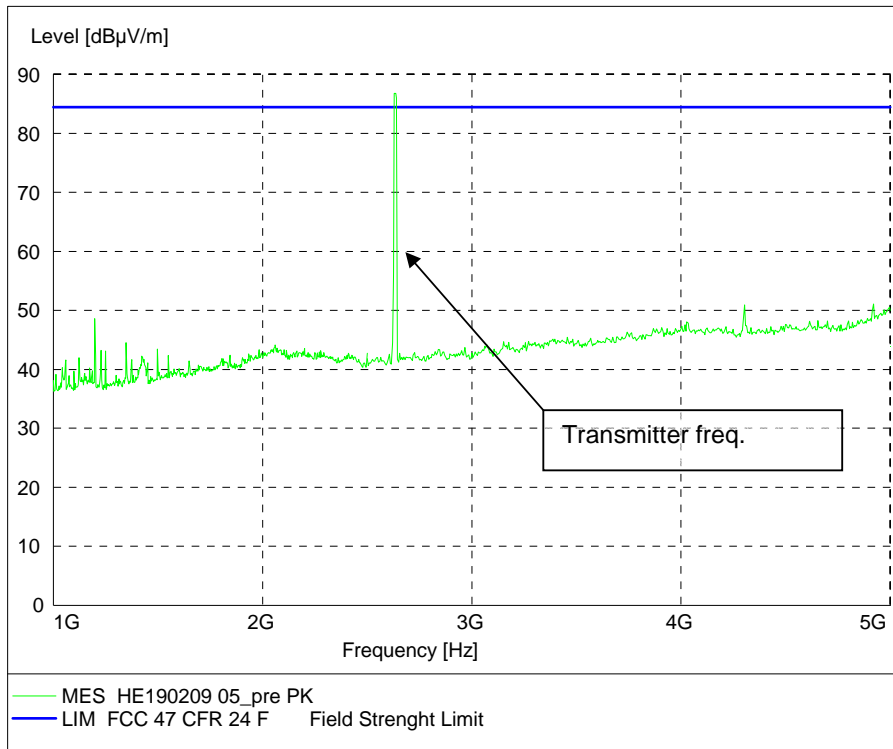

Notes: Tx 2636 MHz


Nemko Oy, Finland

Data Plot		Radiated Emissions Substitution Method		Complete <u> x </u>
Page 4 of 5				Preliminary: <u> </u>
Job No.:	123182	Date:	20/02/2009	
Specification:	PT27	Temperature (°C):	23	
Tested By:	Jarmo Koskela	Relative Humidity (%):	10	
E.U.T.:	WIMAX TRANSMITTER			
Configuration:	TX FULL POWER MIDDLE CHANNEL Combined Output			
Sample Number:	1			
Location:	NET/IMN Oulu	RBW:	1 MHz	Measurement Distance: <u> 3 </u> m
Detector type:	Peak	VBW:	1 MHz	
Test Equipment Used				
Antenna:	24	Directional Coupler:		
Pre-Amp:	29	Cable #1:		
Filter:		Cable #2:		
Receiver:	20	Cable #3:		
Attenuator #1:	-	Cable #4:		
Attenuator #2:		Mixer:		
Additional equipment used:	31, 32			
Measurement Uncertainty:	± 5.2 dB			

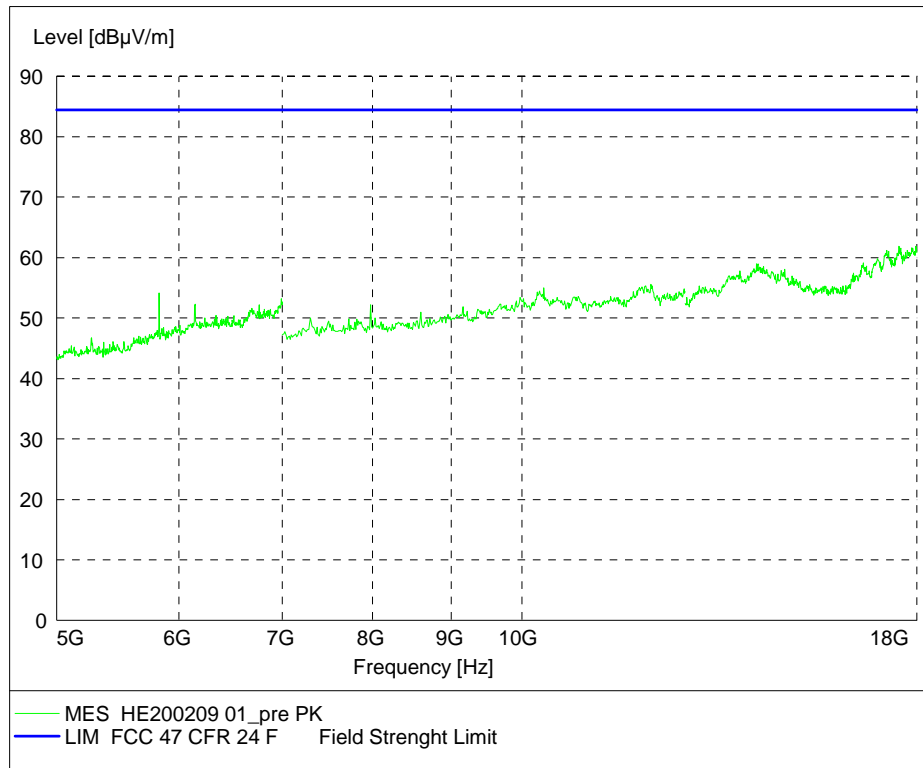

Nemko Oy, Finland

Data Plot		Radiated Emissions Substitution Method		Complete <u> x </u>
Page <u> 5 </u> of <u> 5 </u>				Preliminary: <u> </u>
Job No.: <u> 123182 </u>		Date: <u> 20/02/2009 </u>		
Specification: <u> PT27 </u>		Temperature (°C): <u> 23 </u>		
Tested By: <u> Jarmo Koskela </u>		Relative Humidity (%): <u> 10 </u>		
E.U.T.: <u> WIMAX TRANSMITTER </u>				
Configuration: <u> TX FULL POWER MIDDLE CHANNEL Combined Output </u>				
Sample Number: <u> 1 </u>				
Location: <u> NET/IMN Oulu </u>		RBW: <u> 1 MHz </u>		Measurement Distance: <u> 3 </u> m
Detector type: <u> Peak </u>		VBW: <u> 1 MHz </u>		
Test Equipment Used				
Antenna: <u> 21 </u>		Directional Coupler:		
Pre-Amp: <u> 30 </u>		Cable #1: <u> </u>		
Filter: <u> </u>		Cable #2: <u> </u>		
Receiver: <u> 20 </u>		Cable #3: <u> </u>		
Attenuator #1: <u> - </u>		Cable #4: <u> </u>		
Attenuator #2: <u> </u>		Mixer: <u> </u>		
Additional equipment used: <u> 31, 32 </u>				
Measurement Uncertainty: <u> ± 5.2 dB </u>				

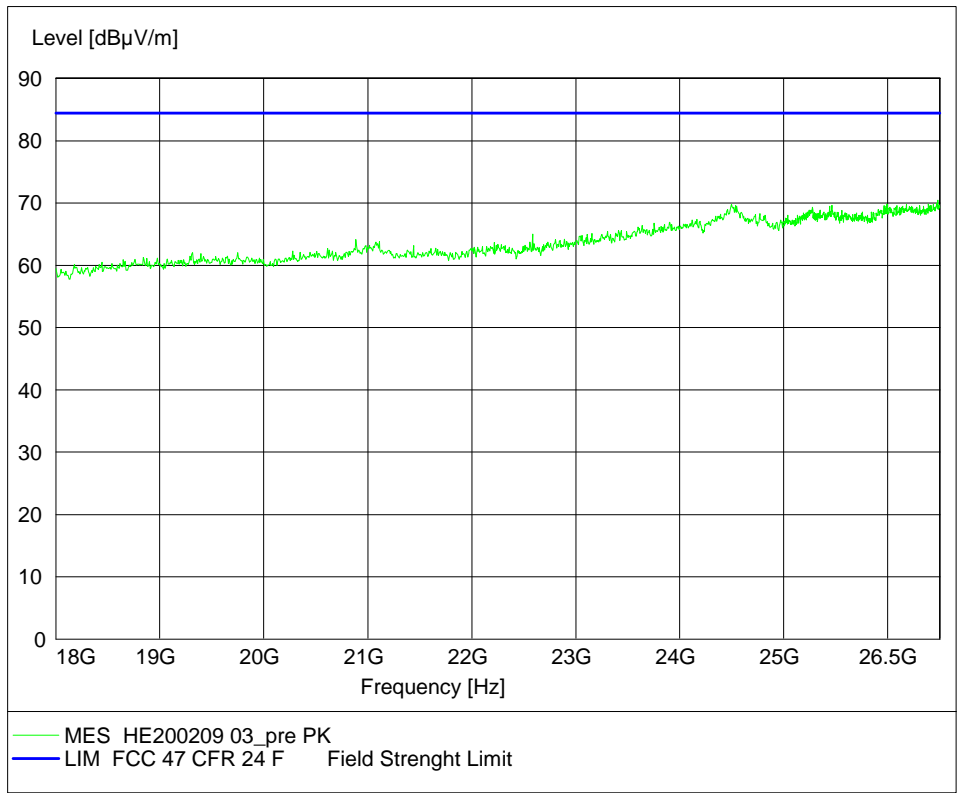

7. Frequency stability

NAME OF TEST: Frequency stability	PARA.NO.: 27.54, & 2.1055
TESTED BY: Jari Veijola	DATE: 16/02/2009

Test Results: Complies.

Standard Test Frequency: 2636.000 MHz.

Standard Test Voltage: 48 V DC.

Equipment used: 1, 5, 6, 7, 8, 10

EUT: WiMAX TRANSMITTER.

Configuration: TX FULL POWER MIDDLE CHANNEL.

Measurement Data: Frequency stability with voltage variation TX1.

Voltage (V DC)	Temp (°C)	Rated (Hz/ppm)	Deviation (Hz)	Deviation (ppm)
48.0	20	132 / 0.05	15.64	0.0059
55.2	20	132 / 0.05	7.99	0.0030
40.8	20	132 / 0.05	29.84	0.0113

Measurement Data: Frequency stability with voltage variation TX2.

Voltage (V DC)	Temp (°C)	Rated (Hz/ppm)	Deviation (Hz)	Deviation (ppm)
48.0	20	132 / 0.05	25.89	0.0098
55.2	20	132 / 0.05	20.56	0.0078
40.8	20	132 / 0.05	5.33	0.0020

Measurement Uncertainty: ± 0.001 ppm (± 2.0 Hz).

Relative Humidity: 15 %.

Note: Test model 198157 includes modulation types; QPSK, 16-QAM and 64-QAM, duty cycle 60%

NAME OF TEST: Frequency stability	PARA.NO.: 27.54, & 2.1055
TESTED BY: Jari Veijola	DATE: 16/02/2009

Test Results: Complies.

Standard Test Frequency: 2636.000 MHz.

Standard Test Voltage: 48 V DC.

Equipment used: 1, 5, 6, 7, 8, 10

EUT: WiMAX TRANSMITTER.

Configuration: TX FULL POWER MIDDLE CHANNEL.

Measurement Data: Frequency stability with temperature variation TX1.

Voltage (V DC)	Temp (°C)	Rated (Hz/ppm)	Deviation (Hz)	Deviation (ppm)
48.0	50	132 / 0.05	-10.00	-0.0038
48.0	40	132 / 0.05	-10.57	-0.0040
48.0	30	132 / 0.05	18.67	0.0071
48.0	10	132 / 0.05	8.10	0.0031
48.0	0	132 / 0.05	19.24	0.0073
48.0	-10	132 / 0.05	17.49	0.0066
48.0	-20	132 / 0.05	-26.51	-0.0100
48.0	-30	132 / 0.05	13.76	0.0517

Measurement Data: Frequency stability with temperature variation TX2.

Voltage (V DC)	Temp (°C)	Rated (Hz/ppm)	Deviation (Hz)	Deviation (ppm)
48.0	50	132 / 0.05	-8.54	-0.0032
48.0	40	132 / 0.05	17.41	0.0066
48.0	30	132 / 0.05	17.05	0.0065
48.0	10	132 / 0.05	42.30	0.0160
48.0	0	132 / 0.05	31.81	0.0121
48.0	-10	132 / 0.05	24.82	0.0094
48.0	-20	132 / 0.05	24.46	0.0093
48.0	-30	132 / 0.05	25.46	0.0097

Measurement Uncertainty: ± 0.001 ppm (± 2.0 Hz).


Note: Test model 198157 includes modulation types; QPSK, 16-QAM and 64-QAM, duty cycle 60%

8. List of test equipment

Each active test equipment is calibrated annually.

Nr.	Equipment	Name of equipment	Serial number
1	Signal analyzer	Rohde & Schwarz:FSQ26/K93/K94	100364
2	Network analyzer	Hewlett-Packard:HP8753E	US38431868
3	Network analyzer	Hewlett-Packard:HP8720ES	US39172107
4	Calibration kit	Hewlett-Packard:HP85032B	2919A04843
5	Enviromental chamber	Weiss technick DU 22/500/80	221/19600
6	Frequency standard	Datum 8040	23006282
7	DC power	Sörensen	9950C0085
8	Temperature/humidity meter	VAISALA HMI 31	P3730008
9	Combiner	Weinschel 1870	6275
10	TDD inband SSU	Orbis inband SSU 2500	SSU-0726-1370
11	Power meter	Rohde & Schwarz:NRVD	832025/034
12	Power sensor	Rohde & Schwarz:NRVZ	839913/010
13	High Pass filter	Reactel 9HSX-3/20-S11	0531
14	High Pass filter	BSC MCN-S8282/02	1182501
15	Attenuator	Weinschel 66-10-34	BK1136
16	Attenuator	Weinschel 66-20-34	401
17	Attenuator	Weinschel 47-10-34	BG 6557
18	Attenuator	Narda 752-30	FSCM99899
19	Semianechoic chamber	Siemens Matsushita 9m × 5m × 6m (room 0039)	Product No S&M B83317- C6019-T232
20	EMI Test Receiver	R&S ESIB 26	100335
21	LogPer Antenna	R&S HL025	349048/002 (1-26 GHz)
22	Bilog Antenna	Chase CBL6112B	2694
23	Horn Antenna	Emco 3115	6346
24	Horn Antenna	Emco 3115	000075697
25	Biconical Antenna	R&S HK116	836891/009
26	Dipole VHF	Mess-Elektronik VHA9103	
27	Dipole UHF	Mess-Elektronik UHA9105	
28	Signal Generator	R&S SMR 20	1715
29	Amplifier	Miteq AFSX4	791117
30	Amplifier	HP 83017A	3123A00444
31	Antenna Mast	Deisel HD240	2401323194
32	Mast Controller	Deisel HD100	1001331
33	Signal Generator	R&S SMP 40	845401/001

9. Photographs of Test Setup

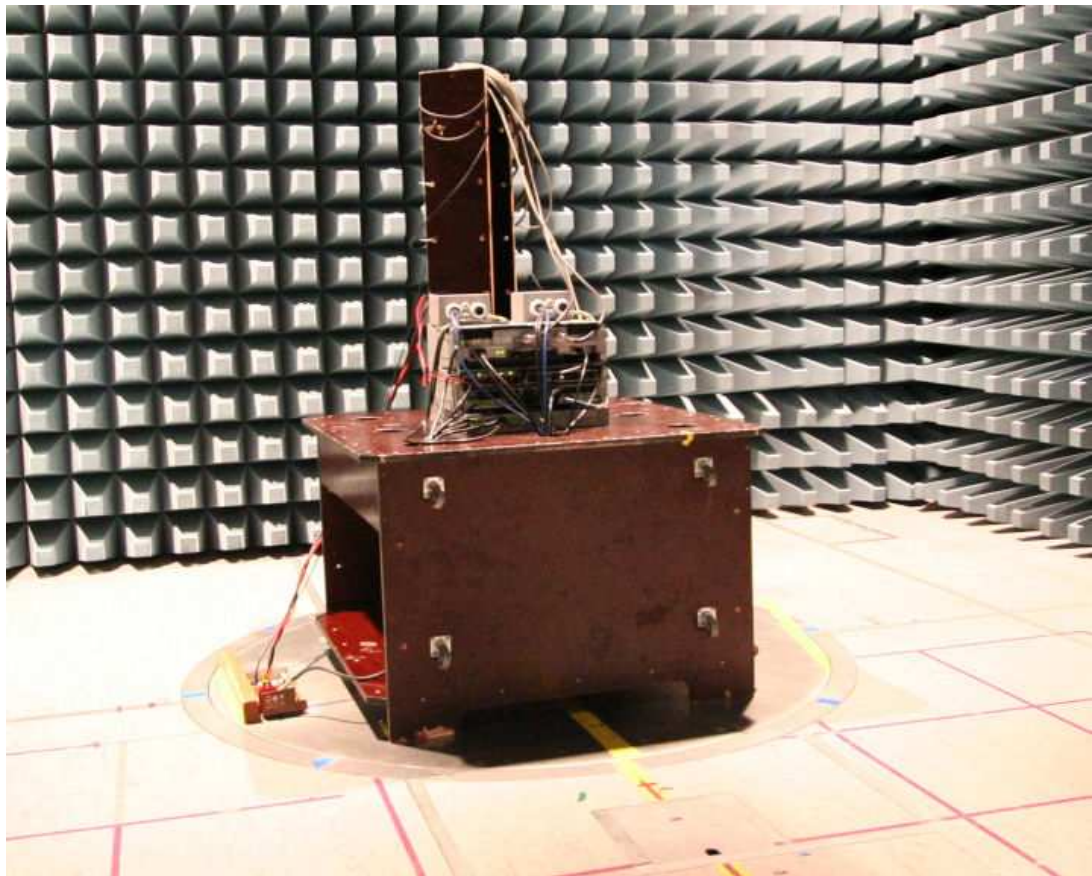

Photograph 1: Radiated spurious emissions test

10. ANNEX A, TEST DETAILS

NAME OF TEST: RF Power Output	PARA. NO.: 2.1046
--------------------------------------	--------------------------

Minimum Standard:

Para. No. 27.50 (h).(1) Main, booster and base stations. (i) The maximum EIRP of a main, booster or base station shall not exceed $33 \text{ dBW} + 10\log(X/Y) \text{ dBW}$, where X is the actual channel width in MHz and Y is either 6 MHz if prior to transition or the station is in the MBS following transition or 5.5 MHz if the station is in the LBS and UBS following transition, except as provided in paragraph (h)(1)(ii) of this section. Sample calculation: $33\text{dBW} + 10\log(10 \text{ MHz} / 5.5 \text{ MHz}) \text{ dBW} = 34.26 \text{ dBW} = \sim 2667 \text{ W}$.

Method Of Measurement:

CDMA Per ANSI/J-STD-014
TDMA Per ANSI/J-STD-010

Antenna terminal:

The power at antenna terminal is measured by using the R&S NRVD broad-band power meter and power sensor NRV-Z1. At Test model 198157 pulse mode duty cycle 60% was used.

NAME OF TEST: Occupied Bandwidth	PARA. NO.: 2.1049
---	--------------------------

Minimum Standard:

Para. No. 2.1049. The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to 0.5% of the emitted power.

Method Of Measurement:

The 99% occupied bandwidth of the carrier emission is measured using a signal analyzer with Resolution Bandwidth set to 1% of the necessary bandwidth of the transmitted carrier. R&S FSQ 26 signal analyzer with WiMAX K93 option was used.

NAME OF TEST: Spurious Emission at Antenna Terminals	PARA. NO.: 2.1051
---	--------------------------

Minimum Standard: Para. No. 27.53(l). For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts.
(l)(2) For fixed and temporary fixed digital stations, the attenuation shall be not less than $43 + 10 \log (P)$ dB

Method Of Measurement:

Spectrum analyzer settings:
RBW: 1 MHz
VBW: 1 MHz

Within 1 MHz of the upper and lower edges of the assigned band of operation the resolution bandwidth is lowered to 1 % of the 26 dB occupied bandwidth of the transmitted carrier. A pre-measurement was performed with the max peak detector and spurious emissions closer than 20 dB to the limit was measured with rms detector.

NAME OF TEST: Field Strength of Spurious Radiation	PARA. NO.: 2.1053
---	--------------------------

Minimum Standard: Para. No. 27.53(l). For BRS and EBS stations, the power of any emissions outside the licensee's frequency bands of operation shall be attenuated below the transmitter power (P) measured in watts.
(l)(2) For fixed and temporary fixed digital stations, the attenuation shall be not less than $43 + 10 \log (P)$ dB

Test Method:

TIA/EIA-603-C-2004, Section 2.2.12

The test was performed in a semi-anechoic shielded room. The EUT was placed on a non-conductive 0.8 m high table standing on the turntable. During the test in the frequency range 30-26500 MHz the distance from the EUT to the measuring antenna was 3 m. In order to find the maximum levels of the disturbance radiation the angle of the turntable, the height of the measuring antenna were varied during the tests. The test was performed with the measuring antenna being both in horizontal and vertical polarizations.

Vertical and horizontal polarizations in the frequency range 30 – 26500 MHz was first measured by using the peak detector. During the peak detector scan the turntable was rotated from 0° to 360° with 30° step with the antenna heights 1.0 m and 2.5 m.

The limit of -13 dBm has been calculated to correspond 84.4 dB(μV/m).
Spurious emissions closer than 20 dB to the limit was measured with average detector.

The antenna substitution method was used to determine the equivalent radiated power at spurious frequencies. The EUT was replaced with a reference substitution antenna with a known gain referenced to an isotropic radiator $G_{Antenna[dBi]}$. This antenna was fed with a signal at the spurious frequency $P_{Gen[dBm]}$. The level of the signal was adjusted to repeat the previously measured level. The resulting EIRP is the signal level fed to the reference antenna corrected for gain referenced to an isotropic. The formula below was used to calculate the EIRP of the EUT.

$$P_{EIRP[dbm]} = P_{Gen[dBm]} - L_{Cable[dB]} + G_{Antenna[dBi]}$$

NAME OF TEST: Frequency Stability	PARA. NO.: 2.1055
--	--------------------------

Minimum Standard:

Para. No. 27.54. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Method Of Measurement:Frequency Stability With Voltage Variation


The E.U.T. is placed in an environmental chamber and allowed to stabilize at +20 degrees Celsius for at least 15 minutes. With the voltage input to the E.U.T. set to 85% S.T.V., the frequency error is measure. This procedure is repeated at 100% S.T.V. and 115% S.T.V.

Frequency Stability With Temperature Variation


The input voltage to the E.U.T. is set to S.T.V. and the temperature of the environmental chamber is varied in 10 degree steps from -30 degrees C to +50 degrees C. The E.U.T. is allowed to stabilize at each temperature and the frequency error is measured.

11. ANNEX B, TEST DIAGRAMS


RF Power Output PARA. NO.: 2.1046




Occupied Bandwidth PARA. NO.: 2.1049



Spurious Emission at Antenna Terminals PARA. NO.: 2.1051




Field Strength of Spurious Radiation PARA. NO.: 2.1053

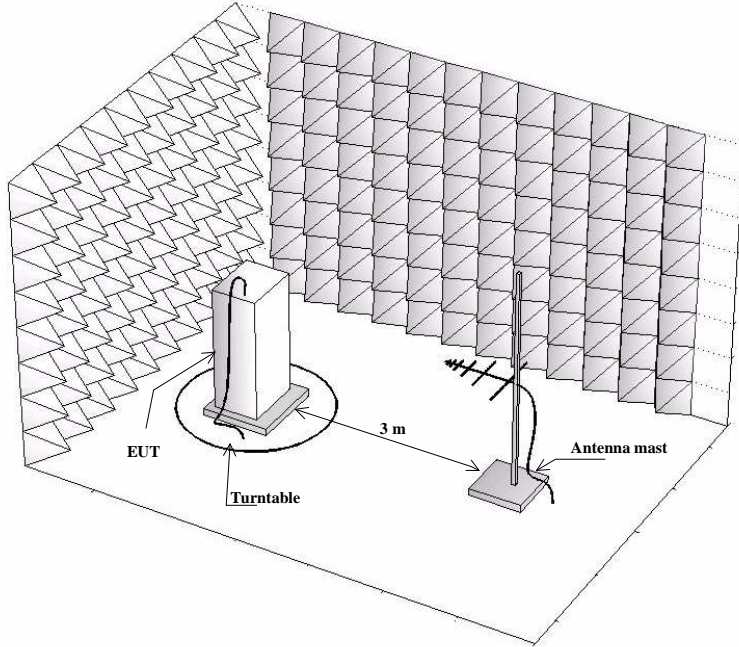

Frequency Stability PARA. NO.: 2.1055

Frequency Stability With Voltage Variation

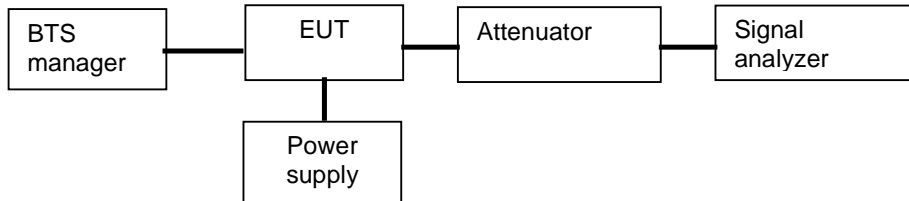

Frequency Stability With Temperature Variation

