



EMC TEST REPORT

Applicant : Miwa Lock Co., Ltd
3-1-12, Shiba, Minato-ku, Tokyo, Japan, 105-8510

Type of Equipment : ALV2S

Model Number : ALV2(Slim)

FCC ID : VBU-ALV2S

Standard : 47 CFR Part 15 Subpart C Section 15.225

Receipt Date of Sample : 2010-7-22

Date Tested : 2010-7-25, 8-02 and 8-03

Date Report Issued : 2010-08-05

Report Number : EMC10122

This test report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government. The report shall not be reproduced, except in full, without the written approval of IPS Corporation.

APPROVED by:

Tetsushi Yamaguchi / Manager

TESTS SUPERVISED by:

Hidemasa Fujimoto

IPS Corporation

1878-1 Harumiya Ono Tatsuno-machi, Kamiina-gun, Nagano-ken, 399-0601, Japan.

Phone: +81-266-44-5200 Fax: +81-266-44-5300

KF

Contents

1 GENERAL INFORMATION	3
1.1 Product Description and Specification.....	3
1.2 Summary of Test Result	4
1.3 Measurement Uncertainty	4
1.4 Tested Systems Details.....	4
1.5 Test Facility	5
2 SYSTEM TEST CONFIGURATION	6
2.1 Justification	6
2.2 Special Accessories	6
2.3 Equipment Conditions.....	6
3 RADIATED EMISSION TEST 0.15MHz-30MHz (Part15.225(a),(b),(c))	7
3.1 Test Setup.....	7
3.2 Testing Instrumentation	7
3.3 Field Strength Calculation	7
3.4 Test Detail	7
4 RADIATED EMISSION TEST 30MHz - 1000MHz (Part 15.209, 225(d))	8
4.1 Test Setup.....	8
4.2 Test Instrumentation	8
4.3 Field Strength Calculation	8
4.4 Test Detail	8
5 FREQUENCY STABILITY TEST (Part 15.225(e))	10
5.1 Test Setup.....	10
5.2 Test Instrumentation	10
5.3 Test Detail	10
6 TEST DATA	12
6.1 Radiated Emission 0.15MHz - 30MHz Detection mode.....	12
6.2 Radiated Emission 0.15MHz - 30MHz Communication mode	13
6.3 Radiated Emission 30MHz - 1000MHz Detection mode	14
6.4 Radiated Emission 030MHz - 1000MHz Communication mode.....	17
7 TEST CONFIGURATION PHOTOS	20
7.1 Photos of Radiated Emission Test (blow 30MHz)	20
7.2 Photos of Radiated Emission Test (above 30MHz)	20
7.3 Photos of Frequency Stability Test	20


1 GENERAL INFORMATION

1.1 Product Description and Specification

The Equipment Under Test (EUT) Model: ALV2S is a low power transmitter for hotel card lock and its fundamental frequency is 13.56MHz. It has two 13.56MHz transmitters. One is for detection of the approach of RFID card, the other is for communication with RFID card. They do not work simultaneously.

Model No.	ALV2S
Serial No.	Sample 2
Product Type	Pre-production
Rated Power	3.0VDC (AA type Alkaline batteries)
Transmitting Frequency	Transmitter A : 13.56MHz Transmitter B : 13.56MHz
Modulation	Transmitter A : Non modulation Transmitter B : ASK
Operation mode	
Detection mode	Detecting the approach of RFID card (by using transmitter A)
Communication mode	Communication with RFID card (by using transmitter B)

< Block Diagram >

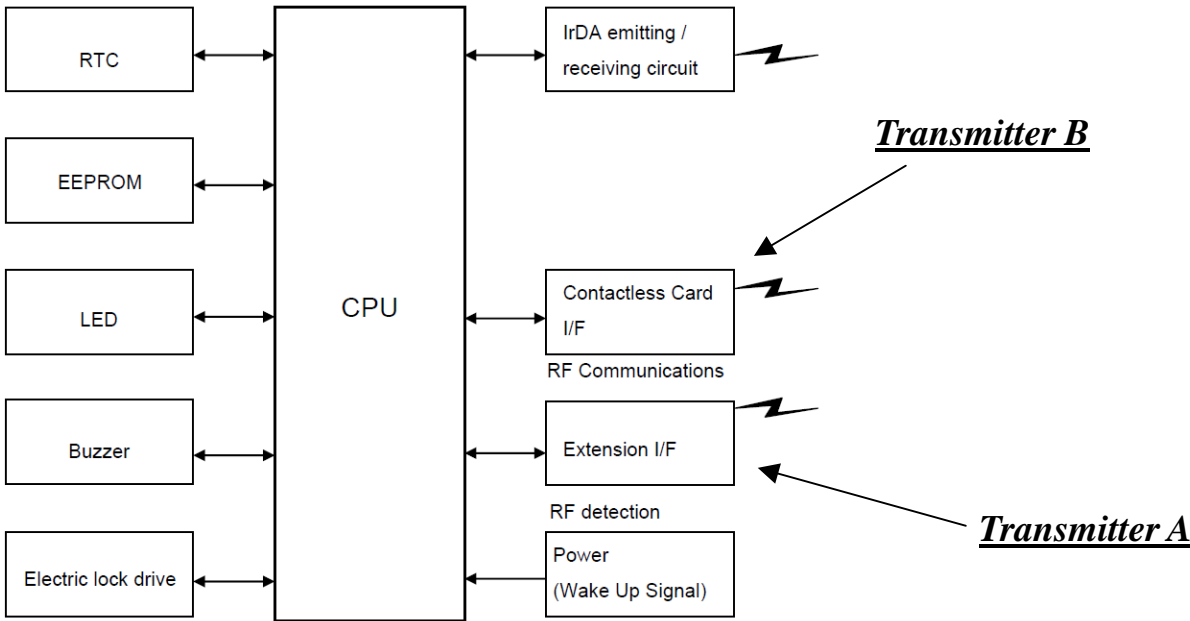

1.2 Summary of Test Result

Transmitter A (Detection mode)

Item	Specification	Deviation	Worst Margin	Results	Remarks
Radiated Emission (Fundamental)	15.225(a)	N/A	90.0dB	PASS	
	15.225(b)	N/A	53.5dB	PASS	
	15.225(c)	N/A	52.2dB	PASS	
Radiated Emission (Spurious)	15.225(d) 15.209	N/A	11.9dB	PASS	
Frequency Stability	15.225(e)	N/A	0.00054%	PASS	

Transmitter B (Communication mode)

Item	Specification	Deviation	Worst Margin	Results	Remarks
Radiated Emission (Fundamental)	15.225(a)	N/A	72.9dB	PASS	
	15.225(b)	N/A	53.5dB	PASS	
	15.225(c)	N/A	52.2dB	PASS	
Radiated Emission (Spurious)	15.225(d) 15.209	N/A	10.7dB	PASS	
Frequency Stability	15.225(e)	N/A	0.00021%	PASS	

1.3 Measurement Uncertainty

Radiated Emission Test	Antenna	Frequency range	Polarization	10m U (dB)	3m U (dB)
Radiated Emission	Biconical (BBA9106)	30MHz-300MHz	Horizontal	3.9	3.9
			Vertical	4.1	4.0
	Log.-Periodic (UHALP9108-A)	300MHz-1GHz	Horizontal	4.1	4.1
			Vertical	4.2	4.2
Magnetic Field Emission	Loop (HLA6120)	9kHz-30MHz	-	-	2.6

Note : Coverage factor k=2
: 1) Applied for Code of Federal Regulation 47 Part 15

1.4 Tested Systems Details

EUT

Equipment		Manufacturer	Model No.	Serial No.	Note
ID	Name				
A	ALV2(Slim)	MIWA	ALV2S	002	

Peripherals

Equipment		Manufacturer	Model No.	Serial No.	FCC ID & Note
ID	Name				
B	DC Power supply	KIKUSUI	PAN35-5A	-----	-----

1.5 Test Facility

The test facilities are located in following places of IPS Corporation.

- EMC Center
1878-1 Harumiya Ono, Tatsuno-machi, Kamiina-gun, Nagano-ken 399-0601 Japan.
- Open Test Site
4593 Hosohora Ono, Tatsuno-machi, Kamiina-gun, Nagano-ken 399-0601 Japan.

Above facilities have been registered at FCC with registration number 171180. Also test facilities are accredited under the National Voluntary Laboratory Accreditation Program (NVLAP) by United States Department of Commerce, National Institute of Standard and Technology (NIST) for satisfactory compliance with criteria established in Title 15, Part 285 Code of Federal Regulations. These criteria encompass the requirements of ISO/IEC 17025 and the relevant requirements of ISO 9002:1994 as suppliers of calibration or test results. Accreditation awarded for specific services, ANSI C63.4 with FCC 47CFR Part 15B and other, listed on the Scope of Accreditation for: ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS.

NVLAP LAB CODE: 200012-0 Effective until: December 31, 2010.

2 SYSTEM TEST CONFIGURATION

2.1 Justification

- All tests were performed without any deviation from the ANSI C63.4:2003.
- The system was configured for testing a typical fashion (as a customer would normally use it). The test data Radiated emission are presented for the “worst case” measurements, that test program as clause 2.2 should be working and the cable routing was attempted to maximize the emission.
- EUT was tested in three orthogonal orientation for Radiated emission in order to present “the worst case”.
- EUT was set to transmit continuously during test by using one of two RF circuit.

2.2 Special Accessories

None.

2.3 Equipment Conditions

The condition at the time of receipt of EUT: Good

The condition at the time of return of EUT: Good

Limited conditions: None

EUT has a DIP switch which can control to set to transmit 13.56MHz continuously.
This DIP switch has placed for test purpose only.

3 RADIATED EMISSION TEST 0.15MHz-30MHz (Part15.225(a),(b),(c))

3.1 Test Setup

- The test setup was made according to ANSI C63.4:2003.
- The table size was 0.8 m high × 1.8 m wide × 1.0 m deep.

3.2 Testing Instrumentation

Equipment	Manufacturer	Model	S/N	Calibration	
				Date	Due
Semi-Anechoic Chamber	Otsuka Science	10m	No.3	2010-02-04	2011-02-28
EMI Test Receiver	Rohde & Schwarz	ESCS30	836858/002	2010-04-21	2011-04-30
Spectrum Analyzer	ADVANTEST	R3132	131201410	2009-11-26	2010-11-30
Loop Antenna	Chase	HLA6120	1131	2010-04-01	2011-04-30
Cable System	IPS Corporation	CE(1)	N/A	2009-10-28	2010-10-31

3.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:-

$$F S = RA + c.f. = RA + AF + CL - AG$$

c.f.	Correction Factor	AF	Antenna Factor
FS	Field Strength (Emission Level - Result)	CL	Cable Loss
RA	Receiver Amplitude (Reading Level)	AG	Amplifier Gain or Attenuator Loss

This measurement was performed at distance of 3m. The limit was extrapolated by using the square of an inverse linear distance extrapolation factor (40 dB/decade). Also the field strength is calculated by converting 30m and 3m distance limit.

3.4 Test Detail

Test data and spectrum chart : Refer to section 6.1. and 6.2

Test configuration photo: Refer to section 7.1

4 RADIATED EMISSION TEST 30MHz – 1000MHz (Part 15.209, 225(d))

4.1 Test Setup

- The test setup was made according to ANSI C63.4:2003.
- The table size was 0.8 m high × 1.8 m wide × 1.0 m deep.

4.2 Test Instrumentation

Equipment	Manufacturer	Model	S/N	Calibration	
				Date	Due
Semi-Anechoic Chamber	Otsuka Science	3m	No.2	2009-12-25	2010-12-31
EMI Test Receiver	Rohde & Schwarz	ESIB40	100208	2010-06-04	2011-06-30
Biconical Antenna	Schwarzbeck	BBA9106	1586	2010-05-08	2011-05-31
Log.-Periodic Antenna	Schwarzbeck	UHALP9108-A	0942	2010-06-03	2011-06-30
Cable System	IPS Corporation	RE(33)	N/A	2010-02-24	2011-02-28

4.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:-

$$F S = RA + c.f. = RA + AF + CL - AG$$

c.f.	Correction Factor	AF	Antenna Factor
FS	Field Strength (Emission Level - Result)	CL	Cable Loss
RA	Receiver Amplitude (Reading Level)	AG	Amplifier Gain or Attenuator Loss

4.4 Test Detail

4.4.1 Detection Mode

EUT was tested in three orthogonal orientations and it was found that “Pattern 2” orientation is the worst-case orientation.

No.	Frequency [MHz]	Reading [dB(uV)]	c.f. [dB]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	H/V	Height [cm]	Angle [°]	Axial
1	339.003	35.0	-3.2	31.8	46.0	14.2	H	100.0	4.0	Pattern 2
2	393.243	35.0	-2.2	32.8	46.0	13.2	H	100.0	1.0	Pattern 2
3	420.362	34.6	-1.9	32.7	46.0	13.3	H	100.0	346.0	Pattern 2
4	881.400	25.1	4.7	29.8	46.0	16.2	H	100.0	201.0	Pattern 2
5	447.483	25.6	-1.7	23.9	46.0	22.1	V	100.0	31.0	Pattern 2
6	366.125	34.8	-2.6	32.2	46.0	13.8	V	142.5	0	Pattern 1
7	366.123	36.7	-2.6	34.1	46.0	11.9	H	100.0	8.0	Pattern 2
8	366.122	35.7	-2.6	33.1	46.0	12.9	H	100.0	0	Pattern 3

4.4.1 Detection Mode (Continued)

Individual test data and spectrum chart : Refer to section 6.3.

Test configuration photo: Refer to section 7.2

4.4.2 Communication Mode

EUT was tested in three orthogonal orientations and it was found that “Pattern 2” orientation is the worst-case orientation.

No.	Frequency [MHz]	Reading [dB(uV)]	c.f. [dB]	Result [dB(uV/m)]	Limit [dB(uV/m)]	Margin [dB]	H/V	Height [cm]	Angle [°]	Axial
1	352.565	36.5	-2.9	33.6	46.0	12.4	H	100.0	4.0	Pattern 2
2	366.125	36.2	-2.6	33.6	46.0	12.4	H	100.0	4.0	Pattern 2
3	216.836	33.3	-2.1	31.2	46.0	14.8	H	142.3	192.0	Pattern 2
4	67.804	33.7	-13.0	20.7	40.0	19.3	H	295.3	256.0	Pattern 2
5	67.805	28.0	-13.0	15.0	40.0	25.0	V	279.0	166.0	Pattern 2
6	949.206	28.3	5.9	34.2	46.0	11.8	V	100.0	359.0	Pattern 1
7	949.499	29.4	5.9	35.3	46.0	10.7	H	100.0	8.0	Pattern 2
8	949.202	28.7	5.9	34.6	46.0	11.4	H	100.0	122.0	Pattern 3


Individual test data and spectrum chart : Refer to section 6.3.

Test configuration photo: Refer to section 7.2

5 FREQUENCY STABILITY TEST (Part 15.225(e))

5.1 Test Setup

- The test setup was made according to ANSI C63.4:2003.
- The EUT was placed in a temperature and humidity chamber.
The near field magnetic sensor was placed near the EUT inside the chamber.

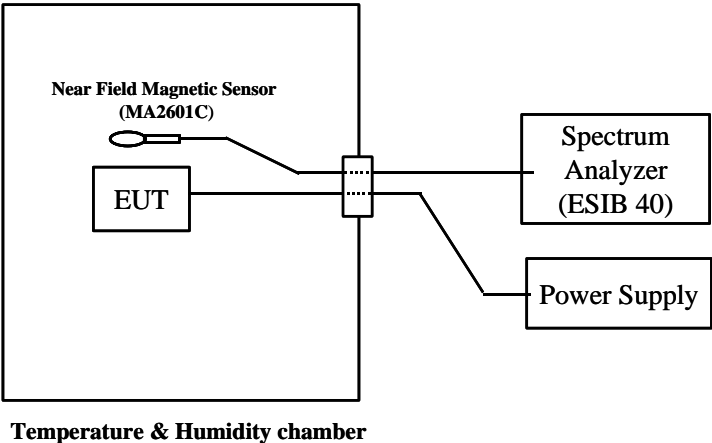

5.2 Test Instrumentation

Equipment	Manufacturer	Model	S/N	Calibration	
				Date	Due
Temp. & Humi. Chamber	IPS Corporation	N/A	N/A	Non Calibration	
Near Field Magnetic Sensor	Rohde & Schwarz	ESCS30	827413/019	2009-06-10	2010-06-30
Spectrum Analyzer	ADVANTEST	R3132	131201410	2009-11-26	2010-11-30
Power supply	Rohde & Schwarz	ESH2-Z5	846953/012	2009-10-16	2010-10-31

5.3 Test Detail

Test configuration photo: Refer to section 7.3

5.3.1 Detection Mode


Frequency stability "D iviation" / "C arrier Frequency"					0.000539%
Temperature	Time				D iviation (M ax)-(M in)
-20°C	start up	2.m in.	5 m in.	10 m in	
Frequency (M Hz)	13.560018	13.560018	13.560016	13.560016	0.000002
Frequency stability : "D iviation" / "C arrier Frequency" @ -20°C					0.000015%
Temperature	Time				D iviation (M ax)-(M in)
20°C	start up	2.m in.	5 m in.	10 m in	
Frequency (M Hz)	13.560003	13.560005	13.559999	13.560010	0.000011
Frequency stability : "D iviation" / "C arrier Frequency" @ 20°C					0.000081%
Temperature	Time				D iviation (M ax)-(M in)
50°C	start up	2.m in.	5 m in.	10 m in	
Frequency (M Hz)	13.559945	13.559949	13.559949	13.559949	0.000004
Frequency stability : "D iviation" / "C arrier Frequency" @ 50°C					0.000030%

5.3.2 Communication Mode

Frequency stability "D iviation" / "C arrier Frequency"					0.000207%
Temperature	Time				D iviation (M ax)-(M in)
-20°C	start up	2.m in.	5 m in.	10 m in	
Frequency (M Hz)	13.560035	13.560031	13.560029	13.560027	0.000008
Frequency stability : "D iviation" / "C arrier Frequency" @ -20°C					0.000059%
Temperature	Time				D iviation (M ax)-(M in)
20°C	start up	2.m in.	5 m in.	10 m in	
Frequency (M Hz)	13.560025	13.560027	13.560031	13.560035	0.000010
Frequency stability : "D iviation" / "C arrier Frequency" @ 20°C					0.000074%
Temperature	Time				D iviation (M ax)-(M in)
50°C	start up	2.m in.	5 m in.	10 m in	
Frequency (M Hz)	13.560009	13.560007	13.560009	13.560011	0.000004
Frequency stability : "D iviation" / "C arrier Frequency" @ 50°C					0.000030%

6 TEST DATA



6.1 Radiated Emission 0.15MHz - 30MHz Detection mode

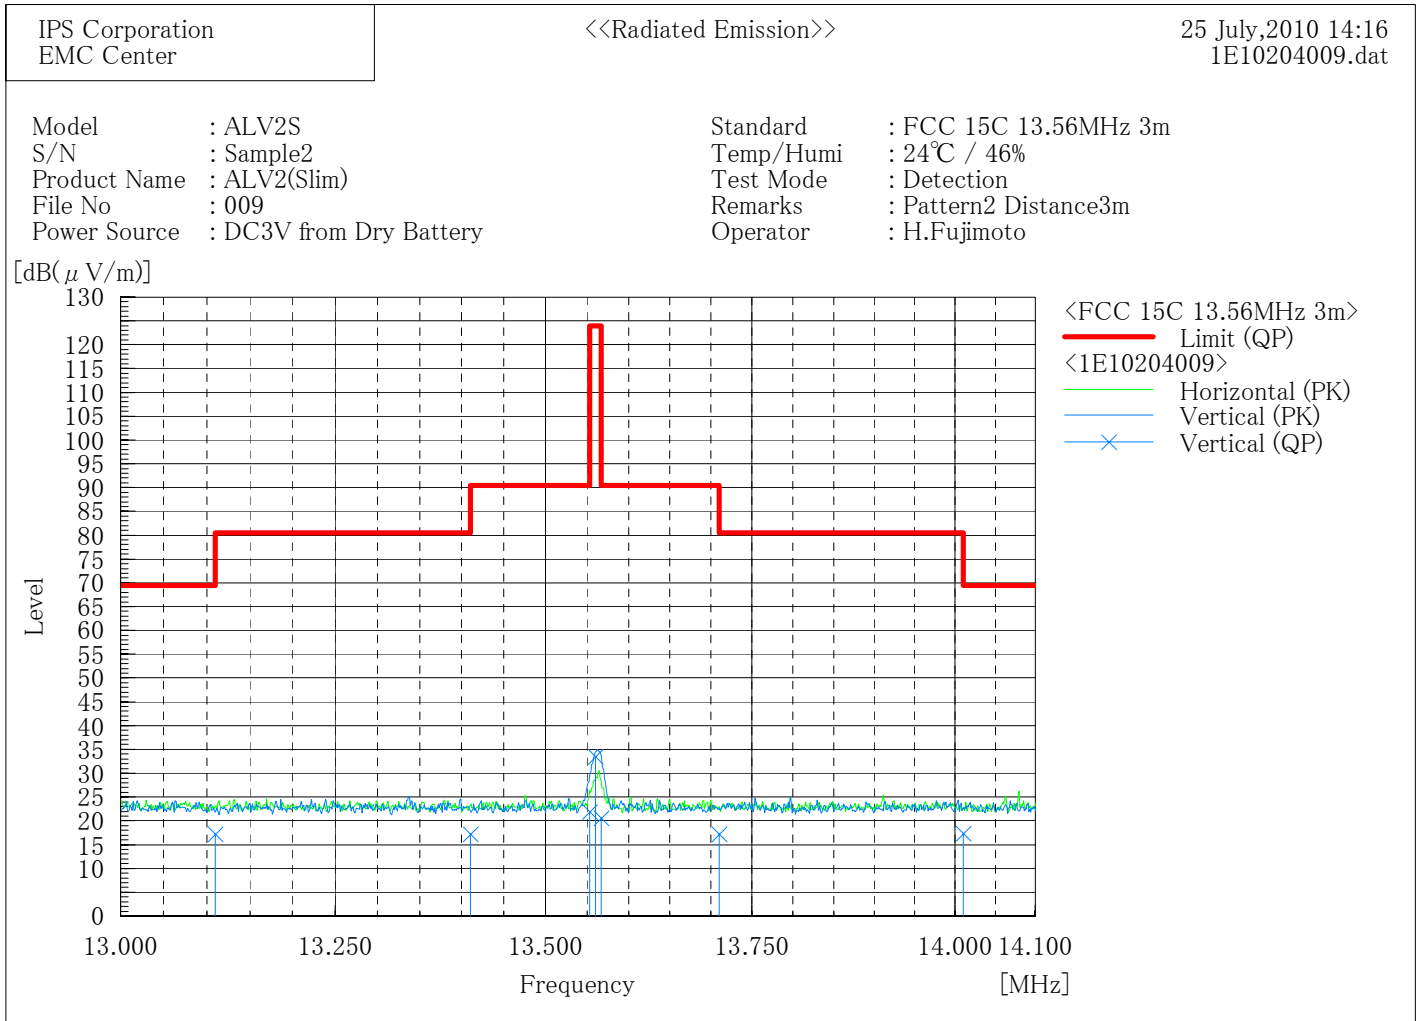


Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	13.110	-4.9	22.1	17.2	69.5	52.3	100.0	9.0
2	13.410	-4.9	22.1	17.2	80.5	63.3	100.0	9.0
3	13.553	-0.1	22.1	22.0	90.5	68.5	100.0	9.0
4	13.560	11.4	22.1	33.5	124.0	90.5	100.0	9.0
5	13.567	-1.5	22.1	20.6	90.5	69.9	100.0	9.0
6	13.710	-4.9	22.1	17.2	80.5	63.3	100.0	9.0
7	14.010	-4.8	22.1	17.3	69.5	52.2	100.0	9.0

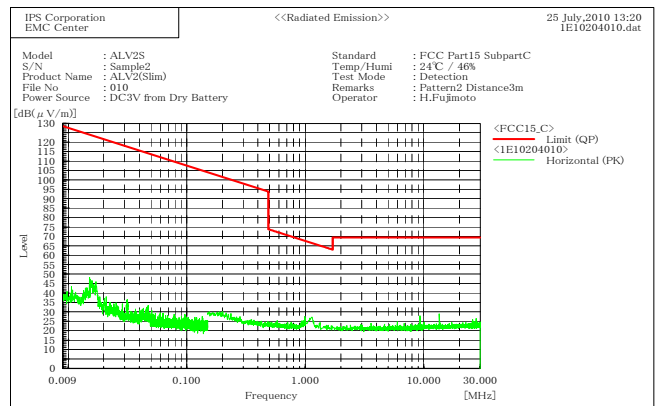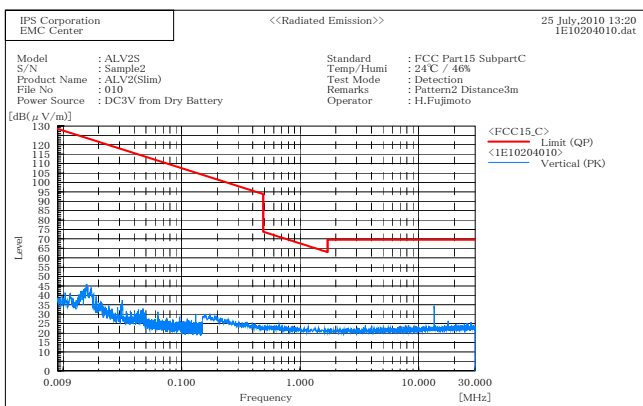



6.2 Radiated Emission 0.15MHz - 30MHz Communication mode

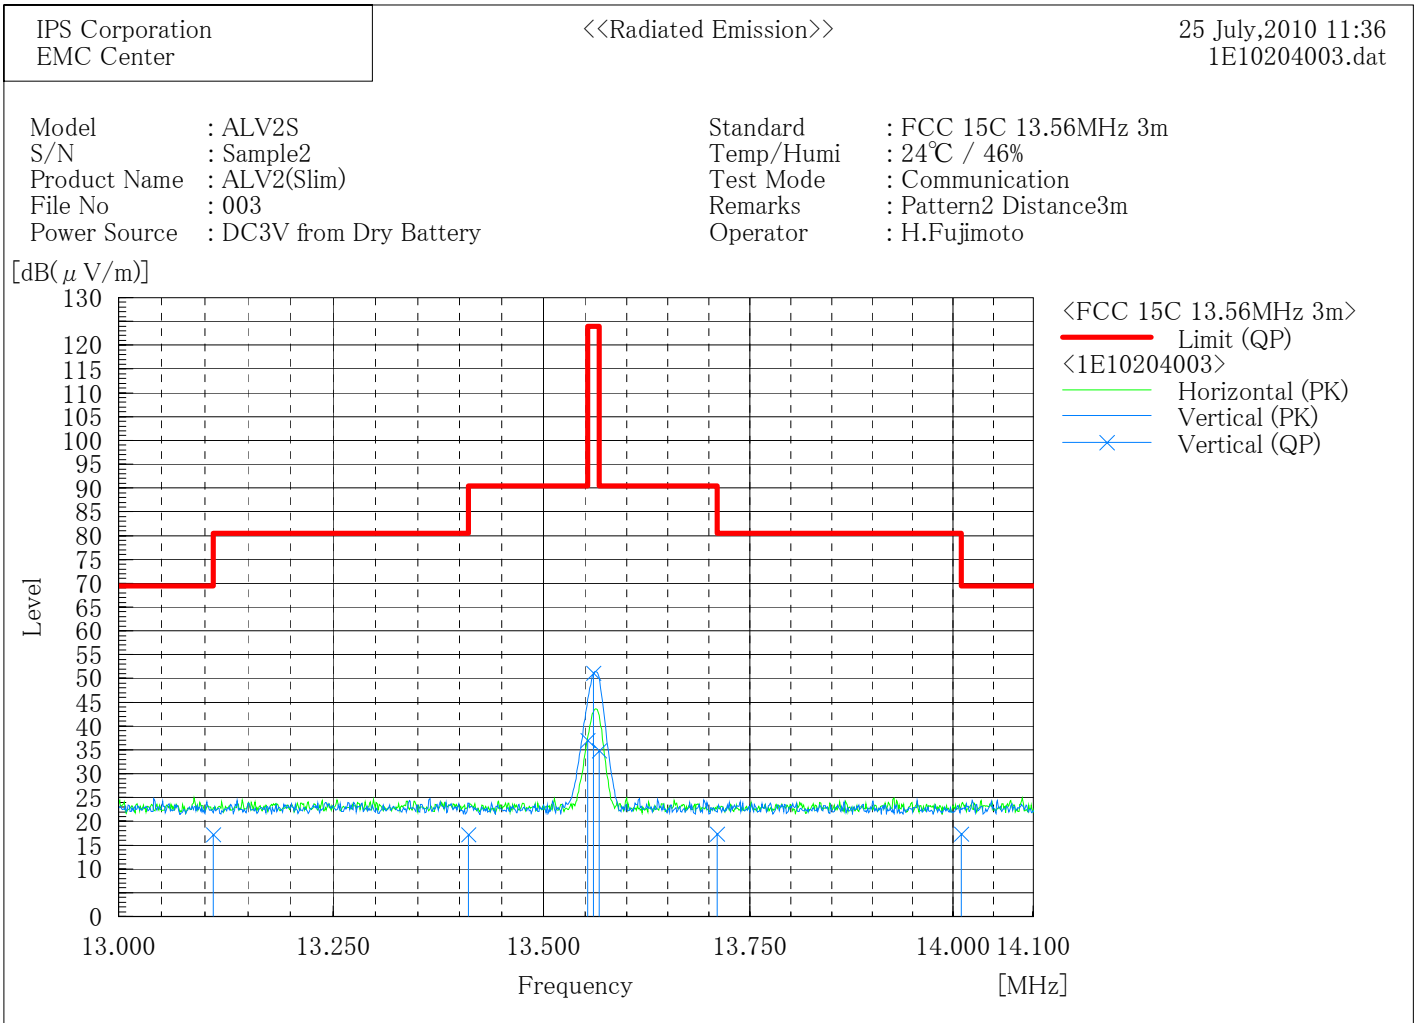

Final Result

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	13.110	-4.9	22.1	17.2	69.5	52.3	100.0	176.0
2	13.410	-4.9	22.1	17.2	80.5	63.3	100.0	176.0
3	13.553	14.9	22.1	37.0	90.5	53.5	100.0	176.0
4	13.560	29.0	22.1	51.1	124.0	72.9	100.0	176.0
5	13.567	12.7	22.1	34.8	90.5	55.7	100.0	176.0
6	13.710	-4.8	22.1	17.3	80.5	63.2	100.0	176.0
7	14.010	-4.8	22.1	17.3	69.5	52.2	100.0	176.0

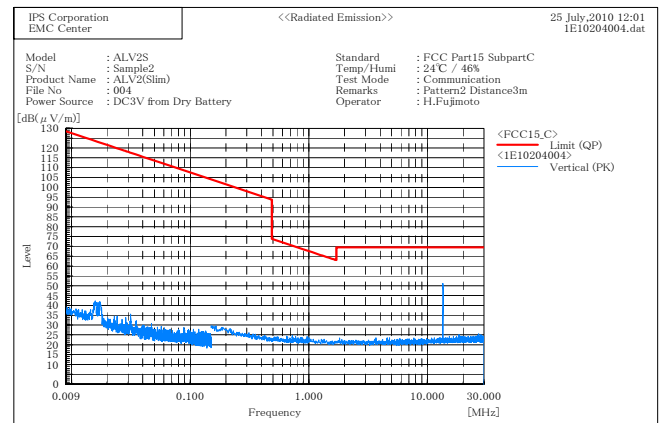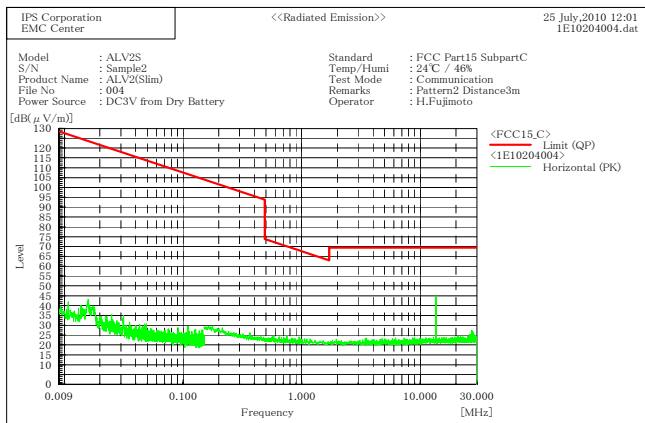

6.3 Radiated Emission 30MHz - 1000MHz Detection mode

Axial Direction of EUT : Pattern 1



***** IPS Corporation *****
 <<Radiated Emission>> 3 August, 2010 12:04
 IE10204018.dat

Standard : FCC Part15 SubpartB ClassB
 Model : ALV2S
 S/N : Sample2
 Product Name : ALV2(Slim)
 File No : 018
 Power Source : DC 3V from Dry Battery
 Temp /Humi : 25deg / 53%
 Test Mode : Detection
 Remarks : Pattern 1
 Operator : M.Furihata



Final Result

--- Horizontal Polarization (QP)---


No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	366.122	28.8	-2.6	26.2	46.0	19.8	184.3	275.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	366.125	34.8	-2.6	32.2	46.0	13.8	142.5	0.0
2	393.244	34.4	-2.2	32.2	46.0	13.8	132.0	0.0
3	420.363	34.3	-1.9	32.4	46.0	13.6	120.5	0.0
4	433.926	30.4	-1.8	28.6	46.0	17.4	118.6	0.0
5	447.782	32.8	-1.7	31.1	46.0	14.9	115.0	0.0

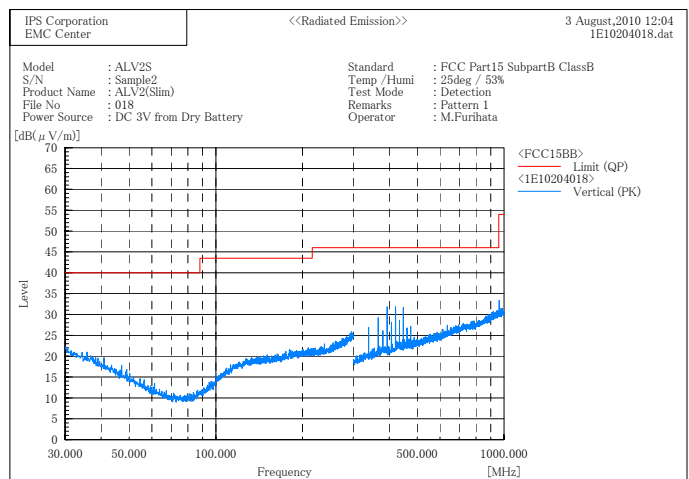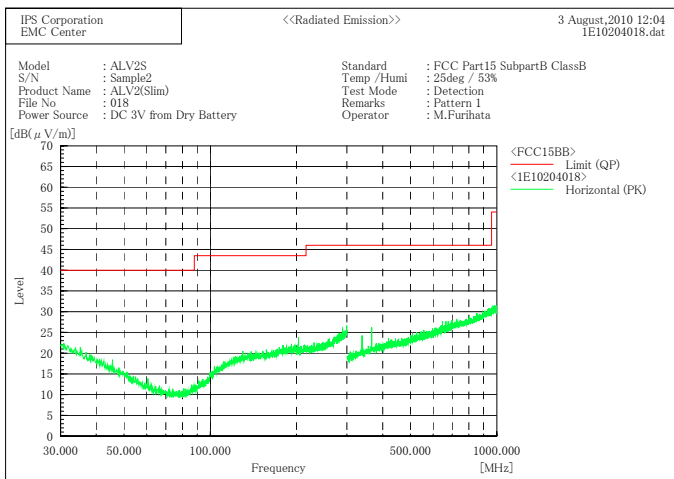

Axial Direction of EUT : Pattern 2

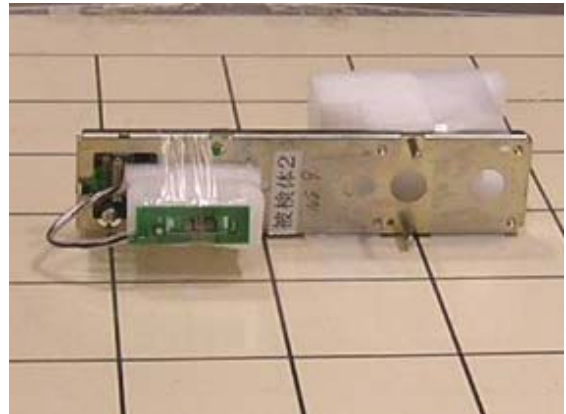

***** IPS Corporation *****
 <<Radiated Emission>> 3 August, 2010 11:13
 1E10204017. dat

Standard : FCC Part15 SubpartB ClassB
 Model : ALV2S
 S/N : Sample2
 Product Name : ALV2(Slim)
 File No : 017
 Power Source : DC 3V from Dry Battery
 Temp /Humi : 25deg / 53%
 Test Mode : Detection
 Remarks : Pattern 2
 Operator : M.Furihata



Final Result

--- Horizontal Polarization (QP)---


No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	339.003	35.0	-3.2	31.8	46.0	14.2	100.0	4.0
2	366.123	36.7	-2.6	34.1	46.0	11.9	100.0	8.0
3	393.243	35.0	-2.2	32.8	46.0	13.2	100.0	1.0
4	420.362	34.6	-1.9	32.7	46.0	13.3	100.0	346.0
5	881.400	25.1	4.7	29.8	46.0	16.2	100.0	201.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	447.483	25.6	-1.7	23.9	46.0	22.1	100.0	31.0

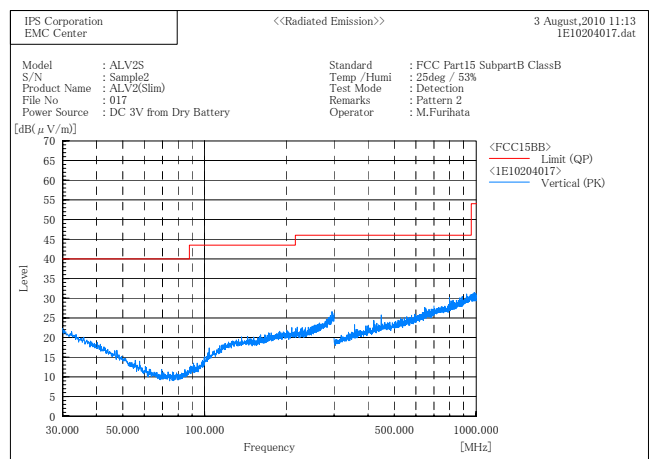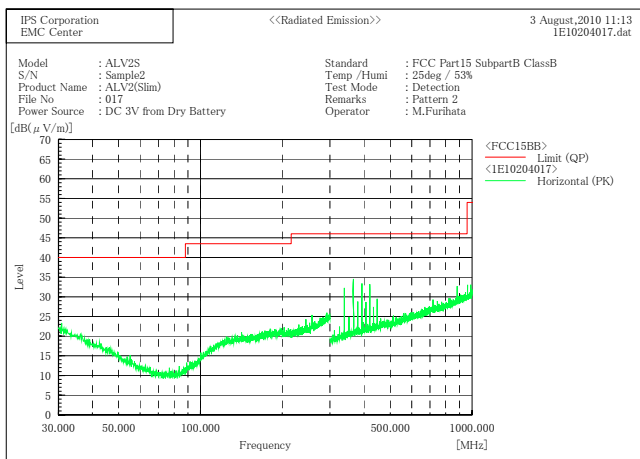

Axial Direction of EUT : Pattern 3

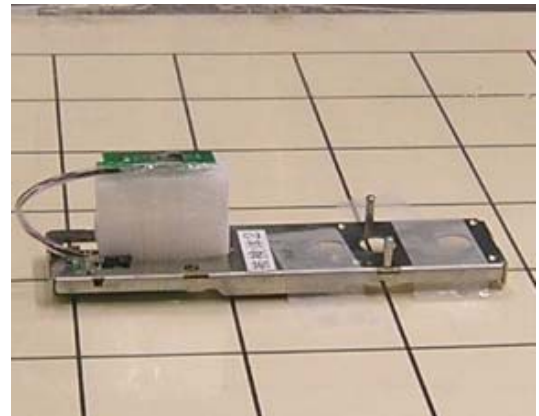

***** IPS Corporation *****
 <<Radiated Emission>> 3 August, 2010 10:
 1E10204016.d

Standard : FCC Part15 SubpartB ClassB
 Model : ALV2S
 S/N : Sample2
 Product Name : ALV2(Slim)
 File No : 016
 Power Source : DC 3V from Dry Battery
 Temp /Humi : 25deg / 53%
 Test Mode : Detection
 Remarks : Pattern 3
 Operator : M.Furihata



Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	339.005	31.4	-3.2	28.2	46.0	17.8	100.0	178.0
2	366.122	35.7	-2.6	33.1	46.0	12.9	100.0	0.0
3	379.683	29.8	-2.4	27.4	46.0	18.6	100.0	1.0
4	393.242	34.0	-2.2	31.8	46.0	14.2	100.0	2.0
5	420.364	32.9	-1.9	31.0	46.0	15.0	100.0	179.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	393.244	29.1	-2.2	26.9	46.0	19.1	106.2	320.0

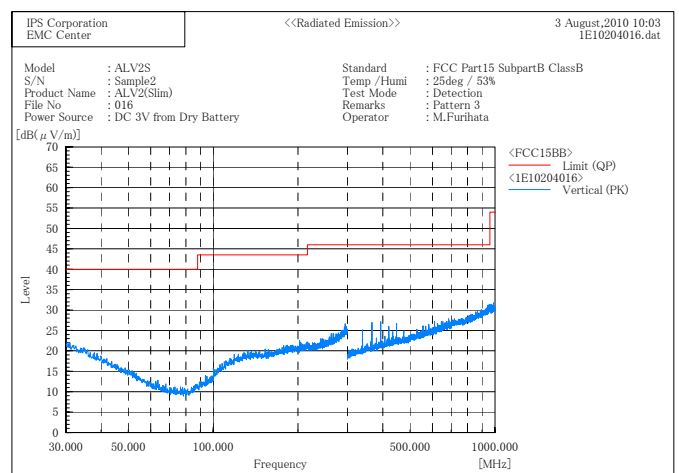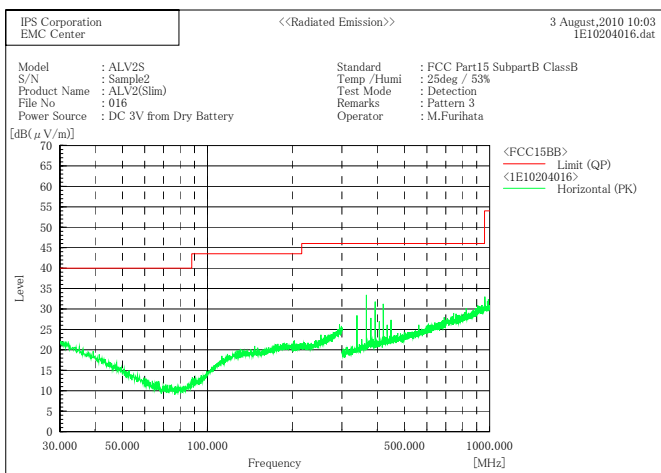

6.4 Radiated Emission 030MHz – 1000MHz Communication mode

Axial Direction of EUT : Pattern 1



***** IPS Corporation *****
 <<Radiated Emission>> 2 August, 2010 16:21
 1E10204013. dat

Standard : FCC Part15 SubpartB ClassB
 Model : ALV2S
 S/N : Sample2
 Product Name : ALV2(Slim)
 File No : 013
 Power Source : DC 3V from Dry Battery
 Temp /Humi : 21deg / 44%
 Test Mode : Communication
 Remarks : Pattern 1
 Operator : M.Furihata



 Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	67.808	35.6	-13.0	22.6	40.0	17.4	265.0	280.0
2	203.409	27.6	-2.3	25.3	43.5	18.2	100.0	89.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	67.806	34.5	-13.0	21.5	40.0	18.5	100.0	52.0
2	216.966	27.0	-2.1	24.9	46.0	21.1	100.0	180.0
3	352.567	34.2	-2.9	31.3	46.0	14.7	144.2	348.0
4	949.206	28.3	5.9	34.2	46.0	11.8	100.0	359.0

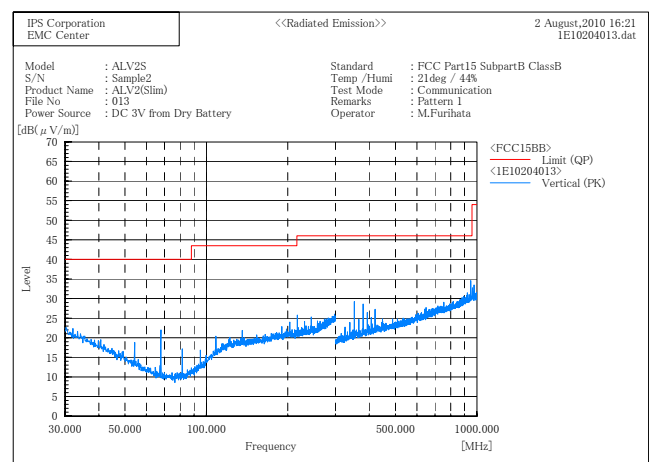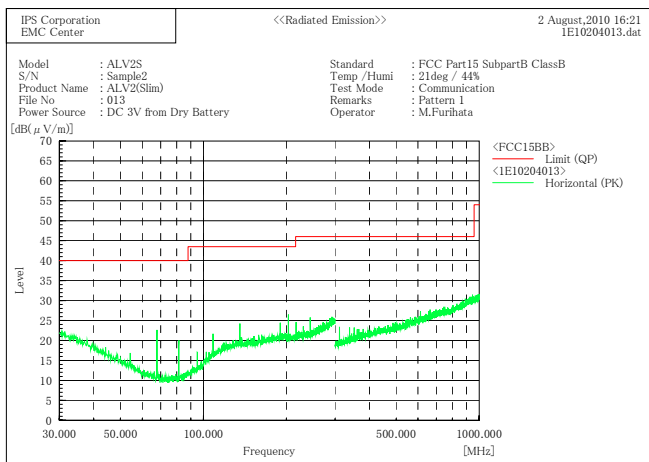

Axial Direction of EUT : Pattern 2



***** IPS Corporation *****
 <<Radiated Emission>> 2 August, 2010 16:21
 1E10204014.dat

Standard : FCC Part15 SubpartB ClassB
 Model : ALV2S
 S/N : Sample2
 Product Name : ALV2(Slim)
 File No : 014
 Power Source : DC 3V from Dry Battery
 Temp /Humi : 21deg / 44%
 Test Mode : Communication
 Remarks : Pattern 2
 Operator : M.Furihata



Final Result

--- Horizontal Polarization (QP)---


No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	352.565	36.5	-2.9	33.6	46.0	12.4	100.0	4.0
2	366.125	36.2	-2.6	33.6	46.0	12.4	100.0	4.0
3	949.499	29.4	5.9	35.3	46.0	10.7	100.0	8.0
4	216.836	33.3	-2.1	31.2	46.0	14.8	142.3	192.0
5	67.804	33.7	-13.0	20.7	40.0	19.3	295.3	256.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	67.805	28.0	-13.0	15.0	40.0	25.0	279.0	166.0

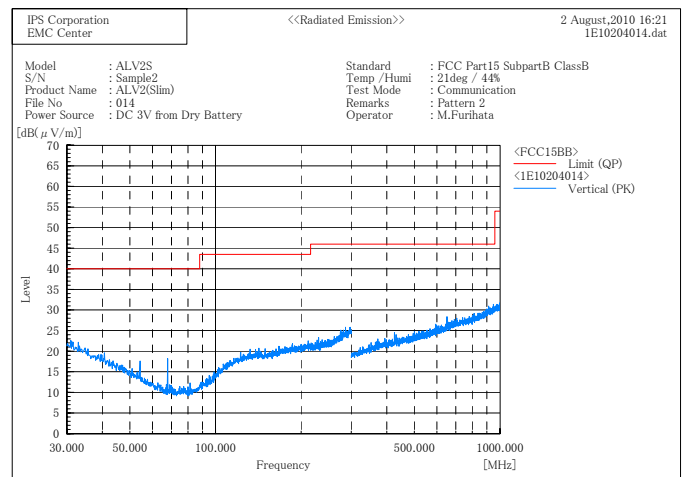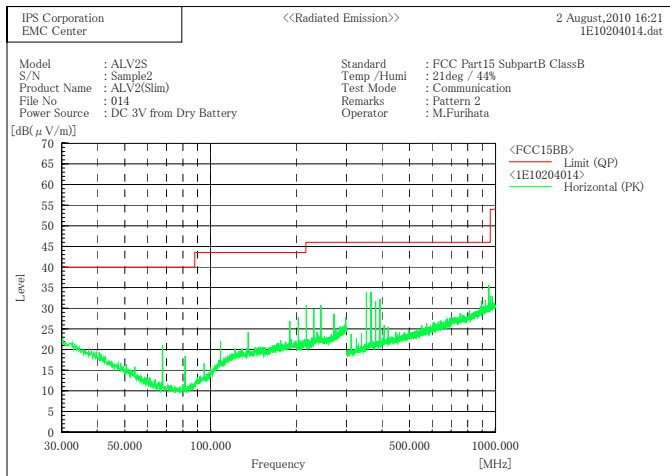

Axial Direction of EUT : Pattern 3

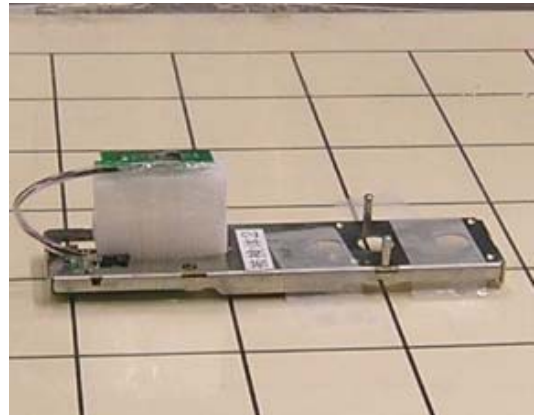

***** IPS Corporation *****
 <<Radiated Emission>> 3 August, 2010 08:52
 1E10204015. dat

Standard : FCC Part15 SubpartB ClassB
 Model : ALV2S
 S/N : Sample2
 Product Name : ALV2(Slim)
 File No : 015
 Power Source : DC 3V from Dry Battery
 Temp /Humi : 25deg / 53%
 Test Mode : Communication
 Remarks : Pattern 3
 Operator : M.Furihata



 Final Result

--- Horizontal Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	949.202	28.7	5.9	34.6	46.0	11.4	100.0	122.0
2	366.123	35.8	-2.6	33.2	46.0	12.8	100.0	8.0
3	352.563	35.7	-2.9	32.8	46.0	13.2	100.0	10.0
4	216.966	34.8	-2.1	32.7	46.0	13.3	141.3	5.0

--- Vertical Polarization (QP)---

No.	Frequency [MHz]	Reading [dB(μV)]	c. f [dB(1/m)]	Result [dB(μV/m)]	Limit [dB(μV/m)]	Margin [dB]	Height [cm]	Angle [°]
1	67.804	36.3	-13.0	23.3	40.0	16.7	100.0	255.0
2	393.243	29.0	-2.2	26.8	46.0	19.2	126.1	221.0

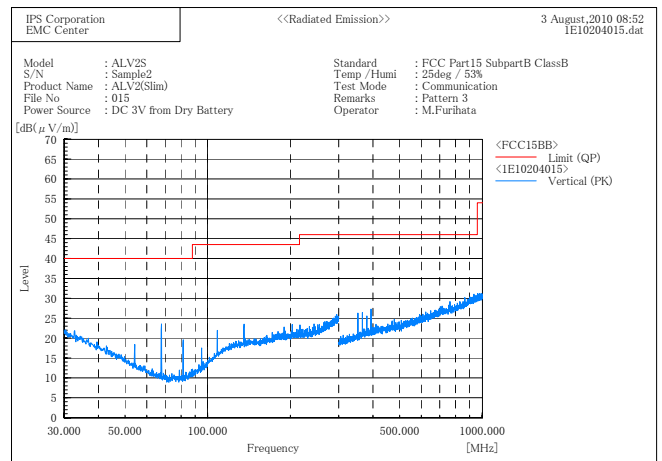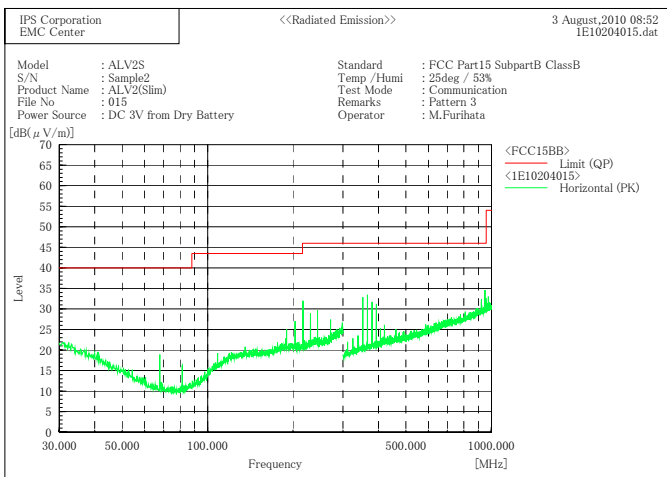

7 TEST CONFIGURATION PHOTOS

7.1 Photos of Radiated Emission Test (blow 30MHz)



7.2 Photos of F

TEST CONFIGURATION PHOTOS were separated from this report.



7.3 Photos of Frequency Stability Test

