



## FCC Certification Test Report For the Axiometric, LLC WM2 Water Meter

**FCC ID: VE4-WM2E**

**WLL JOB# 13062-01 Rev 1**  
**October 4, 2013**  
**Re-issued January 23, 2014**

Prepared for:

**Axiometric, LLC**  
**6200 Old Dobbin Lane**  
**Ste 150**  
**Columbia, MD 21045**

Prepared By:

**Washington Laboratories, Ltd.**  
**7560 Lindbergh Drive**  
**Gaithersburg, Maryland 20879**



Testing Certificate AT-1448

**FCC Certification Test Report  
for the  
Axiometric, LLC  
WM2 Water Meter  
FCC ID: VE4-WM2E**

**October 4, 2013  
Re-issued January 23,2014**

WLL JOB# 13062-01 Rev 1



Prepared by: James Ritter  
EMC laboratory Manager



Reviewed by: Steven D. Koster  
Vice President

## Abstract

This report has been prepared on behalf of Axiometric, LLC to support the attached Application for Equipment Authorization. The test report and application are submitted for a Frequency Hopping Spread Spectrum Transmitter under Part 15.247 (10/2012) of the FCC Rules. This Certification Test Report documents the test configuration and test results for a Axiometric, LLC WM2 Water Meter.

Testing was performed on an Open Area Test Site (OATS) of Washington Laboratories, Ltd, 7560 Lindbergh Drive, Gaithersburg, MD 20879. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACCLASS under Certificate AT-1448 as an independent FCC test laboratory.

The Axiometric, LLC WM2 Water Meter complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247.

| Revision History | Reason                                     | Date             |
|------------------|--|------------------|
| Rev 0            | Initial Release                            | October 4, 2013  |
| Rev 1            | Changed FCC ID from VE4-WM2 to<br>VE4-WM2E | January 23, 2014 |

## Table of Contents

|  |    |
|--|----|
| Abstract .....   | ii |
| 1      Introduction .....  | 1  |
| 1.1    Compliance Statement .....  | 1  |
| 1.2    Test Scope .....  | 1  |
| 1.3    Contract Information .....  | 1  |
| 1.4    Test Dates .....  | 1  |
| 1.5    Test and Support Personnel .....  | 1  |
| 1.6    Abbreviations .....   | 2  |
| 2      Equipment Under Test .....  | 3  |
| 2.1    EUT Identification & Description .....  | 3  |
| 2.2    Test Configuration .....  | 3  |
| 2.3    Testing Algorithm .....   | 3  |
| 2.4    Test Location .....   | 4  |
| 2.5    Measurements .....  | 4  |
| 2.5.1    References .....  | 4  |
| 2.5.2    Measurement Uncertainty .....   | 4  |
| 3      Test Equipment .....  | 6  |
| 4      Test Summary .....  | 7  |
| 5      Test Results .....  | 8  |
| 5.1    Duty Cycle Correction .....   | 8  |
| 5.2    RF Power Output: (FCC Part §2.1046) .....   | 13 |
| 5.3    Occupied Bandwidth: (FCC Part §2.1049) .....  | 20 |
| 5.4    Carrier Frequency Separation and Number of Hop Channels (FCC Part §15247(a)(1)) ..... | 27 |
| 5.5    Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051) .....            | 32 |
| 5.5.1    Band Edge Requirements .....  | 57 |
| 5.6    Radiated Spurious Emissions: (FCC Part §2.1053) .....                                 | 65 |
| 5.6.1 <b>Test Procedure</b> .....  | 65 |
| 5.7    AC Conducted Emissions (FCC Pt.15.207) .....  | 69 |
| 5.7.1    Requirements .....  | 69 |
| 5.7.2    Test Data .....   | 69 |

## List of Tables

|   |    |
|---|----|
| Table 1: Device Summary .....   | 3  |
| Table 2: Expanded Uncertainty List .....                                      | 5  |
| Table 3: Test Equipment List .....  | 6  |
| Table 4: Test Summary Table .....   | 7  |
| Table 5: RF Power Output .....  | 13 |
| Table 6: Occupied Bandwidth Results .....                                     | 20 |
| Table 7: Radiated Emission Test Data (Restricted Bands) <1GHz .....           | 66 |
| Table 8: Radiated Emission Test Data (Restricted Bands), Low Channel .....    | 66 |
| Table 9: Radiated Emission Test Data (Restricted Bands), Center Channel ..... | 67 |
| Table 10: Radiated Emission Test Data (Restricted Bands), High Channel .....  | 68 |

## List of Figures

|  |    |
|--|----|
| Figure 1. Dwell Time Per Hop, Mesh Mode .....  | 9  |
| Figure 2. Time of Occupancy per 20 seconds, Mesh Mode .....                              | 10 |
| Figure 3. Dwell Time Per Hop, Drive-by Mode .....  | 11 |
| Figure 4. Time of Occupancy per 10 seconds, drive-by Mode .....                          | 12 |
| Figure 5. RF Peak Power, Mesh Mode, Low Channel.....                                     | 14 |
| Figure 6. RF Peak Power, Mesh Mode, Center Channel .....                                 | 15 |
| Figure 7. RF Peak Power, Mesh Mode, High Channel .....                                   | 16 |
| Figure 8. RF Peak Power, Drive-by Mode, Low Channel .....                                | 17 |
| Figure 9. RF Peak Power, Drive-by Mode, Center Channel.....                              | 18 |
| Figure 10. RF Peak Power, Drive-by Mode, High Channel .....                              | 19 |
| Figure 11. Occupied Bandwidth, Mesh Mode, Low Channel.....                               | 21 |
| Figure 12. Occupied Bandwidth, Mesh Mode, Center Channel .....                           | 22 |
| Figure 13. Occupied Bandwidth, Mesh Mode, High Channel .....                             | 23 |
| Figure 14. Occupied Bandwidth, Drive-by Mode, Low Channel .....                          | 24 |
| Figure 15. Occupied Bandwidth, Drive-by Mode, Center Channel.....                        | 25 |
| Figure 16. Occupied Bandwidth, Drive-by Mode, High Channel .....                         | 26 |
| Figure 17, Channel Spacing, Mesh Mode.....   | 28 |
| Figure 18, Channel Spacing, Drive-by Mode .....  | 29 |
| Figure 19, Number of Channels Mesh Mode.....   | 30 |
| Figure 20, Number of Channels Drive-by Mode .....  | 31 |
| Figure 21. Conducted Spurious Emissions, Mesh Mode, Low Channel 30 - 901MHz.....         | 33 |
| Figure 22. Conducted Spurious Emissions, Mesh Mode, Low Channel 901 – 929MHz .....       | 34 |
| Figure 23. Conducted Spurious Emissions, Mesh Mode, Low Channel 929-5000MHz.....         | 35 |
| Figure 24. Conducted Spurious Emissions, Mesh Mode, Low Channel 5- 10GHz .....           | 36 |
| Figure 25. Conducted Spurious Emissions, Mesh Mode, Center Channel 30-901 MHz .....      | 37 |
| Figure 26. Conducted Spurious Emissions, Mesh Mode, Center Channel 901-929 MHz .....     | 38 |
| Figure 27. Conducted Spurious Emissions, Mesh Mode, Center Channel 929 -5000MHz .....    | 39 |
| Figure 28. Conducted Spurious Emissions, Mesh Mode, Center Channel 5-10GHz .....         | 40 |
| Figure 29. Conducted Spurious Emissions, Mesh Mode, High Channel 30-901MHz .....         | 41 |
| Figure 30. Conducted Spurious Emissions, Mesh Mode, High Channel 901-929MHz .....        | 42 |
| Figure 31. Conducted Spurious Emissions, Mesh Mode, High Channel 929-5000MHz .....       | 43 |
| Figure 32. Conducted Spurious Emissions, Mesh Mode, High Channel 5-10GHz.....            | 44 |
| Figure 33. Conducted Spurious Emissions, Drive-by Mode, Low Channel 30-901MHz .....      | 45 |
| Figure 34. Conducted Spurious Emissions, Drive-by Mode, Low Channel 901-929MHz .....     | 46 |
| Figure 35. Conducted Spurious Emissions, Drive-by Mode, Low Channel 929-5000MHz .....    | 47 |
| Figure 36. Conducted Spurious Emissions, Drive-by Mode, Low Channel 5-10GHz .....        | 48 |
| Figure 37. Conducted Spurious Emissions, Drive-by Mode, Center Channel 30 - 901MHz ..... | 49 |
| Figure 38. Conducted Spurious Emissions, Drive-by Mode, Center Channel 901-929MHz .....  | 50 |
| Figure 39. Conducted Spurious Emissions, Drive-by Mode, Center Channel 929-5000MHz ..... | 51 |
| Figure 40. Conducted Spurious Emissions, Drive-by Mode, Center Channel 5-10GHz.....      | 52 |
| Figure 41. Conducted Spurious Emissions, Drive-by Mode, High Channel 30-901MHz.....      | 53 |
| Figure 42. Conducted Spurious Emissions, Drive-by Mode, High Channel 901-929MHz.....     | 54 |
| Figure 43. Conducted Spurious Emissions, Drive-by Mode, High Channel 929-5000MHz.....    | 55 |
| Figure 44. Conducted Spurious Emissions, Drive-by Mode, High Channel 5-10GHz .....       | 56 |

|  |    |
|--|----|
| Figure 45. Conducted Lower Band-edge, Mesh Mode, Low Channel.....      | 57 |
| Figure 46. Conducted Lower Band-edge, Drive-by Mode, Low Channel ..... | 58 |
| Figure 47. Conducted Lower Band-edge, Mesh Mode, Hopping .....         | 59 |
| Figure 48. Conducted Lower Band-edge, Drive-by Mode, Hopping.....      | 60 |
| Figure 49. Conducted Upper Band-edge, Mesh Mode, High Channel .....    | 61 |
| Figure 50. Conducted Upper Band-edge, Drive-by Mode, High Channel..... | 62 |
| Figure 51. Conducted Upper Band-edge, Mesh Mode, Hopping.....          | 63 |
| Figure 52. Conducted Upper Band-edge, Drive-by Mode, Hopping .....     | 64 |

## 1 Introduction

### 1.1 Compliance Statement

The Axiometric, LLC WM2 Water Meter complies with the limits for a Frequency Hopping Spread Spectrum Transmitter device under FCC Part 15.247.

### 1.2 Test Scope

Tests for radiated and conducted (at antenna terminal) emissions were performed. All measurements were performed in accordance with FCC Public Notice DA 00-705. The measurement equipment conforms to ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation.

### 1.3 Contract Information

Customer:

Axiometric, LLC  
6200 Old Dobbin Lane - Ste 150  
Columbia, MD 21045

Quotation Number:

67558A

### 1.4 Test Dates

Testing was performed on the following date(s): 9/25/13 to 10/2/13

### 1.5 Test and Support Personnel

Washington Laboratories, LTD

James Ritter

Client Representative

Frank Moody

## 1.6 Abbreviations

|                         |   |
|-------------------------|---|
| <b>A</b>                | Ampere                                  |
| <b>ac</b>               | alternating current                     |
| <b>AM</b>               | Amplitude Modulation                    |
| <b>Amps</b>             | Ampères                                 |
| <b>b/s</b>              | bits per second                         |
| <b>BW</b>               | BandWidth                               |
| <b>CE</b>               | Conducted Emission                      |
| <b>cm</b>               | centimeter                              |
| <b>CW</b>               | Continuous Wave                         |
| <b>dB</b>               | deciBel                                 |
| <b>dc</b>               | direct current                          |
| <b>EMI</b>              | Electromagnetic Interference            |
| <b>EUT</b>              | Equipment Under Test                    |
| <b>FM</b>               | Frequency Modulation                    |
| <b>G</b>                | giga - prefix for $10^9$ multiplier     |
| <b>Hz</b>               | Hertz                                   |
| <b>IF</b>               | Intermediate Frequency                  |
| <b>k</b>                | kilo - prefix for $10^3$ multiplier     |
| <b>LISN</b>             | Line Impedance Stabilization Network    |
| <b>M</b>                | Mega - prefix for $10^6$ multiplier     |
| <b>m</b>                | meter                                   |
| <b><math>\mu</math></b> | micro - prefix for $10^{-6}$ multiplier |
| <b>NB</b>               | Narrowband                              |
| <b>QP</b>               | Quasi-Peak                              |
| <b>RE</b>               | Radiated Emissions                      |
| <b>RF</b>               | Radio Frequency                         |
| <b>rms</b>              | root-mean-square                        |
| <b>SN</b>               | Serial Number                           |
| <b>S/A</b>              | Spectrum Analyzer                       |
| <b>V</b>                | Volt                                    |

## 2 Equipment Under Test

### 2.1 EUT Identification & Description

The Axiometric, LLC WM2 Water Meter is a wireless metering system for monitoring of water usage.

**Table 1: Device Summary**

| ITEM                    | DESCRIPTION  |
|-------------------------|--|
| Manufacturer:           | Axiometric LLC                                       |
| FCC ID Number           | VE4-WM2E   |
| EUT Name:               | WM2 Water Meter                                      |
| Model:                  | WM2  |
| FCC Rule Parts:         | 15.247   |
| Frequency Range:        | 902.5-927MHz   |
| Maximum Output Power:   | 355mW (25.5dBm)                                      |
| Modulation:             | FHSS FSK   |
| 20dB Bandwidth:         | 141.9 kHz for mesh mode, 365.4 kHz for drive-by mode |
| Keying:                 | Automatic  |
| Type of Information:    | Data   |
| Number of Channels:     | 50   |
| Power Output Level      | Fixed  |
| Antenna Type            | 1dB spiral wound 1/4 wave vertical whip              |
| Power Source & Voltage: | Two 3.6Vdc Lithium battery                           |

### 2.2 Test Configuration

The WM2 Water Meter was tested as a stand-alone device with power provided directly to the EUT from a 3.5VDC Lab Power supply for bench tests. Radiated tests were performed with fully charged batteries. The EUT was connected to a support laptop for RF control via RS-232 maintenance port connection to a 6 pin header. The RF radiated tests were performed with a 1dBi whip antenna mounted to the transmitter board.

### 2.3 Testing Algorithm

The WM2 Water Meter was programmed via a 6 pin maintenance port on the EUT to a RS232 port on the support laptop. The support laptop used HyperTerminal to command the EUT to transmit on the lowest, center, and highest channels. Commands were also sent to allow the unit to transmit in a hopping fashion. The unit was preloaded with a typical data payload to transmit.

Worst case emission levels are provided in the test results data.

## 2.4 Test Location

All measurements herein were performed at Washington Laboratories, Ltd. test center in Gaithersburg, MD. Site description and site attenuation data have been placed on file with the FCC's Sampling and Measurements Branch at the FCC laboratory in Columbia, MD. Washington Laboratories, Ltd. has been accepted by the FCC and approved by ACLASS under Certificate AT-1448 as an independent FCC test laboratory.

## 2.5 Measurements

### 2.5.1 References

FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

ANSI C63.2 Specifications for Electromagnetic Noise and Field Strength Instrumentation

### 2.5.2 Measurement Uncertainty

All results reported herein relate only to the equipment tested. The basis for uncertainty calculation uses ANSI/NCSL Z540-2-1997 with a type B evaluation of the standard uncertainty. Elements contributing to the standard uncertainty are combined using the method described in to arrive at the total standard uncertainty. The standard uncertainty is multiplied by the coverage factor to determine the expanded uncertainty which is generally accepted for use in commercial, industrial, and regulatory applications and when health and safety are concerned (see Equation 2). A coverage factor was selected to yield a 95% confidence in the uncertainty estimation.

### Equation 1: Standard Uncertainty

$$u_c = \pm \sqrt{\frac{a^2}{div_a^2} + \frac{b^2}{div_b^2} + \frac{c^2}{div_c^2} + \dots}$$

Where  $u_c$  = standard uncertainty

$a, b, c, \dots$  = individual uncertainty elements

$Div_{a, b, c}$  = the individual uncertainty element divisor based on the probability distribution

Divisor = 1.732 for rectangular distribution

Divisor = 2 for normal distribution

Divisor = 1.414 for trapezoid distribution

### Equation 2: Expanded Uncertainty

$$U = k u_c$$

Where  $U$  = expanded uncertainty  
 $k$  = coverage factor  
 $k \leq 2$  for 95% coverage (ANSI/NCSL Z540-2 Annex G)  
 $u_c$  = standard uncertainty

Measurement uncertainty is not used to adjust the measurements to determine compliance. The expanded uncertainty values for the various scopes in the WLL accreditation are provided in Table 2 below.

**Table 2: Expanded Uncertainty List**

| Scope              | Standard(s)                            | Expanded Uncertainty |
|--------------------|--|----------------------|
| Radiated Emissions | CISPR11, CISPR22, CISPR14, FCC Part 15 | $\pm 4.55$ dB        |

### 3 Test Equipment

Table 3 shows a list of the test equipment used for measurements along with the calibration information.

**Table 3: Test Equipment List**

Equipment List- Conducted Antenna Port Tests

| Test Name: |                    | Test Date: <b>10/2/2013</b> |           |
|------------|--------------------|-----------------------------|-----------|
| Asset #    | Manufacturer/Model | Description                 | Cal. Due  |
| 528        | AGILENT - E4446A   | ANALYZER SPECTRUM           | 2/28/2014 |
| 74         | HP - 8593A         | ANALYZER SPECTRUM           | 10/4/2014 |

Equipment List- Radiated Emissions Tests

| Test Name: <b>Radiated Emissions</b> |   | Test Date: <b>09/25/2013</b>   |           |
|--------------------------------------|---|--------------------------------|-----------|
| Asset #                              | Manufacturer/Model                            | Description                    | Cal. Due  |
| 728                                  | AGILENT - 8564EC                              | SPECTRUM ANALYZER 30HZ - 40GHZ | 5/22/2014 |
| 627                                  | AGILENT - 8449B                               | AMPLIFIER 1-26GHZ              | 5/13/2014 |
| 281                                  | ITC - 21A-3A1                                 | WAVEGUIDE 4.51-10.0GHZ         | 5/29/2014 |
| 742                                  | PENN ENGINEERING - WR284                      | 2.2-4.15GHZ BANDPASS FILTER    | 5/29/2014 |
| 72                                   | HP - 8568B                                    | ANALYZER SPECTRUM              | 1/1/2014  |
| 68                                   | HP - 85650A                                   | ADAPTER QP                     | 1/1/2014  |
| 70                                   | HP - 85685A                                   | PRESELECTOR RF W/OPT 8ZE       | 1/1/2014  |
| 644                                  | SUNOL SCIENCES CORPORATION - JB1 925-833-9936 | BICONALOG ANTENNA              | 1/11/2014 |

## 4 Test Summary

The Table Below shows the results of testing for compliance for a Frequency Hopping System in accordance with FCC Part 15.247:2012 Full results are shown in section 5.

**Table 4: Test Summary Table**

| FCC Rule Part    | Description  | Result                  |
|------------------|--|-------------------------|
| 15.247 (a)(1)(i) | 20dB Bandwidth   | Pass                    |
| 15.247 (b)(2)    | Transmit Output Power  | Pass                    |
| 15.247 (a)(1)    | Channel Separation   | Pass                    |
| 15.247 (a)(1)(i) | Number of Channels =50 minimum                               | Pass                    |
| 15.247 (a)(1)(i) | Time of Occupancy  | Pass                    |
| 15.247 (d)       | Occupied BW / Out-of-Band Emissions (Band Edge @ 20dB below) | Pass                    |
| 15.205           | General Field Strength Limits                                | Pass                    |
| 15.209           | (Restricted Bands & RE Limits)                               |                         |
| 15.207           | AC Conducted Emissions                                       | NA<br>(battery powered) |

## 5 Test Results

### 5.1 Duty Cycle Correction


In accordance with the FCC Public Notice the spurious radiated emissions measurements may be adjusted by using a duty cycle correction factor if the dwell time per channel of the hopping signal is less than 100 ms.

The duty cycle correction factor is calculated by:

$$20 \times \text{LOG}(\text{dwell time}/100 \text{ ms})$$


The following figure shows the plot of the dwell time for the transmitter. Based on this plot, the dwell time per hop is 176.7ms for 'Mesh Mode' and 66.67ms for 'Drive-by mode'. The unit makes a single hop transmission every 6 seconds. FCC part 15.247 also requires that for hopping signals with an occupied bandwidth of greater than 250kHz the total transmit dwell time must be no more than 0.4 seconds per 10 seconds. For signals less than 250 kHz the limit is 0.4 seconds per 20 seconds. As the 'Mesh mode bandwidth is less than 250kHz and the 'Drive-by' mode is more than 250kHz both modes were tested and complied to their respective limit.

Even though the drive-by mode is 40ms no duty cycle correction was applied as the normal mode of operation 'Mesh mode' is over 100ms.

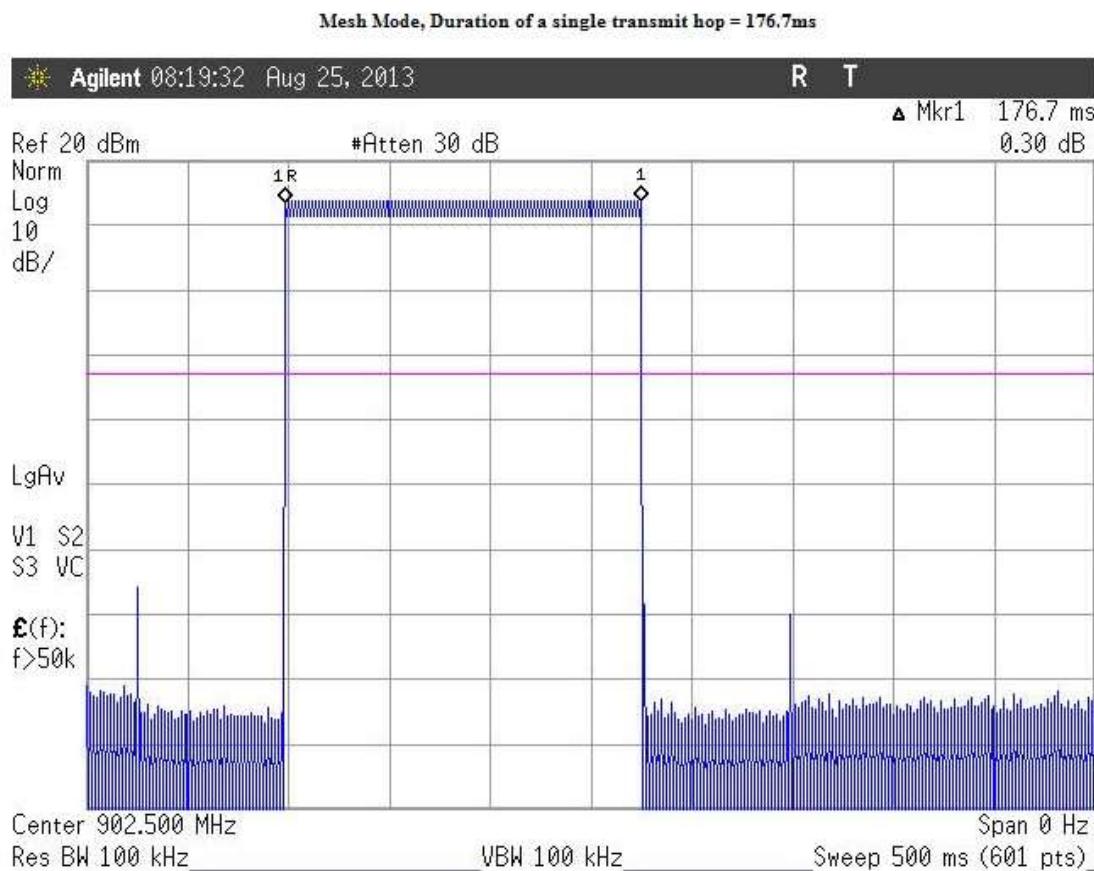


**Figure 1. Dwell Time Per Hop, Mesh Mode**


Time of Occupancy- Mesh Mode. Limit = 0.4 sec per 20 sec. EUT has 1 pulse of 176.7ms per 20 sec. EUT complies  
Note: smaller peaks are spurs from other channels.

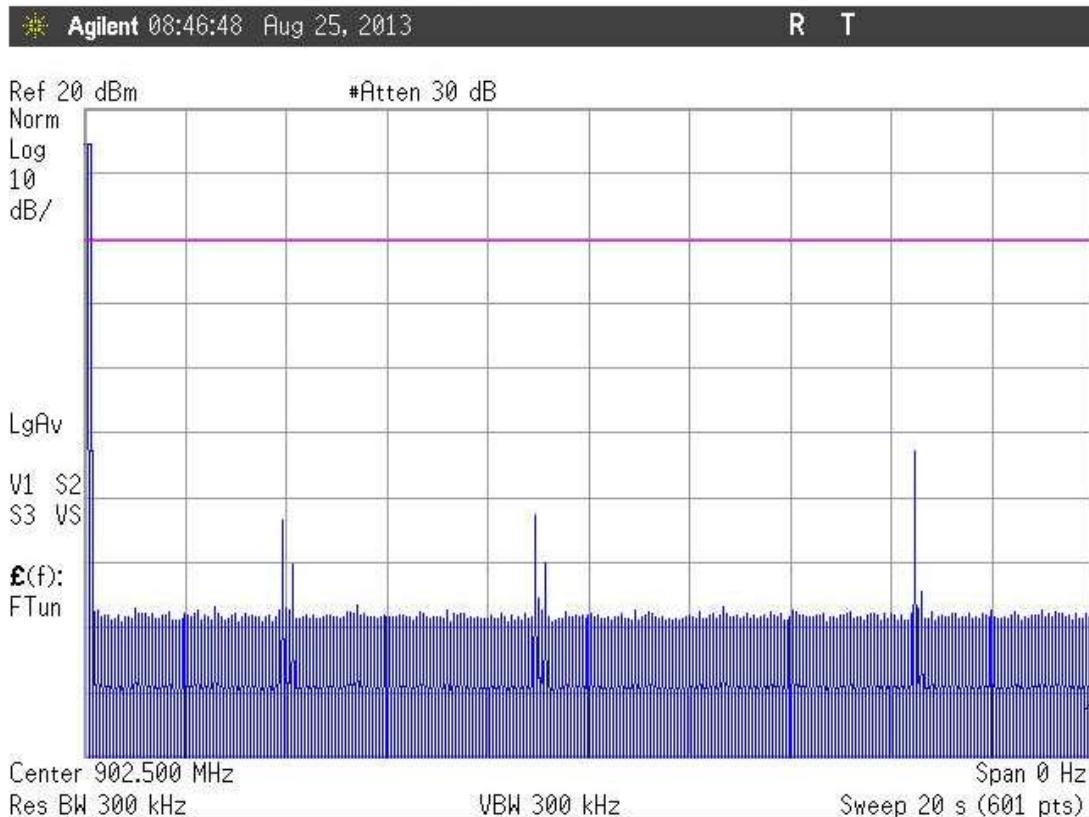

**Figure 2. Time of Occupancy per 20 seconds, Mesh Mode**

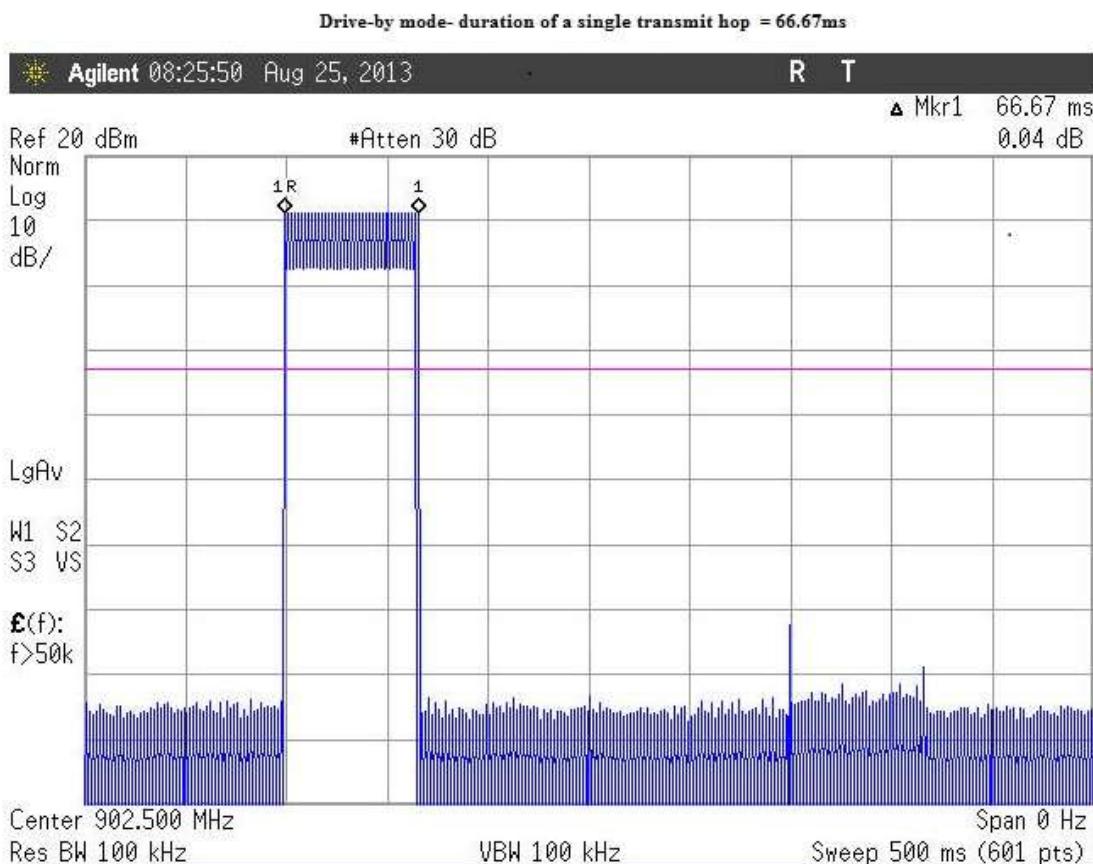

**Figure 3. Dwell Time Per Hop, Drive-by Mode**

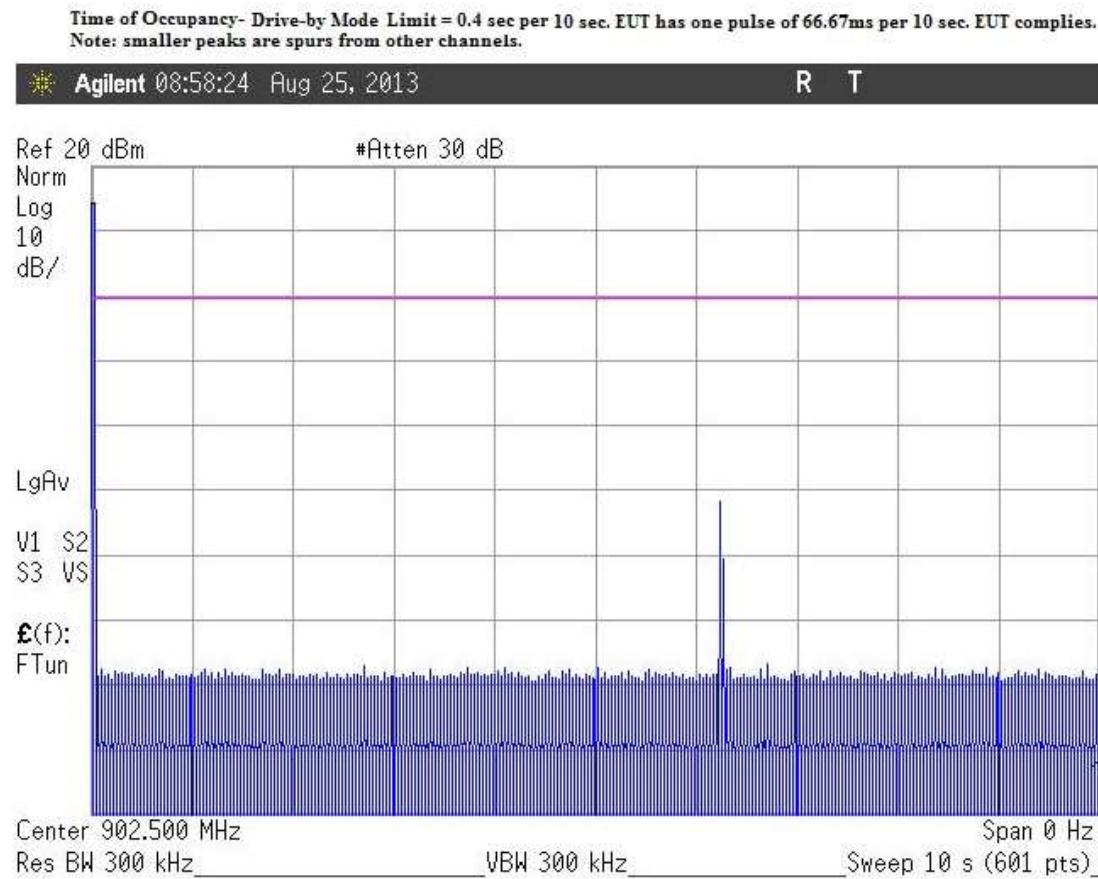

**Figure 4. Time of Occupancy per 10 seconds, drive-by Mode**


## 5.2 RF Power Output: (FCC Part §2.1046)

To measure the output power the hopping sequence was stopped while the frequency dwelled on a low, high and middle channel. The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer. The analyzer offset was adjusted to compensate for the attenuator and other losses in the system.


2 modes of operation were available: a narrow bandwidth ‘Mesh Mode’ and a wider bandwidth ‘Drive-by’ mode.

**Table 5: RF Power Output**


| Mode Tested   | Frequency              | Level (dBm) | Limit (dBm) | Pass/Fail |
|---------------|------------------------|-------------|-------------|-----------|
| Mesh Mode     | Low Channel: 902.5MHz  | 25.5        | 30          | Pass      |
| Mesh Mode     | Center Channel: 915MHz | 25.1        | 30          | Pass      |
| Mesh Mode     | High Channel: 927MHz   | 24.8        | 30          | Pass      |
| Drive-by Mode | Low Channel: 902.5MHz  | 25.3        | 30          | Pass      |
| Drive-by Mode | Center Channel: 915MHz | 25.1        | 30          | Pass      |
| Drive-by mode | High Channel: 927MHz   | 24.8        | 30          | Pass      |

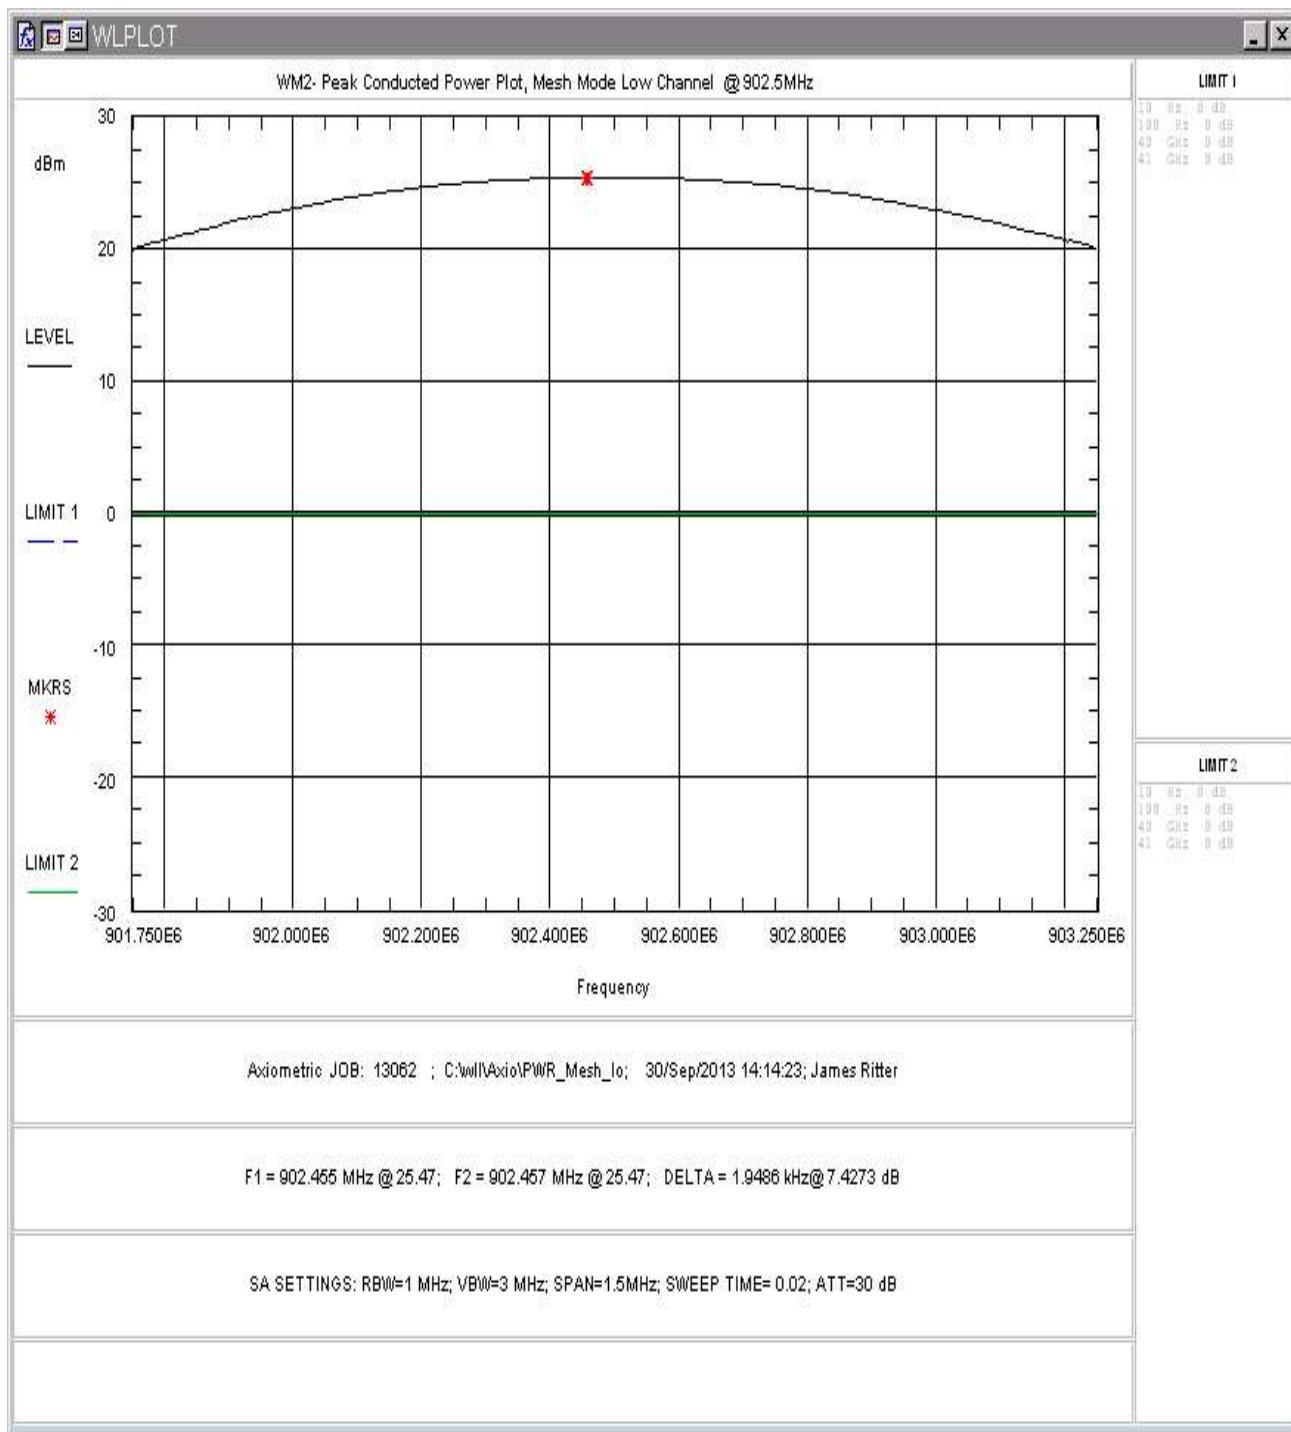


**Figure 5. RF Peak Power, Mesh Mode, Low Channel**

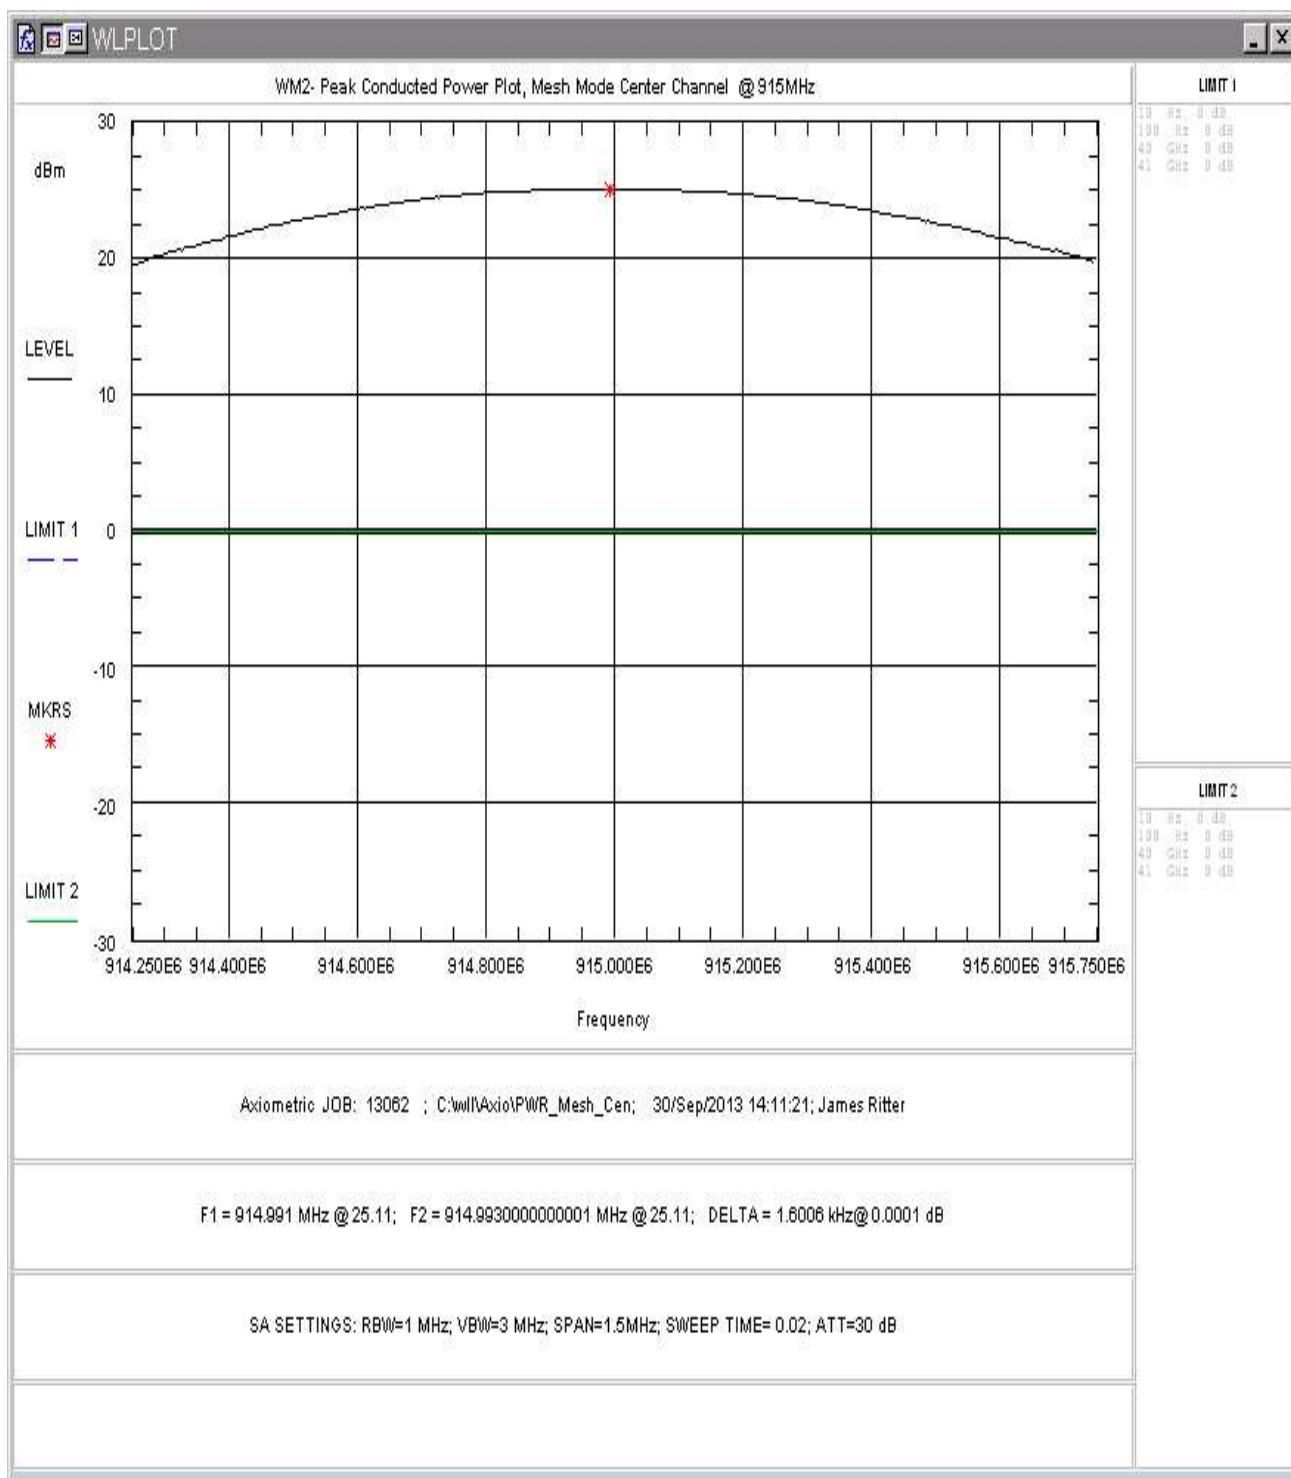


**Figure 6. RF Peak Power, Mesh Mode, Center Channel**

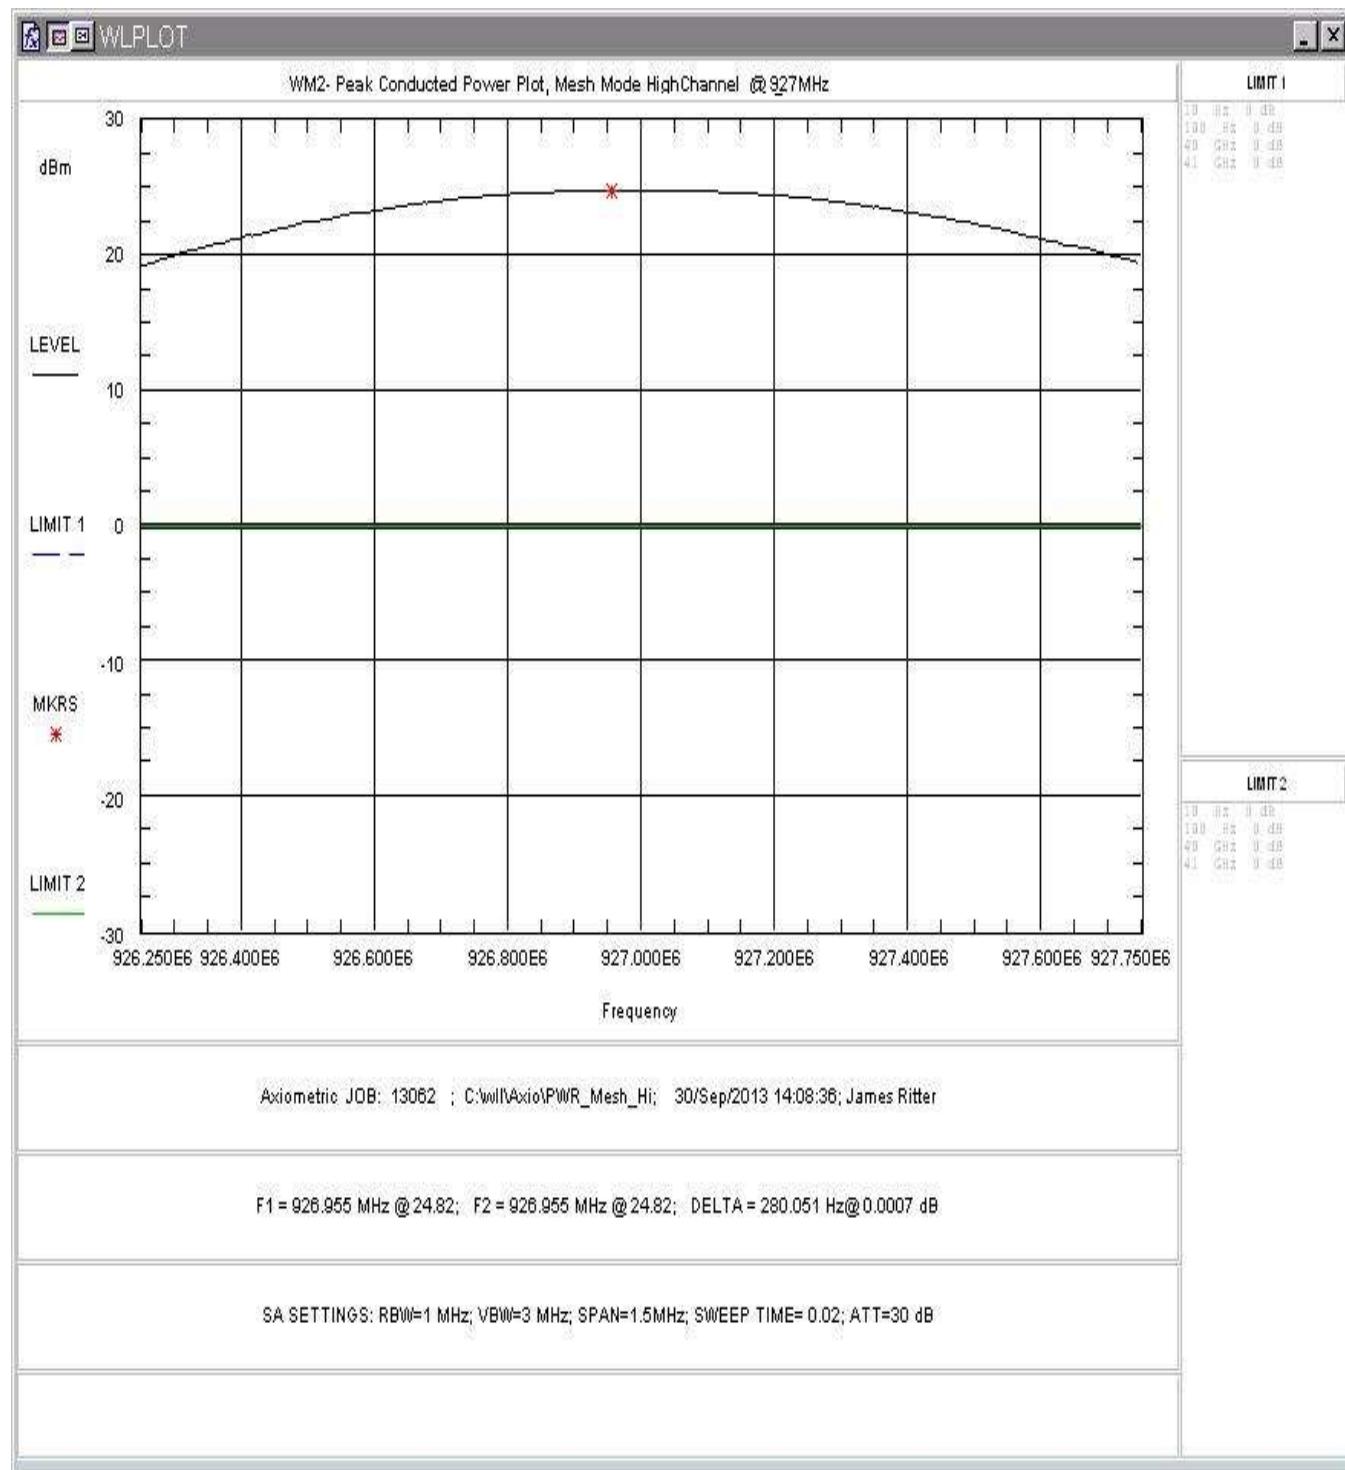


**Figure 7. RF Peak Power, Mesh Mode, High Channel**

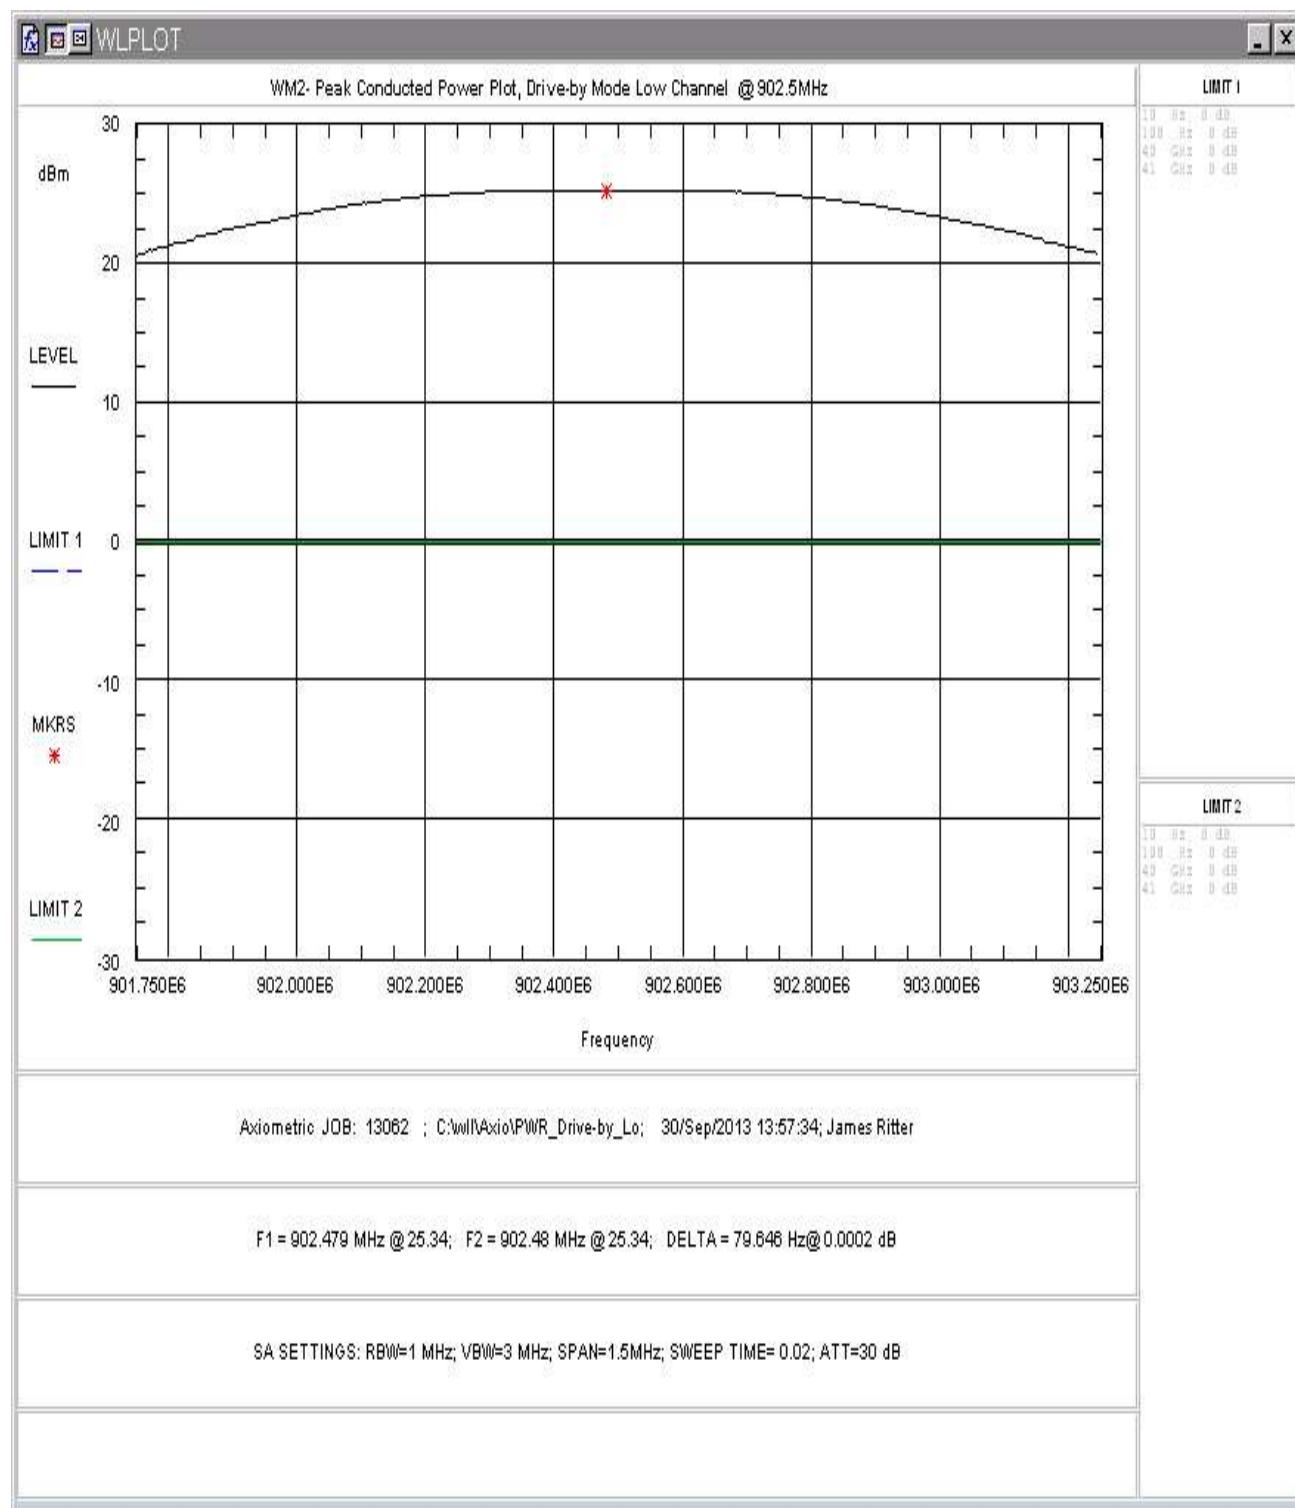

**Figure 8. RF Peak Power, Drive-by Mode, Low Channel**

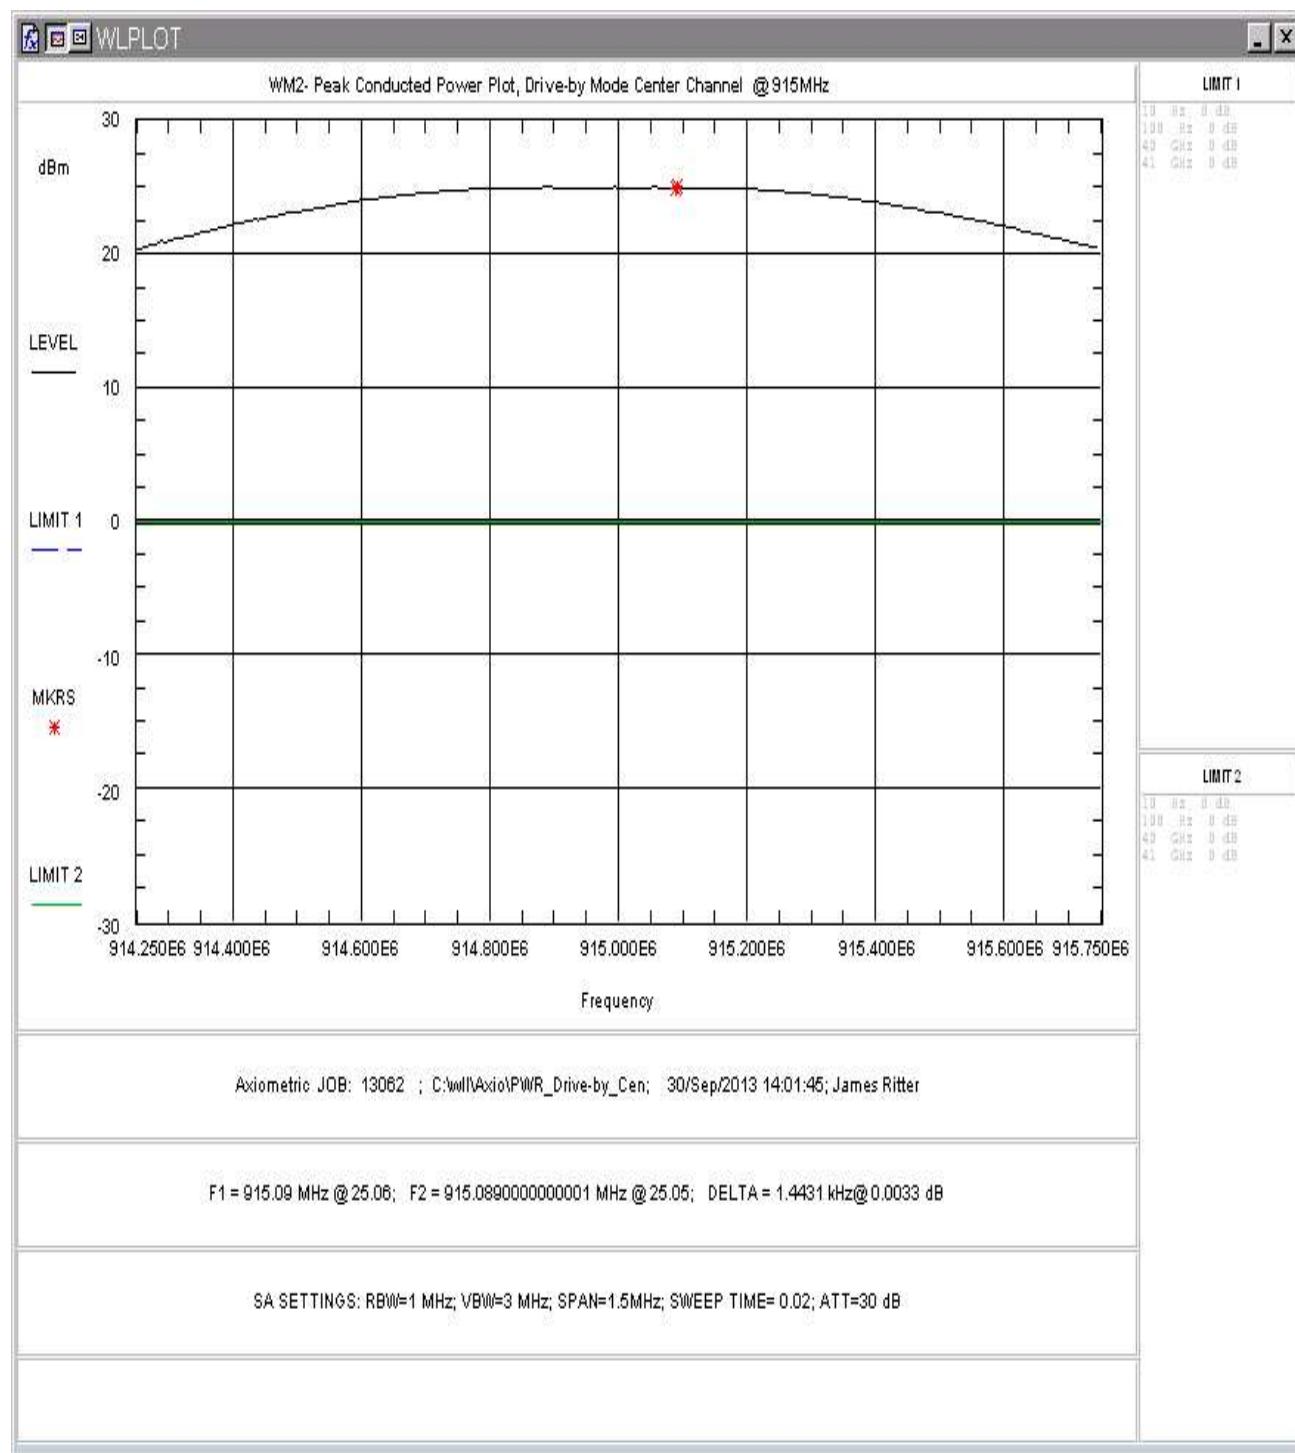

**Figure 9. RF Peak Power, Drive-by Mode, Center Channel**

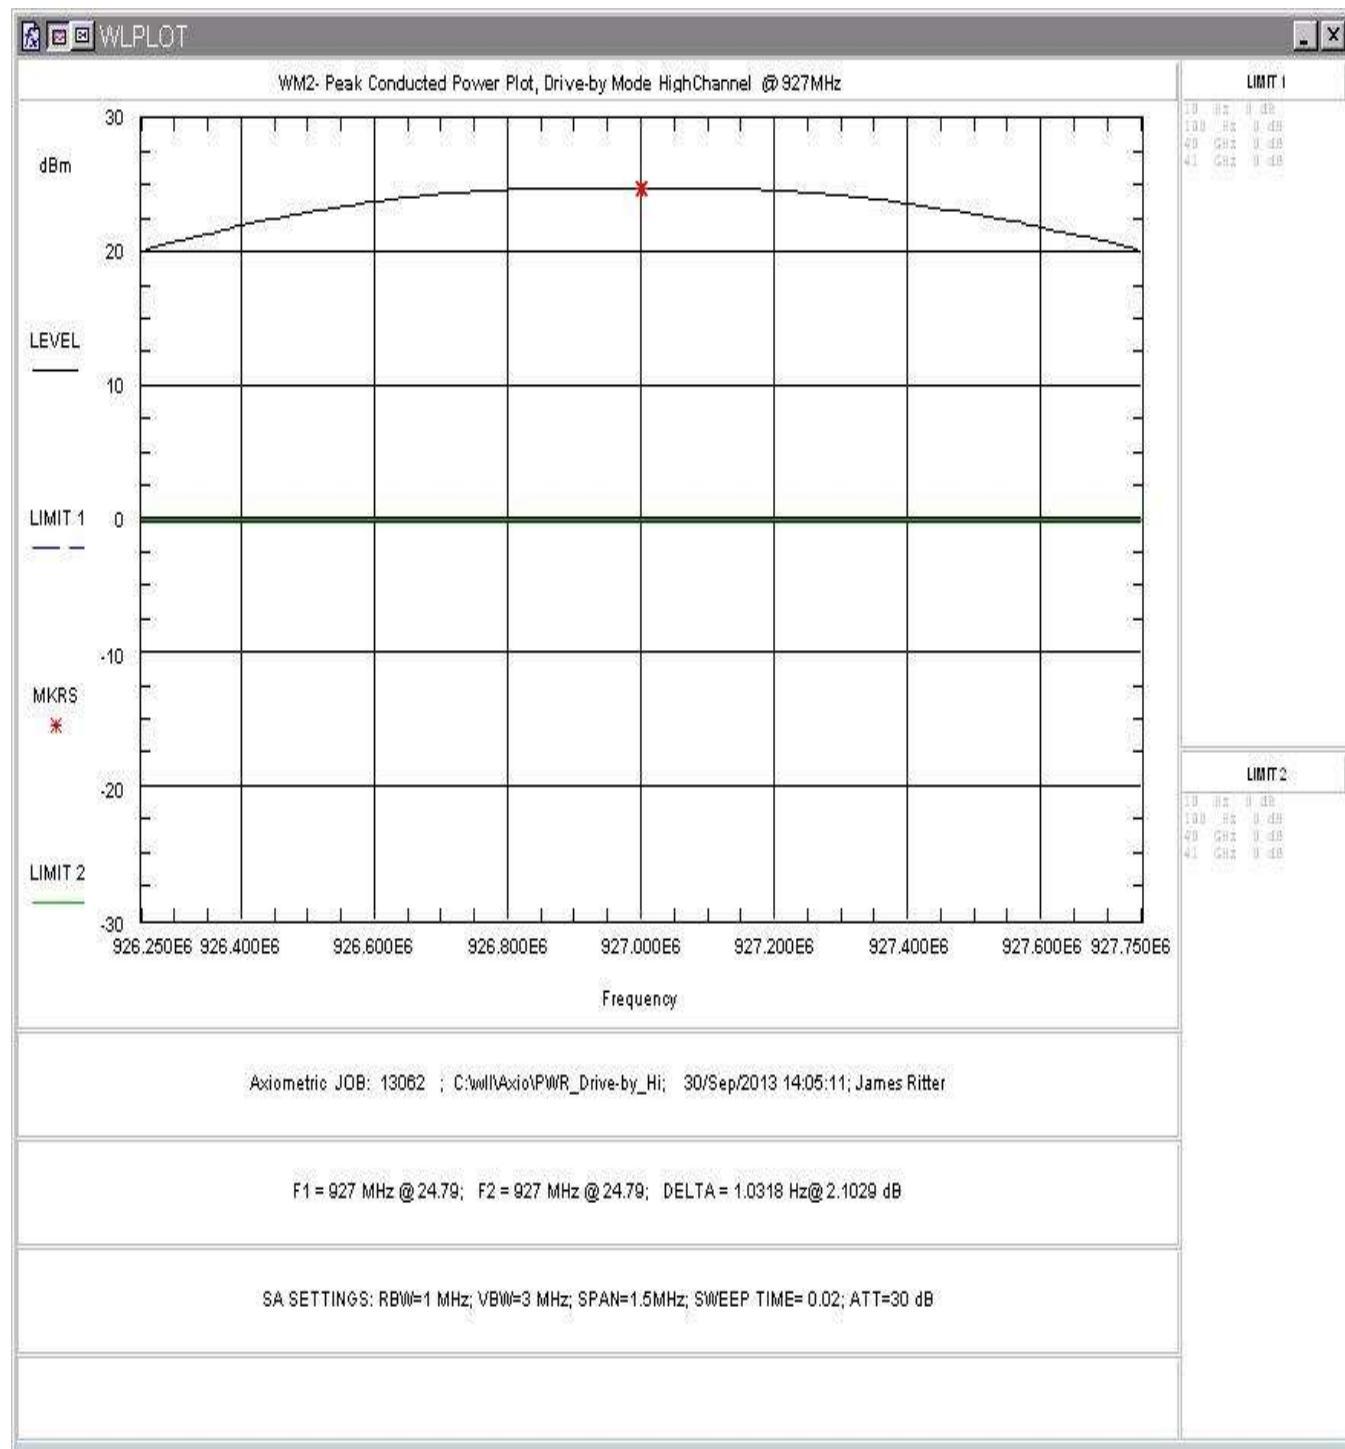

**Figure 10. RF Peak Power, Drive-by Mode, High Channel**

### 5.3 Occupied Bandwidth: (FCC Part §2.1049)

Occupied bandwidth was performed by coupling the output of the EUT to the input of a spectrum analyzer.


For Frequency Hopping Spread Spectrum Systems, FCC Part 15.247 requires the maximum 20 dB bandwidth not exceed 500 kHz.

Two modes of operation were available: a narrow bandwidth ‘Mesh Mode’ and a wider bandwidth ‘Drive-by’ mode, the occupied bandwidth was measured as shown:


Table 6 provides a summary of the Occupied Bandwidth Results.

**Table 6: Occupied Bandwidth Results**


| Mode Tested   | Frequency              | Bandwidth (kHz) | Limit (kHz) | Pass/Fail |
|---------------|------------------------|-----------------|-------------|-----------|
| Mesh Mode     | Low Channel: 902.5MHz  | 141.94          | 500         | Pass      |
| Mesh Mode     | Center Channel: 915MHz | 141.48          | 500         | Pass      |
| Mesh Mode     | High Channel: 927MHz   | 141.94          | 500         | Pass      |
| Drive-by Mode | Low Channel: 902.5MHz  | 344.65          | 500         | Pass      |
| Drive-by Mode | Center Channel: 915MHz | 365.40          | 500         | Pass      |
| Drive-by mode | High Channel: 927MHz   | 365.26          | 500         | Pass      |

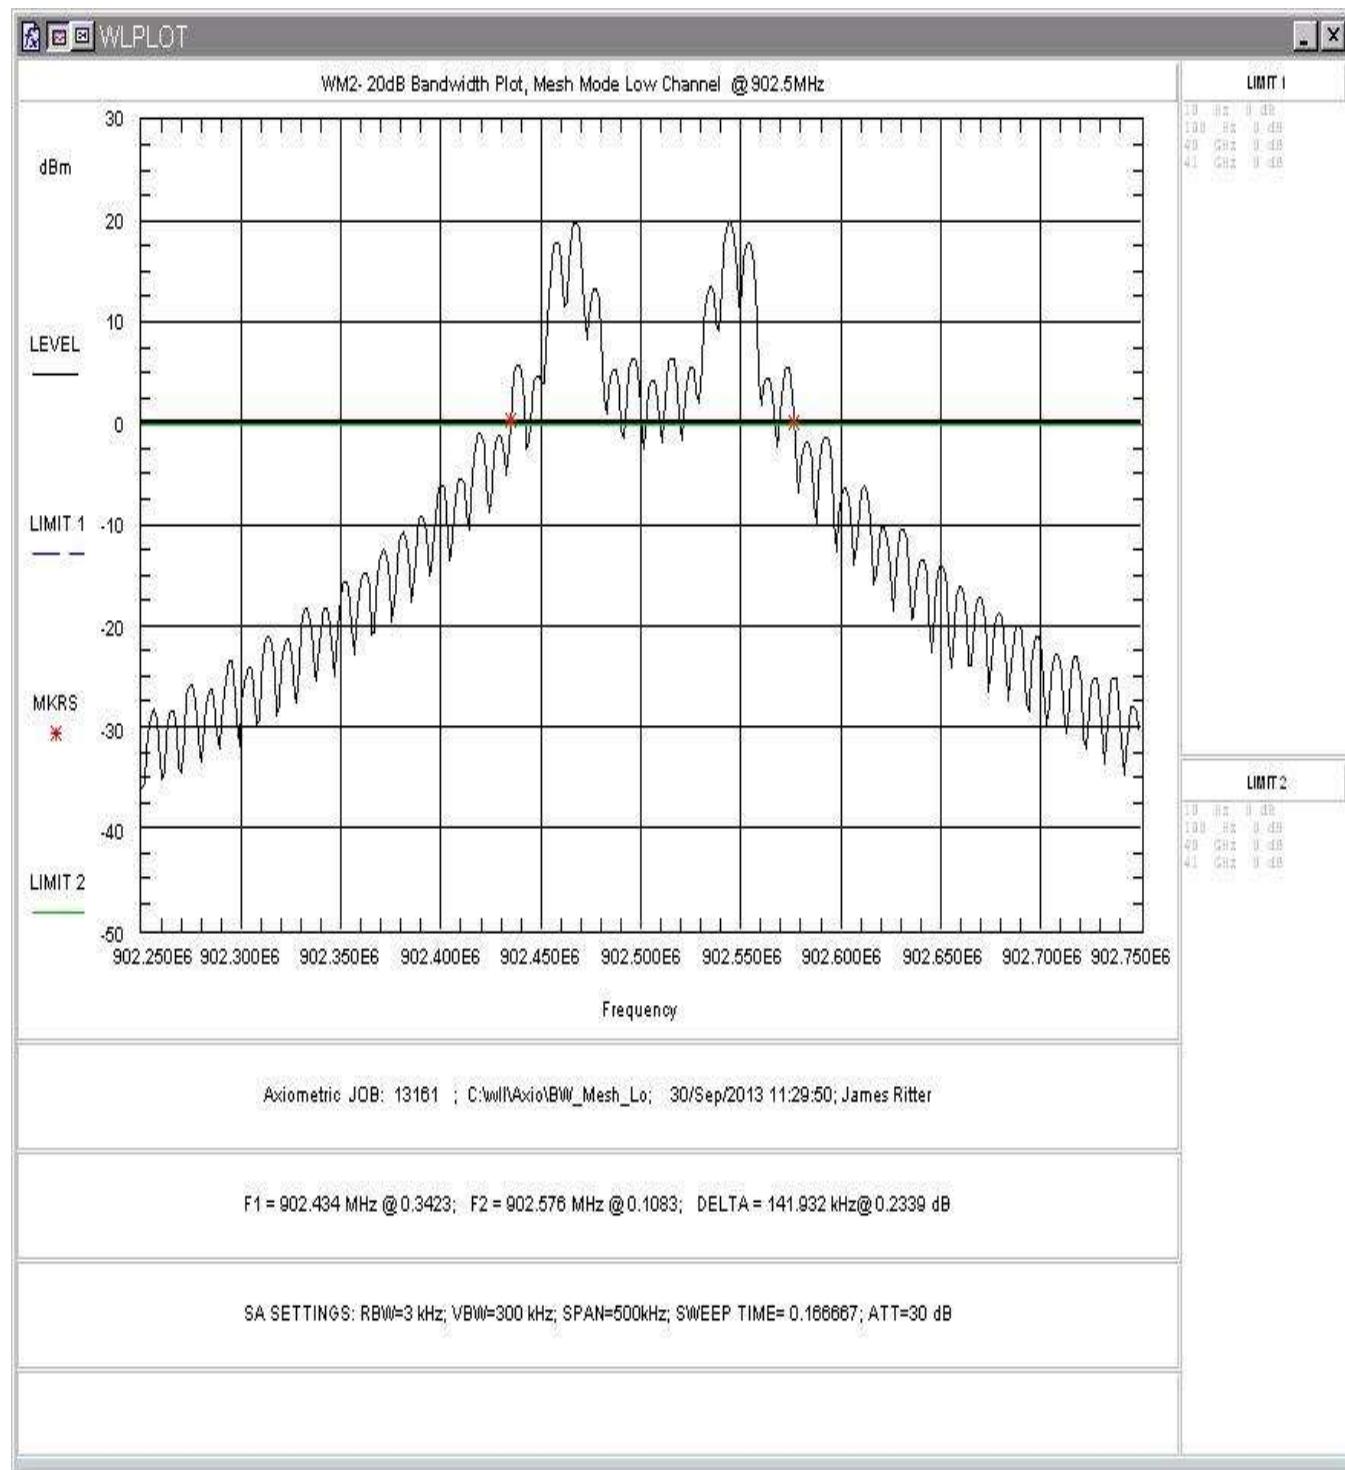


**Figure 11. Occupied Bandwidth, Mesh Mode, Low Channel**

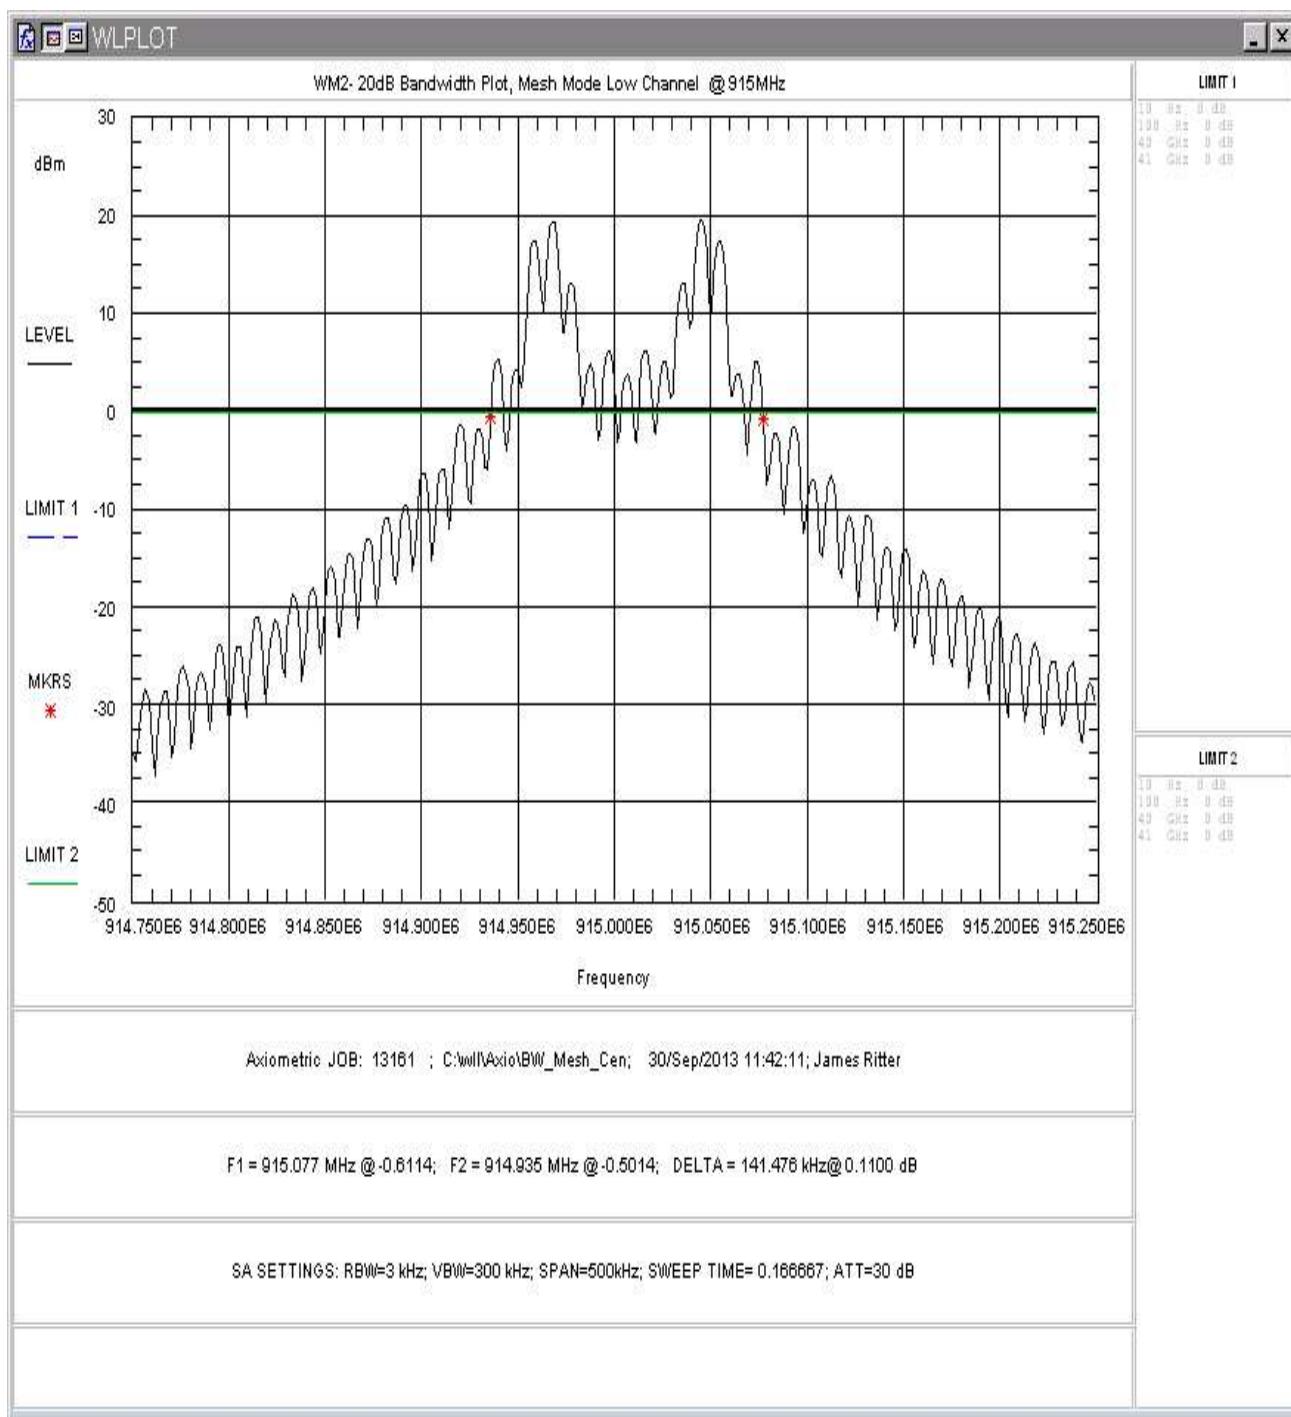


**Figure 12. Occupied Bandwidth, Mesh Mode, Center Channel**

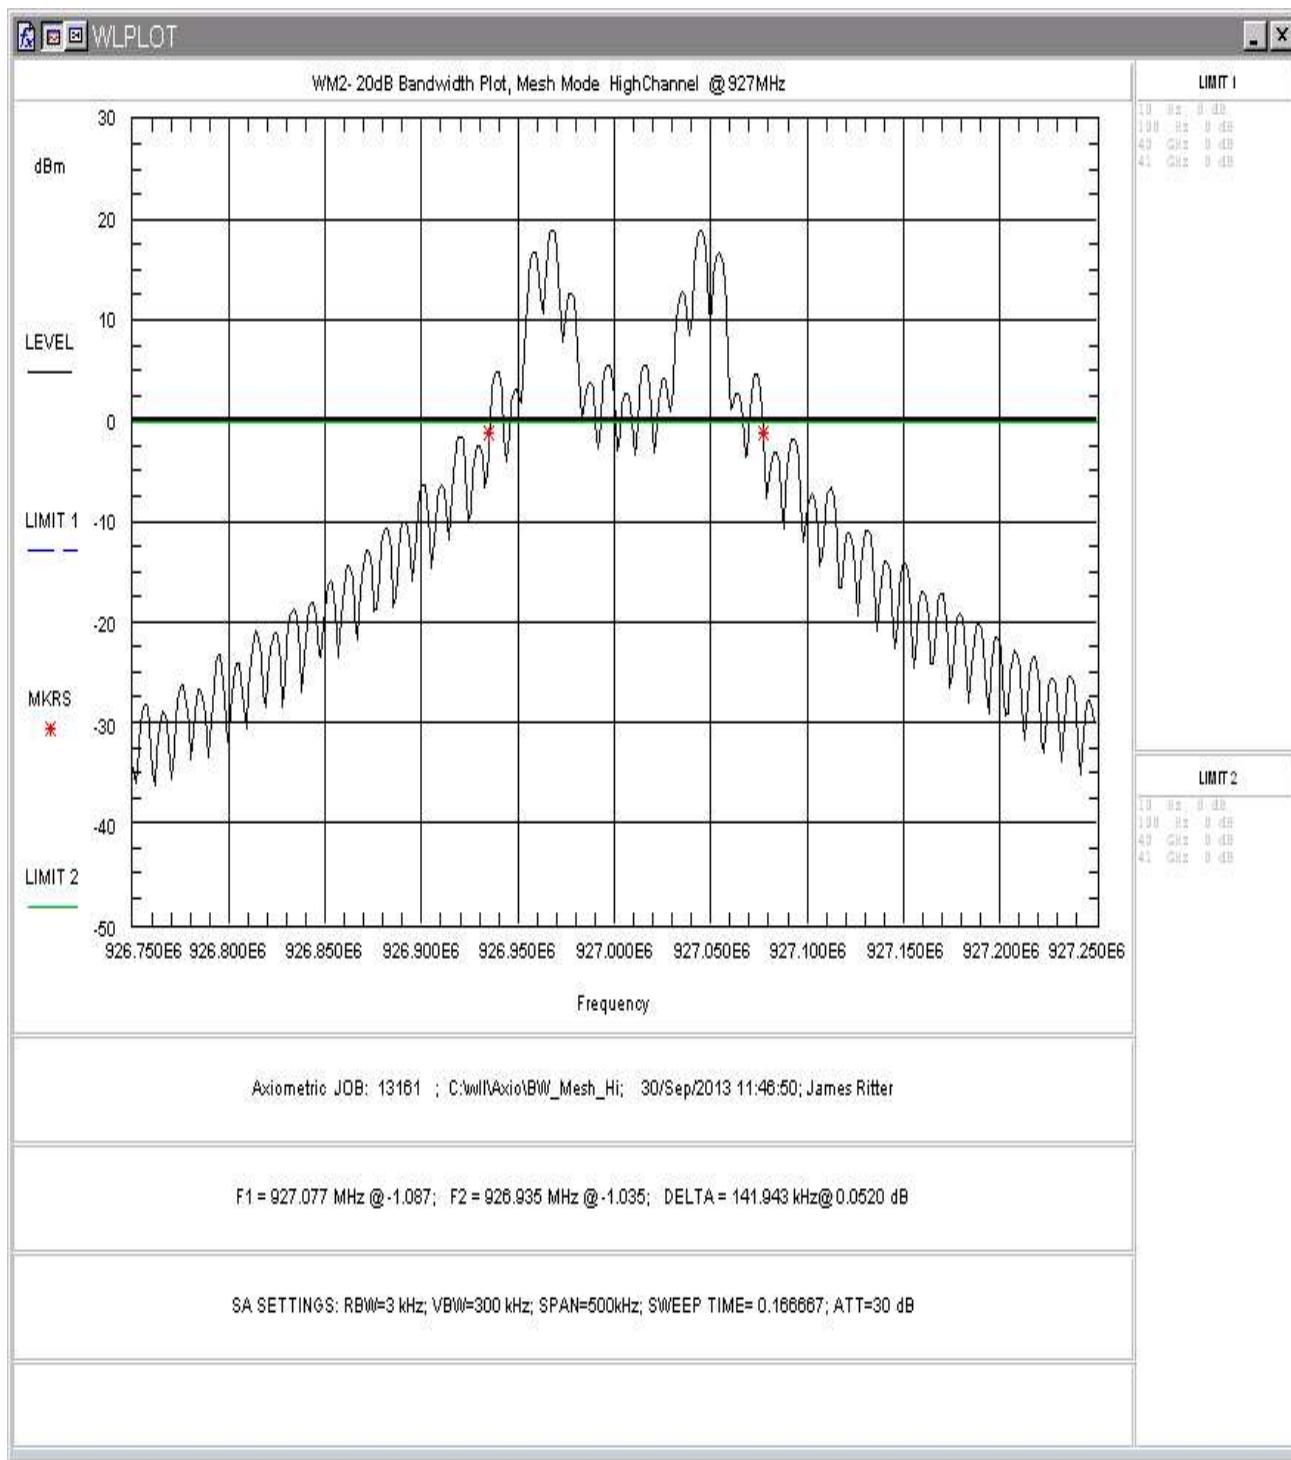


**Figure 13. Occupied Bandwidth, Mesh Mode, High Channel**

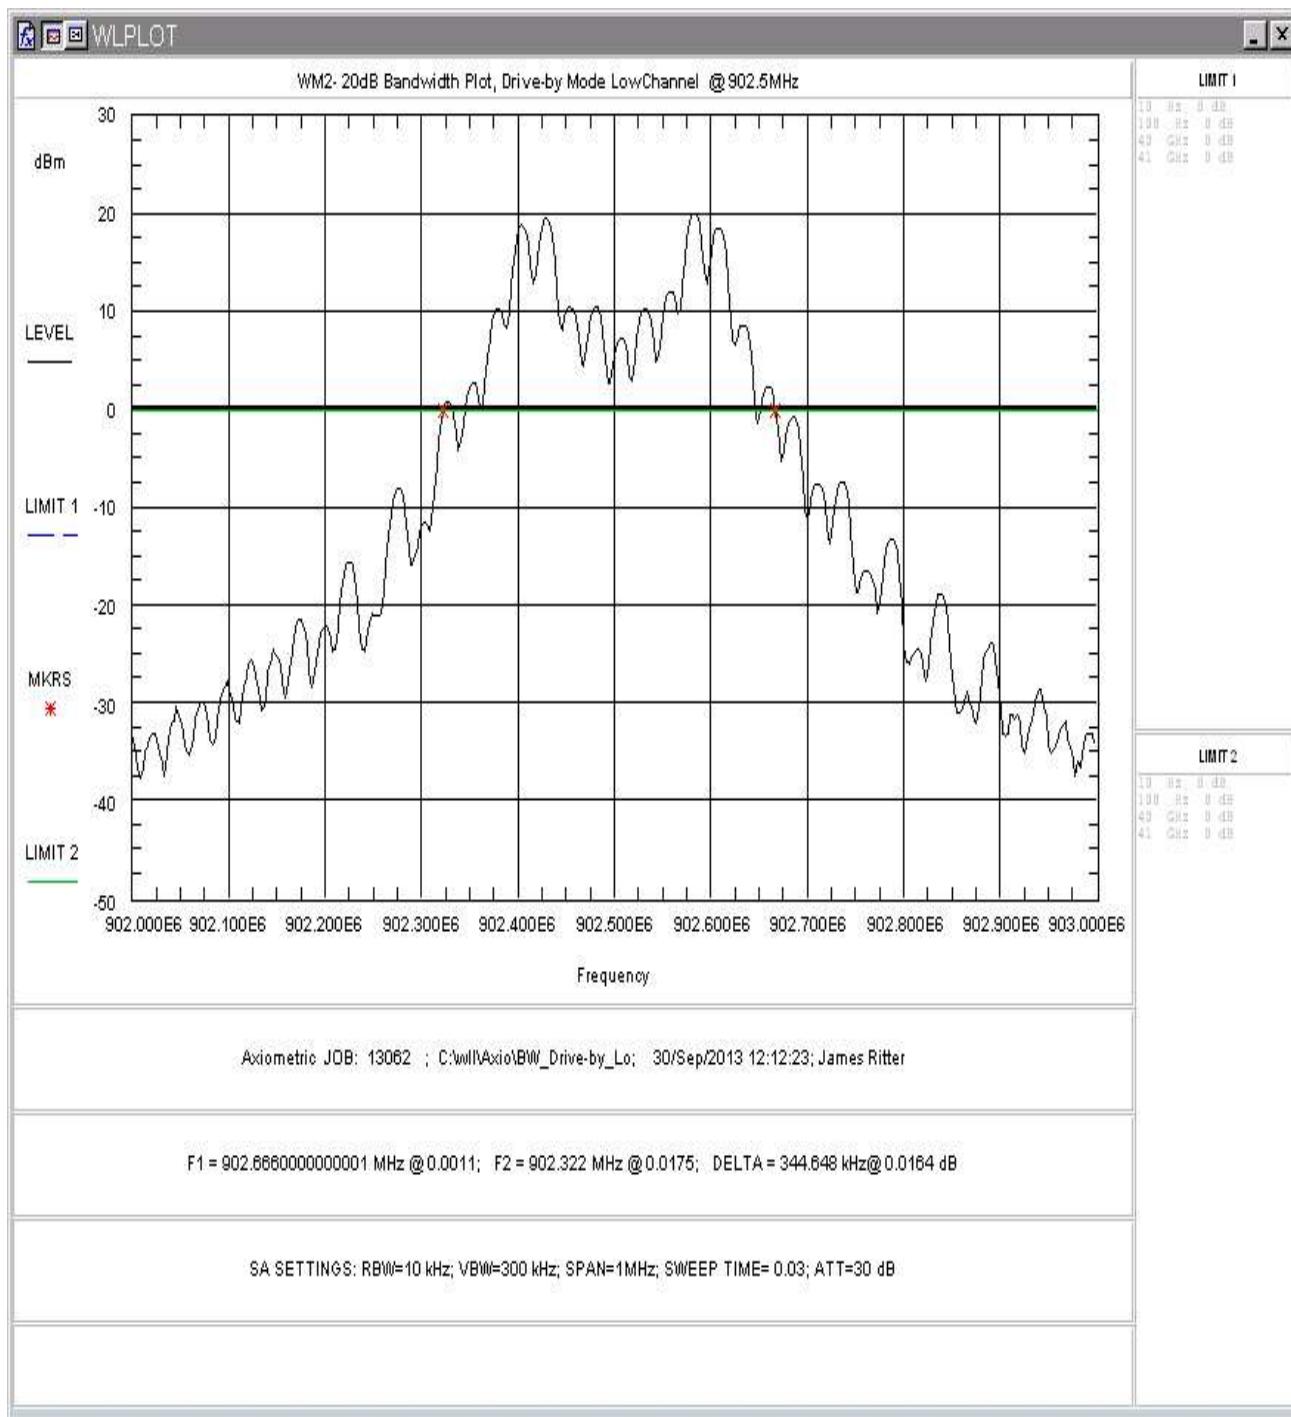

**Figure 14. Occupied Bandwidth, Drive-by Mode, Low Channel**

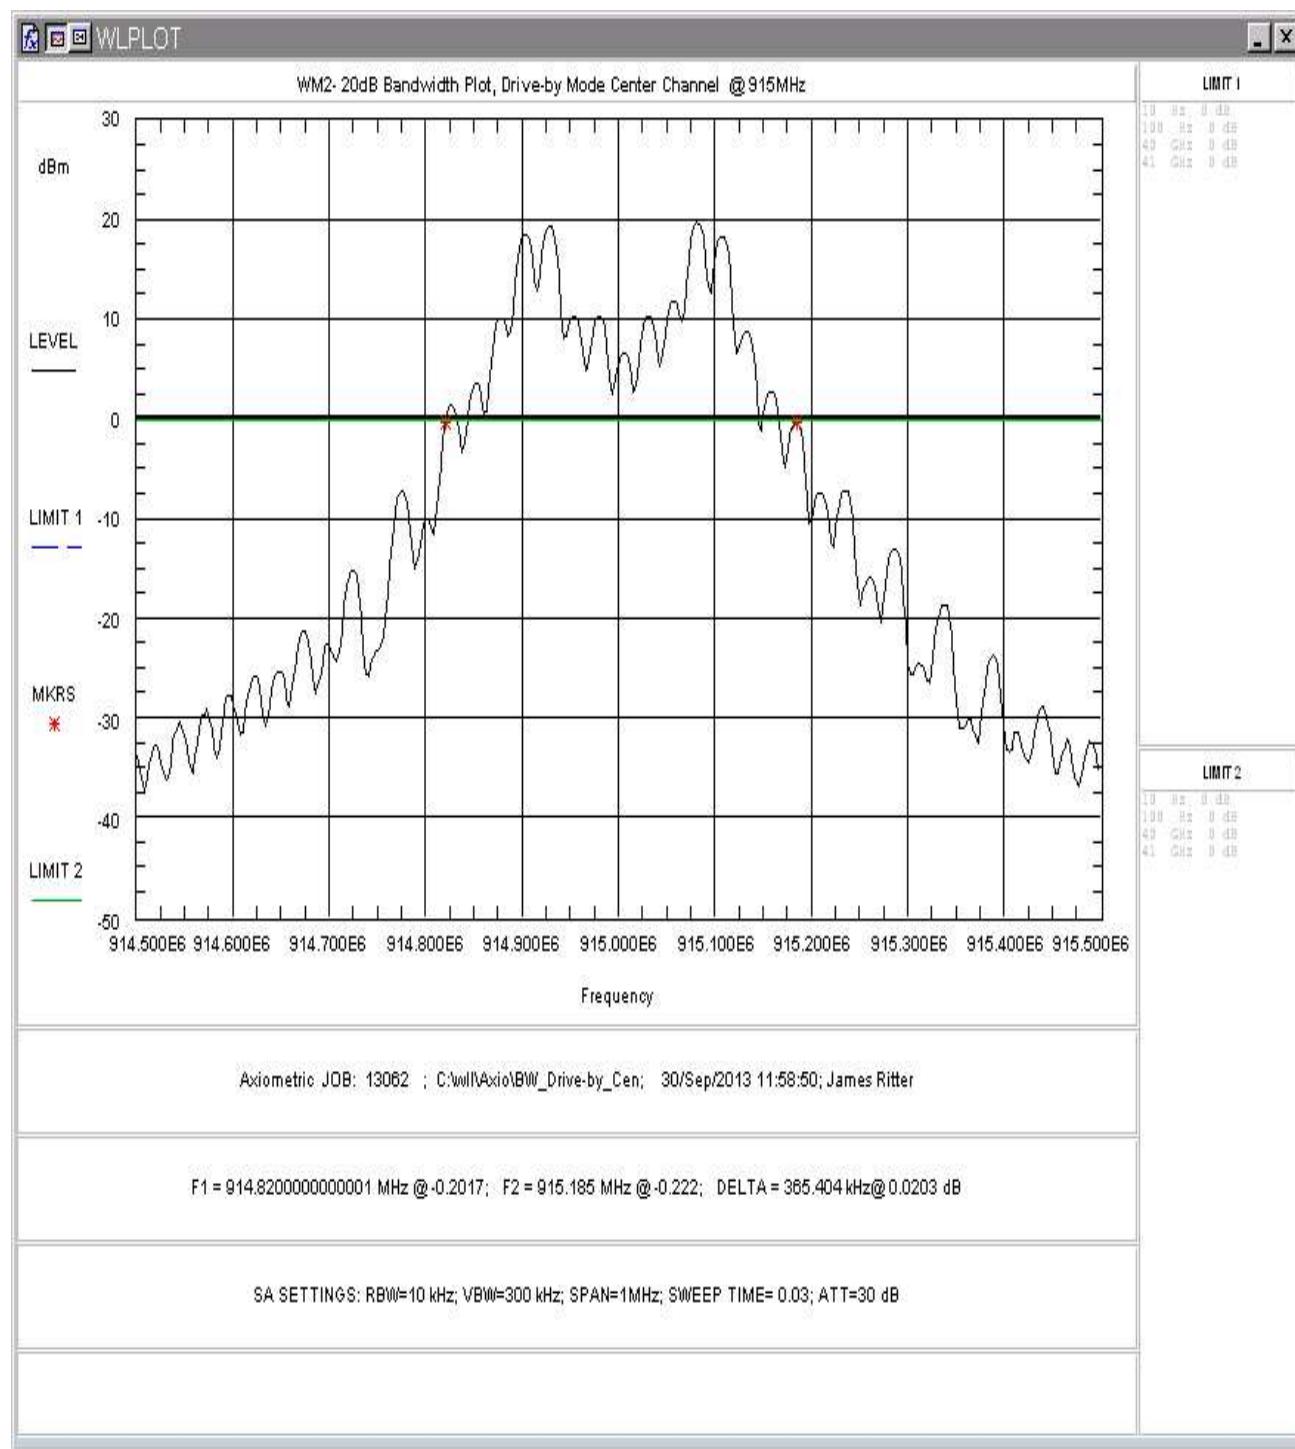

**Figure 15. Occupied Bandwidth, Drive-by Mode, Center Channel**

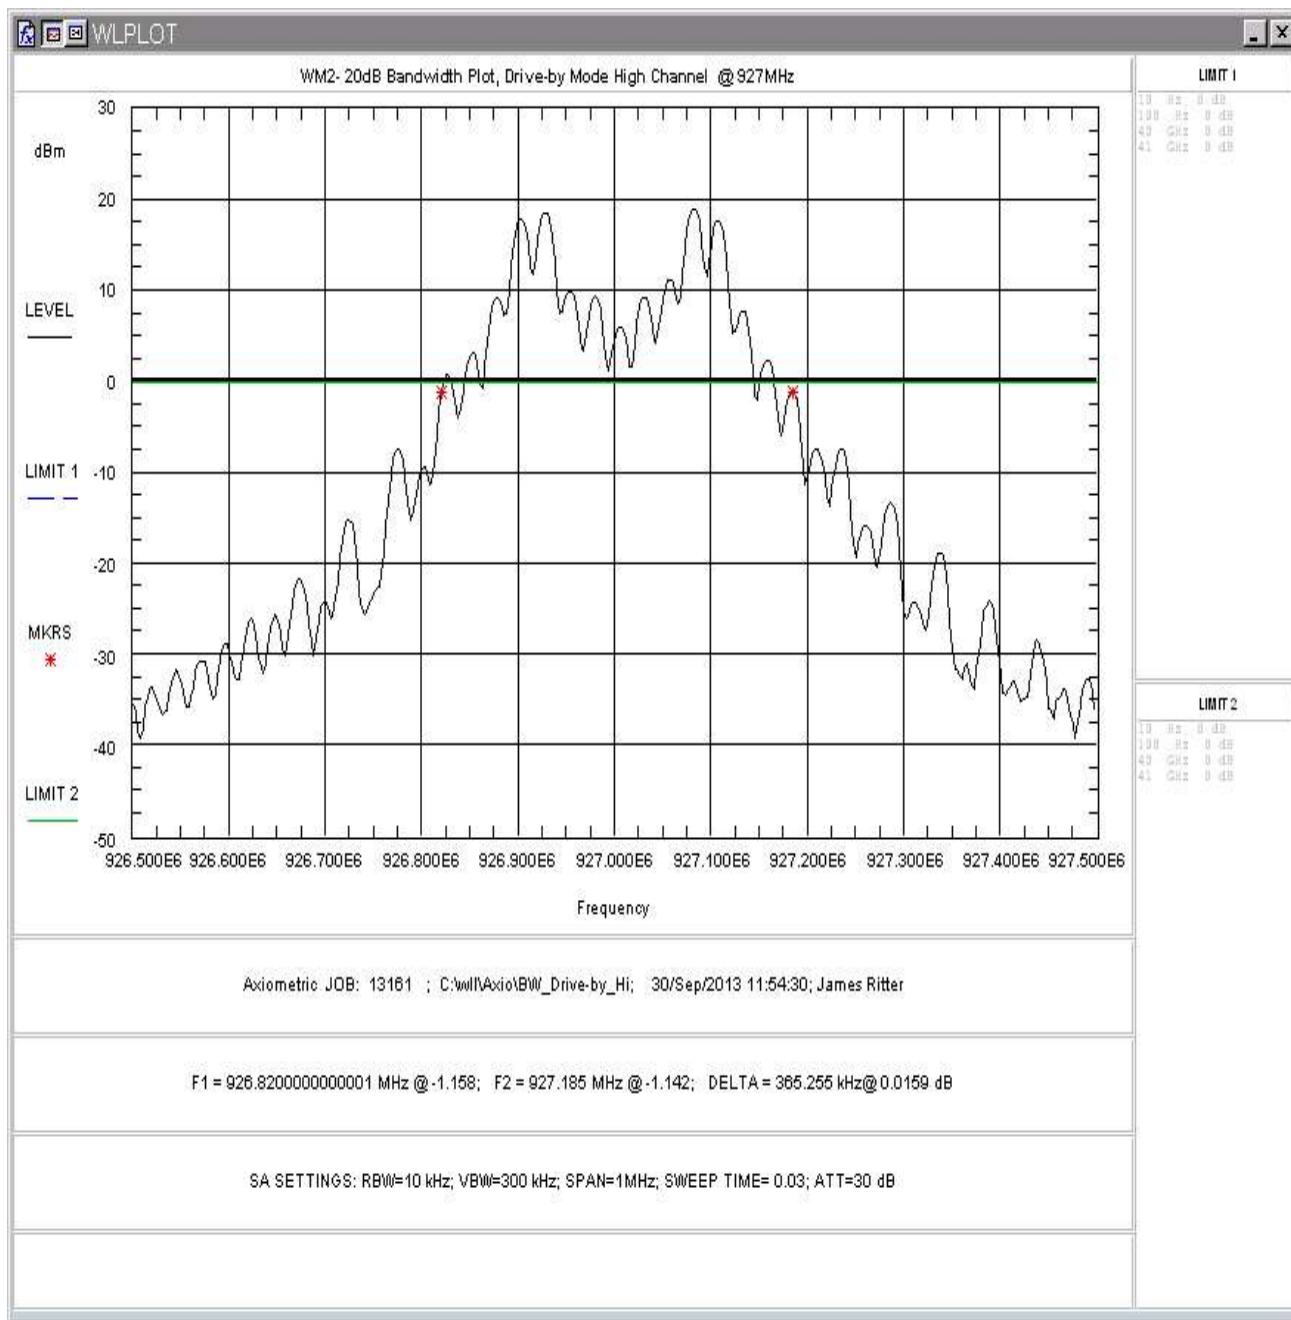

**Figure 16. Occupied Bandwidth, Drive-by Mode, High Channel**

#### 5.4 Carrier Frequency Separation and Number of Hop Channels (FCC Part §15247(a)(1)

Per the FCC requirements, frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 dB bandwidth, whichever is greater. The maximum 20dB bandwidth measured is 141.94 kHz so the channel spacing must be more than 141.94 kHz for mesh mode and 365.26 kHz for drive-by mode. In addition, the number of hopping channels shall be 50 or more for a system with an occupied bandwidth greater than 250kHz.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to greater than 1% of the span and the video bandwidth was set greater than the RBW. The channel spacing of 2 adjacent channels was measured using a spectrum analyzer span setting of 2.3MHz. Also, the number of hopping channels was measured from 902 to 928MHz (to encompass the passband).

The following are plots of the channel spacing and number of hopping channels data. The channel spacing was measured to be 500kHz in both Mesh and Drive-by Modes and the number of channels used is 50 in both modes.

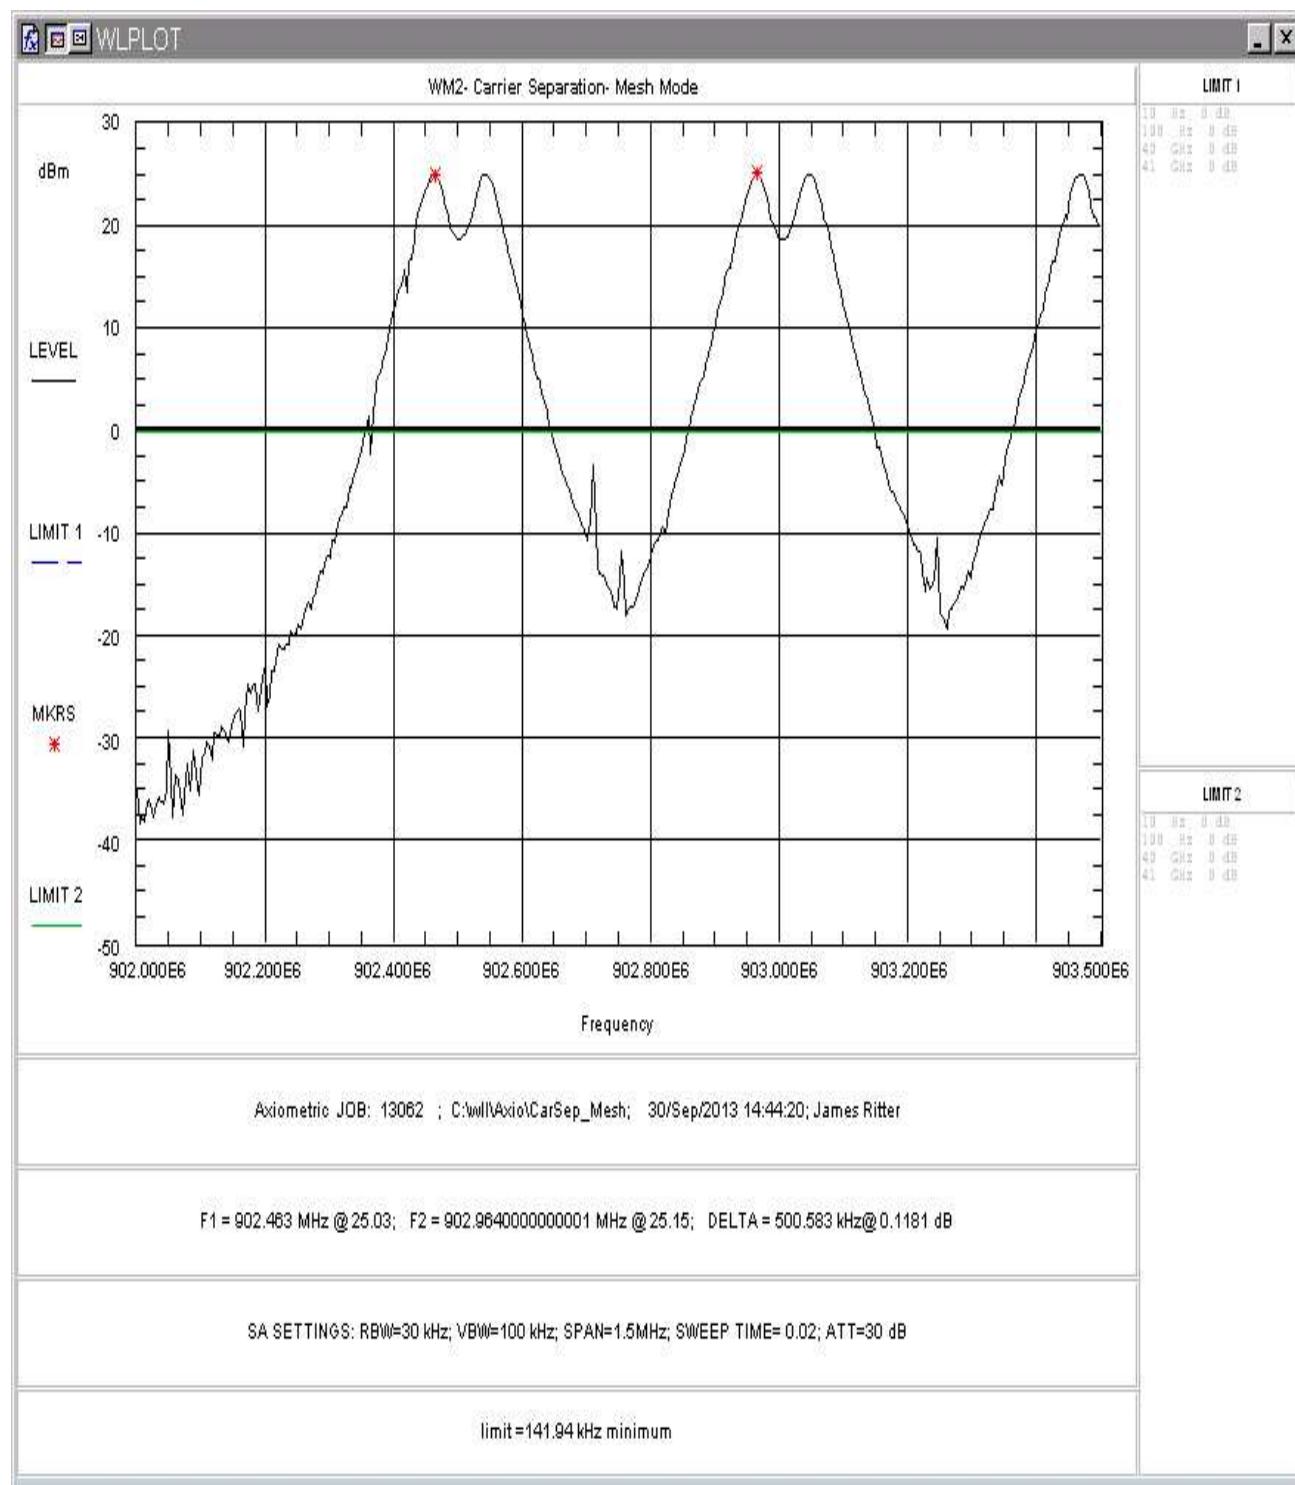


Figure 17, Channel Spacing, Mesh Mode



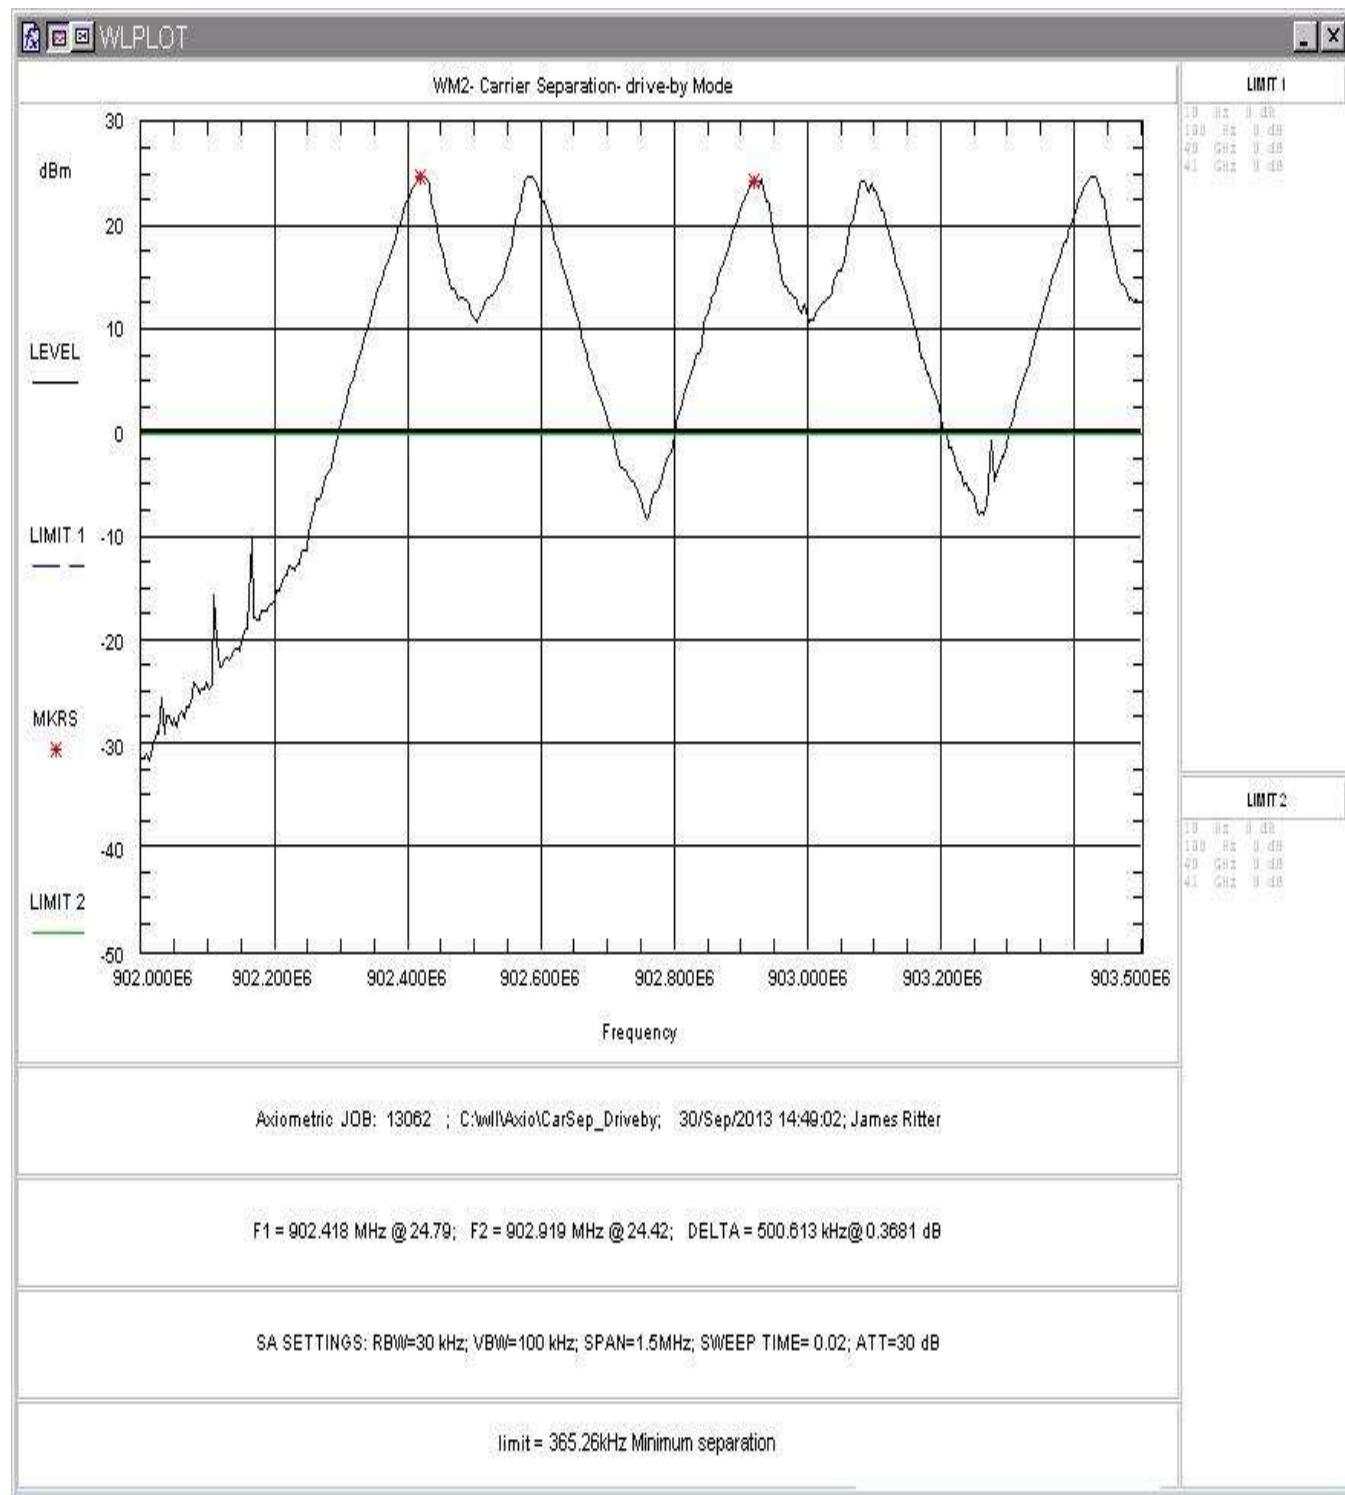


Figure 18, Channel Spacing, Drive-by Mode

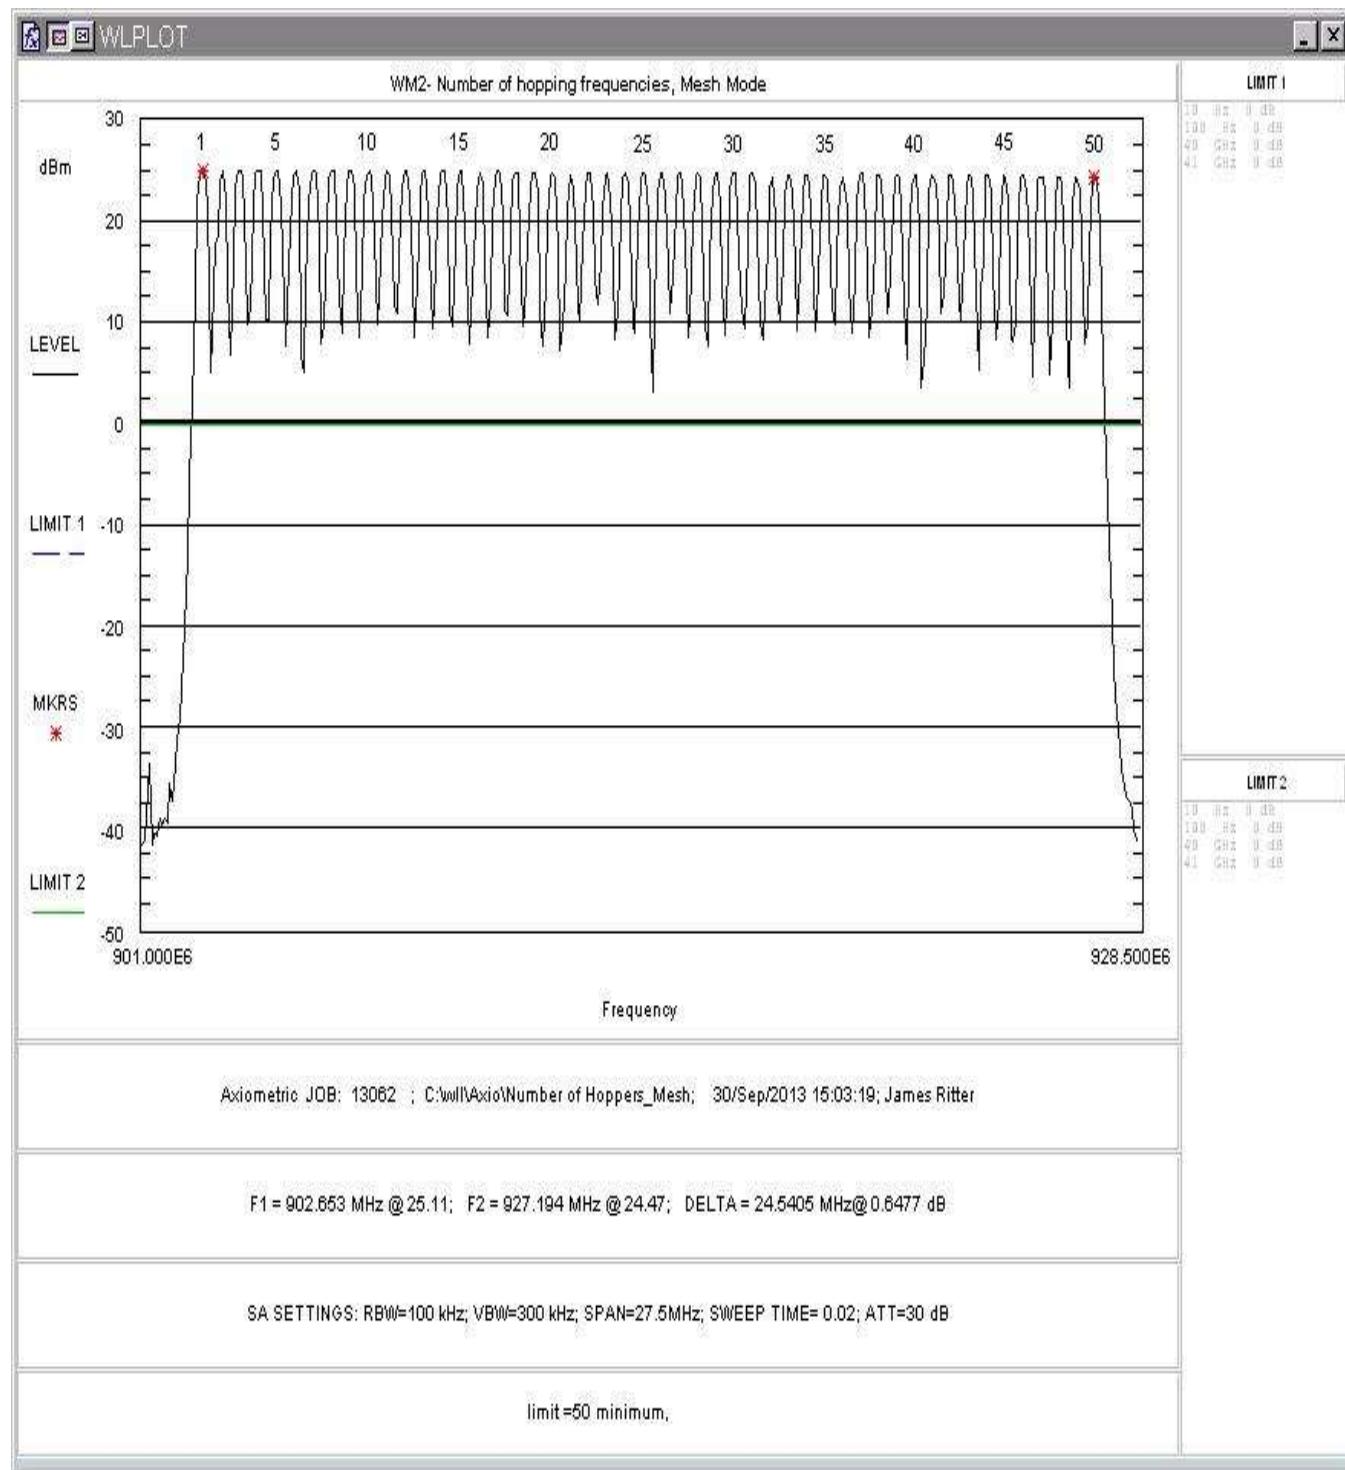

**Figure 19, Number of Channels Mesh Mode**

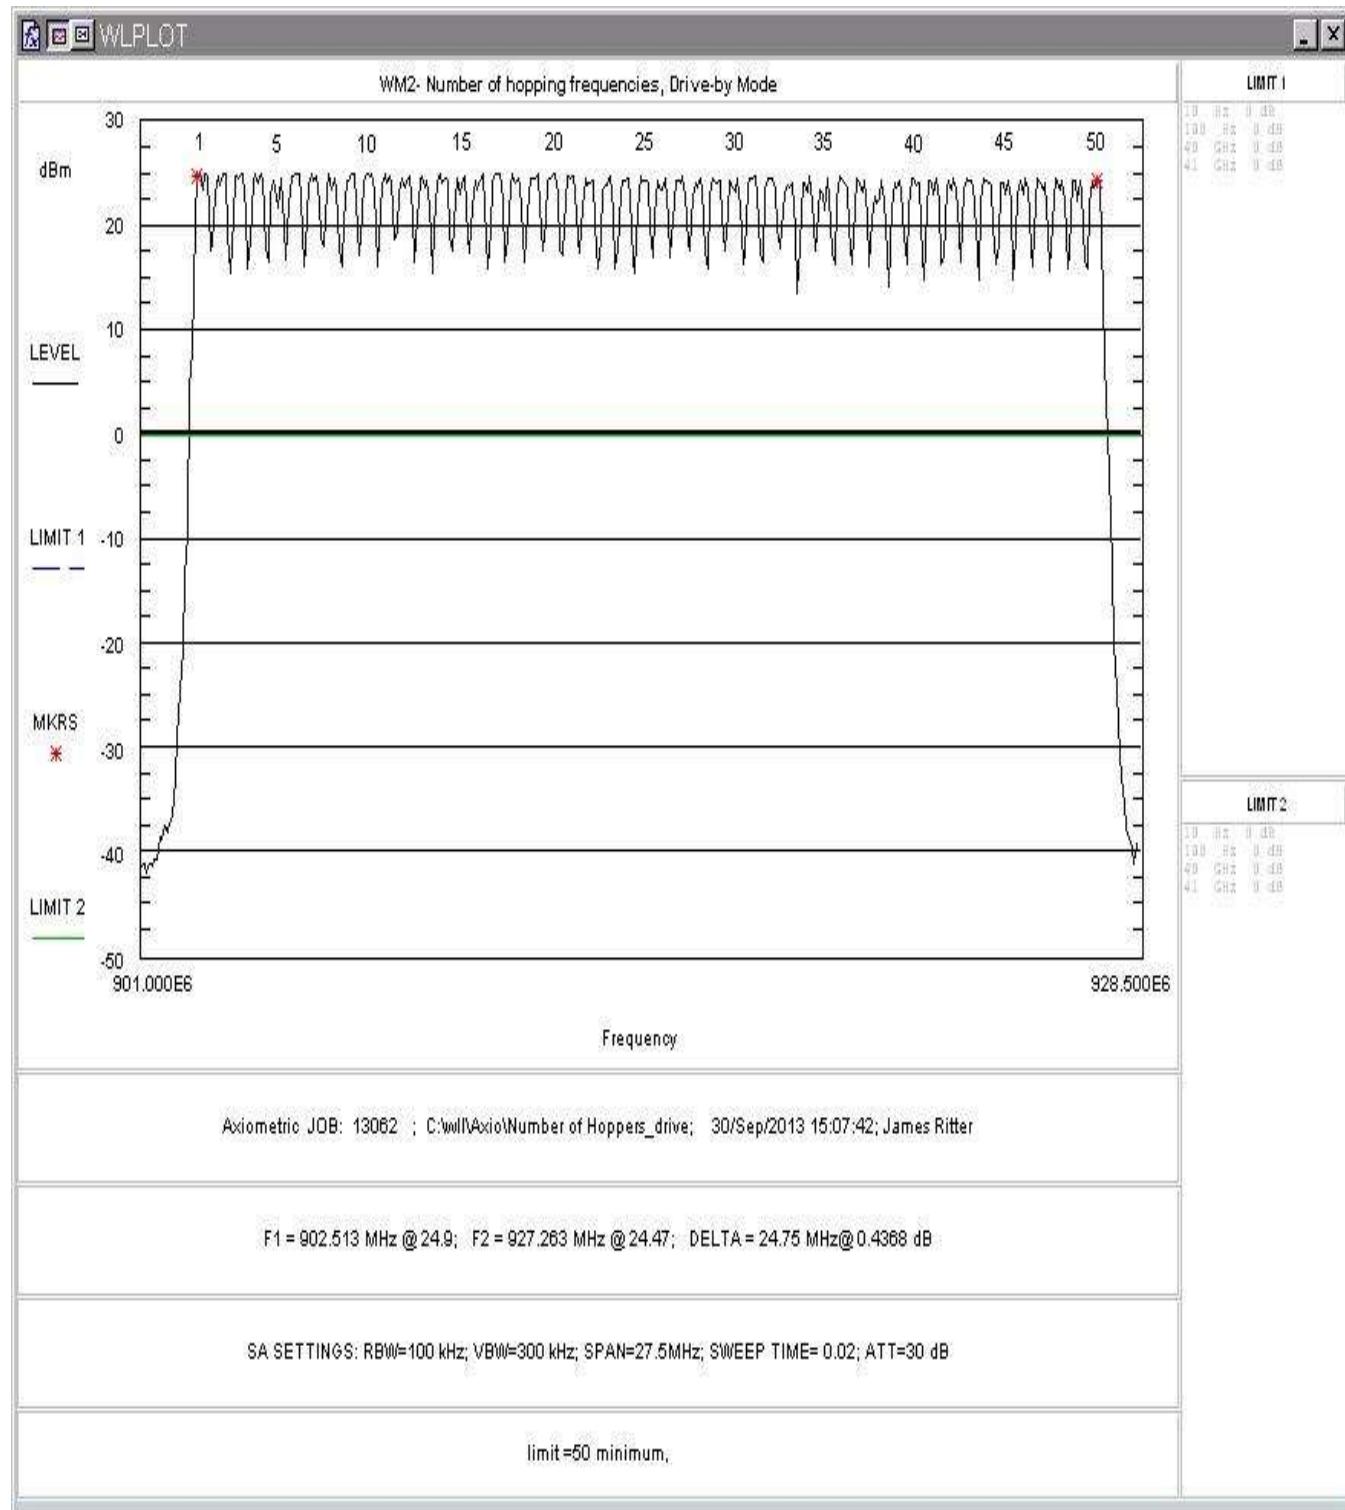


**Figure 20, Number of Channels Drive-by Mode**

## 5.5 Conducted Spurious Emissions at Antenna Terminals (FCC Part §2.1051)

The EUT must comply with requirements for spurious emissions at antenna terminals. Per §15.247(c) all spurious emissions in any 100 kHz bandwidth outside the frequency band in which the spread spectrum device is operating shall be attenuated 20 dB below the highest power level in a 100 kHz bandwidth within the band containing the highest level of the desired power.

The EUT antenna was removed and the cable was connected directly into a spectrum analyzer through a 10 dB attenuator. An offset was programmed into the spectrum analyzer to compensate for the loss of the external attenuator. The spectrum analyzer resolution bandwidth was set to 100 kHz and the video bandwidth was set to 300 kHz. The amplitude of the EUT carrier frequency was measured to determine the emissions limit (20 dB below the carrier frequency amplitude). The emissions outside of the allocated frequency band were then scanned from 30 MHz up to the tenth harmonic of the carrier.

The following are plots of the conducted spurious emissions data.

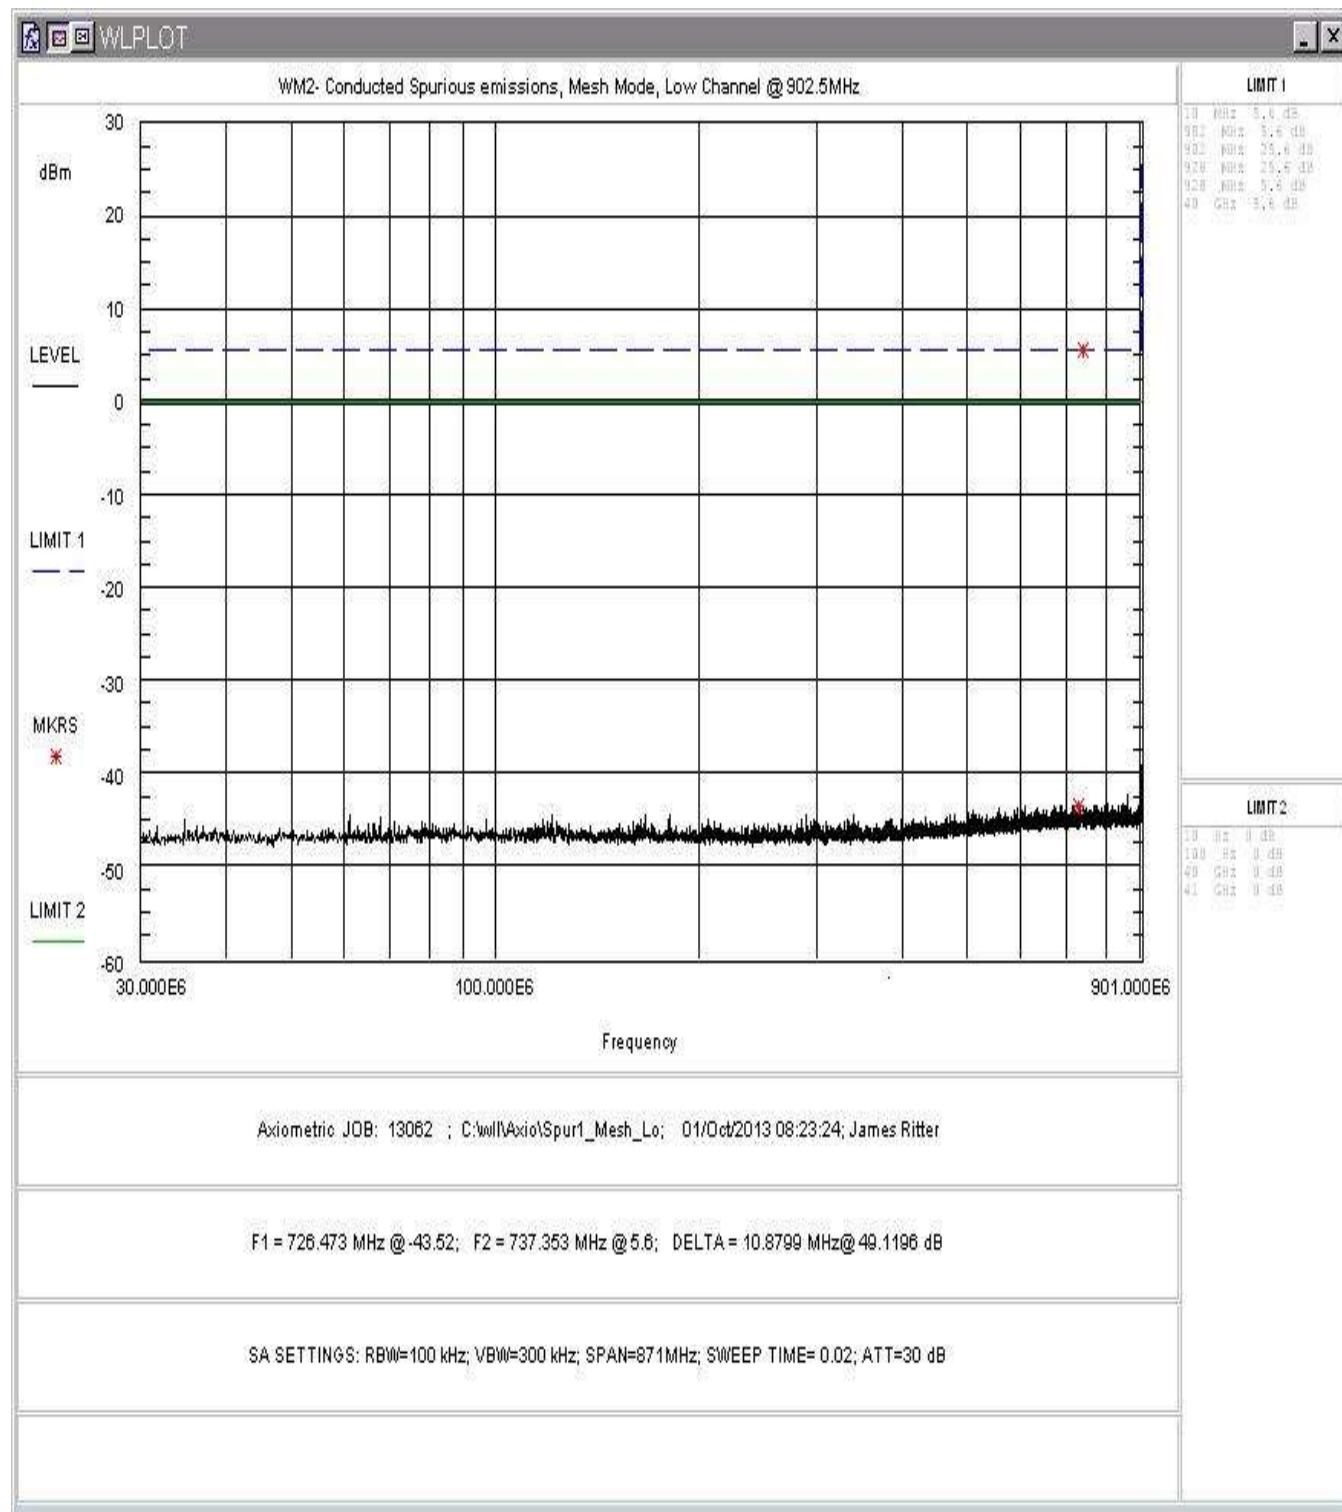

**Figure 21. Conducted Spurious Emissions, Mesh Mode, Low Channel 30 - 901MHz**

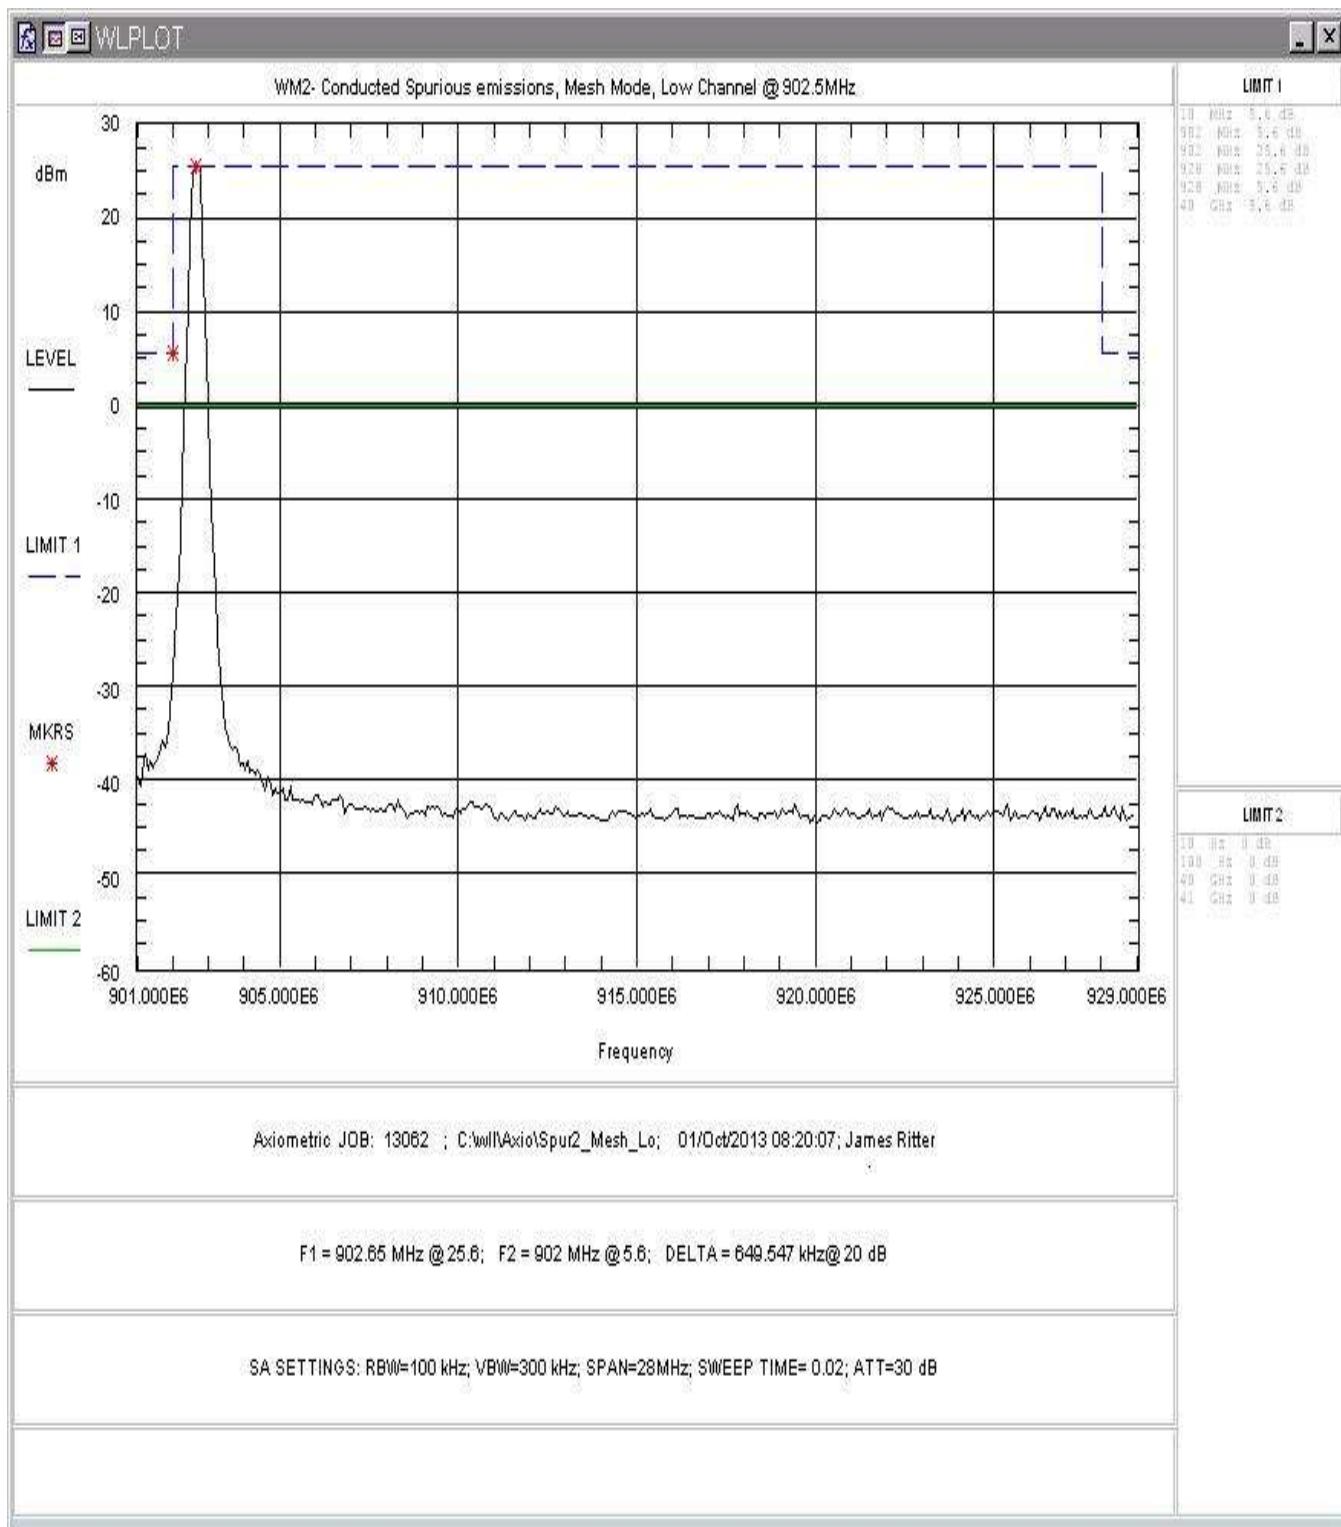


Figure 22. Conducted Spurious Emissions, Mesh Mode, Low Channel 901 – 929MHz



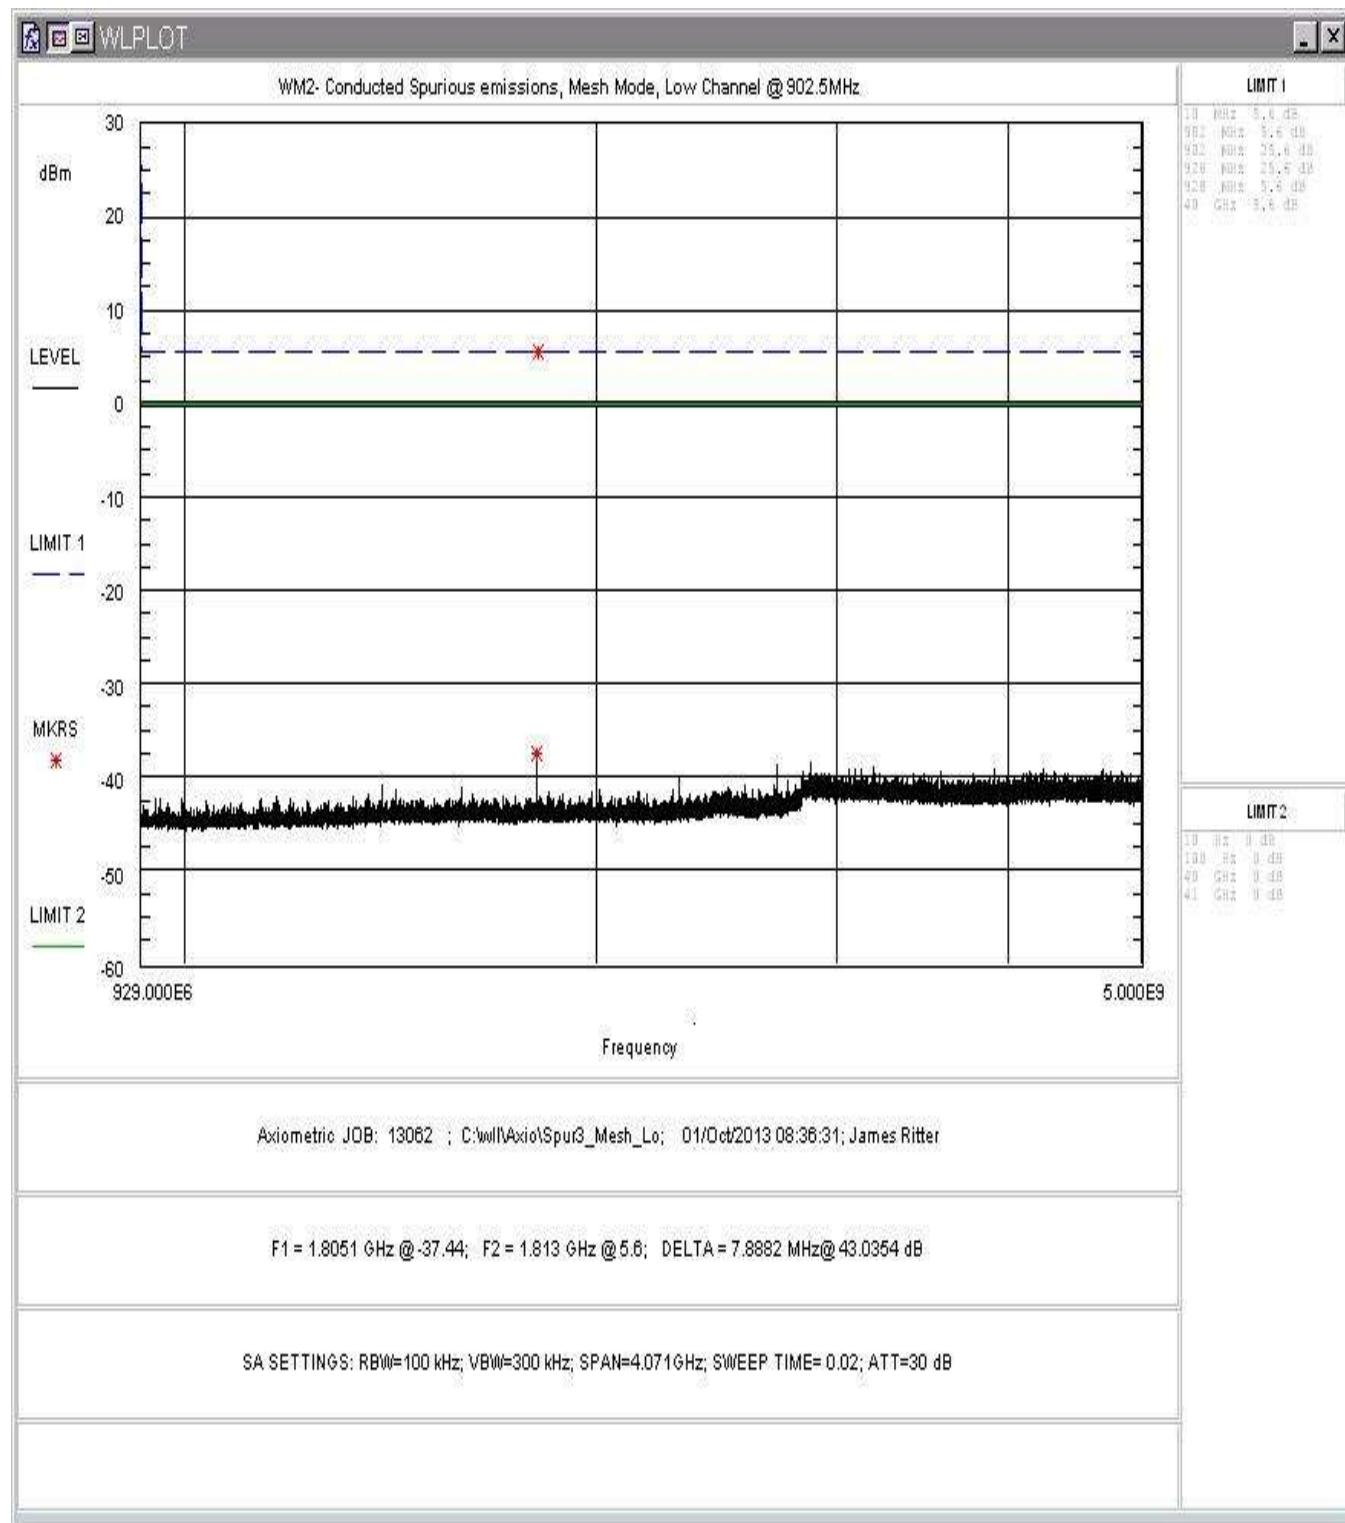



Figure 23. Conducted Spurious Emissions, Mesh Mode, Low Channel 929-5000MHz

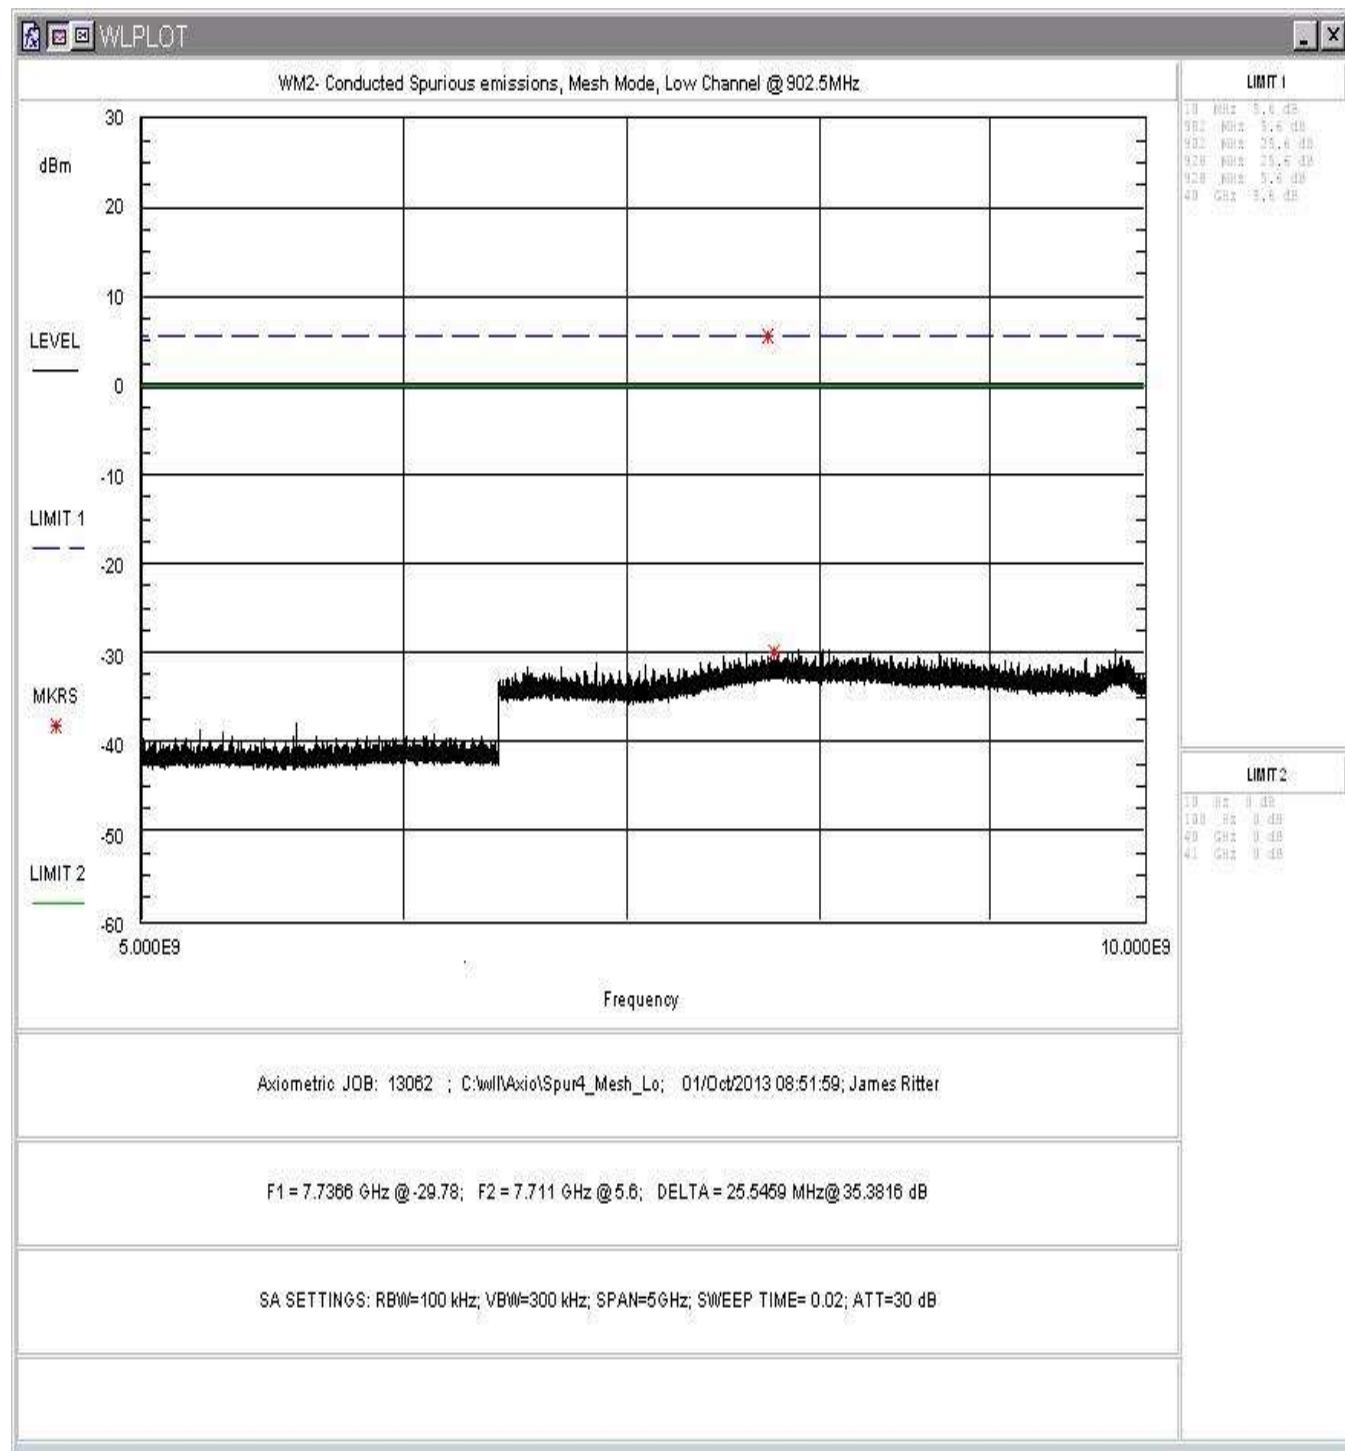

**Figure 24. Conducted Spurious Emissions, Mesh Mode, Low Channel 5- 10GHz**

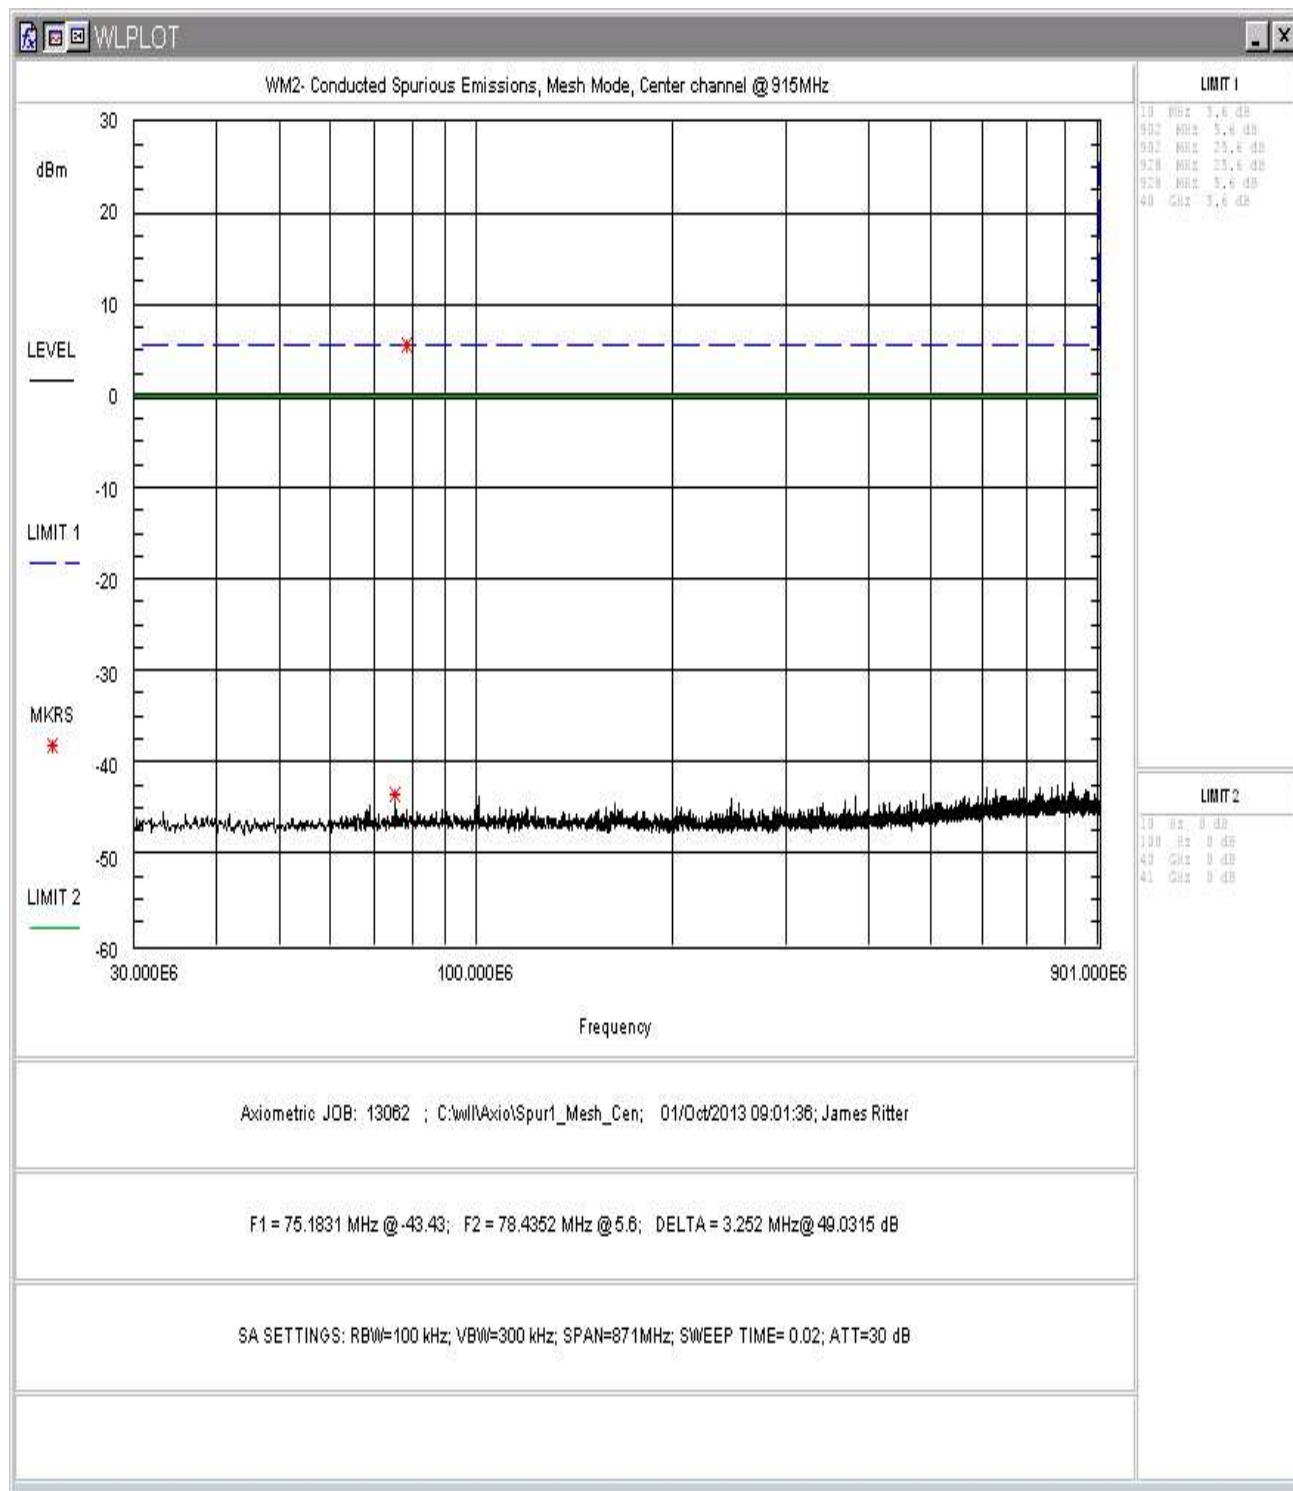

**Figure 25. Conducted Spurious Emissions, Mesh Mode, Center Channel 30-901 MHz**

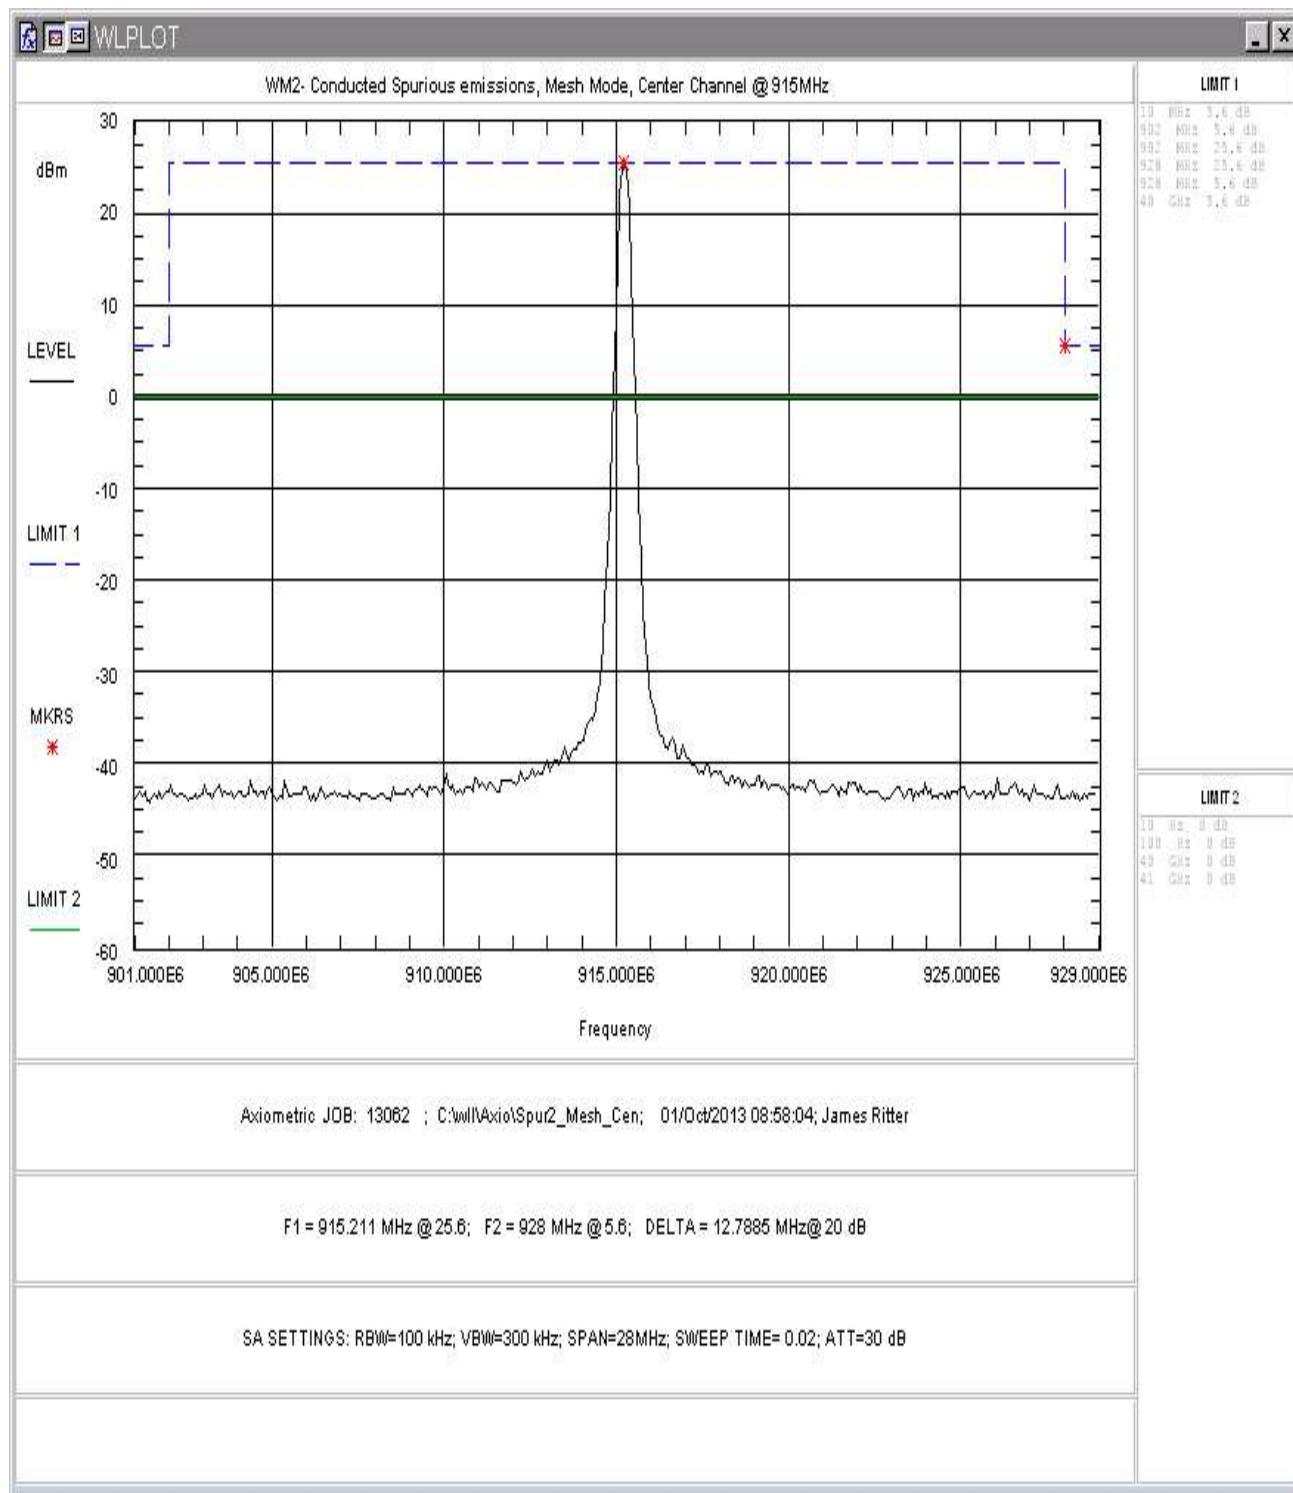

**Figure 26. Conducted Spurious Emissions, Mesh Mode, Center Channel 901-929 MHz**



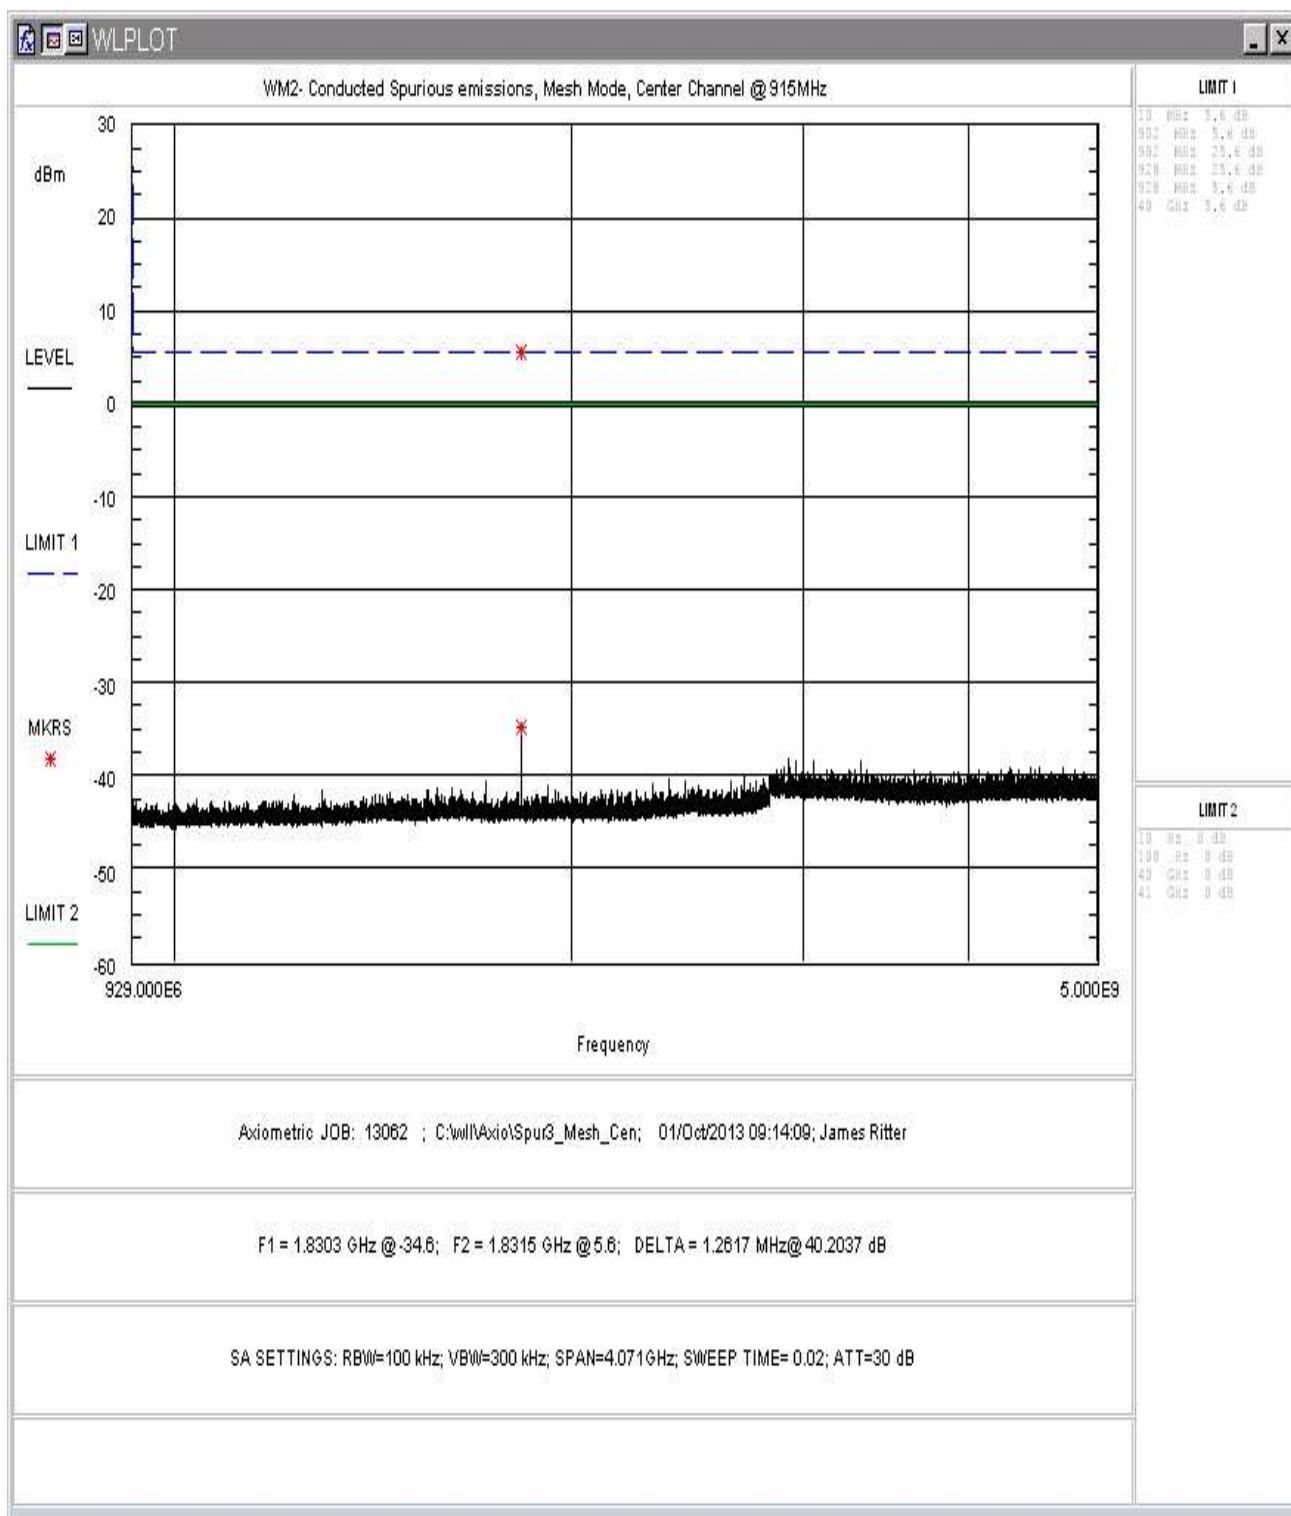


Figure 27. Conducted Spurious Emissions, Mesh Mode, Center Channel 929 -5000MHz

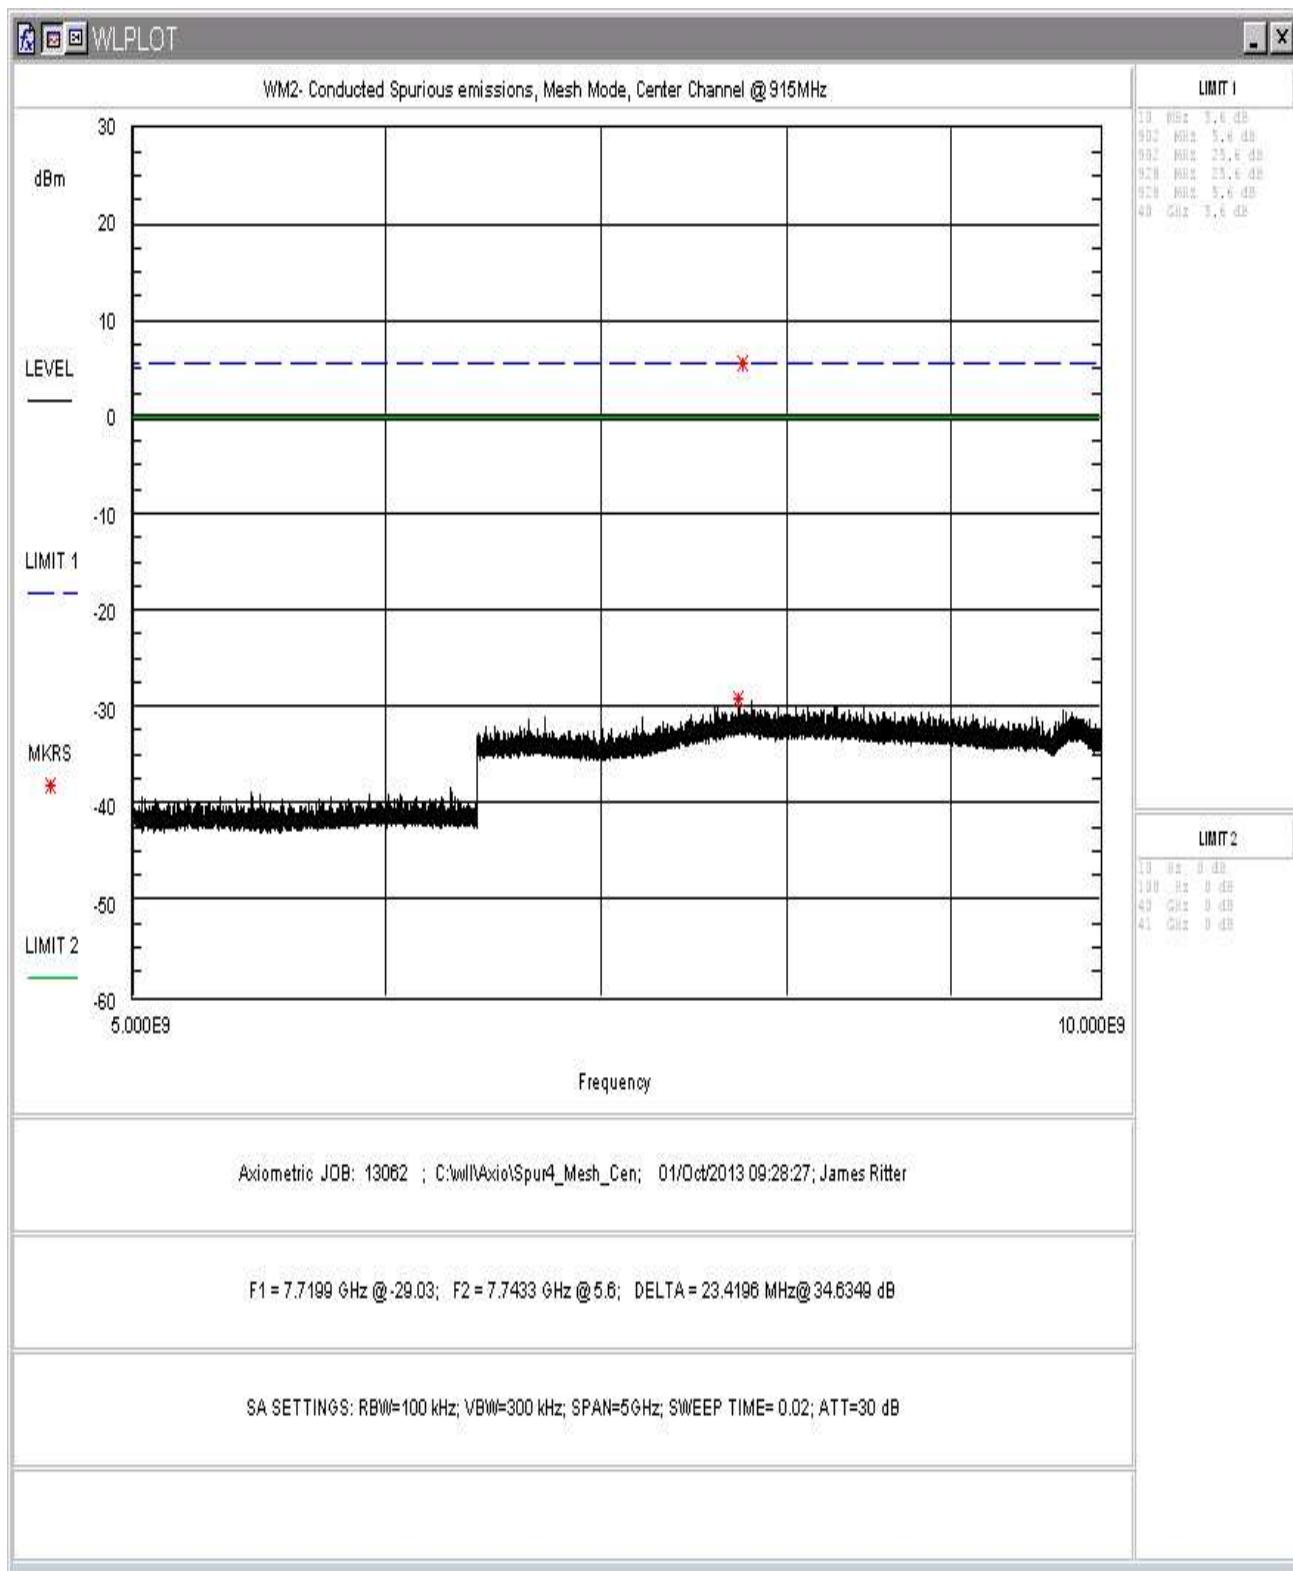

**Figure 28. Conducted Spurious Emissions, Mesh Mode, Center Channel 5-10GHz**

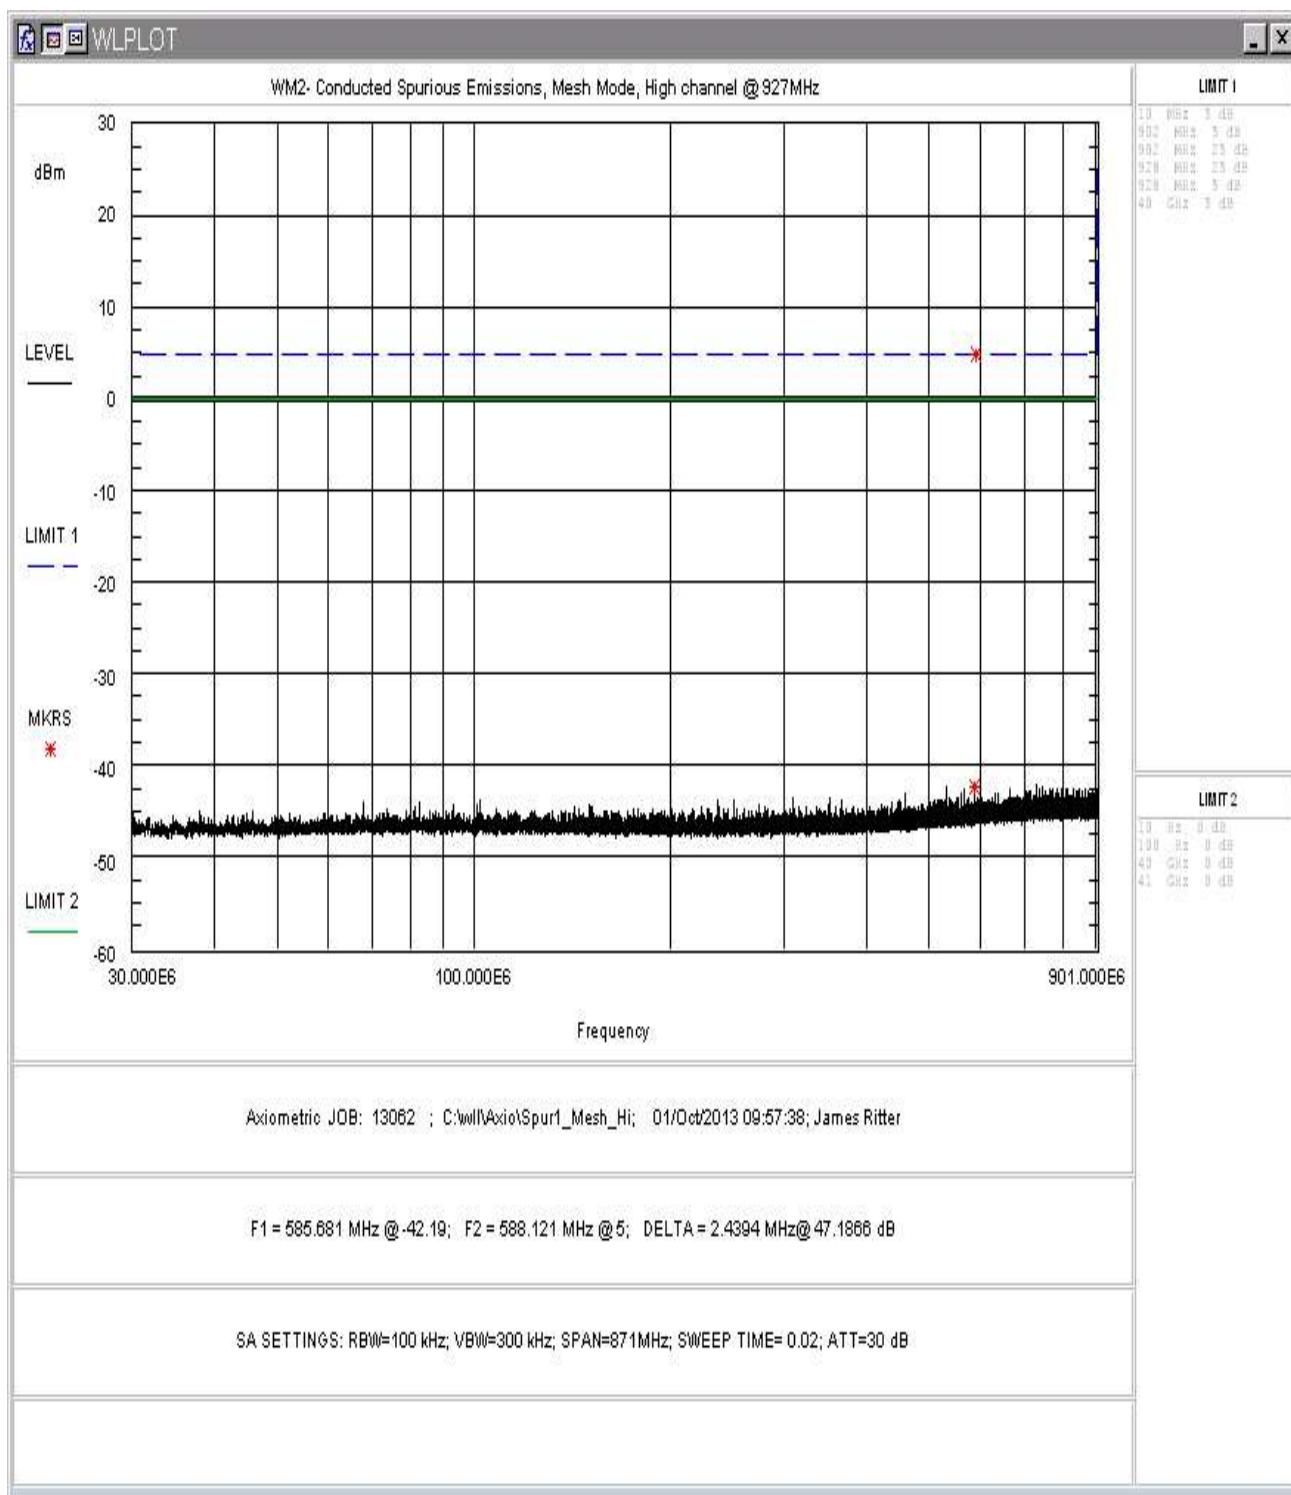

**Figure 29. Conducted Spurious Emissions, Mesh Mode, High Channel 30-901MHz**



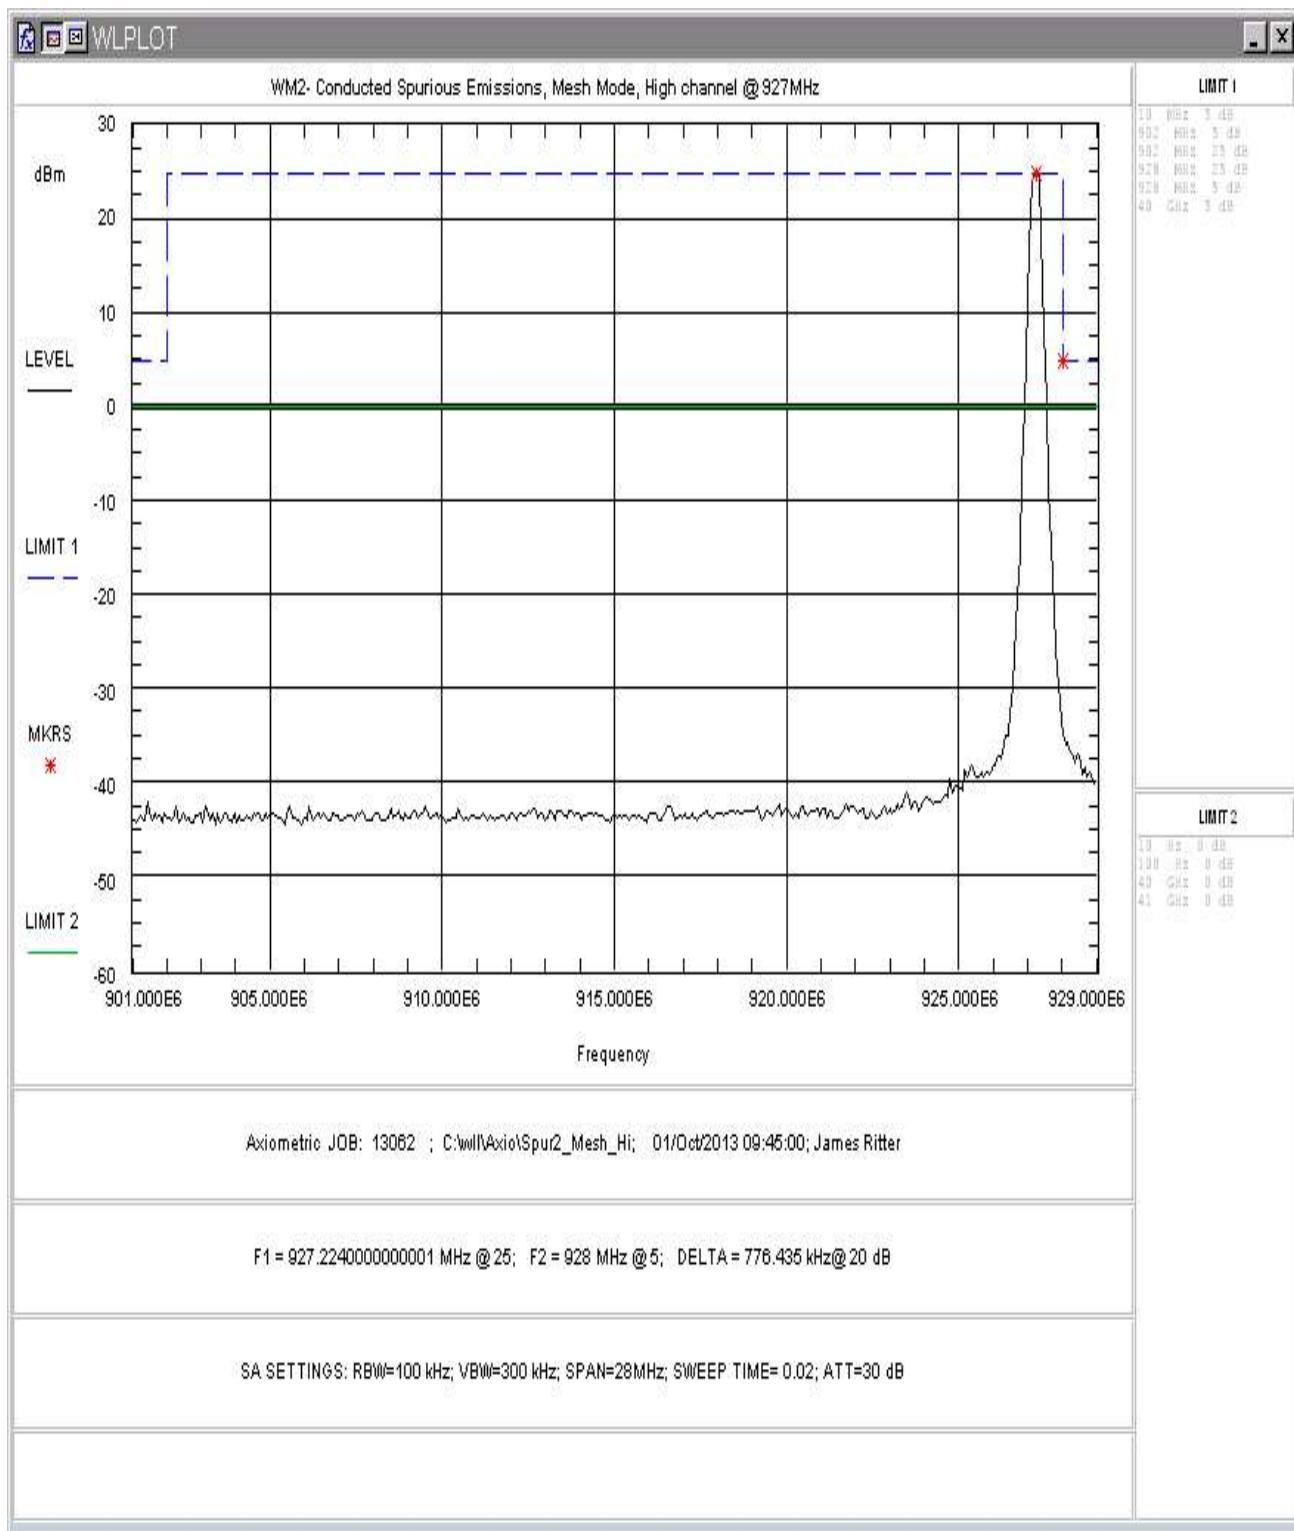



Figure 30. Conducted Spurious Emissions, Mesh Mode, High Channel 901-929MHz

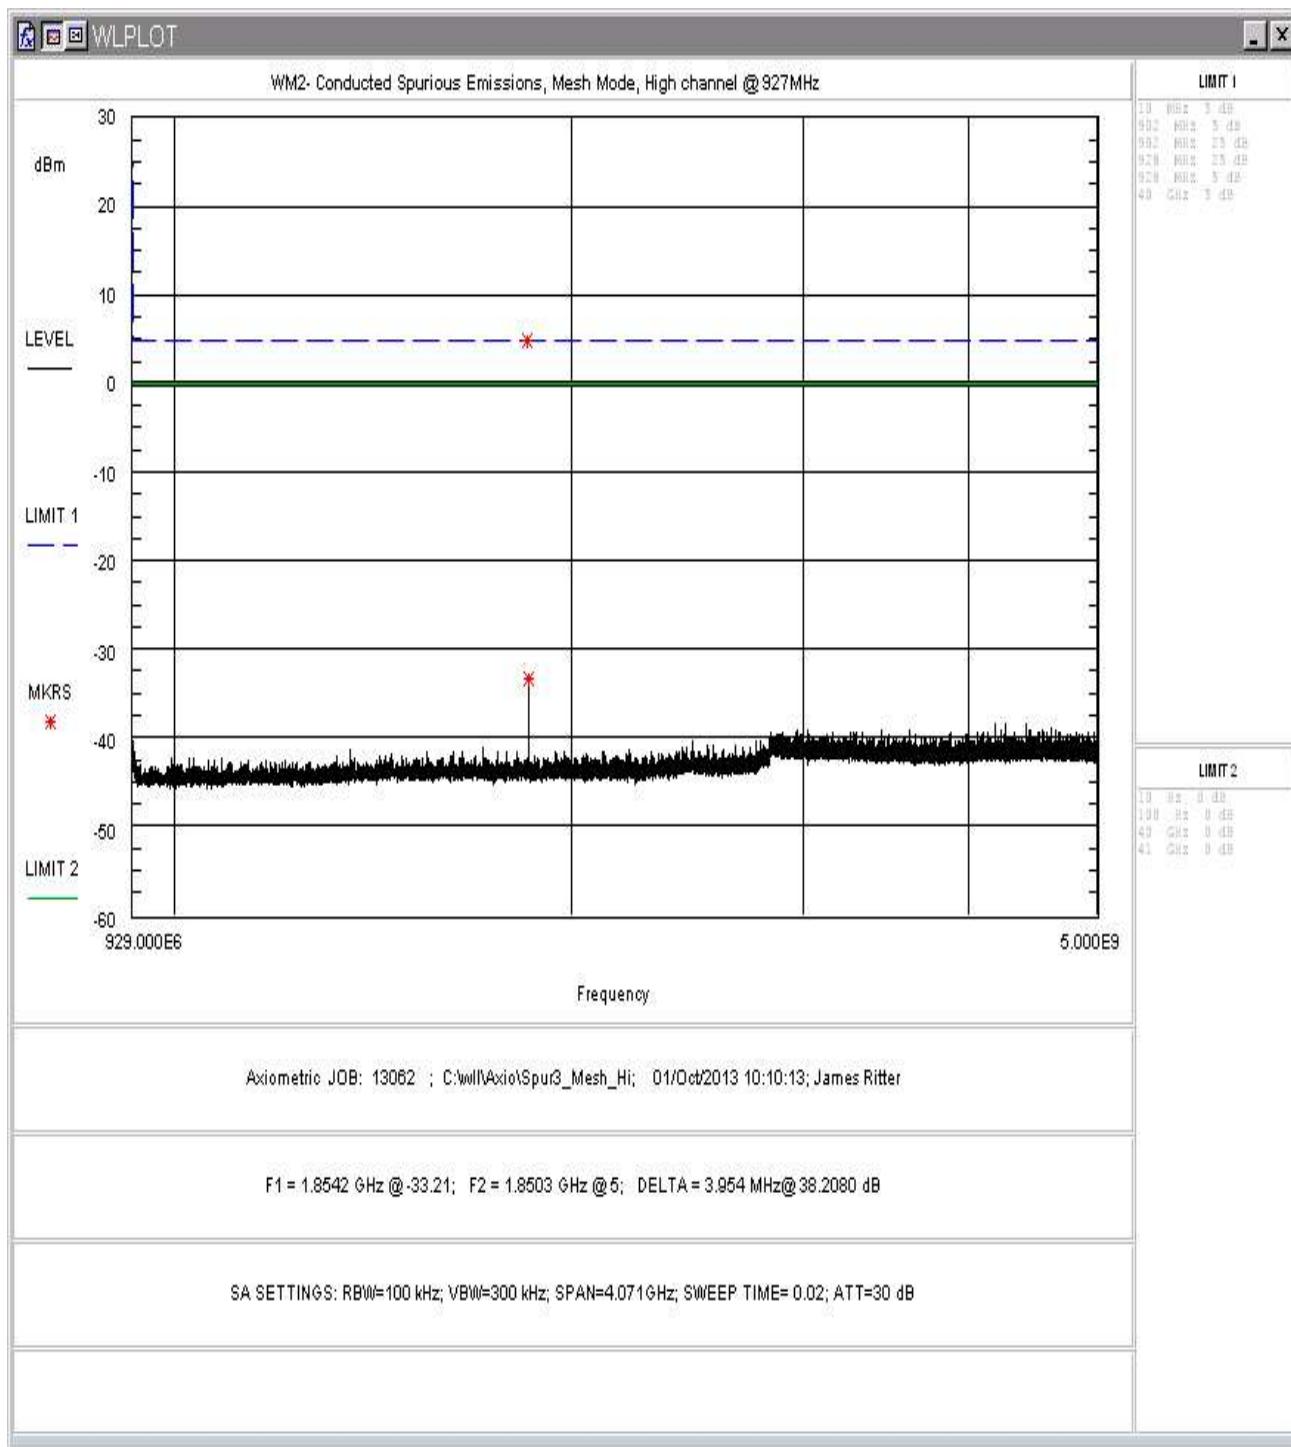

**Figure 31. Conducted Spurious Emissions, Mesh Mode, High Channel 929-5000MHz**

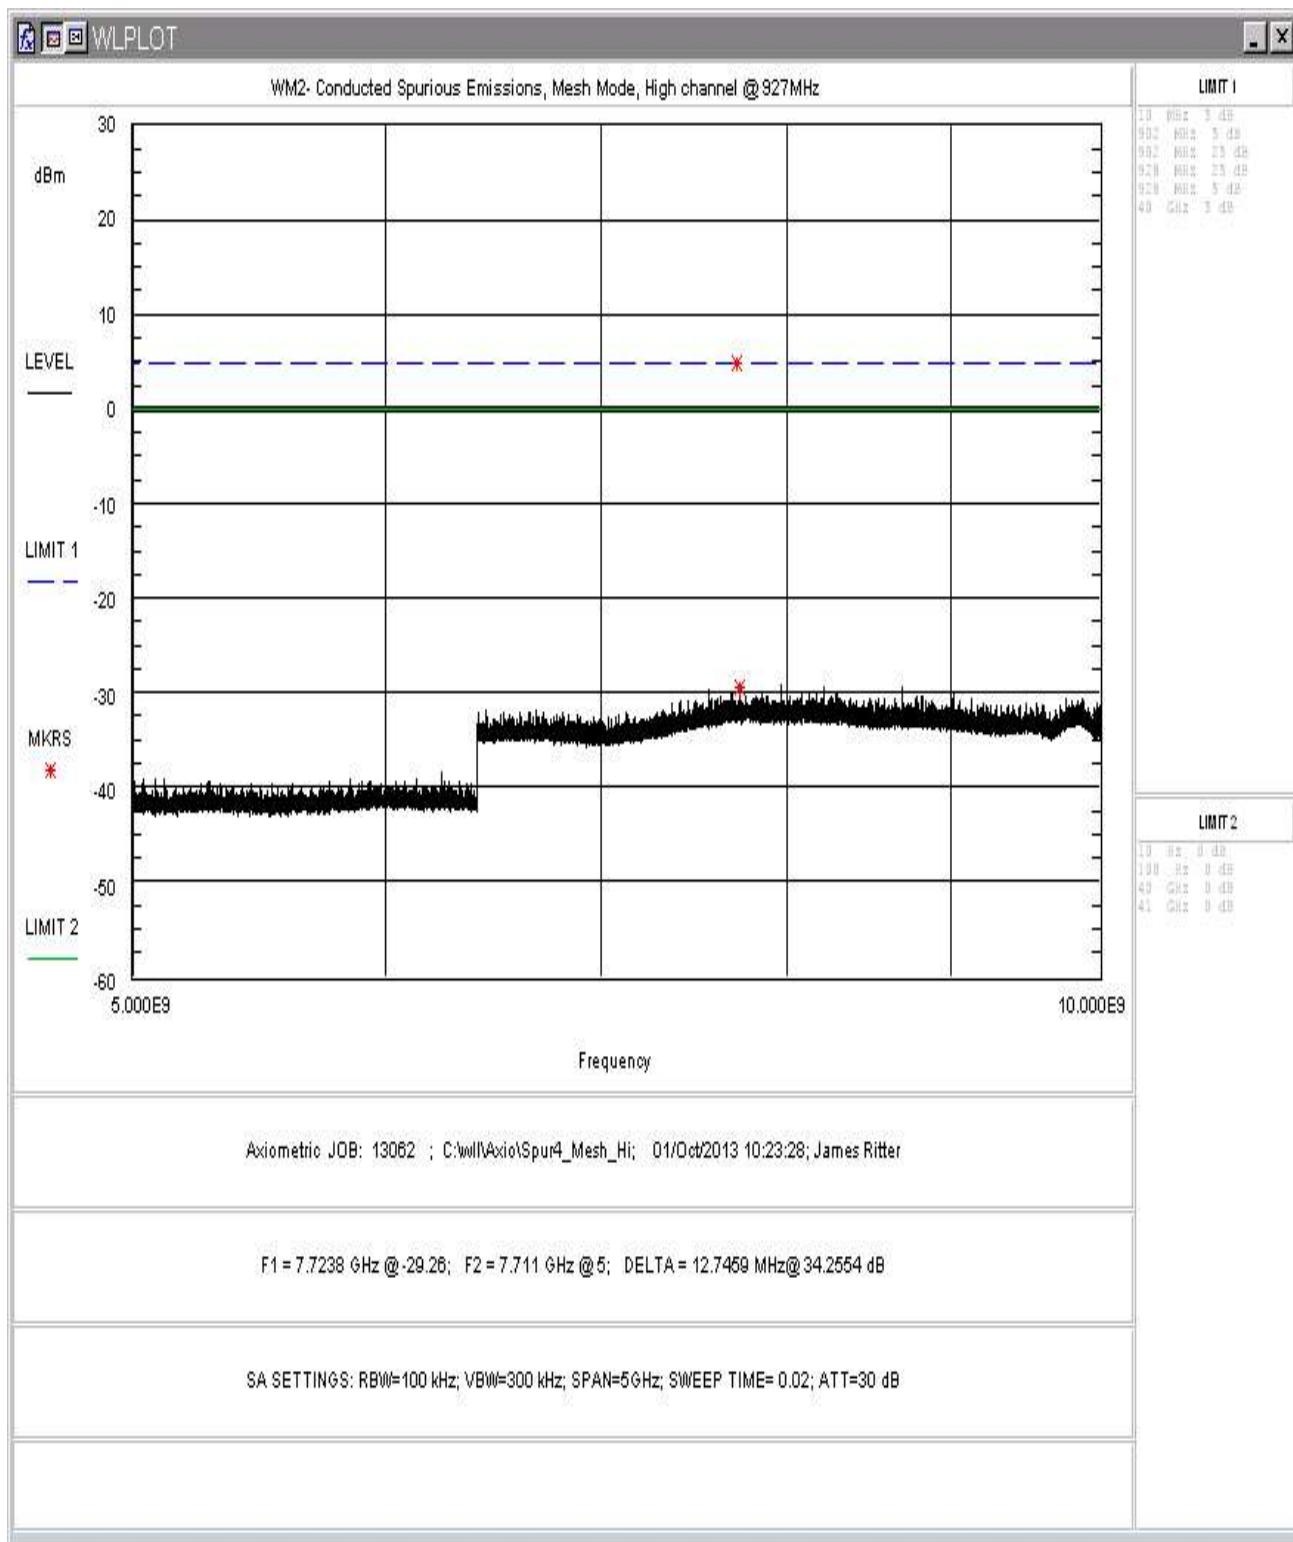

**Figure 32. Conducted Spurious Emissions, Mesh Mode, High Channel 5-10GHz**

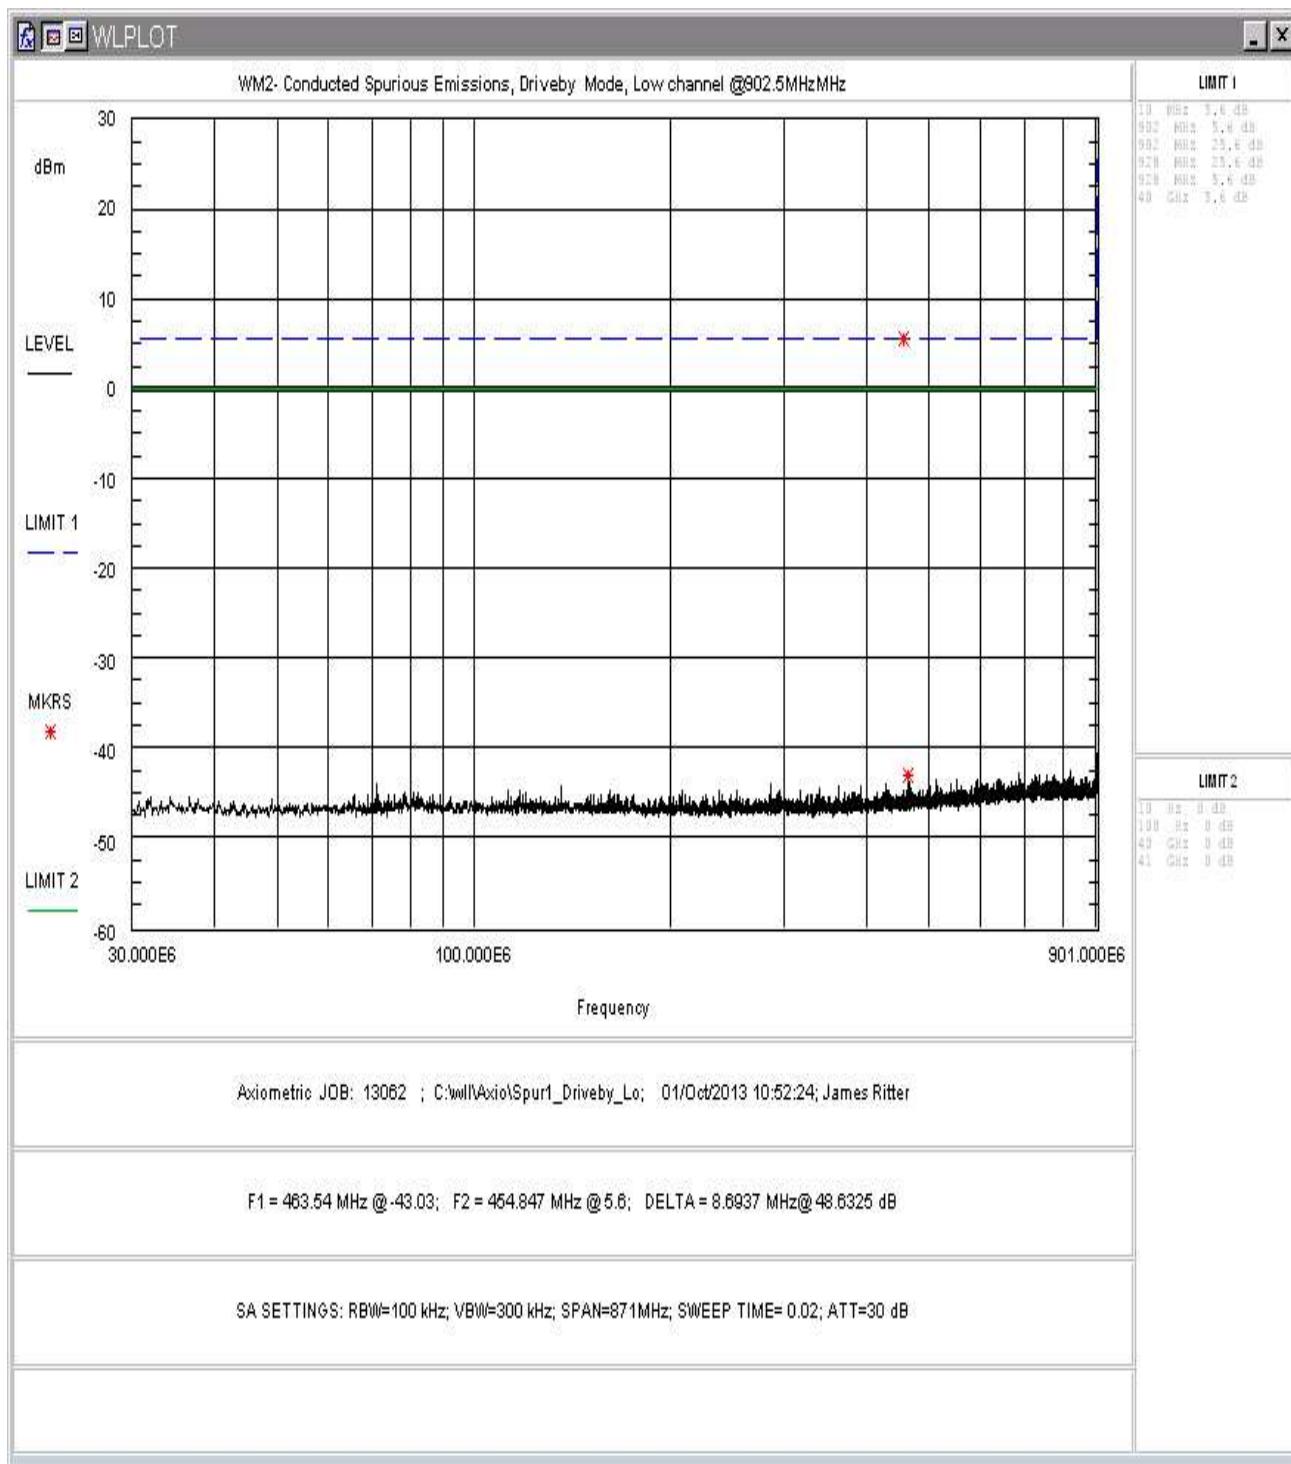

**Figure 33. Conducted Spurious Emissions, Drive-by Mode, Low Channel 30-901MHz**



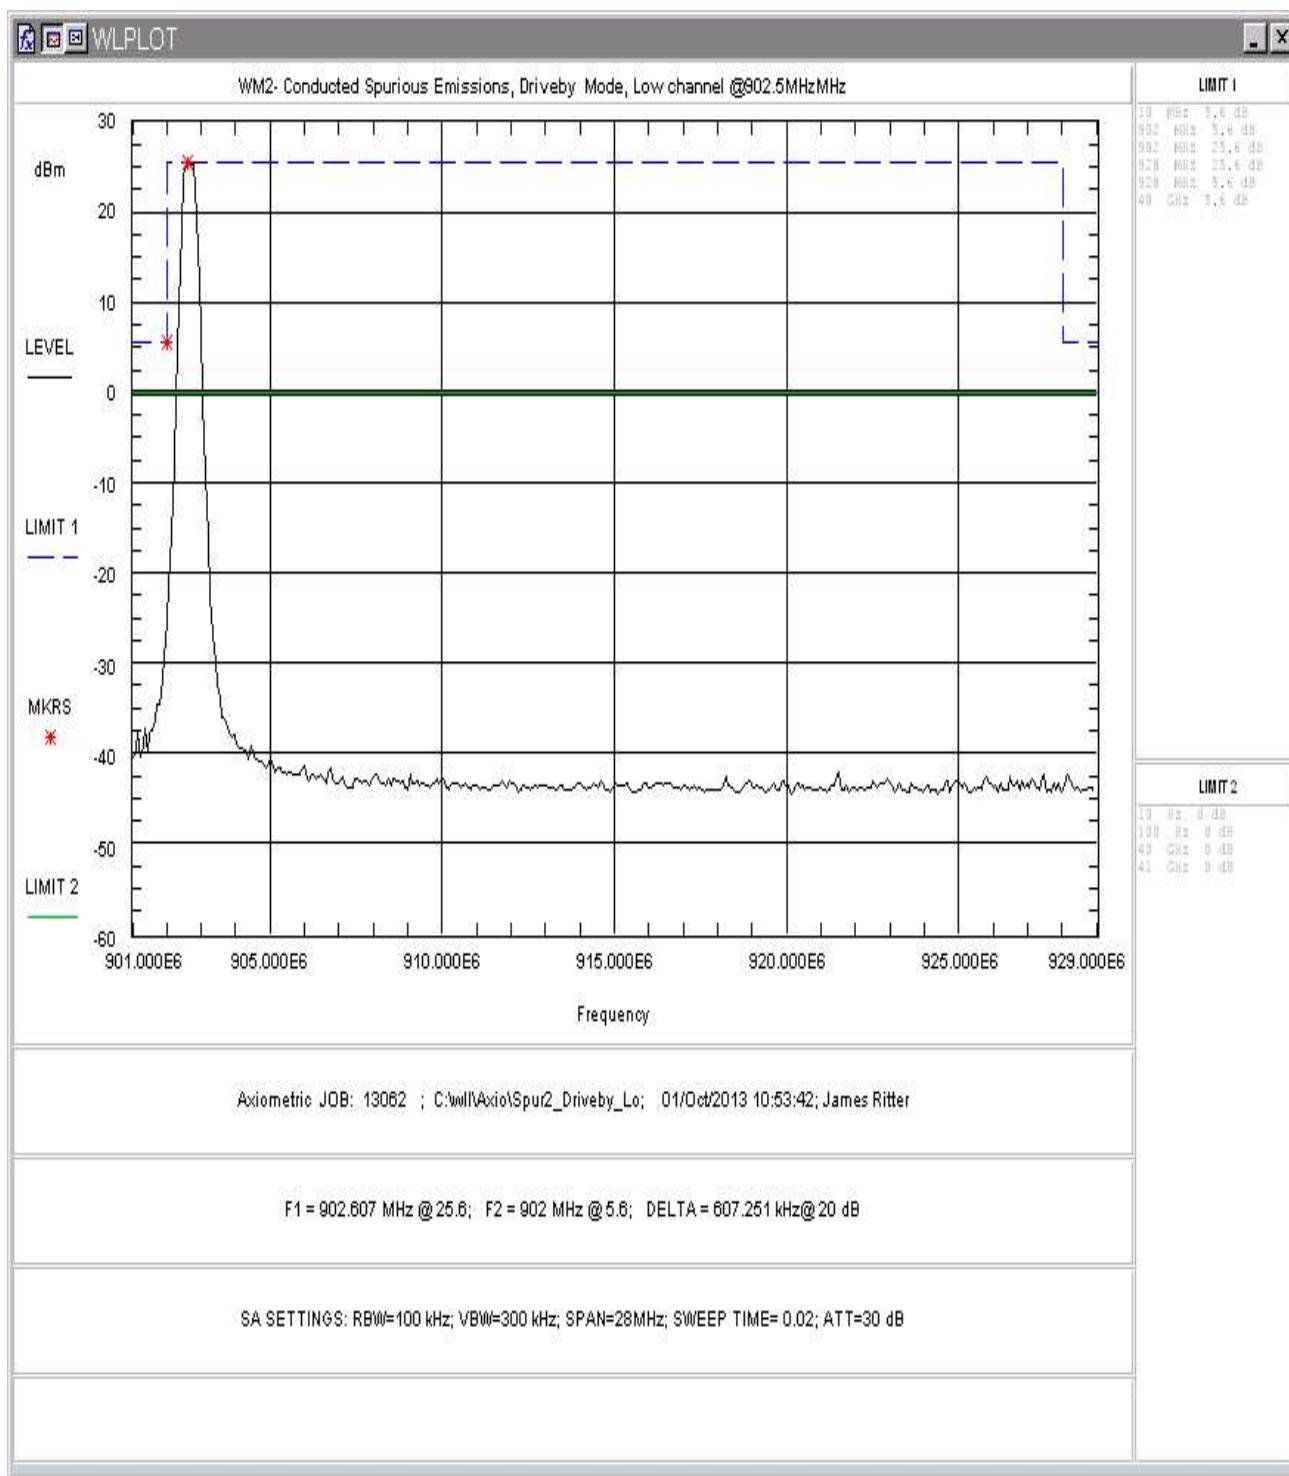



Figure 34. Conducted Spurious Emissions, Drive-by Mode, Low Channel 901-929MHz

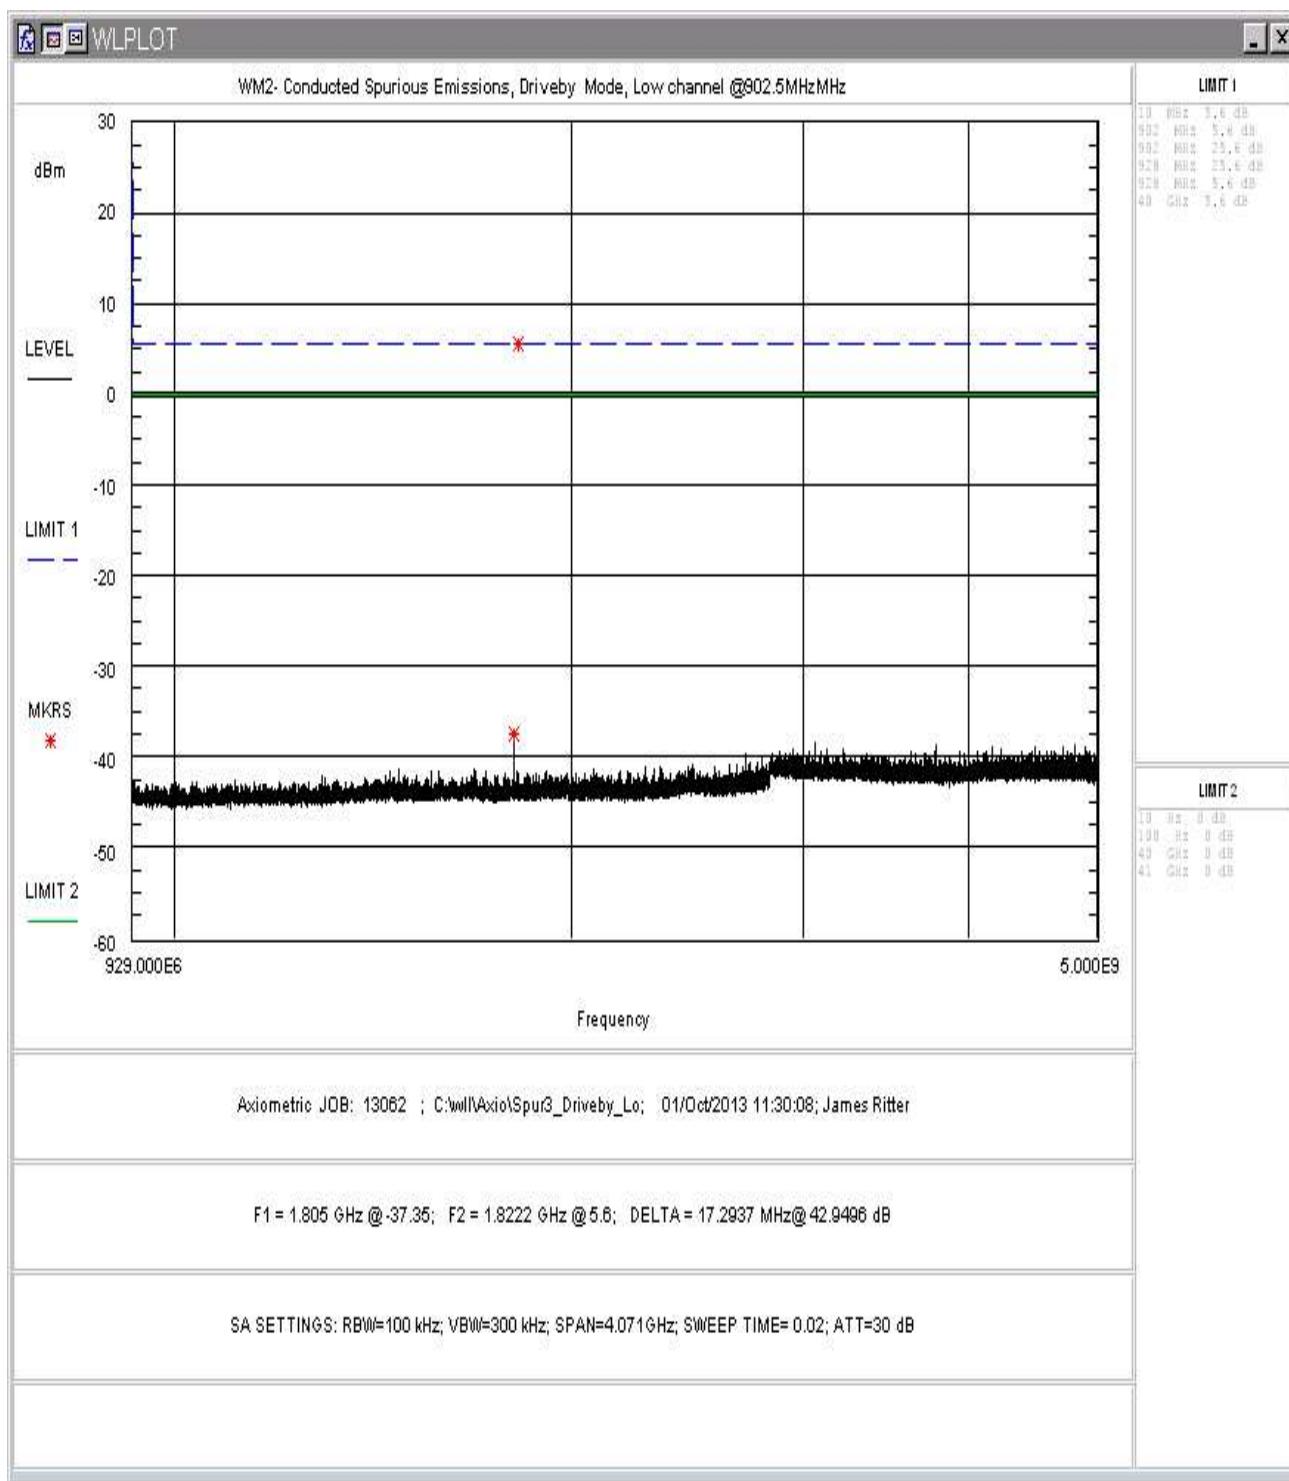


**Figure 35. Conducted Spurious Emissions, Drive-by Mode, Low Channel 929-5000MHz**

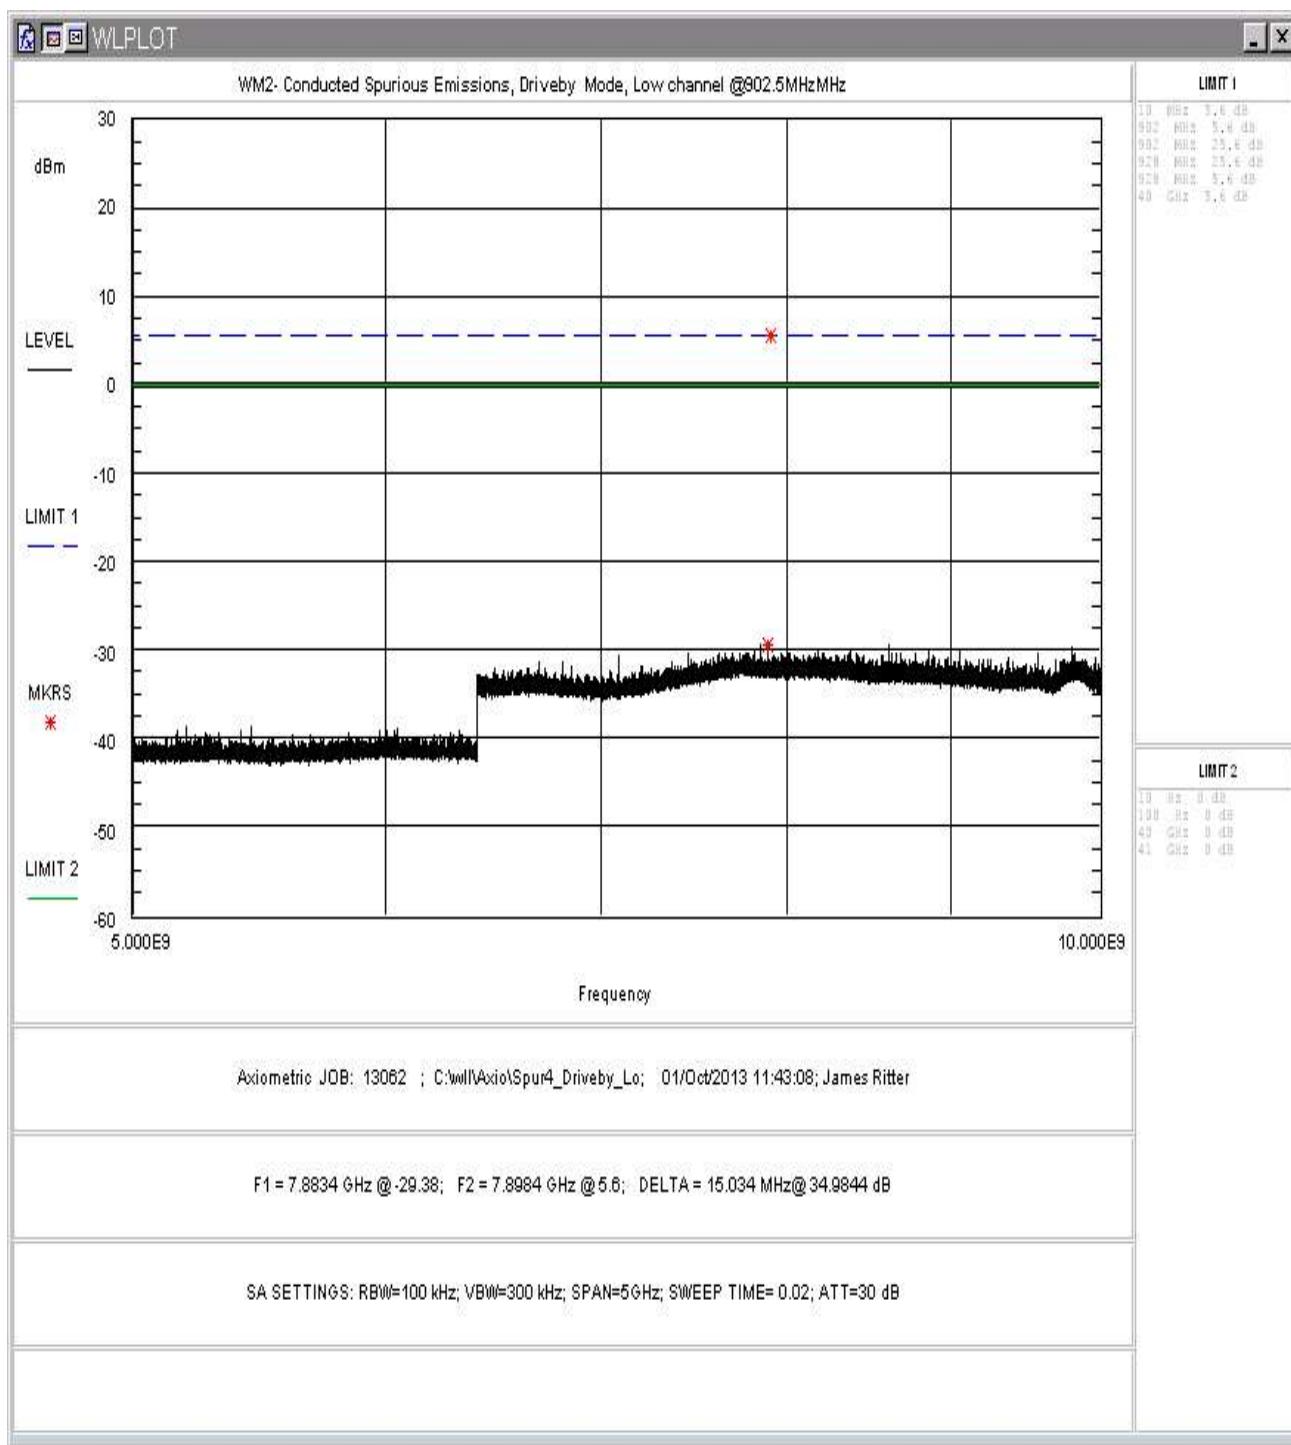

**Figure 36. Conducted Spurious Emissions, Drive-by Mode, Low Channel 5-10GHz**

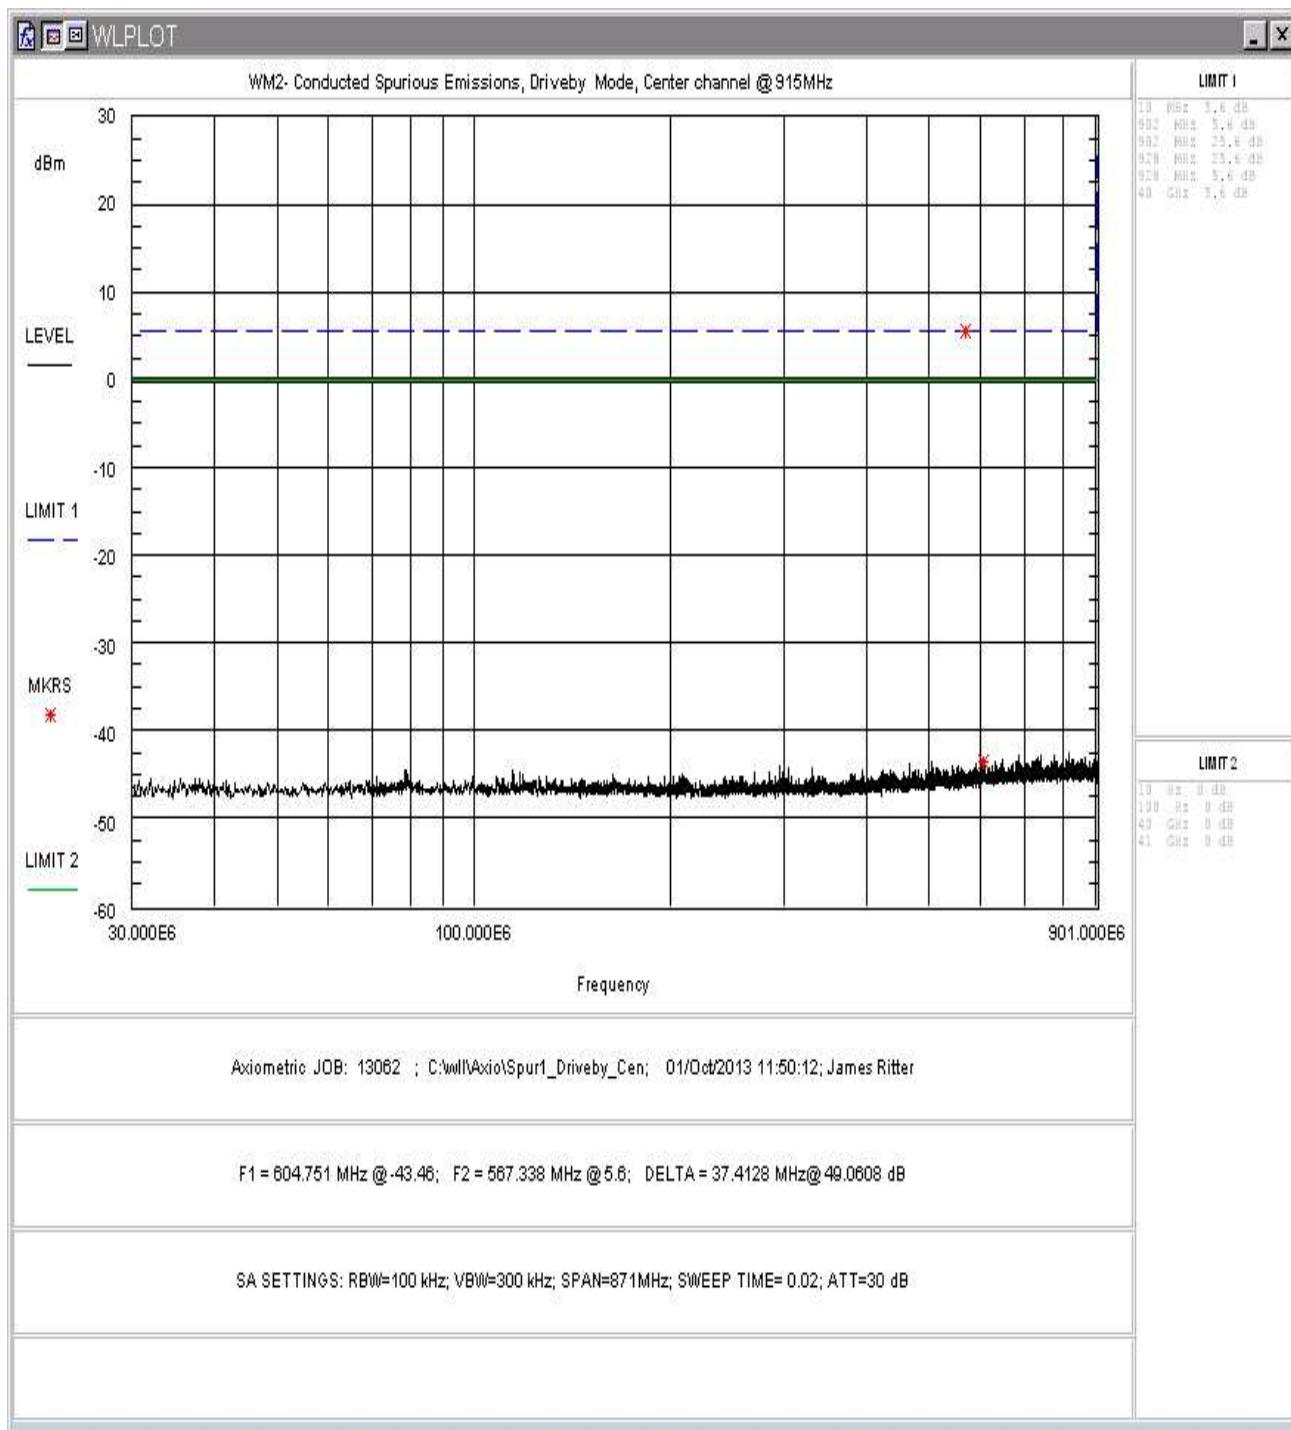

**Figure 37. Conducted Spurious Emissions, Drive-by Mode, Center Channel 30 - 901MHz**

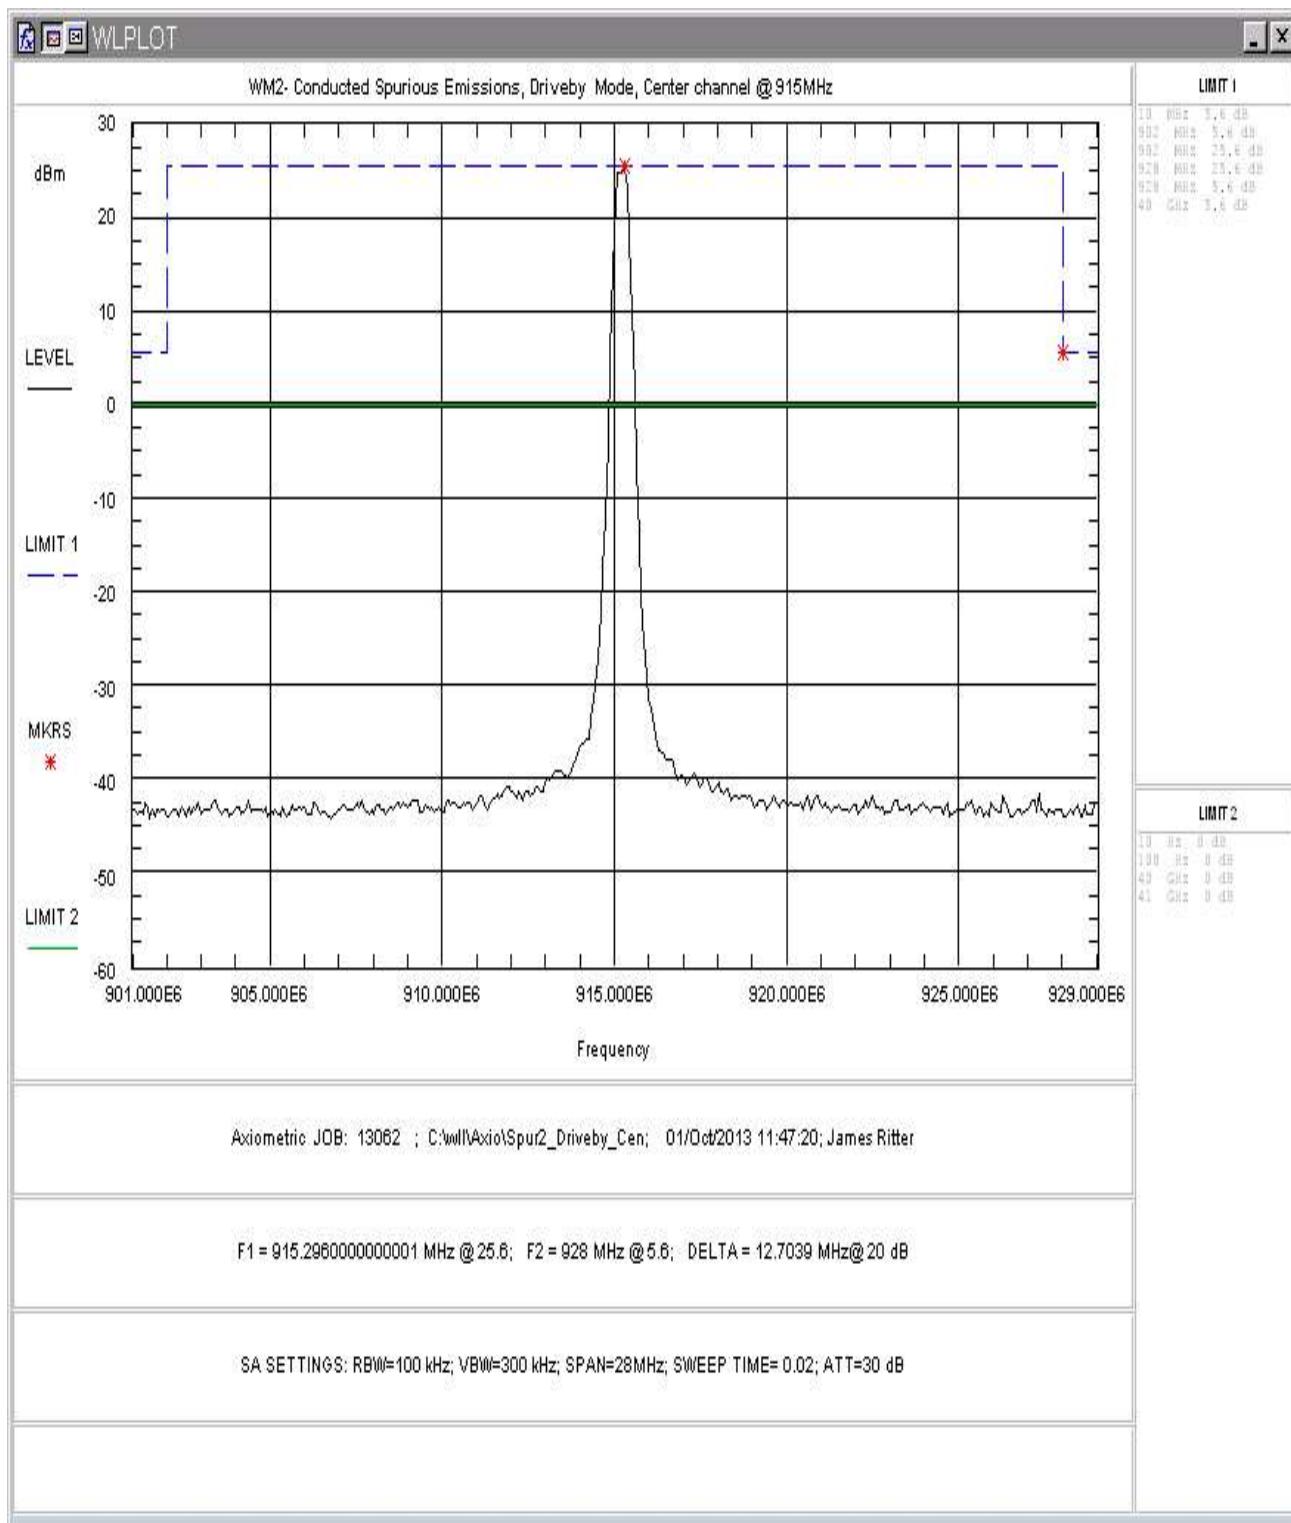

**Figure 38. Conducted Spurious Emissions, Drive-by Mode, Center Channel 901-929MHz**



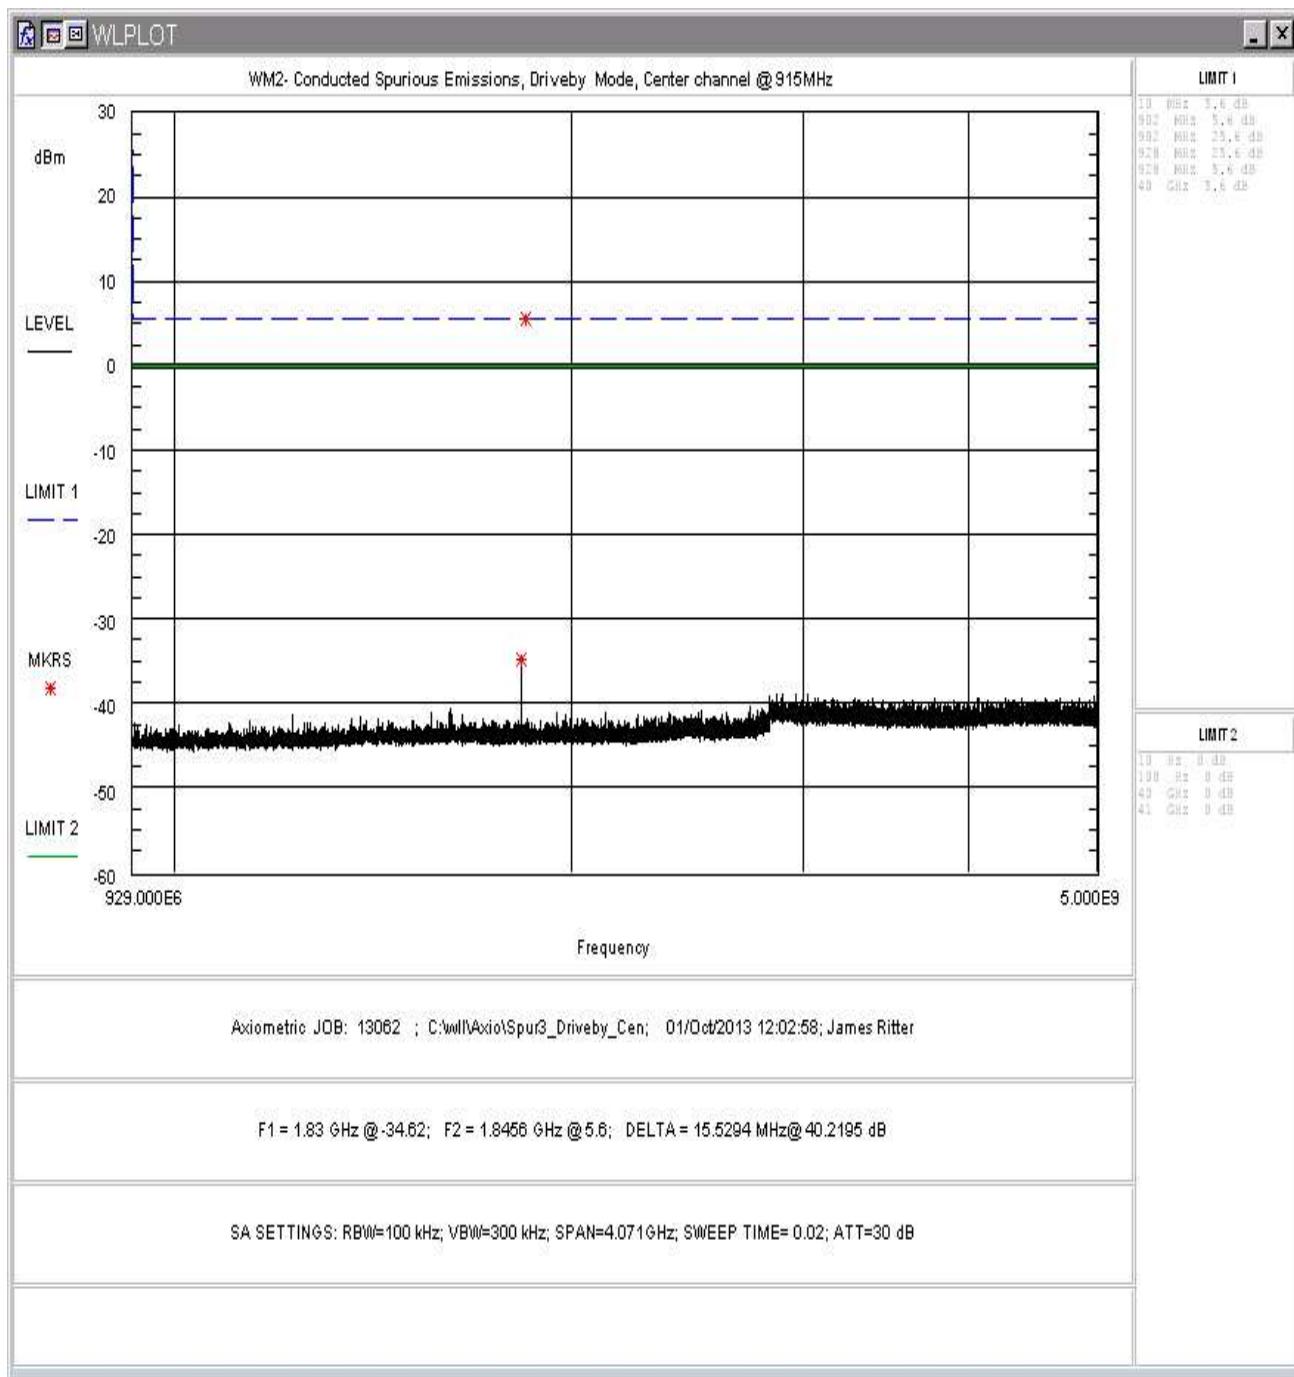



Figure 39. Conducted Spurious Emissions, Drive-by Mode, Center Channel 929-5000MHz

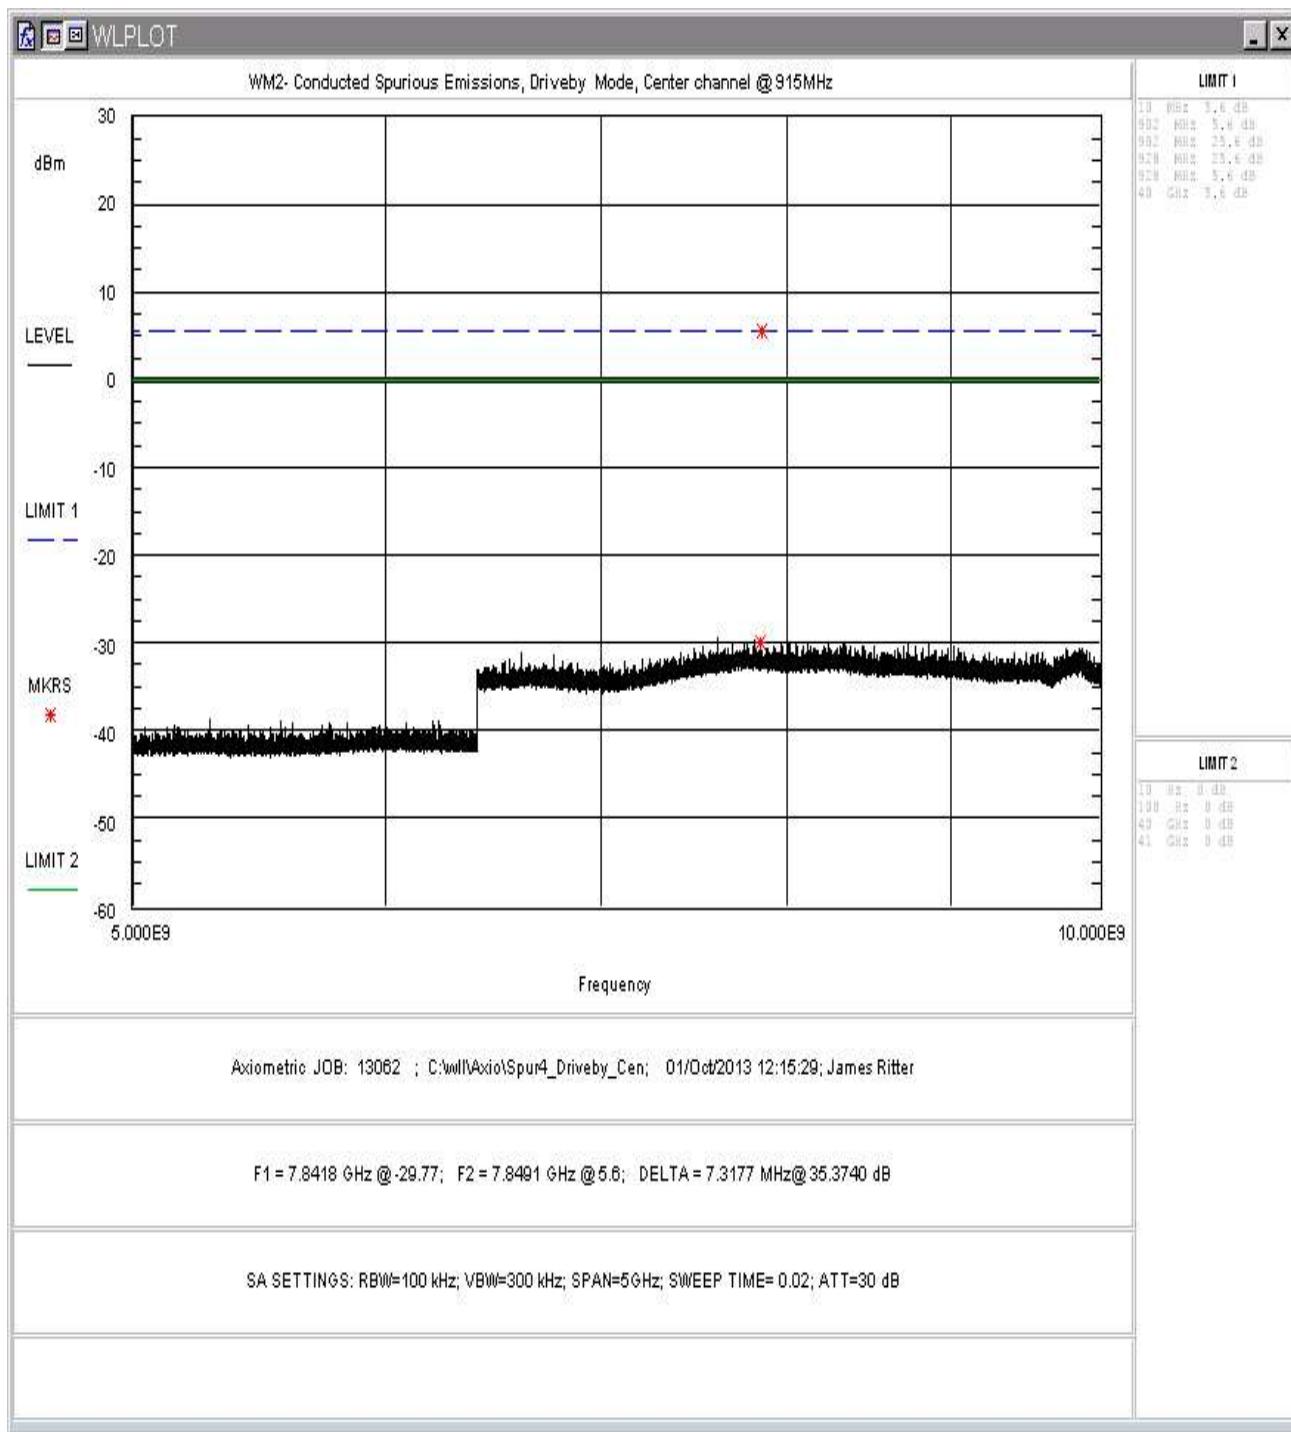


**Figure 40. Conducted Spurious Emissions, Drive-by Mode, Center Channel 5-10GHz**

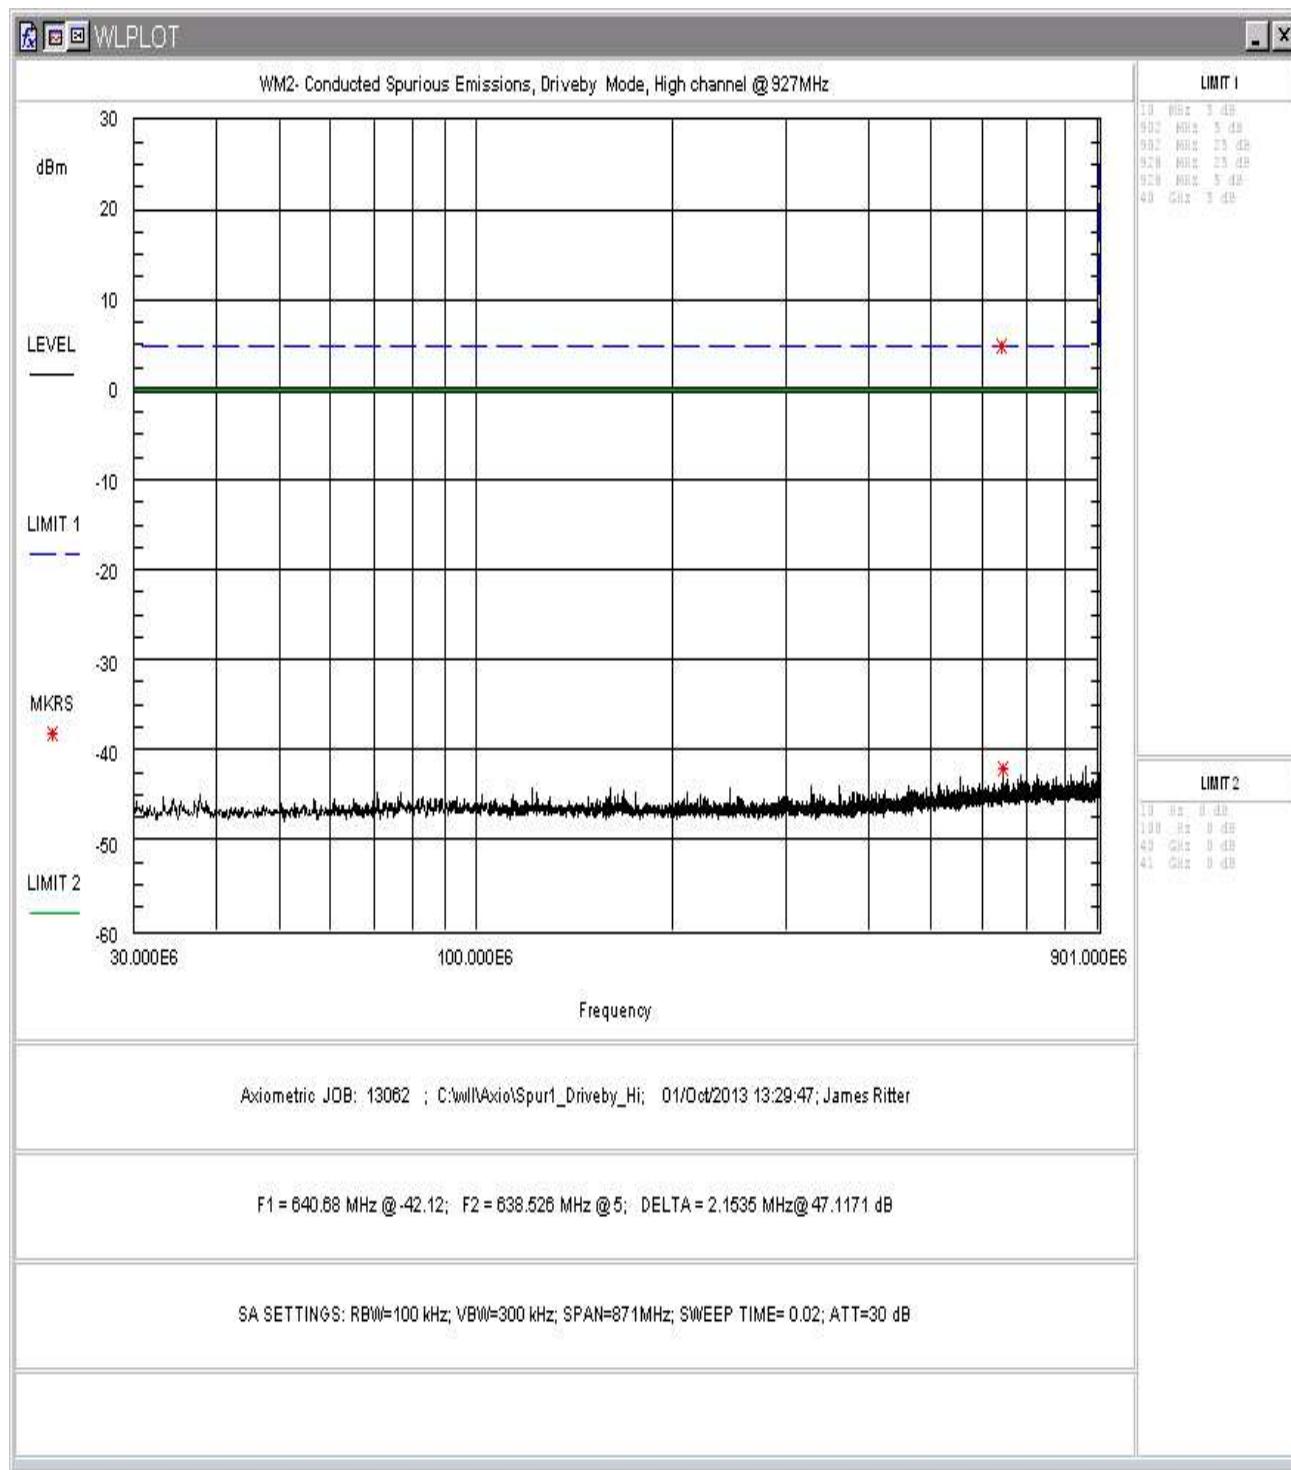


**Figure 41. Conducted Spurious Emissions, Drive-by Mode, High Channel 30-901MHz**

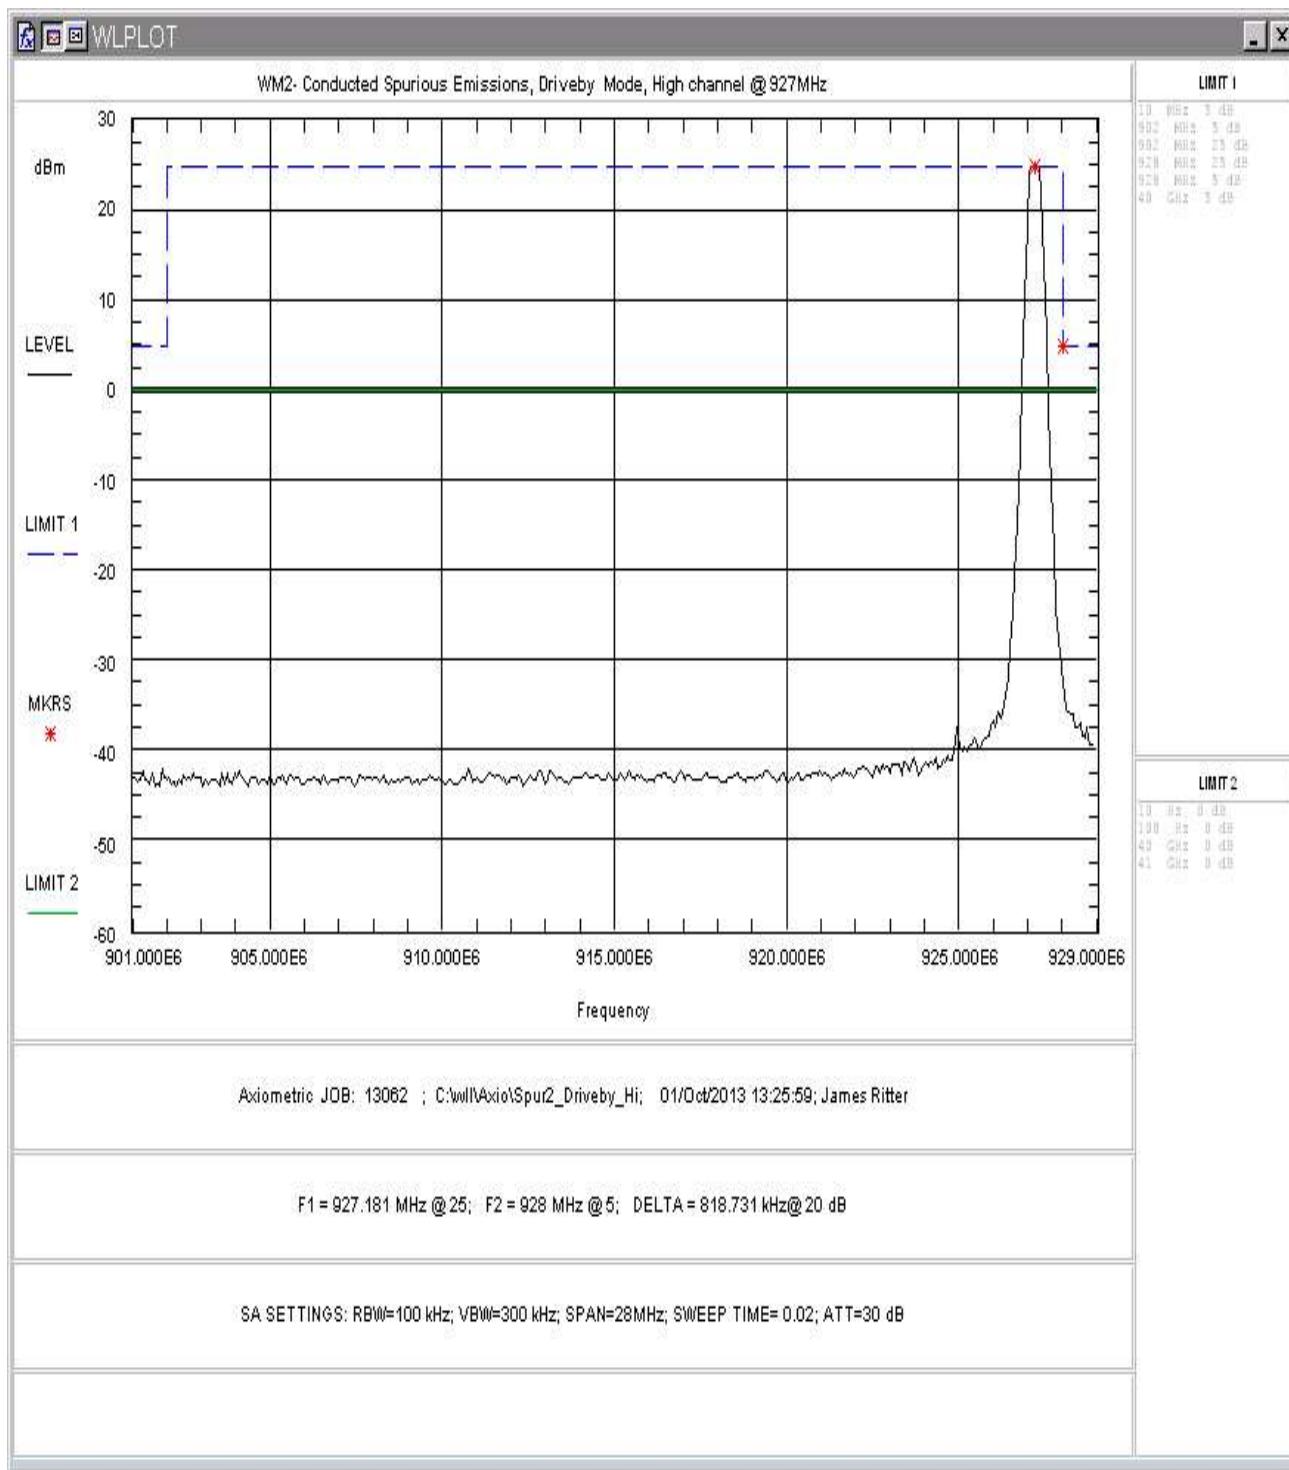

**Figure 42. Conducted Spurious Emissions, Drive-by Mode, High Channel 901-929MHz**

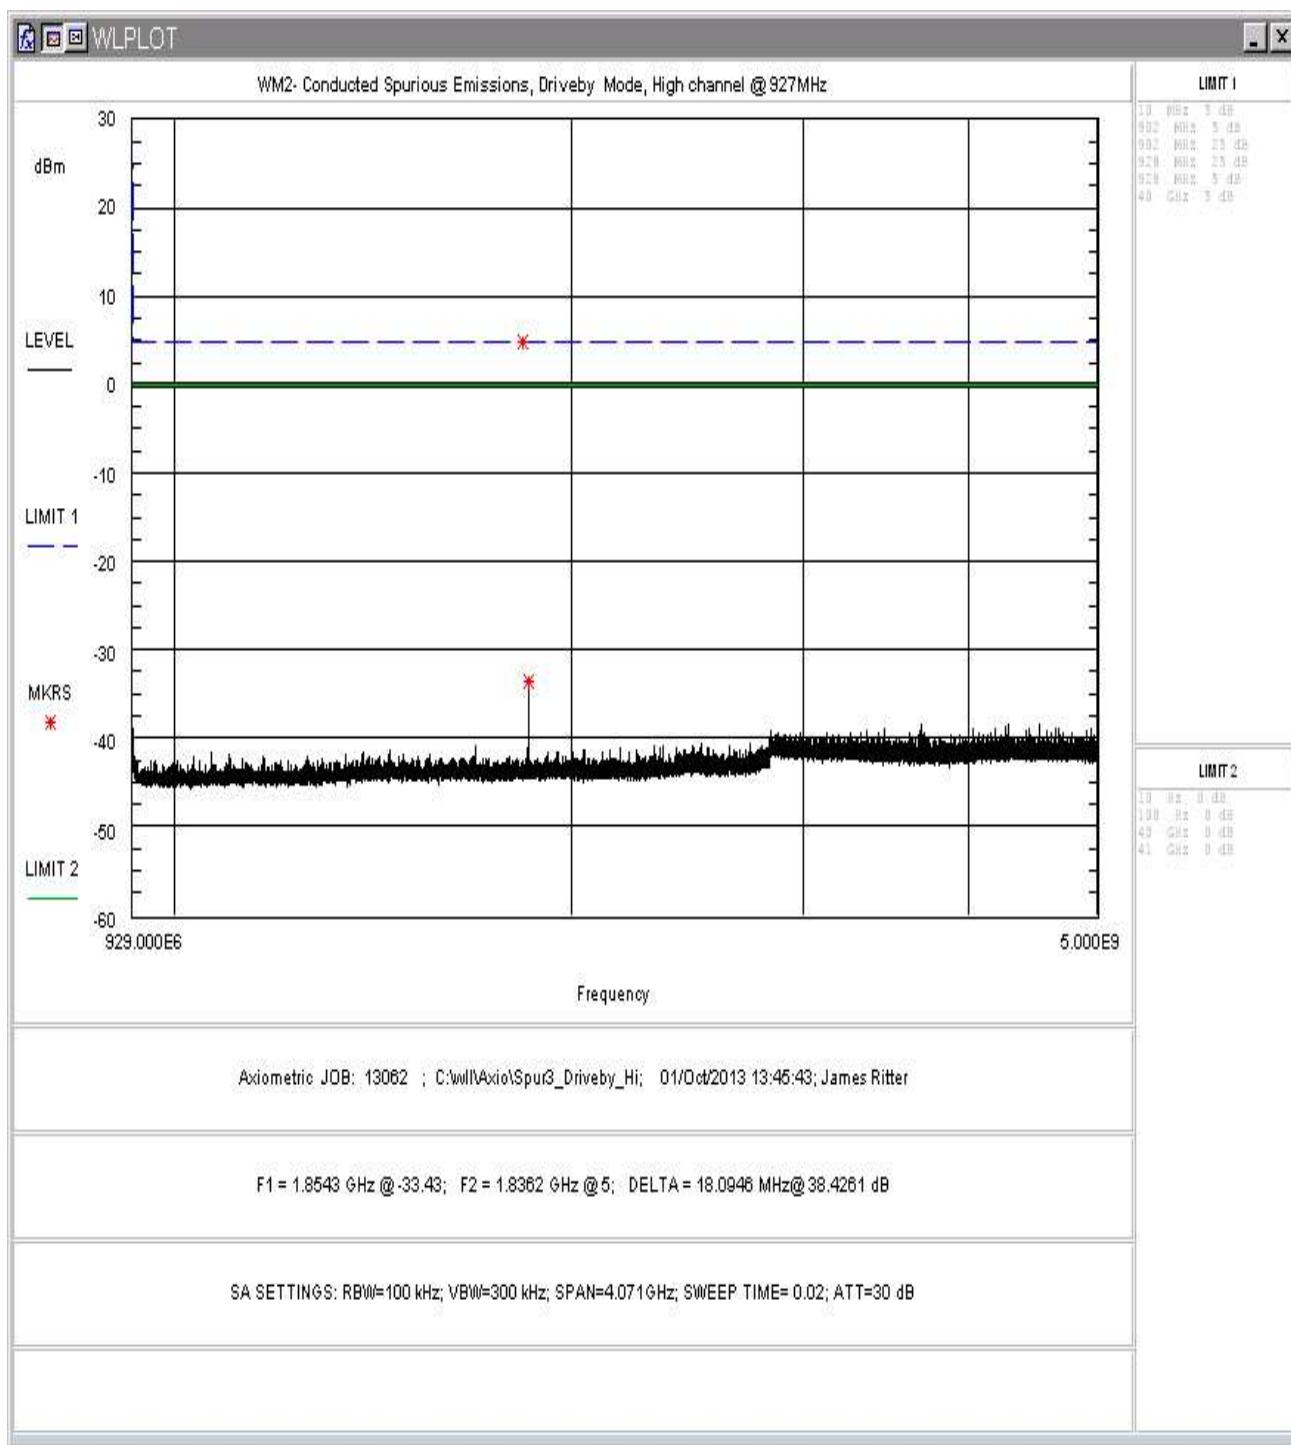


**Figure 43. Conducted Spurious Emissions, Drive-by Mode, High Channel 929-5000MHz**

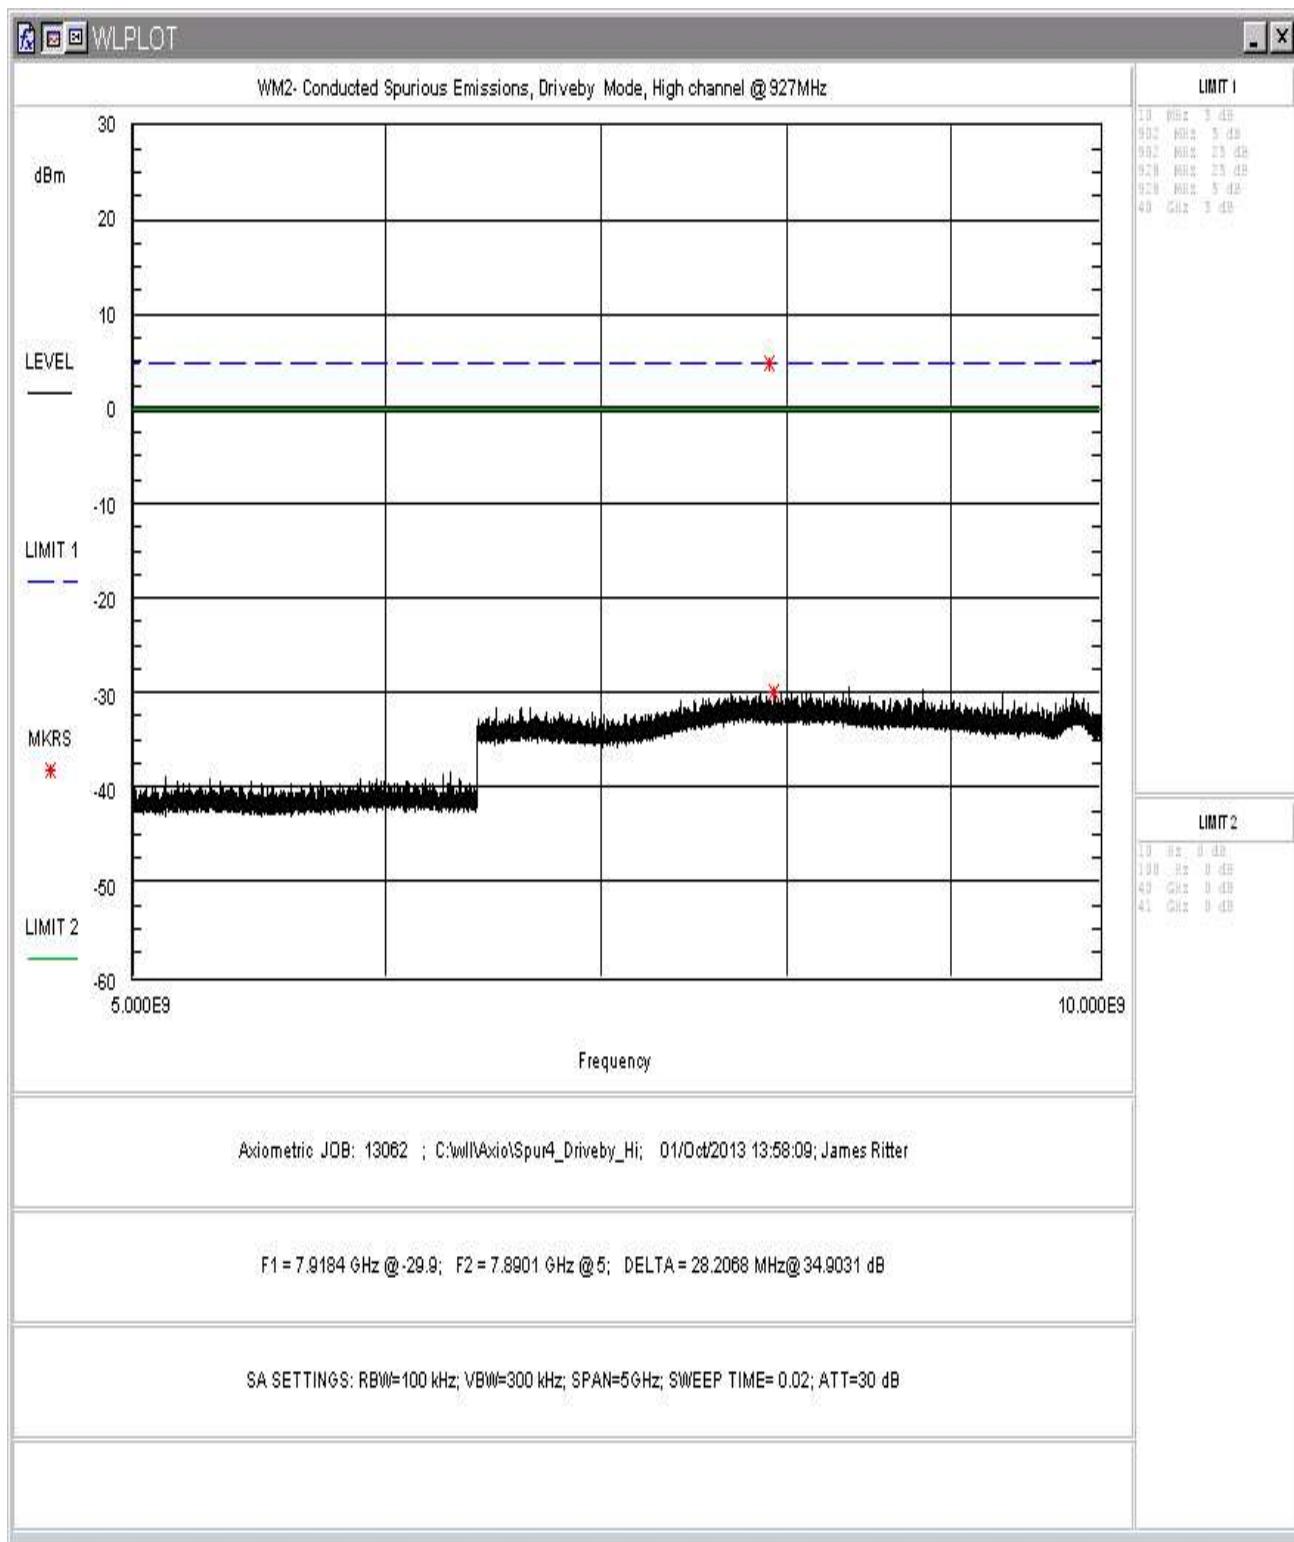

**Figure 44. Conducted Spurious Emissions, Drive-by Mode, High Channel 5-10GHz**

### 5.5.1 Band Edge Requirements

Close up plots of the upper and lower 902-928MHz Band-edges in both Mesh and Drive-by modes are provided below with the EUT fixed at the lower and upper frequencies. Plots are also provided with the EUT hopping functions enabled. Emissions must be attenuated 20dB from the peak emission outside of the 902-928 Band.

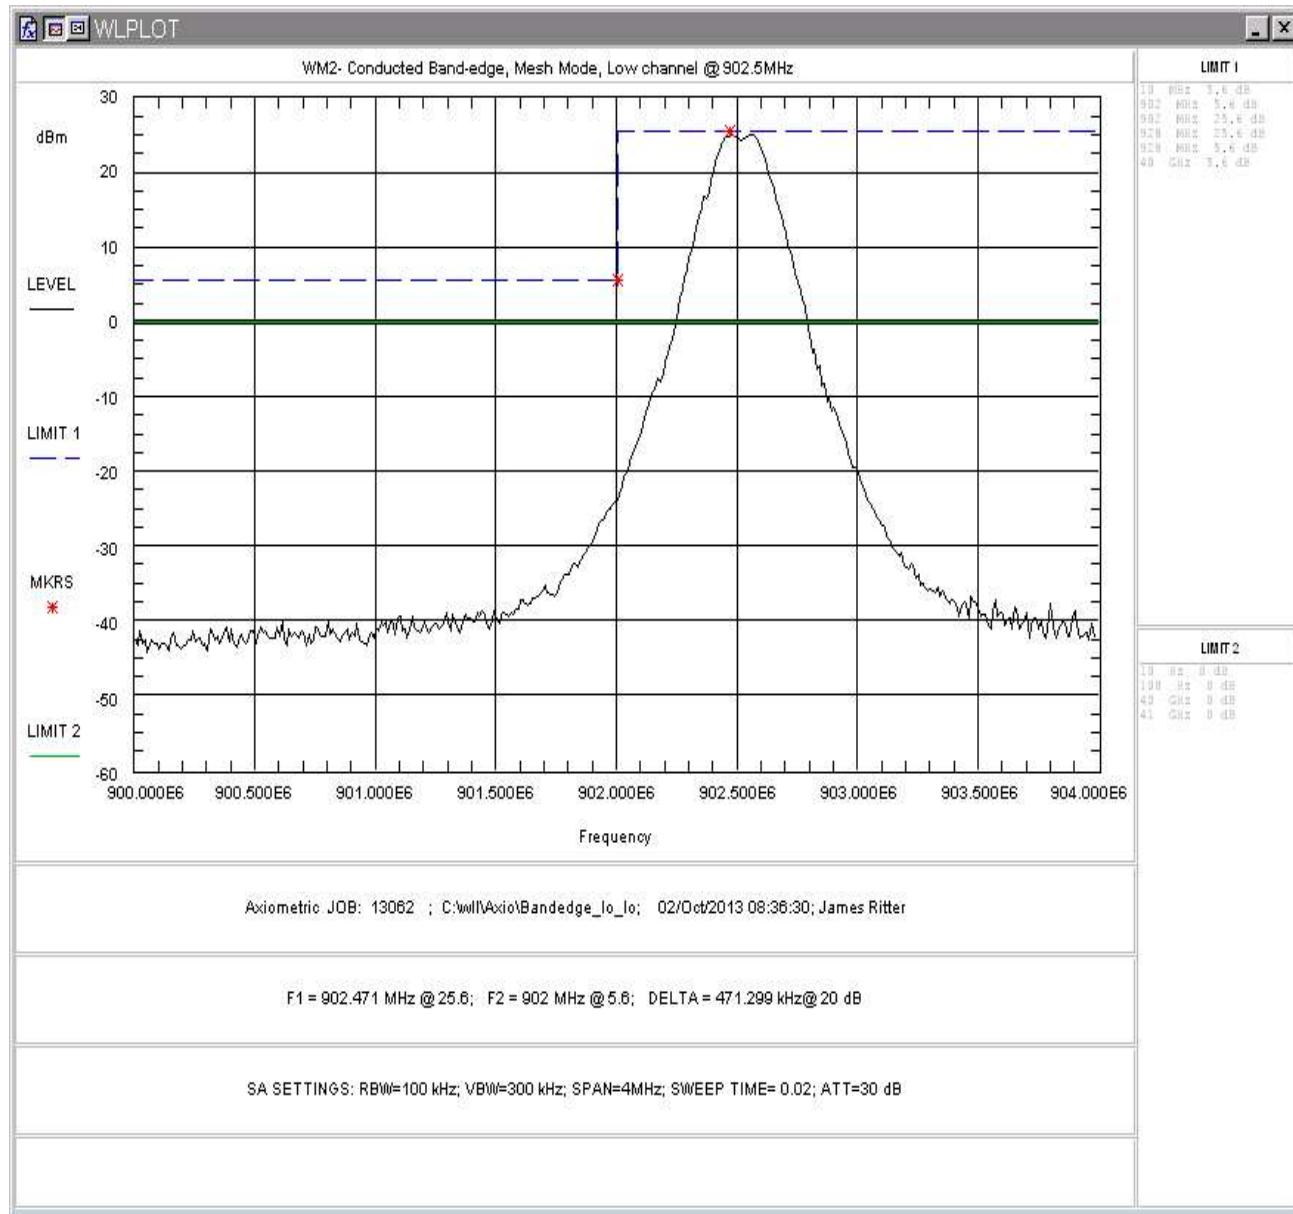

**Figure 45. Conducted Lower Band-edge, Mesh Mode, Low Channel**

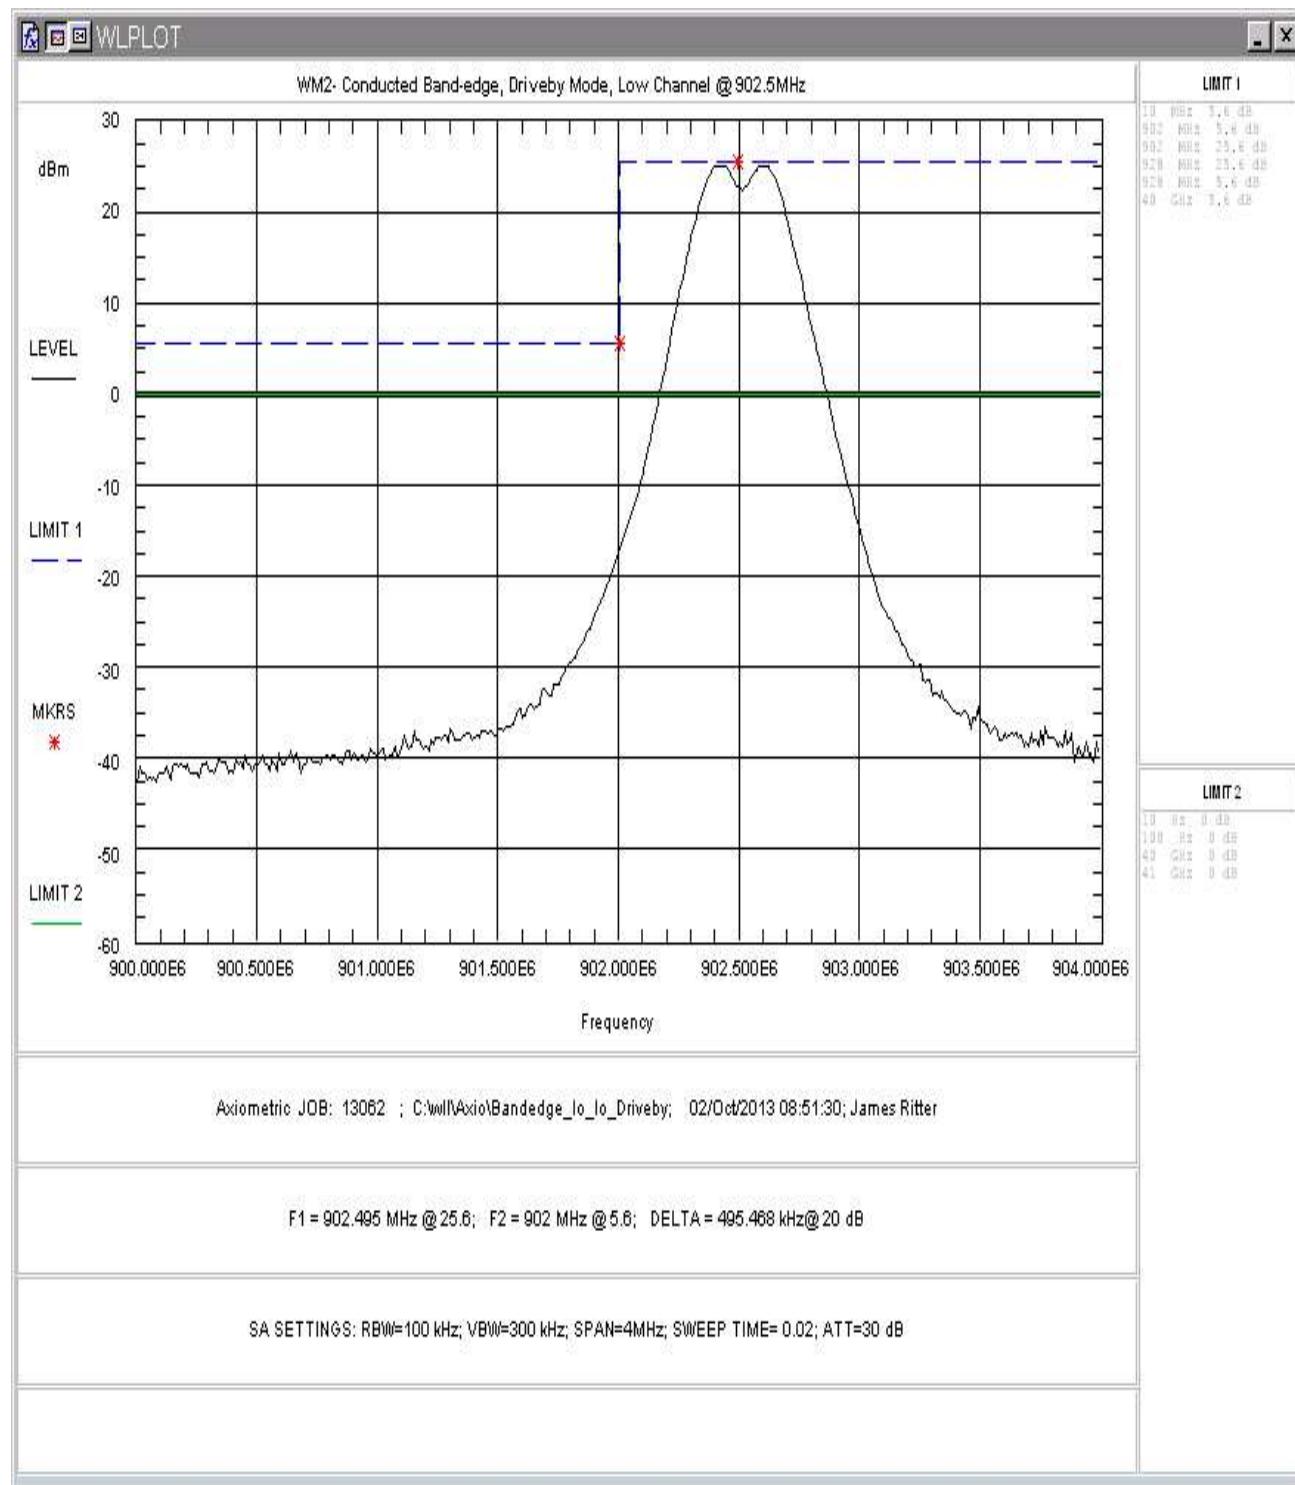


Figure 46. Conducted Lower Band-edge, Drive-by Mode, Low Channel



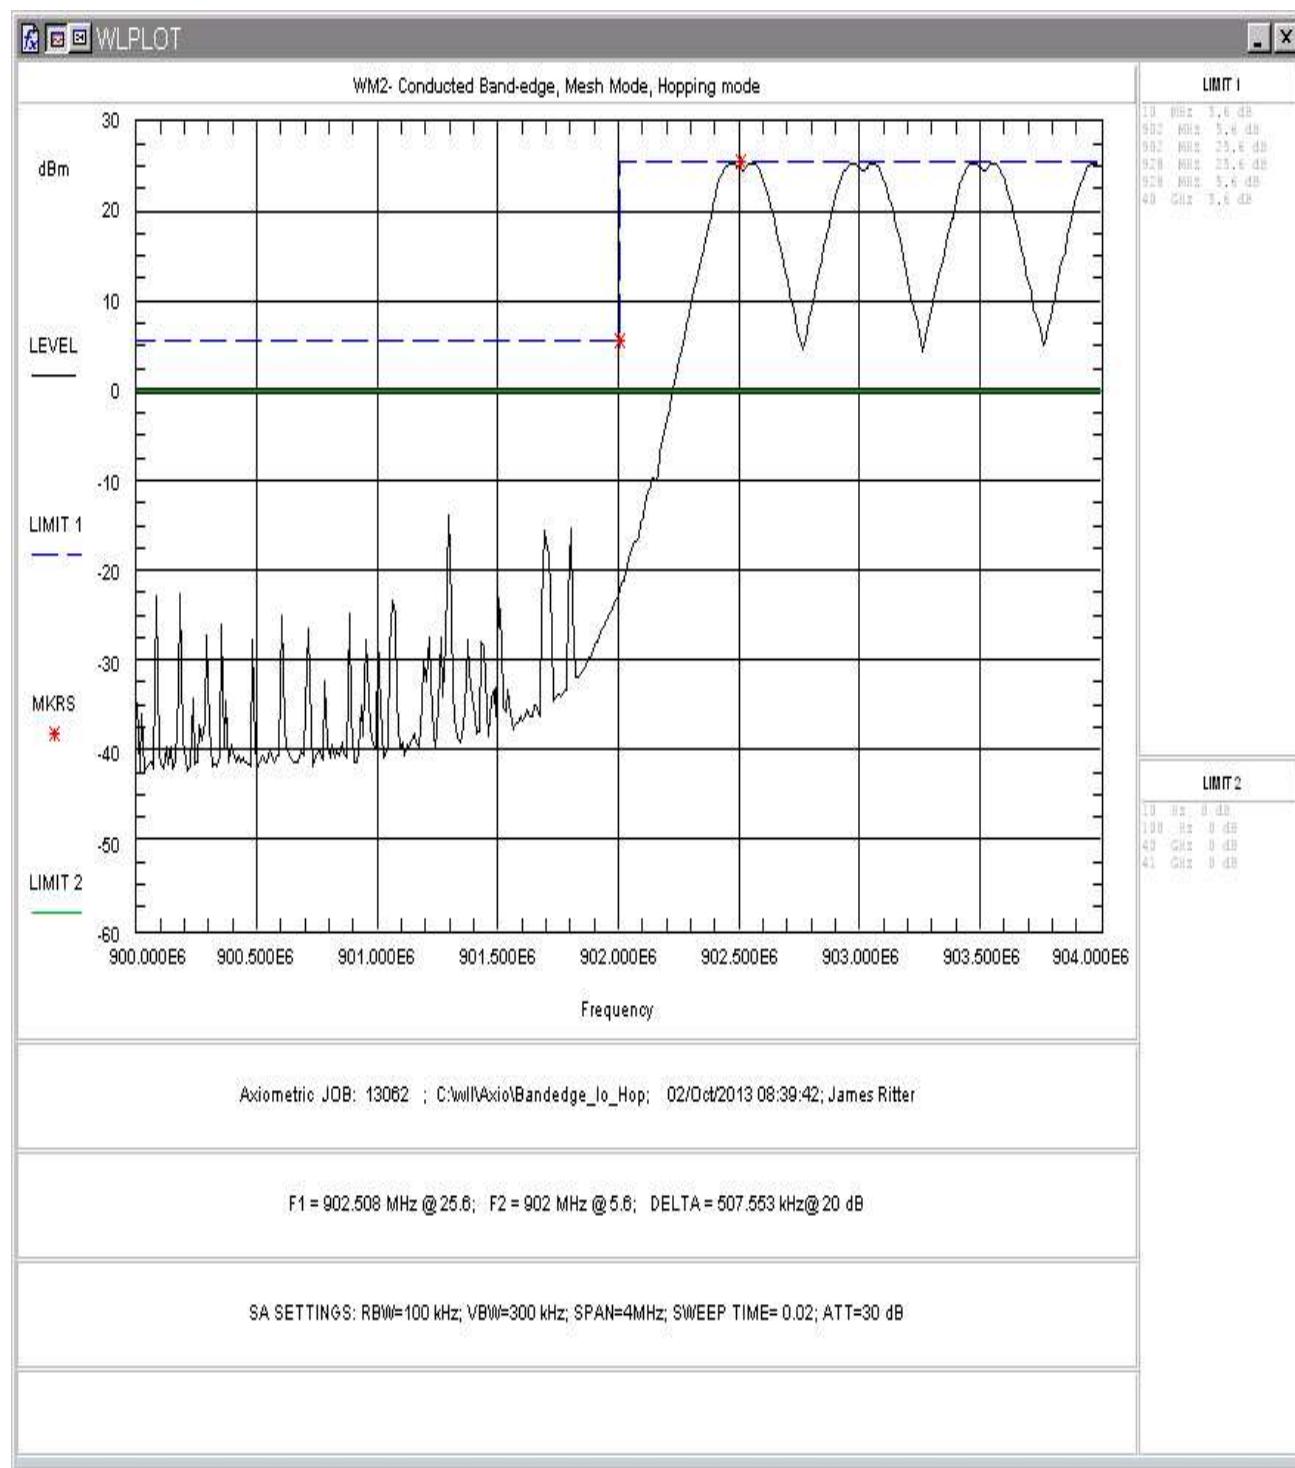



Figure 47. Conducted Lower Band-edge, Mesh Mode, Hopping

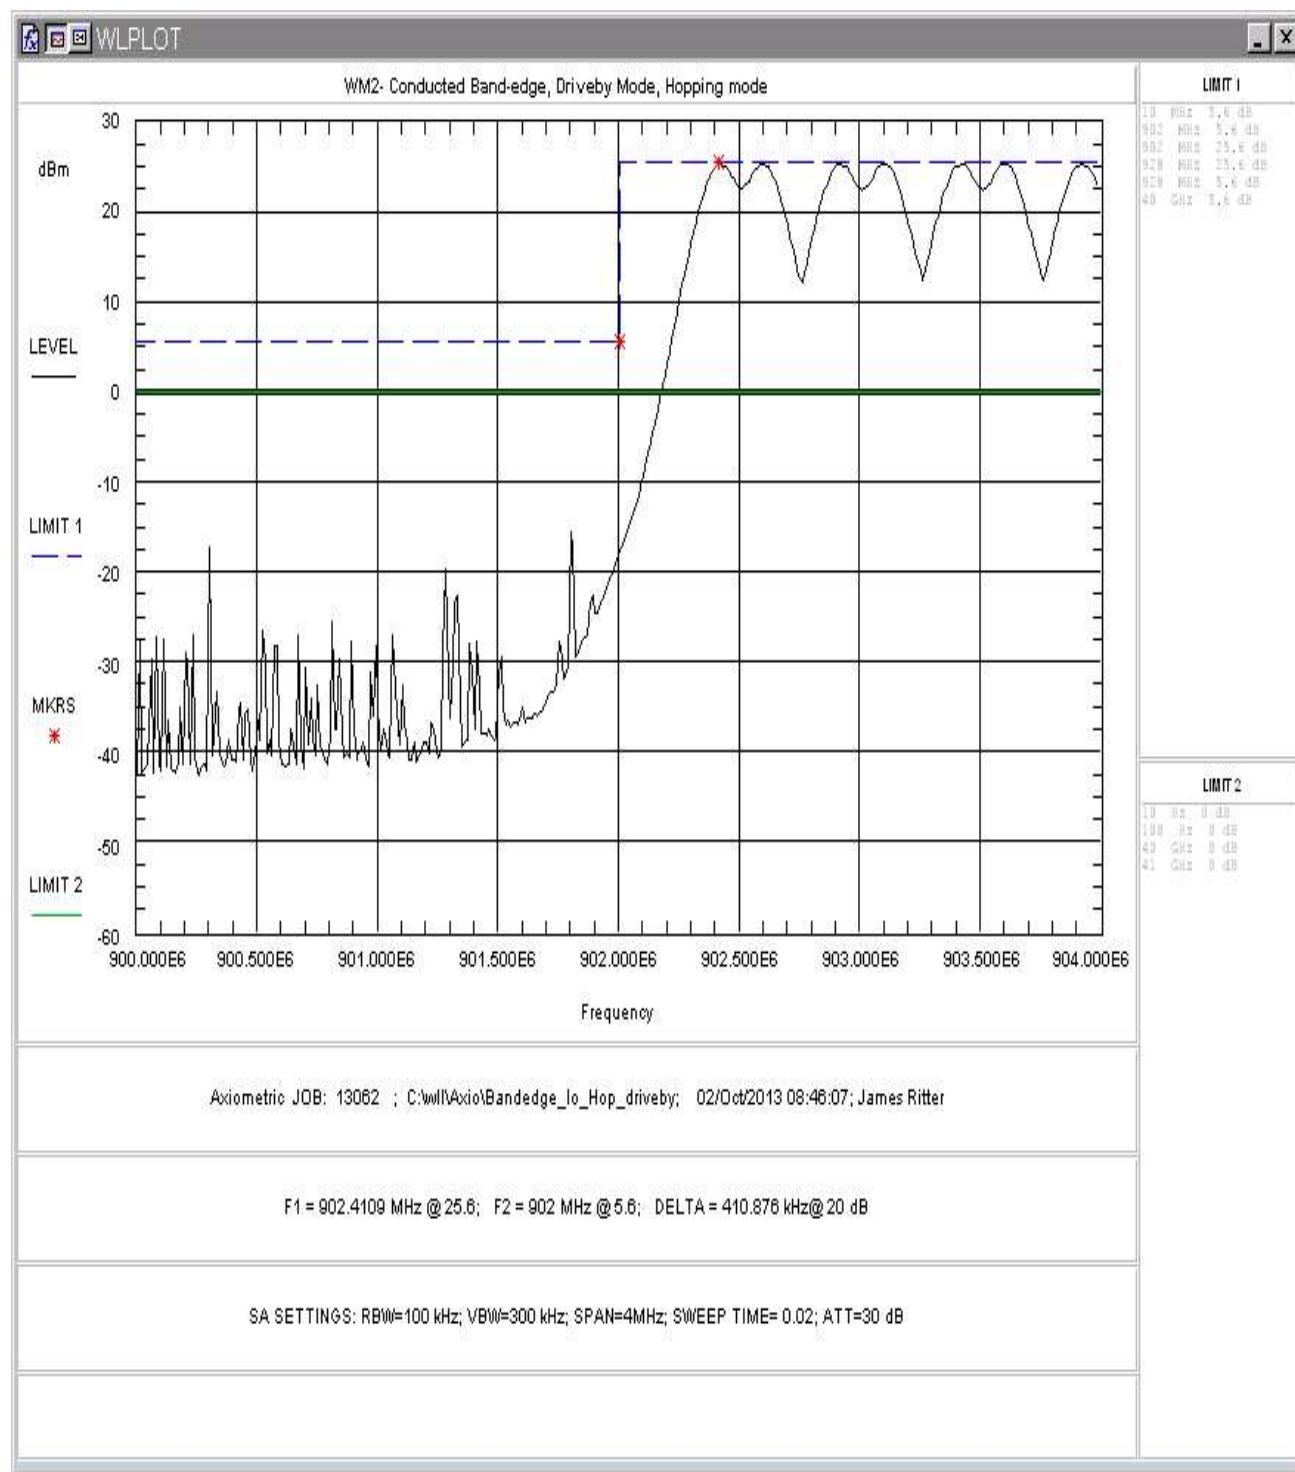


**Figure 48. Conducted Lower Band-edge, Drive-by Mode, Hopping**

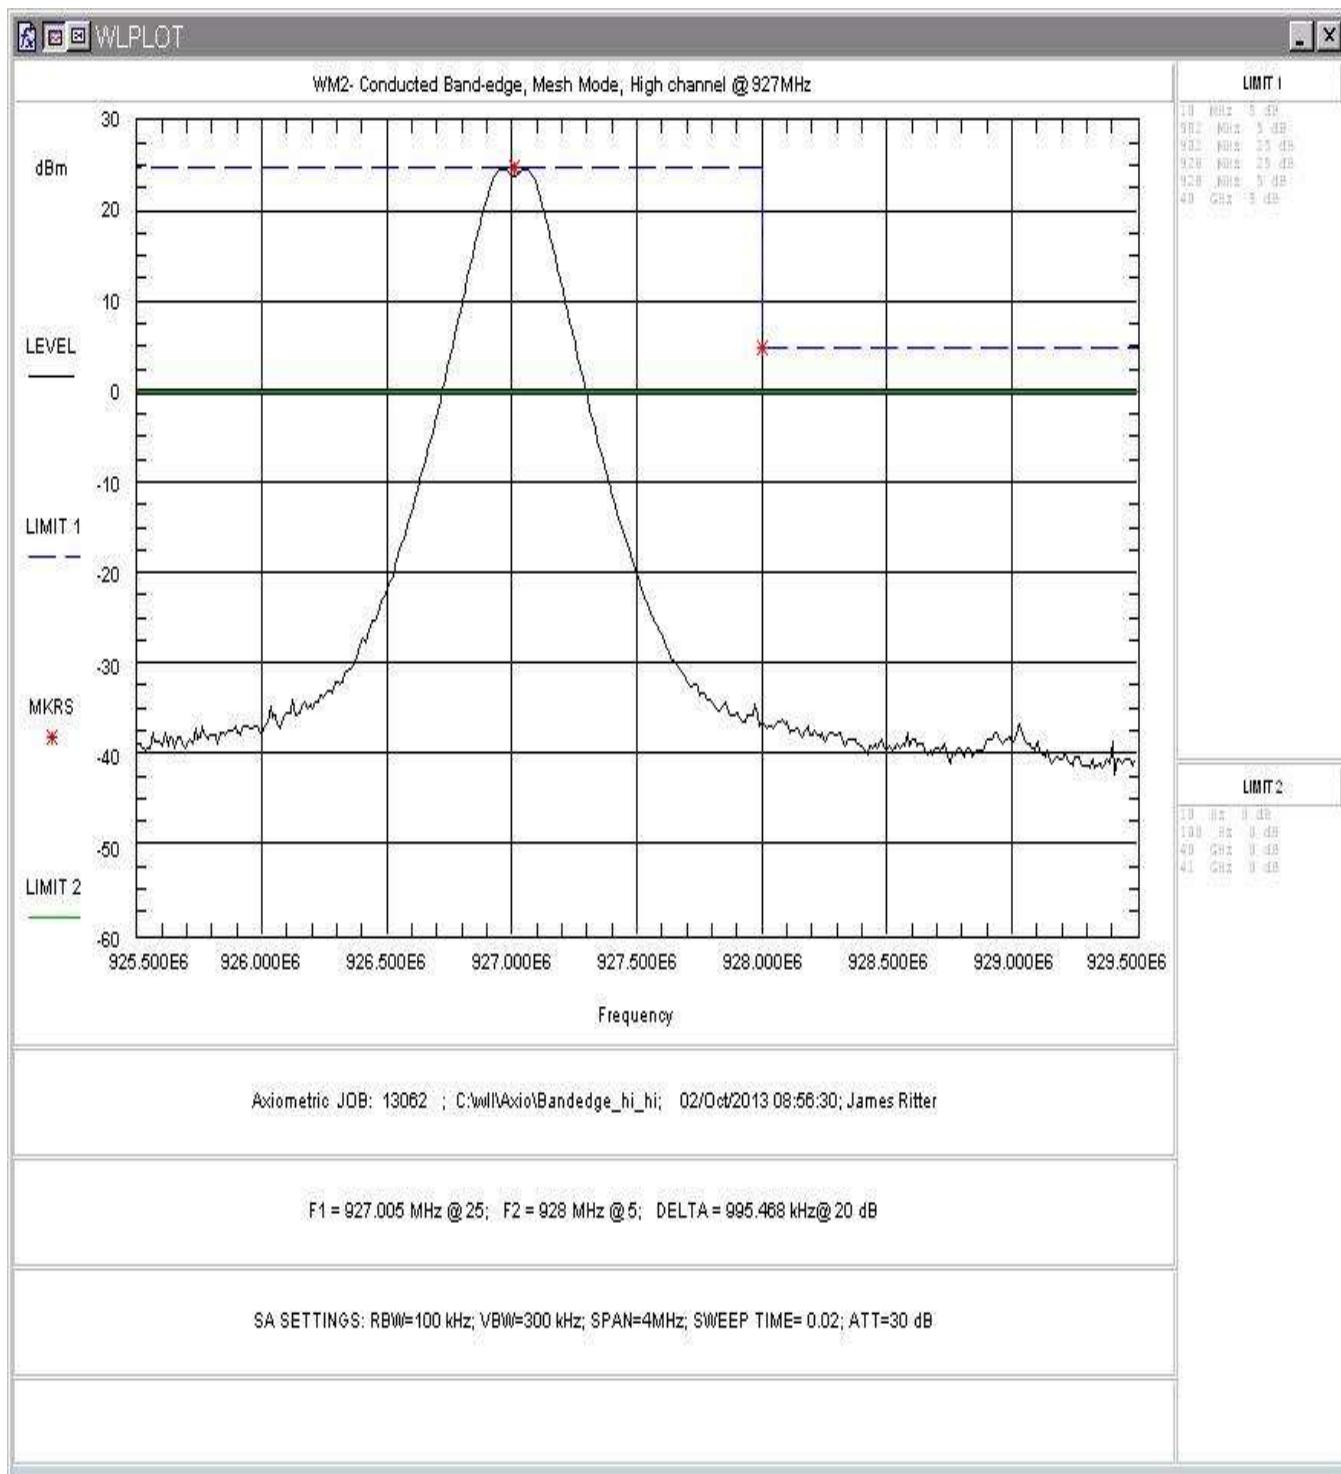


**Figure 49. Conducted Upper Band-edge, Mesh Mode, High Channel**

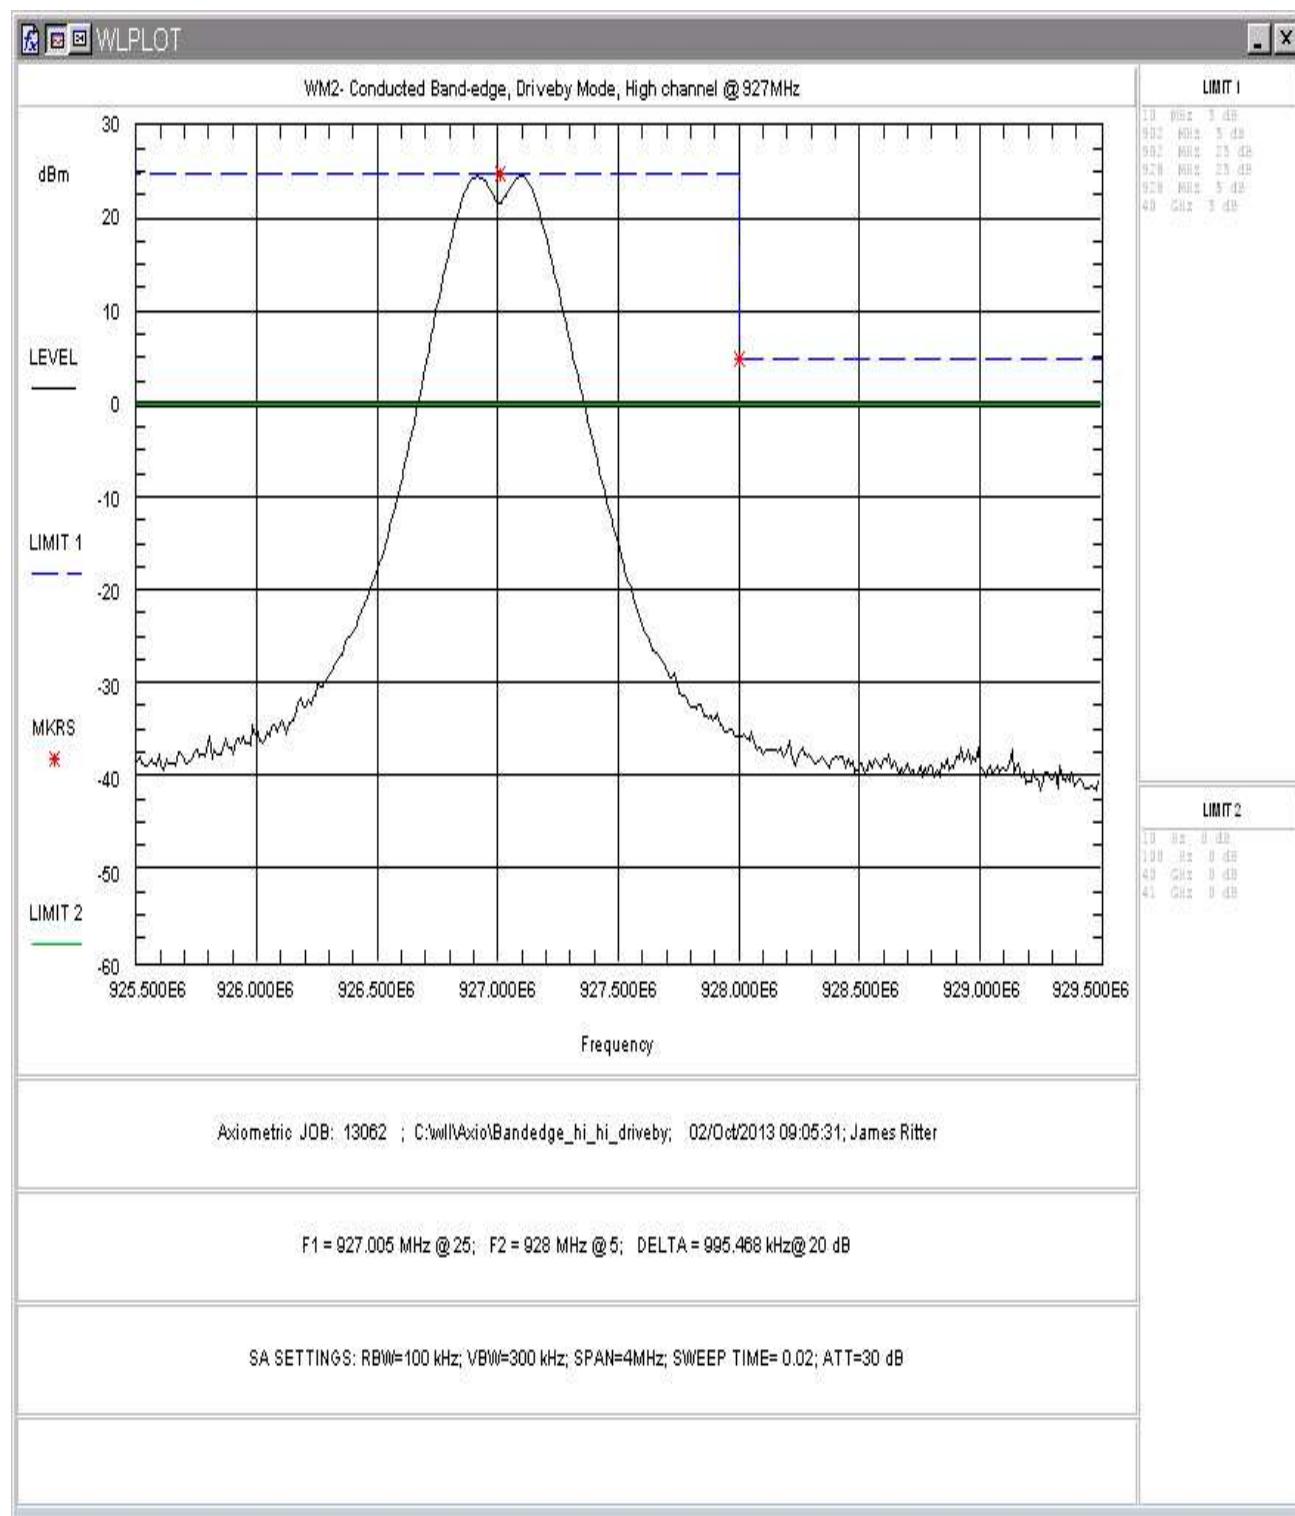

**Figure 50. Conducted Upper Band-edge, Drive-by Mode, High Channel**

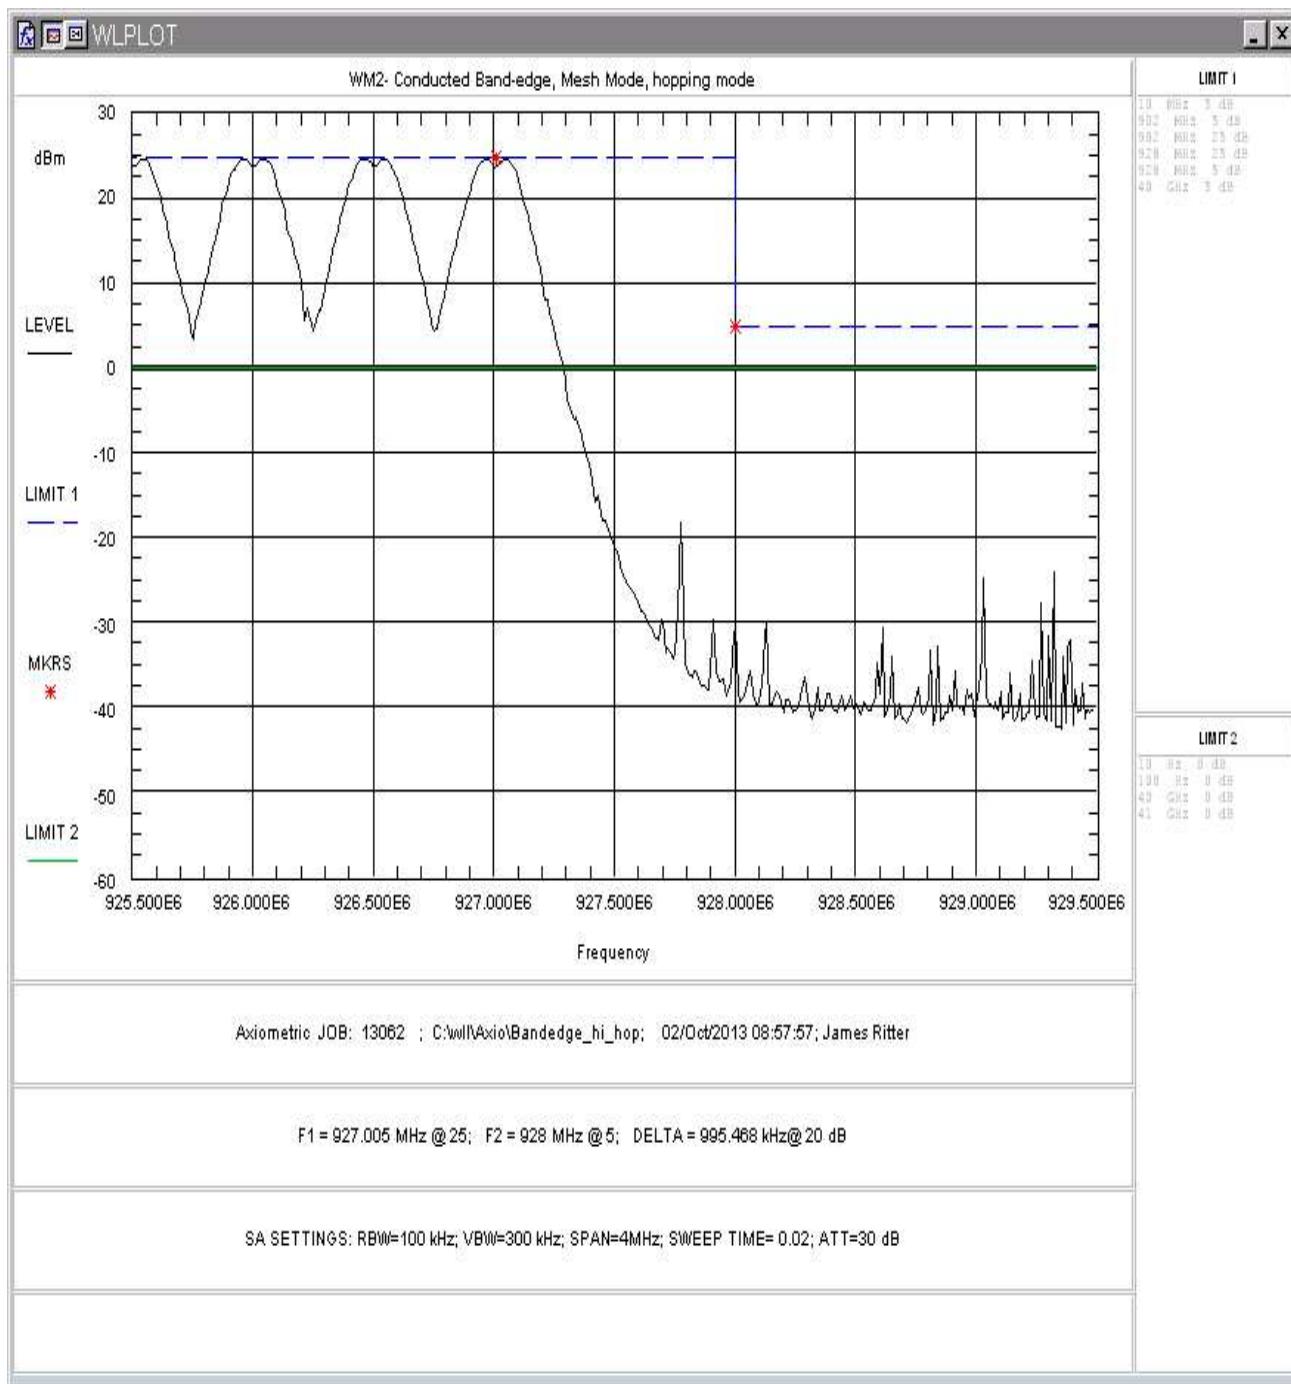

**Figure 51. Conducted Upper Band-edge, Mesh Mode, Hopping**

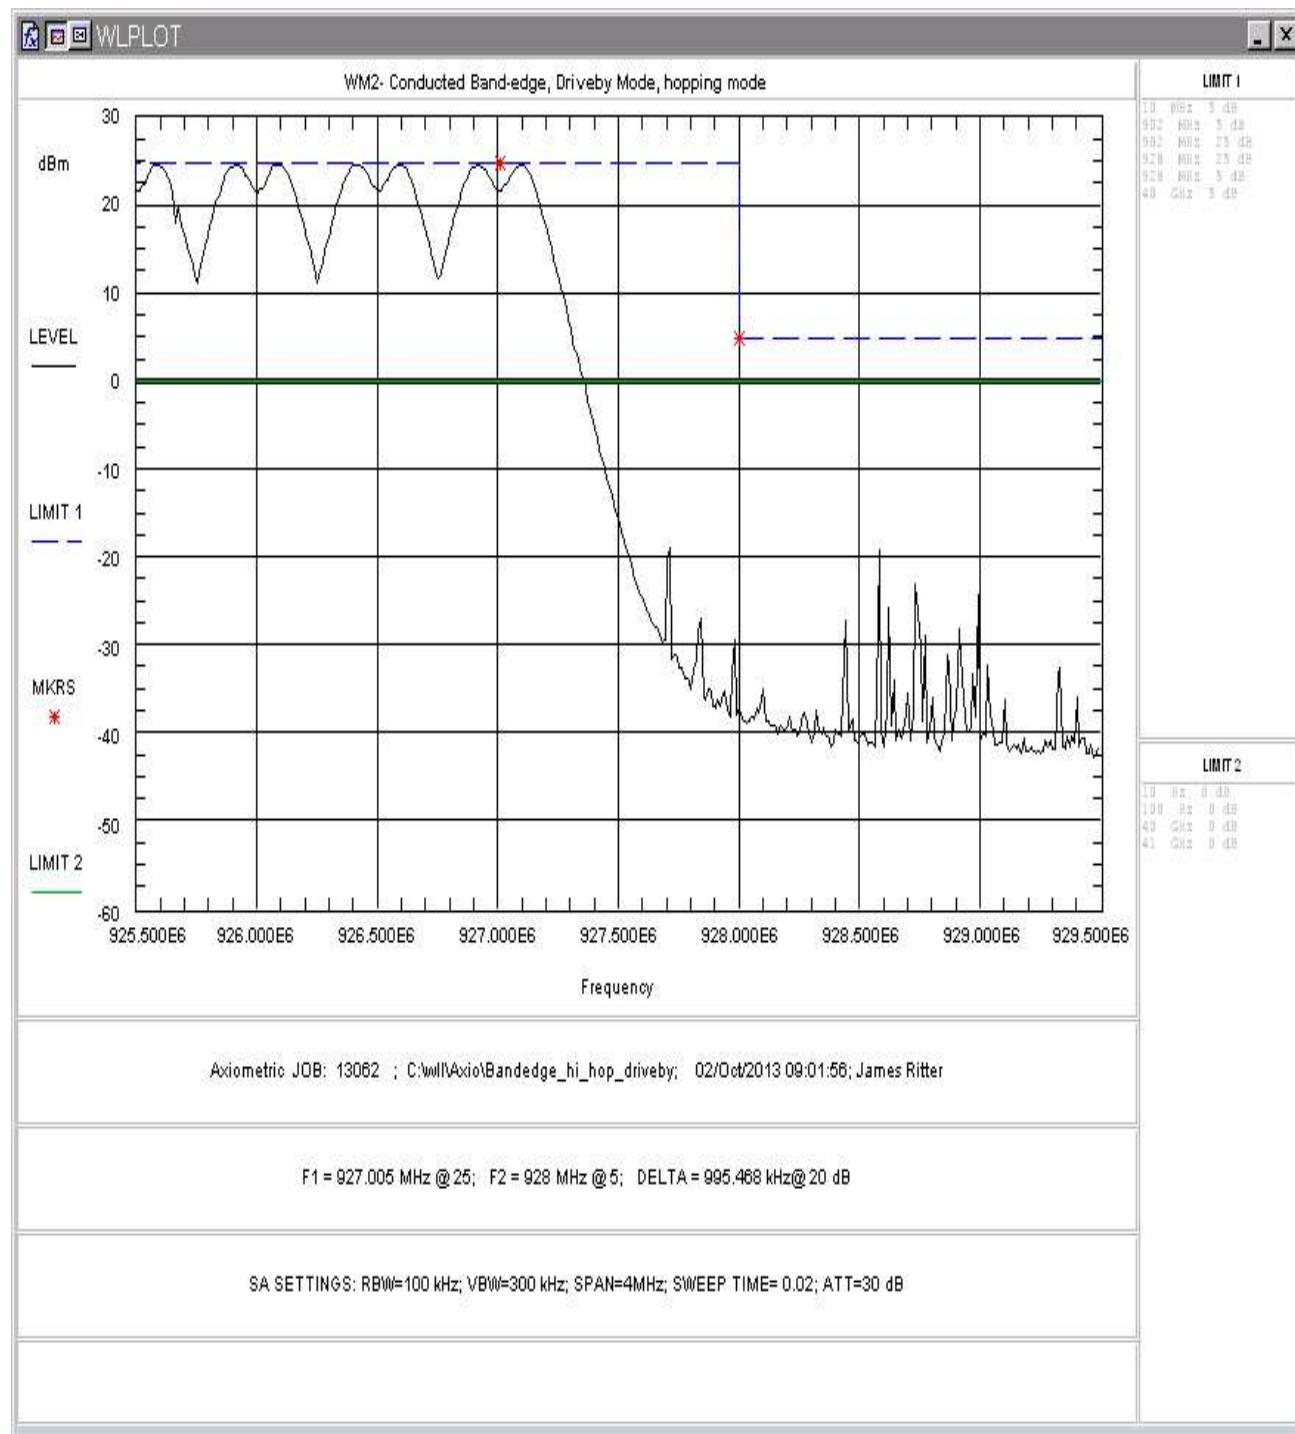

**Figure 52. Conducted Upper Band-edge, Drive-by Mode, Hopping**

## 5.6 Radiated Spurious Emissions: (FCC Part §2.1053)

The EUT must comply with the requirements for radiated spurious emissions that fall within the restricted bands. These emissions must meet the limits specified in §15.209 and §15.35(b) for peak measurements.

### 5.6.1 Test Procedure

The EUT was placed on motorized turntable for radiated testing on a 3-meter open field test site. The emissions from the EUT were measured continuously at every azimuth by rotating the turntable. Receiving antennas were mounted on an antenna mast to determine the height of maximum emissions. The height of the antenna was varied between 1 and 4 meters. The peripherals were placed on the table in accordance with ANSI C63.4-2003. Cables were varied in position to produce maximum emissions. Both the horizontal and vertical field components were measured.

The emissions were measured using the following resolution bandwidths:

| Frequency Range | Resolution Bandwidth | Video Bandwidth             |
|-----------------|----------------------|-----------------------------|
| 30MHz-1000 MHz  | 120kHz               | >120 kHz                    |
| >1000 MHz       | 1 MHz                | 10 Hz (Avg.)<br>1MHz (Peak) |

**Table 7: Radiated Emission Test Data (Restricted Bands) <1GHz**

| Frequency (MHz) | Polarity H/V | Azimuth (Degree) | Ant. Height (m) | SA Level (dBuV) | Corr Factors (dB) | Corr. Level (uV/m) | Limit (uV/m) | Margin (dB) | Comments |
|-----------------|--------------|------------------|-----------------|-----------------|-------------------|--------------------|--------------|-------------|----------|
| 125.02          | V            | 90.00            | 1.00            | 5.40            | 15.5              | 11.1               | 150.0        | -22.6       |          |
| 273.02          | V            | 270.00           | 2.30            | 4.40            | 15.9              | 10.4               | 200.0        | -25.7       |          |
| 323.63          | V            | 190.00           | 1.40            | 3.50            | 17.1              | 10.8               | 200.0        | -25.4       |          |
|                 |              |                  |                 |                 |                   |                    |              |             |          |
| 117.99          | H            | 45.00            | 3.31            | 12.80           | 15.3              | 25.5               | 150.0        | -15.4       |          |
| 125.03          | H            | 90.00            | 3.60            | 6.50            | 15.5              | 12.6               | 150.0        | -21.5       |          |
| 250.00          | H            | 50.00            | 2.79            | 6.50            | 14.1              | 10.7               | 200.0        | -25.4       |          |
| 267.01          | H            | 180.00           | 3.12            | 4.20            | 15.6              | 9.7                | 200.0        | -26.3       |          |
| 323.63          | H            | 200.00           | 1.20            | 2.90            | 17.1              | 10.0               | 200.0        | -26.0       |          |

**Table 8: Radiated Emission Test Data (Restricted Bands), Low Channel**

| Frequency (MHz) | Polarity H/V | Azimuth (Degree) | Ant. Height (m) | SA Level (dBuV) | Corr Factors (dB) | Corr. Level (uV/m) | Limit (uV/m) | Margin (dB) | Comments |
|-----------------|--------------|------------------|-----------------|-----------------|-------------------|--------------------|--------------|-------------|----------|
| TX = 902.5      |              |                  |                 |                 |                   |                    |              |             |          |
| 2707.50         | V            | 90.00            | 3.69            | 47.67           | -1.2              | 211.7              | 5000.0       | -27.5       | Peak     |
| 3610.00         | V            | 170.00           | 2.60            | 44.27           | 0.3               | 169.2              | 5000.0       | -29.4       | Peak     |
| 4512.50         | V            | 45.00            | 3.26            | 43.20           | 2.9               | 201.1              | 5000.0       | -27.9       | Peak     |
| 5415.00         | V            | 180.00           | 3.60            | 44.50           | 5.4               | 314.0              | 5000.0       | -24.0       | Peak     |
| 8122.50         | V            | 50.00            | 2.88            | 42.83           | 10.1              | 444.0              | 5000.0       | -21.0       | Peak     |
| 9025.00         | V            | 45.00            | 3.15            | 43.17           | 12.3              | 593.1              | 5000.0       | -18.5       | Peak     |
| 2707.50         | V            | 90.00            | 3.69            | 39.99           | -1.2              | 87.5               | 500.0        | -15.1       | Average  |
| 3610.00         | V            | 170.00           | 2.60            | 33.67           | 0.3               | 49.9               | 500.0        | -20.0       | Average  |
| 4512.50         | V            | 45.00            | 3.26            | 31.20           | 2.9               | 50.5               | 500.0        | -19.9       | Average  |
| 5415.00         | V            | 180.00           | 3.60            | 31.33           | 5.4               | 68.9               | 500.0        | -17.2       | Average  |
| 8122.50         | V            | 50.00            | 2.88            | 31.50           | 10.1              | 120.5              | 500.0        | -12.4       | Average  |
| 9025.00         | V            | 45.00            | 3.15            | 32.30           | 12.3              | 169.7              | 500.0        | -9.4        | Average  |
|                 |              |                  |                 |                 |                   |                    |              |             |          |
| 2707.50         | H            | 45.00            | 3.67            | 48.17           | -1.2              | 224.3              | 5000.0       | -27.0       | Peak     |
| 3610.00         | H            | 90.00            | 3.04            | 44.17           | 0.3               | 167.2              | 5000.0       | -29.5       | Peak     |
| 4512.50         | H            | 180.00           | 3.40            | 43.67           | 2.9               | 212.3              | 5000.0       | -27.4       | Peak     |
| 5415.00         | H            | 90.00            | 3.30            | 44.14           | 5.4               | 301.2              | 5000.0       | -24.4       | Peak     |
| 8122.50         | H            | 180.00           | 3.09            | 43.83           | 10.1              | 498.2              | 5000.0       | -20.0       | Peak     |
| 9025.00         | H            | 180.00           | 3.31            | 43.33           | 12.3              | 604.1              | 5000.0       | -18.4       | Peak     |
| 2707.50         | H            | 45.00            | 3.67            | 37.68           | -1.2              | 67.0               | 500.0        | -17.5       | Average  |
| 3610.00         | H            | 90.00            | 3.04            | 34.50           | 0.3               | 54.9               | 500.0        | -19.2       | Average  |
| 4512.50         | H            | 180.00           | 3.40            | 30.17           | 2.9               | 44.9               | 500.0        | -20.9       | Average  |
| 5415.00         | H            | 90.00            | 3.30            | 34.67           | 5.4               | 101.3              | 500.0        | -13.9       | Average  |
| 8122.50         | H            | 180.00           | 3.09            | 30.50           | 10.1              | 107.4              | 500.0        | -13.4       | Average  |
| 9025.00         | H            | 180.00           | 3.31            | 31.17           | 12.3              | 149.0              | 500.0        | -10.5       | Average  |

**Table 9: Radiated Emission Test Data (Restricted Bands), Center Channel**

| Frequency (MHz) | Polarity H/V | Azimuth (Degree) | Ant. Height (m) | SA Level (dBuV) | Corr Factors (dB) | Corr. Level (uV/m) | Limit (uV/m) | Margin (dB) | Comments |
|-----------------|--------------|------------------|-----------------|-----------------|-------------------|--------------------|--------------|-------------|----------|
| TX = 915.00     |              |                  |                 |                 |                   |                    |              |             |          |
| 2745.00         | V            | 90.00            | 3.40            | 45.17           | -1.2              | 158.2              | 5000.0       | -30.0       | Peak     |
| 3660.00         | V            | 45.00            | 3.41            | 43.67           | 0.6               | 162.7              | 5000.0       | -29.8       | Peak     |
| 4575.00         | V            | 190.00           | 3.31            | 42.67           | 2.8               | 186.7              | 5000.0       | -28.6       | Peak     |
| 7320.00         | V            | 10.00            | 3.40            | 44.83           | 10.3              | 570.9              | 5000.0       | -18.8       | Peak     |
| 8235.00         | V            | 180.00           | 3.20            | 43.17           | 10.3              | 470.2              | 5000.0       | -20.5       | Peak     |
| 9150.00         | V            | 90.00            | 3.70            | 44.67           | 13.0              | 761.1              | 5000.0       | -16.4       | Peak     |
| 2745.00         | V            | 90.00            | 3.40            | 35.33           | -1.2              | 51.0               | 500.0        | -19.8       | Average  |
| 3660.00         | V            | 45.00            | 3.41            | 32.50           | 0.6               | 45.0               | 500.0        | -20.9       | Average  |
| 4575.00         | V            | 190.00           | 3.31            | 31.50           | 2.8               | 51.6               | 500.0        | -19.7       | Average  |
| 7320.00         | V            | 10.00            | 3.40            | 36.67           | 10.3              | 223.1              | 500.0        | -7.0        | Average  |
| 8235.00         | V            | 180.00           | 3.20            | 31.00           | 10.3              | 115.8              | 500.0        | -12.7       | Average  |
| 9150.00         | V            | 90.00            | 3.70            | 32.70           | 13.0              | 191.8              | 500.0        | -8.3        | Average  |
|                 |              |                  |                 |                 |                   |                    |              |             |          |
| 2745.00         | H            | 45.00            | 2.89            | 46.50           | -1.2              | 184.4              | 5000.0       | -28.7       | Peak     |
| 3660.00         | H            | 90.00            | 3.50            | 44.67           | 0.6               | 182.6              | 5000.0       | -28.8       | Peak     |
| 4575.00         | H            | 180.00           | 3.53            | 42.50           | 2.8               | 183.1              | 5000.0       | -28.7       | Peak     |
| 7320.00         | H            | 10.00            | 3.08            | 45.50           | 10.3              | 616.7              | 5000.0       | -18.2       | Peak     |
| 8235.00         | H            | 90.00            | 3.10            | 44.17           | 10.3              | 527.6              | 5000.0       | -19.5       | Peak     |
| 9150.00         | H            | 180.00           | 3.22            | 43.17           | 13.0              | 640.3              | 5000.0       | -17.9       | Peak     |
| 2745.00         | H            | 45.00            | 2.89            | 36.50           | -1.2              | 58.3               | 500.0        | -18.7       | Average  |
| 3660.00         | H            | 90.00            | 3.50            | 34.33           | 0.6               | 55.5               | 500.0        | -19.1       | Average  |
| 4575.00         | H            | 180.00           | 3.53            | 30.50           | 2.8               | 46.0               | 500.0        | -20.7       | Average  |
| 7320.00         | H            | 10.00            | 3.08            | 35.50           | 10.3              | 195.0              | 500.0        | -8.2        | Average  |
| 8235.00         | H            | 90.00            | 3.10            | 33.00           | 10.3              | 145.8              | 500.0        | -10.7       | Average  |
| 9150.00         | H            | 180.00           | 3.22            | 31.17           | 13.0              | 160.8              | 500.0        | -9.9        | Average  |

**Table 10: Radiated Emission Test Data (Restricted Bands), High Channel**

| Frequency (MHz) | Polarity H/V | Azimuth (Degree) | Ant. Height (m) | SA Level (dBuV) | Corr. Factors (dB) | Corr. Level (uV/m) | Limit (uV/m) | Margin (dB) | Comments |
|-----------------|--------------|------------------|-----------------|-----------------|--------------------|--------------------|--------------|-------------|----------|
| TX = 927.00     |              |                  |                 |                 |                    |                    |              |             |          |
| 2781.00         | V            | 90.00            | 2.80            | 47.83           | -1.2               | 214.1              | 5000.0       | -27.4       | Peak     |
| 3708.00         | V            | 45.00            | 2.76            | 43.33           | 0.8                | 161.1              | 5000.0       | -29.8       | Peak     |
| 4635.00         | V            | 190.00           | 3.30            | 42.83           | 3.0                | 195.5              | 5000.0       | -28.2       | Peak     |
| 7416.00         | V            | 10.00            | 3.44            | 45.67           | 10.2               | 624.4              | 5000.0       | -18.1       | Peak     |
| 8343.00         | V            | 100.00           | 2.76            | 42.17           | 10.3               | 422.4              | 5000.0       | -21.5       | Peak     |
|                 |              |                  |                 |                 |                    |                    |              |             |          |
| 2781.00         | V            | 90.00            | 2.80            | 37.83           | -1.2               | 67.7               | 500.0        | -17.4       | Average  |
| 3708.00         | V            | 45.00            | 2.76            | 31.67           | 0.8                | 42.1               | 500.0        | -21.5       | Average  |
| 4635.00         | V            | 190.00           | 3.30            | 31.80           | 3.0                | 54.9               | 500.0        | -19.2       | Average  |
| 7416.00         | V            | 10.00            | 3.44            | 34.60           | 10.2               | 174.6              | 500.0        | -9.1        | Average  |
| 8343.00         | V            | 100.00           | 2.76            | 30.83           | 10.3               | 114.5              | 500.0        | -12.8       | Average  |
|                 |              |                  |                 |                 |                    |                    |              |             |          |
| 2781.00         | H            | 45.00            | 3.75            | 46.17           | -1.2               | 176.9              | 5000.0       | -29.0       | Peak     |
| 3708.00         | H            | 300.00           | 3.23            | 45.33           | 0.8                | 202.8              | 5000.0       | -27.8       | Peak     |
| 4635.00         | H            | 50.00            | 3.20            | 43.50           | 3.0                | 211.1              | 5000.0       | -27.5       | Peak     |
| 7416.00         | H            | 10.00            | 2.97            | 44.50           | 10.2               | 545.7              | 5000.0       | -19.2       | Peak     |
| 8343.00         | H            | 90.00            | 3.24            | 43.17           | 10.3               | 474.0              | 5000.0       | -20.5       | Peak     |
|                 |              |                  |                 |                 |                    |                    |              |             |          |
| 2781.00         | H            | 45.00            | 3.75            | 37.85           | -1.2               | 67.9               | 500.0        | -17.3       | Average  |
| 3708.00         | H            | 300.00           | 3.23            | 32.33           | 0.8                | 45.4               | 500.0        | -20.8       | Average  |
| 4635.00         | H            | 50.00            | 3.20            | 31.20           | 3.0                | 51.2               | 500.0        | -19.8       | Average  |
| 7416.00         | H            | 10.00            | 2.97            | 35.50           | 10.2               | 193.6              | 500.0        | -8.2        | Average  |
| 8343.00         | H            | 90.00            | 3.24            | 32.10           | 10.3               | 132.5              | 500.0        | -11.5       | Average  |

## 5.7 AC Conducted Emissions (FCC Pt.15.207)

### 5.7.1 Requirements

Test Arrangement: Table Top

Compliance Standard: FCC Class B

| FCC Compliance Limits |                    |                    |
|-----------------------|--------------------|--------------------|
| Frequency             | Quasi-peak         | Average            |
| 0.15 - 0.5MHz         | 66 to 56dB $\mu$ V | 56 to 46dB $\mu$ V |
| 0.5 - 5MHz            | 56dB $\mu$ V       | 46dB $\mu$ V       |
| 5 - 30MHz             | 60dB $\mu$ V       | 50dB $\mu$ V       |

### 5.7.2 Test Data

This EUT is battery powered only and is exempt from this test.