

## EMI TEST REPORT

On Model Name: Microwave Oven

Model Numbers: XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS

Trade Mark:  **TOSHIBA**

FCC ID Number: VG8XM245AYY-PV4

Prepared for Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.

According to

\* FCC Part 18(2016)


*Industrial, Scientific and Medical Equipment*


\* FCC/OST MP-5(1986)


*FCC methods of measurements of radio noise emission from industrial, scientific and medical equipment*

Test Report #: GUA-170311661-FCC

Prepared by:  \_\_\_\_\_ ECMG  
ViVi Huang/Assistant      Company Name

Reviewed by:  \_\_\_\_\_ ECMG  
Jawen Yin/Senior Engineer      Company Name

QC Manager:  \_\_\_\_\_ ECMG  
Swall Zhang/QC Manager      Company Name

Test Report Released by:  \_\_\_\_\_ April 24<sup>th</sup>, 2017  
Swall Zhang      Date



## Verdict

|                      |              |
|----------------------|--------------|
| <b>Test Result :</b> | <i>Pass*</i> |
|----------------------|--------------|

*\*: In the configuration, the EUT complied with the standard specified above.*

## Revision History

| <i>Rev.</i> | <i>Issue date</i> | <i>Revision</i> | <i>Revised by</i> |
|-------------|-------------------|-----------------|-------------------|
| 2.0         | 4/24/2017         | Initial         | Jawen Yin         |

## Test Location

*Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.*

**Test Site Location** : *GD WITOL VACUUM ELECTRONIC EMC TEST LABORATORY*

*BeiJiao, ShunDe, FoShan, Guang Dong,  
528311, China*

**Tel** : *(86)-757-26326917*

**Fax** : *(86)-757- 22607341*

## Test Facility

*The test facility was recognized, certified, or accredited by the following organizations:*

**FCC – Registration No.: 910385**

*GD WITOL VACUUM ELECTRONIC EMC TEST LABORATORY has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files*

# Table of Contents

---

|   |           |
|---|-----------|
| <b>VERDICT</b>  | <b>2</b>  |
| <b>GOVERNMENT DISCLAIMER NOTICE</b>                   | <b>2</b>  |
| <b>REPRODUCTION CLAUSE</b>                            | <b>2</b>  |
| <b>OPINIONS AND INTERPRETATIONS</b>                   | <b>2</b>  |
| <b>STATEMENT OF MEASUREMENT UNCERTAINTY</b>           | <b>2</b>  |
| <b>ADMINISTRATIVE DATA</b>                            | <b>3</b>  |
| <b>EUT DESCRIPTION</b>                                | <b>4</b>  |
| <b>EUT MODEL DERIVED</b>                              | <b>4</b>  |
| <b>TEST SUMMARY</b>                                   | <b>6</b>  |
| <b>LOAD FOR MICROWAVE OVEN</b>                        | <b>7</b>  |
| <b>EUT EXERCISE SOFTWARE</b>                          | <b>7</b>  |
| <b>EQUIPMENT MODIFICATION</b>                         | <b>7</b>  |
| <b>EUT SAMPLE PHOTOS FOR MODEL EM245A5C-BS</b>        | <b>8</b>  |
| <b>TEST SYSTEM DETAILS</b>                            | <b>13</b> |
| <b>CONFIGURATION OF TESTED SYSTEM</b>                 | <b>14</b> |
| <b>ATTACHMENT 1 – RADIATION HAZARD TEST</b>           | <b>15</b> |
| <b>ATTACHMENT 2 – INPUT POWER MEASUREMENT</b>         | <b>17</b> |
| <b>ATTACHMENT 3 – RF OUTPUT POWER MEASUREMENT</b>     | <b>19</b> |
| <b>ATTACHMENT 4 – OPERATING FREQUENCY MEASUREMENT</b> | <b>21</b> |
| <b>ATTACHMENT 5 – CONDUCTED EMISSION TEST RESULTS</b> | <b>24</b> |
| <b>ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS</b>  | <b>29</b> |

**List Attached Files**

| <b>Exhibit Type</b>          | <b>File Description</b>      | <b>File Name</b>                                 |
|------------------------------|------------------------------|--|
| <i>Test Report</i>           | <i>Test Report</i>           | <i>VG8XM245AYY-PV4_Test Report.pdf</i>           |
| <i>Operation Description</i> | <i>Technical Description</i> | <i>VG8XM245AYY-PV4_Operation Description.pdf</i> |
| <i>External Photos</i>       | <i>External Photos</i>       | <i>VG8XM245AYY-PV4_External Photos.pdf</i>       |
| <i>Internal Photos</i>       | <i>Internal Photos</i>       | <i>VG8XM245AYY-PV4_Internal Photos.pdf</i>       |
| <i>Block Diagram</i>         | <i>Block Diagram</i>         | <i>VG8XM245AYY-PV4_Block Diagram.pdf</i>         |
| <i>Schematics</i>            | <i>Circuit Diagram</i>       | <i>VG8XM245AYY-PV4_Schematics.pdf</i>            |
| <i>ID Label/Location</i>     | <i>Label and Location</i>    | <i>VG8XM245AYY-PV4_Label &amp; Location.pdf</i>  |
| <i>User Manual</i>           | <i>User Manual</i>           | <i>VG8XM245AYY-PV4_User's Manual.pdf</i>         |
| <i>Test set-up photos</i>    | <i>Test set-up photos</i>    | <i>VG8XM245AYY-PV4_Test Set-up Photos</i>        |

### **Government Disclaimer Notice**

*When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

### **Reproduction Clause**

*Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).*

### **Opinions and Interpretations**

*This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.*

### **Statement of Measurement Uncertainty**

*The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.*

## Administrative Data

*Test Sample* : Microwave Oven

*Model Numbers* : XM245AYY-PV,XM245AYYY-PV,EM245A5C-BS

*Model Tested* : EM245A5C-BS

*Brand Name* : 

*Receipt Date* : March 28<sup>th</sup>,2017

*Date Tested* : March 30<sup>th</sup>,2017

*Applicant* : Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.

*Address* : No.6, Yong An Road, Beijiao, Shunde, Foshan.

*Telephone* : (86)-757-23606480

*Fax* : (86)-757-22607341

*Manufacturer* : Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.

*Address* : No.6, Yong An Road, Beijiao, Shunde, Foshan.

*Telephone* : (86)-757-23606480

*Fax* : (86)-757-22607341

*Factory* : Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.

*Address* : No.6, Yong An Road, Beijiao, Shunde, Foshan.

*Telephone* : (86)-757-23606480

*Fax* : (86)-757-22607341

## **EUT Description**

Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd. model tested EM245A5C-BS(referred to as the EUT in this report) is a Microwave Oven.

The technical specifications of EUT are as below:

|                                |                           |
|--------------------------------|---------------------------|
| Power Supply                   | 120V AC/60Hz              |
| Rated Input Power (Microwave)  | 1350W                     |
| Rated Output Power (Microwave) | 1250W                     |
| Frequency                      | 2450 MHz(Class B/Group 2) |
| Magnetron Model                | 2M303H                    |
| Magnetron Manufacturer         | TOSHIBA                   |

For more detailed information or features please refer to user's manual of EUT.

## **EUT Model Derived**

XM245AYY-PV,XM245AYYY-PV,EM245A5C-BS model designations as follow:

X =E or A: Controller Type ;

M: indicate microwave function;

245: "1" indicate the microwave output power is 1200W, "45" indicate cavity capacity is 45 liters;

A: indicate the design No.;

YY /YYY= 0-9 or A-Z, indicate different appearance;

Model XM245AYY-PV is identical to XM245AYYY-PV except for model number.

Model EM245A5C-BS is identical to EM245A5C-PV except for model number.

Model EM245A5C-BS was severally selected for all testing.


**Note:**The EUT contains two Manufacturer's LED lamp in this report(For detailed LED lamp informations,Please refer to the following LED Spec). They have the same circuitry theory and PCB Layout except for input power.Pre-Scan has been performed on this two products with LED model ZH187AW and YHW01. The worst case LED model YHW01 was selected for all testing.

### **LED information as below:**


**Manufacturer 1 :** FOSHAN EVERGREEN IMPERIAL BUSINESS CO LTD (E464687)

**Model number:** ZH187AW

**Specification :** AC 120 V/60 Hz, 0.017 A, 1.1 W

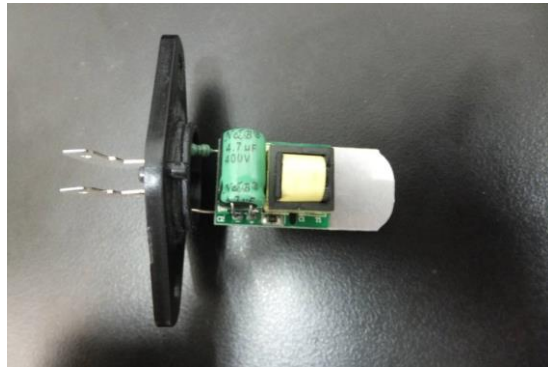

**Manufacturer 2:** XIAMEN YONGHONG INDUSTRY AND TRADE CO LTD (E472051)  
**Model number:** YHW01  
**Specification :** 120 V/60 Hz, 0.025 A, 1.8 W

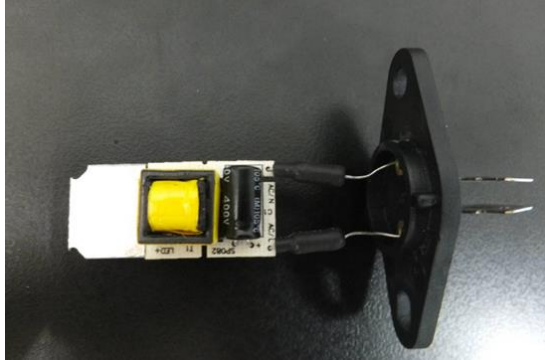



## Test Summary

The electromagnetic compatibility requirements on model EM245A5C-BS for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the equipment under test. this report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

| <b>Emission Tests</b>                                    |                                    |                     |                   |               |
|--|------------------------------------|---------------------|-------------------|---------------|
| <b>Specifications</b>                                    | <b>Description</b>                 | <b>Test Results</b> | <b>Test Point</b> | <b>Remark</b> |
| FCC Part 18:2016<br>FCC/OST MP-5:1986 ANSI<br>C63.4-2014 | Radiation Hazard<br>Measurement    | Passed              | Enclosure         | Attachment 1  |
| FCC Part 18:2016<br>FCC/OST MP-5:1986 ANSI<br>C63.4-2014 | Input Power<br>Measurement         | Passed              | AC Input Port     | Attachment 2  |
| FCC Part 18:2016<br>FCC/OST MP-5:1986 ANSI<br>C63.4-2014 | RF Output power<br>Measurement     | Passed              | EUT               | Attachment 3  |
| FCC Part 18:2016<br>FCC/OST MP-5:1986 ANSI<br>C63.4-2014 | Operating Frequency<br>Measurement | Passed              | EUT               | Attachment 4  |
| FCC Part 18:2016<br>FCC/OST MP-5:1986 ANSI<br>C63.4-2014 | Conducted Emission                 | Passed              | AC Input Port     | Attachment 5  |
| FCC Part 18:2016<br>FCC/OST MP-5:1986 ANSI<br>C63.4-2014 | Radiated Emission                  | Passed              | Enclosure         | Attachment 6  |

### **Load for Microwave Oven**

*For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tap water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.*

*-Load for power output measurement: 1250 milliliters of water in the beaker located in the center of the oven.*

*-Load for frequency measurement: 1250 milliliters of water in the beaker located in the center of the oven.*

*-Load for measurement of radiation on second and third harmonic: Two loads, one of 875 and the other of 375 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.*

*-Load for all other measurements: 875 milliliters of water, with the beaker located in the center of the oven.*

### **EUT Exercise Software**

*No Exercise software support this test.*

### **Equipment Modification**

*Any modifications installed previous to testing by Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd., will be incorporated in each production model sold or leased in United States.*

*There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.*

**EUT Sample Photos For Model EM245A5C-BS**




**EUT- Front View**




**EUT- Back View**




***Door Open View***

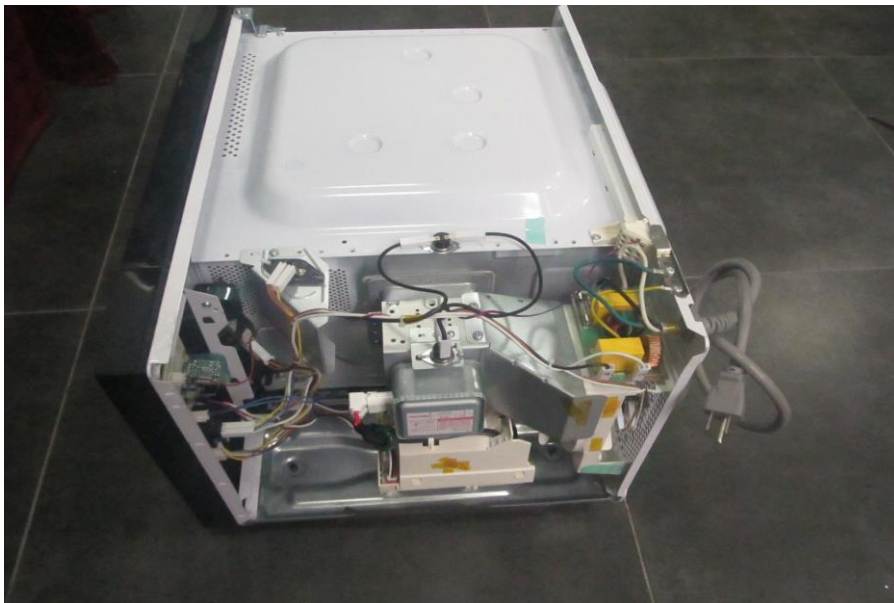


***EUT- Uncovered View***

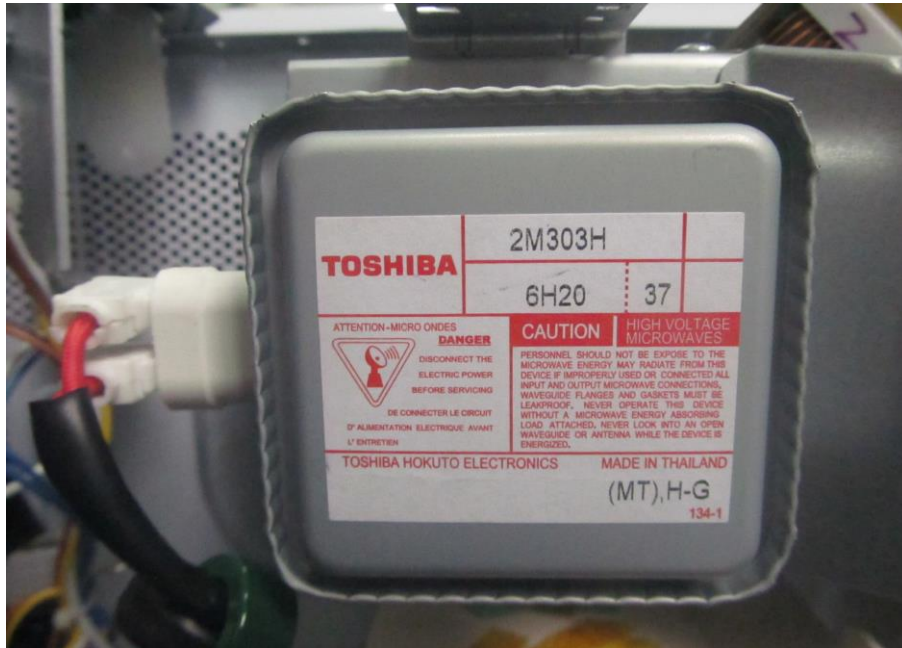


**Magnetron -Front View**

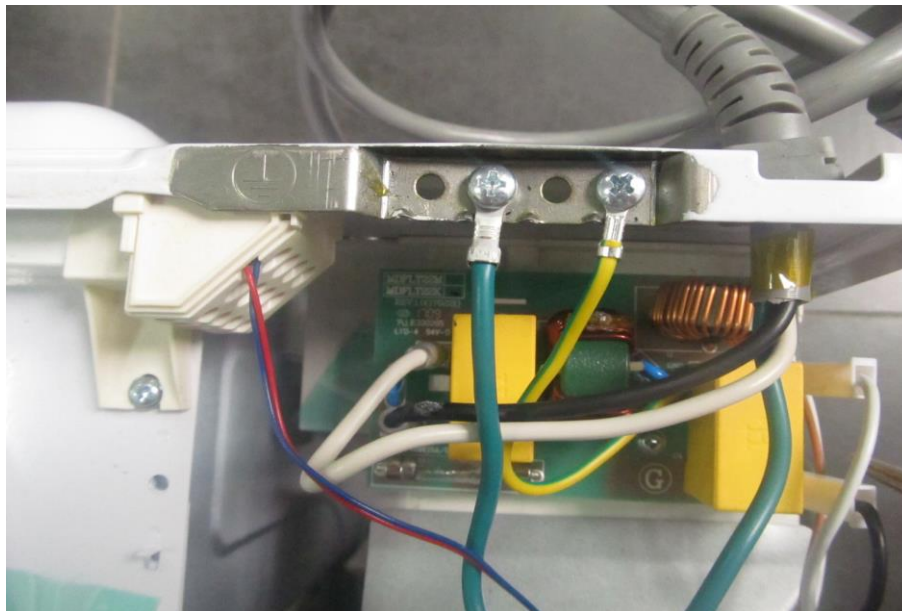


**Power Filter Board -Top View**

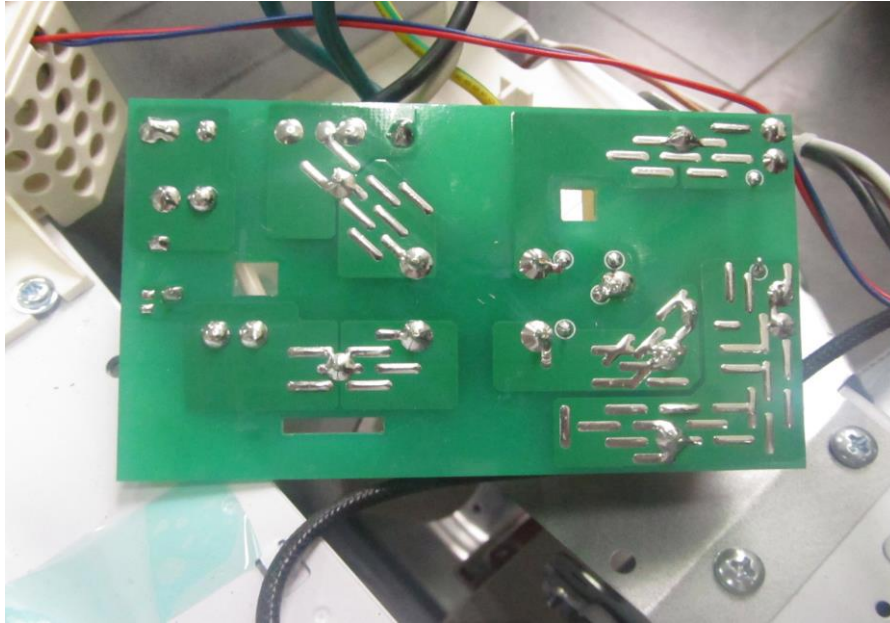

**Power Filter Board -Bottom View**

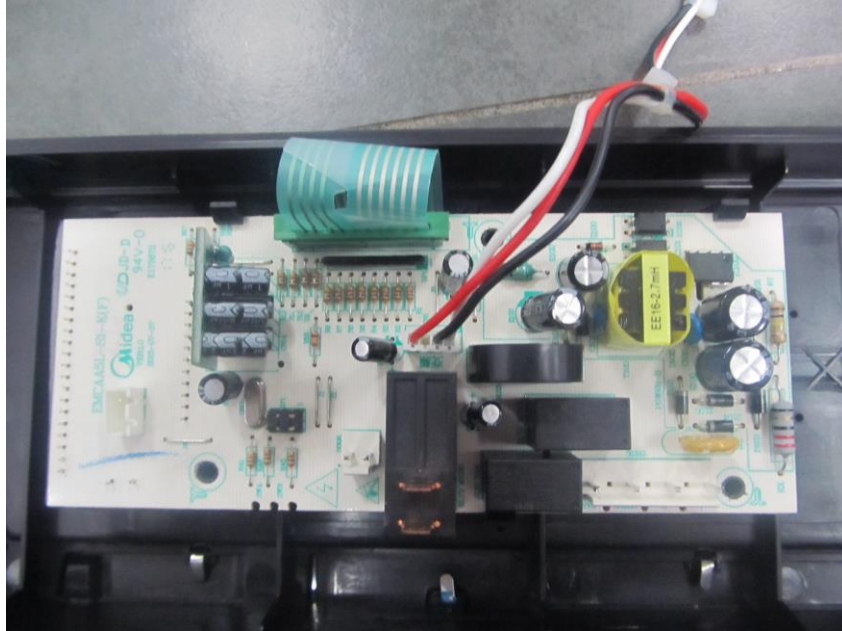

**Mother board - Top View**

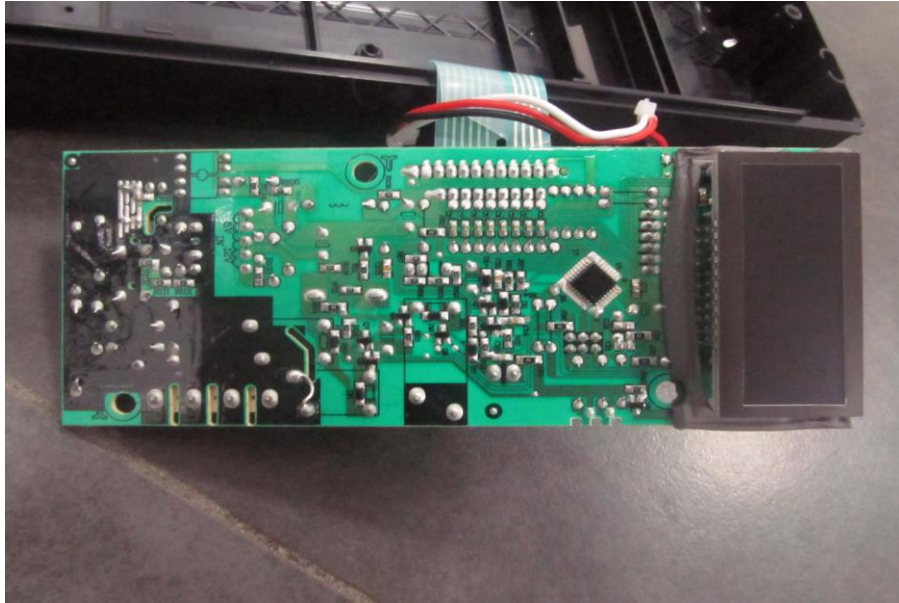

***Power board - Bottom View***


## Test System Details

| <b>EUT</b>                             |   |                      |                        |                       |                      |
|--|---|----------------------|------------------------|-----------------------|----------------------|
| <b>Model Number:</b>                   | XM245AYY-PV,XM245AYYY-PV,EM245A5C-BS                      |                      |                        |                       |                      |
| <b>Model Tested:</b>                   | EM245A5C-BS   |                      |                        |                       |                      |
| <b>Description:</b>                    | Microwave Oven  |                      |                        |                       |                      |
| <b>Input:</b>                          | AC 120V/60Hz  |                      |                        |                       |                      |
| <b>Manufacturer:</b>                   | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd. |                      |                        |                       |                      |
| <b>Support Equipment</b>               |   |                      |                        |                       |                      |
| <b>Description</b>                     | <b>Model Number</b>                                       | <b>Serial Number</b> | <b>Manufacturer</b>    |                       |                      |
| N/A                                    |   |                      |                        |                       |                      |
| <b>Cable Description</b>               |   |                      |                        |                       |                      |
| <b>Description</b>                     | <b>From</b>   | <b>To</b>            | <b>Length (Meters)</b> | <b>Shielded (Y/N)</b> | <b>Ferrite (Y/N)</b> |
| Power Cable                            | EUT   | Plug                 | 1.2                    | N                     | N                    |
| Note:The "EUT" means "Microwave Oven". |   |                      |                        |                       |                      |

*Note:The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.*



**Configuration of Tested System**

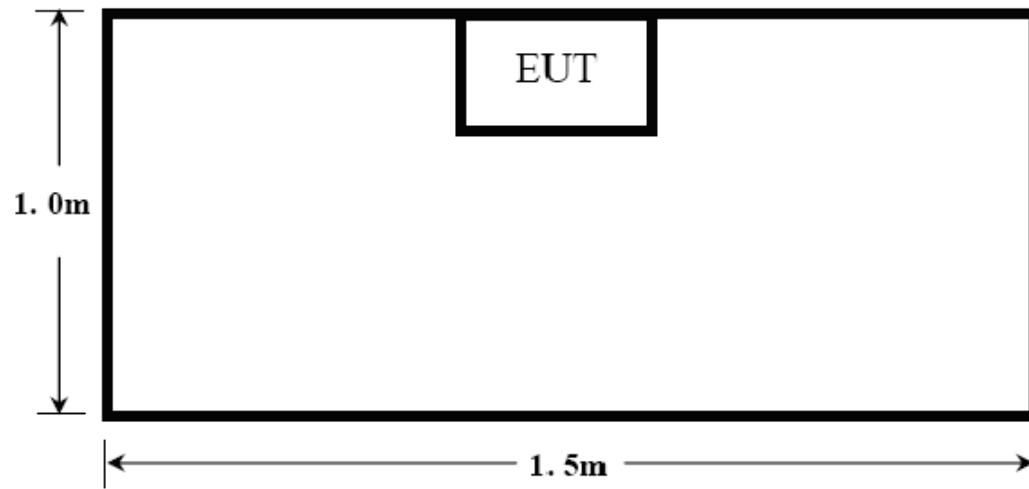

**ATTACHMENT 1 –RADIATION HAZARD TEST**

|                                      |  |                         |                              |
|--------------------------------------|--|-------------------------|------------------------------|
| <b>CLIENT:</b>                       | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.  | <b>TEST STANDERD:</b>   | FCC Part 18                  |
| <b>MODEL NUMBERS:</b>                | XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS   | <b>PRODUCT:</b>         | Microwave Oven               |
| <b>MODEL TESTED:</b>                 | EM245A5C-BS  | <b>EUT DESIGNATION:</b> | Home or Office               |
| <b>TEMPERATURE:</b>                  | 23°C   | <b>HUMIDITY:</b>        | 51%                          |
| <b>ATM PRESSURE:</b>                 | 103kPa   | <b>GROUNDING:</b>       | Through AC Power Cord        |
| <b>TESTED BY:</b>                    | Yang Dongmei   | <b>DATE OF TEST:</b>    | March 30 <sup>th</sup> ,2017 |
| <b>TEST REFERENCE:</b>               | ANSI C63.4-2014, FCC/OST MP-5:1986   |                         |                              |
| <b>TEST PROCEDURE:</b>               | The EUT was set-up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 875ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven operating, the microwavemeter will check the leakage and then record the maximum leakage. |                         |                              |
| <b>TESTED RANGE:</b>                 | N/A  |                         |                              |
| <b>TEST VOLTAGE:</b>                 | AC 120V/60Hz   |                         |                              |
| <b>RADIATION HAZARD TEST SET-UP:</b> | <p style="text-align: center;"><b>Microwave Leakage Tester</b></p>   |                         |                              |
| <b>RESULTS:</b>                      | <p>There was no microwave leakage exceeding a power level of 0.12 mW/cm<sup>2</sup> observed at any point 5cm or more from the external surface of the oven. A maximum of 1.0 mW/cm<sup>2</sup> is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.</p> <p>The test results relate only to the equipment under test provided by client.</p>         |                         |                              |
| <b>CHANGES OR MODIFICATIONS:</b>     | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.   |                         |                              |
| <b>M. UNCERTAINTY:</b>               | 0.0001 mW/cm <sup>2</sup>  |                         |                              |

**Test Equipment List:**

| Test Equipment        | Manufacturer | Model    | Serial No. | Cal. Due Date |
|-----------------------|--------------|----------|------------|---------------|
| Microwave Measurement | HOLADAY      | HI-1710A | 00122261   | 2017.12.09    |

TESTED BY: 杨冬哲  
ENGINEER

REVIEWED BY: James Jiao  
SENIOR ENGINEER

**Radiation Hazard Test Set up:**



**ATTACHMENT 2 – INPUT POWER MEASUREMENT**

|                                  |   |                         |                              |
|----------------------------------|---|-------------------------|------------------------------|
| <b>CLIENT:</b>                   | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.   | <b>TEST STANDERD:</b>   | FCC Part 18                  |
| <b>MODEL NUMBERS:</b>            | XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS  | <b>PRODUCT:</b>         | Microwave Oven               |
| <b>MODEL TESTED:</b>             | EM245A5C-BS   | <b>EUT DESIGNATION:</b> | Home or Office               |
| <b>TEMPERATURE:</b>              | 22°C  | <b>HUMIDITY:</b>        | 59%                          |
| <b>ATM PRESSURE:</b>             | 103.1kPa  | <b>GROUNDING:</b>       | Through AC Power Cord        |
| <b>TESTED BY:</b>                | Yang Dongmei  | <b>DATE OF TEST:</b>    | March 30 <sup>th</sup> ,2017 |
| <b>TEST REFERENCE:</b>           | ANSI C63.4-2014, FCC/OST MP-5:1986  |                         |                              |
| <b>TEST PROCEDURE:</b>           | The EUT was set up according to the FCC MP-5 and FCC Part 18 for input power measurement. The input power and current was measured using a power analyzer. A 875ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current. |                         |                              |
| <b>TESTED RANGE:</b>             | N/A   |                         |                              |
| <b>TEST VOLTAGE:</b>             | 120VAC / 60Hz   |                         |                              |
| <b>RESULTS :</b>                 | Based on the measured input power, the EUT was found to be operating within the intended specifications. The test results relate only to the equipment under test provided by client.   |                         |                              |
| <b>CHANGES OR MODIFICATIONS:</b> | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.  |                         |                              |
| <b>M. UNCERTAINTY :</b>          | ± 5W  |                         |                              |

**Test Data:**

| Input voltage (V) | Input Current (A) | Measured Input Power (W) | Rated input Power (W) |
|-------------------|-------------------|--------------------------|-----------------------|
| 119.9             | 13.90             | 1598                     | 1350                  |

**Test Equipments List:**

| Test Equipment | Manufacturer | Model   | Serial No. | Cal. Due Date |
|----------------|--------------|---------|------------|---------------|
| Power Meter    | Yesdo        | MD2015W | RC200142G  | 2017.12.12    |

TESTED BY:

杨冬松

ENGINEER

REVIEWED BY:

James Jia

SENIOR ENGINEER

**Input power Test Set up:**



### ATTACHMENT 3 – RF OUTPUT POWER MEASUREMENT

|                                  |  |                         |                               |
|----------------------------------|--|-------------------------|-------------------------------|
| <b>CLIENT:</b>                   | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.  | <b>TEST STANDERD:</b>   | FCC Part 18                   |
| <b>MODEL NUMBERS:</b>            | XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS   | <b>PRODUCT:</b>         | Microwave Oven                |
| <b>MODEL TESTED:</b>             | EM245A5C-BS  | <b>EUT DESIGNATION:</b> | Home or Office                |
| <b>TEMPERATURE:</b>              | 22°C   | <b>HUMIDITY:</b>        | 60%RH                         |
| <b>ATM PRESSURE:</b>             | 103kPa   | <b>GROUNDING:</b>       | Through AC Power Cord         |
| <b>TESTED BY:</b>                | Yang Dongmei   | <b>DATE OF TEST:</b>    | March 30 <sup>th</sup> , 2017 |
| <b>TEST REFERENCE:</b>           | ANSI C63.4-2014, FCC/OST MP-5:1986   |                         |                               |
| <b>TEST PROCEDURE:</b>           | <p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 1250ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.</p> <p>RF Output Power<br/> <math>= (4.2 \text{ joules/calorie}) \times (\text{volume in milliliters}) \times (\text{temperature rise}) / (\text{time in seconds})</math><br/> <math>= 4.2 \text{ joules/calorie} \times 1250 \times (\text{Final Temp} - \text{Initial Temp}) / 120</math></p> |                         |                               |
| <b>TESTED RANGE:</b>             | N/A  |                         |                               |
| <b>TEST VOLTAGE:</b>             | 120VAC / 60Hz  |                         |                               |
| <b>RESULTS:</b>                  | The test results relate only to the equipment under test provided by client.   |                         |                               |
| <b>CHANGES OR MODIFICATIONS:</b> | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.   |                         |                               |
| <b>M. UNCERTAINTY:</b>           | ± 0.3°C  |                         |                               |

**Test Result:**

| Initial Temp (°C) | Final Temp (°C) | Measured Times (s) | Measured out put Power (W) |
|-------------------|-----------------|--------------------|----------------------------|
| 19.9              | 42.7            | 120S               | 997.5                      |

$RF\ Output\ Power\ (W) = 4.2 \times 1250 \times (Final\ Temp - Initial\ Temp) / 120$


**Test Equipments List:**

| Test Equipment    | Manufacturer      | Model       | Serial No. | Cal. Due Date |
|-------------------|-------------------|-------------|------------|---------------|
| Digit Thermometer | Fluke Corporation | Fluke 51 II | 15940197   | 2017.08.25    |
| Stopwatch         | JUNSD             | JS-510      | CF-003     | 2017.08.07    |

TESTED BY: 杨冬栋  
ENGINEER

REVIEWED BY: Jamario  
SENIOR ENGINEER

**RF Output Power Test Set up:**

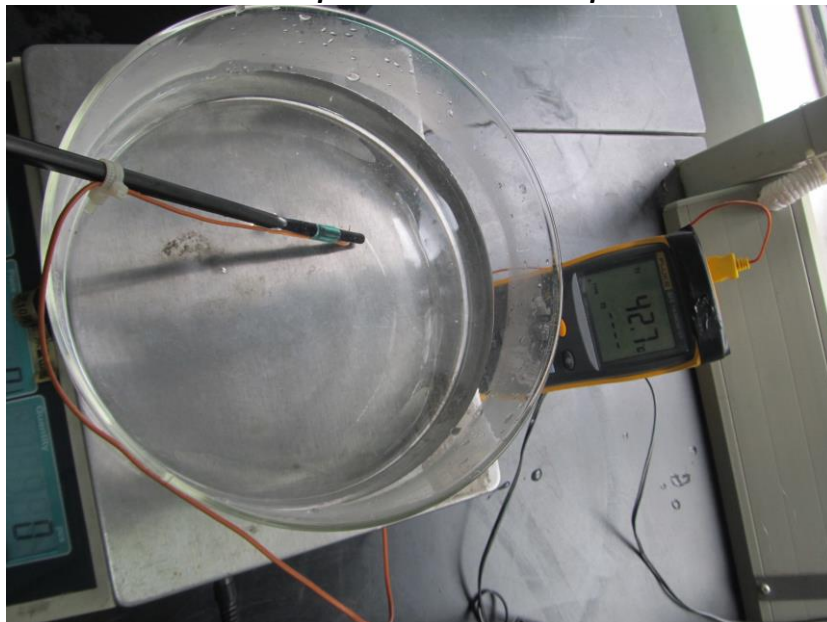

#### ATTACHMENT 4 – OPERATING FREQUENCY MEASUREMENT

|                                  |  |                         |                               |
|----------------------------------|--|-------------------------|-------------------------------|
| <b>CLIENT:</b>                   | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.  | <b>TEST STANDERD:</b>   | FCC Part 18                   |
| <b>MODEL NUMBERS:</b>            | XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS   | <b>PRODUCT:</b>         | Microwave Oven                |
| <b>MODEL TESTED:</b>             | EM245A5C-BS  | <b>EUT DESIGNATION:</b> | Home or Office                |
| <b>TEMPERATURE:</b>              | 22°C   | <b>HUMIDITY:</b>        | 60%RH                         |
| <b>ATM PRESSURE:</b>             | 101.1kPa   | <b>GROUNDING:</b>       | Through AC Power Cord         |
| <b>TESTED BY:</b>                | Yang Dongmei   | <b>DATE OF TEST:</b>    | March 30 <sup>th</sup> , 2017 |
| <b>TEST REFERENCE:</b>           | ANSI C63.4-2014, FCC/OST MP-5:1986   |                         |                               |
| <b>TEST PROCEDURE:</b>           | <p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.</p> <p>1) The variation of frequency with time. The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1250ml water load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.</p> <p>2) The variation of frequency with Line Voltage. The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 1250ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.</p> |                         |                               |
| <b>TESTED RANGE:</b>             | 2450 ± 50MHz   |                         |                               |
| <b>TEST VOLTAGE:</b>             | 120VAC / 60Hz  |                         |                               |
| <b>RESULTS:</b>                  | Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement. The test results relate only to the equipment under test provided by client.   |                         |                               |
| <b>CHANGES OR MODIFICATIONS:</b> | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.   |                         |                               |
| <b>M. UNCERTAINTY:</b>           | Freq. ±10kHz   |                         |                               |



**Variation in Operating Frequency with Time:**

| <i>Minimum Frequency (MHz)</i> | <i>Maximum Frequency (MHz)</i> |
|--------------------------------|--------------------------------|
| 2450.2                         | 2451.7                         |

**Variation in Operating Frequency with Line Voltage:**

| <i>Minimum Frequency (MHz)</i>                         | <i>Maximum Frequency (MHz)</i> |
|--|--------------------------------|
| 2448.3   | 2453.2                         |
| <i>Note: Line voltage varied from 96Vac to 150Vac.</i> |                                |

**Test Equipments List:**

| <b>Test Equipment</b> | <b>Manufacturer</b> | <b>Model</b> | <b>Serial No.</b> | <b>Last Cal.</b> | <b>Cal. Due</b> |
|-----------------------|---------------------|--------------|-------------------|------------------|-----------------|
| EMI Test Receiver     | R&S                 | ESIB-26      | 100174            | 11/18/2016       | 11/17/2017      |
| Horn Antenna          | R&S                 | HF906        | 100311            | 11/20/2016       | 11/21/2017      |

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: 杨冬哲  
ENGINEER


REVIEWED BY: James Jia  
SENIOR ENGINEER

**Operating Frequency Test Set-up:**



**ATTACHMENT 5 – CONDUCTED EMISSION TEST RESULTS**

|                                  |  |                         |                               |
|----------------------------------|--|-------------------------|-------------------------------|
| <b>CLIENT:</b>                   | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.  | <b>TEST STANDERD:</b>   | FCC Part 18                   |
| <b>MODEL NUMBERS:</b>            | XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS   | <b>PRODUCT:</b>         | Microwave Oven                |
| <b>MODEL TESTED:</b>             | EM245A5C-BS  | <b>EUT DESIGNATION:</b> | Home or Office                |
| <b>TEMPERATURE:</b>              | 22°C   | <b>HUMIDITY:</b>        | 60%RH                         |
| <b>ATM PRESSURE:</b>             | 101.1kPa   | <b>GROUNDING:</b>       | Through AC Power Cord         |
| <b>TESTED BY:</b>                | Yang Dongmei   | <b>DATE OF TEST:</b>    | March 30 <sup>th</sup> , 2017 |
| <b>TEST REFERENCE:</b>           | ANSI C63.4-2014, FCC/OST MP-5:1986   |                         |                               |
| <b>TEST PROCEDURE:</b>           | <p>The EUT was set up according to the guideline of ANSI C63.4-2014 &amp; FCC MP-5 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150kHz to 30MHz. Corrected Amplitude &amp; Over Limit Calculation.</p> <p>The basic equation as follow:<br/> <math>VC = VR + AC + VDF;</math><br/>                 Herein,<br/>                 VC: corrected voltage amplitude<br/>                 VR: reading voltage amplitude<br/>                 AC: attenuation caused by cable loss<br/>                 VDF: voltage division factor of AMN or ISN.</p> <p>he "Over Limit" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a Over Limit of 7dB means the emission is 7dB below the maximum limit.</p> <p>The equation for Over Limit calculation is as follows:<br/>                 Over Limit = Limit - Corrected Amplitude.</p> |                         |                               |
| <b>TESTED RANGE:</b>             | 150kHz to 30MHz  |                         |                               |
| <b>TEST VOLTAGE:</b>             | 120VAC / 60Hz  |                         |                               |
| <b>RESULTS:</b>                  | The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.   |                         |                               |
| <b>CHANGES OR MODIFICATIONS:</b> | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.   |                         |                               |
| <b>M. UNCERTAINTY:</b>           | The maximum measurement uncertainty is evaluated as :<br>150KHz~ 30MHz: 3.0dB  |                         |                               |

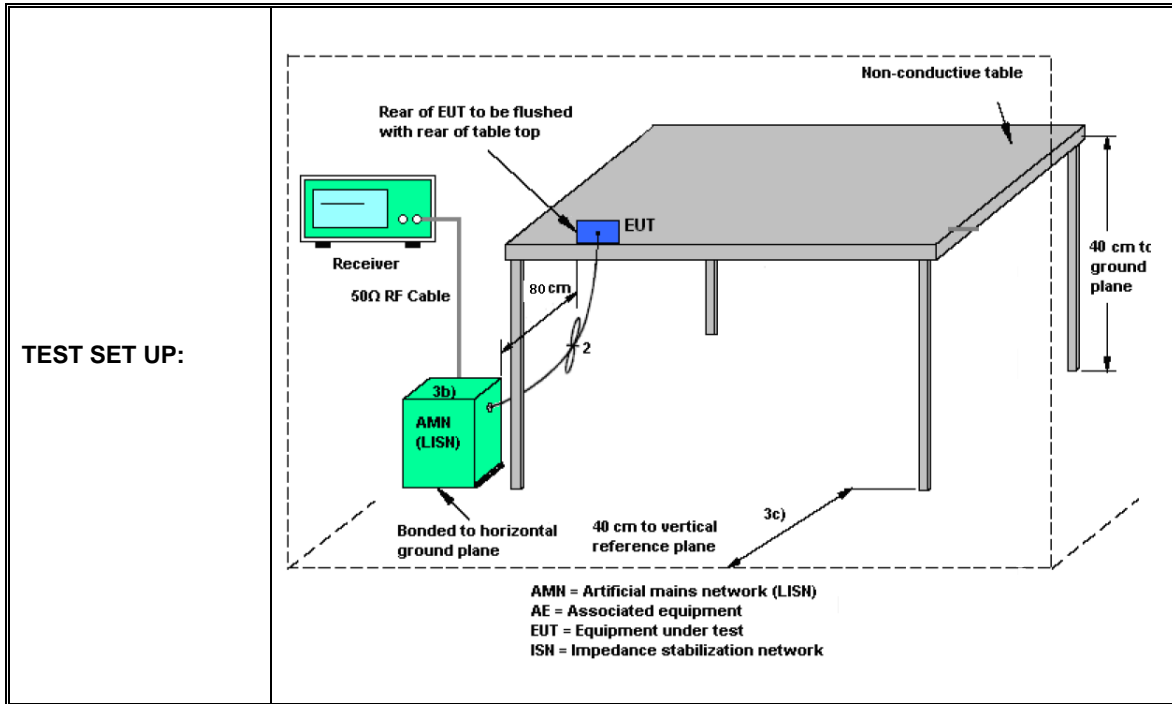


**EMI Receiver Set-up:**

| Frequency [MHz] | IF B/W |
|-----------------|--------|
| 0.15 - 30       | 9KHz   |


**Conducted Emission Limit:**

| Frequency [MHz] | Field strength [dBuV] |           |
|-----------------|-----------------------|-----------|
|                 | Quasi-peak            | Average   |
| 0.15-0.5        | 66 to 56*             | 56 to 46* |
| 0.5-5           | 56                    | 46        |
| 5-30            | 60                    | 50        |

\*Decreases with the logarithm of the frequency.

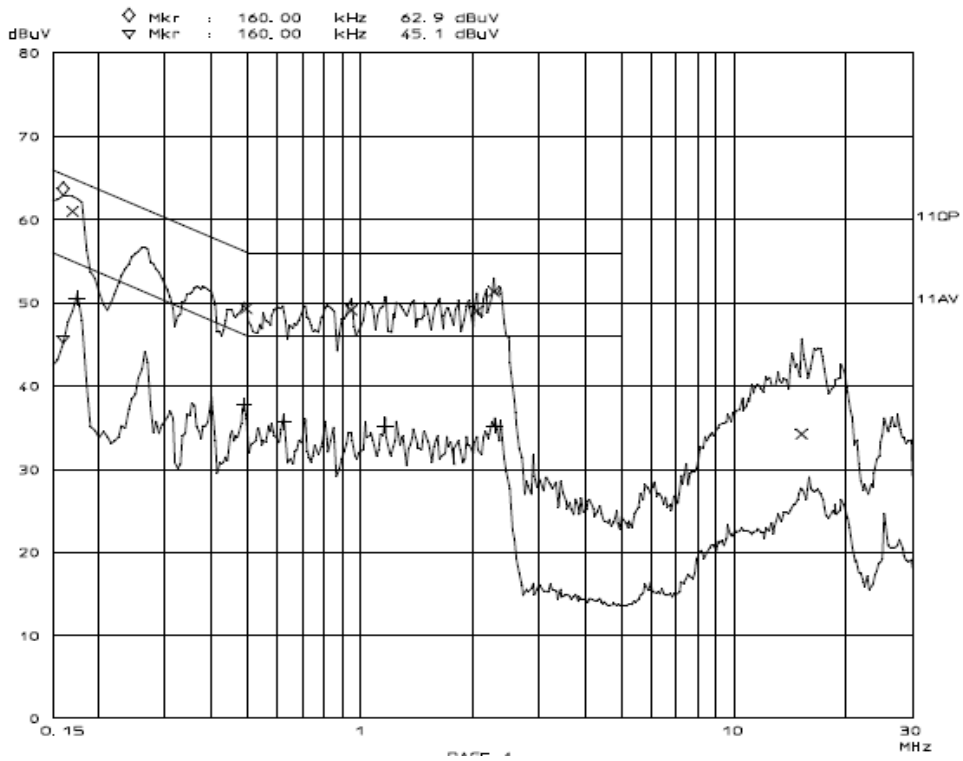

**Line L Conducted Emission Graph**

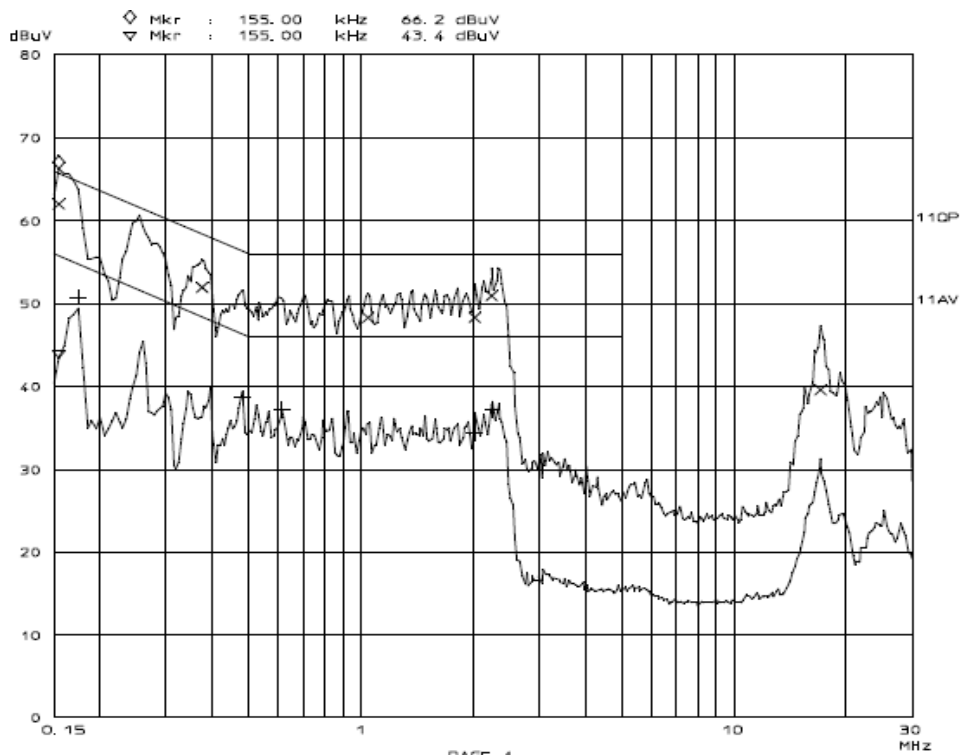

**Line N Conducted Emission Graph**

**Test Data:**

| <i>Lines (L/N)</i> | <i>Frequency (MHz)</i> | <i>Corrected QP Level (dBuV)</i> | <i>Limits QP (dBuV)</i> | <i>Over Limit QP (dB)</i> | <i>Frequency (MHz)</i> | <i>Corrected AV Level (dBuV)</i> | <i>Limits AV (dBuV)</i> | <i>Over Limit AVE (dB)</i> |
|--------------------|------------------------|----------------------------------|-------------------------|---------------------------|------------------------|----------------------------------|-------------------------|----------------------------|
| L                  | 0.170                  | 60.9                             | 64.9                    | -4.0                      | 0.175                  | 50.5                             | 54.7                    | -4.2                       |
| L                  | 0.495                  | 49.3                             | 56.0                    | -6.7                      | 0.490                  | 37.7                             | 46.1                    | -8.4                       |
| L                  | 2.285                  | 51.3                             | 55.9                    | -4.6                      | 1.165                  | 35.2                             | 45.9                    | -10.7                      |
| N                  | 0.155                  | 62.0                             | 65.7                    | -3.7                      | 0.175                  | 50.7                             | 54.7                    | -4.0                       |
| N                  | 0.375                  | 51.9                             | 58.3                    | -6.4                      | 0.480                  | 38.6                             | 46.3                    | -7.7                       |
| N                  | 2.245                  | 50.9                             | 55.9                    | -5.0                      | 2.255                  | 37.1                             | 45.9                    | -8.8                       |

**Note :**

- 1) All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not used.
- 2) "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

**Test Equipments List:**

| Test Equipment    | Manufacturer | Model No. | Serial No. | Last Cal.  | Cal. Due   |
|-------------------|--------------|-----------|------------|------------|------------|
| EMI test receiver | R&S          | ESIB-26   | 100174     | 11/19/2016 | 11/18/2017 |
| LISN              | R&S          | ESH2-Z5   | 100091     | 11/19/2016 | 11/18/2017 |
| Transient Limiter | Agilent      | 11947A    | 3107A03648 | 11/19/2016 | 11/18/2017 |
| Shielding Room    | TDK          | 8m×4m×3m  | N/A        | 04/17/2016 | 04/16/2018 |

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: 杨冬松  
ENGINEER

REVIEWED BY: James Jiao  
SENIOR ENGINEER

**Conducted Emission Test Set-up:**




## ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS


|                                  |   |                         |                               |
|----------------------------------|---|-------------------------|-------------------------------|
| <b>CLIENT:</b>                   | Guangdong Midea Kitchen Appliances Manufacturing Co.,Ltd.   | <b>TEST STANDERD:</b>   | FCC Part 18                   |
| <b>MODEL NUMBERS:</b>            | XM245AYY-PV, XM245AYYY-PV, EM245A5C-BS  | <b>PRODUCT:</b>         | Microwave Oven                |
| <b>MODEL TESTED:</b>             | EM245A5C-BS   | <b>EUT DESIGNATION:</b> | Home or Office                |
| <b>TEMPERATURE:</b>              | 22°C  | <b>HUMIDITY:</b>        | 63%RH                         |
| <b>ATM PRESSURE:</b>             | 103.0kPa  | <b>GROUNDING:</b>       | Through AC Power Cord         |
| <b>TESTED BY:</b>                | Yang Dongmei  | <b>DATE OF TEST:</b>    | March 30 <sup>th</sup> , 2017 |
| <b>TEST REFERENCE:</b>           | ANSI C63.4-2014, FCC/OST MP-5:1986  |                         |                               |
| <b>TEST PROCEDURE:</b>           | <p>The EUT was set up according to the guidelines of ANSI C63.4-2014&amp; FCC MP-5 for radiated emissions. Microwave Oven was placed on a 1m *1.5m nonconductive table. The top of the table is 1.0 m above the ground. The table is placed on a flush mounted metal turntable. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. All data was recorded in Quasi-peak detection mode from 30 MHz to 1GHz and average detector mode above 1GHz.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength<br/> RA = Receiver Amplitude<br/> AF = Antenna Factor<br/> CF = Cable Attenuation Factor<br/> AG = Amplifier Gain</p> |                         |                               |
| <b>TESTED RANGE:</b>             | 30MHz to 24.5GHz  |                         |                               |
| <b>TEST VOLTAGE:</b>             | 120VAC / 60Hz   |                         |                               |
| <b>RESULTS:</b>                  | The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.  |                         |                               |
| <b>CHANGES OR MODIFICATIONS:</b> | There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.  |                         |                               |
| <b>M. UNCERTAINTY:</b>           | The maximum measurement uncertainty is evaluated as :<br>30~1000MHz: 4.76dB;<br>1~25GHz: 4.5dB  |                         |                               |



For radiated emissions from 30MHz to 1GHz

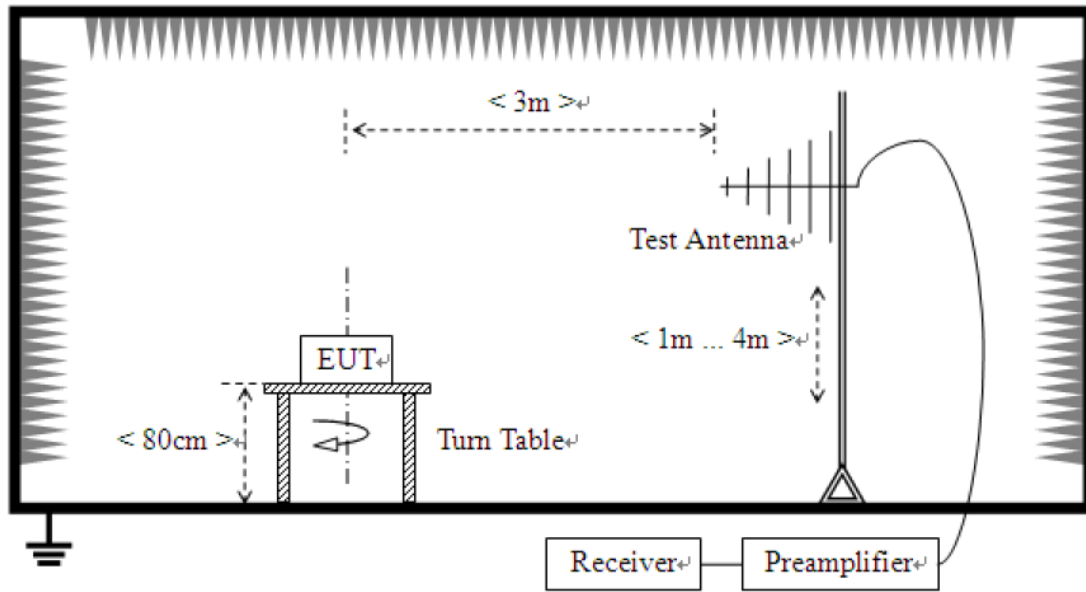

For radiated emissions above 1GHz

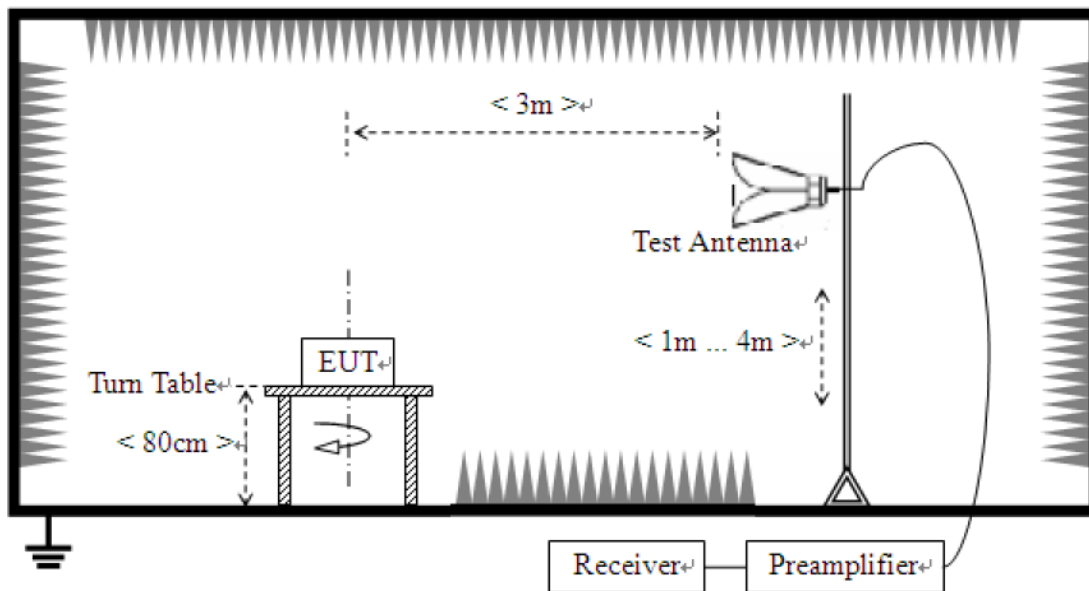

**Field strength limits for out-of-band emissions :**

For RF output power <500W, Limit at 300m = 27.96dBuV/m

For RF output power >500W, Limit at 300m = 20log [25\*SQRT(Power/500)]dBuV/m

**Test Data:**

| <b>30MHz – 1GHz</b>   |                                   |                                   |                    |                                |                       |                                 |
|---|-----------------------------------|-----------------------------------|--------------------|--------------------------------|-----------------------|---------------------------------|
| <i>Frequency [MHz]</i>  | <i>Antenna Polarization [V/H]</i> | <i>Corrected Reading [dBμV/m]</i> | <i>Factor (dB)</i> | <i>Field Strength [dBμV/m]</i> | <i>Delta, QP [dB]</i> | <i>3 Meters Limits [dBμV/m]</i> |
| 134.969   | V                                 | 27.2                              | 12.2               | 39.4                           | -31.45                | 70.85                           |
| 222.444   | V                                 | 23.3                              | 14.2               | 37.5                           | -33.35                | 70.85                           |
| 30.000  | V                                 | 27.2                              | 11.2               | 38.4                           | -32.45                | 70.85                           |
| 134.969   | H                                 | 26.5                              | 12.2               | 38.7                           | -32.15                | 70.85                           |
| 39.719  | H                                 | 25.3                              | 10.8               | 36.1                           | -34.75                | 70.85                           |
| 222.444   | H                                 | 23.2                              | 14.2               | 37.4                           | -33.45                | 70.85                           |
| Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor. |                                   |                                   |                    |                                |                       |                                 |
| <b>1GHz – 25GHz</b>   |                                   |                                   |                    |                                |                       |                                 |
| <i>Frequency [GHz]</i>  | <i>Antenna Polarization [V/H]</i> | <i>Corrected Reading [dBμV/m]</i> | <i>Factor (dB)</i> | <i>Field Strength [dBμV/m]</i> | <i>Delta, AV [dB]</i> | <i>3 Meters Limits [dBμV/m]</i> |
| 4.864   | V                                 | 25.85                             | 18.85              | 44.7                           | -26.15                | 70.85                           |
| 7.359   | V                                 | 21.59                             | 21.51              | 43.1                           | -27.75                | 70.85                           |
| 8.561   | V                                 | 18.78                             | 22.42              | 41.2                           | -30.65                | 70.85                           |
| 7.351   | H                                 | 23.89                             | 21.51              | 45.4                           | -25.45                | 70.85                           |
| 8.591   | H                                 | 21.28                             | 22.42              | 43.7                           | -27.15                | 70.85                           |
| 9.854   | H                                 | 17.63                             | 28.07              | 45.7                           | -25.15                | 70.85                           |
| Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.      |                                   |                                   |                    |                                |                       |                                 |

**Test Equipments List:**

| <b>Test Equipment</b>       | <b>Manufacturer</b> | <b>Model</b> | <b>Serial No.</b> | <b>Last Cal.</b> | <b>Cal. Due</b> |
|-----------------------------|---------------------|--------------|-------------------|------------------|-----------------|
| EMI Test Receiver           | R&S                 | ESIB-26      | 100174            | 11/19/2016       | 11/18/2017      |
| Horn Antenna                | R&S                 | HF906        | 100311            | 11/21/2016       | 11/20/2017      |
| Hybrid Log Periodic Antenna | TDK                 | HLP-3003C    | 130144            | 11/21/2016       | 11/20/2017      |
| Anechoic Chamber            | TDK                 | 9m×6 m×5.7m  | N/A               | 04/17/2016       | 04/16/2018      |

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY: 杨冬平  
ENGINEER

REVIEWED BY: James Fio  
SENIOR ENGINEER

**Radiated Emission Test Set-up (30-1000MHz):**



**Radiated Emission Test Set-up (1-25GHz):**

**※※※ End Of Report ※※※**