


Body

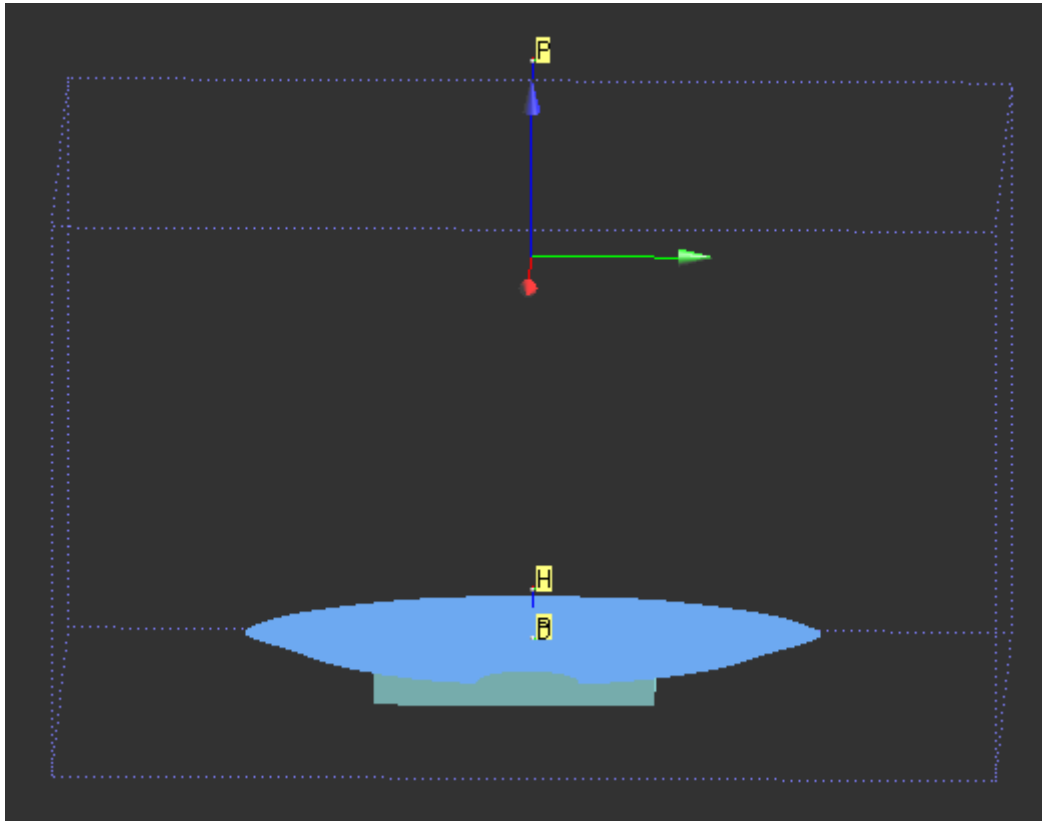

Date/Time: 2/21/2011 9:43:36 AM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A

Communication System: IEEE 802.11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section


DASY4 Configuration:


- Probe: EX3DV4 - SN3555; ConvF(6.34, 6.34, 6.34); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FLI4.0; Type: QDOVA001BA; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SFMCAD, V1.8 Build 186

802.11B_CH01_A_Side/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.00 V/m; Power Drift = -0.185 dB
Peak SAR (extrapolated) = 0.757 W/kg
SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.112 mW/g
Maximum value of SAR (measured) = 0.320 mW/g

802.11B_CH01_A_Side/Arca Scan (141x161x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.264 mW/g

802.11B_CH01_A_Side/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.004 mW/g

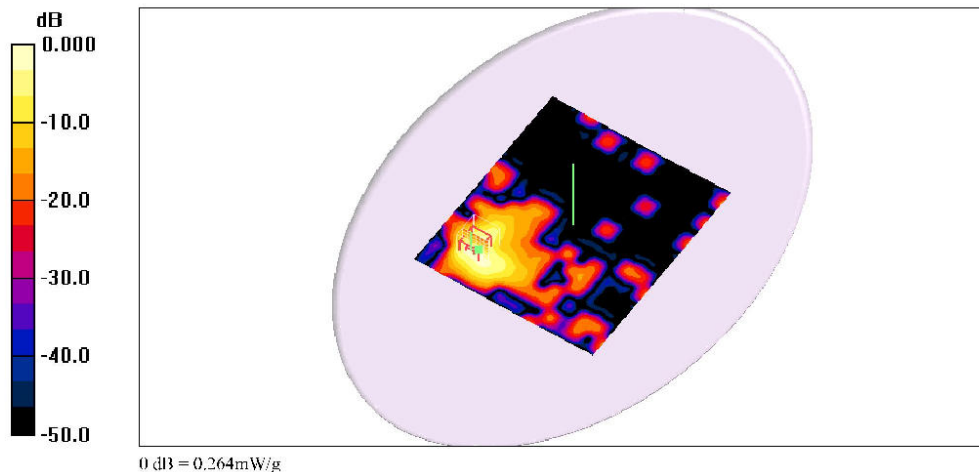

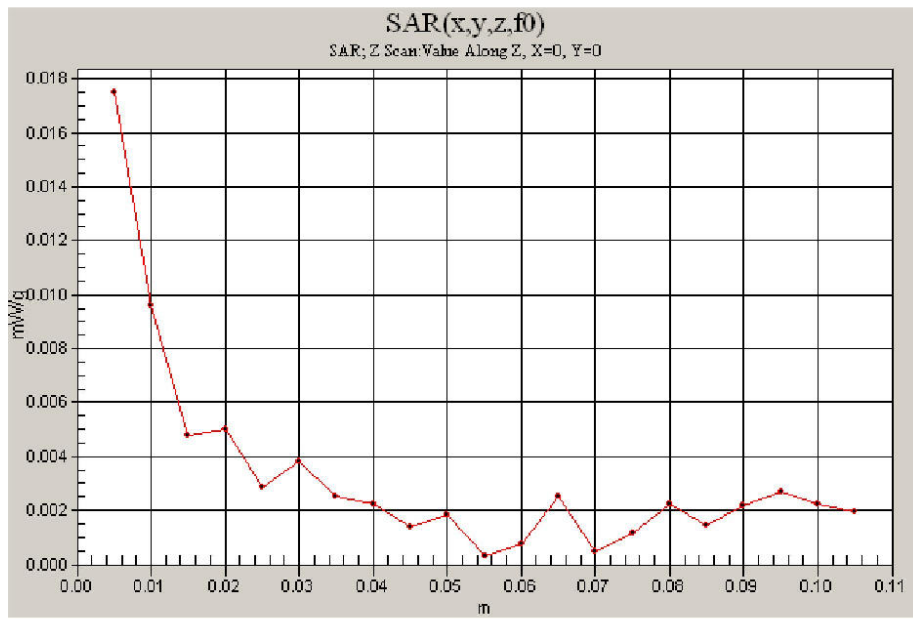

Date/Time: 2/21/2011 2:19:02 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(6.34, 6.34, 6.34); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11B_CH01_B_Side/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.996 V/m; Power Drift = 0.183 dB
Peak SAR (extrapolated) = 0.014 W/kg
SAR(1 g) = 0.004 mW/g; SAR(10 g) = 0.003 mW/g
Maximum value of SAR (measured) = 0.005 mW/g

802.11B_CH01_B_Side/Arca Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.006 mW/g

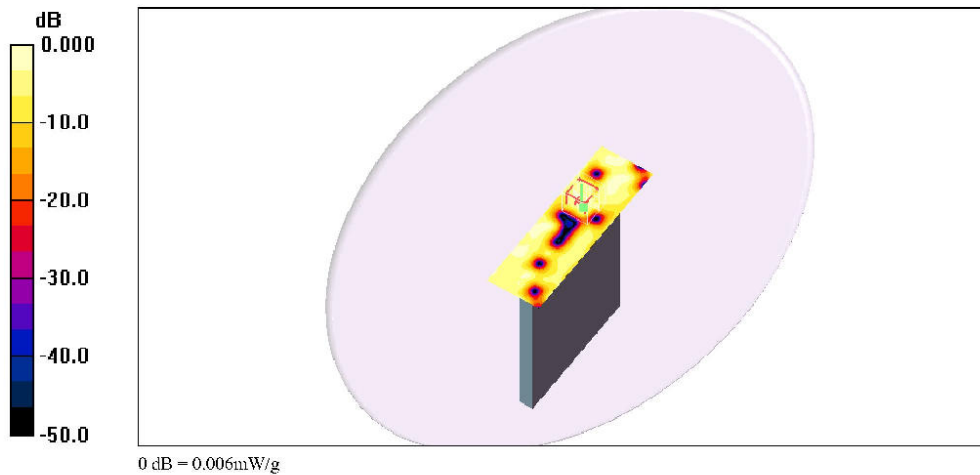

Date/Time: 2/21/2011 3:27:32 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11b/g/n; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.89$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(6.34, 6.34, 6.34); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11B_CH01_C_Side/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.92 V/m; Power Drift = 0.027 dB
Peak SAR (extrapolated) = 0.219 W/kg
SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.051 mW/g
Maximum value of SAR (measured) = 0.128 mW/g

802.11B_CH01_C_Side/Area Scan (41x161x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.129 mW/g

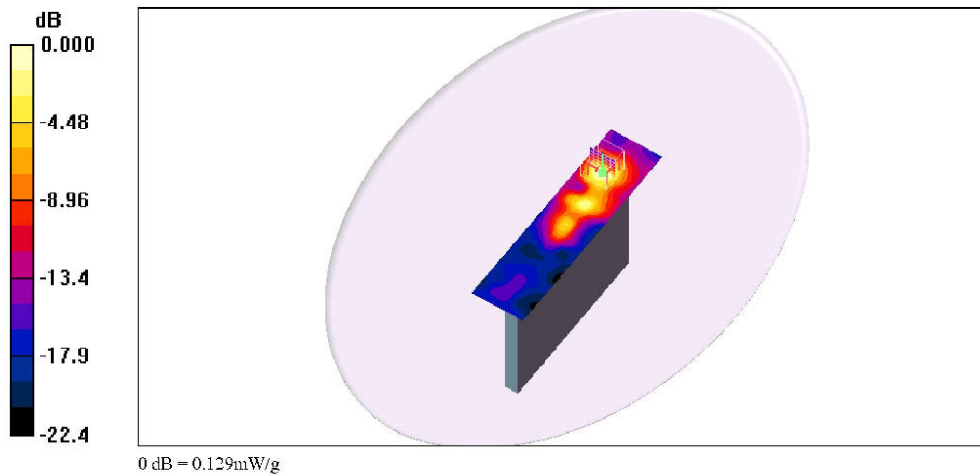

Date/Time: 2/21/2011 4:44:36 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A

Communication System: IEEE 802.11b/g/n; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(6.34, 6.34, 6.34); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF-4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001BA; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SFMCAID, V1.8 Build 186

802.11gn20_CH11_A_Side/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.774 V/m; Power Drift = -0.183 dB


Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.236 mW/g; SAR(10 g) = 0.094 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

802.11gn20_CH11_A_Side/Area Scan (141x161x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.316 mW/g

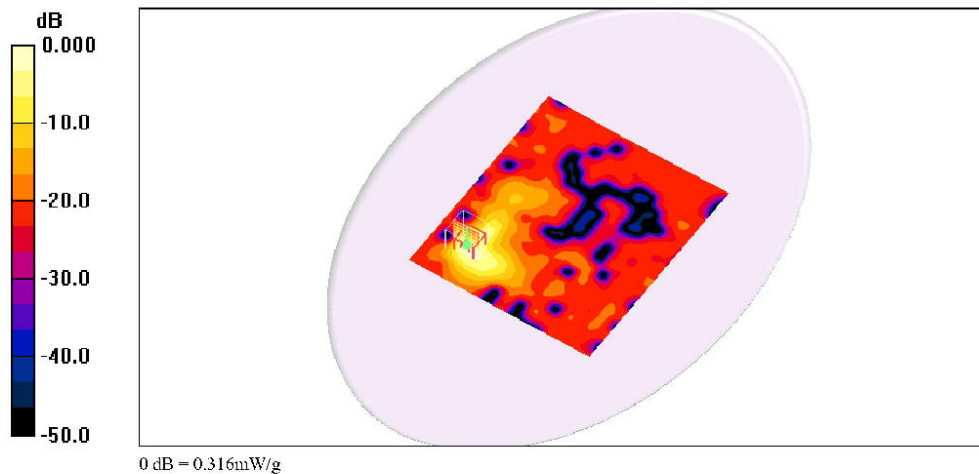

Date/Time: 2/21/2011 2:39:42 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11b/g/n; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.95 \text{ mho/m}$; $\epsilon_r = 51.5$; $\rho = 1000 \text{ kg/m}^3$
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(6.34, 6.34, 6.34); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FLI4.0; Type: QDOVA001BA; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SFMCAD, V1.8 Build 186

802.11gn20_CH11_B_Side/Area Scan (41x131x1); Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.006 mW/g

802.11gn20_CH11_B_Side/Zoom Scan (7x7x7)/Cube 0; Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 0.872 V/m; Power Drift = 0.134 dB
Peak SAR (extrapolated) = 0.010 W/kg
SAR(1 g) = 0.004 mW/g; SAR(10 g) = 0.003 mW/g
Maximum value of SAR (measured) = 0.006 mW/g

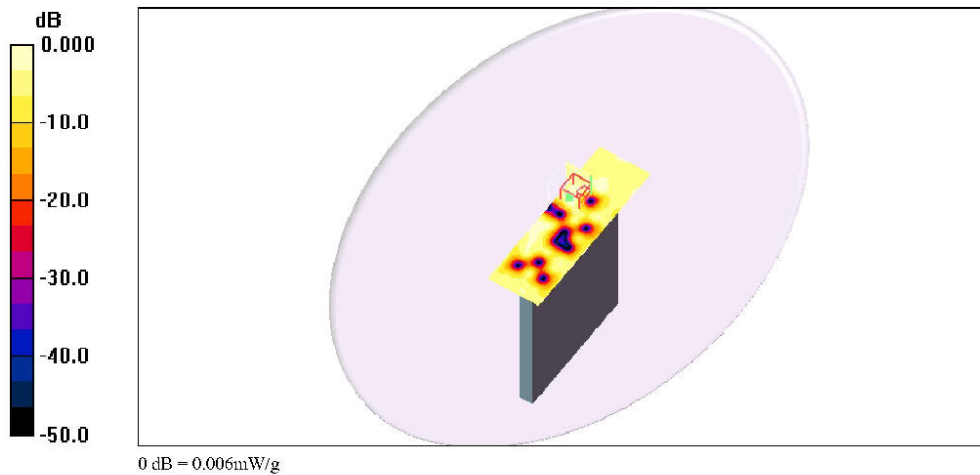

Date/Time: 2/21/2011 4:01:14 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11b/g/n; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.5$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(6.34, 6.34, 6.34); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11gn20_CH11_C_Side/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 3.01 V/m; Power Drift = 0.154 dB
Peak SAR (extrapolated) = 0.227 W/kg
SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.054 mW/g
Maximum value of SAR (measured) = 0.135 mW/g

802.11gn20_CH11_C_Side/Area Scan (41x161x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.140 mW/g

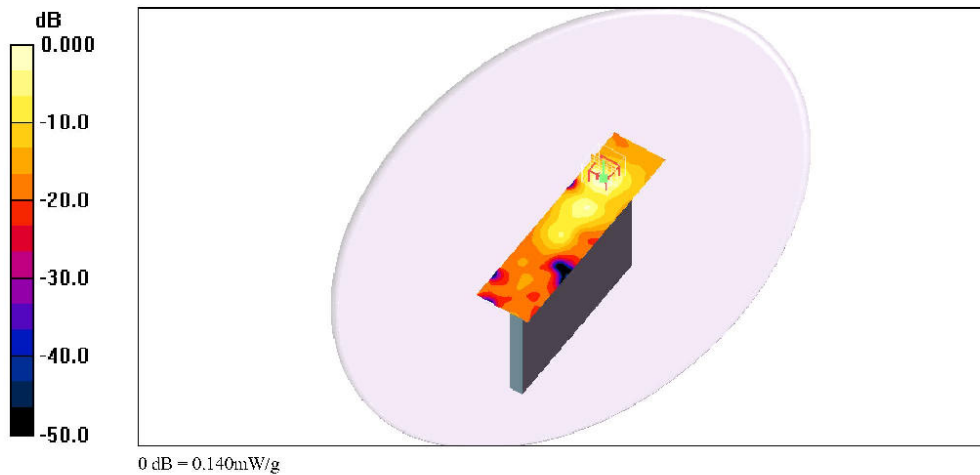

Date/Time: 2/23/2011 10:38:43 AM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.24$ mho/m; $\epsilon_r = 49.1$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.91, 3.91, 3.91); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11a_CH48_A_Side/Area Scan (141x161x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.721 mW/g

802.11a_CH48_A_Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.526 V/m; Power Drift = 0.180 dB
Peak SAR (extrapolated) = 5.13 W/kg
SAR(1 g) = 0.853 mW/g; SAR(10 g) = 0.219 mW/g
Maximum value of SAR (measured) = 1.03 mW/g

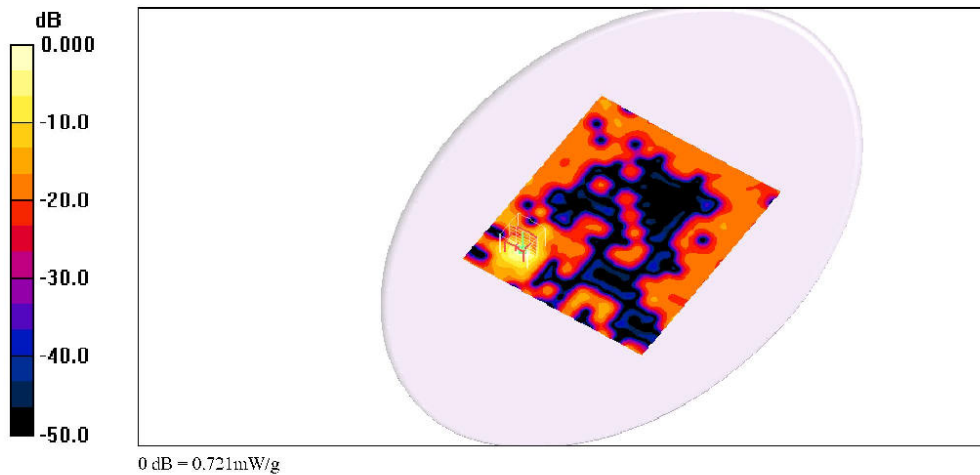

Date/Time: 2/23/2011 10:06:09 AM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.24$ mho/m; $\epsilon_r = 49.1$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.91, 3.91, 3.91); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAD, V1.8 Build 186

802.11a_CH48_B_Side/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.081 mW/g

802.11a_CH48_B_Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.934 V/m; Power Drift = 0.163 dB
Peak SAR (extrapolated) = 0.230 W/kg
SAR(1 g) = **0.080 mW/g**; SAR(10 g) = **0.036 mW/g**
Maximum value of SAR (measured) = 0.092 mW/g

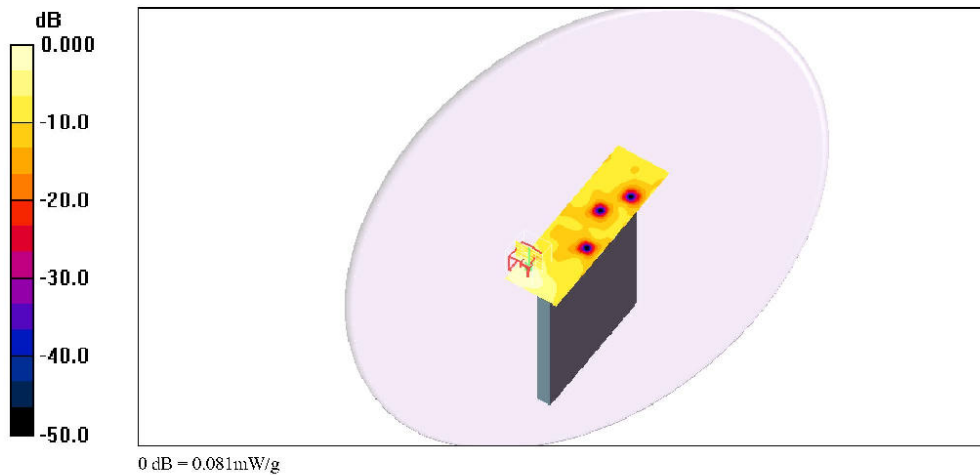

Date/Time: 2/23/2011 9:05:46 AM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5240$ MHz; $\sigma = 5.24$ mho/m; $\epsilon_r = 49.1$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.91, 3.91, 3.91); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11a_CH48_C_Side/Area Scan (41x161x1); Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.262 mW/g

802.11a_CH48_C_Side/Zoom Scan (5x5x7)/Cube 0; Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 2.99 V/m; Power Drift = -0.131 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.233 mW/g; SAR(10 g) = 0.081 mW/g
Maximum value of SAR (measured) = 0.306 mW/g

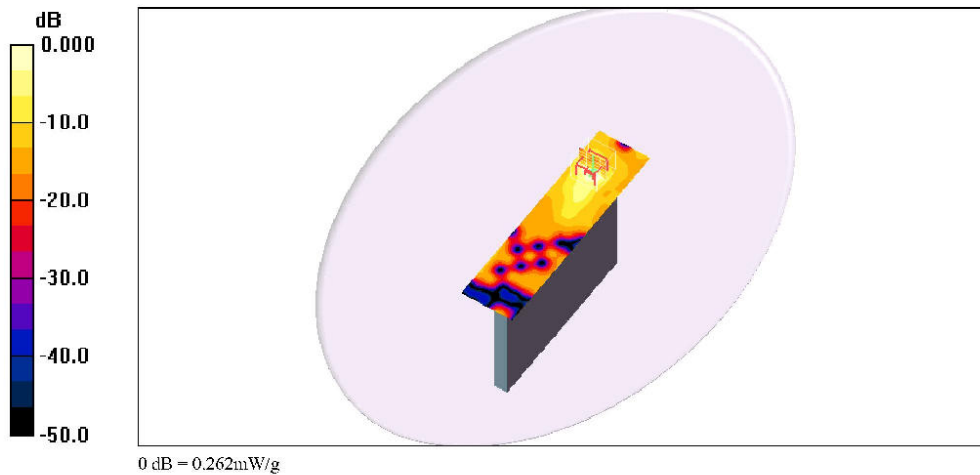

Date/Time: 2/23/2011 11:42:22 AM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.33$ mho/m; $\epsilon_r = 49$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.71, 3.71, 3.71); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11a_CH60_A_Side/Area Scan (141x161x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.760 mW/g

802.11a_CH60_A_Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.880 V/m; Power Drift = 0.169 dB
Peak SAR (extrapolated) = 1.69 W/kg
SAR(1 g) = 0.591 mW/g; SAR(10 g) = 0.181 mW/g
Maximum value of SAR (measured) = 0.913 mW/g

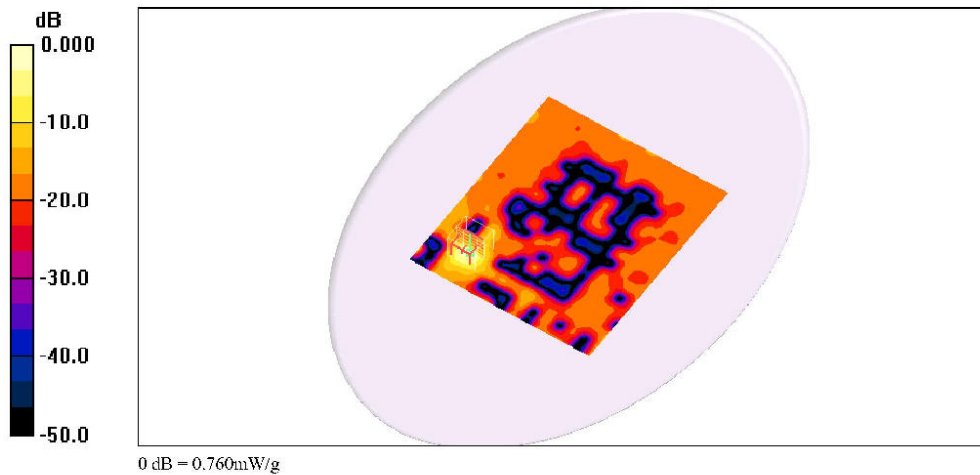

Date/Time: 2/23/2011 12:41:47 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.33$ mho/m; $\epsilon_r = 49$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.71, 3.71, 3.71); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11a_CH60_B_Side/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.123 mW/g

802.11a_CH60_B_Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.18 V/m; Power Drift = 0.110 dB
Peak SAR (extrapolated) = 0.237 W/kg
SAR(1 g) = 0.090 mW/g; SAR(10 g) = 0.043 mW/g
Maximum value of SAR (measured) = 0.095 mW/g

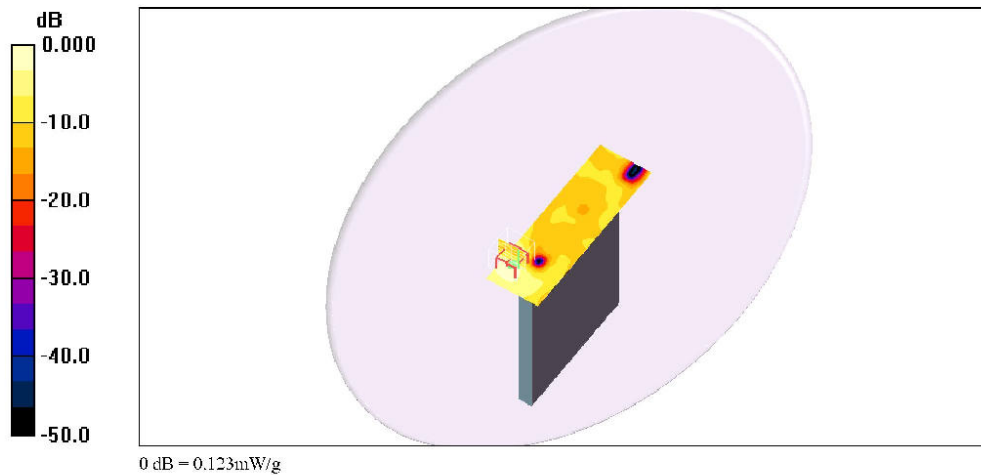

Date/Time: 2/23/2011 12:18:41 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5300$ MHz; $\sigma = 5.33$ mho/m; $\epsilon_r = 49$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.71, 3.71, 3.71); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAD, V1.8 Build 186

802.11a_CH60_C_Side/Area Scan (41x161x1); Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.362 mW/g

802.11a_CH60_C_Side/Zoom Scan (5x5x7)/Cube 0; Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 0.996 V/m; Power Drift = 0.156 dB
Peak SAR (extrapolated) = 0.742 W/kg
SAR(1 g) = 0.261 mW/g; SAR(10 g) = 0.097 mW/g
Maximum value of SAR (measured) = 0.331 mW/g

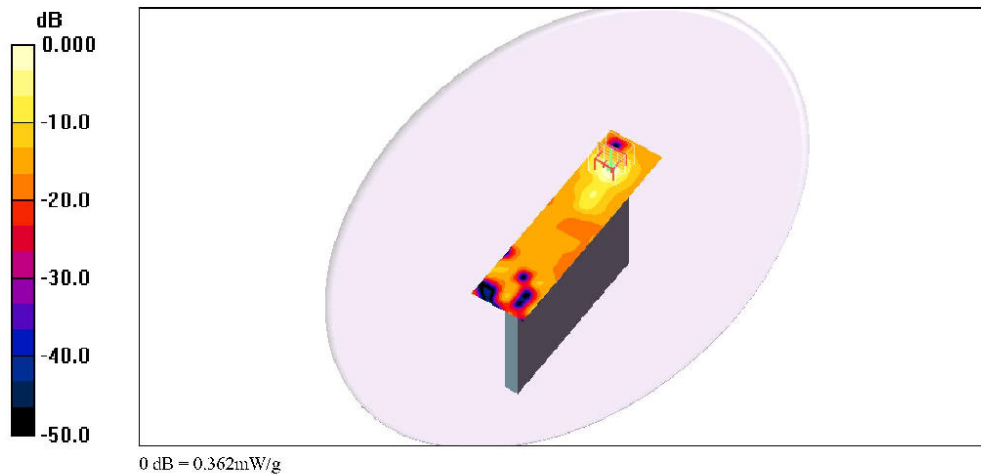

Date/Time: 2/23/2011 1:41:47 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A


Communication System: IEEE 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700 \text{ MHz}$; $\sigma = 5.94 \text{ mho/m}$; $\epsilon_r = 48.2$; $\rho = 1000 \text{ kg/m}^3$
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.17, 3.17, 3.17); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAID, V1.8 Build 186

802.11a_CH140_A_Side/Area Scan (141x161x1); Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.27 mW/g

802.11a_CH140_A_Side/Zoom Scan (5x5x7)/Cube 0; Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.15 V/m; Power Drift = 0.158 dB
Peak SAR (extrapolated) = 2.77 W/kg
SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.286 mW/g
Maximum value of SAR (measured) = 1.28 mW/g

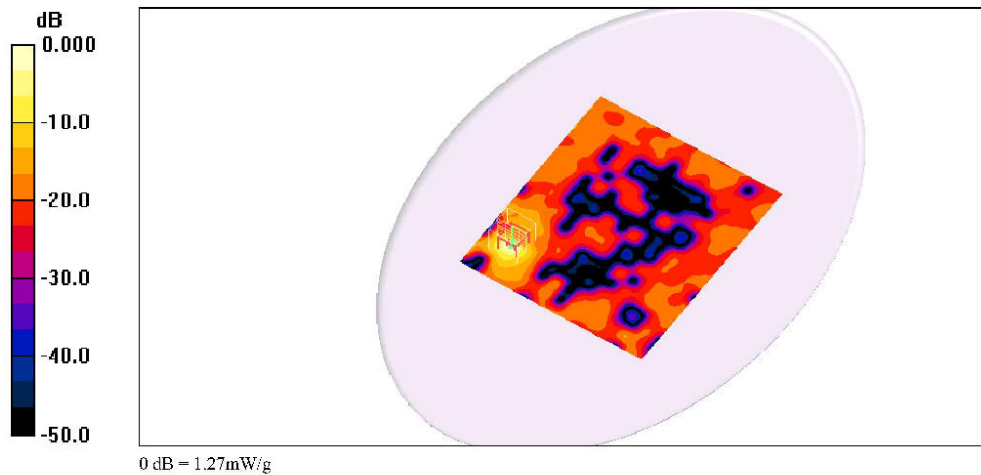

Date/Time: 2/23/2011 1:06:05 PM

Test Laboratory: Electronics Testing Center, Taiwan

DUT: Tablet; Type: **Not Specified**; Serial: N/A

Communication System: IEEE 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5700$ MHz; $\sigma = 5.94$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³
Air temperature: 22 degC; Liquid temperature: 22.3 degC;
Phantom section: Flat Section

DASY4 Configuration:

- Probe: EX3DV4 - SN3555; ConvF(3.17, 3.17, 3.17); Calibrated: 9/22/2010
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAF4 Sn629; Calibrated: 9/17/2010
- Phantom: Flat Phantom FL14.0; Type: QDOVA001B3A; Serial: SN:1055
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SHMCAD, V1.8 Build 186

802.11a_CH140_B_Side/Area Scan (41x131x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.178 mW/g

802.11a_CH140_B_Side/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 1.56 V/m; Power Drift = -0.110 dB
Peak SAR (extrapolated) = 0.484 W/kg
SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.077 mW/g
Maximum value of SAR (measured) = 0.215 mW/g

