



Test report No. : 4789166774-US-R1-V0
Page : 1 of 137
Issued date : Apr. 8, 2020
FCC ID : VGY2765

RADIO TEST REPORT

Product : DSL Router

Model Name : Vigor2765Vac

Series Model : Vigor2765ac, Vigor2766ac, Vigor2766Vac, Vigor2135ac, Vigor2135Vac, Vigor2135Fac, Vigor2135FVac, Vigor2125ac, Vigor2125Vac, Vigor2125Fac, Vigor2125FVac

FCC ID : VGY2765

Test Regulation : FCC 47 CFR Part 15 Subpart E (Section 15.407)

Received Date : Sep. 11, 2019

Test Date : Sep. 27, 2019 ~ Feb 14, 2020

Issued Date : Apr. 8, 2020

Applicant : DrayTek Corp.
No.26 Fu Shing Rd., HuKou County, Hsin-Chu Industrial Park,
Hsin-Chu, Taiwan 303 R.O.C

Issued By : Underwriters Laboratories Taiwan Co., Ltd.
Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd.,
Zhudong Township, Hsinchu County, Taiwan



The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report are responsible of the test sample(s) provided by the client only and are not to be used to indicate applicability to other similar products.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Table Of Contents

1. Attestation of Test Results	4
2. Summary of Test Results	5
3. Test Methodology and Reference Procedures.....	6
4. Facilities and Accreditation.....	6
5. Measurement Uncertainty	7
6. Equipment under Test	8
6.1. Description of EUT.....	8
6.2. Channel List.....	11
6.3. Test Condition.....	12
6.4. Description Of Available Antennas	12
6.5. Test Mode Applicability and Tested Channel Detail.....	13
6.6. Duty cycle	15
7. Test Equipment.....	17
8. Description of Test Setup.....	19
9. Test Results.....	21
9.1. 6dB Bandwidth	21
9.2. 26dB Bandwidth	26
9.3. Occupied Bandwidth.....	31
9.4. Conducted output power	41
9.5. Power Spectral Density.....	46
9.6. Frequency Stability	60
9.7. Radiated Spurious Emission	63
9.8. AC Power Line Conducted Emission	106
Appendix I Radiated Band Edge and OOBE Measurement.....	112
Appendix II Radiated Spurious Emission Measurement	127

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



1. Attestation of Test Results

APPLICANT: DrayTek Corp.
 No.26 Fu Shing Rd., HuKou County, Hsin-Chu Industrial Park, Hsin-Chu, Taiwan 303 R.O.C

MANUFACTURER DrayTek Corp.
 No.26 Fu Shing Rd., HuKou County, Hsin-Chu Industrial Park, Hsin-Chu, Taiwan 303 R.O.C

EUT DESCRIPTION: DSL Router

BRAND: DrayTek

MODEL: Vigor2765Vac

SERIES MODEL: Vigor2765ac, Vigor2766ac, Vigor2766Vac, Vigor2135ac, Vigor2135Vac, Vigor2135Fac, Vigor2135FVac, Vigor2125ac, Vigor2125Vac, Vigor2125Fac, Vigor2125FVac

SAMPLE STAGE: Engineering sample

DATE of TESTED: Sep. 27, 2019 ~ Feb 14, 2020

APPLICABLE STANDARDS	
STANDARD	Test Results
FCC 47 CFR PART 15 Subpart E (Section 15.407)	PASS

Underwriters Laboratories Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Underwriters Laboratories Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Underwriters Laboratories Taiwan Co., Ltd. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Underwriters Laboratories Taiwan Co., Ltd. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Prepared By:

Cindy Hsin
 Project Handler

Date : Apr. 8, 2020

Approved and Authorized By:

Howard Kao Date : Apr. 8, 2020
 Project Engineer

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
 Telephone :+886-2-7737-3000
 Facsimile (FAX) :+886-3-583-7948



2. Summary of Test Results

Summary of Test Results		
FCC Clause	Test Items	Result
15.407(e)	6dB Bandwidth	PASS
15.403(i)	26dB Bandwidth	PASS
2.1049	Occupied Bandwidth	See Note2
15.407(a)(1/3)	Conducted Output Power	PASS
15.407(a)(1/3)	Power Spectral Density	PASS
15.407(g)	Frequency Stability	PASS
15.407(b) (1/4(i/ii)/6)	Radiated Emissions and Band Edge Measurement	PASS
15.407(b)(6)	AC Power Conducted Emission	PASS
15.203	Antenna Requirement	PASS

Note:

1. For the Radiated Band Edge and OOB test plots were recorded in Appendix I, the Radiated Emissions test plots were recorded in Appendix II.
2. The Occupied Bandwidth was reference only.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



3. Test Methodology and Reference Procedures

The tests documented in this report were performed in accordance with 47 CFR FCC Part 2, KDB 789033 D02 General UNII Test Procedure New Rules v02r01, KDB414788 D01 Radiated Test Site v01r01, ANSI C63.10-2013 and KDB 662911 D01 Multiple Transmitter Output v02r01.

4. Facilities and Accreditation

Test Location	Underwriters Laboratories Taiwan Co., Ltd.
Address	Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Accreditation Certificate	Underwriters Laboratories Taiwan Co., Ltd. is accredited by TAF, Laboratory Code 3398. The full scope of accreditation can be viewed at http://accreditation.taftw.org.tw/taf/public/basic/viewApplyItems.action?unitNo=3398

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948



5. Measurement Uncertainty

For statement of conformity, accuracy method (Section 8.2.4 and 8.2.5 of ISO Guide 98-4) was applied as decision rule for measurement in this test report.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k=2$.

Test Item	Measurement Frequency Range	K	U(dB)
Conducted disturbance at mains terminals ports	0.15MHz ~ 30MHz	2	1.7
RF Conducted	9 kHz - 40GHz	2	1.0
Radiated disturbance below 30MHz	9 kHz - 30 MHz	2	2.2
Radiated disturbance below 1 GHz	30MHz ~ 1GHz	2	5.3
Radiated disturbance above 1GHz	1GHz ~ 40GHz	2	4.8

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



6. Equipment under Test

6.1. Description of EUT

Product	DSL Router	
Brand Name	DrayTek	
Model Name	Vigor2765Vac	
Series Model	Vigor2765ac, Vigor2766ac, Vigor2766Vac, Vigor2135ac, Vigor2135Vac, Vigor2135Fac, Vigor2135FVac, Vigor2125ac, Vigor2125Vac, Vigor2125Fac, Vigor2125FVac	
S/N	191001DAA185F58	
Operating Frequency	5180 ~ 5240 MHz 5745 ~ 5825 MHz	
Modulation	256QAM, 64QAM, 16QAM, QPSK, BPSK	
Transfer Rate	802.11a: up to 54 Mbps 802.11n: up to MCS15 802.11ac: up to MCS9	
Number of Channel	5180 ~ 5240 MHz	4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20)
		2 for 802.11n (HT40), 802.11 ac (VHT40)
		1 for 802.11ac (VHT80)
	5745 ~ 5825 MHz	5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20)
		2 for 802.11n (HT40), 802.11 ac (VHT40)
		1 for 802.11ac (VHT80)
Maximum Output Power	Non-Beamforming Mode: 5180 ~ 5240 MHz: 25.49 dBm 5745 ~ 5825 MHz: 25.16 dBm Beamforming Mode: 5180 ~ 5240 MHz: 24.65 dBm 5745 ~ 5825 MHz: 24.72 dBm	
Normal Voltage	12Vdc from adapter	

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Note:

1. The models difference table as below:

Main Model	Function				
	DSL	gfast	FXS	Eth-RJ45 WAN	Eth-SFP WAN
Vigor2765Vac	V	-	V	-	-
Series Model	Function difference				
	DSL	gfast	FXS	Eth-RJ45 WAN	Eth-SFP WAN
Vigor2765ac	V	-	-	-	-
Vigor2766ac	V	V	-	-	-
Vigor2766Vac	V	V	V	-	-
Vigor2135ac	-	-	-	V	-
Vigor2135Vac	-	-	V	V	-
Vigor2135Fac	-	-	-	-	V
Vigor2135FVac	-	-	V	-	V
Vigor2125ac	-	-	-	V	-
Vigor2125Vac	-	-	V	V	-
Vigor2125Fac	-	-	-	-	V
Vigor2125FVac	-	-	V	-	V

- The above models are declared for market purpose by the manufacturer, the difference between the main model and the series model is the combination of hardware design and appearance, there are no changes in RF-related parts, which will not affect RF characteristic.
2. The EUT incorporates a MIMO function. Physically, the EUT provides two completed transmitters and two receivers.

Modulation Mode	Tx,Rx Function
802.11a	2TX,2RX
802.11n (HT20)	2TX,2RX
802.11n (HT40)	2TX,2RX
802.11ac (VHT20)	2TX,2RX
802.11ac (VHT40)	2TX,2RX
802.11ac (VHT80)	2TX,2RX

* The modulation and bandwidth are similar for 802.11n mode for HT20 / HT40 and 802.11ac mode for VHT20 / VHT40, therefore investigated worst case to representative mode in test report.

Underwriters Laboratories Taiwan Co., Ltd.



3. The EUT contains following accessory devices

Product	Brand	Model	Description
AC Adapter	Channel Well Technology	2ABL024F US	Input: 100-240Vac, 0.8A, Output: 12Vdc, 2A Length: 1.5 m, non-shielded cable w/o ferrite core
RJ-45 Cable	Tung-Li	5U422-20	Length: 3 m, non-shielded cable
RJ-11 Cable	N/A	N/A	Length: 1.8 m, non-shielded cable, 6P4C
RJ-11 to RJ-45 Cable	N/A	N/A	Length: 2.2 m, non-shielded cable, 6P4C
RJ-45 to RJ-45 Cable	N/A	N/A	Length: 2.2 m, non-shielded cable, 6P4C

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer the manufacturer's or user's manual.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



6.2. Channel List

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745MHz	161	5805MHz
153	5765MHz	165	5825MHz
157	5785MHz	-	-

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755MHz	159	5795MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775MHz

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



6.3. Test Condition

Test Item	Test Site No.	Environmental Condition	Input Power	Test Date	Tested by
Antenna Port Conducted Measurement	SR4	23~26°C / 62~66%RH	120Vac / 60 Hz	Oct. 3, 2019 ~ Feb. 14, 2020	WaterNil Guan / Wayne Chen
Radiated Spurious Emission	966-2	23~27°C / 60~69%RH	120Vac / 60 Hz	Sep. 27, 2019 ~ Feb. 7, 2020	WaterNil Guan / Wayne Chen
AC power Line Conducted Emission	SR1	24~26°C / 63~66%RH	120Vac / 60 Hz	Oct. 15, 2019 ~ Nov. 8, 2019	Wayne Chen

FCC Test Firm Registration Number: 498077

6.4. Description Of Available Antennas

Antenna	Brand Name	Model Name	Antenna Type	Antenna Gain(dBi)
Chain(0)	Walsin	RFDPA131300SBLB805	Dipole	4.45
Chain(1)	Walsin	RFDPA131300SBLB805	Dipole	4.45

Note: The above antenna information was provided from customer and for more detailed features description, please refer the manufacturer's specification or user's manual.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



6.5. Test Mode Applicability and Tested Channel Detail

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- For below 1 GHz radiated emission and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
- For Antenna Port Conducted Measurement, this item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- The fundamental of the EUT was investigated in three orthogonal axes X/Y/Z, it was determined that X axis was worst-case . Therefore, all final radiated testing was performed with the EUT in X axis.
- For below 30MHz testing, investigation was done on three antenna orientations (parallel, perpendicular, and ground-parallel), parallel and perpendicular are the worst orientations, therefore testing was performed on these two orientations only.
- For AC power line conducted emissions, the pre-scan has been determined by AC power 120Vac/60Hz (worst case)
- Pre-scan radiation has been determined by the model Vigor2765Vac (the worst case). Therefore, only the model Vigor2765Vac tests was performed and recorded in this report.

Non-Beamforming Mode

Test item	Mode	Frequency Band (MHz)	Modulation Technology	Available Channel	Test Channel	Data Rate
Radiated Emissions (Above 1GHz)	802.11a	5180-5240	OFDM	36 to 48	36, 44, 48	6.0
	802.11ac (VHT20)		OFDM	36 to 48	36, 44, 48	MCS0
	802.11ac (VHT40)		OFDM	38 to 46	38, 46	MCS0
	802.11ac (VHT80)		OFDM	42	42	MCS0
	802.11a	5745-5825	OFDM	149 to 165	149, 157, 165	6.0
	802.11ac (VHT20)		OFDM	149 to 165	149, 157, 165	MCS0
	802.11ac (VHT40)		OFDM	151 to 159	151, 159	MCS0
	802.11ac (VHT80)		OFDM	155	155	MCS0
Radiated Emissions (Below 1GHz)	802.11ac (VHT80)	5180-5240	OFDM	42	42	MCS0
AC Power Line Conducted Emission	802.11ac (VHT80)	5180-5240	OFDM	42	42	MCS0
Antenna Port Conducted Measurement	802.11a	5180-5240	OFDM	36 to 48	36, 44, 48	6.0
	802.11ac (VHT20)		OFDM	36 to 48	36, 44, 48	MCS0
	802.11ac (VHT40)		OFDM	38 to 46	38, 46	MCS0
	802.11ac (VHT80)		OFDM	42	42	MCS0
	802.11a	5745-5825	OFDM	149 to 165	149, 157, 165	6.0
	802.11ac (VHT20)		OFDM	149 to 165	149, 157, 165	MCS0
	802.11ac (VHT40)		OFDM	151 to 159	151, 159	MCS0
	802.11ac (VHT80)		OFDM	155	155	MCS0

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948



Beamforming Mode

Test item	Mode	Frequency Band (MHz)	Modulation Technology	Available Channel	Test Channel	Data Rate
Radiated Emissions (Above 1GHz)	802.11ac (VHT20)	5180-5240	OFDM	36 to 48	36, 44, 48	MCS0 (Nss1)
	802.11ac (VHT40)		OFDM	38 to 46	38, 46	MCS0 (Nss1)
	802.11ac (VHT80)		OFDM	42	42	MCS0 (Nss1)
	802.11ac (VHT20)	5745-5825	OFDM	149 to 165	149, 157, 165	MCS0 (Nss1)
	802.11ac (VHT40)		OFDM	151 to 159	151, 159	MCS0 (Nss1)
	802.11ac (VHT80)		OFDM	155	155	MCS0 (Nss1)
Radiated Emissions (Below 1GHz)	802.11ac (VHT40)	5180-5240	OFDM	38 to 46	38	MCS0 (Nss1)
Antenna Port Conducted Measurement	802.11ac (VHT20)	5180-5240	OFDM	36 to 48	36, 44, 48	MCS0 (Nss1)
	802.11ac (VHT40)		OFDM	38 to 46	38, 46	MCS0 (Nss1)
	802.11ac (VHT80)		OFDM	42	42	MCS0 (Nss1)
	802.11ac (VHT20)	5745-5825	OFDM	149 to 165	149, 157, 165	MCS0 (Nss1)
	802.11ac (VHT40)		OFDM	151 to 159	151, 159	MCS0 (Nss1)
	802.11ac (VHT80)		OFDM	155	155	MCS0 (Nss1)

Co-Location Mode

Test item	Mode	Modulation Technology	Modulation Type	Available Channel	Test Channel	Data Rate
Radiated Emissions	802.11b	DSSS	DBPSK	1 to 11	6+48	1.0
	802.11a	OFDM	BPSK	36 to 48		6.0
				149 to 165		

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



6.6. Duty cycle


Non-Beamforming Mode

802.11a: Duty cycle = $1.395/1.447 = 0.964$, Duty factor = $10 * \log(1/0.964) = 0.16$

802.11ac (VHT20): Duty cycle = $0.6837/0.735 = 0.93$, Duty factor = $10 * \log(1/0.93) = 0.31$

802.11ac (VHT40): Duty cycle = $0.352/0.4027 = 0.874$, Duty factor = $10 * \log(1/0.874) = 0.58$

802.11ac (VHT80): Duty cycle = $0.188/0.2392 = 0.786$, Duty factor = $10 * \log(1/0.786) = 1.05$

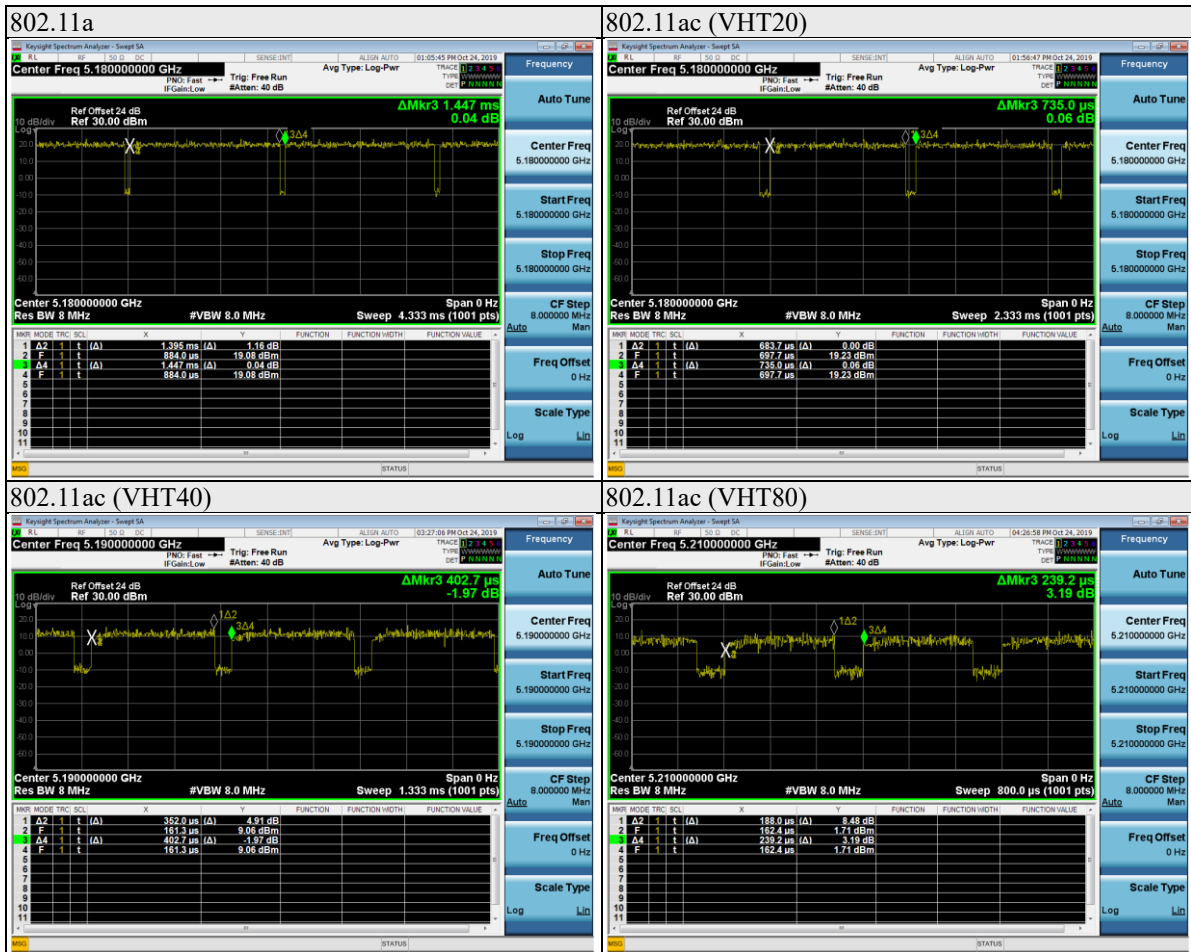




Beamforming Mode

802.11ac (VHT20): Duty cycle = 0.46/0.571 = 0.806, Duty factor = $10 * \log(1/0.806) = 0.94$

802.11ac (VHT40): Duty cycle = 0.2402/0.3323 = 0.723, Duty factor = $10 * \log(1/0.723) = 1.41$

802.11ac (VHT80): Duty cycle = 0.08905/0.1499 = 0.594, Duty factor = $10 * \log(1/0.594) = 2.26$

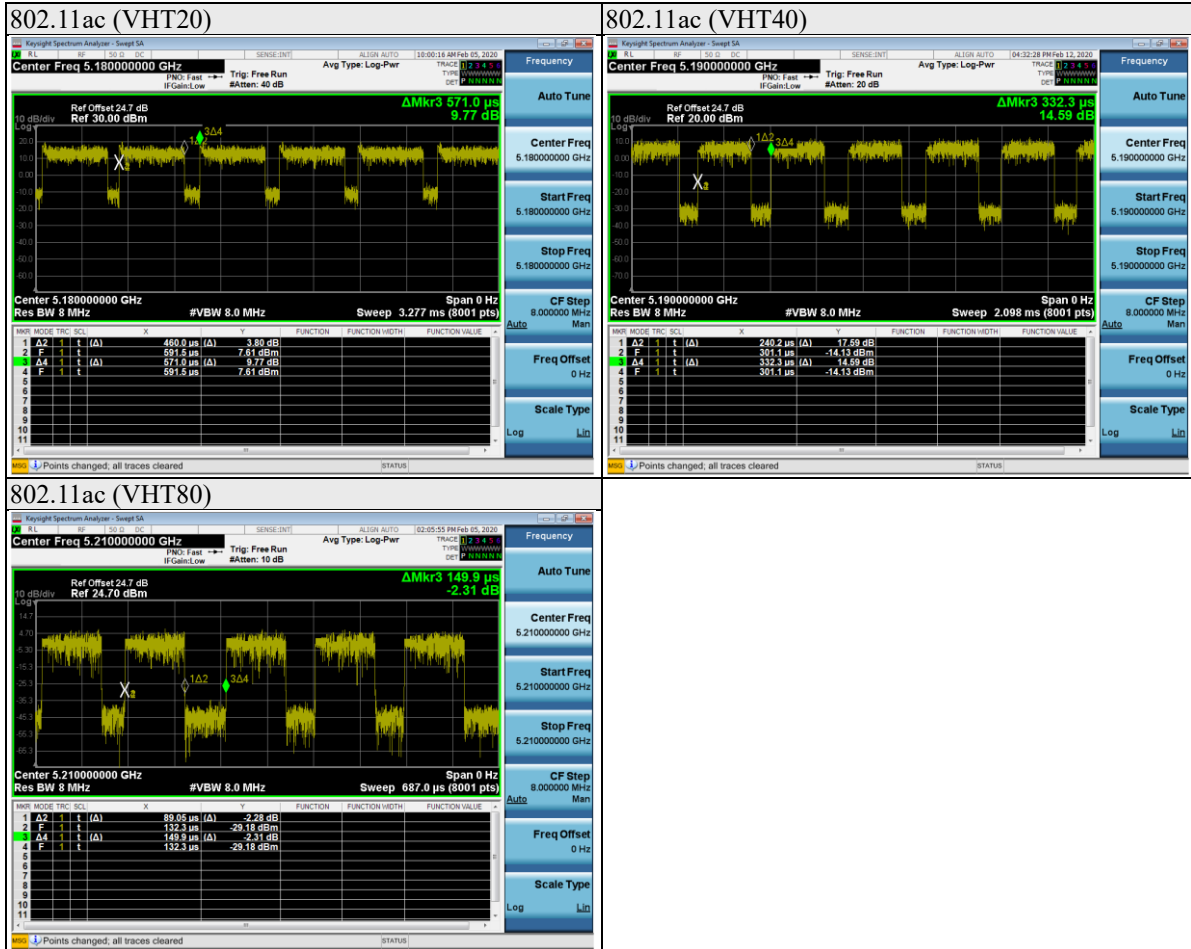



7. Test Equipment

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
Radiated Spurious Emission					
Spectrum Analyzer	Keysight	N9010A	MY56070827	Nov. 8, 2018	1 year
				Nov. 13, 2019	
EMI Test Receiver	Rohde & Schwarz	ESR7	101754	Nov. 8, 2018	1 year
				Dec. 4, 2019	
Loop Antenna	ETS lindgren	6502	00213440	Dec. 11, 2018	1 year
				Dec. 19, 2019	
Trilog-Broadband Antenna with 5dB Attenuator	Schwarzbeck & EMCI	VULB 9168 & N-6-05	774 & AT-N0538	Jan. 14, 2019	1 year
				Jan. 3, 2020	
Horn Antenna (1-18 GHz)	Schwarzbeck	BBHA 9120 D	01690	Jan. 25, 2019	1 year
				Jan. 3, 2020	
Horn Antenna(18-40 GHz)	Schwarzbeck	BBHA 9170	781	Jan. 16, 2019	1 year
				Dec. 27, 2019	
Preamplifier (30-1000 MHz)	EMCI	EMC330E	980405	Jan. 30, 2019	1 year
				Feb. 4, 2020	
Preamplifier (1-18 GHz)	EMCI	EMC051835BE	980406	Jan. 29, 2019	1 year
				Feb. 4, 2020	
Preamplifier (18-40GHz)	EMCI	EMC184040SE E	980426	May. 8, 2019	1 year
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-4 & 170425-2	Jan. 29, 2019	1 year
				Jan. 8, 2020	
Cables	Hanyitek	K1K50-UP0264-K1K50-2500	170214-1 & 170214-2	Jan. 29, 2019	1 year
				Jan. 8, 2020	

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Test report No. : 4789166774-US-R1-V0
Page : 18 of 137
Issued date : Apr. 8, 2020
FCC ID : VGY2765

Test Equipment List					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
Antenna Port Conducted Measurement					
Spectrum Analyzer	Keysight	N9010A	MY56070834	Nov. 8, 2018	1 year
				Nov. 6, 2019	
Pulse Power Sensor	Anrisu	MA2411B	1531202	Dec. 17, 2018	1 year
				Dec. 23, 2019	
Power Meter	Anrisu	ML2495A	1645002	Dec. 17, 2018	1 year
				Dec. 23, 2019	
Temperature & Humidity Test Chamber	GIANT FORCE	GTH-150-40-CP-AR	MAA1701-010	Apr. 3, 2019	1 year
AC power Line Conducted Emission					
EMI Test Receiver	Rohde & Schwarz	ESR7	101753	Nov. 14, 2018	1 year
				Nov. 19, 2019	
Two-Line V-Network	Rohde & Schwarz	ENV216	102136	Aug. 8, 2019	1 year
Impuls-Begrenzer Pulse Limiter	Rohde & Schwarz	ESH3-Z2	102219-Qt	Aug. 6, 2019	1 year
Cables	HARBOUR INDUSTRIES	LL142	170205-5000-1	Jan. 29, 2019	1 year
				Feb. 5, 2020	

UL Software		
Description	Name	Version
Radiated measurement	EZ_EMCC	1.1.4.2
Conducted measurement	Keysight.TestSystem	1.0.0.0
AC power Line Conducted Emission	EZ_EMCC	1.1.4.2

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



8. Description of Test Setup

Support Equipment

Equipment	Brand Name	Model Name	S/N	Remark
Notebook	DELL	Latitude E5470	3JFKWF2	N/A
Notebook	DELL	Latitude E5470	JVSKWF2	N/A
Connector	N/A	N/A	N/A	RJ-45 to RJ-45
USB Device	SP Widget	TOUCH T03	N/A	8GB
USB Device	SP Widget	TOUCH T03	N/A	8GB
Rx Device (BF Client)	DrayTek	Vigor2766Vac	N/A	FW: r83413_beta

I/O Cables

Equipment	Brand Name	Model Name	S/N	Remark
RJ-45 cable	N/A	N/A	N/A	Length : 10m
RJ-45 cable	N/A	N/A	N/A	Length : 1.5m
RJ-45 cable	N/A	N/A	N/A	Length : 1.5m
RJ-45 cable	N/A	N/A	N/A	Length : 1.5m

Test Setup

Controlled using a bespoke application (MT7615D QAtool package_UIv1.84_DLLv3.81) on a test Notebook. The application was used to enable a continuous transmission mode and to select the test channels, data rates, modulation schemes and power setting as required.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000


Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0




Setup Diagram for Test

Non-Beamforming Mode

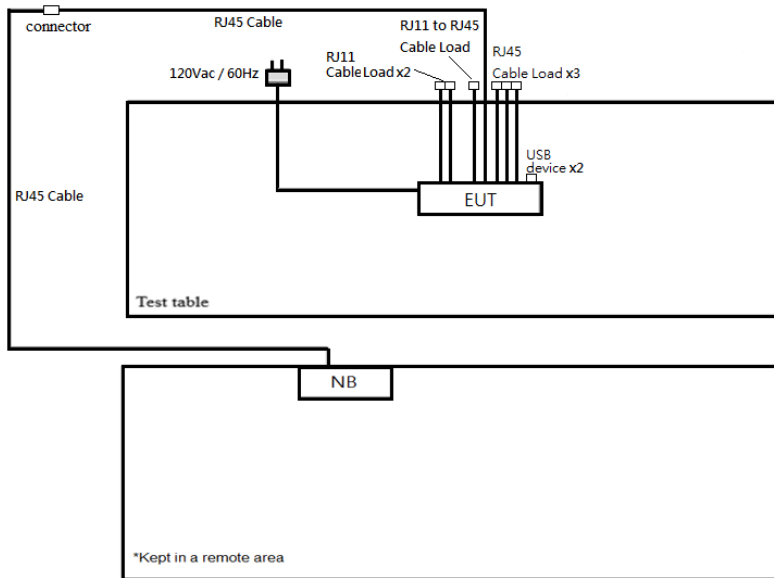

Beamforming Mode

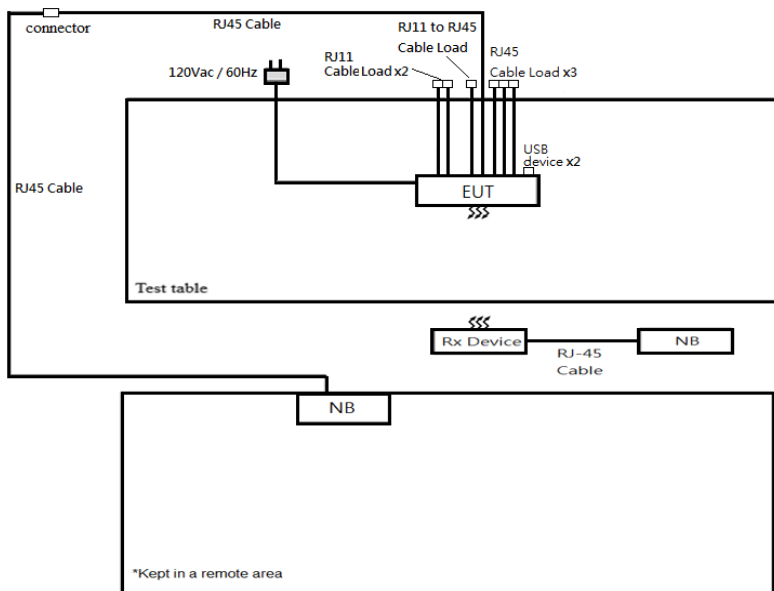

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



9. Test Results

9.1. 6dB Bandwidth


Requirements

The minimum 6 dB bandwidth shall be at least 500 kHz.

Test procedure

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Test Data

Non-Beamforming Mode

802.11a

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	15.03	14.7	0.5	Pass
157	5785	15.24	14.43	0.5	Pass
165	5825	14.64	14.49	0.5	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	15.12	15.03	0.5	Pass
157	5785	15.09	13.77	0.5	Pass
165	5825	15.09	14.97	0.5	Pass

802.11ac (VHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.1	35.1	0.5	Pass
159	5795	34.98	35.1	0.5	Pass

802.11ac (VHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	73.8	75.12	0.5	Pass

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



Beamforming Mode

802.11ac (VHT20)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
149	5745	15.1125	15.1125	0.5	Pass
157	5785	15.1275	17.33625	0.5	Pass
165	5825	15.6375	15.075	0.5	Pass

802.11ac (VHT40)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
151	5755	35.085	35.0925	0.5	Pass
159	5795	35.0925	35.445	0.5	Pass

802.11ac (VHT80)

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1		
155	5775	75.615	75.12	0.5	Pass


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0

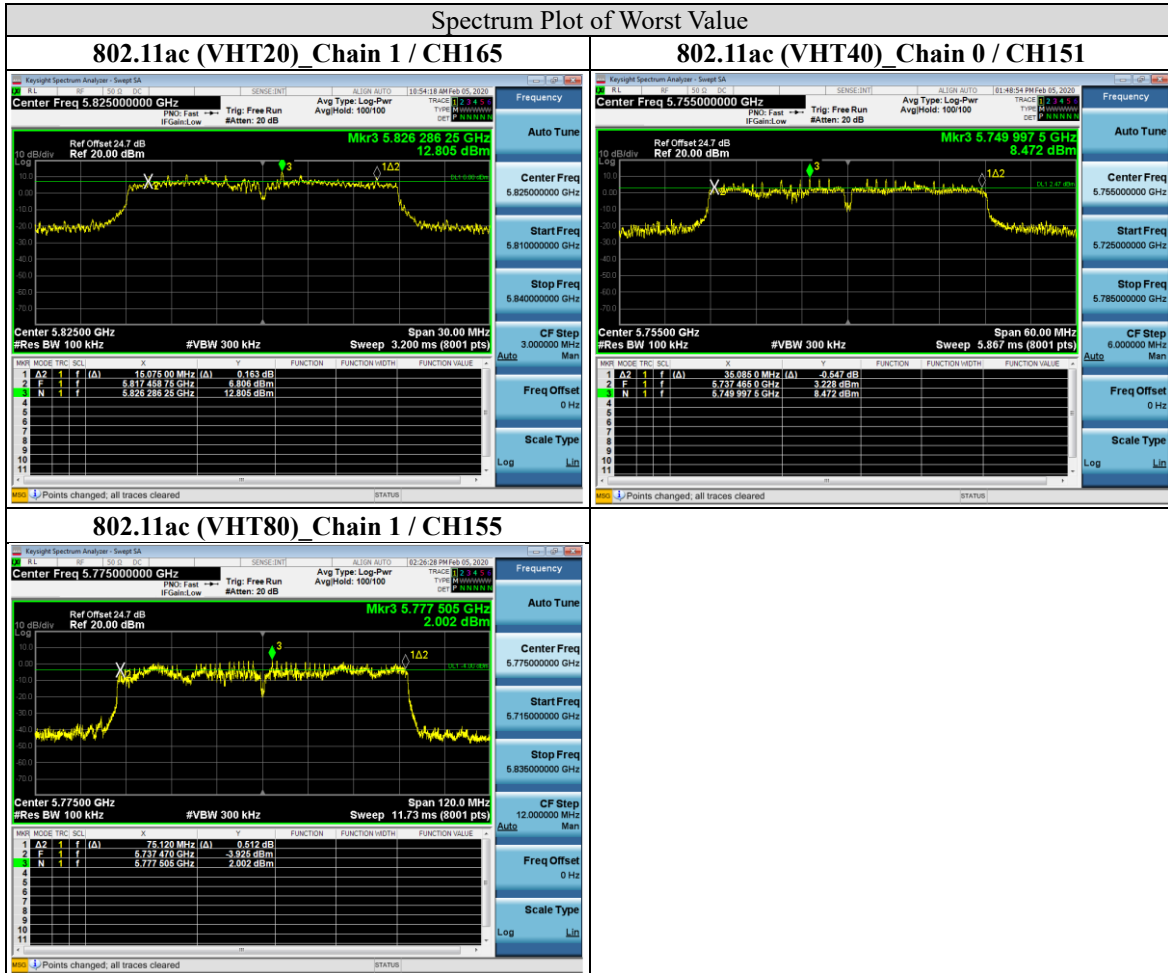




9.2. 26dB Bandwidth

Test procedure

- a. Set RBW = approximately 1% of the emission bandwidth.
- b. Set the VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Test Data

Non-Beamforming Mode

802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	20.21	19.67	PASS
44	5220	27.73	22.81	PASS
48	5240	30	30	PASS

802.11ac (VHT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	20.31	20.16	PASS
44	5220	24.64	20.95	PASS
48	5240	30	29.84	PASS

802.11ac (VHT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	41.1	40.52	PASS
46	5230	52.75	40.42	PASS

802.11ac (VHT80)

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
42	5210	80.91	80.39	PASS


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0

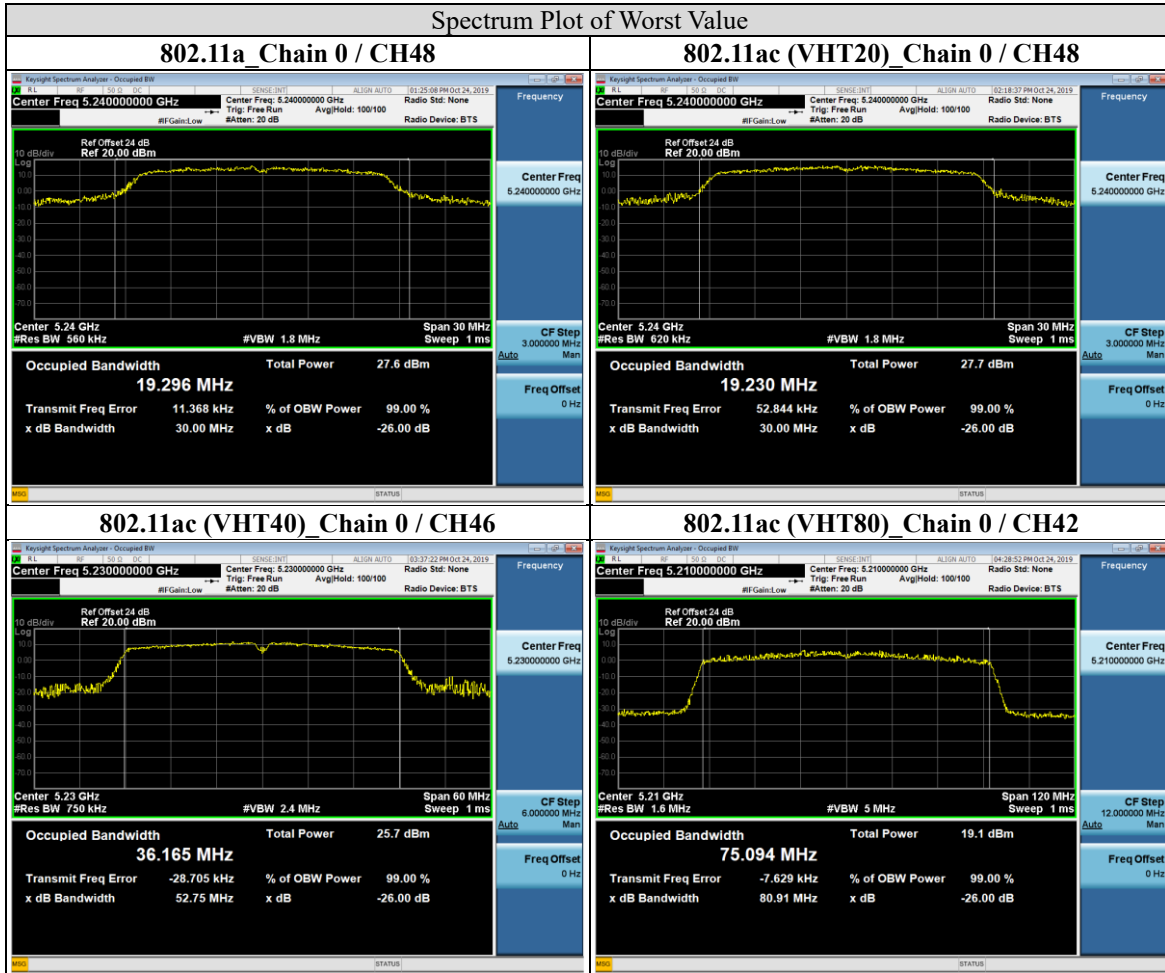

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



Beamforming Mode

802.11ac (VHT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
36	5180	20.37	20.22	PASS
44	5220	22.78	20.5	PASS
48	5240	29.53	25.24	PASS

802.11ac (VHT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
38	5190	41.14	40.8	PASS
46	5230	40.43	41.4	PASS

802.11ac (VHT80)

CHANNEL	CHANNEL FREQUENCY (MHz)	26 dB Bandwidth (MHz)		PASS / FAIL
		CHAIN 0	CHAIN 1	
42	5210	81.04	80.99	PASS


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0

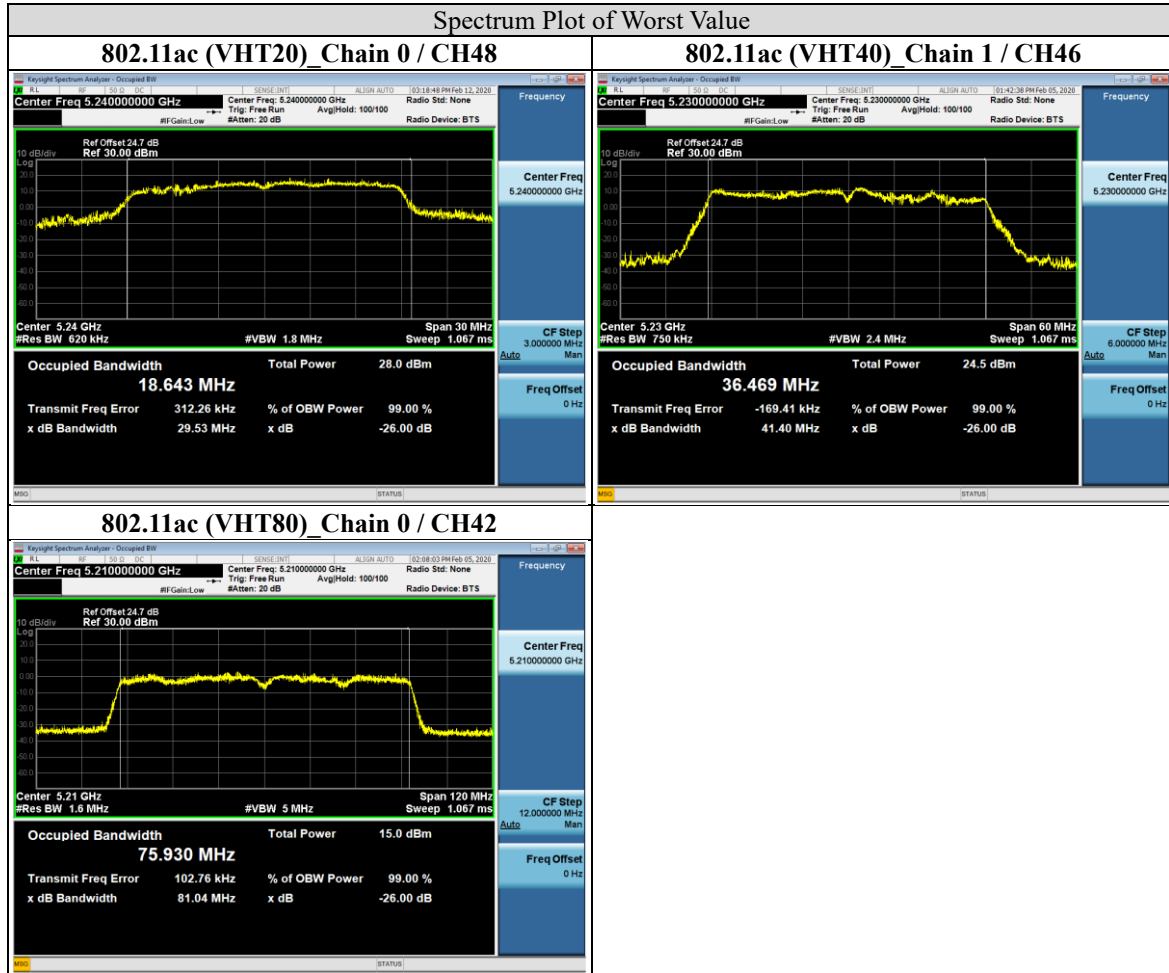

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948




9.3. Occupied Bandwidth

Test procedure

- a. Set center frequency to the nominal EUT channel center frequency.
- b. Set span = 1.5 times to 5.0 times the OBW.
- c. Set RBW = 1% to 5% of the OBW
- d. Set VBW $\geq 3 \times$ RBW
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f. Use the 99% power bandwidth function of the instrument (if available).
- g. If the instrument does not have a 99% power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

Test Setup



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.



Test Data

Non-Beamforming Mode

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
36	5180	16.55	16.473
44	5220	16.738	16.551
48	5240	19.813	17.551
149	5745	16.71	16.48
157	5785	16.721	16.5
165	5825	16.731	16.456

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
36	5180	17.645	17.649
44	5220	17.681	17.705
48	5240	18.543	18.538
149	5745	17.714	17.641
157	5785	17.728	17.659
165	5825	17.668	17.644

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



802.11ac (VHT40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
38	5190	36.009	35.969
46	5230	36.107	36.008
151	5755	36.929	36.156
159	5795	37.541	36.174

802.11ac (VHT80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
42	5210	75.125	75.125
155	5775	75.454	75.137


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0

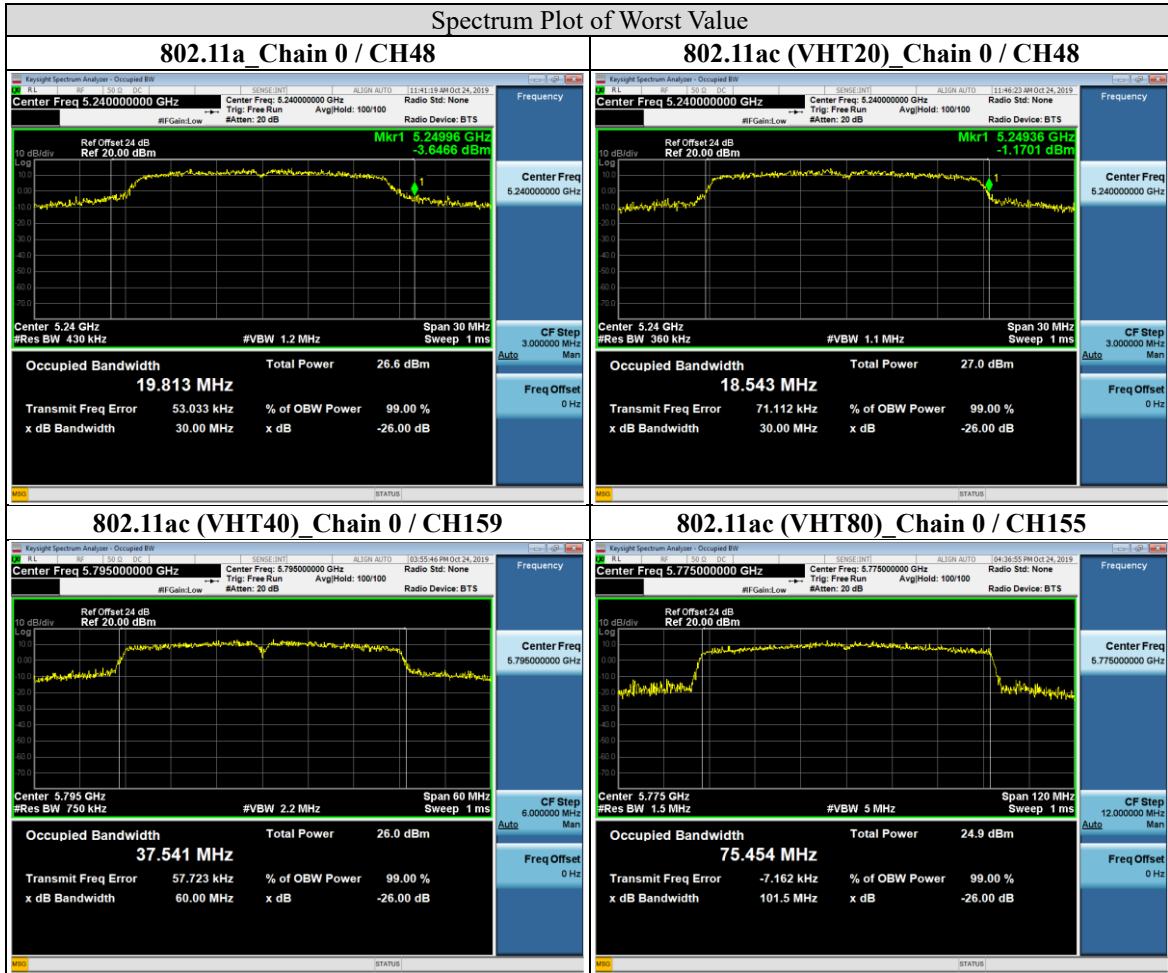


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

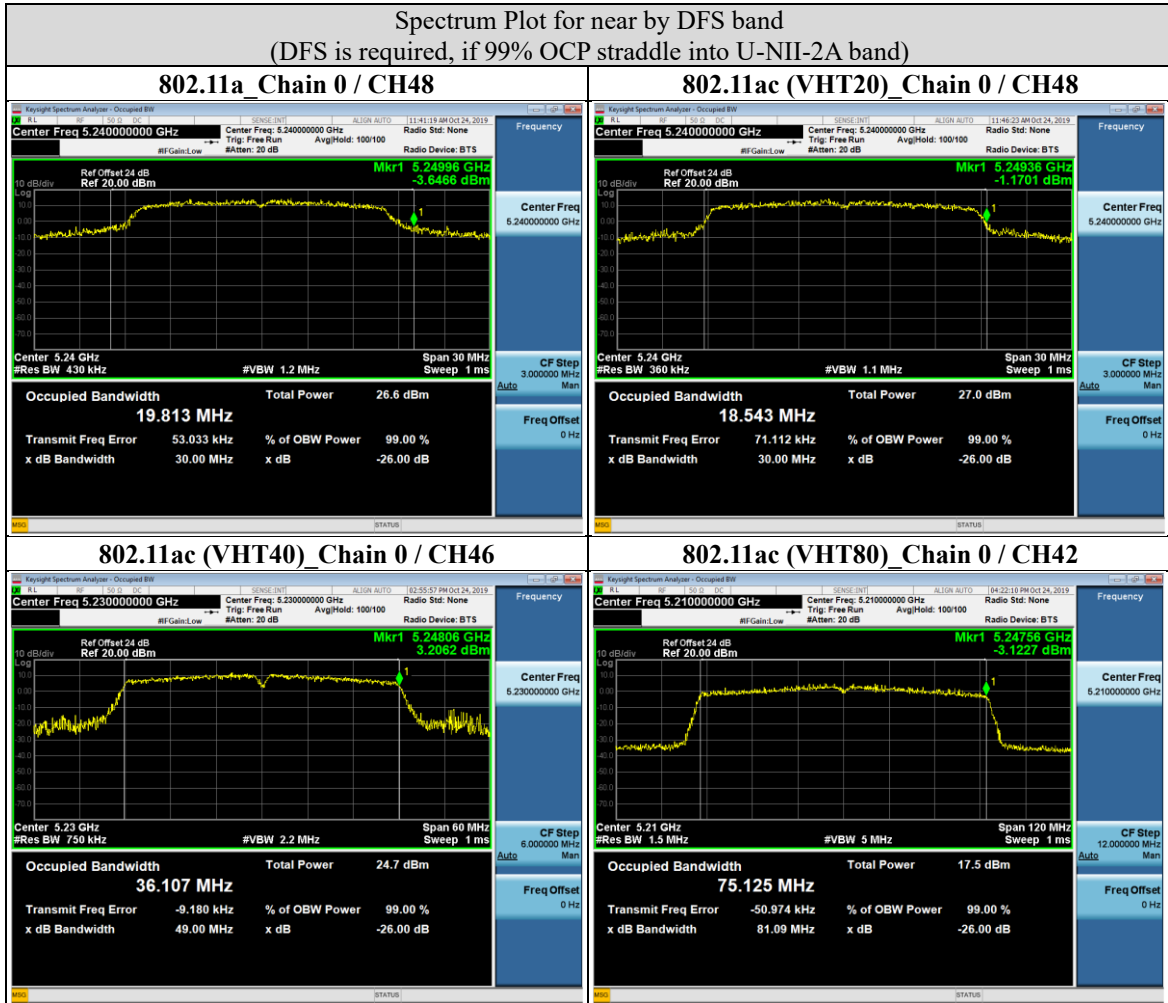


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

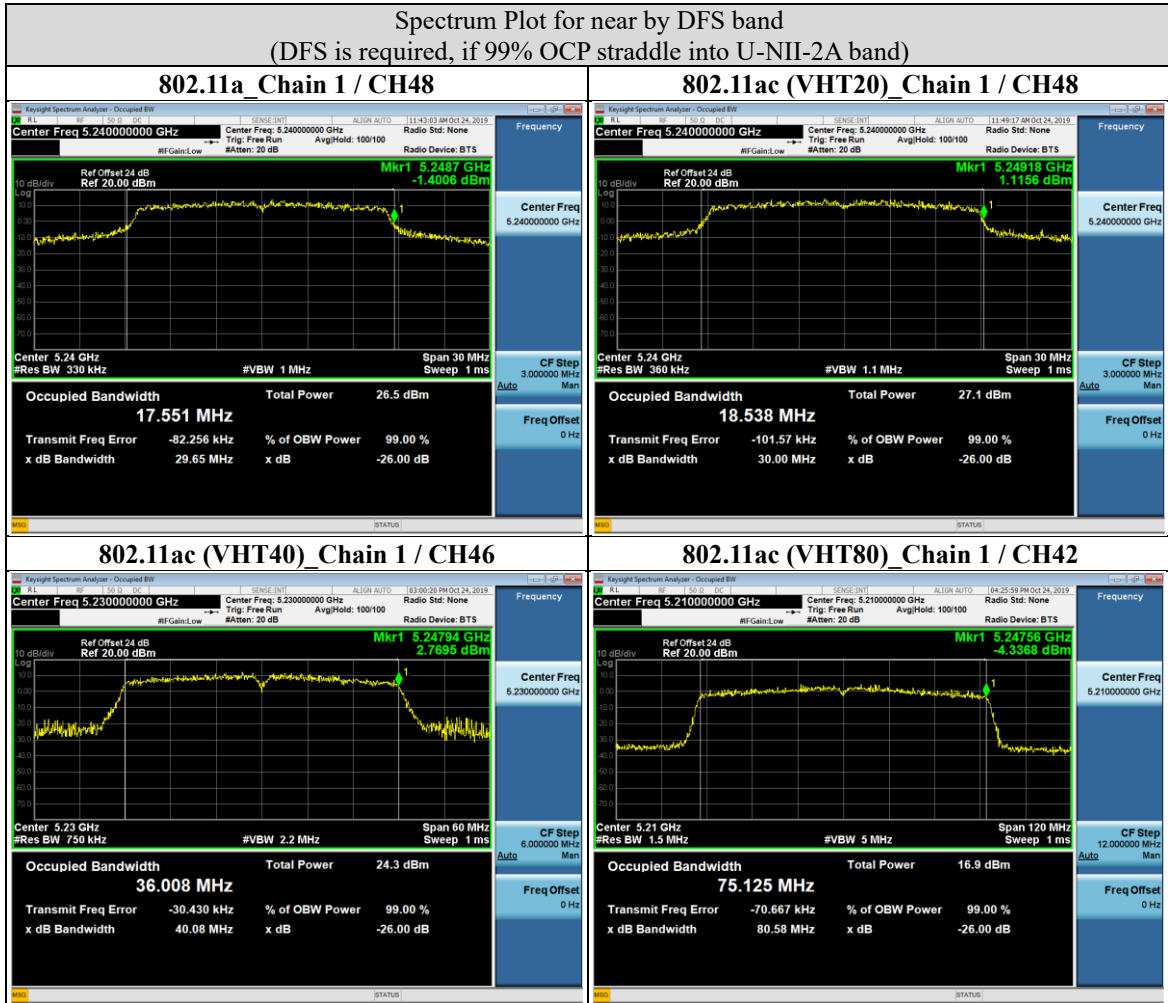

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948



Beamforming Mode

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
36	5180	17.824	17.6
44	5220	17.87	17.821
48	5240	18.579	17.628
149	5745	18.086	17.528
157	5785	18.065	17.918
165	5825	18.018	17.772

802.11ac (VHT40)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
38	5190	36.386	36.011
46	5230	36.363	35.749
151	5755	36.499	36.219
159	5795	36.397	36.386

802.11ac (VHT80)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)	
		CHAIN 0	CHAIN 1
42	5210	75.638	75.311
155	5775	76.181	75.451


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0

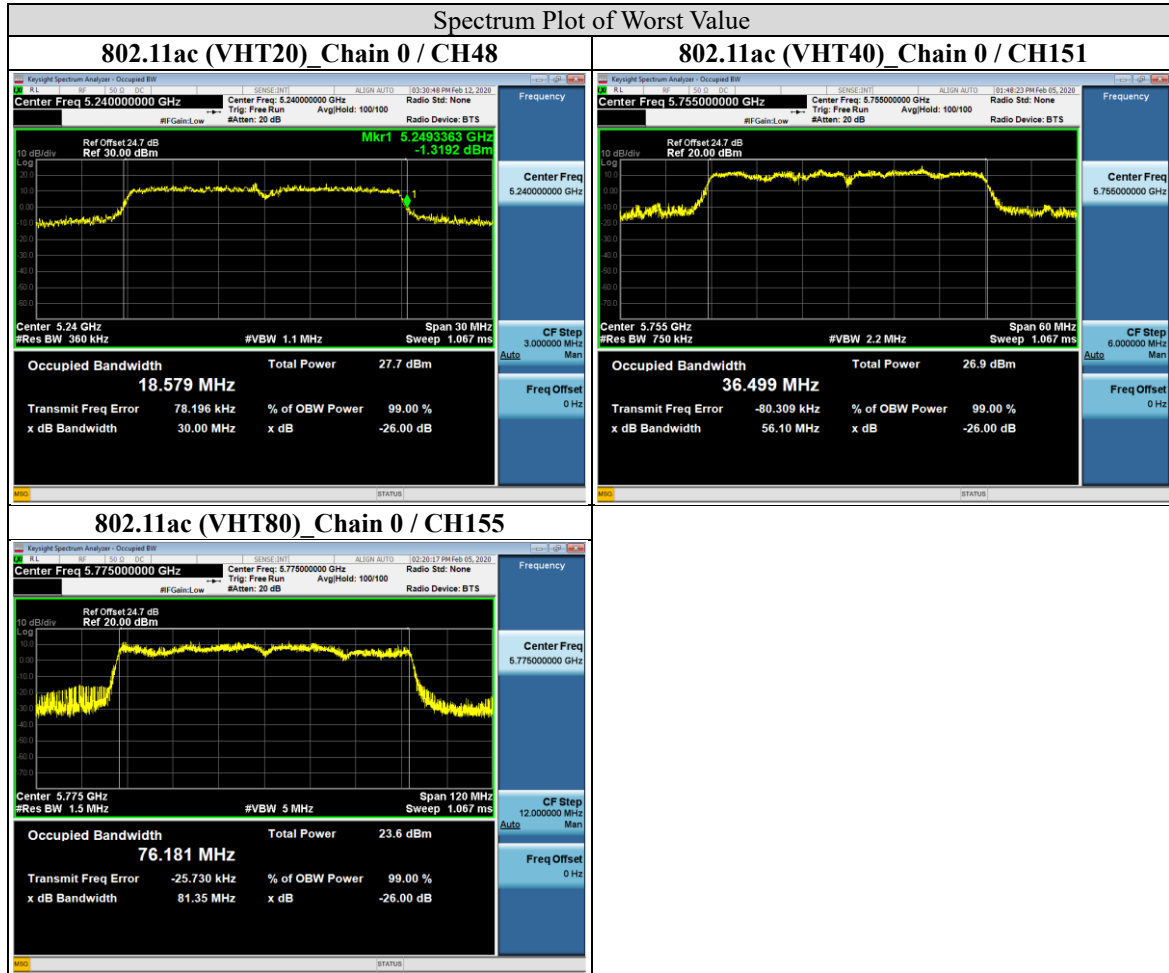


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

Doc No: 17-EM-F0878 / 5.0

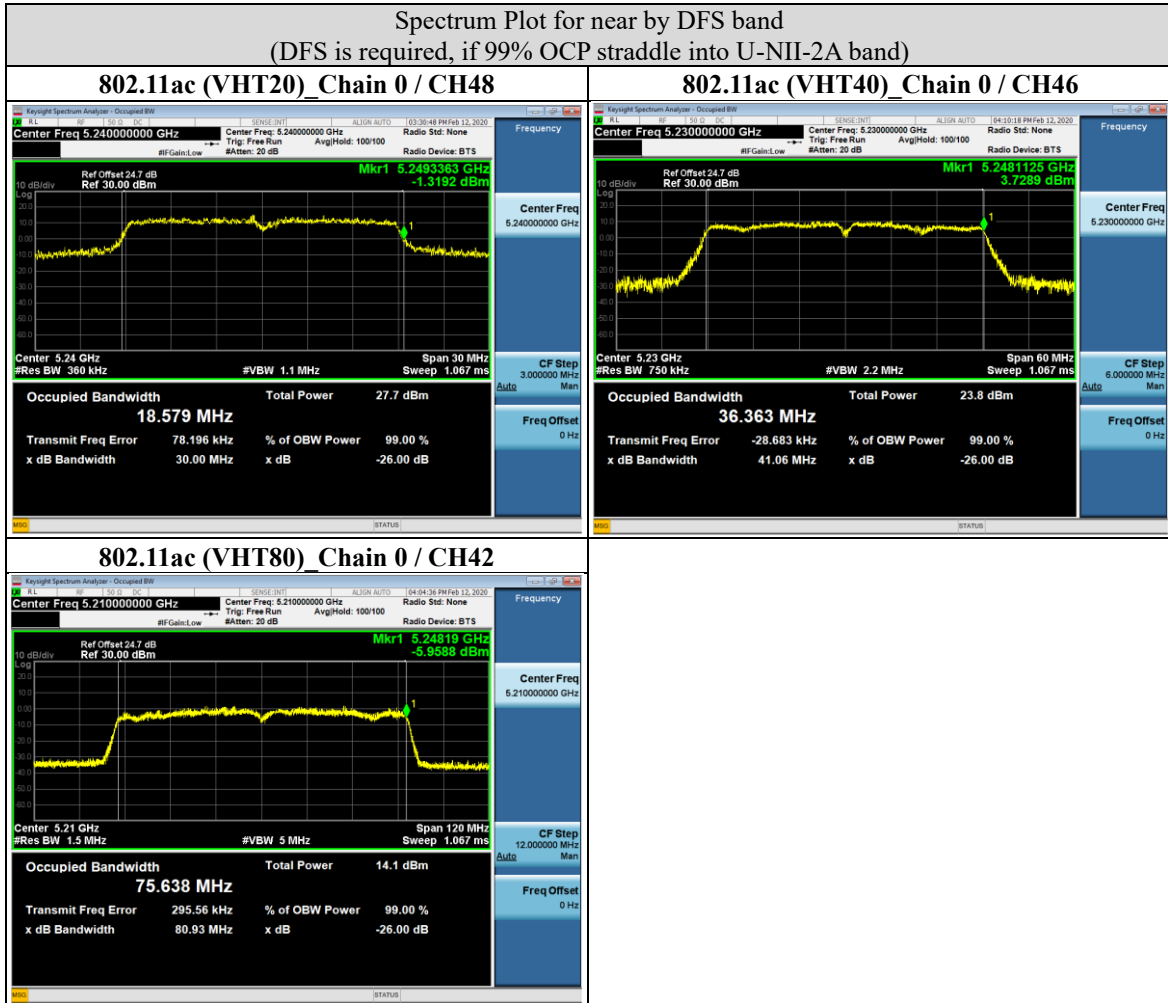


Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone : +886-2-7737-3000

Facsimile (FAX) : +886-3-583-7948

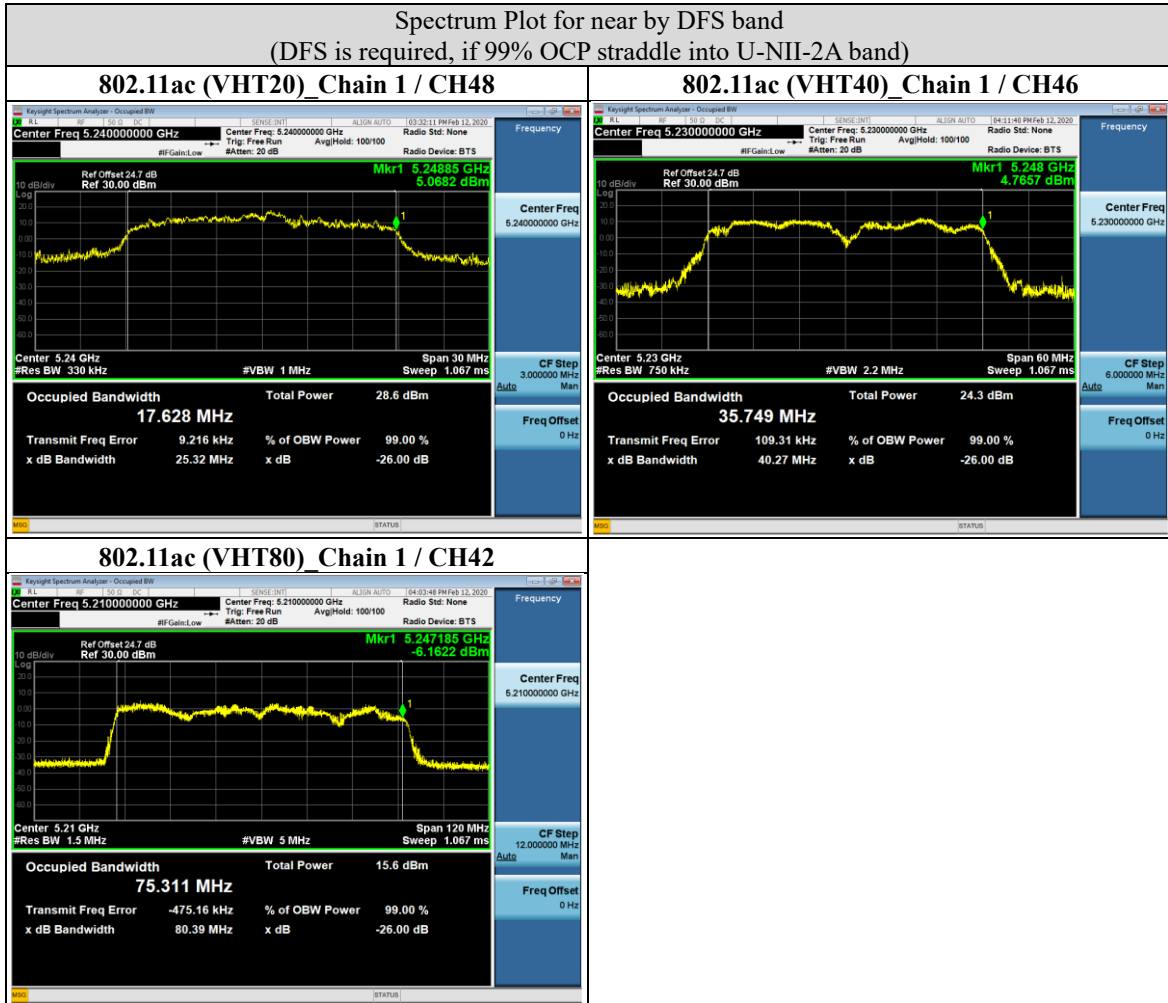



9.4. Conducted output power

Requirements

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
		Fixed point-to-point Access Point	1 Watt (30 dBm) If $G_{TX} > 23$ dBi, then $P_{Out} = 30 - (G_{TX} - 23)$
	√	Indoor Access Point	1 Watt (30 dBm) If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$
		Client device	250mW (24 dBm) If $G_{TX} > 6$ dBi, then $P_{Out} = 24 - (G_{TX} - 6)$
U-NII-3	---		For Point-to-multipoint systems (P2M): 1 Watt (30 dBm). If $G_{TX} > 6$ dBi, then $P_{Out} = 30 - (G_{TX} - 6)$ For Point-to-point systems (P2P): 1 Watt (30 dBm)

Note:

- P_{Out} = maximum conducted output power in dBm,
- G_{TX} = the maximum transmitting antenna directional gain in dBi.
- Directional Gain = $G_{ant} + 10 \log(N_{ant})$ dBi.

Nant: Number of Transmit Antennas

G1, G2,..., Gn: Gain of Individual Antennas (Same for Each Antenna)

- B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Test Procedure

Test method PM-G

For 802.11a, 802.11ac (VHT20), 802.11ac (VHT40)

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst and set the detector to AVERAGE. Duty factor is not added to measured value.


Test method SA-1

For 802.11ac (VHT80)


- Set span to encompass the entire 26 dB EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- Set sweep trigger*.
- Set RBW = 1 MHz.
- Set VBW \geq 3 MHz
- Number of points in sweep \geq 2 Span / RBW.
- Sweep time \leq (number of points in sweep) * T
- Using emission bandwidth to determine the frequency span for integration the channel bandwidth.
- Detector = RMS.
- Trace mode = max hold.
- Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

* If transmit duty cycle < 98%, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle \geq 98%, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run.”

Test Setup



The loss between RF output port of the EUT and the input port of the Power Meter has been taken into consideration.



The loss between RF output port of the EUT and the input port of the Spectrum Analyzer has been taken into consideration.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan
Telephone :+886-2-7737-3000
Facsimile (FAX) :+886-3-583-7948



Test Data

Non-Beamforming Mode

802.11a

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
36	5180	17.34	17.44	109.663	20.40	30	PASS
44	5220	20.36	20.37	217.536	23.38	30	PASS
48	5240	22.13	22.61	345.695	25.39	30	PASS
149	5745	19.67	19.72	186.439	22.71	30	PASS
157	5785	19.5	19.55	179.282	22.54	30	PASS
165	5825	19.49	19.51	178.251	22.51	30	PASS

NOTE: Directional gain = 4.45 dBi < 6 dBi, so the limit no need to reduced.

802.11ac (VHT20)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
36	5180	17.17	17.29	105.699	20.24	30	PASS
44	5220	20.2	20.26	210.883	23.24	30	PASS
48	5240	22.45	22.51	354.03	25.49	30	PASS
149	5745	19.8	19.59	186.49	22.71	30	PASS
157	5785	19.86	19.56	187.193	22.72	30	PASS
165	5825	19.53	19.48	178.459	22.52	30	PASS

NOTE: Directional gain = 4.45 dBi < 6 dBi, so the limit no need to reduced.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



802.11ac (VHT40)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
38	5190	14.29	14.52	55.167	17.42	30	PASS
46	5230	19.89	20.06	198.89	22.99	30	PASS
151	5755	22.16	22.13	327.742	25.16	30	PASS
159	5795	22.03	22.23	326.697	25.14	30	PASS

NOTE: Directional gain = 4.45 dBi < 6 dBi, so the limit no need to reduced.

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
42	5210	12.45	12.57	35.651	15.52	30	PASS
155	5775	19.71	19.74	187.73	22.74	30	PASS

NOTE: Directional gain = 4.45 dBi < 6 dBi, so the limit no need to reduced.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948

Doc No: 17-EM-F0878 / 5.0



Beamforming Mode

802.11ac (VHT20)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
36	5180	13.95	14.97	56.236	17.50	28.54	PASS
44	5220	20.45	20.71	228.678	23.59	28.54	PASS
48	5240	21.38	21.89	291.929	24.65	28.54	PASS
149	5745	21.23	21.86	286.201	24.57	28.54	PASS
157	5785	21.92	21.48	296.202	24.72	28.54	PASS
165	5825	21.15	21.88	284.487	24.54	28.54	PASS

NOTE: Directional gain = 7.46 dBi > 6 dBi , so the limit shall be reduced.

802.11ac (VHT40)

CHAN.	FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
38	5190	8.25	9.04	14.7	11.67	28.54	PASS
46	5230	17.54	18.23	123.281	20.91	28.54	PASS
151	5755	20.56	20.92	237.358	23.75	28.54	PASS
159	5795	20.85	21.06	249.263	23.97	28.54	PASS

NOTE: Directional gain = 7.46 dBi > 6 dBi , so the limit shall be reduced.

802.11ac (VHT80)

CHAN.	CHAN. FREQ. (MHz)	MAXIMUM CONDUCTED POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		chain 0	chain 1				
42	5210	5.79	6.91	8.702	9.40	28.54	PASS
155	5775	14.58	14.13	54.59	17.37	28.54	PASS

NOTE: Directional gain = 7.46 dBi > 6 dBi , so the limit shall be reduced.

Underwriters Laboratories Taiwan Co., Ltd.

Building B and Building E, No. 372-7, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County, Taiwan

Telephone :+886-2-7737-3000

Facsimile (FAX) :+886-3-583-7948