


NOTES:

- 1.材質:打字消銀龍(50#),表面不上亮膜
- 2.整體尺寸公差為 +/-0.3mm
- 3.進料方式:捲狀,每捲1000pcs
- 4.歐盟RoHS限用物質
原料與外加工(印刷/噴漆/電鍍/染色/上光/背膠/薄膜/溶劑等)物質
須符合規範如下:

項次	系列元素	含量
1	鉛(Pb)	<80 ppm
2	鎘(Cd)	<80 ppm
3	汞(Hg)	<80 ppm
4	六價鉻(Cr+6)	<80 ppm
5	多溴聯苯(PBBs)	<80 ppm
6	多溴二苯醚(PBDEs)	<80 ppm
以上六大元素總合		<80 ppm

REVISIONS			
ECN	DESCRIPTION	DATE	APPROVED
1			
2			

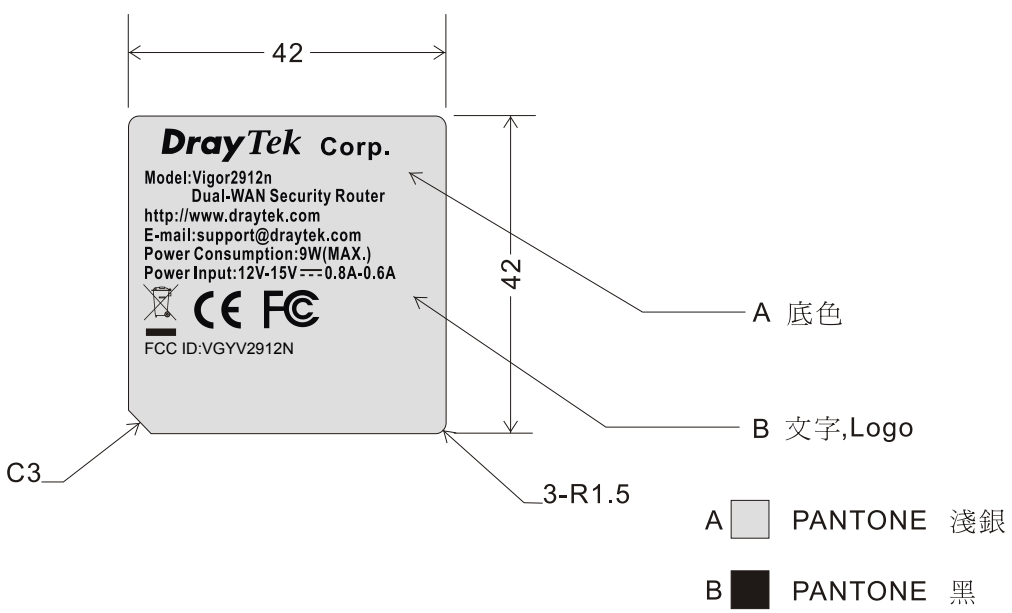

DIM	MAT'L	CORRUGATED PAPER		No. 26, Fu Shing Road, HuKou County Hsin-Chu Industrial Park, Hsin-Chu, Taiwan 303 ROC TEL: 886-3-5972727 FAX: 886-3-5972121 http://www.draytek.com	TYPE	TITLE		Tolerances unless otherwise specified		
	L<200	±1			Doc/No	Vigor2912n	MODEL LABEL	Angle	±1/2°	±1°
200<L<500	±1.5	REV.DATE	ISSUED DATE	Material	Drawing No.	Part No.	Rev.	300-500 ±0.3	±0.6	
500<L<1000	±2	PAGE.OF	Version	SEE NOTES	Drawn	Date	UNIT	200-300 ±0.25	±0.5	
1000<L<1800	±2.5			Heat Treatment	Checked	Date	Q'TY	120-200 ±0.2	±0.4	
1800<L<3000	±3			Surface Treatment	Approved	Date	Scale	60-120 ±0.15	±0.3	
3000<L	±5			SEE NOTES	Size	A4	Sheet	10-60 ±0.1	±0.2	
								CLASS	A	B