


What's in the Box?

- ▶ KDC280
- ▶ Type-C Cable
- ▶ Protective Rubber Boot
- ▶ KDC® Lanyard
- ▶ Quick Manual
- ▶ KOAMTACON Guide

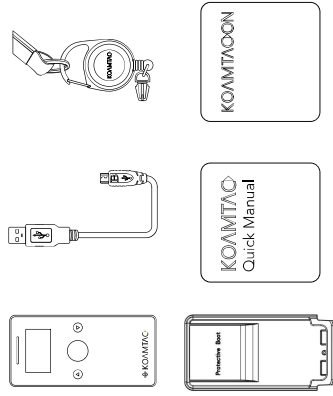


Powering On/Off

Power On

Press and hold the SCAN and DOWN buttons for 3 seconds.

Power Off

Press and hold the SCAN and DOWN buttons for 3 seconds again.



Additional Accessories

- ▶ 1-Slot and 4-Slot Charging Cradles
- ▶ 650mAh Battery
- ▶ Type-C USB Cable
- ▶ KBLE50 BLE Dongle
- ▶ Protective Rubber Boot

Visit our website for more information.



116 Village Blvd, Ste 305, Princeton, NJ 08540
 +1 609-256-4700 p | +1 609-228-4373 f
 info@koamtac.com | www.koamtac.com




KDC280 Mini Guide



Basic Operation

1. Aim the KDC directly at the barcode and press the SCAN button, ensuring the beam covers the barcode horizontally.



*KDC280C

2. A successful scan (A) will sound 1 beep, show a green LED, and display the scanned info on the screen. An unsuccessful scan (B) will sound 5 beeps, show a red LED, and display "Read Failed" on the screen.



Bluetooth Profiles Explained

HID

Allows one-way Bluetooth communication with an Android or iOS host device. The KDC only transmits data to the host device.

SPP

Allows two-way Bluetooth communication. The KDC transmits data to the host device and the host can transmit data back to the KDC.

**HID
Windows**

Allows one-way Bluetooth communication with a Windows PC. The KDC only transmits data to the Windows PC.

HID inputs data directly into an application. SPP requires the KOAMTAC KTSync® app or integration of the KOAMTAC SDK to input data into an application.

Pairing & Connecting

1. Navigate to the Bluetooth setting on the host PC, Mac, Smartphone, or Tablet.
2. Ensure that Bluetooth is enabled on the host device and searching for devices.
3. Using the KDC, scan the pairing barcode that corresponds to your desired Bluetooth profile. If you are unsure which Bluetooth profile is right for you, please refer to previous panel.
4. Check the list of available Bluetooth devices on your host device. In iOS, the application will need to search devices.
5. From the list, select the KDC280 listed by serial number in brackets that matches the serial number found on the back side of the KDC280.
6. In HID Mode, KDC280 is ready to use.
7. To complete connection in SPP Mode, launch KTSync or your application and select KDC280 to connect.

Pairing Barcodes



HID



HID Windows



SPP

Pairing via NFC (Android Only)

This feature applies only to Android host devices and is available for HID or SPP pairing profiles only.

1. The default connection mode is SPP. To connect in SPP mode, approach the NFC antenna area on the back of the host device with the KDC to complete pairing.
2. If HID mode is preferred, scan the HID Mode barcode first, then approach the NFC antenna area on the back of the host device with the KDC to complete pairing.



NFC HID



NFC SPP

Using Keyboard Wedge

Keyboard wedge allows you to use your KDC as a keyboard. The HID profile works as keyboard wedge by default. When using SPP, KTSync provides a keyboard wedge function when KTSync keyboard is enabled. Please refer to the KDC Reference Manual for detailed instructions to enable KTSync keyboard.

1. Ensure that the KDC is connected to the host using the HID profile or the KDC is connected via KTSync keyboard using the SPP profile.
2. Open any application on the host device that contains a text field you want to populate.
3. Tap the text field in the application.
4. Scan any barcode with the KDC.
5. The barcode data will then populate in the text field.

KTSync & SDK

KTSync® is a program which communicates with the KDC via Bluetooth. It enables users to read and store data. KTSync is compatible with iOS, Android, Windows, and Mac. It also supports wedging and downloading data from the KDC.

For more information about KTSync, please visit: www.koamtac.com/support/downloads/applications

The Software Development Kit (SDK) is the perfect solution for creating a custom application to collect data utilizing your KDC. The KOAMTAC SDK covers all major development platforms: Android, iOS, Windows, Xamarin, and Cordova. Developers may take advantage of the complimentary SDK and enjoy the full benefits of the KOAMTAC Developer Program.

For more information regarding the KOAMTAC Developer Program or to request the latest SDKs, visit: www.koamtac.com/support/downloads/sdk or e-mail sdk@koamtac.com.

Helpful Barcodes




Enable Beep Sound



Disable Beep Sound

KDC280 Diagram

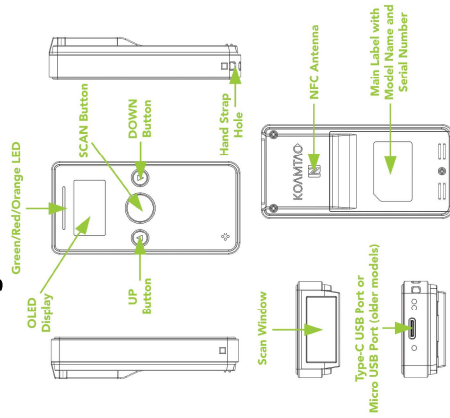

Specs

Functionality

Memory Flash ROM: 1MB Program, 5MB User Data
Memory RAM: 256KB
Can store more than 262,000 barcodes (EAN-13)

Wedging & Synchronization

Store to a file or transfer to an application
Keyboard wedge function
Add-on prefixes and suffixes
Barcode option selection

Scan Range (20mil Code39)

Imager: 2.36" to 18.35" (60 mm to 466 mm)

Physical Characteristic

Size: 1.6" X 3.2" X 0.9"
40mm X 82mm X 18mm

Weight: 2.0oz, 58g

KDC280 Charging Cradles & Accessories



KDC280 1-Slot Charging Cradle
Charges one KDC280 or KDC270.



KDC280 4-Slot Charging Cradle
Charges up to four KDC280 or KDC270 devices.



Protective Rubber Boot

The Protective Boot adds shock absorption to your KDC, protecting it from drops and falls that could be damaging.

MG_KDC280_20220506