



TEST REPORT

Date: 2012-04-13

Report No.: 60.870.11.023.01F

Applicant: Acoustic Arc International Ltd.
Unit 311B, 3/F., IC Development Centre, 6
Science Park West Avenue, Hong Kong Science
Park, Shatin, New Territories, Hong Kong

Description of Samples: Model name: Bluetooth Speaker
Brand name: aai
Model no.: BT1110, BT1120
FCCID: VHC-AAI-BT1120-00

Date Samples Received: 2011-12-05

Date Tested: 2011-12-05 to 2012-04-13

Investigation Requested: FCC Part 15 Subpart C, Section 15.247

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks: ----
Checked by:

Approved by:-

Ray Cheung
Project Engineer
Wireless & Telecom Department

Jeff Pong
Operating Manager
Wireless & Telecom Department

**CONTENT:**

Cover	Page 1 of 42
Content	Page 2-3 of 42
<u>1.0</u>	<u>General Details</u>
1.1	Test Laboratory
1.2	Applicant Details
1.3	Equipment Under Test [EUT]
1.4	Related Submittal(s) Grants
<u>2.0</u>	<u>Technical Details</u>
2.1	Investigations Requested
2.2	Test Standards and Results Summary
<u>3.0</u>	<u>Test Methodology</u>
3.1	Radiated Emission
3.2	Field Strength Calculation
3.3	Conducted Emission
<u>4.0</u>	<u>Test Results</u>
4.1	Number of Frequency Hopping
4.2	20dB Bandwidth Measurement
4.3	Hopping Channel Carrier Frequency Separation
4.4	Average Time of Occupancy
4.5	Band Edge Measurement
4.6	Maximum Output Power
4.7	Out of Band Emissions and Emissions in Restricted Bands
4.8	Conducted Emission on AC Mains



5.0 RF Exposure Compliance Requirement

Page 41 of 42

6.0 List of Measurement Equipments

Page 42 of 42

Appendix A

Photos of Test Setup

Appendix B

External EUT Photos

Appendix C

Internal EUT Photos



1.0 General Details

1.1 Test Laboratory

SEM Test Compliance Server Co., Ltd.
3/F, jinbao Commerce Building, Xin'an Fanshen Road,
Bao'an District, Shenzhen, P.R.C.
Registration Number: 994117

Tested by:

A handwritten signature in blue ink, appearing to read 'John Zhi', written over a horizontal line.

John Zhi

1.2 Applicant Details

Applicant

Acoustic Arc International Ltd.

Unit 311B, 3/F, IC Development Centre, 6 Science
Park West Avenue, Hong Kong Science Park, Shatin,
New Territories, Hong Kong

Manufacturer

Acoustic Arc International Ltd.

Unit 311B, 3/F, IC Development Centre, 6 Science
Park West Avenue, Hong Kong Science Park, Shatin,
New Territories, Hong Kong



1.3 Equipment Under Test [EUT]

Description of EUT

Product Description:	Bluetooth Speaker
Model No.:	BT1110, BT1120
Brand Name:	aai
FCCID:	VHC-AAI-BT1120-00
Rating:	- DC 5.0V, 1000mA powered by AC/DC power adaptor or .- 1 x 3.7V 800mAh Li-ion battery
Operated Frequency:	2402 - 2480 MHz
No. of Operated Channel:	79
Accessories and Auxiliary Equipments:	- AC/DC power adaptor - iPod - Bluetooth Player
Antenna Type:	Integral
Manufacture of Antenna:	Acoustic Arc International Ltd.
Antenna Gain:	0 dBi
Antenna Model:	N/A

General Operation of EUT

The Equipment Under Test (EUT) is a Bluetooth Speaker.

As per Client Declaration, the circuit design, PCB Layout, shielding and interface of BT1110 and BT1120 are identical, only the cosmetic are different. So we use BT1120 as a representative model to perform all testing.

FHSS Operation Principle:

This module is controlled by Bluetooth microchip to generate Pseudorandom Frequency Hopping Sequence, this module support 79 hopping channels. Refer to section 4.5 of this report to have more detail of Pseudorandom Hopping Algorithm.

1.4 Related Submittal(s) Grants

This is a signal application subjected to Certificate Authorization.



2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2010 and ANSI C63.4: 2003

2.2 Test Standards and Results Summary Tables

Test Condition	Test Requirement	Test Result	
		Pass	N/A
Number of Frequency Hopping	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth Measurement	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Hopping Channel Carrier Frequency Separation	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Average Time of Occupancy	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Pseudorandom Hopping Algorithm	Section 15.247 (a1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band Edge Measurement	Section 15.247	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Maximum Output Power	Section 15.247 (b1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Out of Band Emission	Section 15.247 (d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission in Restricted Band	Section 15.247 (d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Conducted Emission on AC Mains	Section 15.207	<input checked="" type="checkbox"/>	<input type="checkbox"/>
RF Exposure	Section 15.247 (i)	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Antenna Requirement	Section 15.203	<input checked="" type="checkbox"/> See note 1	<input type="checkbox"/>

Note 1 : The EUT uses a permanently attached antenna, which in accordance to Section 15.203, is considered sufficient to comply with the provisions of this section.

Remark: N/A - Not Applicable



3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$FS = R + \text{System Factor}$

$\text{System Factor} = AF + CF + FA - PA$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The test was performed in accordance with ANSI C63.4: 2003, with the following: initial measurements were performed in peak and average detection modes on the live line of personal computer, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

4.0 Test Results

4.1 Number of Hopping Frequency

Test Requirement:	FCC part 15 section 15.247 (a1)(iii)
Test Date:	2011-12-16
Mode of Operation:	Transmitting mode.
Detector Function:	Max Hold

Result: PASS

Measured Result :


Operating Channel Frequency in sequence:

2402 ; 2403 ; 2404 ; 2405 ; 2406 ; 2407 ; 2408 ; 2409 ; 2410 ; 2411 ; 2412 ; 2413 ; 2414 ; 2415 ;
 2416 ; 2417 ; 2418 ; 2419 ; 2420 ; 2421 ; 2422 ; 2423 ; 2424 ; 2425 ; 2426 ; 2427 ; 2428 ; 2429 ;
 2430 ; 2431 ; 2432 ; 2433 ; 2434 ; 2435 ; 2436 ; 2437 ; 2438 ; 2439 ; 2440 ; 2441 ; 2442 ; 2443 ;
 2444 ; 2445 ; 2446 ; 2447 ; 2448 ; 2449 ; 2450 ; 2451 ; 2452 ; 2453 ; 2454 ; 2455 ; 2456 ; 2457 ;
 2458 ; 2459 ; 2460 ; 2461 ; 2462 ; 2463 ; 2464 ; 2465 ; 2466 ; 2467 ; 2468 ; 2469 ; 2470 ; 2471 ;
 2472 ; 2473 ; 2474 ; 2475 ; 2476 ; 2477 ; 2478 ; 2479 ; 2480

Limit for Number of Hopping Channel [Section 15.247 (a1)(iii)]

At least 79 non-overlapping channels for 2400-2483.5MHz.

Result data graph shows the number of operation channels:

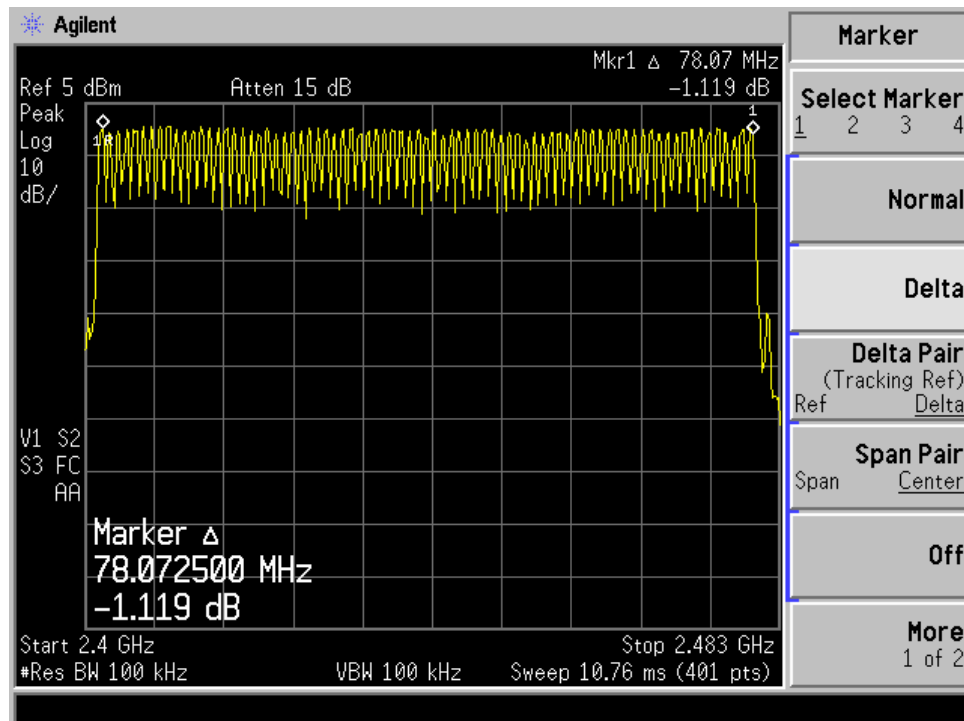

4.2 20dB Bandwidth Measurement

Test Requirement:	FCC part 15 section 15.247 (a1)
Test Date:	2011-12-16
Mode of Operation:	Transmitting mode.
Detector Function:	Max Hold


Test Setup:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Channel	Measured frequency (MHz)	20dB Bandwidth (MHz)
Lowest	2.402	0.856
Middle	2.441	0.858
Highest	2.480	0.853


This result is used for checking the hopping channel carrier frequencies separation.

Result data graph shows 20 dB bandwidth, CF = 2.402GHz, BW = 0.856MHz

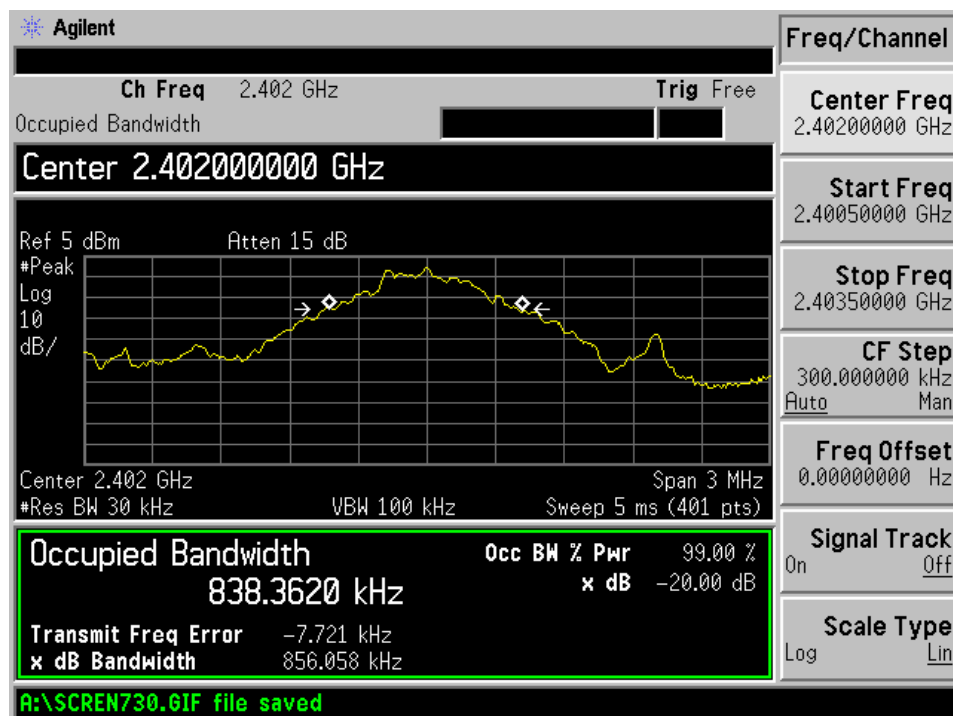




Result data graph shows 20 dB bandwidth, CF = 2.441GHz, BW = 0.858MHz

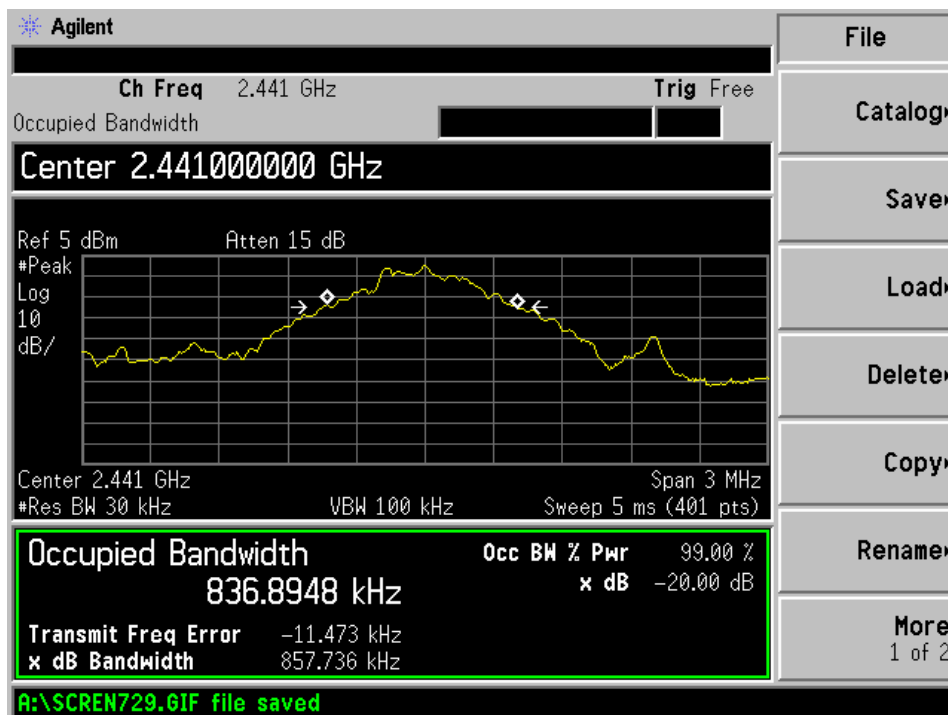

Result data graph shows 20 dB bandwidth, CF = 2.480GHz, BW = 0.853MHz

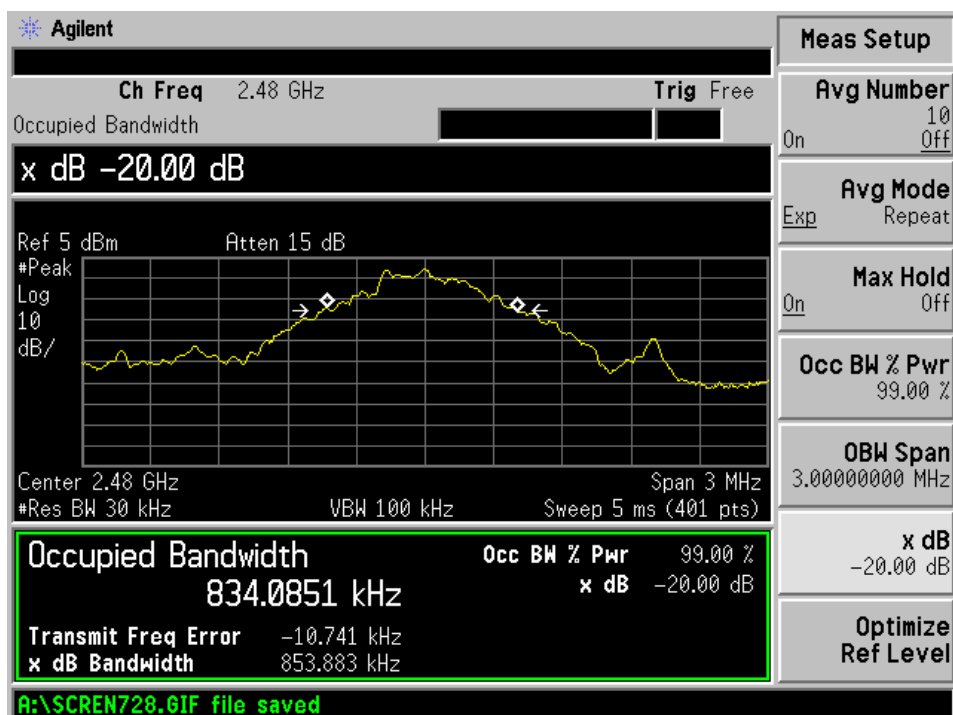

4.3 Hopping Channel Carrier Frequency Separation

Test Requirement:	FCC part 15 section 15.247 (a1)
Test Date:	2011-12-16
Mode of Operation:	Transmitting mode.
Detector Function:	Max Hold

Result: PASS

Measured Result :


Refer to the delta marker, the frequency separation between two adjacent channels is 1 MHz, therefore, the requirement of channel separated by a two-third of the 20dB bandwidth of the hopping channel is applied.

According to the test result shown in section 4.2, the maximum 20dB bandwidth is 0.858 MHz, so the hopping channel separation of this EUT is found to comply with the requirement.

Limits for Hopping Channel Separation [Section 15.247 (a1)]:

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

Result data graph shows the channel separation

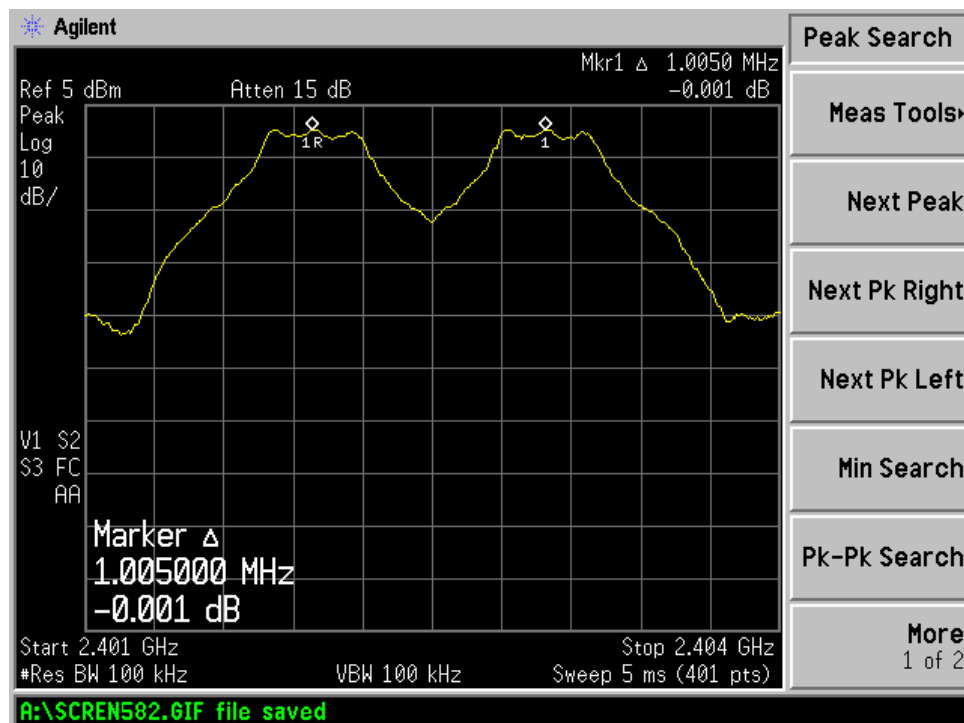

4.4 Average Time of Channel Occupancy

Test Requirement:	FCC part 15 section 15.247 (a1)(iii)
Test Date:	2011-12-16
Mode of Operation:	Transmitting mode.
Detector Function:	Zero span

Result : PASS

Measured Result :

Observing time for 79 hopping channels $79 \times 0.4\text{s} = 31.6\text{s}$

Dell Time = No. of Transmission (observing in 31.6s) x Length of Transmission time

No. of Transmission for each Packet (observing in 31.6s) as below:


DH1	= (64 pulses x 5)	= 320s
DH3	= (32 pulses x 5)	= 160s
DH5	= (22 pulses x 5)	= 110s

Result shown as below table and data graph.


Limits for Average Time of Occupancy [Section 15.247 (a1)(iii)]:

The average time of occupancy on any channel shall not be greater than 0.4 second within a period of 0.4 seconds multiplied by the number of hopping channels employed.


Result data graph shows the no. of pulses within 6.32s of DH1 Package

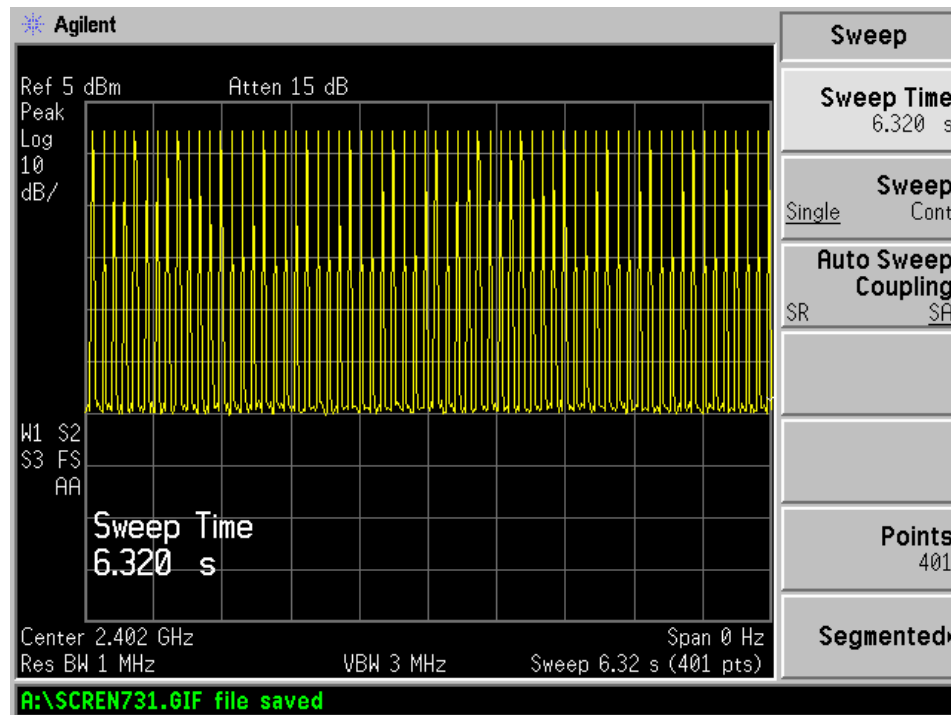

Result data graph shows the no. of pulses within 6.32s of DH3 Package

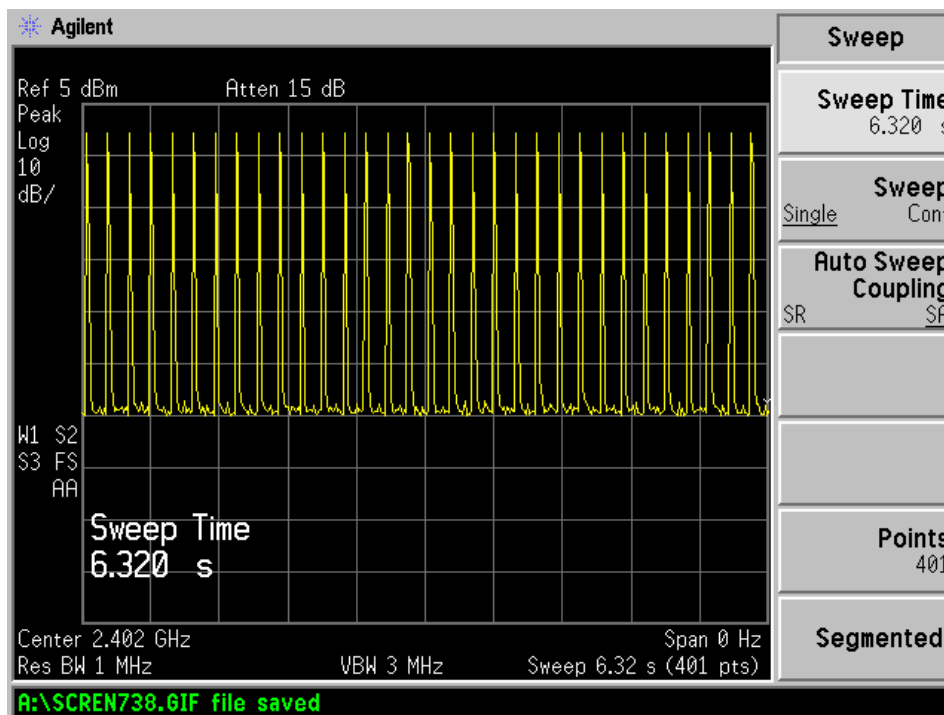


Result data graph shows the no. of pulses within 6.32s of DH5 Package

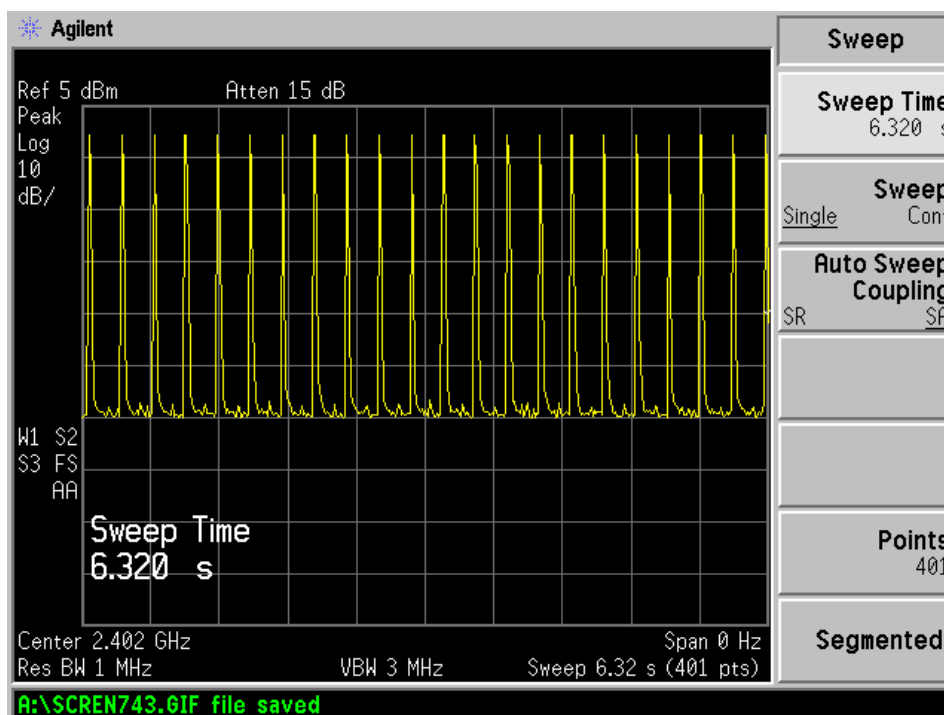


The table shown the result of Lowest Channel at 1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell time (ms)	Limit (ms)
DH1	2402	0.54	172.8	400
DH3	2402	1.81	289.6	400
DH5	2402	3.06	336.6	400


Result data graph shows the times slot of DH1 Package

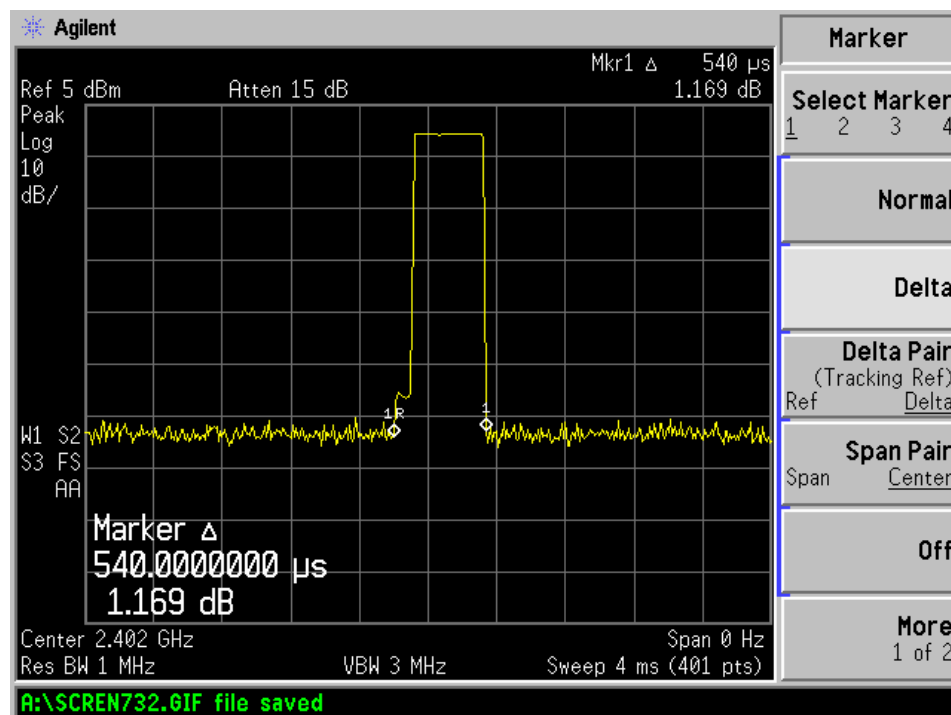

Result data graph shows the times slot of DH3 Package

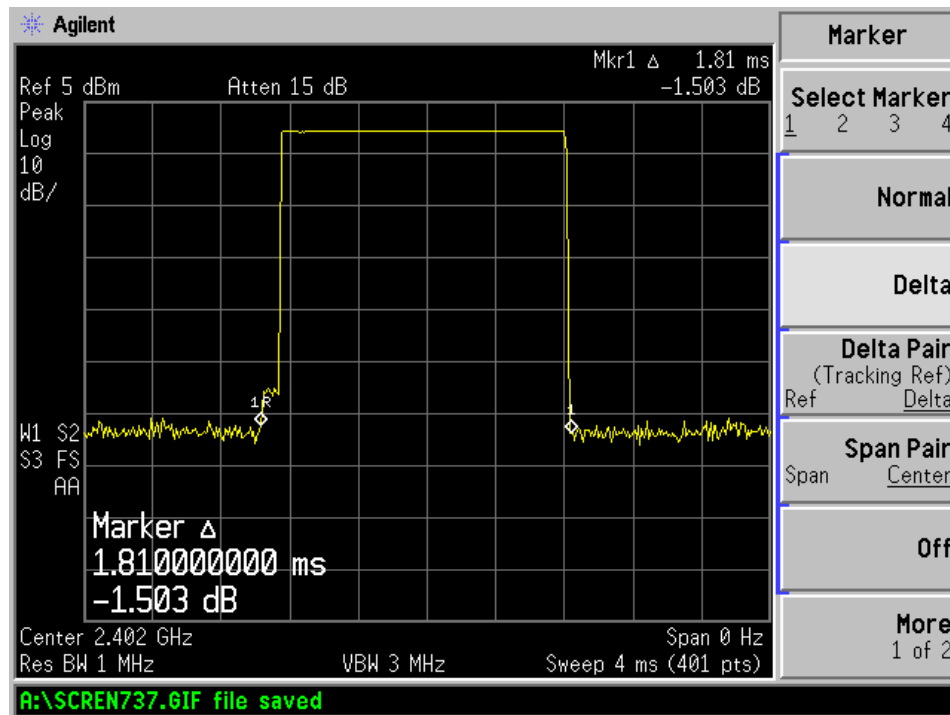


Result data graph shows the times slot of DH5 Package

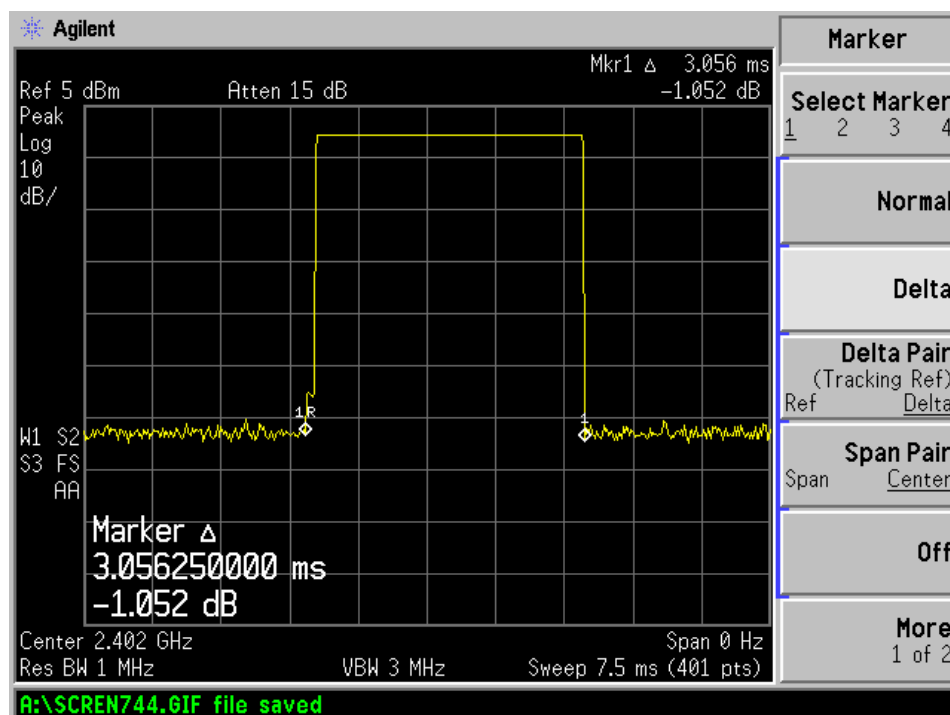


The table shown the result of Middle Channel at 1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell time (ms)	Limit (ms)
DH1	2441	0.54	172.8	400
DH3	2441	1.81	289.6	400
DH5	2441	3.08	338.8	400


Result data graph shows the times slot of DH1 Package

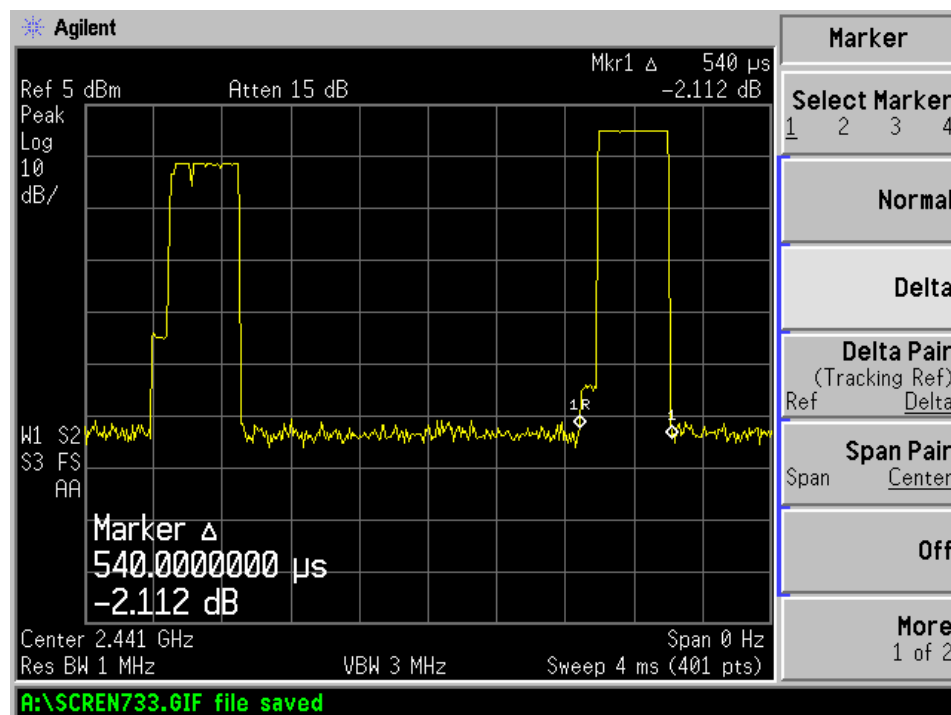

Result data graph shows the times slot of DH3 Package

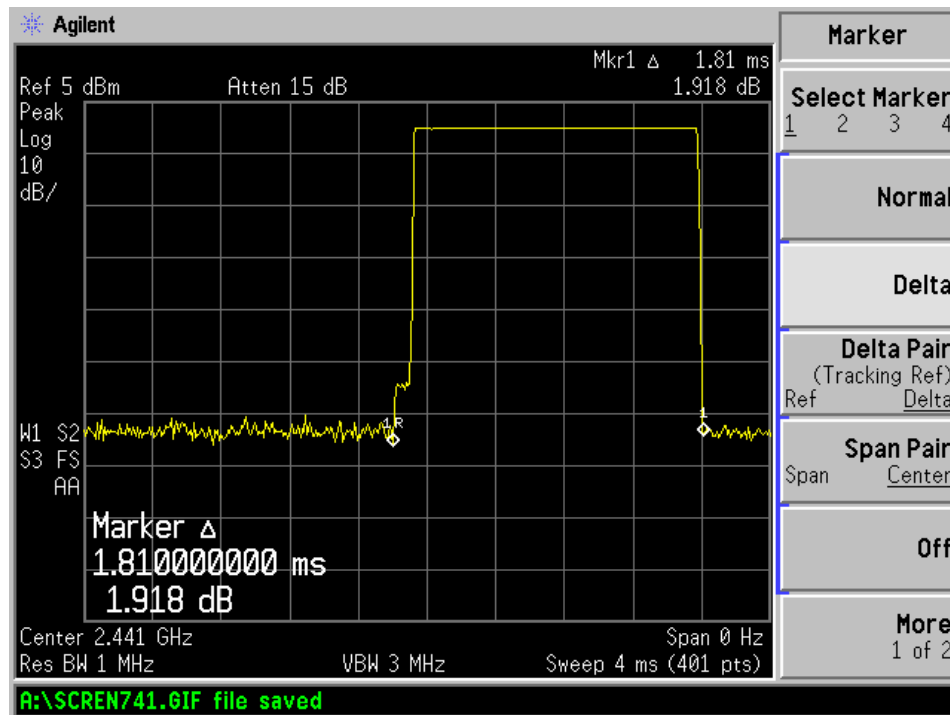


Result data graph shows the times slot of DH5 Package

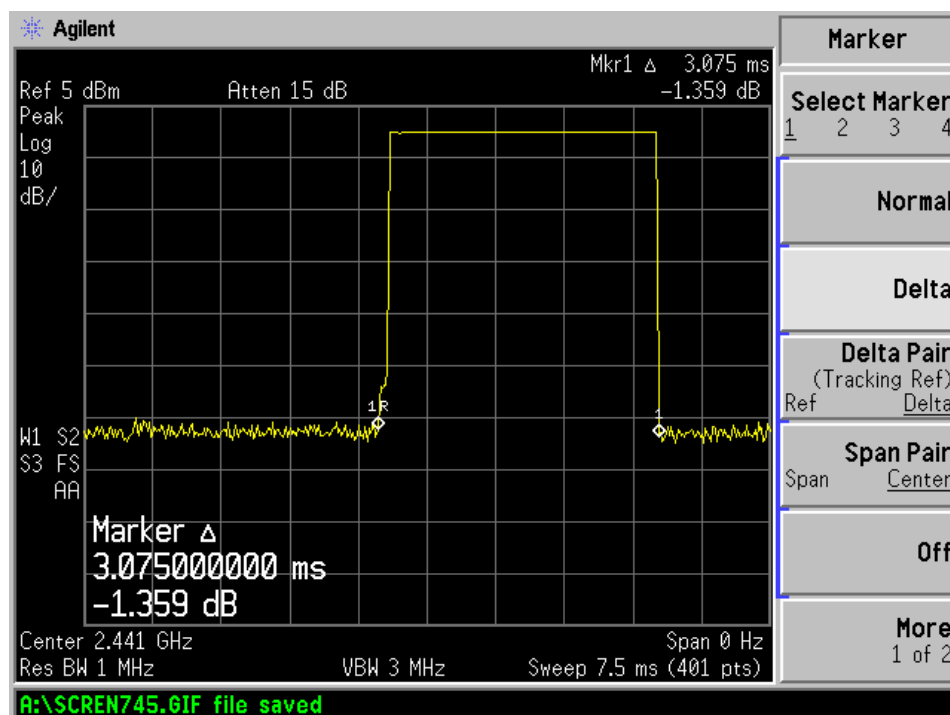


The table shown the result of Highest Channel at 1Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell time (ms)	Limit (ms)
DH1	2480	0.54	172.8	400
DH3	2480	1.80	288.0	400
DH5	2480	3.08	338.8	400


Result data graph shows the times slot of DH1 Package

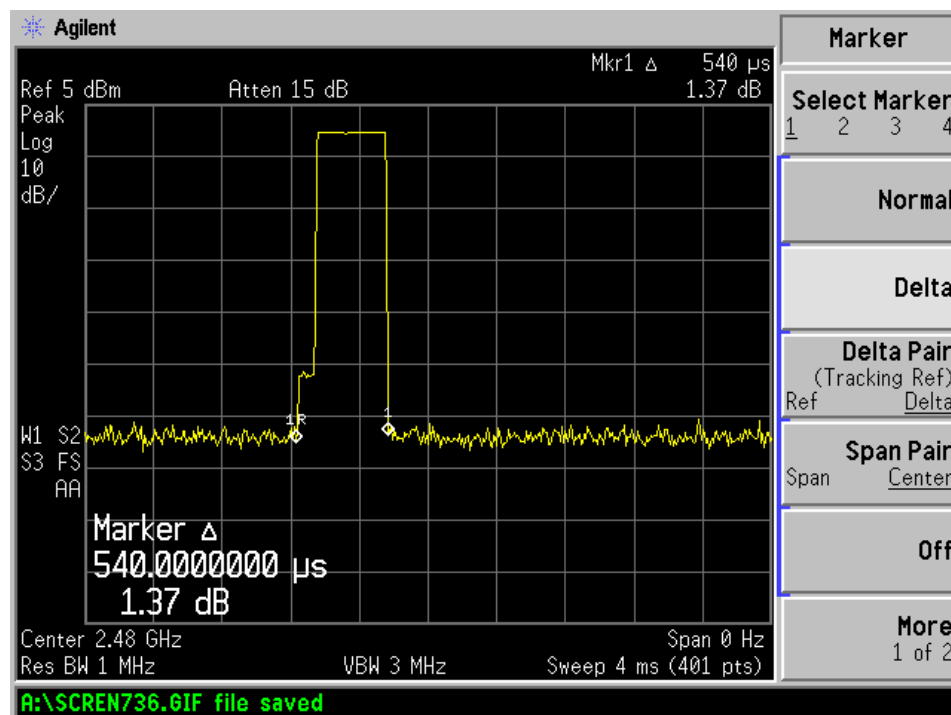

Result data graph shows the times slot of DH3 Package

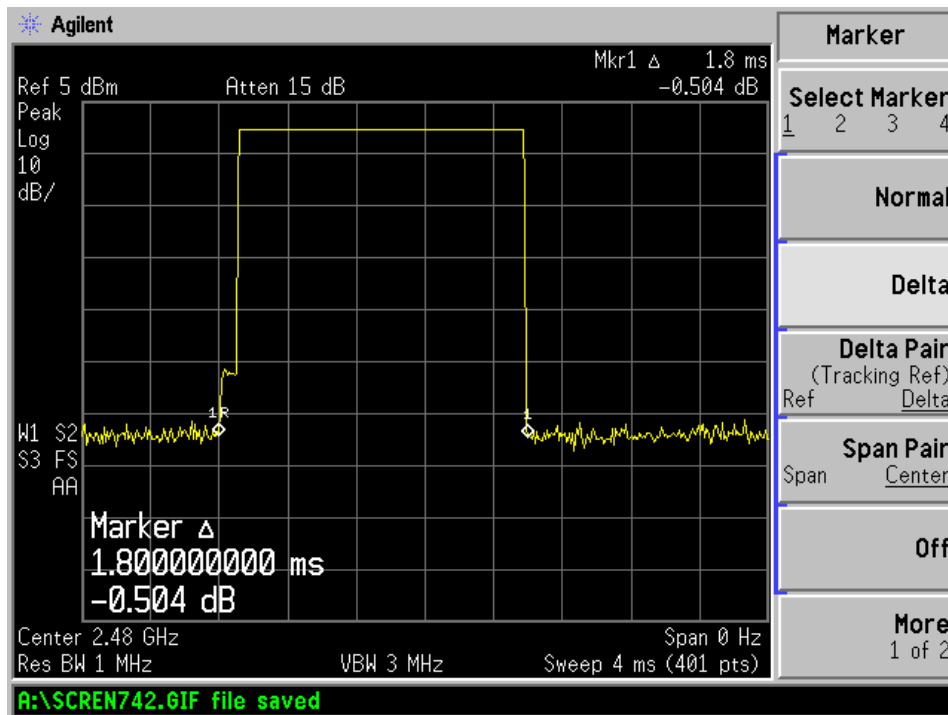


Result data graph shows the times slot of DH5 Package

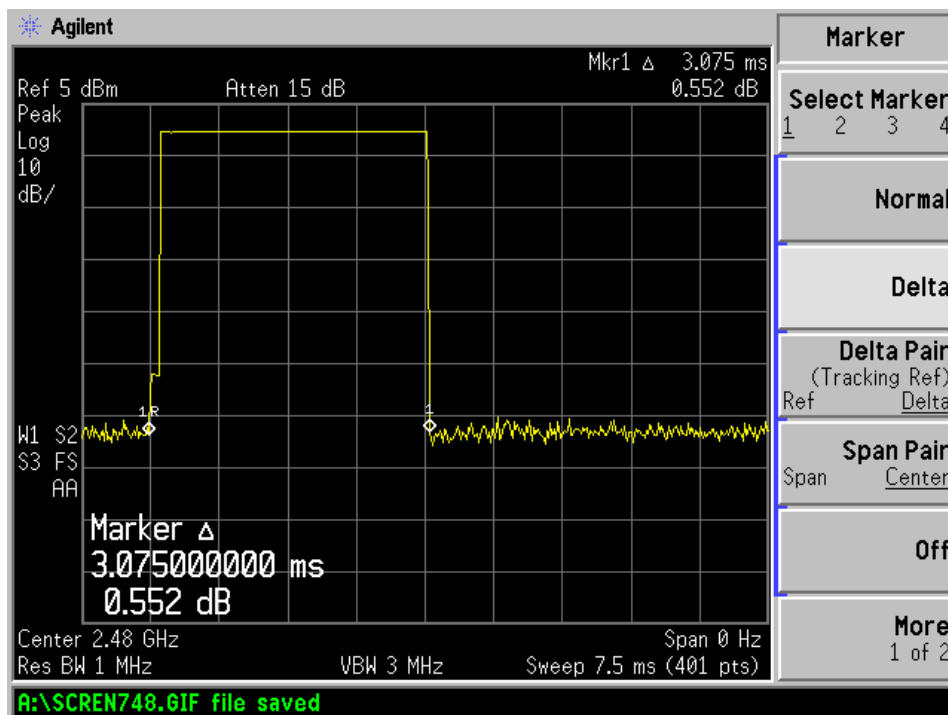


The table shown the result of Lowest Channel at 3Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell time (ms)	Limit (ms)
DH1	2402	0.55	176.0	400
DH3	2402	1.81	289.6	400
DH5	2402	3.09	339.9	400


Result data graph shows the times slot of DH1 Package

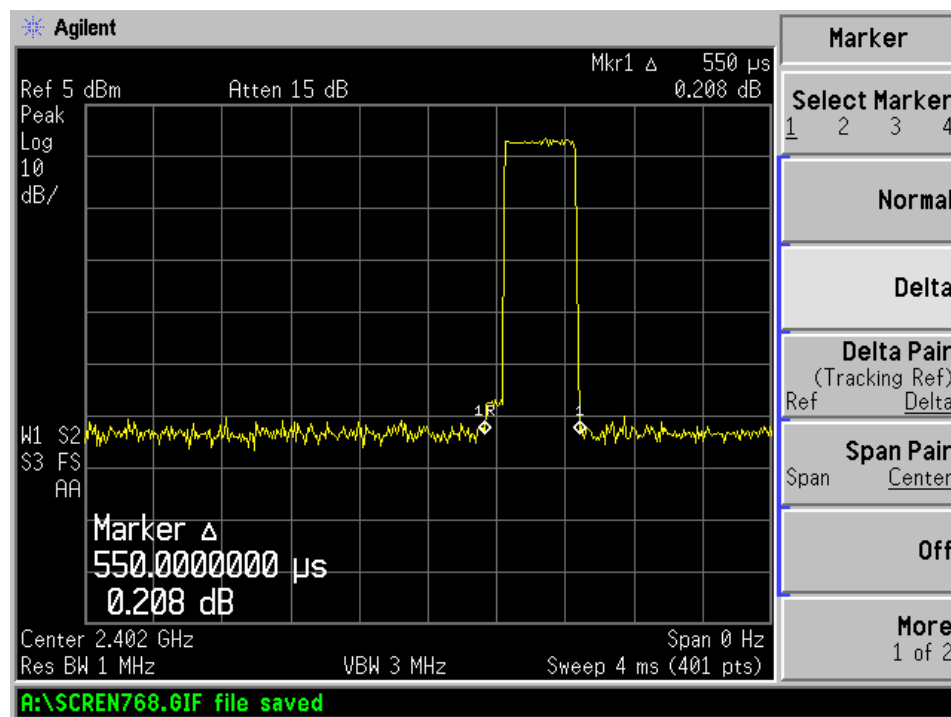

Result data graph shows the times slot of DH3 Package

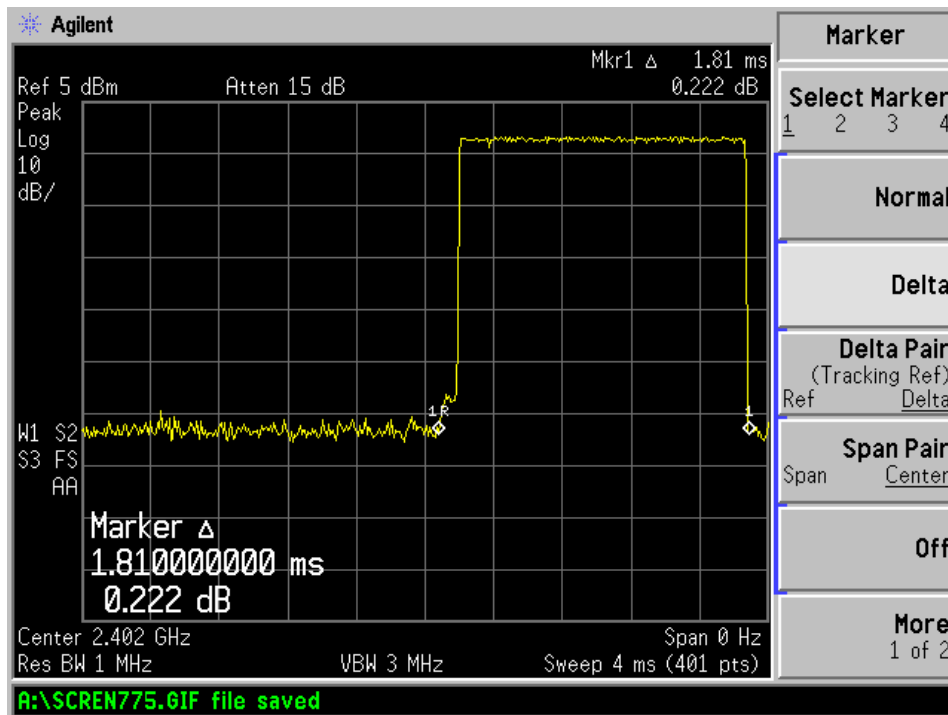


Result data graph shows the times slot of DH5 Package

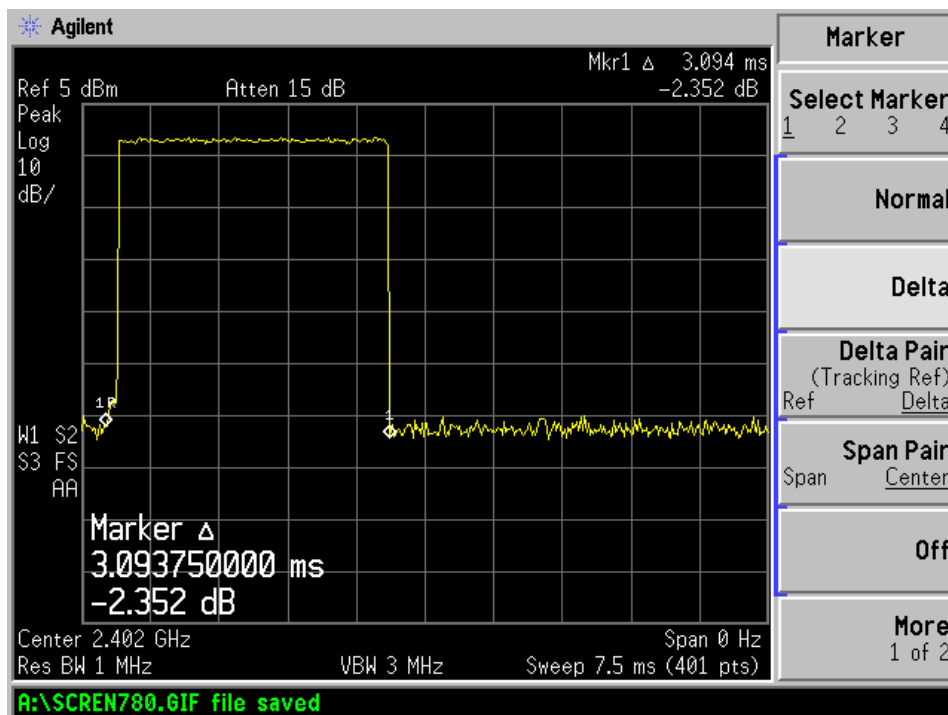


The table shown the result of Middle Channel at 3Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell time (ms)	Limit (ms)
DH1	2441	0.55	176.0	400
DH3	2441	1.81	289.6	400
DH5	2441	3.08	338.8	400


Result data graph shows the times slot of DH1 Package

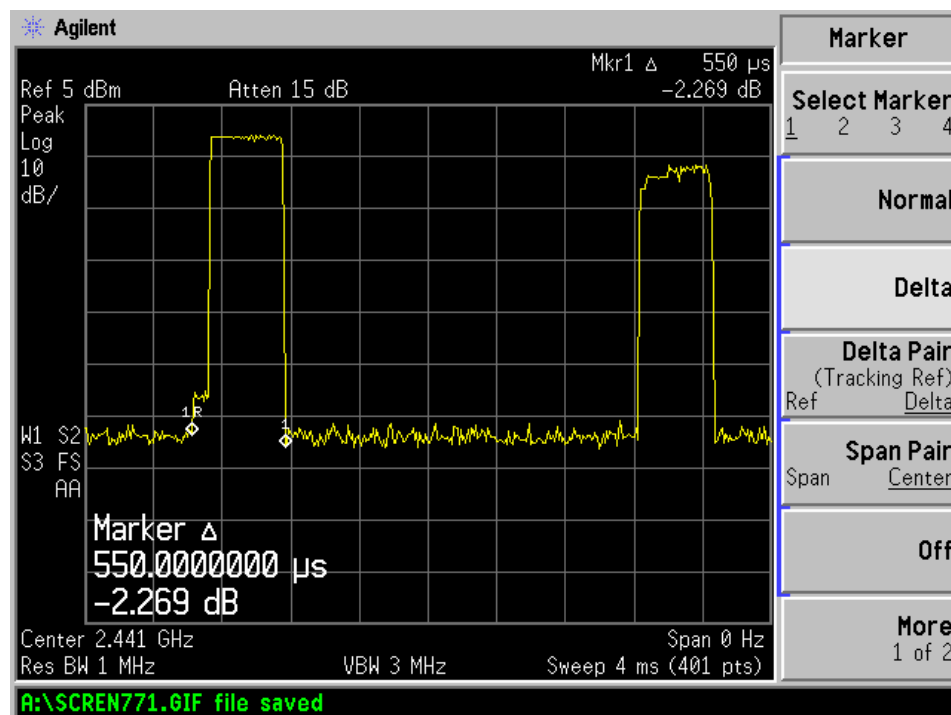

Result data graph shows the times slot of DH3 Package

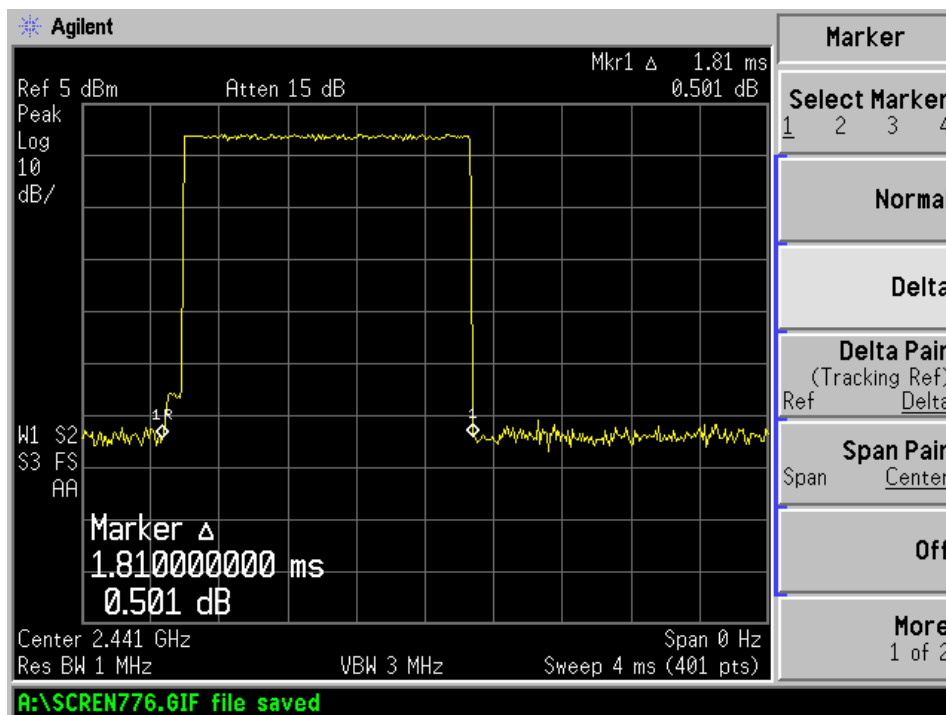


Result data graph shows the times slot of DH5 Package

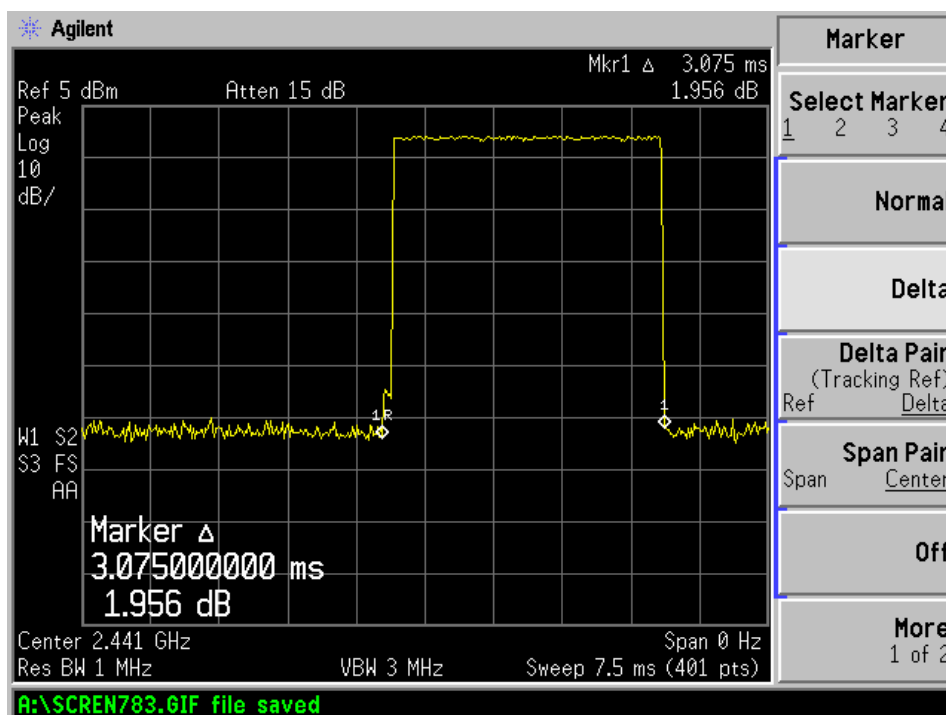


The table shown the result of Highest Channel at 3Mbps

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell time (ms)	Limit (ms)
DH1	2480	0.55	176.0	400
DH3	2480	1.81	289.6	400
DH5	2480	3.06	336.6	400


Result data graph shows the times slot of DH1 Package

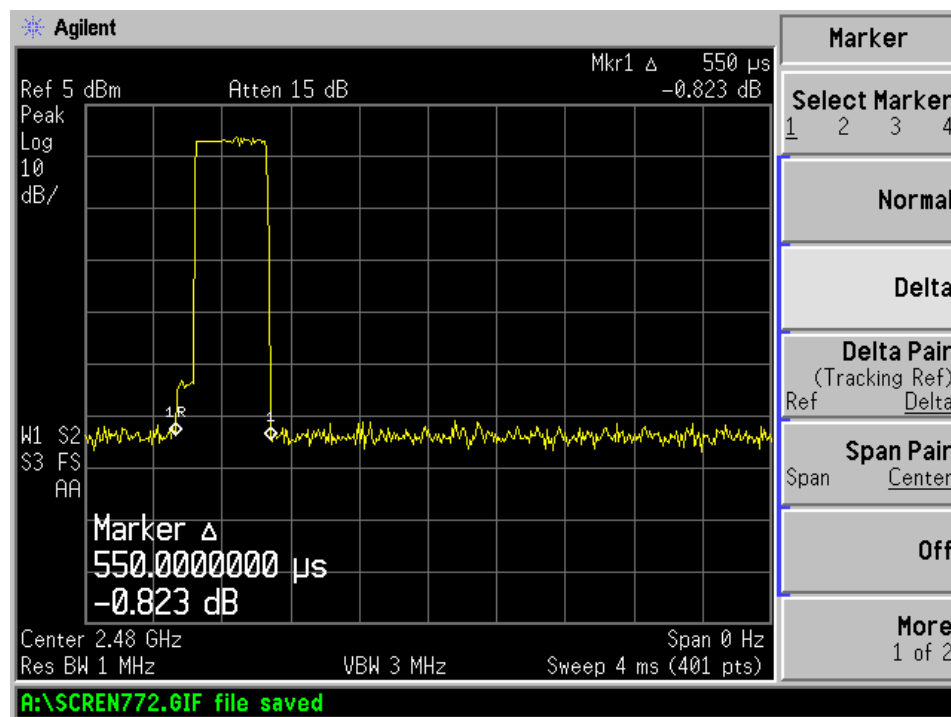

Result data graph shows the times slot of DH3 Package

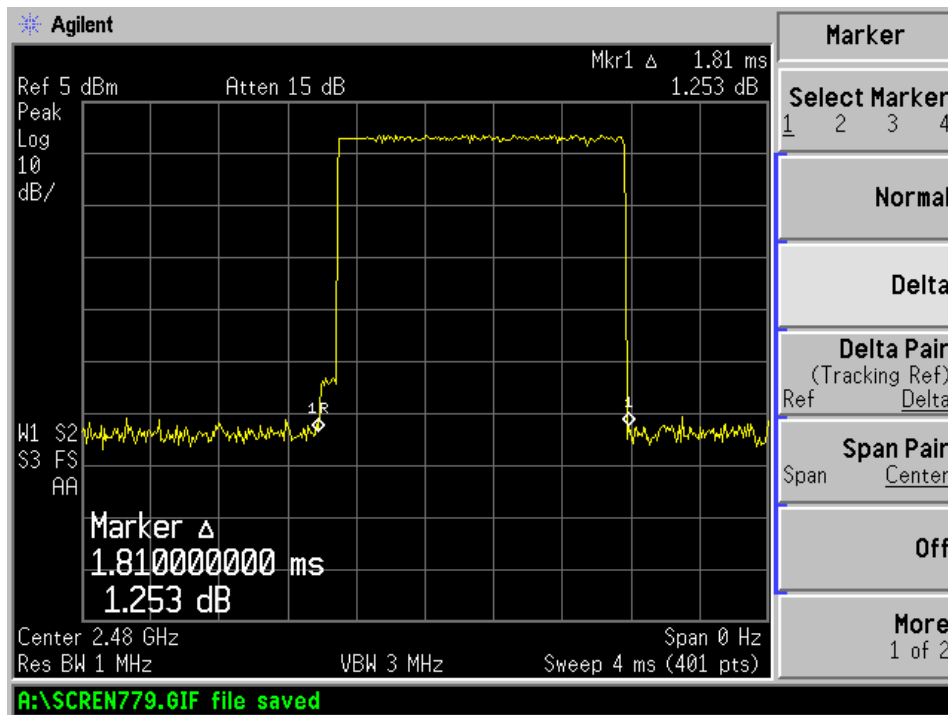

Result data graph shows the times slot of DH5 Package

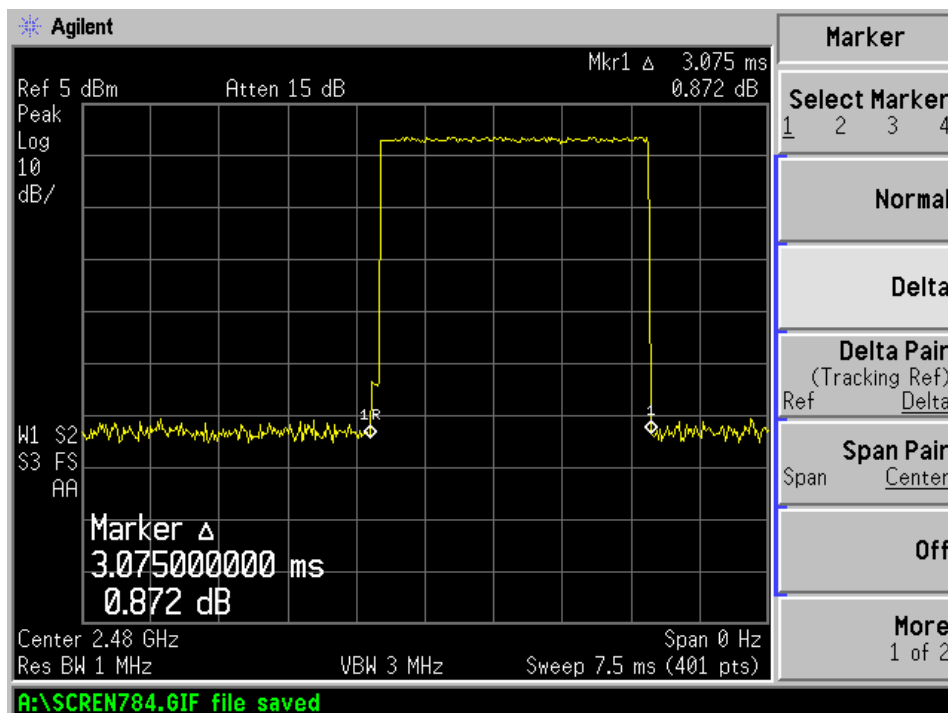

4.5 Band Edge Measurement

Test Requirement:	FCC part 15 section 15.247
Test Date:	2011-12-12
Mode of Operation:	Transmitting mode.
Detector Function:	Max Hold

Result: PASS


Measured Result :

Refer to the table and data graph, it shows the frequency of lower band edge and upper band edge separately.

Limits of Band Edge for Carrier Frequencies Operated within the Bands [Section 15.247]:


The carrier frequencies should operate within 2400-2483.5MHz.

Result table and data graph shows the frequency of lower channel.

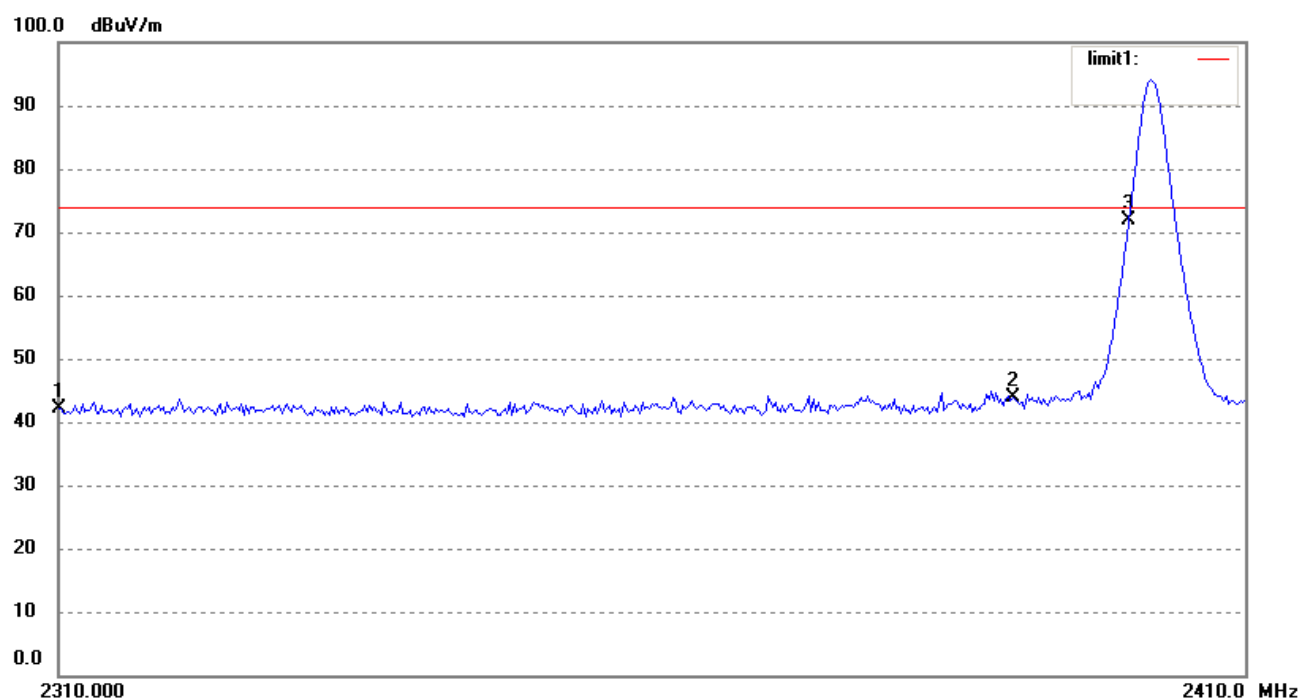

Maker No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	49.55	-7.51	42.04	74.00	-31.96	peak
2	2390.000	51.24	-7.34	43.90	74.00	-30.10	peak
3	2400.000	79.26	-7.31	71.95	74.00	-2.05	peak

Result table and data graph shows the frequency of upper channel.

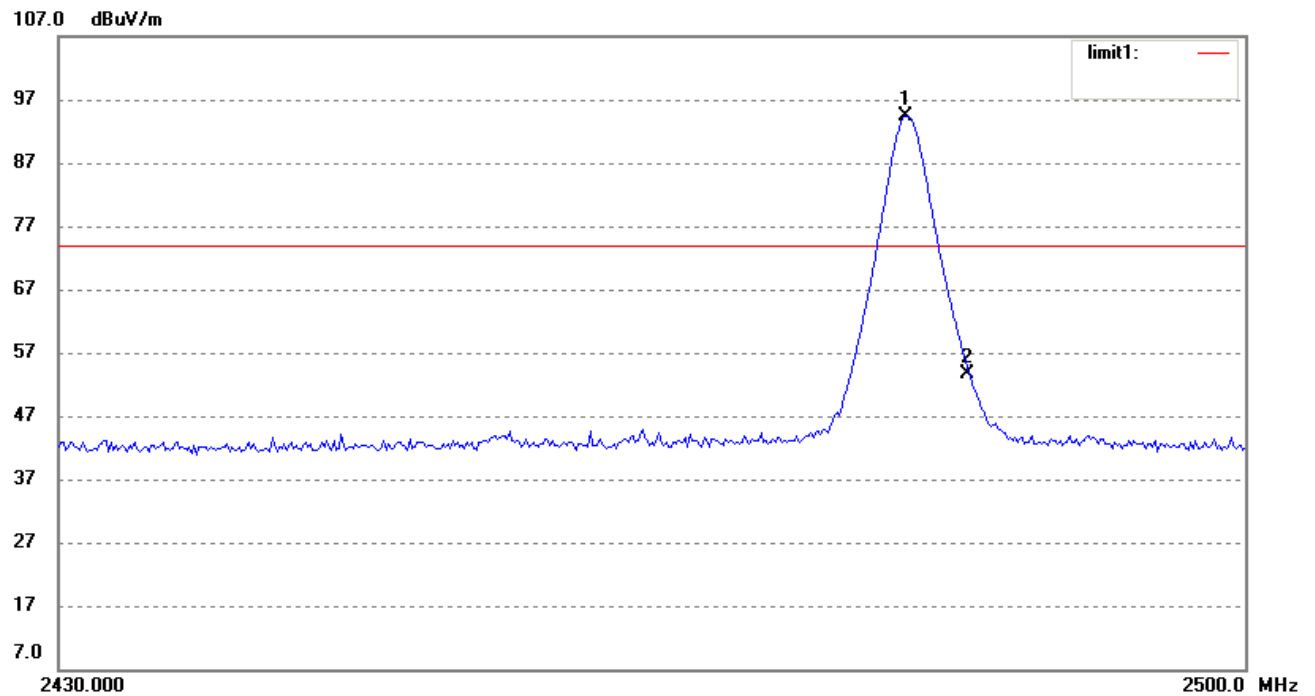

Maker No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.77	101.62	-7.13	94.49	74.00	20.49	peak
2	2483.50	60.68	-7.13	53.55	74.00	-20.45	peak

4.6 Maximum Output Power

Test Requirement:	FCC part 15 section 15.247 (a1)
Test Method:	ANSI C63.4:2003
Test Date:	2012-01-12
Mode of Operation:	Transmitting mode.
Detector Function:	Peak
Measurement BW:	RBW 1MHz ; VBW 3MHz

Test Setup:




Result : PASS

Frequency (MHz)	Peak Output Power		Limit	
	(dBm)	(W)	(dBm)	(W)
Lowest Channel : 2402	-0.613	0.0008	21	0.125
Middle Channel : 2441	-0.018	0.0010	21	0.125
Highest Channel : 2480	-0.282	0.0009	21	0.125


Limits for Maximum Output Power [Section 15.247 (a1)(iii)]:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt
 For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts


Result data graph shows the frequency of lowest channel.

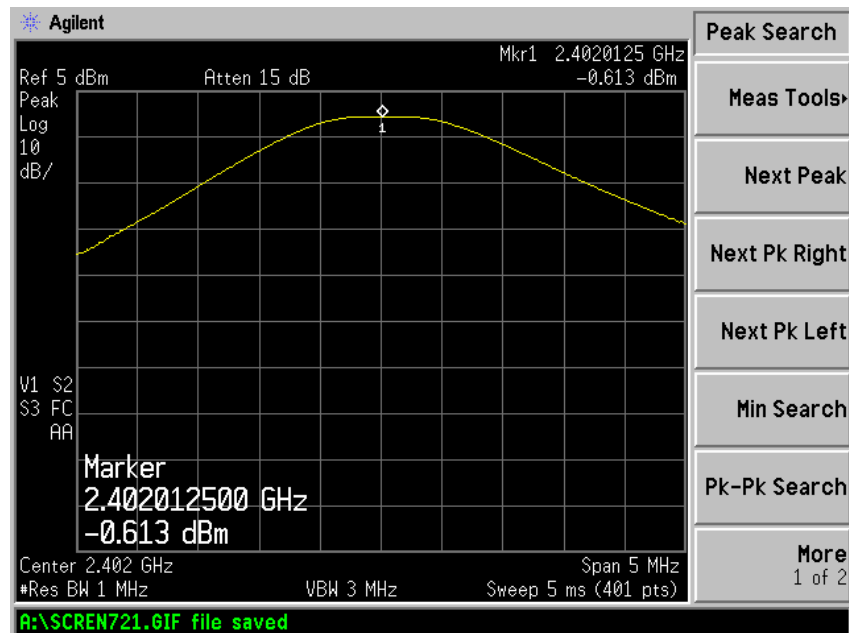

Result data graph shows the frequency of middle channel.

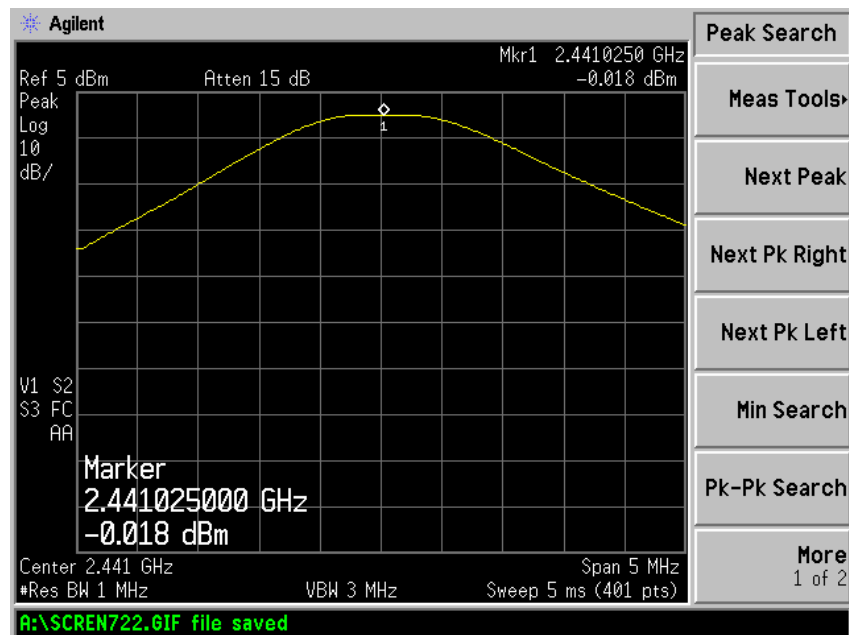


Result data graph shows the frequency of highest channel.

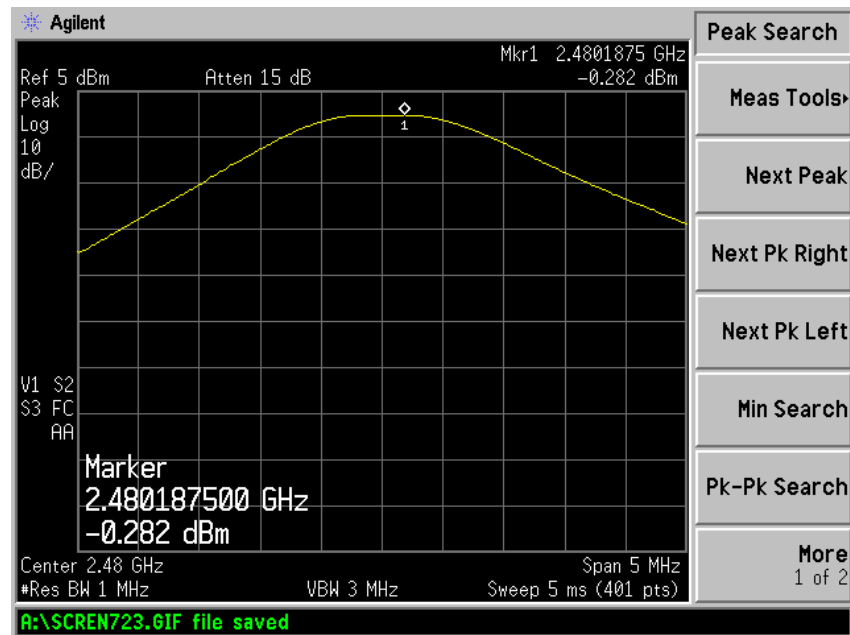

4.7 Out of Band Emissions and Emissions in Restricted Bands

Test Requirement:	FCC part 15 section 15.247 (d)
Test Method:	ANSI C63.4:2003
Test Date:	2012-01-12
Mode of Operation:	Transmitting mode, connected with iPod
Detector Function:	Peak
Measurement BW:	RBW 100KHz ; VBW 300KHz

Test Setup:

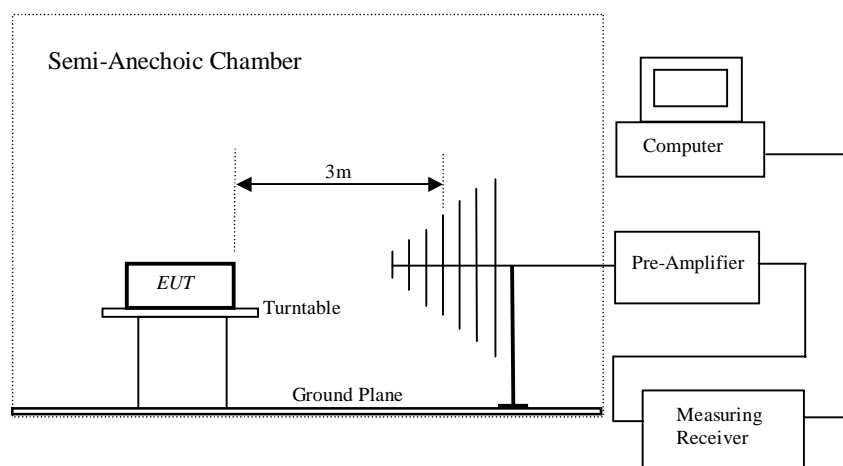



Result : PASS

Out of Frequency Band Emissions:

For out of band emissions that are close to or exceed 20dB attenuation requirement, and emission falls into restricted band, radiated emission was performed in order to show compliance with the general radiated emission requirement.

Result Summary:

Refer to the data graph for the emission data graph, result shows that the significant emissions detected are with more than 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

Limits for Out of Frequency Band Emission [Section 15.247 (d)]:

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. Attenuation below the general limits specified in Section 15.209(a) is not required.

Limit for Radiated Emission Falling in Restricted Bands [Section 15.209]:

Frequency (MHz)	Field Strength [$\mu\text{V/m}$]	Field Strength [dB $\mu\text{V/m}$]
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

Radiated emissions, which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209.

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.



Result : PASS

All Emission and Emissions Fall into Restricted Band were recorded as below:

Radiated Emissions							
	Emissions Frequency	E-Field Polarity	Reading	System Factor	Field strength at 3m	Limit	Delta to Limit
	MHz		dBuV/m	dB	dBuV/m	dBuV/m	dBuV/m
Lowest Channel							
PK	4808.87	V	61.14	-4.64	56.50	74.00	-17.50
AV		V	51.14	-4.64	46.50	74.00	-27.50
Middle Channel							
PK	4881.10	H	63.81	-4.58	59.23	74.00	-14.77
AV		H	53.81	-4.58	49.23	74.00	-24.77
Highest Channel							
PK	4954.42	H	59.81	-4.51	55.30	74.00	-18.70
AV		H	49.81	-4.51	45.30	74.00	-28.70
Spurious Emissions							
QP	109.03	V	29.69	7.68	37.37	43.50	-6.13
QP	116.13	V	31.04	6.58	37.62	43.50	-5.88
QP	160.35	V	35.70	4.55	40.25	43.50	-3.25
QP	229.29	V	28.80	7.82	36.62	46.00	-9.38
QP	341.98	V	26.64	10.47	37.11	46.00	-8.89
QP	499.42	V	23.47	14.36	37.83	46.00	-8.17
QP	110.57	H	31.93	7.50	39.43	43.50	-4.07
QP	140.34	H	31.67	3.96	35.63	43.50	-7.87
QP	216.78	H	28.91	7.17	36.08	46.00	-9.92
QP	256.52	H	31.27	8.85	40.12	46.00	-5.88
QP	499.42	H	24.2	14.36	38.56	46.00	-7.44
Spurious Emissions (BT Playing Mode with adaptor)							
QP	96.10	V	22.54	8.14	30.68	43.50	-12.82
QP	256.52	V	23.53	8.85	32.38	46.00	-13.62
QP	321.06	V	21.87	10.01	31.88	46.00	-14.12
QP	351.71	V	21.87	10.01	31.88	46.00	-14.12
QP	374.62	V	28.22	11.11	39.33	46.00	-6.67
QP	407.51	V	24.51	11.39	35.90	46.00	-10.10
QP	32.18	H	20.76	6.77	27.53	40.00	-12.47
QP	289.00	H	24.82	9.63	34.45	46.00	-11.55
QP	321.06	H	24.21	10.01	34.22	46.00	-11.78
QP	341.98	H	24.87	10.47	35.34	46.00	-10.66
QP	374.62	H	28.17	11.11	39.28	46.00	-6.72
QP	407.51	H	27.05	11.39	38.44	46.00	-7.56
Spurious Emissions (Playing Mode with adaptor)							
QP	85.30	V	30.86	5.56	36.42	40.00	-3.58
QP	159.23	V	31.06	4.51	35.57	43.50	-7.93
QP	176.89	V	31.54	5.51	36.95	43.50	-6.55
QP	199.29	V	0.84	6.58	37.42	43.50	-6.08
QP	289.00	V	27.57	9.63	37.20	46.00	-8.80
QP	798.98	V	22.23	18.99	41.22	46.00	-4.78
QP	33.10	H	22.36	6.77	29.13	40.00	-10.87
QP	87.72	H	25.11	6.35	31.46	40.00	-8.54
QP	128.11	H	24.69	4.82	29.51	43.50	-13.99
QP	178.13	H	28.31	5.50	33.81	43.50	-9.69
QP	209.31	H	25.89	6.91	32.8	43.50	-10.70
QP	312.18	H	27.87	9.90	37.77	46.00	-8.23



- Refer to the data graph shows the worst case channel's emission data graph from 30MHz-1GHz.
- Only background noise was measured from 1GHz-26GHz except related to the operation frequency.


Result Summary:

- 1) Communication mode: All other emissions are more than 20dB below FCC part 15.209 limit.
- 2) No further spurious emissions found between 30 MHz and lowest internal used/generated frequency and from 30MHz to 1GHz.


Remarks:

1. " * " Radiated emissions which fall in the restricted bands as defined in Section 15.205(a).
2. Emission level with more than 20dB below the FCC required limit is not mentioned in table.
3. Delta to Limit = Field strength (dB μ V/m) – Limit (dB μ V/m).
4. Calculated measurement uncertainty: 9kHz -30MHz: 1.8dB.
30MHz -1GHz: 5.2dB.
1GHz -18GHz: 5.1dB.

Radiated emission data graph (Vertical polarization, 30MHz-1GHz), Transmitting Mode

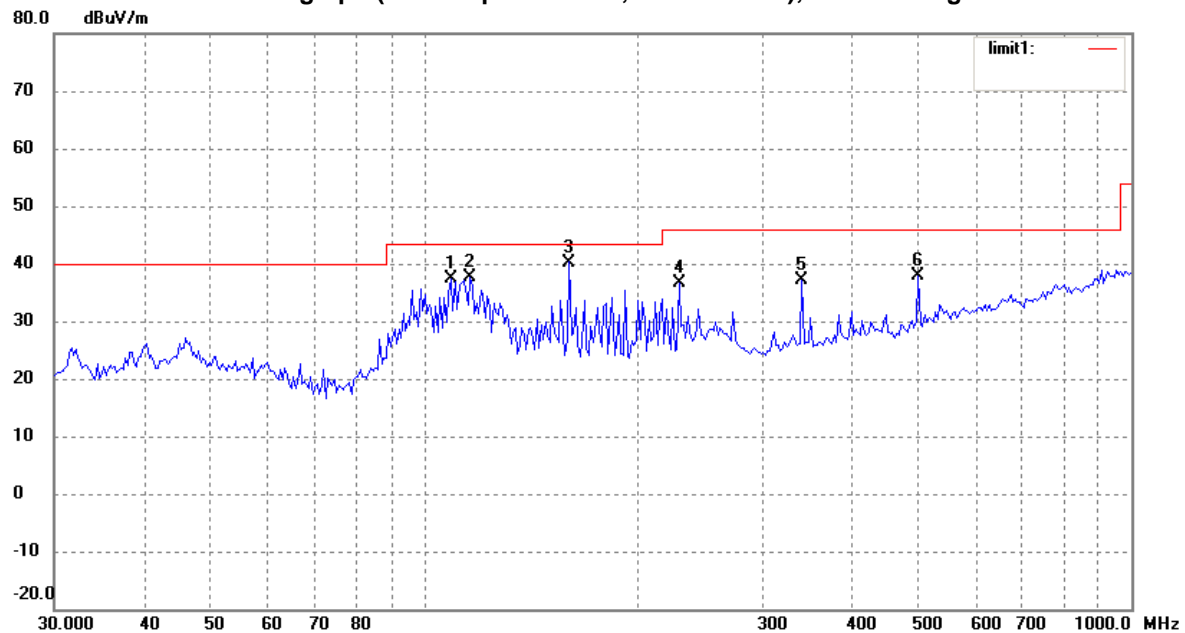


Radiated emission data graph (Vertical polarization, 1GHz-26GHz), Transmitting Mode

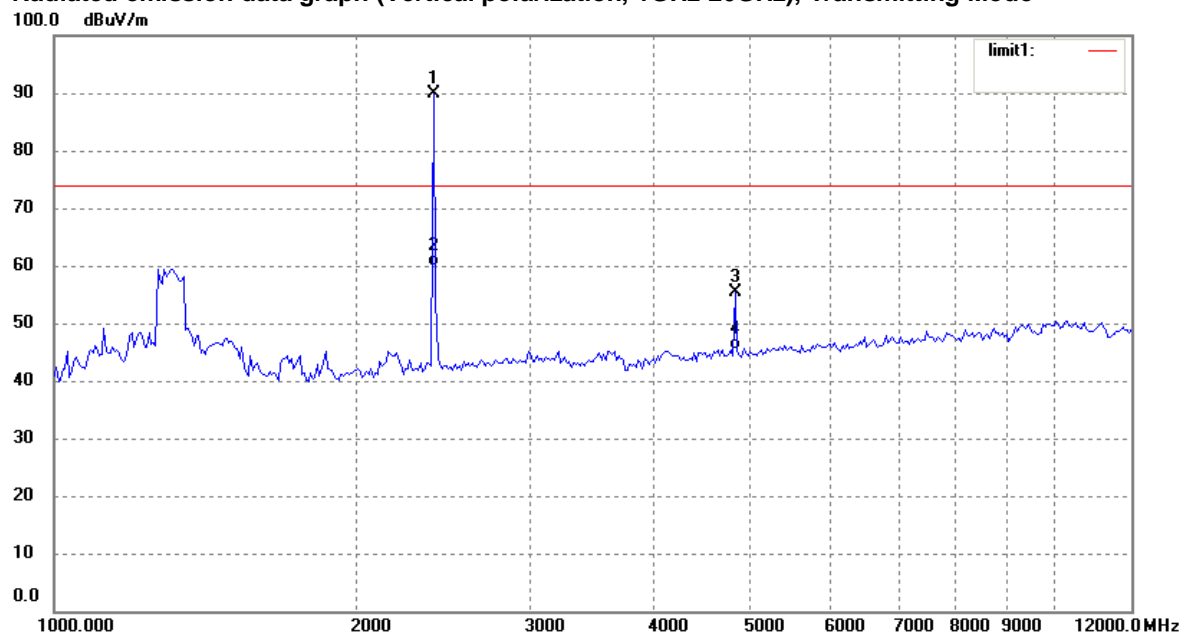


Remark: Only background noise was measured from 12GHz-26GHz.

Radiated emission data graph (Horizontal polarization, 30MHz-1GHz), Transmitting Mode

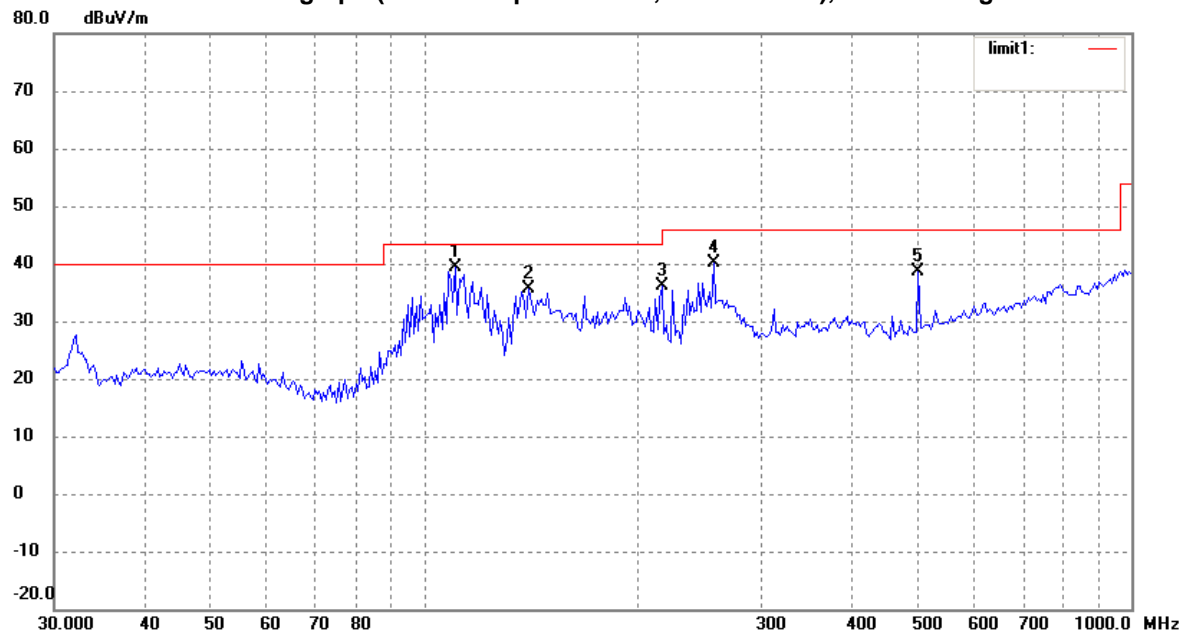


Radiated emission data graph (Horizontal polarization, 1GHz-26GHz), Transmitting Mode

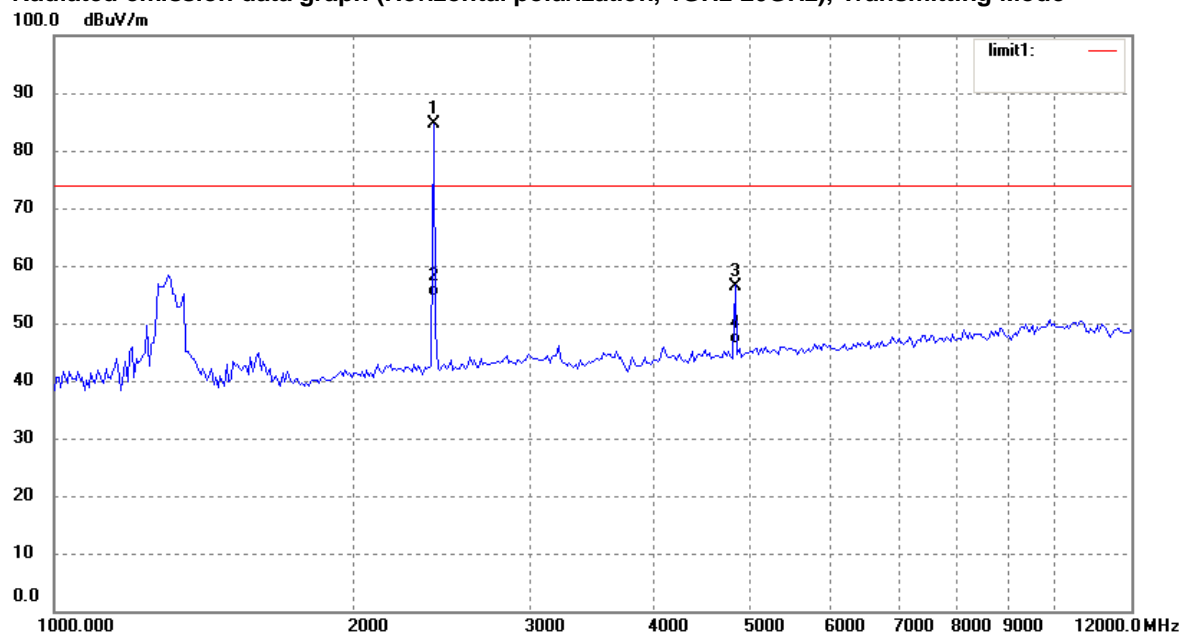


Remark: Only background noise was measured from 12GHz-26GHz.


Radiated emission data graph (Vertical polarization, 30MHz-1GHz), BT Playing Mode

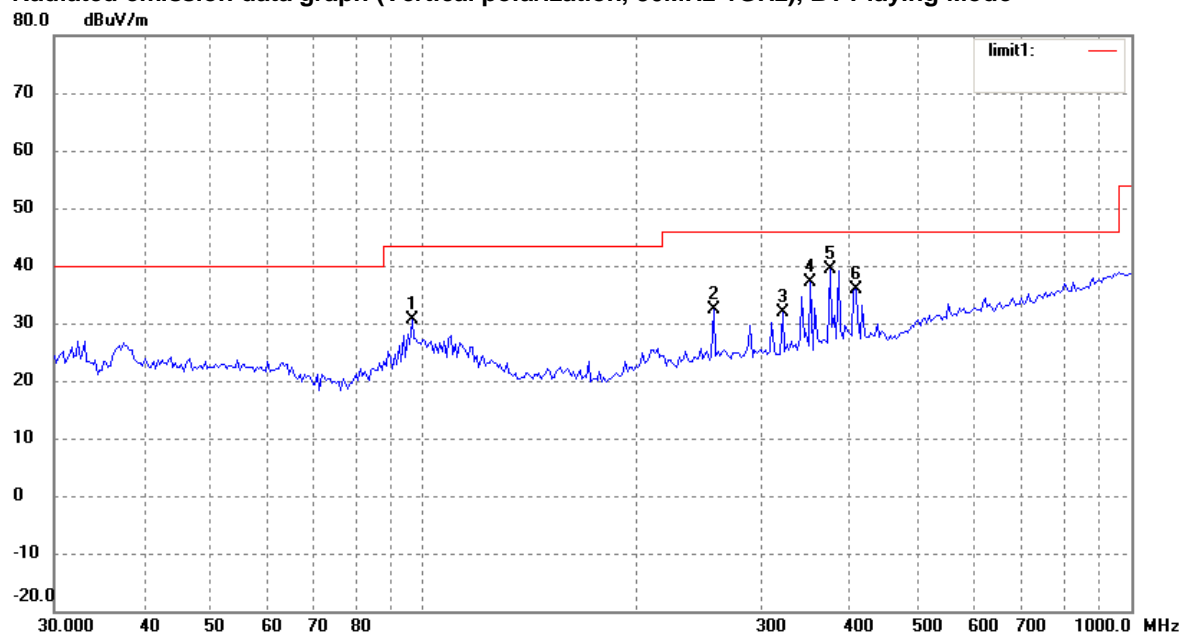


Radiated emission data graph (Horizontal polarization, 30MHz-1GHz), BT Playing Mode

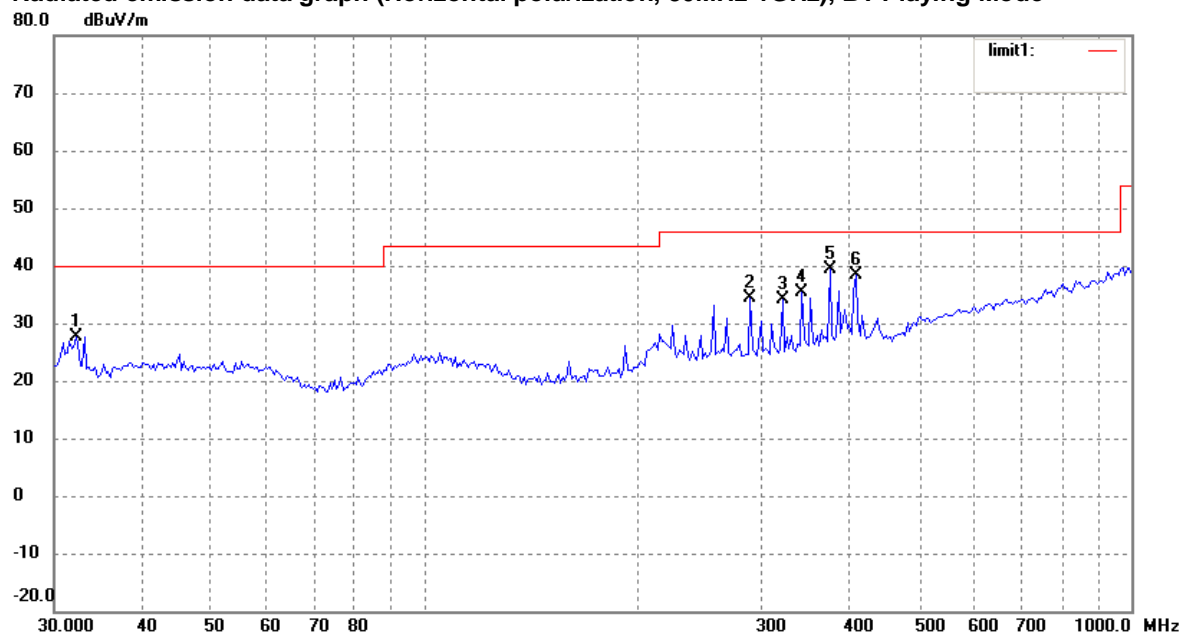

Radiated emission data graph (Vertical polarization, 30MHz-1GHz), Playing Mode

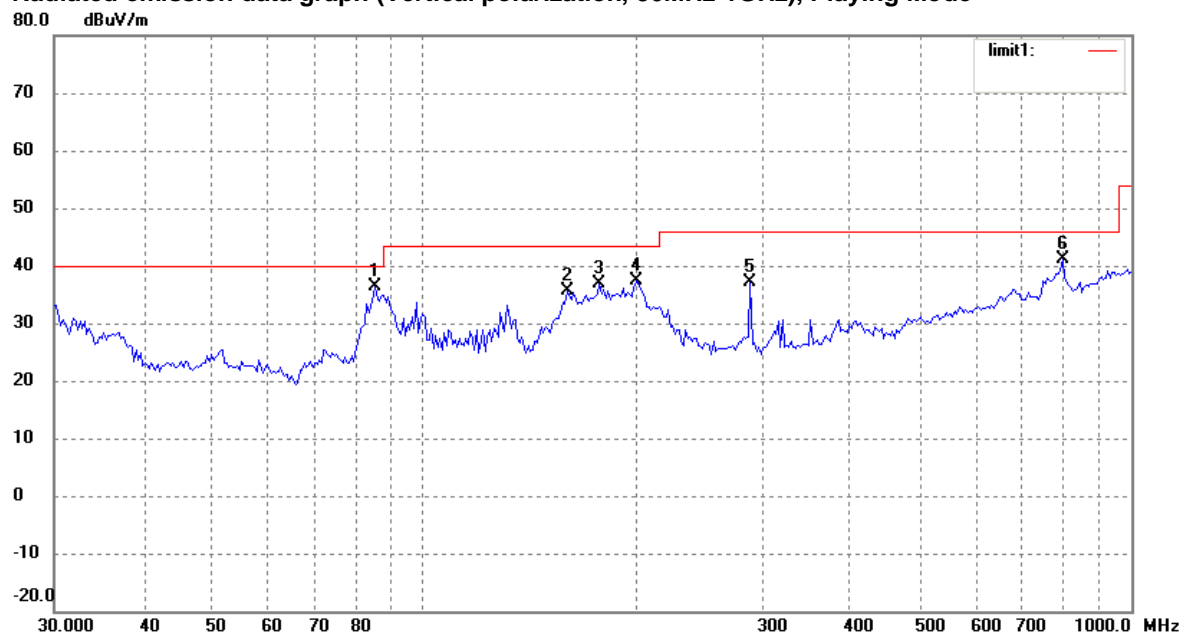

Radiated emission data graph (Horizontal polarization, 30MHz-1GHz), Playing Mode

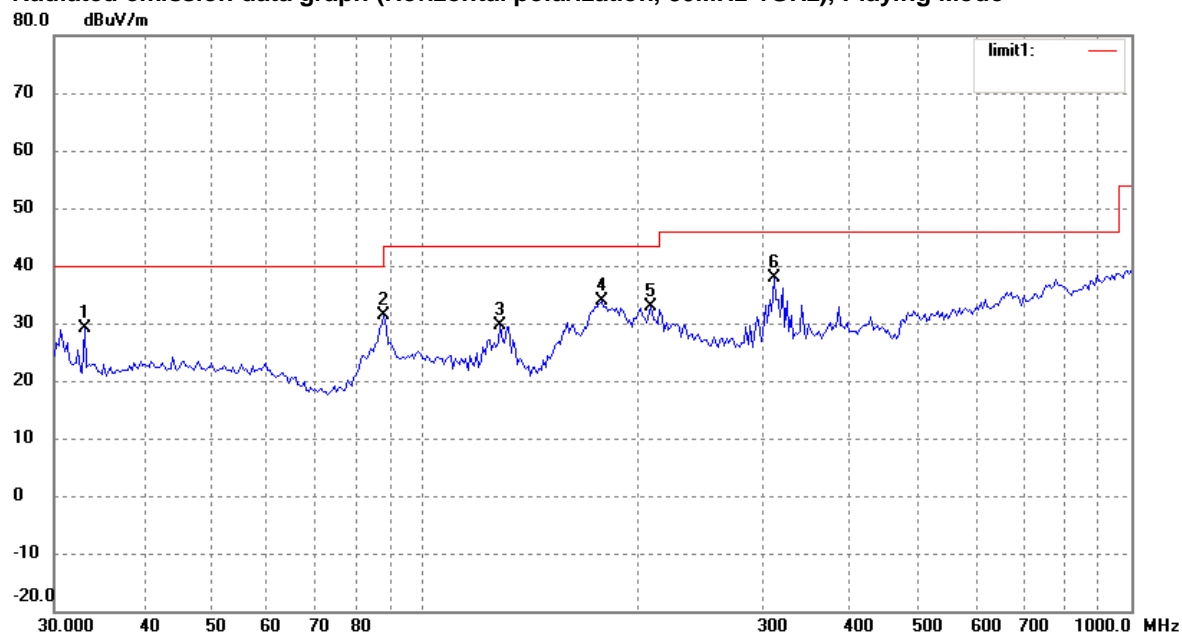

4.8 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC part 15 Section 15.207 Class B
 Test Method: ANSI C63.4:2003
 Test Date: 2011-12-06
 Mode of Operation: Transmitting with charging mode
 Detector Function: CISPR Quasi Peak
 Measurement BW: 100 kHz
 Worst Case Channel: 1

Results: PASS

Refer the result table and data graph.

Limits for Conducted Emission [Section 15.207]:

Frequency Range [MHz]	Quasi-Peak Limit [dB μ V]	Average Limit [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.


Remarks:

Calculated measurement uncertainty: ± 2.8 dB

Refer to the following table for the result details:


Frequency (MHz)	Detector (QP/AV)	Phase	Result (dB μ V)	Limit (dB μ V)	Margin
0.282	QP	L	51.01	60.74	-9.73
0.458	AV	L	30.03	46.72	-16.69
0.574	QP	L	45.37	56.00	-10.63
0.738	AV	L	29.02	46.00	-16.98
4.698	QP	L	43.10	56.00	-12.90
7.538	AV	L	32.84	50.00	-17.16
0.538	QP	N	43.83	53.00	-9.17
0.558	AV	N	34.92	46.00	-11.08
0.578	AV	N	34.37	46.00	-11.63
0.722	QP	N	45.01	56.00	-10.99
2.362	QP	N	43.89	56.00	-12.11
2.398	AV	N	31.72	46.00	-14.28

Result data graph shows the conducted emission (Live).

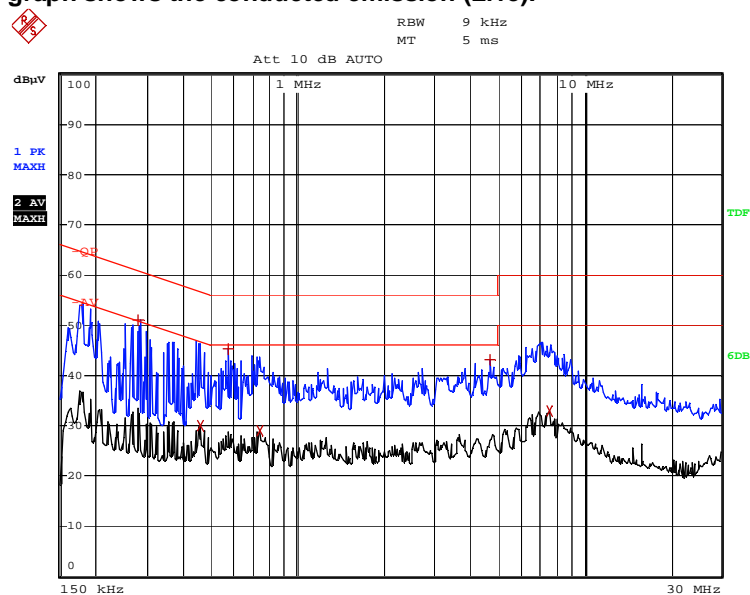

Date: 6.DEC.2011 20:34:17

Result data graph shows the conducted emission (Neutral).

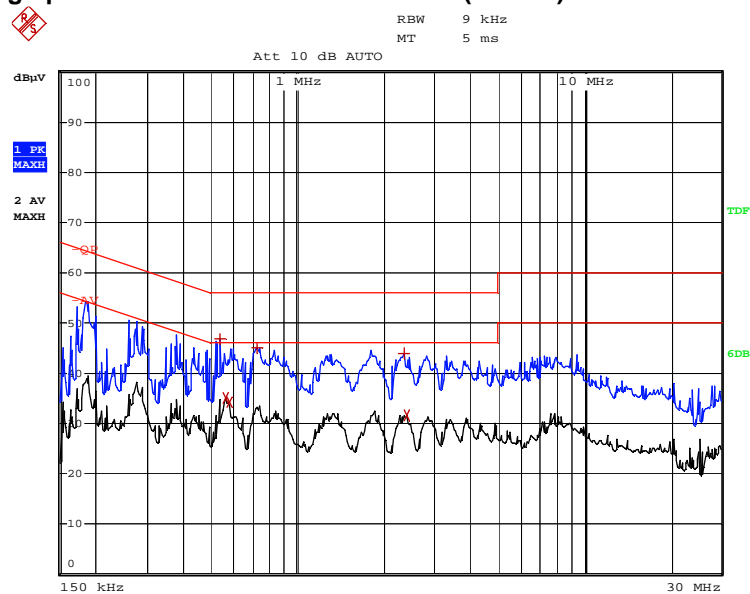

Date: 6.DEC.2011 20:28:57



5.0 RF Exposure Compliance Requirement

Test Requirement: FCC part 15 section 15.247 (i)
 Test Method: FCC part 15 section 1.1307 (b1)
 OET Bulletin 65, Edition 01-01

Results: PASS

Systems operation under the provision of this section shall be operated in a manner that ensures the public is not exposed to radio frequency energy levels in excess of the Commission's guideline,

The EUT is considered as a mobile device according to OET Bulletin 65, Edition 01-01, therefore distance to human body of min. 20cm is determined.

Frequency Band:	2.400GHz ~ 2.4835GHz
Device Category:	<input type="checkbox"/> Portable (< 20cm separation) <input checked="" type="checkbox"/> Mobile (>20cm separation) <input type="checkbox"/> Others :
Exposure Classification:	<input type="checkbox"/> Occupational/ Controlled exposure <input checked="" type="checkbox"/> General Population / Uncontrolled exposure
Max. Output Power	1 mW
Antenna Gain	0 dBi (Numeric gain:1)
Evaluation Applied:	<input checked="" type="checkbox"/> MPE Evaluation <input type="checkbox"/> SAR Evaluation

MPE calculation:

The radiated (EIRP) = 1 mW

The power density at 20cm from the antenna : = $EIRP / 4\pi R^2$
 = 0.0002 mW / cm²

Limits for General Population/Uncontrolled Exposure [OET Bulletin 65, Edition 01-01]:

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	--	--	f/1500	30
1500-100,000	--	--	1.0	30

6.0 List of Measurement Equipment

Radiated Emission and Bandwidth Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
Test Receiver	R & S	ESVB	825471/005	19 Dec 2012
Spectrum Analyzer	Agilent	E4402B	US41192821	19 Dec 2012
Spectrum Analyzer	R & S	FSP	836079/035	19 Dec 2012
Antenna	Schwarzbeck	VULB9163	9163-333	08 Jan 2013
Horn Antenna	ETS	3117	00086197	08 Jan 2013
Pre-Amplifier	Agilent	8447F	3113A06717	19 Dec 2012
Attenuator	ATTENCT	ATS100-4-20	N/A	19 Dec 2012

Line Conducted

Description	Manufacturer	Model no.	Serial no.	CAL due
LISN	Schwarzbeck	NSLK8126	8126-224	19 Dec 2012
AMN	EMCO	3825/2	11967C	19 Dec 2012
EMI Test Receiver	R&S	ESPI	101611	19 Dec 2012
Pulse Limiter	R&S	ESH3-Z2	100911	19 Dec 2012

N/A Not Applicable or Not Available