

## Antenna datasheet for model X3D MAX and X3D

### 1. Antenna structure

### 2. Antenna specification

Frequency(MHz)	2402 ~ 2480 MHz
VSWR	$\leq 1.92$
Impedance	50 Ohm Nominal
Return Loss	-10 dB Max
Radiation	Omni-directional

BlueAnt Wireless  
 Suite 6,861 Doncaster RD.Doncaster East,Victoria 3109 Australia.


Gain (Peak)	1.08443dBi
Polarization	Linear, Vertical
Admitted Power	2W
Connector	Tin

### 3. Antenna report


Spectrum Detector:	PK	Test Date :	June 8, 2013
Test By:	Andy	Temperature :	28°C
Test Result:	PASS	Humidity :	55 %
Modulation:	GFSK		

Frequency VNA (MHz)	E Total. dB(dB)
2400MHz	0.0403503
2410MHz	0.0886264
2420MHz	0.267381
2430MHz	0.193012
2440MHz	0.26366
2450MHz	0.0723139
2460MHz	0.36895
2470MHz	0.551525
2480MHz	0.640702
2490MHz	1.05232
2500MHz	1.08443

### 4. Test plot:

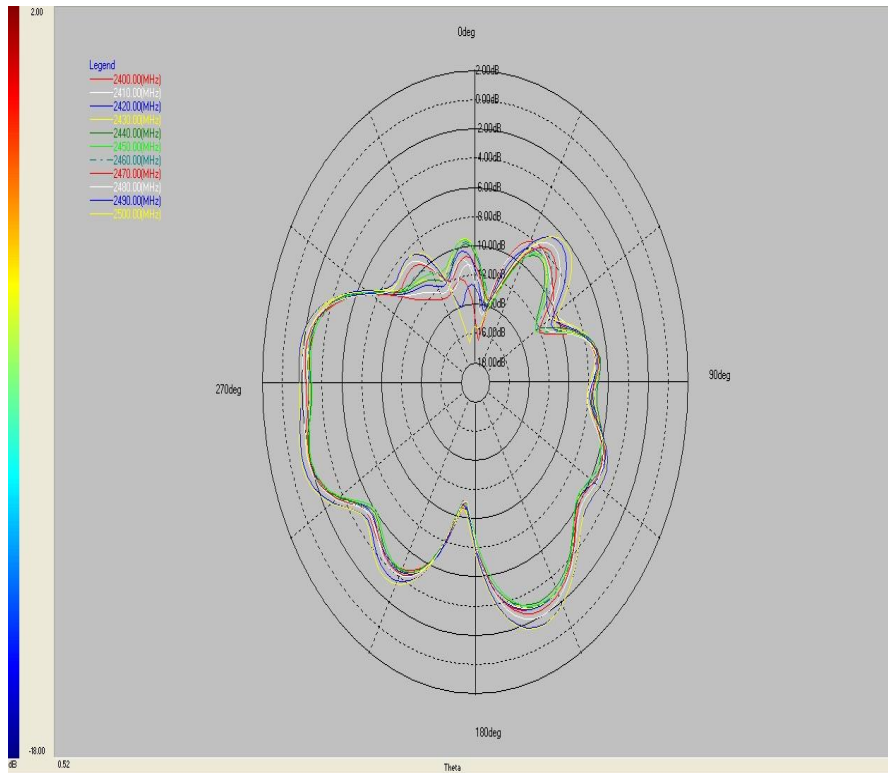


PHI 0 degree

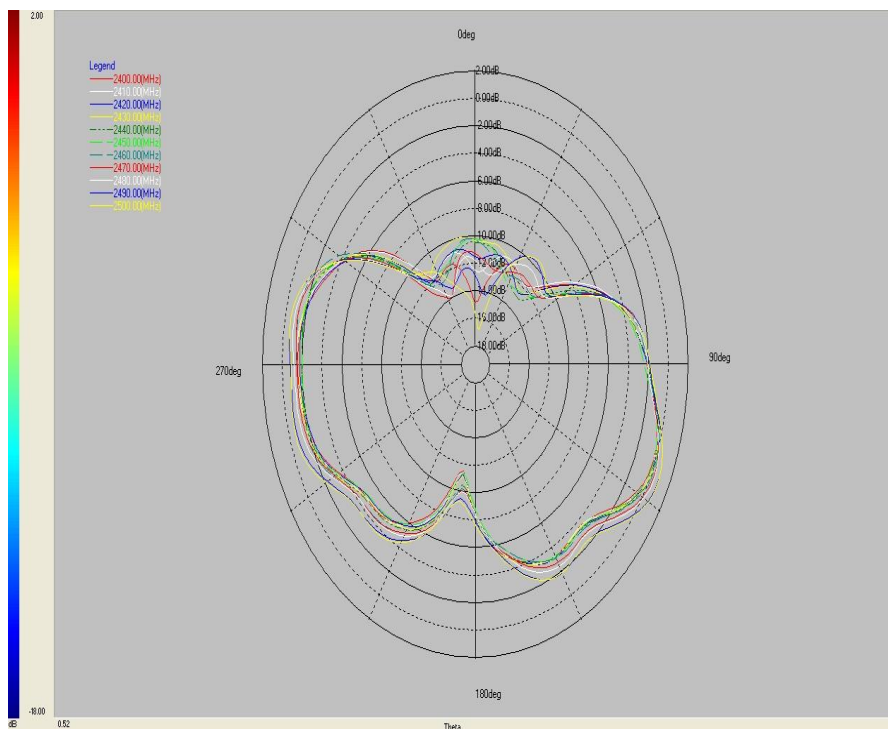

PHI 90 degree

BlueAnt Wireless  
 Suite 6,861 Doncaster RD.Doncaster East,Victoria 3109 Australia.

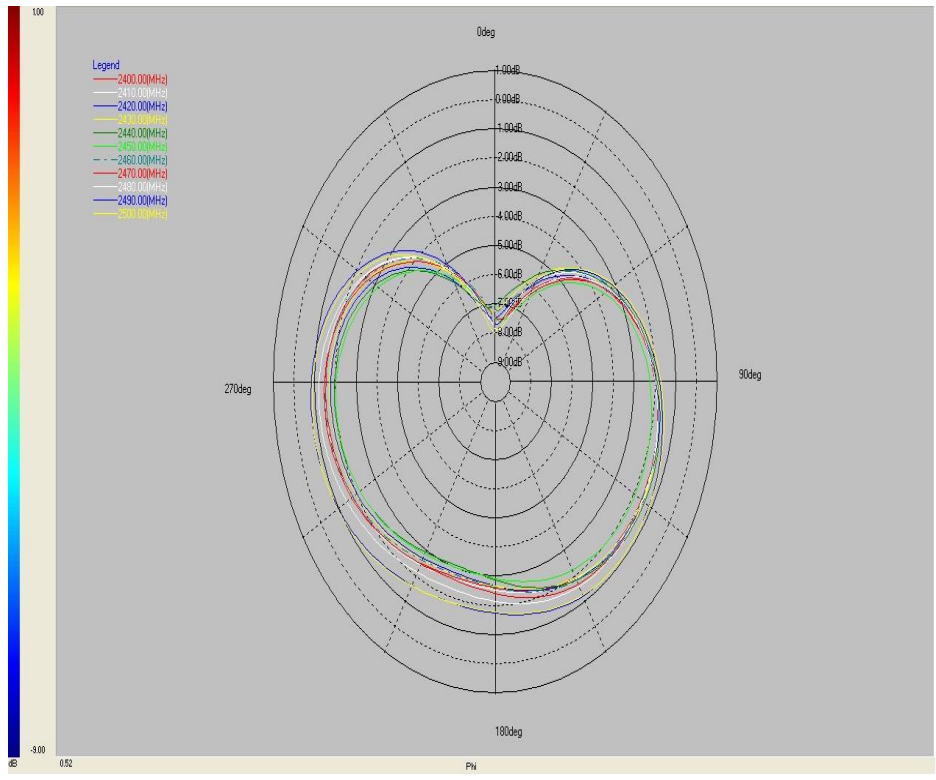

THETA 90 degree

## VSWR

