



SGS-CSTC Standards Technical Services Ltd.

No.198 Kezhu Road, Science Town Economic& Technology
Development District Guangzhou, China 510663 Telephone:
Telephone: +86 (0) 20 82155555
Fax: +86 (0) 20 82075059
Email: sgs_internet_operations@sgs.com
FEDERAL COMMUNICATIONS COMMISSION
Registration number: 282399

Report No.: SZEMO070601580RFF
Page: 1 of 15
FCC ID: VHND90401

TEST REPORT

Application No. : SZEMO070601580RF
Applicant : Youngo Limited
FCC ID : VHND90401
Fundamental Frequency : 303MHz
Equipment under Test (EUT):
Name : Wall Control
Model : DC90401
Standards : FCC PART 15, SUBPART C : 2006 (Section 15.231)
Date of Receipt : 26 June 2007
Date of Test : 27 June to 10 July 2007
Date of Issue : 11 July 2007

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This Test Report is issued by the Company subject to its General Conditions of Service printed overleaf. Attention is drawn to the limitations of liability, indemnification and jurisdictional issues defined therein. The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full, without prior written permission of the Company.



2 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Conducted Emission (150KHz to 30MHz)	FCC PART 15, SUBPART B: 2006	Section 15.207	PASS
Radiated Emission (30MHz to 1000MHz)	FCC PART 15 : 2006	Section 15.231	PASS
Occupied Bandwidth	FCC PART 15 : 2006	Section 15.231	PASS
Dwell Time	FCC PART 15 : 2006	Section 15.231	PASS



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	4
4.1 CLIENT INFORMATION	4
4.2 DETAILS OF E.U.T.	4
4.3 DESCRIPTION OF SUPPORT UNITS	4
4.4 TEST LOCATION	4
4.5 OTHER INFORMATION REQUESTED BY THE CUSTOMER	4
4.6 TEST FACILITY.....	5
5 TEST RESULTS	6
5.1 TEST INSTRUMENTS	6
5.2 E.U.T. OPERATION	6
5.2.1 <i>Conducted Emissions Mains Terminals, 150kHz to 30MHz</i>	6
5.2.2 <i>E.U.T. Operation</i>	6
5.2.3 <i>Plan View of Test Setup</i>	7
5.2.4 <i>Measurement Data</i>	7
5.2.5 <i>Radiated Emissions</i>	10
5.2.6 <i>Occupied Bandwidth</i>	13-15



4 General Information

4.1 Client Information

Applicant: Youngo Limited
Address of Applicant: The Youth Industrial Administration Park Chen Jiang Huizhou City
Guandong Province P.R.C

4.2 Details of E.U.T.

Product Name: Wall Control
Model: DC90401
Power Supply: 120V AC 50/60Hz

4.3 Description of Support Units

The EUT was tested as an independent unit: a 303MHz radio transmitter.

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory, No.198 Kezhu
Road, Science Town Economic& Technology Development District Guangzhou, China 510663

Tel: +86 20 82155555

Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Other Information Requested by the Customer

None.



4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP – Lab Code: 200611-0**
SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is recognized under the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0. Effective through December 31, 2006.
- **ACA**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our NVLAP accreditation.
- **VCCI**
The 3m Semi-anechoic chamber and Shielded Room (11.5m x 4m x 4m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1599 and C-1706 respectively.
Date of Registration: June 01, 2005. Valid until February 22, 2008
- **SGS UK(Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**
Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.
- **CNAL – LAB Code: L0141**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of Testing Laboratories.
- **FCC – Registration No.: 282399**
SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 282399, May 31, 2002. With the above and NVLAP's accreditation, SGS-CSTC is an authorised test laboratory for the DoC process.
- **Industry Canada (IC)**
The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5169.



5 Test Results

5.1 Test Instruments

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	16-06-2007	15-06-2008
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	14-12-2006	13-12-2007
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	01-06-2007	31-05-2008
5	Coaxial cable	SGS	N/A	SEL0027	01-06-2007	31-05-2008
6	BiConiLog Antenna	ETS-LINDGREN	3142C	00042673	03-03-2007	02-03-2008
7	EMI Test Receiver	Rohde & Schwarz	ESCI	100119	27-06-2007	26-06-2008
8	Loop Antenna	Emco	6502	00042963	30-05-2006	29-05-2008

5.2 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C
Humidity: 50 % RH
Atmospheric Pressure: 1006 mbar

5.2.1 Conducted Emissions Mains Terminals, 150kHz to 30MHz


Test Requirement: FCC Part15 B
Test Method: ANSI C63.4
Test Date: 27 June 2007
Frequency Range: 150KHz to 30MHz
Class / Severity: Class B
Detector: Peak for pre-scan (9kHz Resolution Bandwidth)
Quasi-Peak if maximised peak within 6dB of Quasi-Peak limit

5.2.2 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 52 % RH Atmospheric Pressure: 1012 mbar
EUT Operation: Test in on mode connected with PC system.

5.2.3 Plan View of Test Setup

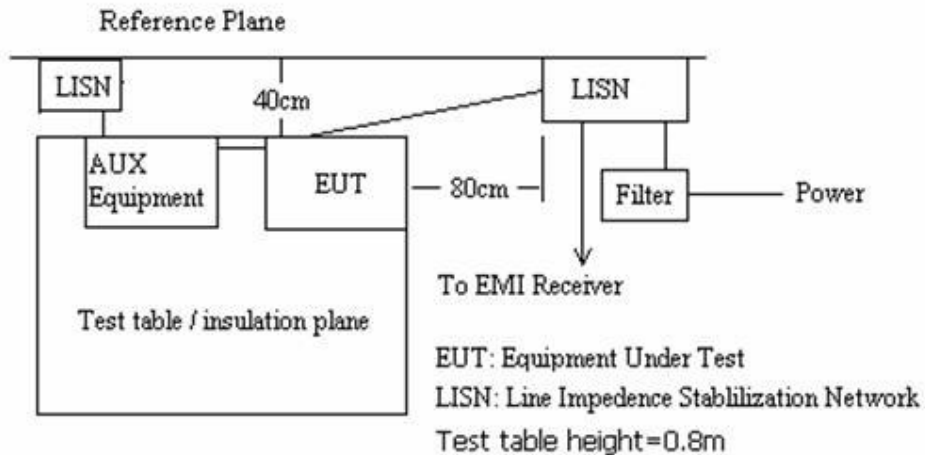

5.2.4 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


The following Quasi-Peak and Average measurements were performed on the EUT.



Live Line:

Quasi-peak and Average measurement:

Data: 135
Level (dBuV)

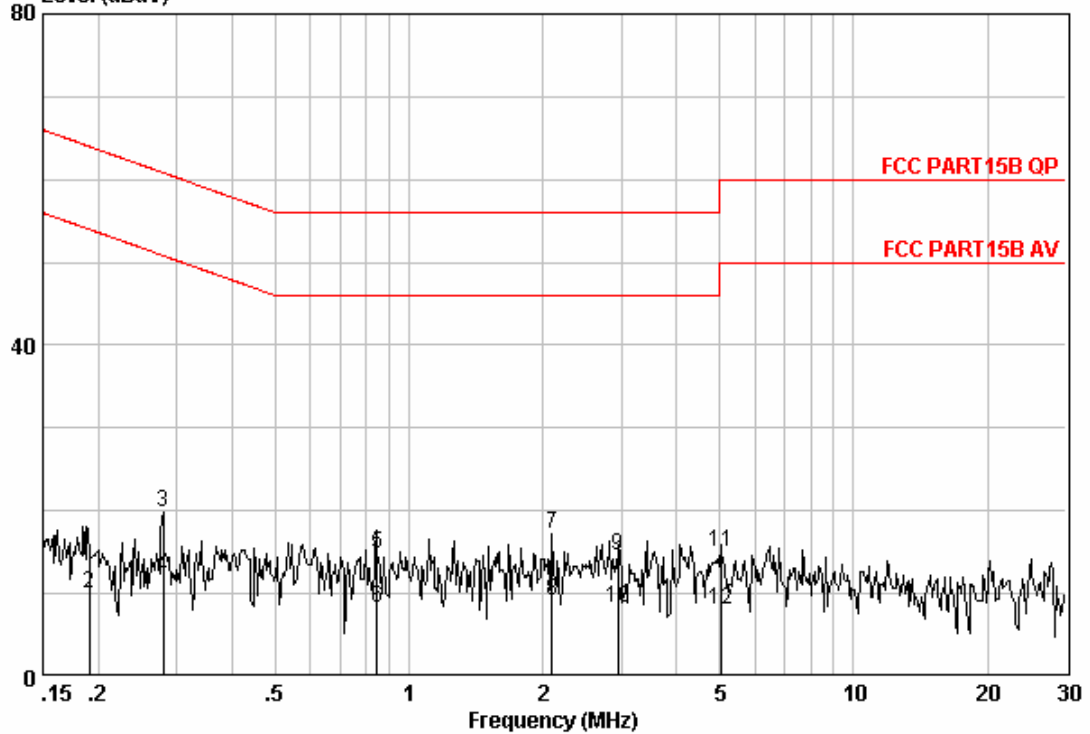


Site : Shielding Room
Condition : FCC PART15B QP LISN OLD LINE
EUT : 1580RF

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.19039	-0.08	-0.05	15.49	15.37	64.02	-48.65	QP
2	0.19039	-0.08	-0.05	10.23	10.10	54.02	-43.92	Average
3	0.28029	-0.02	-0.04	19.84	19.78	60.81	-41.03	QP
4	0.28029	-0.02	-0.04	12.05	11.99	50.81	-38.82	Average
5	0.84826	0.06	-0.05	14.87	14.88	56.00	-41.12	QP
6	0.84826	0.06	-0.05	8.26	8.27	46.00	-37.73	Average
7	2.099	0.10	-0.06	17.28	17.31	56.00	-38.69	QP
8 @	2.099	0.10	-0.06	9.12	9.16	46.00	-36.84	Average
9	2.946	0.10	-0.07	14.58	14.60	56.00	-41.40	QP
10	2.946	0.10	-0.07	8.16	8.19	46.00	-37.81	Average
11	5.058	0.10	-0.11	15.06	15.05	60.00	-44.95	QP
12	5.058	0.10	-0.11	8.16	8.15	50.00	-41.85	Average



Neutral Line

Quasi-peak and Average measurement:

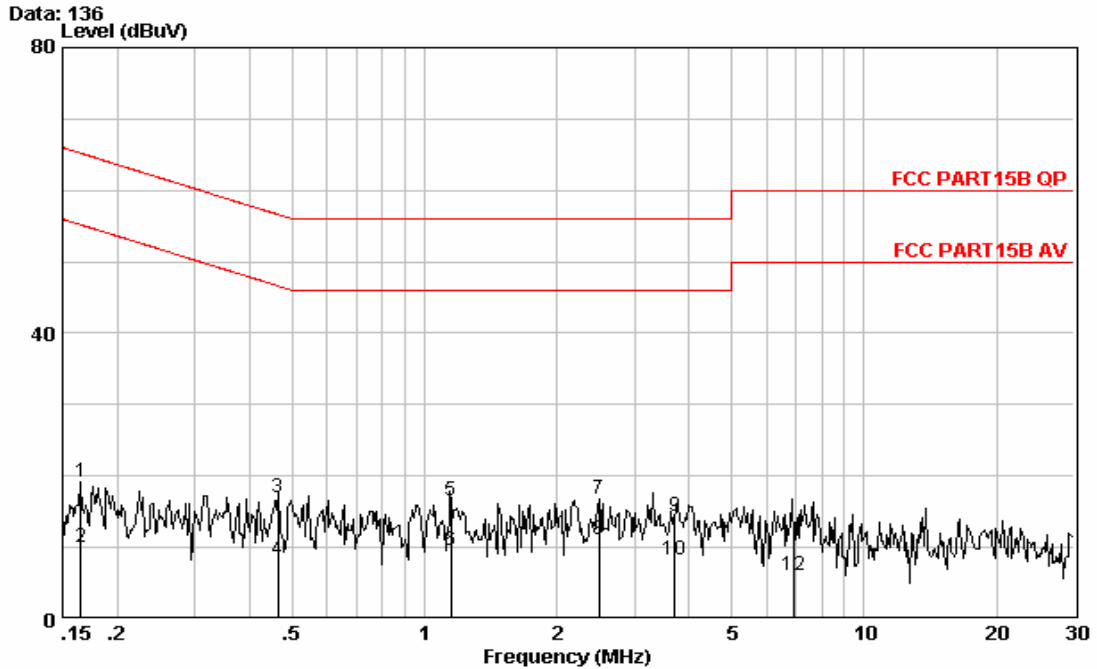

Site : Shielding Room
Condition : FCC PART15B QP LISN OLD NEUTRAL
EUT : 1580RF

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.16501	-0.03	-0.04	19.35	19.27	65.21	-45.94	QP
2	0.16501	-0.03	-0.04	10.02	9.94	55.21	-45.26	Average
3	0.46367	0.00	-0.04	16.93	16.89	56.63	-39.73	QP
4	0.46367	0.00	-0.04	8.23	8.19	46.63	-38.44	Average
5	1.147	0.10	-0.05	16.56	16.61	56.00	-39.39	QP
6	1.147	0.10	-0.05	9.45	9.50	46.00	-36.50	Average
7	2.487	0.10	-0.07	16.67	16.70	56.00	-39.30	QP
8 @	2.487	0.10	-0.07	11.03	11.06	46.00	-34.94	Average
9	3.700	0.10	-0.09	14.43	14.44	56.00	-41.56	QP
10	3.700	0.10	-0.09	8.23	8.24	46.00	-37.76	Average
11	6.914	0.15	-0.18	10.40	10.37	60.00	-49.63	QP
12	6.914	0.15	-0.18	6.12	6.09	50.00	-43.91	Average



5.2.5 Radiated Emissions

Test Requirement: FCC Part15 C
 Test Method: ANSI C63.4 section 8 & 13
 Test Date: 27 June 2007(Initial Test)
 10 July 2007(Retest)

Measurement Distance: 3m (Semi-Anechoic Chamber and OATS)
 Frequency range 30 MHz – 5.0GHz for transmitting mode.
 Test instrumentation resolution bandwidth 120 kHz (30 MHz - 1000 MHz)
 1 MHz (1000 MHz – 25GHz)
 Receive antenna scan height 1 m - 4 m, polarization Vertical/Horizontal

Requirements:

Fundamental Frequency MHz	Field Strength of Fundamental (dBµV/m @ 3m)	Field Strength of Harmonics and Spurious Emissions (dBµV/m @ 3m)
40.66 to 40.70	67.04	47.04
70 to 130	61.94	41.94
130 to 174	61.94 to 71.48	41.94 to 51.48
174 to 260	71.48	51.48
260 to 470	71.48 to 81.94	51.48 to 61.94
470 and above	81.94	61.94

The fundamental frequency of the EUT is 303.96MHz

The limit for average field strength dBµV/m for the fundamental frequency= 74.9dBµV/m.

No fundamental is allowed in the restricted bands.

The limit for average field strength dBµV/m for the harmonics and spurious frequencies = 54.9dBµV/m. Spurious in the restricted bands must be less than 54.0 dBµV/m or 15.209.

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 5.0GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Peramplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Peramplifier Factor

An initial pre-scan was performed in the 3m chamber using the spectrum analyser in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities.

The following test results were performed on the EUT on 20 December 2003:


1. Fundamental emission

Test Frequency (MHz)	Peak (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
303.96	55.21	51.47	94.9	39.69	43.43

Duty Cycle Calculation



Calculation according to RF burst Para 15.35(c)
 $20\log*((1.16-0.4)\text{msec}/1.16\text{msec})=-3.6\text{dB}$

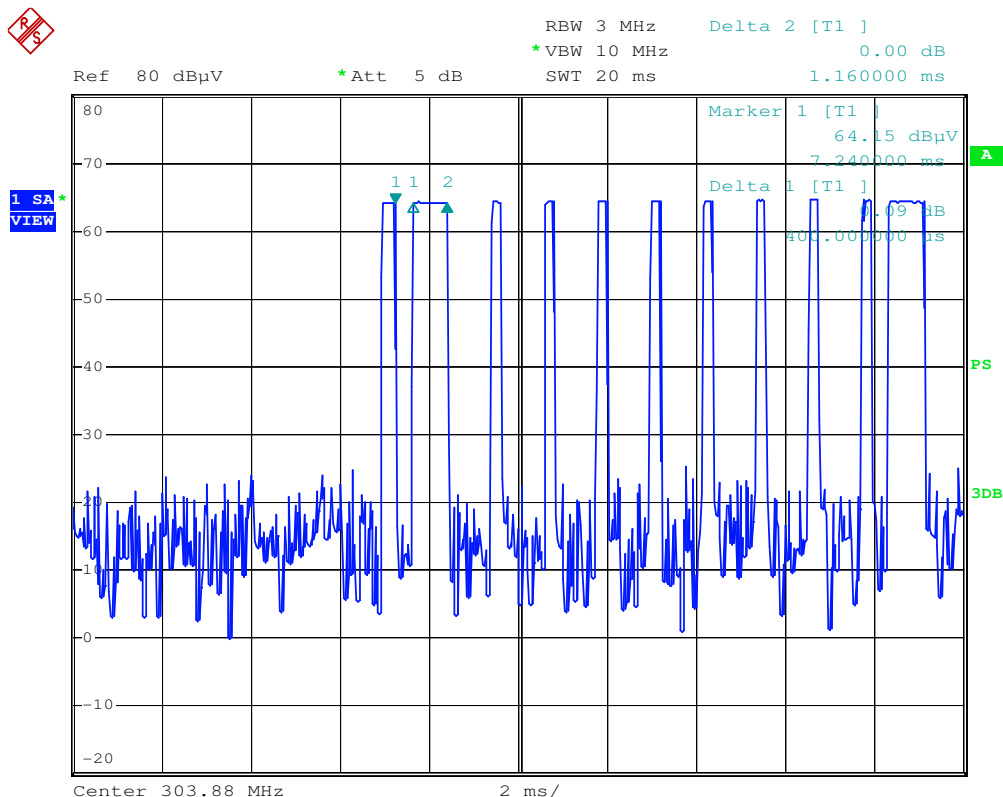

N
 Date: 3.AUG.2007 09:26:36

Average data=Peak data + Duty cycle

Test Frequency (MHz)	Average (dBμV/m)		Limits (dBμV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
303.96	51.61	47.87	74.9	23.29	27.03



2. Harmonics & Spurious Emissions

Measure with Peak Detector

Test Frequency (MHz)	Average (dBµV/m)		Limits (dBµV/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
607.920	30.8	26.4	54.9	24.10	28.50
911.880	32.1	30.6	54.9	22.80	24.30
1215.840	33.8	34.0	54.9	21.10	20.90
1519.800	34.5	35.2	54.9	20.40	19.70
1823.760	35.7	36.2	54.9	19.20	18.70
2127.720	37.3	36.8	54.9	17.60	18.10
2431.680	37.0	36.5	54.9	17.90	18.40
2735.640	38.2	38.0	54.9	16.70	16.90
3039.600	37.6	37.5	54.9	17.30	17.40

Harmonics & Spurious Emissions Average

Measure with Peak Detector

Test Frequency (MHz)	Peak (dBµV/m)		Limits (dBµV/m)	Duty cycle	Margin (dB)	
	Vertical	Horizontal			Vertical	Horizontal
607.920	30.8	26.4	46	-3.6	18.8	23.2
911.880	32.1	30.6	46	-3.6	17.5	19.0
1215.840	33.8	34.0	54	-3.6	23.8	23.6
1519.800	34.5	35.2	54	-3.6	23.1	22.4
1823.760	35.7	36.2	54	-3.6	21.9	21.4
2127.720	37.3	36.8	54	-3.6	20.3	20.8
2431.680	37.0	36.5	54	-3.6	20.6	21.1
2735.640	38.2	38.0	54	-3.6	19.4	19.6
3039.600	37.6	37.5	54	-3.6	20	20.1

Remark:

According to 15.35 (b) When average radiated emission measurements are specified in the regulations, including emission measurements below 1000 MHz, there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules, e.g., see Section 15.255.

TEST RESULTS: The unit does meet the FCC Part 15 C Section 15.231 requirements.




5.2.6 Occupied Bandwidth

Test Requirement: FCC Part15 C
Test Method: ANSI C63.4 section 13 & FCC Part 2.1049
Test Date: 04 July 2007

Requirements: 15.231 (c3) The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Method of measurement: A small sample of the transmitter output was fed into the Spectrum Analyzer and the attached plot was taken. The vertical is set to 10dB per division. The horizontal scale is set to 151.9KHz per division.

The graph as below, represents the emissions take for this device.

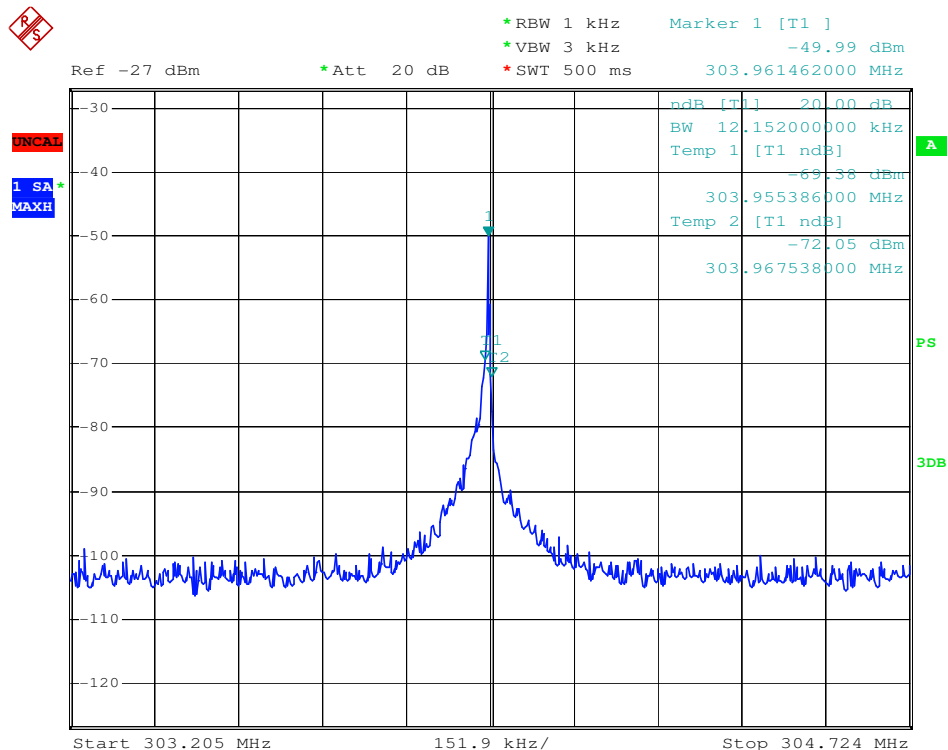

N
Date: 4.JUL.2007 08:55:56

The results: The unit does meet the FCC Part 15C Section 15.231 requirements.



4.3.5 Dwell Time:

Test Requirement: FCC Part15 C
Test Method: FCC Part15 C Section 15.231.
Test Date: 04 July 2007
Requirements:

1. Regulation 15.231 (a) The provisions of this Section are restricted to periodic operation within the band 40.66 40.70 MHz and above 70 MHz. Except as shown in paragraph (e) of this Section, the intentional radiator is restricted to the transmission of a control signal such as those used with alarm systems, door openers, remote switches, etc. Radio control of toys is not permitted. Continuous transmissions, such as voice or video, and data transmissions are not permitted. The prohibition against data transmissions does not preclude the use of recognition codes. Those codes are used to identify the sensor that is activated or to identify the particular component as being part of the system.


Result:

The EUT is similar as a remote switch.
The EUT meets the requirements of this section.


2. Regulation 15.231 (a1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

Result:

Transmitter ceases immediately after being released.
Please refer to the duration of the each transmission as below:

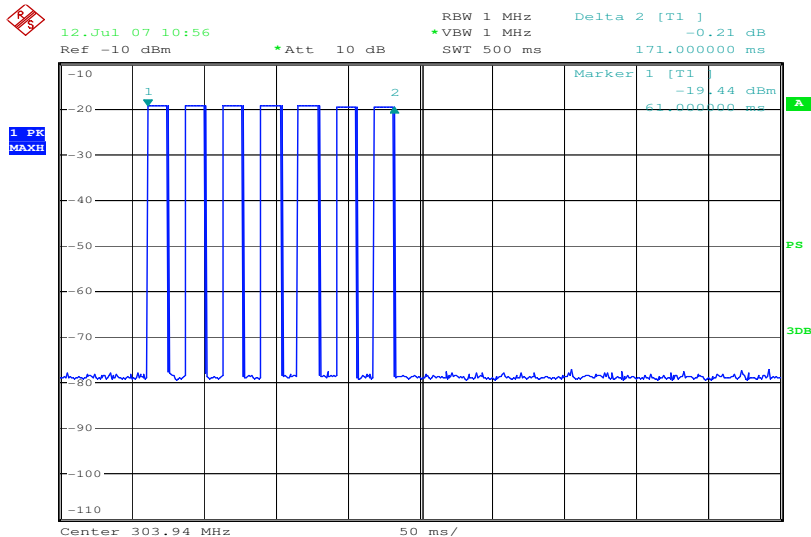

N
Date: 12.JUL.2007 10:56:45

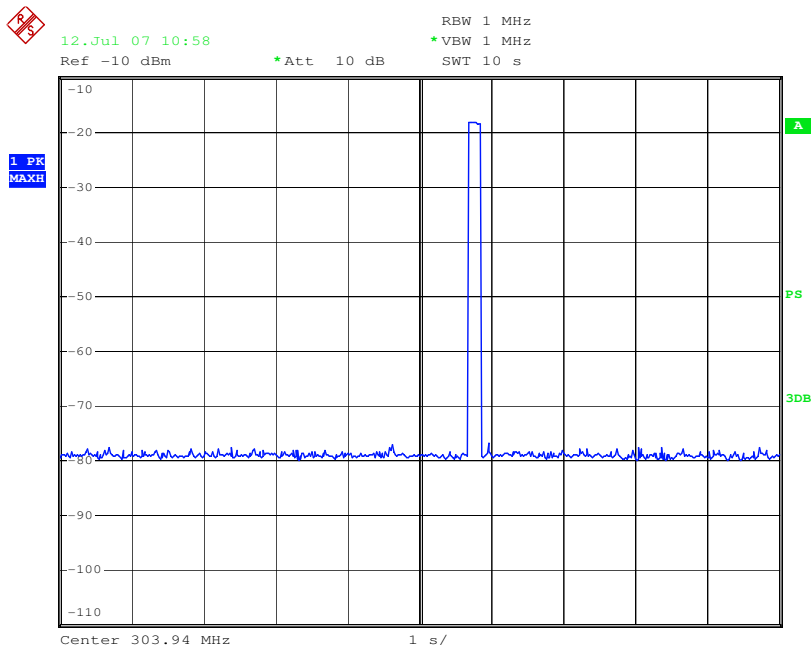

N

Date: 12.JUL.2007 10:58:06

The results: The unit does meet the FCC Part 15C Section 15.231 requirements.

3. Regulation 15.231 (a2) A transmitter activated automatically shall cease transmission within 5 seconds after activation.

Result:

The EUT does not have automatic transmission.

4. Regulation 15.231 (a3) Periodic transmissions at regular predetermined intervals are not permitted. However, polling or supervision transmissions to determine system integrity of transmitters used in security or safety applications are allowed if the periodic rate of transmission does not exceed one transmission of not more than one second duration per hour for each transmitter.

Result:

The EUT does not employ periodic transmission.

5. Regulation 15.231 (a4) Intentional radiators which are employed for radio control purposes during emergencies involving fire, security, and safety of life, when activated to signal an alarm, may operate during the pendency of the alarm condition.

Result:

This section is not applicable to the EUT.