



Product Service

Choose certainty.
Add value.

Report On

FCC Testing of the
Orolia SAS KanAtoN3
In accordance with FCC CFR 47 Part 15B

COMMERCIAL-IN-CONFIDENCE

FCC ID: VIQ-KANATON

Document 75925284 Report 01 Issue 1

March 2014



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
Orolia SAS KanAtoN3
In accordance with FCC CFR 47 Part 15B

Document 75925284 Report 01 Issue 1

March 2014

PREPARED FOR


Orolia SAS
Z.I des 5 Chemins
CS 10028
56520
Guidel
France

PREPARED BY



Natalie Bennett
Senior Administrator, Technical Solutions

APPROVED BY



Simon Bennett
Authorised Signatory

DATED

17 March 2014

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 15B. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s):



G Lawler



COMMERCIAL-IN-CONFIDENCE



CONTENTS

Section	Page No
1 REPORT SUMMARY	3
1.1 Introduction	4
1.2 Brief Summary of Results	5
1.3 Declaration of Build Status	6
1.4 Product Information	7
1.5 Test Conditions	7
1.6 Deviations from the Standard	7
1.7 Modification Record	7
2 TEST DETAILS	8
2.1 Radiated Emissions	9
3 TEST EQUIPMENT USED	12
3.1 Test Equipment Used	13
3.2 Measurement Uncertainty	14
4 ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....	15
4.1 Accreditation, Disclaimers and Copyright.....	16



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
Orolia SAS KanAtoN3
In accordance with FCC CFR 47 Part 15B



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the Orolia SAS KanAtoN3 to the requirements of FCC CFR 47 Part 15B.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Orolia SAS
Model Number(s)	Kan AtoN3
Serial Number(s)	LX1200023441
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 15B (2013)
Incoming Release Date	Declaration of Build Status 17 March 2014
Disposal Reference Number	Held Pending Disposal
Date	Not Applicable
Order Number	1400012
Date	10 January 2014
Start of Test	5 March 2014
Finish of Test	5 March 2014
Name of Engineer(s)	G Lawler
Related Document(s)	ANSI C63.4 (2003)



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 15B is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
Idle				
2.1	15.109	Radiated Emissions	Pass	ANSI C63.4 (2003)



Product Service

1.3 DECLARATION OF BUILD STATUS

Manufacturer	OROLIA SAS
Country of origin	FRANCE
Technical Description	AIS transponder used in automated systems for Aids To Navigation
Model No	KanAtoN3
Part No	1202570
Serial No	Not Applicable
Drawing Number	B0301801
Build Status	In production
Software Issue	YLB0302K
Hardware Issue	I618A
FCC ID	VIQ-KANATON
IC ID	
Highest Operating Frequency	162.025 MHz
Signature	S. INCHELEAU 
Date	19/03/2014
D of B S Serial No	

Note: This document has been prepared to enable manufacturers with no mechanism for producing their own Declaration of Build Status, to declare the build state of the equipment submitted for test.



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a Orolia SAS KanAtoN3. A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 24 V DC supply.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard were made during testing.

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
Orolia SAS KanAtoN3
In accordance with FCC CFR 47 Part 15B



2.1 RADIATED EMISSIONS

2.1.1 Specification Reference

FCC CFR 47 Part 15B, Clause 15.109

2.1.2 Equipment Under Test and Modification State

Kan AtoN3 S/N: LX1200023441 - Modification State 0

2.1.3 Date of Test

5 March 2014

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

A test environment and testing arrangement meeting the specification of ANSI C63.4 was used during all testing. The Equipment Under Test (EUT) was set upon a non-conducting platform at an elevation of 80 cm above a horizontal reference ground plane.

The horizontal reference ground plane encompasses a turntable which was used to adjust the azimuth of the EUT. An antenna positioner was used to elevate the measuring antenna above the horizontal reference ground plane whereby the antenna elevation was adjustable between 1 m and 4 m.

Exploratory radiated emissions measurements were made by azimuth emissions searches over a range of 0° and 360°. These exploratory radiated emissions measurements were made using a peak detector over a frequency range of 30 MHz to 2 GHz, with the measuring antenna in both vertical and horizontal polarizations.

At least six of the greatest peak emissions, frequency positions were selected from the exploratory radiated emissions measurements for further evaluation as final measuring points.

To ascertain the azimuth and measuring antenna polarization that yields the highest peak emission level, each final measurement frequency was investigated by continuous azimuth emissions searching with the measuring antenna in both vertical and horizontal polarizations. For each final measurement frequency, the respective peak emission azimuth and measuring antenna polarization was used during a measuring antenna elevation search from 1 m to 4 m. Each final measurement frequency was then measured with the EUT azimuth, measuring antenna height and polarization that yielded the greatest peak emission level.

Final measurement points over the frequency range of 30 MHz to 1 GHz were measured using a quasi-peak detector. Final measurement points over the frequency range of 1 GHz and 2 GHz were measured using peak and average methods. Peak measurements were made using a peak detector with 1 MHz resolution and video bandwidths. Average measurements were made using a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

All final measurements were assessed against the Class B radiated emission limits in Clause 15.109 of FCC CFR 47 FCC Part 15B.




Product Service

2.1.6 Environmental Conditions

Ambient Temperature 18.4°C
 Relative Humidity 35.0%

2.1.7 Test Results

30 MHz to 1 GHz

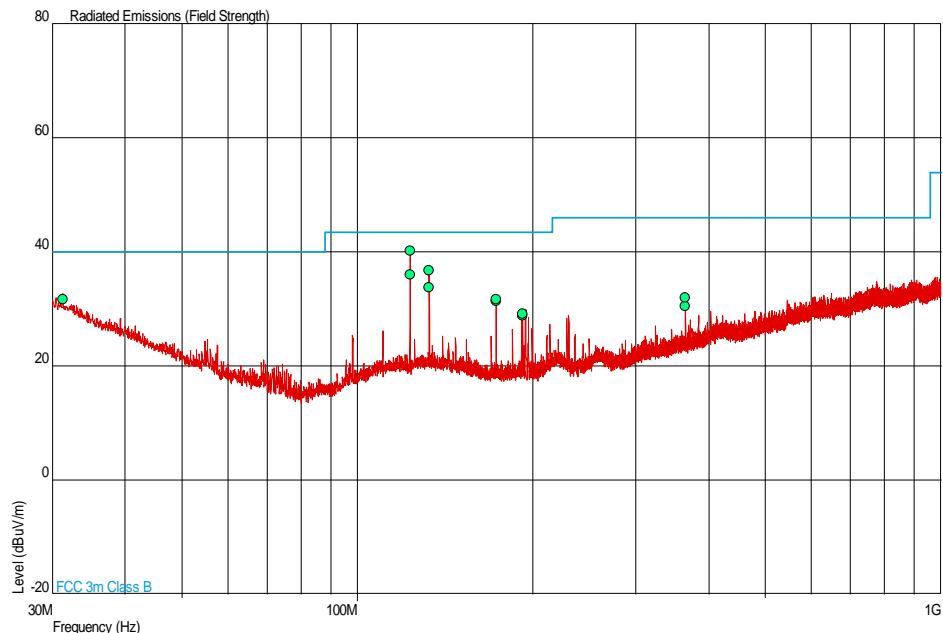


Frequency (MHz)	QP Level (dB μ V/m)	QP Level (μ V/m)	QP Limit (dB μ V/m)	QP Limit (μ V/m)	QP Margin (dB μ V/m)	QP Margin (μ V/m)	Angle (Deg)	Height (m)	Polarity
31.300	31.6	38.0	40.0	100	-8.4	62.0	30	1.00	Vertical
123.119	36.1	63.8	43.5	150	-7.4	86.2	111	2.59	Horizontal
123.125	40.3	103.5	43.5	150	-3.2	46.5	309	1.00	Vertical
132.766	33.8	49.0	43.5	150	-9.7	101.0	280	2.88	Horizontal
132.781	36.8	69.2	43.5	150	-6.7	80.8	264	1.00	Vertical
172.790	31.4	37.2	43.5	150	-12.1	112.8	265	2.30	Horizontal
172.817	31.8	38.9	43.5	150	-11.7	61.1	327	1.00	Vertical
191.985	28.8	27.5	43.5	150	-14.7	122.5	55	1.00	Horizontal
192.001	29.2	28.8	43.5	150	-14.3	121.2	56	1.00	Vertical
364.821	32.0	39.8	46.0	200	-14.0	160.2	200	1.25	Vertical
364.821	30.5	33.5	46.0	200	-15.5	166.5	331	1.00	Horizontal

1 GHz to 2 GHz



Product Service

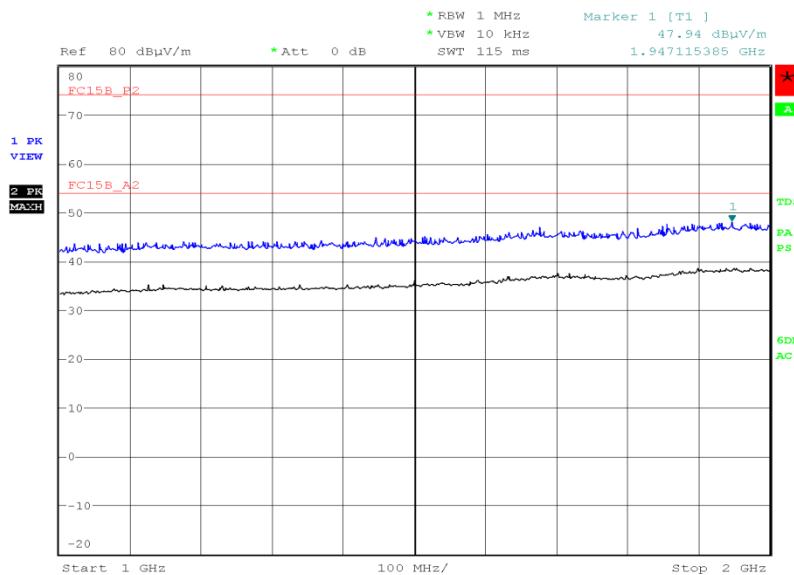

Date: 5.MAR.2014 20:46:47



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - Radiated Emissions					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	3-Apr-2014
Screened Room (5)	Rainford	Rainford	1545	24	10-Jan-2015
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	10-Jun-2015
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	22-Oct-2014
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU

TU – Traceability Unscheduled



Product Service

3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Radiated Emissions	30MHz to 1GHz: ± 5.1 dB 1GHz to 40GHz: ± 6.3 dB



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2014 TÜV SÜD Product Service