

# ***FCC TEST REPORT***

**FCC ID** : VIX-ARS50A  
**Applicant** : Audiovox Accessories Corp.  
**Address** : 701 Congressional Blvd. suite 200, Carmel, Indiana, United States

**Equipment Under Test (EUT) :**

Product Name : AUDIO SYSTEM WITH BLUETOOTH  
Model No. : ARS50-A

**Standards** : FCC CFR47 Part 15 Section 15.247:2010


**Date of Test** : May 16 ~ May 25, 2012

**Date of Issue** : June 1, 2012

**Test Engineer** : Zero Zhou / Engineer



**Reviewed By** : Philo zhong / Manager



|                    |               |
|--------------------|---------------|
| <b>Test Result</b> | <b>: PASS</b> |
|--------------------|---------------|

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

12B, West Tower, Aidi Building, No.5003, Binhe Road, Futian District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

✧ The sample detailed above has been tested to the requirements of Council Directives ANSI C63.4:2003. The test results have been reviewed against the Directives above and found to meet their essential requirements.

## 2 Test Summary

| Test Items  | Test Requirement                 | Result |
|---|----------------------------------|--------|
| Radiated Spurious Emissions<br>(26MHz to 25GHz)                   | 15.205(a)<br>15.209<br>15.247(d) | PASS   |
| 20dB Bandwidth  | 15.247(a)(1)                     | PASS   |
| Maximum Peak Output Power   | 15.247(b)(1)                     | PASS   |
| Frequency Separation  | 15.247(a)(1)                     | PASS   |
| Number of Hopping Frequency                                       | 15.247(a)(1)(iii)                | PASS   |
| Dwell time  | 15.247(a)(1)(iii)                | PASS   |
| Maximum Permissible Exposure<br>(Exposure of Humans to RF Fields) | 1.1307(b)(1)                     | PASS   |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

### 3 Contents

|   | <b>Page</b> |
|---|-------------|
| <b>1 COVER PAGE .....</b>                                     | <b>1</b>    |
| <b>2 TEST SUMMARY .....</b>                                   | <b>2</b>    |
| <b>3 CONTENTS.....</b>  | <b>3</b>    |
| <b>4 GENERAL INFORMATION .....</b>                            | <b>5</b>    |
| 4.1 CLIENT INFORMATION .....                                  | 5           |
| 4.2 GENERAL DESCRIPTION OF E.U.T. ....                        | 5           |
| 4.3 DETAILS OF E.U.T.....                                     | 5           |
| 4.4 DESCRIPTION OF SUPPORT UNITS .....                        | 5           |
| 4.5 STANDARDS APPLICABLE FOR TESTING.....                     | 5           |
| 4.6 TEST FACILITY .....                                       | 6           |
| 4.7 TEST LOCATION .....                                       | 6           |
| <b>5 EQUIPMENT USED DURING TEST .....</b>                     | <b>7</b>    |
| <b>6 CONDUCTED EMISSION .....</b>                             | <b>8</b>    |
| 6.1 E.U.T. OPERATION.....                                     | 8           |
| 6.2 EUT SETUP.....  | 9           |
| 6.3 CONDUCTED EMISSION TEST RESULT .....                      | 9           |
| 6.4 PHOTOGRAPH – CONDUCTED EMISSION TEST SETUP .....          | 12          |
| <b>7 RADIATED SPURIOUS EMISSIONS .....</b>                    | <b>13</b>   |
| 7.1 EUT OPERATION : .....                                     | 13          |
| 7.2 MEASUREMENT UNCERTAINTY .....                             | 13          |
| 7.3 TEST SETUP.....   | 14          |
| 7.4 SPECTRUM ANALYZER SETUP .....                             | 16          |
| 7.5 TEST PROCEDURE .....                                      | 17          |
| 7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION .....            | 17          |
| 7.7 SUMMARY OF TEST RESULTS .....                             | 17          |
| 7.8 PHOTOGRAPH – RADIATION SPURIOUS EMISSION TEST SETUP ..... | 27          |
| <b>8 BAND EDGE MEASUREMENTS .....</b>                         | <b>29</b>   |
| <b>9 20 DB BANDWIDTH MEASUREMENT .....</b>                    | <b>34</b>   |
| 9.1 TEST PROCEDURE: .....                                     | 34          |
| 9.2 TEST RESULT: .....  | 34          |
| <b>10 MAXIMUM PEAK OUTPUT POWER .....</b>                     | <b>36</b>   |
| 10.1 TEST PROCEDURE:.....                                     | 36          |
| 10.2 TEST RESULT:.....  | 36          |
| <b>11 HOPPING CHANNEL SEPARATION .....</b>                    | <b>37</b>   |
| 11.1 TEST PROCEDURE:.....                                     | 37          |
| 11.2 TEST RESULT:.....  | 37          |
| <b>12 NUMBER OF HOPPING FREQUENCY.....</b>                    | <b>40</b>   |
| 12.1 TEST PROCEDURE:.....                                     | 40          |
| 12.2 TEST RESULT: TOTAL CHANNELS ARE 79 CHANNELS.....         | 40          |
| <b>13 DWELL TIME .....</b>                                    | <b>41</b>   |
| 13.1 TEST PROCEDURE:.....                                     | 41          |
| 13.2 TEST RESULT:.....  | 41          |
| <b>14 ANTENNA REQUIREMENT.....</b>                            | <b>48</b>   |
| <b>15 RF EXPOSURE.....</b>                                    | <b>49</b>   |
| 15.1 REQUIMENTS:.....   | 49          |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

15.2 THE PROCEDURES / LIMIT ..... 49

15.3 MPE CALCULATION METHOD ..... 50

**16 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS ..... 51**

16.1 PRODUCT VIEW ..... 51

16.2 EUT – APPEARANCE VIEW ..... 51

16.3 EUT – OPEN VIEW ..... 53

16.4 EUT – PCB1 VIEW ..... 54

16.5 EUT – PCB2 VIEW ..... 56

**17 FCC LABEL ..... 58**

## 4 General Information

### 4.1 Client Information

**Applicant** : Audiovox Accessories Corp.  
**Address of Applicant** : 701 Congressional Blvd. suite 200, Carmel, Indiana, United States

**Manufacturer** : SHENZHEN DEHUIDA TECHNOLOGY CO., LTD  
**Address of Manufacturer** : Dehuida Industrial Park, No.237, Xikeng Road, Guanlan Street, Baoan District, Shenzhen City.

### 4.2 General Description of E.U.T.

**Product Name** : AUDIO SYSTEM WITH BLUETOOTH  
**Model No.** : ARS50-A

### 4.3 Details of E.U.T.

**Technical Data** : Adapter Input: 100-240VAC, 50/60Hz, 0.5A MAX  
Adapter Output: 5.0VDC, 1.5A

**Operation Frequency** : 2402MHz ~ 2480MHz

**Antenna Gain** : 0 dBi

### 4.4 Description of Support Units

The EUT has been tested as an independent unit.

### 4.5 Standards Applicable for Testing

The customer requested FCC tests for a AUDIO SYSTEM WITH BLUETOOTH. The rules used were FCC CFR47 Part 15 Section 15.203, Section 15.207, Section 15.209 and Section 15.247.

#### **4.6 Test Facility**

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: IC7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, August 3, 2010.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

#### **4.7 Test Location**

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

## 5 Equipment Used during Test

| Equipment Name                           | Manufacturer Model   | Equipment No    | Internal No | Specification  | Cal. Date       | Due Date        | Uncertainty  |
|--|--|-----------------|-------------|--|-----------------|-----------------|--|
| EMC Analyzer                             | Agilent/<br>E7405A   | MY451149<br>43  | W2008001    | 9k-26.5GHz   | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±1dB   |
| Trilog Broadband Antenne                 | SCHWARZB<br>ECK MESS-<br>ELEKTROM<br>/ VULB9163            | 336             | W2008002    | 30-3000<br>MHz   | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±1dB   |
| Broad-band Horn Antenna                  | SCHWARZB<br>ECK MESS-<br>ELEKTROM<br>/ BBHA<br>9120D(1201) | 667             | W2008003    | 1-18GHz  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | f < 10 GHz :<br>±1dB<br>10GHz < f <<br>18 GHz :<br>±1.5dB                  |
| Broadband Preamplifier                   | SCHWARZB<br>ECK MESS-<br>ELEKTROM<br>/ BBV 9718            | 9718-148        | W2008004    | 0.5-18GHz  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±1.2dB   |
| 10m Coaxial Cable with N-male Connectors | SCHWARZB<br>ECK MESS-<br>ELEKTROM<br>/ AK 9515<br>H        | -               | -           | -  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | -  |
| 10m 50 Ohm Coaxial Cable                 | SCHWARZB<br>ECK MESS-<br>ELEKTROM<br>/ AK 9513             | -               | -           | -  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | -  |
| Positioning Controller                   | C&C LAB/<br>CC-C-IF  | -               | -           | -  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | -  |
| Color Monitor                            | SUNSP0/<br>SP-14C  | -               | -           | -  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | -  |
| Test Receiver                            | ROHDE&SC<br>HWARZ/<br>ESPI                                 | 101155          | W2005001    | 9k-3GHz  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±1dB   |
| Two-Line V-Network                       | ROHDE&SC<br>HWARZ/<br>ENV216                               | 100115          | W2005002    | 50Ω/50μH   | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±10%   |
| RF Generator                             | TESEQ<br>GmbH/<br>NSG4070                                  | 25781           | W2008008    | Fraq-range :<br>9K-1GHz<br>RF voltage : -<br>60 dBm-<br>+10dBm | Aug. 2,<br>2011 | Aug. 1,<br>2012 | Power_freq<br>distinguish0.<br>1Hz<br>RFelectricity<br>distinguish<br>0.1B |
| Active Loop Antenna                      | Beijing Dazhi<br>/ ZN30900A                                | -               | -           | -  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±1Db   |
| MP3 Player                               | Ipod<br>Player/A1285                                       | 5K85004U<br>3R0 | -           | -  | Aug. 2,<br>2011 | Aug. 1,<br>2012 | ±0.5dB   |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

## 6 Conducted Emission

|                   |  |
|-------------------|--|
| Test Requirement: | FCC CFR 47 Part 15 Section 15.207  |
| Test Method:      | ANSI C63.4:2003  |
| Test Result:      | PASS   |
| Frequency Range:  | 150kHz to 30MHz  |
| Class:            | Class B  |
| Limit:            | 66-56 dB $\mu$ V between 0.15MHz & 0.5MHz<br>56 dB $\mu$ V between 0.5MHz & 5MHz<br>60 dB $\mu$ V between 5MHz & 30MHz |
| Detector:         | Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit       |

### 6.1 E.U.T. Operation

#### Operating Environment:

|                       |           |
|-----------------------|-----------|
| Temperature:          | 25.5 °C   |
| Humidity:             | 51 % RH   |
| Atmospheric Pressure: | 1012 mbar |

#### EUT Operation:

The pre-test was performed in AUX IN mode, normal link mode and continuously transmit mode, the worse mode is normal link mode, so the data show is that mode's only.


The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.



## 6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15.207 limits.

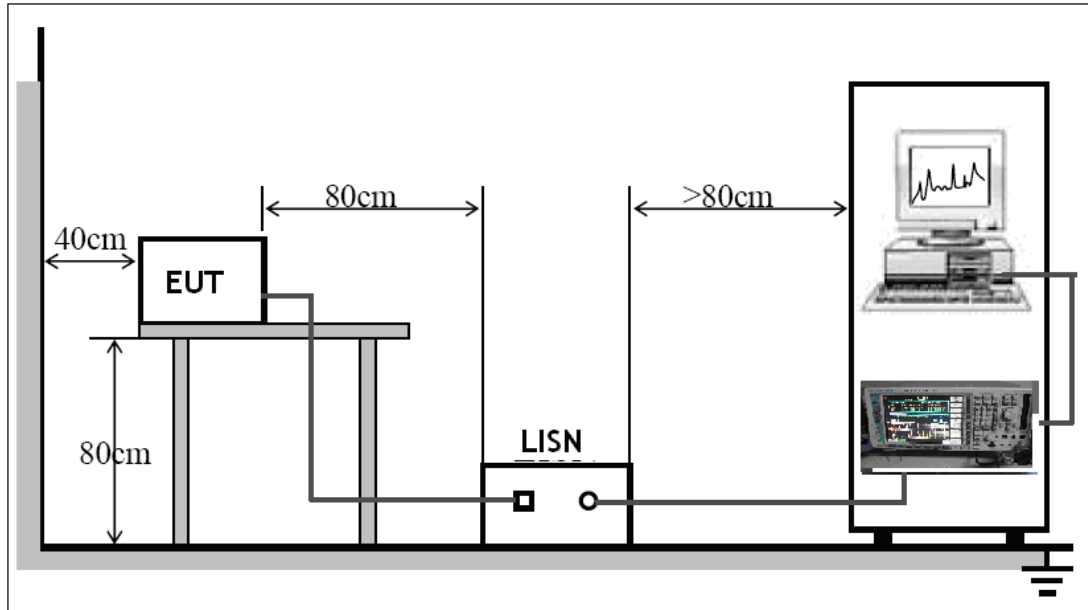


The EUT was placed on the test table in shielding room

## 6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.


Live line:

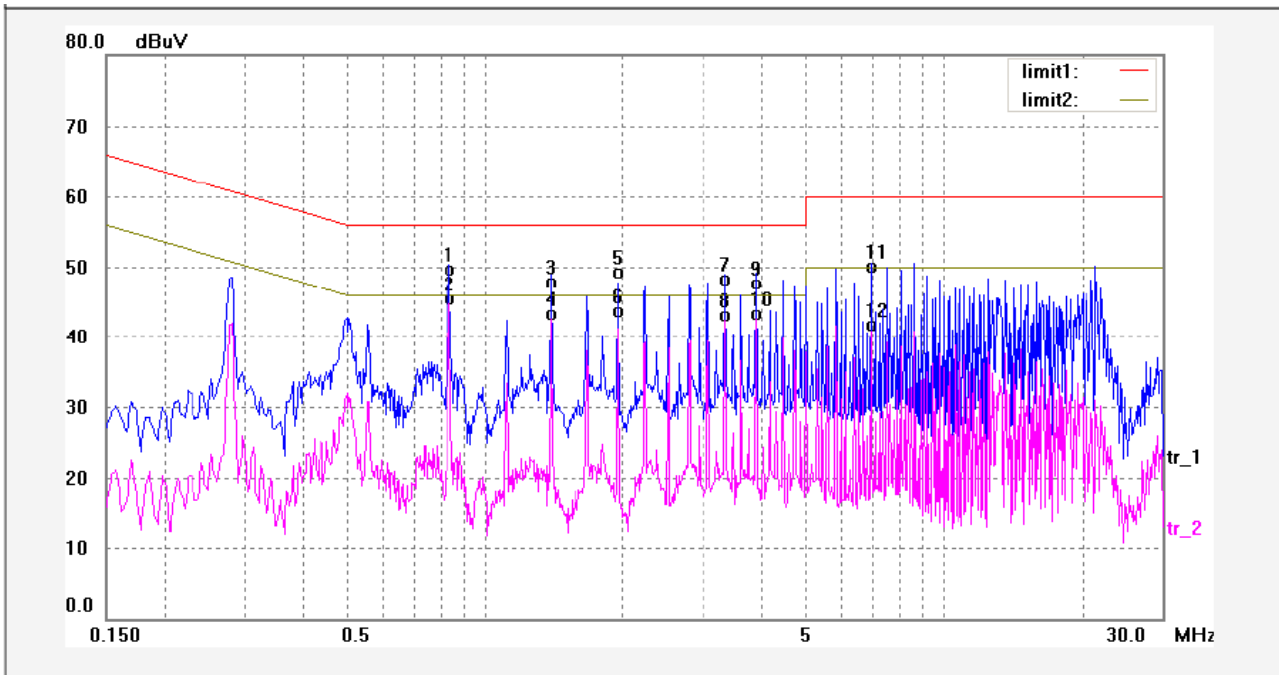

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.8380      | 38.61          | 10.36       | 48.97         | 56.00      | -7.03       | QP       |        |
| 2   | 0.8380      | 34.34          | 10.36       | 44.70         | 46.00      | -1.30       | AVG      |        |
| 3   | 1.3980      | 36.83          | 10.36       | 47.19         | 56.00      | -8.81       | QP       |        |
| 4   | 1.3980      | 32.13          | 10.36       | 42.49         | 46.00      | -3.51       | AVG      |        |
| 5   | 1.9580      | 38.17          | 10.37       | 48.54         | 56.00      | -7.46       | QP       |        |
| 6   | 1.9580      | 32.52          | 10.37       | 42.89         | 46.00      | -3.11       | AVG      |        |
| 7   | 3.3560      | 37.03          | 10.39       | 47.42         | 56.00      | -8.58       | QP       |        |
| 8   | 3.3560      | 31.98          | 10.39       | 42.37         | 46.00      | -3.63       | AVG      |        |
| 9   | 3.9140      | 36.57          | 10.39       | 46.96         | 56.00      | -9.04       | QP       |        |
| 10  | 3.9140      | 32.02          | 10.39       | 42.41         | 46.00      | -3.59       | AVG      |        |
| 11  | 6.9910      | 38.97          | 10.43       | 49.40         | 60.00      | -10.60      | QP       |        |
| 12  | 6.9910      | 30.44          | 10.43       | 40.87         | 50.00      | -9.13       | AVG      |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


Neutral line:

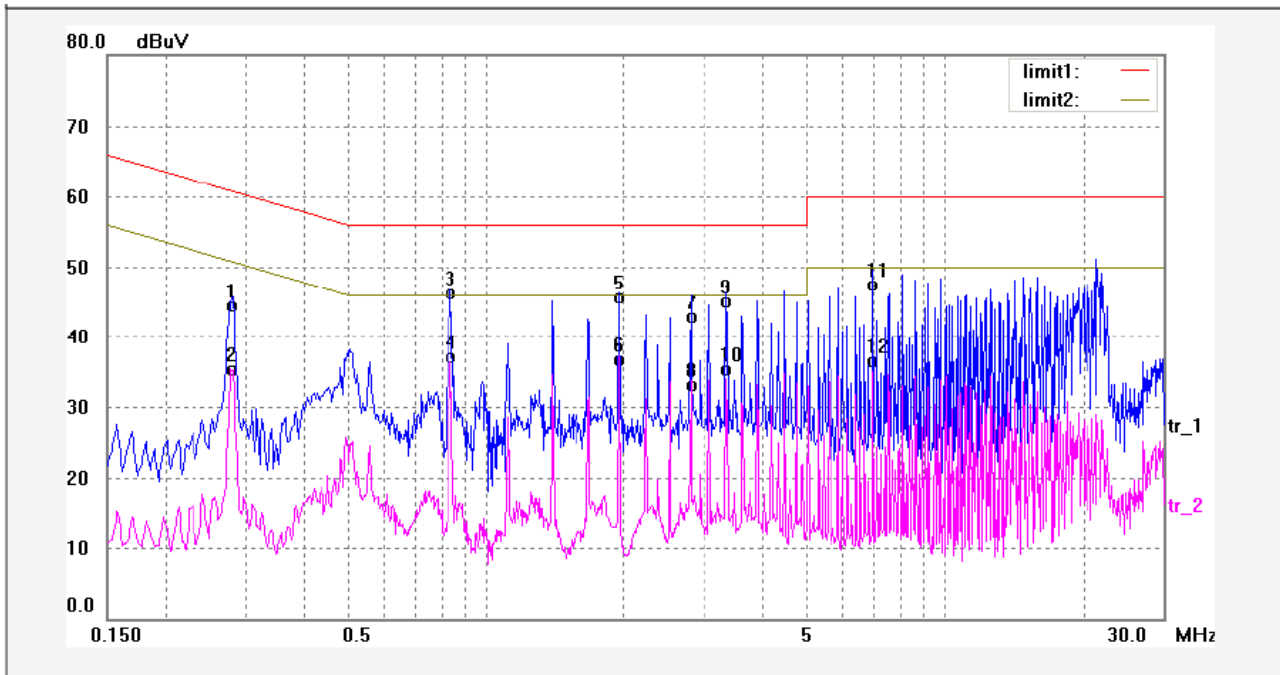

| No. | Freq. (MHz) | Reading (dBuV) | Factor (dB) | Result (dBuV) | Limit dBuV | Margin (dB) | Detector | Remark |
|-----|-------------|----------------|-------------|---------------|------------|-------------|----------|--------|
| 1   | 0.2819      | 33.28          | 10.35       | 43.63         | 60.76      | -17.13      | QP       |        |
| 2   | 0.2819      | 24.10          | 10.35       | 34.45         | 50.76      | -16.31      | AVG      |        |
| 3   | 0.8420      | 35.15          | 10.36       | 45.51         | 56.00      | -10.49      | QP       |        |
| 4   | 0.8420      | 25.86          | 10.36       | 36.22         | 46.00      | -9.78       | AVG      |        |
| 5   | 1.9620      | 34.58          | 10.37       | 44.95         | 56.00      | -11.05      | QP       |        |
| 6   | 1.9620      | 25.62          | 10.37       | 35.99         | 46.00      | -10.01      | AVG      |        |
| 7   | 2.7980      | 31.76          | 10.38       | 42.14         | 56.00      | -13.86      | QP       |        |
| 8   | 2.7980      | 21.84          | 10.38       | 32.22         | 46.00      | -13.78      | AVG      |        |
| 9   | 3.3620      | 34.00          | 10.39       | 44.39         | 56.00      | -11.61      | QP       |        |
| 10  | 3.3620      | 24.18          | 10.39       | 34.57         | 46.00      | -11.43      | AVG      |        |
| 11  | 7.0020      | 36.35          | 10.43       | 46.78         | 60.00      | -13.22      | QP       |        |
| 12  | 7.0020      | 25.28          | 10.43       | 35.71         | 50.00      | -14.29      | AVG      |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

**6.4 Photograph – Conducted Emission Test Setup**

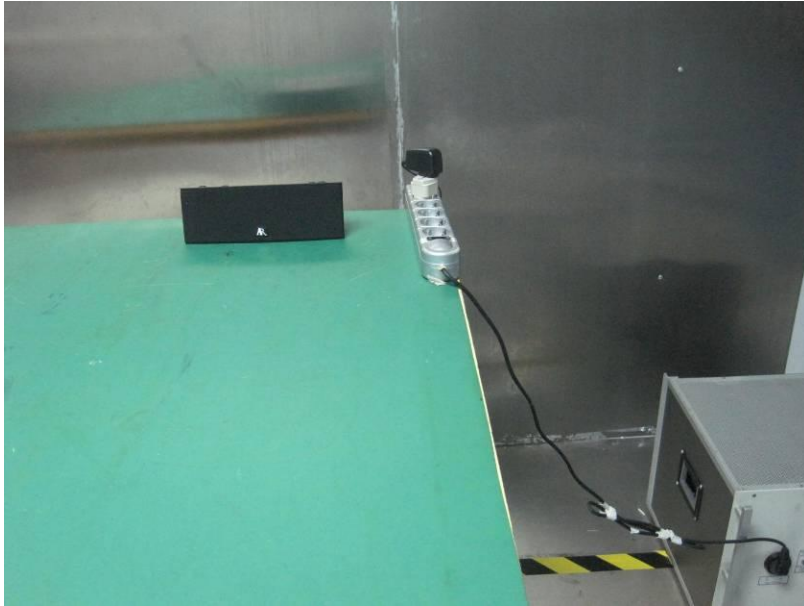

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12052841-S-S-F

## 7 Radiated Spurious Emissions

|                       |   |
|-----------------------|---|
| Test Requirement:     | FCC CFR47 Part 15 Section 15.209 & 15.247   |
| Test Method:          | DA 00-705   |
| Test Result:          | PASS  |
| Frequency Range:      | 26MHz to 25GHz  |
| Measurement Distance: | 3m  |
| 15.209 Limit:         | 40.0 dBuV/m between 30MHz & 88MHz<br>43.5 dBuV/m between 88MHz & 216MHz<br>46.0 dBuV/m between 216MHz & 960MHz<br>54.0 dBuV/m above 960MHz  |
| 15.247 (d) Limit:     | (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that Contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. |
| Test mode:            | The EUT was tested in continuously Transmit mode.   |

### 7.1 EUT Operation :

#### Operating Environment:

|                       |           |
|-----------------------|-----------|
| Temperature:          | 25.5 °C   |
| Humidity:             | 51 % RH   |
| Atmospheric Pressure: | 1012 mbar |

### 7.2 Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is  $\pm 5.03$ dB.


### 7.3 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003.

The diagram below shows the test setup that is utilized to make the measurements for emission from 26MHz to 30 MHz Emissions.

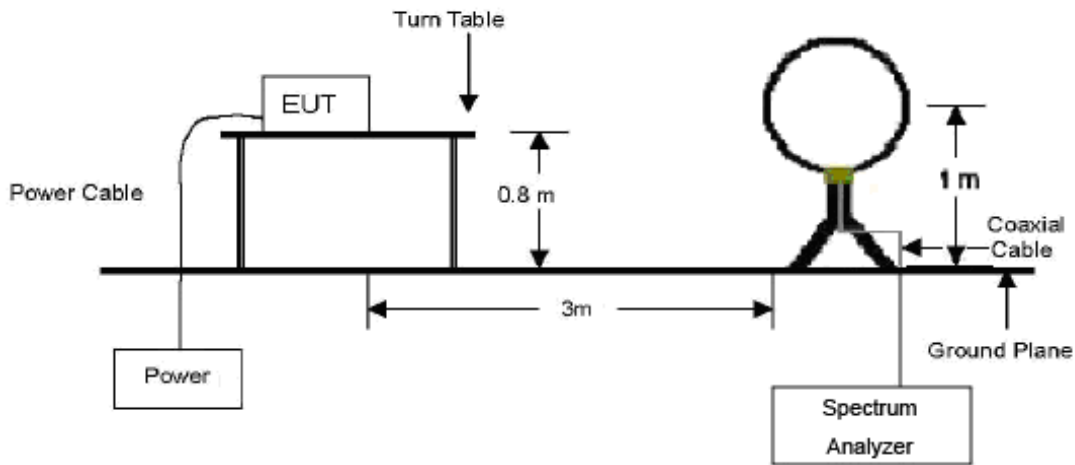


The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz Emissions.

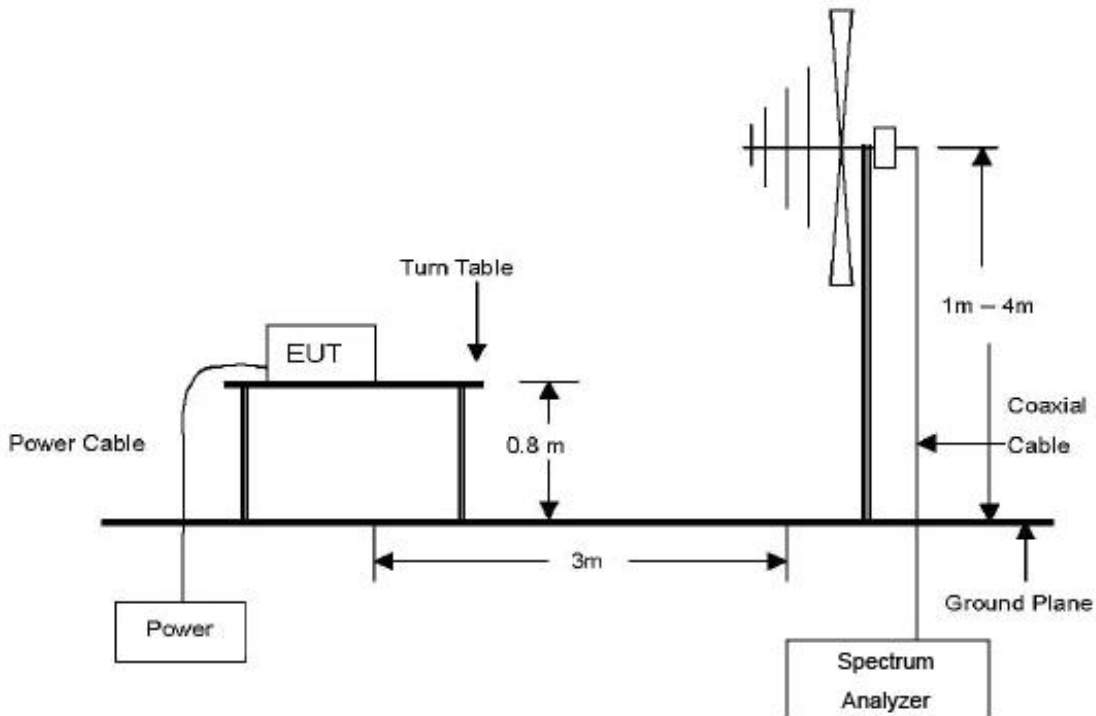

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 25 GHz Emissions.

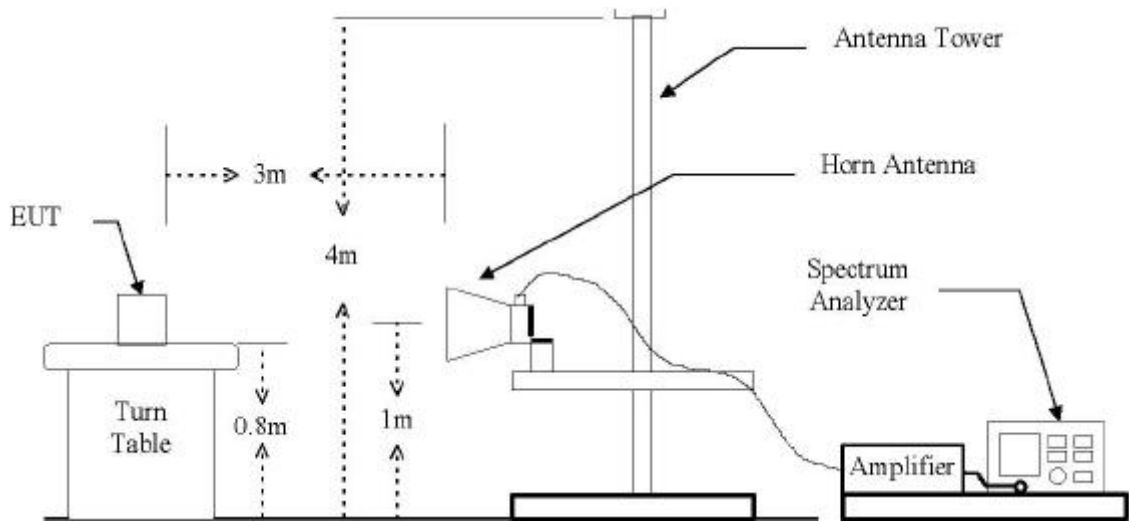

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

**7.4 Spectrum Analyzer Setup**

According to FCC Part15 Rules, the system was tested 25MHz to 25000MHz.

26MHz ~ 30MHz

|                           |       |
|---------------------------|-------|
| Start Frequency .....     | 26MHz |
| Stop Frequency .....      | 30MHz |
| Sweep Speed.....          | Auto  |
| IF Bandwidth .....        | 10KHz |
| Video Bandwidth.....      | 10KHz |
| Resolution Bandwidth..... | 10KHz |

30MHz ~ 1GHz

|                                    |         |
|------------------------------------|---------|
| Start Frequency .....              | 30 MHz  |
| Stop Frequency .....               | 1000MHz |
| Sweep Speed.....                   | Auto    |
| IF Bandwidth .....                 | 120 KHz |
| Video Bandwidth.....               | 100KHz  |
| Quasi-Peak Adapter Bandwidth ..... | 120 KHz |
| Quasi-Peak Adapter Mode.....       | Normal  |
| Resolution Bandwidth .....         | 100KHz  |

Above 1GHz

|                                    |          |
|------------------------------------|----------|
| Start Frequency .....              | 1000 MHz |
| Stop Frequency .....               | 25000MHz |
| Sweep Speed.....                   | Auto     |
| IF Bandwidth .....                 | 120 KHz  |
| Video Bandwidth.....               | 3MHz     |
| Quasi-Peak Adapter Bandwidth ..... | 120 KHz  |
| Quasi-Peak Adapter Mode.....       | Normal   |
| Resolution Bandwidth .....         | 1MHz     |



## 7.5 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X(normal uses) axis positioning. And all the modes was tested in the report. Only the worst case is shown in the report.

## 7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 7.7 Summary of Test Results

According to the data in this section, the EUT complied with the FCC CFR47 Part 15 Section 15.209 & 15.247 standards.


**Test mode: continuously receive mode**

Remark: the EUT was pretested at the high, middle and low channel, and the worse case was the middle Channel, so the data show was the low channel only.

Because the emissions below 30MHz are more than 20dB below the limit, the data is not show in the report.

Test Frequency : 30MHz ~ 1000MHz


Antenna polarization: Vertical

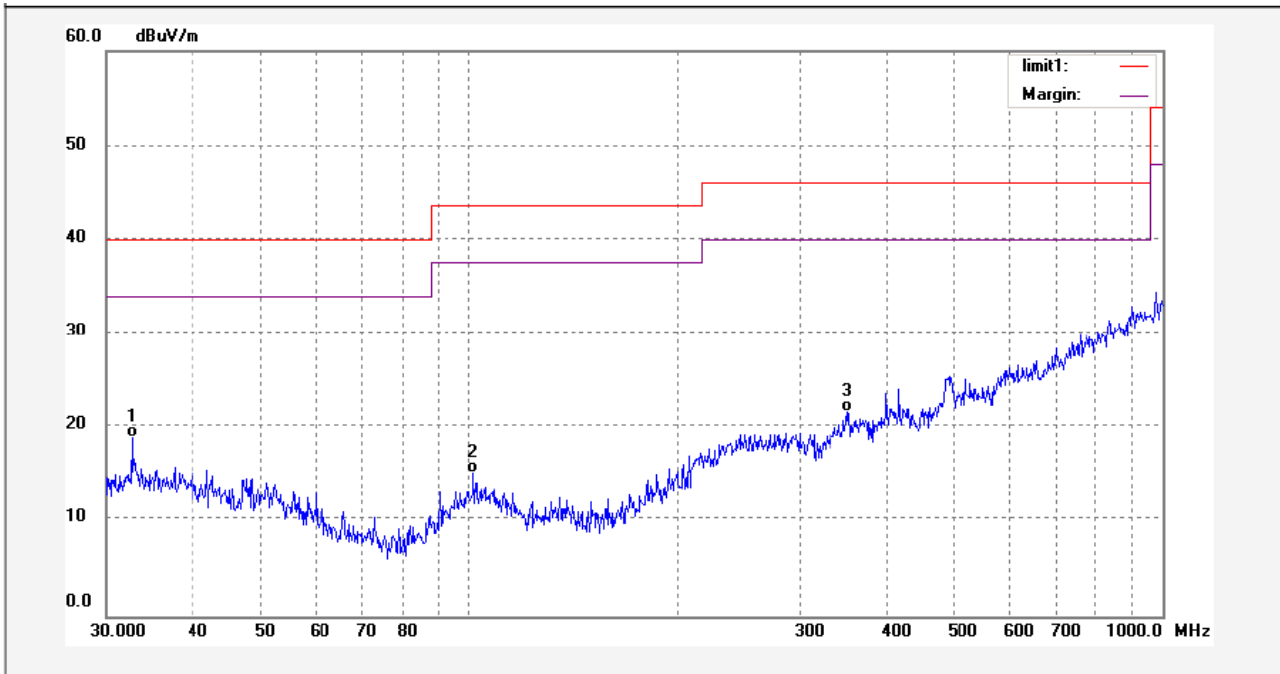

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 32.6395     | 2.35             | 16.58       | 18.93           | 40.00          | -21.07      | QP       |        |
| 2   | 101.5358    | 1.12             | 14.06       | 15.18           | 43.50          | -28.32      | QP       |        |
| 3   | 350.9722    | 1.48             | 20.19       | 21.67           | 46.00          | -24.33      | QP       |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna polarization: Horizontal

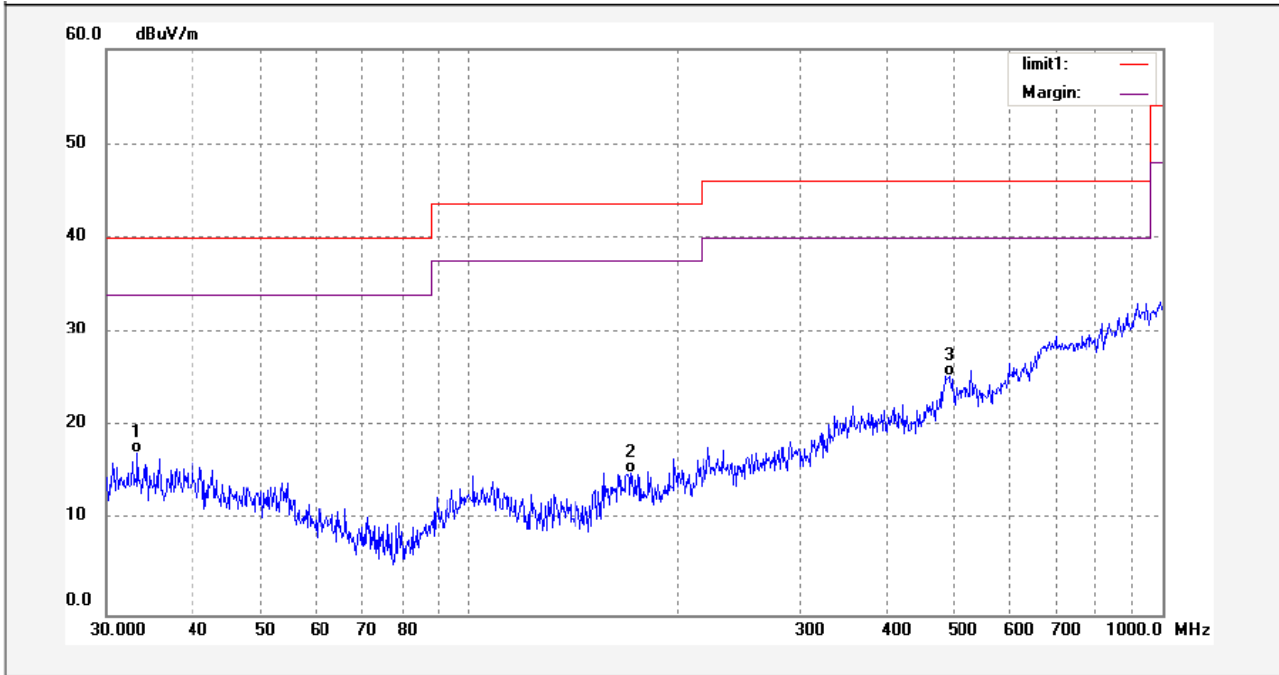


| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 33.2180     | 0.55             | 16.56       | 17.11           | 40.00          | -22.89      | QP       |        |
| 2   | 171.3890    | 2.97             | 12.15       | 15.12           | 43.50          | -28.38      | QP       |        |
| 3   | 491.7700    | 0.04             | 25.29       | 25.33           | 46.00          | -20.67      | QP       |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Test Frequency: Above 1GHz radiation test data:

Remark: No any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.


Antenna polarization: Vertical

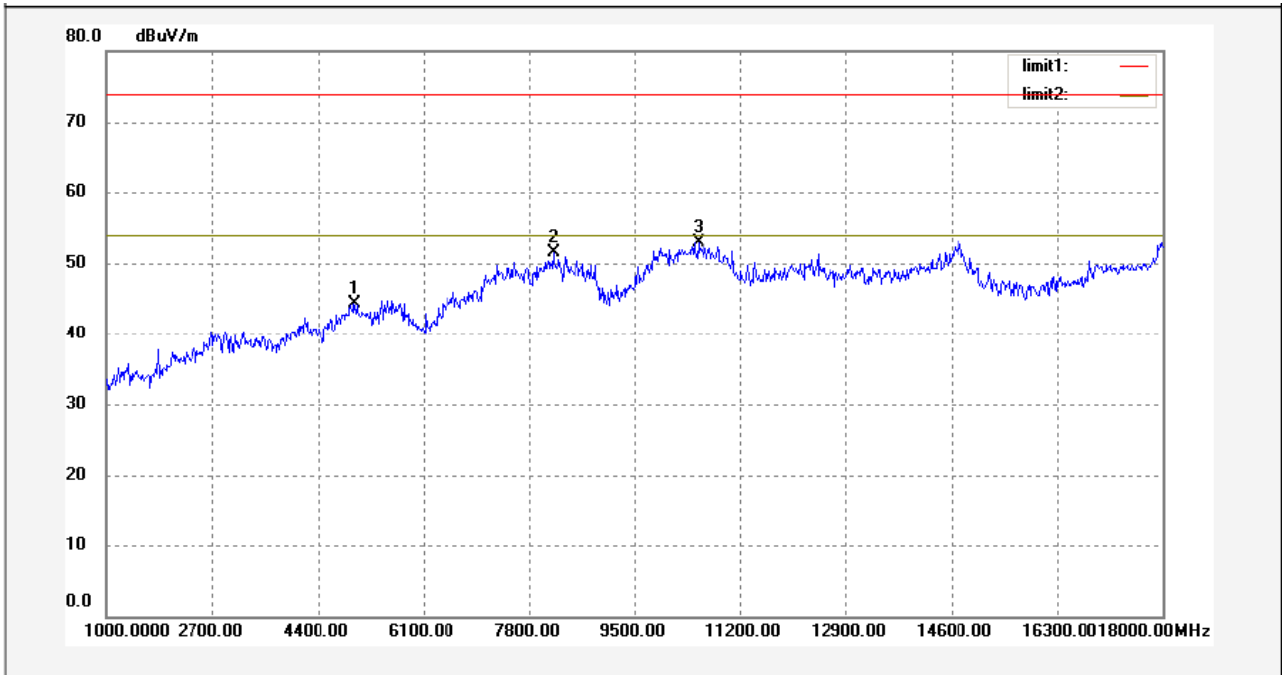

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 4985.972    | 39.15            | 5.12        | 44.27           | 74.00          | -29.73      | peak     |        |
| 2   | 8188.377    | 36.98            | 14.58       | 51.56           | 74.00          | -22.44      | peak     |        |
| 3   | 10522.044   | 34.45            | 18.52       | 52.97           | 74.00          | -21.03      | peak     |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna polarization: Horizontal

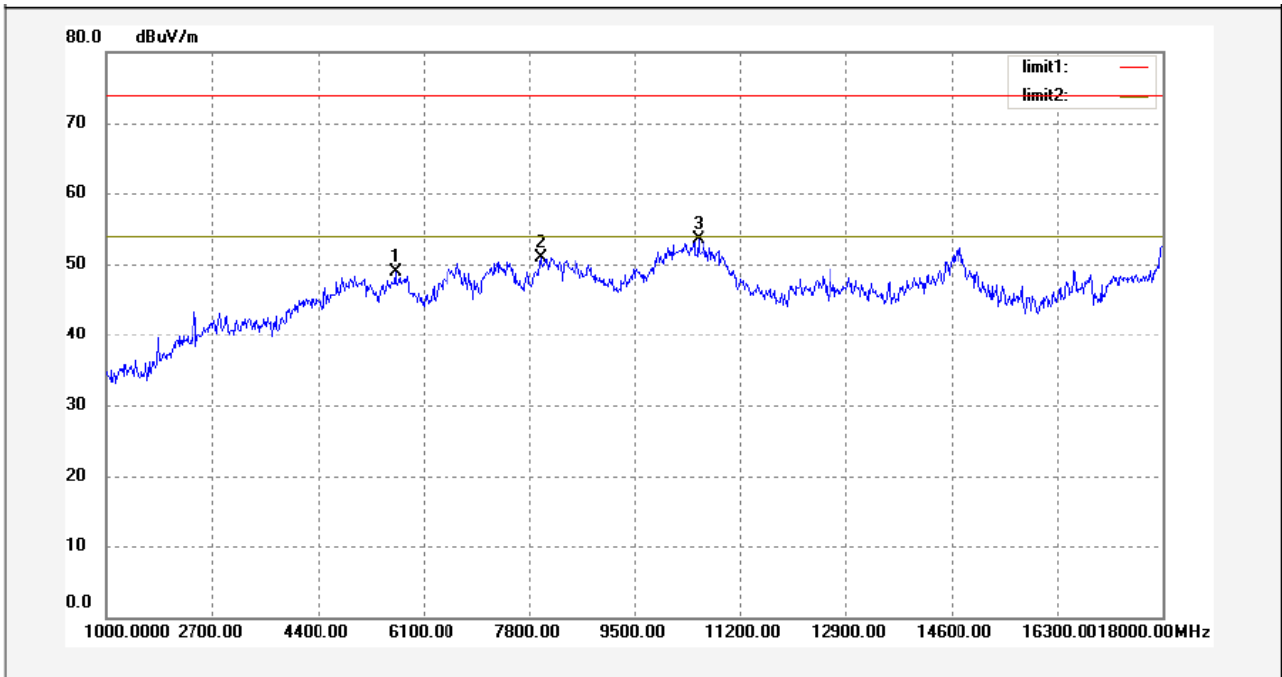

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 5650.301    | 39.56            | 9.37        | 48.93           | 74.00          | -25.07      | peak     |        |
| 2   | 7983.968    | 32.74            | 18.16       | 50.90           | 74.00          | -23.10      | peak     |        |
| 3   | 10522.044   | 32.60            | 20.84       | 53.44           | 74.00          | -20.56      | peak     |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


**Test mode: continuously transmit mode**

Remark: The pre-test was performed in AUX IN mode, continuously transmit mode and normal link mode, and the continuously transmit mode was pretested at the high, middle and low channel. The worst mode is normal link mode, so the data show was that mode's only.

Because the emissions below 30MHz are more than 20dB below the limit, the data is not show in the report.

Test Frequency : 30MHz ~ 1000MHz


Antenna polarization: Vertical

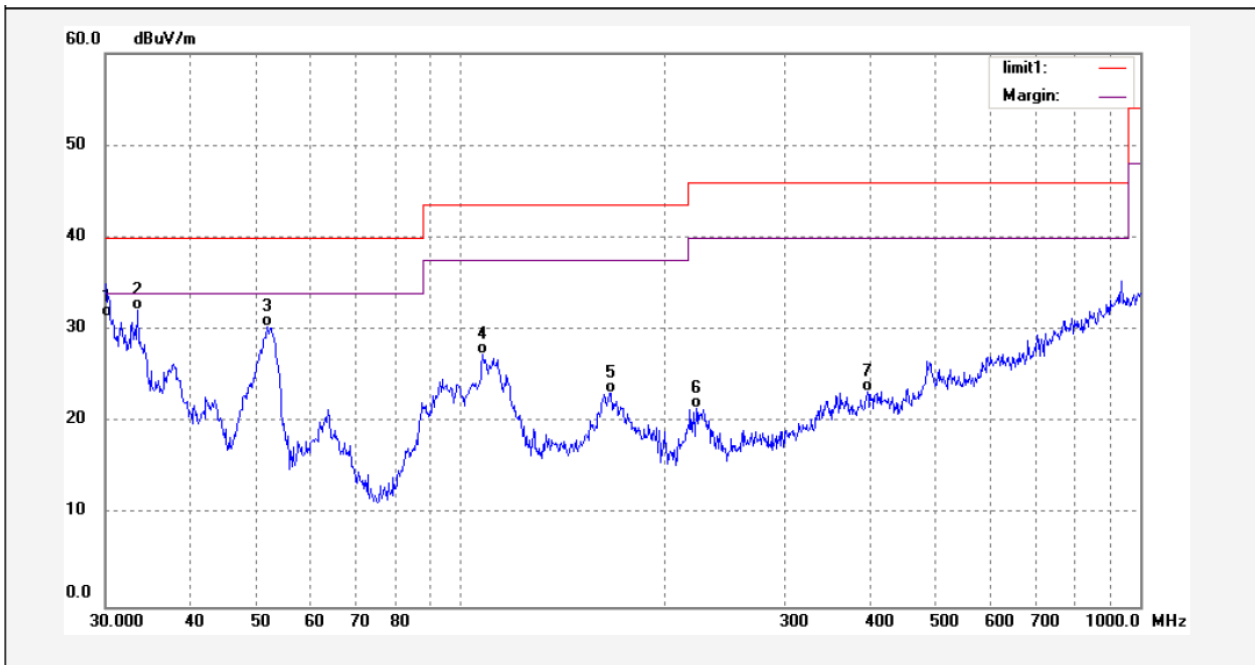

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 30.0000     | 15.20            | 16.15       | 31.35           | 40.00          | -8.65       | QP       |        |
| 2   | 33.4522     | 15.58            | 16.56       | 32.14           | 40.00          | -7.86       | QP       |        |
| 3   | 51.8998     | 15.88            | 14.50       | 30.38           | 40.00          | -9.62       | QP       |        |
| 4   | 107.7854    | 13.47            | 13.97       | 27.44           | 43.50          | -16.06      | QP       |        |
| 5   | 166.6385    | 11.18            | 11.99       | 23.17           | 43.50          | -20.33      | QP       |        |
| 6   | 222.2806    | 5.24             | 16.23       | 21.47           | 46.00          | -24.53      | QP       |        |
| 7   | 396.8992    | 2.50             | 20.81       | 23.31           | 46.00          | -22.69      | QP       |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Antenna polarization: Horizontal

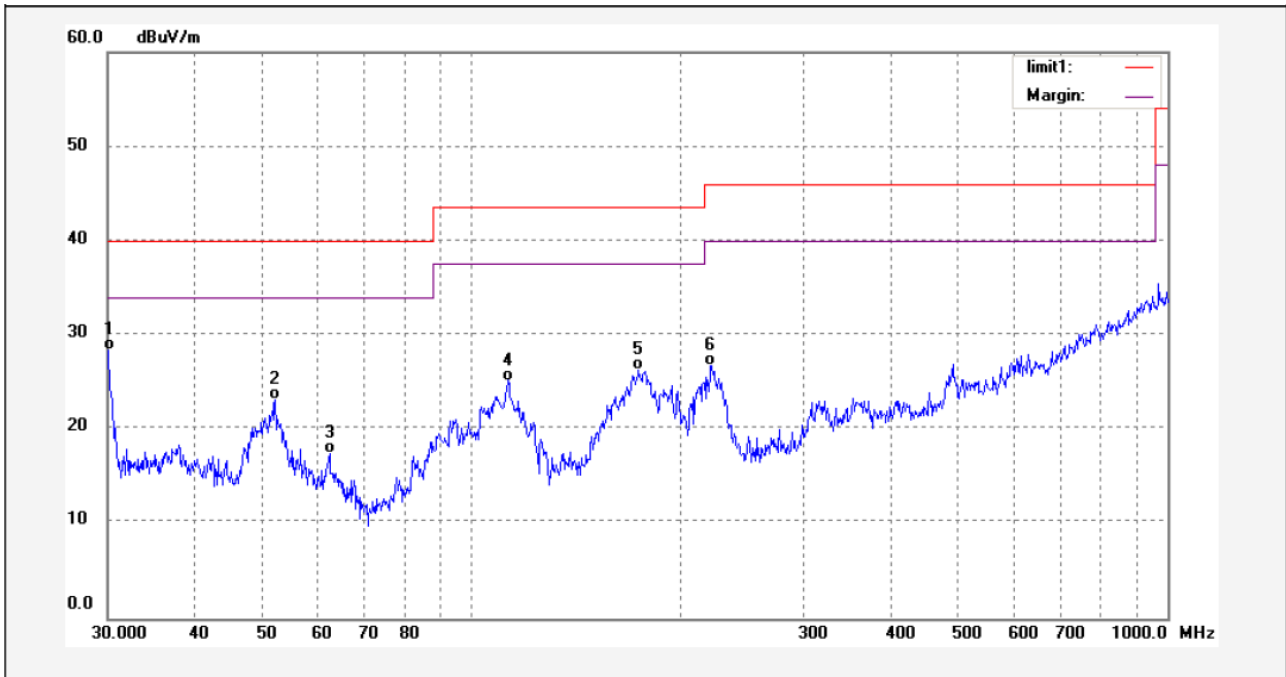

| No. | Freq. (MHz) | Reading (dBuV/m) | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Remark |
|-----|-------------|------------------|-------------|-----------------|----------------|-------------|----------|--------|
| 1   | 30.1056     | 12.28            | 16.17       | 28.45           | 40.00          | -11.55      | QP       |        |
| 2   | 52.2659     | 8.76             | 14.43       | 23.19           | 40.00          | -16.81      | QP       |        |
| 3   | 62.5230     | 5.65             | 11.77       | 17.42           | 40.00          | -22.58      | QP       |        |
| 4   | 112.8229    | 12.10            | 13.10       | 25.20           | 43.50          | -18.30      | QP       |        |
| 5   | 173.8146    | 14.03            | 12.27       | 26.30           | 43.50          | -17.20      | QP       |        |
| 6   | 220.7241    | 10.57            | 16.17       | 26.74           | 46.00          | -19.26      | QP       |        |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Test Frequency: 1GHz ~ 25GHz

And the below is the Fundamental and Harmonic

| Frequency (MHz)      | Detector | Antenna Polarization | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Height (m) | Turntable Angle (°) |
|----------------------|----------|----------------------|-------------------------|----------------|-------------|--------------------|---------------------|
| <b>Low frequency</b> |          |                      |                         |                |             |                    |                     |
| 2402.00              | AV       | Vertical             | 95.20                   |                | (Fund.)     | 1.3                | 50                  |
| 4804.00              | AV       | Vertical             | 38.59                   | 54.00          | -15.41      | 1.1                | 105                 |
| 7206.00              | AV       | Vertical             | 39.38                   | 54.00          | -14.62      | 1.6                | 160                 |
| 9608.00              | AV       | Vertical             | 35.80                   | 54.00          | -18.20      | 1.7                | 110                 |
| 12010.00             | AV       | Vertical             | 33.39                   | 54.00          | -20.61      | 1.7                | 195                 |
| 14412.00             | AV       | Vertical             | 35.40                   | 54.00          | -18.60      | 1.3                | 160                 |
| 16814.00             | AV       | Vertical             | 34.65                   | 54.00          | -19.35      | 1.8                | 150                 |
| 19216.00             | AV       | Vertical             | 29.57                   | 54.00          | -24.43      | 1.4                | 120                 |
| 21618.00             | AV       | Vertical             | 26.81                   | 54.00          | -27.19      | 1.7                | 40                  |
| 24020.00             | AV       | Vertical             | 29.89                   | 54.00          | -24.11      | 1.1                | 110                 |
| 2402.00              | AV       | Horizontal           | 88.93                   |                | (Fund.)     | 1.3                | 60                  |
| 4804.00              | AV       | Horizontal           | 35.48                   | 54.00          | -18.52      | 1.1                | 160                 |
| 7206.00              | AV       | Horizontal           | 33.81                   | 54.00          | -20.19      | 1.6                | 110                 |
| 9608.00              | AV       | Horizontal           | 36.36                   | 54.00          | -17.64      | 1.1                | 160                 |
| 12010.00             | AV       | Horizontal           | 34.60                   | 54.00          | -19.40      | 1.6                | 100                 |
| 14412.00             | AV       | Horizontal           | 31.45                   | 54.00          | -22.55      | 1.1                | 170                 |
| 16814.00             | AV       | Horizontal           | 34.26                   | 54.00          | -19.74      | 1.6                | 160                 |
| 19216.00             | AV       | Horizontal           | 26.77                   | 54.00          | -27.23      | 1.7                | 140                 |
| 21618.00             | AV       | Horizontal           | 27.71                   | 54.00          | -26.29      | 1.3                | 150                 |
| 24020.00             | AV       | Horizontal           | 26.33                   | 54.00          | -27.67      | 1.4                | 70                  |
| 2402.00              | PK       | Vertical             | 103.08                  |                | (Fund.)     | 1.6                | 40                  |
| 4804.00              | PK       | Vertical             | 57.44                   | 74.00          | -16.56      | 1.7                | 110                 |
| 7206.00              | PK       | Vertical             | 58.38                   | 74.00          | -15.62      | 1.7                | 150                 |
| 9608.00              | PK       | Vertical             | 55.11                   | 74.00          | -18.89      | 1.3                | 220                 |
| 12010.00             | PK       | Vertical             | 51.47                   | 74.00          | -22.53      | 1.3                | 110                 |
| 14412.00             | PK       | Vertical             | 52.76                   | 74.00          | -21.24      | 1.1                | 120                 |
| 16814.00             | PK       | Vertical             | 49.57                   | 74.00          | -24.43      | 1.5                | 175                 |
| 19216.00             | PK       | Vertical             | 47.85                   | 74.00          | -26.15      | 1.1                | 170                 |
| 21618.00             | PK       | Vertical             | 45.63                   | 74.00          | -28.37      | 1.8                | 120                 |
| 24020.00             | PK       | Vertical             | 46.78                   | 74.00          | -27.22      | 1.3                | 130                 |
| 2402.00              | PK       | Horizontal           | 97.43                   |                | (Fund.)     | 1.9                | 110                 |
| 4804.00              | PK       | Horizontal           | 55.75                   | 74.00          | -18.25      | 1.7                | 150                 |
| 7206.00              | PK       | Horizontal           | 53.50                   | 74.00          | -20.50      | 1.9                | 100                 |
| 9608.00              | PK       | Horizontal           | 50.61                   | 74.00          | -23.39      | 1.1                | 50                  |
| 12010.00             | PK       | Horizontal           | 52.59                   | 74.00          | -21.41      | 1.3                | 195                 |
| 14412.00             | PK       | Horizontal           | 47.50                   | 74.00          | -26.50      | 1.4                | 40                  |
| 16814.00             | PK       | Horizontal           | 53.60                   | 74.00          | -20.40      | 1.9                | 230                 |
| 19216.00             | PK       | Horizontal           | 45.45                   | 74.00          | -28.55      | 1.4                | 120                 |
| 21618.00             | PK       | Horizontal           | 46.78                   | 74.00          | -27.22      | 1.3                | 160                 |

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.



|                         |    |            |        |       |         |     |     |
|-------------------------|----|------------|--------|-------|---------|-----|-----|
| 24020.00                | PK | Horizontal | 48.55  | 74.00 | -25.45  | 1.8 | 120 |
| <b>Middle frequency</b> |    |            |        |       |         |     |     |
| 2441.00                 | AV | Vertical   | 94.55  |       | (Fund.) | 1.6 | 80  |
| 4882.00                 | AV | Vertical   | 41.11  | 54.00 | -12.89  | 1.5 | 150 |
| 7323.00                 | AV | Vertical   | 39.32  | 54.00 | -14.68  | 1.2 | 130 |
| 9764.00                 | AV | Vertical   | 35.23  | 54.00 | -18.77  | 1.1 | 50  |
| 12205.00                | AV | Vertical   | 39.82  | 54.00 | -14.18  | 1.3 | 60  |
| 14646.00                | AV | Vertical   | 33.64  | 54.00 | -20.36  | 1.1 | 190 |
| 17087.00                | AV | Vertical   | 35.44  | 54.00 | -18.56  | 1.6 | 50  |
| 19528.00                | AV | Vertical   | 32.23  | 54.00 | -21.77  | 1.4 | 60  |
| 21969.00                | AV | Vertical   | 30.36  | 54.00 | -23.64  | 1.9 | 220 |
| 24410.00                | AV | Vertical   | 34.45  | 54.00 | -19.55  | 1.1 | 140 |
| 2441.00                 | AV | Horizontal | 90.60  |       | (Fund.) | 1.2 | 180 |
| 4882.00                 | AV | Horizontal | 37.58  | 54.00 | -16.42  | 1.5 | 130 |
| 7323.00                 | AV | Horizontal | 38.79  | 54.00 | -15.21  | 1.6 | 320 |
| 9764.00                 | AV | Horizontal | 33.70  | 54.00 | -20.30  | 1.1 | 180 |
| 12205.00                | AV | Horizontal | 31.39  | 54.00 | -22.61  | 1.3 | 190 |
| 14646.00                | AV | Horizontal | 35.29  | 54.00 | -18.71  | 1.3 | 230 |
| 17087.00                | AV | Horizontal | 34.52  | 54.00 | -19.48  | 1.7 | 195 |
| 19528.00                | AV | Horizontal | 29.20  | 54.00 | -24.80  | 1.3 | 130 |
| 21969.00                | AV | Horizontal | 30.25  | 54.00 | -23.75  | 1.3 | 200 |
| 24410.00                | AV | Horizontal | 28.43  | 54.00 | -25.57  | 1.6 | 180 |
| 2441.00                 | PK | Vertical   | 102.81 |       | (Fund.) | 1.3 | 40  |
| 4882.00                 | PK | Vertical   | 62.34  | 74.00 | -11.66  | 1.0 | 140 |
| 7323.00                 | PK | Vertical   | 60.45  | 74.00 | -13.55  | 1.5 | 160 |
| 9764.00                 | PK | Vertical   | 56.31  | 74.00 | -17.69  | 1.2 | 160 |
| 12205.00                | PK | Vertical   | 59.55  | 74.00 | -14.45  | 1.8 | 230 |
| 14646.00                | PK | Vertical   | 52.22  | 74.00 | -21.78  | 1.1 | 60  |
| 17087.00                | PK | Vertical   | 55.47  | 74.00 | -18.53  | 1.5 | 40  |
| 19528.00                | PK | Vertical   | 50.28  | 74.00 | -23.72  | 1.4 | 170 |
| 21969.00                | PK | Vertical   | 54.27  | 74.00 | -19.73  | 1.6 | 195 |
| 24410.00                | PK | Vertical   | 47.33  | 74.00 | -26.67  | 1.3 | 160 |
| 2441.00                 | PK | Horizontal | 99.80  |       | (Fund.) | 1.7 | 50  |
| 4882.00                 | PK | Horizontal | 57.41  | 74.00 | -16.59  | 1.6 | 105 |
| 7323.00                 | PK | Horizontal | 59.14  | 74.00 | -14.86  | 1.7 | 130 |
| 9764.00                 | PK | Horizontal | 53.25  | 74.00 | -20.75  | 1.4 | 110 |
| 12205.00                | PK | Horizontal | 56.00  | 74.00 | -18.00  | 1.5 | 210 |
| 14646.00                | PK | Horizontal | 51.40  | 74.00 | -22.60  | 1.4 | 190 |
| 17087.00                | PK | Horizontal | 48.59  | 74.00 | -25.41  | 1.2 | 170 |
| 19528.00                | PK | Horizontal | 51.28  | 74.00 | -22.72  | 1.4 | 210 |
| 21969.00                | PK | Horizontal | 52.51  | 74.00 | -21.49  | 1.2 | 40  |
| 24410.00                | PK | Horizontal | 47.19  | 74.00 | -26.81  | 1.5 | 195 |
| <b>High frequency</b>   |    |            |        |       |         |     |     |
| 2480.00                 | AV | Vertical   | 95.54  |       | (Fund.) | 1.1 | 230 |
| 4960.00                 | AV | Vertical   | 41.38  | 54.00 | -12.62  | 1.5 | 60  |


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

|          |    |            |        |       |         |     |     |
|----------|----|------------|--------|-------|---------|-----|-----|
| 7440.00  | AV | Vertical   | 40.34  | 54.00 | -13.66  | 1.4 | 160 |
| 9920.00  | AV | Vertical   | 38.82  | 54.00 | -15.18  | 1.3 | 110 |
| 12400.00 | AV | Vertical   | 37.38  | 54.00 | -16.62  | 1.6 | 150 |
| 14880.00 | AV | Vertical   | 40.92  | 54.00 | -13.08  | 1.7 | 160 |
| 17360.00 | AV | Vertical   | 34.31  | 54.00 | -19.69  | 1.2 | 150 |
| 19840.00 | AV | Vertical   | 31.60  | 54.00 | -22.40  | 1.0 | 240 |
| 22320.00 | AV | Vertical   | 38.37  | 54.00 | -15.63  | 1.5 | 160 |
| 24800.00 | AV | Vertical   | 30.33  | 54.00 | -23.67  | 1.4 | 185 |
| 2480.00  | AV | Horizontal | 91.69  |       | (Fund.) | 1.2 | 180 |
| 4960.00  | AV | Horizontal | 39.67  | 54.00 | -14.33  | 2.1 | 190 |
| 7440.00  | AV | Horizontal | 35.04  | 54.00 | -18.96  | 1.3 | 170 |
| 9920.00  | AV | Horizontal | 35.61  | 54.00 | -18.39  | 1.4 | 240 |
| 12400.00 | AV | Horizontal | 36.88  | 54.00 | -17.12  | 1.3 | 175 |
| 14880.00 | AV | Horizontal | 33.43  | 54.00 | -20.57  | 1.1 | 170 |
| 17360.00 | AV | Horizontal | 30.59  | 54.00 | -23.41  | 1.5 | 240 |
| 19840.00 | AV | Horizontal | 33.22  | 54.00 | -20.78  | 2.0 | 100 |
| 22320.00 | AV | Horizontal | 28.48  | 54.00 | -25.52  | 1.4 | 140 |
| 24800.00 | AV | Horizontal | 29.33  | 54.00 | -24.67  | 2.3 | 150 |
| 2480.00  | PK | Vertical   | 103.51 |       | (Fund.) | 1.3 | 220 |
| 4960.00  | PK | Vertical   | 60.91  | 74.00 | -13.09  | 1.1 | 80  |
| 7440.00  | PK | Vertical   | 57.34  | 74.00 | -16.66  | 2.2 | 170 |
| 9920.00  | PK | Vertical   | 59.80  | 74.00 | -14.20  | 1.4 | 140 |
| 12400.00 | PK | Vertical   | 54.90  | 74.00 | -19.10  | 1.5 | 140 |
| 14880.00 | PK | Vertical   | 61.45  | 74.00 | -12.55  | 1.1 | 120 |
| 17360.00 | PK | Vertical   | 55.48  | 74.00 | -18.52  | 1.3 | 130 |
| 19840.00 | PK | Vertical   | 56.35  | 74.00 | -17.65  | 1.1 | 170 |
| 22320.00 | PK | Vertical   | 54.67  | 74.00 | -19.33  | 1.7 | 180 |
| 24800.00 | PK | Vertical   | 48.29  | 74.00 | -25.71  | 1.5 | 175 |
| 2480.00  | PK | Horizontal | 98.71  |       | (Fund.) | 1.8 | 230 |
| 4960.00  | PK | Horizontal | 57.30  | 74.00 | -16.70  | 1.3 | 120 |
| 7440.00  | PK | Horizontal | 55.61  | 74.00 | -18.39  | 1.6 | 160 |
| 9920.00  | PK | Horizontal | 56.43  | 74.00 | -17.57  | 1.2 | 230 |
| 12400.00 | PK | Horizontal | 54.29  | 74.00 | -19.71  | 1.3 | 150 |
| 14880.00 | PK | Horizontal | 48.48  | 74.00 | -25.52  | 1.9 | 130 |
| 17360.00 | PK | Horizontal | 52.69  | 74.00 | -21.31  | 2.0 | 200 |
| 19840.00 | PK | Horizontal | 47.36  | 74.00 | -26.64  | 1.4 | 210 |
| 22320.00 | PK | Horizontal | 50.19  | 74.00 | -23.81  | 2.4 | 160 |
| 24800.00 | PK | Horizontal | 45.57  | 74.00 | -28.43  | 1.8 | 240 |


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

### 7.8 Photograph – Radiation Spurious Emission Test Setup

Below 30MHz

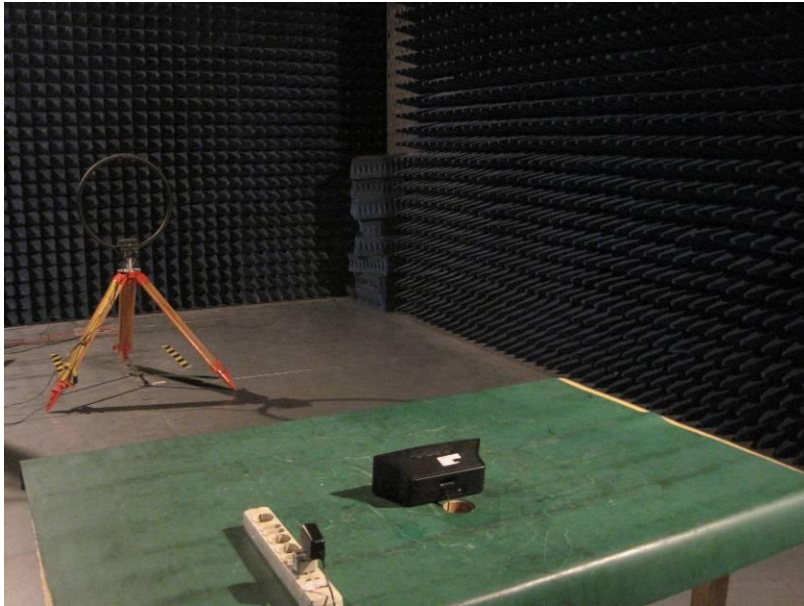

30M - 1GHz

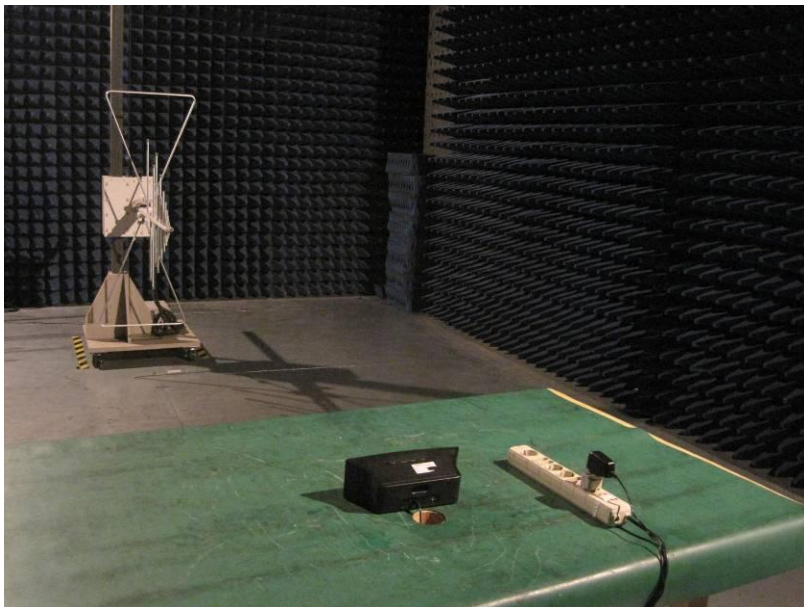


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12052841-S-S-F

Above 1GHz

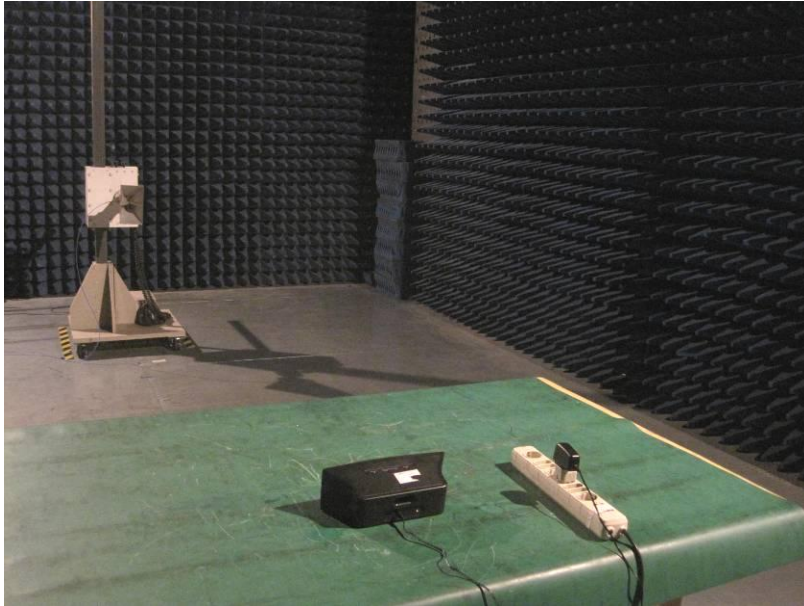

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


WALTEK SERVICES

Reference No.: WT12052841-S-S-F

## 8 Band Edge Measurements


|                       |  |
|-----------------------|--|
| Test Requirement:     | Section 15.247(d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).                                |
| Test Method:          | DA 00-705  |
| Measurement Distance: | 3m   |
| Limit:                | 40.0 dBuV/m between 30MHz & 88MHz;<br>43.5 dBuV/m between 88MHz & 216MHz;<br>46.0 dBuV/m between 216MHz & 960MHz;<br>54.0 dBuV/m above 960MHz.<br>74.0 dBuV/m for peak above 1GHz<br>54.0 dBuV/m for AVG above 1GHz  |
| Detector:             | For Peak value:<br>RBW = 1 MHz for $f \geq 1$ GHz<br>VBW $\geq$ RBW; Sweep = auto<br>Detector function = peak<br>Trace = max hold<br>For AVG value:<br>RBW = 1 MHz for $f \geq 1$ GHz<br>VBW = 10Hz; Sweep = auto<br>Detector function = AVG<br>Trace = max hold |

**Test Result:**  
**Low Channel – Peak**

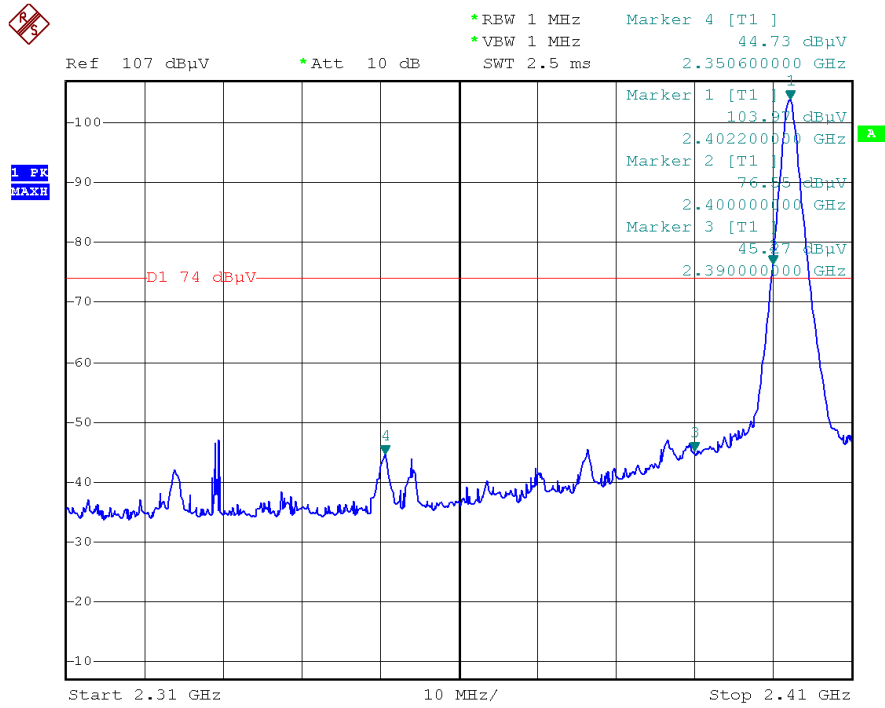


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Low Channel – AV

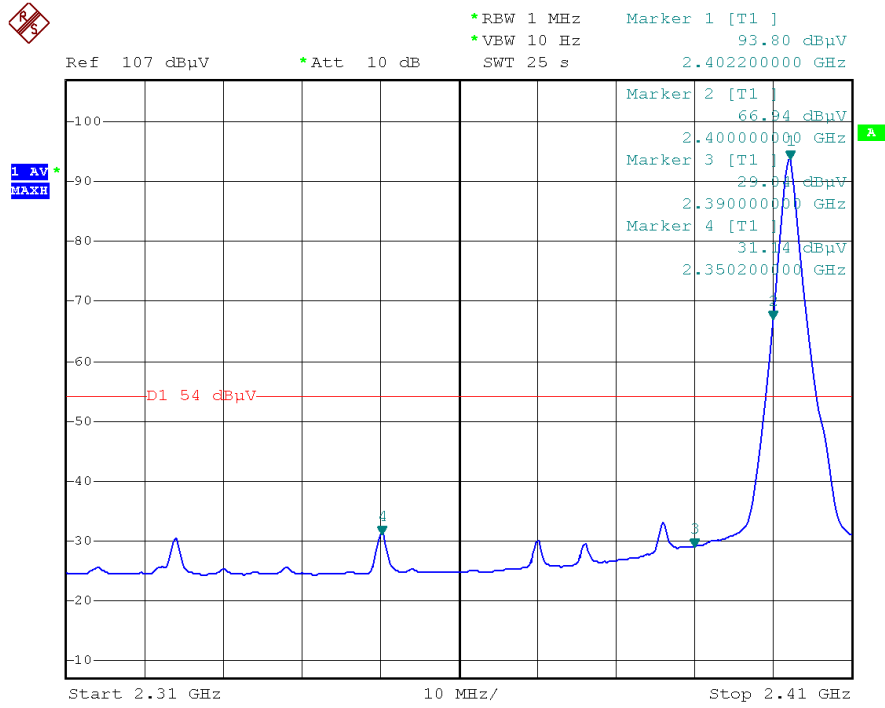

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


High Channel – Peak

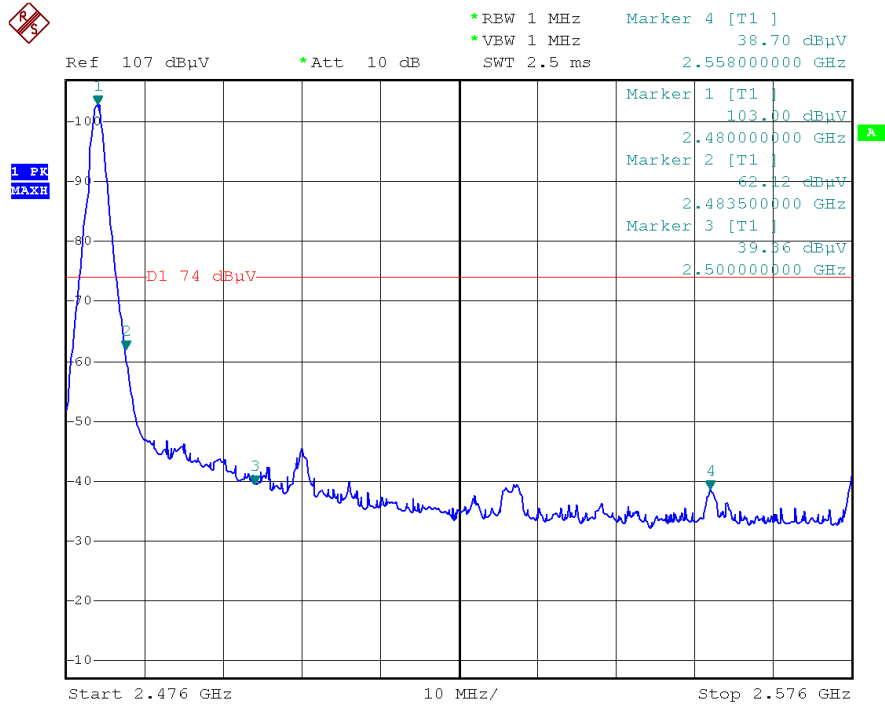

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.



High Channel – AV

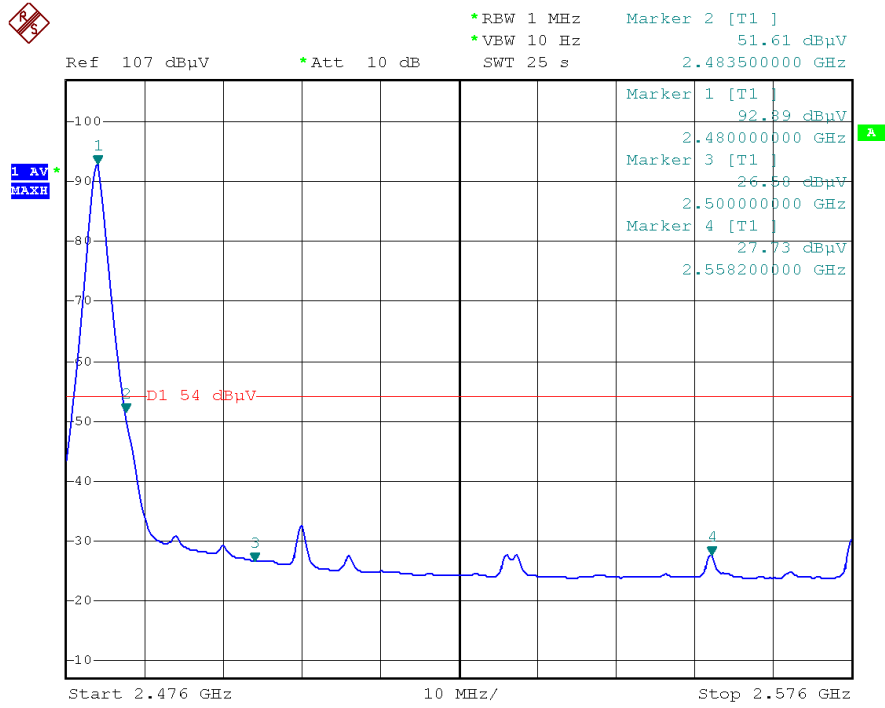

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

## 9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: DA 00-705  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 9.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: Span = 3MHz, RBW = 100kHz, VBW = 100kHz

### 9.2 Test Result:

| Test Channel | Bandwidth |
|--------------|-----------|
| Low          | 1.128MHz  |
| Middle       | 1.086MHz  |
| High         | 1.086MHz  |


Test result plot as follows:

Low Channel

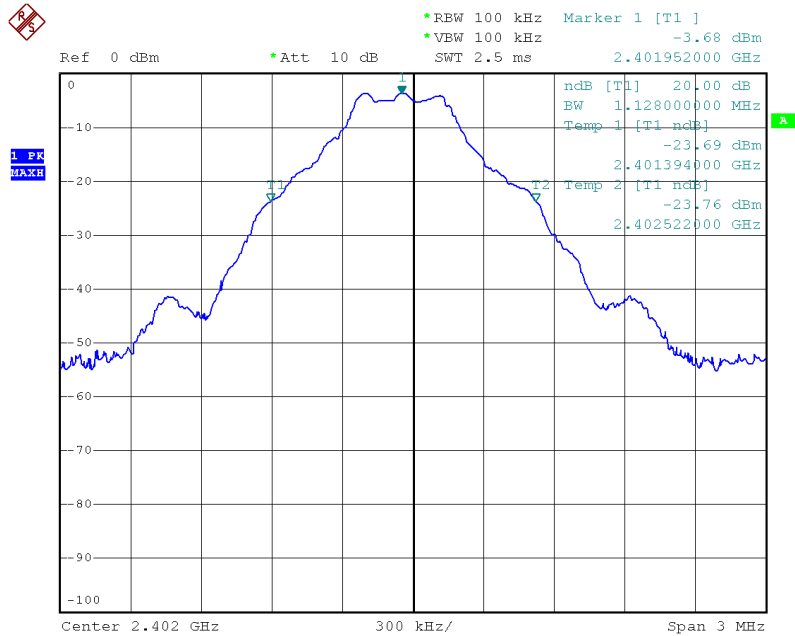


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

Middle Channel

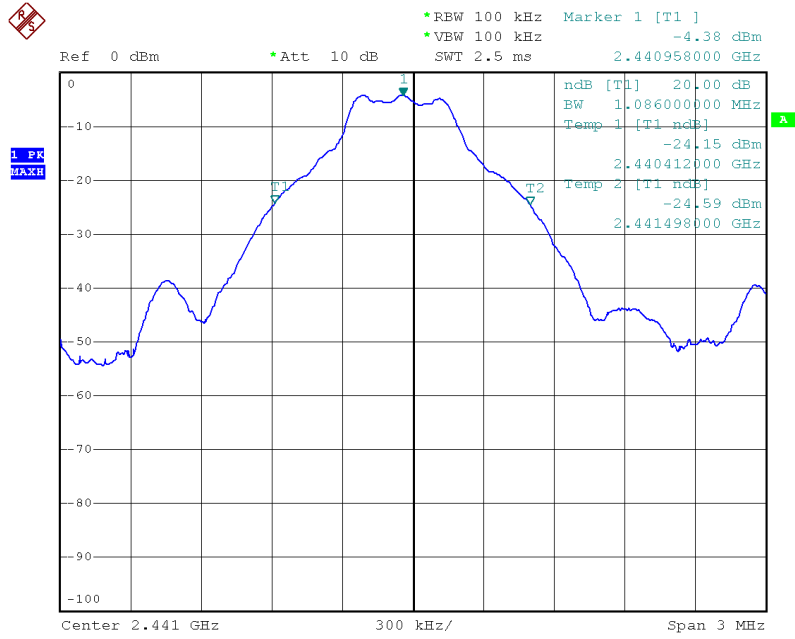

High Channel

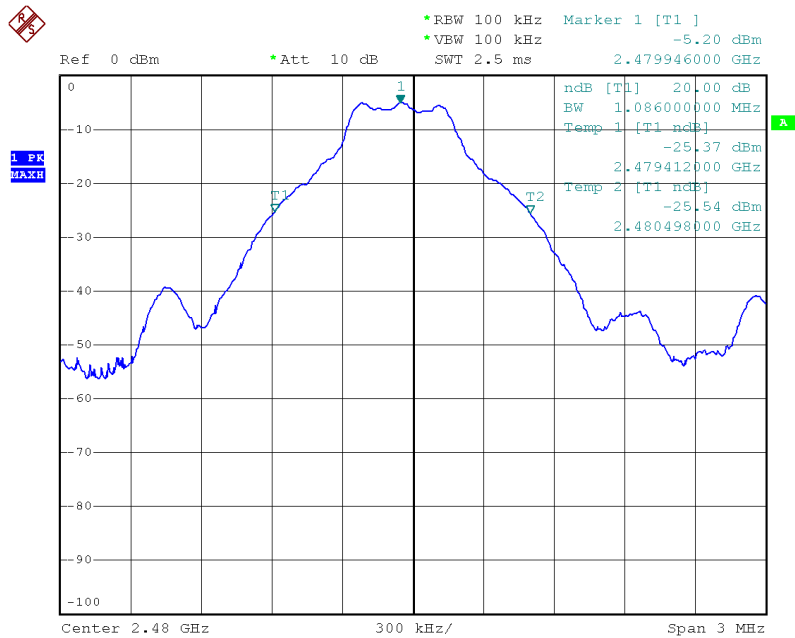

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

## 10 Maximum Peak Output Power

|                   |  |
|-------------------|--|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247   |
| Test Method:      | ANSI C63.4:2003  |
| Test Limit:       | Regulation 15.247 (b)(1)For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.<br>Refer to the result “Number of Hopping Frequency” of this document. The 1watts (30 dBm) limit applies. |
| Test mode:        | Test in fixing frequency transmitting mode.  |

### 10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW = 10 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 10.2 Test Result:

| Test Channel | Output Power (dBm) | Limit (dBm) |
|--------------|--------------------|-------------|
| Low          | -3.27              | 30          |
| Middle       | -4.08              | 30          |
| High         | -4.92              | 30          |

## 11 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Mode: Test in hopping transmitting operating mode.

### 11.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30kHz. VBW = 100kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

### 11.2 Test Result:

| Test Channel | Separation (MHz) | Result |
|--------------|------------------|--------|
| Low          | 1.000            | PASS   |
| Middle       | 1.000            | PASS   |
| High         | 1.000            | PASS   |

Test result plot as follows:

Low Channel:

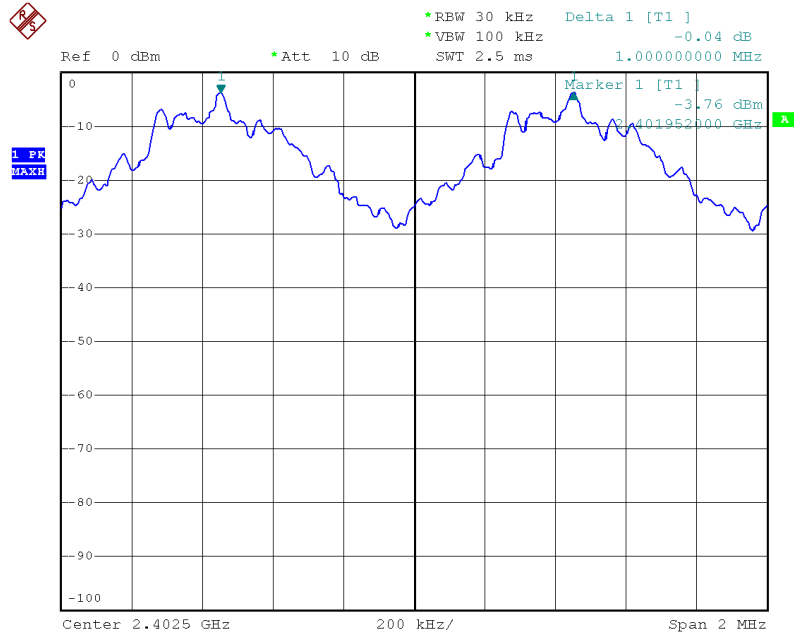


Middle Channel



The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

High Channel

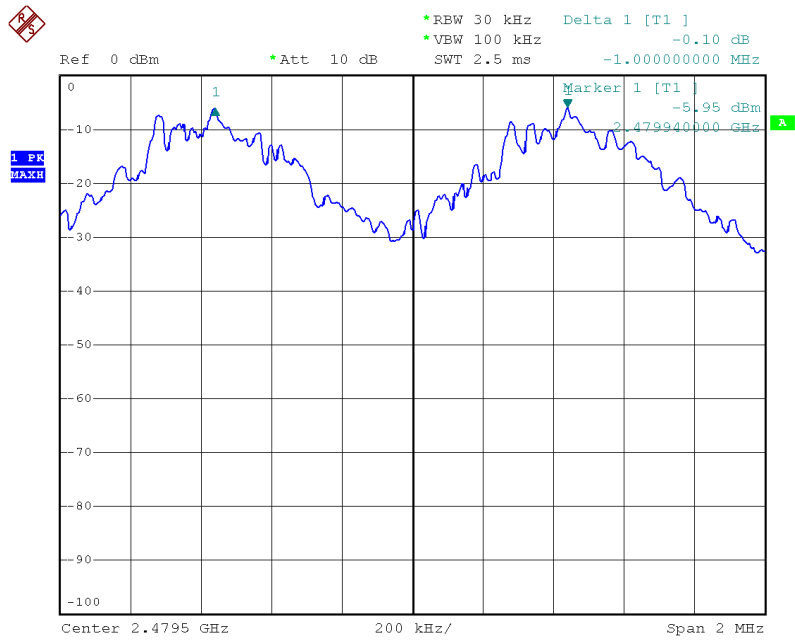

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.


## 12 Number of Hopping Frequency

|                   |   |
|-------------------|---|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247  |
| Test Method:      | DA 00-705   |
| Test Limit:       | Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. |
| Test Mode:        | Test in hopping transmitting operating mode.  |

### 12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100 kHz. VBW = 100 kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Center Frequency = 2441MHz, Span = 86MHz. Submit the test result graph.

### 12.2 Test Result: Total Channels are 79 Channels.

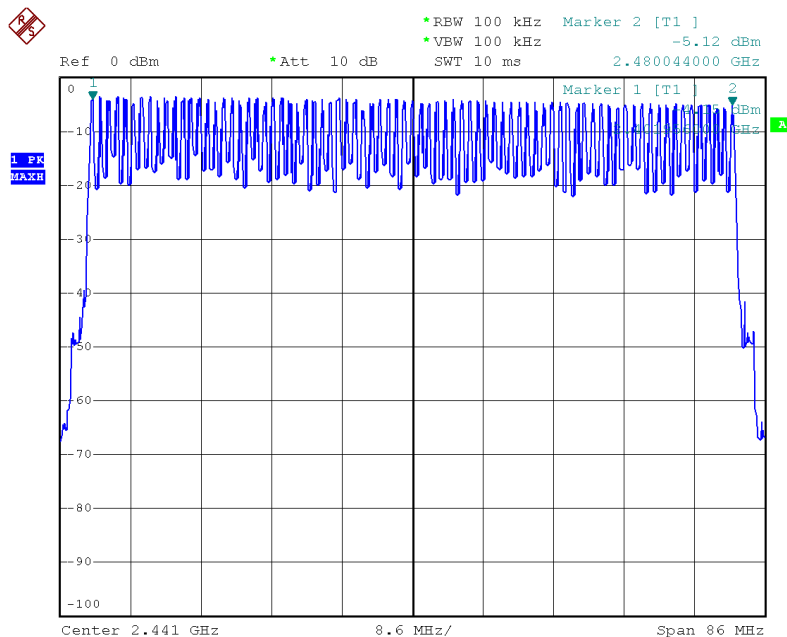

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.



### 13 Dwell Time

|                   |   |
|-------------------|---|
| Test Requirement: | FCC CFR47 Part 15 Section 15.247  |
| Test Method:      | DA 00-705   |
| Test Limit:       | Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. |
| Test Mode:        | Test in hopping transmitting operating mode.  |

#### 13.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

#### 13.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period:  $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum  $1600 / 79 / 6$  hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum  $1600 / 79 / 4$  hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum  $1600 / 79 / 2$  hops per second in each channel (1 time slot RX, 1 time slot TX). So,the Dwell Time can be calculated as follows:


| Data Packet | Dwell Time(s)                    |
|-------------|----------------------------------|
| DH5         | $1600/79/6*31.6*(MkrDelta)/1000$ |
| DH3         | $1600/79/4*31.6*(MkrDelta)/1000$ |
| DH1         | $1600/79/2*31.6*(MkrDelta)/1000$ |

**Note** : Mkr Delta is once pulse time .

**Low Channel: 2402MHz**


Dwell time of each occupation in this channel as follows:

| Data Packet | Frequency | Mkr Delta(ms) | Dwell Time(s) | Limits(s) | Result |
|-------------|-----------|---------------|---------------|-----------|--------|
| DH5         | 2402 MHz  | 3.104         | 0.331         | 0.400     | Pass   |
| DH3         | 2402 MHz  | 1.798         | 0.288         | 0.400     | Pass   |
| DH1         | 2402 MHz  | 0.530         | 0.170         | 0.400     | Pass   |

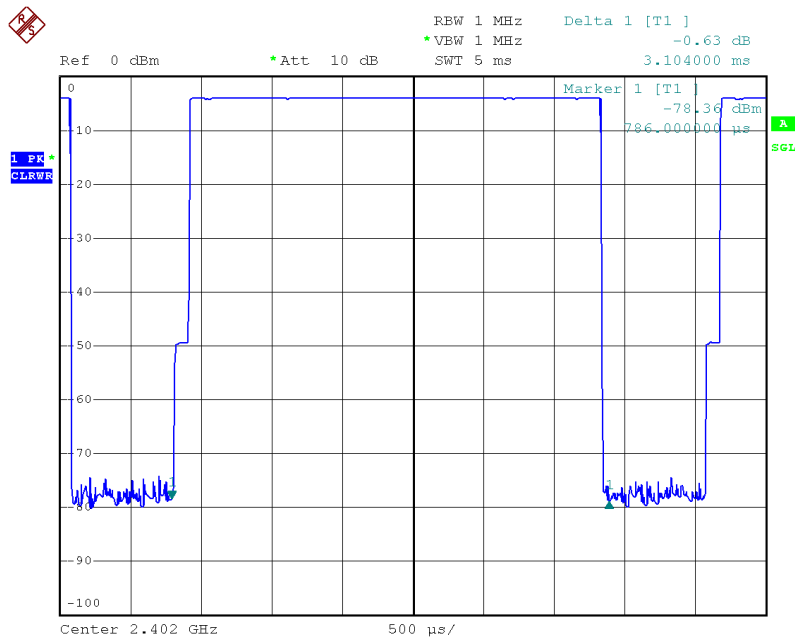


(DH5)

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

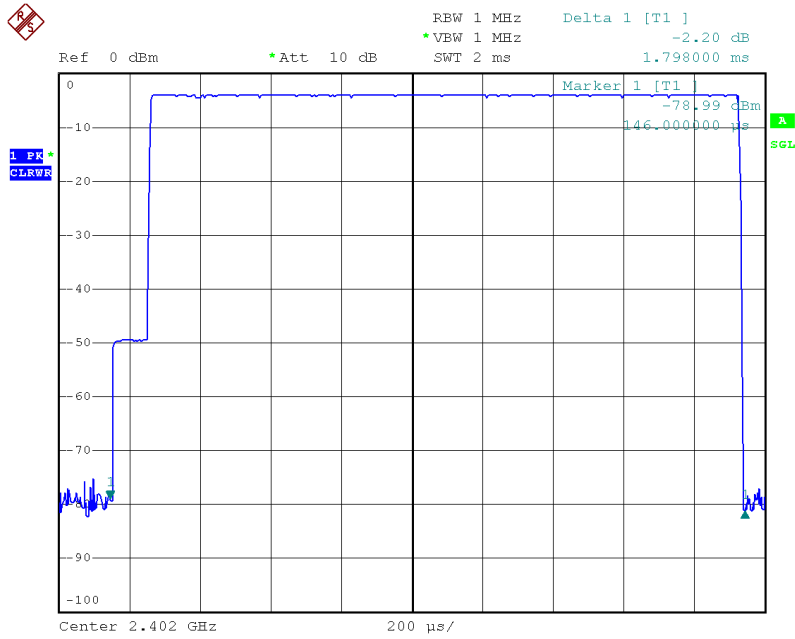

(DH3)

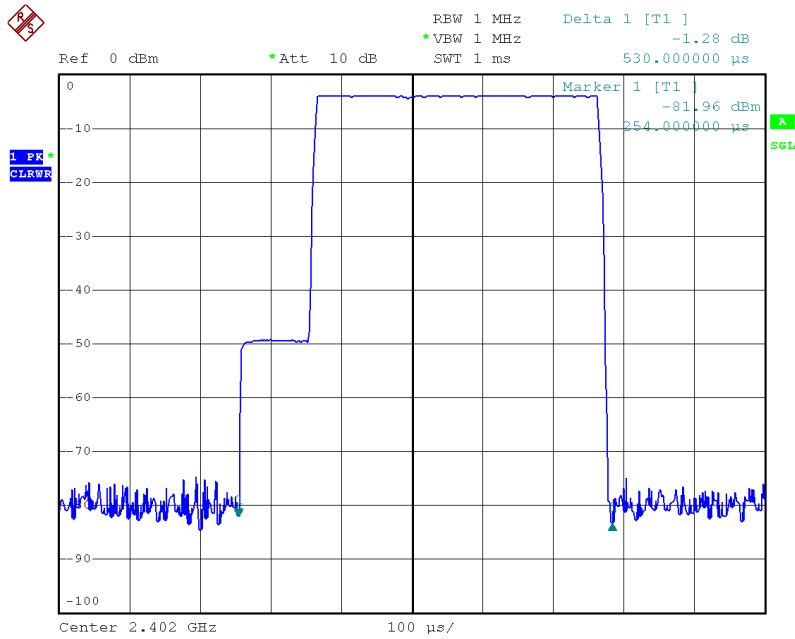


(DH1)

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

**Middle Channel: 2441MHz**


Dwell time of each occupation in this channel as follows:

| Data Packet | Frequency | Mkr Delta(ms) | Dwell Time(s) | Limits(s) | Result |
|-------------|-----------|---------------|---------------|-----------|--------|
| DH5         | 2441 MHz  | 3.080         | 0.329         | 0.400     | Pass   |
| DH3         | 2441 MHz  | 1.798         | 0.288         | 0.400     | Pass   |
| DH1         | 2441 MHz  | 0.530         | 0.170         | 0.400     | Pass   |

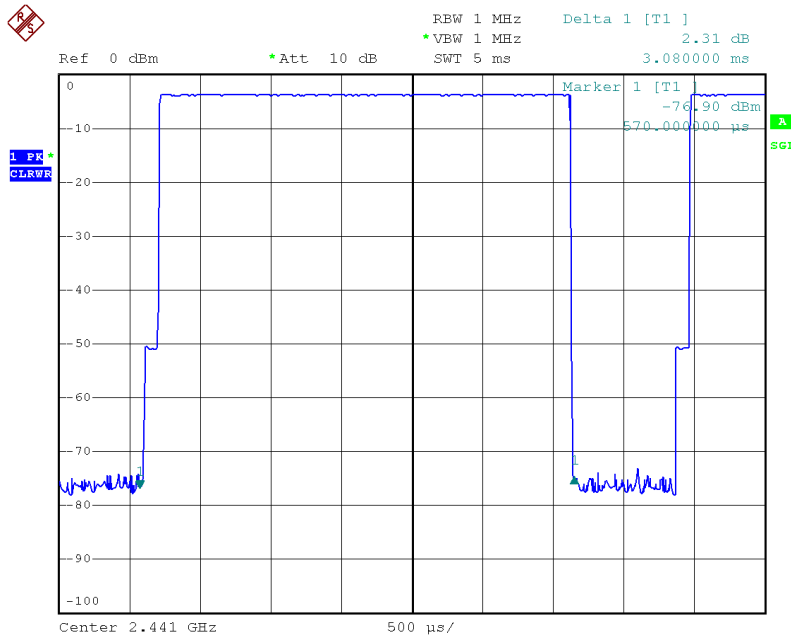


(DH5)

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

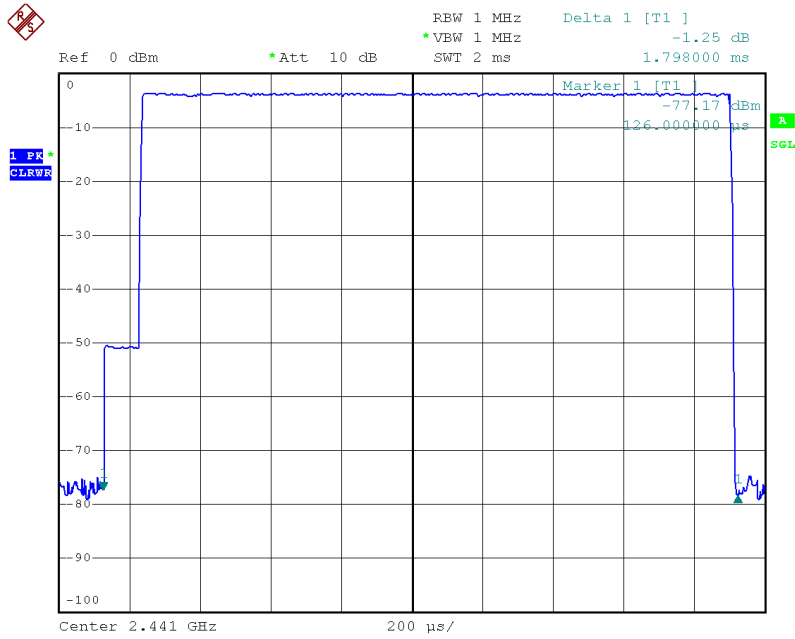

(DH3)

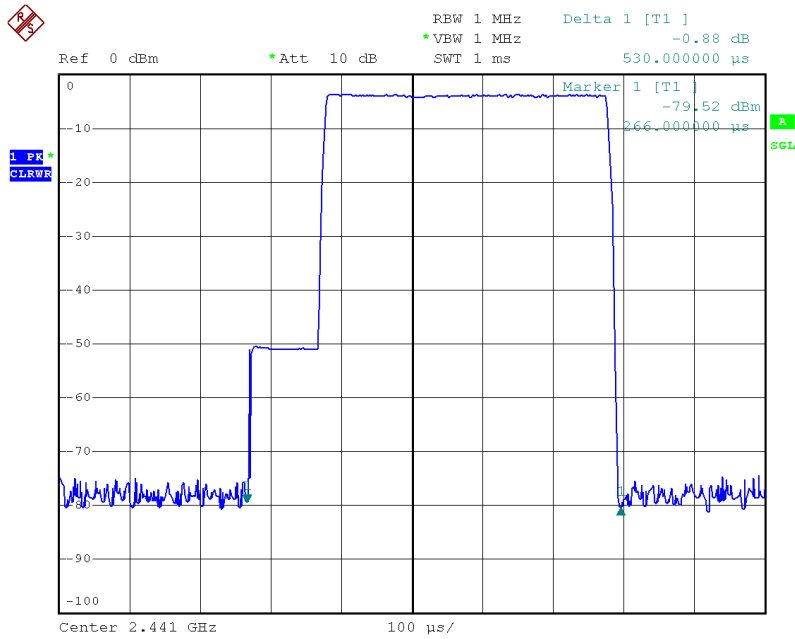


(DH1)

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

**High Channel: 2480MHz**


Dwell time of each occupation in this channel as follows:

| Data Packet | Frequency | Mkr Delta(ms) | Dwell Time(s) | Limits(s) | Result |
|-------------|-----------|---------------|---------------|-----------|--------|
| DH5         | 2480 MHz  | 3.052         | 0.326         | DH5       | Pass   |
| DH3         | 2480 MHz  | 1.802         | 0.288         | DH3       | Pass   |
| DH1         | 2480 MHz  | 0.534         | 0.171         | DH1       | Pass   |

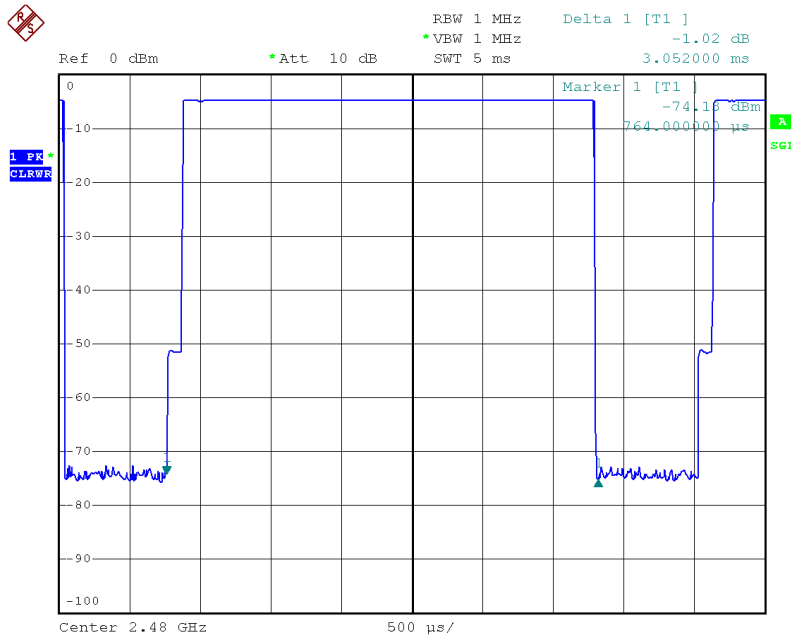


(DH5)

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

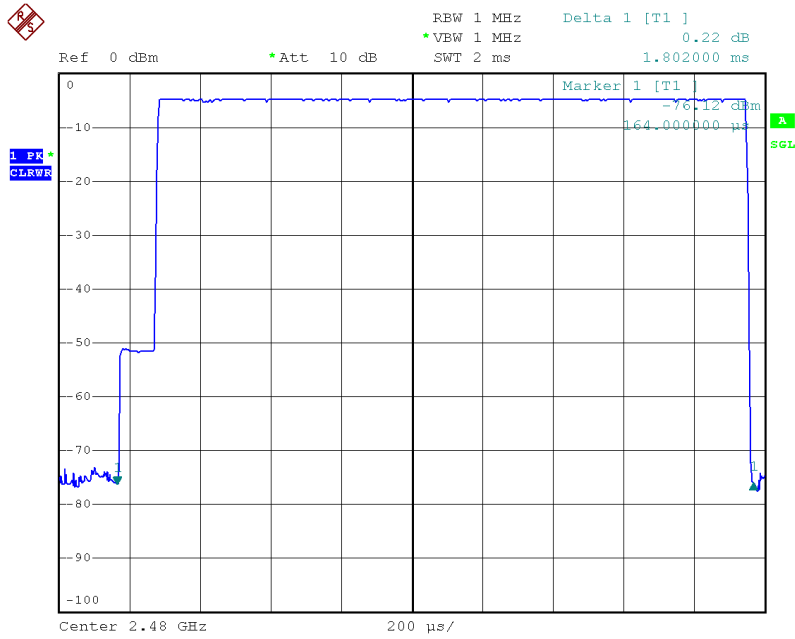

(DH3)

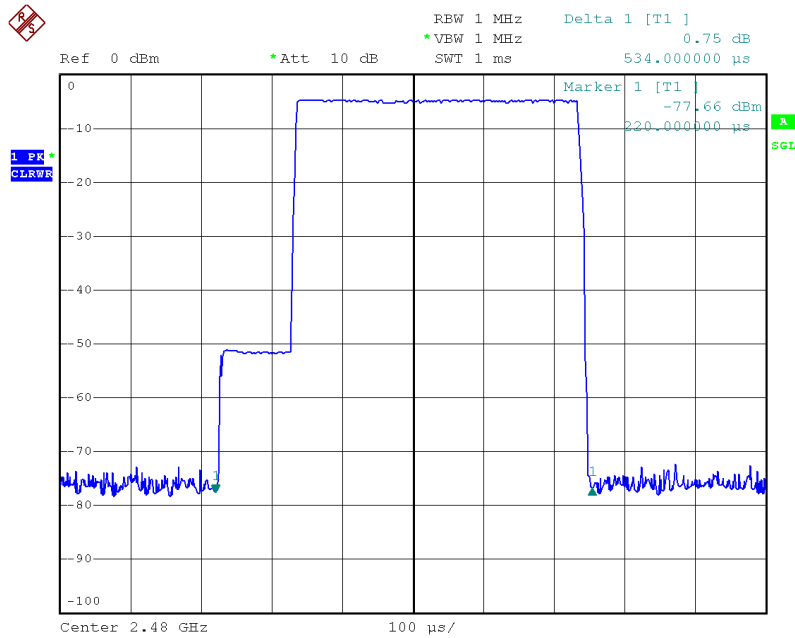

(DH1)

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

## **14 Antenna Requirement**

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent PCB antenna, fulfill the requirement of this section.



## 15 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

### 15.1 Requirments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1093 this device has been defined as a mobile device.

### 15.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-3.0               | 614                               | 1.63                              | (100)*                                   | 6  |
| 3.0-30                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6  |
| 30-300                | 61.4                              | 0.163                             | 1.0                                      | 6  |
| 300-1500              |                                   |                                   | F/300                                    | 6  |
| 1500-100,000          |                                   |                                   | 5  | 6  |

(B) Limits for General Population / Uncontrolled Exposure

| Frequency Range (MHz) | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes) |
|-----------------------|-----------------------------------|-----------------------------------|--|--|
| 0.3-1.34              | 614                               | 1.63                              | (100)*                                   | 30   |
| 1.34-30               | 824/f                             | 2.19/f                            | (180/f)*                                 | 30   |
| 30-300                | 27.5                              | 0.073                             | 0.2                                      | 30   |
| 300-1500              |                                   |                                   | F/1500                                   | 30   |
| 1500-100,000          |                                   |                                   | 1.0                                      | 30   |

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

**15.3 MPE Calculation Method**

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

| Antenna Gain (dBi) | Antenna Gain (numeric) | Peak Output Power (dBm) | Peak Output Power (mW) | Power Density (S) (mW/cm <sup>2</sup> ) | Limit of Power Density (S) (mW/cm <sup>2</sup> ) | Test Result |
|--------------------|------------------------|-------------------------|------------------------|---|--|-------------|
| 0                  | 1                      | -3.27                   | 0.4709                 | 0.000094                                | 1  | Complies    |
| 0                  | 1                      | -4.08                   | 0.3908                 | 0.000074                                | 1  | Complies    |
| 0                  | 1                      | -4.92                   | 0.3221                 | 0.000064                                | 1  | Complies    |


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

## 16 Photographs - Constructional Details

### 16.1 Product View



### 16.2 EUT – Appearance View

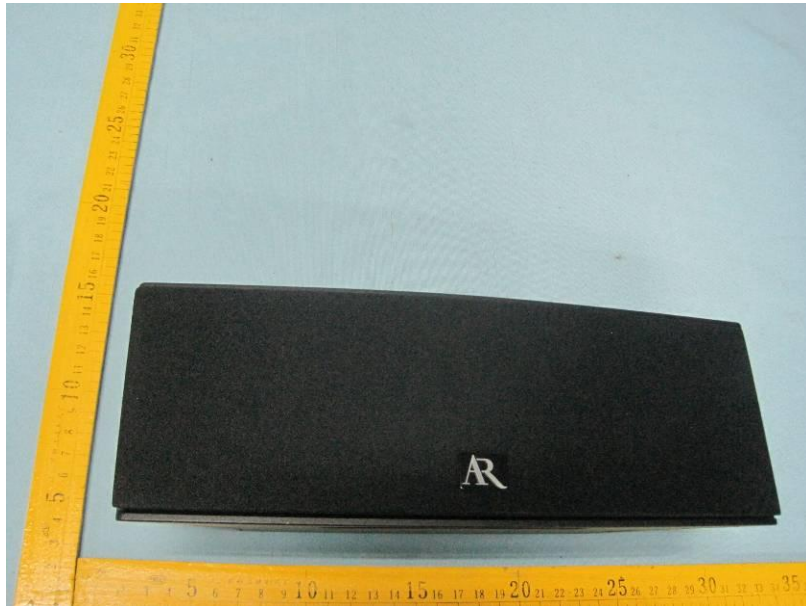

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.









### 16.3 EUT – Open View



16.4 EUT – PCB1 View

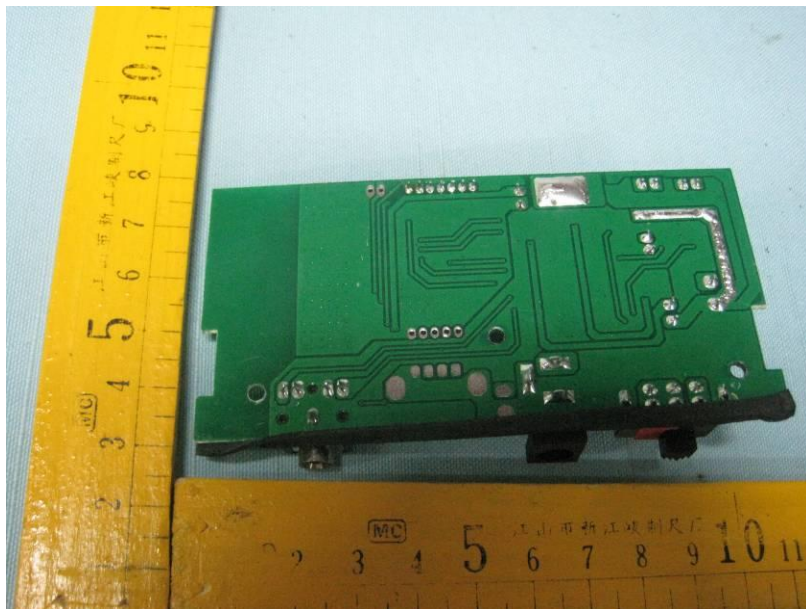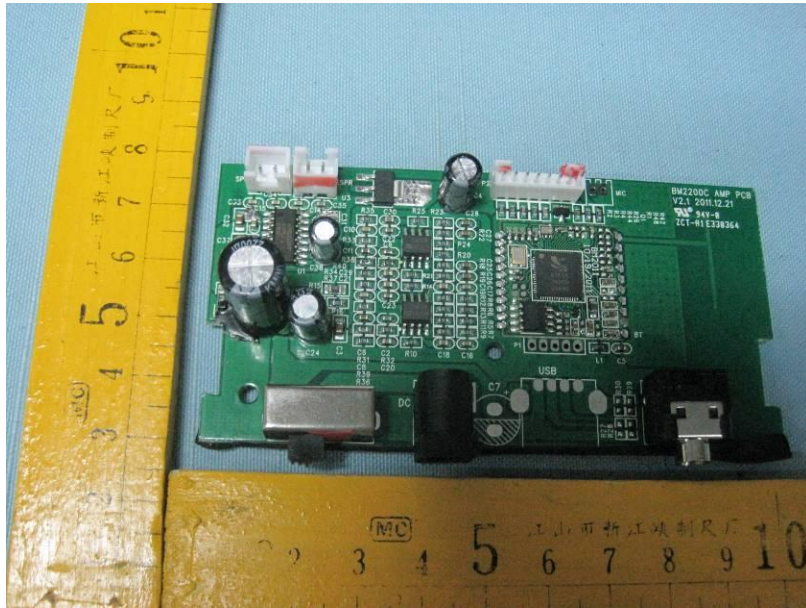


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

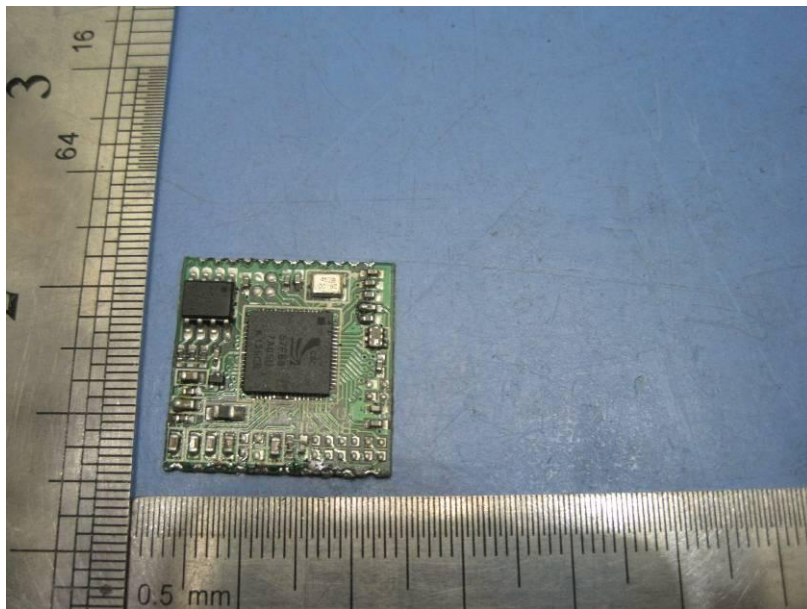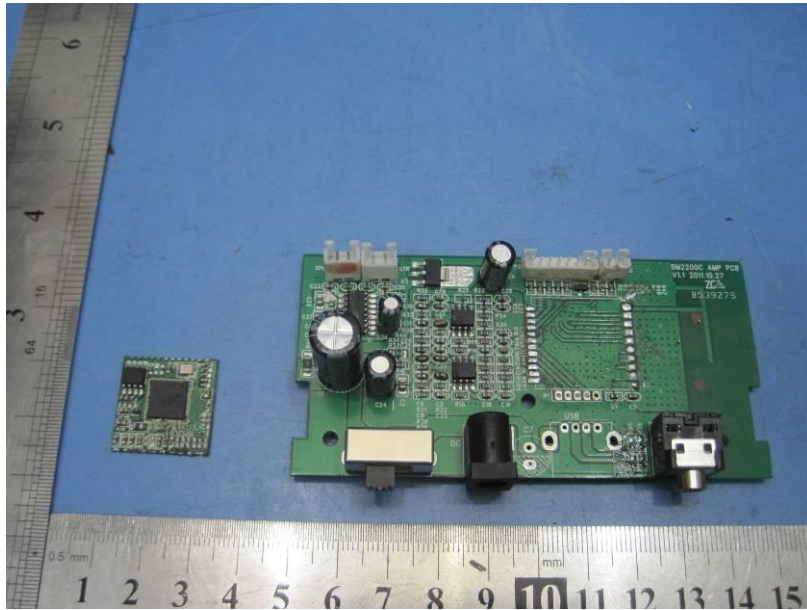


The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12052841-S-S-F

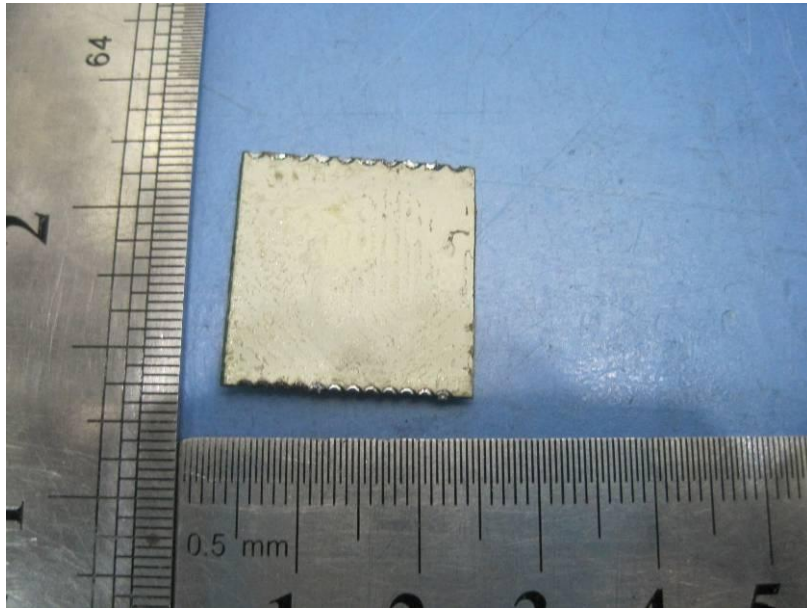


### 16.5 EUT – PCB2 View

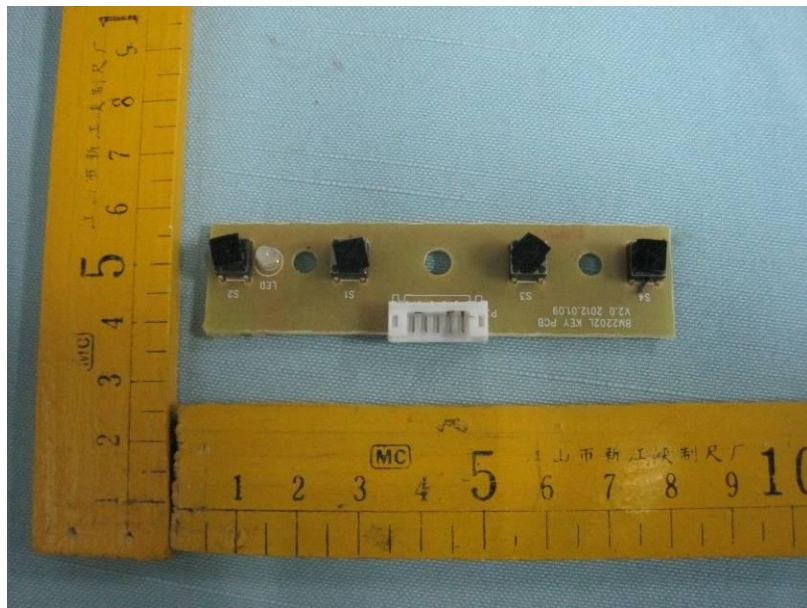

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.



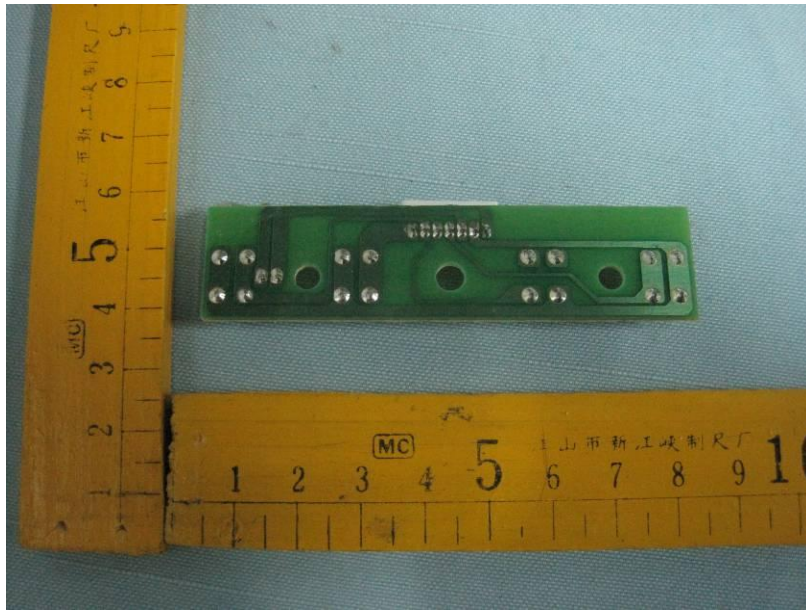

The results shown in this test report refer only to the sample(s) tested , This Test report cannot be reproduced, except in full, without prior written permission of the Company.

WALTEK SERVICES

Reference No.: WT12052841-S-S-F

## 17 FCC Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT  
EUT Bottom View/ proposed FCC Label Location

