

FCC TEST REPORT(Bluetooth)

for

Voxx Accessories Corp.

AR Bliss Speaker

Model Number: AWSBTCN1

FCC ID: VIXAWSBTCN1

Prepared for : Voxx Accessories Corp.

Address : 3502 Woodview Trace, suite 220, Indianapolis, IN 46268,  
United States

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Building 1, Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : 15KWE113241F

Date of Test : Nov. 02~16, 2015

Date of Report : Nov. 17, 2015

## TABLE OF CONTENTS

	Page
Test Report Declaration	4
<b>1. TEST SUMMARY</b> .....	<b>4</b>
<b>2. GENERAL PRODUCT INFORMATION</b> .....	<b>5</b>
2.1. Product Function.....	5
2.2. Description of Device (EUT) .....	5
2.3. Difference between Model Numbers .....	5
2.4. Independent Operation Modes .....	5
2.5. Test Supporting System .....	5
2.6. Test Facilities .....	6
2.7. List of Test and Measurement Instruments .....	7
<b>3. TEST SET-UP AND OPERATION MODES</b> .....	<b>8</b>
3.1. Principle of Configuration Selection .....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software .....	8
3.4. Special Accessories and Auxiliary Equipment .....	8
3.5. Countermeasures to Achieve EMC Compliance .....	8
3.6. Test Environment: .....	8
<b>4. MAXIMUM PEAK OUTPUT POWER</b> .....	<b>9</b>
4.1. Limits .....	9
4.2. Test Procedure.....	9
<b>5. EMISSION TEST RESULTS</b> .....	<b>15</b>
5.1. Conducted Emission at the Mains Terminals Test.....	15
5.2. Radiated Emission Test.....	20
<b>6. 20DB BANDWIDTH</b> .....	<b>38</b>
6.1. Limits .....	38
6.2. Test setup .....	38
<b>7. FREQUENCY SEPARATION</b> .....	<b>45</b>
7.1. Limits .....	45
7.2. Test setup .....	45
<b>8. NUMBER OF HOPPING FREQUENCY</b> .....	<b>52</b>
8.1. Limits .....	52
8.2. Test setup .....	52
<b>9. DWELL TIME</b> .....	<b>54</b>
9.1. Limits .....	54
9.2. Test setup .....	54
<b>10. BAND EDGE COMPLIANCE TEST</b> .....	<b>61</b>
10.1. Limits .....	61
10.2. Test setup .....	61
10.3. TEST Procedure .....	62
<b>11. ANTENNA REQUIREMENTS</b> .....	<b>71</b>
11.1. Limits .....	71
11.2. Result .....	71
<b>12. PHOTOGRAPHS OF TEST SET-UP</b> .....	<b>72</b>
<b>13. PHOTOGRAPHS OF THE EUT</b> .....	<b>74</b>

## Keyway Testing Technology Co., Ltd.

<b>Applicant:</b>	Voxx Accessories Corp.		
<b>Address:</b>	3502 Woodview Trace, suite 220, Indianapolis, IN 46268, United States		
<b>Manufacturer:</b>	Shenzhen Great Power Enterprise Co.,Ltd.		
<b>Address:</b>	Building E, Xin Xulong Industrial Area, KuKeng Village, Guanlan Town, Baoan District, Shenzhen, China		
<b>E.U.T:</b>	AR Bliss Speaker		
<b>Model Number:</b>	AWSBTCN1		
<b>Serial Model:</b>	N/A		
<b>Trade Name:</b>	AR (Acoustic Research)	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Nov. 01, 2015	<b>Date of Test:</b>	Nov.02~16, 2015
<b>Test Specification:</b>	FCC Part 15, Subpart C Section 15.247: 2014 ANSI C63.10:2013		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
	<b>Issue Date: Nov. 17, 2015</b>		
Tested by:	Reviewed by:	Approved by:	
			
_____ Keven Wu / Engineer	_____ Mike Xu / Supervisor	 _____ Andy Gao / Supervisor	
<b>Other Aspects:</b>	None.		
<i>Abbreviations: OK/P=passed    fail/F=failed    n.a/N=not applicable    E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.</i>			

# 1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	N/A
Radiated Emissions	15.205(a)/15.209	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

## 2.GENERAL PRODUCT INFORMATION

### 2.1. Product Function

Refer to Technical Construction Form and User Manual.

### 2.2. Description of Device (EUT)

Product Name:	AR Bliss Speaker
Model No.:	AWSBTCN1
Serial Model:	N/A
Model Difference	N/A
Operation Frequency:	2402MHz ~2480MHz
Channel numbers:	79 Channels
Channel spacing	1MHz
Modulation technology:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK
Bit Rate of Transmitter	1Mbps/2Mbps/3Mbps
Antenna Type:	PCB
Antenna gain:	1.0dBi
Power supply:	Power Source: 1# Battery supplied ,Model: ITR18650-220 2# Charged via USB port Power Rating: 1# DC3.7V, 2200mAh 2# DC 5V
Note:	AWSBTCN1 may come in color variations but are electrically and mechanically the same. The only difference is the color.

### 2.3. Difference between Model Numbers

None.

### 2.4. Independent Operation Modes

The basic operation modes are:

2.4.1. EUT work BT mode and Test mode as below:

Pretest Mode	Description
Mode 1	CH00
Mode 2	CH39
Mode 3	CH78
Mode 4	BT link

### 2.5. Test Supporting System

Adapter:	Manufacturer: Cenique Infotainment Group Limited I/P: AC 100~240V 50/60Hz 0.15A O/P: DC 5V 1A DC Line: Unshielded, detachable 1.2m
----------	---

## 2.6. Test Facilities

Lab Qualifications : 944 Shielded Room built by ETS-Lindgren, USA  
Date of completion: March 28, 2011

966 Chamber built by ETS-Lindgren, USA  
Date of completion: March 28, 2011

Certificated by TUV Rheinland, Germany.  
Registration No.: UA 50207153  
Date of registration: July 13, 2011

Certificated by UL, USA  
Registration No.: 100567-237  
Date of registration: September 1, 2011

Certificated by Intertek  
Registration No.: 2011-RTL-L1-31  
Date of registration: October 11, 2011

Certificated by Industry Canada  
Registration No.: 9868A  
Date of registration: December 8, 2011

Certificated by FCC, USA  
Registration No.: 370994  
Date of registration: February 21, 2012

Certificated by CNAS China  
Registration No.: CNAS L5783  
Date of registration: August 8, 2012

Name of Firm : Keyway Testing Technology Co., Ltd.

Site Location : Building 1, Baishun Industrial Zone, Zhangmutou  
Town, Dongguan, Guangdong, China

## 2.7. List of Test and Measurement Instruments

### 2.7.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 27,15	Apr. 27,16
Artificial Mains Network (AUX)	Rohde&Schwarz	ENV216	101314	Apr. 27,15	Apr. 27,16
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 27,15	Apr. 27,16

### 2.7.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 27,15	Apr. 27,16
System Simulator	Agilent	E5515C	GB43130245	Apr. 27,15	Apr. 27,16
Power Splitter	Weinschel	1506A	NW425	Apr. 27,15	Apr. 27,16
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 27,15	Apr. 27,16
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 27,15	Apr. 27,16
Signal Amplifier	SONOMA	310	187016	Apr. 27,15	Apr. 27,16
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 27,15	Apr. 27,16
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	DAZE	ZN30701	11003	Apr. 27,15	Apr. 27,16
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	8593E	3911A04271	Apr. 27,15	Apr. 27,16
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 27,15	Apr. 27,16
Signal Amplifier	DAZE	ZN3380C	11001	Apr. 27,15	Apr. 27,16
High Pass filter	Micro	HPM50111	324216	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C836.5-25-X	KW032	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1747.5-75-X2	KW035	Apr. 27,15	Apr. 27,16
Filter	COM-MW	ZBSF-C1880-60-X2	KW037	Apr. 27,15	Apr. 27,16
DC Power Supply	LongWei	PS-305D	010964729	Apr. 27,15	Apr. 27,16
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 27,15	Apr. 27,16
Universal radio communication tester	Rohde&Schwarz	CMU200	3215420	Apr. 27,15	Apr. 27,16
Splitter	Agilent	11636B	0025164	Apr. 27,15	Apr. 27,16
Attenuation	MCE	24-10-34	BN9258	Apr. 27,15	Apr. 27,16
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 22,15	Apr. 22,16

### 3. TEST SET-UP AND OPERATION MODES

#### 3.1. Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

#### 3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



*(EUT: AR Bliss Speaker)*

#### 3.3. Test Operation Mode and Test Software

None.

#### 3.4. Special Accessories and Auxiliary Equipment

None.

#### 3.5. Countermeasures to Achieve EMC Compliance

None.

#### 3.6. Test Environment:

Ambient conditions in the test laboratory:

Items	Actual
Temperature (°C)	21~23
Humidity (%RH)	50~65



## 4. MAXIMUM PEAK OUTPUT POWER

### 4.1. Limits



FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (b)(i)	Peak Output Power	0.125 w or 20.96dBm	2400-2483.5	PASS



### 4.2. Test Procedure



- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured  
 Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel  
 VBW ≥ RBW  
 Sweep = auto  
 Detector function = peak  
 Trace = max hold



Test data:


1Mbps			
Test Channel	Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)
CH00	2402	5.191	30
CH39	2441	5.324	30
CH78	2480	5.135	30
2Mbps			
CH00	2402	4.609	20.96
CH39	2441	4.646	20.96
CH78	2480	5.180	20.96
3Mbps			
CH00	2402	4.714	20.96
CH39	2441	4.655	20.96
CH78	2480	4.548	20.96

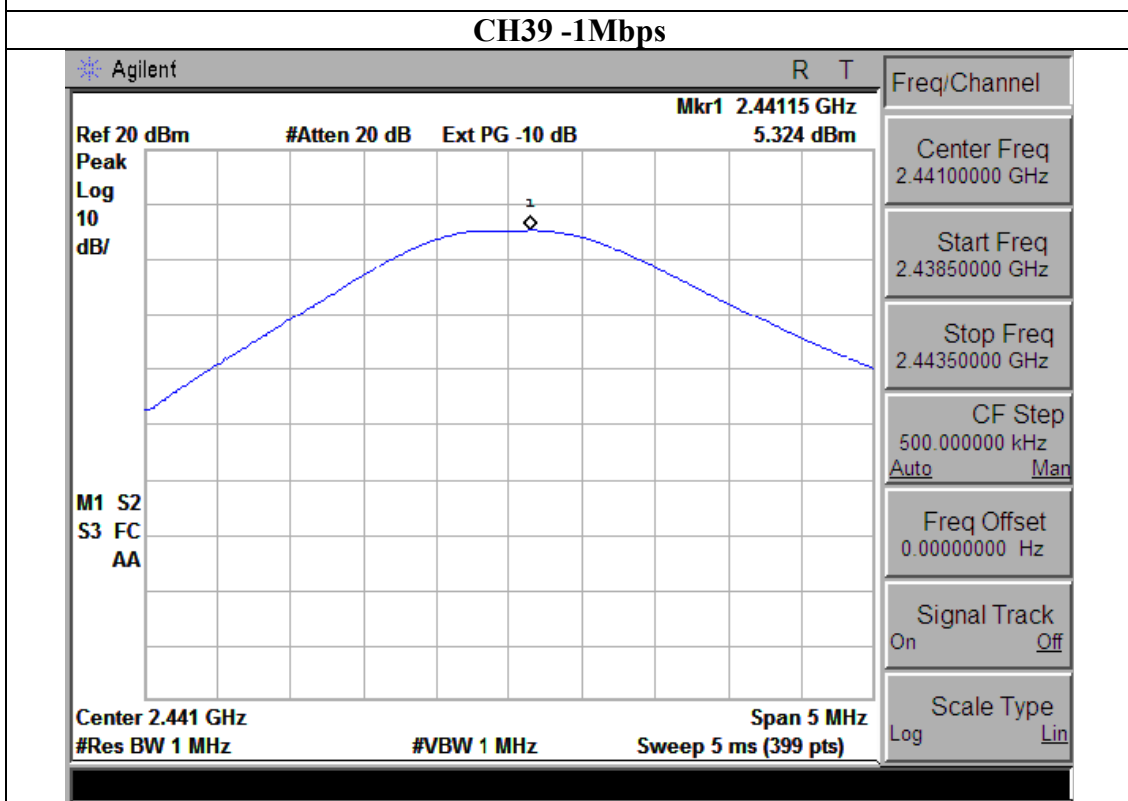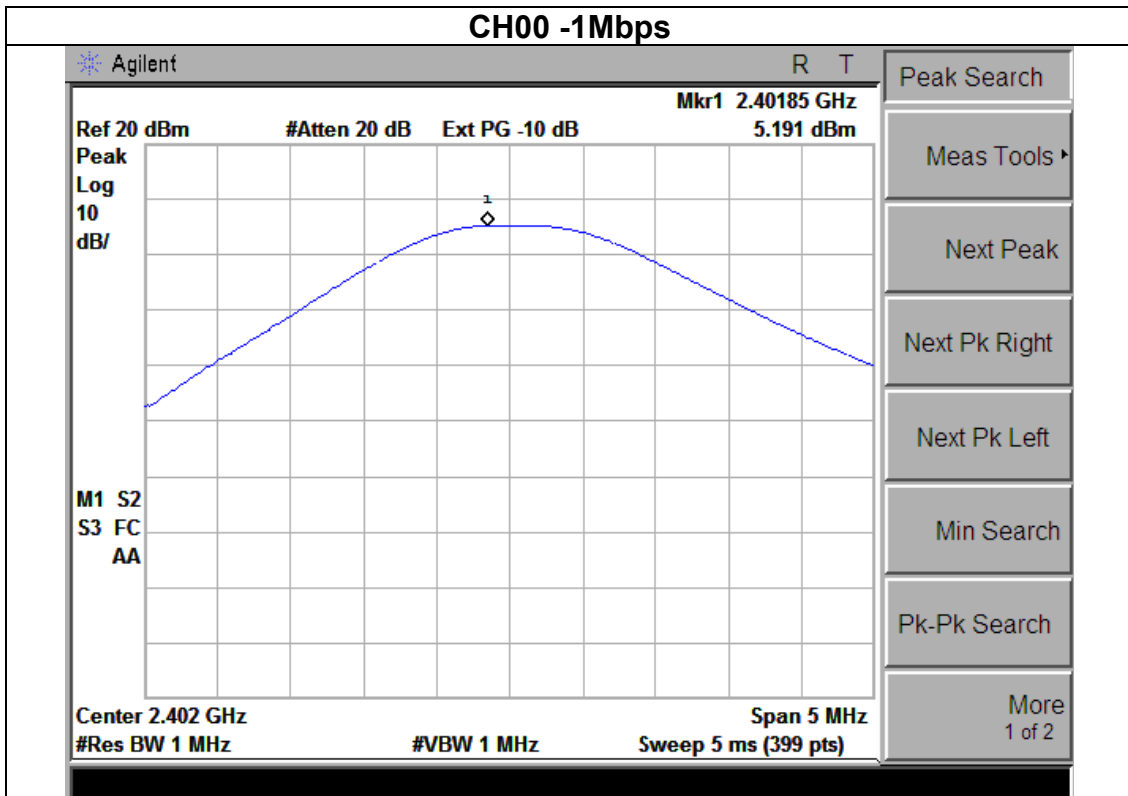

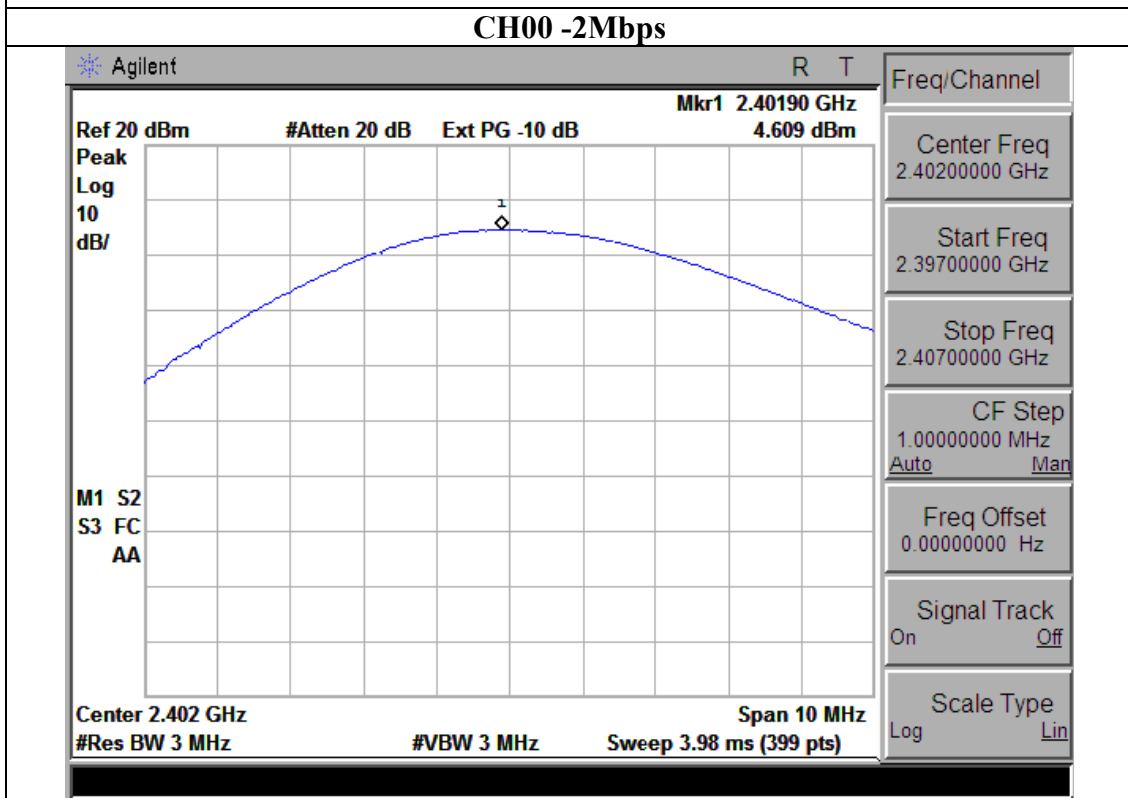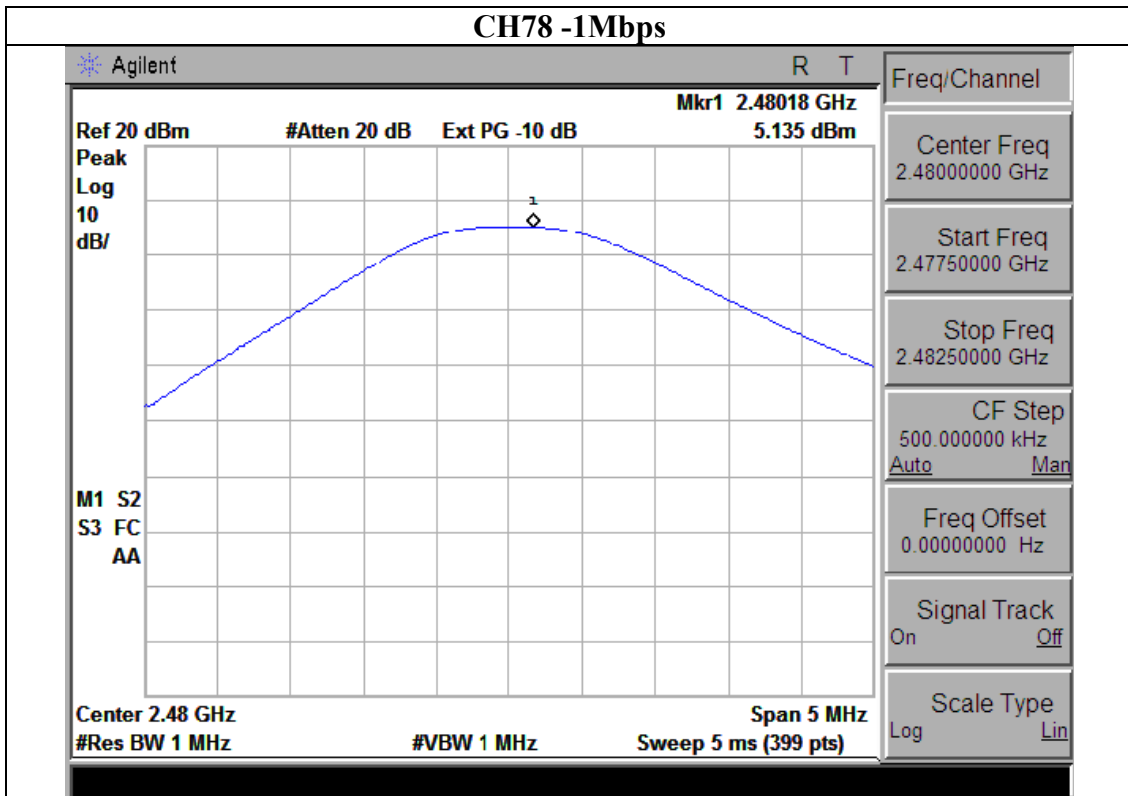

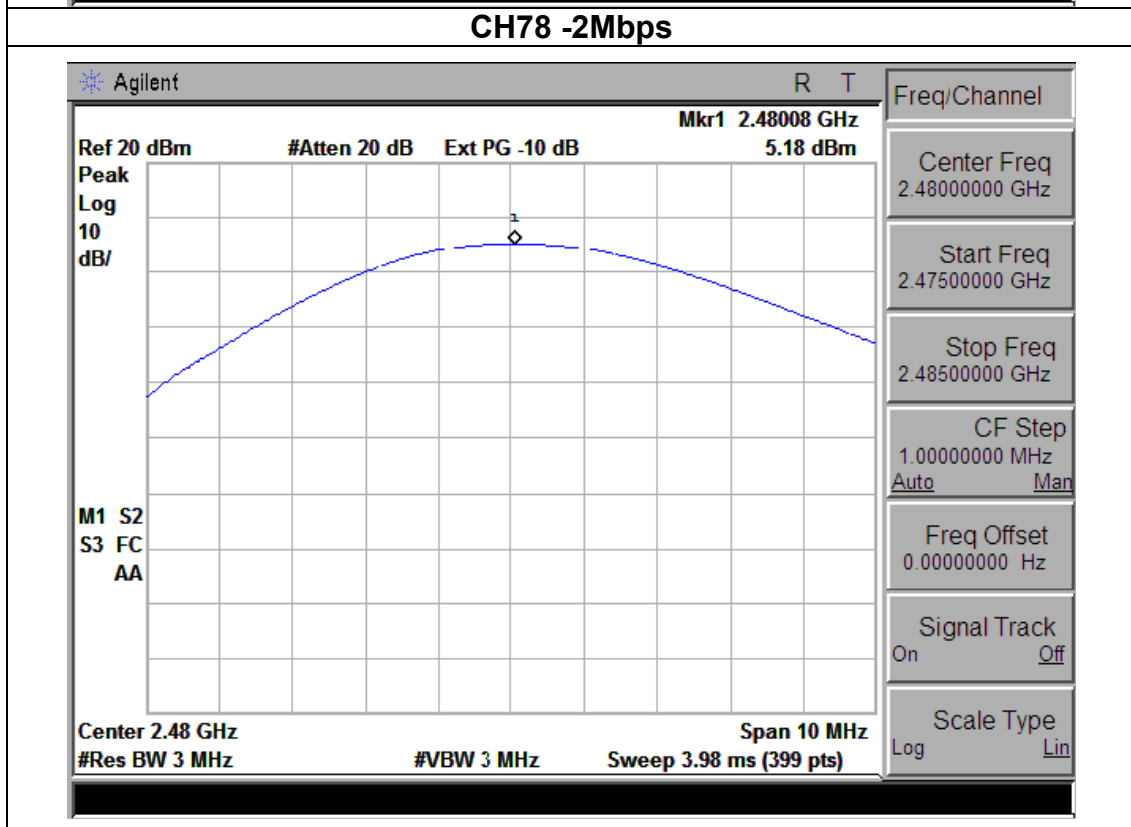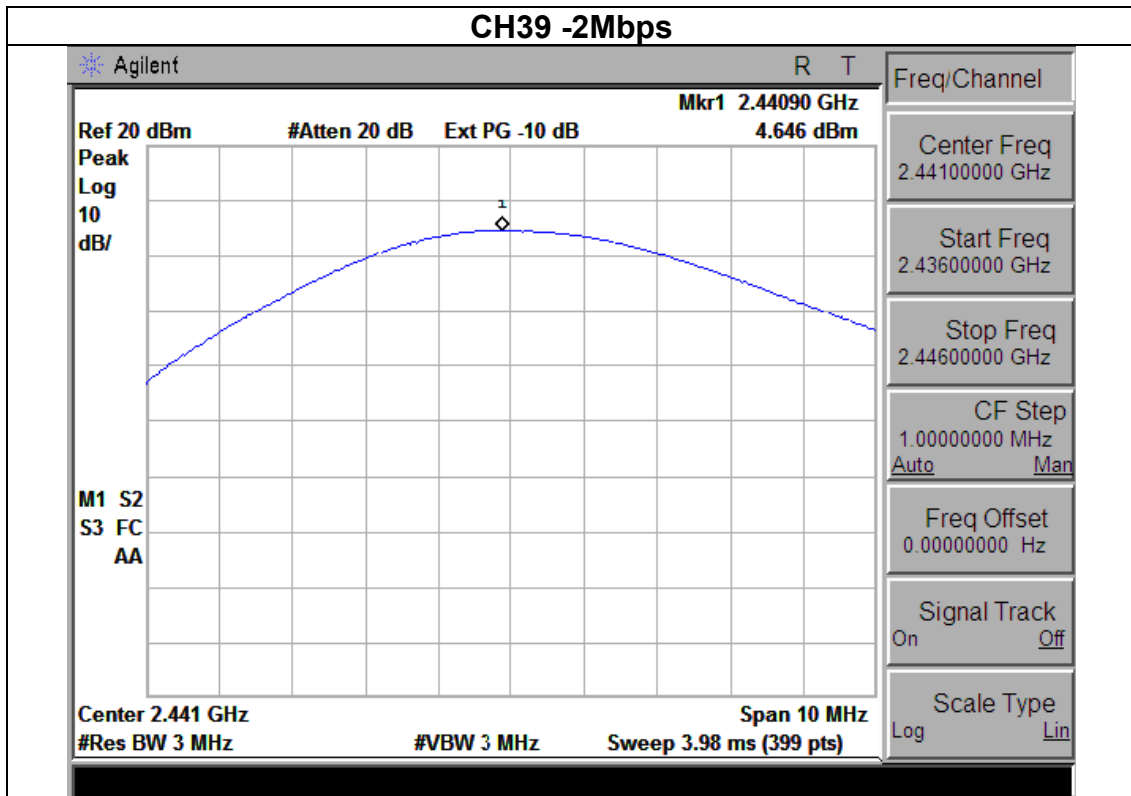

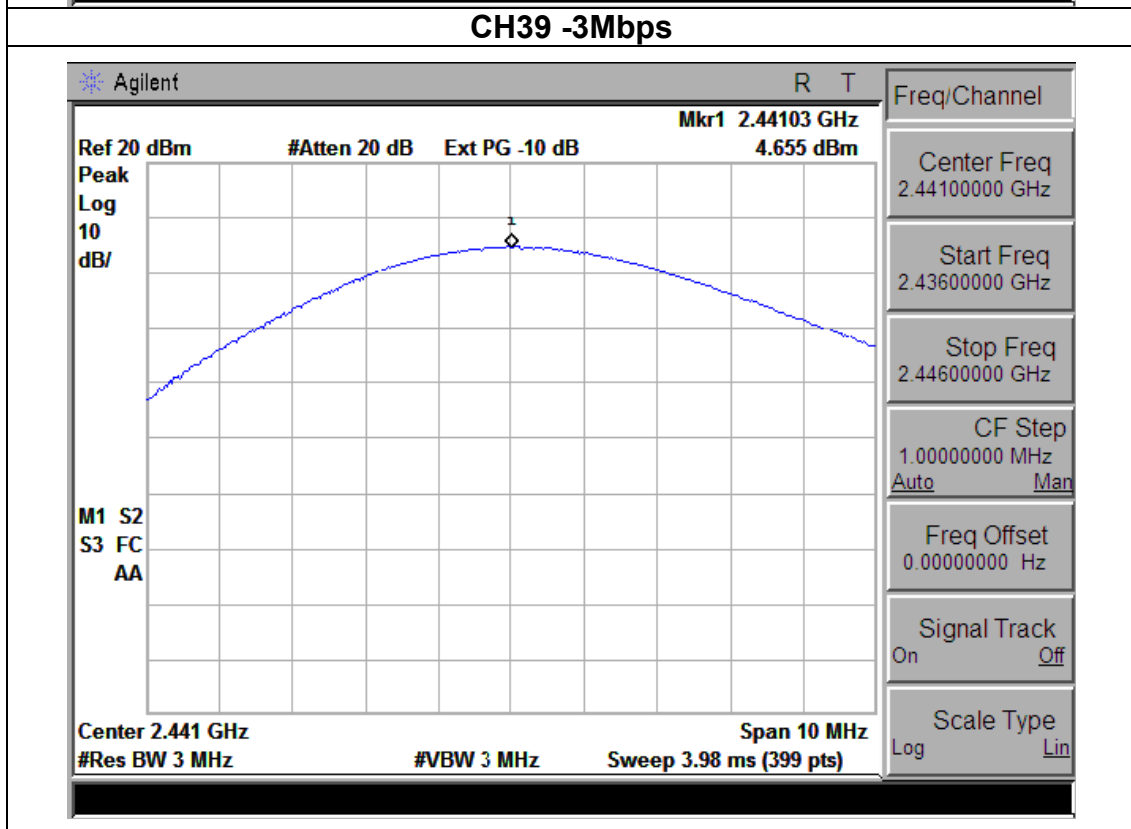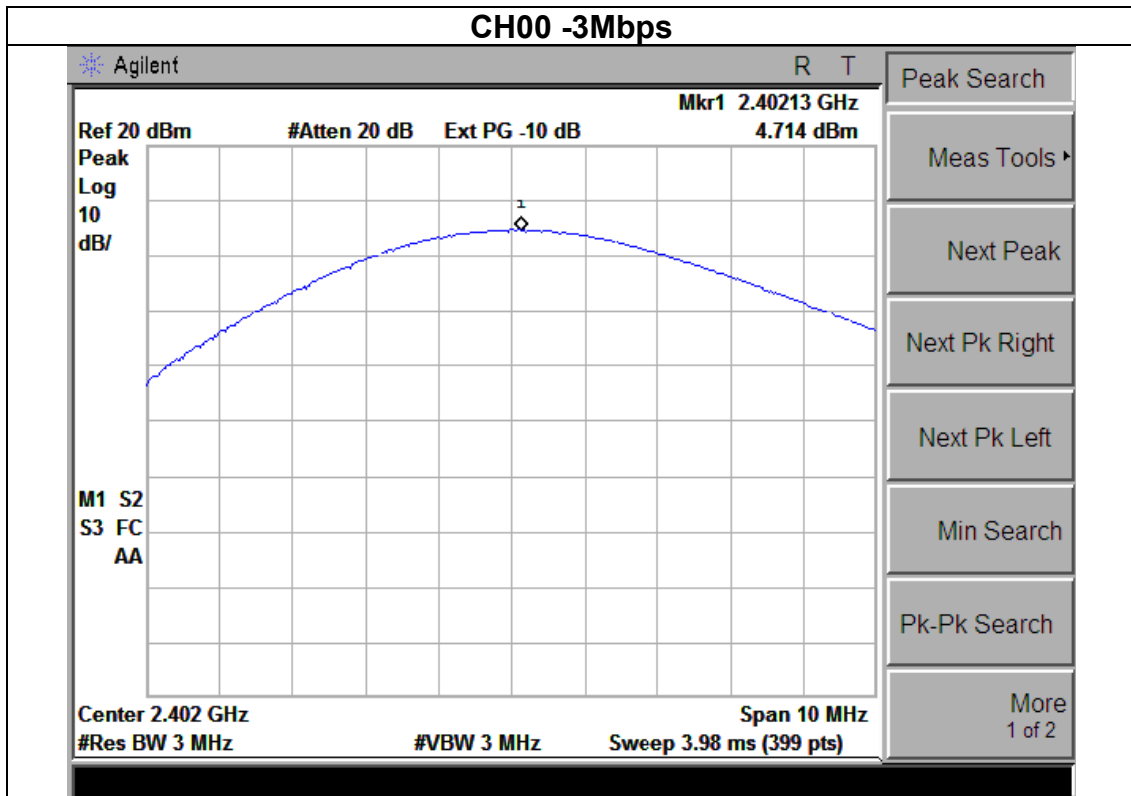

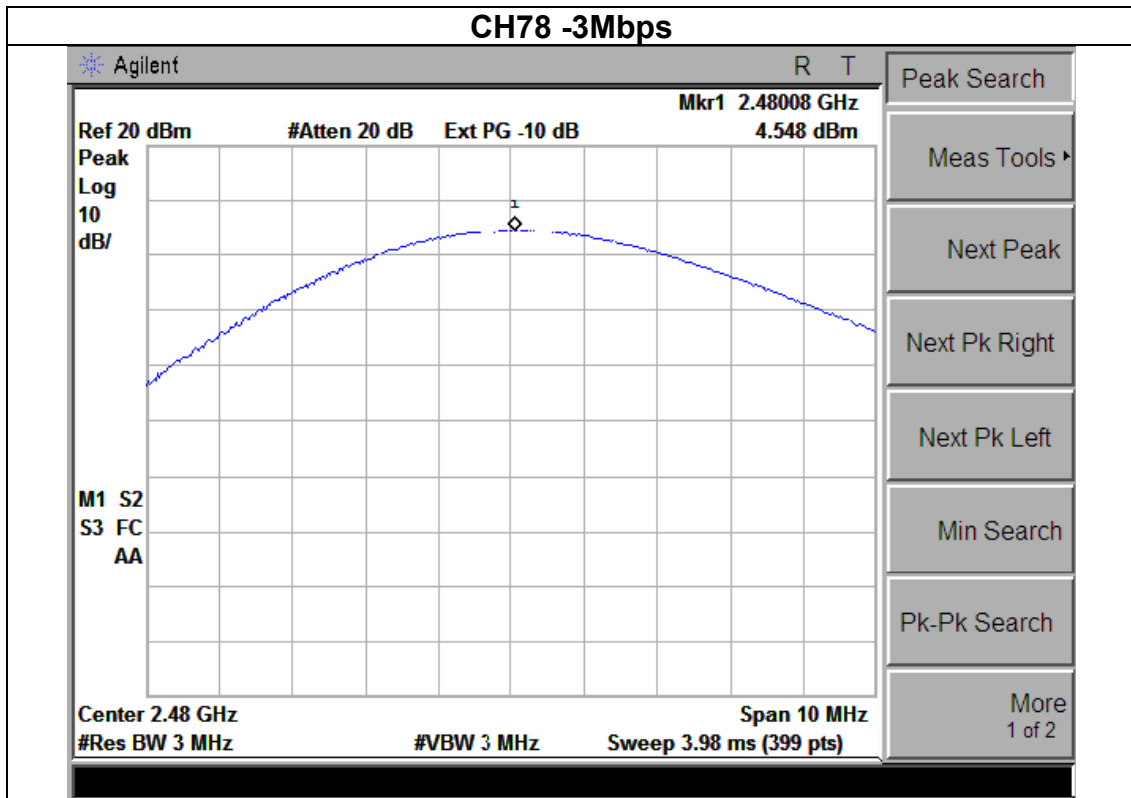

## 5. EMISSION TEST RESULTS

### 5.1. Conducted Emission at the Mains Terminals Test

#### 5.1.1. Limit 15.207 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 5.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the center so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.


Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

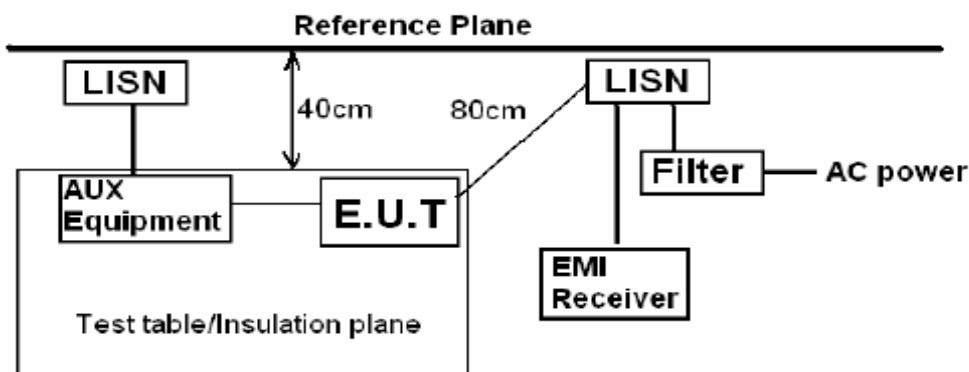

Remark:  
 E.U.T: Equipment Under Test  
 LISN: Line Impedance Stabilization Network  
 Test table height=0.8m

5.1.3. Test result


EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

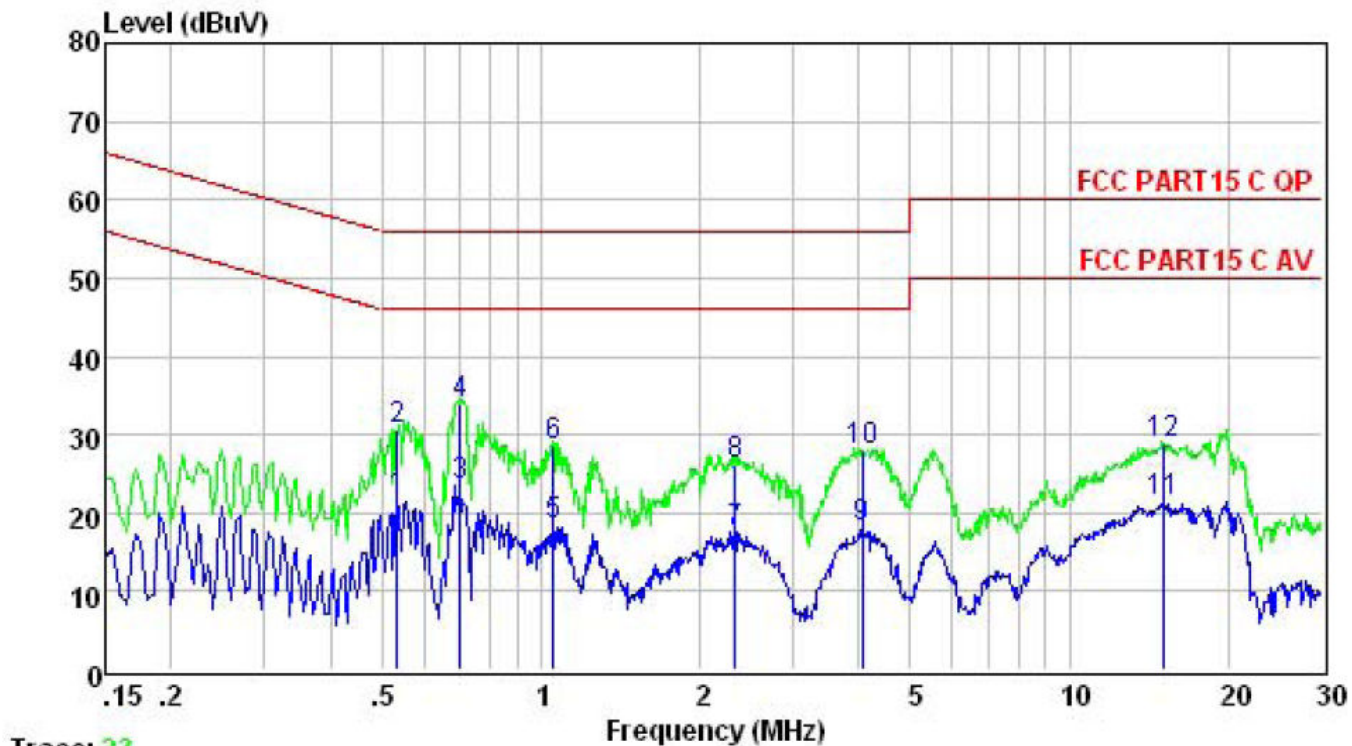

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.535	21.66	56.00	-34.34	Average
2	0.535	30.59	56.00	-25.41	QP
3	0.705	23.47	56.00	-32.53	Average
4	0.705	34.03	56.00	-21.97	QP
5	1.054	18.44	56.00	-37.56	Average
6	1.054	28.69	56.00	-27.31	QP
7	2.334	17.61	56.00	-38.39	Average
8	2.334	26.19	56.00	-29.81	QP
9	4.049	18.04	56.00	-37.96	Average
10	4.049	28.09	56.00	-27.91	QP
11	15.066	21.49	60.00	-38.51	Average
12	15.066	28.94	60.00	-31.06	QP




EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 4

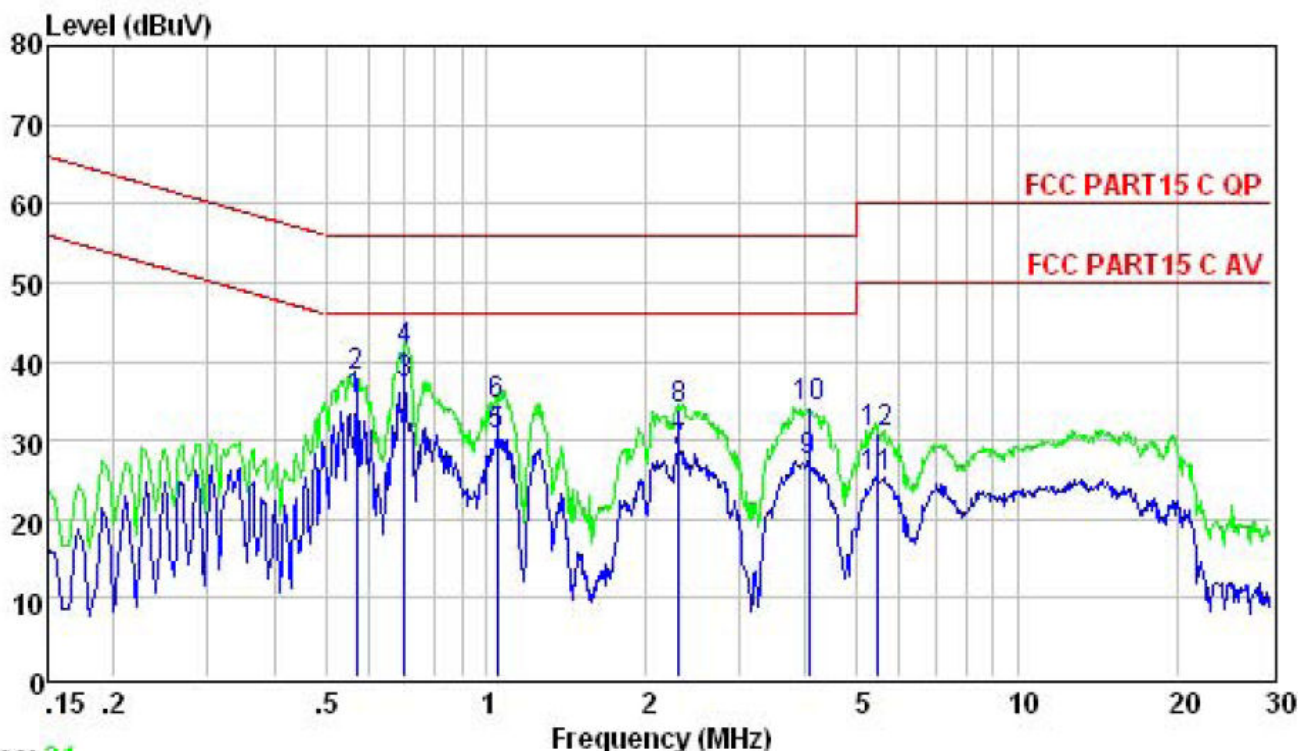

Trace: 21


	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.570	35.03	56.00	-20.97	Average
2	0.570	38.02	56.00	-17.98	QP
3	0.705	37.22	56.00	-18.78	Average
4	0.705	41.26	56.00	-14.74	QP
5	1.049	30.50	56.00	-25.50	Average
6	1.049	34.52	56.00	-21.48	QP
7	2.309	28.53	56.00	-27.47	Average
8	2.309	34.03	56.00	-21.97	QP
9	4.049	27.49	56.00	-28.51	Average
10	4.049	34.19	56.00	-21.81	QP
11	5.447	25.37	60.00	-34.63	Average
12	5.447	31.06	60.00	-28.94	QP

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 4

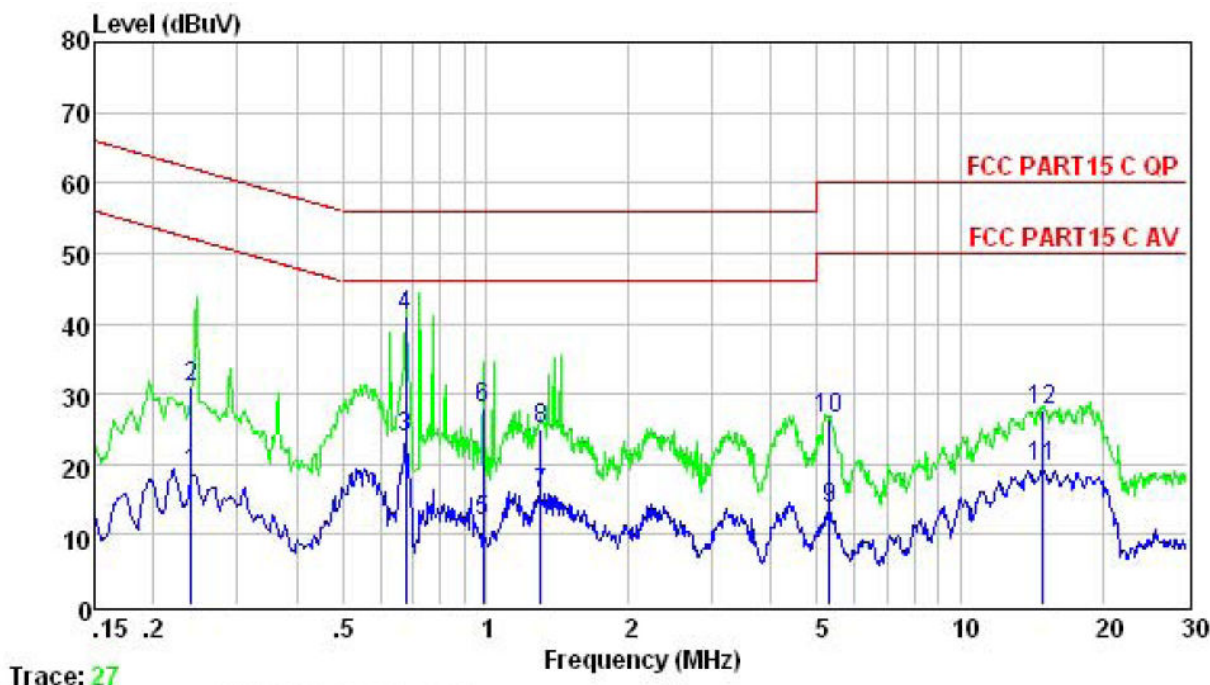

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.240	18.65	62.08	-43.43	Average
2	0.240	30.96	62.08	-31.12	QP
3	0.679	23.81	56.00	-32.19	Average
4	0.679	41.09	56.00	-14.91	QP
5	0.989	11.78	56.00	-44.22	Average
6	0.989	28.03	56.00	-27.97	QP
7	1.310	15.78	56.00	-40.22	Average
8	1.310	24.96	56.00	-31.04	QP
9	5.305	13.58	60.00	-46.42	Average
10	5.305	26.42	60.00	-33.58	QP
11	14.907	19.52	60.00	-40.48	Average
12	14.907	27.53	60.00	-32.47	QP

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 4

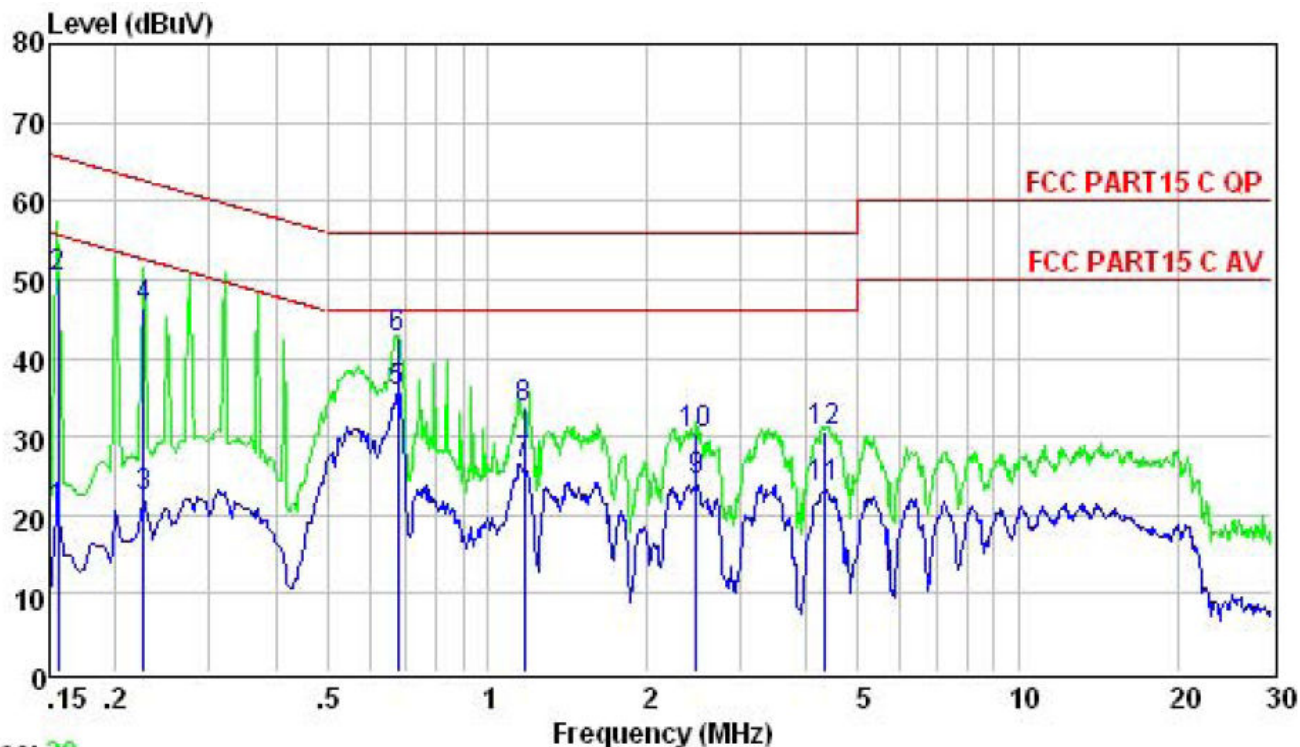

Trace: 29

	Freq	Level	Limit	Over	Remark
	MHz	dBuV	dBuV	dB	
1	0.156	20.45	65.69	-45.24	Average
2	0.156	50.35	65.69	-15.34	QP
3	0.226	22.21	62.61	-40.40	Average
4	0.226	46.39	62.61	-16.22	QP
5	0.679	35.72	56.00	-20.28	Average
6	0.679	42.59	56.00	-13.41	QP
7	1.172	26.56	56.00	-29.44	Average
8	1.172	33.47	56.00	-22.53	QP
9	2.474	24.31	56.00	-31.69	Average
10	2.474	30.26	56.00	-25.74	Peak
11	4.338	23.37	56.00	-32.63	Average
12	4.338	30.65	56.00	-25.35	QP

## 5.2. Radiated Emission Test

### 5.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

### 5.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

### 5.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m above the ground blow 1G and 1.5m above 1G. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, the EUT was placed on a turn table which was 1.5 m above the ground, for all test, used peak detector.

The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

Notes: 1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.

2. Measurement Uncertainty:  $\pm 3.2$  dB at a level of confidence of 95%.


3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.


5. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).

6. We pretest all modulation, the worst data was show in the report.


# Radiated Emission Test-Up Frequency Below 30MHz

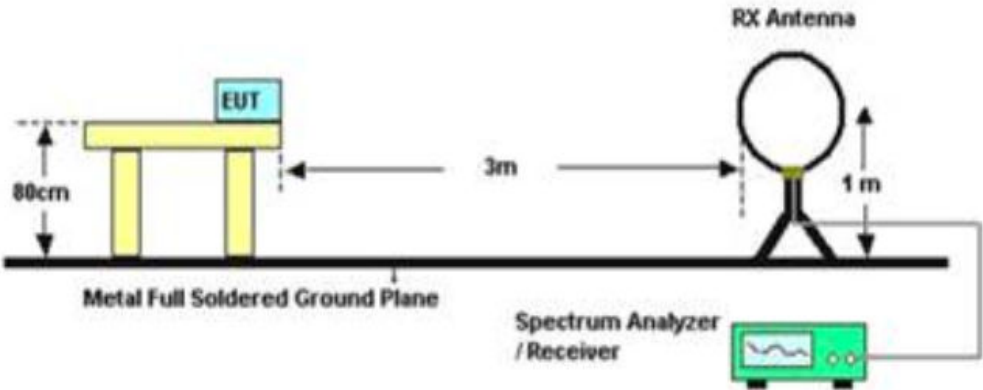

## 30MHz- 1GHz

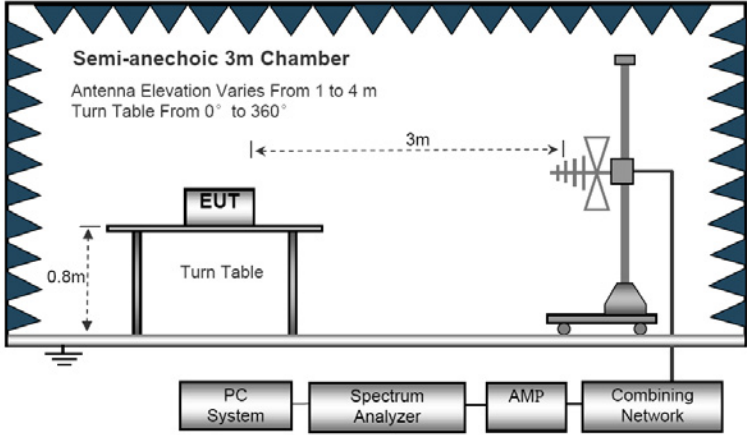

## Above 1GHz

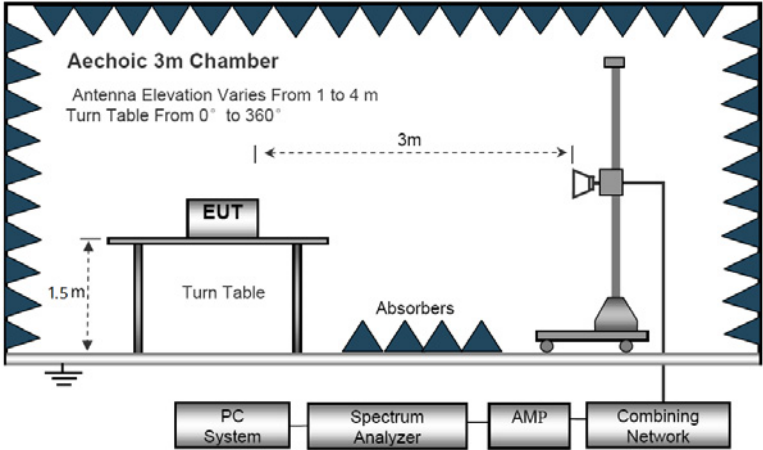

**Below 30MHz**

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $20 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	3.7V		


30- 1GHz  
Horizontal

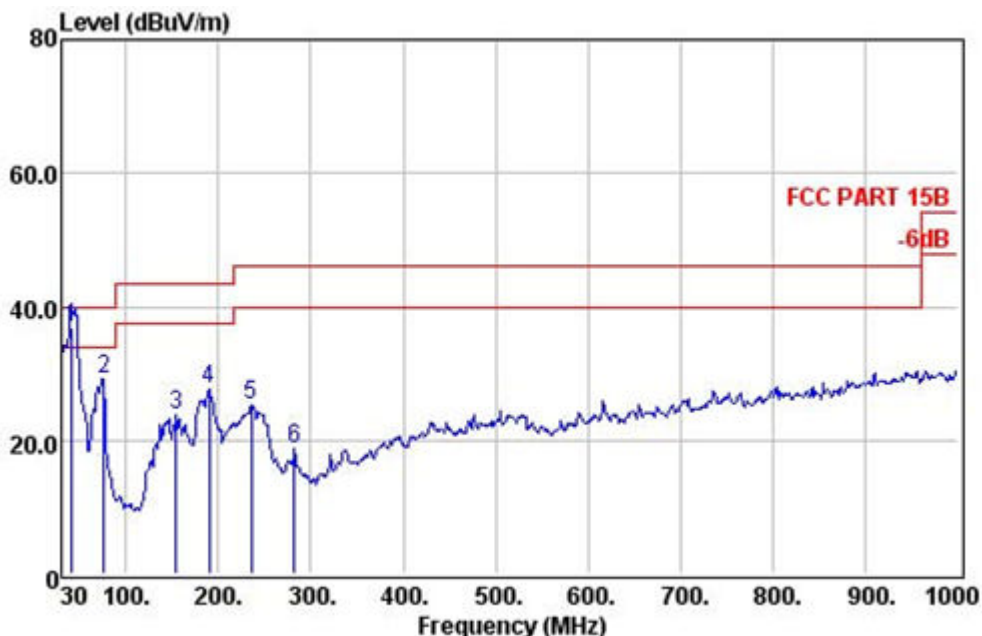

		Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1 !	41.64	31.38	55.36	0.56	36.77	40.00	-3.23	QP
2	76.56	31.33	51.87	0.85	29.22	40.00	-10.78	QP
3	154.16	31.25	44.63	1.22	23.68	43.50	-19.82	QP
4	190.05	31.12	47.17	1.39	27.54	43.50	-15.96	QP
5	235.64	30.94	42.16	1.61	25.33	46.00	-20.67	QP
6	282.20	30.94	34.45	1.87	18.61	46.00	-27.39	QP



Vertical

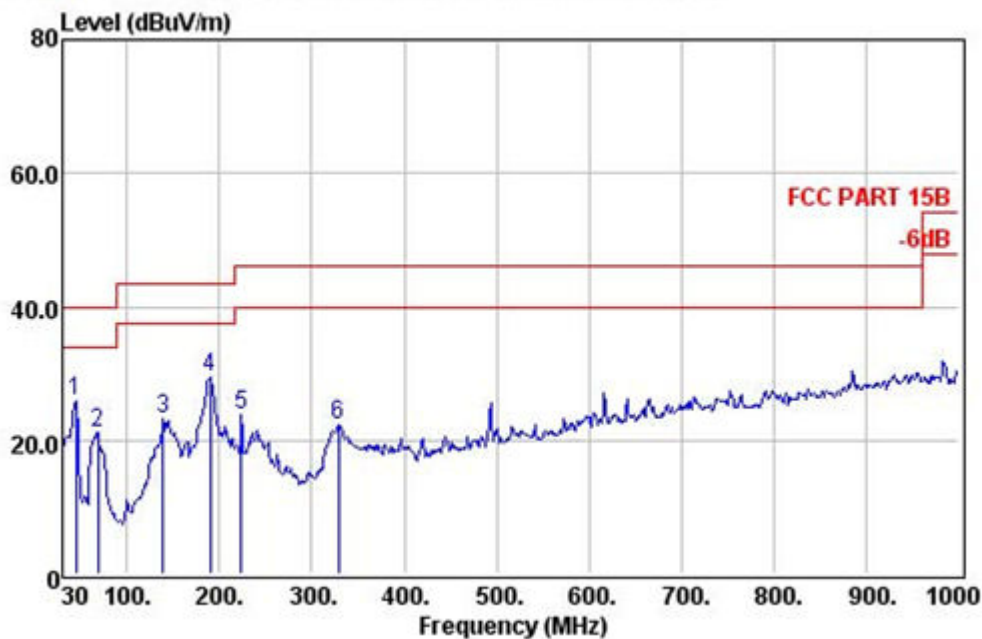

	Freq	Preamp	Read	Cable	Level	Limit	Over	Remark
	MHz	Factor	Level	Loss	Level	Line	Limit	
		dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	44.55	31.40	45.59	0.56	25.78	40.00	-14.22	QP
2	68.80	31.32	44.24	0.85	21.25	40.00	-18.75	QP
3	138.64	31.21	44.92	1.22	23.32	43.50	-20.18	QP
4	190.05	31.12	49.12	1.39	29.49	43.50	-14.01	QP
5	224.00	30.95	41.21	1.53	23.94	46.00	-22.06	QP
6	328.76	30.79	36.57	2.02	22.45	46.00	-23.55	QP

NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,


Over Limit= Absolute Level – Limit

1M(Middle channel) is the worst mode.

Above 1GHz


EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	1M-2402
Test Voltage :	DC 3.7V		

Vertical

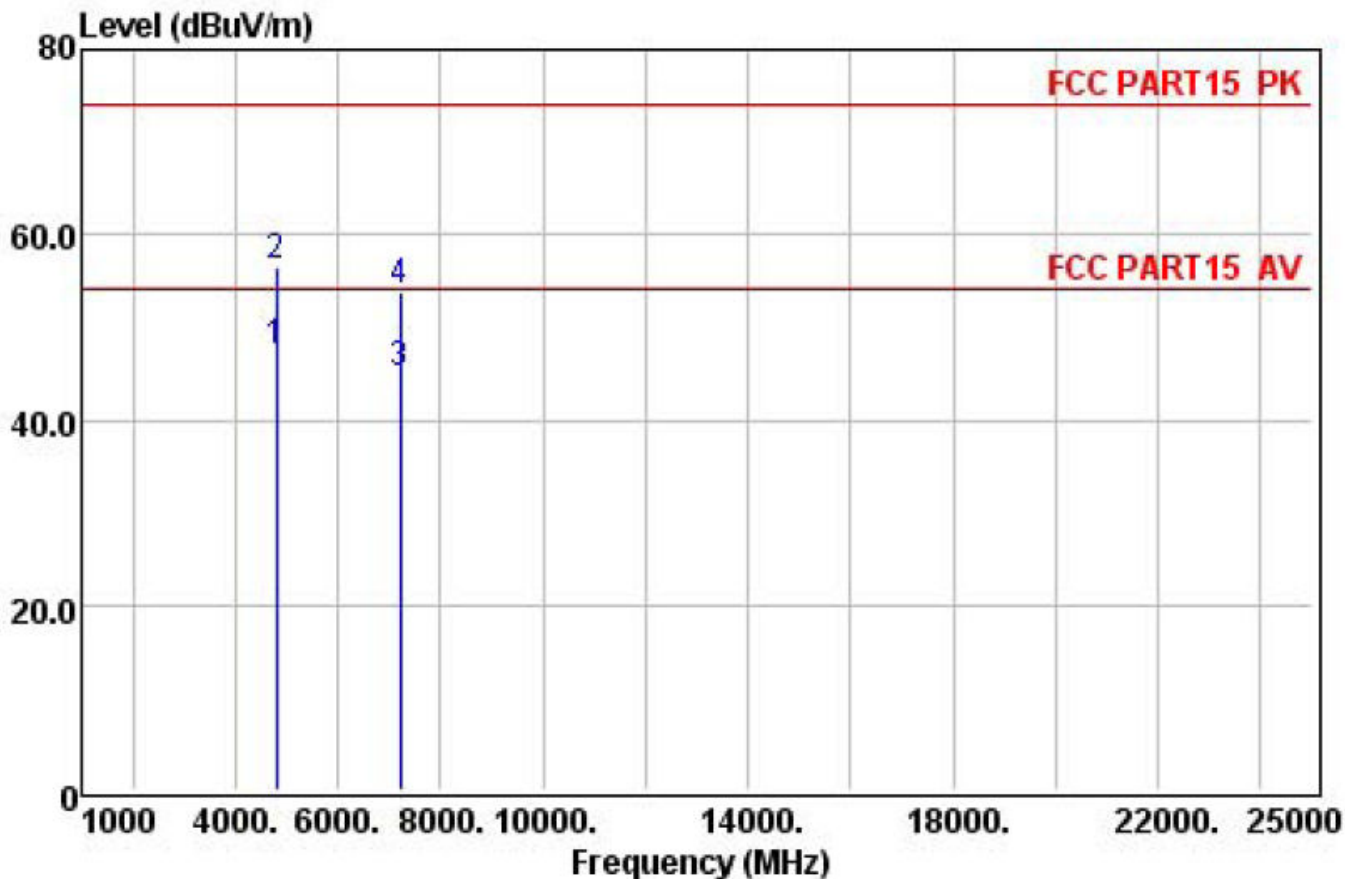

	Preamp	Read	Cable	Limit	Over			
Freq	Factor	Level	Loss	Line	Limit	Remark		
MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB		
1	4804.00	27.49	29.79	11.96	47.20	54.00	-6.80	Average
2	4804.00	27.49	39.07	11.96	56.48	74.00	-17.52	Peak
3	7206.00	27.94	30.84	16.61	44.79	54.00	-9.21	Average
4	7206.00	27.94	39.98	16.61	53.93	74.00	-20.07	Peak


Horizontal

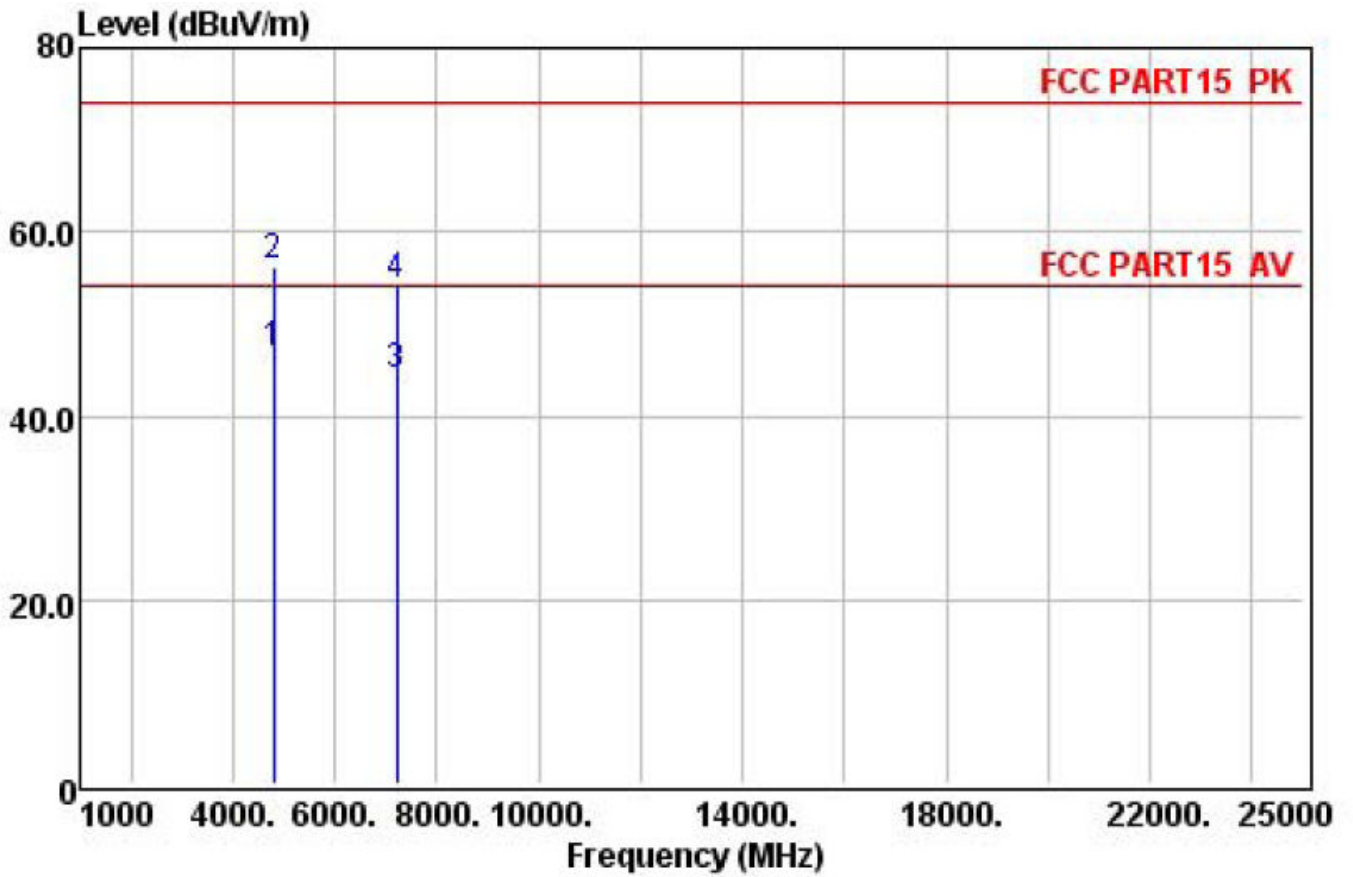

	Preamp	Read	Cable	Limit	Over		
Freq	Factor	Level	Loss	Line	Limit	Remark	
MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.00	27.49	29.14	11.96	46.55	54.00	-7.45 Average
2	4804.00	27.49	38.68	11.96	56.09	74.00	-17.91 Peak
3	7206.00	27.94	30.29	16.61	44.24	54.00	-9.76 Average
4	7206.00	27.94	40.04	16.61	53.99	74.00	-20.01 Peak


EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	1M-2441
Test Voltage :	DC 3.7V		

Vertical

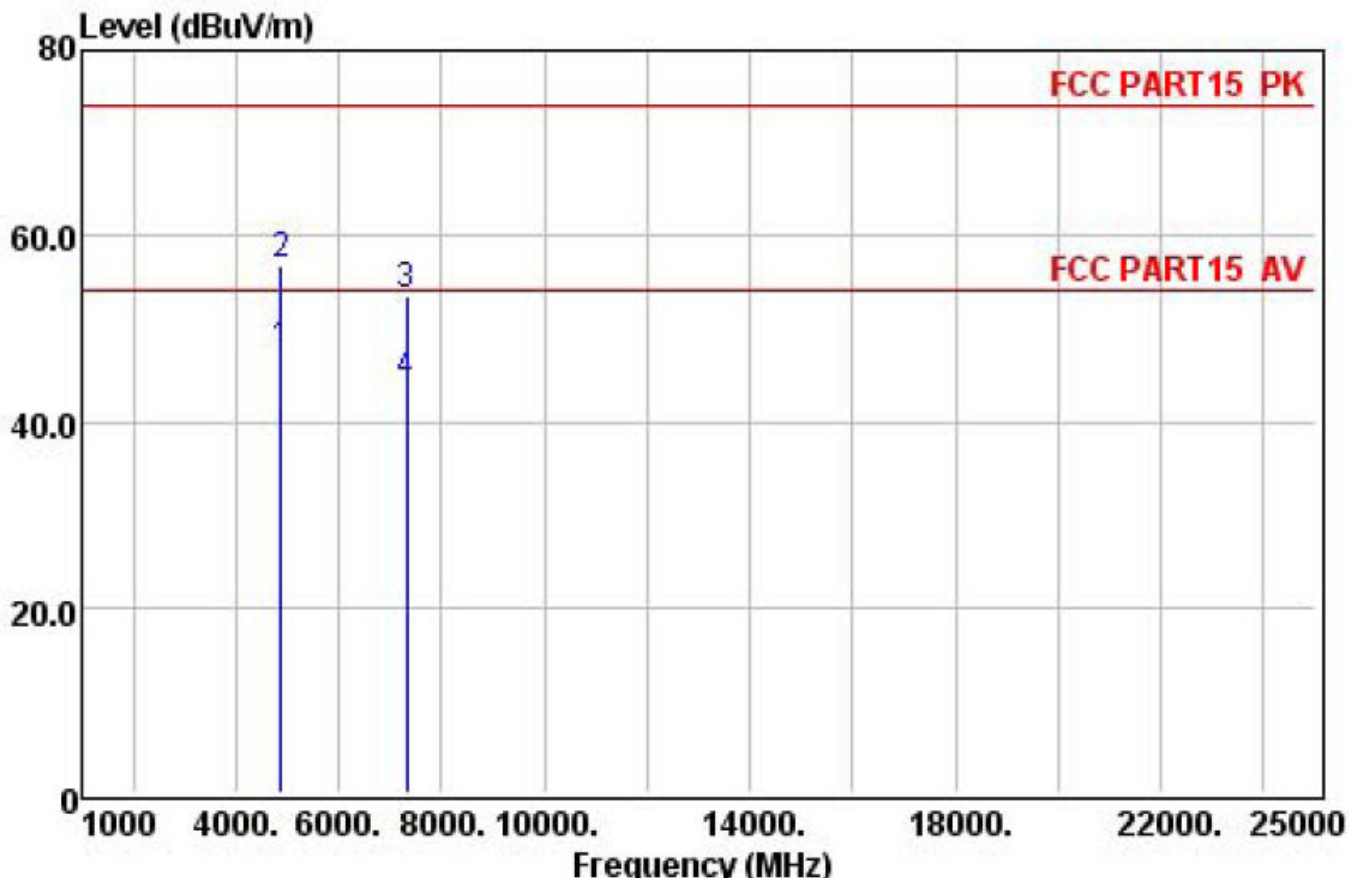

	Preamp	Read	Cable	Limit	Over		
	Freq	Factor	Level	Loss	Level	Line	Limit
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	4882.00	27.53	30.69	12.14	47.41	54.00	-6.59 Average
2	4882.00	27.53	40.07	12.14	56.79	74.00	-17.21 Peak
3	7320.00	27.96	40.68	16.62	53.67	74.00	-20.33 Peak
4	7323.00	27.96	30.95	16.62	43.94	54.00	-10.06 Average


Horizontal

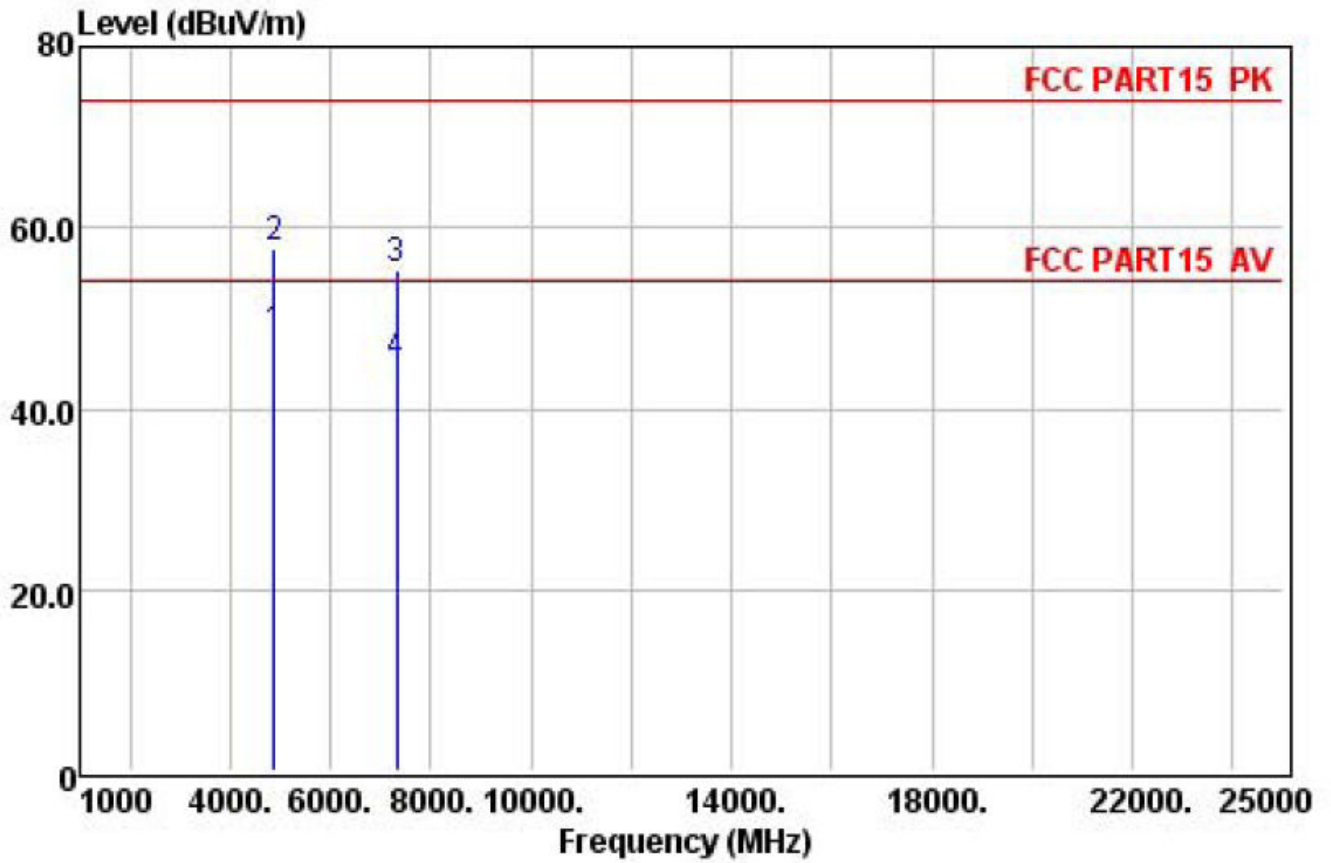

	Preamp	Read	Cable		Limit	Over	
	Freq	Factor	Level	Loss	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	4882.00	27.53	31.28	12.14	48.00	54.00	-6.00 Average
2	4882.00	27.53	40.97	12.14	57.69	74.00	-16.31 Peak
3	7320.00	27.96	42.47	16.62	55.46	74.00	-18.54 Peak
4	7323.00	27.96	31.95	16.62	44.94	54.00	-9.06 Average


EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	1M-2480
Test Voltage :	DC 3.7V		

Vertical

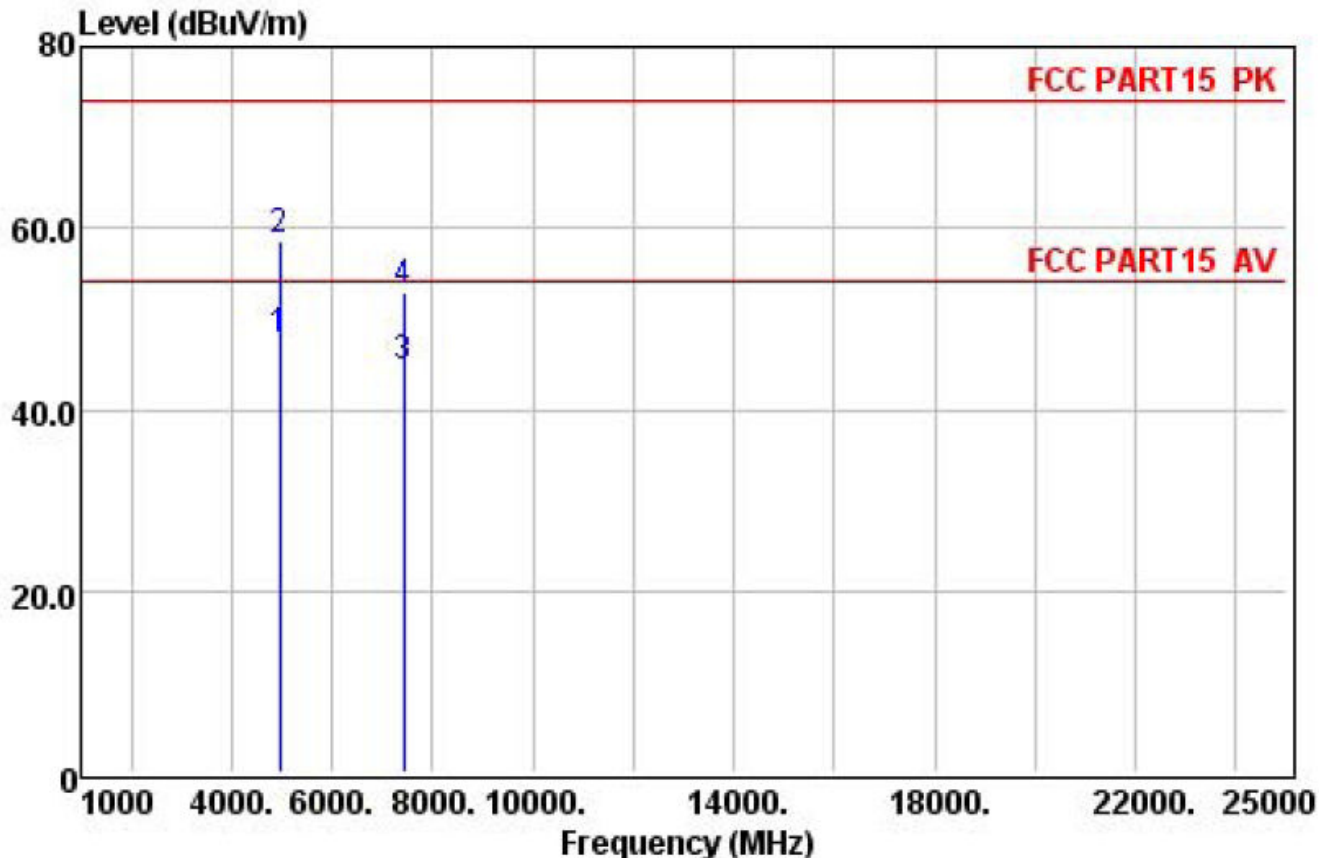

	Preamp	Read	Cable	Limit	Over			
Freq	Factor	Level	Loss	Line	Limit	Remark		
MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB		
1	4960.00	27.58	31.55	12.36	47.65	54.00	-6.35	Average
2	4960.00	27.58	42.37	12.36	58.47	74.00	-15.53	Peak
3	7440.00	27.99	31.68	16.62	44.69	54.00	-9.31	Average
4	7440.00	27.99	40.06	16.62	53.07	74.00	-20.93	Peak


Horizontal

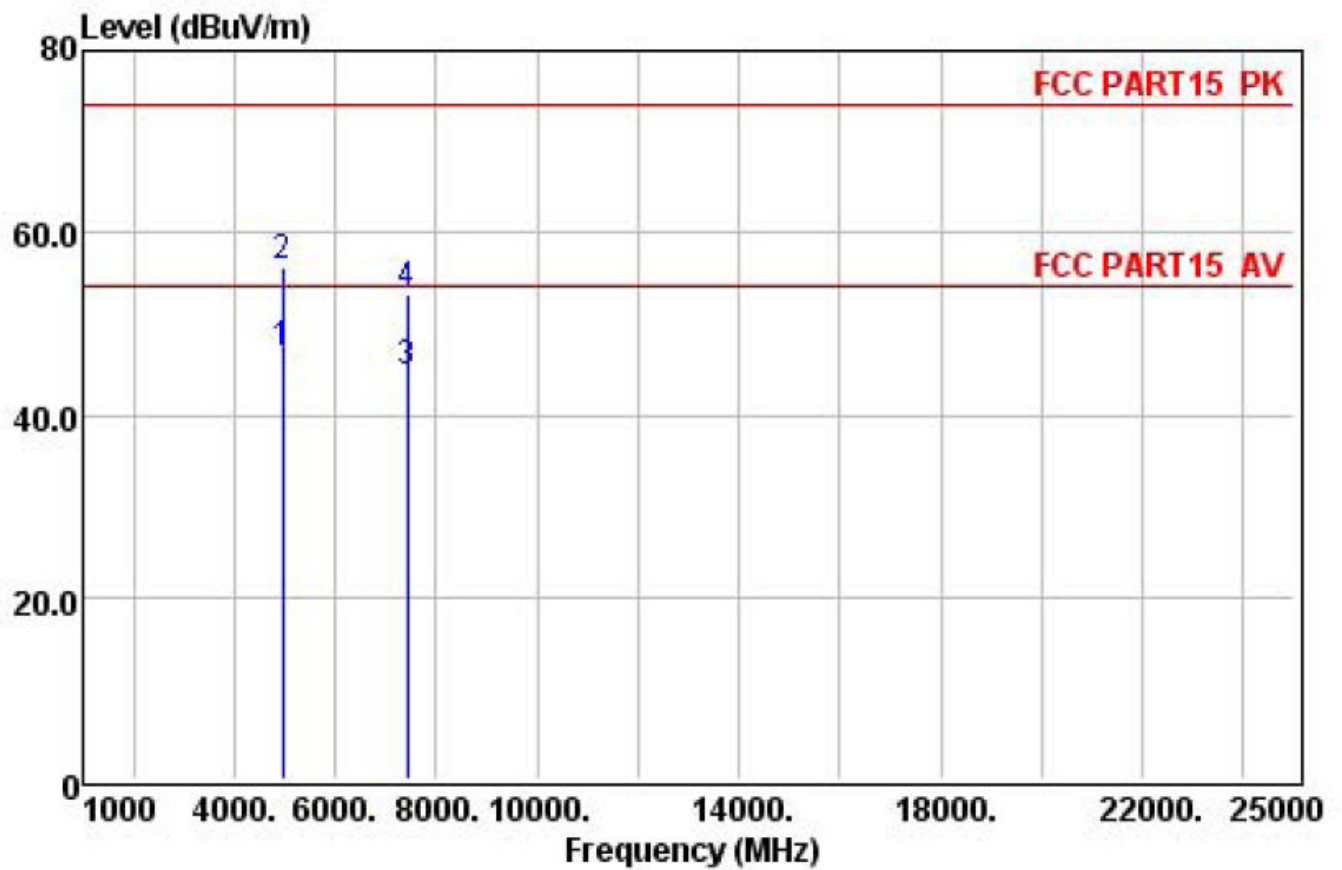

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.00	27.58	30.64	12.36	46.74	54.00	-7.26	Average
2	4960.00	27.58	40.13	12.36	56.23	74.00	-17.77	Peak
3	7440.00	27.99	31.58	16.62	44.59	54.00	-9.41	Average
4	7440.00	27.99	40.36	16.62	53.37	74.00	-20.63	Peak

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	2M-2402
Test Voltage :	DC 3.7V		


Vertical

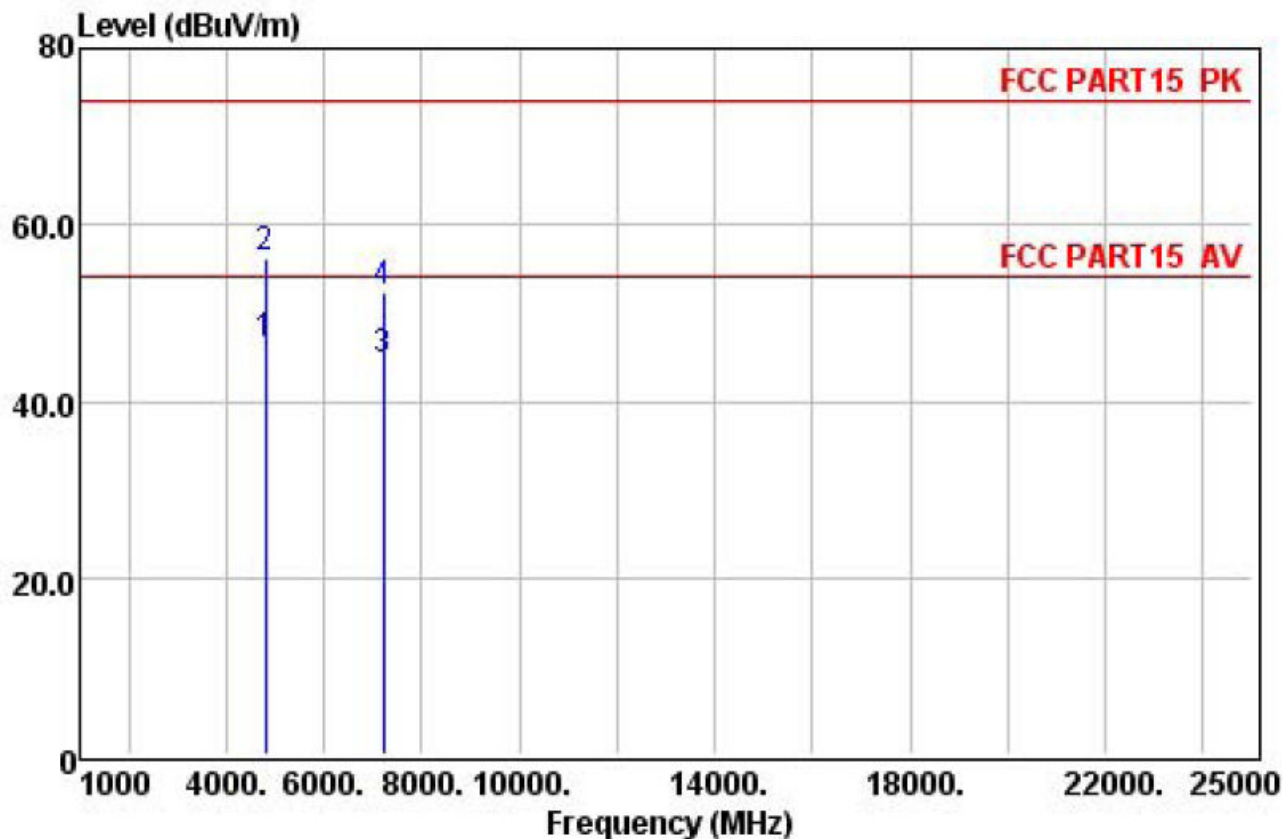

	Preamp	Read	Cable	Limit	Over			
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.00	27.49	28.94	11.96	46.35	54.00	-7.65	Average
2	4804.00	27.49	38.75	11.96	56.16	74.00	-17.84	Peak
3	7206.00	27.94	30.65	16.61	44.60	54.00	-9.40	Average
4	7206.00	27.94	38.34	16.61	52.29	74.00	-21.71	Peak




Horizontal

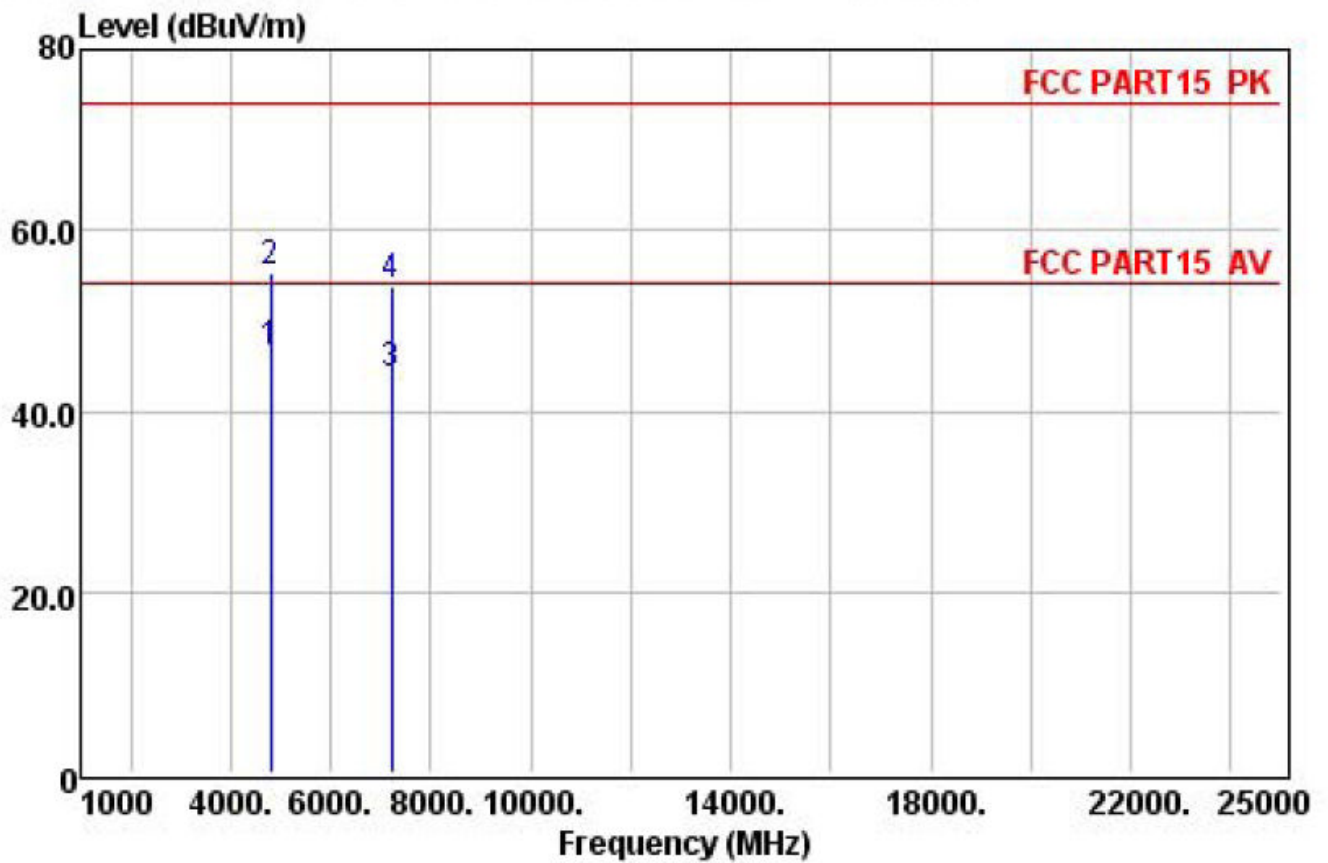

	Preamp Freq	Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4804.00	27.49	28.94	11.96	46.35	54.00	-7.65	Average
2	4804.00	27.49	37.92	11.96	55.33	74.00	-18.67	Peak
3	7206.00	27.94	30.11	16.61	44.06	54.00	-9.94	Average
4	7206.00	27.94	39.76	16.61	53.71	74.00	-20.29	Peak


EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	2M-2441
Test Voltage :	DC 3.7V		

Vertical

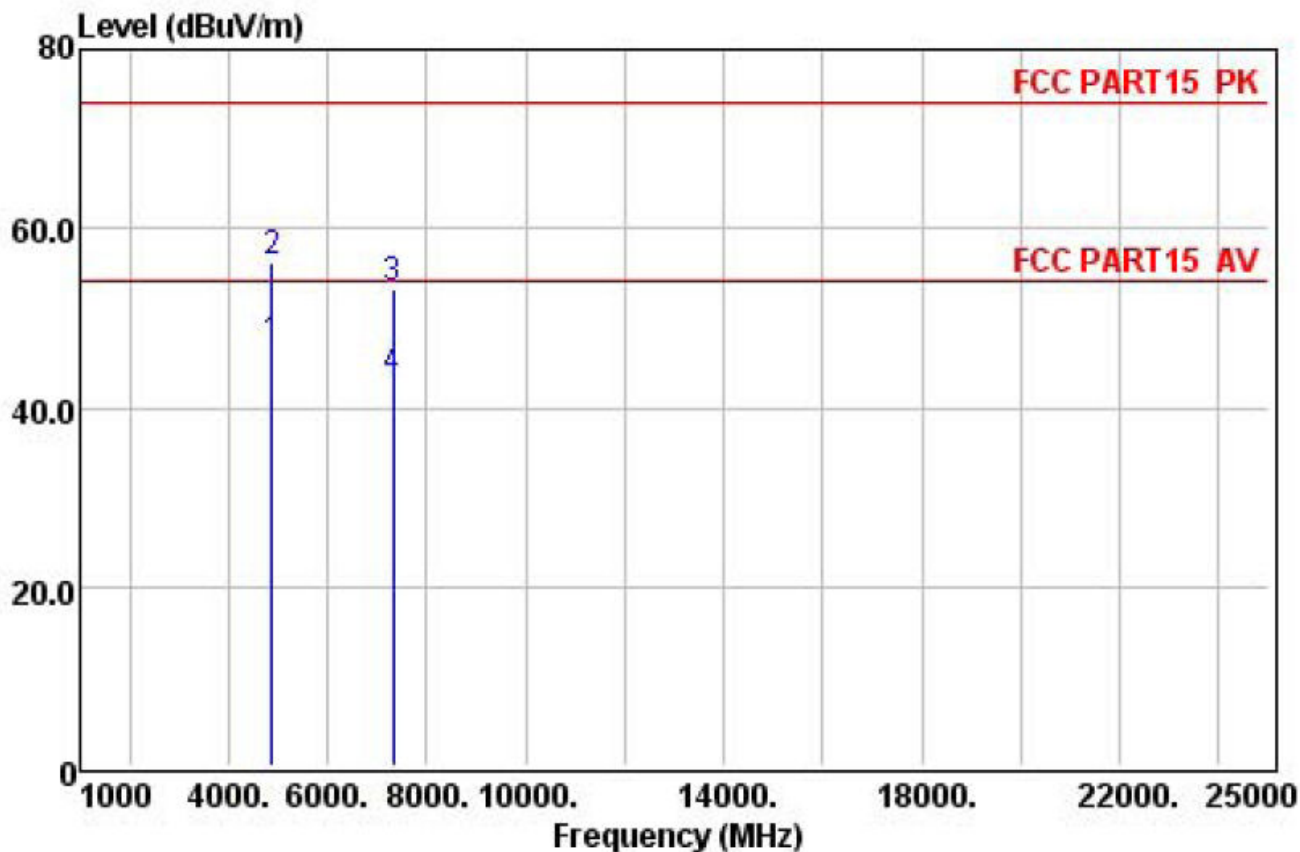

	Preamp	Read	Cable	Limit	Over			
	Freq	Factor	Level	Loss	Level	Line	Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4882.00	27.53	30.07	12.14	46.79	54.00	-7.21	Average
2	4882.00	27.53	39.34	12.14	56.06	74.00	-17.94	Peak
3	7320.00	27.96	40.15	16.62	53.14	74.00	-20.86	Peak
4	7323.00	27.96	30.13	16.62	43.12	54.00	-10.88	Average


Horizontal

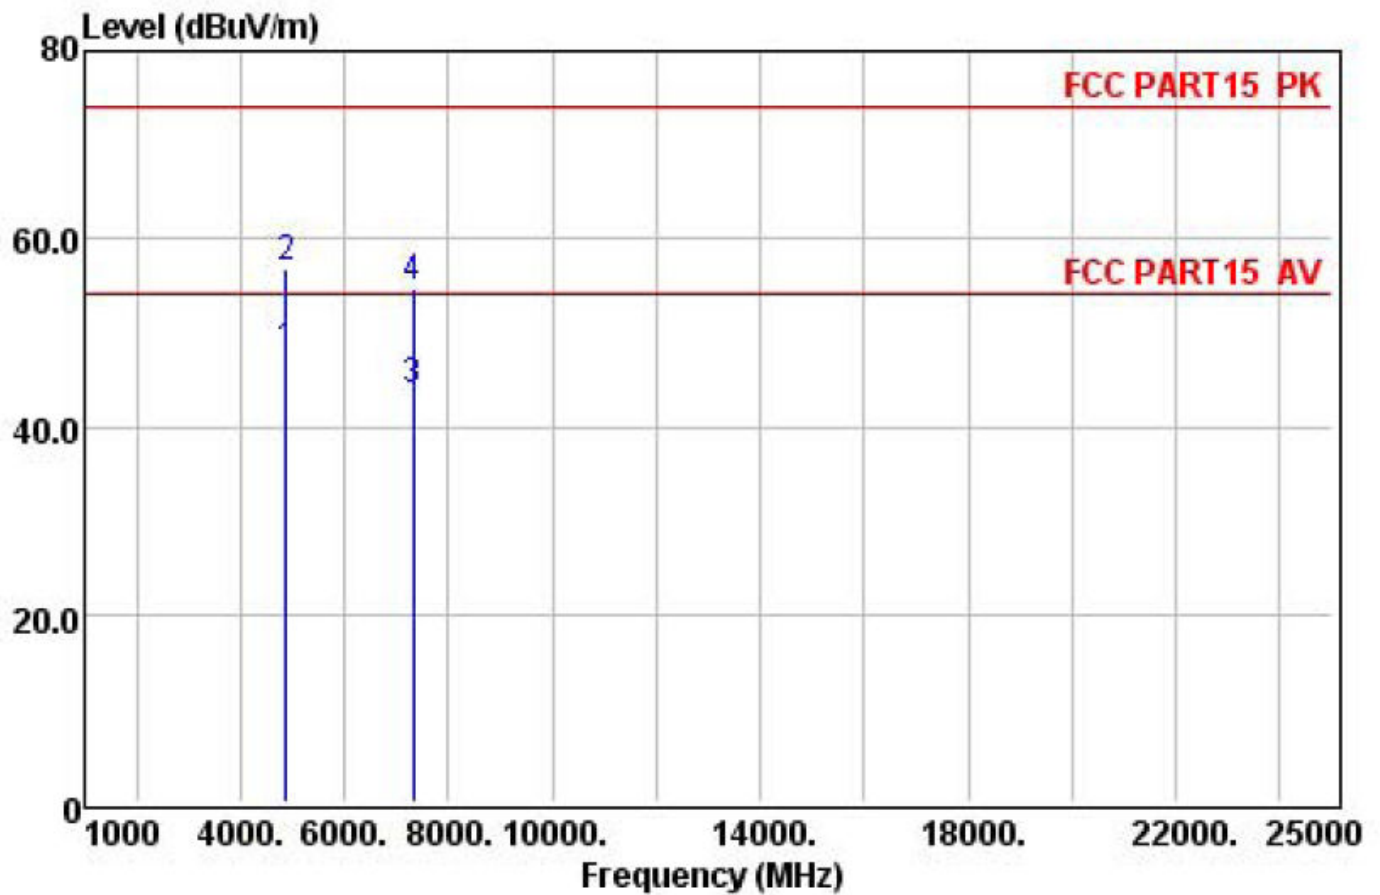


	Preamp	Read	Cable	Limit	Over		
Freq	Factor	Level	Loss	Line	Limit	Remark	
MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4882.00	27.53	30.93	12.14	47.65	54.00	-6.35 Average
2	4882.00	27.53	40.07	12.14	56.79	74.00	-17.21 Peak
3	7323.00	27.96	30.81	16.62	43.80	54.00	-10.20 Average
4	7323.00	27.96	41.76	16.62	54.75	74.00	-19.25 Peak

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	2M-2480
Test Voltage :	DC 3.7V		

Vertical

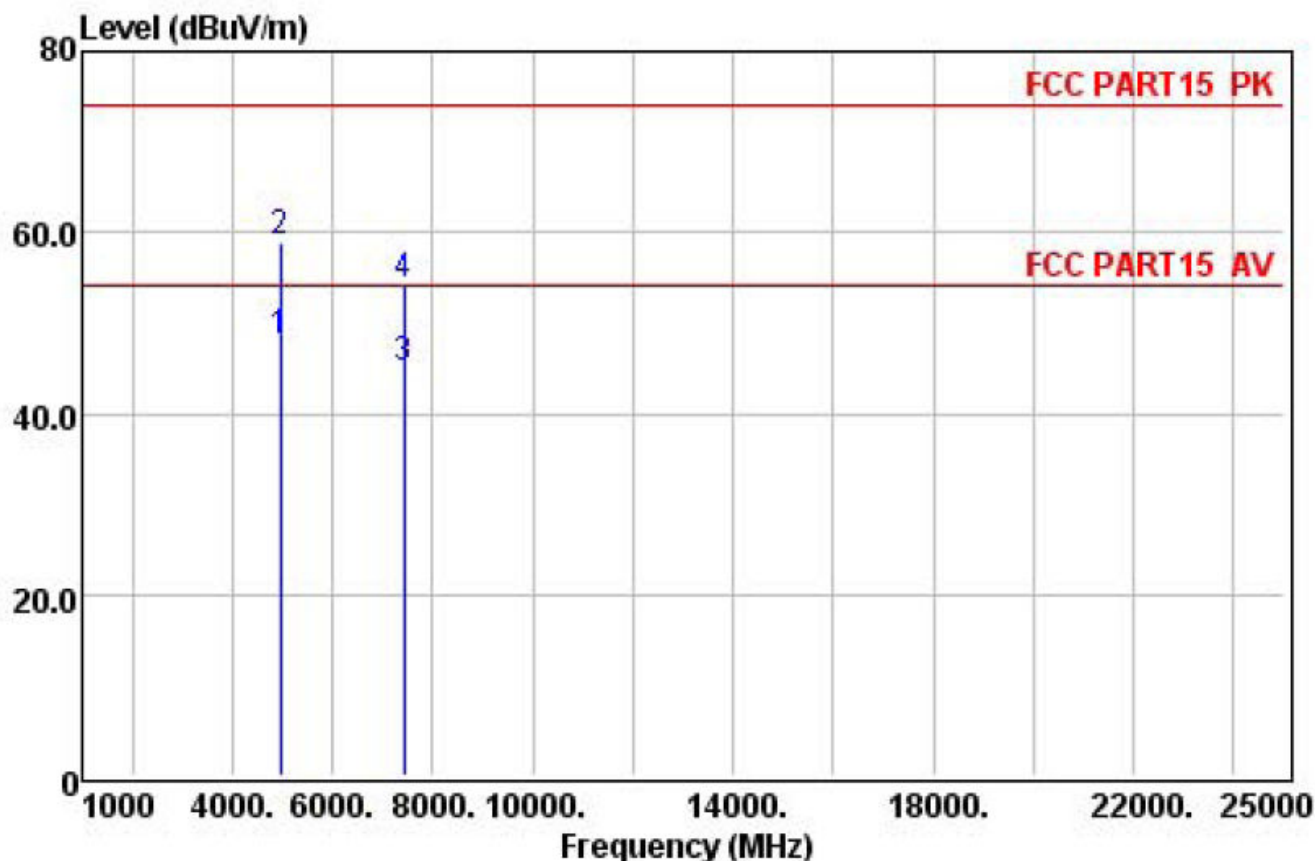

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.00	27.58	31.68	12.36	47.78	54.00	-6.22	Average
2	4960.00	27.58	42.69	12.36	58.79	74.00	-15.21	Peak
3	7440.00	27.99	31.94	16.62	44.95	54.00	-9.05	Average
4	7440.00	27.99	41.19	16.62	54.20	74.00	-19.80	Peak

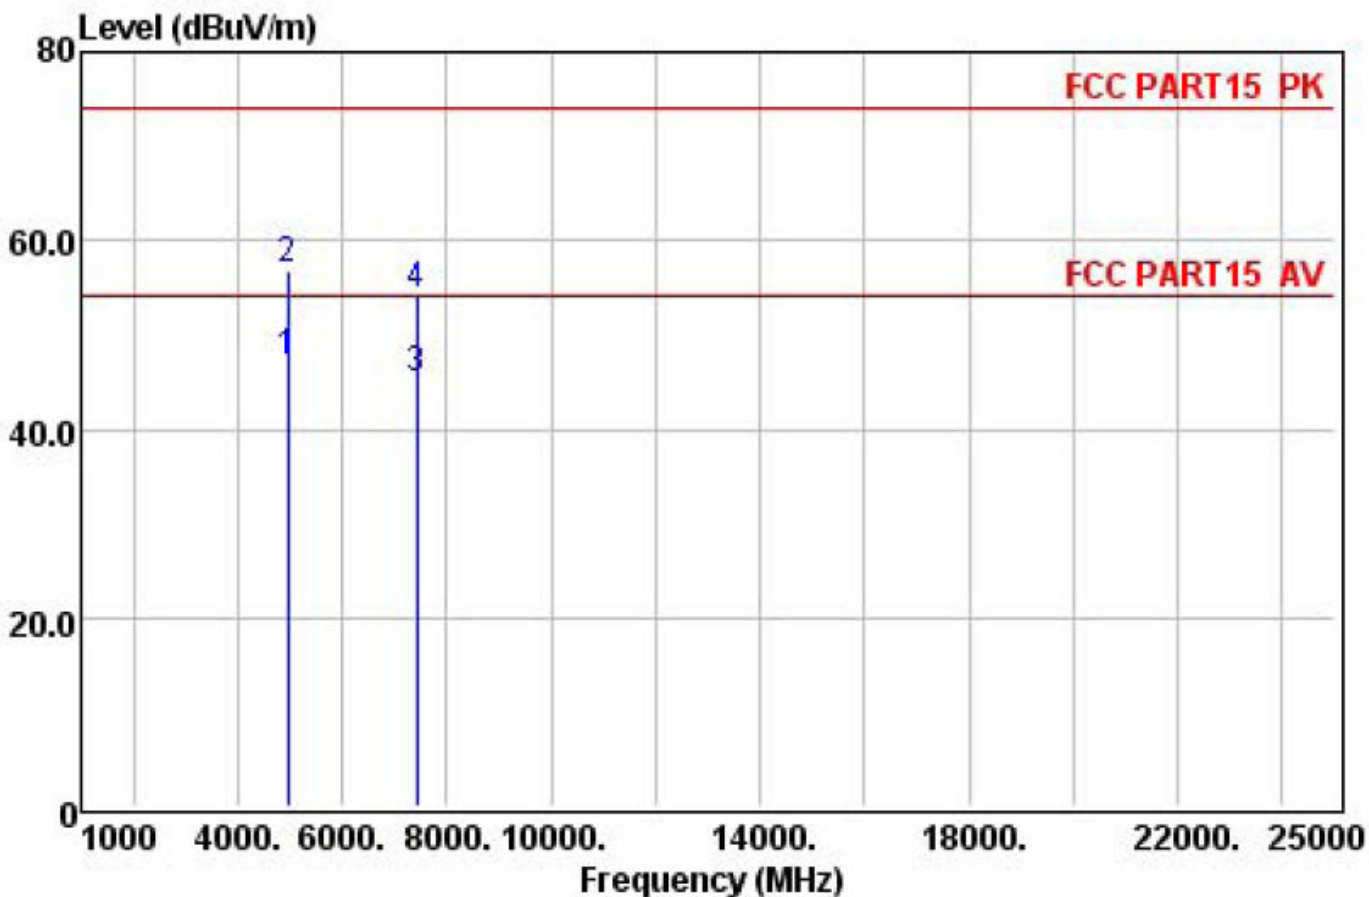

	Freq	Preamp Factor	Read Level	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB	
1	4960.00	27.58	30.99	12.36	47.09	54.00	-6.91	Average
2	4960.00	27.58	40.68	12.36	56.78	74.00	-17.22	Peak
3	7440.00	27.99	32.08	16.62	45.09	54.00	-8.91	Average
4	7440.00	27.99	41.07	16.62	54.08	74.00	-19.92	Peak

**NOTE:**

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,

Over Limit= Absolute Level – Limit

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation)

## 6. 20DB BANDWIDTH

### 6.1. Limits

According to FCC Section 15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth( $10 \cdot \log 1\% = 20\text{dB}$ )taking the RF output power

### 6.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode transmitting.

2. Set the spectrum analyzer:

Span: approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel

RBW  $\geq 1\%$  of the 20dB bandwidth

VBW  $\geq$  RBW

Sweep=auto

Detector function=peak


Trace=max hold



Test data:

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78(1Mbps)		

Frequency	20dB Bandwidth (kHz)	Result
2402 MHz	872.462	<b>PASS</b>
2441 MHz	858.475	<b>PASS</b>
2480 MHz	863.840	<b>PASS</b>

Test plot as follows:

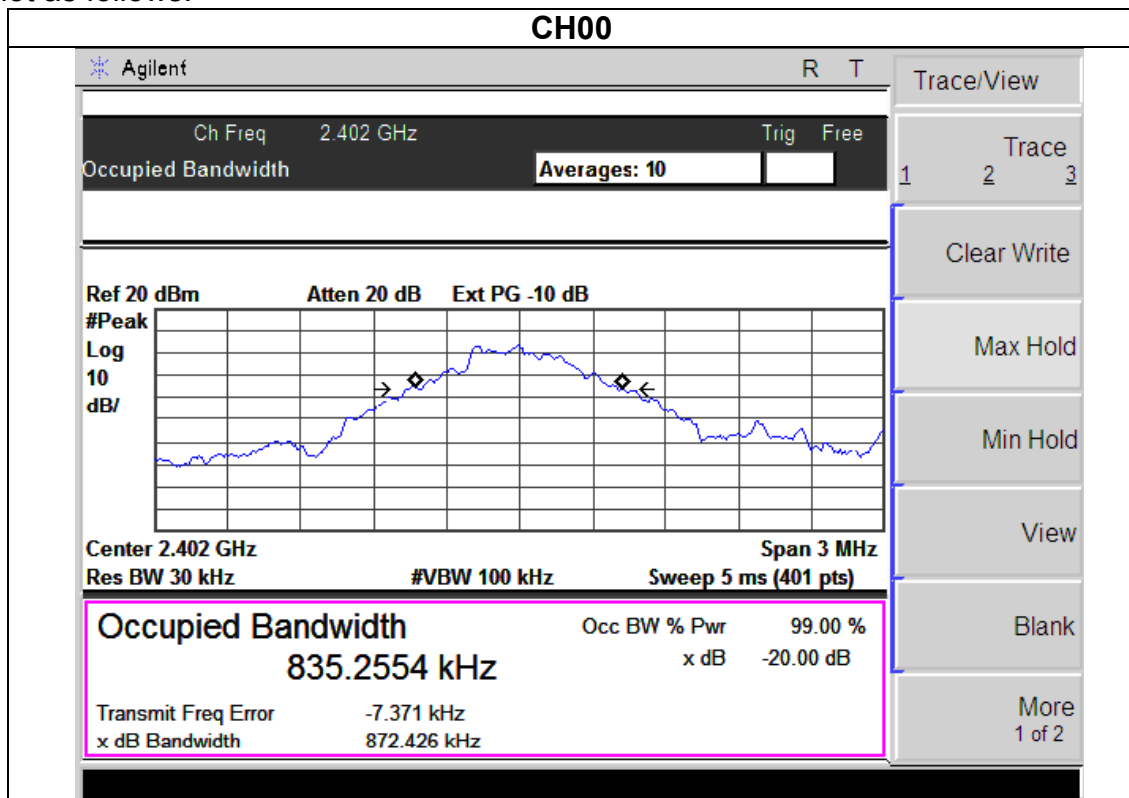


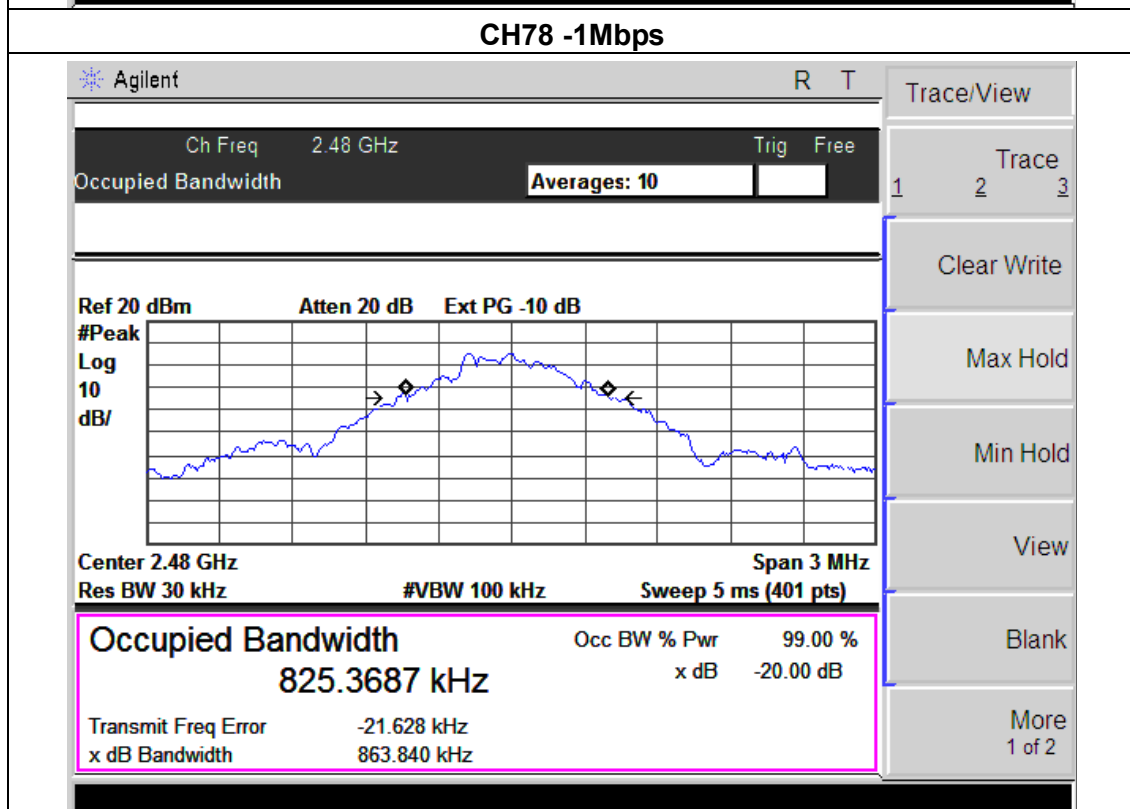
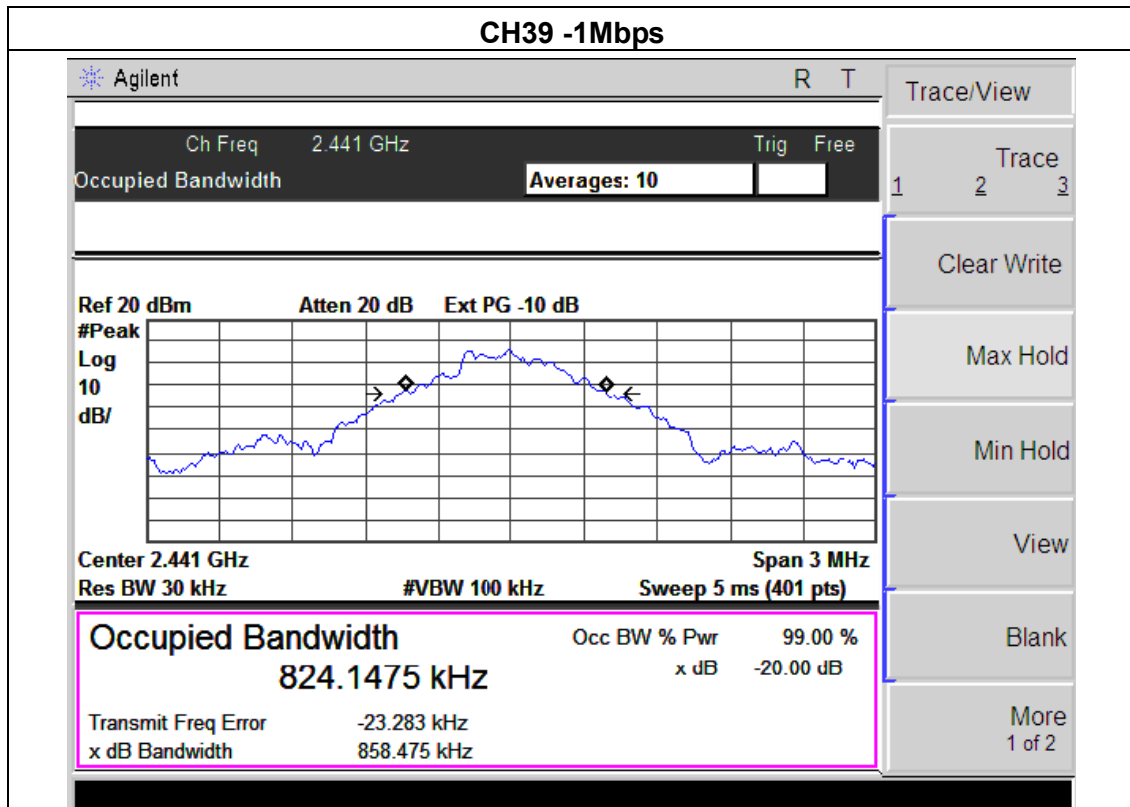




EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /C78(2Mbps)		


Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.208	<b>PASS</b>
2441 MHz	1.215	<b>PASS</b>
2480 MHz	1.178	<b>PASS</b>


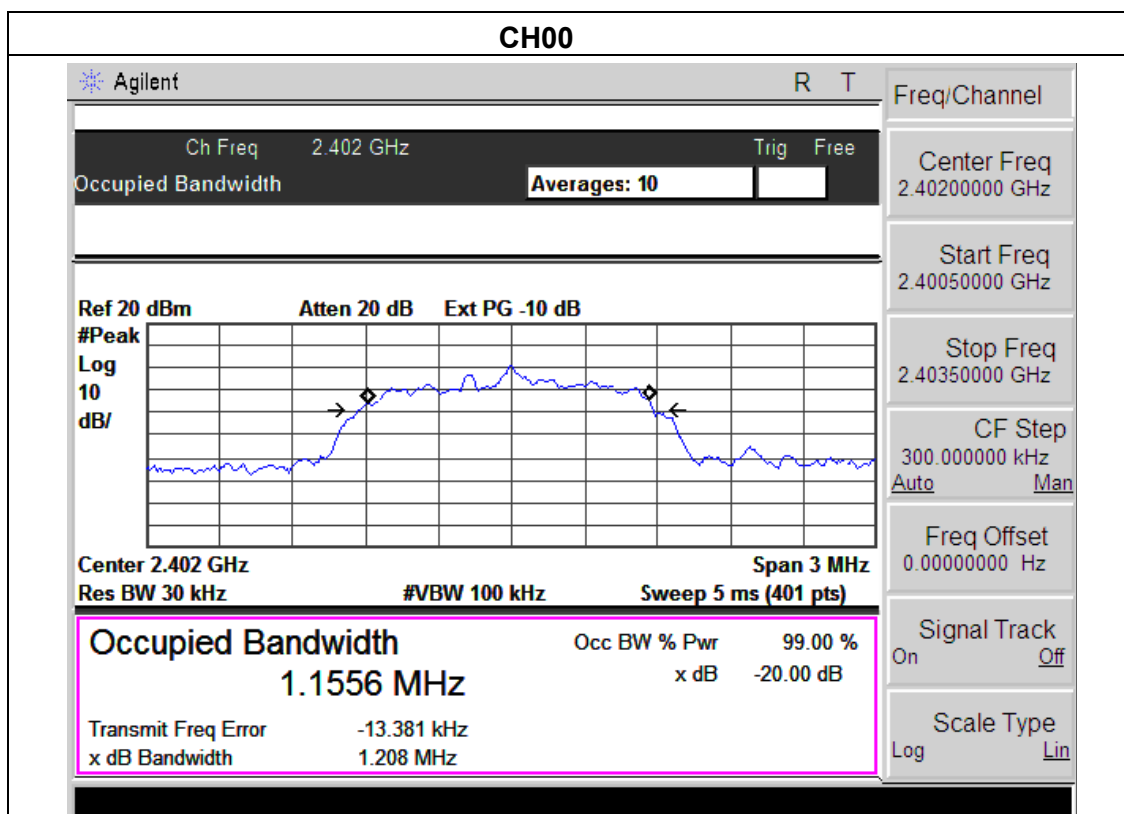


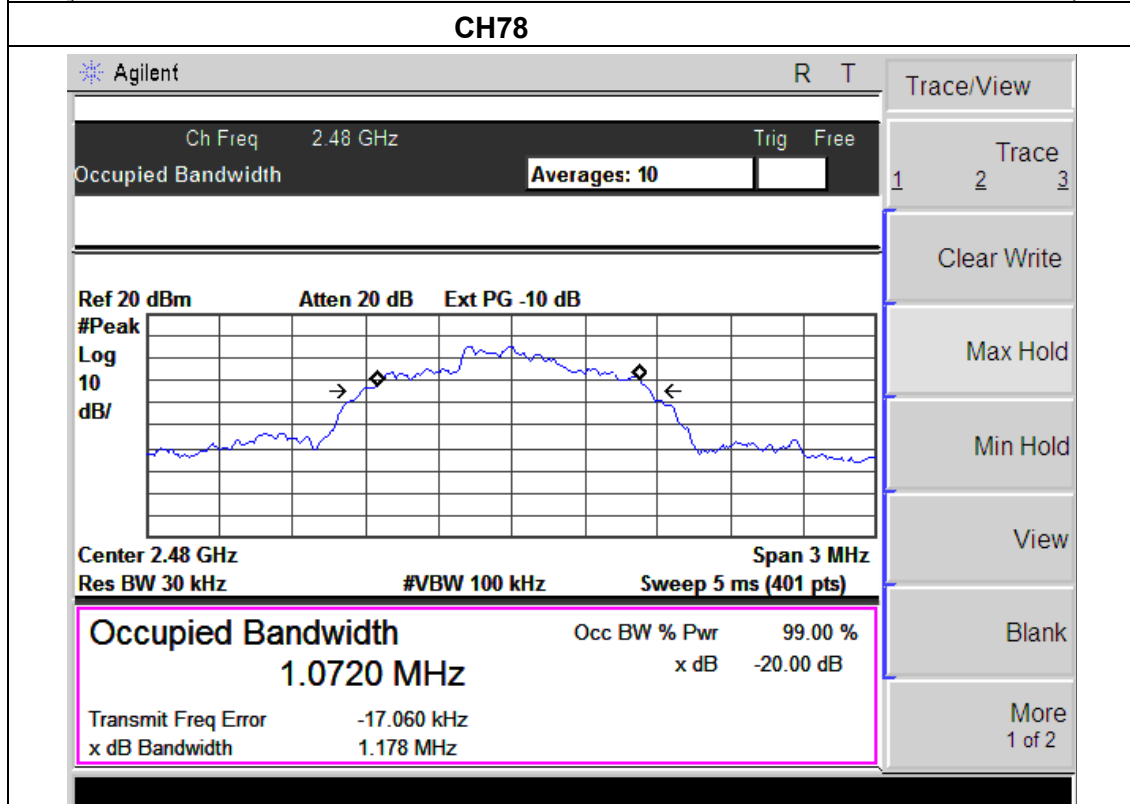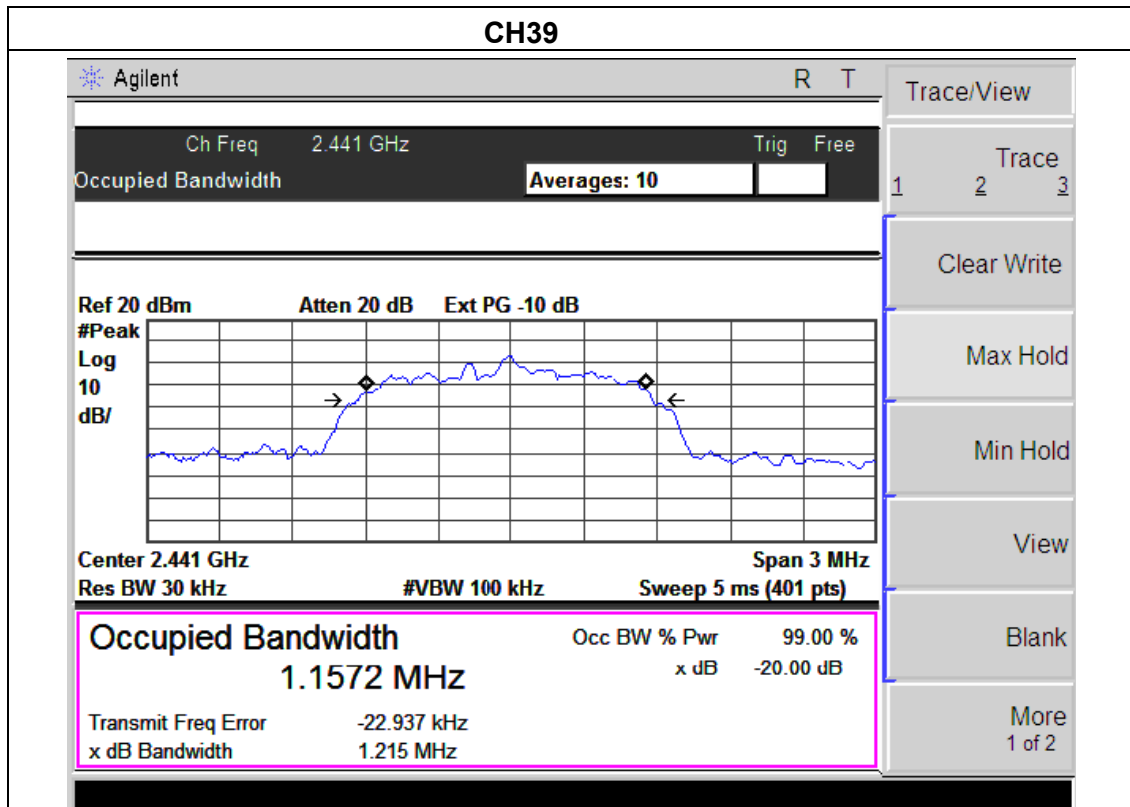

EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	25 °C	Relative Humidity :	60%
Pressure :	1012 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(3Mbps)		

Frequency	20dB Bandwidth (MHz)	Result
2402 MHz	1.234	<b>PASS</b>
2441 MHz	1.213	<b>PASS</b>
2480 MHz	1.215	<b>PASS</b>

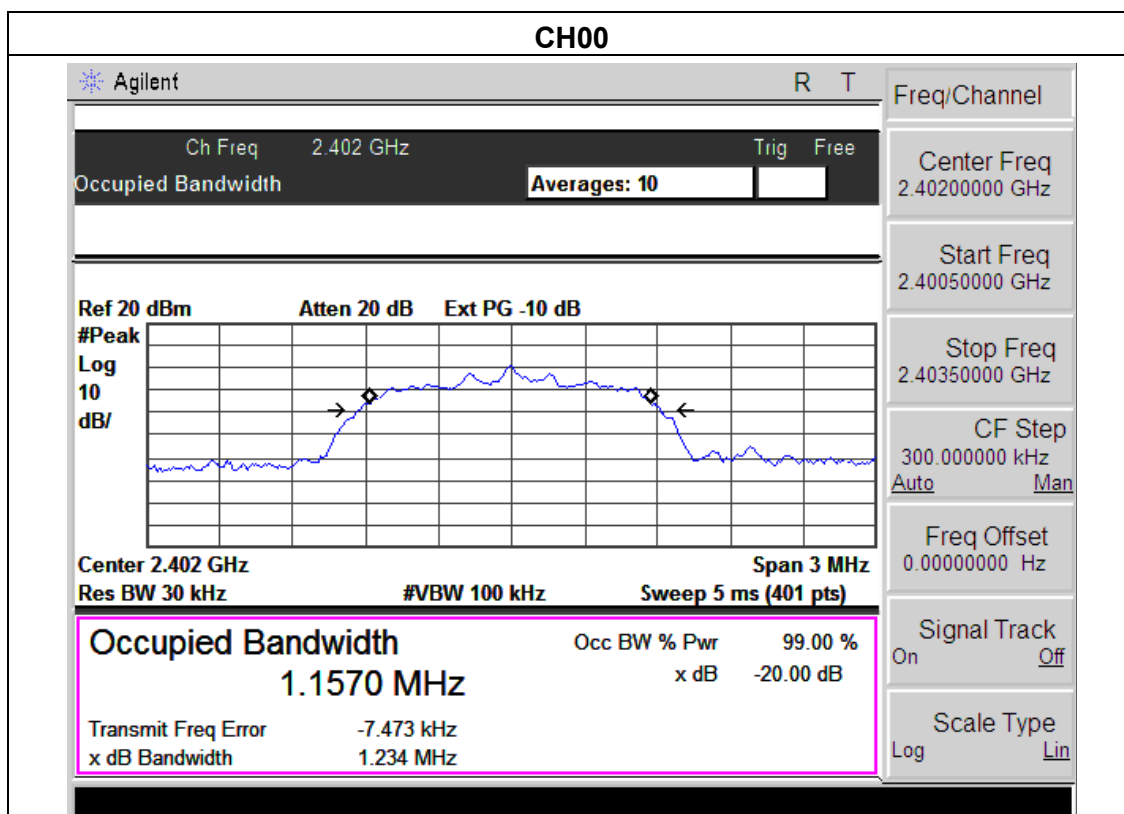

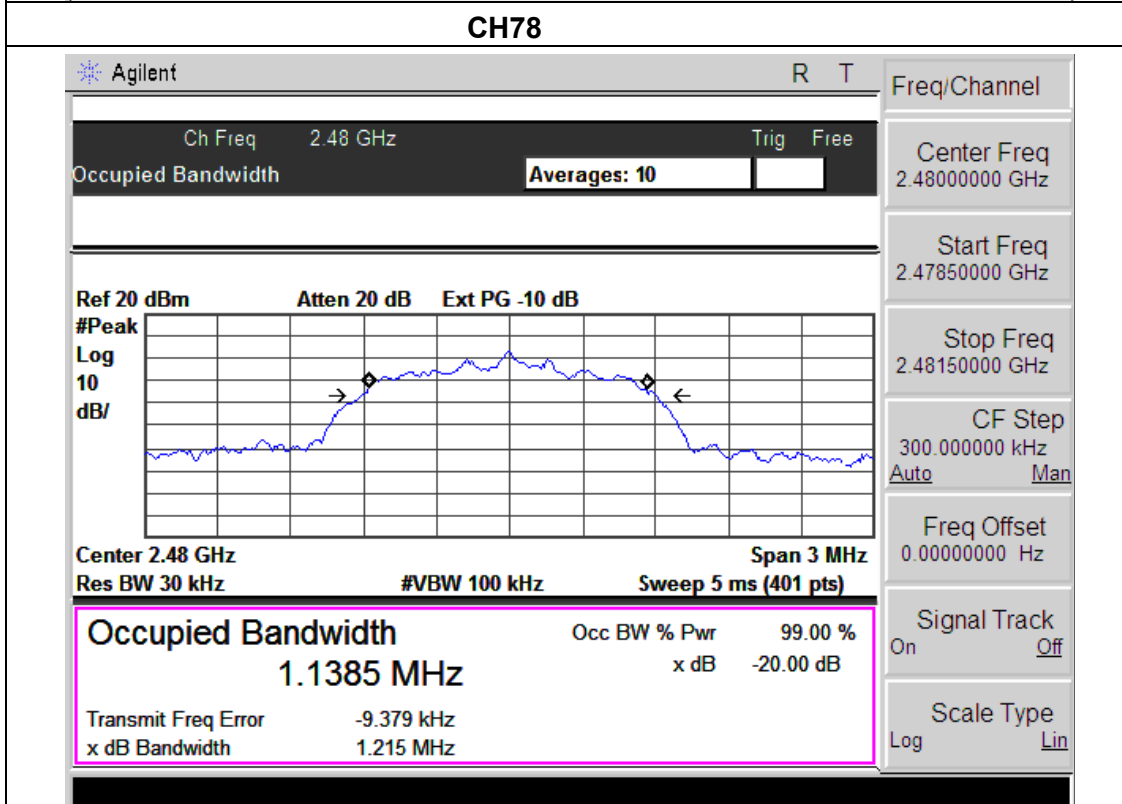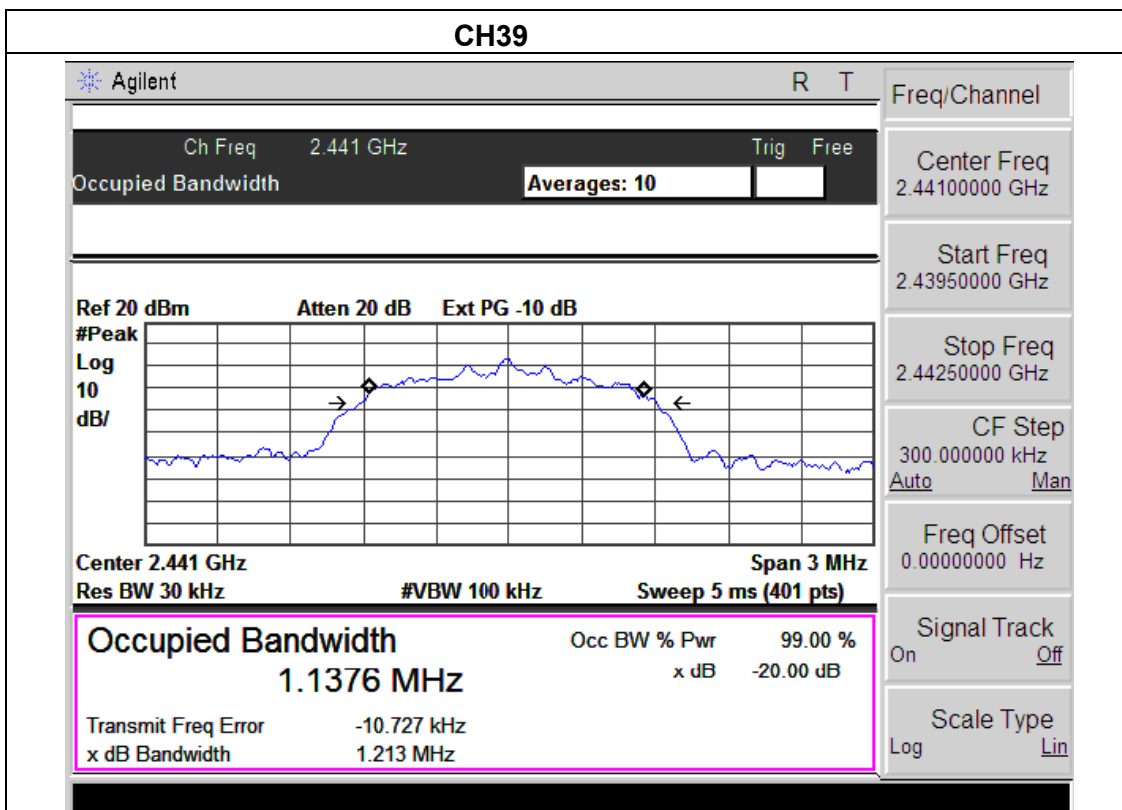

## 7. FREQUENCY SEPARATION

### 7.1. Limits

According to FCC Section 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 7.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: wide enough to capture the peaks of two adjacent channels

RBW  $\geq$  1% of the span(30KHz)

VBW  $\geq$  RBW(100KHz)

Sweep=auto

Detector function=peak

Trace=max hold


Test data:



EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(1Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.010	<b>Complies</b>
2441 MHz	1.005	<b>Complies</b>
2480 MHz	1.005	<b>Complies</b>

**Ch. Separation Limits: > 20dB bandwidth**

Test plot as follows:

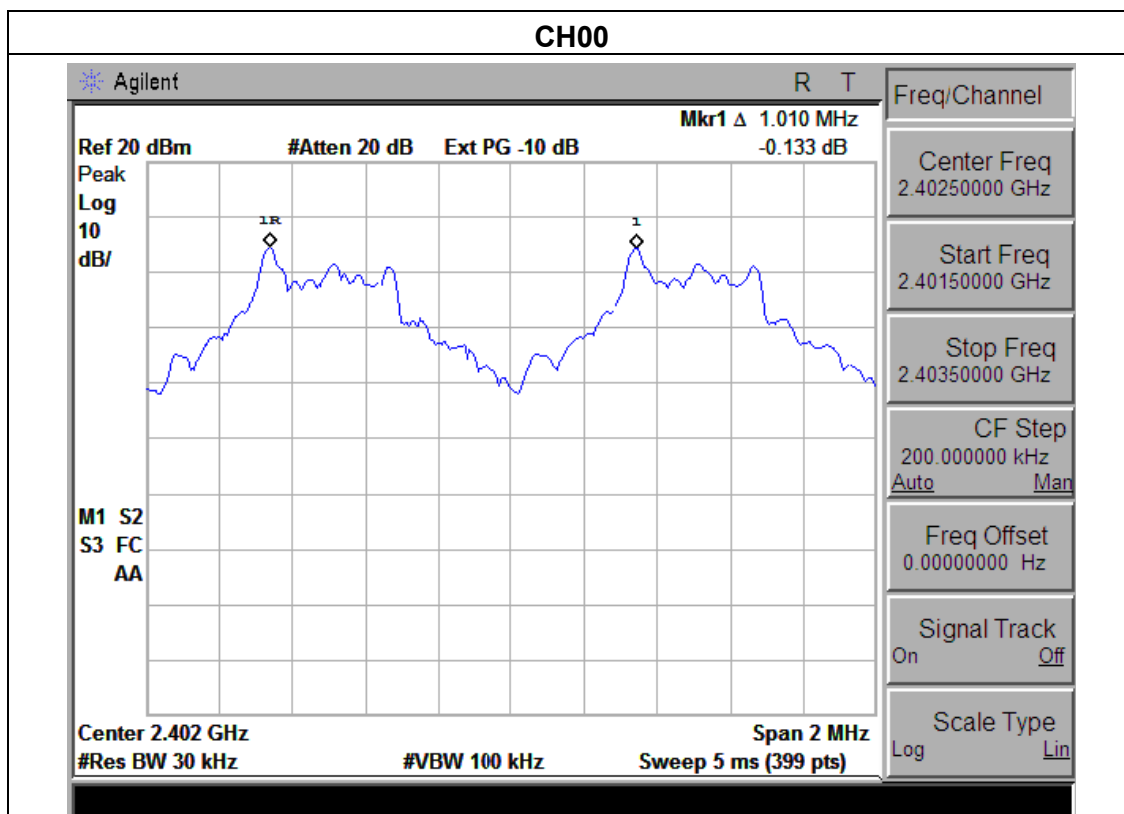


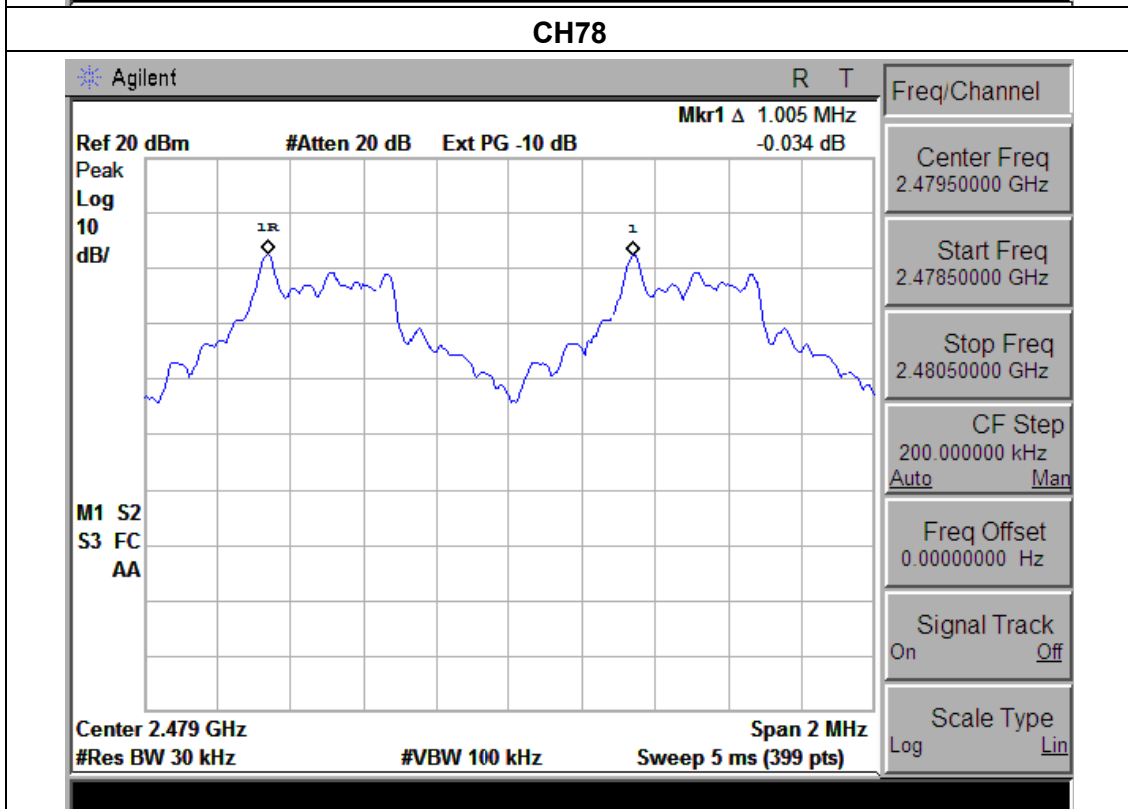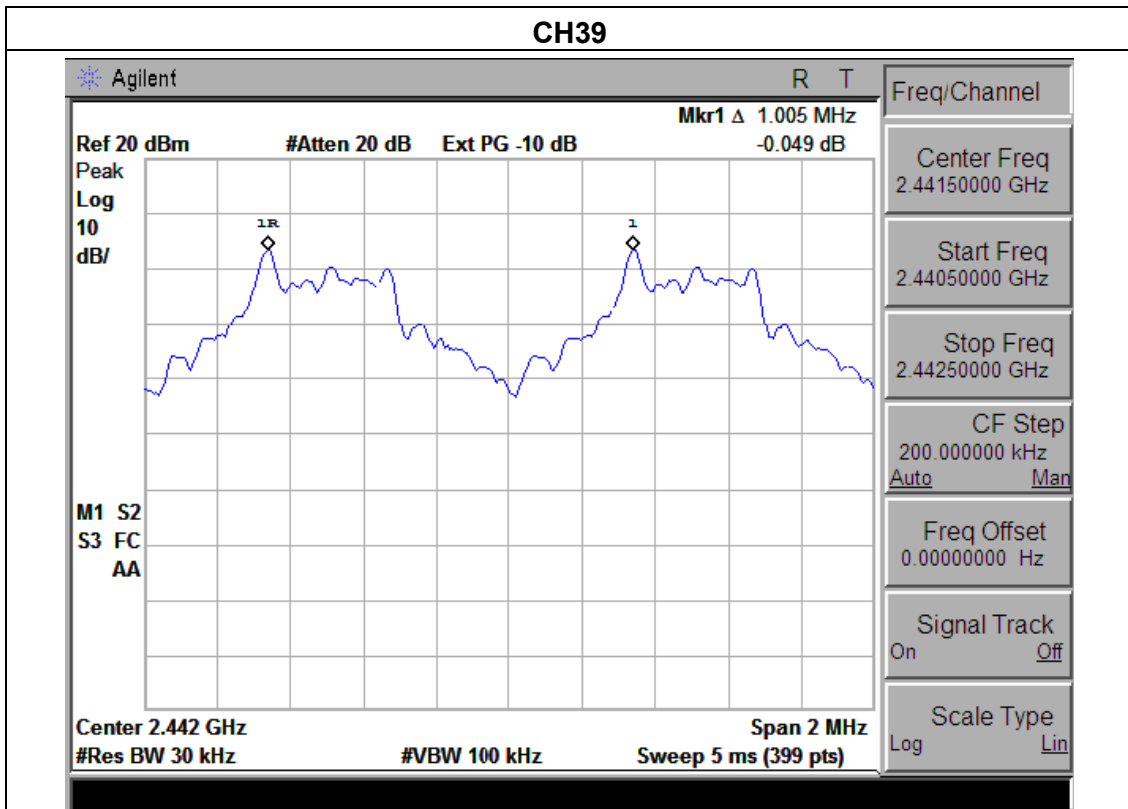



EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(2Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.005	Complies
2441 MHz	1.005	Complies
2480 MHz	1.005	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

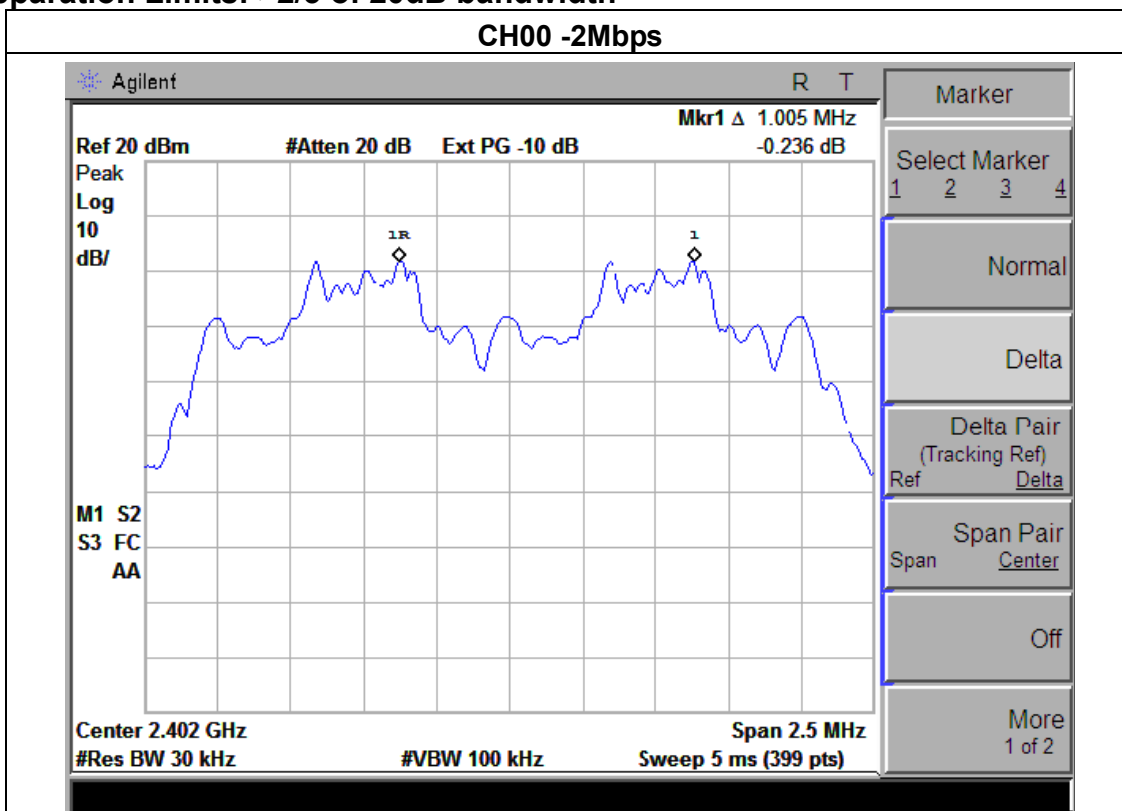




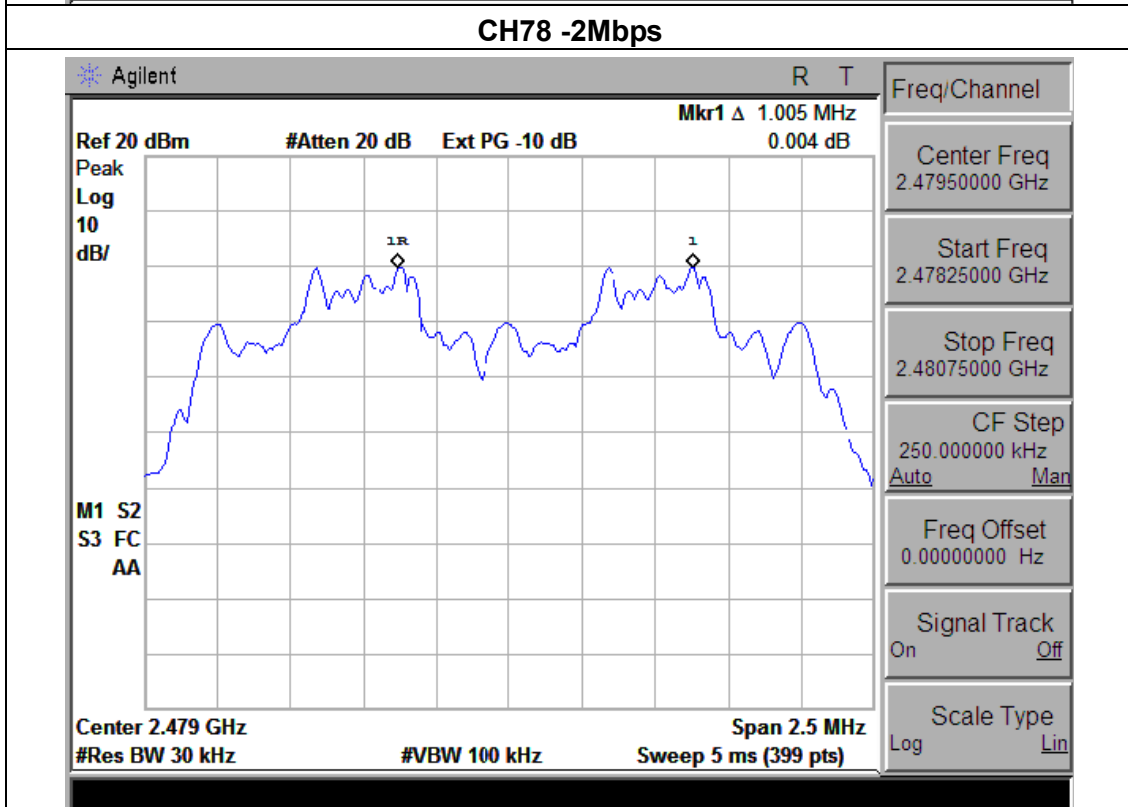
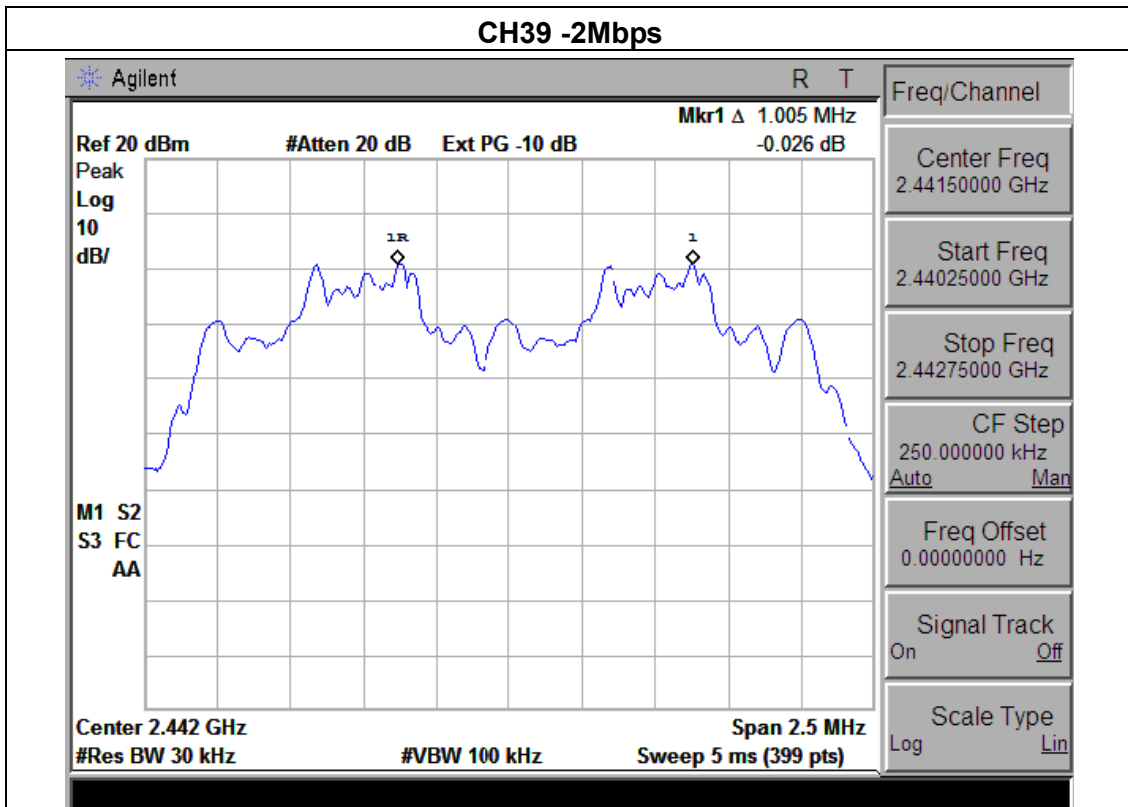


EUT :	AR Bliss Speaker	Model Name :	AWSBTCN1
Temperature :	24 °C	Relative Humidity :	58%
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	CH00 / CH39 /CH78(3Mbps)		

Frequency	Ch. Separation (MHz)	Result
2402 MHz	1.005	Complies
2441 MHz	1.005	Complies
2480 MHz	1.006	Complies

Ch. Separation Limits: >2/3 of 20dB bandwidth

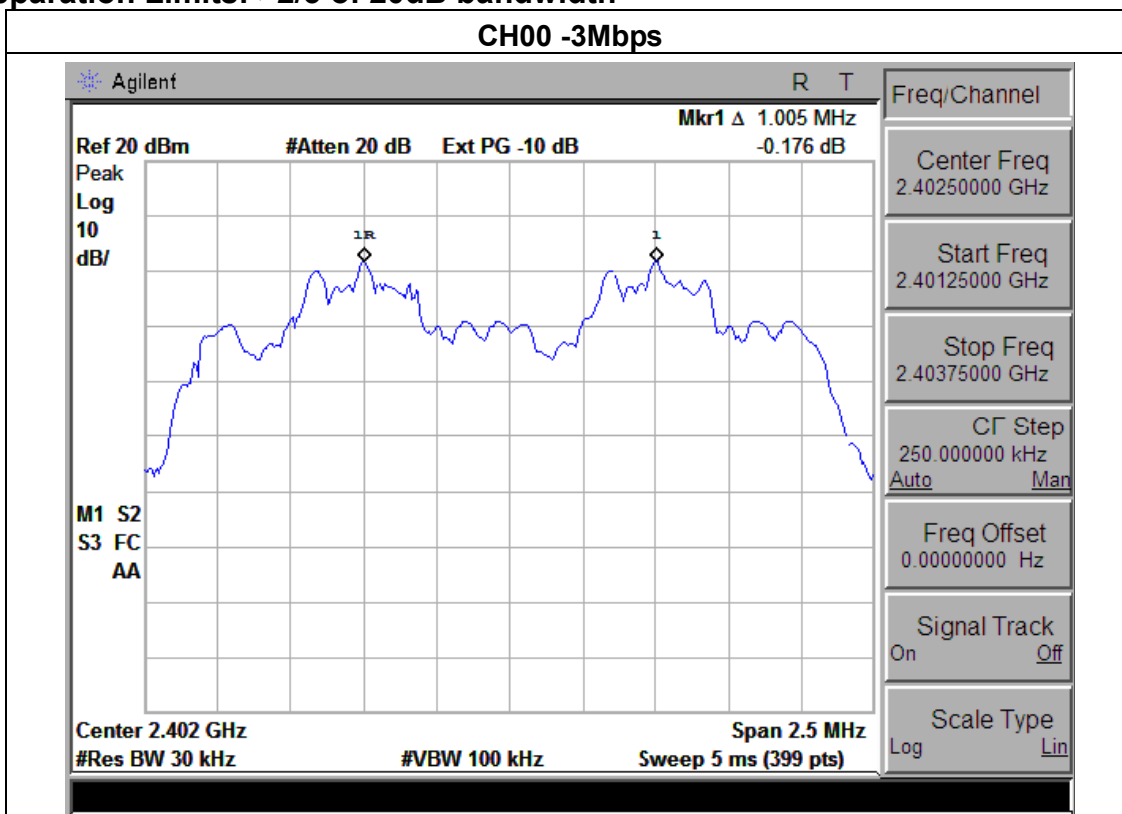

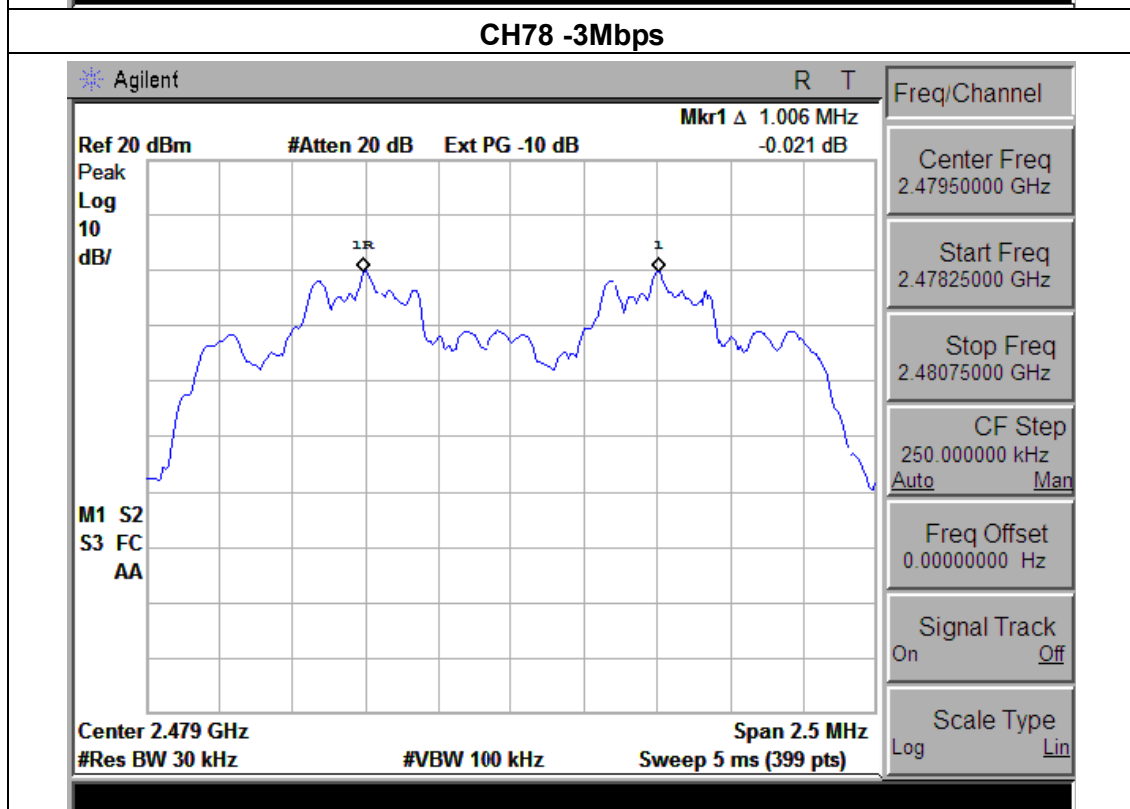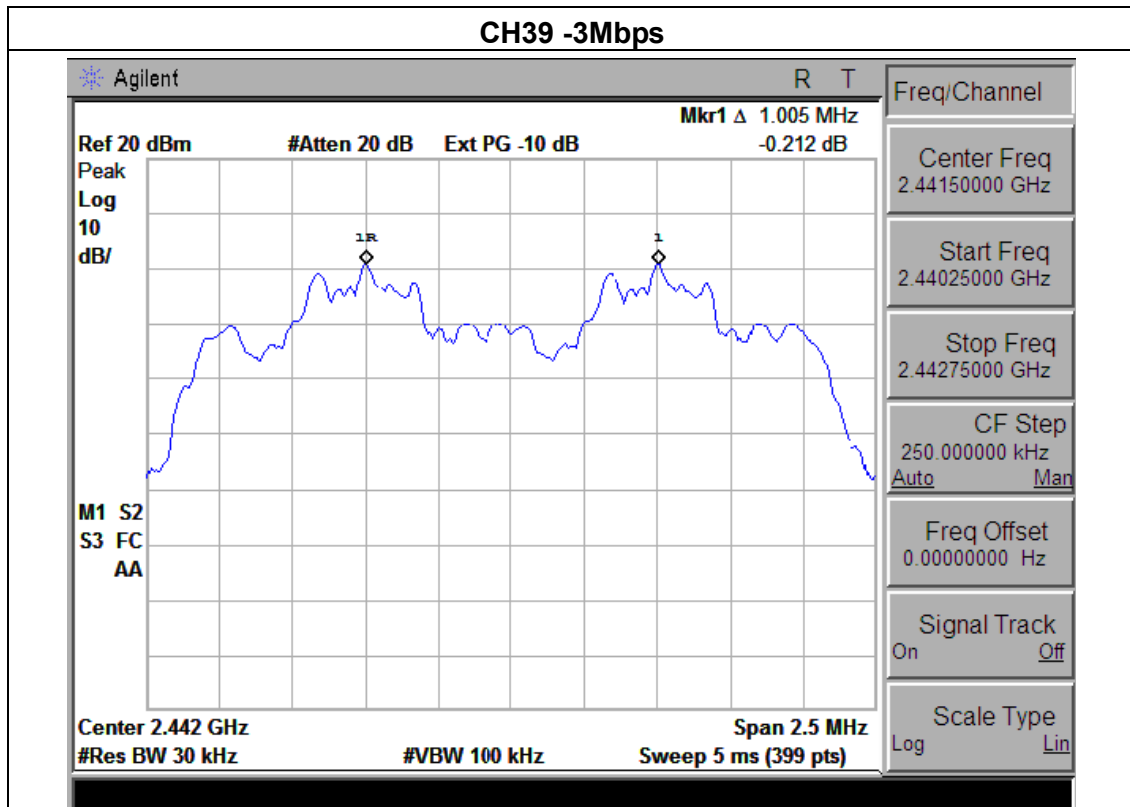

## 8. NUMBER OF HOPPING FREQUENCY

### 8.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

### 8.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode .

2. Set the spectrum analyzer:

Span: the frequency band of operation

RBW =100KHz

VBW=100KHz

Sweep=auto


Detector function=peak

Trace=max hold

Test data:

Measured channel numbers	Limit	Result
79	$\geq 15$	PASS

Test plot as follows:

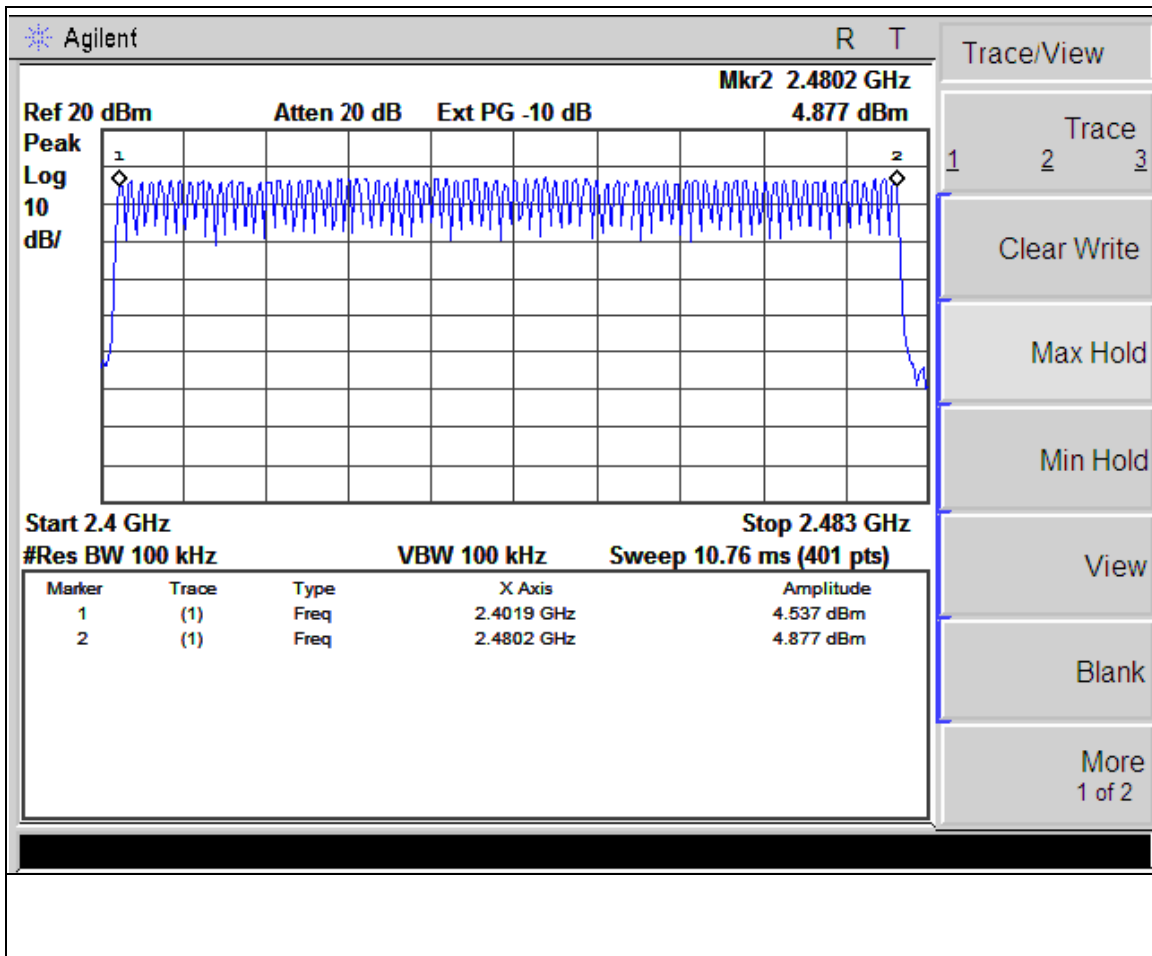

## 9. DWELL TIME

### 9.1. Limits

According to FCC Section 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 9.2. Test setup

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum, During the measurement, the Bluetooth module of the EUT is activated and controlled by the software, and is set to operate under test mode power.

2. Set the spectrum analyzer:

Span= 0Hz, RBW =1000 kHz, VBW = 3000 kHz

Use a video trigger with the trigger level set to enable triggering only on full pulses.

Detector function=peak, Sweep Time is more than once pulse time.

Set the EUT for DH5, DH3 and DH1 packet transmitting

Measure the maximum time duration of one single pulse.

A Period Time = (channel number)\*0.4

DH1 Time Slot: Reading \* (1600/2)\*31.6/(channel number)


DH3 Time Slot: Reading \* (1600/4)\*31.6/(channel number)



DH5 Time Slot: Reading \* (1600/6)\*31.6/(channel number)

Test data:

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH1	2441 MHz	0.43	0.14	0.4
2DH1	2441 MHz	0.41	0.13	0.4
3DH1	2441 MHz	0.42	0.13	0.4


Test plot as follows as below:


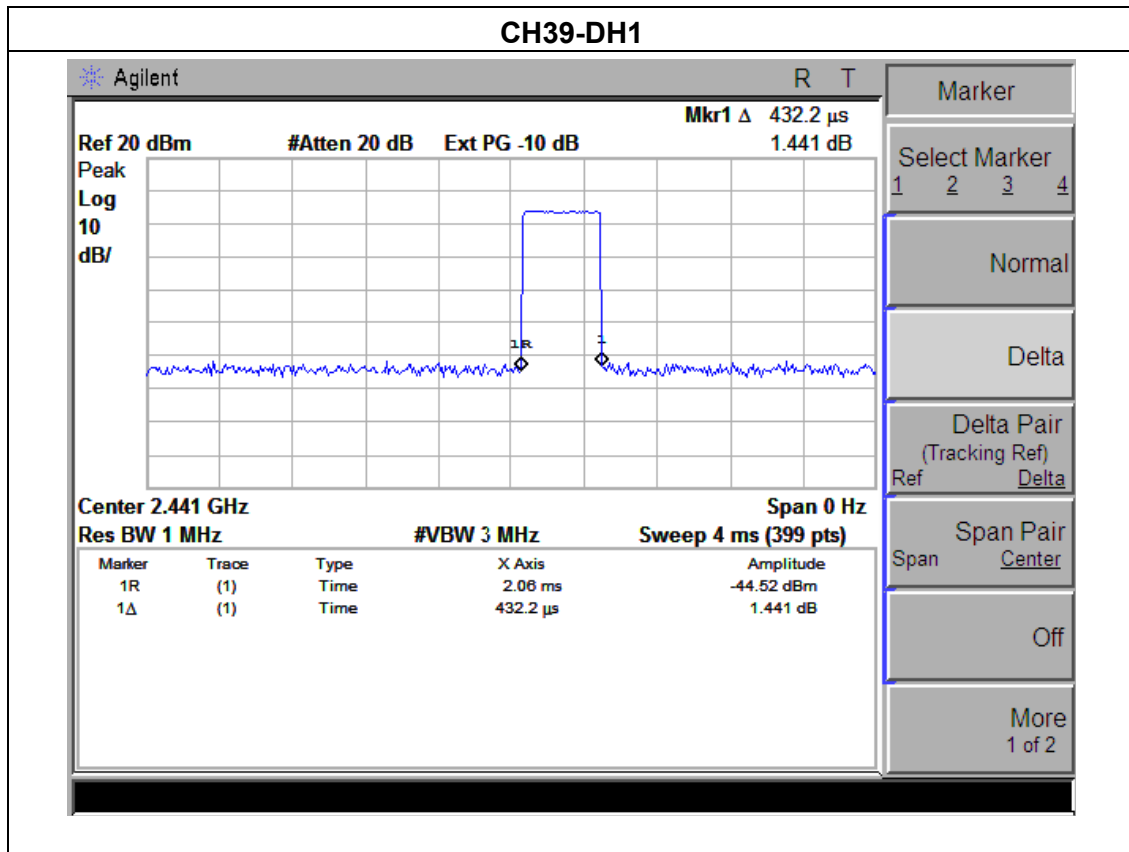


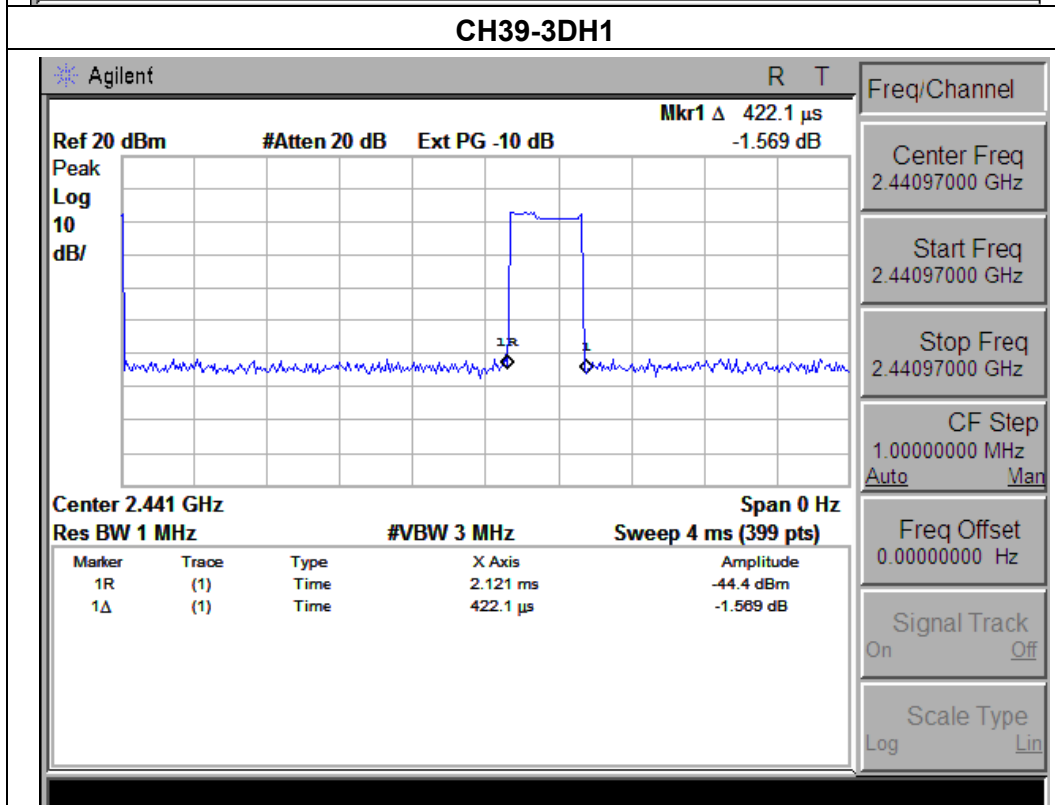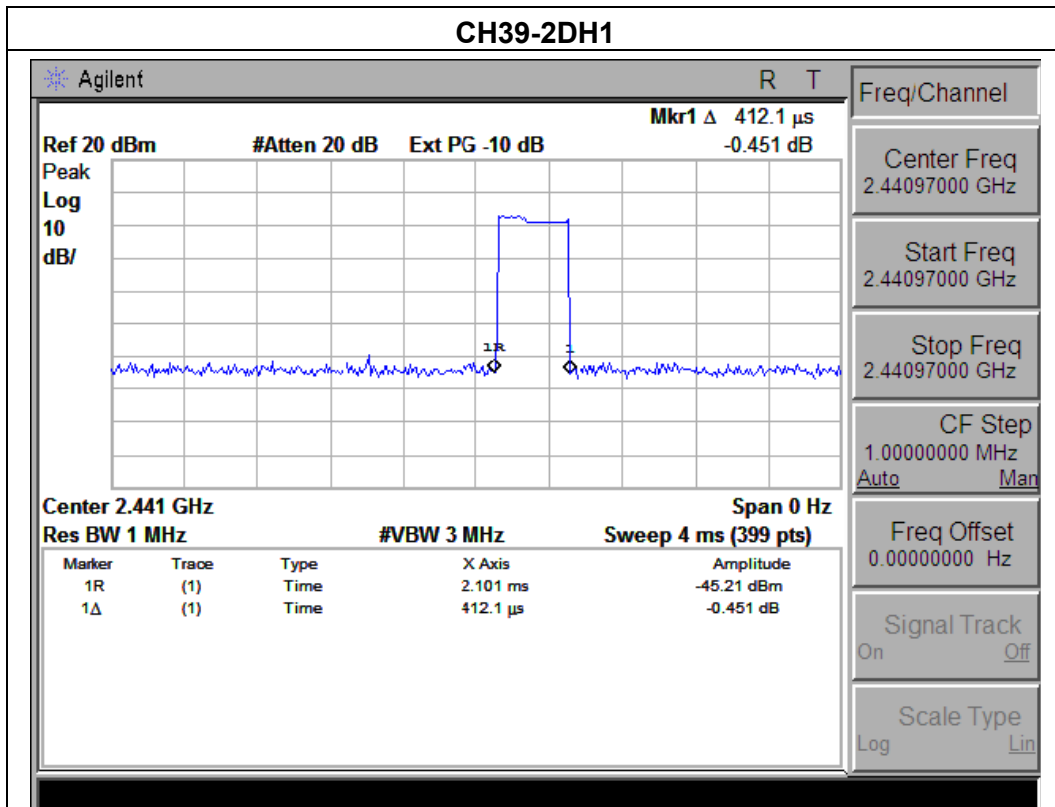






Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH3	2441 MHz	1.68	0.27	0.4
2DH3	2441 MHz	1.68	0.27	0.4
3DH3	2441 MHz	1.69	0.27	0.4

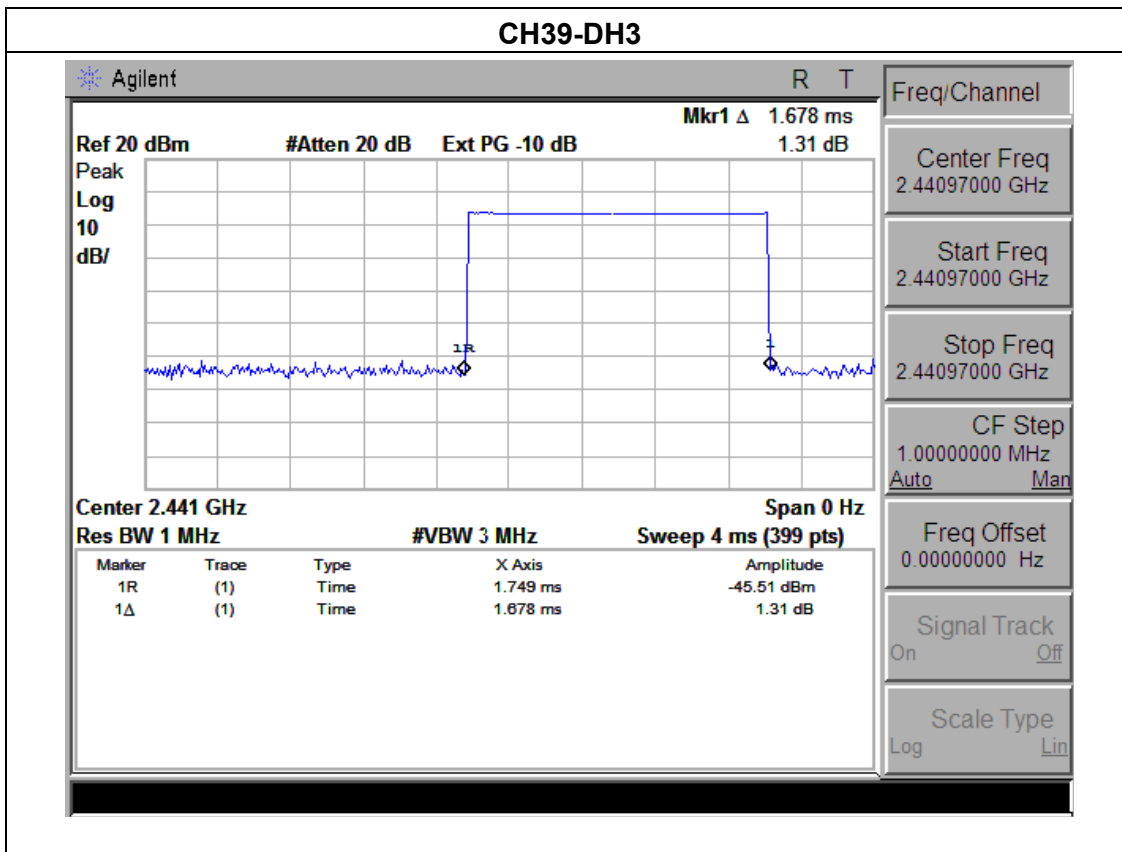

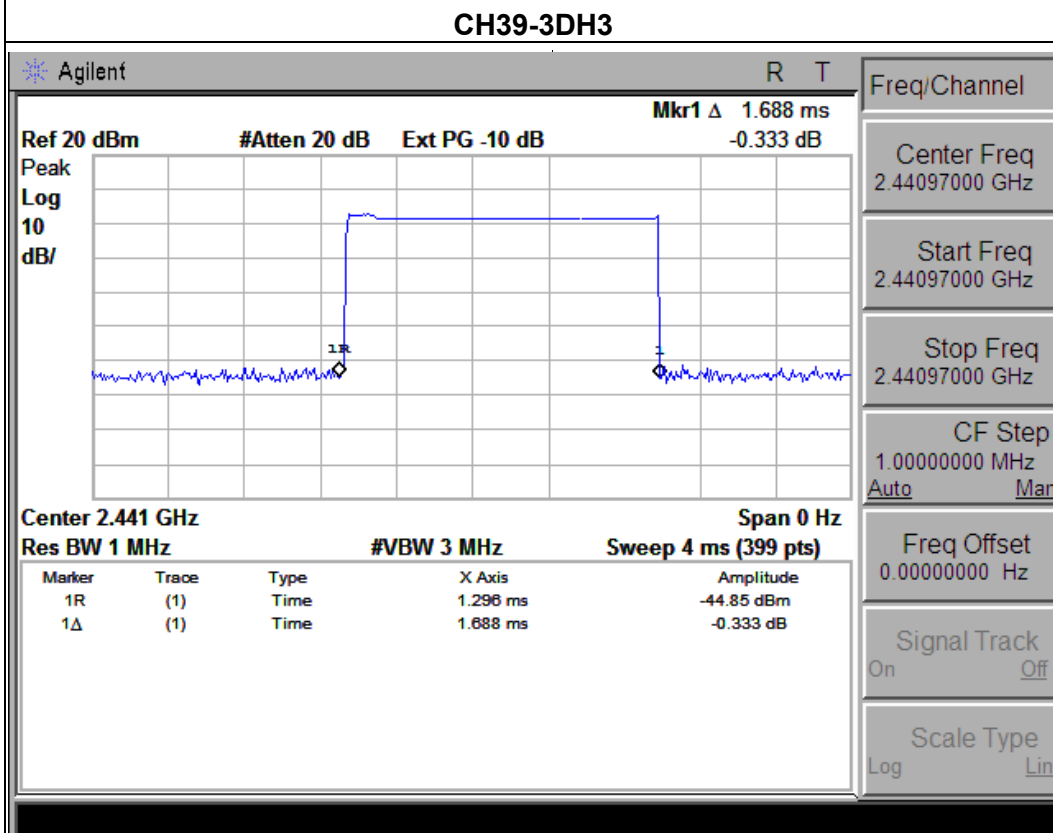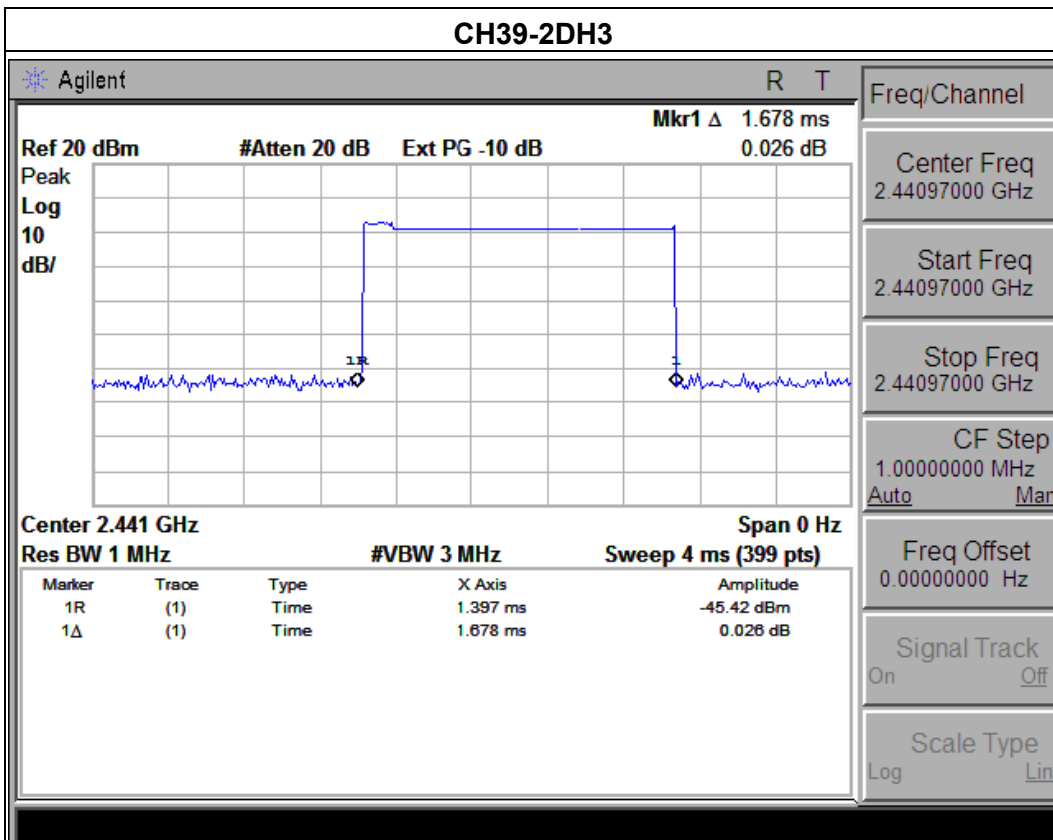

Data Packet	Frequency	Pulse Duration	Dwell Time	Limits
		(ms)	(s)	(s)
DH5	2441 MHz	2.93	0.31	0.4
2DH5	2441 MHz	2.94	0.31	0.4
3DH5	2441 MHz	2.93	0.31	0.4

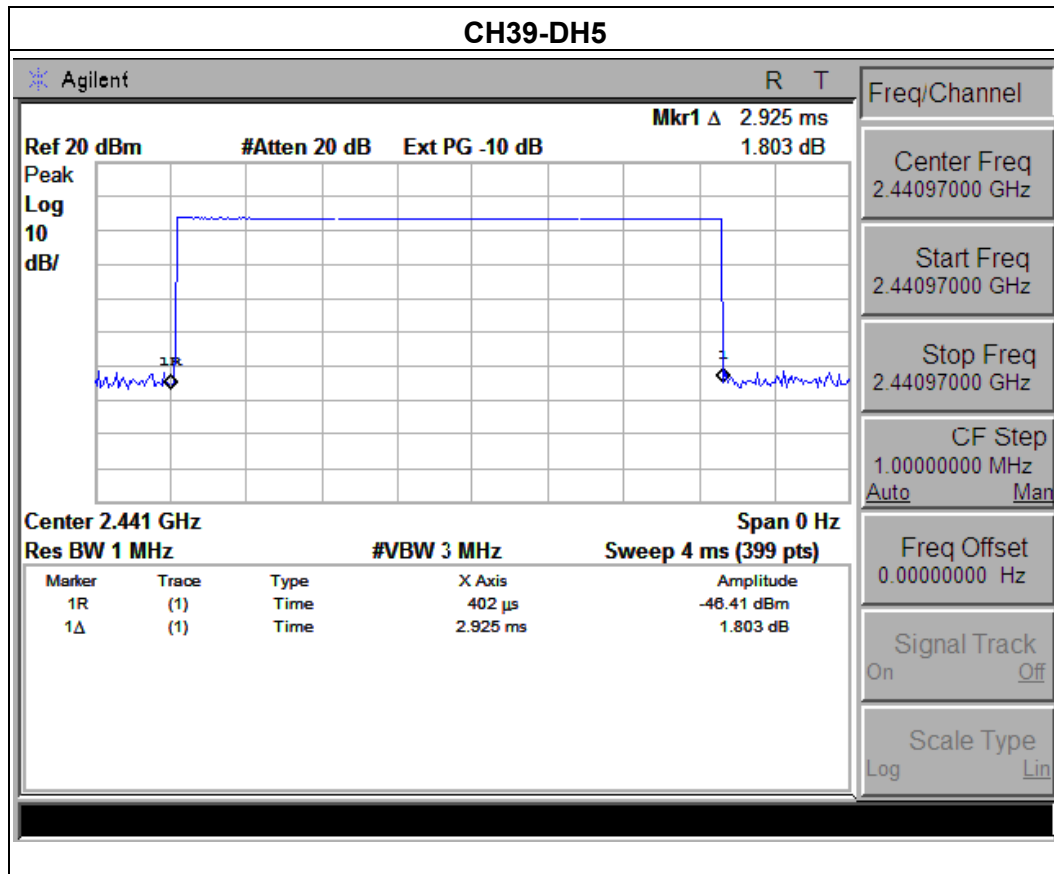

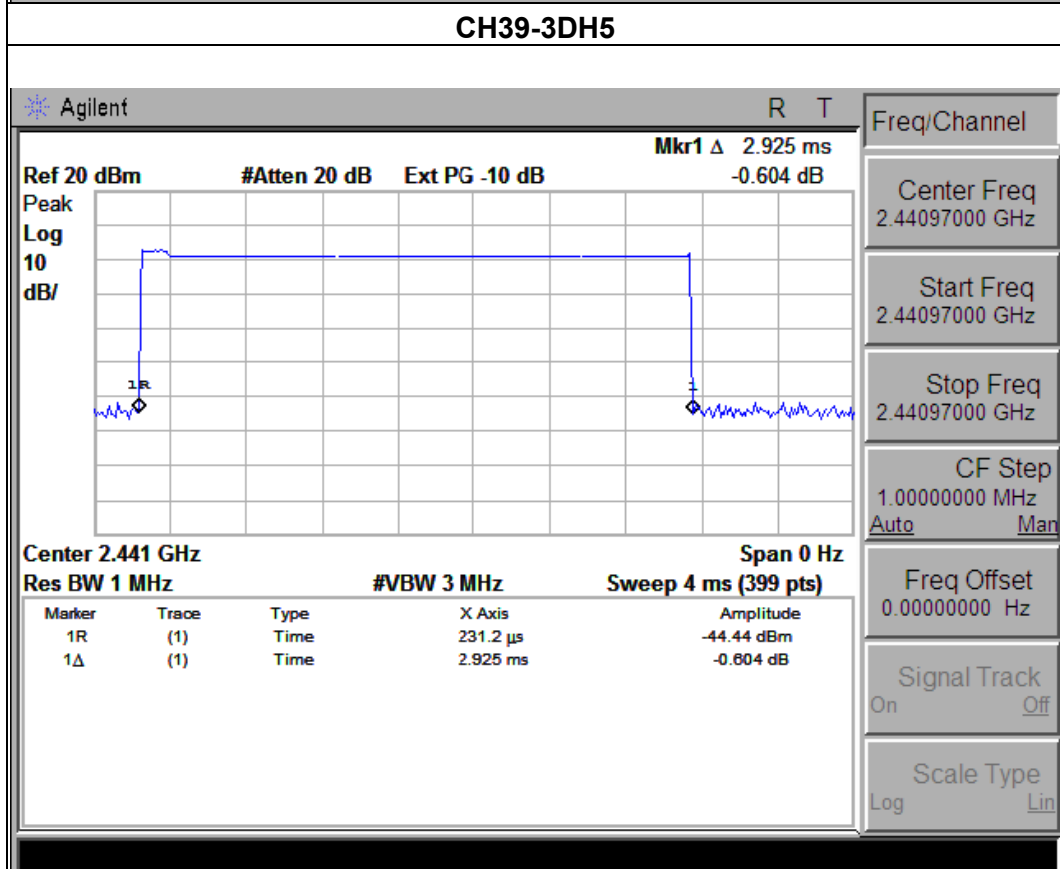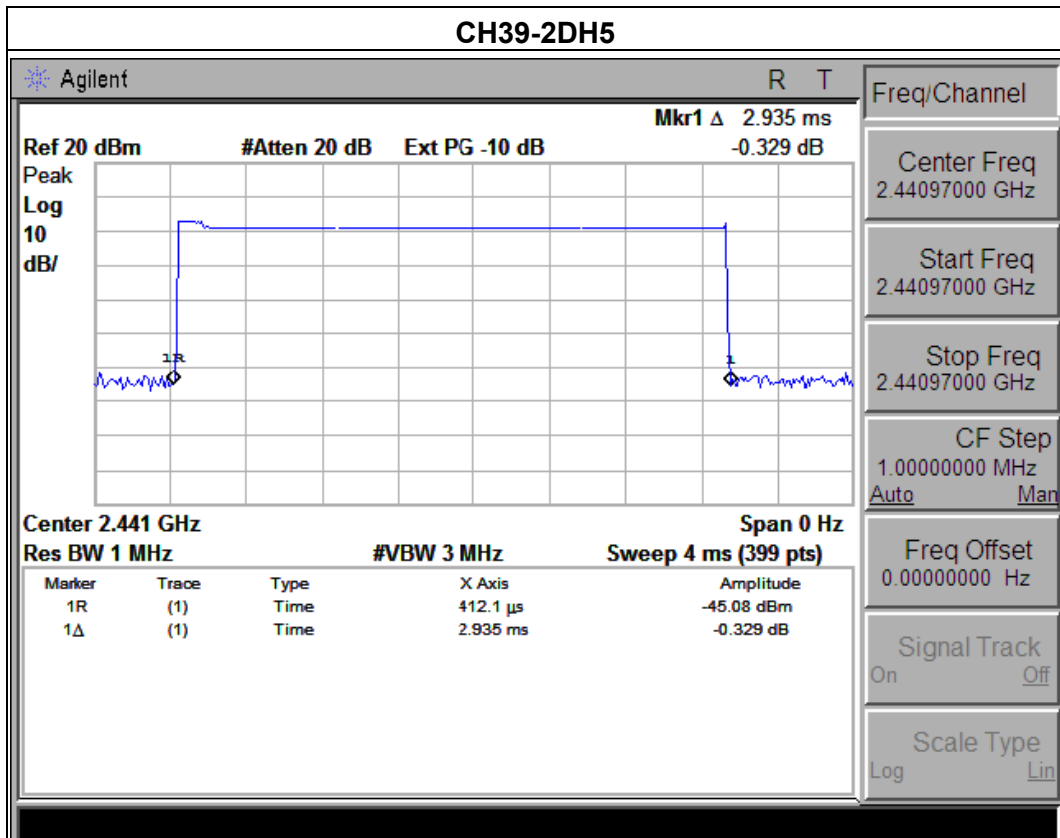

## 10. BAND EDGE COMPLIANCE TEST

### 10.1. Limits


According to FCC Section 15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement

### 10.2. Test setup

For Conducted Test



For Radiated emission Test

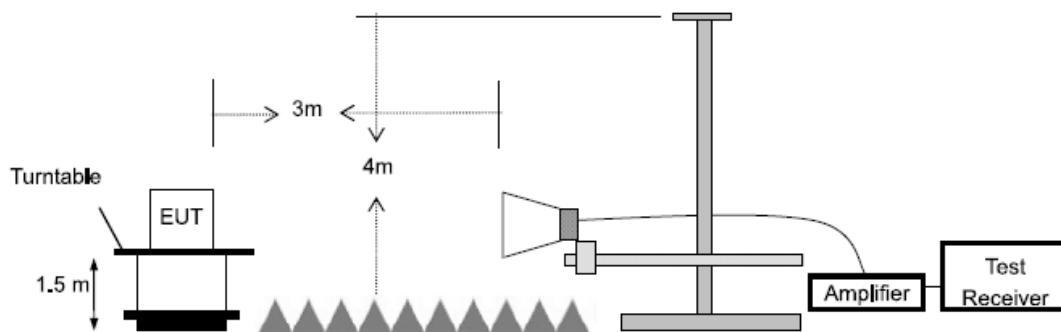

### 10.3.TEST Procedure

#### For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

#### For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	1MHz
VBW	3MHz
Detector	Peak
Trace	Max hold

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

Test plot as follows:

For radiated test as follows:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
1Mbps Non-hopping							
2390	36.85	13.06	49.91	74.00	-24.09	peak	Vertical
2390	35.78	13.06	48.84	74.00	-25.16	peak	Horizontal
2483.5	37.23	12.78	50.01	74.00	-23.99	peak	Vertical
2483.5	38.56	12.78	51.34	74.00	-22.66	peak	Horizontal
1Mbps hopping							
2390	36.23	13.06	49.29	74	-24.71	peak	Vertical
2390	35.15	13.06	48.21	74	-25.79	peak	Horizontal
2483.5	37.56	12.78	50.34	74	-23.66	peak	Vertical
2483.5	38.36	12.78	51.14	74	-22.86	peak	Horizontal
2Mbps Non-hopping							
2390	35.23	13.06	48.29	74	-25.71	peak	Vertical
2390	34.87	13.06	47.93	74	-26.07	peak	Horizontal
2483.5	36.23	12.78	49.01	74	-24.99	peak	Vertical
2483.5	37.12	12.78	49.9	74	-24.1	peak	Horizontal
2Mbps hopping							
2390	35.76	13.06	48.82	74	-25.18	peak	Vertical
2390	34.89	13.06	47.95	74	-26.05	peak	Horizontal
2483.5	36.46	12.78	49.24	74	-24.76	peak	Vertical
2483.5	37.36	12.78	50.14	74	-23.86	peak	Horizontal
3Mbps Non-hopping							
2390	35.12	13.06	48.18	74	-25.82	peak	Vertical
2390	34.89	13.06	47.95	74	-26.05	peak	Horizontal
2483.5	36.34	12.78	49.12	74	-24.88	peak	Vertical
2483.5	37.23	12.78	50.01	74	-23.99	peak	Horizontal
3Mbps hopping							
2390	35.65	13.06	48.71	74	-25.29	peak	Vertical
2390	34.86	13.06	47.92	74	-26.08	peak	Horizontal
2483.5	36.42	12.78	49.2	74	-24.8	peak	Vertical
2483.5	37.41	12.78	50.19	74	-23.81	peak	Horizontal



If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

For conducted test:



Frequency Band	Delta Peak to band emission (dBc)	> Limit (dBc)	Result
GFSK Non-hopping			
2400	52.38	20	Pass
2483.5	54.36	20	Pass
$\pi/4$ -DQPSK Non-hopping			
2400	48.42	20	Pass
2483.5	52.24	20	Pass
8DPSK Non-hopping			
2400	49.00	20	Pass
2483.5	50.48	20	Pass
GFSK hopping			
2400	53.51	20	Pass
2483.5	52.01	20	Pass
$\pi/4$ -DQPSK hopping			
2400	50.29	20	Pass
2483.5	49.76	20	Pass
8DPSK hopping			
2400	50.12	20	Pass
2483.5	47.36	20	Pass





BDR mode (GFSK): Band Edge-Left Side

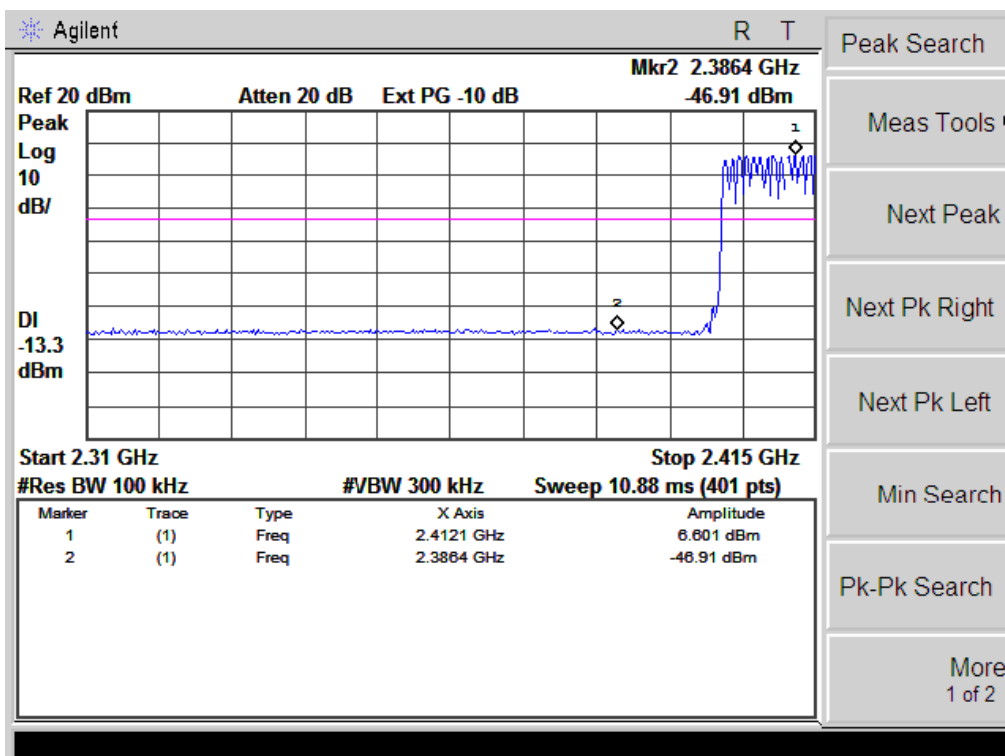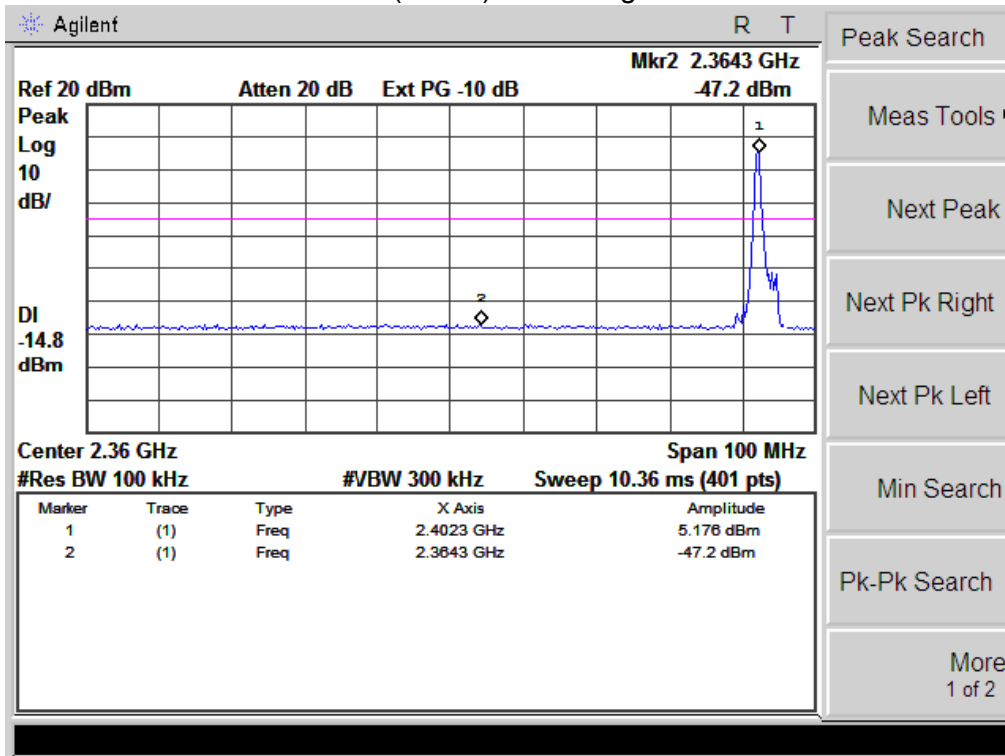



BDR mode (GFSK): Band Edge-Right Side

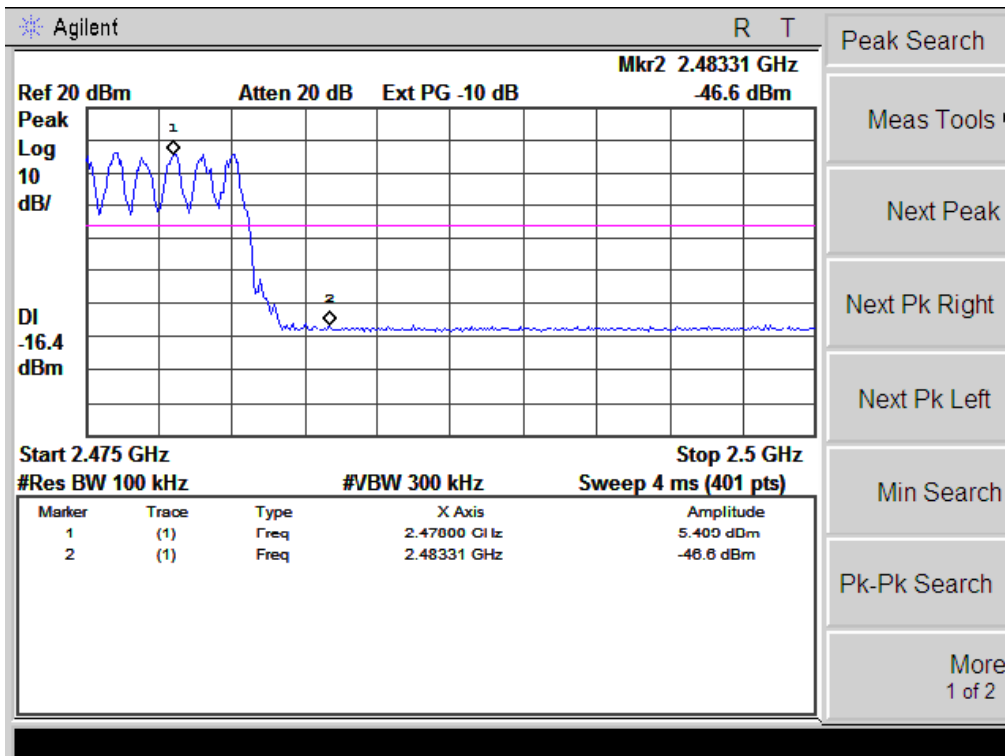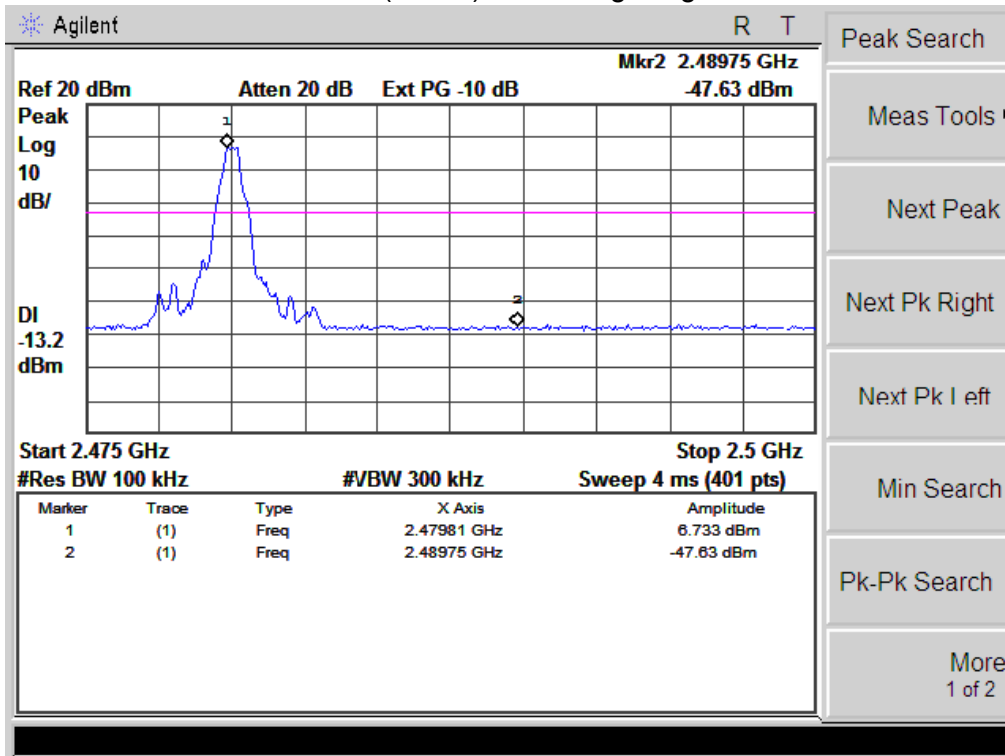



EDR mode ( $\pi/4$ -DQPSK): Band Edge-Left Side

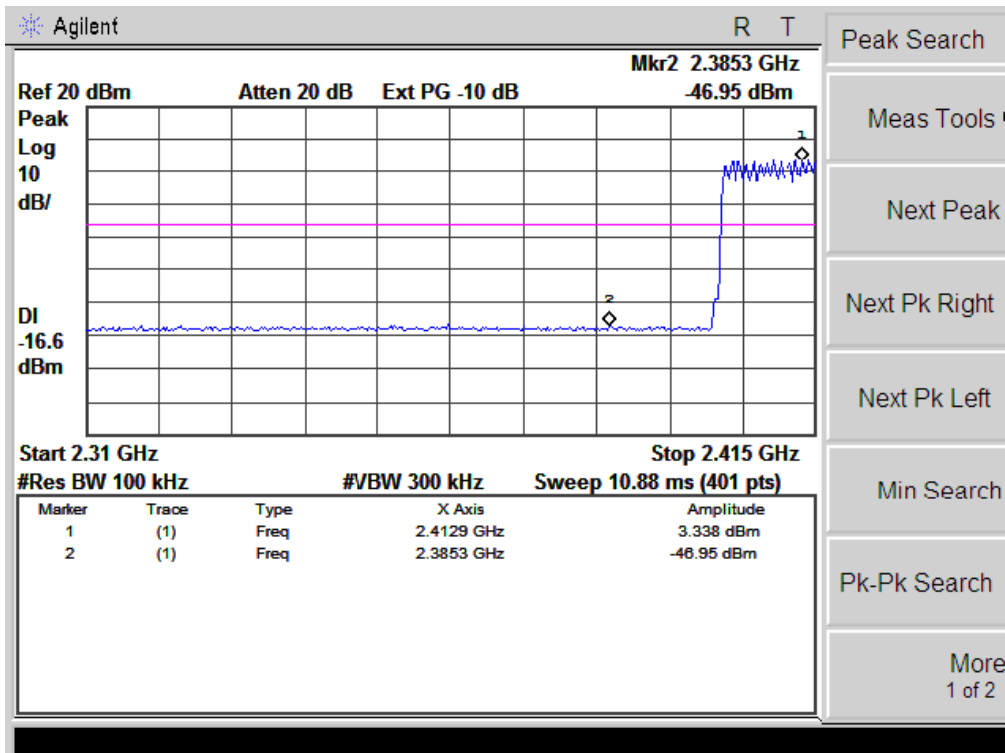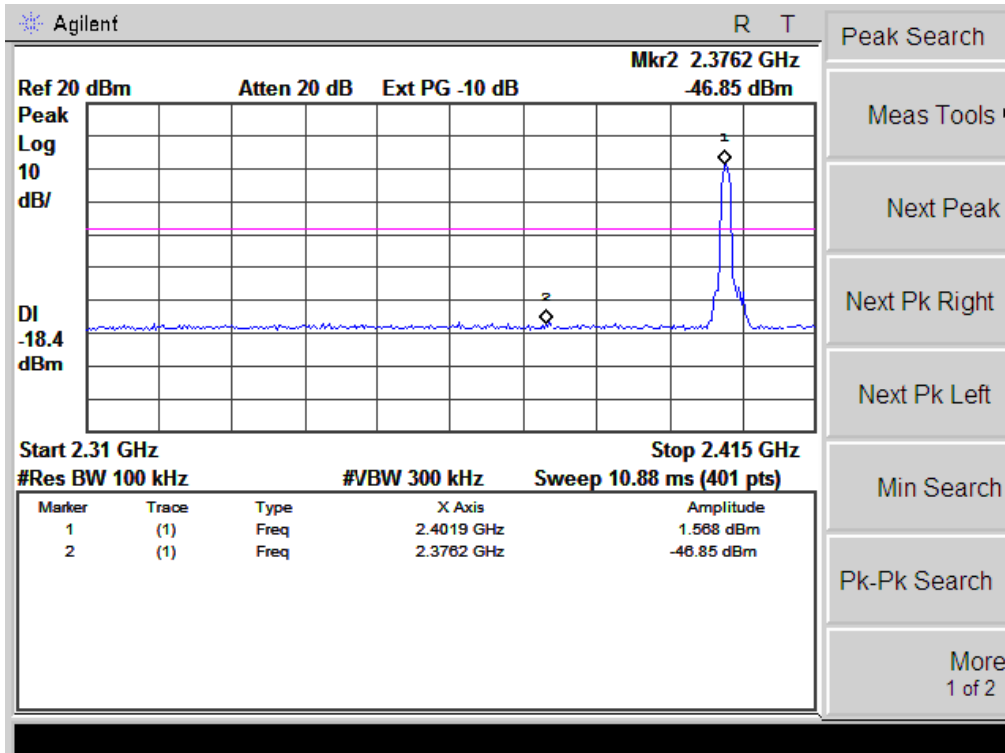



EDR mode ( $\pi/4$ -DQPSK): Band Edge- Right Side

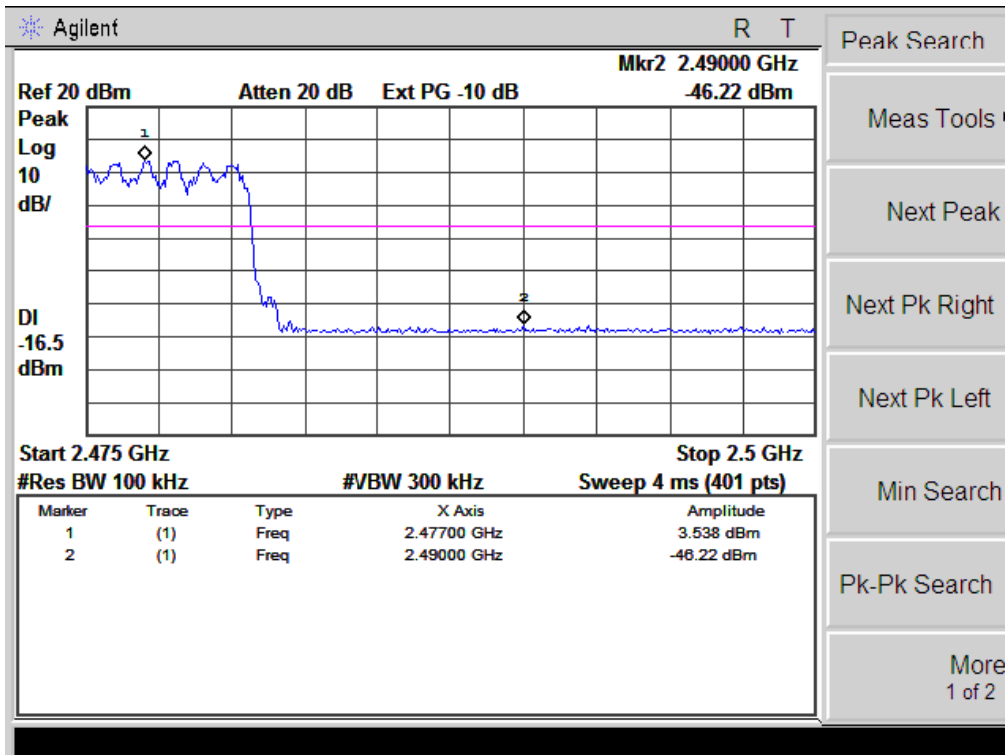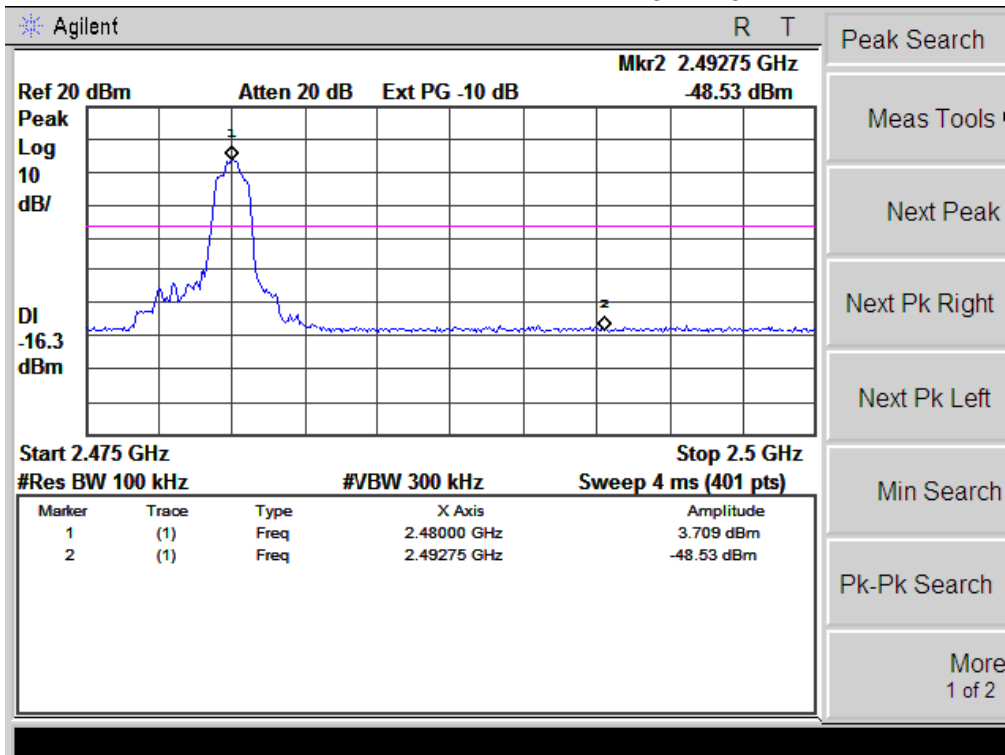

EDR mode(8DPSK): Band Edge-Left Side

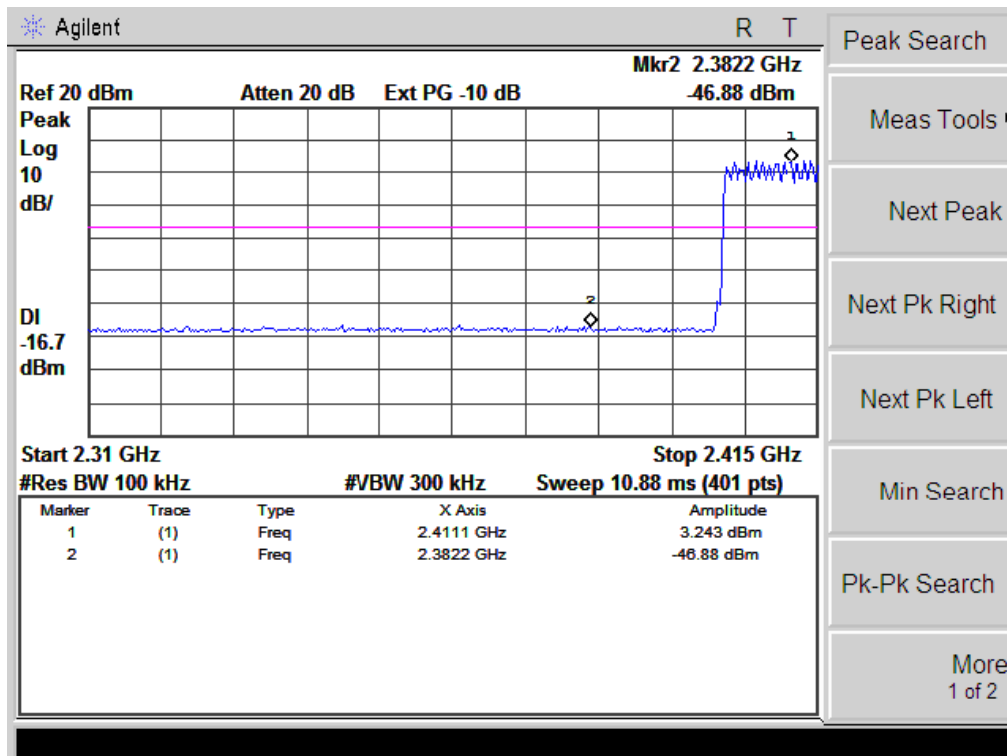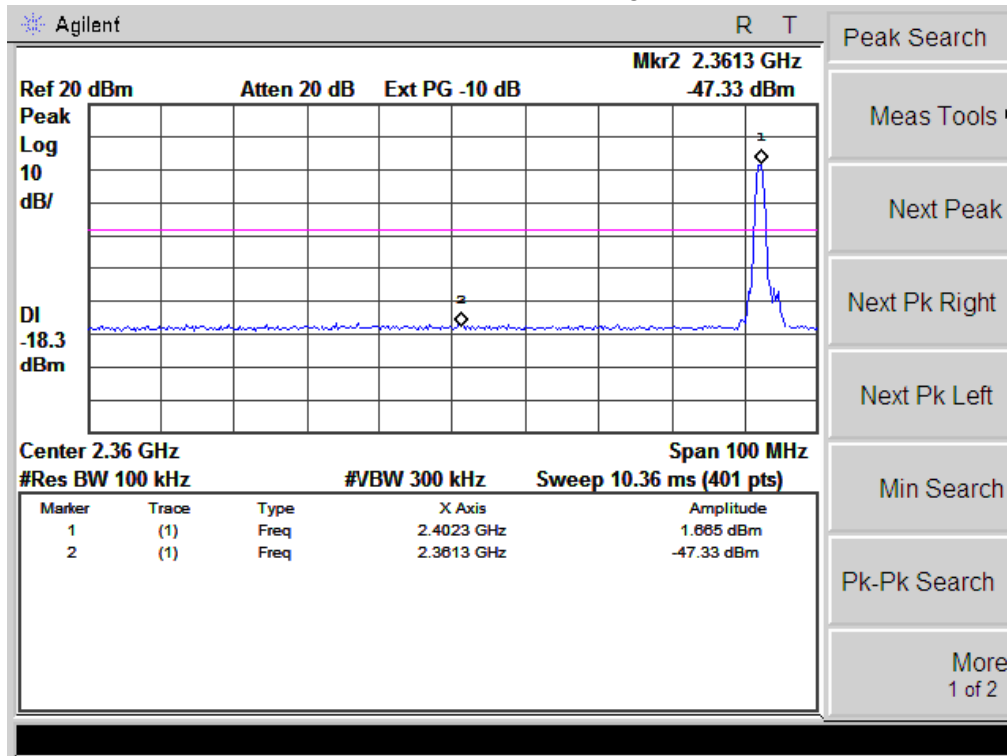

EDR mode(8DPSK): Band Edge-Right Side

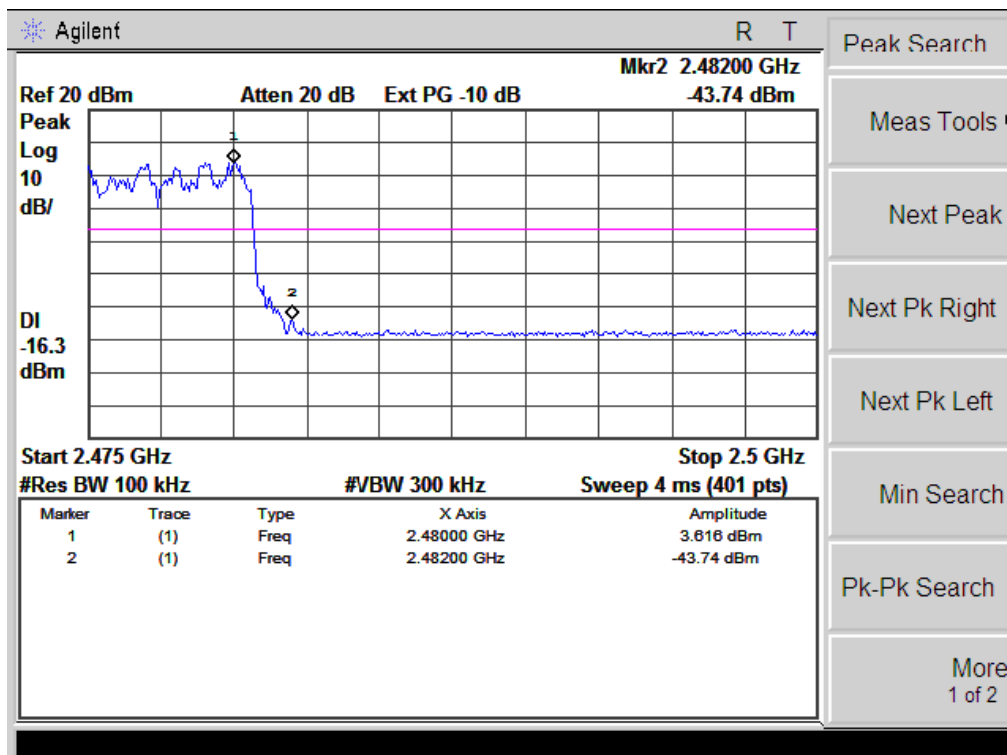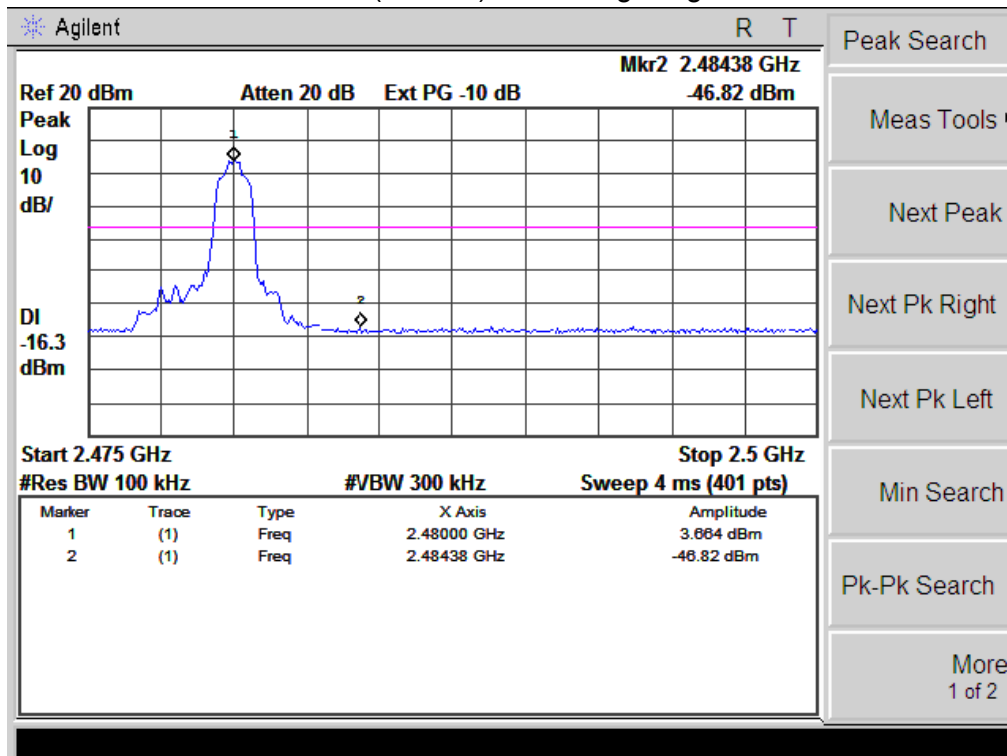

NOTE:

Hopping enabled and disabled have evaluated, and the worst data was reported

## 11. ANTENNA REQUIREMENTS

### 11.1.Limits


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 11.2. Result

The antennas used for this product are Permanently fixed antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 1.0dBi.


## 12. PHOTOGRAPHS OF TEST SET-UP

Radiated Emission Test

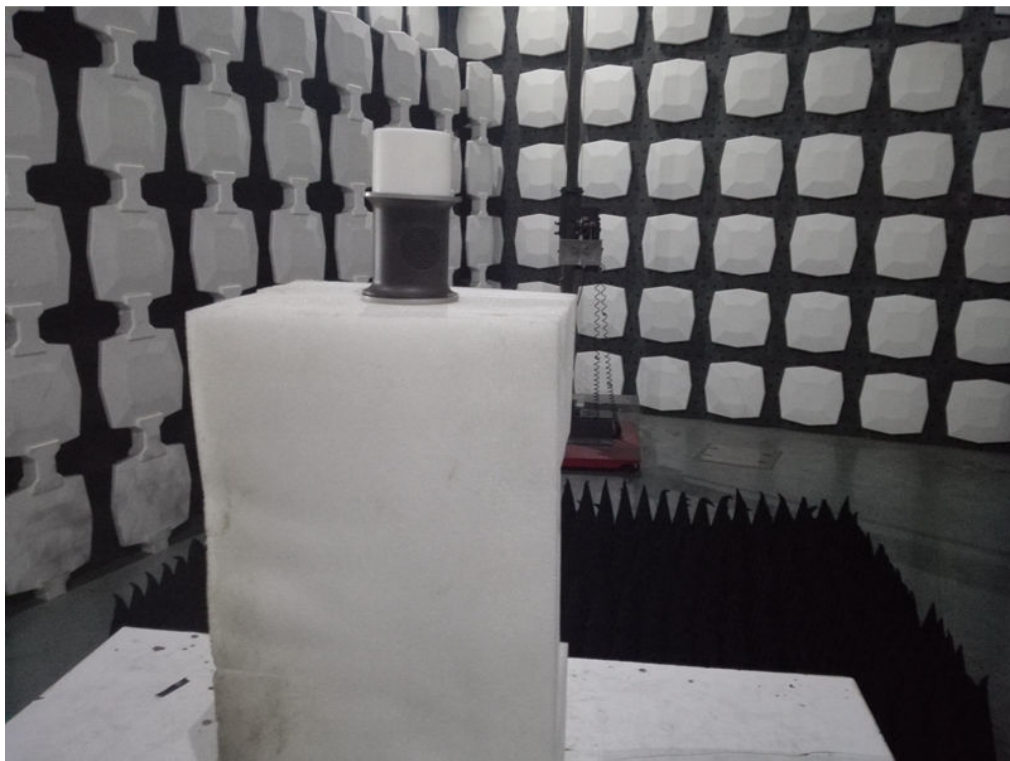








Conducted Emission


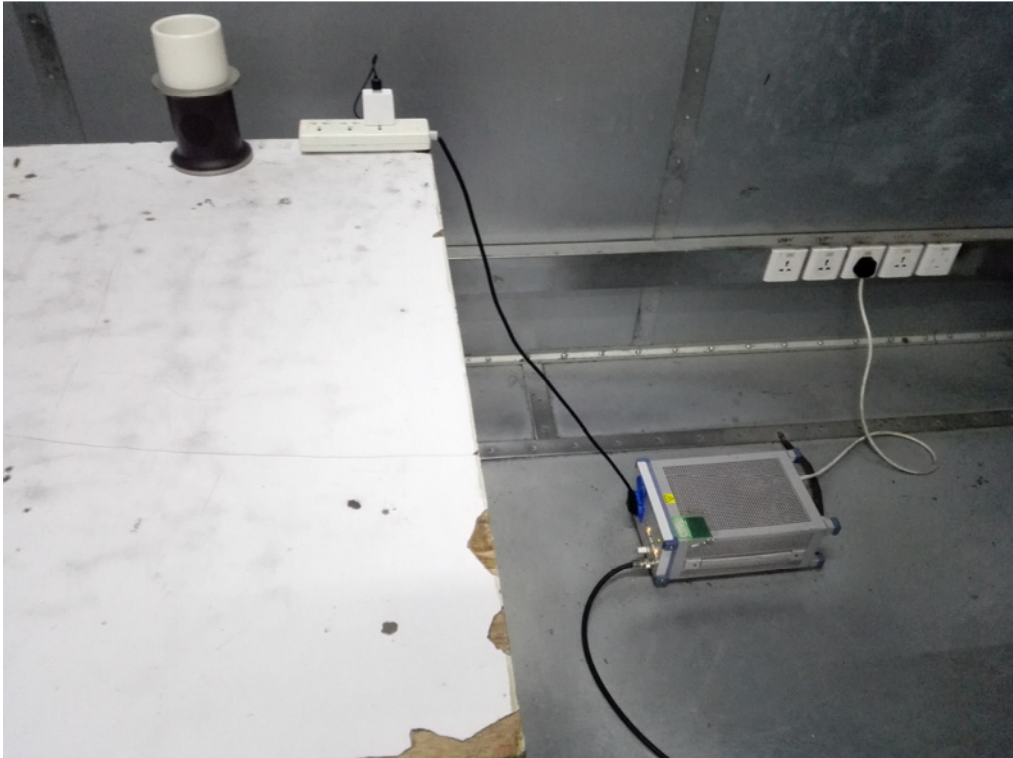




13. PHOTOGRAPHS OF THE EUT


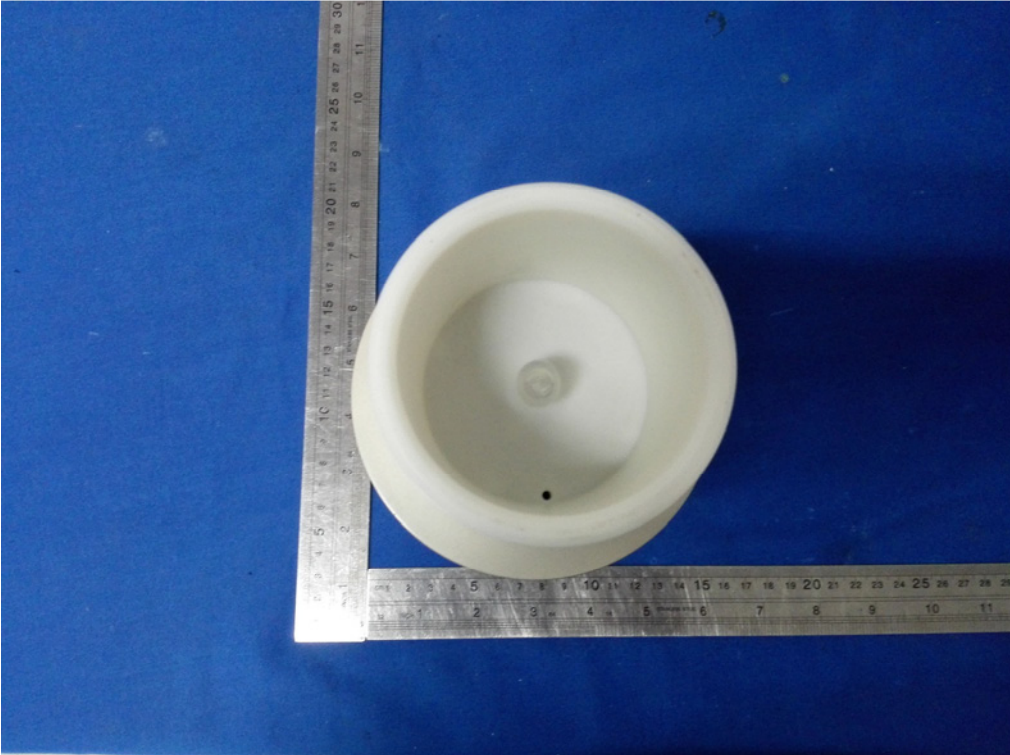


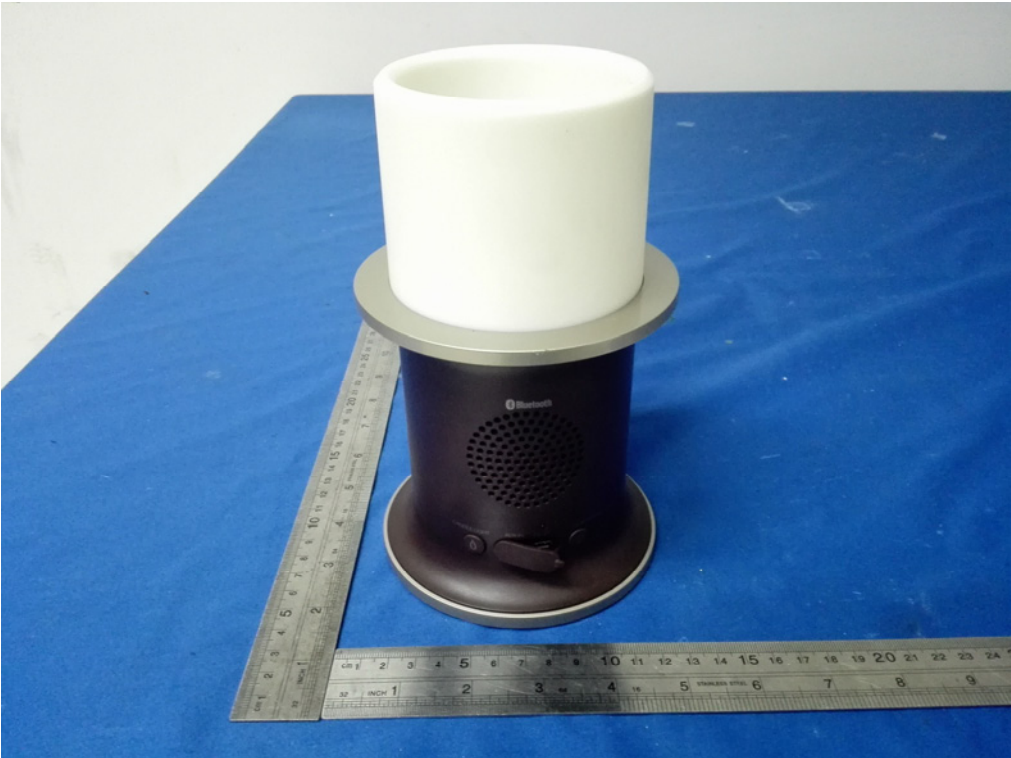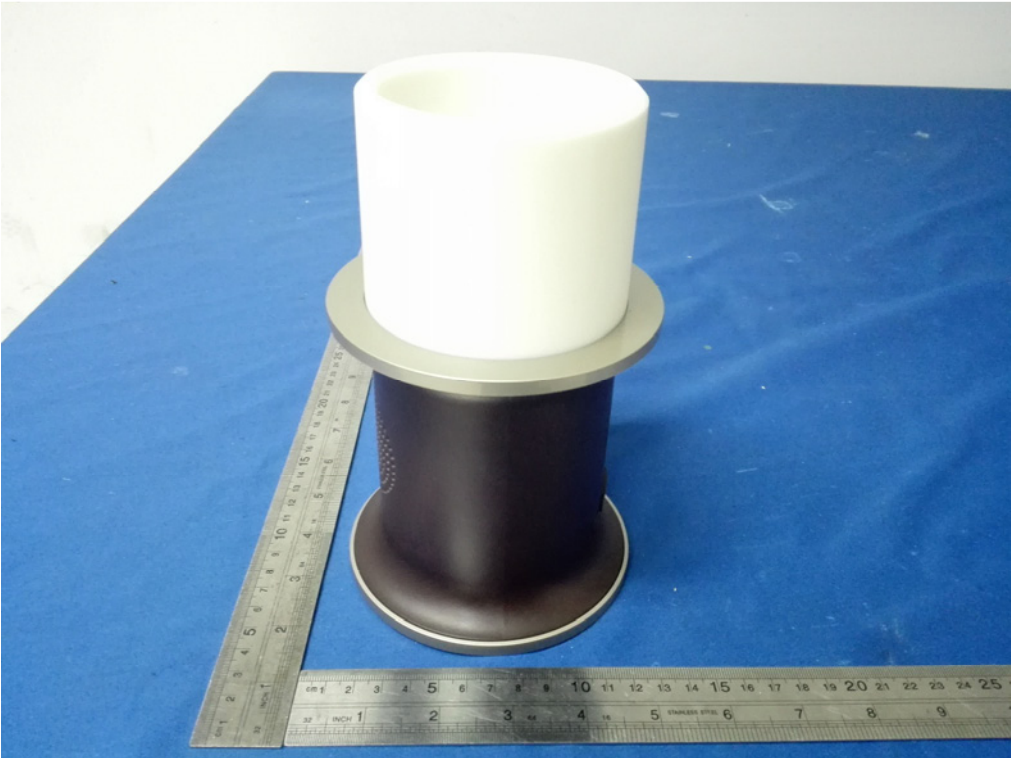

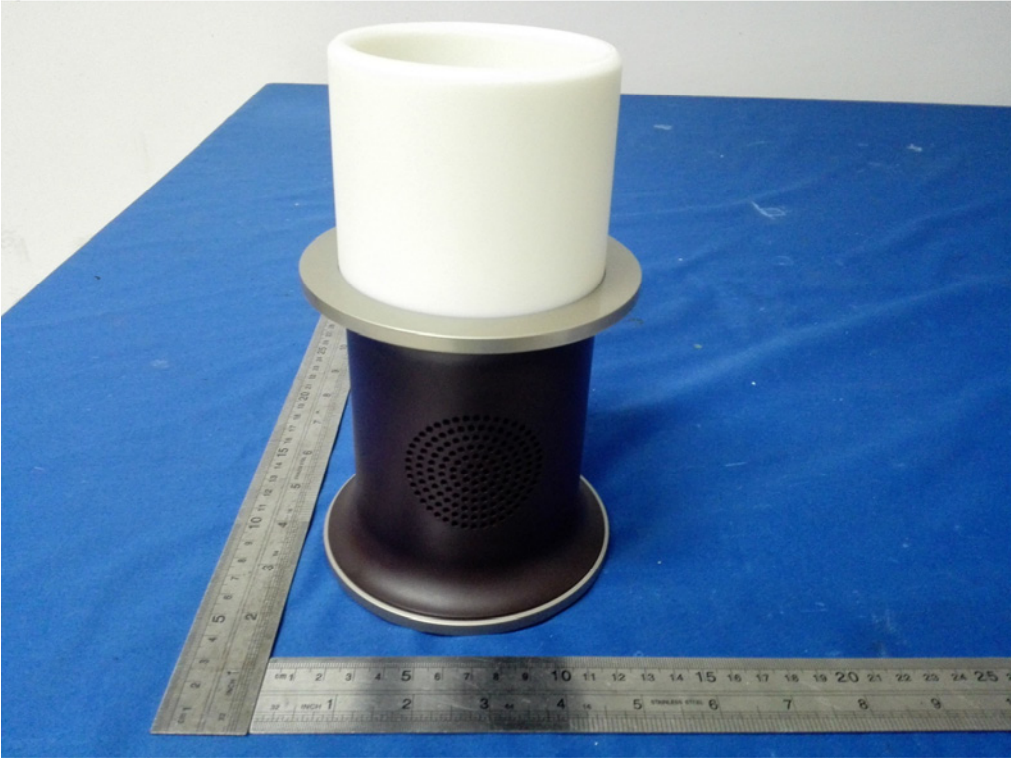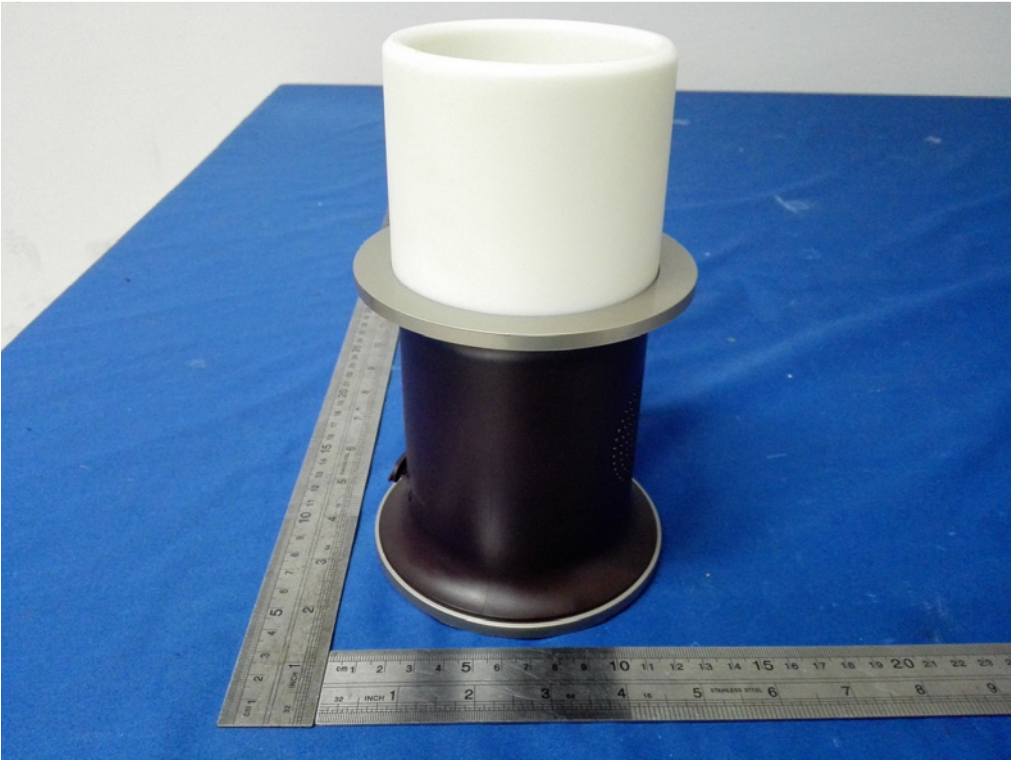

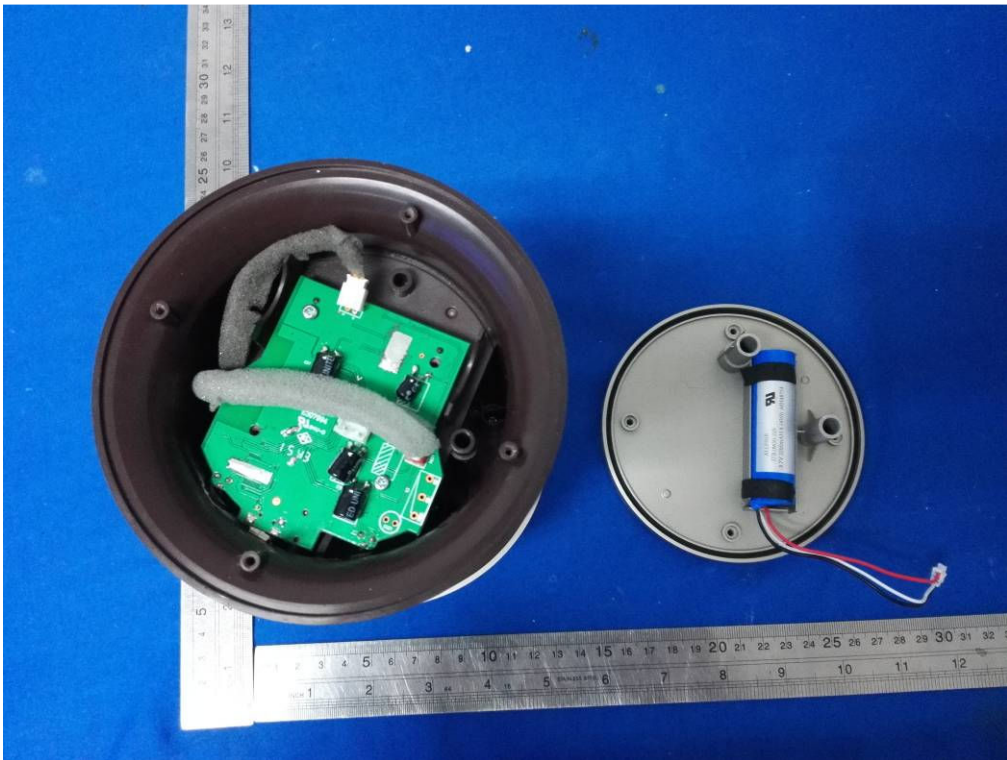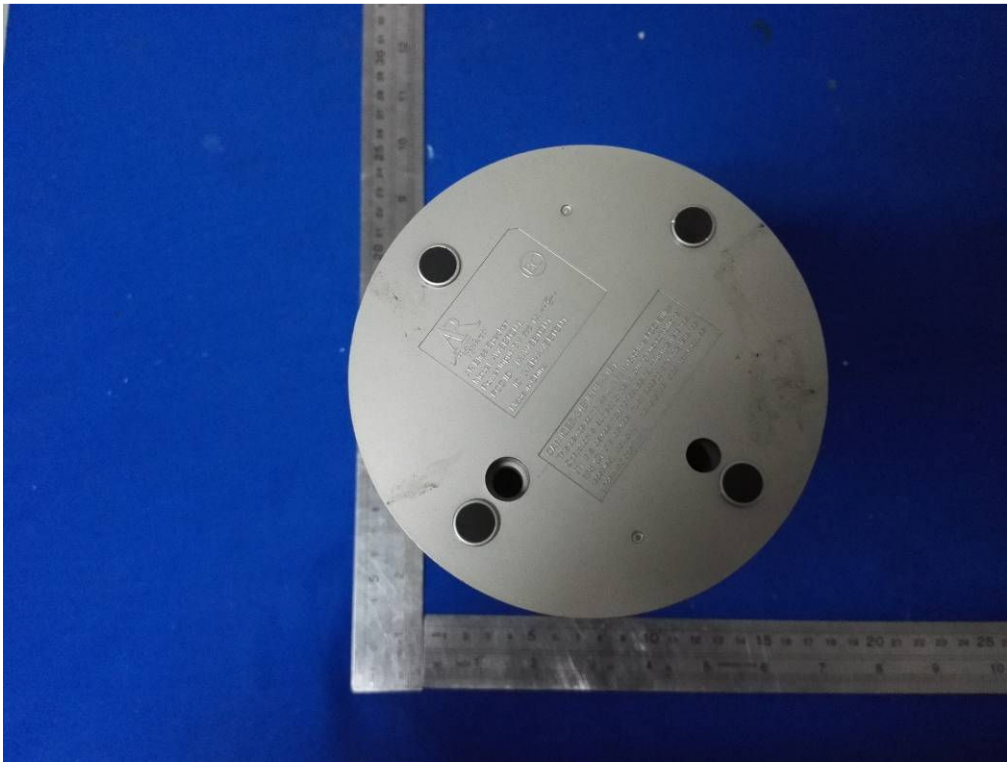

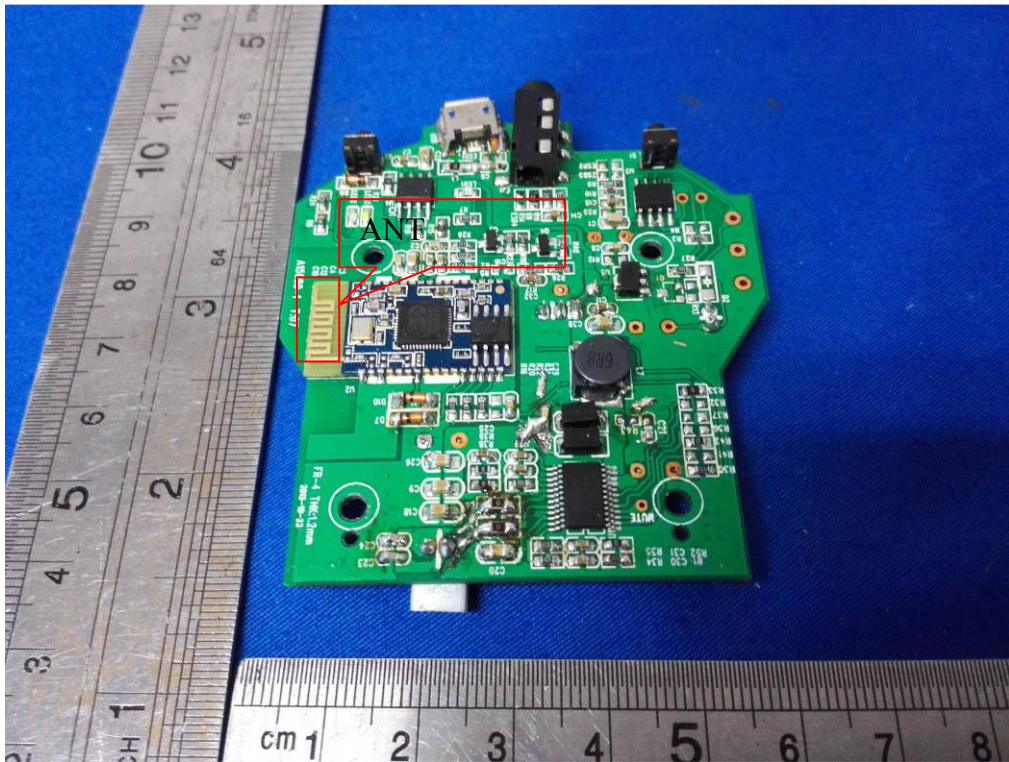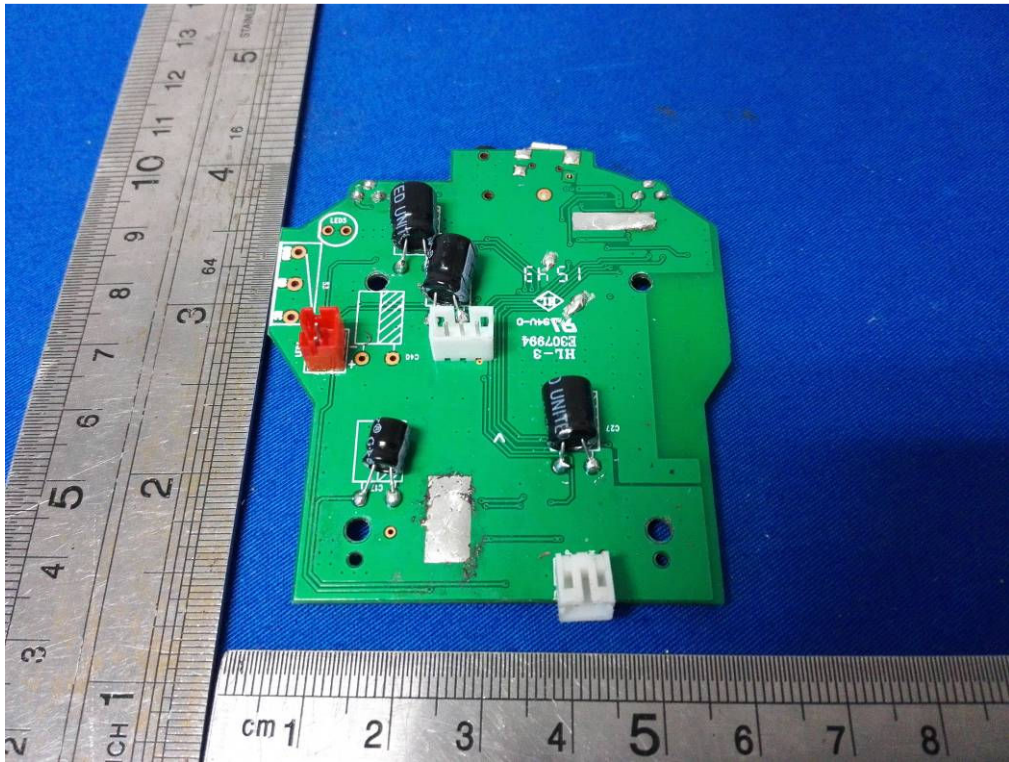

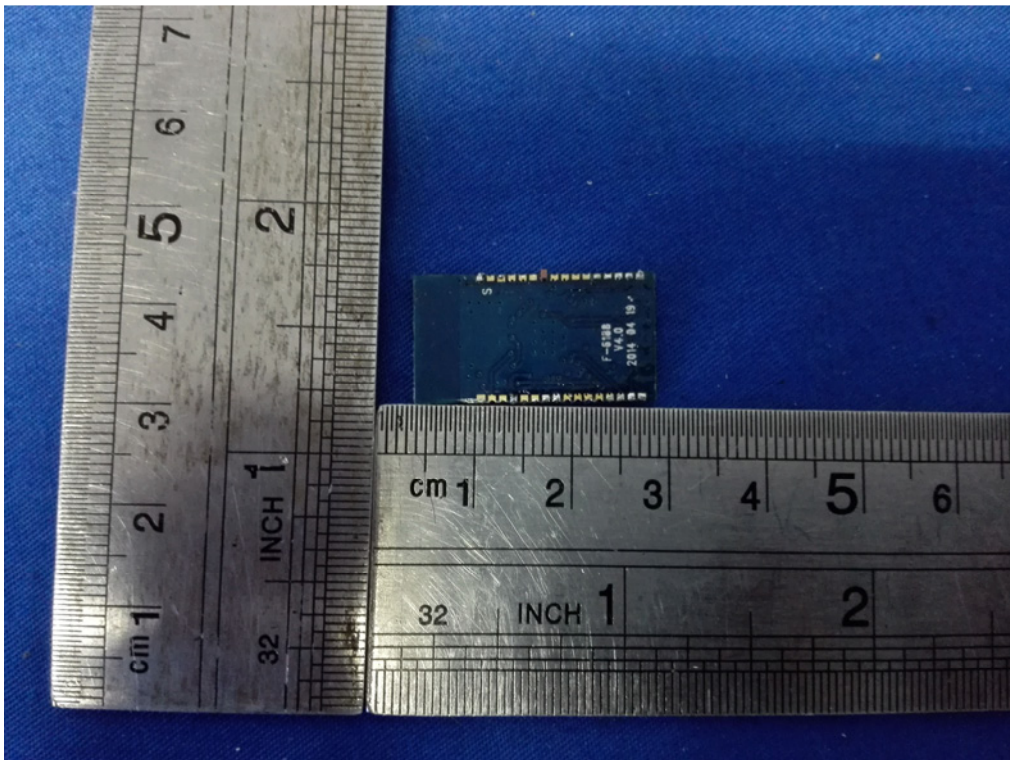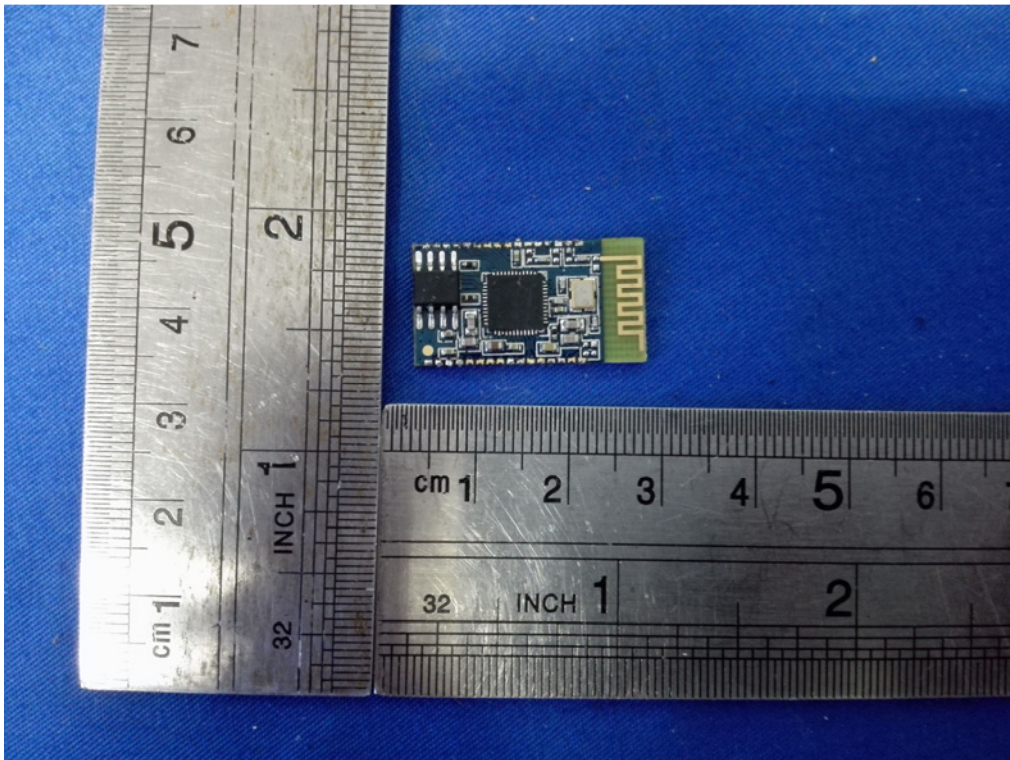



-----End-----