





MPE TEST REPORT

Test Report No. 15204675H-D-R2

Customer	Hosiden Corporation
Description of EUT	CRADLE ASSY, MOBILE WIRELESS CHARGER
Model Number of EUT	861C0-B2010-C0
FCC ID	VIYCBC4077
Test Regulation	FCC rule §1.1310 Radiofrequency radiation exposure limits.
Test Result	Complied
Issue Date	June 7, 2024
Remarks	*This test report has issued for MPE testing by wireless charger according to KDB 680106 D01 v04.

Representative test engineer	Approved by
	
Ken Fujita Engineer	Tsubasa Takayama Leader
 	
CERTIFICATE 5107.02	
<input type="checkbox"/> The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.	
<input checked="" type="checkbox"/> There is no testing item of "Non-accreditation".	

Report Cover Page - Form-ULID-003532 (DCS:13-EM-F0429) Issue# 23.0

ANNOUNCEMENT

- This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- The results in this report apply only to the sample tested. (Laboratory was not involved in sampling.)
- This sample tested is in compliance with the limits of the above regulation.
- The test results in this test report are traceable to the national or international standards.
- This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
- This test report covers Radio technical requirements.
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
- The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
- The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
- The information provided by the customer for this report is identified in SECTION 1.
- The laboratory is not responsible for information provided by the customer which can impact the validity of the results.
- For test report(s) referred in this report, the latest version (including any revisions) is always referred.

REVISION HISTORY

Original Test Report No.: 15204675H-D

This report is a revised version of 15204675H-D-R1. 15204675H-D-R1 is replaced with this report.

Revision	Test Report No.	Date	Page Revised Contents
- (Original)	15204675H-D	March 19, 2024	-
1	15204675H-D-R1	June 3, 2024	Deletion of "**2)" from test data (P. 13 to 32)
1	15204675H-D-R1	June 3, 2024	Correction of the Last Calibration Date in APPENDIX 2: Test Equipment list (LIMS ID: 141572 and 141360)
2	15204675H-D-R2	June 7, 2024	Remodification of the Last Calibration Date in APPENDIX 2: Test Equipment list (LIMS ID: 141572 and 141360)

Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	ICES	Interference-Causing Equipment Standard
AC	Alternating Current	IEC	International Electrotechnical Commission
AFH	Adaptive Frequency Hopping	IEEE	Institute of Electrical and Electronics Engineers
AM	Amplitude Modulation	IF	Intermediate Frequency
Amp, AMP	Amplifier	ILAC	International Laboratory Accreditation Conference
ANSI	American National Standards Institute	ISED	Innovation, Science and Economic Development Canada
Ant, ANT	Antenna	ISO	International Organization for Standardization
AP	Access Point	JAB	Japan Accreditation Board
ASK	Amplitude Shift Keying	LAN	Local Area Network
Atten., ATT	Attenuator	LIMS	Laboratory Information Management System
AV	Average	MCS	Modulation and Coding Scheme
BPSK	Binary Phase-Shift Keying	MRA	Mutual Recognition Arrangement
BR	Bluetooth Basic Rate	N/A	Not Applicable
BT	Bluetooth	NIST	National Institute of Standards and Technology
BT LE	Bluetooth Low Energy	NS	No signal detect.
BW	BandWidth	NSA	Normalized Site Attenuation
Cal Int	Calibration Interval	NVLAP	National Voluntary Laboratory Accreditation Program
CCK	Complementary Code Keying	OBW	Occupied Band Width
Ch., CH	Channel	OFDM	Orthogonal Frequency Division Multiplexing
CISPR	Comite International Special des Perturbations Radioelectriques	P/M	Power meter
CW	Continuous Wave	PCB	Printed Circuit Board
DBPSK	Differential BPSK	PER	Packet Error Rate
DC	Direct Current	PHY	Physical Layer
D-factor	Distance factor	PK	Peak
DFS	Dynamic Frequency Selection	PN	Pseudo random Noise
DQPSK	Differential QPSK	PRBS	Pseudo-Random Bit Sequence
DSSS	Direct Sequence Spread Spectrum	PSD	Power Spectral Density
EDR	Enhanced Data Rate	QAM	Quadrature Amplitude Modulation
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	QP	Quasi-Peak
EMC	ElectroMagnetic Compatibility	QPSK	Quadri-Phase Shift Keying
EMI	ElectroMagnetic Interference	RBW	Resolution Band Width
EN	European Norm	RDS	Radio Data System
ERP, e.r.p.	Effective Radiated Power	RE	Radio Equipment
EU	European Union	RF	Radio Frequency
EUT	Equipment Under Test	RMS	Root Mean Square
Fac.	Factor	RSS	Radio Standards Specifications
FCC	Federal Communications Commission	Rx	Receiving
FHSS	Frequency Hopping Spread Spectrum	SA, S/A	Spectrum Analyzer
FM	Frequency Modulation	SG	Signal Generator
Freq.	Frequency	SVSWR	Site-Voltage Standing Wave Ratio
FSK	Frequency Shift Keying	TR	Test Receiver
GFSK	Gaussian Frequency-Shift Keying	Tx	Transmitting
GNSS	Global Navigation Satellite System	VBW	Video BandWidth
GPS	Global Positioning System	Vert.	Vertical
Hori.	Horizontal	WLAN	Wireless LAN

CONTENTS	PAGE
SECTION 1: Customer Information.....	5
SECTION 2: Equipment Under Test (EUT)	5
SECTION 3: Test specification, procedures & results	6
SECTION 4: Operation of EUT during testing.....	9
SECTION 5: MPE Limit [KDB 680106 Section 3) (FCC §1.1310)].....	12
APPENDIX 1: Test data	13
Electric, Magnetic and Electromagnetic fields.....	13
APPENDIX 2: Test instruments	33
APPENDIX 3: Photographs of test setup.....	34

SECTION 1: Customer Information

Company Name	Hosiden Corporation
Address	4-33, Kitakyuhoji 1-Chome, Yao-City, Osaka, 581-0071 Japan
Telephone Number	+81-72-924-1293
Contact Person	Fumitaka Sekiguchi

The information provided by the customer is as follows;

- Customer, Description of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer Information
- SECTION 2: Equipment Under Test (EUT) other than the Receipt Date and Test Date
- SECTION 4: Operation of EUT during testing

SECTION 2: Equipment Under Test (EUT)

2.1 Identification of EUT

Description	CRADLE ASSY, MOBILE WIRELESS CHARGER
Model Number	861C0-B2010-C0
Serial Number	Refer to SECTION 4.2
Condition	Production prototype (Not for Sale: This sample is equivalent to mass-produced items.)
Modification	No Modification by the test lab
Receipt Date	January 22, 2024
Test Date	February 2, 2024

2.2 Product Description

General Specification

Rating	DC 14 V / 2 A
Operating frequency	-30 deg. C to +60 deg. C (Wireless power transmission (Qi)) -30 deg. C to +80 deg. C (NFC)

Radio Specification

Wireless power transmission (Qi)

Operating Frequency	127.70 kHz (Power transmit) / 125.73 kHz to 129.81 kHz (Communication)
Rated Output Power	15 W
Modulation	FSK
Coil system	Single Coil
Charging distance	Contact

NFC

Equipment Type	Transceiver
Frequency of Operation	13.56 MHz
Type of Modulation	ASK

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Title	FCC rule §1.1310 Radiofrequency radiation exposure limits.
--------------	--

3.2 Procedures and results

Item	Test Procedure	Limits	Worst Margin	Result
MPE Limit	KDB 680106 D01 RF Exposure Wireless Charging Apps v04	§1.1310(e)(1)	Refer to section.5	Complied

*These tests were performed without any deviations from test procedure.

Table 1—Limits for Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(i) Limits for Occupational/Controlled Exposures				
0.3 - 3.0	614	1.63	*(100)	≤6
3.0 - 30	1842/f	4.89/f	*(900/f ²)	<6
30 - 300	61.4	0.163	1.0	<6
300 - 1,500			f/300	<6
1,500 - 100,000			5	<6
(ii) Limits for General Population/Uncontrolled Exposure				
0.3 - 1.34	614	1.63	*(100)	<30
1.34 - 30	824/f	2.19/f	*(180/f ²)	<30
30 - 300	27.5	0.073	0.2	<30
300 - 1,500			f/1500	<30
1,500 - 100,000			1.0	<30

f = frequency in MHz

* = Plane-wave equivalent power density

Note 1 to Table 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

Note 2 to Table 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

Test limit was applied to the test limit of 100 kHz - 300 kHz based on FCC rule Section 1.1310, according to KDB 680106 D01 RF Exposure Wireless Charging Apps Section 3 c).

KDB 680106 D01 RF Exposure Wireless Charging Apps requires following contents in order to exclude RF exposure evaluation.

- (1) The power transfer frequency is below 1 MHz.
- (2) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.
- (3) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact).
- (4) Only § 2.1091-*Mobile* exposure conditions apply (i.e., this provision does not cover § 2.1093-*Portable* exposure conditions).
- (5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a $1/d$ (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes. The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures (e.g., coils or antennas) that by design can simultaneously transmit are energized at their nominal maximum power.
- (6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. For instance, a device may use three RF coils powered at 5 W, or one coil powered at 15 W: in this case, both scenarios shall be tested.

All requests were complied.

Also, Test data used Exposure Level Tester is complied KDB 680106 D01 RF Exposure Wireless Charging Apps Section 3.2.

3.3 Confirmation

UL Japan, Inc. hereby confirms that EUT, in the configuration tested, complies with the specifications KDB 680106 D01 RF Exposure Wireless Charging Apps.

3.4 Uncertainty

Although this standard determines only the limit value of uncertainty, there is no applicable rule of uncertainty in this. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

EMF

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor $k = 2$.

1 Hz - 400 kHz (H-Field) ELT400	±13.85 %
100 kHz - 3 GHz (E-Field) MBFM-01, MBFM-03	±24.35 %

*The worst value in the test range was applied.

3.5 Test Location

UL Japan, Inc. Ise EMC Lab.
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 Japan
Telephone: +81-596-24-8999

*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.10 shielded room	3.8 x 2.8 x 2.8	3.8 x 2.8	-	-
No.11 measurement room	4.0 x 3.4 x 2.5	N/A	-	-
No.12 measurement room	2.6 x 3.4 x 2.5	N/A	-	-
Large Chamber	16.9 x 22.1 x 10.17	16.9 x 22.1	-	10 m
Small Chamber	5.3 x 6.69 x 3.59	5.3 x 6.69	-	-

3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

SECTION 4: Operation of EUT during testing

4.1. Operating Mode(s)


The EUT exercise program used during testing was designed to exercise the various system components in a manner similar to typical use. Test configuration was adjusted maximum output power of EUT.

Test sequence is used:

Test mode	Remarks
1) Tx 15 W (127.70 kHz)	-
2) Tx 5 W (127.70 kHz)	
3) Tx FSK (127.96 kHz / 128.21 kHz / 128.74 kHz / 129.81 kHz / 127.45 kHz / 127.19 kHz / 126.70 kHz / 125.73 kHz)	
Justification: The system was configured in typical fashion (as a user would normally use it) for testing.	

4.2. Configuration and peripherals

Tx 15 W

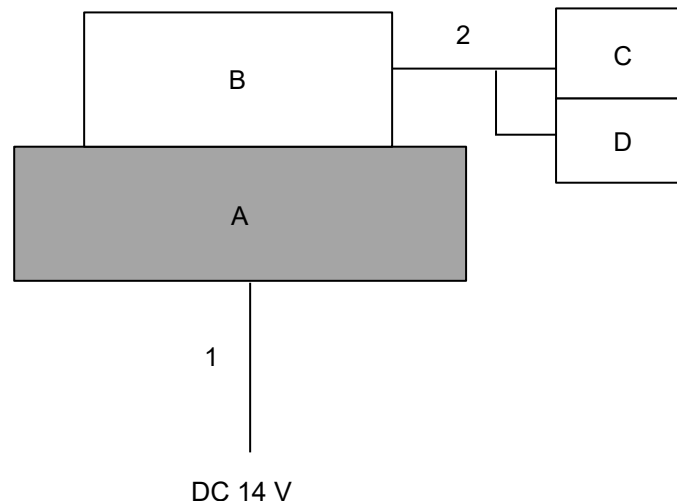

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.


Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	CRADLE ASSY, MOBILE WIRELESS CHARGER	861C0-B2010-C0	102	Hosiden Corporation	EUT
B	Receiver coil	CBC-4091	ES-35	-	-
C	Resistance	HS50F	19.3	ARCOL	-
D	Resistance	HS50	20.03	ARCOL	-

List of Cables Used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	2.5	Unshielded	Unshielded	-
2	DC Cable	0.2	Unshielded	Unshielded	-

Tx 5 W

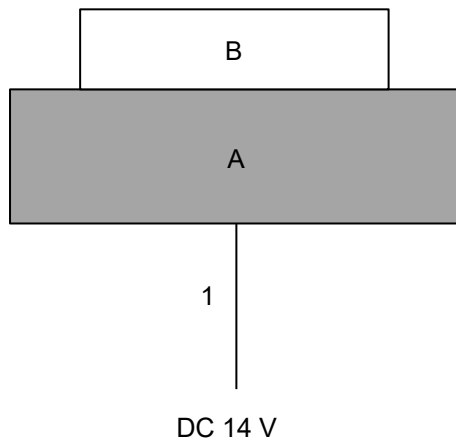

* Cabling and setup were taken into consideration and test data was taken under worse case conditions.


Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	CRADLE ASSY, MOBILE WIRELESS CHARGER	861C0-B2010-C0	101	Hosiden Corporation	EUT
B	Receiver	SM-G9810	86	Samsung Electronics	-

List of Cables Used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	2.5	Unshielded	Unshielded	-

FSK

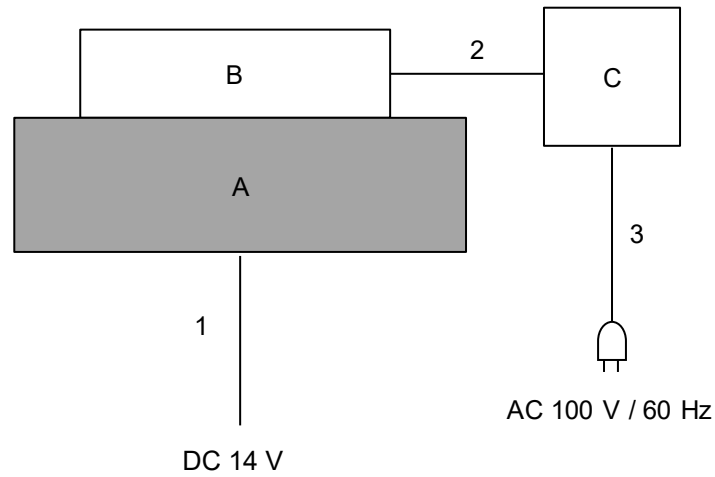

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support Equipment

No.	Item	Model number	Serial Number	Manufacturer	Remark
A	CRADLE ASSY, MOBILE WIRELESS CHARGER	861C0-B2010-C0	102	Hosiden Corporation	EUT
B	Receiver coil	TPR#MP1B	EBST-01-03	nok9	-
C	Qi measurement instrument	CATS II BST	200134-1807	nok9	-

List of Cables Used

No.	Name	Length (m)	Shield		Remark
			Cable	Connector	
1	DC Cable	2.5	Unshielded	Unshielded	-
2	DC Cable	0.5	Unshielded	Unshielded	-
3	AC Cable	1.5	Unshielded	Unshielded	-

SECTION 5: MPE Limit [KDB 680106 Section 3) (FCC §1.1310)]

5.1. Operating environment

Date	See data
Test place	See data
Temperature	See data
Humidity	See data
Test engineer	See data
Mode	See data

5.2. Test configuration

The EUT was placed on a non-metallic of 0.8 m above the reference ground plane. Worst position is shown in the photos in Appendix 2.

5.3. Test conditions

The maximum radiation axis was scanned on each side (Top, Bottom, Left, Right, Front, Back), and final measurements were taken at three or more points on each detected maximum radiation axis. Since the measurement detects the worst radiation, the maximum value during 6 minutes was reported. During testing, the EUT was set to transmit at maximum power. The measurement value was corrected so that the measurement distance of 0 cm was the distance from the sensing element of the measurement probe to the EUT surface. The 20 cm distance value was used to demonstrate that it was less than 50 % of the MPE limit.

5.4. Test procedure

The test of the weighted result has been performed using time domain evaluation.

Sensor locations	Around from 10 cm to 40 cm
------------------	----------------------------

5.5. Results

Summary of the test results	Complied
-----------------------------	----------

APPENDIX 1: Test data

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 1)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	22 deg. C / 51 % RH
Engineer	Ken Fujita
Mode	Tx 15 W 127.70 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance	Electric field strength (Result)	Limit	Result
[cm]	[V/m]	[V/m]	
0	23.50	614.00	-
10	9.41	614.00	-
20	5.26	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance	Magnetic field strength (Result)	Limit	Result
[cm]	[A/m]	Leg [A/m]	
0	13.40	1.63	-
10	0.51	1.63	-
20	0.12	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance	Electric field strength (Result)	Limit	Result
[cm]	[V/m]	[V/m]	
0	131.00	614.00	-
10	12.20	614.00	-
20	5.97	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance	Magnetic field strength (Result)	Limit	Result
[cm]	[A/m]	Leg [A/m]	
0	48.70	1.63	-
10	0.80	1.63	-
20	0.19	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance	Electric field strength (Result)	Limit	Result
[cm]	[V/m]	[V/m]	
0	22.10	614.00	-
10	7.65	614.00	-
20	5.61	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance *1)	Magnetic field strength (Result)	Limit	Result
[cm]	[A/m]	Leg [A/m]	
0	15.30	1.63	-
10	0.58	1.63	-
20	0.18	1.63	Pass *1)

Carrier Frequency	
0.1277	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 1)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	22 deg. C / 51 % RH
Engineer	Ken Fujita
Mode	Tx 15 W 127.70 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	29.60	614.00	-
10	8.33	614.00	-
20	4.76	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	40.60	1.63	-
10	1.33	1.63	-
20	0.24	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	571.00	614.00	-
10	21.60	614.00	-
15	10.90	614.00	-
20	8.58	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	613.00	1.63	-
10	5.04	1.63	-
15	1.37	1.63	-
20	0.78	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	19.30	614.00	-
10	4.52	614.00	-
20	4.16	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	5.61	1.63	-
10	0.86	1.63	-
20	0.32	1.63	Pass *1)

Carrier Frequency	
0.1277	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 2)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx 5 W 127.70 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	92.80	614.00	-
10	5.76	614.00	-
20	0.50	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	1.59	1.63	-
10	0.04	1.63	-
20	0.03	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	62.90	614.00	-
10	9.39	614.00	-
20	4.11	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.16	1.63	-
10	0.25	1.63	-
20	0.07	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	96.50	614.00	-
10	7.12	614.00	-
20	2.40	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.18	1.63	-
10	0.11	1.63	-
20	0.02	1.63	Pass *1)

Carrier Frequency	
0.1277	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 2)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx 5 W 127.70 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	29.60	614.00	-
10	7.39	614.00	-
20	3.07	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	15.60	1.63	-
10	0.33	1.63	-
20	0.06	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	398.00	614.00	-
10	14.70	614.00	-
20	5.79	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	6.66	1.63	-
10	0.21	1.63	-
20	0.05	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	11.30	614.00	-
10	2.32	614.00	-
20	1.74	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	1.08	1.63	-
10	0.14	1.63	-
20	0.03	1.63	Pass

Carrier Frequency	
0.1277	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 3)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 127.96 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	15.20	614.00	-
10	2.33	614.00	-
20	1.37	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.54	1.63	-
10	0.34	1.63	-
20	0.11	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	27.50	614.00	-
10	4.54	614.00	-
20	0.13	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	29.10	1.63	-
10	0.87	1.63	-
20	0.08	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	87.90	614.00	-
10	5.18	614.00	-
20	2.33	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.46	1.63	-
10	0.29	1.63	-
20	0.10	1.63	Pass *1)

Carrier Frequency	
0.12796	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 3)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 127.96 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	24.30	614.00	-
10	5.14	614.00	-
20	2.50	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	20.60	1.63	-
10	0.46	1.63	-
20	0.13	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1010.00	614.00	-
10	13.40	614.00	-
15	7.86	614.00	-
20	5.10	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	277.00	1.63	-
10	1.67	1.63	-
15	0.86	1.63	-
20	0.41	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.81	614.00	-
10	1.55	614.00	-
20	1.30	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.36	1.63	-
10	0.61	1.63	-
20	0.19	1.63	Pass *1)

Carrier Frequency	
0.12796	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 4)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 128.21 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	15.30	614.00	-
10	2.31	614.00	-
20	1.29	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.22	1.63	-
10	0.31	1.63	-
20	0.09	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	27.60	614.00	-
10	4.39	614.00	-
20	0.11	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	29.10	1.63	-
10	0.55	1.63	-
20	0.09	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	87.80	614.00	-
10	5.10	614.00	-
20	2.16	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.29	1.63	-
10	0.26	1.63	-
20	0.08	1.63	Pass *1)

Carrier Frequency	
0.12796	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 4)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 128.21 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	24.78	614.00	-
10	5.73	614.00	-
20	2.76	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	20.30	1.63	-
10	0.32	1.63	-
20	0.12	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1002.00	614.00	-
10	13.10	614.00	-
15	7.67	614.00	-
20	4.98	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	265.00	1.63	-
10	1.64	1.63	-
15	0.78	1.63	-
20	0.33	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.34	614.00	-
10	1.52	614.00	-
20	1.23	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.31	1.63	-
10	0.56	1.63	-
20	0.17	1.63	Pass *1)

Carrier Frequency	
0.12821	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 5)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 128.74 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	14.80	614.00	-
10	2.43	614.00	-
20	1.23	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.13	1.63	-
10	0.29	1.63	-
20	0.08	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	27.30	614.00	-
10	4.23	614.00	-
20	0.11	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	29.00	1.63	-
10	0.51	1.63	-
20	0.06	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	87.30	614.00	-
10	5.11	614.00	-
20	2.27	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	4.00	1.63	-
10	0.32	1.63	-
20	0.10	1.63	Pass *1)

Carrier Frequency	
0.12874	MHz

*1) The result is less than 50 % of MPE limit.

**Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 5)**

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 128.74 kHz

**Left
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	23.89	614.00	-
10	5.07	614.00	-
20	2.19	614.00	Pass *1)

**Left
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	19.70	1.63	-
10	0.41	1.63	-
20	0.12	1.63	Pass *1)

**Top
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1002.00	614.00	-
10	13.10	614.00	-
15	7.67	614.00	-
20	5.12	614.00	Pass *1)

**Top
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	274.00	1.63	-
10	1.64	1.63	-
15	0.67	1.63	-
20	0.37	1.63	Pass *1)

**Bottom
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.59	614.00	-
10	1.53	614.00	-
20	1.28	614.00	Pass *1)

**Bottom
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.21	1.63	-
10	0.56	1.63	-
20	0.13	1.63	Pass *1)

Carrier Frequency	
0.12874	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 6)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 129.81 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	14.80	614.00	-
10	2.74	614.00	-
20	1.28	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.33	1.63	-
10	0.43	1.63	-
20	0.13	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	26.98	614.00	-
10	4.28	614.00	-
20	0.11	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	28.90	1.63	-
10	1.13	1.63	-
20	0.07	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance *1) [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	86.98	614.00	-
10	5.09	614.00	-
20	2.17	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.23	1.63	-
10	0.31	1.63	-
20	0.11	1.63	Pass *1)

Carrier Frequency	
0.12981	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 6)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 129.81 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance	Electric field strength (Result)	Limit	Result
[cm]	[V/m]	[V/m]	
0	24.80	614.00	-
10	5.27	614.00	-
20	2.38	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance	Magnetic field strength (Result)	Limit	Result
[cm]	[A/m]	Leg [A/m]	
0	20.80	1.63	-
10	0.55	1.63	-
20	0.34	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance	Electric field strength (Result)	Limit	Result
[cm]	[V/m]	[V/m]	
0	1012.00	614.00	-
10	14.30	614.00	-
15	8.32	614.00	-
20	5.21	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance	Magnetic field strength (Result)	Limit	Result
[cm]	[A/m]	Leg [A/m]	
0	279.00	1.63	-
10	1.72	1.63	-
15	0.79	1.63	-
20	0.52	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance	Electric field strength (Result)	Limit	Result
[cm]	[V/m]	[V/m]	
0	6.57	614.00	-
10	1.48	614.00	-
20	1.32	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance	Magnetic field strength (Result)	Limit	Result
[cm]	[A/m]	Leg [A/m]	
0	2.36	1.63	-
10	0.61	1.63	-
20	0.19	1.63	Pass *1)

Carrier Frequency	
0.12981	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 7)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 127.45 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	15.00	614.00	-
10	2.28	614.00	-
20	1.50	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.44	1.63	-
10	0.31	1.63	-
20	0.05	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	26.59	614.00	-
10	4.39	614.00	-
20	0.11	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	28.95	1.63	-
10	1.38	1.63	-
20	0.24	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	85.98	614.00	-
10	5.29	614.00	-
20	2.45	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.45	1.63	-
10	0.31	1.63	-
20	0.13	1.63	Pass *1)

Carrier Frequency	
0.12745	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 7)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 127.45 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	25.10	614.00	-
10	5.23	614.00	-
20	2.28	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	20.50	1.63	-
10	0.42	1.63	-
20	0.11	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1006.00	614.00	-
10	12.80	614.00	-
15	7.55	614.00	-
20	4.99	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	269.00	1.63	-
10	1.69	1.63	-
15	0.91	1.63	-
20	0.38	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.70	614.00	-
10	1.67	614.00	-
20	1.38	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.44	1.63	-
10	0.59	1.63	-
20	0.28	1.63	Pass *1)

Carrier Frequency	
0.12745	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 8)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 127.19 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	15.90	614.00	-
10	2.87	614.00	-
20	1.43	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.89	1.63	-
10	0.56	1.63	-
20	0.16	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	28.20	614.00	-
10	4.78	614.00	-
20	0.17	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	30.20	1.63	-
10	1.56	1.63	-
20	0.43	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	88.12	614.00	-
10	5.98	614.00	-
20	2.41	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.33	1.63	-
10	0.31	1.63	-
20	0.07	1.63	Pass *1)

Carrier Frequency	
0.12719	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 8)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 127.19 kHz

Left
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	23.20	614.00	-
10	5.23	614.00	-
20	2.70	614.00	Pass *1)

Left
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	20.50	1.63	-
10	0.39	1.63	-
20	0.07	1.63	Pass *1)

Top
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1004.00	614.00	-
10	13.70	614.00	-
15	8.02	614.00	-
20	4.78	614.00	Pass *1)

Top
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	280.00	1.63	-
10	1.66	1.63	-
15	0.91	1.63	-
20	0.36	1.63	Pass *1)

Bottom
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.81	614.00	-
10	1.55	614.00	-
20	1.30	614.00	Pass *1)

Bottom
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.36	1.63	-
10	0.61	1.63	-
20	0.19	1.63	Pass *1)

Carrier Frequency	
0.12719	MHz

*1) The result is less than 50 % of MPE limit.

Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 9)

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 126.70 kHz

Front
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	15.30	614.00	-
10	2.19	614.00	-
20	1.48	614.00	Pass *1)

Front
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.56	1.63	-
10	0.36	1.63	-
20	0.10	1.63	Pass *1)

Right
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	27.40	614.00	-
10	4.36	614.00	-
20	0.11	614.00	Pass *1)

Right
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	28.90	1.63	-
10	1.49	1.63	-
20	0.07	1.63	Pass *1)

Rear
(E-Field) 3 kHz to 10 MHz

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	87.50	614.00	-
10	5.17	614.00	-
20	2.45	614.00	Pass *1)

Rear
(H-Field) 3 kHz to 10 MHz

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.66	1.63	-
10	0.28	1.63	-
20	0.13	1.63	Pass *1)

Carrier Frequency	
0.1267	MHz

*1) The result is less than 50 % of MPE limit.

**Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 9)**

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 126.70 kHz

**Left
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	23.80	614.00	-
10	4.99	614.00	-
20	2.58	614.00	Pass *1)

**Left
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	20.50	1.63	-
10	0.54	1.63	-
20	0.12	1.63	Pass *1)

**Top
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1005.00	614.00	-
10	13.20	614.00	-
15	7.61	614.00	-
20	4.88	614.00	Pass *1)

**Top
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	271.00	1.63	-
10	1.68	1.63	-
15	0.87	1.63	-
20	0.40	1.63	Pass *1)

**Bottom
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.23	614.00	-
10	1.53	614.00	-
20	1.12	614.00	Pass *1)

**Bottom
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.58	1.63	-
10	0.76	1.63	-
20	0.04	1.63	Pass *1)

Carrier Frequency	
0.1267	MHz

*1) The result is less than 50 % of MPE limit.

**Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 10)**

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 125.73 kHz

**Front
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	15.30	614.00	-
10	2.19	614.00	-
20	1.44	614.00	Pass *1)

**Front
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	9.44	1.63	-
10	0.41	1.63	-
20	0.08	1.63	Pass *1)

**Right
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	24.80	614.00	-
10	4.29	614.00	-
20	0.15	614.00	Pass *1)

**Right
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	28.70	1.63	-
10	1.34	1.63	-
20	0.09	1.63	Pass *1)

**Rear
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	87.82	614.00	-
10	5.36	614.00	-
20	2.34	614.00	Pass *1)

**Rear
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	8.23	1.63	-
10	0.34	1.63	-
20	0.12	1.63	Pass *1)

Carrier Frequency	
0.12573	MHz

*1) The result is less than 50 % of MPE limit.

**Electric, Magnetic and Electromagnetic fields
RF Exposure (mode 10)**

Test place	Ise EMC Lab.
Shielded Room	No.7
Date	February 2, 2024
Temperature/ Humidity	21 deg. C / 48 % RH
Engineer	Ken Fujita
Mode	Tx FSK 125.73 kHz

**Left
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	23.98	614.00	-
10	5.11	614.00	-
20	2.39	614.00	Pass *1)

**Left
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	20.17	1.63	-
10	0.51	1.63	-
20	0.11	1.63	Pass *1)

**Top
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	1002.00	614.00	-
10	13.10	614.00	-
15	7.27	614.00	-
20	4.39	614.00	Pass *1)

**Top
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	268.00	1.63	-
10	1.68	1.63	-
15	0.92	1.63	-
20	0.38	1.63	Pass *1)

**Bottom
(E-Field) 3 kHz to 10 MHz**

Distance [cm]	Electric field strength (Result) [V/m]	Limit [V/m]	Result
0	6.38	614.00	-
10	1.32	614.00	-
20	1.09	614.00	Pass *1)

**Bottom
(H-Field) 3 kHz to 10 MHz**

Distance [cm]	Magnetic field strength (Result) [A/m]	Limit Leg [A/m]	Result
0	2.45	1.63	-
10	0.74	1.63	-
20	0.23	1.63	Pass *1)

Carrier Frequency	
0.12573	MHz

*1) The result is less than 50 % of MPE limit.

APPENDIX 2: Test instruments

Test Equipment

Test Item	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
EMF	141572	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	3401	2024/01/10	12
EMF	141360	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	70900532	2024/01/31	12
EMF	142178	Measure, Tape	PROMART	SEN1635	-	-	-
EMF	234777	Magnetic Amplitude and Gradient Probe System	Schmid & Partner Engineering AG	MAGPy-8H3D+E3D / MAGPy-DAS	3057	2023/09/13	12

***Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.**

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

EMF: Electromagnetic field