

TEST REPORT

Applicant : Hosiden Corporation
Address : 4-33, Kitakyuhoji 1-Chome, Yao-City, Osaka 581-0071, Japan

Products : Bluetooth Low Energy Module
Model No. : HRM1062
Serial No. : 8 , 10

FCC ID : VIYHRM1062

Test Standard : CFR 47 FCC Rules and Regulations Part 15

Test Results : **Passed**

Date of Test : August 21, 2019 ~ September 17, 2019



Kousei Shibata
Manager
Japan Quality Assurance Organization
KITA-KANSAI Testing Center
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

-
- The test results in this test report was made by using the measuring instruments which are traceable to national standards of measurement in accordance with ISO/IEC 17025.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.
 - VLAC does not approve, certify or warrant the product by this test report.

TABLE OF CONTENTS

	Page
1 Description of the Equipment Under Test.....	3
2 Summary of Test Results	4
3 Test Procedure	5
4 Test Location.....	5
5 Recognition of Test Laboratory.....	5
6 Description of Test Setup	6
7 Test Requirements.....	9

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

EUT : Equipment Under Test**EMC** : Electromagnetic Compatibility**AE** : Associated Equipment**EMI** : Electromagnetic Interference**N/A** : Not Applicable**EMS** : Electromagnetic Susceptibility**N/T** : Not Tested☒ - indicates that the listed condition, standard or equipment is applicable for this report.☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

1 Description of the Equipment Under Test

1. Manufacturer : Hosiden Corporation
4-33, Kitakyuhoji 1-Chome, Yao-City, Osaka 581-0071, Japan
2. Products : Bluetooth Low Energy Module
3. Model No. : HRM1062
4. Serial No. : 8 , 10
5. Product Type : Pre-production
6. Date of Manufacture : May, 2019
7. Power Rating : 3.0VDC
8. Grounding : None
9. Transmitting Frequency : 2402.0 MHz(00CH) – 2480.0MHz(39CH)
10. Receiving Frequency : 2402.0 MHz(00CH) – 2480.0MHz(39CH)
11. Max. RF Output Power : 3.51 dBm (Measure Value of Bluetooth Low Energy)
12. Antenna Type : Printed Pattern Antenna (Integral)
13. Antenna Gain : 2.0 dBi
14. Category : DTS
15. EUT Authorization : Certification
16. Received Date of EUT : August 20, 2019
17. Channel Plan

Bluetooth Low Energy 2Mbps Mode:

The carrier spacing is 2 MHz.

The carrier frequency is designated by the absolute frequency channel number (ARFCN).

The carrier frequency is expressed in the equation shown as follows:

Transmitting Frequency (in MHz) = $2402.0 + 2 \cdot n$

Receiving Frequency (in MHz) = $2402.0 + 2 \cdot n$

where, n : channel number ($0 \leq n \leq 39$)

2 Summary of Test Results

Applied Standard : CFR 47 FCC Rules and Regulations Part 15
Subpart C - Intentional Radiators

The EUT described in clause 1 was tested according to the applied standard shown above.
Details of the test configuration is shown in clause 6.

The conclusion for the test items of which are required by the applied standard is indicated under the test result.

- ☒ - The test result was **passed** for the test requirements of the applied standard.
- ☐ - The test result was **failed** for the test requirements of the applied standard.
- ☐ - The test result was **not judged** the test requirements of the applied standard.

In the approval of test results,

- Determining compliance with the limits in this report was based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
- No deviations were employed from the applied standard.
- No modifications were conducted by JQA to achieve compliance to the limitations.

Reviewed by
Shigeru Osawa / Deputy Manager



Tested by
Kazuma Yamakaji / Test Engineer



3 Test Procedure

Test Requirements : §15.247, §15.207 and §15.209

Test Procedure : ANSI C63.10–2013
Testing unlicensed wireless devices.

KDB 558074 D01
15.247 Meas Guidance v05r02: April 12, 2019

KDB 414788 D01
Radiated Test Site v01r01: July 12, 2018

4 Test Location

Japan Quality Assurance Organization (JQA)
KITA-KANSAI Testing Center
7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan
SAITO EMC Branch
7-3-10, Saito-asagi, Ibaraki-shi, Osaka 567-0085, Japan

5 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center SAITO EMC Branch is accredited under ISO/IEC 17025 by following accreditation bodies and the test facility is registered by the following bodies.

VLAC Accreditation No. : VLAC-001-2 (Expiry date : March 30, 2020)
VCCI Registration No. : A-0002 (Expiry date : March 30, 2020)
FCC Accreditation No. : JP5008 (Expiry date : March 30, 2020)
BSMI Registration No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-R1/R2-E-6006, SL2-A1-E-6006
(Expiry date : September 14, 2019)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Expiry date : February 22, 2022)

6 Description of Test Setup

6.1 Test Configuration

The equipment under test (EUT) consists of :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
A	Bluetooth Low Energy Module	Hosiden	HRM1062	8 *1) 10 *2)	VIYHRM1062

*1) Used for AC Powerline Conducted Emission and Field Strength of Spurious Emission.

*2) Used for Antenna Conducted Emission.


The auxiliary equipment used for testing :

	Item	Manufacturer	Model No.	Serial No.	FCC ID
B	Jig Board Bluetooth Low Energy Module	Hosiden	HRM1067	--	N/A
C	DC Power Source	KIKUSUI	PBZ40-10	QB001800	N/A

Type of Cable:

No.	Description	Identification (Manu. etc.)	Connector Shielded	Cable Shielded	Ferrite Core	Length (m)
1	DC Cable	--	--	NO	NO	2.0
2	AC Cable	--	NO	NO	NO	1.8

6.2 Test Arrangement (Drawings)

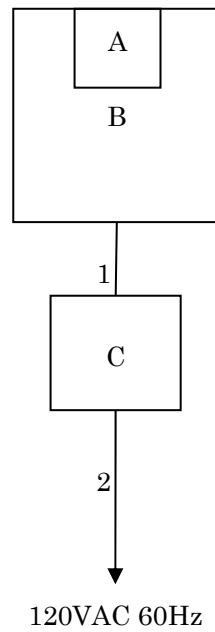

6.3 Operating Condition

Power Supply Voltage : 3.0 VDC (for Jig Board)
120 VAC, 60 Hz (For DC Power Supply)

Bluetooth Low Energy 2Mbps Mode :

Transmitting frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Receiver frequency : 2402.0 MHz(0CH) – 2480.0 MHz(39CH)

Modulation Type

Bluetooth Low Energy : GFSK

The tests were performed in the following worst condition.

Mode	Condition
Bluetooth Low Energy	2 Mbps

The EUT was rotated through three orthogonal axis (X, Y and Z axis) in radiated measurement.

The EUT with temporary antenna port was used in conducted measurement.

The tests were performed using the following test program supplied by applicant;

- Software Name : Tera Term
- Software Version : Version 4.99
- Storage Location : Controller PC

7 Test Requirements

7.0 Summary of the Test Results

Test Item	FCC Specification	Reference of the Test Report	Results	Remarks
Antenna Requirement	Section 15.203	Section 1.12	Passed	-
Channel Separation	Section 15.247(a)(1)	-	-	-
Minimum Hopping Channel	Section 15.247(a)(1)(iii)	-	-	-
Occupied Bandwidth	Section 15.247(a)(2)	Section 7.3	Passed	-
Dwell Time	Section 15.247(a)(1)(iii)	-	-	-
Peak Output Power (Conduction)	Section 15.247(b)(3)	Section 7.5	Passed	-
Peak Power Density (Conduction)	Section 15.247(e)	Section 7.6	Passed	-
Spurious Emissions (Conduction)	Section 15.247(d)	Section 7.7	Passed	-
AC Powerline Conducted Emission	Section 15.207	Section 7.8	Passed	-
Radiated Emission	Section 15.205 Section 15.209	Section 7.9	Passed	-
RF Exposure	Section 15.247(i)	Section 7.10	Passed	-

7.1 Channel Separation

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : _____

7.2 Minimum Hopping Channel

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : _____

7.3 Occupied Bandwidth

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.3.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

99% Bandwidth of BLE 2 Mbps is 2082.7 kHz at 2440.0 MHz

6dB Bandwidth of BLE 2 Mbps is 1209.0 kHz at 2440.0 MHz

Uncertainty of Measurement Results ± 0.9 %(2σ)

Remarks : _____

7.3.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2020/03/26
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2020/08/15
Attenuator	54A-10	W5732 (D-30)	Weinschel	2020/08/15

NOTE : The calibration interval of the above test instruments is 12 months.

7.3.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:

99% Occupied Bandwidth

Test Mode	Bluetooth LE 2 Mbps
Res. Bandwidth	30 kHz *1
Video Bandwidth	91 kHz
Span	6 MHz
Sweep Time	AUTO
Trace	Maxhold

*1) RBW is set to the range of 1 % to 5 % of the occupied bandwidth.

-6dBc Occupied Bndwidth

Test Mode	Bluetooth LE 2 Mbps
Res. Bandwidth	100 kHz
Video Bandwidth	300 kHz
Span	6 MHz
Sweep Time	AUTO
Trace	Maxhold

7.3.4 Test Data


Test Date :August 21, 2019

Temp.:24°C, Humi:73%

The resolution bandwidth was set to 100 kHz (for 6dB BW) or 1 - 5% of emission bandwidth (for 99% BW), -6dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

1) Bluetooth Low Energy


Channel	Frequency (MHz)	99% Bandwidth (MHz)	-6dBc Bandwidth (MHz)	Minimum -6dBc Bandwidth Limit (kHz)
00	2402.0	2.0807	1.163	500
19	2440.0	2.0827	1.209	500
39	2480.0	2.0696	1.157	500

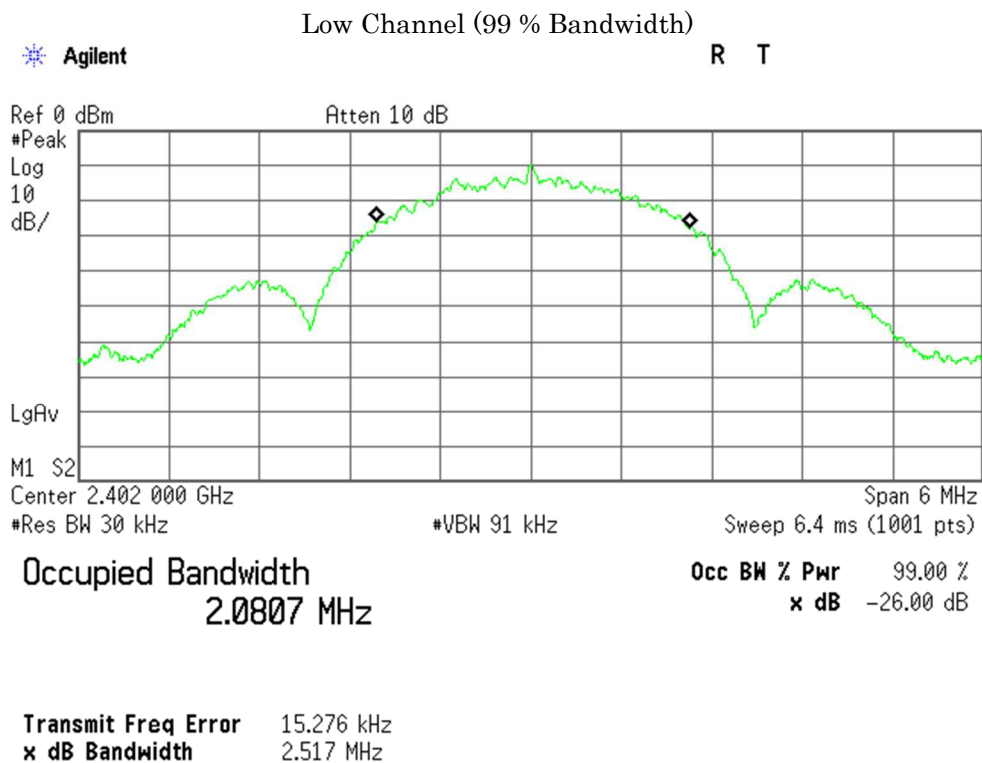

Middle Channel (99 % Bandwidth)

Agilent

R T

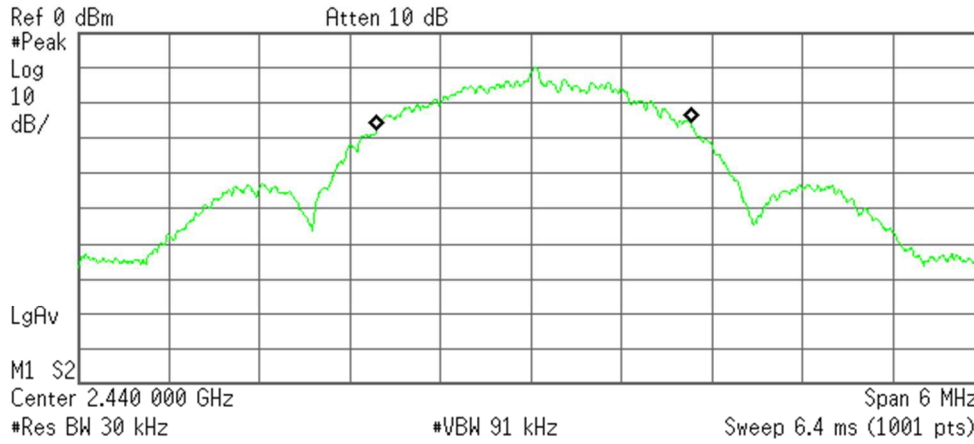

Occupied Bandwidth
 2.0827 MHz


Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 18.086 kHz
 x dB Bandwidth 2.500 MHz

High Channel (99 % Bandwidth)

Agilent



R T

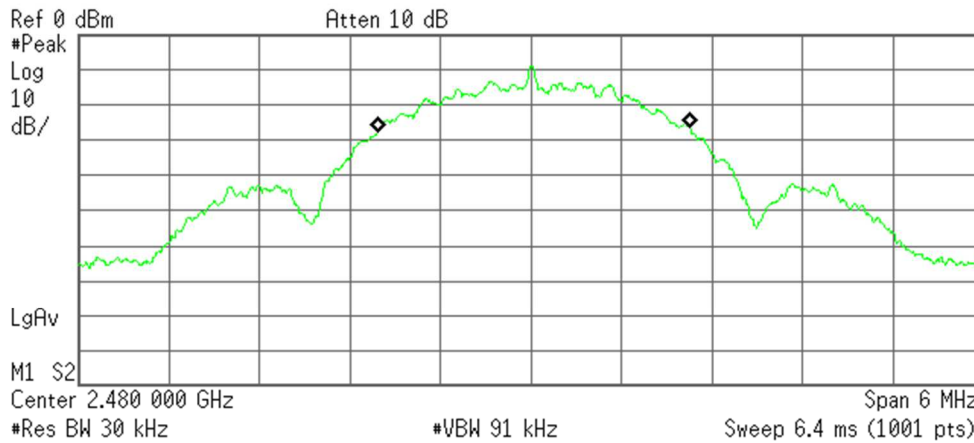


Occupied Bandwidth
 2.0696 MHz

Occ BW % Pwr 99.00 %
 x dB -26.00 dB

Transmit Freq Error 19.616 kHz
 x dB Bandwidth 2.420 MHz

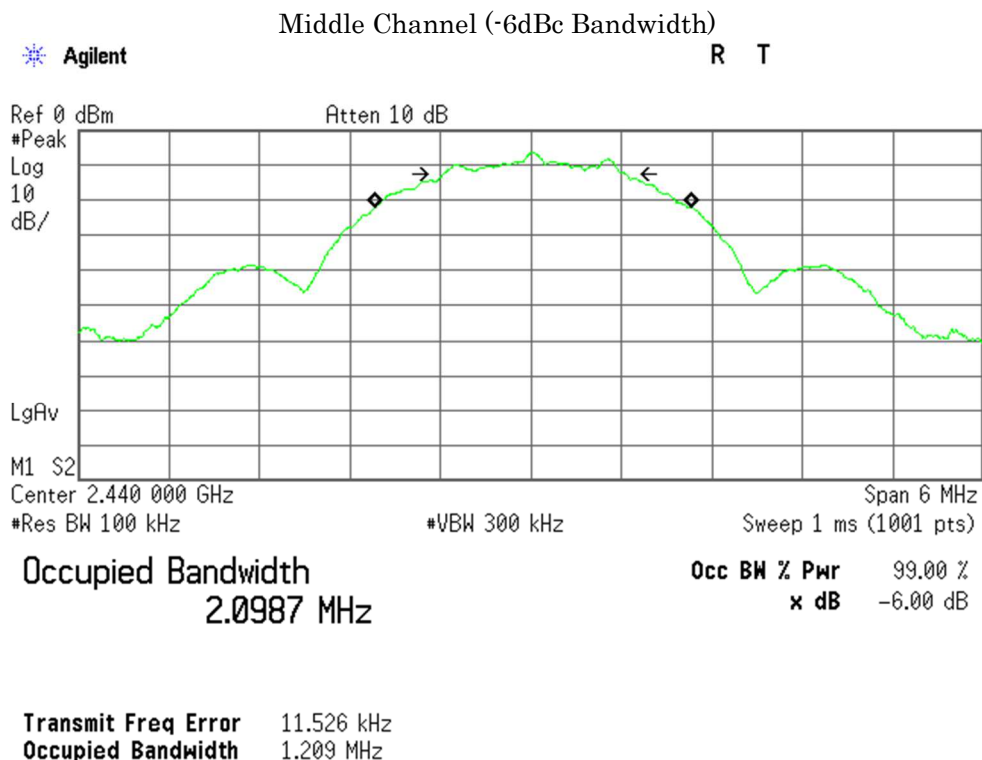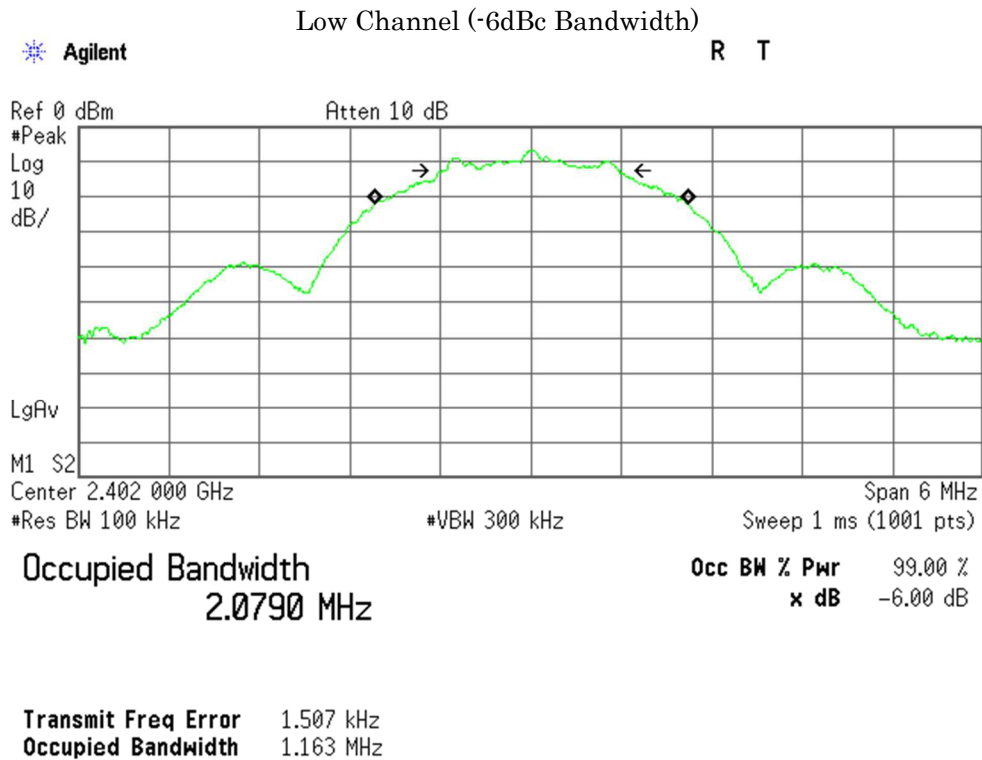

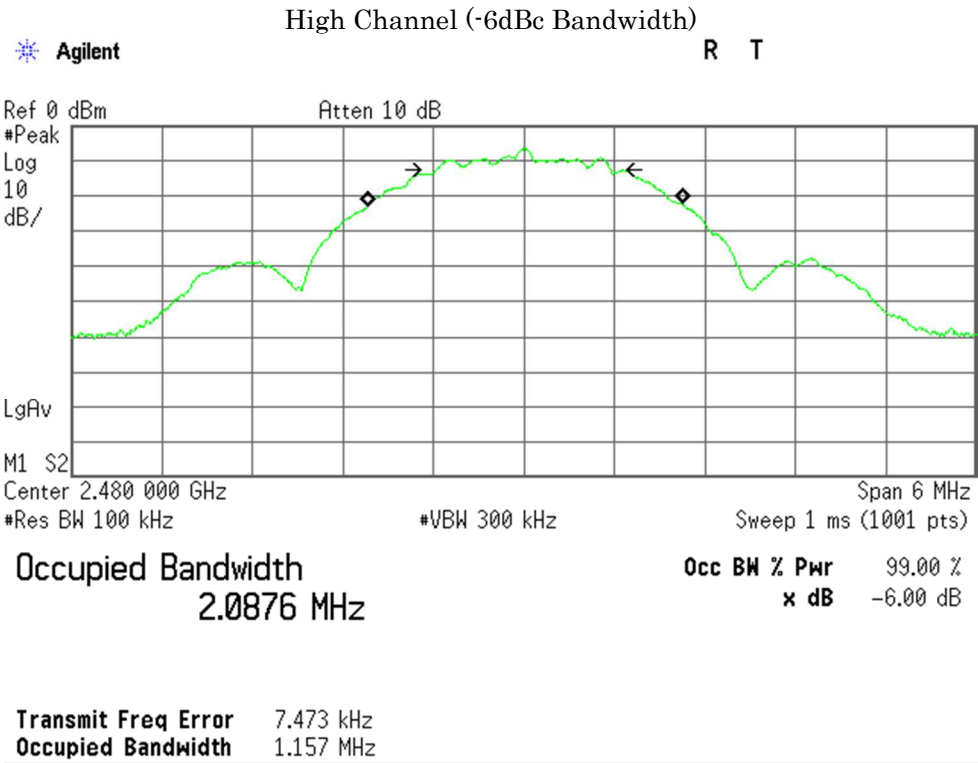

7.4 Dwell Time

For the requirements, ☐ - Applicable [☐ - Tested. ☐ - Not tested by applicant request.]
☒ - Not Applicable

Remarks : _____

7.5 Peak Output Power(Conduction)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.5.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Peak Output Power of BLE is _____ 3.51 _____ dBm at _____ 2440.0 _____ MHz

Uncertainty of Measurement Results _____ ± 0.9 _____ dB(2 σ)

Remarks : _____


7.5.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Power Meter	N1911A	GB45100291 (B-63)	Agilent	2020/07/22
Power Sensor	N1921A	US44510470 (B-64)	Agilent	2020/07/22
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2020/08/15
Attenuator	54A-10	W5732 (D-30)	Weinschel	2020/08/15

NOTE : The calibration interval of the above test instruments is 12 months.

7.5.3 Test Method and Test Setup (Diagrammatic illustration)

The Conducted RF Power Output was measured with a power meter, one attenuator and a short, low loss cable.



7.5.4 Test Data

1) Bluetooth Low Energy

Test Date: August 21, 2019
Temp.: 24 °C, Humi: 73 %

Transmitting Frequency		Correction Factor	Meter Reading	Conducted Peak Output Power		Limits	Margin
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.25	- 6.79	3.46	2.22	30.00	+26.54
19	2440	10.25	- 6.74	3.51	2.24	30.00	+26.49
39	2480	10.25	- 6.76	3.49	2.23	30.00	+26.51

Calculated result at 2440.000 MHz, as the worst point shown on underline:

Correction Factor	=	10.25 dB
+) Meter Reading	=	-6.74 dBm
Result	=	3.51 dBm = 2.24 mW

Minimum Margin: 30.00 - 3.51 = 26.49 (dB)

NOTES

1. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
2. Setting of measuring instrument(s) :

Detector Function	Video B.W.
Peak	Off

** Although the DC power supply voltage was varied between 85% and 115% of the nominal rated voltage, the Peak Output Power did not change.

7.6 Peak Power Density(Conduction)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.6.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Peak Power Density of BLE is 1.07 dBm at 2480.0 MHz

Uncertainty of Measurement Results ± 1.7 dB(2 σ)

Remarks : _____


7.6.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2020/03/26
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2020/08/15
Attenuator	54A-10	W5732 (D-30)	Weinschel	2020/08/15

NOTE : The calibration interval of the above test instruments is 12 months.

7.6.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



7.6.4 Test Data

1) Bluetooth Low Energy

Test Date: August 21, 2019

Temp.: 24 °C, Humi: 73 %

Transmitting Frequency		Correction	Meter Reading	Conducted		Limits	Margin
		Factor		Peak Power Density			
CH	[MHz]	[dB]	[dBm]	[dBm]	[mW]	[dBm]	[dB]
00	2402	10.25	−9.91	0.34	1.08	8.00	+ 7.66
19	2440	10.25	−10.82	−0.57	0.88	8.00	+ 8.57
39	2480	10.25	−9.18	1.07	1.28	8.00	+ 6.93

Calculated result at 2480.000 MHz, as the worst point shown on underline:


Correction Factor	=	10.25 dB
+) Meter Reading	=	-9.18 dBm
Result	=	1.07 dBm = 1.28 mW



Minimum Margin: 8.00 - 1.07 = 6.93 (dB)

NOTES

1. The peak power density complied with the limit using 30 kHz resolution bandwidth of Spectrum Analyzer.
2. The correction factor shows the attenuation pad loss including the short, low loss cable or adapter.
3. Setting of measuring instrument(s) :

Detector Function	RES B.W.	Video B.W.
Peak	30kHz	100kHz

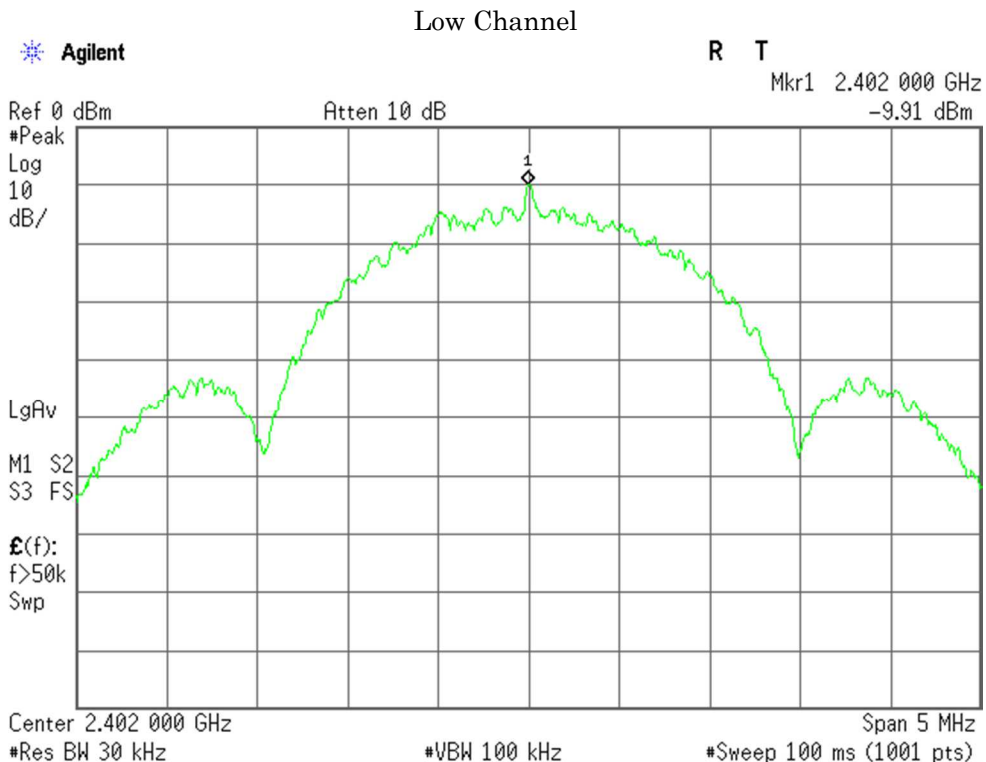

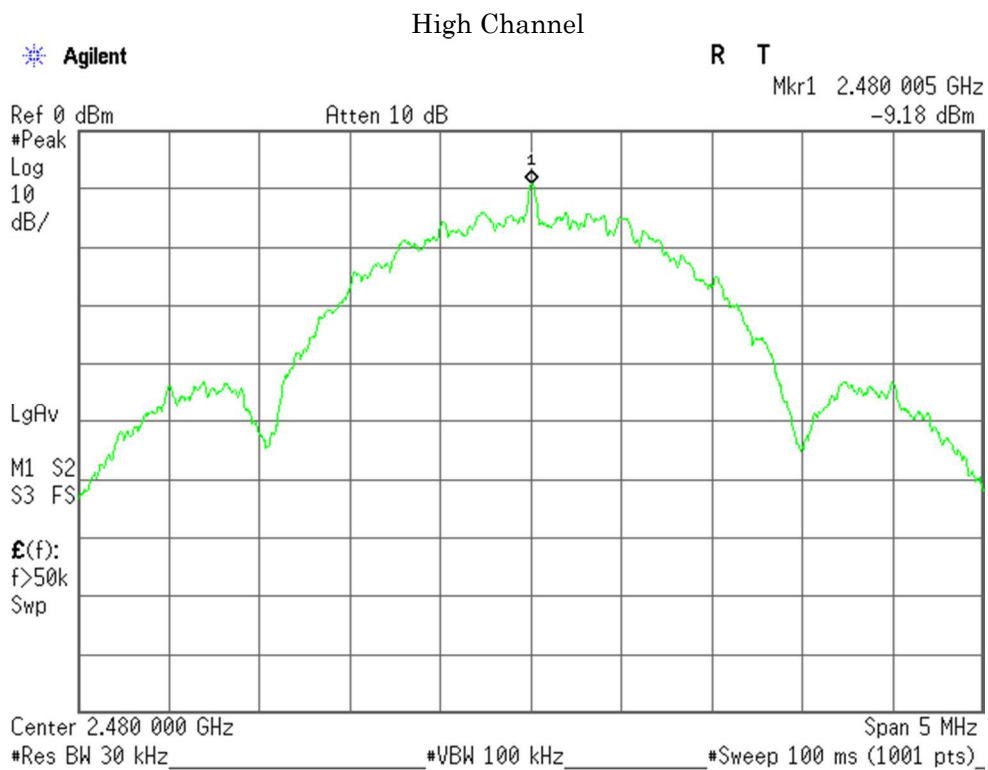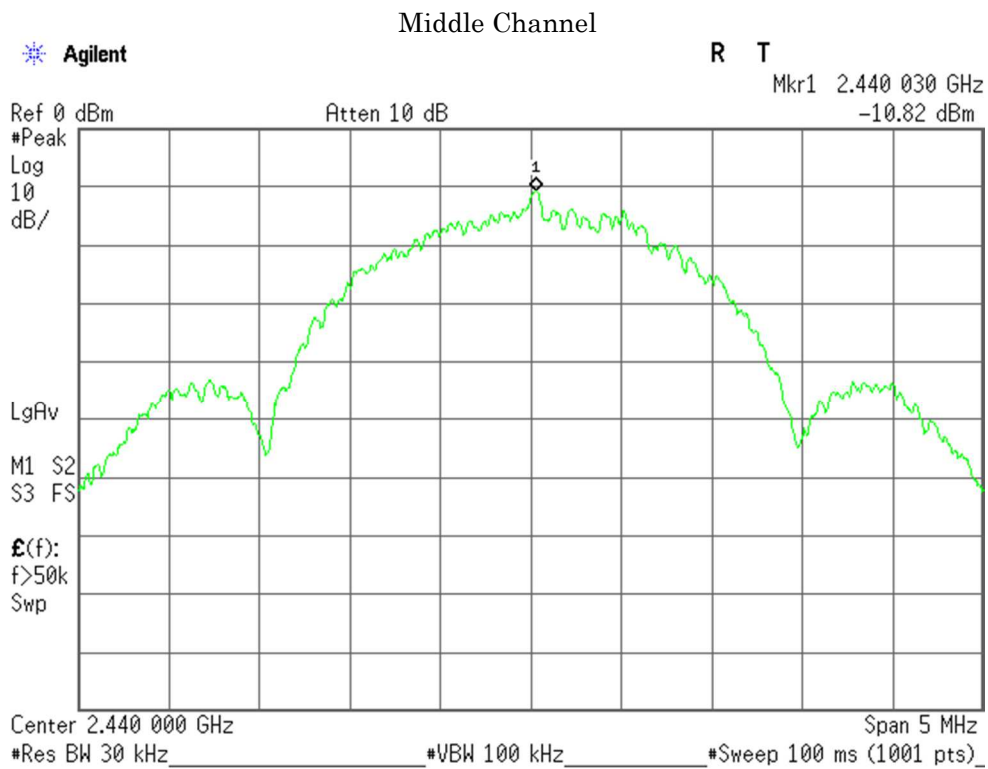

7.7 Spurious Emissions(Conduction)

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.7.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Uncertainty of Measurement Results

9 kHz – 1 GHz	± 1.4	dB(2 σ)
1 GHz – 18 GHz	± 1.7	dB(2 σ)
18 GHz – 40 GHz	± 2.3	dB(2 σ)

Remarks : _____


7.7.2 Test Instruments

Shielded Room S4				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Spectrum Analyzer	E4446A	US44300388 (A-39)	Agilent	2020/03/26
RF Cable	SF102	14253/2 (C-52)	HUBER+SUHNER	2020/08/15
Attenuator	54A-10	W5732 (D-30)	Weinschel	2020/08/15

NOTE : The calibration interval of the above test instruments is 12 months.

7.7.3 Test Method and Test Setup (Diagrammatic illustration)

The test system is shown as follows:



The setting of the spectrum analyzer are shown as follows:


Frequency Range	30 MHz - 25 GHz	Band-Edge
Res. Bandwidth	100 kHz	100 kHz
Video Bandwidth	300 kHz	300 kHz
Sweep Time	AUTO	AUTO
Trace	Maxhold	Maxhold

7.7.4 Test Data


Test Date : August 21, 2019

Temp.: 24°C, Humi: 73%


1) Bluetooth Low Energy

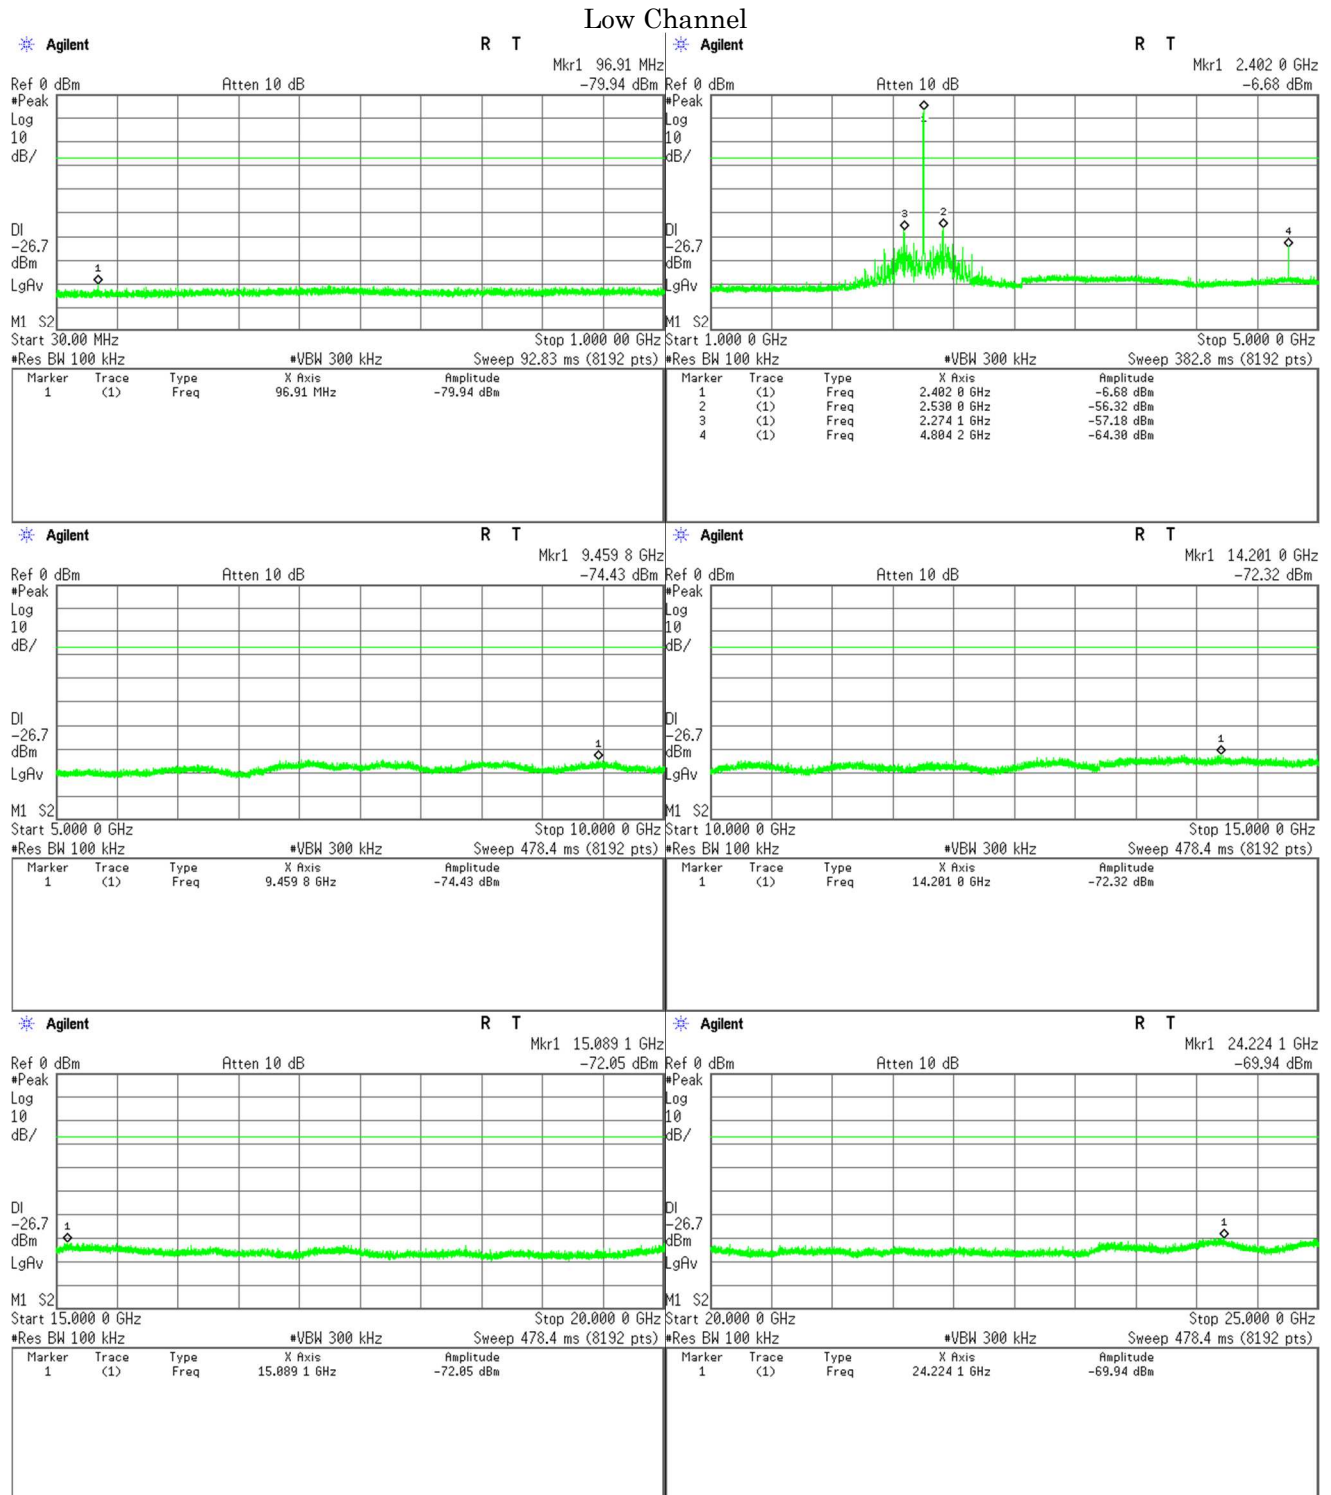

Middle Channel

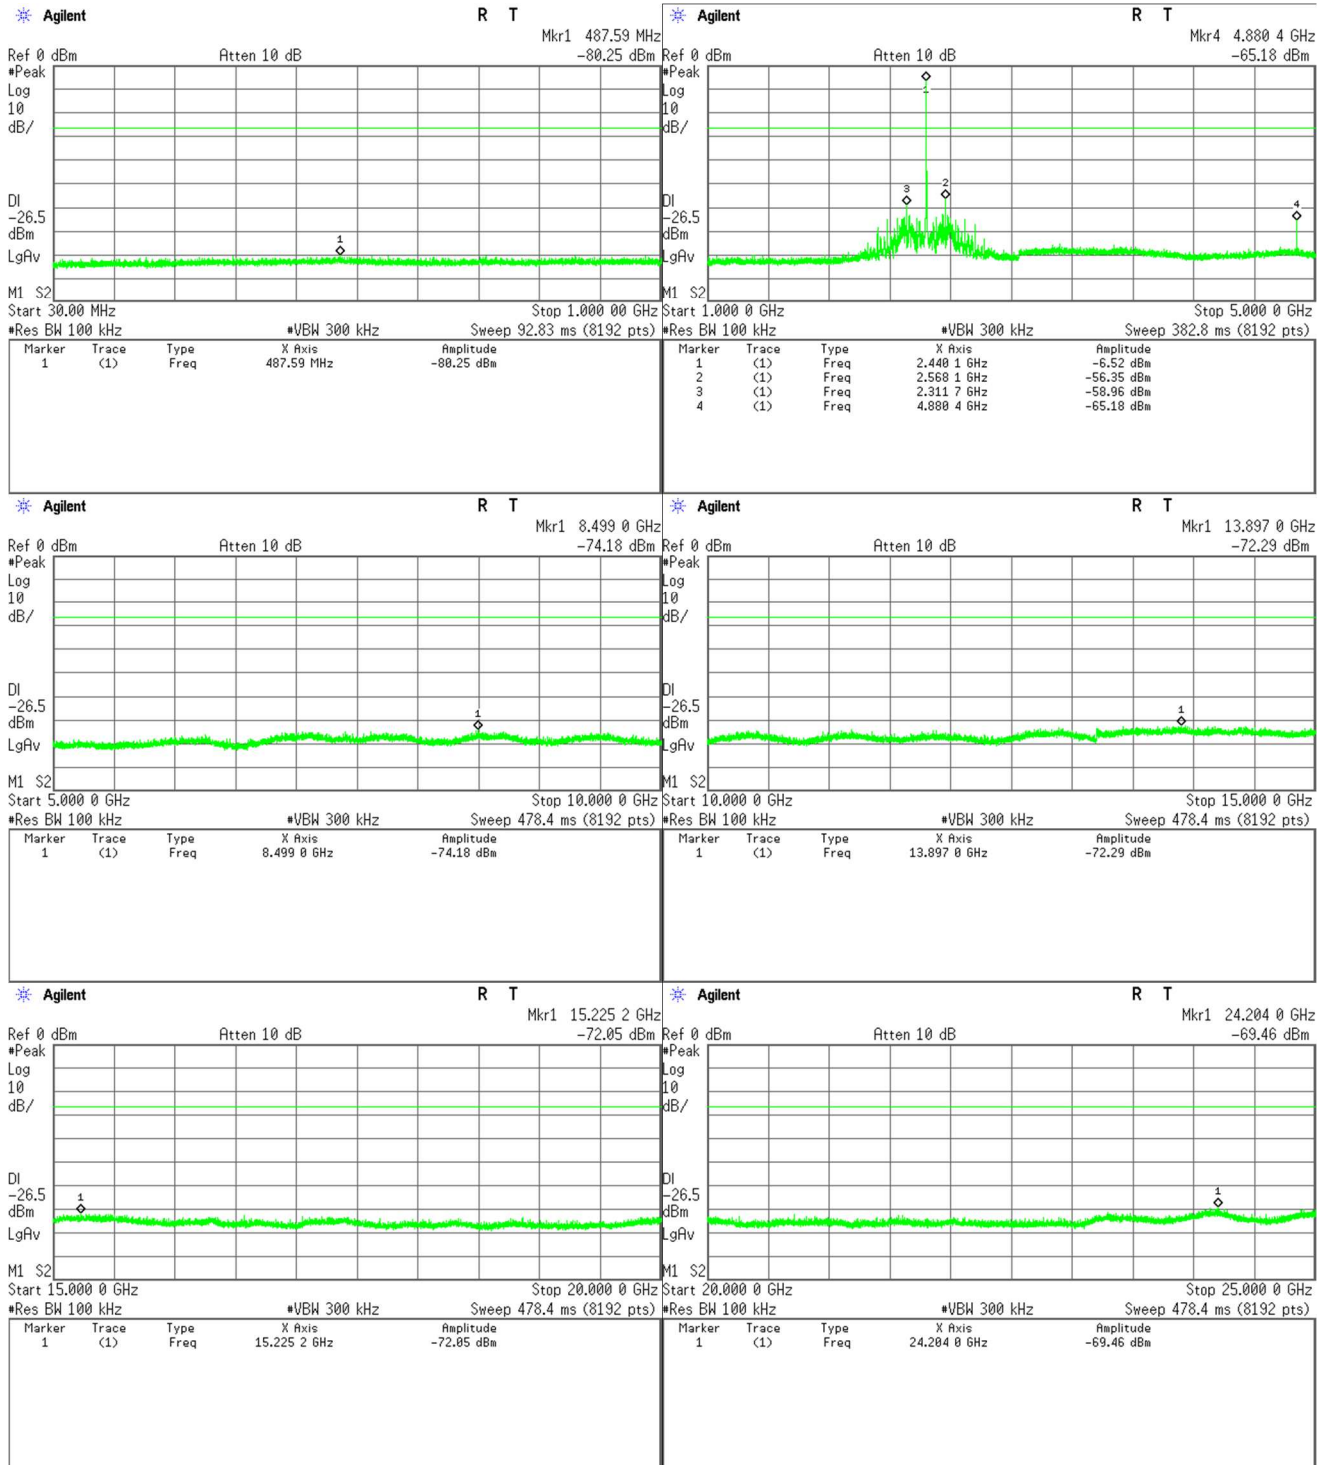

High Channel

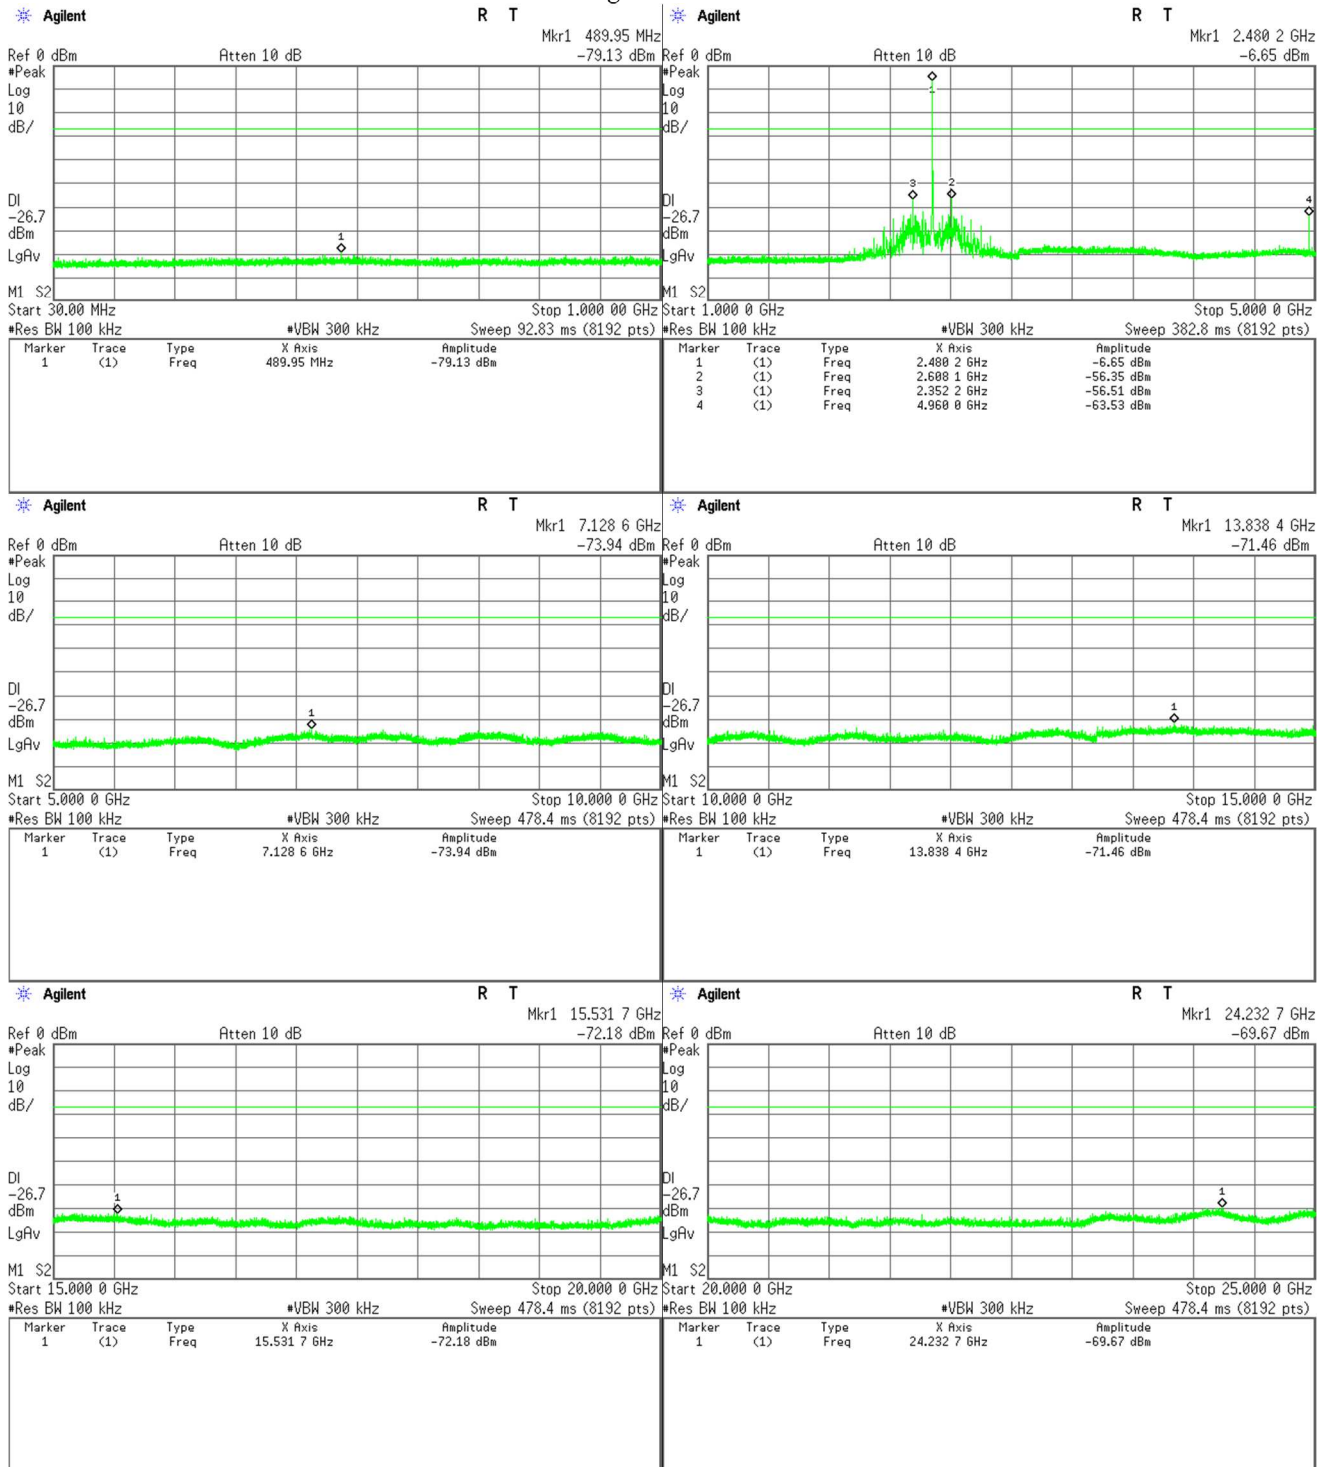


Band-Edge Emission

Test Date : August 21, 2019


Temp.: 24°C, Humi: 73%

1) Bluetooth Low Energy

Low Channel

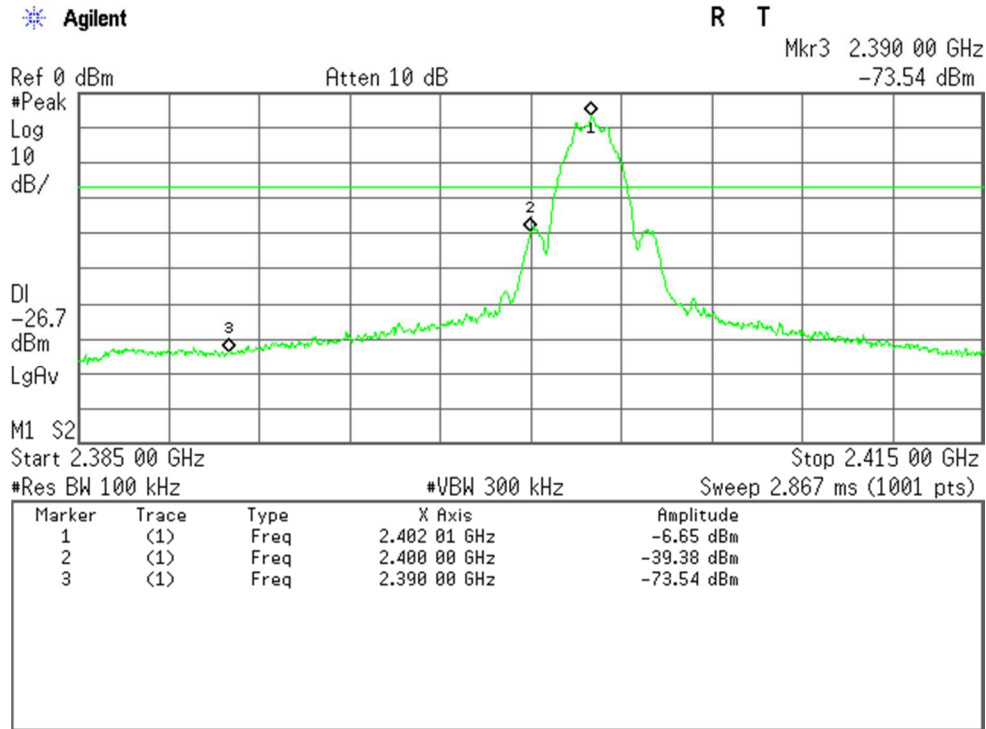

High Channel

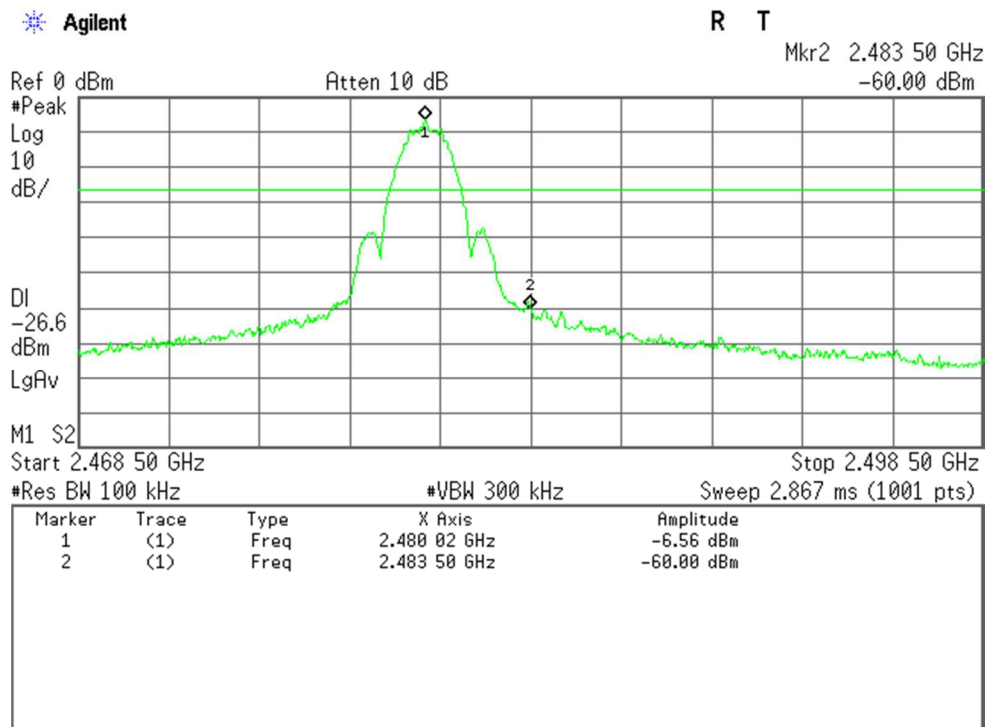

7.8 AC Powerline Conducted Emission

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.8.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Average) 5.9 dB at 0.2179 MHz

Uncertainty of Measurement Results ± 2.6 dB(2σ)

Remarks : _____

7.8.2 Test Instruments

Shielded Room S2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESCI	100453 (A-42)	Rohde & Schwarz	2019/12/10
AMN (main)	KNW-407FR	8-2019-1 (D-103)	Kyoritsu	2019/10/18
RF Cable	RG223/U	--- (H-35)	HUBER+SUHNER	2020/06/05

NOTE : The calibration interval of the above test instruments is 12 months.


7.8.3 Test Method and Test Setup (Diagrammatic illustration)

The preliminary tests were performed using the scan mode of test receiver or spectrum analyzer to observe the emissions characteristics of the EUT.

The EUT configuration, cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for final tests.

(Reference divisional instruction No. G703649)

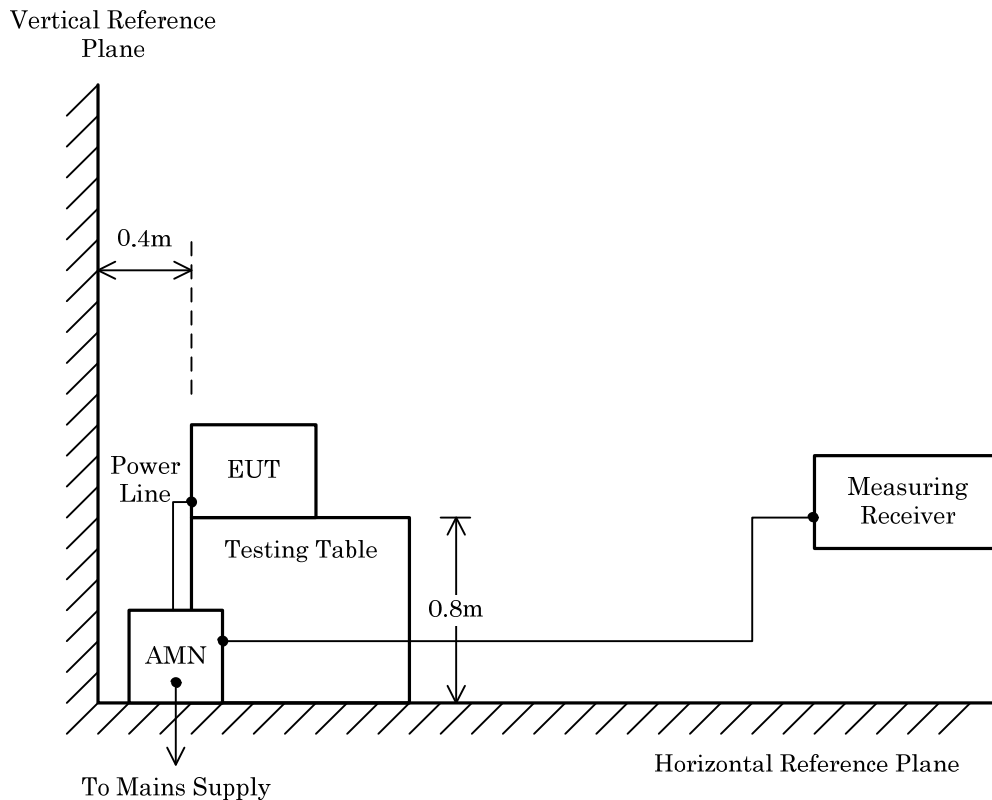

NOTE

AMN : Artificial Mains Network

7.8.4 Test Data


Mode of EUT : All modes have been investigated and the worst case mode for channel (19ch: 2440MHz / Bluetooth Low Energy) has been listed.

Test voltage : 3VDC (DC Power Supply : 120VAC 60Hz)

Test Date: September 17, 2019
 Temp.: 23 °C, RH: 67 %, Atm.: 995 hPa

Measured phase : L1

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.1605	10.6	28.5	--	65.4	55.4	39.1	--	+ 26.3	--	-
0.1781	10.6	32.9	--	64.6	54.6	43.5	--	+ 21.1	--	-
0.2176	10.5	31.5	--	62.9	52.9	42.0	--	+ 20.9	--	-
0.4373	10.5	31.2	--	57.1	47.1	41.7	--	+ 15.4	--	-
0.4856	10.5	29.3	--	56.2	46.2	39.8	--	+ 16.4	--	-
0.5352	10.5	29.7	--	56.0	46.0	40.2	--	+ 15.8	--	-

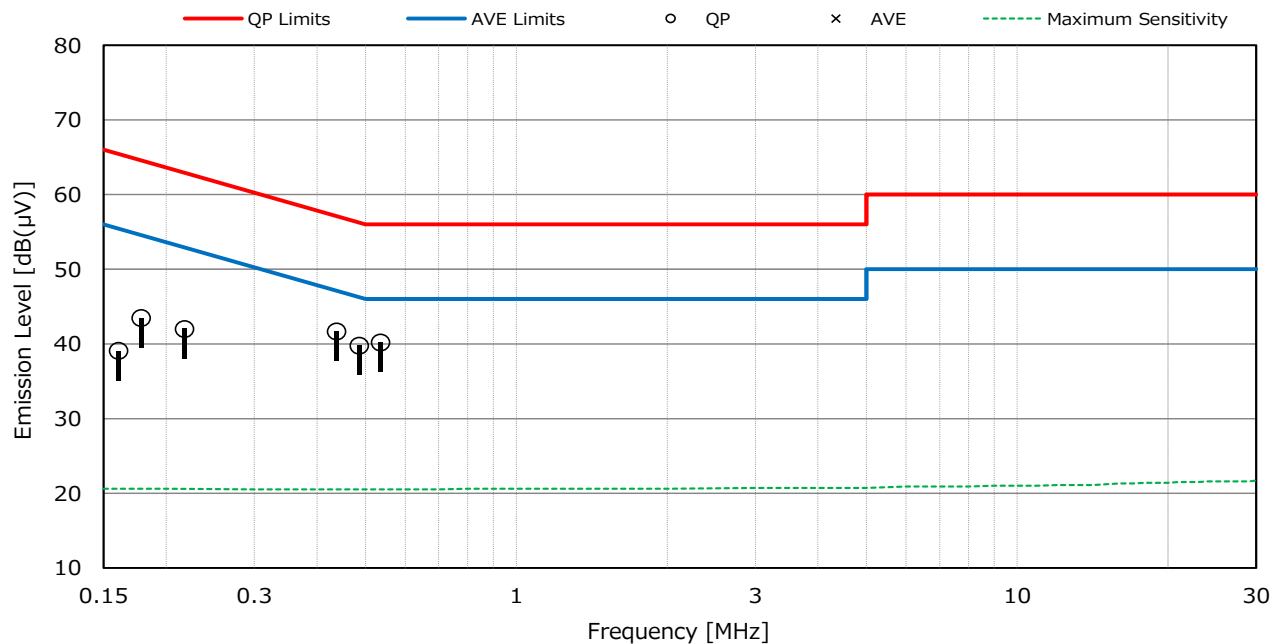


NOTES

- 1) The spectrum was checked from 150 kHz to 30 MHz.
- 2) The factor includes the AMN voltage division factor and the cable loss.
- 3) The symbol of "--" means "not applicable".
- 4) Calculated result as the worst point shown on underline :
 Factor + Reading (QP) = 10.5 + 31.2 = 41.7 dB(μV) at 0.4373 MHz
- 5) QP : Quasi-Peak detector, AVE : Average detector
- 6) Bandwidth : 9 kHz (150 kHz - 30 MHz)

Test voltage : 3VDC (DC Power Supply : 120VAC 60Hz)**Test Date: September 17, 2019****Temp.: 23 °C, RH: 67 %, Atm.: 995 hPa****Measured phase : L2**

Frequency [MHz]	Factor [dB]	Readings [dB(μV)]		Limits [dB(μV)]		Results [dB(μV)]		Margin [dB]		Remarks
		QP	AVE	QP	AVE	QP	AVE	QP	AVE	
0.1605	10.3	33.2	--	65.4	55.4	43.5	--	+ 21.9	--	-
0.1781	10.3	34.7	--	64.6	54.6	45.0	--	+ 19.6	--	-
0.2179	10.2	39.5	36.8	62.9	52.9	49.7	47.0	+ 13.2	+ 5.9	-
0.4373	10.2	26.6	--	57.1	47.1	36.8	--	+ 20.3	--	-
0.4856	10.2	26.8	--	56.2	46.2	37.0	--	+ 19.2	--	-
0.5352	10.2	29.8	--	56.0	46.0	40.0	--	+ 16.0	--	-

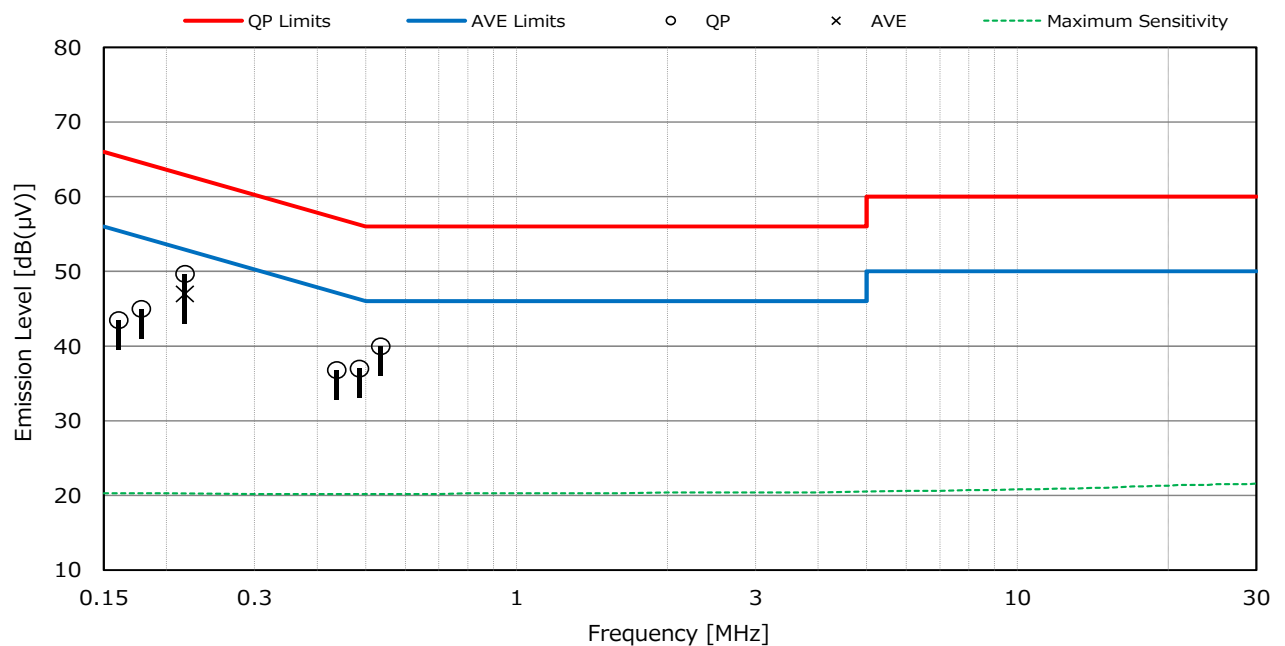**NOTES**

- 1) The spectrum was checked from 150 kHz to 30 MHz.
- 2) The factor includes the AMN voltage division factor and the cable loss.
- 3) The symbol of "--" means "not applicable".
- 4) Calculated result as the worst point shown on underline :
Factor + Reading (AVE) = 10.2 + 36.8 = 47.0 dB(μV) at 0.2179 MHz
- 5) QP : Quasi-Peak detector, AVE : Average detector
- 6) Bandwidth : 9 kHz (150 kHz - 30 MHz)

7.9 Radiated Emission

For the requirements, ☒ - Applicable [☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

7.9.1 Test Results

For the standard, ☒ - Passed ☐ - Failed ☐ - Not judged

Min. Limit Margin (Average) 6.9 dB at 2608.0 MHz

Uncertainty of Measurement Results

9 kHz – 30 MHz	<u>± 3.0</u>	dB(2σ)
30 MHz – 300 MHz	<u>± 3.8</u>	dB(2σ)
300 MHz – 1000 MHz	<u>± 4.8</u>	dB(2σ)
1 GHz – 6 GHz	<u>± 4.7</u>	dB(2σ)
6 GHz – 18 GHz	<u>± 4.6</u>	dB(2σ)
18 GHz – 40 GHz	<u>± 5.5</u>	dB(2σ)

Remarks : Y axis position.

7.9.2 Test Instruments

Anechoic Chamber A2				
Type	Model	Serial No. (ID)	Manufacturer	Cal. Due
Test Receiver	ESU 26	100170 (A-6)	Rohde & Schwarz	2019/11/08
Loop Antenna	HFH2-Z2	860605/030 (C-3)	Rohde & Schwarz	2020/08/04
Biconical Antenna	VHA9103/BBA9106	2355 (C-30)	Schwarzbeck	2020/05/28
Log-periodic Antenna	VULP9118B	870 (C-25)	Schwarzbeck	2019/11/14
Double-Ridge Guide Horn Antenna	TR17206	73370006 (C-29)	ADVANTEST	2020/06/04
Horn Antenna	3160-07	9902-1113 (C-58)	EMCO	2020/06/04
Horn Antenna	3160-08	9904-1099 (C-59)	EMCO	2020/06/04
Horn Antenna	3160-09	9808-1117 (C-48)	EMCO	2020/06/24
Pre-Amplifier	TPA0118-36	1010 (A-37)	TOYO	2020/05/19
Pre-Amplifier	RP1826G-45H	RP140121-11 (A-53)	EMCS	2020/06/24
Attenuator	54A-10	W5732 (D-30)	Weinschel	2020/08/15
RF Cable	RG213/U	--- (H-29)	HUBER+SUHNER	2020/08/04
RF Cable	S 10162 B-11 etc.	--- (H-4)	HUBER+SUHNER	2020/04/01
RF Cable	SF102E	6683/2E (C-70)	HUBER+SUHNER	2019/12/06
RF Cable	SF102E	10055/2E (C-75)	HUBER+SUHNER	2019/12/18
RF Cable	SF102EA	3041/2EA (C-69)	HUBER+SUHNER	2019/12/18

NOTE : The calibration interval of the above test instruments is 12 months.

7.9.3 Test Method and Test Setup (Diagrammatic illustration)

7.9.3.1 Radiated Emission 9 kHz – 30 MHz


The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

The measurement were performed about three antenna orientations (parallel, perpendicular, and ground-parallel).

According to KDB 414788, a used anechoic chamber were equivalent to those on an open fields site based on comparison measurements.

This configurations was used for the final tests.

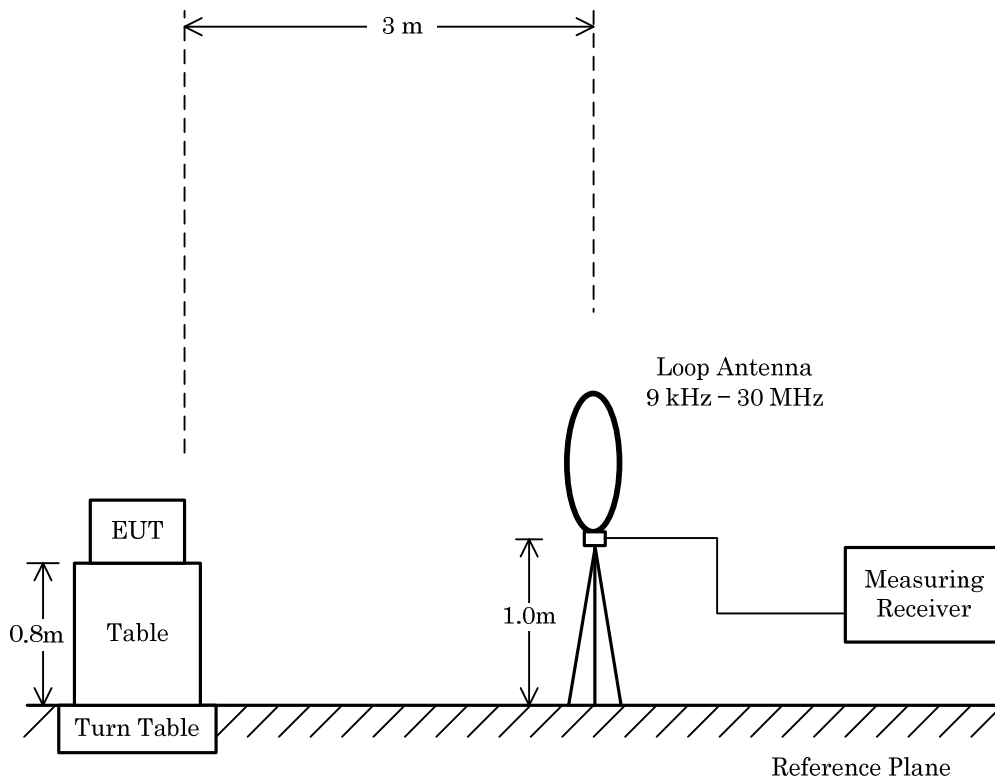


7.9.3.2 Radiated Emission 30 MHz – 1000 MHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

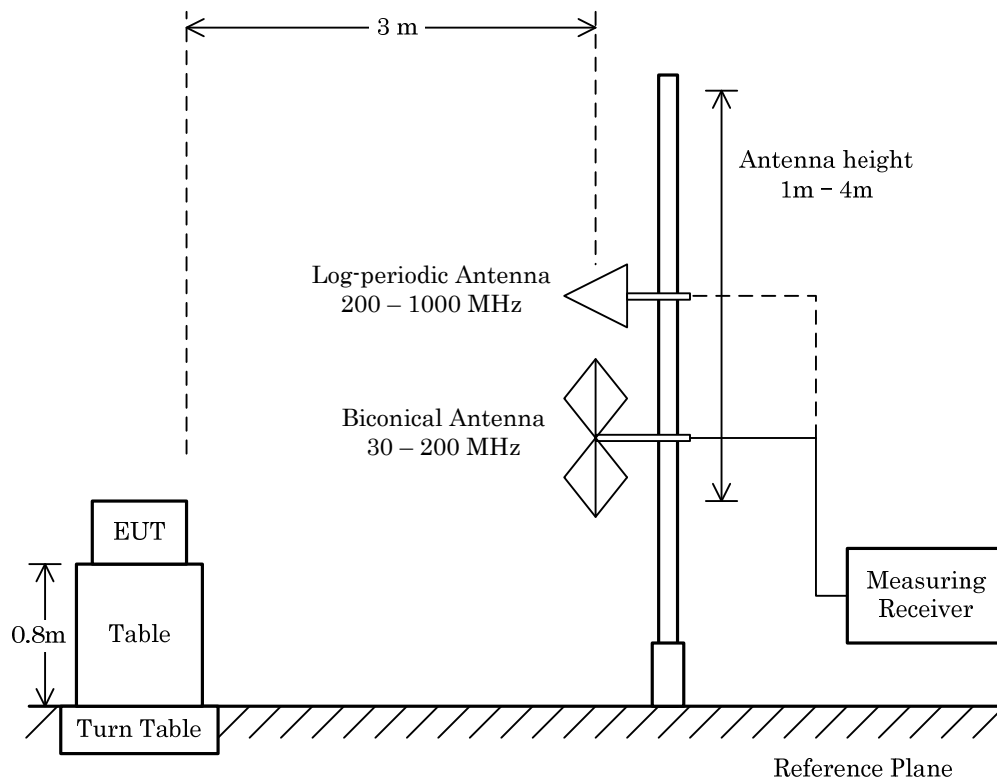

7.9.3.3 Radiated Emission above 1 GHz

The preliminary tests were performed at the measurement distance that specified for compliance to determine the emission characteristics of the EUT.

The EUT configuration (in X, Y and Z axis), cable configuration and mode of operation were determined for producing the maximum level of emissions.

This configurations was used for the final tests.

The setting of the measuring instruments are shown as follows:


Type	Peak	Average
Detector Function	Peak	Peak
Res. Bandwidth	1 MHz	1 MHz
Video Bandwidth	3 MHz	$\geq 1/T$ *)
Video Filtering	Linear Voltage	Linear Voltage
Sweep Time	AUTO	AUTO
Trace	Max Hold	Max Hold

*) T: Minimum transmission duration

Average (VBW) Setting:

Bluetooth Low Energy 2 Mbps

Mode	Interval	Cycle	Duty cycle	Burst on period(T)	Min. VBW(1/T)	VBW Setting
	(msec)	(msec)	(%)	(msec)	(kHz)	(kHz)
BLE 2 Mbps	0.12	1.18	89.8%	1.06	0.95	1.00

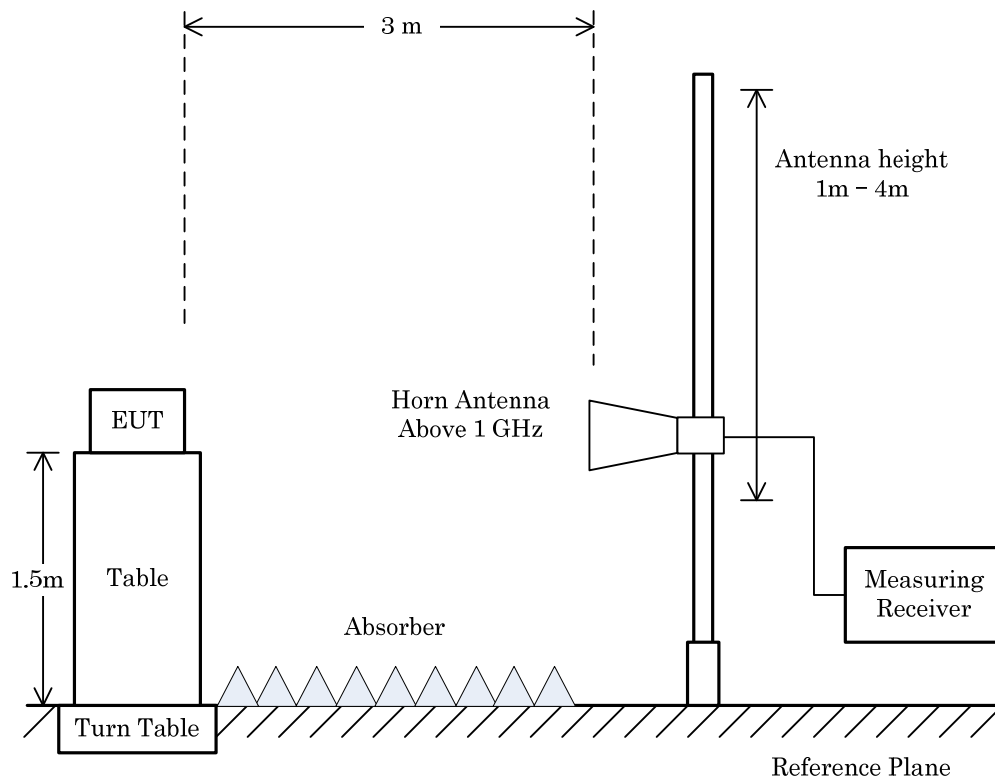

NOTE

When the EUT is manipulated through three different orientations, the scan height upper range for the measurement antenna is limited to 2.5 m or 0.5 m above the top of the EUT.

7.9.4 Test Data


7.9.4.1 Band-edge Compliance

Test Date : August 26, 2019

Temp.: 25°C, Humi: 60%

Mode of EUT : 0ch: 2402 MHz, (Bluetooth Low Energy)


Antenna Polarization : Horizontal

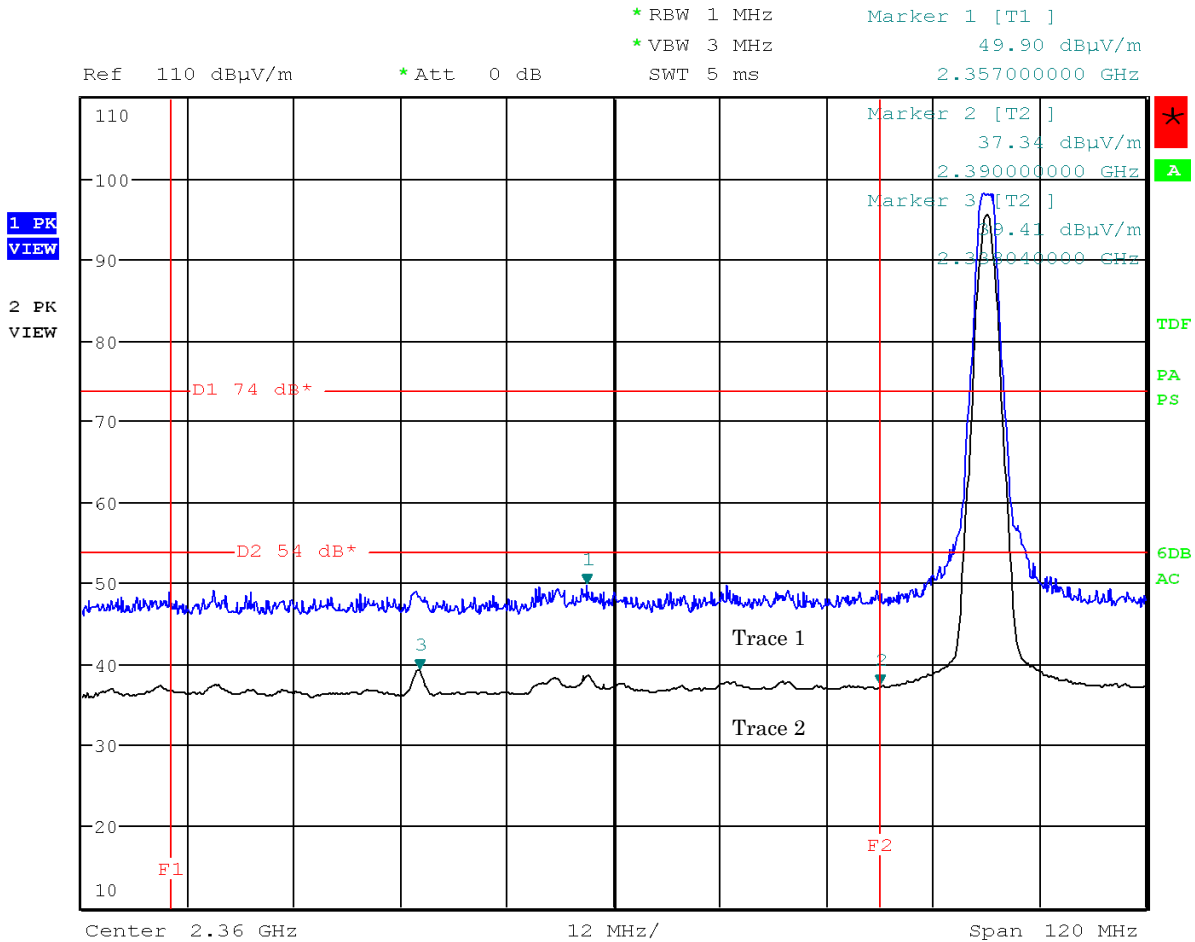

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 0ch: 2402 MHz, (Bluetooth Low Energy)


Antenna Polarization : Vertical

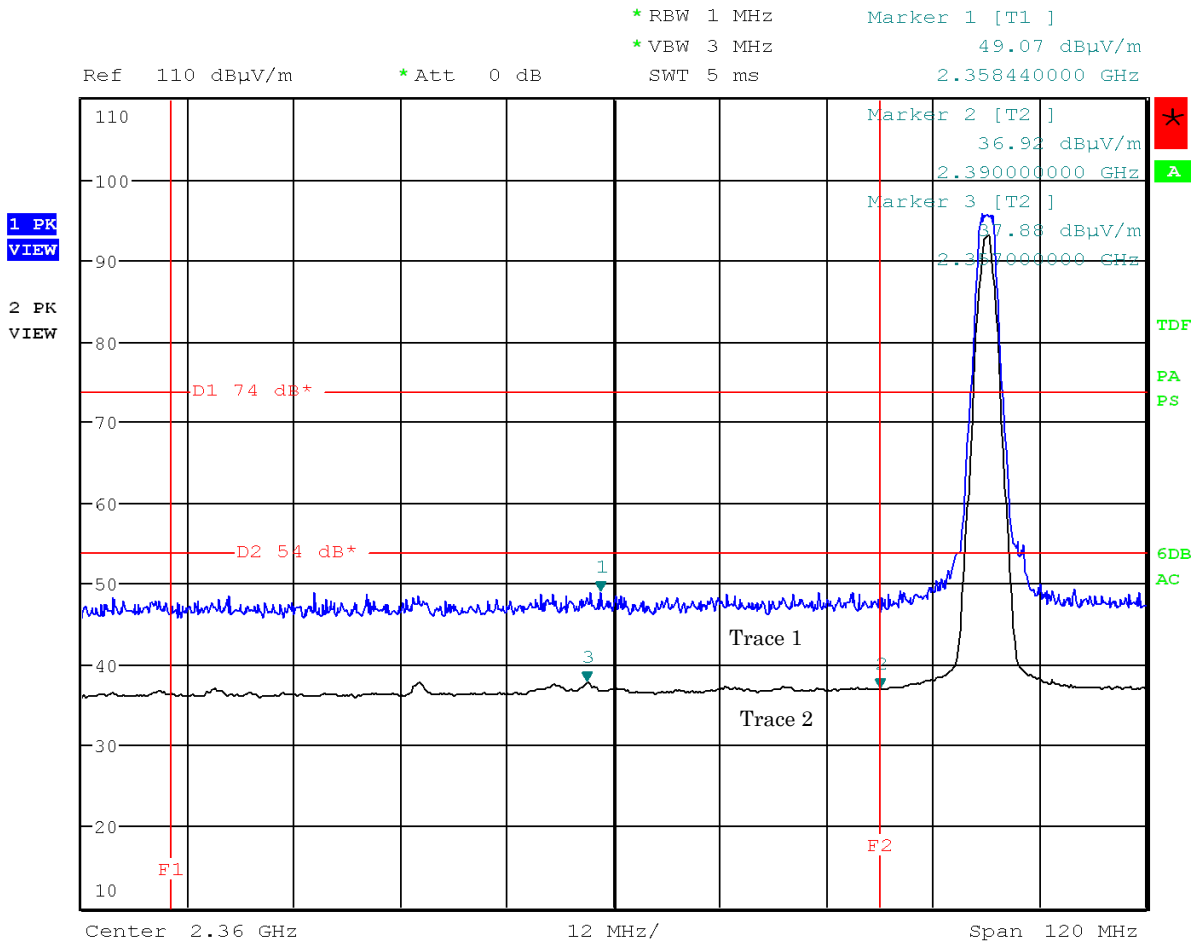

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 39ch: 2480 MHz, (Bluetooth Low Energy)


Antenna Polarization : Horizontal

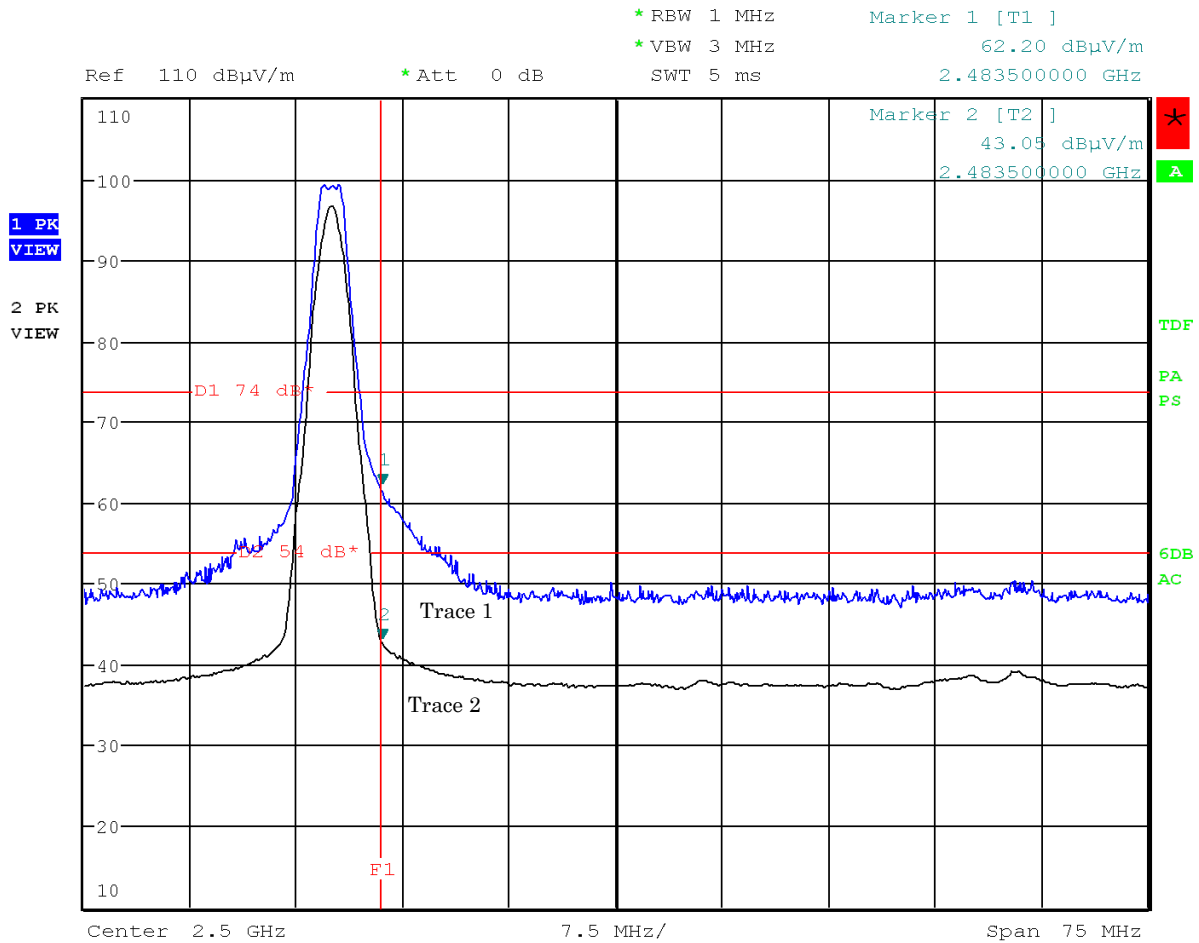

Note: The trace 1 is Peak . The trace 2 is Average.

Mode of EUT : 39ch: 2480 MHz, (Bluetooth Low Energy)

Antenna Polarization : Vertical

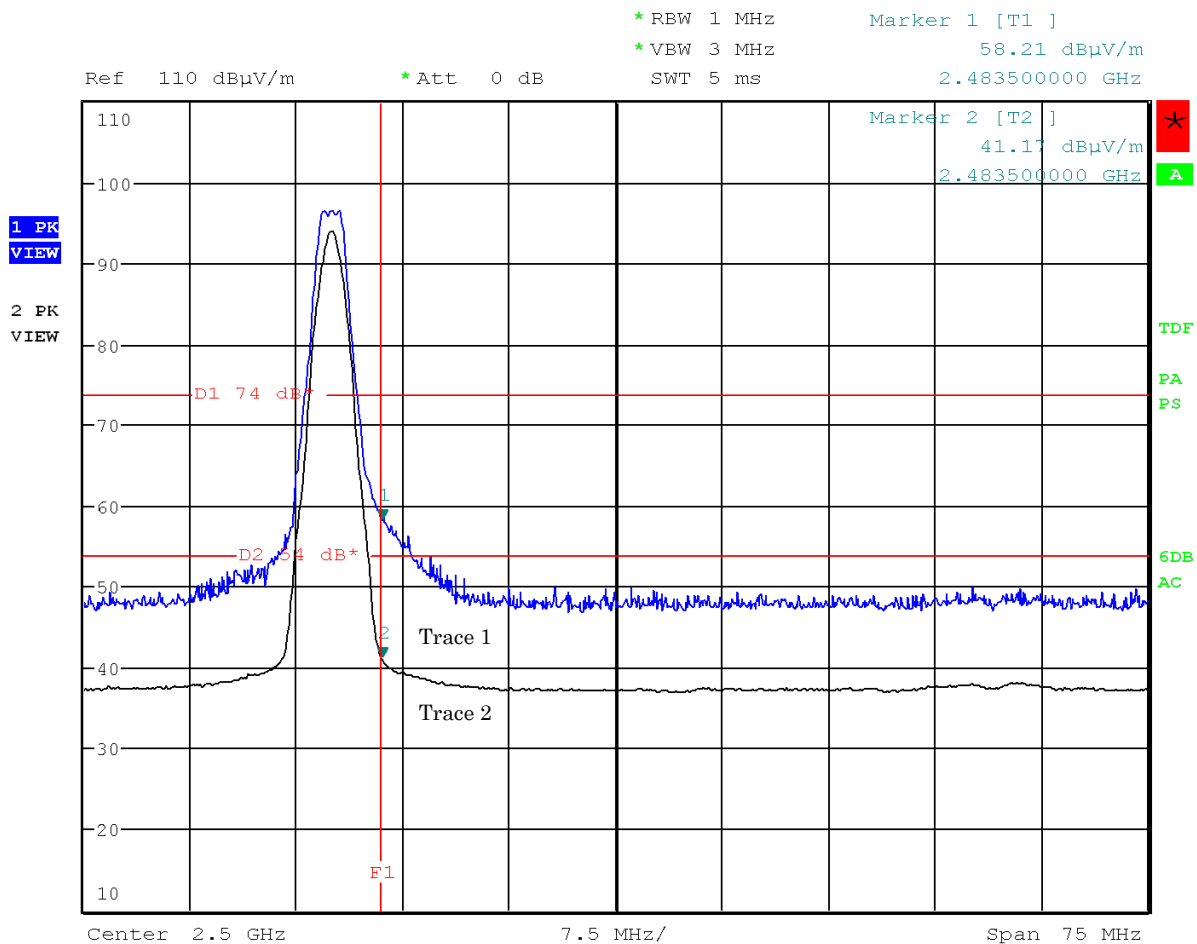

Note: The trace 1 is Peak . The trace 2 is Average.

7.9.4.2 Other Spurious Emission (9kHz – 30MHz)


Mode of EUT : Bluetooth LE

Results : No spurious emissions in the range 20dB below the limit.

Test voltage : 3VDC (DC Power Supply : 120VAC 60Hz)

Test Date: September 3, 2019

Temp.: 27 °C, RH: 54 %, Atm.: 999 hPa

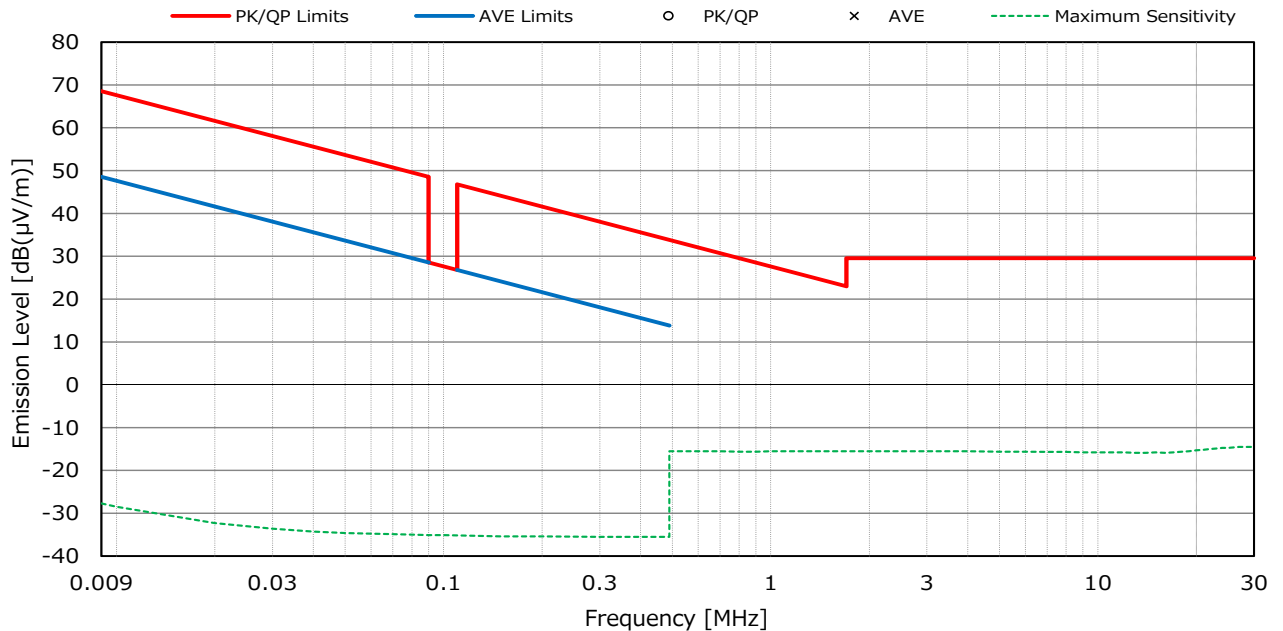

NOTES

- 1) Measurement Distance : 3 m (Specified Distance : 30 m)
- 2) The spectrum was checked from 9 kHz to 30 MHz.
- 3) PK/QP : Quasi-Peak detector, AVE : Average detector
- 4) Bandwidth : 200 Hz (9 kHz - 150 kHz), 9 kHz (150 kHz - 30 MHz)
- 5) All emission levels were below the noise floor, or more than 15 dB below the applied limits.

7.9.4.3 Other Spurious Emission (30MHz – 1000MHz)


Mode of EUT : All modes have been investigated and the worst case mode for channel (19ch: 2440MHz / Bluetooth Low Energy) has been listed.

Test voltage : 3VDC (DC Power Supply : 120VAC 60Hz)

Test Date: September 3, 2019

Temp.: 25 °C, RH: 68 %, Atm.: 1002 hPa

Antenna polarization : Horizontal

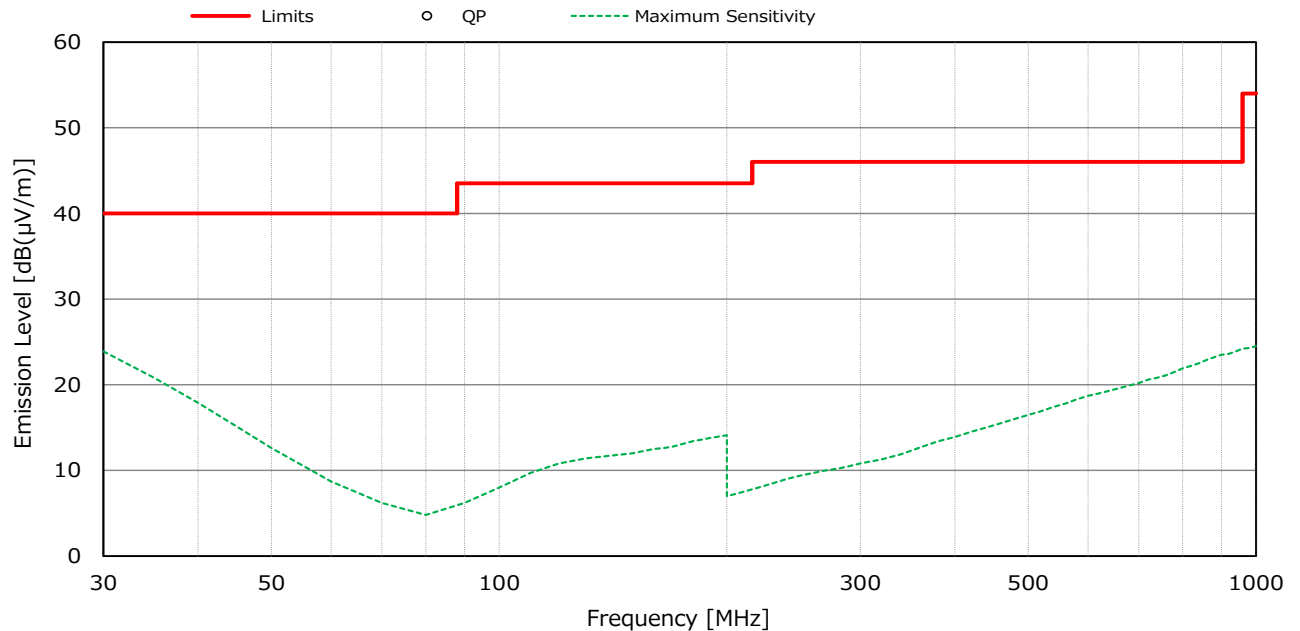

NOTES


- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 30 MHz to 1000 MHz.
- 3) QP : Quasi-Peak detector
- 4) Bandwidth : 120 kHz (30 MHz - 1000 MHz)
- 5) All emission levels were below the noise floor, or more than 15 dB below the applied limits.

Test voltage : 3VDC (DC Power Supply : 120VAC 60Hz)

Test Date: September 3, 2019

Temp.: 25 °C, RH: 68 %, Atm.: 1002 hPa

Antenna polarization : Vertical

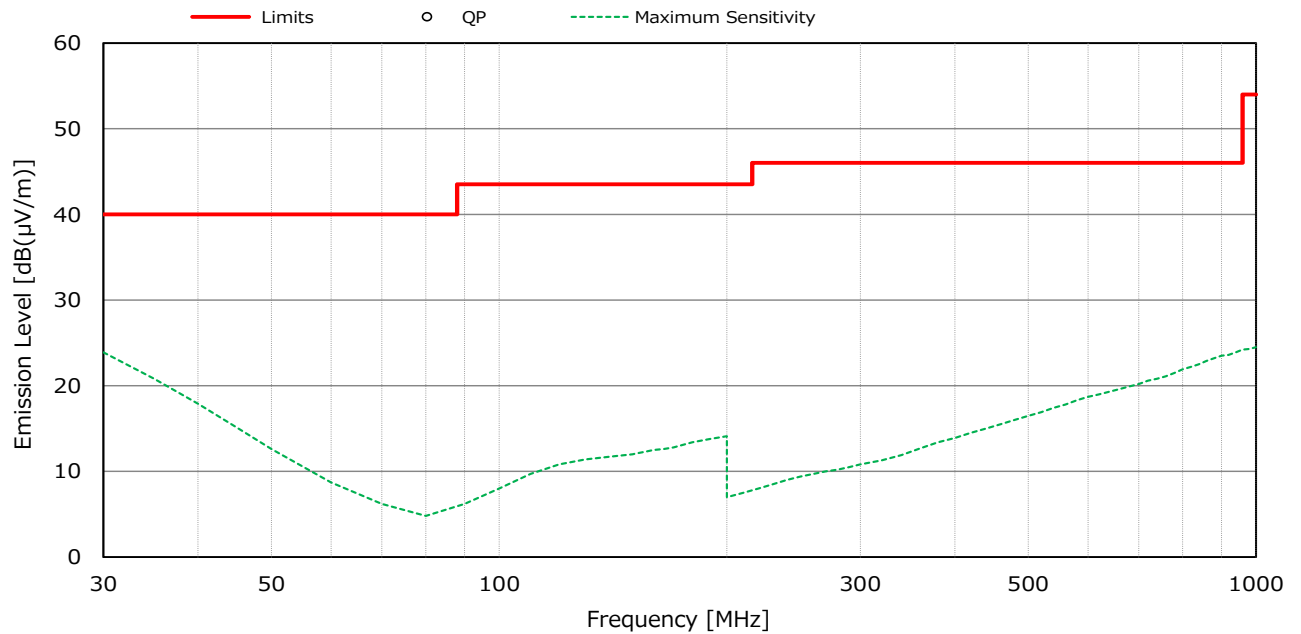

NOTES

- 1) Measurement Distance : 3 m
- 2) The spectrum was checked from 30 MHz to 1000 MHz.
- 3) QP : Quasi-Peak detector
- 4) Bandwidth : 120 kHz (30 MHz - 1000 MHz)
- 5) All emission levels were below the noise floor, or more than 15 dB below the applied limits.

7.9.4.4 Other Spurious Emission (Above 1000MHz)

Mode of EUT : Bluetooth Low Energy

Test Date: August 26, 2019

Temp: 26 °C, Humi: 68 %

Frequency	Antenna	Corr.	Meter Readings [dB(μV)]				Limits		Results		Margin	Remarks
	Factor	Factor	Horizontal		Vertical		[dB(μV/m)]		[dB(μV/m)]		[dB]	
	[MHz]	[dB(1/m)]	[dB]	PK	AVE	PK	AVE	PK	AVE	PK	AVE	
Test condition : Tx Low Ch												
2274.0	27.9	3.7	18.0	9.2	18.0	7.7	74.0	54.0	49.6	40.8	+13.2	—
2530.0	28.7	3.7	22.0	14.6	20.1	12.1	74.0	54.0	54.4	47.0	+ 7.0	—
4804.0	32.9	−31.7	45.0	30.4	43.6	33.8	74.0	54.0	46.2	35.0	+19.0	—
12010.0	39.2	−29.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 50.0	< 40.0	> +14.0	—
19216.0	−5.8	11.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.2	< 35.2	> +18.8	—
Test condition : TX Middle Ch												
2312.0	28.0	3.7	17.9	8.8	17.6	6.8	74.0	54.0	49.6	40.5	+13.5	—
2568.0	28.7	3.7	20.2	12.2	18.4	9.2	74.0	54.0	52.6	44.6	+ 9.4	—
4880.0	33.1	−31.6	44.4	35.2	43.3	34.6	74.0	54.0	45.9	36.7	+17.3	—
7320.0	36.4	−31.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.0	< 35.0	> +19.0	—
12200.0	39.0	−29.4	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 49.6	< 39.6	> +14.4	—
19520.0	−5.8	11.1	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.3	< 35.3	> +18.7	—
Test condition : TX High Ch												
2352.0	28.3	3.7	21.3	13.6	19.1	10.9	74.0	54.0	53.3	45.6	+ 8.4	—
2608.0	28.8	3.7	21.5	14.6	19.6	11.7	74.0	54.0	54.0	47.1	+ 6.9	—
4960.0	33.2	−31.5	44.0	35.3	43.5	34.6	74.0	54.0	45.7	37.0	+17.0	—
7440.0	36.5	−31.3	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.2	< 35.2	> +18.8	—
12400.0	38.8	−29.9	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 48.9	< 38.9	> +15.1	—
19840.0	−6.0	11.2	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.2	< 35.2	> +18.8	—
22320.0	−6.5	12.0	< 40.0	< 30.0	< 40.0	< 30.0	74.0	54.0	< 45.5	< 35.5	> +18.5	—

Calculated result at 2608.0 MHz, as the worst point shown on underline:

Antenna Factor = 28.8 dB(1/m)

Corr. Factor = 3.7 dB

+) Meter Reading = 14.6 dB(μV)

Result = 47.1 dB(μV/m)


Minimum Margin: 54.0 - 47.1 = 6.9 (dB)

NOTES

1. Test Distance : 3 m
2. The spectrum was checked from 1 GHz to 25 GHz (10th harmonic of the highest fundamental frequency).
3. The correction factor is shown as follows:
Corr. Factor [dB] = Cable Loss - Pre-Amp. Gain [dB]
4. The symbol of "<" means "or less".
5. The symbol of ">" means "more than".
6. PK : Peak / AVE : Average

Mode of EUT : Bluetooth Low Energy

TX Low/Middle/High ch (Horizontal)

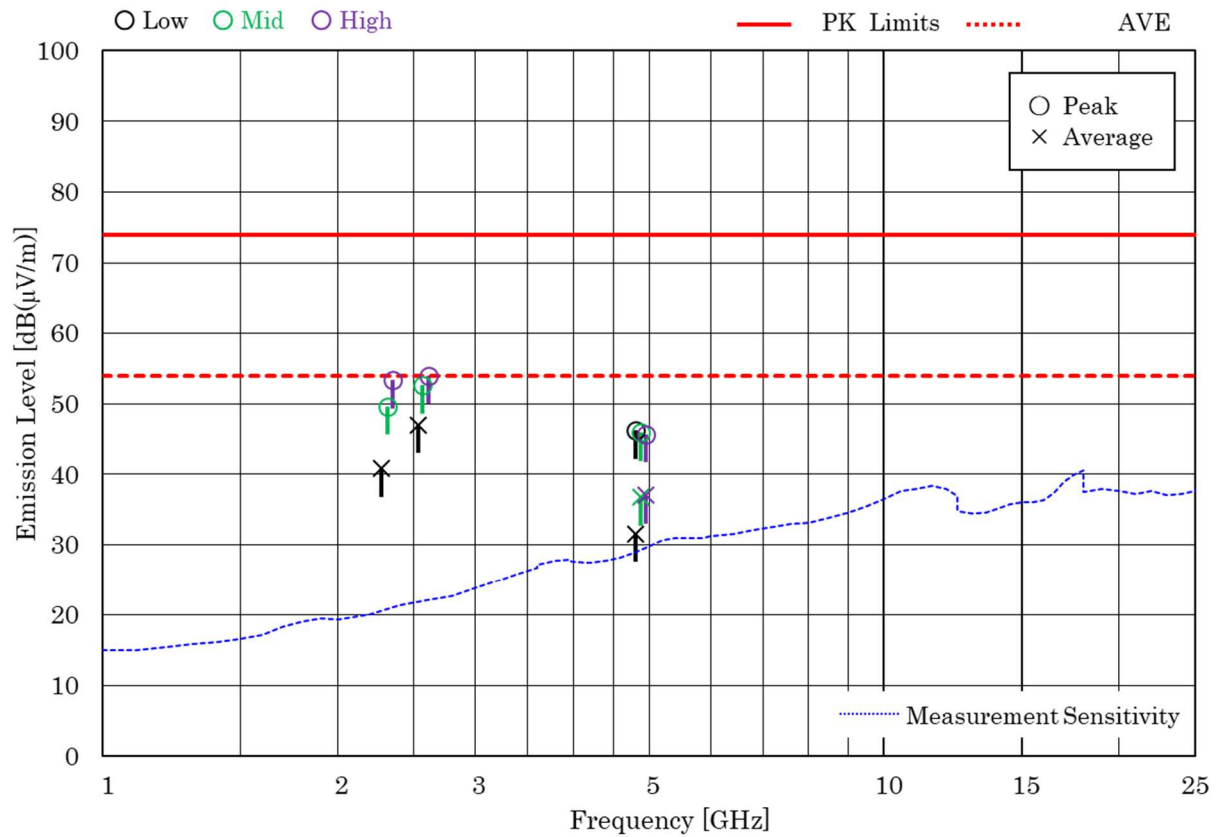

TX Low/Middle/High ch (Vertical)

