



## Test Report

Prepared for: Q-Track Corporation

Model: QT-644 TX Tag

Description: Forklift Collision Avoidance Tag

Serial Number: 24

FCC ID: VJ3-QT-644-TAG  
IC: 10503A-TXTAG644

To

FCC Part 15.209

And

IC RSS-210 Issue 9 (November 2017)

Date of Issue: May 11, 2018

On the behalf of the applicant:

Q-Track Corporation  
2223 Drake Avenue  
SW 1<sup>st</sup> Floor  
Huntsville, AL 35805

Attention of:

Hans Schantz, Chief Technical Officer  
Ph: (256)489-0075  
E-Mail: [h.schantz@q-track.com](mailto:h.schantz@q-track.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project ID: p17b0021

**Kenneth Lee**  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.

### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	12/8/2017	Kenneth Lee	Original Document
2.0	5/8/2018	Kenneth Lee	Updated Standard to RSS-210, added RSS-Gen Section 6.6, Updated Additional Information Section
3.0	5/11/2018	Kenneth Lee	Added information on 15.203, added Frequency Range of Operation

**Table of Contents**

<b><u>Description</u></b>	<b><u>Page</u></b>
Standard Test Conditions and Engineering Practices .....	6
Test Results Summary .....	7
15.209 Radiated Emissions .....	8
RSS-GEN Section 6.6 – Occupied Bandwidth.....	12
Test Equipment Utilized .....	15

**The applicant has been cautioned as to the following**

**FCC**

15.21 – Information to user

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) – Special Accessories

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in the part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in §2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**

## Test and Measurement Data

Subpart 2.1033(b)

All tests and measurement data shown were performed in accordance with FCC Rule Parts: 15.207, 15.209 (Intentional Radiators).

All tests and measurement data shown are deemed satisfactory evidence of compliance with Industry Canada General Requirements for Compliance of Radio Apparatus Standard RSS-GEN.

Name of Test	FCC Section	RSS-GEN
A/C Powerline Conducted Emissions	15.207	Section 8.8
Radiated Emissions	15.209	Section 8.9

## Standard Engineering Practices

Unless otherwise indicated, the procedures contained in ANSI C63.10-2013 were observed during testing.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurement.

## Standard Test Conditions and Engineering Practices

Unless otherwise indicated in the specific measurement results, the ambient temperature was maintained within the range of 10° to 40°C (50° to 104°F) and the relative humidity levels were in the range of 10% to 90%.

Environmental Conditions	
Temperature (°C)	Humidity (%)
15-21	20-34

## EUT Description

**Model:** QT-644 TX Tag

**Description:** Forklift Collision Avoidance Tag

**Firmware:** N/A

**Software:** N/A

**Serial Number:** 24

**Additional Information:** The EUT normally operates with a 100% Duty Cycle and transmits on a single channel without implementing any modulation.

**Frequency Range of Operation:** 1000 – 1250 kHz

## EUT Operation during Tests

The EUT was powered on and transmitting continuously throughout testing.

**Accessories:** None

**Cables:** None

**Modifications:** None

**Test Results Summary**

Specification	Test Name	Pass, Fail, N/A	Comments
15.207	A/C Powerline Conducted Emissions	N/A	EUT is DC Powered
15.209	Radiated Emissions	Pass	
RSS-GEN Section 6.6	Occupied Bandwidth	Pass	

**15.203: Antenna Requirement:**

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply

## 15.209 Radiated Emissions

**Engineer:** Kenneth Lee

**Test Date:** 12/8/2017


### Test Procedure Below 30 MHz

The EUT was tested in a semi-anechoic chamber with the device set 3m from the receiving loop antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by placing it in 3 orthogonal axes. With the EUT in each axis, the loop antenna was also positioned into 3 orthogonal axes to ensure worst case emissions were measured. All Emissions from 9 kHz to 30 MHz were examined.

### Test Procedure Above 30 MHz

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antennas in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the signal levels were maximized. All emissions from 30 MHz to 1 GHz were examined.

#### Test Setup



#### Analyzer Settings for 9-490 kHz

RBW = 300 Hz

VBW = 1 KHz

Detector – Peak

#### Analyzer Settings for 490-30000 kHz

RBW = 10 kHz

VBW = 30 KHz

Detector – Peak

#### Analyzer Settings for 30-1000 MHz

RBW = 120 kHz

VBW = 300 KHz


Detector – Peak

#### Sample Calculations

Corrected Value = Measured Value + Correction factor

Correction factor = ACF + Cable loss



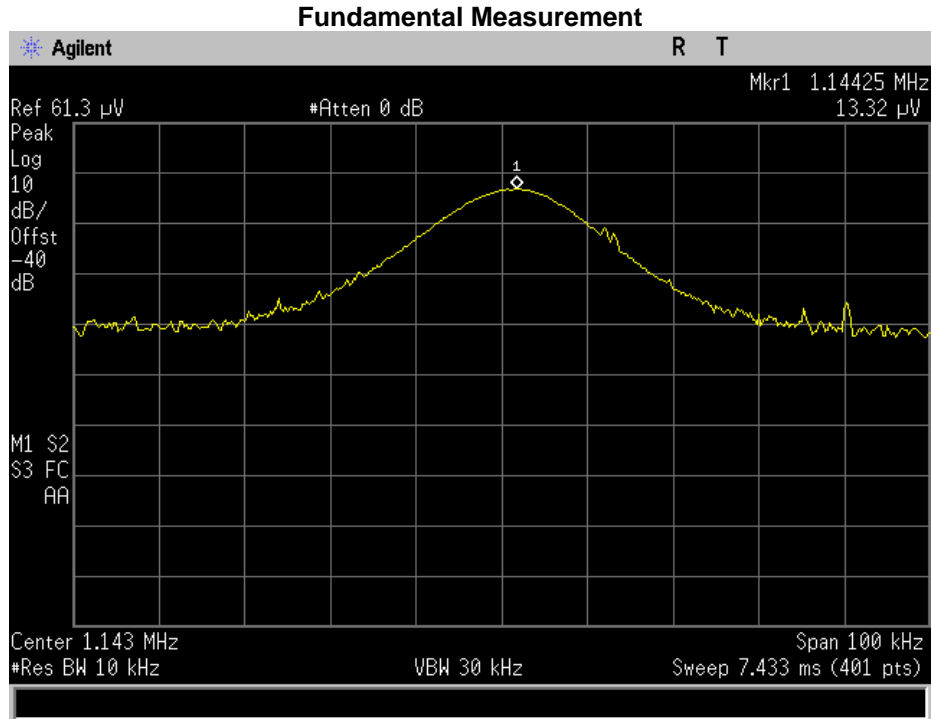


A -40 dB offset was input into the analyzer to accommodate the reduction in test distance. The -40 dB was derived from the equation in ANSI C63.10 stating the extrapolation factor of 40 dB/decade of distance will be used for frequencies below 30 MHz.


$$\text{Distance Correction Factor} = 40 \text{ Log}(30/3) = 40$$



### Spurious Emissions - 9 – 490 kHz

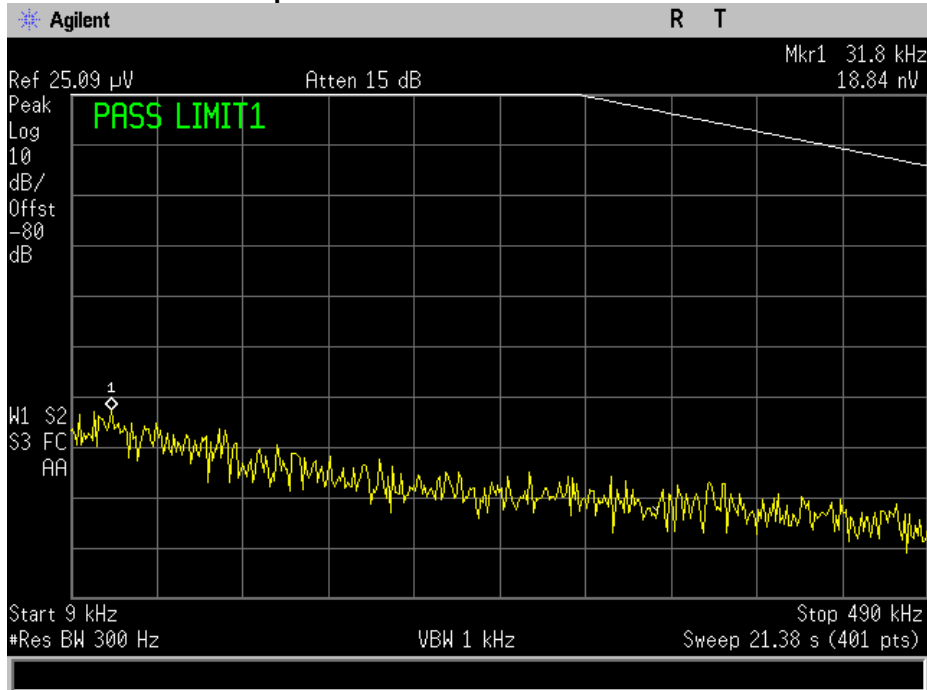


### Spurious Emissions – 490-1705 kHz

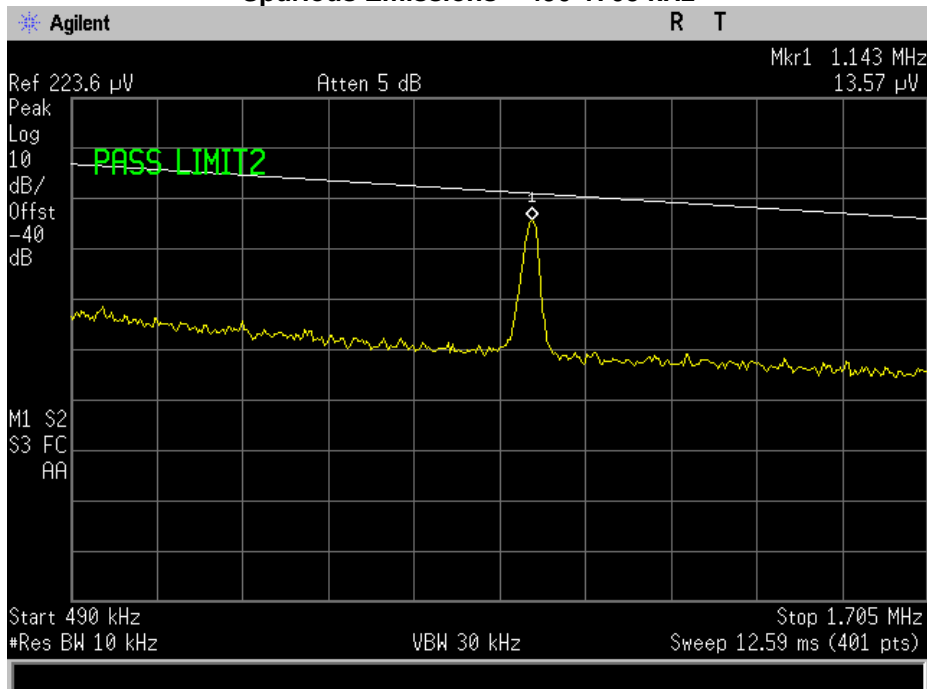




### Spurious Emissions – 1.705 - 30 MHz

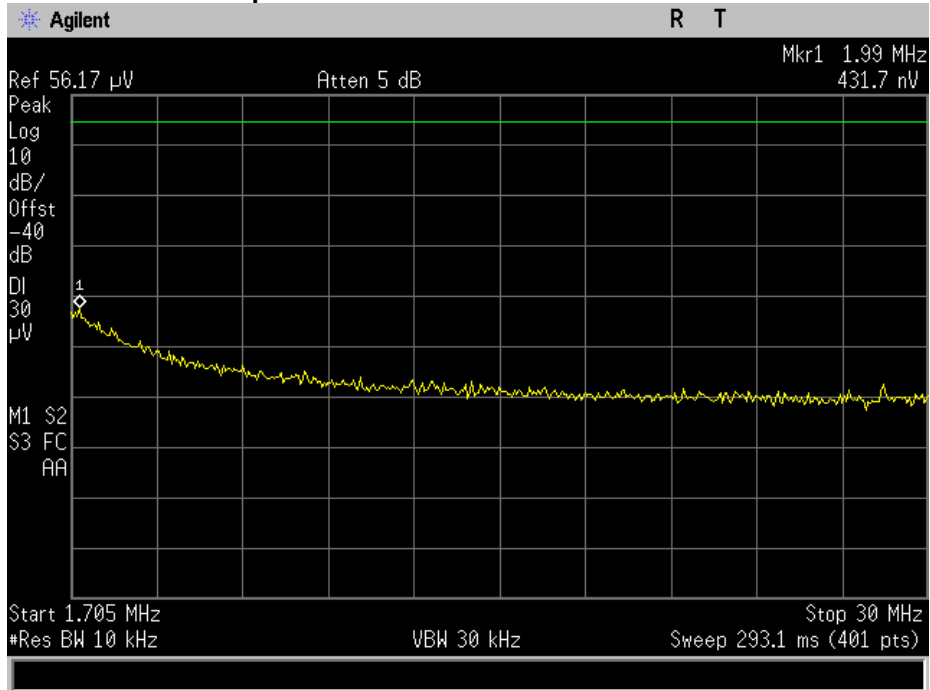

### Spurious Emissions – 30 - 1000 MHz

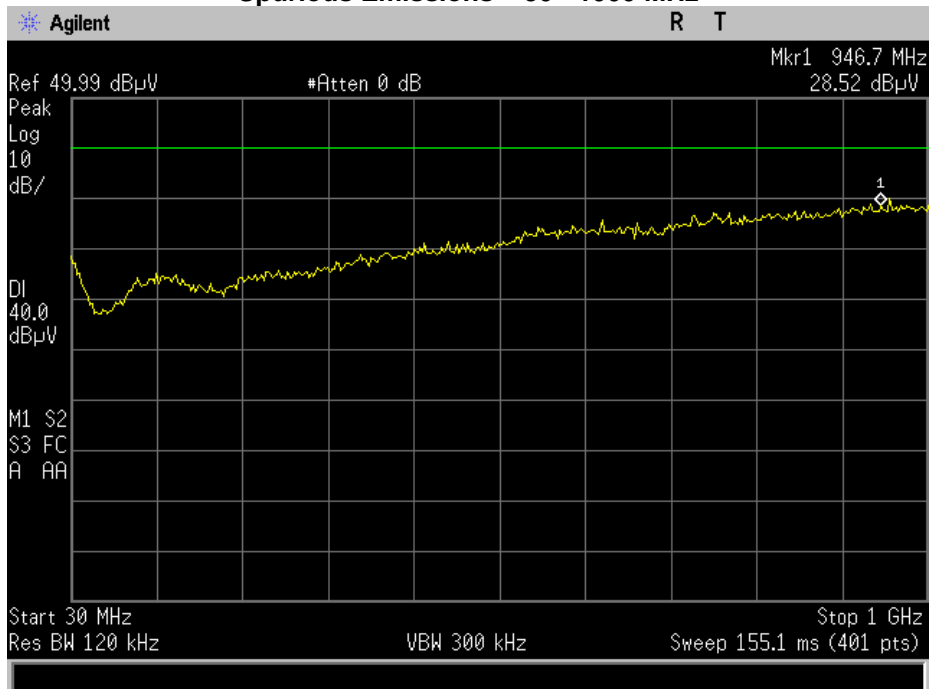

**RSS-GEN Section 6.6 – Occupied Bandwidth**

**Engineer:** Kenneth Lee


**Test Date:** 5/3/2018

**Test Procedure**

The EUT was tested in a semi-anechoic chamber with the device set 3m from the receiving loop antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Occupied Bandwidth. The EUT was tested by placing it in 3 orthogonal axes. With the EUT in each axis, the loop antenna was also positioned into 3 orthogonal axes to ensure worst case emissions were measured.


**Test Results**

Frequency (MHz)	Measured Bandwidth (Hz)	Result
1.143	654.0633	Pass

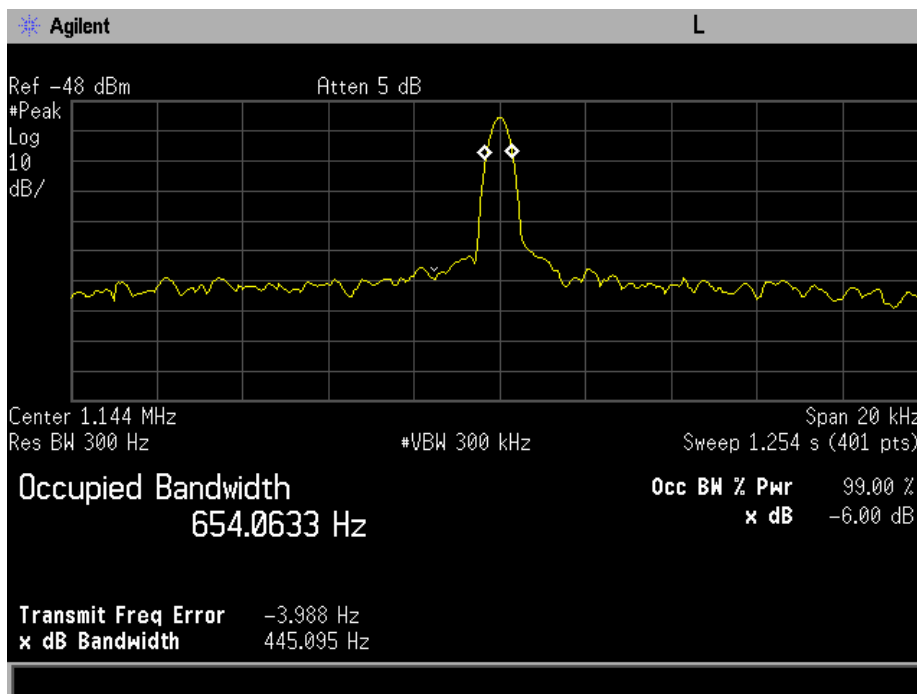


**Radiated Emissions Test Setup Photos Below 30 MHz**

**Front**

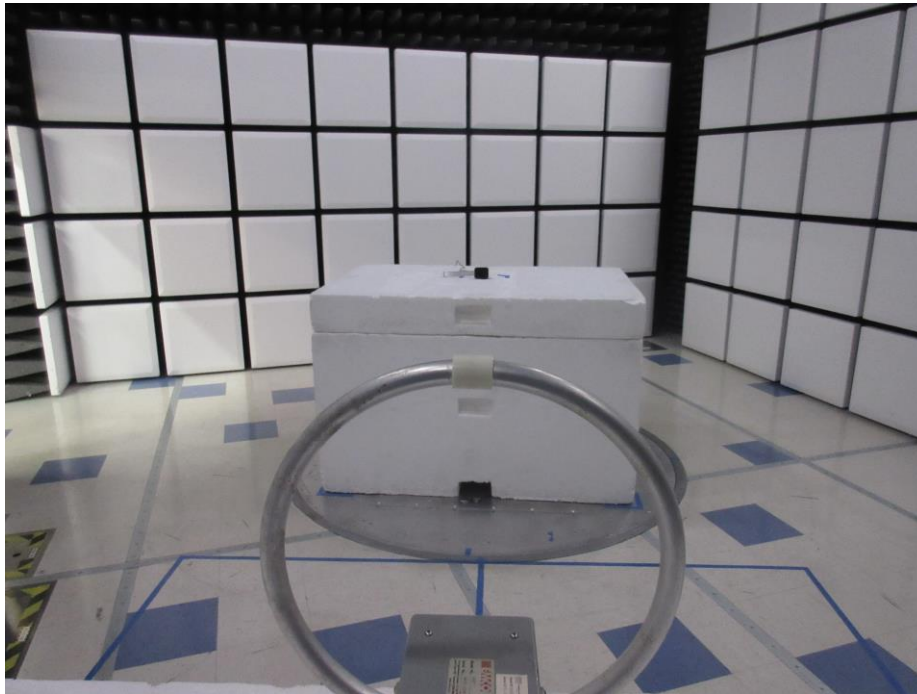


**Rear**

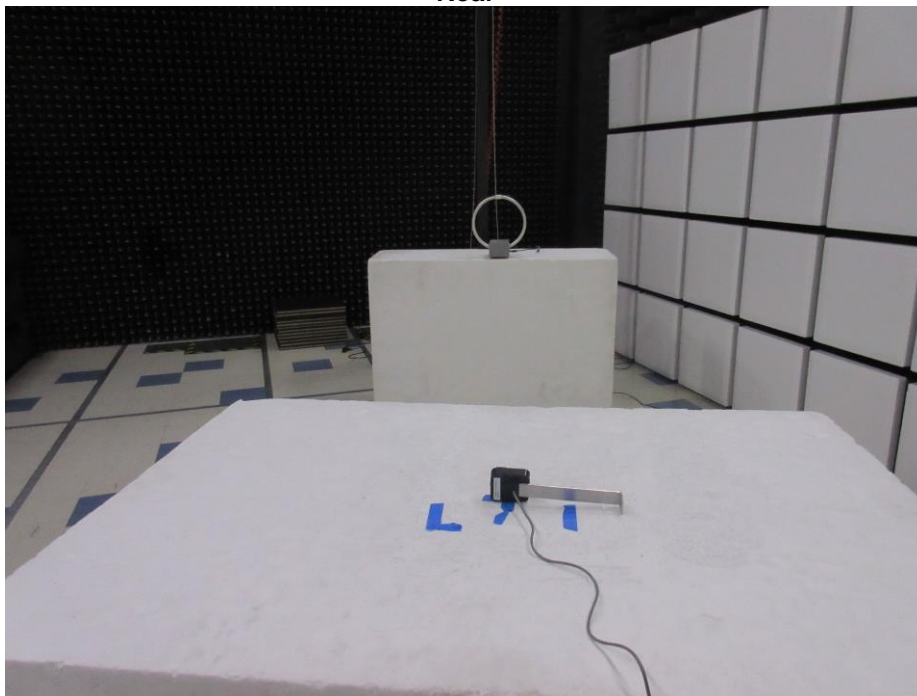


**Radiated Emissions Test Setup Photos Above 30 MHz**

**Front**

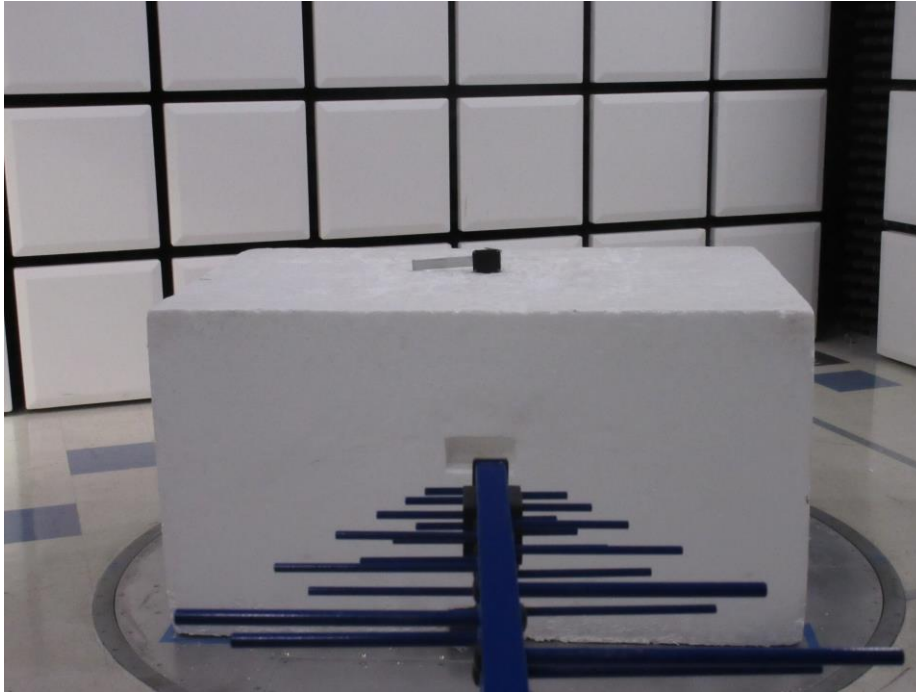

**Rear**

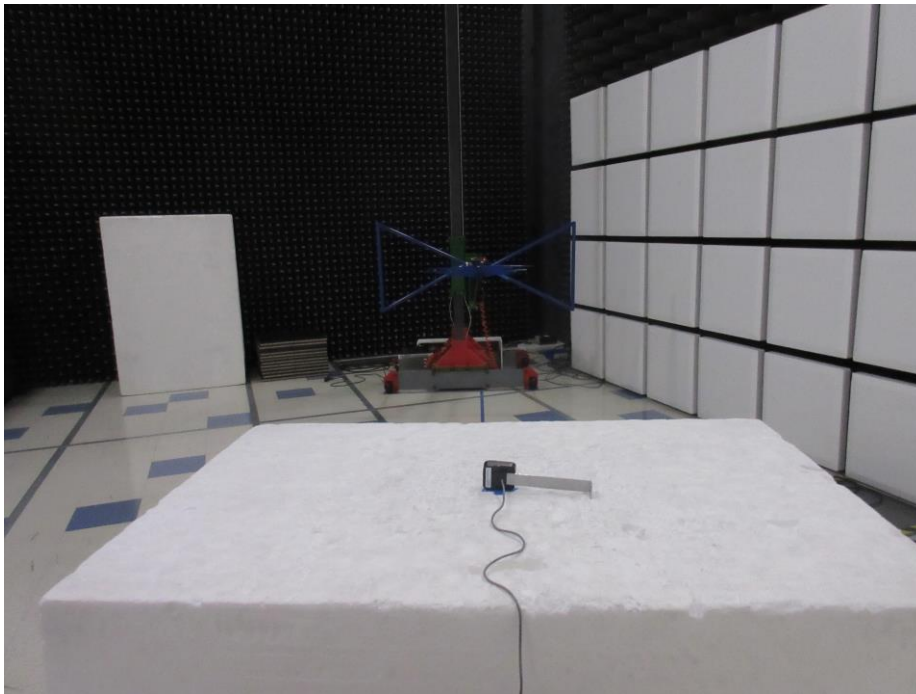

**Test Equipment Utilized**

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Active Loop Antenna	EMCO	6507	i00326	9/25/17	9/25/19
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	6/9/17	6/9/18
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	8/3/16	8/3/18
EMI Analyzer	Agilent	E7405A	i00379	2/22/17	2/22/18
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	8/15/16	8/15/19

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT