


|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

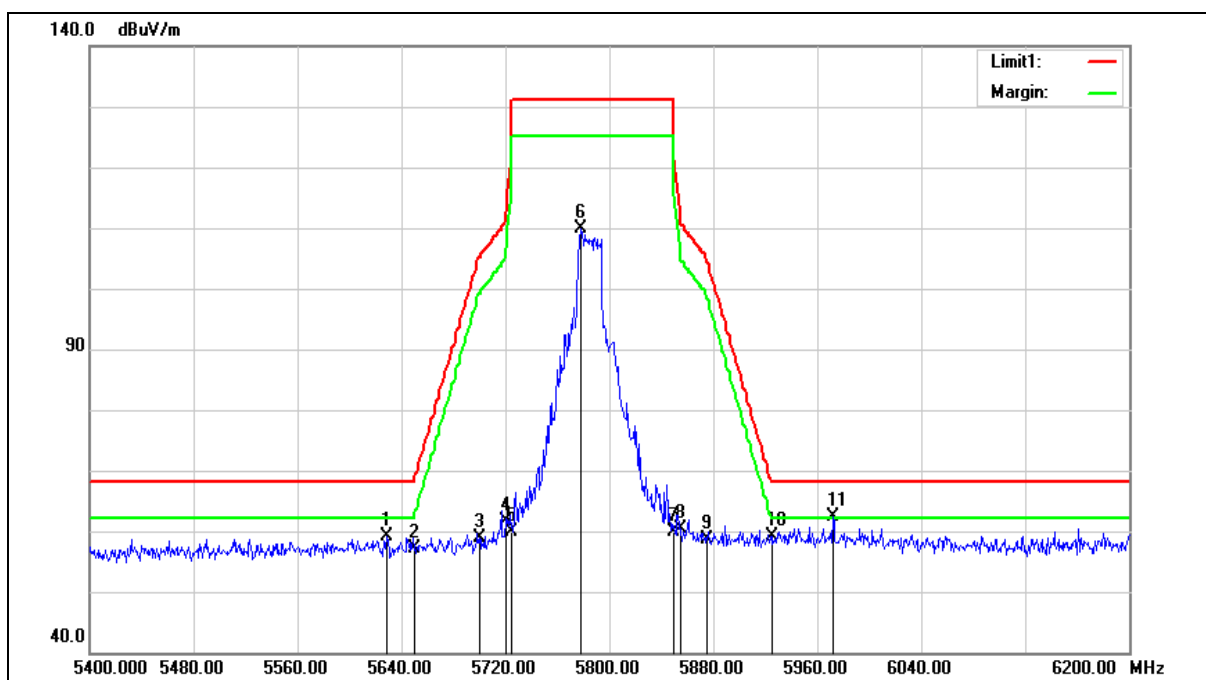

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5628.800           | 59.53             | -0.33                    | 59.20              | 68.20             | -9.00          | peak   |
| 2   | 5650.000           | 57.33             | -0.28                    | 57.05              | 68.20             | -11.15         | peak   |
| 3   | 5700.000           | 58.92             | -0.16                    | 58.76              | 105.20            | -46.44         | peak   |
| 4   | 5720.000           | 61.77             | -0.11                    | 61.66              | 110.80            | -49.14         | peak   |
| 5   | 5725.000           | 60.01             | -0.10                    | 59.91              | 122.20            | -62.29         | peak   |
| 6   | 5778.400           | 109.88            | 0.03                     | 109.91             | --                | --             | peak   |
| 7   | 5850.000           | 59.73             | 0.20                     | 59.93              | 122.20            | -62.27         | peak   |
| 8   | 5855.000           | 60.19             | 0.21                     | 60.40              | 110.80            | -50.40         | peak   |
| 9   | 5875.000           | 58.32             | 0.26                     | 58.58              | 105.20            | -46.62         | peak   |
| 10  | 5925.000           | 58.72             | 0.38                     | 59.10              | 68.20             | -9.10          | peak   |
| 11  | 5972.000           | 61.88             | 0.49                     | 62.37              | 68.20             | -5.83          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

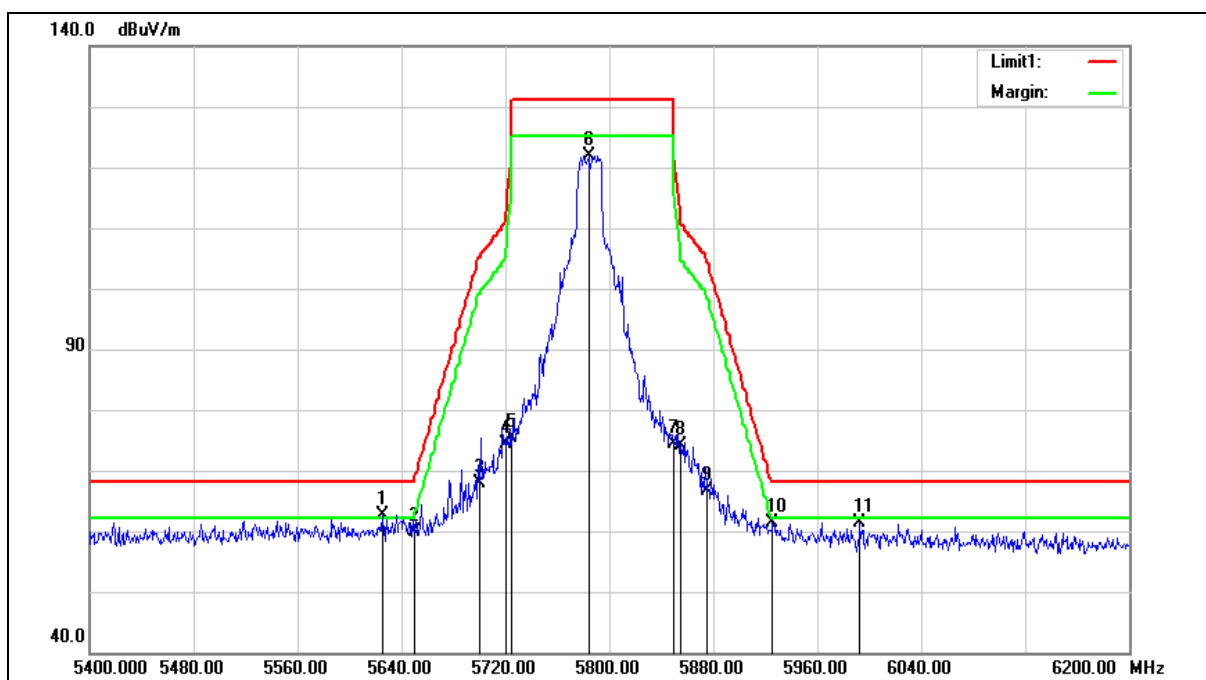

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5625.600           | 63.05             | -0.33                    | 62.72              | 68.20             | -5.48          | peak   |
| 2   | 5650.000           | 60.21             | -0.28                    | 59.93              | 68.20             | -8.27          | peak   |
| 3   | 5700.000           | 67.94             | -0.16                    | 67.78              | 105.20            | -37.42         | peak   |
| 4   | 5720.000           | 74.61             | -0.11                    | 74.50              | 110.80            | -36.30         | peak   |
| 5   | 5725.000           | 75.60             | -0.10                    | 75.50              | 122.20            | -46.70         | peak   |
| 6   | 5784.000           | 121.91            | 0.04                     | 121.95             | --                | --             | peak   |
| 7   | 5850.000           | 74.15             | 0.20                     | 74.35              | 122.20            | -47.85         | peak   |
| 8   | 5855.000           | 73.87             | 0.21                     | 74.08              | 110.80            | -36.72         | peak   |
| 9   | 5875.000           | 66.35             | 0.26                     | 66.61              | 105.20            | -38.59         | peak   |
| 10  | 5925.000           | 60.90             | 0.38                     | 61.28              | 68.20             | -6.92          | peak   |
| 11  | 5992.800           | 60.94             | 0.53                     | 61.47              | 68.20             | -6.73          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

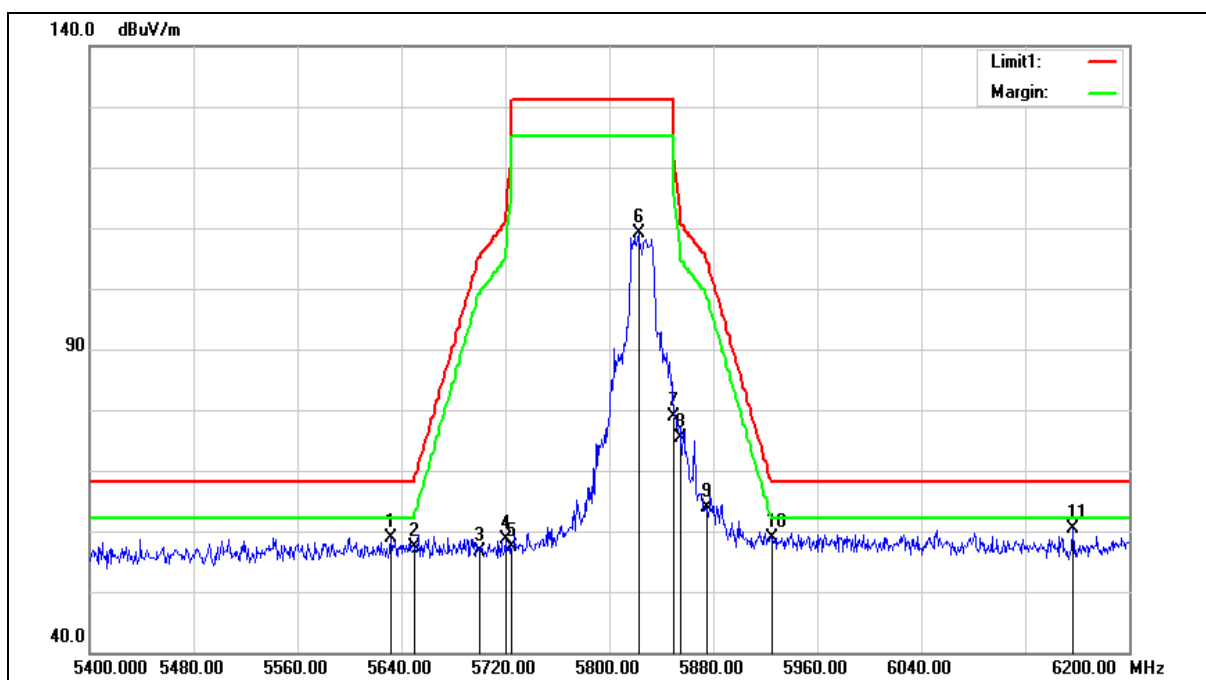

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5632.000           | 59.31             | -0.31                    | 59.00              | 68.20             | -9.20          | peak   |
| 2   | 5650.000           | 57.66             | -0.28                    | 57.38              | 68.20             | -10.82         | peak   |
| 3   | 5700.000           | 56.69             | -0.16                    | 56.53              | 105.20            | -48.67         | peak   |
| 4   | 5720.000           | 58.82             | -0.11                    | 58.71              | 110.80            | -52.09         | peak   |
| 5   | 5725.000           | 57.39             | -0.10                    | 57.29              | 122.20            | -64.91         | peak   |
| 6   | 5822.400           | 108.88            | 0.14                     | 109.02             | --                | --             | peak   |
| 7   | 5850.000           | 78.56             | 0.20                     | 78.76              | 122.20            | -43.44         | peak   |
| 8   | 5855.000           | 75.28             | 0.21                     | 75.49              | 110.80            | -35.31         | peak   |
| 9   | 5875.000           | 63.58             | 0.26                     | 63.84              | 105.20            | -41.36         | peak   |
| 10  | 5925.000           | 58.38             | 0.38                     | 58.76              | 68.20             | -9.44          | peak   |
| 11  | 6156.800           | 59.20             | 1.12                     | 60.32              | 68.20             | -7.88          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

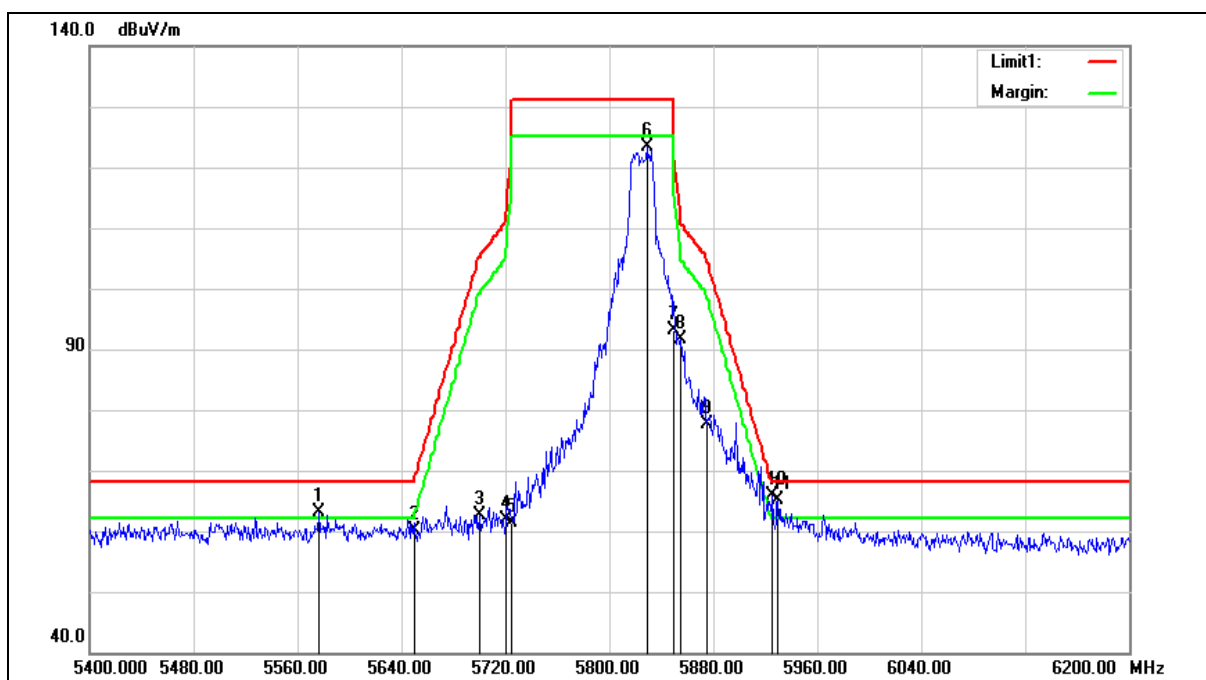

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5576.800           | 63.59             | -0.45                    | 63.14              | 68.20             | -5.06          | peak   |
| 2   | 5650.000           | 60.29             | -0.28                    | 60.01              | 68.20             | -8.19          | peak   |
| 3   | 5700.000           | 62.79             | -0.16                    | 62.63              | 105.20            | -42.57         | peak   |
| 4   | 5720.000           | 61.92             | -0.11                    | 61.81              | 110.80            | -48.99         | peak   |
| 5   | 5725.000           | 61.60             | -0.10                    | 61.50              | 122.20            | -60.70         | peak   |
| 6   | 5828.800           | 123.22            | 0.15                     | 123.37             | --                | --             | peak   |
| 7   | 5850.000           | 92.88             | 0.20                     | 93.08              | 122.20            | -29.12         | peak   |
| 8   | 5855.000           | 91.39             | 0.21                     | 91.60              | 110.80            | -19.20         | peak   |
| 9   | 5875.000           | 77.32             | 0.26                     | 77.58              | 105.20            | -27.62         | peak   |
| 10  | 5925.000           | 65.48             | 0.38                     | 65.86              | 68.20             | -2.34          | peak   |
| 11  | 5929.600           | 64.71             | 0.39                     | 65.10              | 68.20             | -3.10          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5190 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

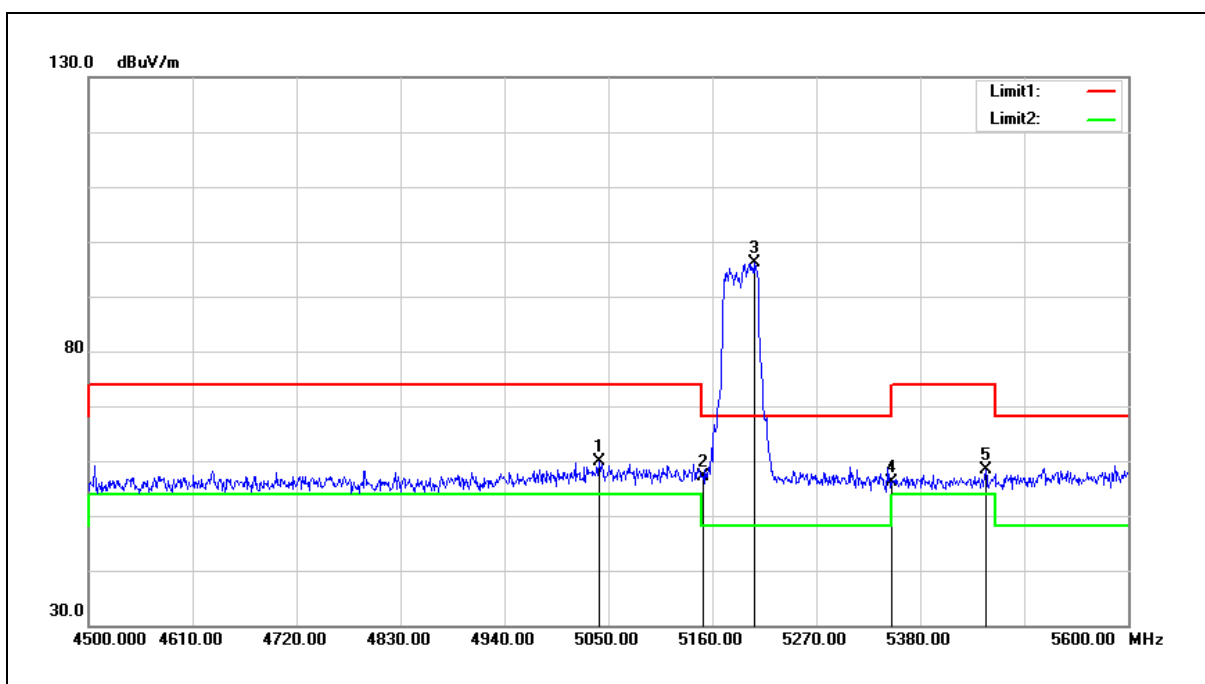


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5040.100           | 61.38             | -1.55                    | 59.83              | 74.00             | -14.17         | peak   |
| 2   | 5150.000           | 58.42             | -1.33                    | 57.09              | 74.00             | -16.91         | peak   |
| 3   | 5204.000           | 97.29             | -1.22                    | 96.07              | --                | --             | peak   |
| 4   | 5350.000           | 57.05             | -0.92                    | 56.13              | 74.00             | -17.87         | peak   |
| 5   | 5449.300           | 59.12             | -0.72                    | 58.40              | 74.00             | -15.60         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5190 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

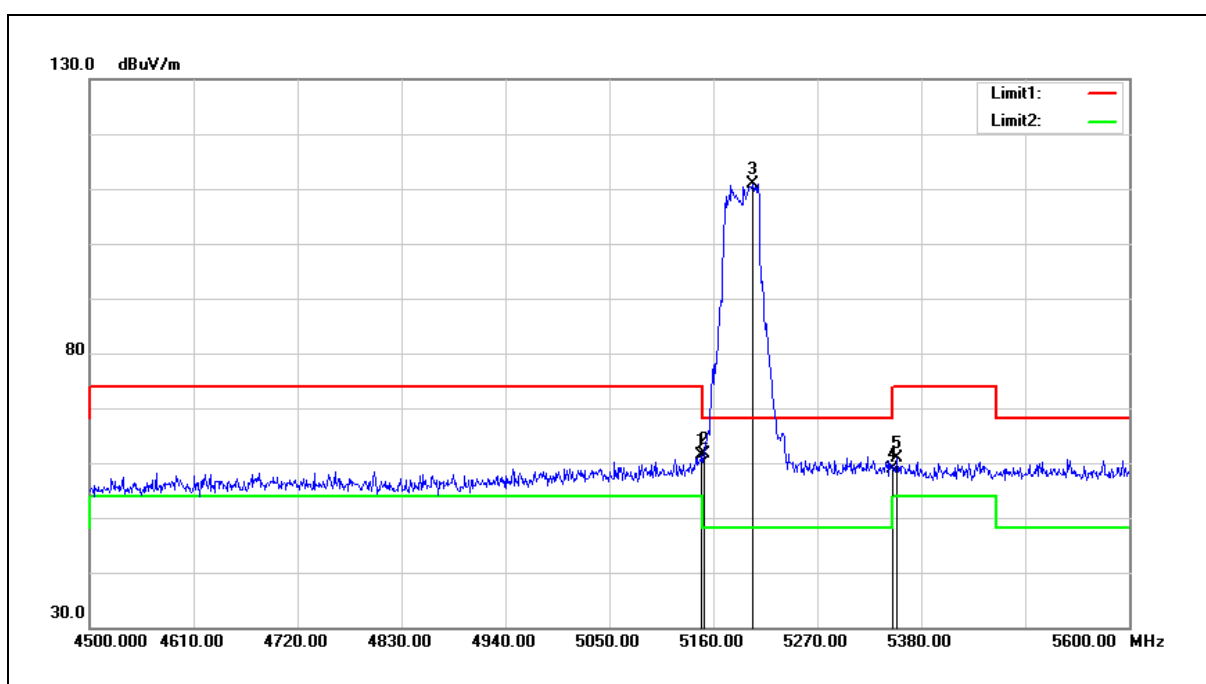


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5147.900           | 62.80             | -1.33                    | 61.47              | 74.00             | -12.53         | peak   |
| 2   | 5150.000           | 63.03             | -1.33                    | 61.70              | 74.00             | -12.30         | peak   |
| 3   | 5201.800           | 112.20            | -1.22                    | 110.98             | --                | --             | peak   |
| 4   | 5350.000           | 59.72             | -0.92                    | 58.80              | 74.00             | -15.20         | peak   |
| 5   | 5354.700           | 61.76             | -0.92                    | 60.84              | 74.00             | -13.16         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5230 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

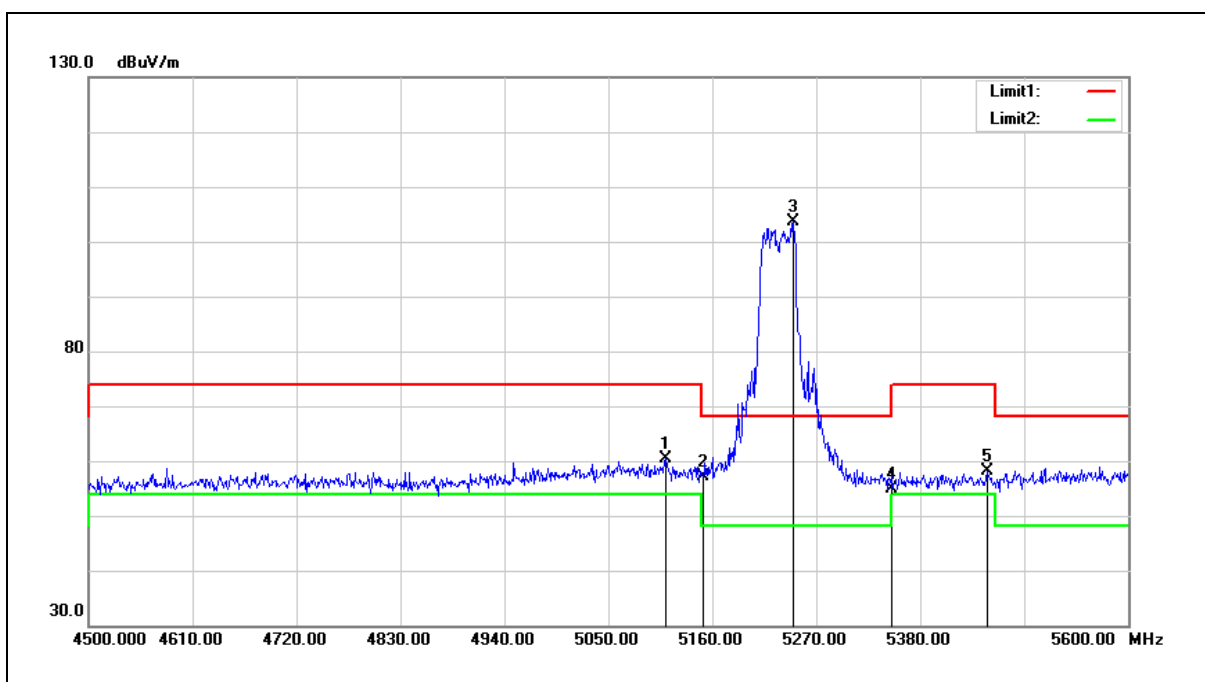


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5110.500           | 61.67             | -1.41                    | 60.26              | 74.00             | -13.74         | peak   |
| 2   | 5150.000           | 58.38             | -1.33                    | 57.05              | 74.00             | -16.95         | peak   |
| 3   | 5245.800           | 104.71            | -1.13                    | 103.58             | --                | --             | peak   |
| 4   | 5350.000           | 55.68             | -0.92                    | 54.76              | 74.00             | -19.24         | peak   |
| 5   | 5450.400           | 58.91             | -0.72                    | 58.19              | 74.00             | -15.81         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5230 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

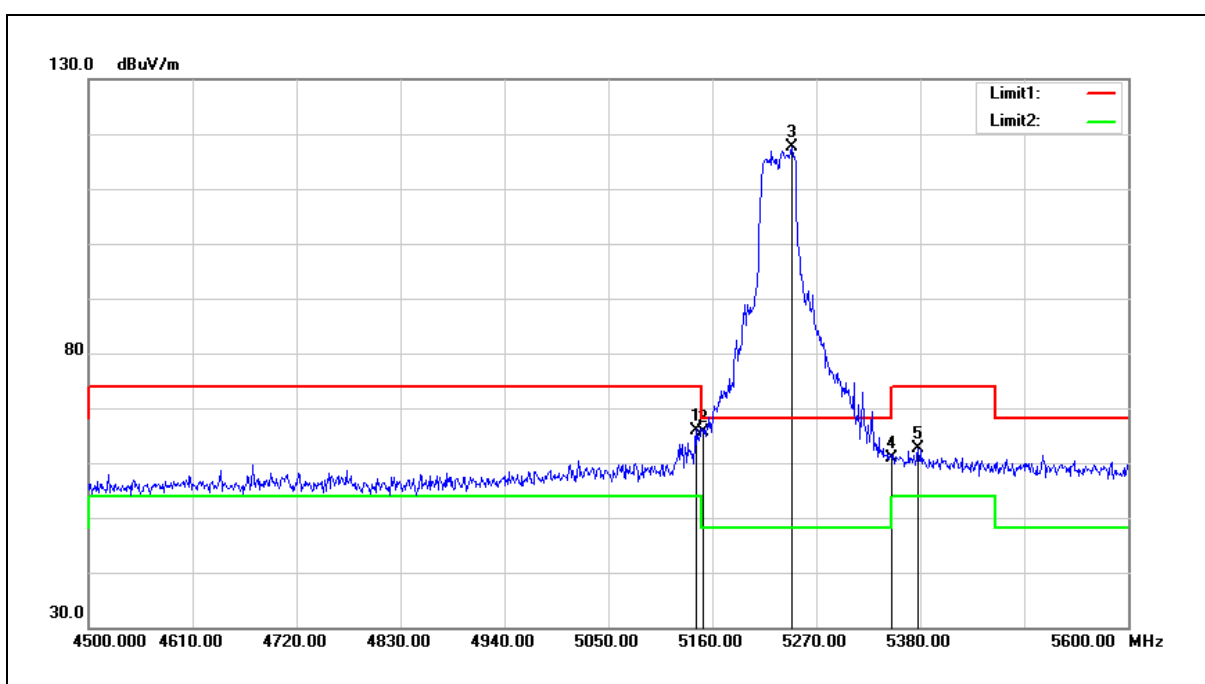


| No. | Frequency (MHz) | Reading (dBUV) | Correct Factor (dB/m) | Result (dBUV/m) | Limit (dBUV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5142.400        | 67.35          | -1.35                 | 66.00           | 74.00          | -8.00       | peak   |
| 2   | 5150.000        | 66.96          | -1.33                 | 65.63           | 74.00          | -8.37       | peak   |
| 3   | 5244.700        | 118.76         | -1.13                 | 117.63          | --             | --          | peak   |
| 4   | 5350.000        | 61.72          | -0.92                 | 60.80           | 74.00          | -13.20      | peak   |
| 5   | 5377.800        | 63.44          | -0.87                 | 62.57           | 74.00          | -11.43      | peak   |

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5270 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

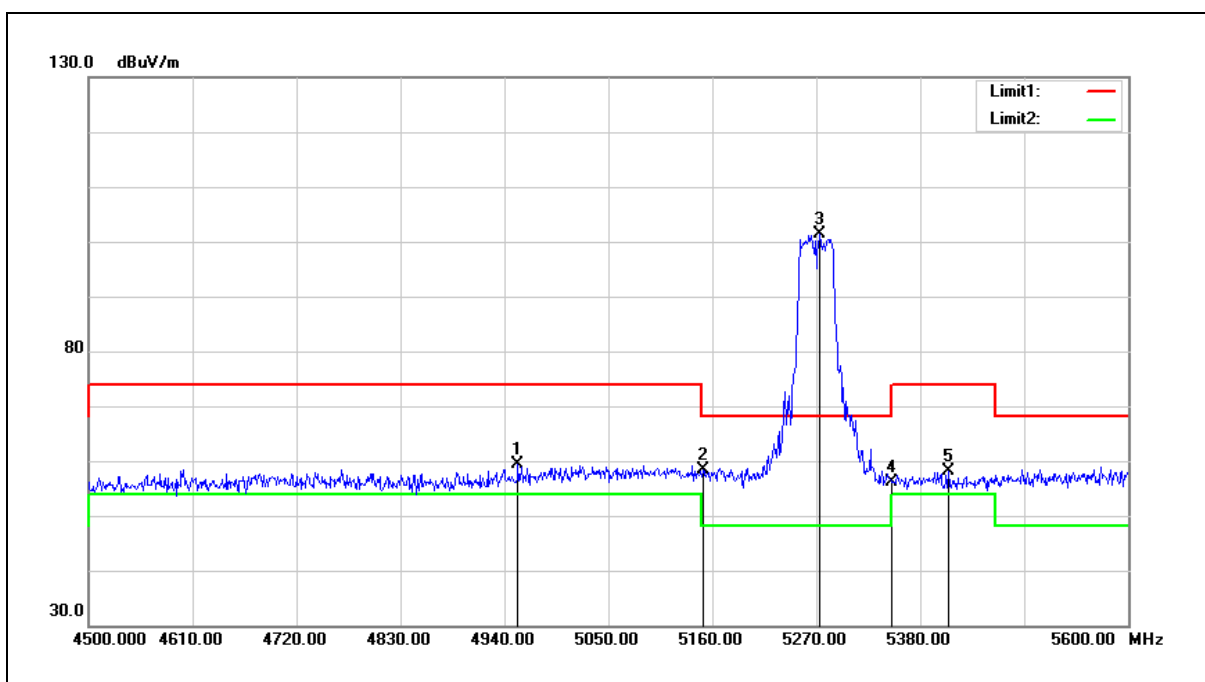


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4954.300        | 61.01          | -1.75                 | 59.26           | 74.00          | -14.74      | peak   |
| 2   | 5150.000        | 59.81          | -1.33                 | 58.48           | 74.00          | -15.52      | peak   |
| 3   | 5273.300        | 102.35         | -1.08                 | 101.27          | --             | --          | peak   |
| 4   | 5350.000        | 57.09          | -0.92                 | 56.17           | 74.00          | -17.83      | peak   |
| 5   | 5409.700        | 58.98          | -0.80                 | 58.18           | 74.00          | -15.82      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5270 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

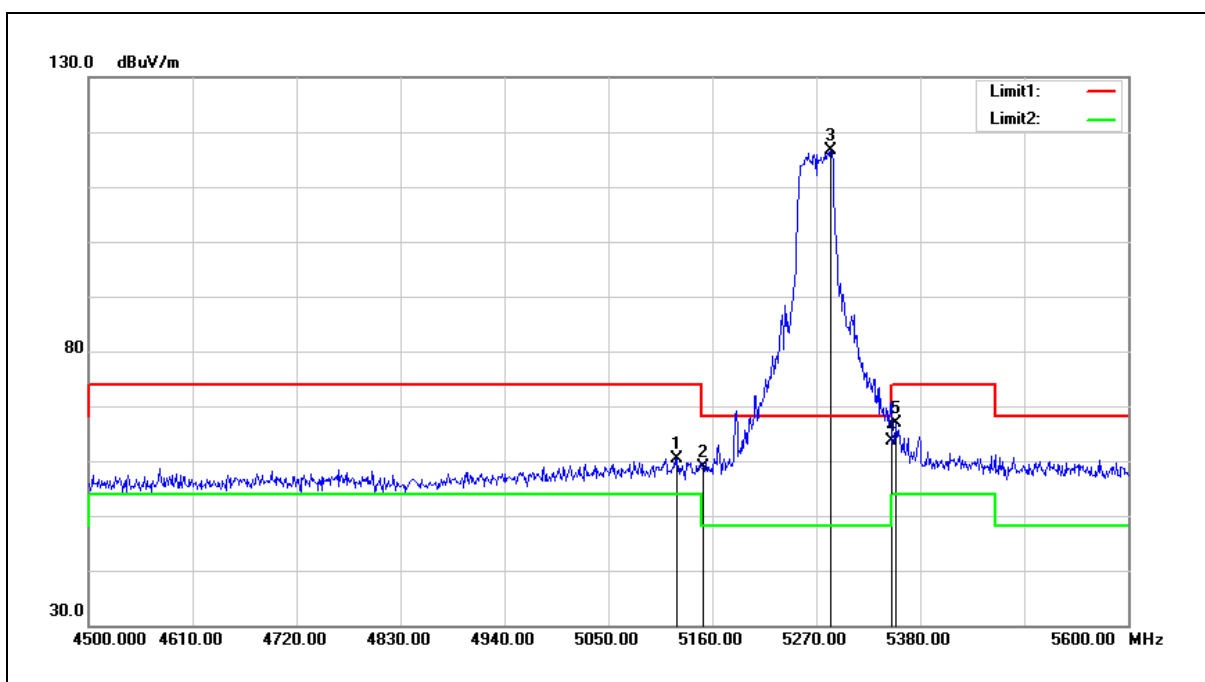


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5122.600        | 61.86          | -1.38                 | 60.48           | 74.00          | -13.52      | peak   |
| 2   | 5150.000        | 60.13          | -1.33                 | 58.80           | 74.00          | -15.20      | peak   |
| 3   | 5285.400        | 117.69         | -1.05                 | 116.64          | --             | --          | peak   |
| 4   | 5350.000        | 64.58          | -0.92                 | 63.66           | 74.00          | -10.34      | peak   |
| 5   | 5354.700        | 67.76          | -0.92                 | 66.84           | 74.00          | -7.16       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5310 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

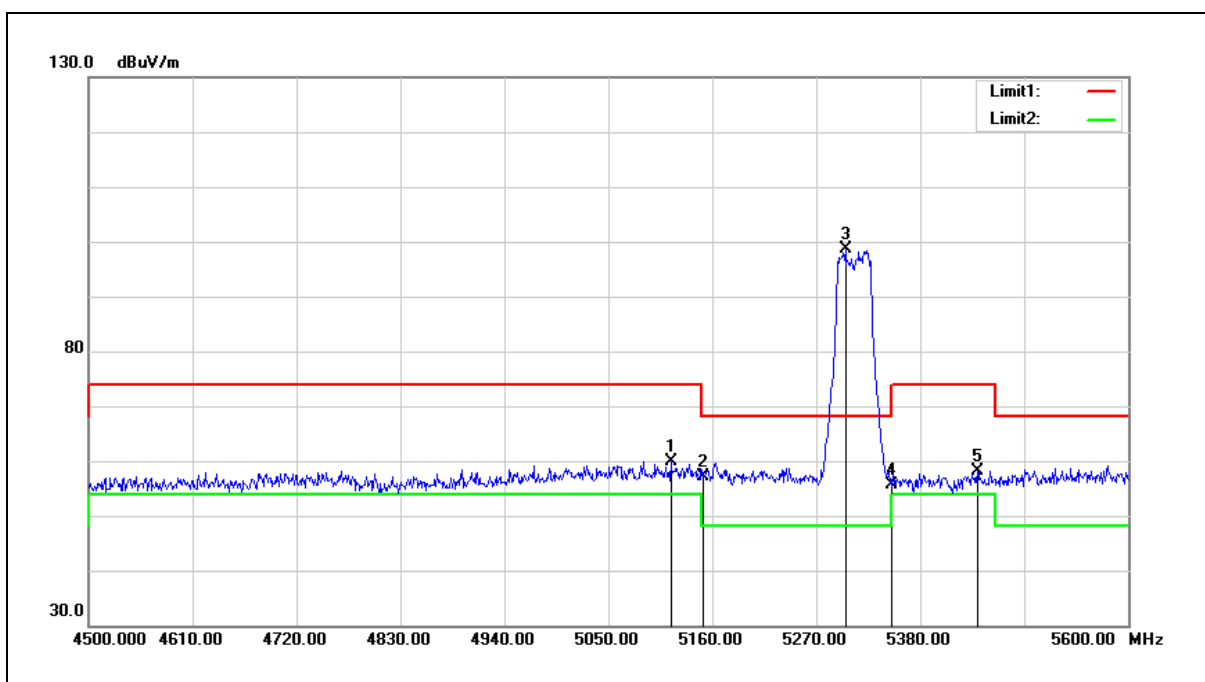


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5116.000        | 61.40          | -1.40                 | 60.00           | 74.00          | -14.00      | peak   |
| 2   | 5150.000        | 58.45          | -1.33                 | 57.12           | 74.00          | -16.88      | peak   |
| 3   | 5300.800        | 99.59          | -1.03                 | 98.56           | --             | --          | peak   |
| 4   | 5350.000        | 56.60          | -0.92                 | 55.68           | 74.00          | -18.32      | peak   |
| 5   | 5440.500        | 58.85          | -0.75                 | 58.10           | 74.00          | -15.90      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5310 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

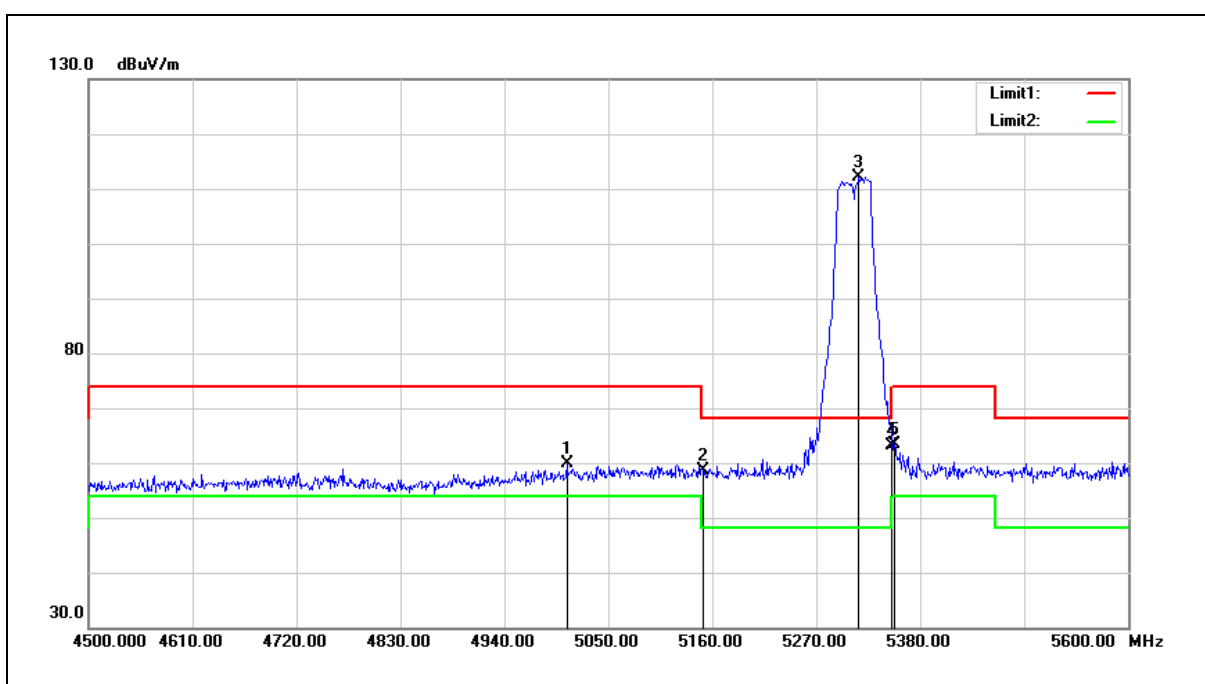


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5006.000           | 61.61             | -1.63                    | 59.98              | 74.00             | -14.02         | peak   |
| 2   | 5150.000           | 59.94             | -1.33                    | 58.61              | 74.00             | -15.39         | peak   |
| 3   | 5315.100           | 113.21            | -1.00                    | 112.21             | --                | --             | peak   |
| 4   | 5350.000           | 64.10             | -0.92                    | 63.18              | 74.00             | -10.82         | peak   |
| 5   | 5352.500           | 64.18             | -0.92                    | 63.26              | 74.00             | -10.74         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

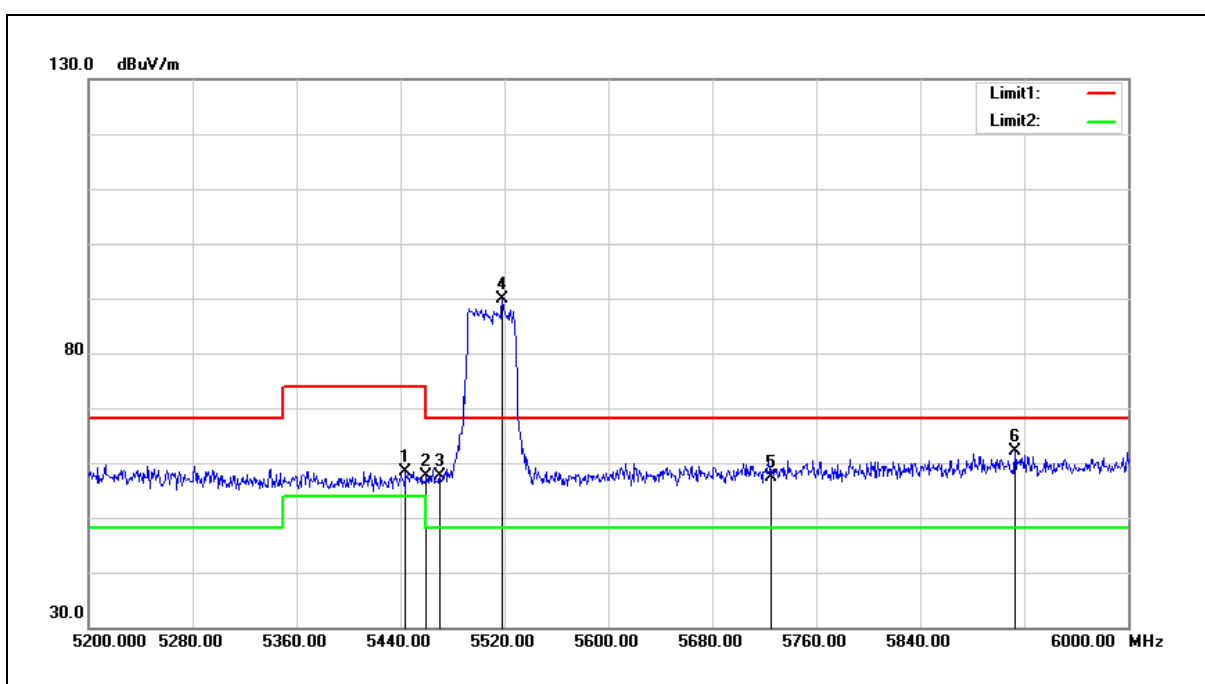


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5444.000        | 58.02          | 0.47                  | 58.49           | 74.00          | -15.51      | peak   |
| 2   | 5460.000        | 57.04          | 0.51                  | 57.55           | 74.00          | -16.45      | peak   |
| 3   | 5470.000        | 57.21          | 0.52                  | 57.73           | 68.20          | -10.47      | peak   |
| 4   | 5518.400        | 89.27          | 0.62                  | 89.89           | 68.20          | 21.69       | peak   |
| 5   | 5725.000        | 56.12          | 1.18                  | 57.30           | 68.20          | -10.90      | peak   |
| 6   | 5912.800        | 60.34          | 1.69                  | 62.03           | 68.20          | -6.17       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

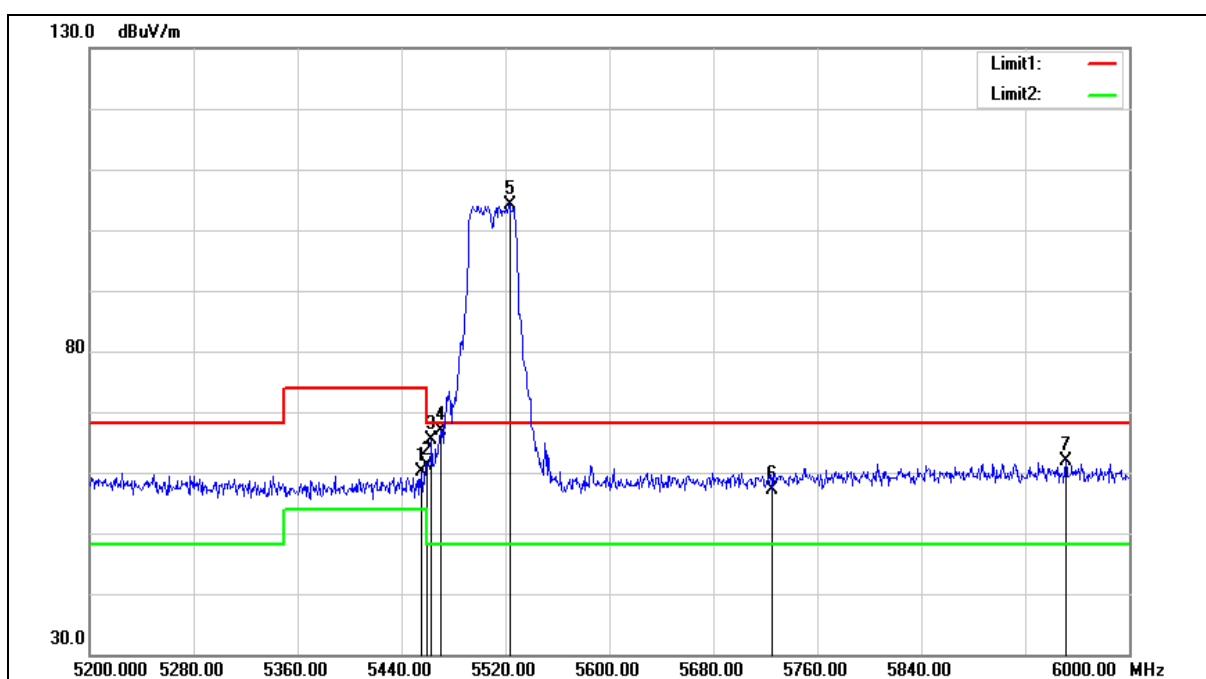

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5455.200           | 59.76             | 0.48                     | 60.24              | 74.00             | -13.76         | peak   |
| 2   | 5460.000           | 60.57             | 0.51                     | 61.08              | 74.00             | -12.92         | peak   |
| 3   | 5463.200           | 64.86             | 0.51                     | 65.37              | 68.20             | -2.83          | peak   |
| 4   | 5470.000           | 66.28             | 0.52                     | 66.80              | 68.20             | -1.40          | peak   |
| 5   | 5523.200           | 103.51            | 0.64                     | 104.15             | 68.20             | 35.95          | peak   |
| 6   | 5725.000           | 55.86             | 1.18                     | 57.04              | 68.20             | -11.16         | peak   |
| 7   | 5951.200           | 60.11             | 1.78                     | 61.89              | 68.20             | -6.31          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

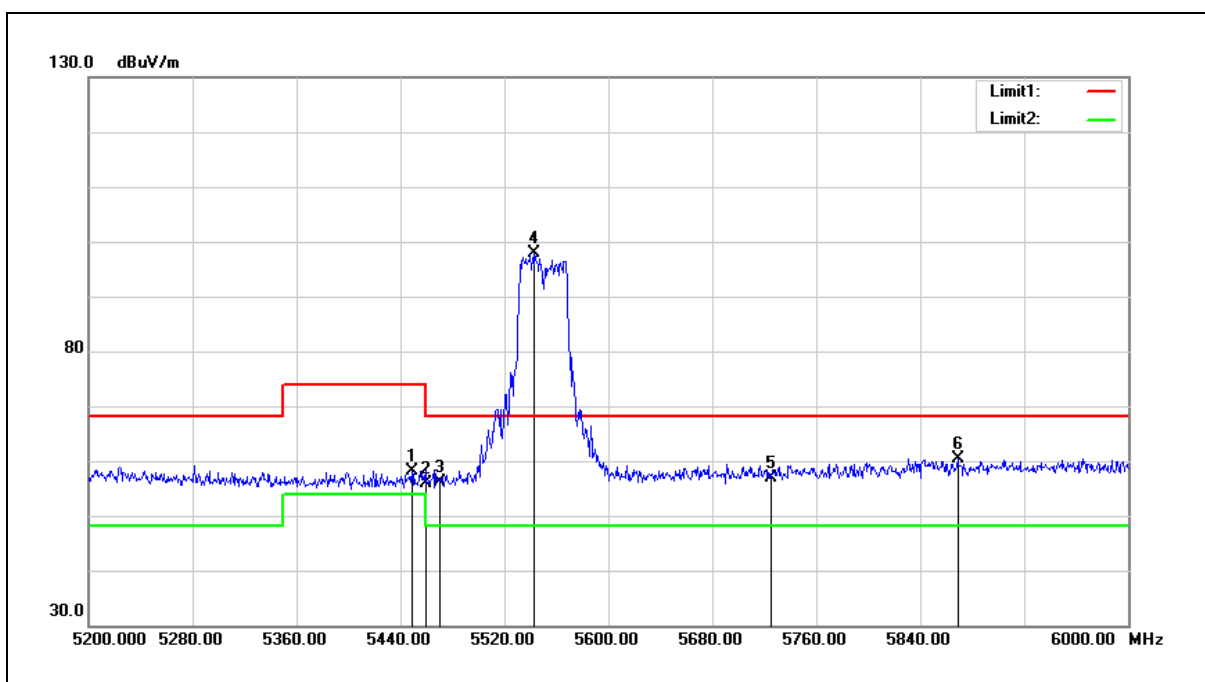


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5448.800           | 58.93             | -0.72                    | 58.21              | 74.00             | -15.79         | peak   |
| 2   | 5460.000           | 56.66             | -0.70                    | 55.96              | 74.00             | -18.04         | peak   |
| 3   | 5470.000           | 56.87             | -0.68                    | 56.19              | 68.20             | -12.01         | peak   |
| 4   | 5543.200           | 98.38             | -0.52                    | 97.86              | --                | --             | peak   |
| 5   | 5725.000           | 57.02             | -0.10                    | 56.92              | 68.20             | -11.28         | peak   |
| 6   | 5868.800           | 60.21             | 0.23                     | 60.44              | 68.20             | -7.76          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

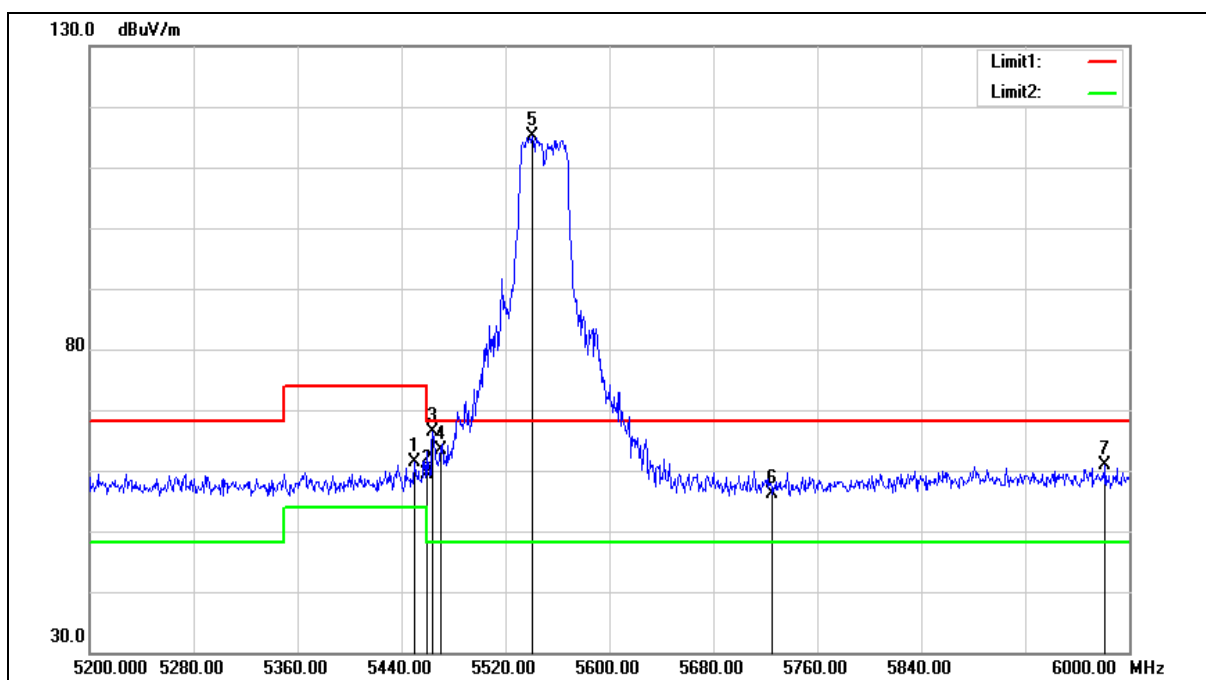

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5449.600           | 62.15             | -0.72                    | 61.43              | 74.00             | -12.57         | peak   |
| 2   | 5460.000           | 60.11             | -0.70                    | 59.41              | 74.00             | -14.59         | peak   |
| 3   | 5464.000           | 67.14             | -0.70                    | 66.44              | 68.20             | -1.76          | peak   |
| 4   | 5470.000           | 64.06             | -0.68                    | 63.38              | 68.20             | -4.82          | peak   |
| 5   | 5540.800           | 115.78            | -0.53                    | 115.25             | --                | --             | peak   |
| 6   | 5725.000           | 56.19             | -0.10                    | 56.09              | 68.20             | -12.11         | peak   |
| 7   | 5981.600           | 60.47             | 0.51                     | 60.98              | 68.20             | -7.22          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5670 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

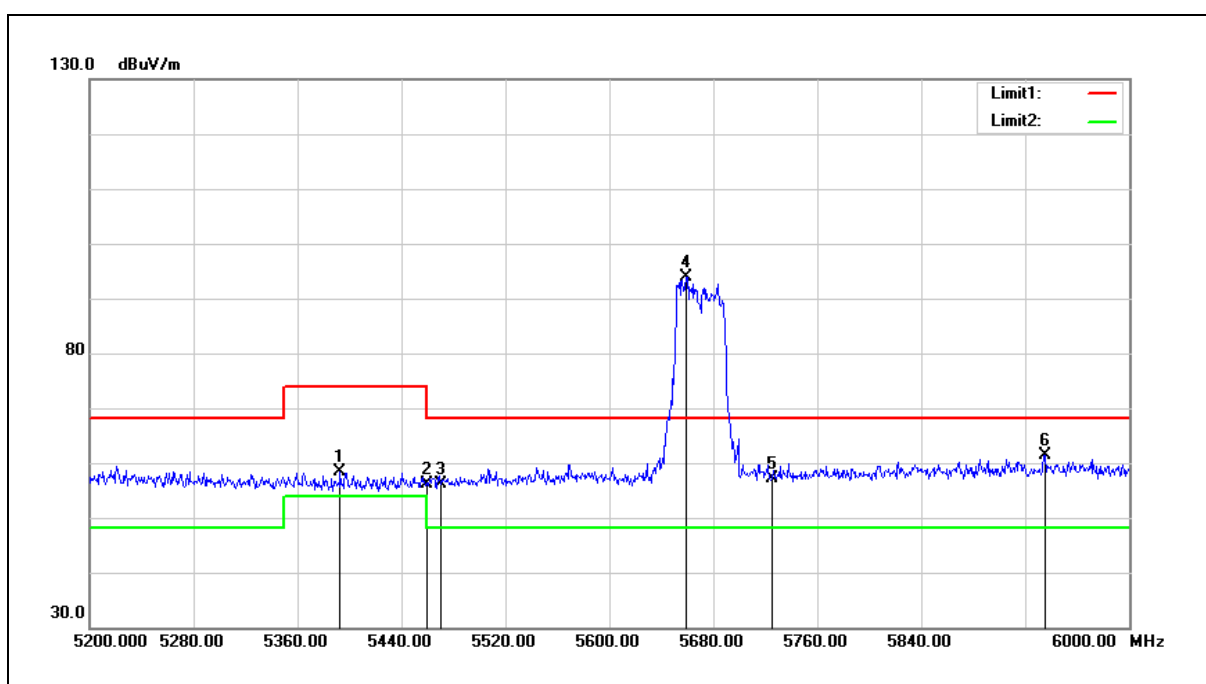


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5392.800           | 59.11             | -0.84                    | 58.27              | 74.00             | -15.73         | peak   |
| 2   | 5460.000           | 56.76             | -0.70                    | 56.06              | 74.00             | -17.94         | peak   |
| 3   | 5470.000           | 56.89             | -0.68                    | 56.21              | 68.20             | -11.99         | peak   |
| 4   | 5659.200           | 94.24             | -0.25                    | 93.99              | --                | --             | peak   |
| 5   | 5725.000           | 57.23             | -0.10                    | 57.13              | 68.20             | -11.07         | peak   |
| 6   | 5935.200           | 60.95             | 0.39                     | 61.34              | 68.20             | -6.86          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5670 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

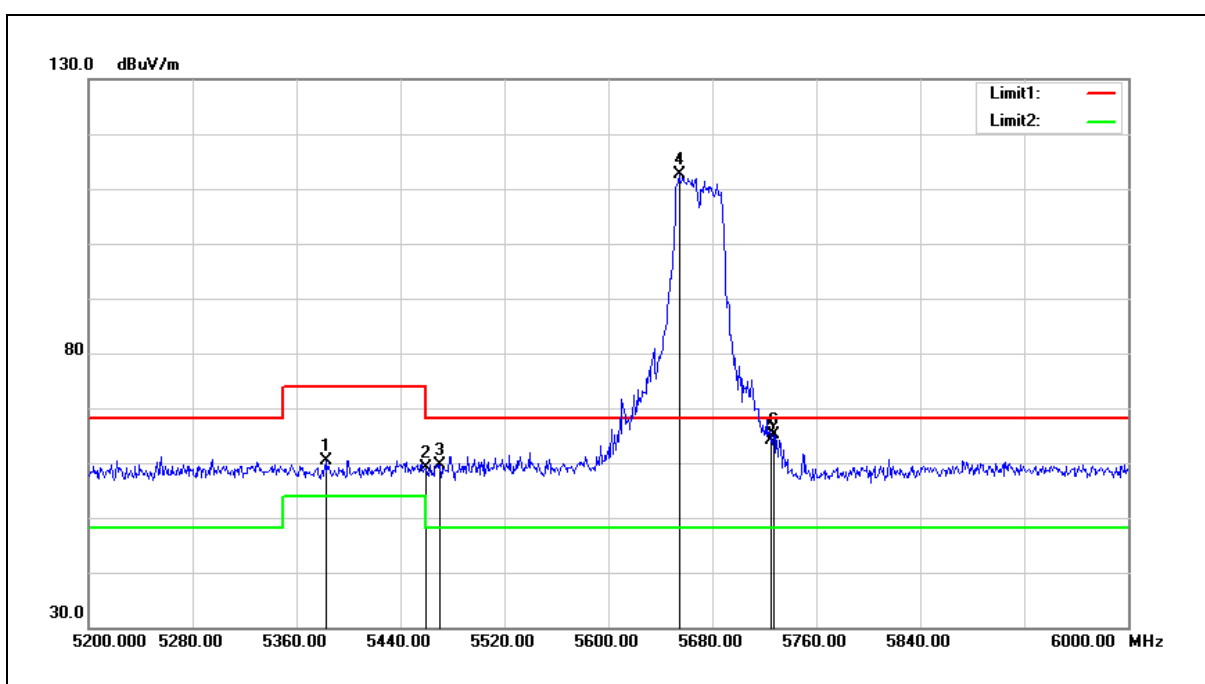


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5383.200           | 61.28             | -0.86                    | 60.42              | 74.00             | -13.58         | peak   |
| 2   | 5460.000           | 59.76             | -0.70                    | 59.06              | 74.00             | -14.94         | peak   |
| 3   | 5470.000           | 60.37             | -0.68                    | 59.69              | 68.20             | -8.51          | peak   |
| 4   | 5654.400           | 112.85            | -0.26                    | 112.59             | --                | --             | peak   |
| 5   | 5725.000           | 64.32             | -0.10                    | 64.22              | 68.20             | -3.98          | peak   |
| 6   | 5727.200           | 65.27             | -0.09                    | 65.18              | 68.20             | -3.02          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5755 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

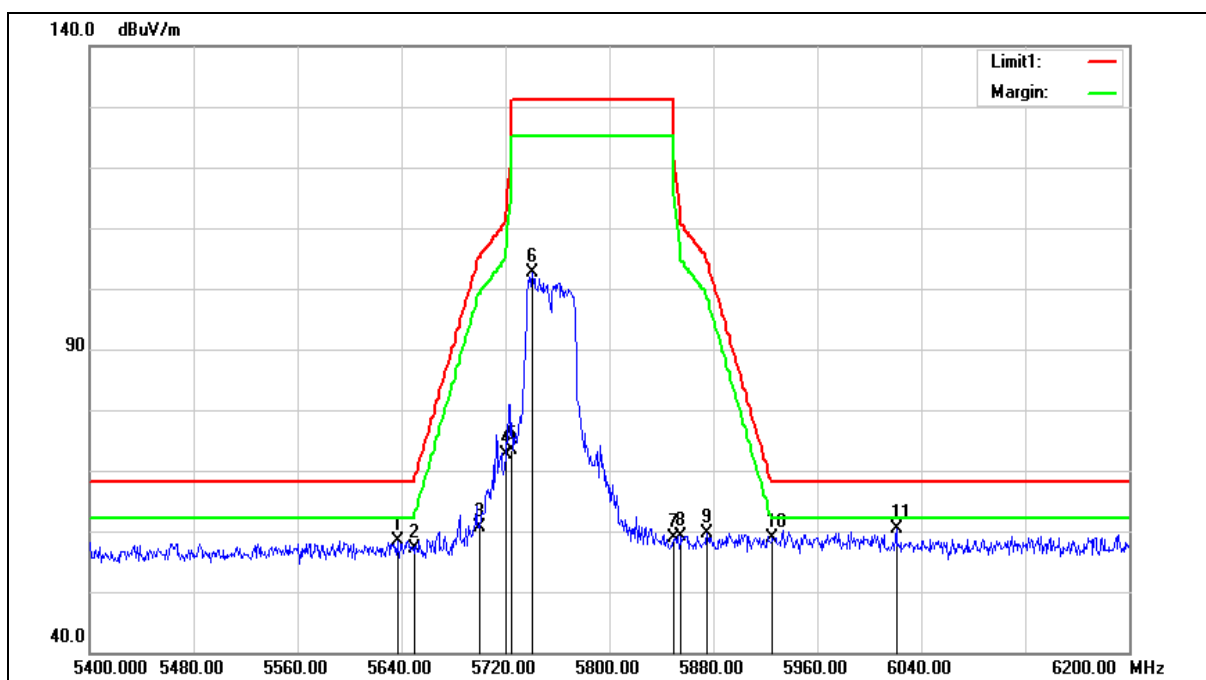

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5755 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5636.800           | 58.72             | -0.31                    | 58.41              | 68.20             | -9.79          | peak   |
| 2   | 5650.000           | 57.40             | -0.28                    | 57.12              | 68.20             | -11.08         | peak   |
| 3   | 5700.000           | 60.90             | -0.16                    | 60.74              | 105.20            | -44.46         | peak   |
| 4   | 5720.000           | 72.66             | -0.11                    | 72.55              | 110.80            | -38.25         | peak   |
| 5   | 5725.000           | 73.59             | -0.10                    | 73.49              | 122.20            | -48.71         | peak   |
| 6   | 5740.800           | 102.80            | -0.06                    | 102.74             | --                | --             | peak   |
| 7   | 5850.000           | 58.57             | 0.20                     | 58.77              | 122.20            | -63.43         | peak   |
| 8   | 5855.000           | 58.87             | 0.21                     | 59.08              | 110.80            | -51.72         | peak   |
| 9   | 5875.000           | 59.41             | 0.26                     | 59.67              | 105.20            | -45.53         | peak   |
| 10  | 5925.000           | 58.40             | 0.38                     | 58.78              | 68.20             | -9.42          | peak   |
| 11  | 6020.800           | 59.69             | 0.62                     | 60.31              | 68.20             | -7.89          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5755 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

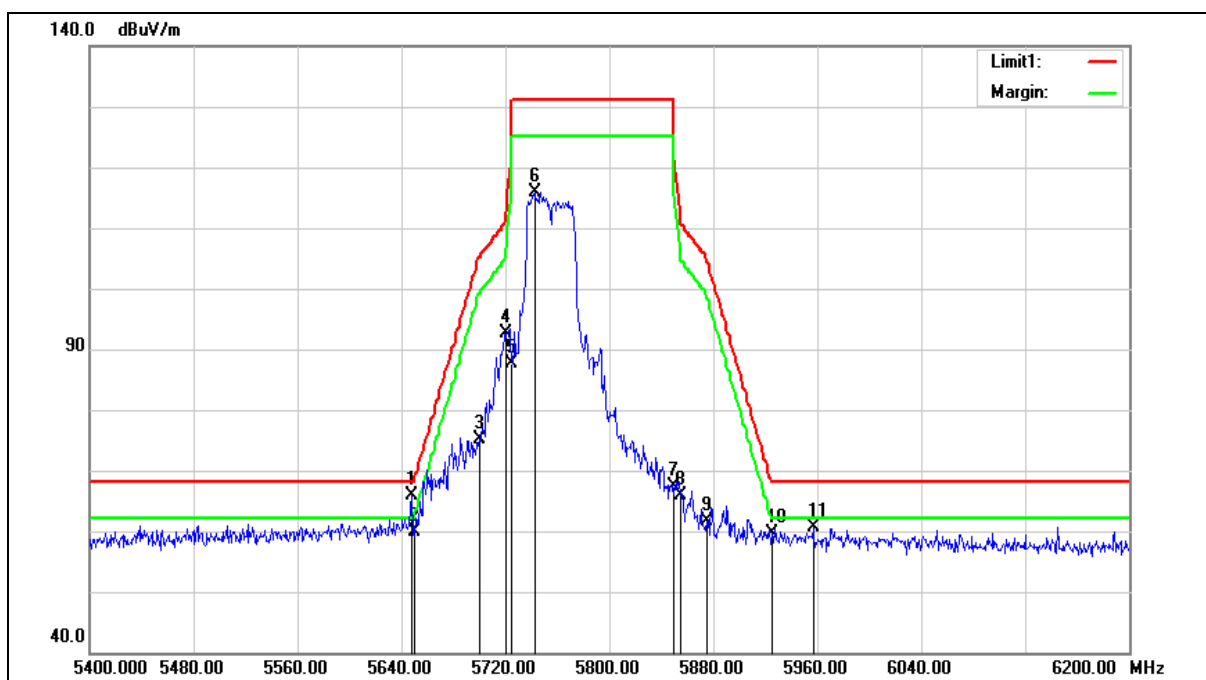

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5755 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5648.000           | 66.22             | -0.28                    | 65.94              | 68.20             | -2.26          | peak   |
| 2   | 5650.000           | 60.25             | -0.28                    | 59.97              | 68.20             | -8.23          | peak   |
| 3   | 5700.000           | 75.26             | -0.16                    | 75.10              | 105.20            | -30.10         | peak   |
| 4   | 5720.000           | 92.70             | -0.11                    | 92.59              | 110.80            | -18.21         | peak   |
| 5   | 5725.000           | 87.65             | -0.10                    | 87.55              | 122.20            | -34.65         | peak   |
| 6   | 5742.400           | 115.84            | -0.06                    | 115.78             | --                | --             | peak   |
| 7   | 5850.000           | 67.22             | 0.20                     | 67.42              | 122.20            | -54.78         | peak   |
| 8   | 5855.000           | 65.78             | 0.21                     | 65.99              | 110.80            | -44.81         | peak   |
| 9   | 5875.000           | 61.28             | 0.26                     | 61.54              | 105.20            | -43.66         | peak   |
| 10  | 5925.000           | 59.29             | 0.38                     | 59.67              | 68.20             | -8.53          | peak   |
| 11  | 5956.800           | 60.17             | 0.45                     | 60.62              | 68.20             | -7.58          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5795 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

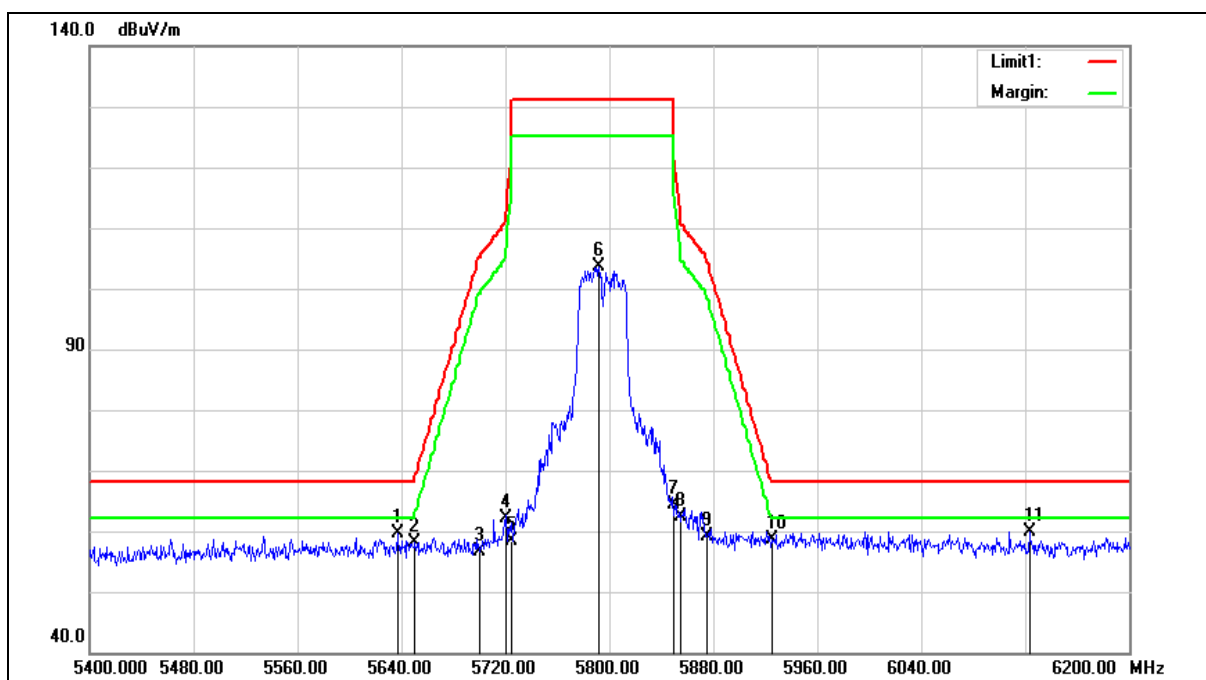

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5795 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5636.800           | 59.94             | -0.31                    | 59.63              | 68.20             | -8.57          | peak   |
| 2   | 5650.000           | 58.36             | -0.28                    | 58.08              | 68.20             | -10.12         | peak   |
| 3   | 5700.000           | 56.76             | -0.16                    | 56.60              | 105.20            | -48.60         | peak   |
| 4   | 5720.000           | 62.24             | -0.11                    | 62.13              | 110.80            | -48.67         | peak   |
| 5   | 5725.000           | 58.40             | -0.10                    | 58.30              | 122.20            | -63.90         | peak   |
| 6   | 5792.000           | 103.65            | 0.06                     | 103.71             | --                | --             | peak   |
| 7   | 5850.000           | 64.27             | 0.20                     | 64.47              | 122.20            | -57.73         | peak   |
| 8   | 5855.000           | 62.25             | 0.21                     | 62.46              | 110.80            | -48.34         | peak   |
| 9   | 5875.000           | 58.89             | 0.26                     | 59.15              | 105.20            | -46.05         | peak   |
| 10  | 5925.000           | 58.17             | 0.38                     | 58.55              | 68.20             | -9.65          | peak   |
| 11  | 6123.200           | 58.96             | 1.00                     | 59.96              | 68.20             | -8.24          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5795 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

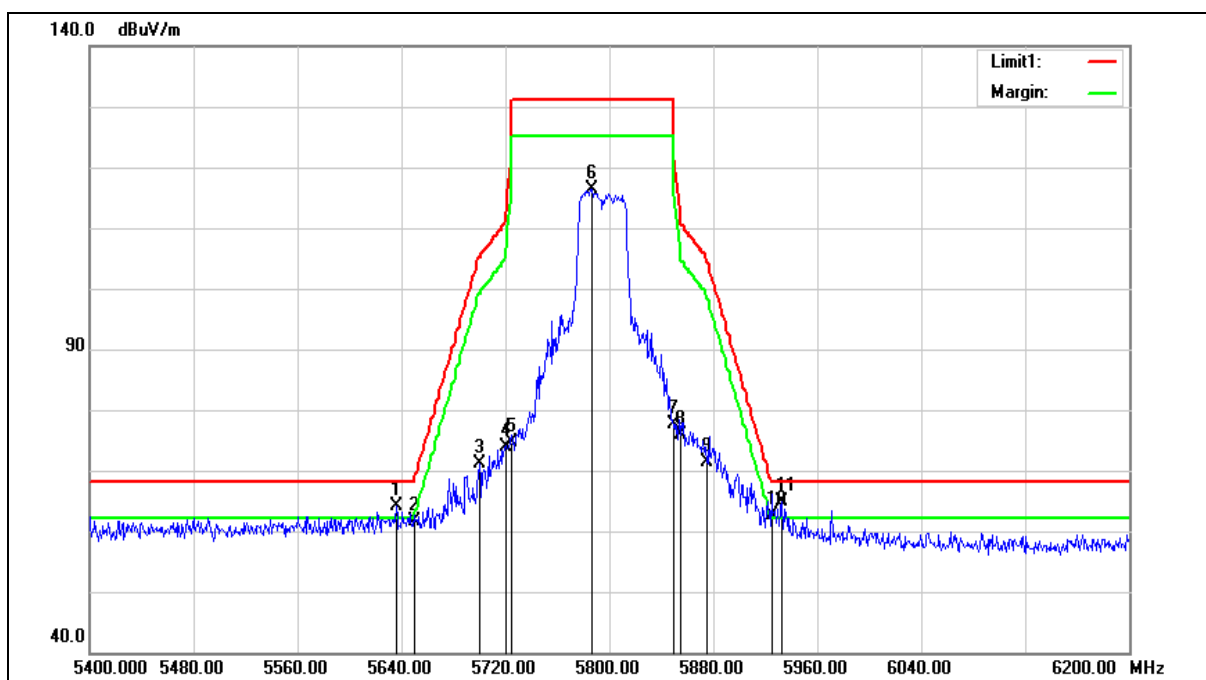

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5795 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5636.000           | 64.32             | -0.31                    | 64.01              | 68.20             | -4.19          | peak   |
| 2   | 5650.000           | 61.85             | -0.28                    | 61.57              | 68.20             | -6.63          | peak   |
| 3   | 5700.000           | 71.35             | -0.16                    | 71.19              | 105.20            | -34.01         | peak   |
| 4   | 5720.000           | 73.87             | -0.11                    | 73.76              | 110.80            | -37.04         | peak   |
| 5   | 5725.000           | 74.84             | -0.10                    | 74.74              | 122.20            | -47.46         | peak   |
| 6   | 5786.400           | 116.39            | 0.04                     | 116.43             | --                | --             | peak   |
| 7   | 5850.000           | 77.45             | 0.20                     | 77.65              | 122.20            | -44.55         | peak   |
| 8   | 5855.000           | 75.66             | 0.21                     | 75.87              | 110.80            | -34.93         | peak   |
| 9   | 5875.000           | 71.13             | 0.26                     | 71.39              | 105.20            | -33.81         | peak   |
| 10  | 5925.000           | 62.27             | 0.38                     | 62.65              | 68.20             | -5.55          | peak   |
| 11  | 5932.800           | 64.54             | 0.39                     | 64.93              | 68.20             | -3.27          | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

### Average

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

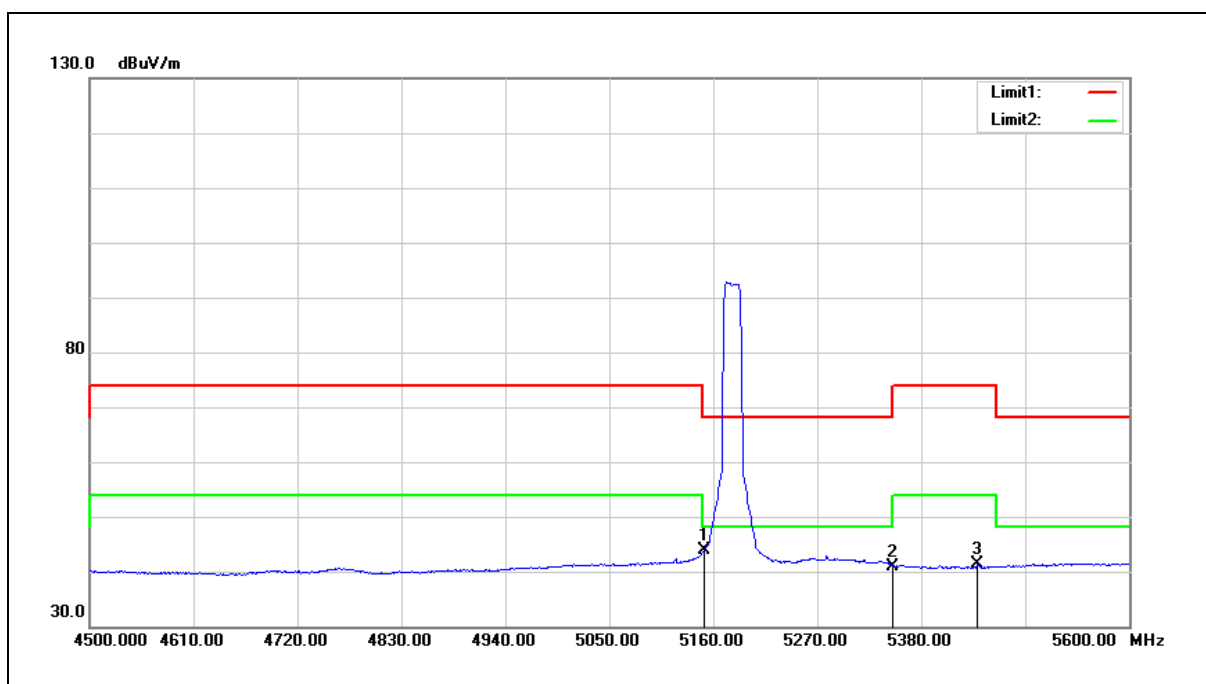


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5150.000        | 45.13          | -1.33                 | 43.80           | 54.00          | -10.20      | AVG    |
| 2   | 5350.000        | 41.91          | -0.92                 | 40.99           | 54.00          | -13.01      | AVG    |
| 3   | 5439.400        | 42.18          | -0.75                 | 41.43           | 54.00          | -12.57      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

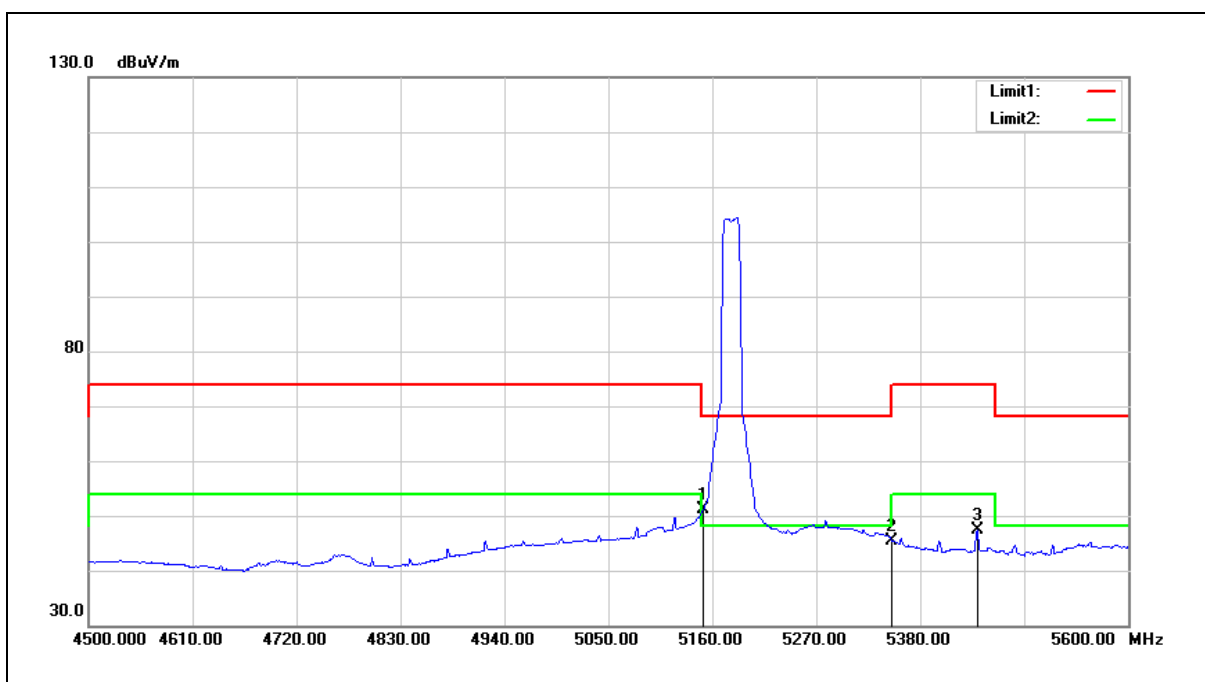


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5150.000        | 52.36          | -1.33                 | 51.03           | 54.00          | -2.97       | AVG    |
| 2   | 5350.000        | 46.23          | -0.92                 | 45.31           | 54.00          | -8.69       | AVG    |
| 3   | 5440.500        | 48.08          | -0.75                 | 47.33           | 54.00          | -6.67       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

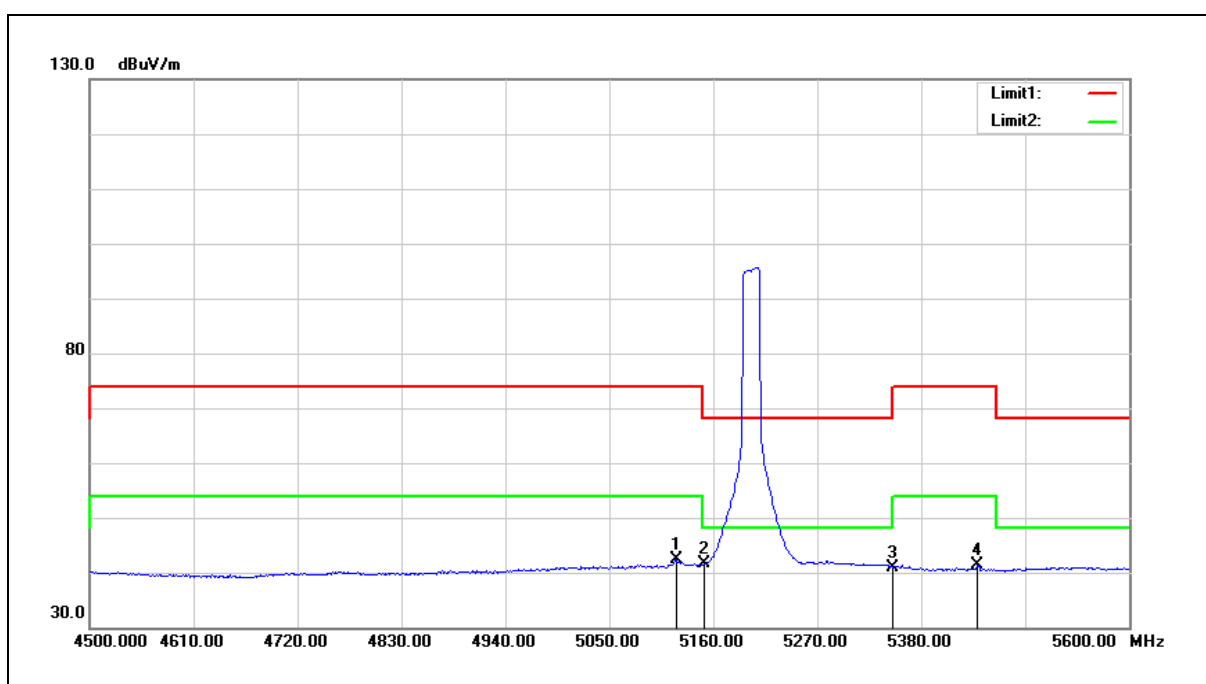


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 43.87          | -1.38                 | 42.49           | 54.00          | -11.51      | AVG    |
| 2   | 5150.000        | 42.93          | -1.33                 | 41.60           | 54.00          | -12.40      | AVG    |
| 3   | 5350.000        | 41.87          | -0.92                 | 40.95           | 54.00          | -13.05      | AVG    |
| 4   | 5439.400        | 42.21          | -0.75                 | 41.46           | 54.00          | -12.54      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

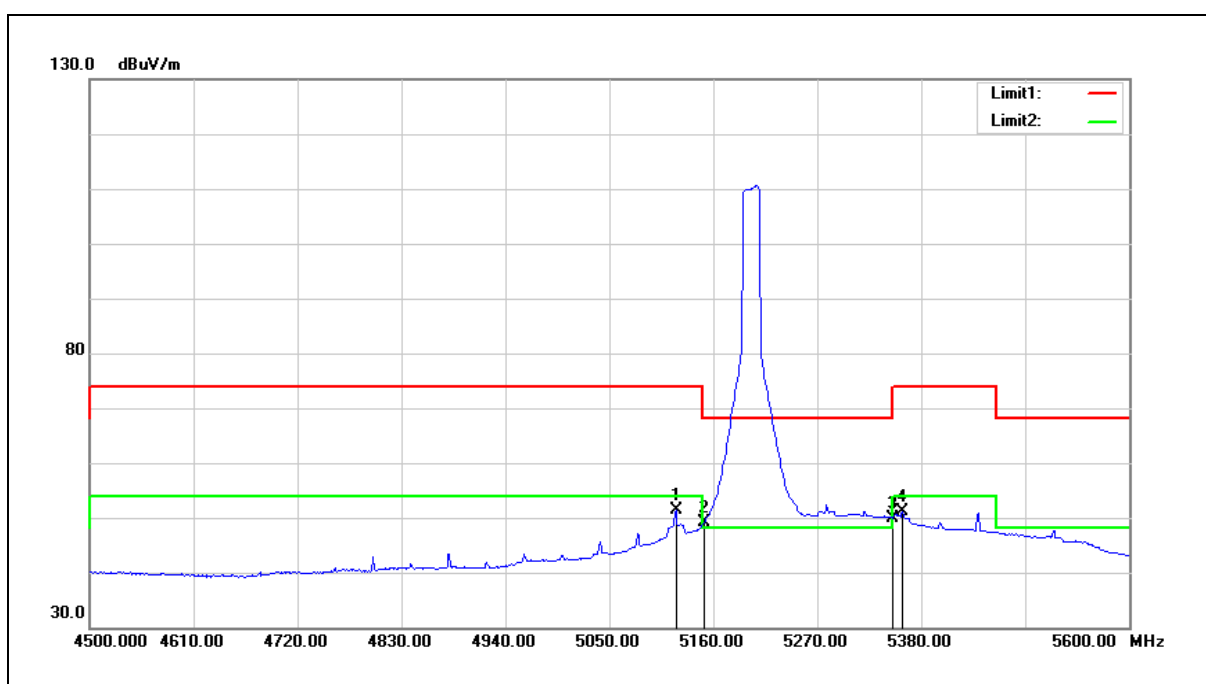


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 52.67             | -1.38                    | 51.29              | 54.00             | -2.71          | AVG    |
| 2   | 5150.000           | 50.35             | -1.33                    | 49.02              | 54.00             | -4.98          | AVG    |
| 3   | 5350.000           | 50.88             | -0.92                    | 49.96              | 54.00             | -4.04          | AVG    |
| 4   | 5360.200           | 51.97             | -0.91                    | 51.06              | 54.00             | -2.94          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

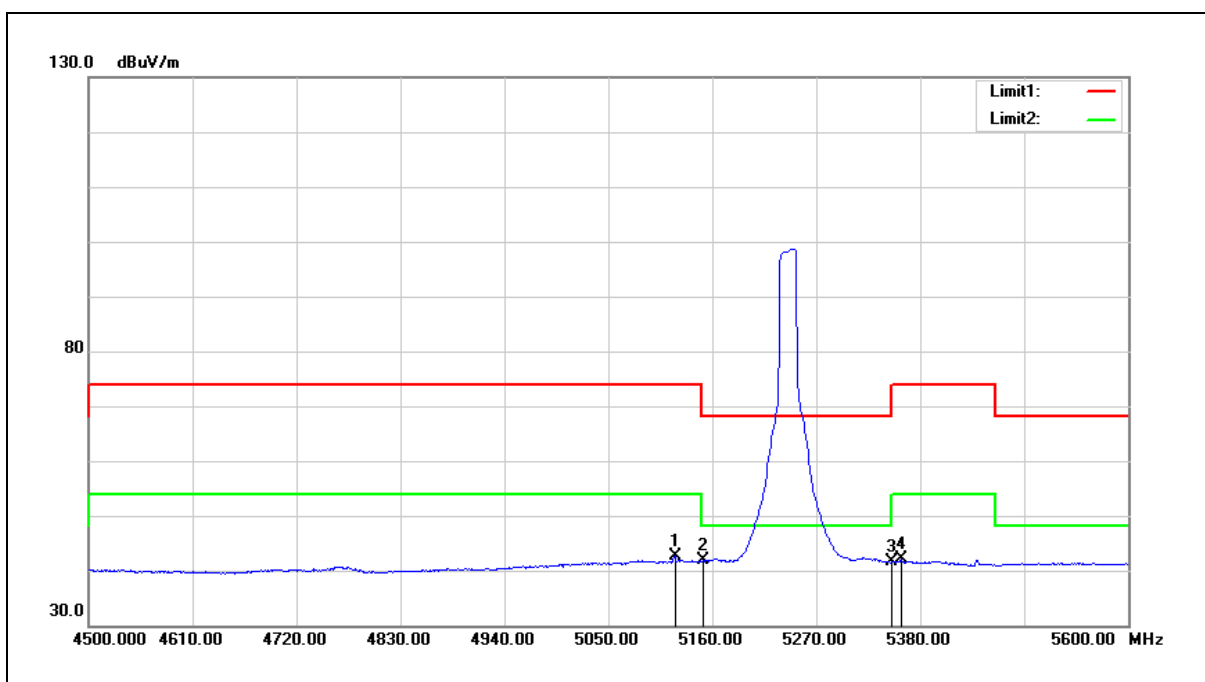


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 44.08          | -1.38                 | 42.70           | 54.00          | -11.30      | AVG    |
| 2   | 5150.000        | 43.10          | -1.33                 | 41.77           | 54.00          | -12.23      | AVG    |
| 3   | 5350.000        | 42.44          | -0.92                 | 41.52           | 54.00          | -12.48      | AVG    |
| 4   | 5360.200        | 43.09          | -0.91                 | 42.18           | 54.00          | -11.82      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

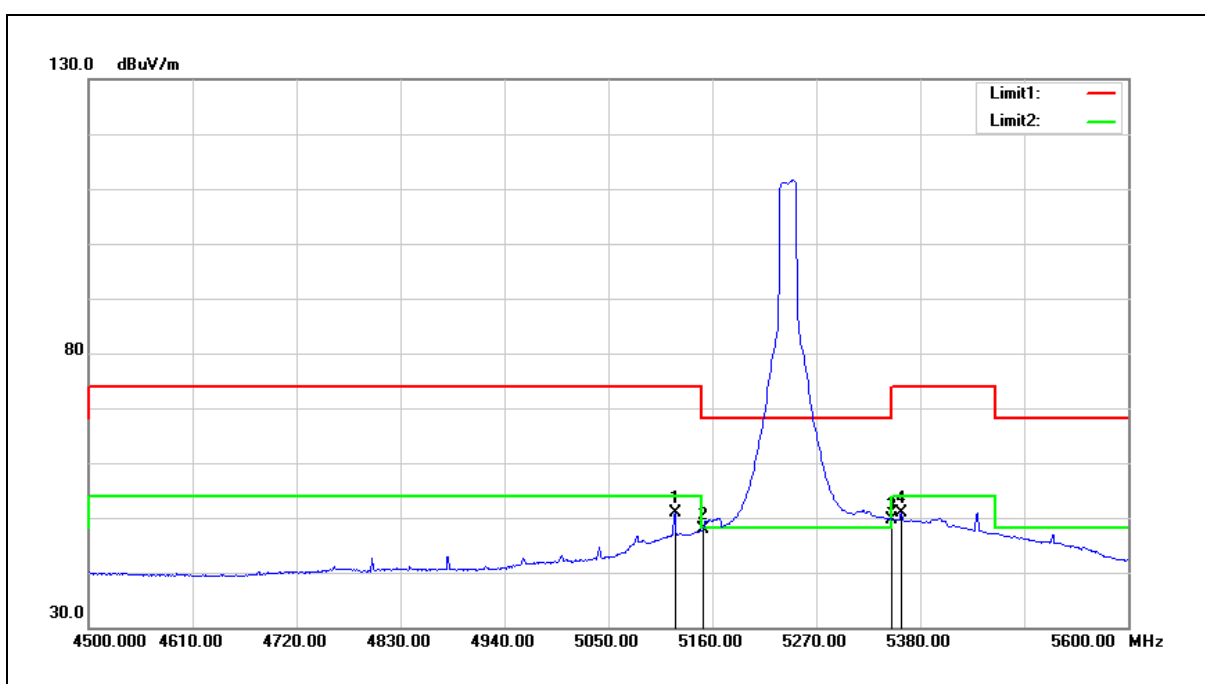


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 52.31             | -1.38                    | 50.93              | 54.00             | -3.07          | AVG    |
| 2   | 5150.000           | 49.16             | -1.33                    | 47.83              | 54.00             | -6.17          | AVG    |
| 3   | 5350.000           | 50.64             | -0.92                    | 49.72              | 54.00             | -4.28          | AVG    |
| 4   | 5360.200           | 51.76             | -0.91                    | 50.85              | 54.00             | -3.15          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

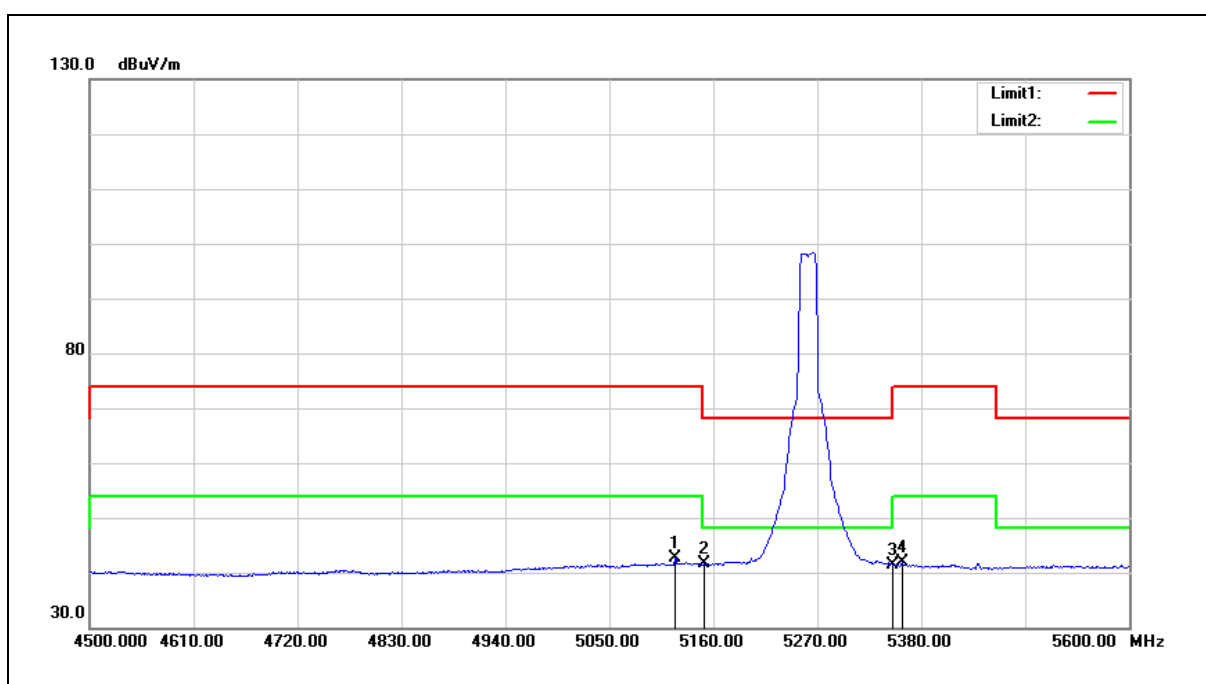


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5119.300           | 44.08             | -1.38                    | 42.70              | 54.00             | -11.30         | AVG    |
| 2   | 5150.000           | 42.86             | -1.33                    | 41.53              | 54.00             | -12.47         | AVG    |
| 3   | 5350.000           | 42.22             | -0.92                    | 41.30              | 54.00             | -12.70         | AVG    |
| 4   | 5360.200           | 42.69             | -0.91                    | 41.78              | 54.00             | -12.22         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

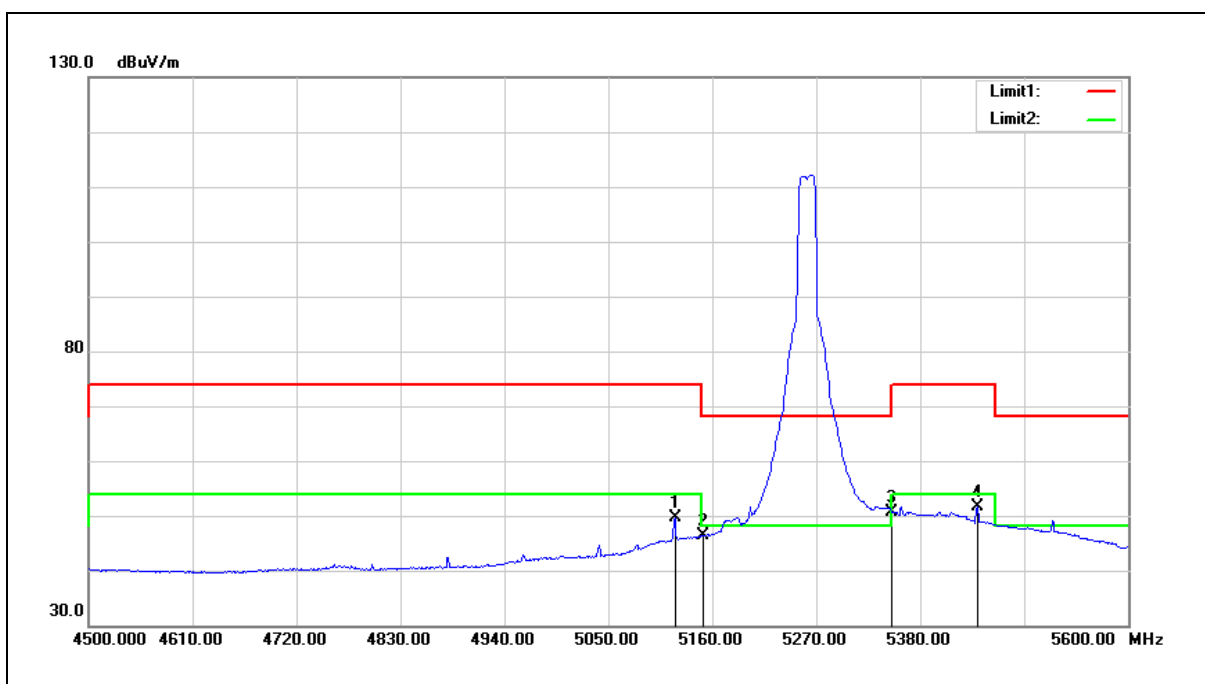


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 51.01             | -1.38                    | 49.63              | 54.00             | -4.37          | AVG    |
| 2   | 5150.000           | 47.66             | -1.33                    | 46.33              | 54.00             | -7.67          | AVG    |
| 3   | 5350.000           | 51.57             | -0.92                    | 50.65              | 54.00             | -3.35          | AVG    |
| 4   | 5440.500           | 52.43             | -0.75                    | 51.68              | 54.00             | -2.32          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

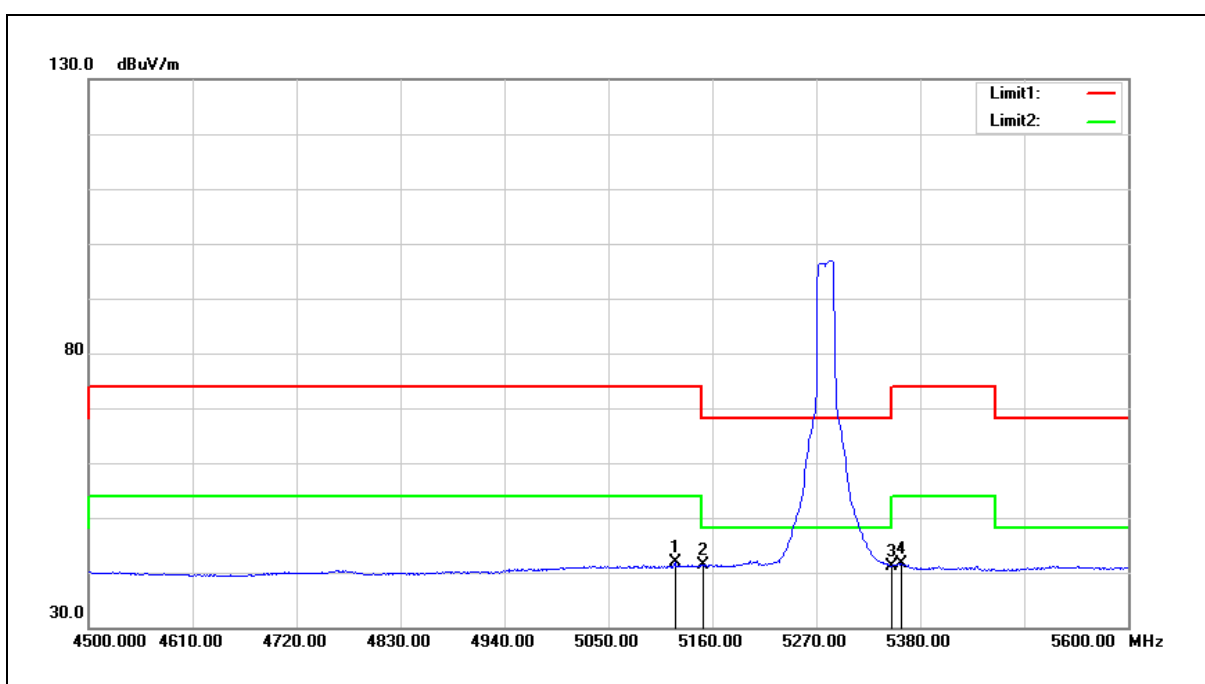


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 43.15             | -1.38                    | 41.77              | 54.00             | -12.23         | AVG    |
| 2   | 5150.000           | 42.71             | -1.33                    | 41.38              | 54.00             | -12.62         | AVG    |
| 3   | 5350.000           | 42.08             | -0.92                    | 41.16              | 54.00             | -12.84         | AVG    |
| 4   | 5360.200           | 42.50             | -0.91                    | 41.59              | 54.00             | -12.41         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

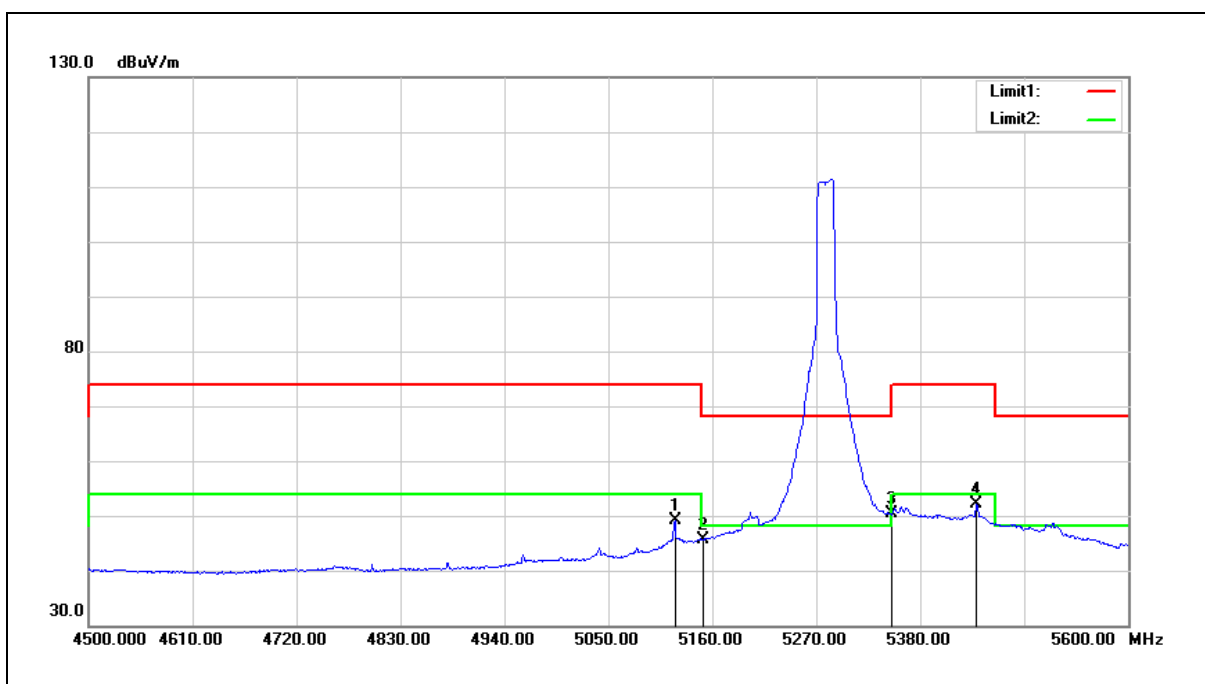


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 50.43             | -1.38                    | 49.05              | 54.00             | -4.95          | AVG    |
| 2   | 5150.000           | 46.98             | -1.33                    | 45.65              | 54.00             | -8.35          | AVG    |
| 3   | 5350.000           | 51.40             | -0.92                    | 50.48              | 54.00             | -3.52          | AVG    |
| 4   | 5439.400           | 52.79             | -0.75                    | 52.04              | 54.00             | -1.96          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

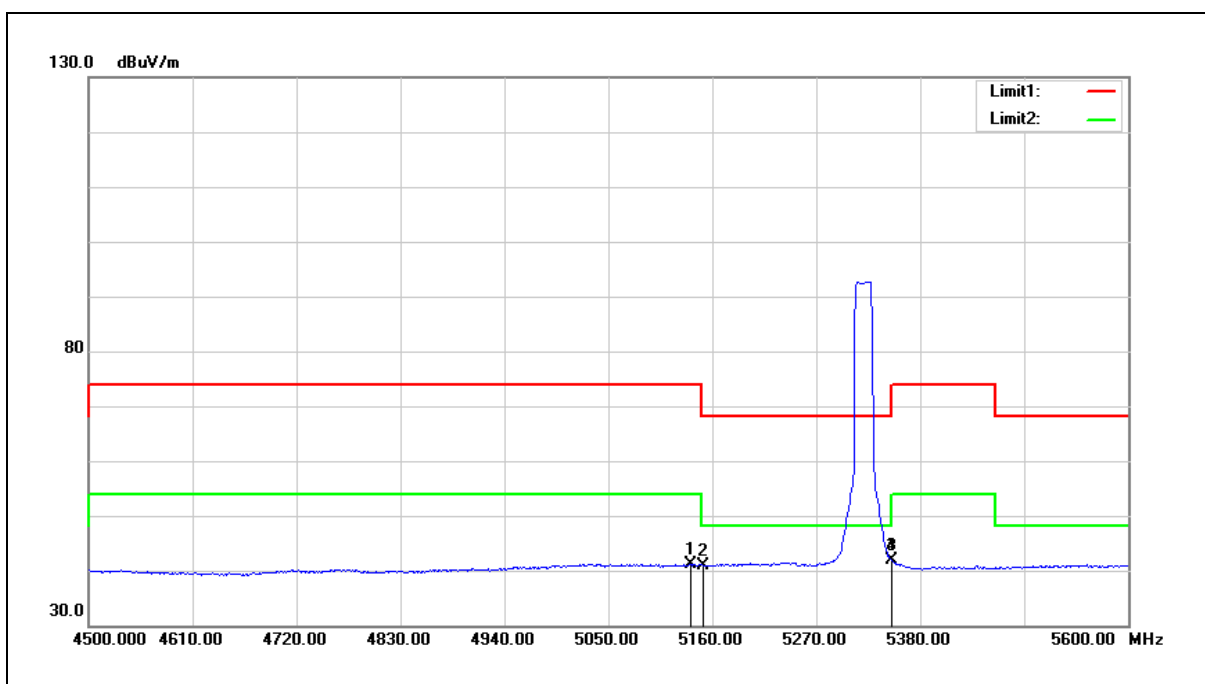


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5136.900        | 42.55          | -1.35                 | 41.20           | 54.00          | -12.80      | AVG    |
| 2   | 5150.000        | 42.23          | -1.33                 | 40.90           | 54.00          | -13.10      | AVG    |
| 3   | 5350.000        | 42.75          | -0.92                 | 41.83           | 54.00          | -12.17      | AVG    |
| 4   | 5350.300        | 42.75          | -0.92                 | 41.83           | 54.00          | -12.17      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

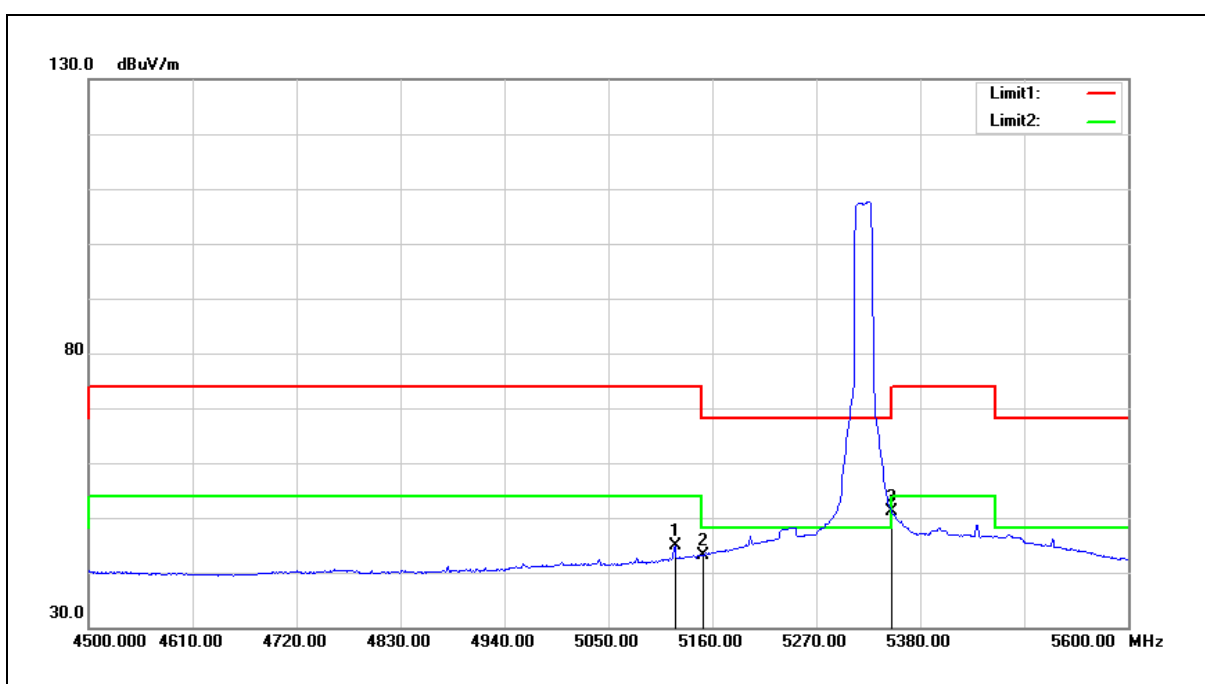


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 46.30          | -1.38                 | 44.92           | 54.00          | -9.08       | AVG    |
| 2   | 5150.000        | 44.44          | -1.33                 | 43.11           | 54.00          | -10.89      | AVG    |
| 3   | 5350.000        | 52.00          | -0.92                 | 51.08           | 54.00          | -2.92       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

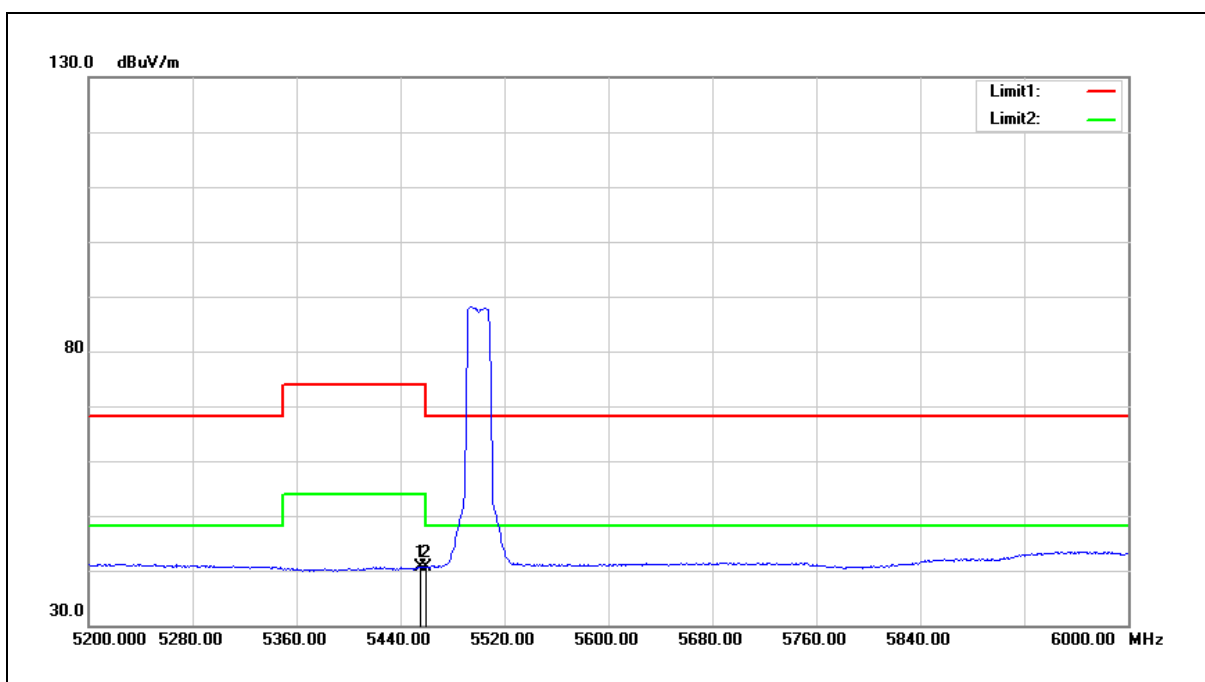


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5455.200           | 41.38             | -0.72                    | 40.66              | 54.00             | -13.34         | AVG    |
| 2   | 5460.000           | 41.35             | -0.70                    | 40.65              | 54.00             | -13.35         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

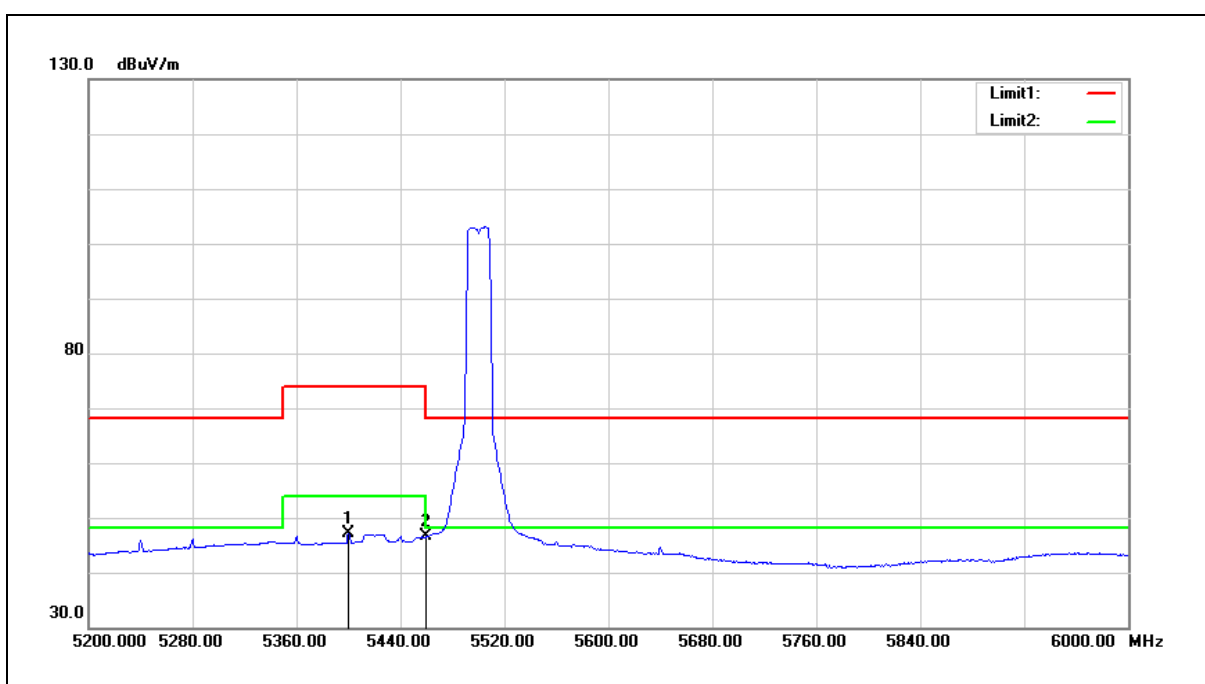


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5400.000           | 48.03             | -0.83                    | 47.20              | 54.00             | -6.80          | AVG    |
| 2   | 5460.000           | 47.22             | -0.70                    | 46.52              | 54.00             | -7.48          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

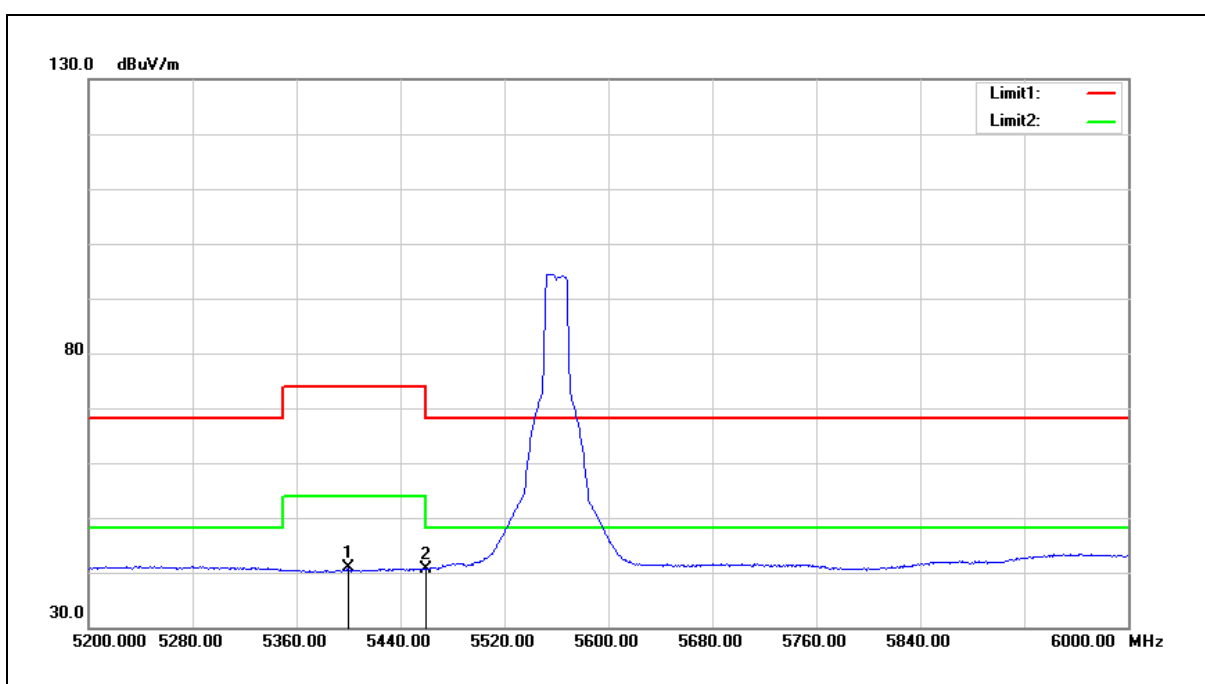


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5400.000        | 41.63          | -0.83                 | 40.80           | 54.00          | -13.20      | AVG    |
| 2   | 5460.000        | 41.33          | -0.70                 | 40.63           | 54.00          | -13.37      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

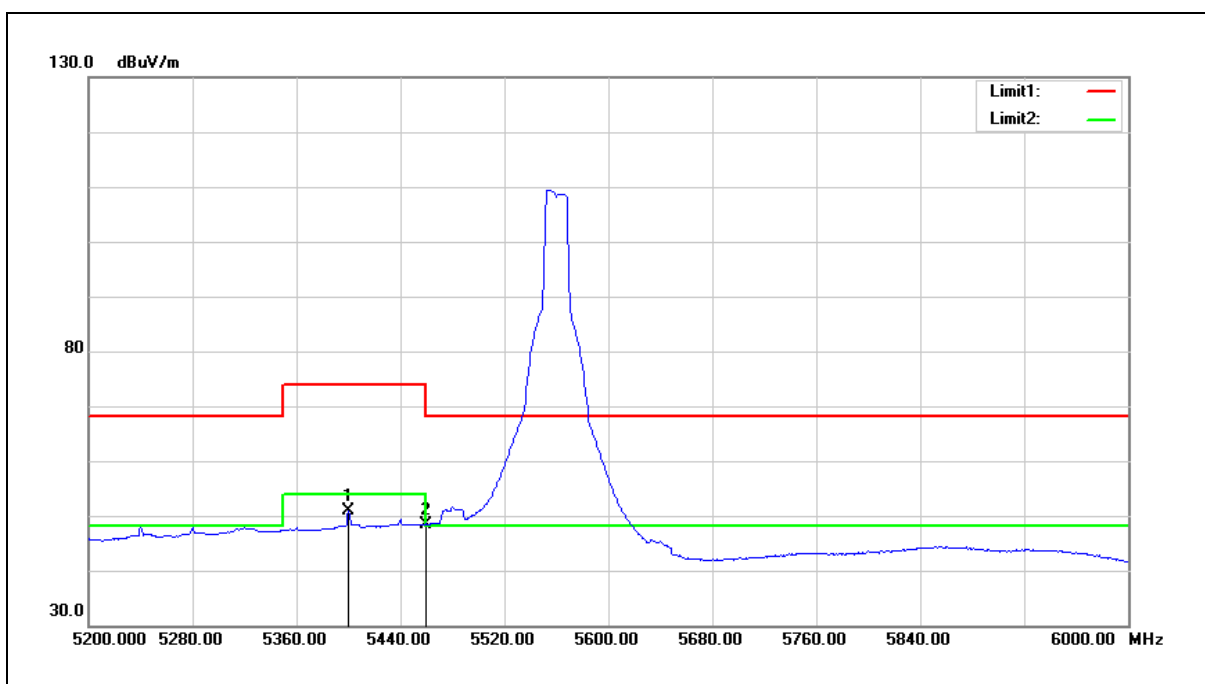


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5400.000        | 51.81          | -0.83                 | 50.98           | 54.00          | -3.02       | AVG    |
| 2   | 5460.000        | 49.18          | -0.70                 | 48.48           | 54.00          | -5.52       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

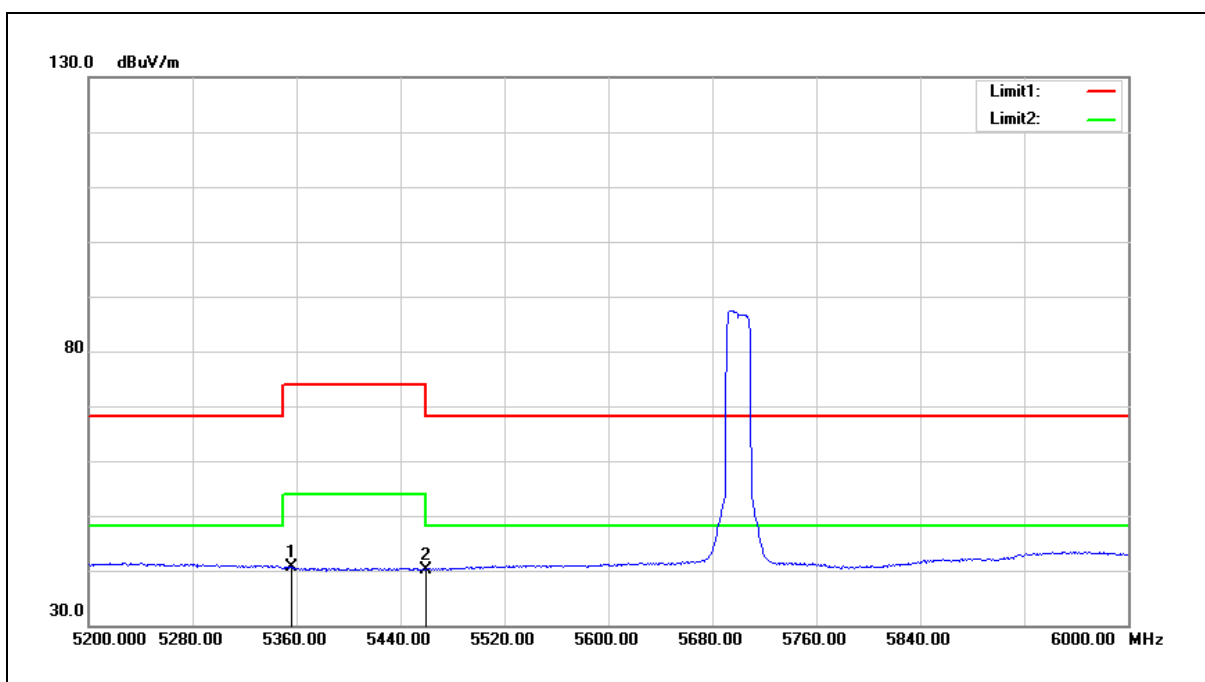


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5356.000        | 41.53          | -0.92                 | 40.61           | 54.00          | -13.39      | AVG    |
| 2   | 5460.000        | 40.87          | -0.70                 | 40.17           | 54.00          | -13.83      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

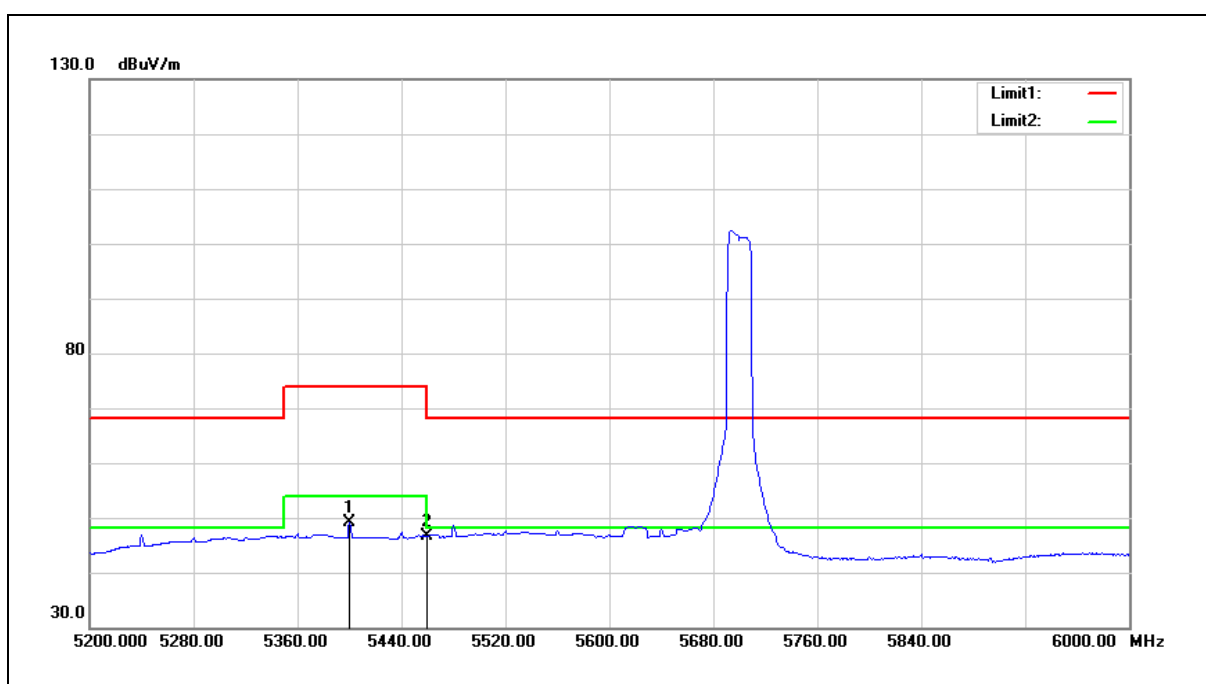


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5400.000        | 49.84          | -0.83                 | 49.01           | 54.00          | -4.99       | AVG    |
| 2   | 5460.000        | 47.37          | -0.70                 | 46.67           | 54.00          | -7.33       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

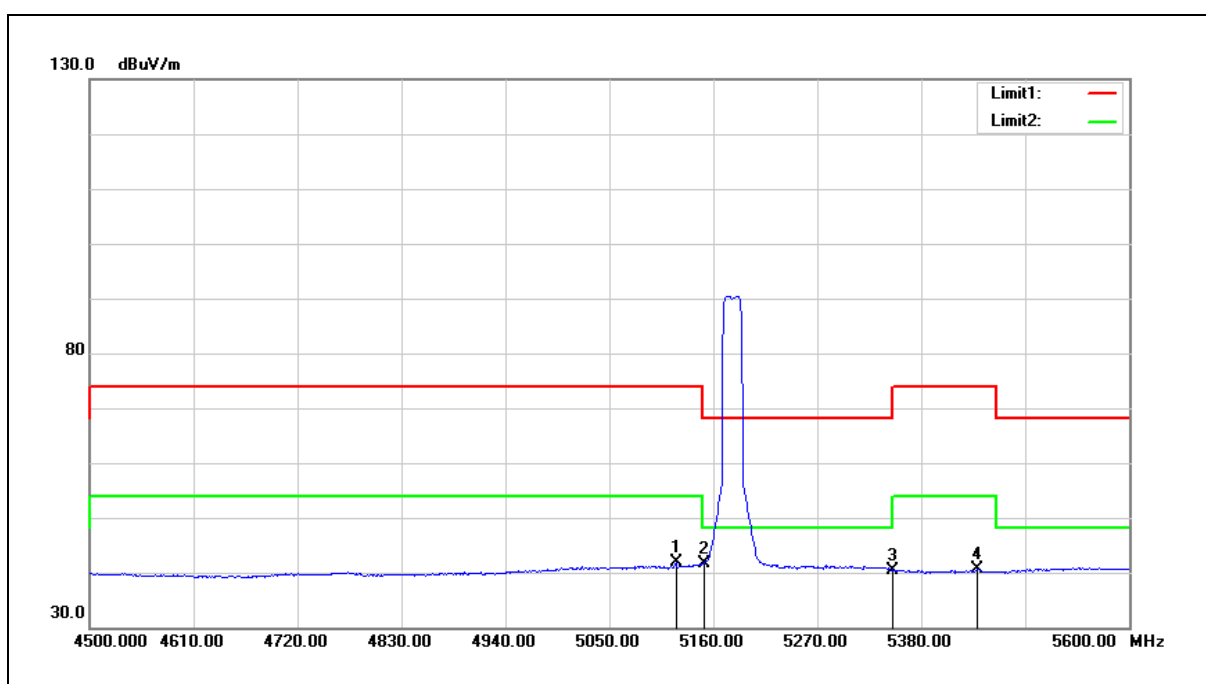


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 43.21          | -1.38                 | 41.83           | 54.00          | -12.17      | AVG    |
| 2   | 5150.000        | 43.00          | -1.33                 | 41.67           | 54.00          | -12.33      | AVG    |
| 3   | 5350.000        | 41.31          | -0.92                 | 40.39           | 54.00          | -13.61      | AVG    |
| 4   | 5439.400        | 41.33          | -0.75                 | 40.58           | 54.00          | -13.42      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

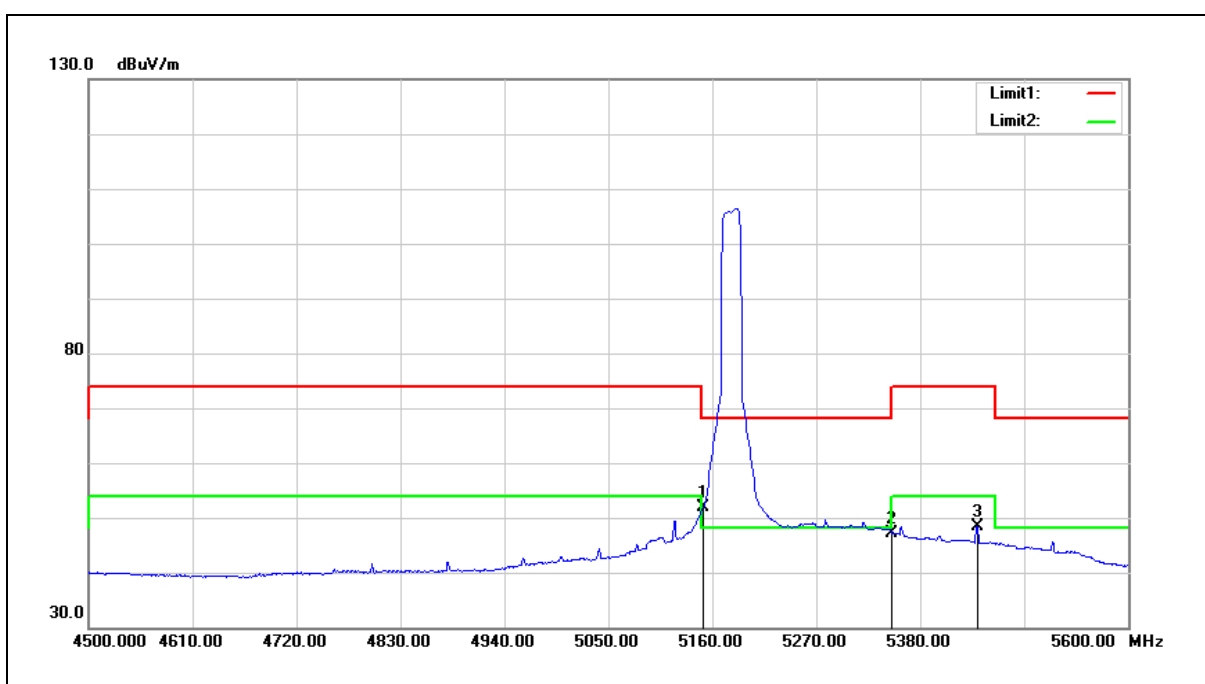


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5150.000        | 53.11          | -1.33                 | 51.78           | 54.00          | -2.22       | AVG    |
| 2   | 5350.000        | 48.08          | -0.92                 | 47.16           | 54.00          | -6.84       | AVG    |
| 3   | 5440.500        | 49.19          | -0.75                 | 48.44           | 54.00          | -5.56       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

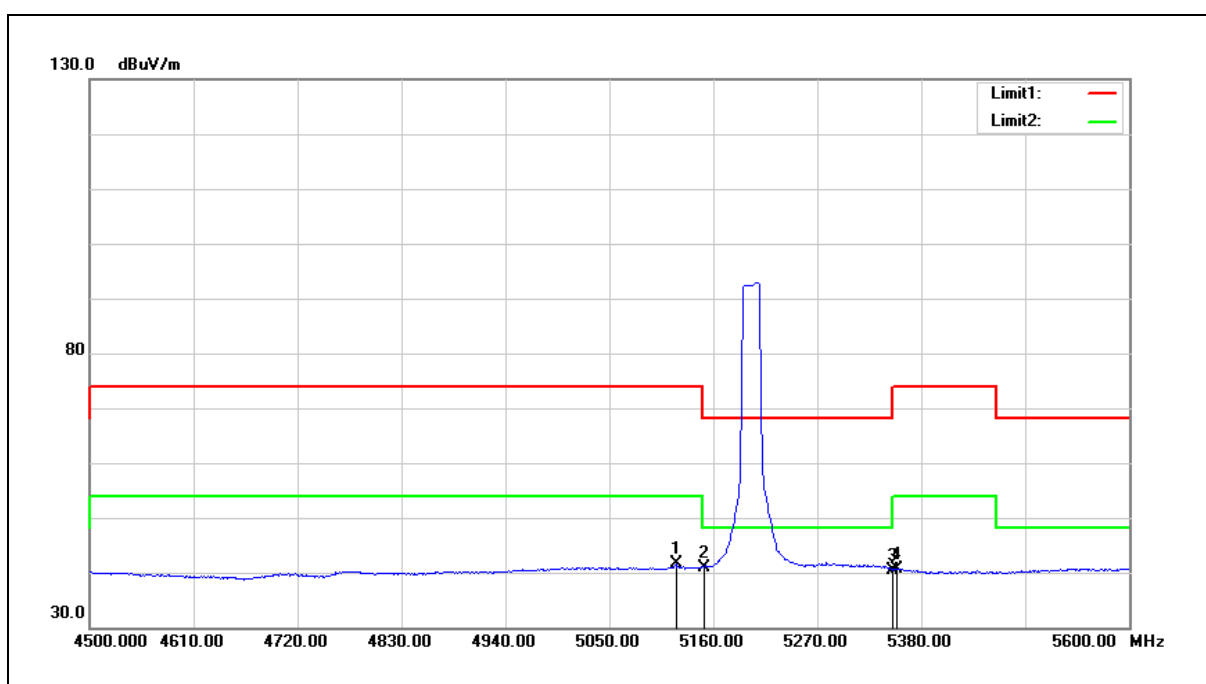


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 42.99          | -1.38                 | 41.61           | 54.00          | -12.39      | AVG    |
| 2   | 5150.000        | 42.24          | -1.33                 | 40.91           | 54.00          | -13.09      | AVG    |
| 3   | 5350.000        | 41.39          | -0.92                 | 40.47           | 54.00          | -13.53      | AVG    |
| 4   | 5354.700        | 41.65          | -0.92                 | 40.73           | 54.00          | -13.27      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

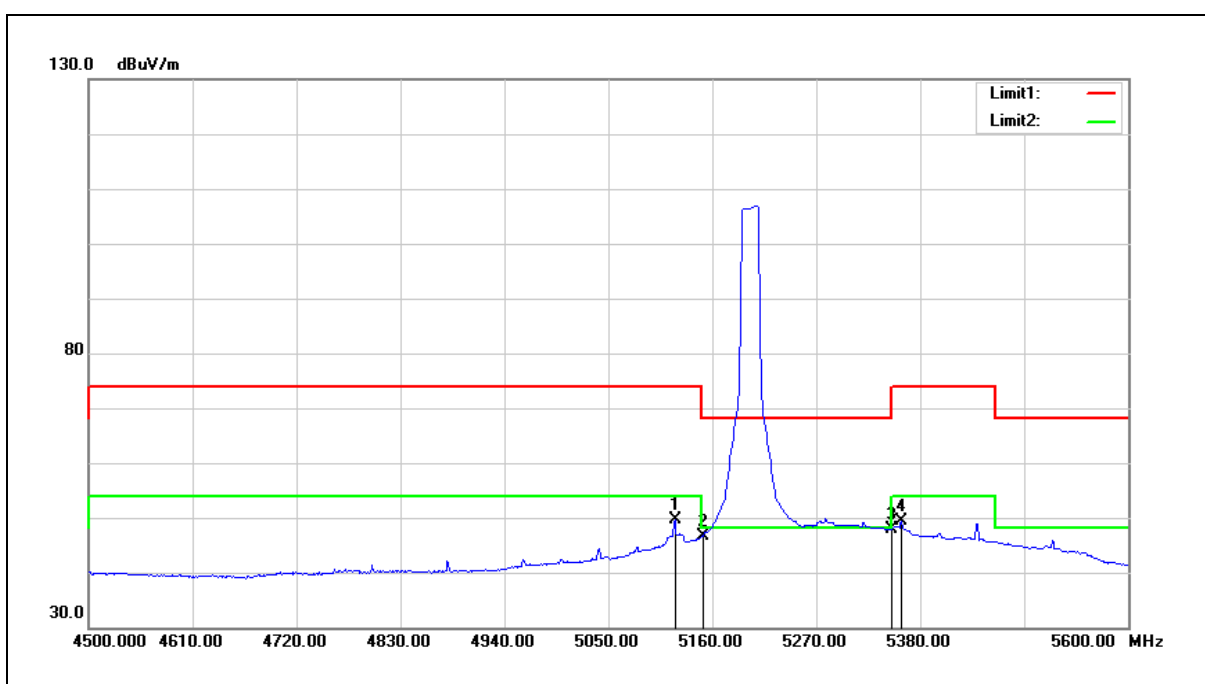


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 50.97             | -1.38                    | 49.59              | 54.00             | -4.41          | AVG    |
| 2   | 5150.000           | 47.99             | -1.33                    | 46.66              | 54.00             | -7.34          | AVG    |
| 3   | 5350.000           | 48.86             | -0.92                    | 47.94              | 54.00             | -6.06          | AVG    |
| 4   | 5360.200           | 50.21             | -0.91                    | 49.30              | 54.00             | -4.70          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

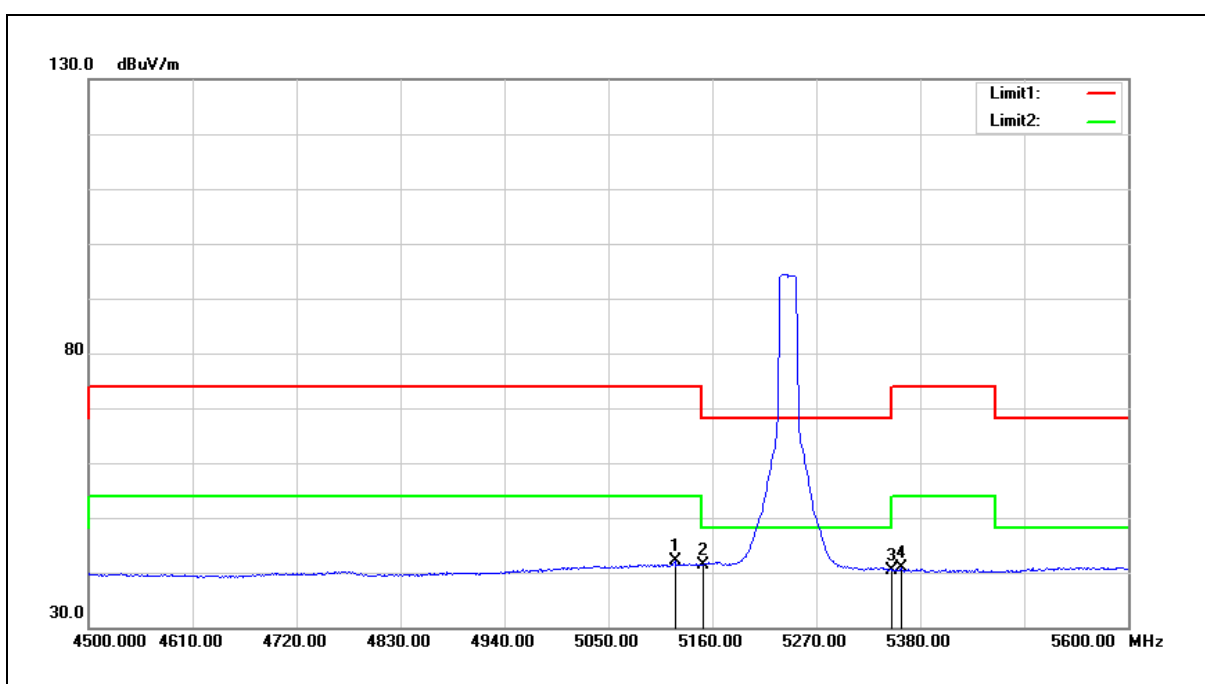


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 43.51             | -1.38                    | 42.13              | 54.00             | -11.87         | AVG    |
| 2   | 5150.000           | 42.72             | -1.33                    | 41.39              | 54.00             | -12.61         | AVG    |
| 3   | 5350.000           | 41.39             | -0.92                    | 40.47              | 54.00             | -13.53         | AVG    |
| 4   | 5360.200           | 41.70             | -0.91                    | 40.79              | 54.00             | -13.21         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

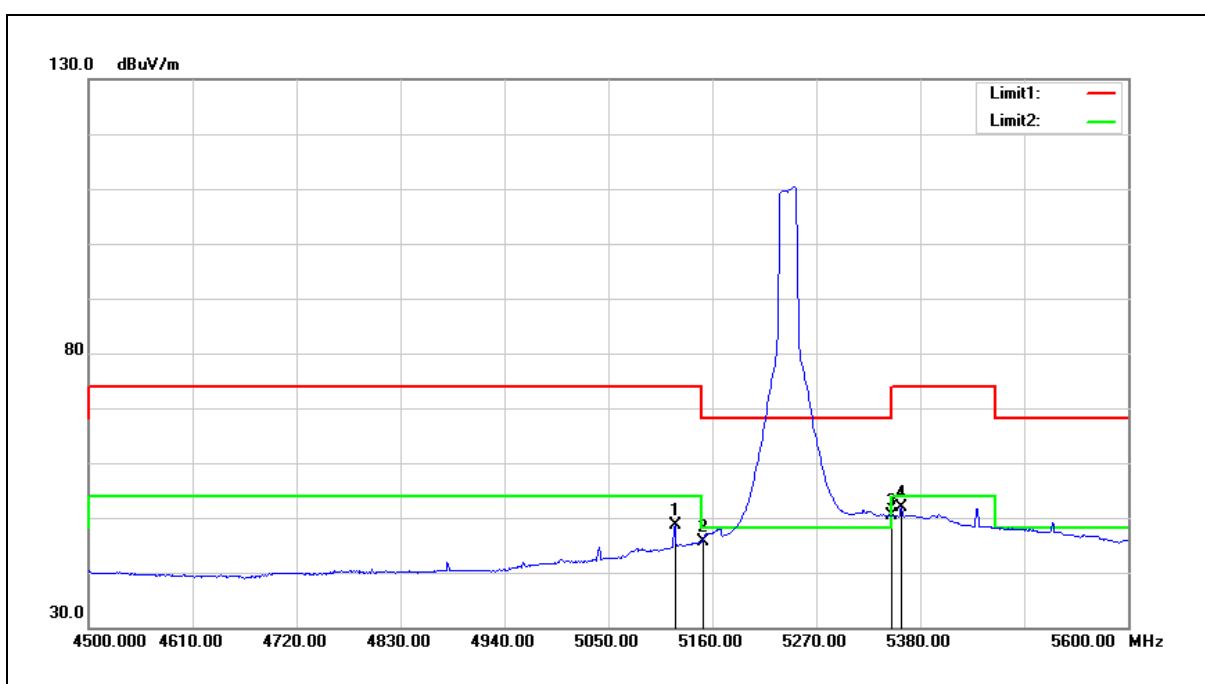


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 50.09             | -1.38                    | 48.71              | 54.00             | -5.29          | AVG    |
| 2   | 5150.000           | 47.02             | -1.33                    | 45.69              | 54.00             | -8.31          | AVG    |
| 3   | 5350.000           | 51.26             | -0.92                    | 50.34              | 54.00             | -3.66          | AVG    |
| 4   | 5360.200           | 52.86             | -0.91                    | 51.95              | 54.00             | -2.05          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

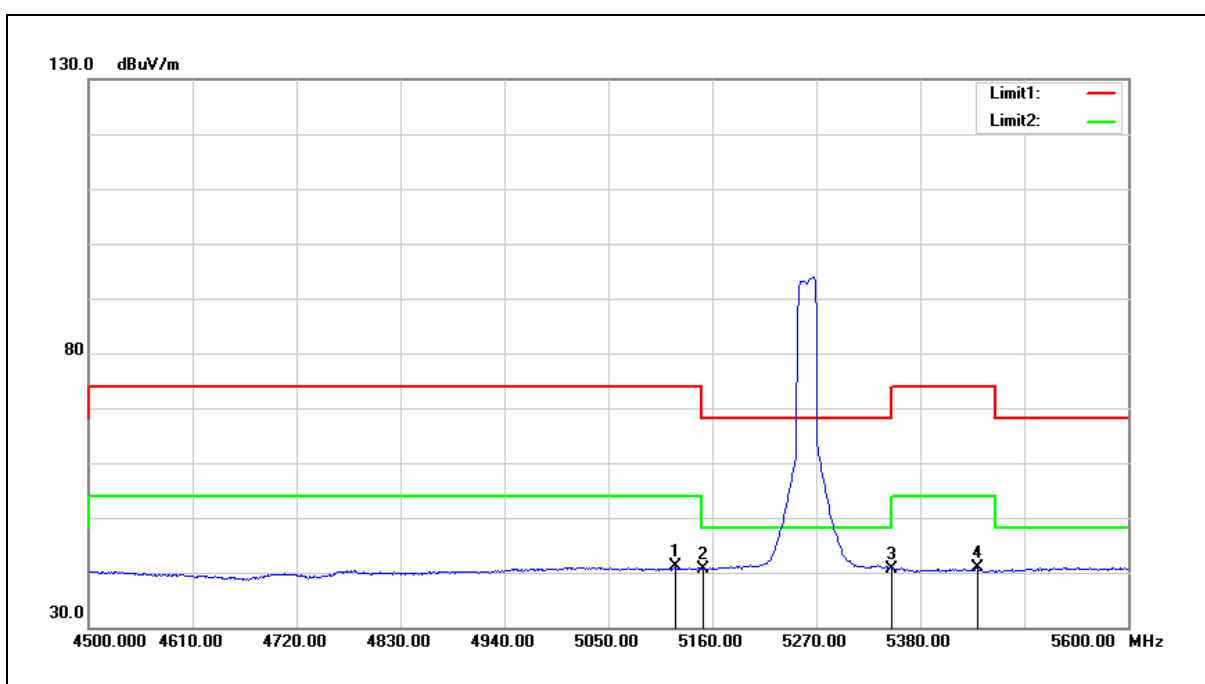


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 42.45             | -1.38                    | 41.07              | 54.00             | -12.93         | AVG    |
| 2   | 5150.000           | 42.00             | -1.33                    | 40.67              | 54.00             | -13.33         | AVG    |
| 3   | 5350.000           | 41.62             | -0.92                    | 40.70              | 54.00             | -13.30         | AVG    |
| 4   | 5440.500           | 41.58             | -0.75                    | 40.83              | 54.00             | -13.17         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

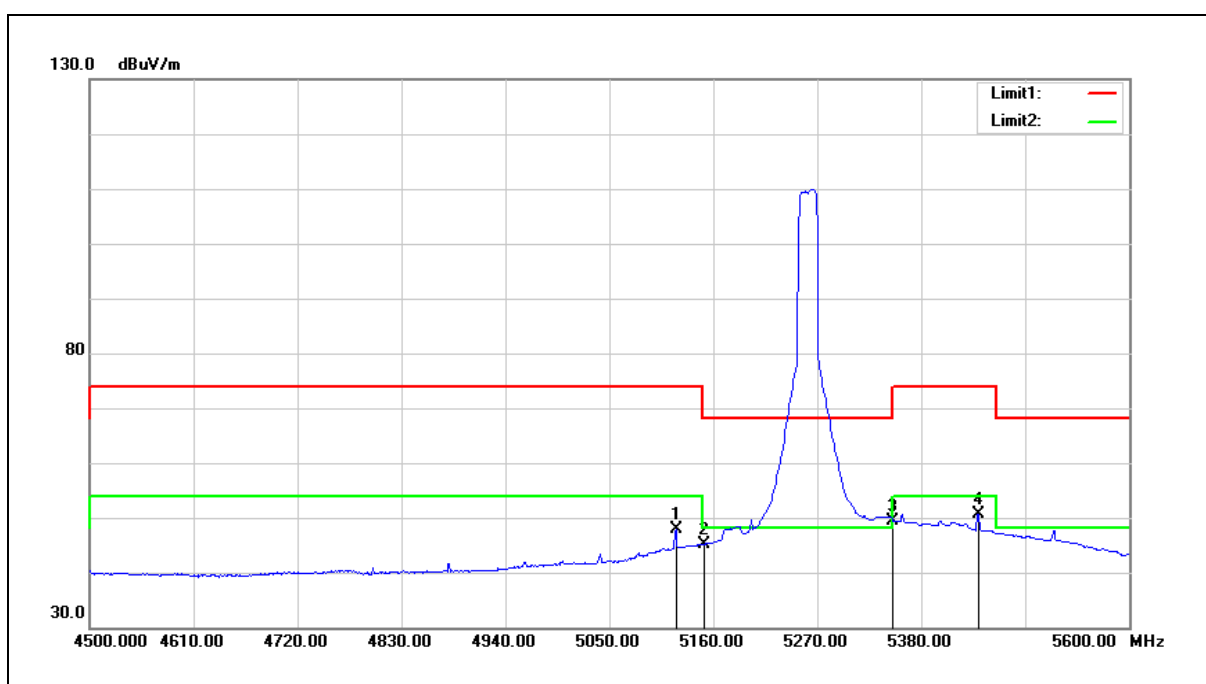


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 49.33          | -1.38                 | 47.95           | 54.00          | -6.05       | AVG    |
| 2   | 5150.000        | 46.58          | -1.33                 | 45.25           | 54.00          | -8.75       | AVG    |
| 3   | 5350.000        | 50.33          | -0.92                 | 49.41           | 54.00          | -4.59       | AVG    |
| 4   | 5440.500        | 51.44          | -0.75                 | 50.69           | 54.00          | -3.31       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

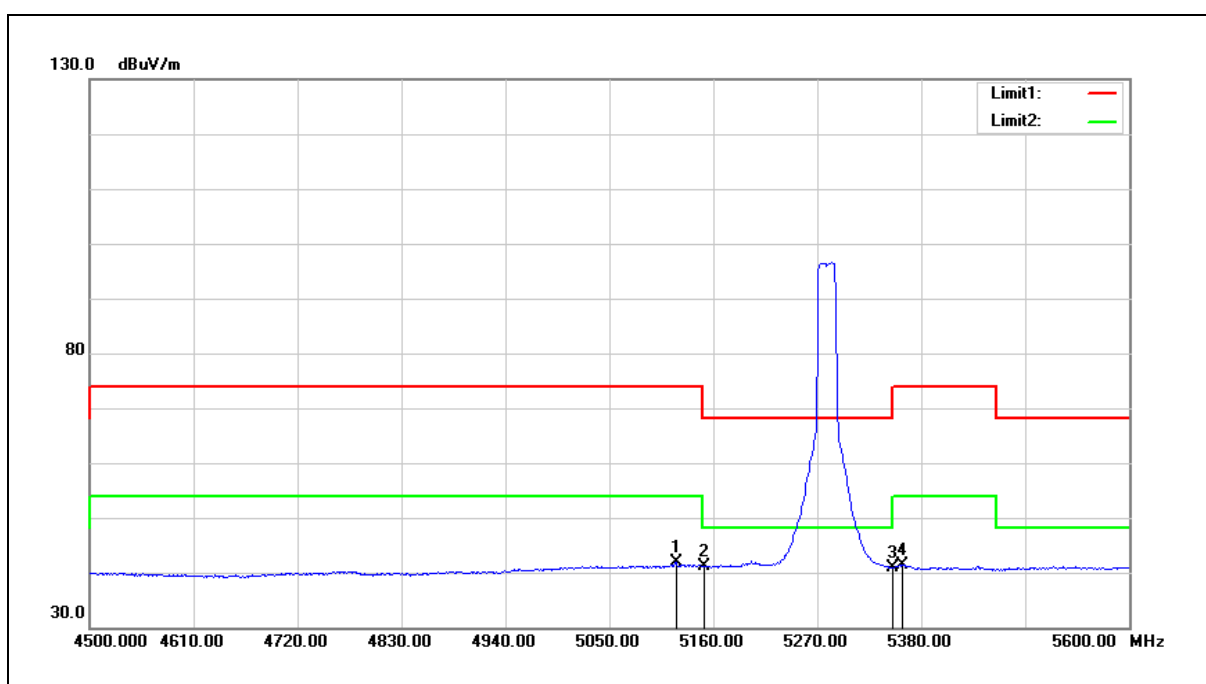


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 43.31             | -1.38                    | 41.93              | 54.00             | -12.07         | AVG    |
| 2   | 5150.000           | 42.34             | -1.33                    | 41.01              | 54.00             | -12.99         | AVG    |
| 3   | 5350.000           | 41.91             | -0.92                    | 40.99              | 54.00             | -13.01         | AVG    |
| 4   | 5360.200           | 42.32             | -0.91                    | 41.41              | 54.00             | -12.59         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

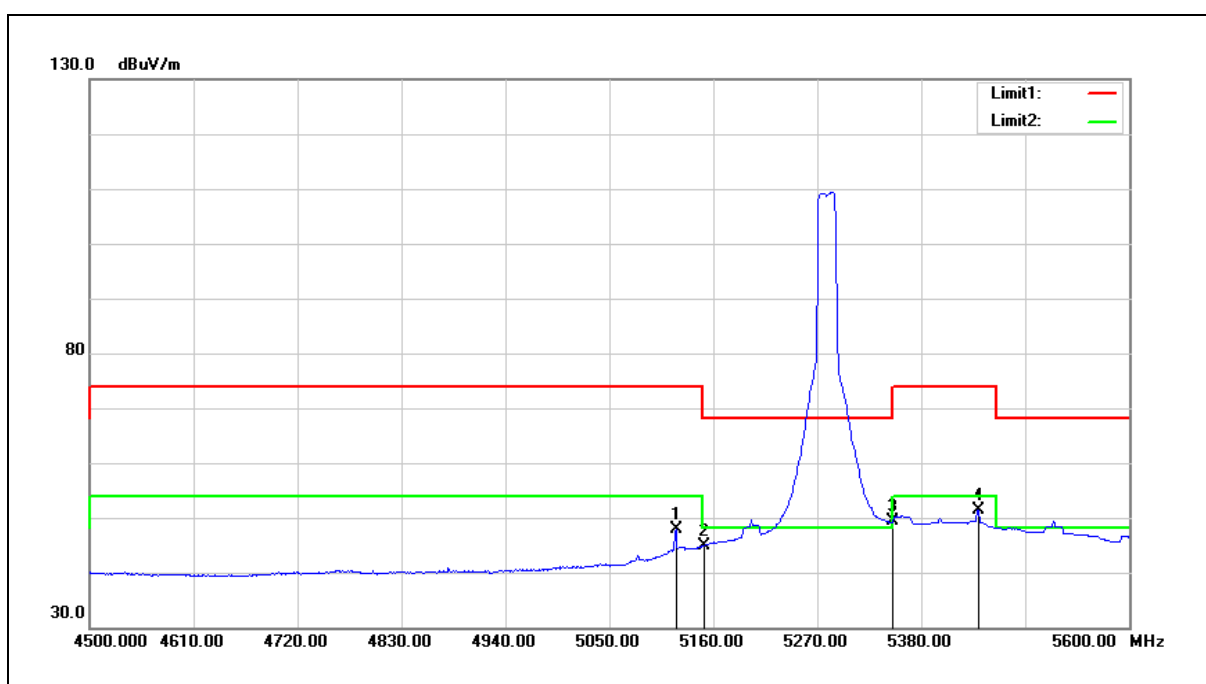


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 49.20             | -1.38                    | 47.82              | 54.00             | -6.18          | AVG    |
| 2   | 5150.000           | 46.21             | -1.33                    | 44.88              | 54.00             | -9.12          | AVG    |
| 3   | 5350.000           | 50.37             | -0.92                    | 49.45              | 54.00             | -4.55          | AVG    |
| 4   | 5440.500           | 52.17             | -0.75                    | 51.42              | 54.00             | -2.58          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

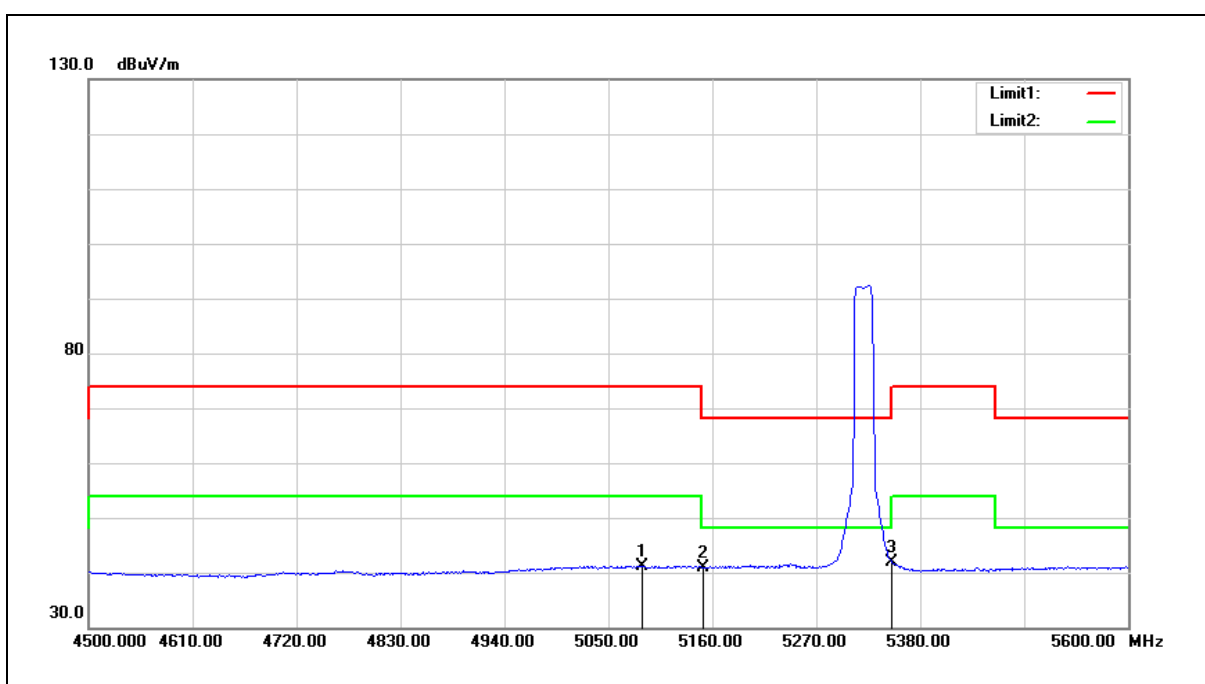


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5085.200        | 42.70          | -1.46                 | 41.24           | 54.00          | -12.76      | AVG    |
| 2   | 5150.000        | 42.14          | -1.33                 | 40.81           | 54.00          | -13.19      | AVG    |
| 3   | 5350.000        | 42.84          | -0.92                 | 41.92           | 54.00          | -12.08      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

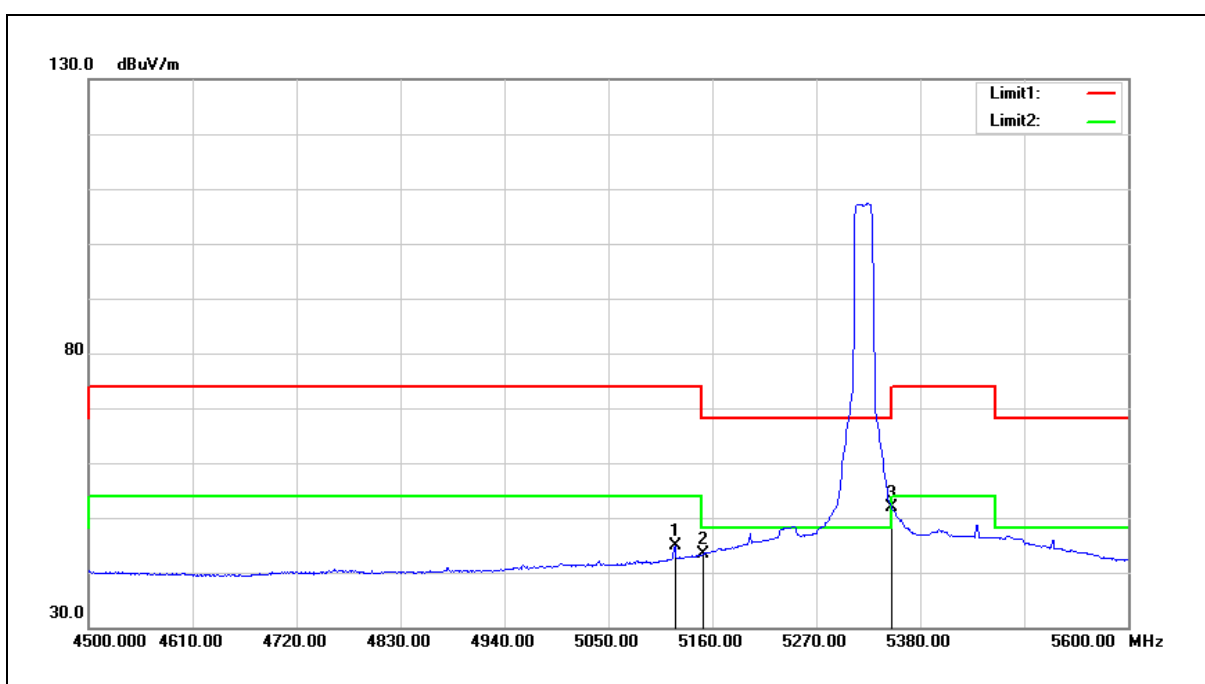


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 46.27          | -1.38                 | 44.89           | 54.00          | -9.11       | AVG    |
| 2   | 5150.000        | 44.61          | -1.33                 | 43.28           | 54.00          | -10.72      | AVG    |
| 3   | 5350.000        | 52.75          | -0.92                 | 51.83           | 54.00          | -2.17       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

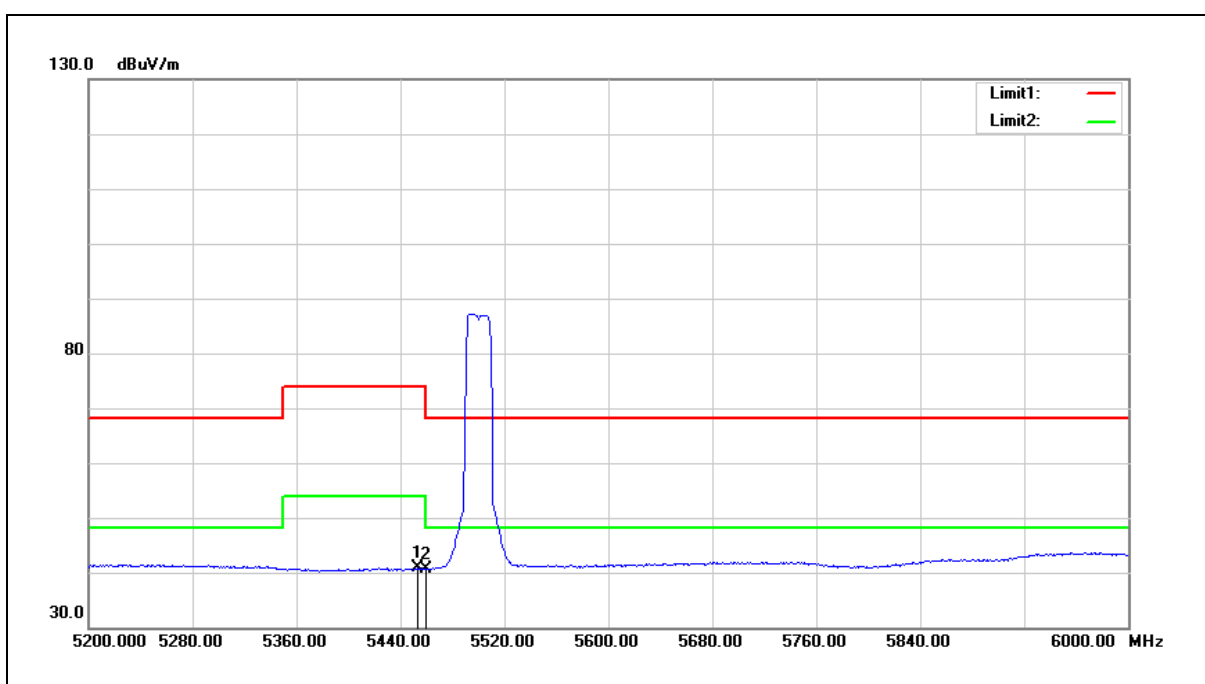


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5452.800           | 41.53             | -0.72                    | 40.81              | 54.00             | -13.19         | AVG    |
| 2   | 5460.000           | 41.41             | -0.70                    | 40.71              | 54.00             | -13.29         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

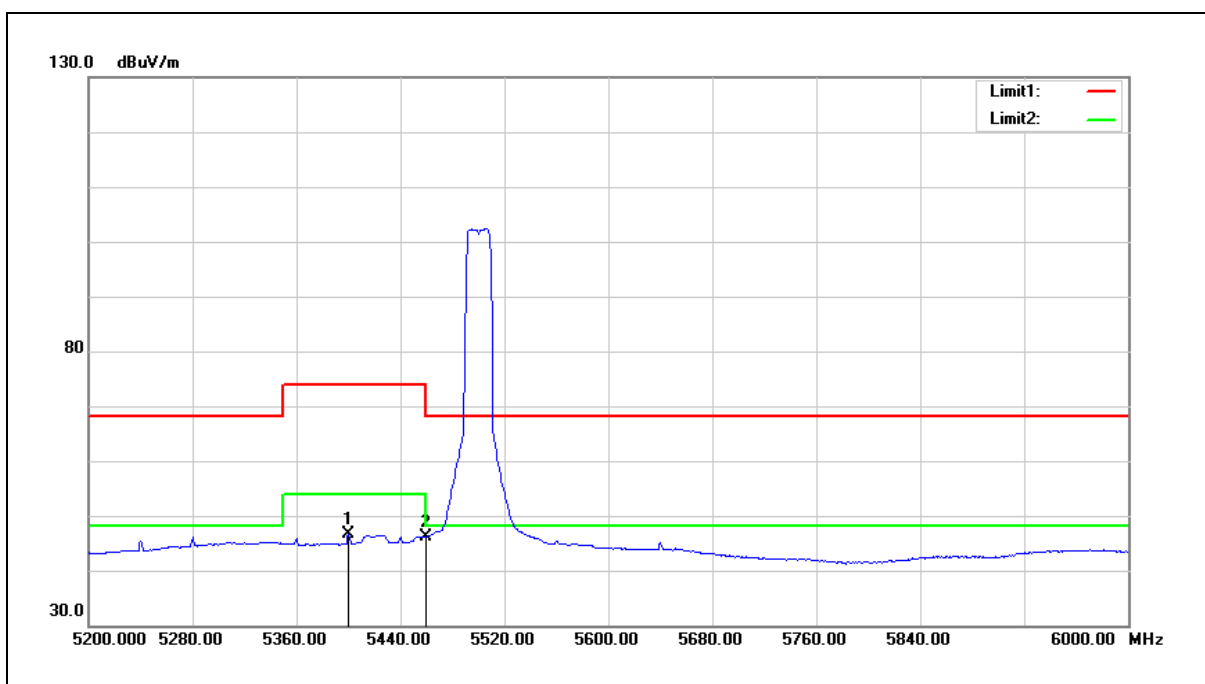


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5400.000           | 47.50             | -0.83                    | 46.67              | 54.00             | -7.33          | AVG    |
| 2   | 5460.000           | 46.78             | -0.70                    | 46.08              | 54.00             | -7.92          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

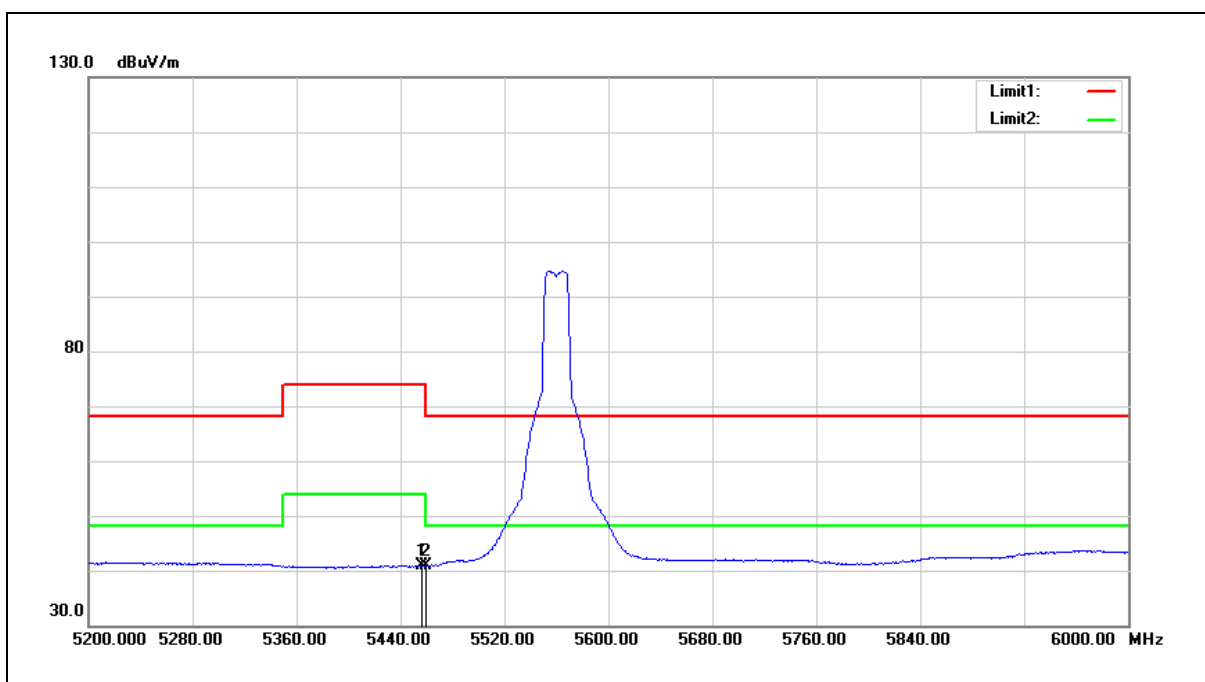


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5456.000           | 41.70             | -0.72                    | 40.98              | 54.00             | -13.02         | AVG    |
| 2   | 5460.000           | 41.68             | -0.70                    | 40.98              | 54.00             | -13.02         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

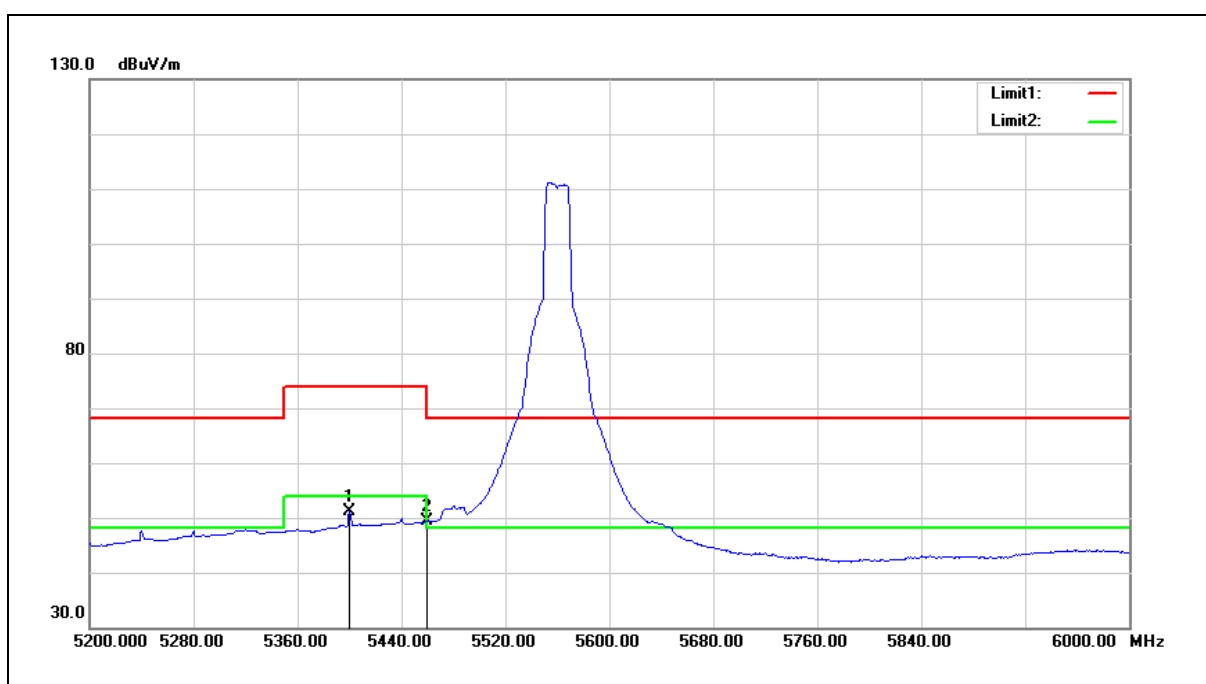


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5400.000           | 51.93             | -0.83                    | 51.10              | 54.00             | -2.90          | AVG    |
| 2   | 5460.000           | 50.01             | -0.70                    | 49.31              | 54.00             | -4.69          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

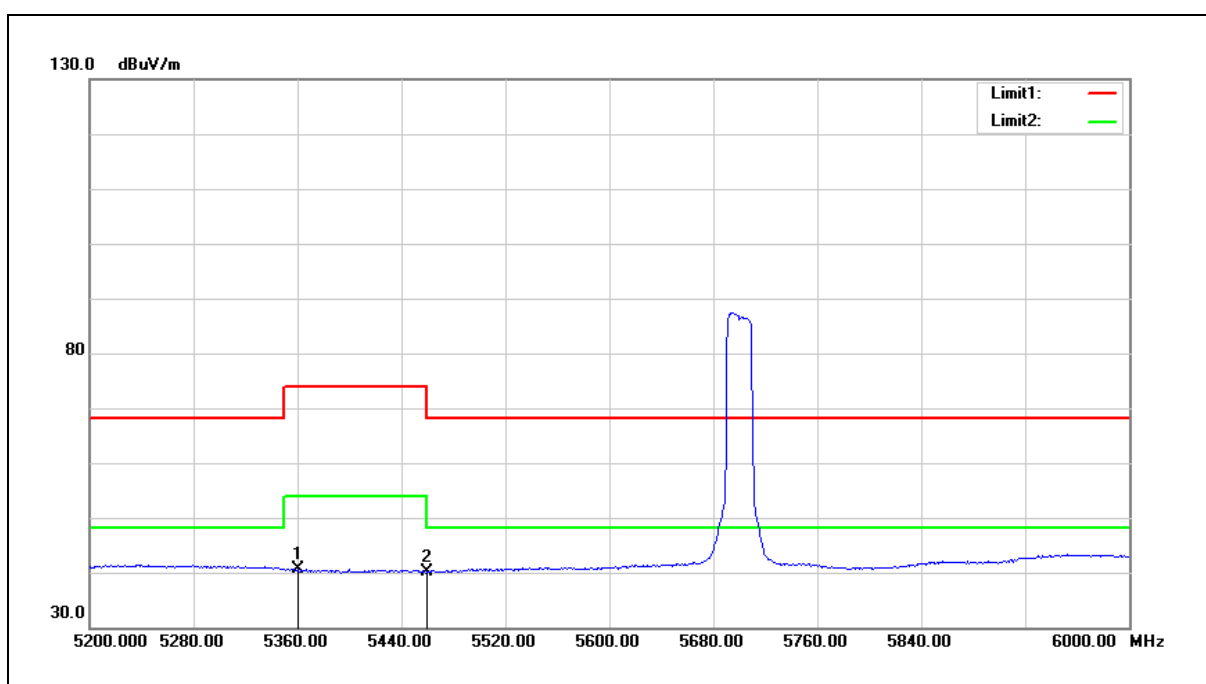


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5360.800           | 41.48             | -0.91                    | 40.57              | 54.00             | -13.43         | AVG    |
| 2   | 5460.000           | 40.94             | -0.70                    | 40.24              | 54.00             | -13.76         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

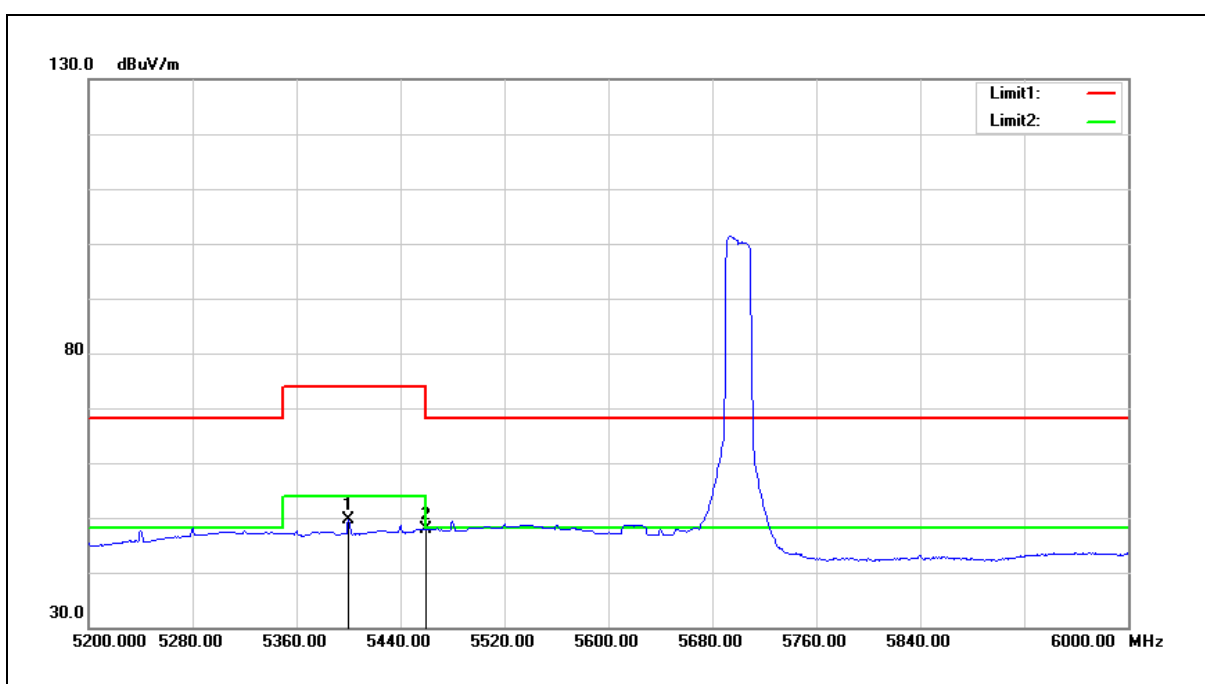


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5400.000        | 50.50          | -0.83                 | 49.67           | 54.00          | -4.33       | AVG    |
| 2   | 5460.000        | 48.52          | -0.70                 | 47.82           | 54.00          | -6.18       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5190 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

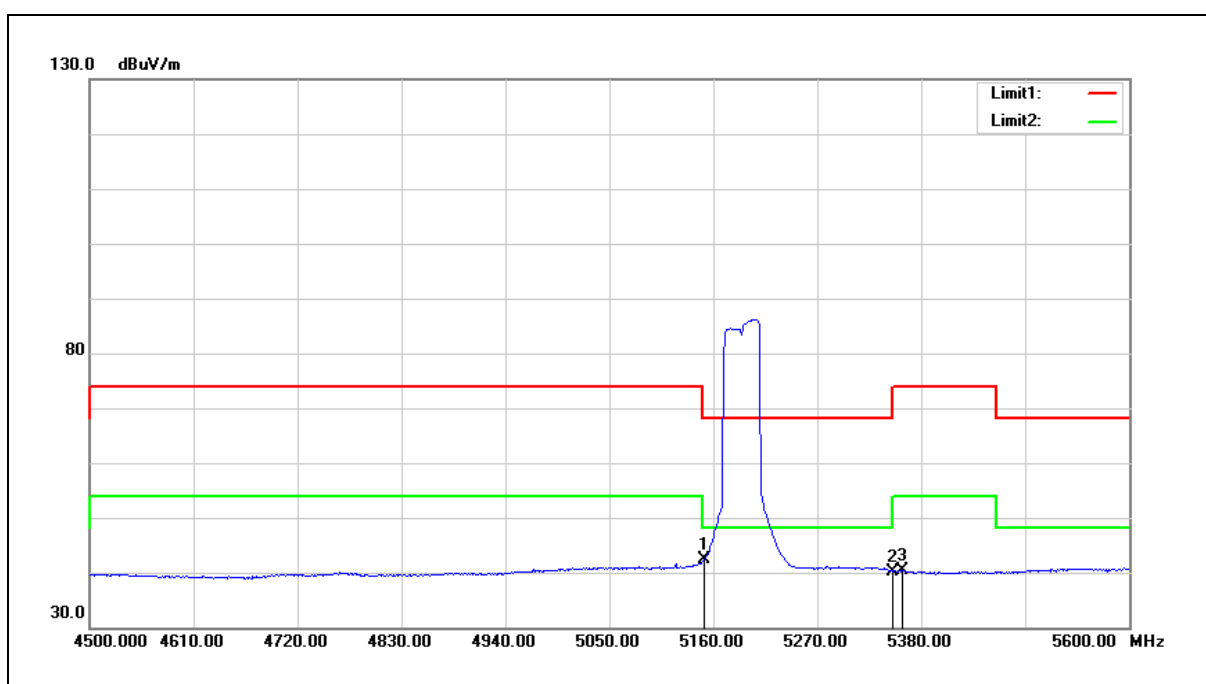


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5150.000        | 43.66          | -1.33                 | 42.33           | 54.00          | -11.67      | AVG    |
| 2   | 5350.000        | 41.13          | -0.92                 | 40.21           | 54.00          | -13.79      | AVG    |
| 3   | 5360.200        | 41.31          | -0.91                 | 40.40           | 54.00          | -13.60      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5190 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

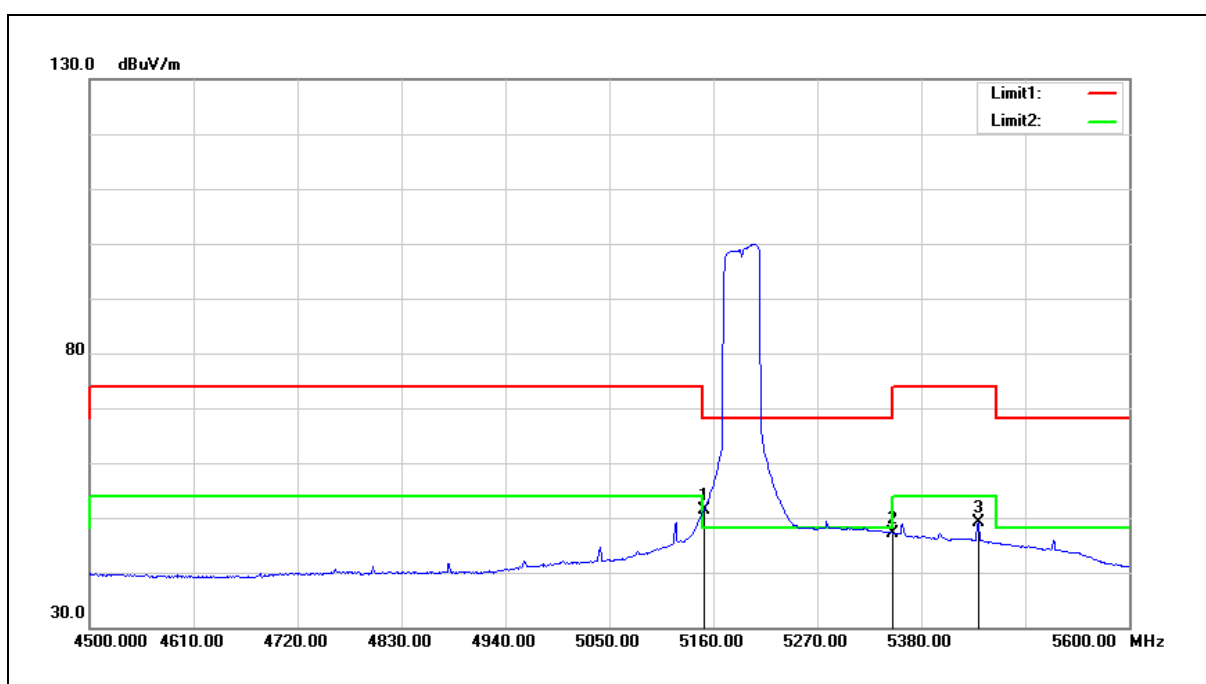


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5150.000           | 52.72             | -1.33                    | 51.39              | 54.00             | -2.61          | AVG    |
| 2   | 5350.000           | 48.05             | -0.92                    | 47.13              | 54.00             | -6.87          | AVG    |
| 3   | 5440.500           | 49.77             | -0.75                    | 49.02              | 54.00             | -4.98          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5230 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

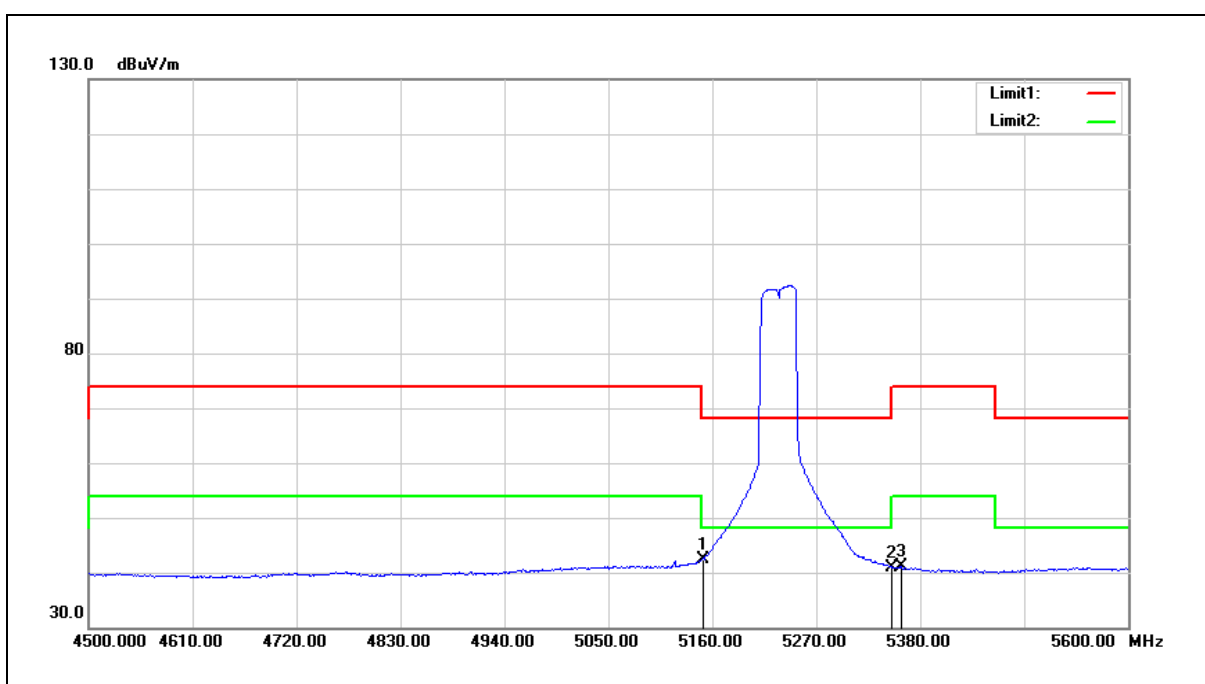


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5150.000        | 43.83          | -1.33                 | 42.50           | 54.00          | -11.50      | AVG    |
| 2   | 5350.000        | 41.87          | -0.92                 | 40.95           | 54.00          | -13.05      | AVG    |
| 3   | 5360.200        | 42.12          | -0.91                 | 41.21           | 54.00          | -12.79      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5230 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

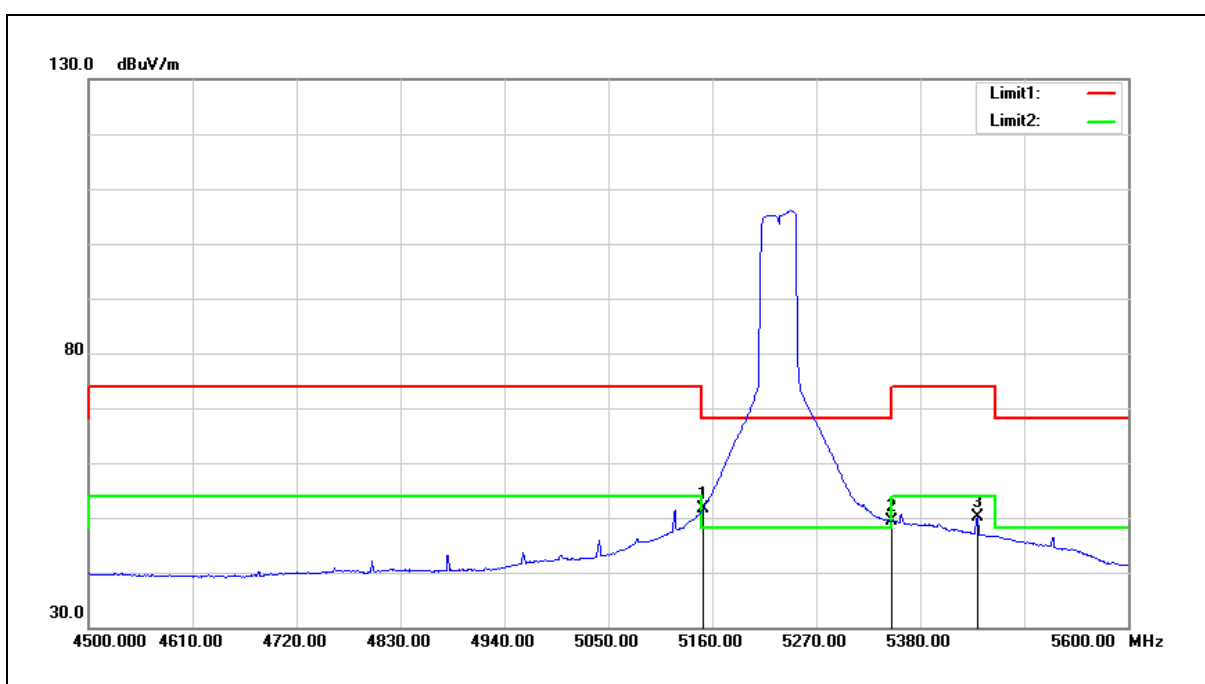


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5150.000        | 52.90          | -1.33                 | 51.57           | 54.00          | -2.43       | AVG    |
| 2   | 5350.000        | 50.33          | -0.92                 | 49.41           | 54.00          | -4.59       | AVG    |
| 3   | 5440.500        | 50.77          | -0.75                 | 50.02           | 54.00          | -3.98       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5270 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

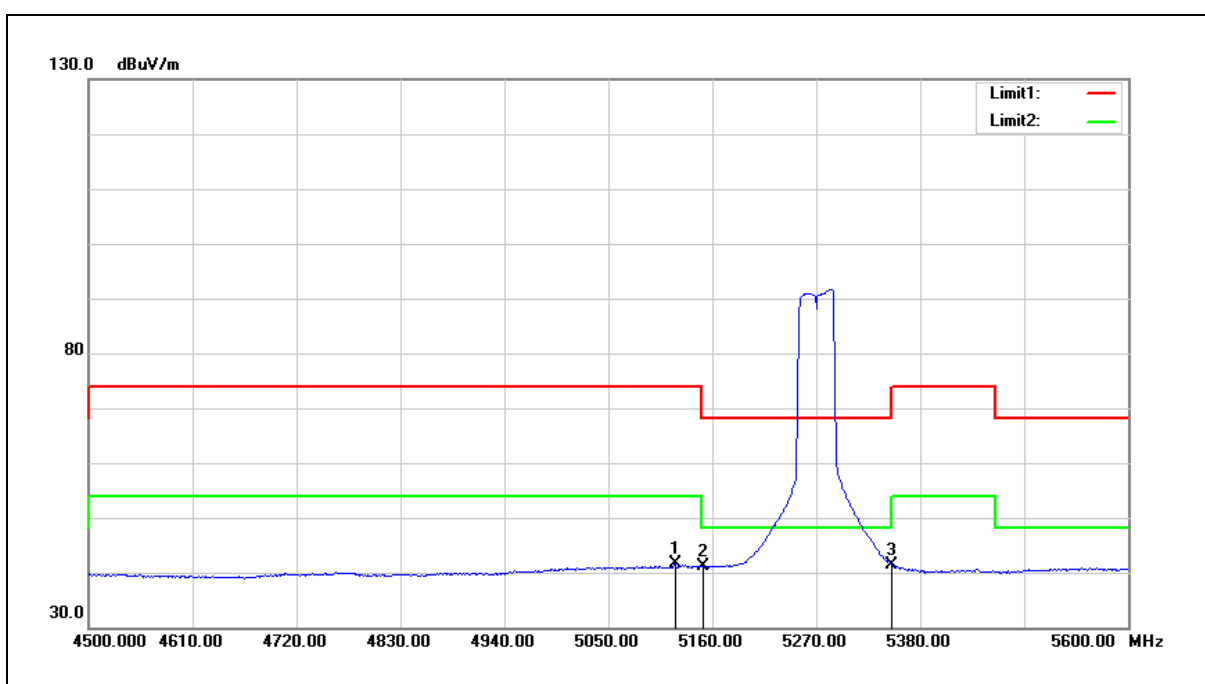


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 43.09          | -1.38                 | 41.71           | 54.00          | -12.29      | AVG    |
| 2   | 5150.000        | 42.39          | -1.33                 | 41.06           | 54.00          | -12.94      | AVG    |
| 3   | 5350.000        | 42.21          | -0.92                 | 41.29           | 54.00          | -12.71      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5270 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

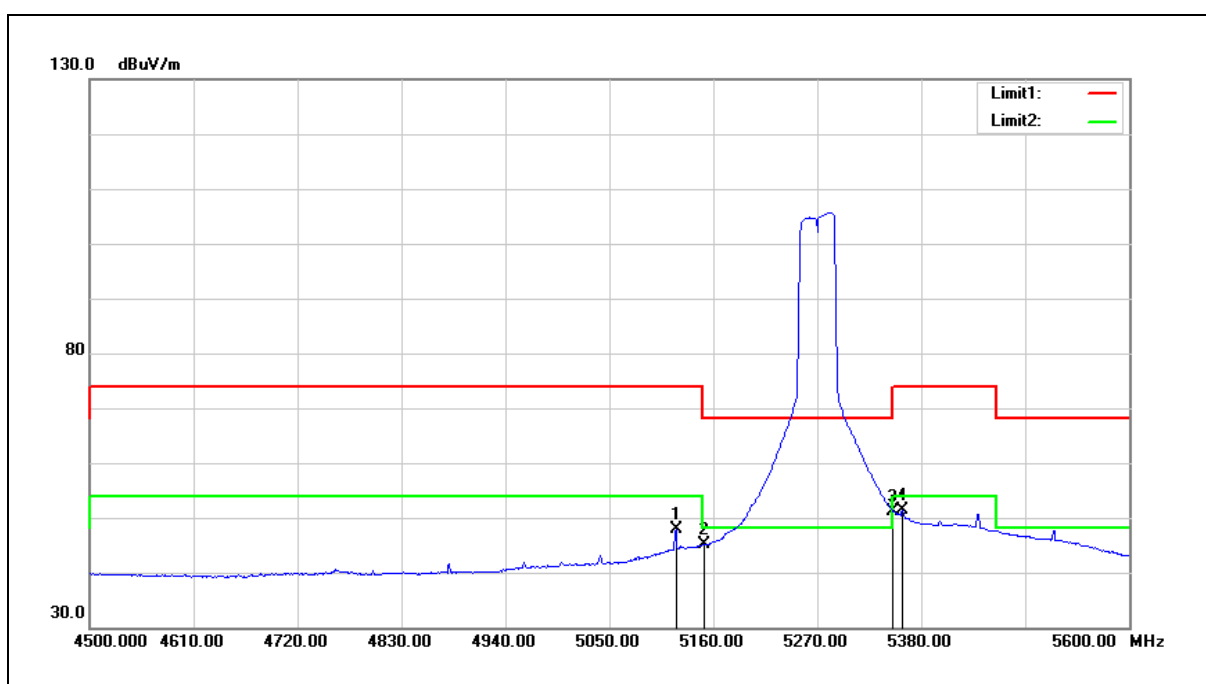


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 49.14          | -1.38                 | 47.76           | 54.00          | -6.24       | AVG    |
| 2   | 5150.000        | 46.41          | -1.33                 | 45.08           | 54.00          | -8.92       | AVG    |
| 3   | 5350.000        | 52.11          | -0.92                 | 51.19           | 54.00          | -2.81       | AVG    |
| 4   | 5360.200        | 52.24          | -0.91                 | 51.33           | 54.00          | -2.67       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5310 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

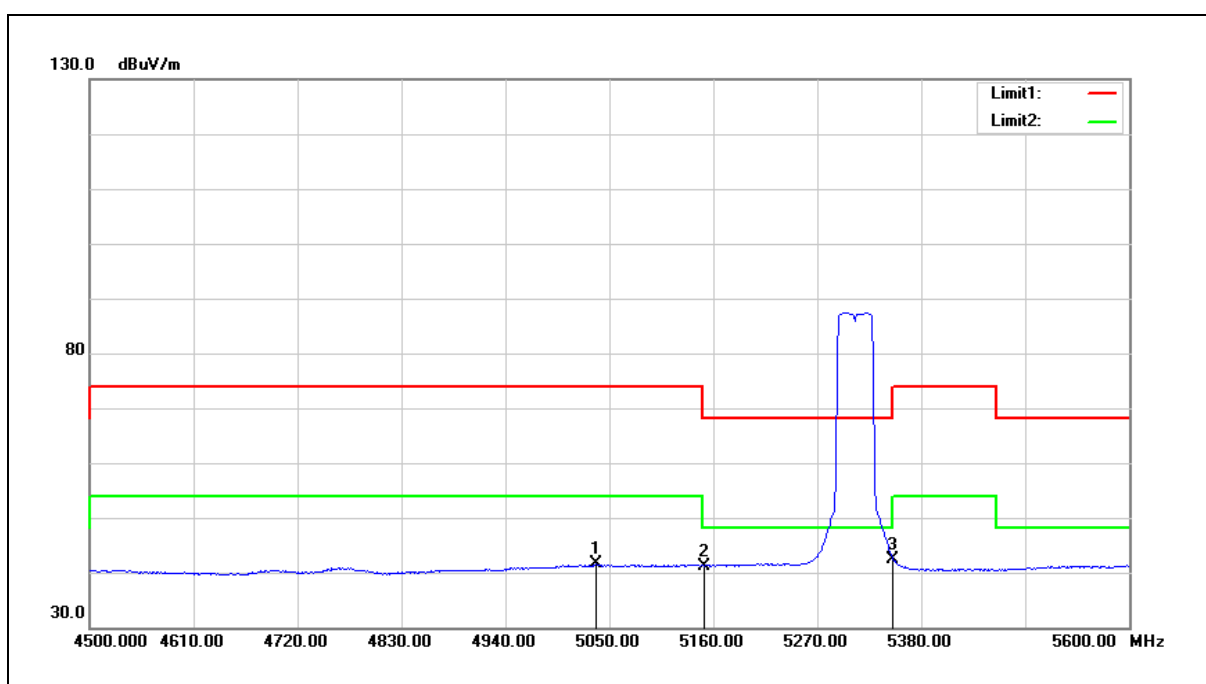


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5035.700        | 43.07          | -1.55                 | 41.52           | 54.00          | -12.48      | AVG    |
| 2   | 5150.000        | 42.57          | -1.33                 | 41.24           | 54.00          | -12.76      | AVG    |
| 3   | 5350.000        | 43.24          | -0.92                 | 42.32           | 54.00          | -11.68      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5310 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

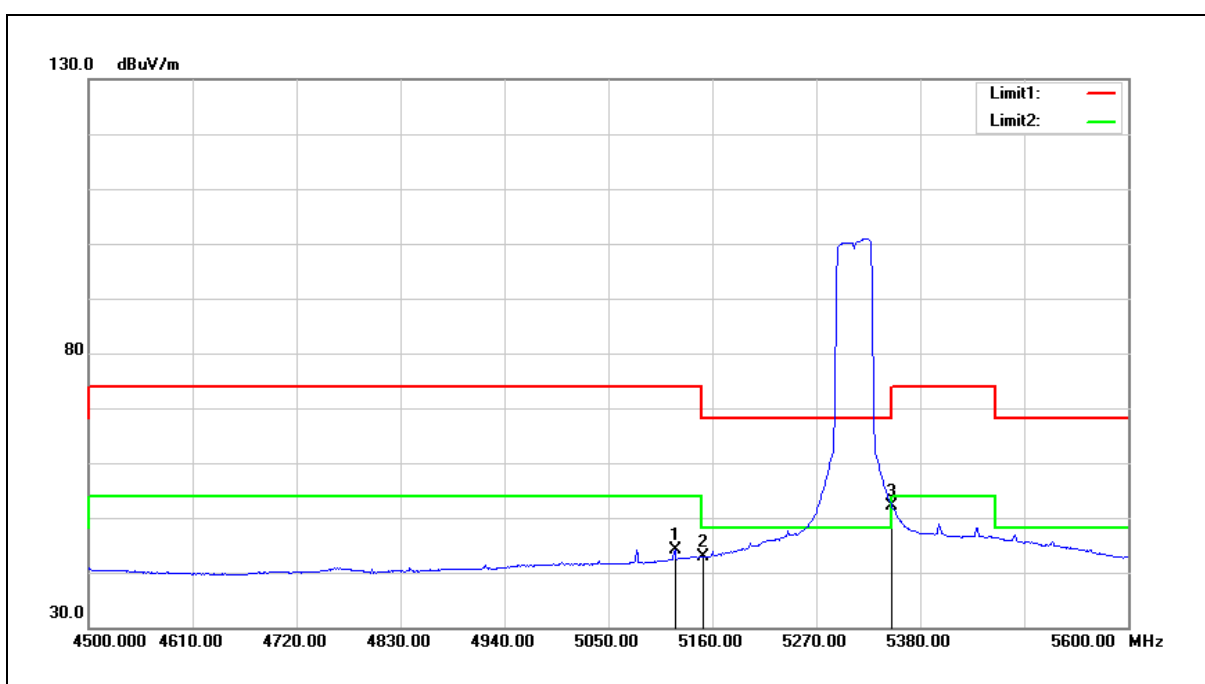


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5120.400           | 45.50             | -1.38                    | 44.12              | 54.00             | -9.88          | AVG    |
| 2   | 5150.000           | 44.21             | -1.33                    | 42.88              | 54.00             | -11.12         | AVG    |
| 3   | 5350.000           | 52.93             | -0.92                    | 52.01              | 54.00             | -1.99          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

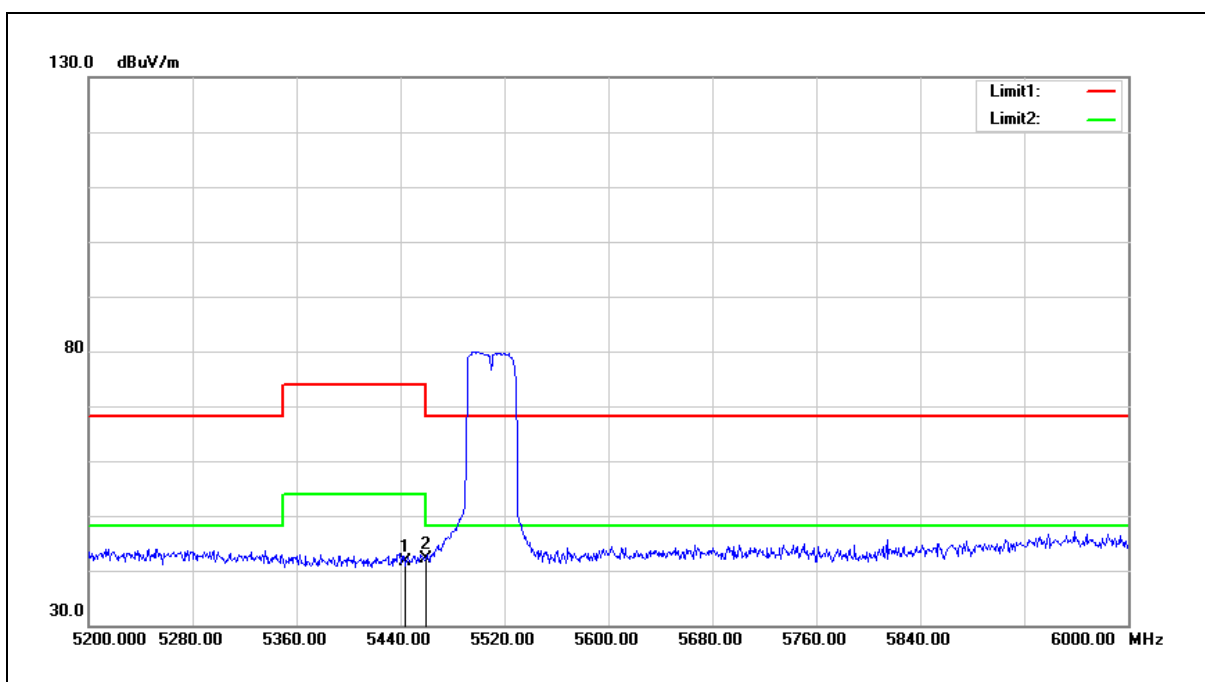


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5444.000           | 41.09             | 0.47                     | 41.56              | 54.00             | -12.44         | AVG    |
| 2   | 5460.000           | 41.73             | 0.51                     | 42.24              | 54.00             | -11.76         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

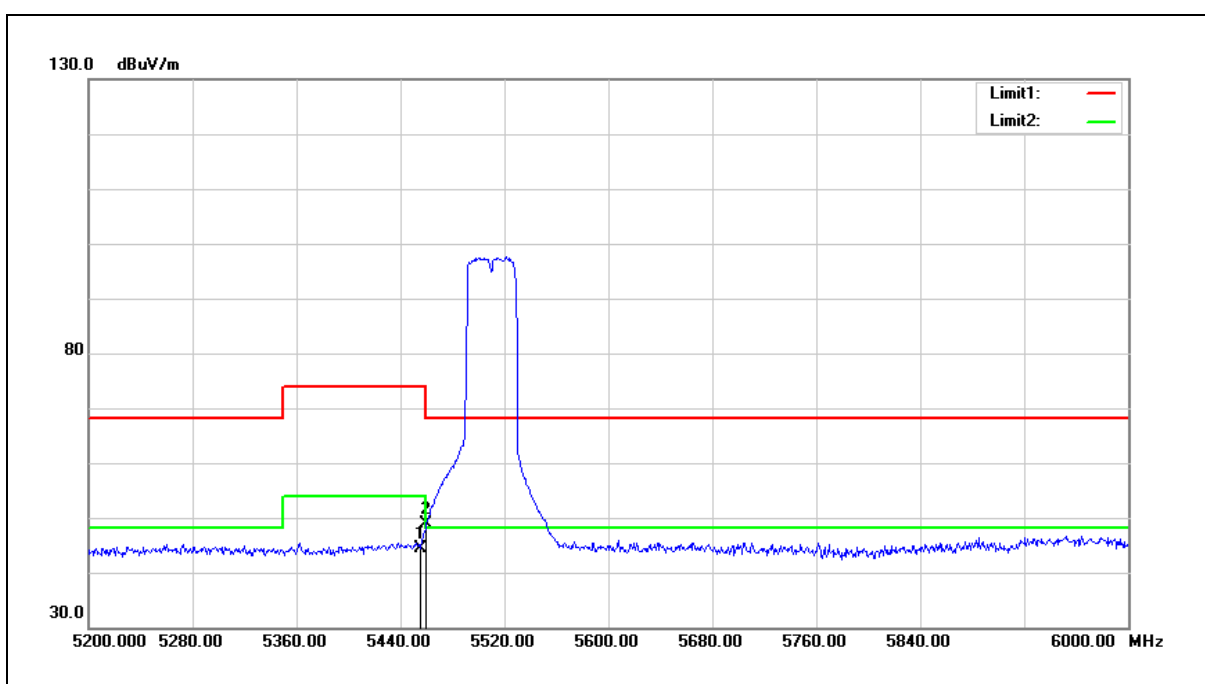


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5455.200           | 43.97             | 0.48                     | 44.45              | 54.00             | -9.55          | AVG    |
| 2   | 5460.000           | 48.32             | 0.51                     | 48.83              | 54.00             | -5.17          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

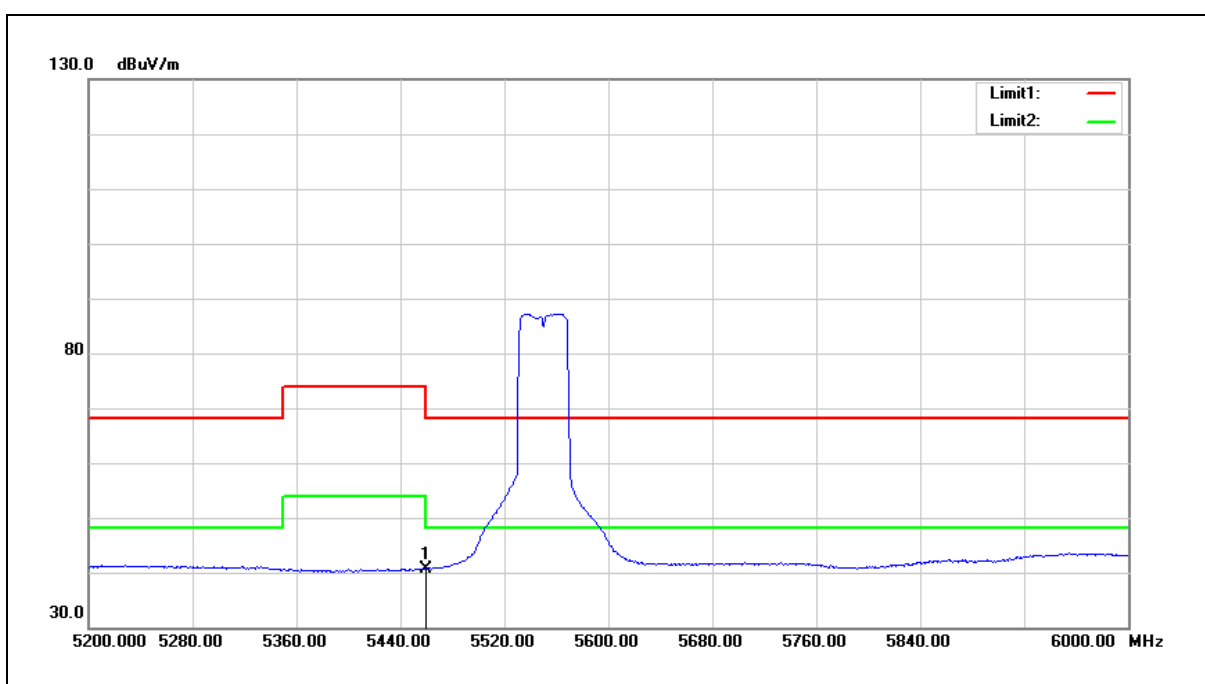


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5460.000           | 41.45             | -0.70                    | 40.75              | 54.00             | -13.25         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

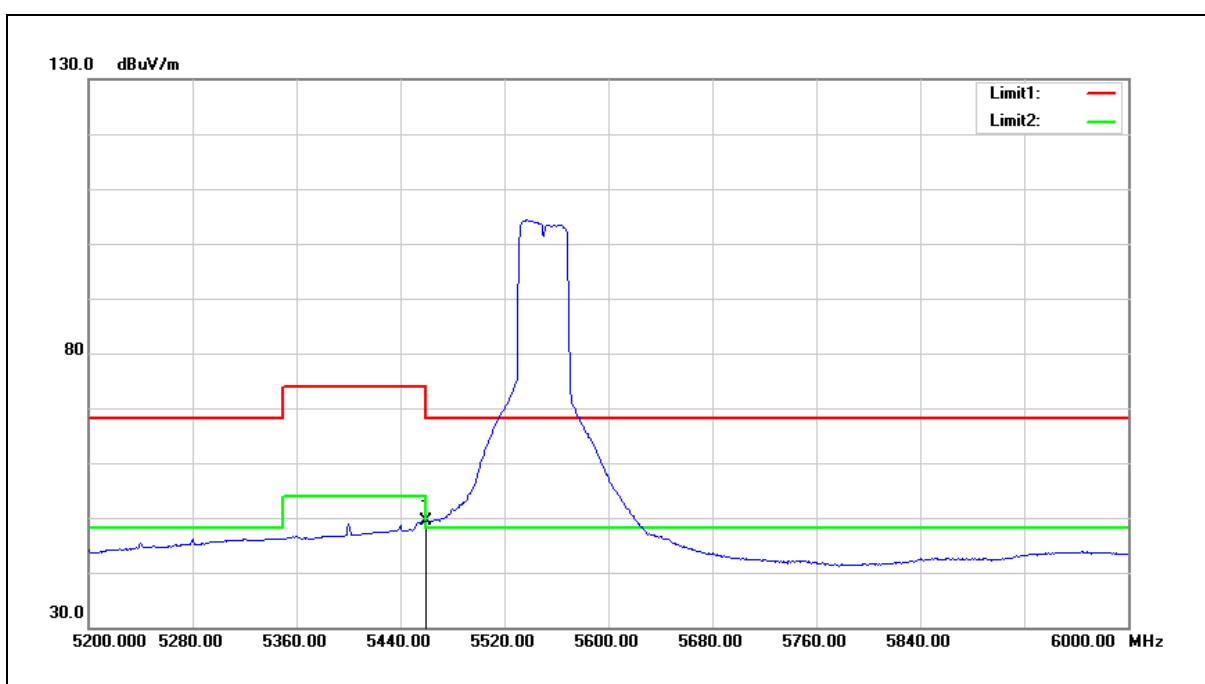


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5460.000           | 50.03             | -0.70                    | 49.33              | 54.00             | -4.67          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5670 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

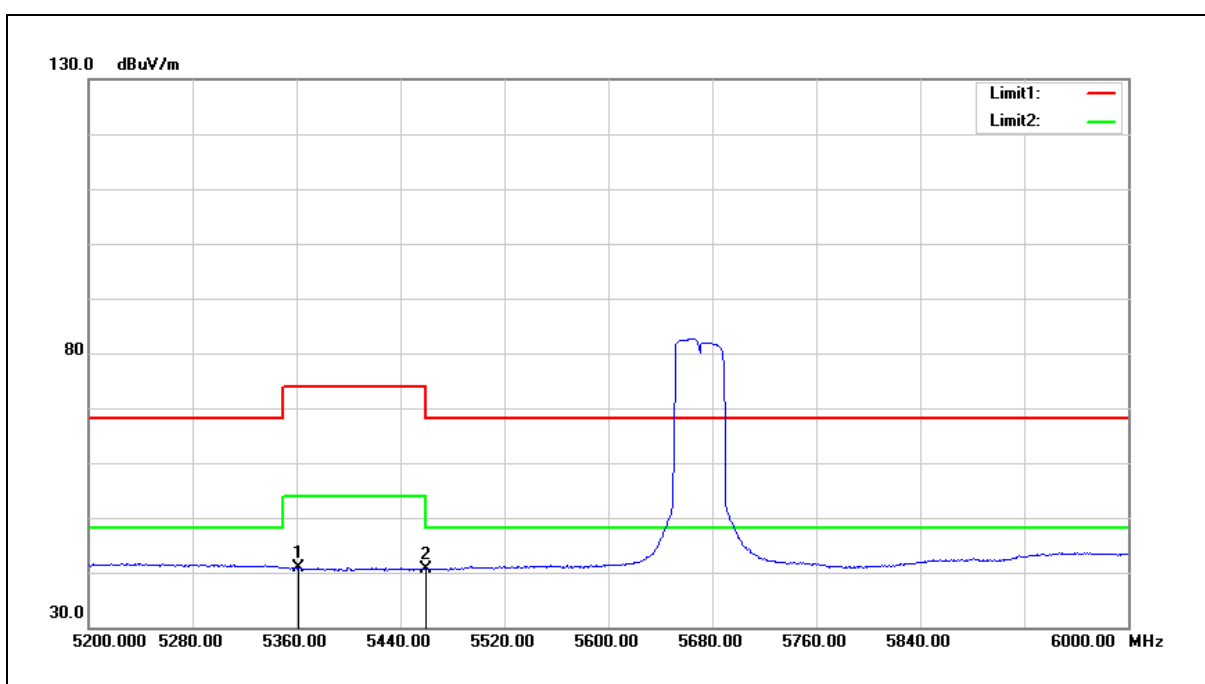


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5361.600           | 41.76             | -0.91                    | 40.85              | 54.00             | -13.15         | AVG    |
| 2   | 5460.000           | 41.39             | -0.70                    | 40.69              | 54.00             | -13.31         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5670 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

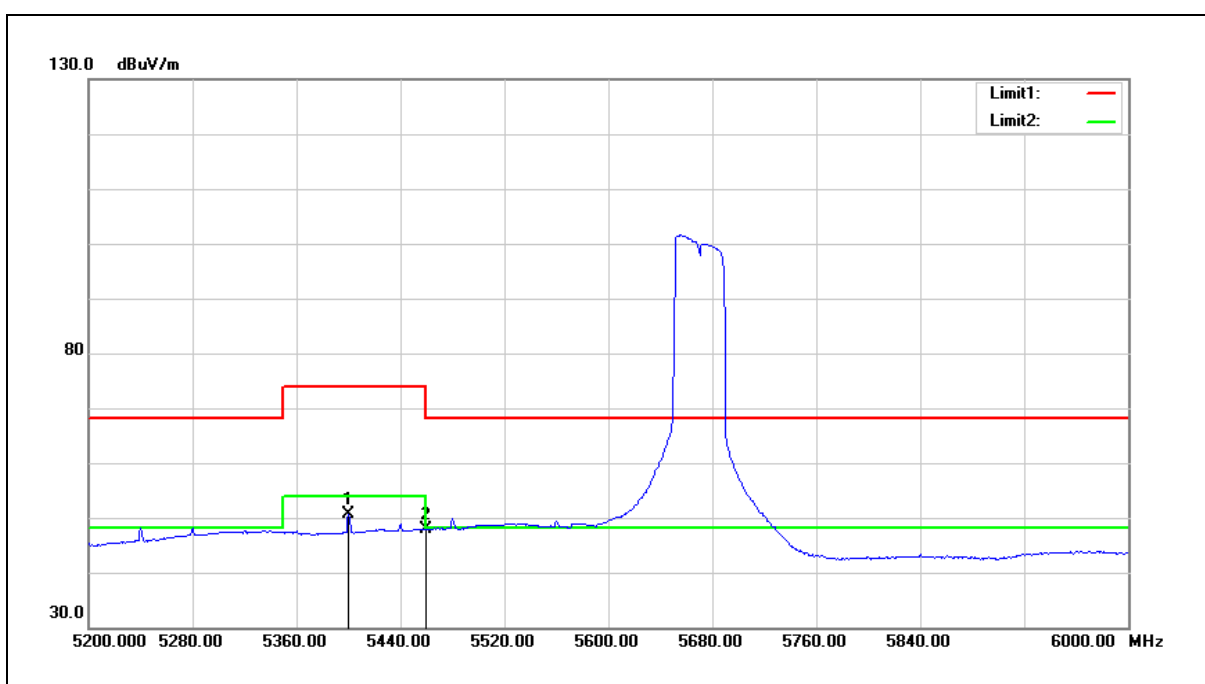

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5400.000           | 51.35             | -0.83                    | 50.52              | 54.00             | -3.48          | AVG    |
| 2   | 5460.000           | 48.56             | -0.70                    | 47.86              | 54.00             | -6.14          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

# MIMO

Below 1 GHz

|             |                   |                |    |
|-------------|-------------------|----------------|----|
| Standard:   | FCC Part 15.407   | Test Distance: | 3m |
| Test item:  | Radiated Emission |                |    |
| Frequency:  | 5700 MHz          |                |    |
| Mode:       | Mode 2            |                |    |
| Ant.Polar.: | Horizontal        |                |    |

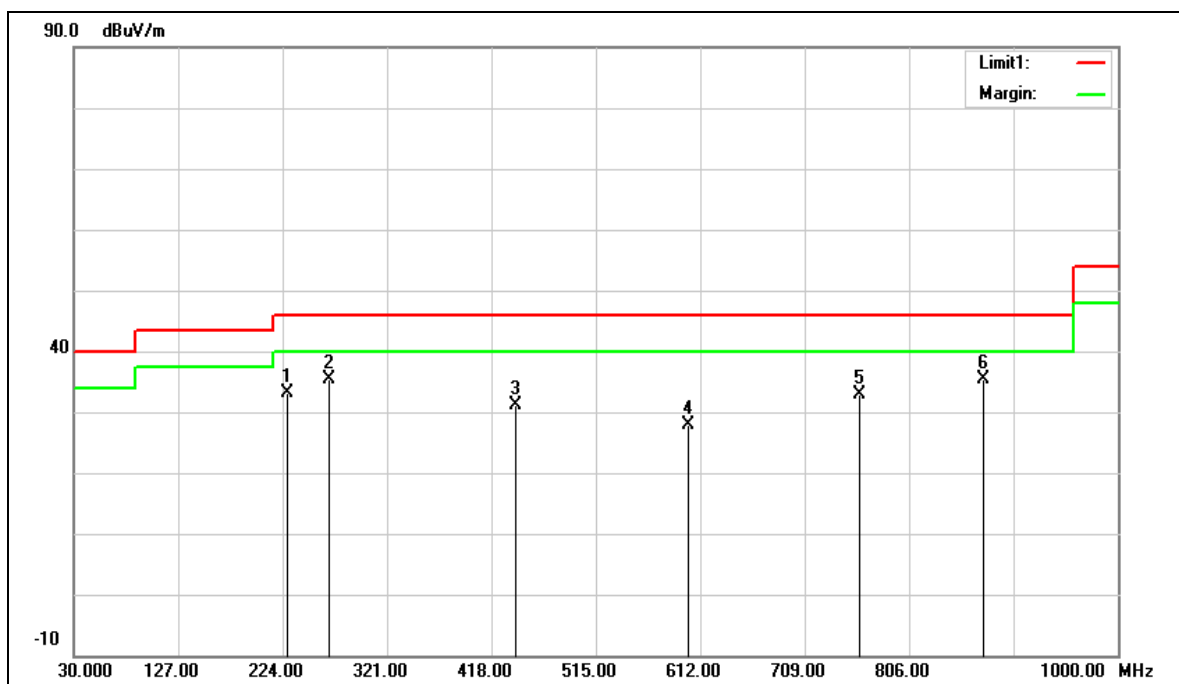


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 227.8800        | 58.28          | -25.26                | 33.02           | 46.00          | -12.98      | QP     |
| 2   | 267.6500        | 59.16          | -23.72                | 35.44           | 46.00          | -10.56      | QP     |
| 3   | 440.3100        | 50.16          | -19.14                | 31.02           | 46.00          | -14.98      | QP     |
| 4   | 600.3600        | 43.34          | -15.47                | 27.87           | 46.00          | -18.13      | QP     |
| 5   | 760.4100        | 45.87          | -12.98                | 32.89           | 46.00          | -13.11      | QP     |
| 6   | 874.8700        | 46.45          | -11.17                | 35.28           | 46.00          | -10.72      | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                   |                |    |
|-------------|-------------------|----------------|----|
| Standard:   | FCC Part 15.407   | Test Distance: | 3m |
| Test item:  | Radiated Emission |                |    |
| Frequency:  | 5700 MHz          |                |    |
| Mode:       | Mode 2            |                |    |
| Ant.Polar.: | Vertical          |                |    |

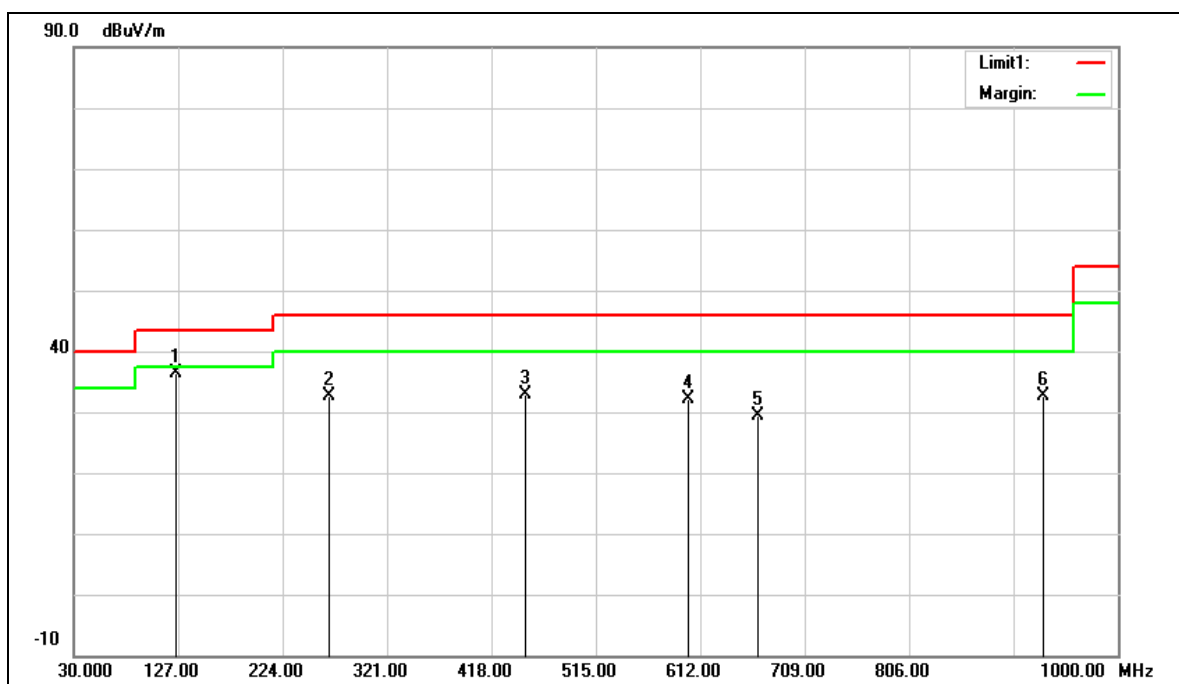

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 125.0600        | 62.08          | -25.77                | 36.31           | 43.50          | -7.19       | QP     |
| 2   | 267.6500        | 56.42          | -23.72                | 32.70           | 46.00          | -13.30      | QP     |
| 3   | 450.0100        | 51.76          | -18.95                | 32.81           | 46.00          | -13.19      | QP     |
| 4   | 600.3600        | 47.56          | -15.47                | 32.09           | 46.00          | -13.91      | QP     |
| 5   | 665.3500        | 43.94          | -14.56                | 29.38           | 46.00          | -16.62      | QP     |
| 6   | 931.1300        | 43.05          | -10.36                | 32.69           | 46.00          | -13.31      | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

## Harmonic

Above 1 GHz

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

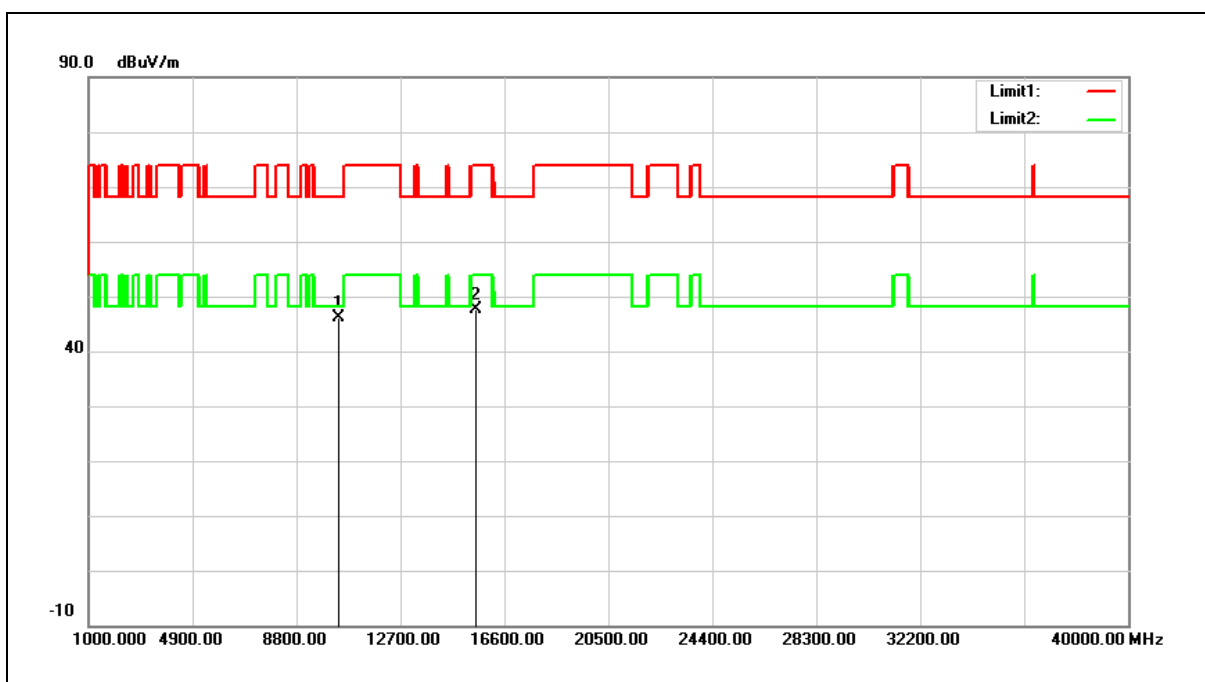


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10360.000          | 35.09             | 11.16                    | 46.25              | 68.20             | -21.95         | peak   |
| 2   | 15540.000          | 33.95             | 13.66                    | 47.61              | 74.00             | -26.39         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

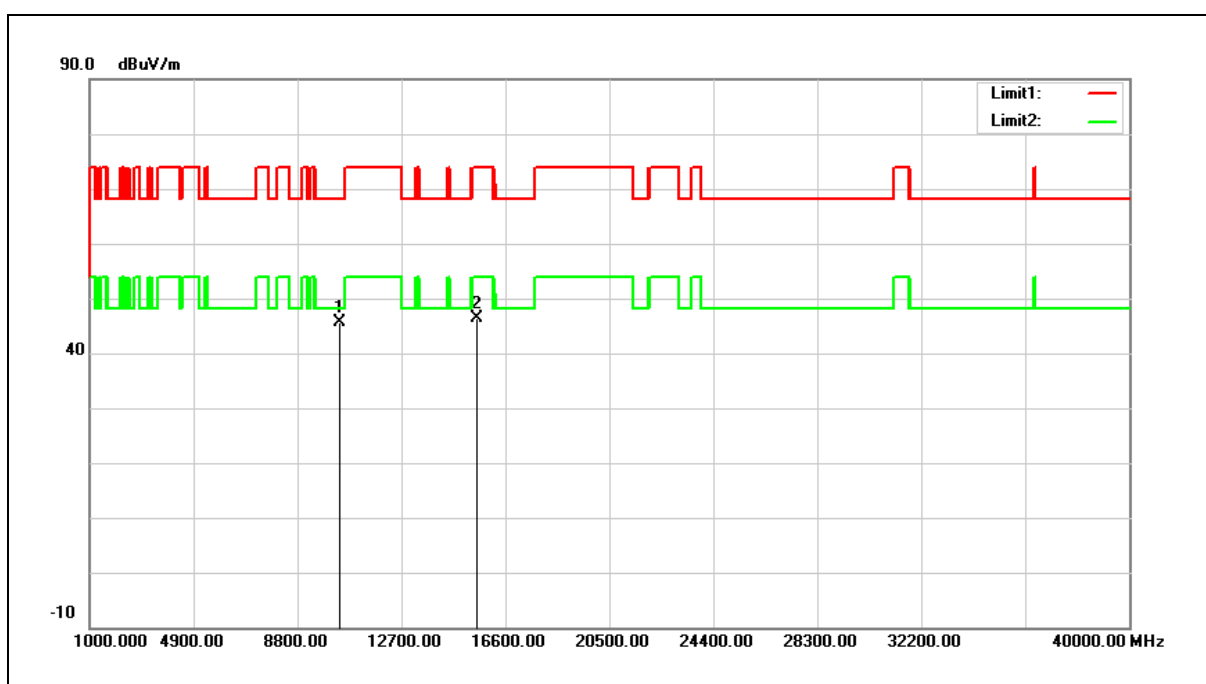


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10360.000       | 34.48          | 11.16                 | 45.64           | 68.20          | -22.56      | peak   |
| 2   | 15540.000       | 32.62          | 13.66                 | 46.28           | 74.00          | -27.72      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

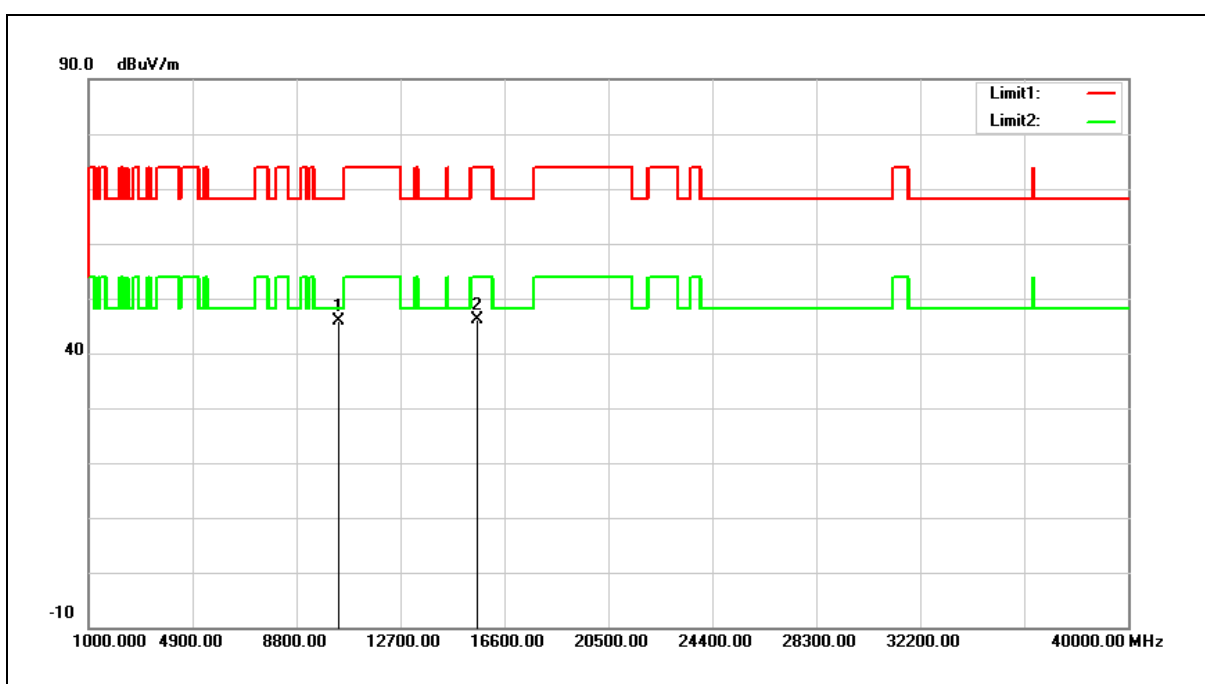


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10400.000          | 34.57             | 11.26                    | 45.83              | 68.20             | -22.37         | peak   |
| 2   | 15600.000          | 32.68             | 13.56                    | 46.24              | 74.00             | -27.76         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

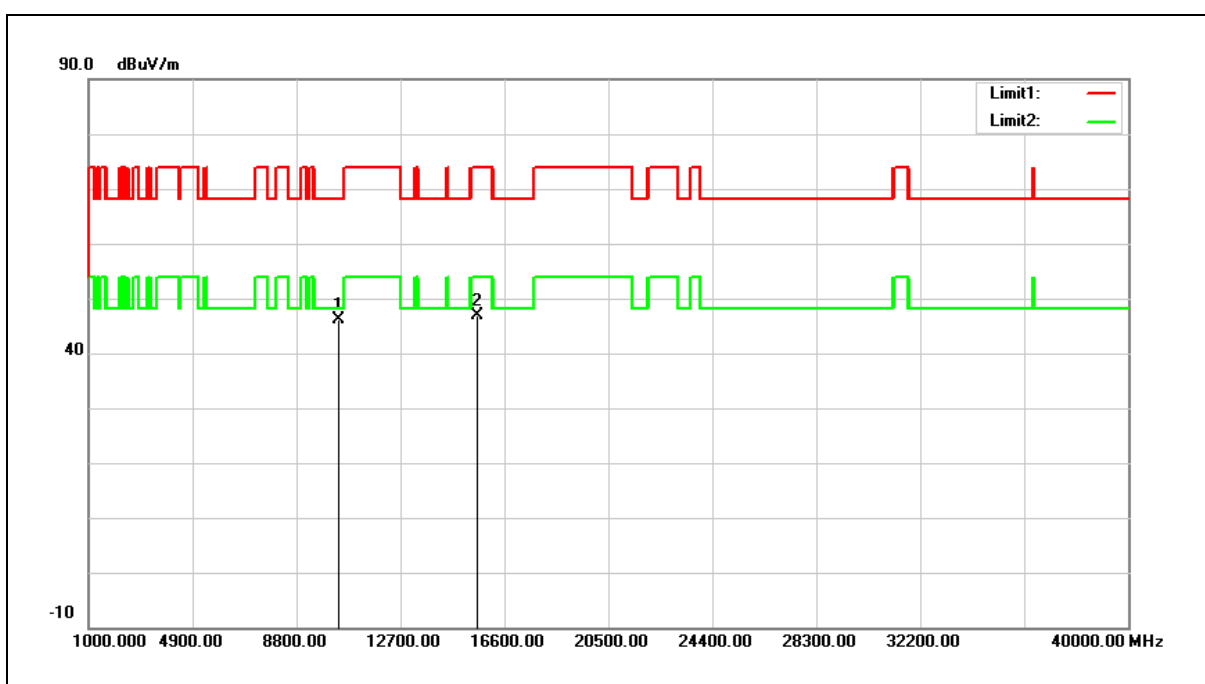


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 34.84          | 11.26                 | 46.10           | 68.20          | -22.10      | peak   |
| 2   | 15600.000       | 33.36          | 13.56                 | 46.92           | 74.00          | -27.08      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

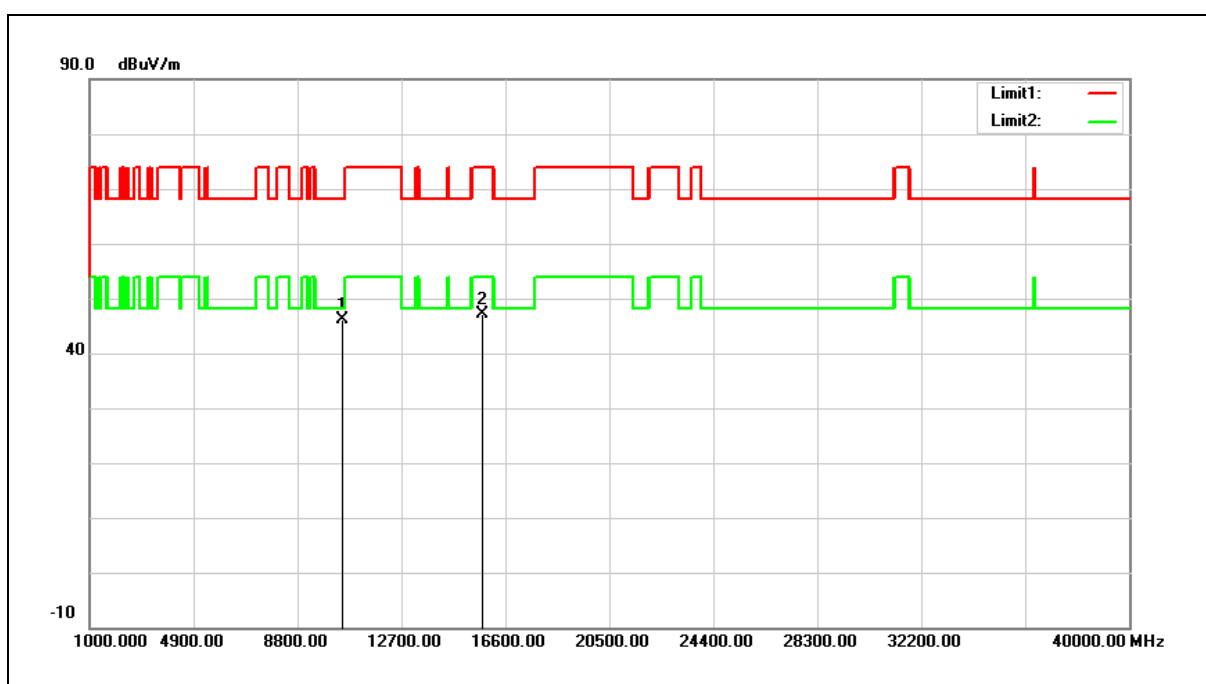


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10480.000          | 34.63             | 11.47                    | 46.10              | 68.20             | -22.10         | peak   |
| 2   | 15720.000          | 33.88             | 13.37                    | 47.25              | 74.00             | -26.75         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

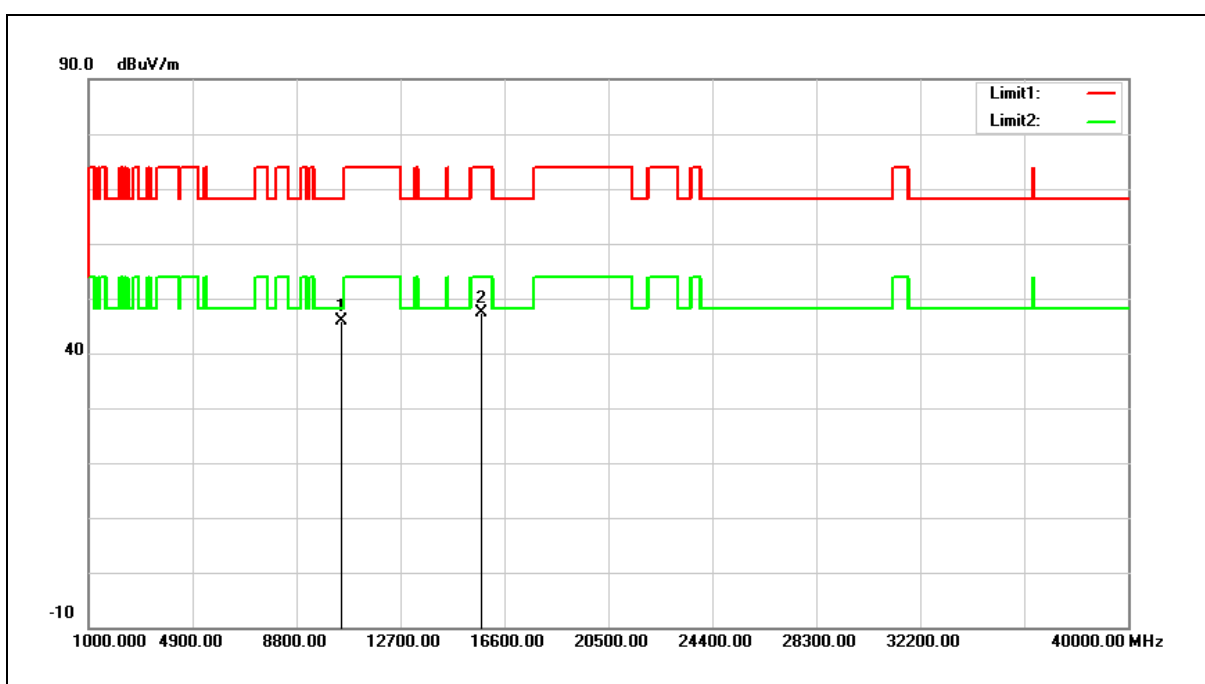


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10480.000          | 34.51             | 11.47                    | 45.98              | 68.20             | -22.22         | peak   |
| 2   | 15720.000          | 33.93             | 13.37                    | 47.30              | 74.00             | -26.70         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

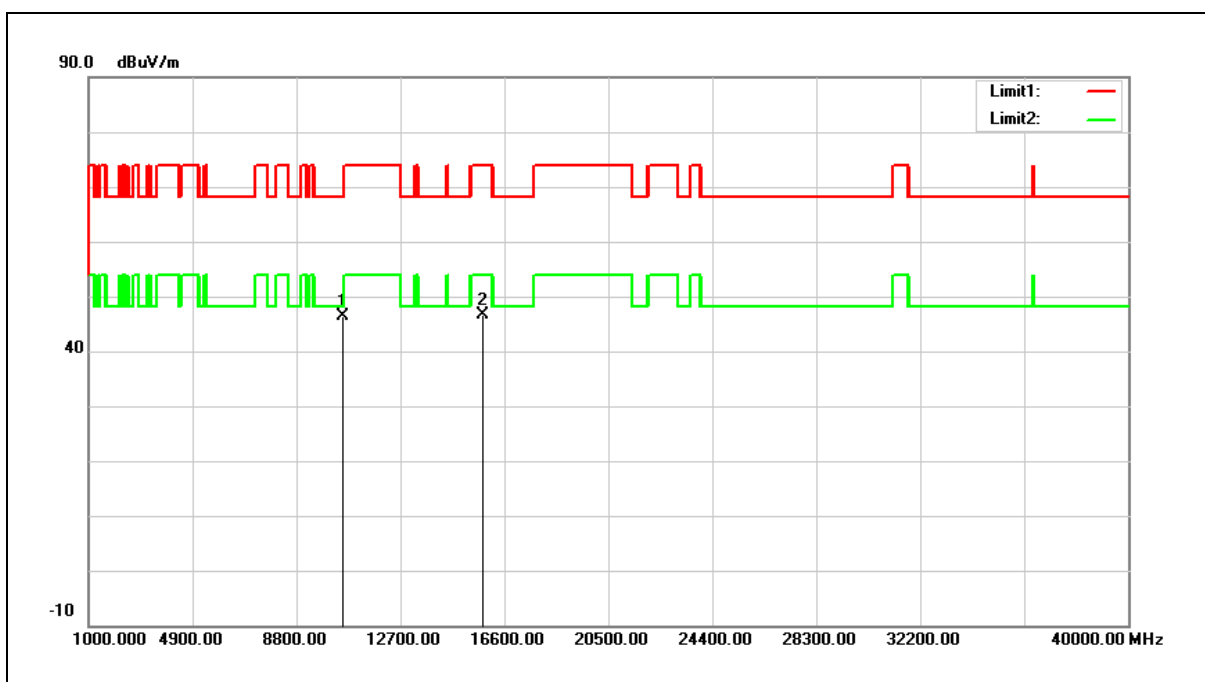


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 34.84          | 11.53                 | 46.37           | 68.20          | -21.83      | peak   |
| 2   | 15780.000       | 33.43          | 13.30                 | 46.73           | 74.00          | -27.27      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

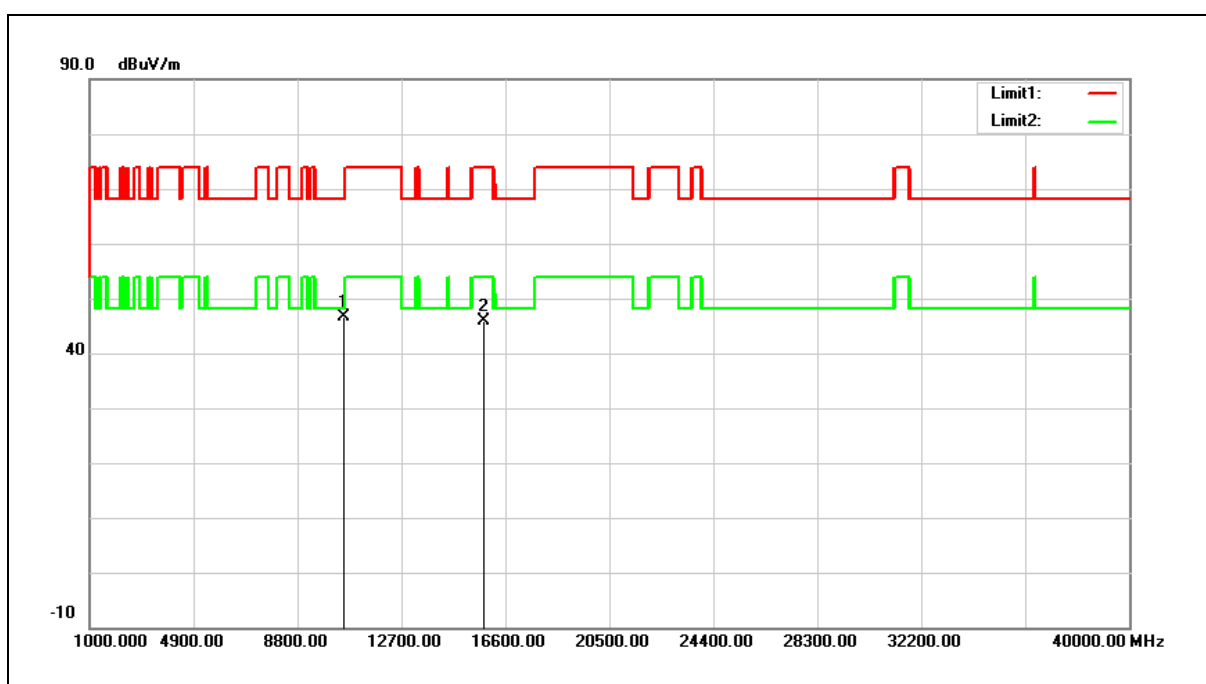


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10520.000          | 35.13             | 11.53                    | 46.66              | 68.20             | -21.54         | peak   |
| 2   | 15780.000          | 32.67             | 13.30                    | 45.97              | 74.00             | -28.03         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

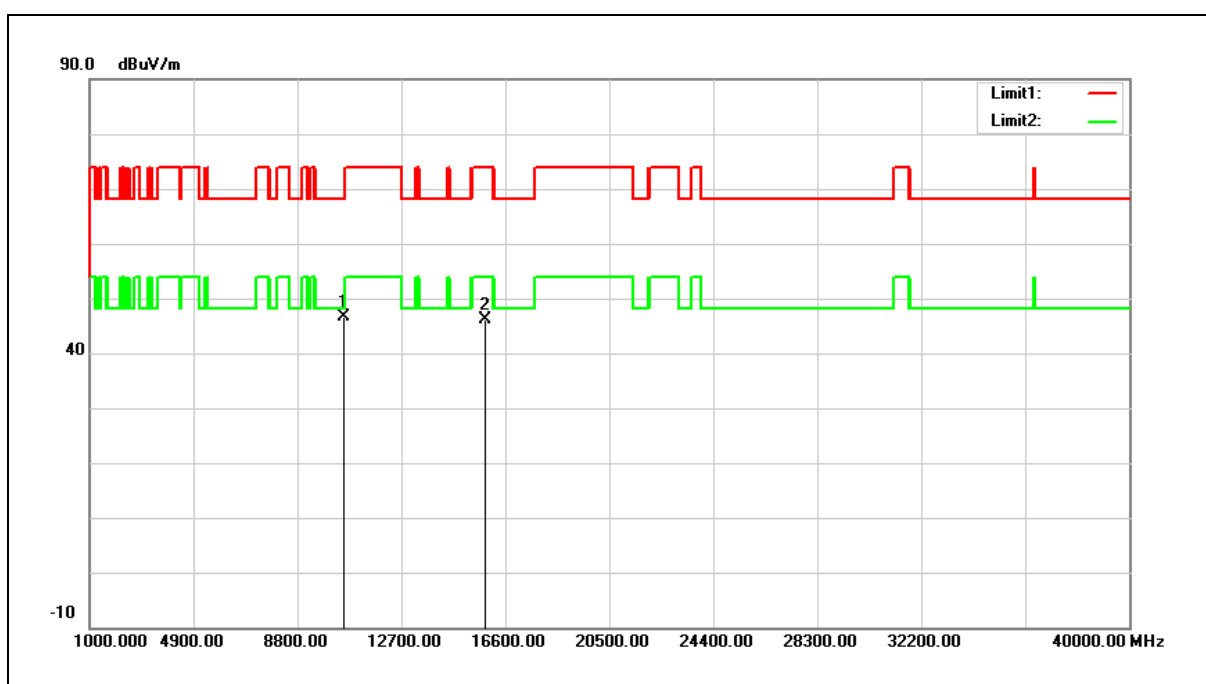


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10560.000          | 35.06             | 11.53                    | 46.59              | 68.20             | -21.61         | peak   |
| 2   | 15840.000          | 32.84             | 13.20                    | 46.04              | 74.00             | -27.96         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

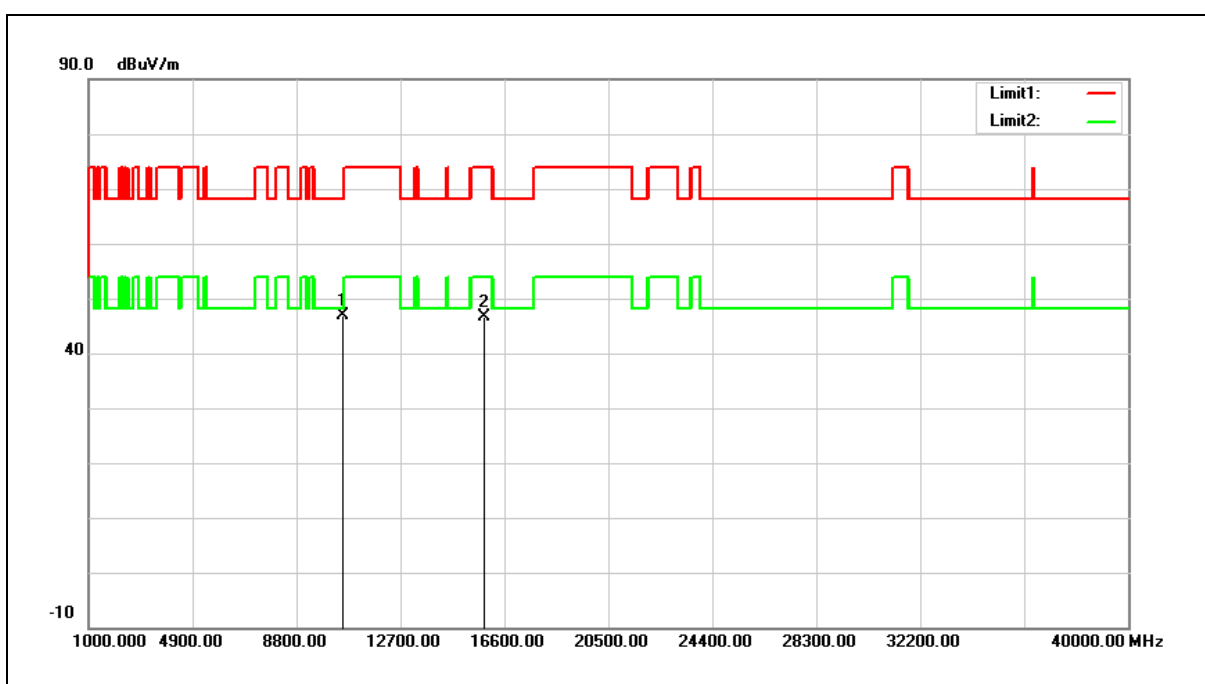


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10560.000          | 35.32             | 11.53                    | 46.85              | 68.20             | -21.35         | peak   |
| 2   | 15840.000          | 33.38             | 13.20                    | 46.58              | 74.00             | -27.42         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

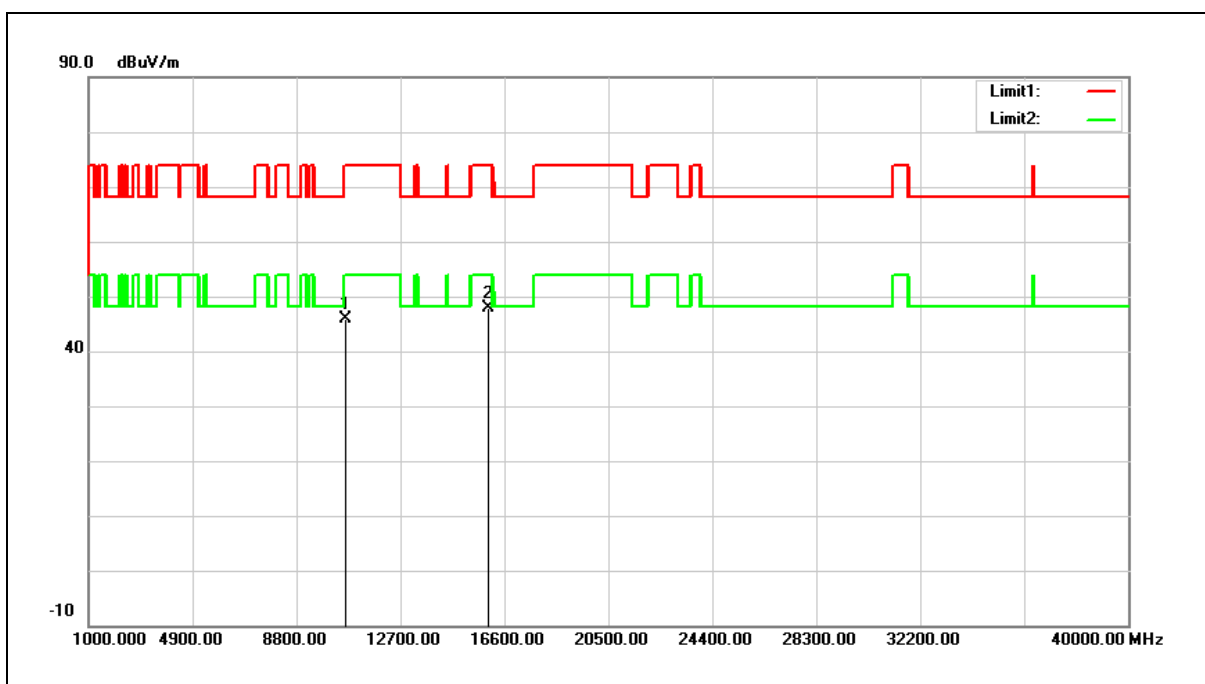


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10640.000          | 34.25             | 11.54                    | 45.79              | 74.00             | -28.21         | peak   |
| 2   | 15960.000          | 34.87             | 13.01                    | 47.88              | 74.00             | -26.12         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

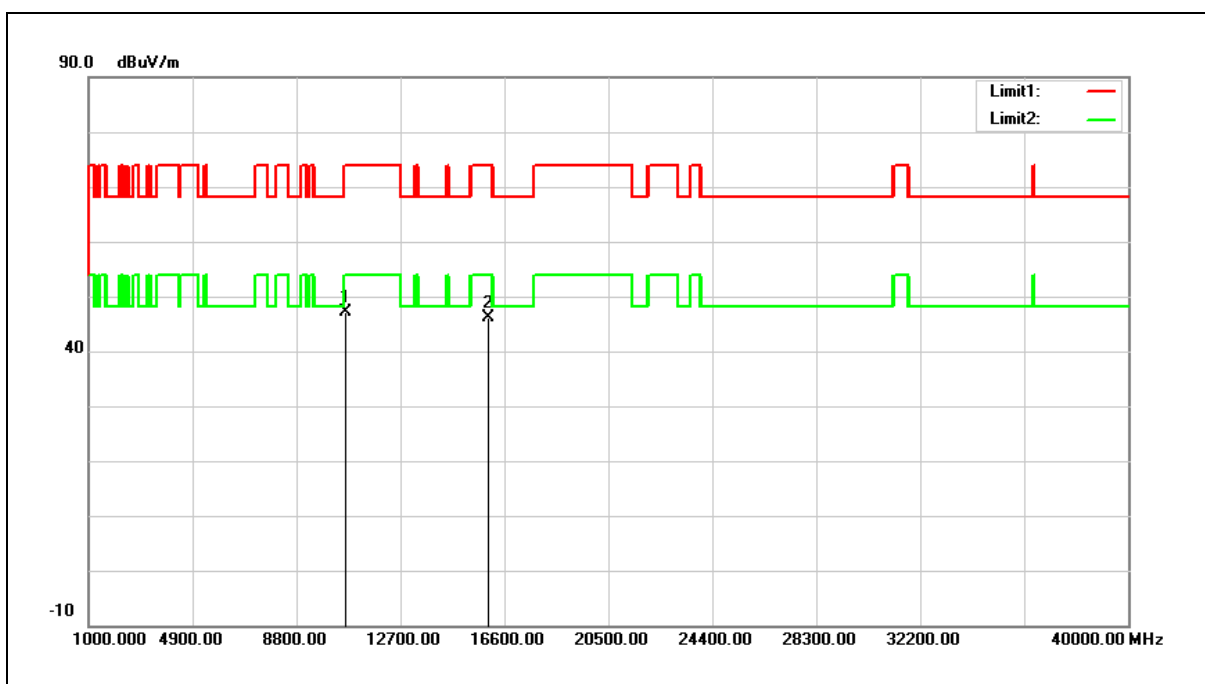


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10640.000          | 35.50             | 11.54                    | 47.04              | 74.00             | -26.96         | peak   |
| 2   | 15960.000          | 33.15             | 13.01                    | 46.16              | 74.00             | -27.84         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

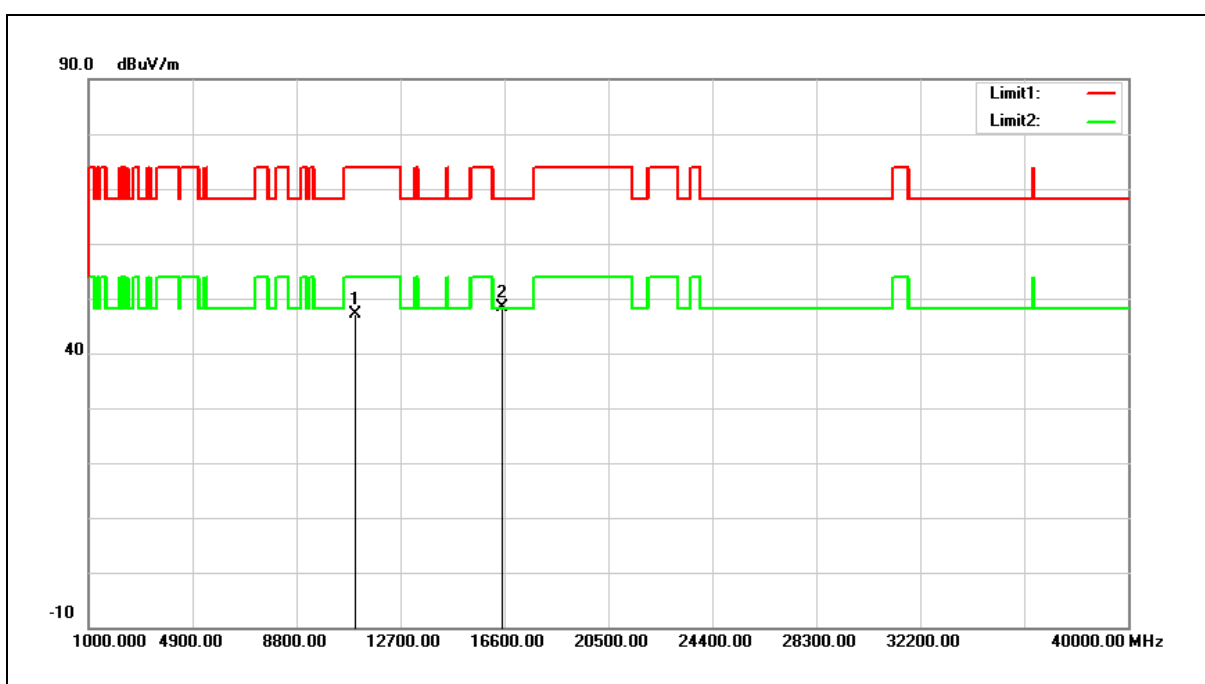


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11000.000          | 35.64             | 11.59                    | 47.23              | 74.00             | -26.77         | peak   |
| 2   | 16500.000          | 34.64             | 13.70                    | 48.34              | 68.20             | -19.86         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

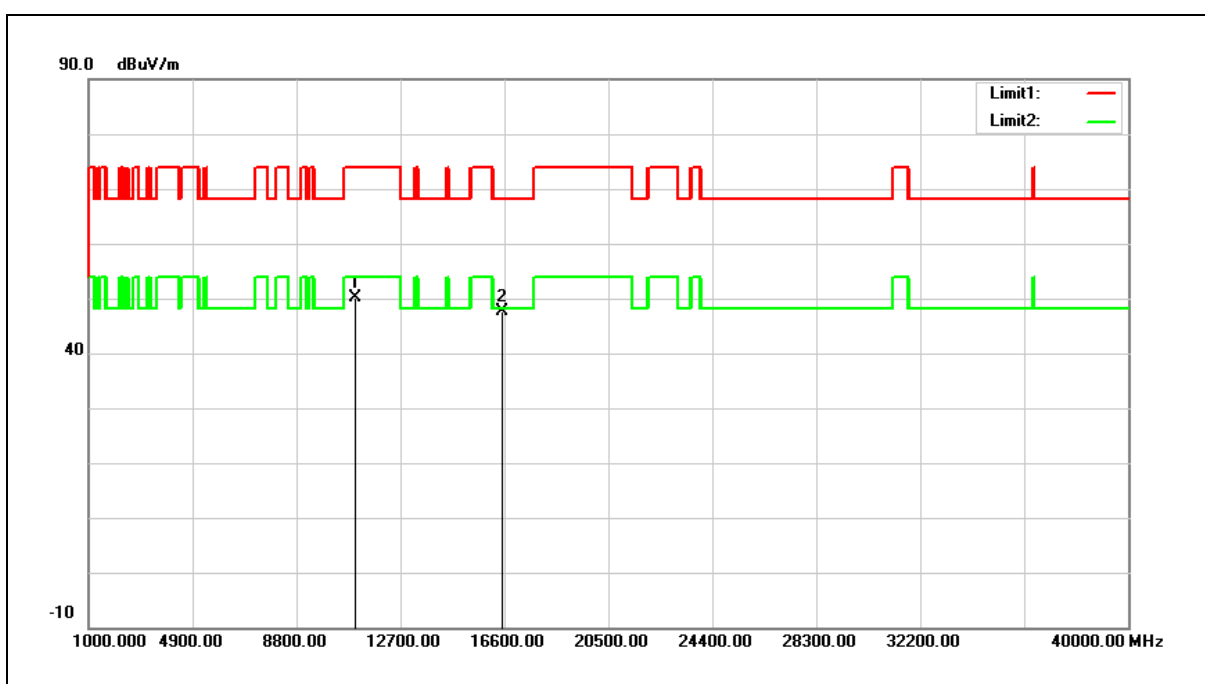


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11000.000          | 38.49             | 11.59                    | 50.08              | 74.00             | -23.92         | peak   |
| 2   | 16500.000          | 33.85             | 13.70                    | 47.55              | 68.20             | -20.65         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

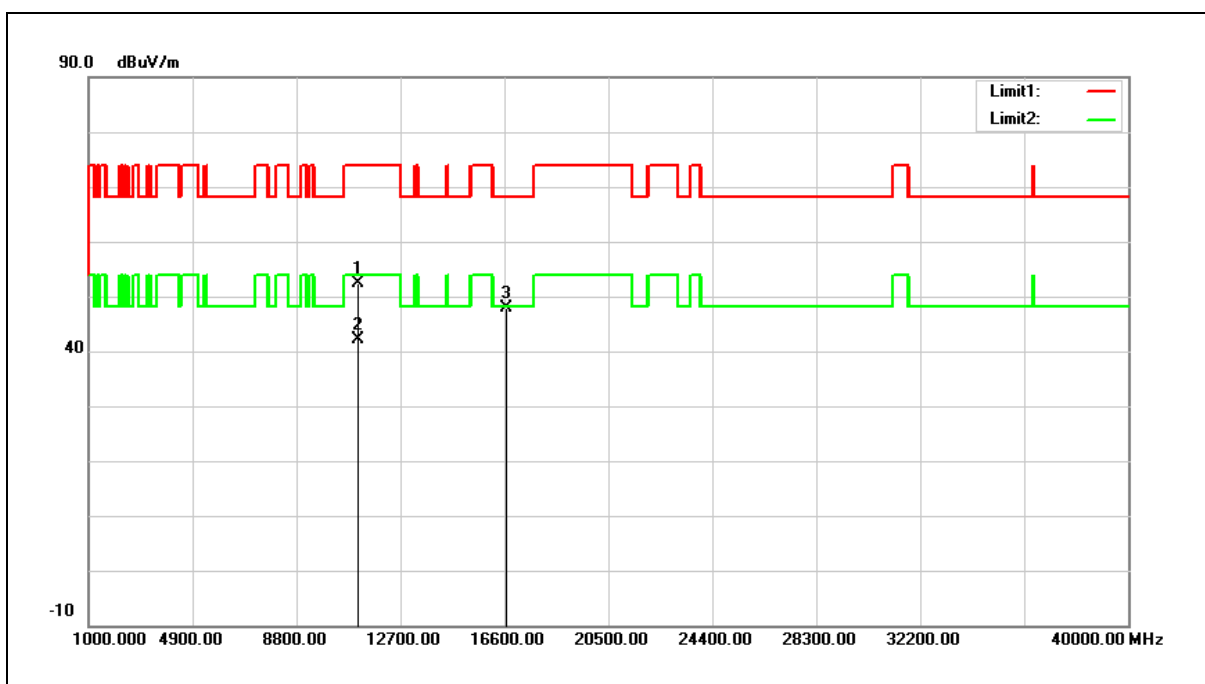


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 40.59             | 11.73                    | 52.32              | 74.00             | -21.68         | peak   |
| 2   | 11120.000          | 30.40             | 11.73                    | 42.13              | 54.00             | -11.87         | AVG    |
| 3   | 16680.000          | 33.31             | 14.55                    | 47.86              | 68.20             | -20.34         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

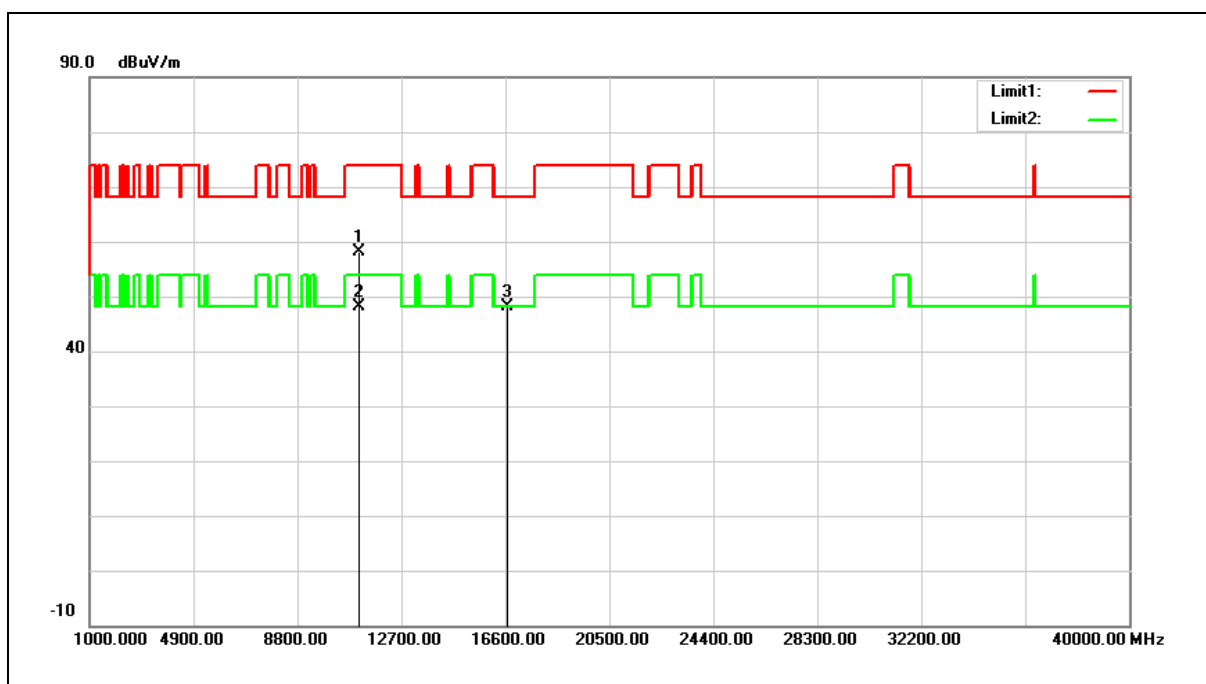


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 46.28             | 11.73                    | 58.01              | 74.00             | -15.99         | peak   |
| 2   | 11120.000          | 36.29             | 11.73                    | 48.02              | 54.00             | -5.98          | AVG    |
| 3   | 16680.000          | 33.48             | 14.55                    | 48.03              | 68.20             | -20.17         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

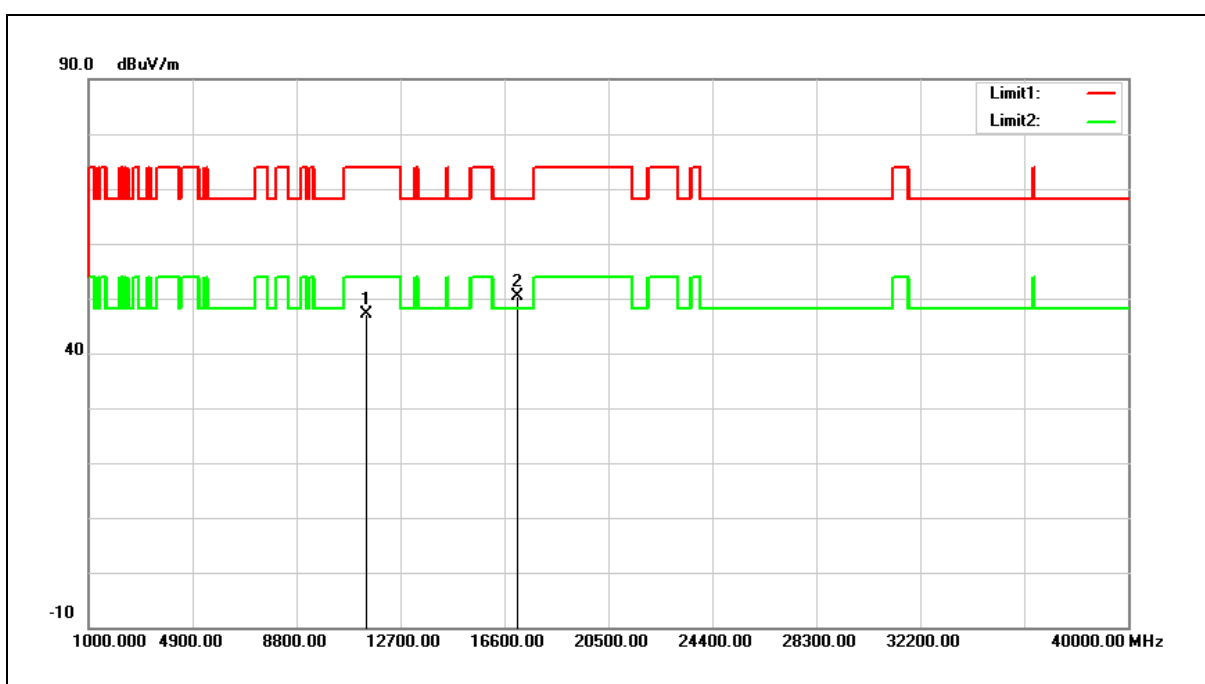


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11400.000          | 35.14             | 12.03                    | 47.17              | 74.00             | -26.83         | peak   |
| 2   | 17100.000          | 33.73             | 16.69                    | 50.42              | 68.20             | -17.78         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

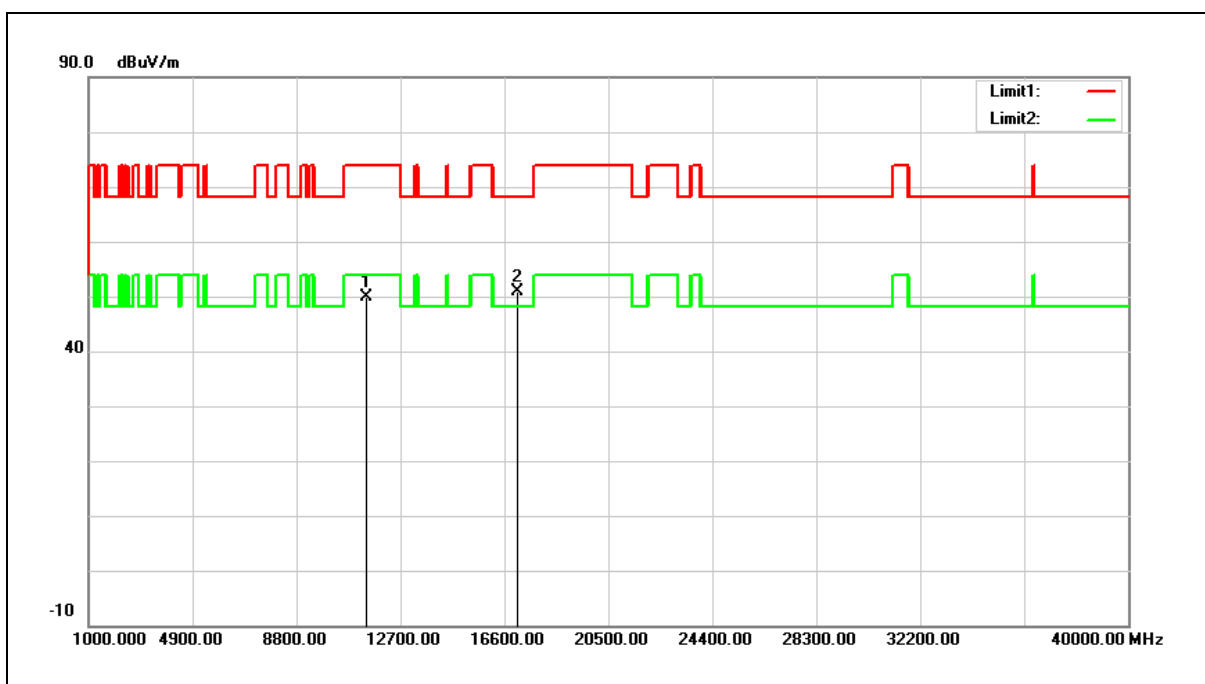


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11400.000          | 37.95             | 12.03                    | 49.98              | 74.00             | -24.02         | peak   |
| 2   | 17100.000          | 34.26             | 16.69                    | 50.95              | 68.20             | -17.25         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

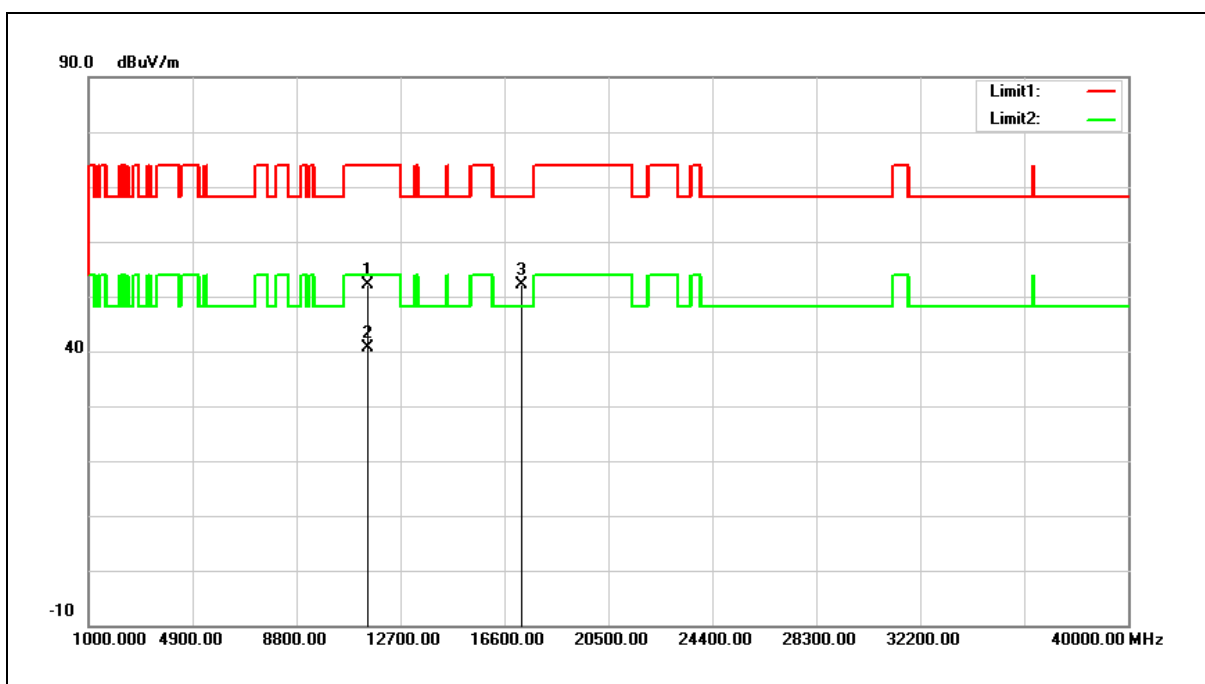


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11490.000          | 40.03             | 12.13                    | 52.16              | 74.00             | -21.84         | peak   |
| 2   | 11490.000          | 28.59             | 12.13                    | 40.72              | 54.00             | -13.28         | AVG    |
| 3   | 17235.000          | 34.46             | 17.55                    | 52.01              | 68.20             | -16.19         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

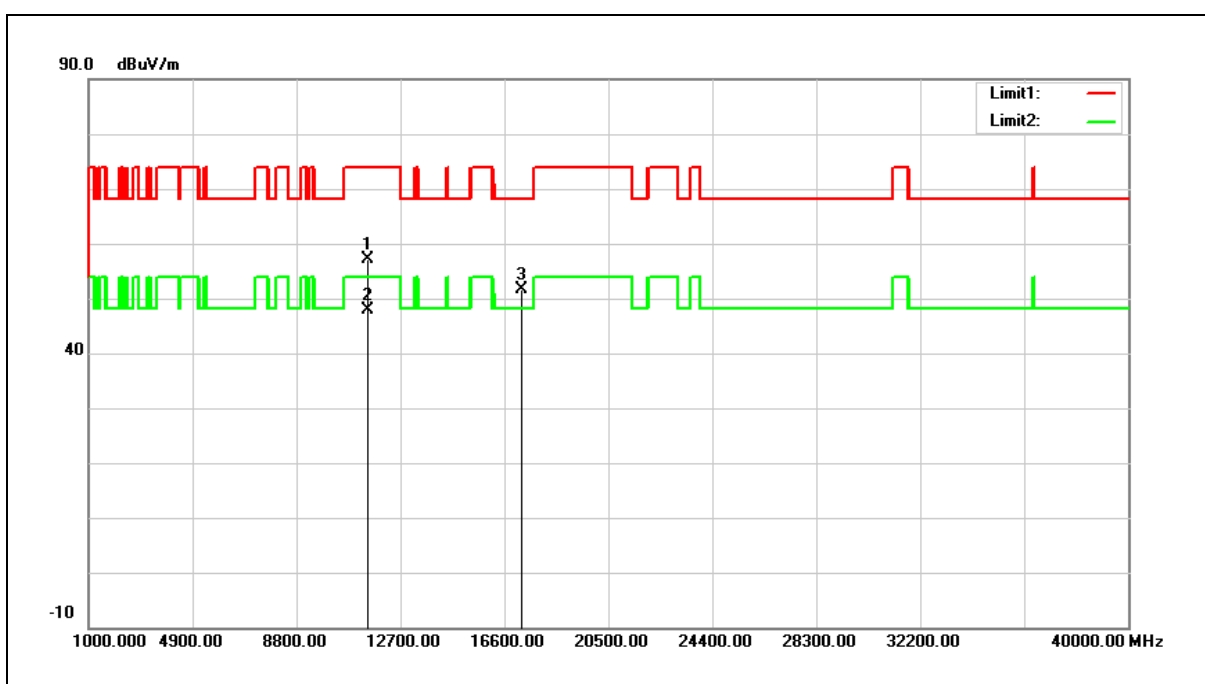


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 44.89          | 12.13                 | 57.02           | 74.00          | -16.98      | peak   |
| 2   | 11490.000       | 35.75          | 12.13                 | 47.88           | 54.00          | -6.12       | AVG    |
| 3   | 17235.000       | 33.97          | 17.55                 | 51.52           | 68.20          | -16.68      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

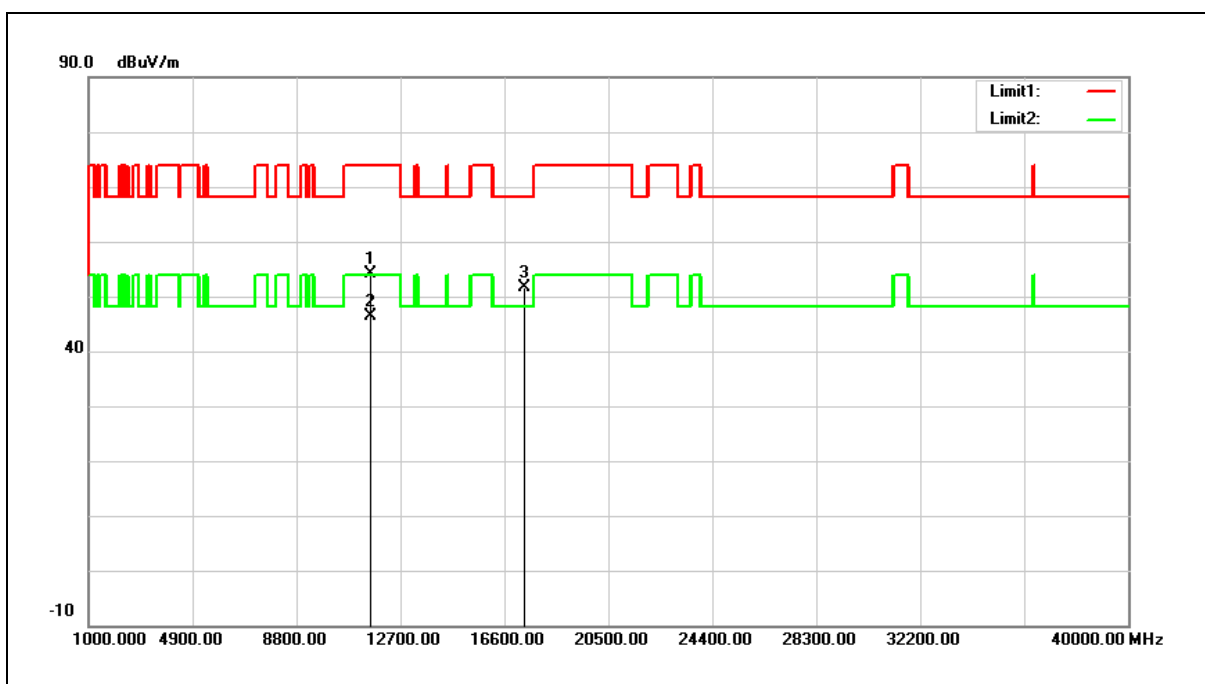


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11570.000          | 42.11             | 12.00                    | 54.11              | 74.00             | -19.89         | peak   |
| 2   | 11570.000          | 34.34             | 12.00                    | 46.34              | 54.00             | -7.66          | AVG    |
| 3   | 17355.000          | 33.39             | 18.30                    | 51.69              | 68.20             | -16.51         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

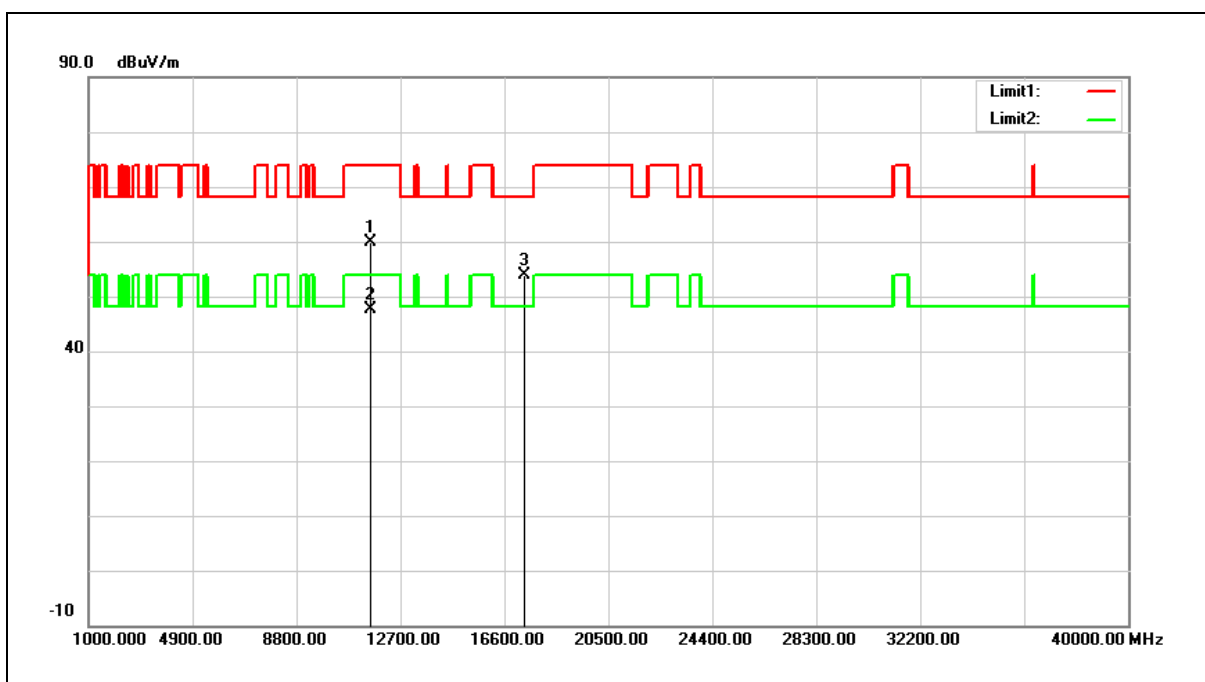


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11570.000       | 47.99          | 12.00                 | 59.99           | 74.00          | -14.01      | peak   |
| 2   | 11570.000       | 35.73          | 12.00                 | 47.73           | 54.00          | -6.27       | AVG    |
| 3   | 17355.000       | 35.70          | 18.30                 | 54.00           | 68.20          | -14.20      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

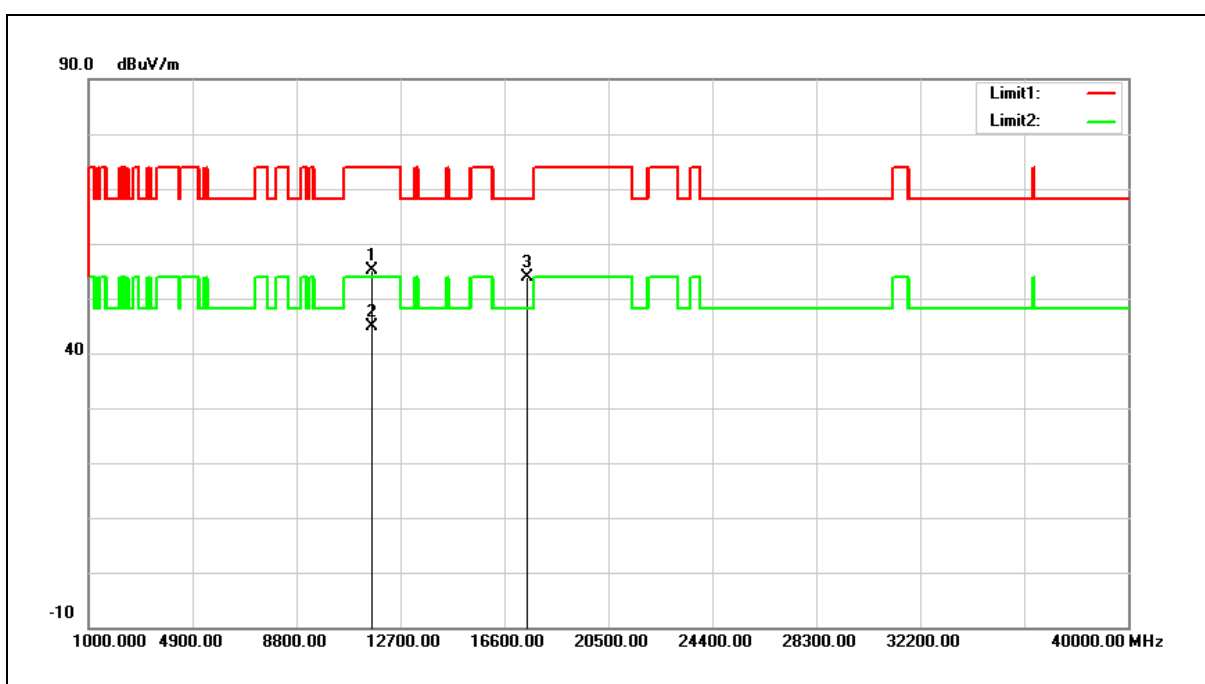


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11650.000          | 43.38             | 11.85                    | 55.23              | 74.00             | -18.77         | peak   |
| 2   | 11650.000          | 33.03             | 11.85                    | 44.88              | 54.00             | -9.12          | AVG    |
| 3   | 17475.000          | 34.85             | 19.07                    | 53.92              | 68.20             | -14.28         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

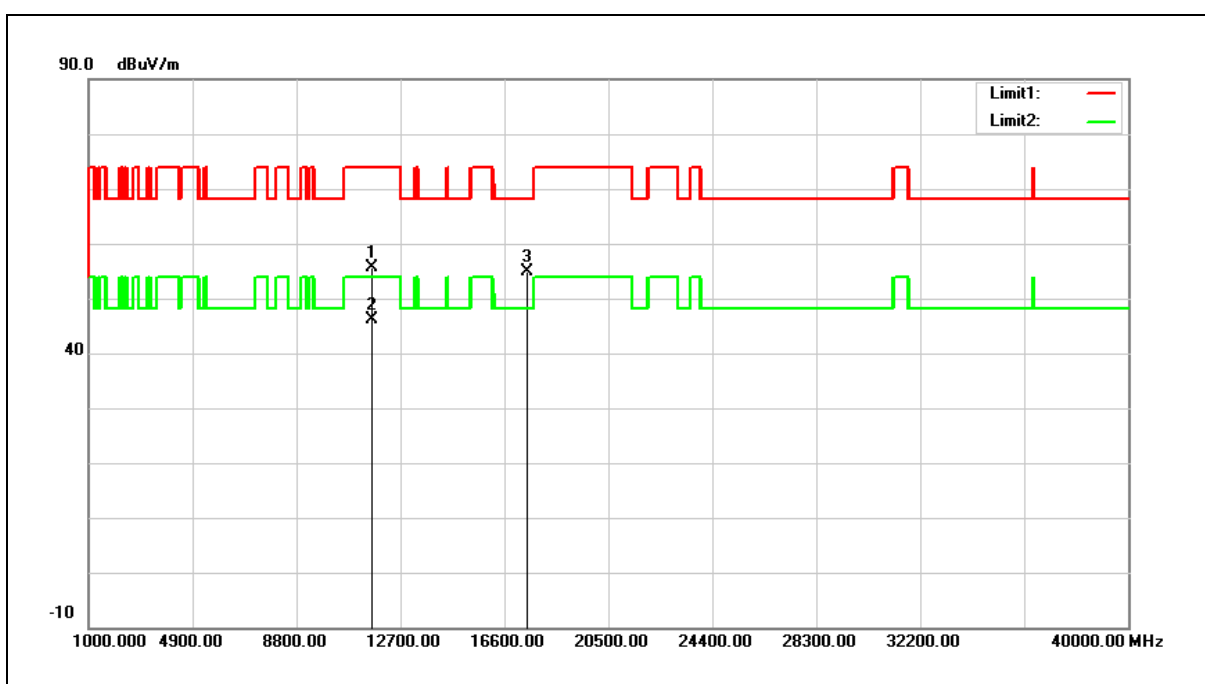


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11650.000          | 43.66             | 11.85                    | 55.51              | 74.00             | -18.49         | peak   |
| 2   | 11650.000          | 34.36             | 11.85                    | 46.21              | 54.00             | -7.79          | AVG    |
| 3   | 17475.000          | 35.73             | 19.07                    | 54.80              | 68.20             | -13.40         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

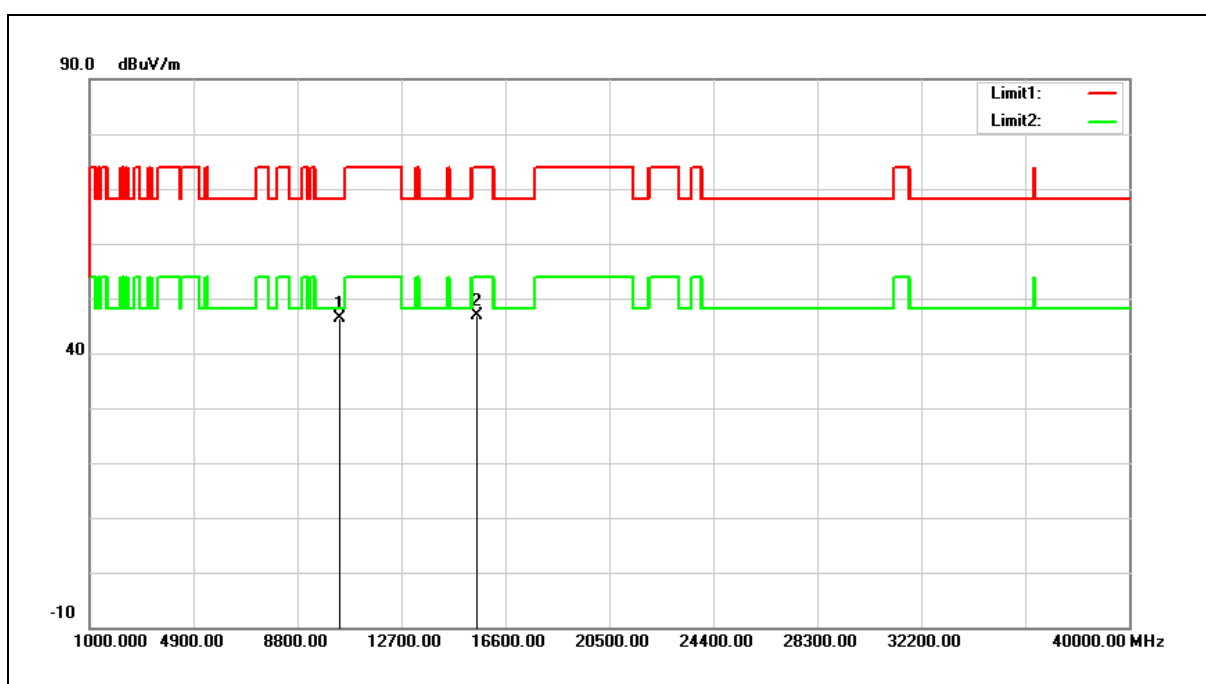


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10360.000          | 35.26             | 11.16                    | 46.42              | 68.20             | -21.78         | peak   |
| 2   | 15540.000          | 33.18             | 13.66                    | 46.84              | 74.00             | -27.16         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

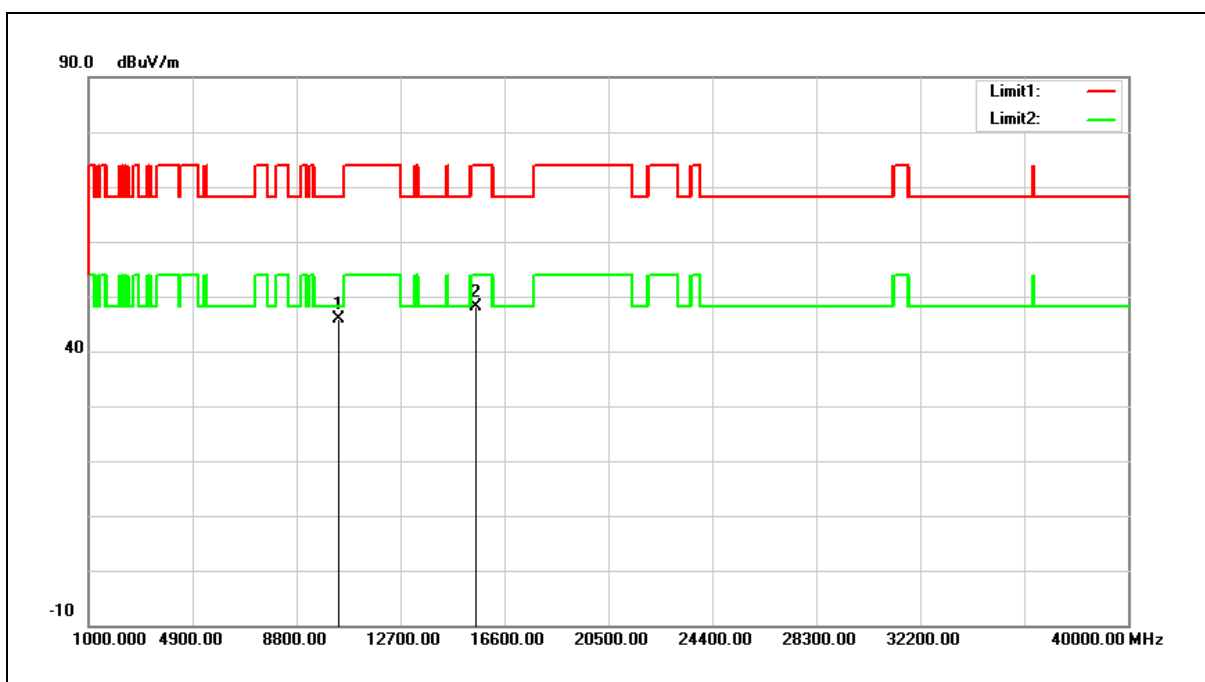


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10360.000          | 34.84             | 11.16                    | 46.00              | 68.20             | -22.20         | peak   |
| 2   | 15540.000          | 34.56             | 13.66                    | 48.22              | 74.00             | -25.78         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

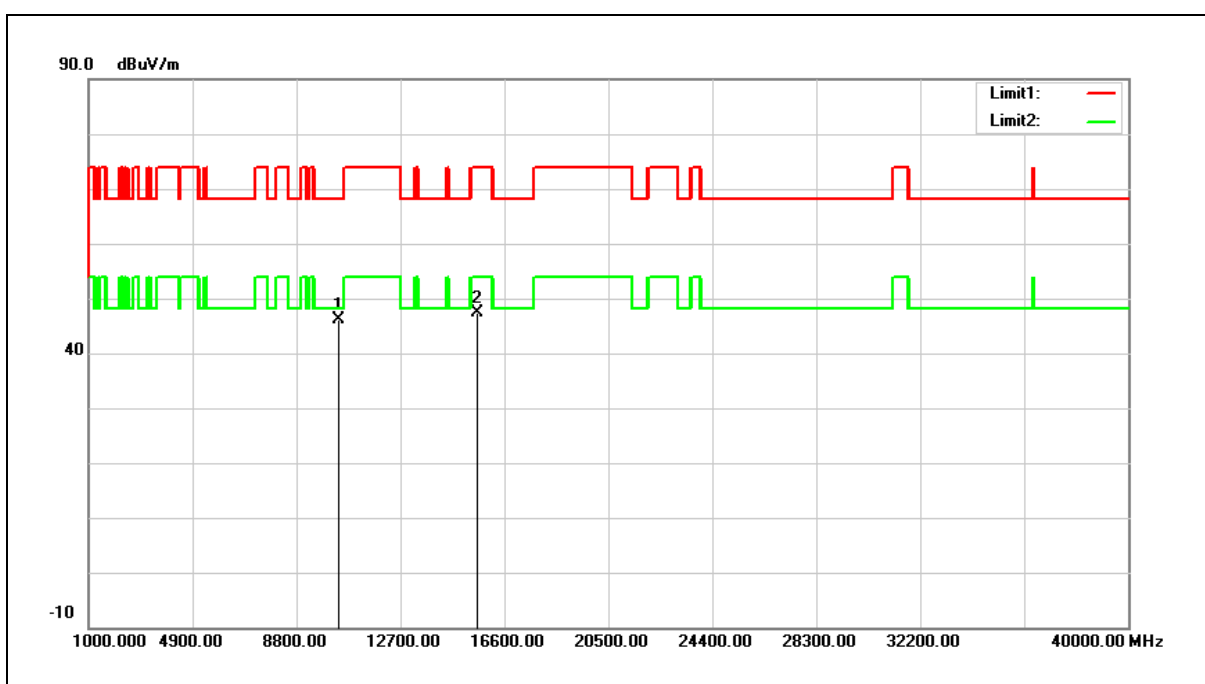


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10400.000          | 34.85             | 11.26                    | 46.11              | 68.20             | -22.09         | peak   |
| 2   | 15600.000          | 33.84             | 13.56                    | 47.40              | 74.00             | -26.60         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

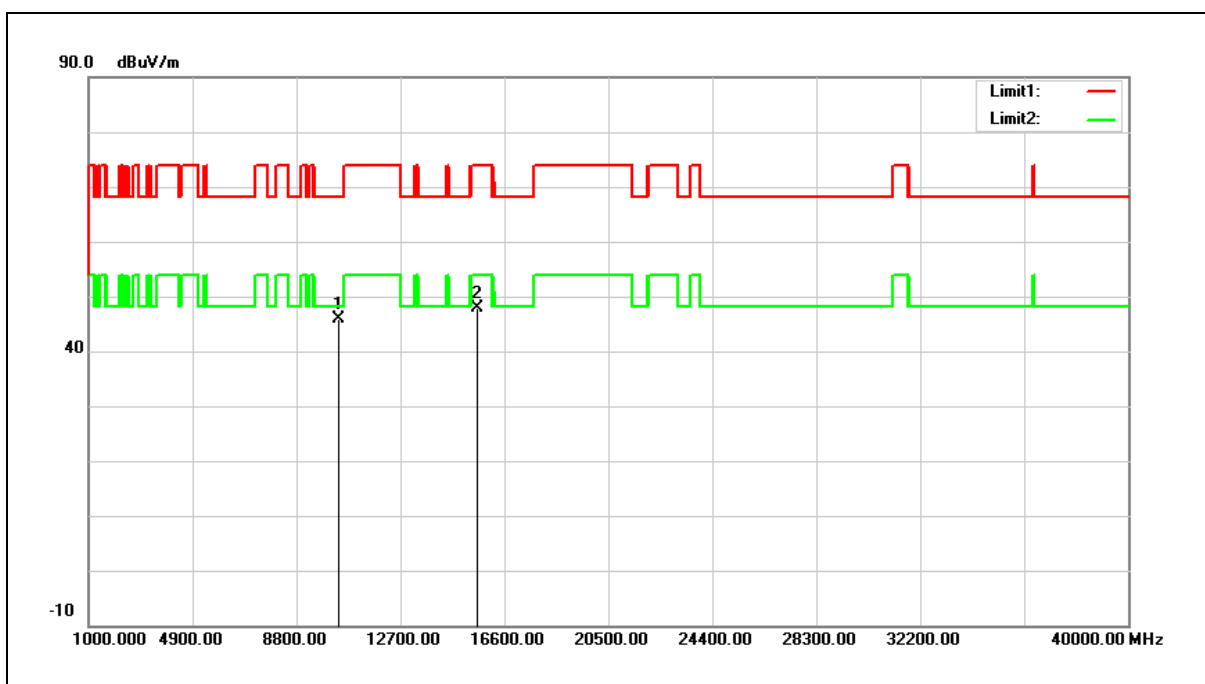


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10400.000       | 34.60          | 11.26                 | 45.86           | 68.20          | -22.34      | peak   |
| 2   | 15600.000       | 34.41          | 13.56                 | 47.97           | 74.00          | -26.03      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

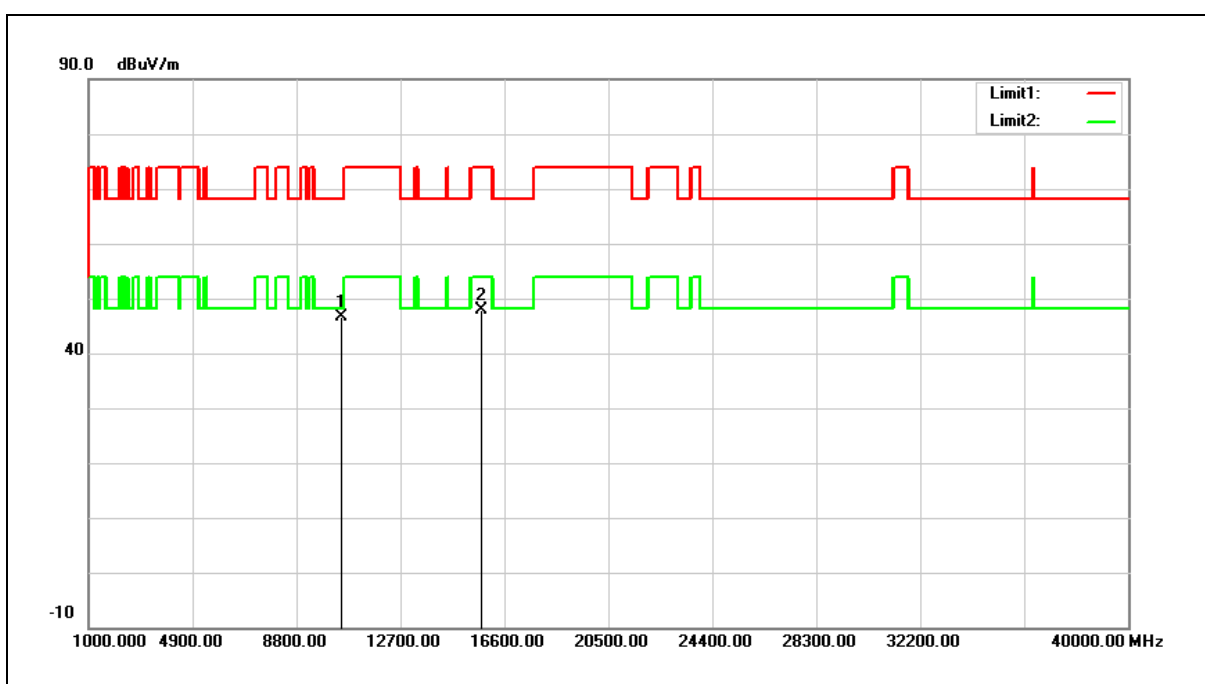


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10480.000          | 35.09             | 11.47                    | 46.56              | 68.20             | -21.64         | peak   |
| 2   | 15720.000          | 34.50             | 13.37                    | 47.87              | 74.00             | -26.13         | peak   |

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

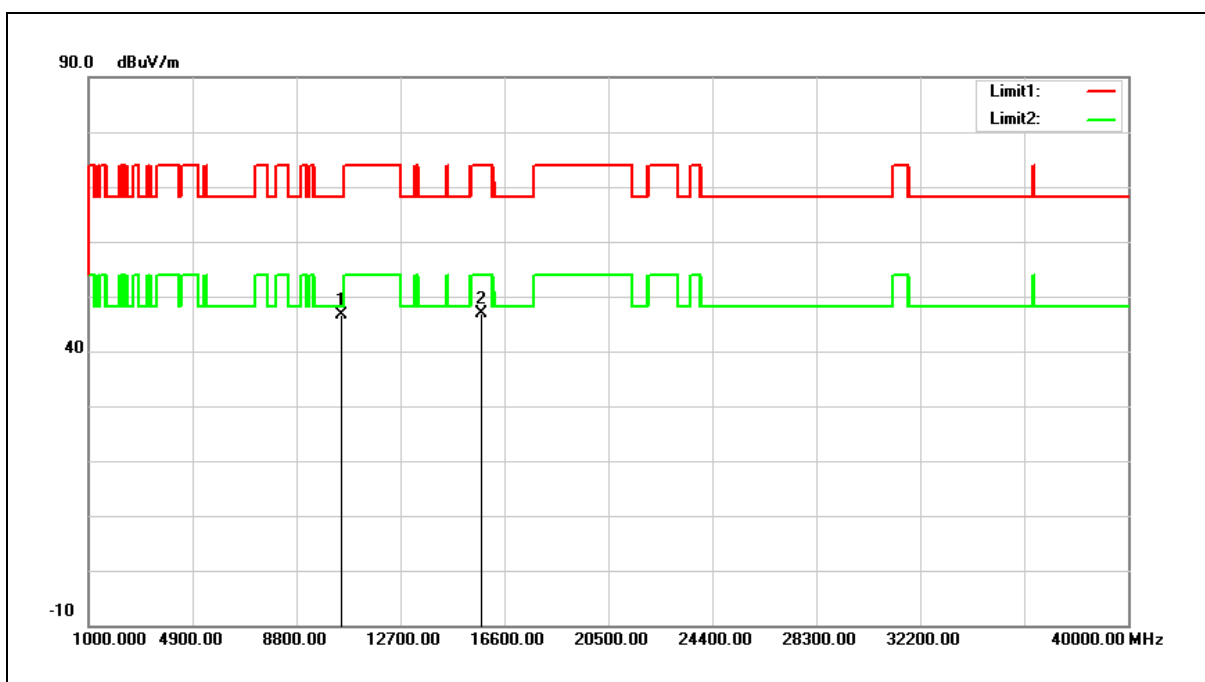


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10480.000          | 35.04             | 11.47                    | 46.51              | 68.20             | -21.69         | peak   |
| 2   | 15720.000          | 33.47             | 13.37                    | 46.84              | 74.00             | -27.16         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

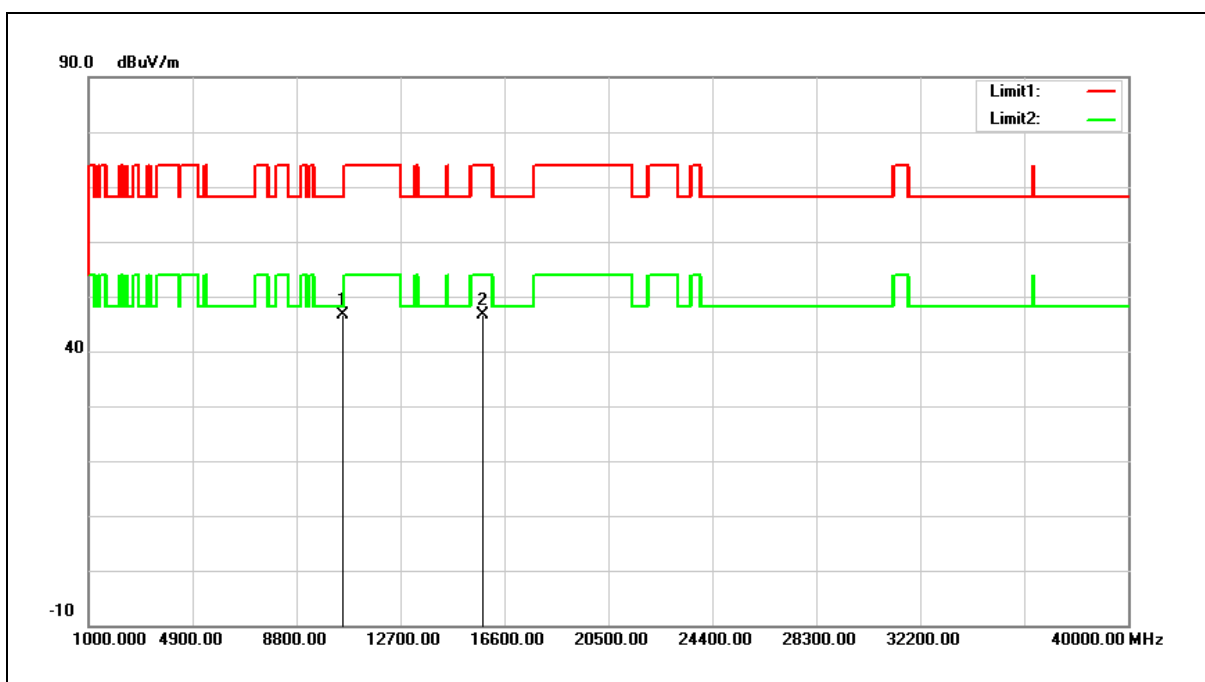


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10520.000          | 34.98             | 11.53                    | 46.51              | 68.20             | -21.69         | peak   |
| 2   | 15780.000          | 33.26             | 13.30                    | 46.56              | 74.00             | -27.44         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

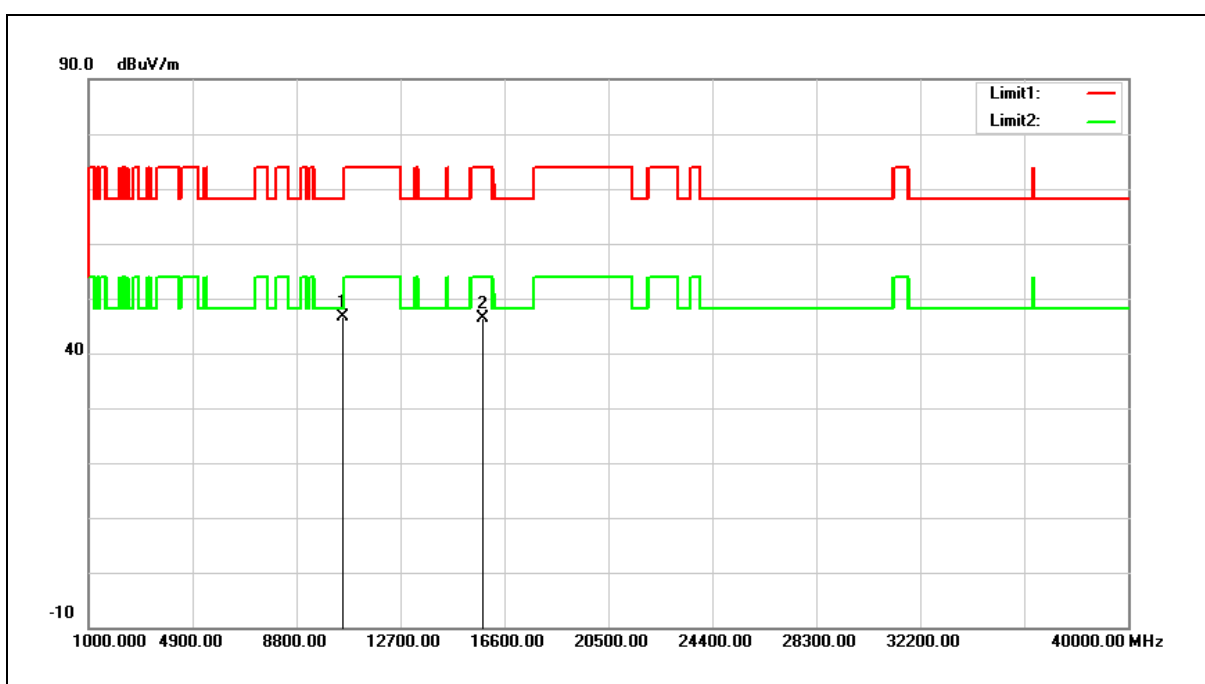


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10520.000       | 35.09          | 11.53                 | 46.62           | 68.20          | -21.58      | peak   |
| 2   | 15780.000       | 33.20          | 13.30                 | 46.50           | 74.00          | -27.50      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

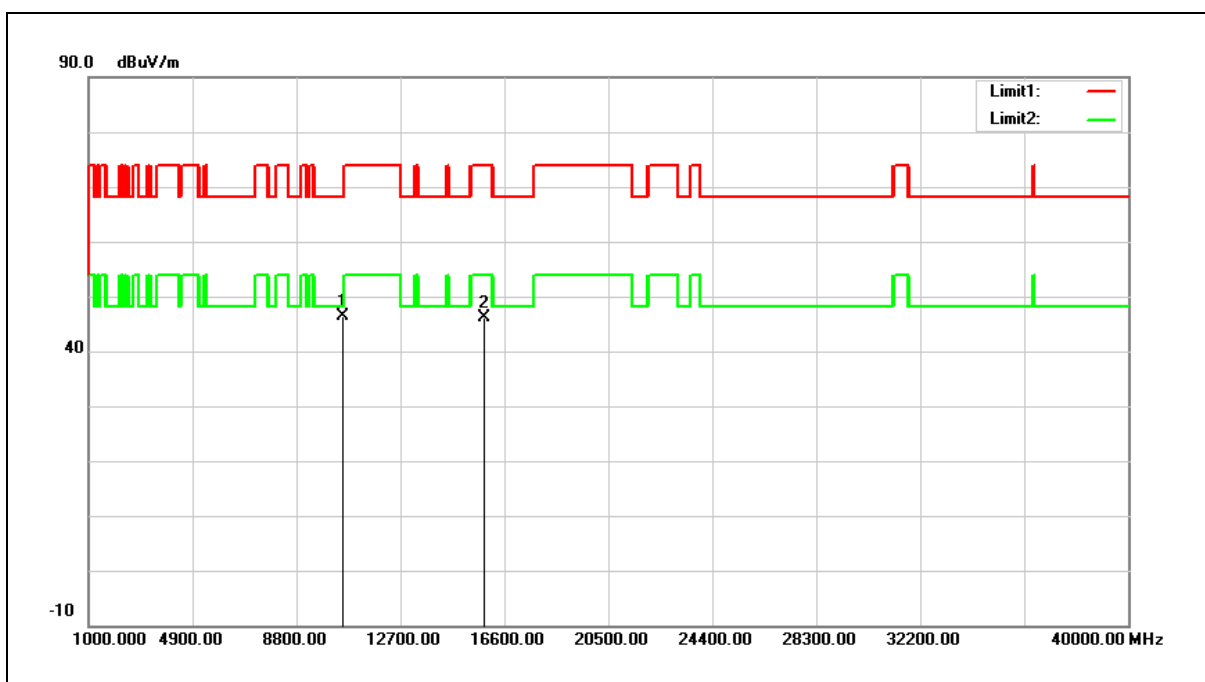


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10560.000          | 34.93             | 11.53                    | 46.46              | 68.20             | -21.74         | peak   |
| 2   | 15840.000          | 32.84             | 13.20                    | 46.04              | 74.00             | -27.96         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

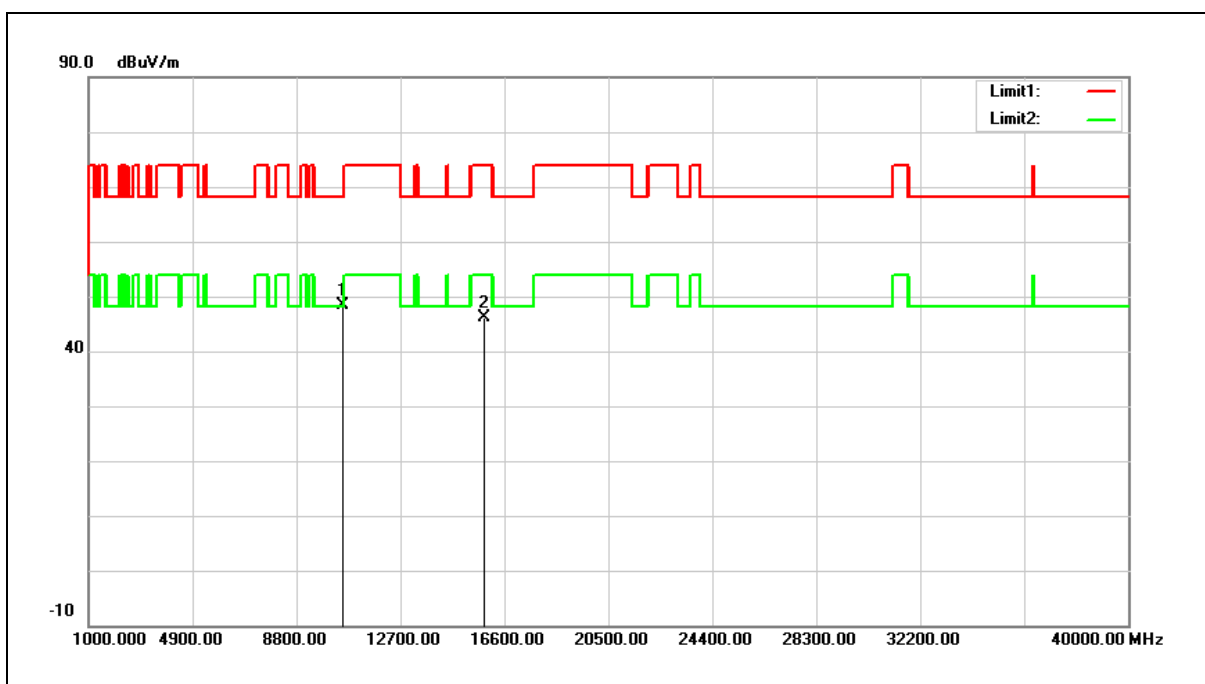


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10560.000          | 36.91             | 11.53                    | 48.44              | 68.20             | -19.76         | peak   |
| 2   | 15840.000          | 32.86             | 13.20                    | 46.06              | 74.00             | -27.94         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

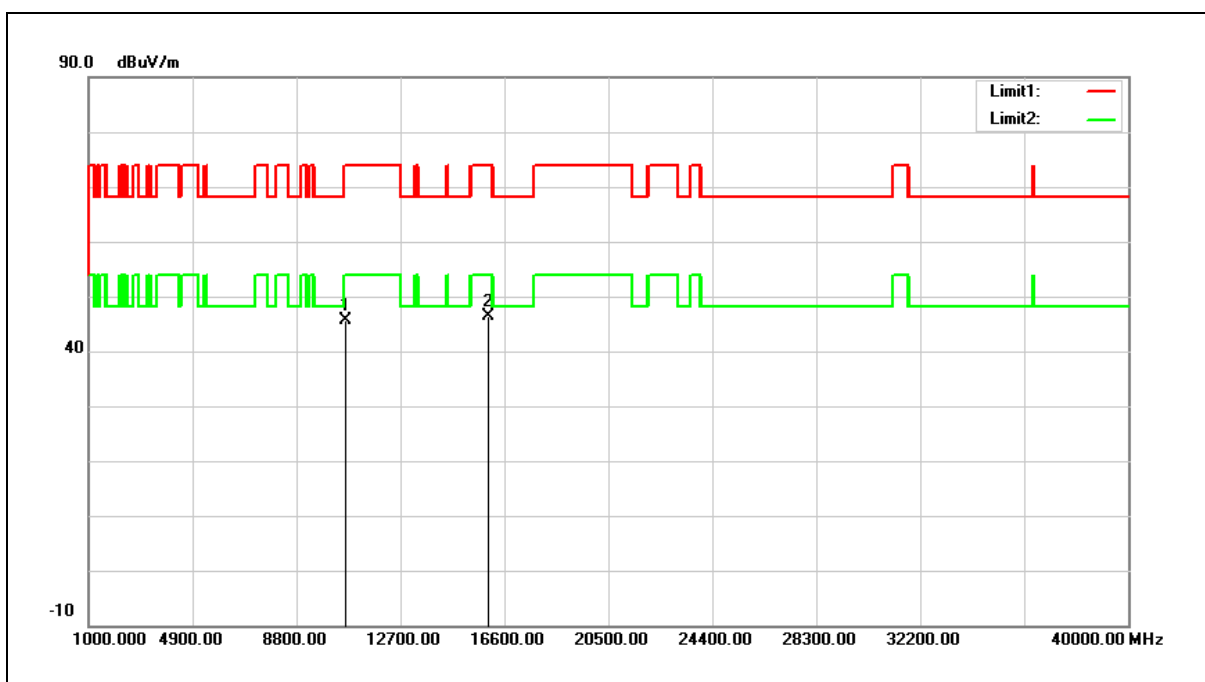


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10640.000          | 34.21             | 11.54                    | 45.75              | 74.00             | -28.25         | peak   |
| 2   | 15960.000          | 33.47             | 13.01                    | 46.48              | 74.00             | -27.52         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

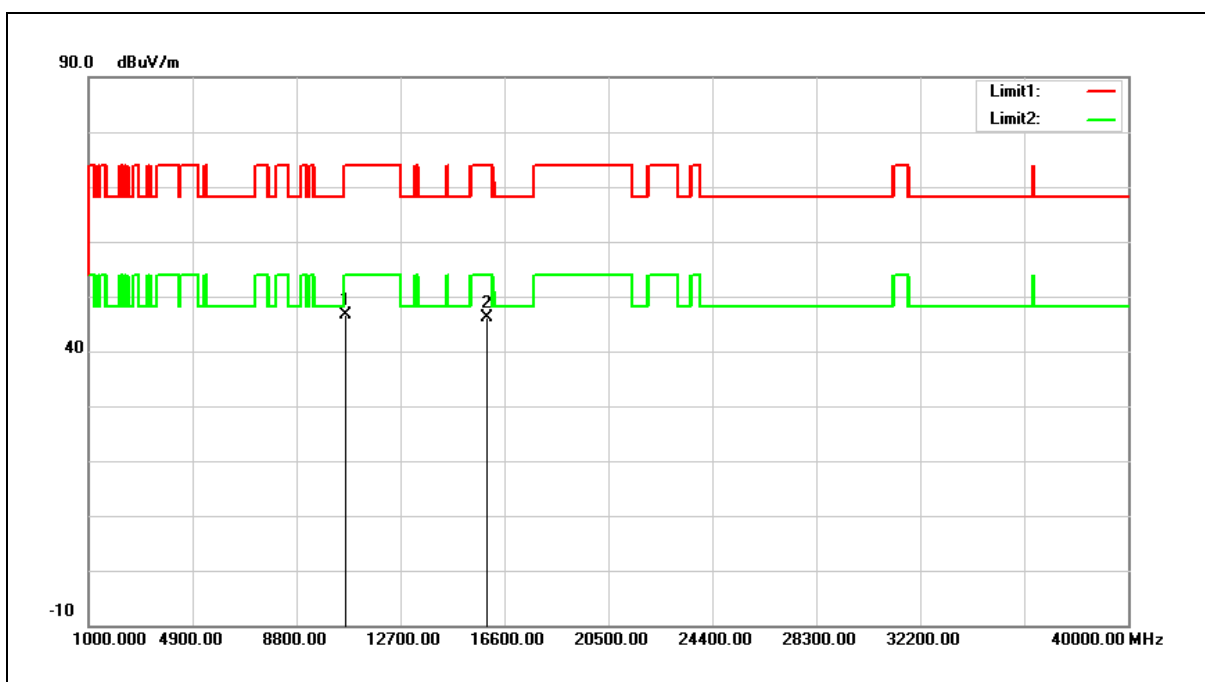


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10640.000          | 35.07             | 11.54                    | 46.61              | 74.00             | -27.39         | peak   |
| 2   | 15960.000          | 33.16             | 13.01                    | 46.17              | 74.00             | -27.83         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

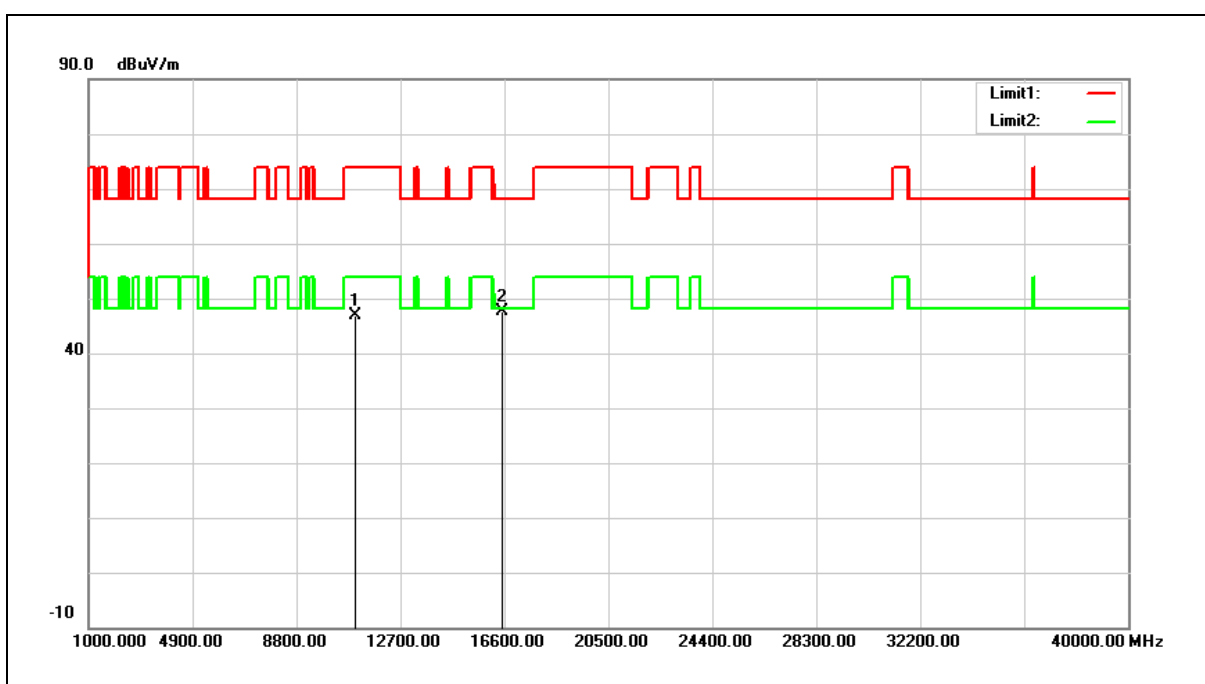


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11000.000          | 35.25             | 11.59                    | 46.84              | 74.00             | -27.16         | peak   |
| 2   | 16500.000          | 33.88             | 13.70                    | 47.58              | 68.20             | -20.62         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

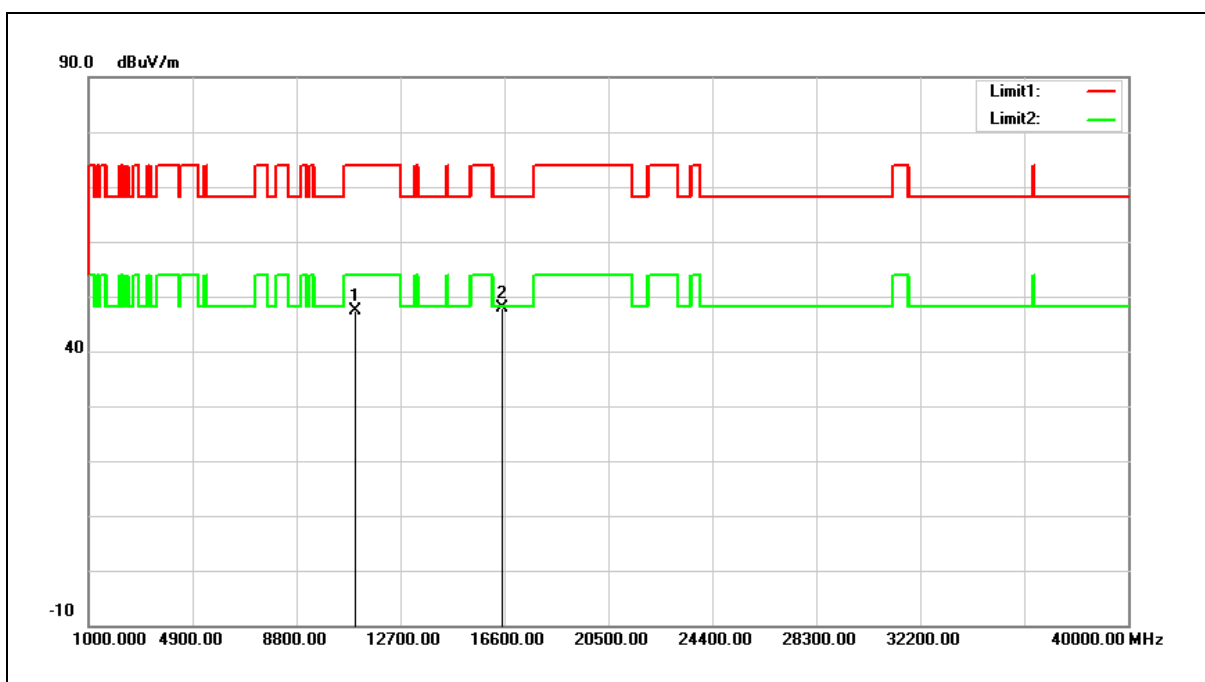


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11000.000          | 35.71             | 11.59                    | 47.30              | 74.00             | -26.70         | peak   |
| 2   | 16500.000          | 34.06             | 13.70                    | 47.76              | 68.20             | -20.44         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

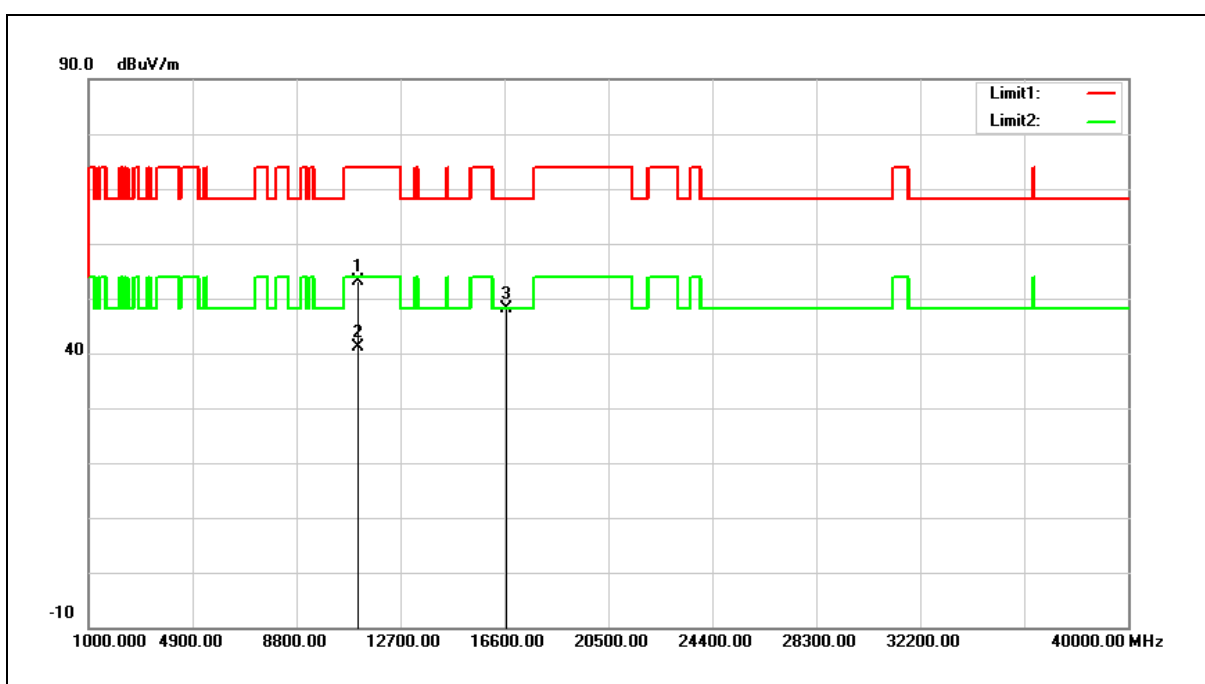


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 41.48             | 11.73                    | 53.21              | 74.00             | -20.79         | peak   |
| 2   | 11120.000          | 29.34             | 11.73                    | 41.07              | 54.00             | -12.93         | AVG    |
| 3   | 16680.000          | 33.67             | 14.55                    | 48.22              | 68.20             | -19.98         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

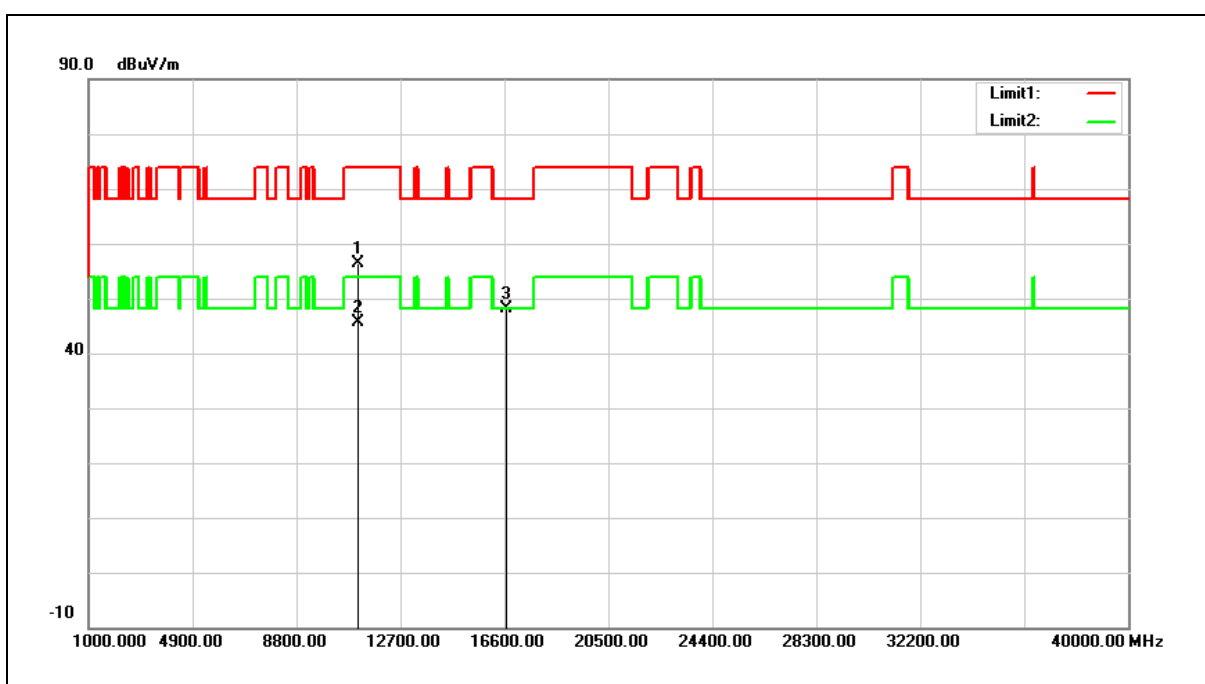


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11120.000          | 44.56             | 11.73                    | 56.29              | 74.00             | -17.71         | peak   |
| 2   | 11120.000          | 34.01             | 11.73                    | 45.74              | 54.00             | -8.26          | AVG    |
| 3   | 16680.000          | 33.64             | 14.55                    | 48.19              | 68.20             | -20.01         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

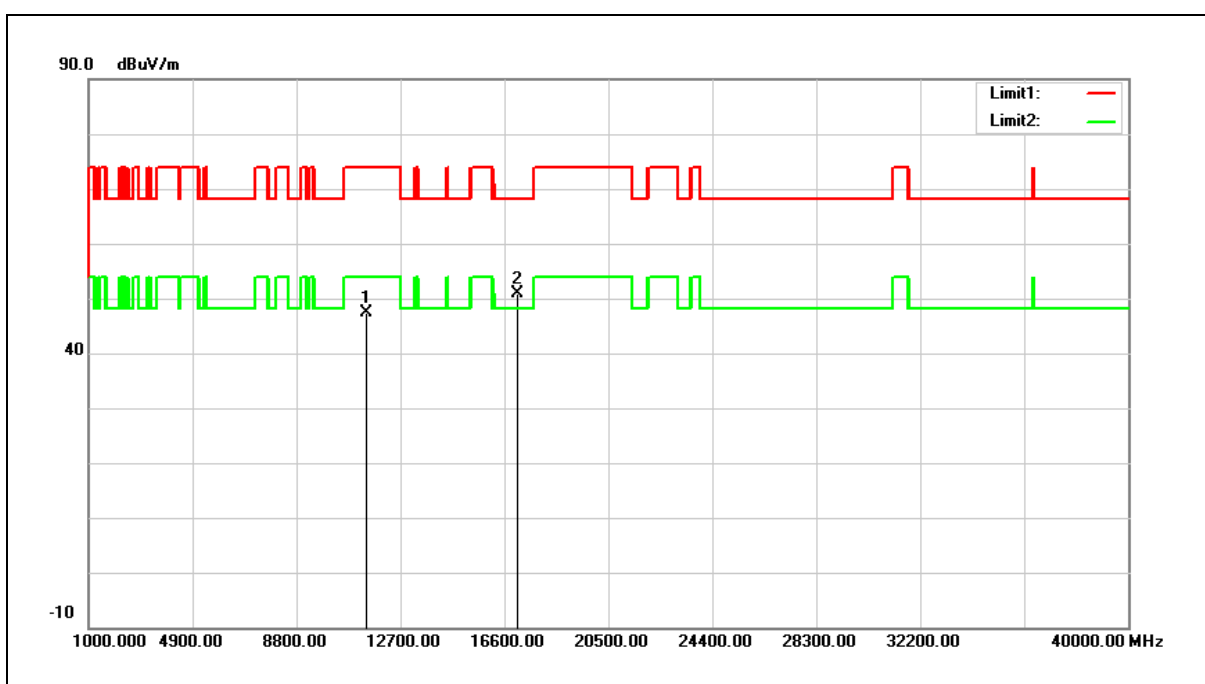


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11400.000          | 35.36             | 12.03                    | 47.39              | 74.00             | -26.61         | peak   |
| 2   | 17100.000          | 34.11             | 16.69                    | 50.80              | 68.20             | -17.40         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

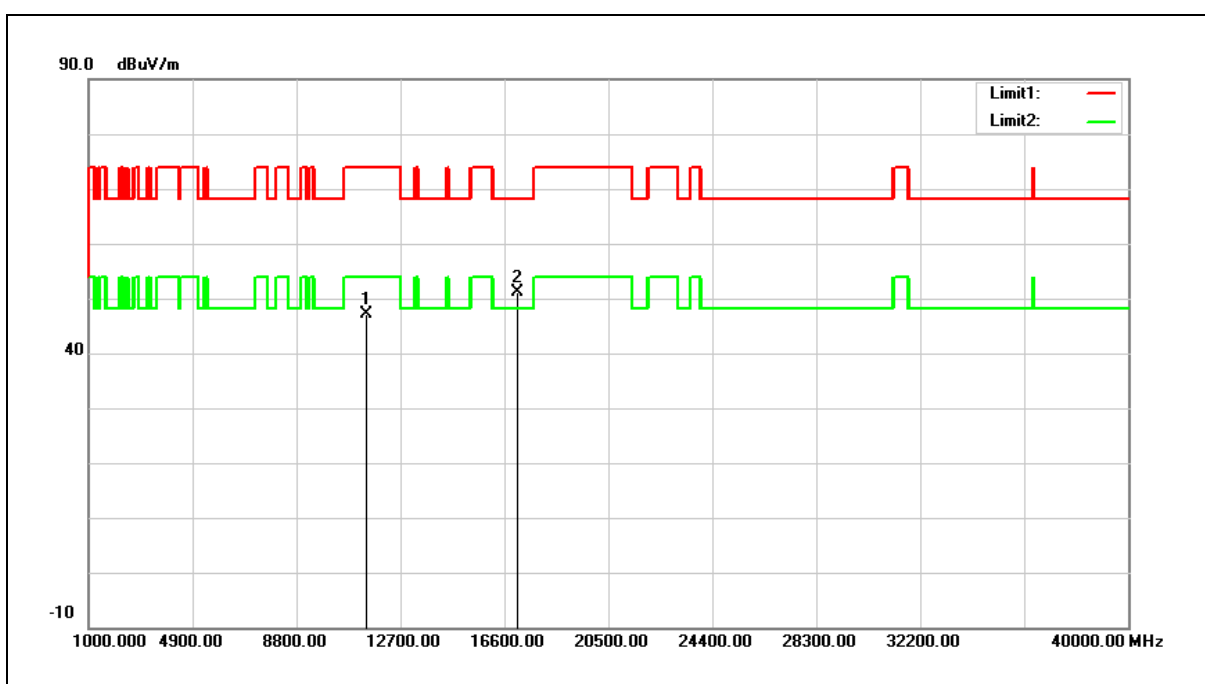


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11400.000          | 35.17             | 12.03                    | 47.20              | 74.00             | -26.80         | peak   |
| 2   | 17100.000          | 34.51             | 16.69                    | 51.20              | 68.20             | -17.00         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

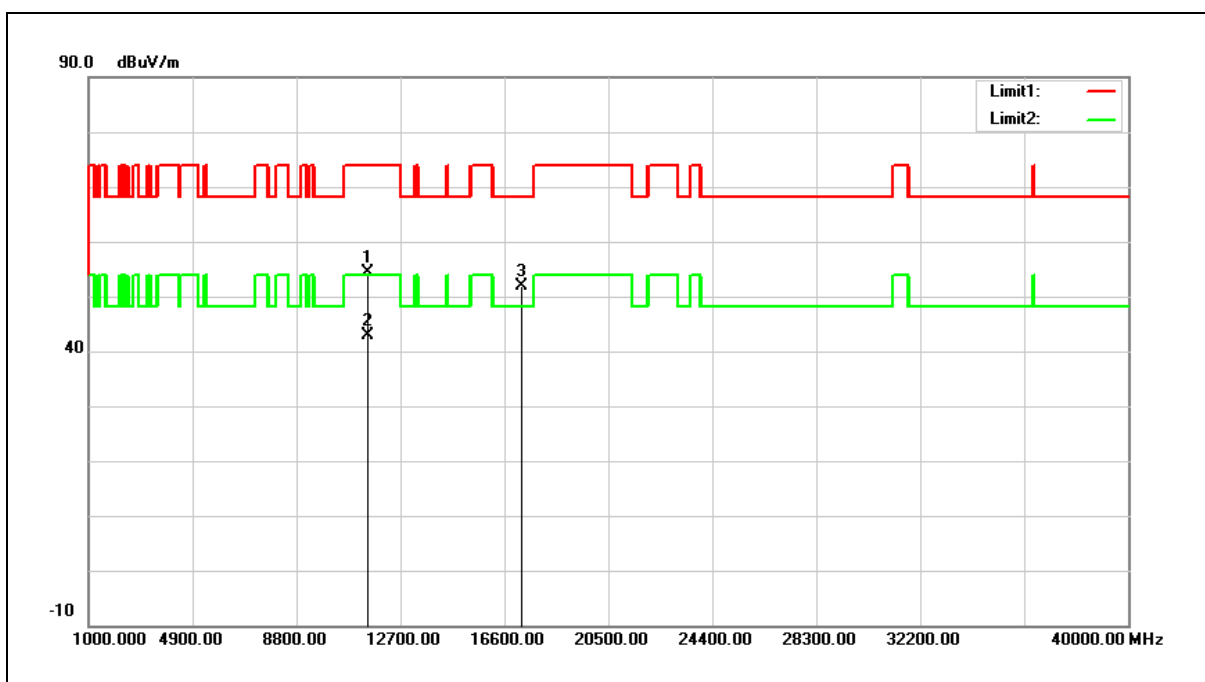


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11490.000          | 42.30             | 12.13                    | 54.43              | 74.00             | -19.57         | peak   |
| 2   | 11490.000          | 30.78             | 12.13                    | 42.91              | 54.00             | -11.09         | AVG    |
| 3   | 17235.000          | 34.42             | 17.55                    | 51.97              | 68.20             | -16.23         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

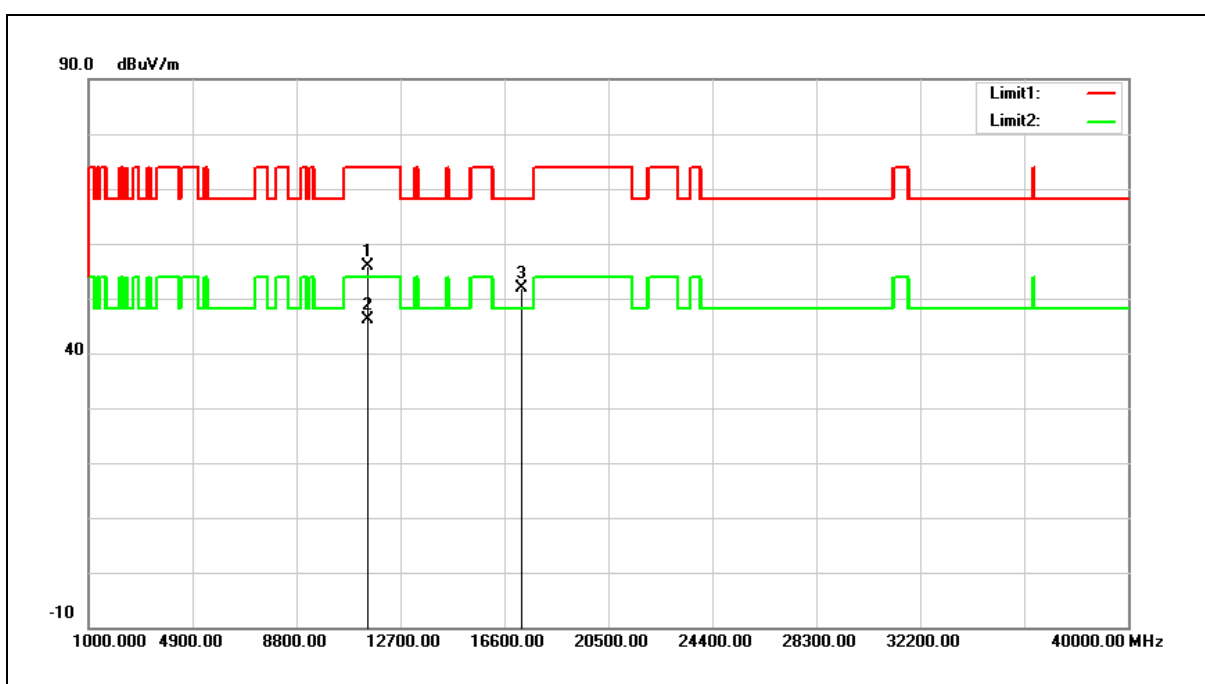


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11490.000       | 43.81          | 12.13                 | 55.94           | 74.00          | -18.06      | peak   |
| 2   | 11490.000       | 33.93          | 12.13                 | 46.06           | 54.00          | -7.94       | AVG    |
| 3   | 17235.000       | 34.41          | 17.55                 | 51.96           | 68.20          | -16.24      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

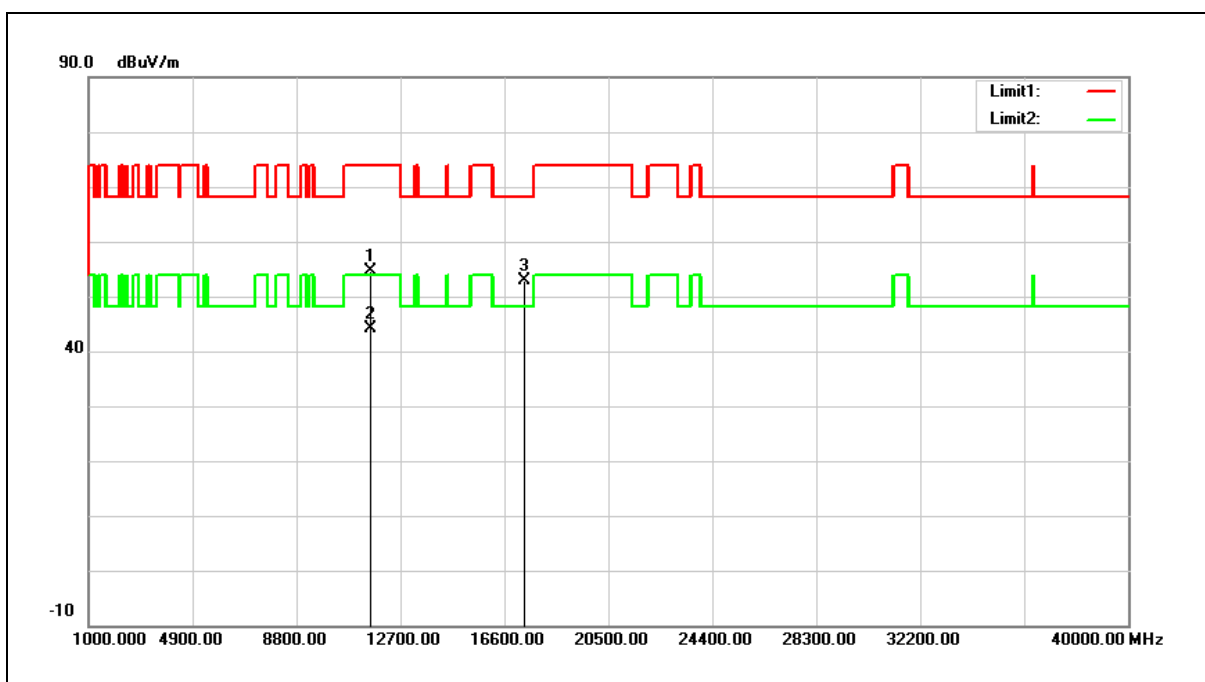


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11570.000          | 42.71             | 12.00                    | 54.71              | 74.00             | -19.29         | peak   |
| 2   | 11570.000          | 32.11             | 12.00                    | 44.11              | 54.00             | -9.89          | AVG    |
| 3   | 17355.000          | 34.67             | 18.30                    | 52.97              | 68.20             | -15.23         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

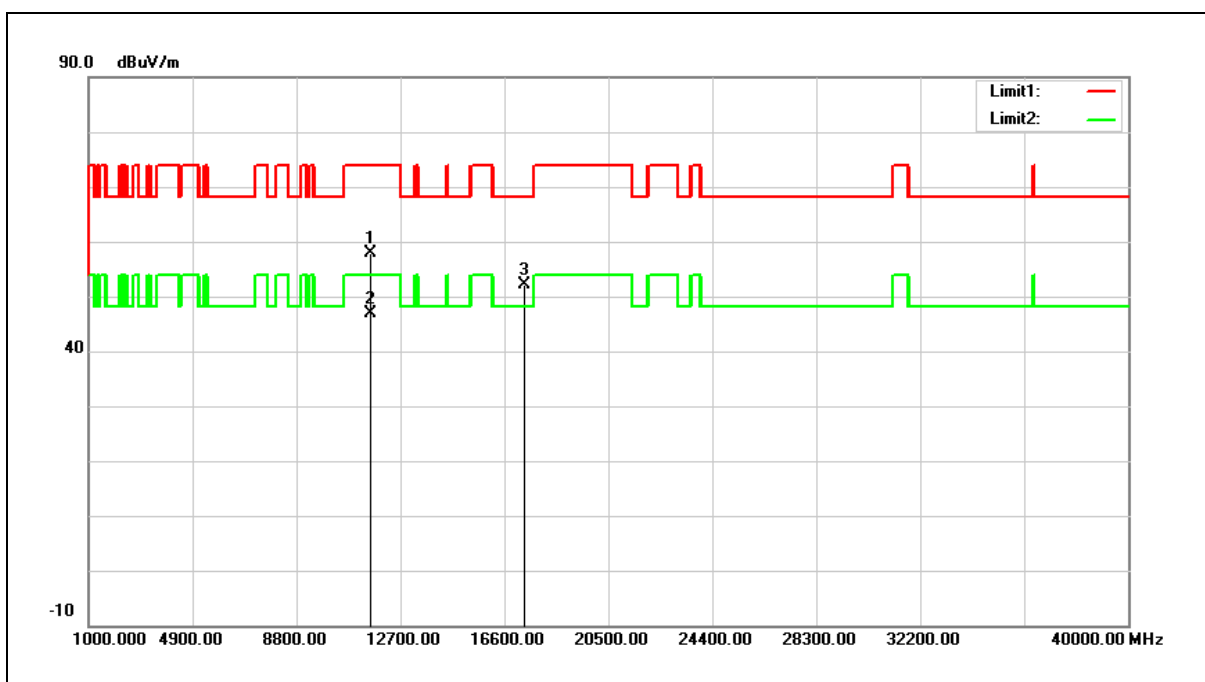


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11570.000          | 45.96             | 12.00                    | 57.96              | 74.00             | -16.04         | peak   |
| 2   | 11570.000          | 34.76             | 12.00                    | 46.76              | 54.00             | -7.24          | AVG    |
| 3   | 17355.000          | 33.95             | 18.30                    | 52.25              | 68.20             | -15.95         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

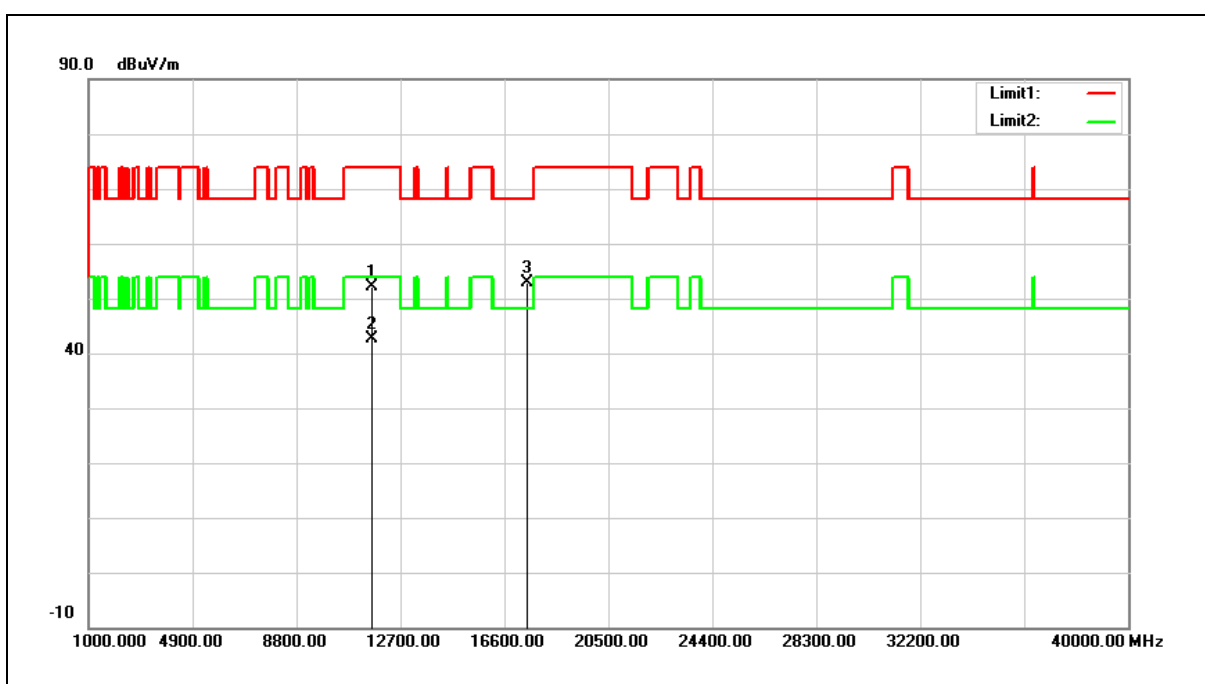


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11650.000          | 40.37             | 11.85                    | 52.22              | 74.00             | -21.78         | peak   |
| 2   | 11650.000          | 30.83             | 11.85                    | 42.68              | 54.00             | -11.32         | AVG    |
| 3   | 17475.000          | 33.83             | 19.07                    | 52.90              | 68.20             | -15.30         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 3          |                |     |
| Ant.Polar.: | Vertical        |                |     |

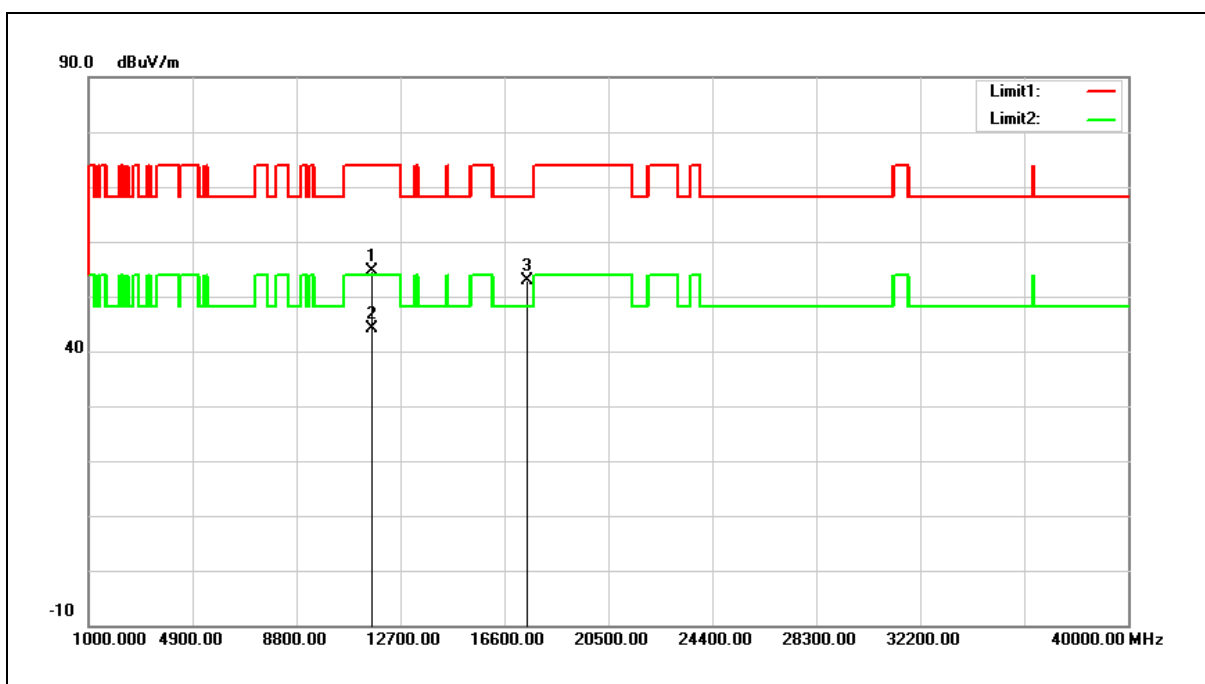


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11650.000          | 42.87             | 11.85                    | 54.72              | 74.00             | -19.28         | peak   |
| 2   | 11650.000          | 32.19             | 11.85                    | 44.04              | 54.00             | -9.96          | AVG    |
| 3   | 17475.000          | 33.76             | 19.07                    | 52.83              | 68.20             | -15.37         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5190 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

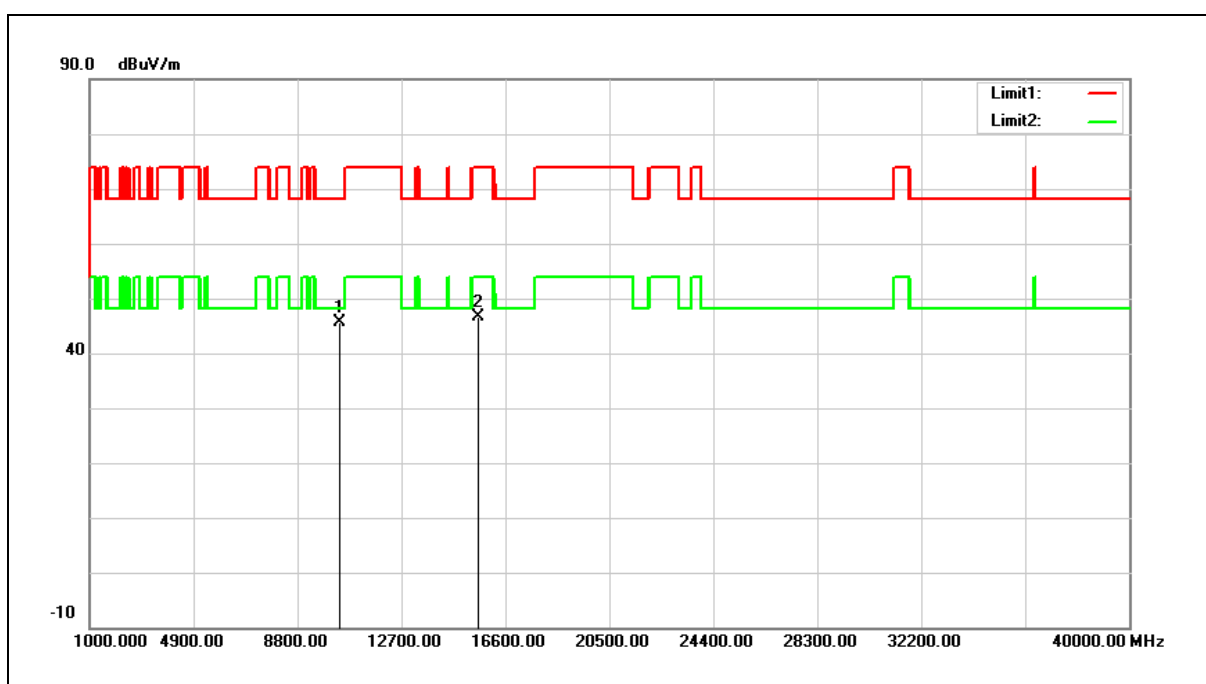


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10380.000       | 34.36          | 11.22                 | 45.58           | 68.20          | -22.62      | peak   |
| 2   | 15570.000       | 32.98          | 13.60                 | 46.58           | 74.00          | -27.42      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5190 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

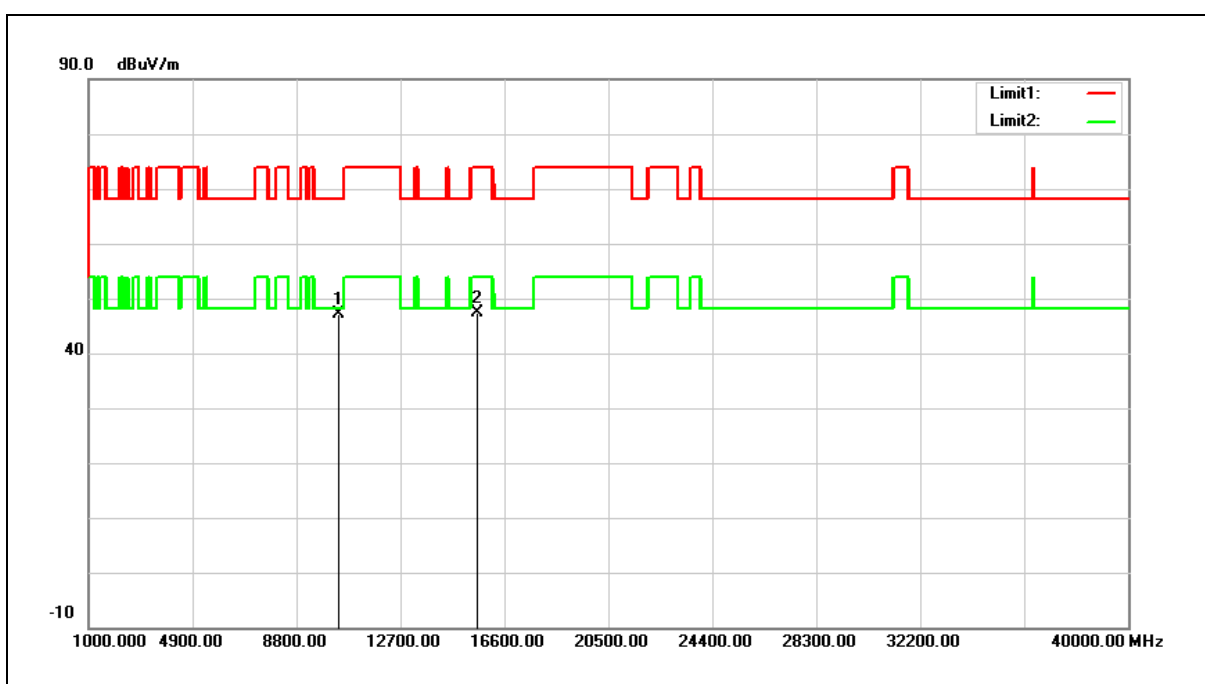


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10380.000          | 35.82             | 11.22                    | 47.04              | 68.20             | -21.16         | peak   |
| 2   | 15570.000          | 33.69             | 13.60                    | 47.29              | 74.00             | -26.71         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5230 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

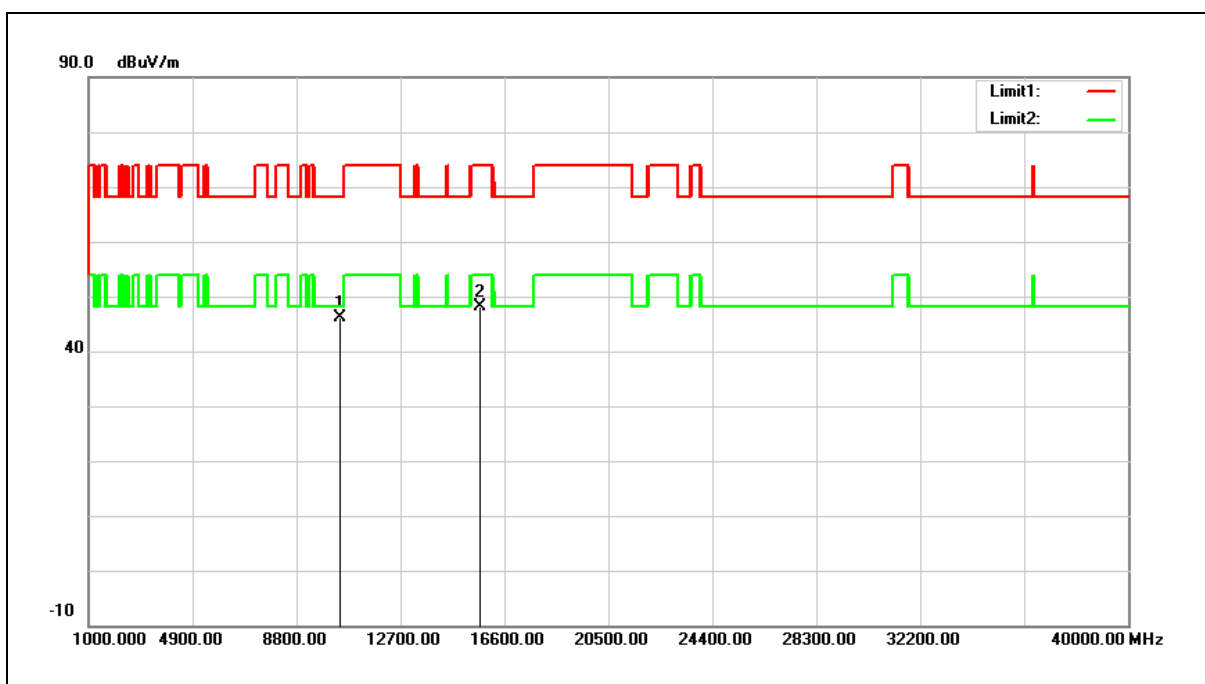


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10460.000          | 34.76             | 11.42                    | 46.18              | 68.20             | -22.02         | peak   |
| 2   | 15690.000          | 34.78             | 13.42                    | 48.20              | 74.00             | -25.80         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5230 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

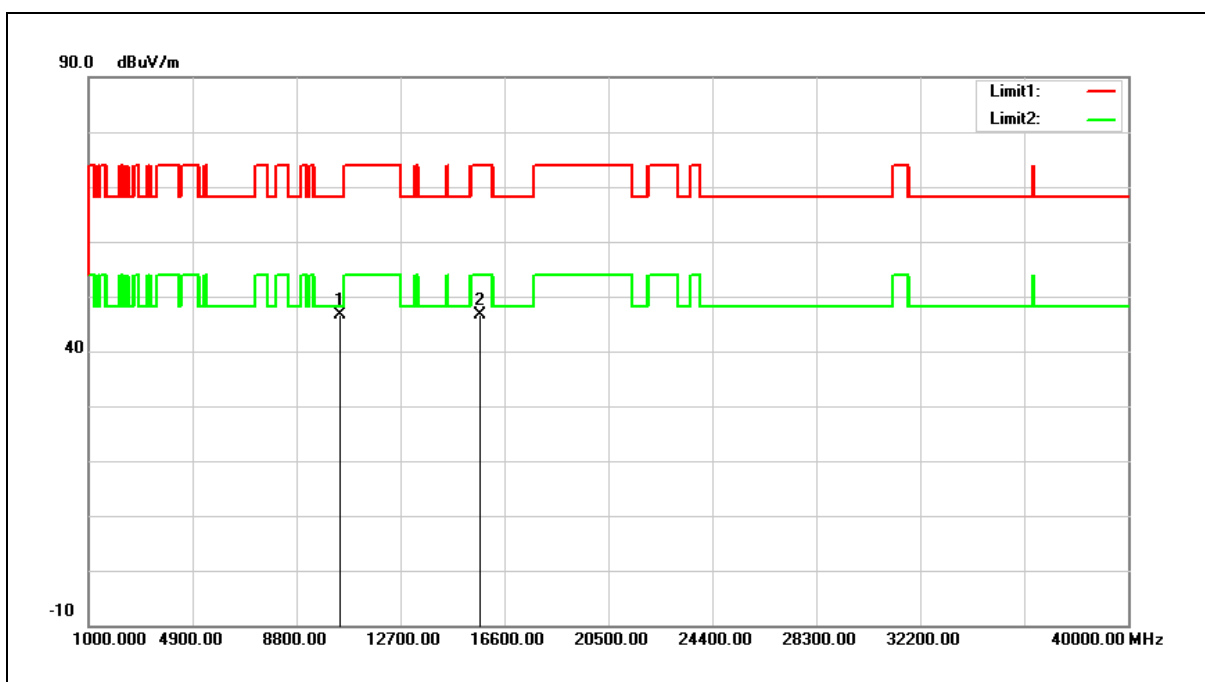


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10460.000          | 35.21             | 11.42                    | 46.63              | 68.20             | -21.57         | peak   |
| 2   | 15690.000          | 33.30             | 13.42                    | 46.72              | 74.00             | -27.28         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5270 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

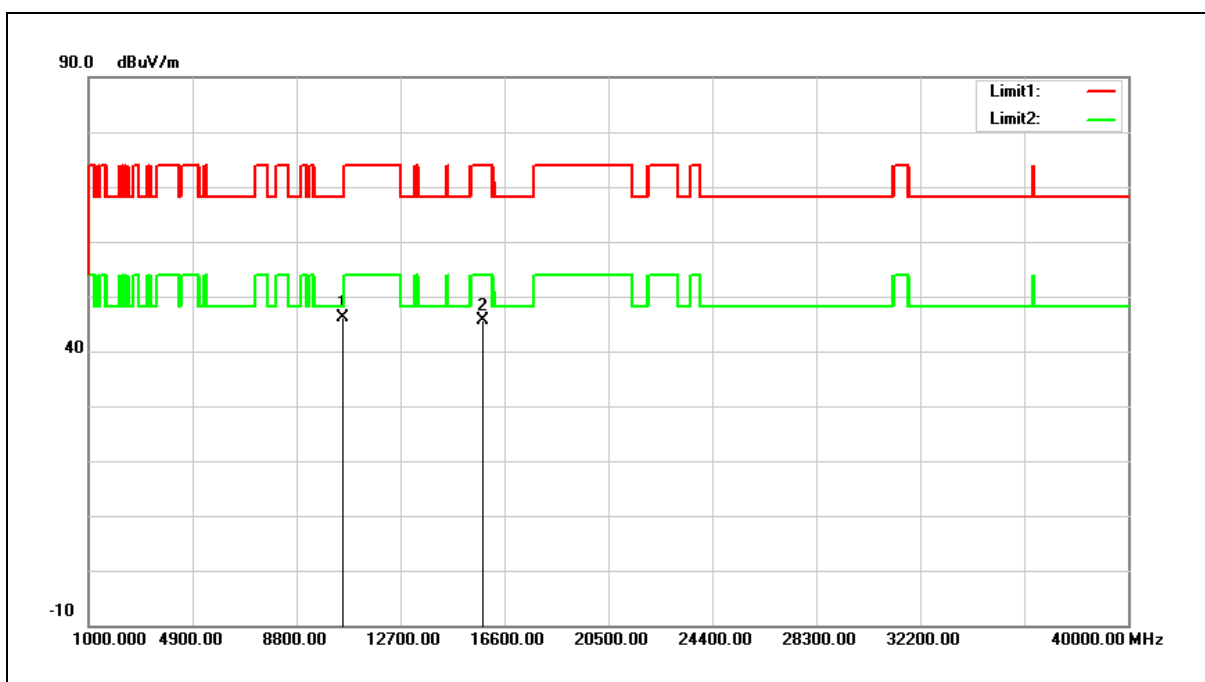


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10540.000          | 34.73             | 11.52                    | 46.25              | 68.20             | -21.95         | peak   |
| 2   | 15810.000          | 32.44             | 13.25                    | 45.69              | 74.00             | -28.31         | peak   |

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5270 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

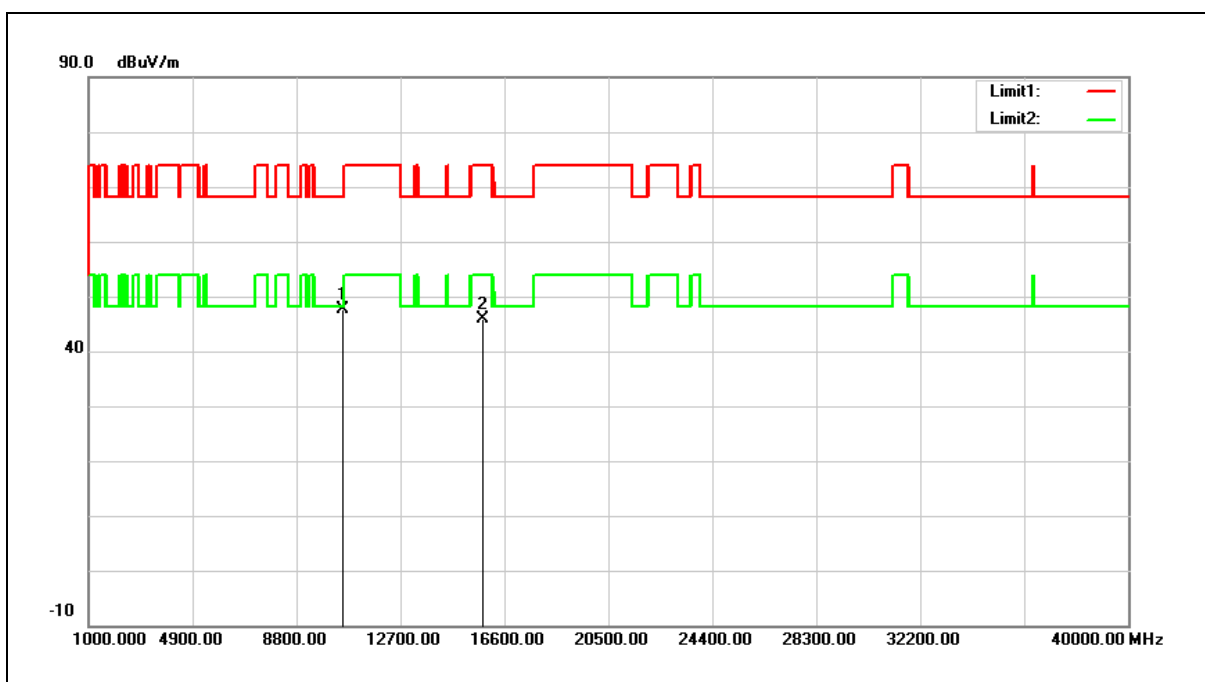


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10540.000          | 35.99             | 11.52                    | 47.51              | 68.20             | -20.69         | peak   |
| 2   | 15810.000          | 32.52             | 13.25                    | 45.77              | 74.00             | -28.23         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5310 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

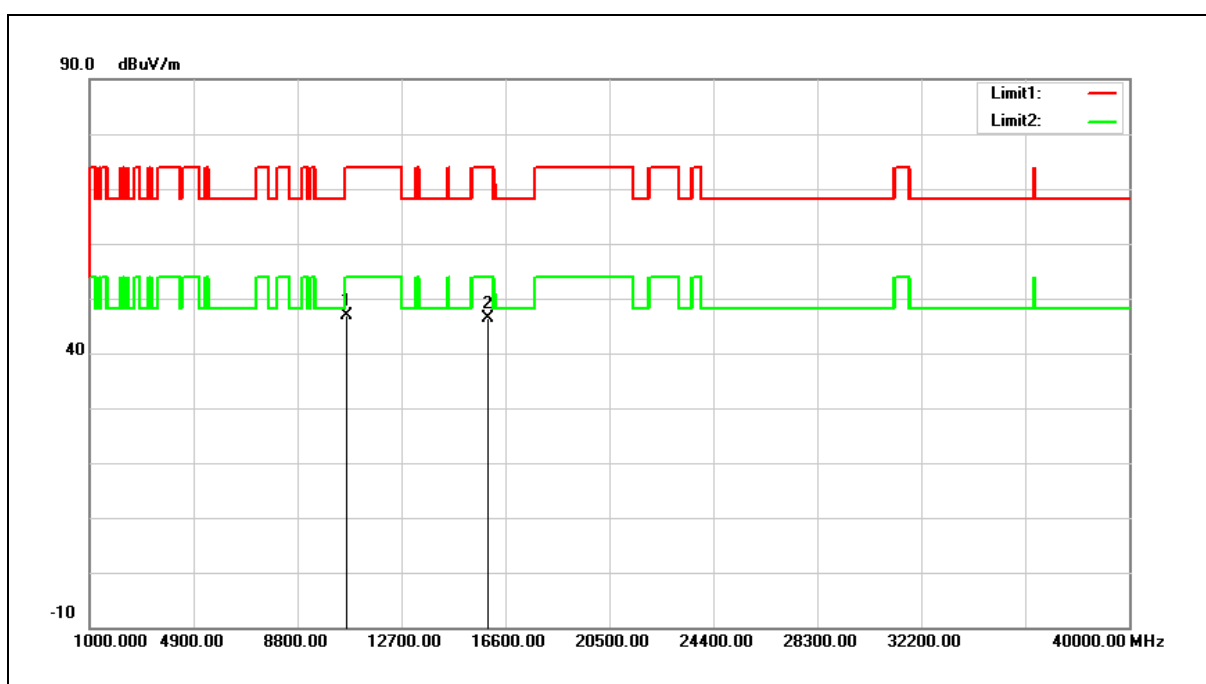


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 10620.000       | 35.43          | 11.53                 | 46.96           | 74.00          | -27.04      | peak   |
| 2   | 15930.000       | 33.31          | 13.07                 | 46.38           | 74.00          | -27.62      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5310 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

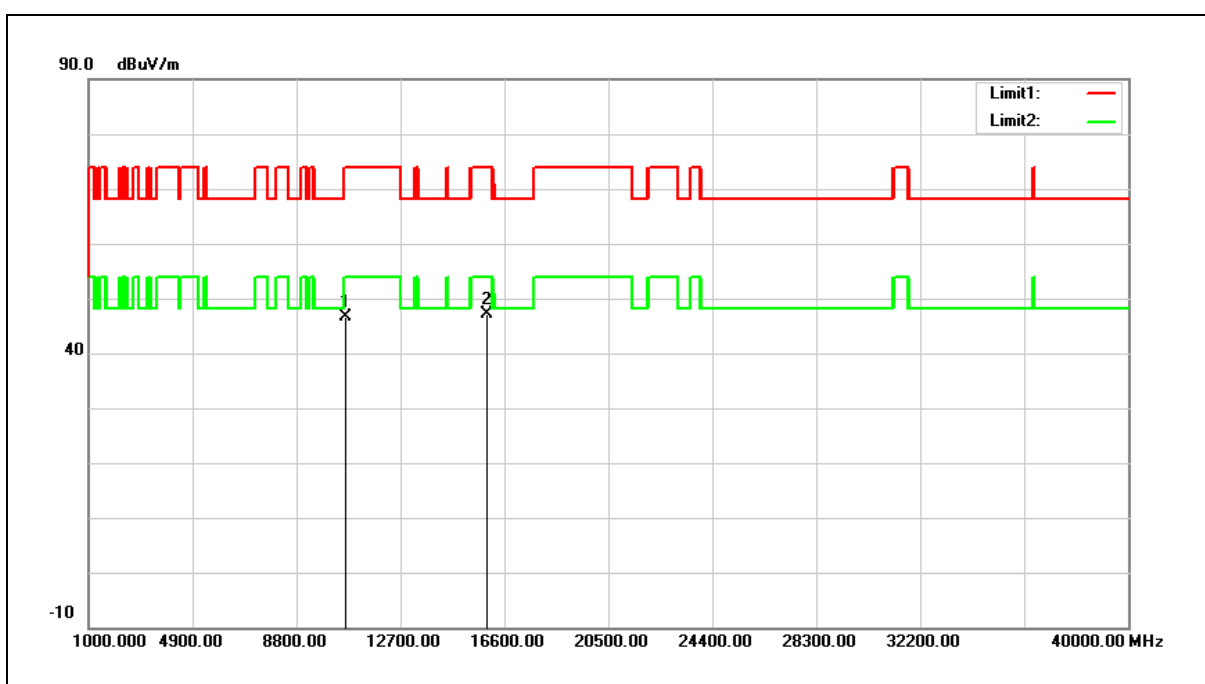


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 10620.000          | 35.00             | 11.53                    | 46.53              | 74.00             | -27.47         | peak   |
| 2   | 15930.000          | 34.11             | 13.07                    | 47.18              | 74.00             | -26.82         | peak   |

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

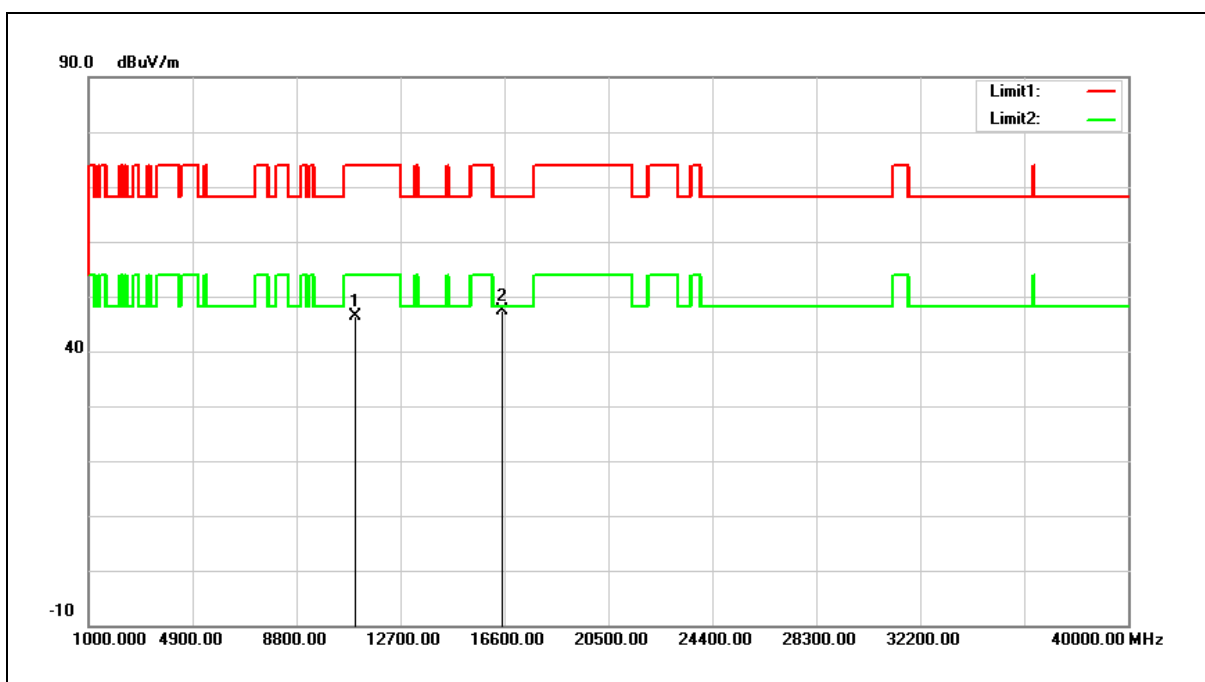


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11020.000          | 34.71             | 11.62                    | 46.33              | 74.00             | -27.67         | peak   |
| 2   | 16530.000          | 33.53             | 13.84                    | 47.37              | 68.20             | -20.83         | peak   |

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5510 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

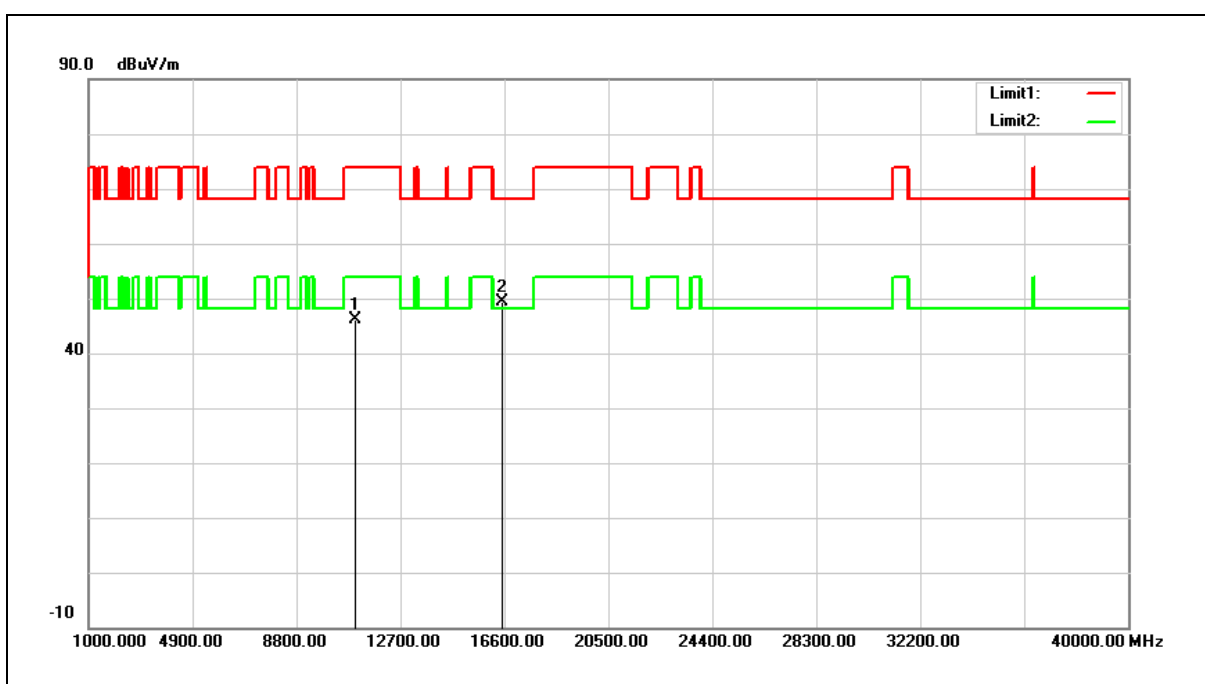


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11020.000          | 34.46             | 11.62                    | 46.08              | 74.00             | -27.92         | peak   |
| 2   | 16530.000          | 35.42             | 13.84                    | 49.26              | 68.20             | -18.94         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

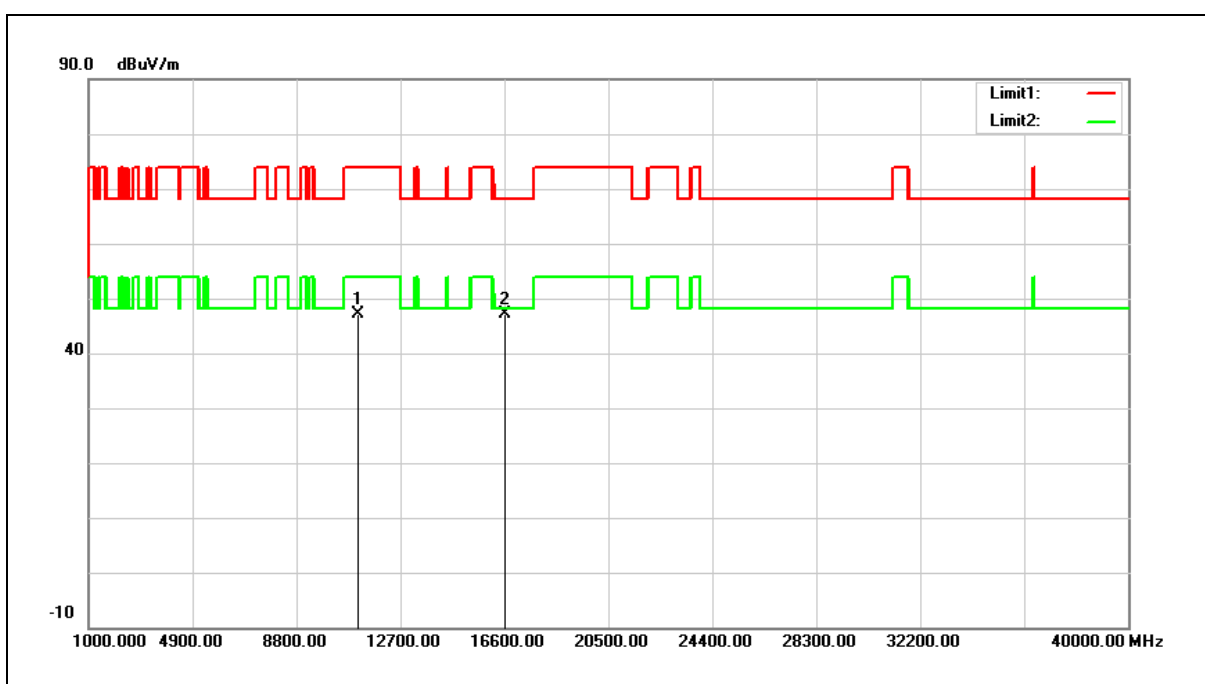


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11100.000          | 35.38             | 11.70                    | 47.08              | 74.00             | -26.92         | peak   |
| 2   | 16650.000          | 32.83             | 14.41                    | 47.24              | 68.20             | -20.96         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5550 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

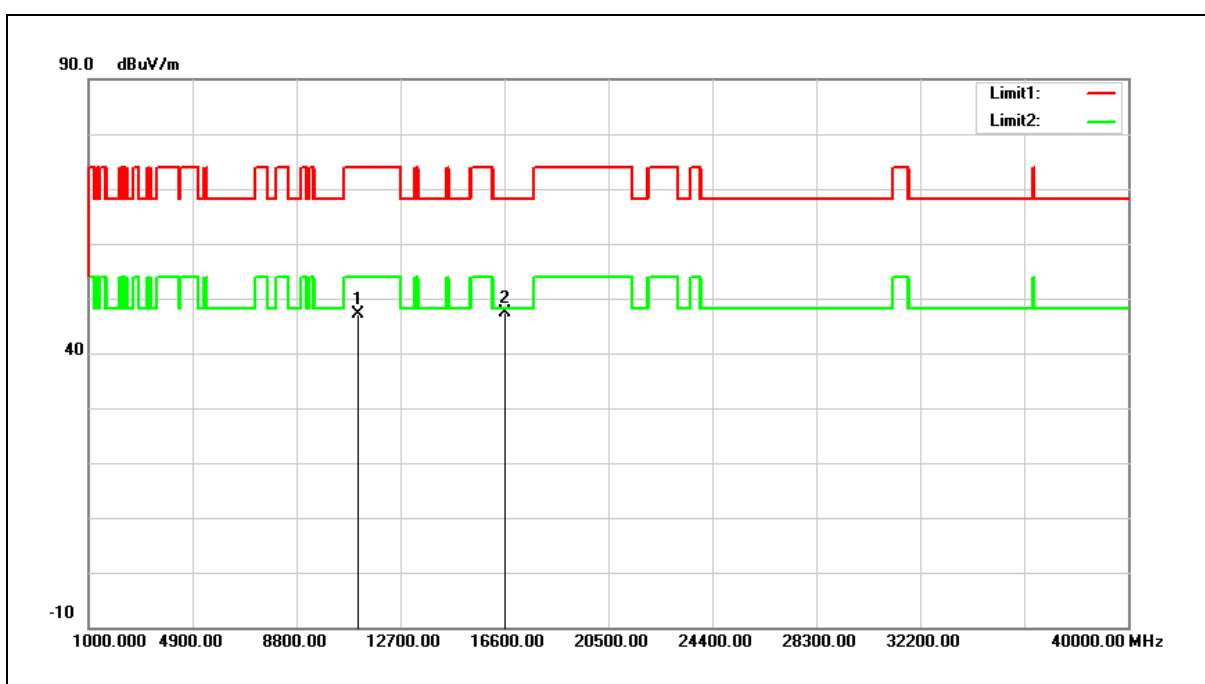


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11100.000       | 35.36          | 11.70                 | 47.06           | 74.00          | -26.94      | peak   |
| 2   | 16650.000       | 32.92          | 14.41                 | 47.33           | 68.20          | -20.87      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5670 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

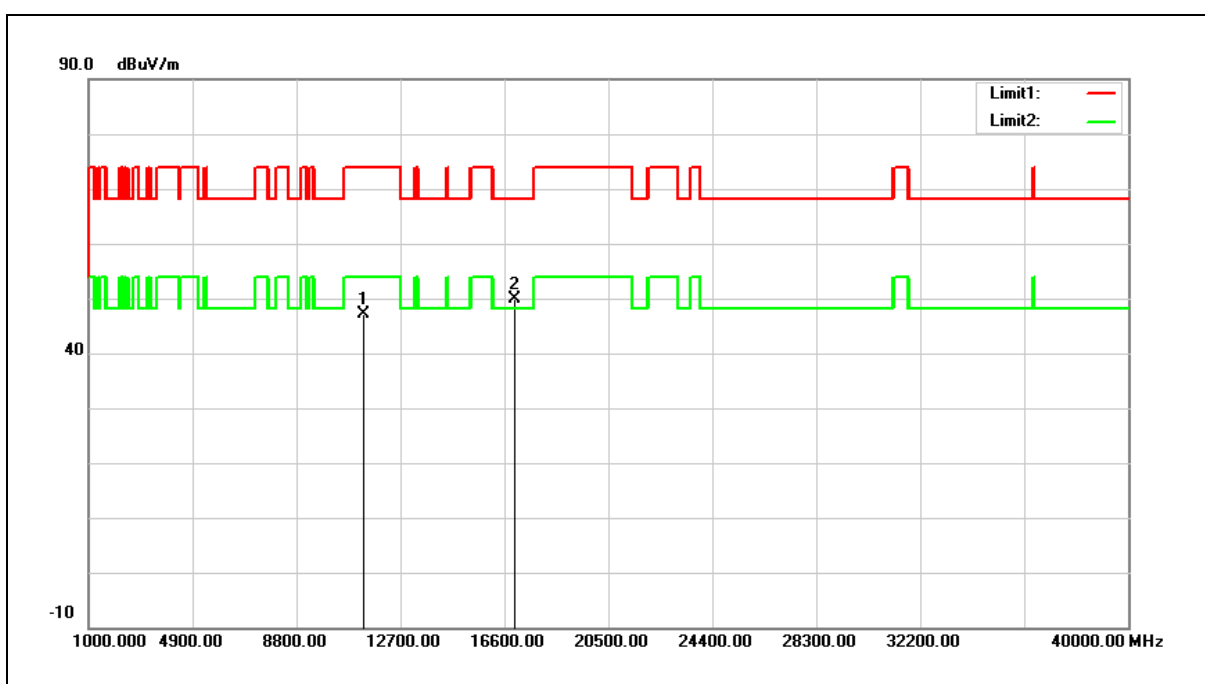


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11340.000          | 35.23             | 11.96                    | 47.19              | 74.00             | -26.81         | peak   |
| 2   | 17010.000          | 33.68             | 16.12                    | 49.80              | 68.20             | -18.40         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5670 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

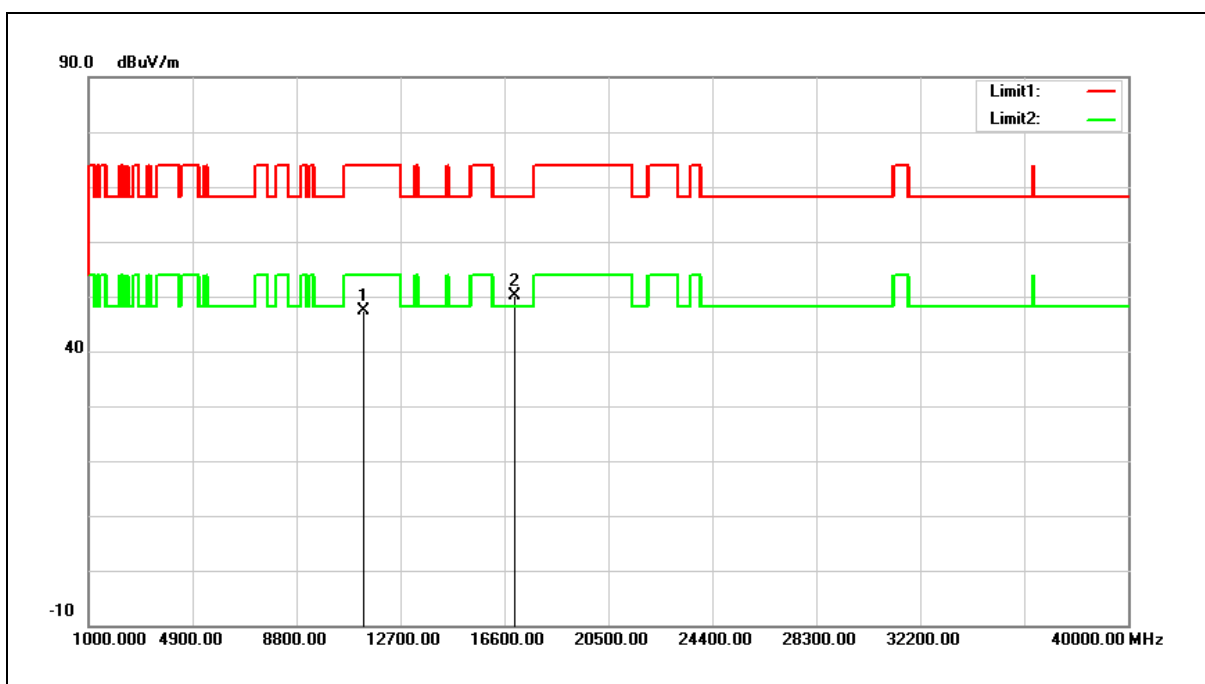


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11340.000          | 35.36             | 11.96                    | 47.32              | 74.00             | -26.68         | peak   |
| 2   | 17010.000          | 34.08             | 16.12                    | 50.20              | 68.20             | -18.00         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5755 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

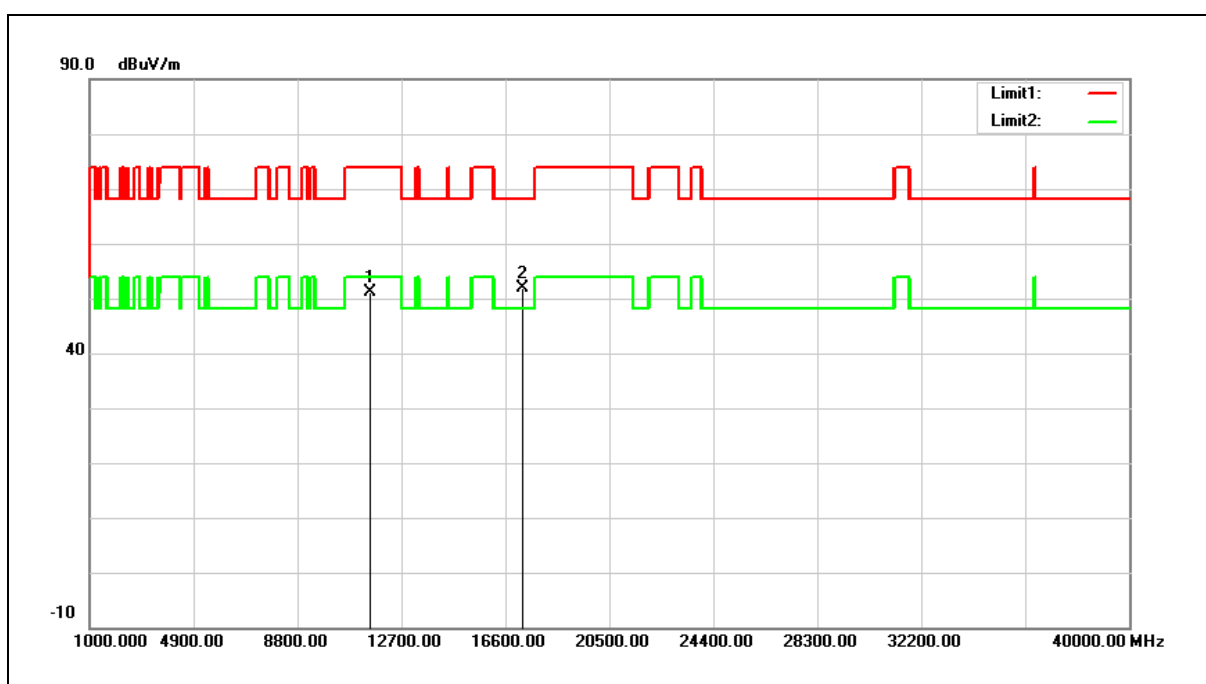


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11510.000       | 39.03          | 12.12                 | 51.15           | 74.00          | -22.85      | peak   |
| 2   | 17265.000       | 34.16          | 17.74                 | 51.90           | 68.20          | -16.30      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5755 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

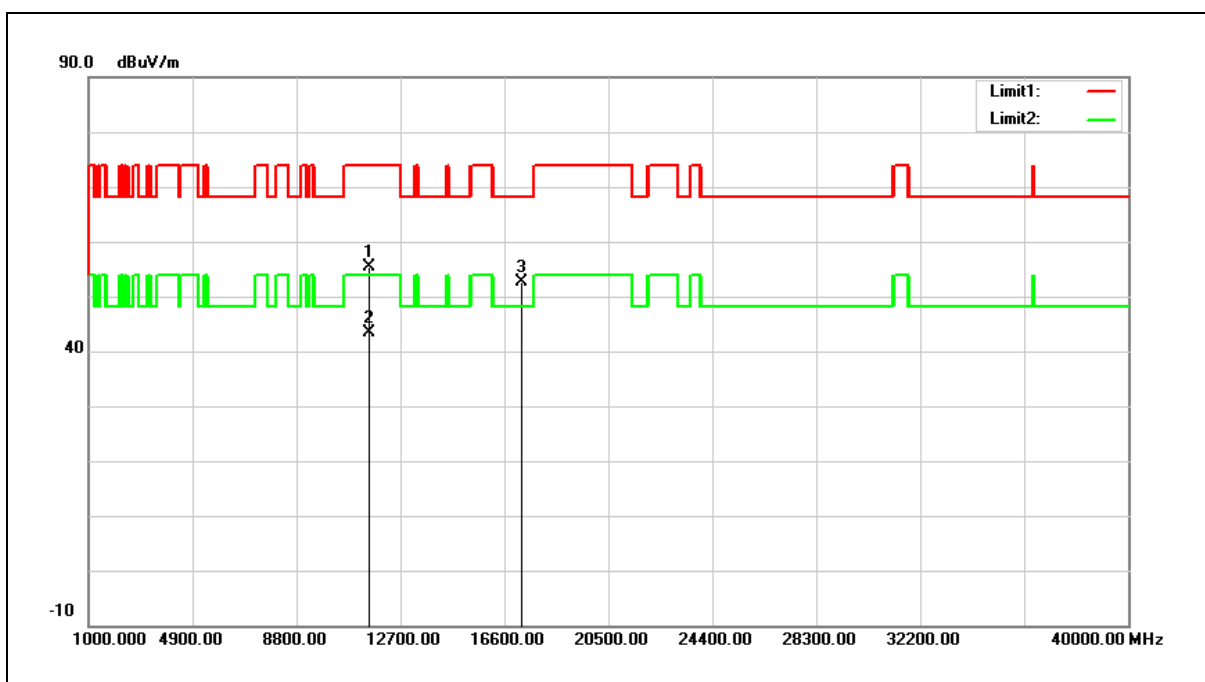


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11510.000       | 43.22          | 12.12                 | 55.34           | 74.00          | -18.66      | peak   |
| 2   | 11510.000       | 31.32          | 12.12                 | 43.44           | 54.00          | -10.56      | AVG    |
| 3   | 17265.000       | 34.81          | 17.74                 | 52.55           | 68.20          | -15.65      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5795 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

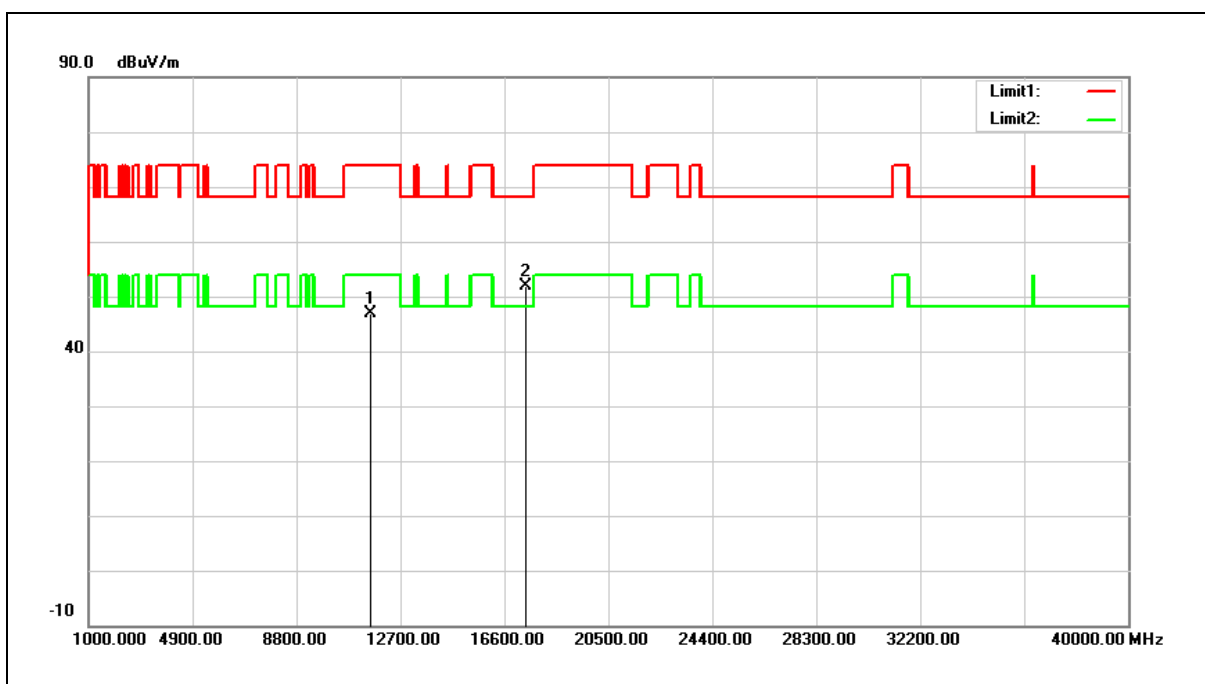


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 11590.000       | 34.94          | 11.96                 | 46.90           | 74.00          | -27.10      | peak   |
| 2   | 17385.000       | 33.43          | 18.50                 | 51.93           | 68.20          | -16.27      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Harmonic        |                |     |
| Frequency:  | 5795 MHz        |                |     |
| Mode:       | Mode 4          |                |     |
| Ant.Polar.: | Vertical        |                |     |

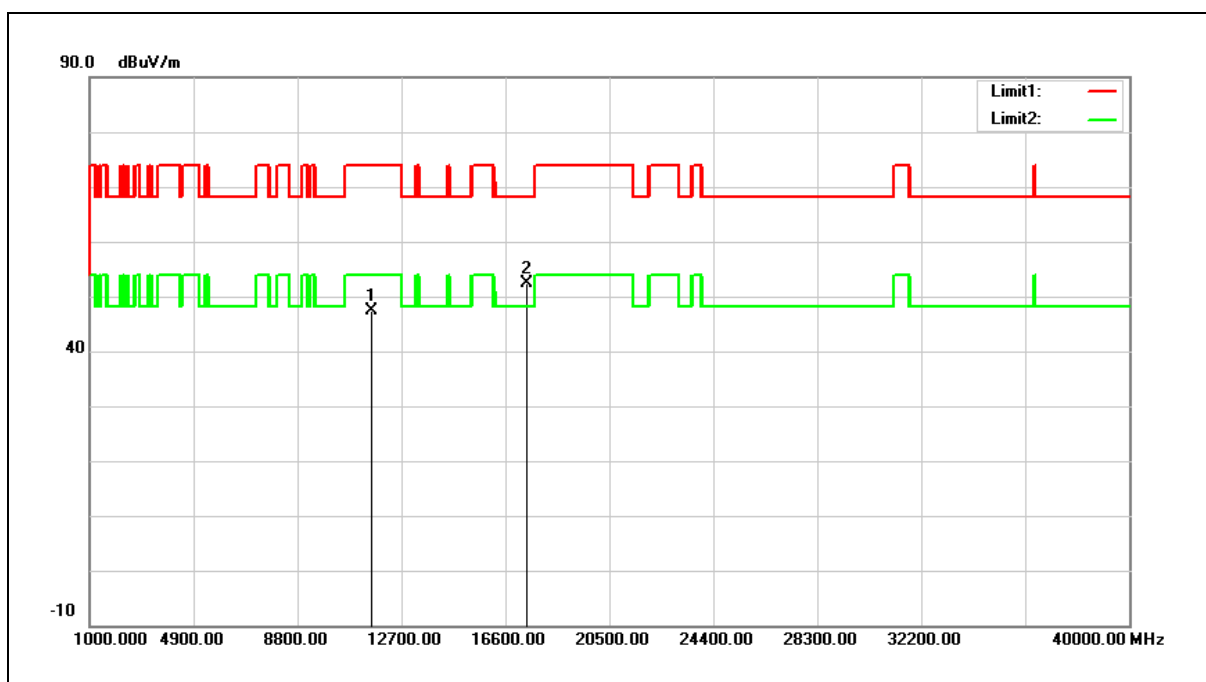


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 11590.000          | 35.47             | 11.96                    | 47.43              | 74.00             | -26.57         | peak   |
| 2   | 17385.000          | 33.98             | 18.50                    | 52.48              | 68.20             | -15.72         | peak   |

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                           |                |     |
|-------------|---------------------------|----------------|-----|
| Standard:   | FCC Part 15.407           | Test Distance: | 3 m |
| Test item:  | Harmonic                  |                |     |
| Mode:       | Simultaneous Transmitting |                |     |
|             | (WLAN 4.9 + 5 GHz)        |                |     |
| Ant.Polar.: | Horizontal                |                |     |

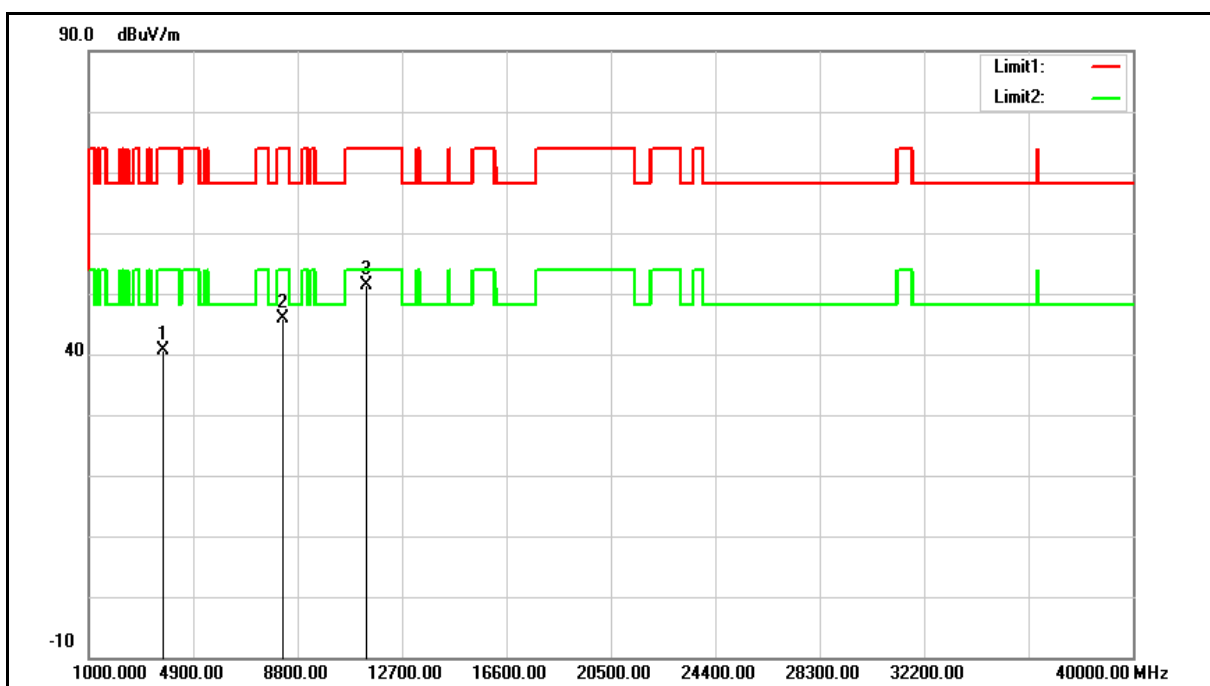


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 3754.000        | 44.60          | -4.08                 | 40.52           | 74.00          | -33.48      | peak   |
| 2   | 8242.000        | 37.20          | 8.65                  | 45.85           | 74.00          | -28.15      | peak   |
| 3   | 11353.000       | 36.25          | 15.13                 | 51.38           | 74.00          | -22.62      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                           |                |     |
|-------------|---------------------------|----------------|-----|
| Standard:   | FCC Part 15.407           | Test Distance: | 3 m |
| Test item:  | Harmonic                  |                |     |
| Mode:       | Simultaneous Transmitting |                |     |
|             | (WLAN 4.9 + 5 GHz)        |                |     |
| Ant.Polar.: | Vertical                  |                |     |

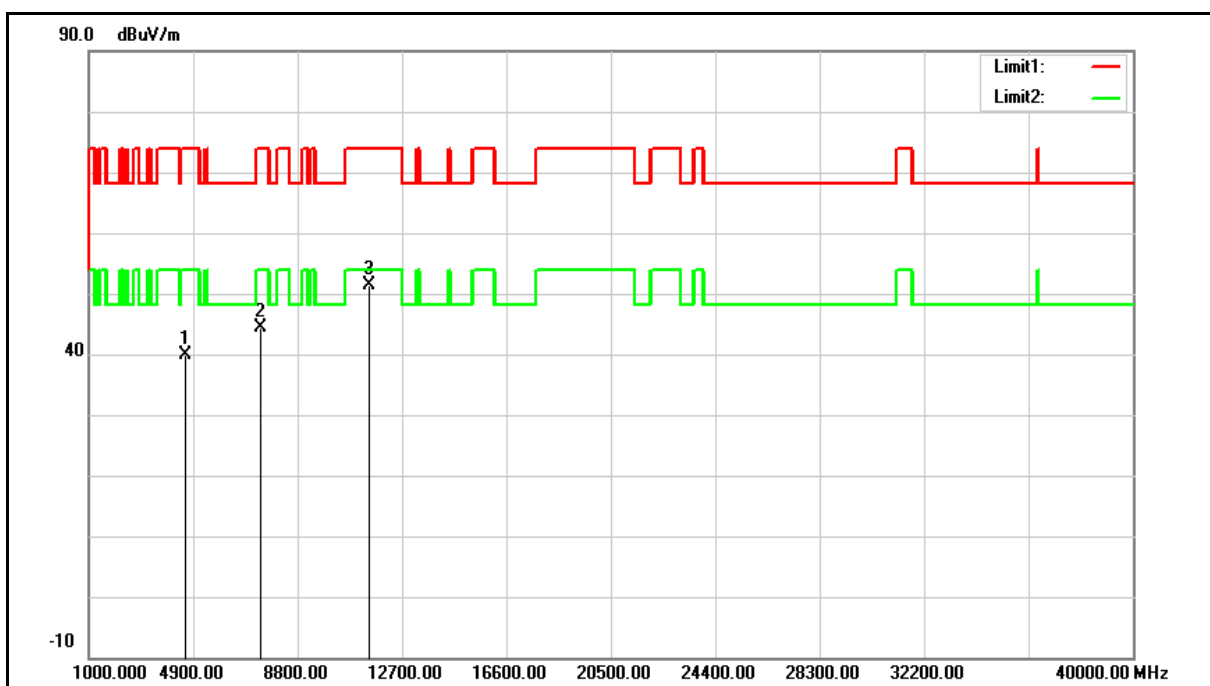


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4587.000           | 41.71             | -1.80                    | 39.91              | 74.00             | -34.09         | peak   |
| 2   | 7409.000           | 37.52             | 6.85                     | 44.37              | 74.00             | -29.63         | peak   |
| 3   | 11489.000          | 35.88             | 15.39                    | 51.27              | 74.00             | -22.73         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                           |                |     |
|-------------|---------------------------|----------------|-----|
| Standard:   | FCC Part 15.407           | Test Distance: | 3 m |
| Test item:  | Harmonic                  |                |     |
| Mode:       | Simultaneous Transmitting |                |     |
|             | (WLAN 5 + 5 GHz)          |                |     |
| Ant.Polar.: | Horizontal                |                |     |

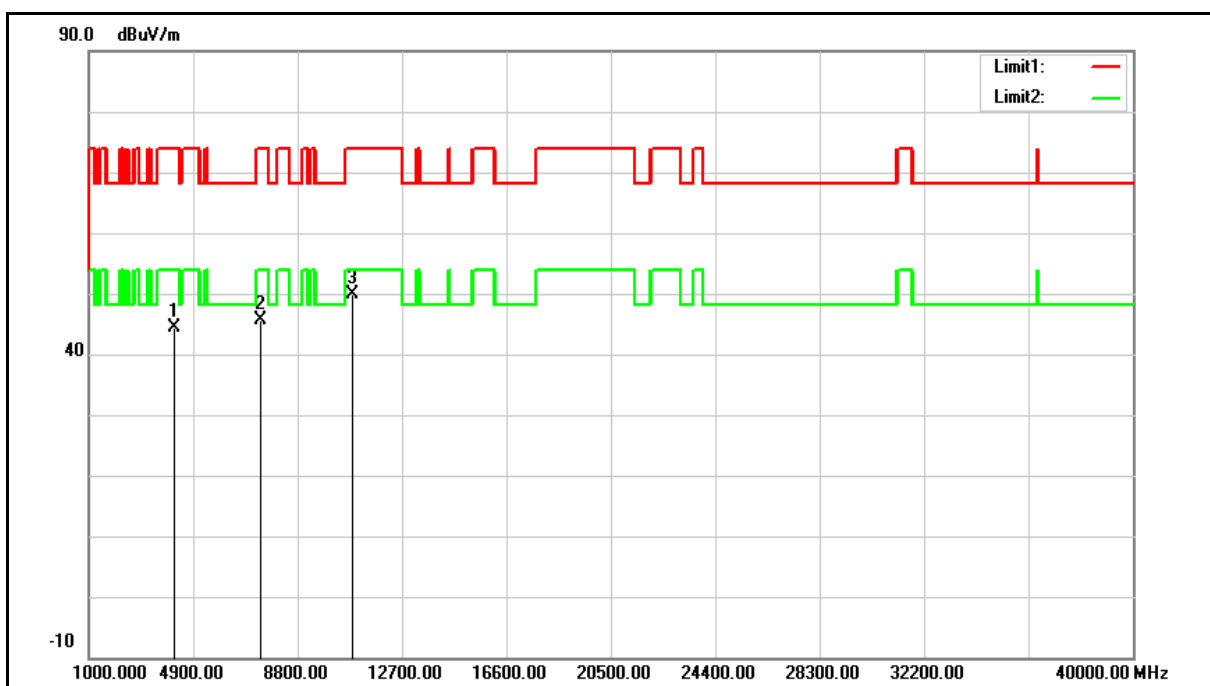


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4162.000        | 47.56          | -3.12                 | 44.44           | 74.00          | -29.56      | peak   |
| 2   | 7426.000        | 38.65          | 6.90                  | 45.55           | 74.00          | -28.45      | peak   |
| 3   | 10792.000       | 35.42          | 14.52                 | 49.94           | 74.00          | -24.06      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                           |                |     |
|-------------|---------------------------|----------------|-----|
| Standard:   | FCC Part 15.407           | Test Distance: | 3 m |
| Test item:  | Harmonic                  |                |     |
| Mode:       | Simultaneous Transmitting |                |     |
|             | (WLAN 5 + 5 GHz)          |                |     |
| Ant.Polar.: | Vertical                  |                |     |

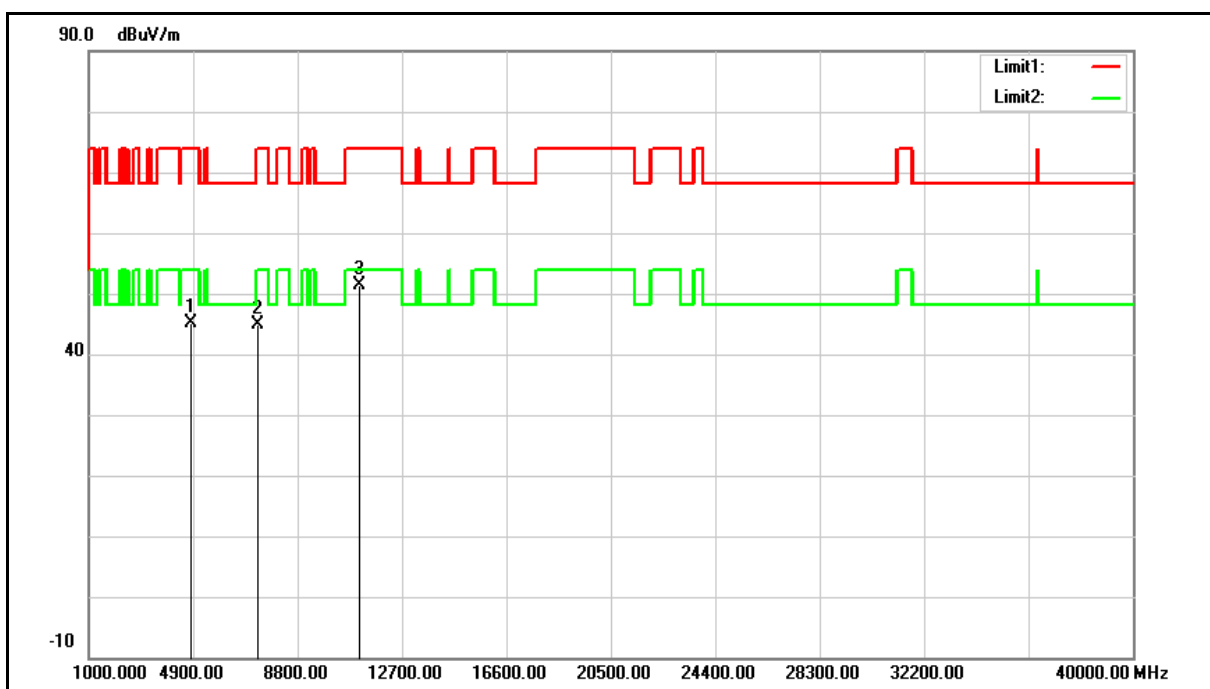

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4808.000           | 46.29             | -1.04                    | 45.25              | 74.00             | -28.75         | peak   |
| 2   | 7307.000           | 38.57             | 6.43                     | 45.00              | 74.00             | -29.00         | peak   |
| 3   | 11064.000          | 36.84             | 14.59                    | 51.43              | 74.00             | -22.57         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

## Band Edge

### Peak

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

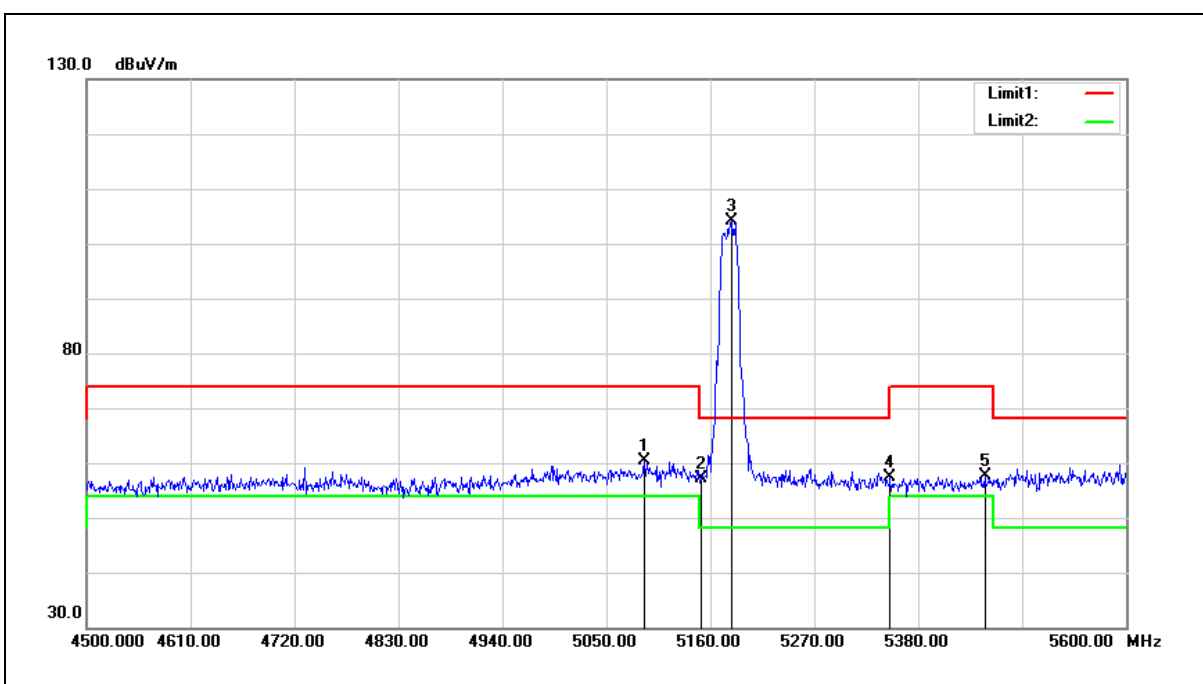


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5090.700           | 61.86             | -1.45                    | 60.41              | 74.00             | -13.59         | peak   |
| 2   | 5150.000           | 58.47             | -1.33                    | 57.14              | 74.00             | -16.86         | peak   |
| 3   | 5183.100           | 105.34            | -1.26                    | 104.08             | --                | --             | peak   |
| 4   | 5350.000           | 58.34             | -0.92                    | 57.42              | 74.00             | -16.58         | peak   |
| 5   | 5450.400           | 58.29             | -0.72                    | 57.57              | 74.00             | -16.43         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5180 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

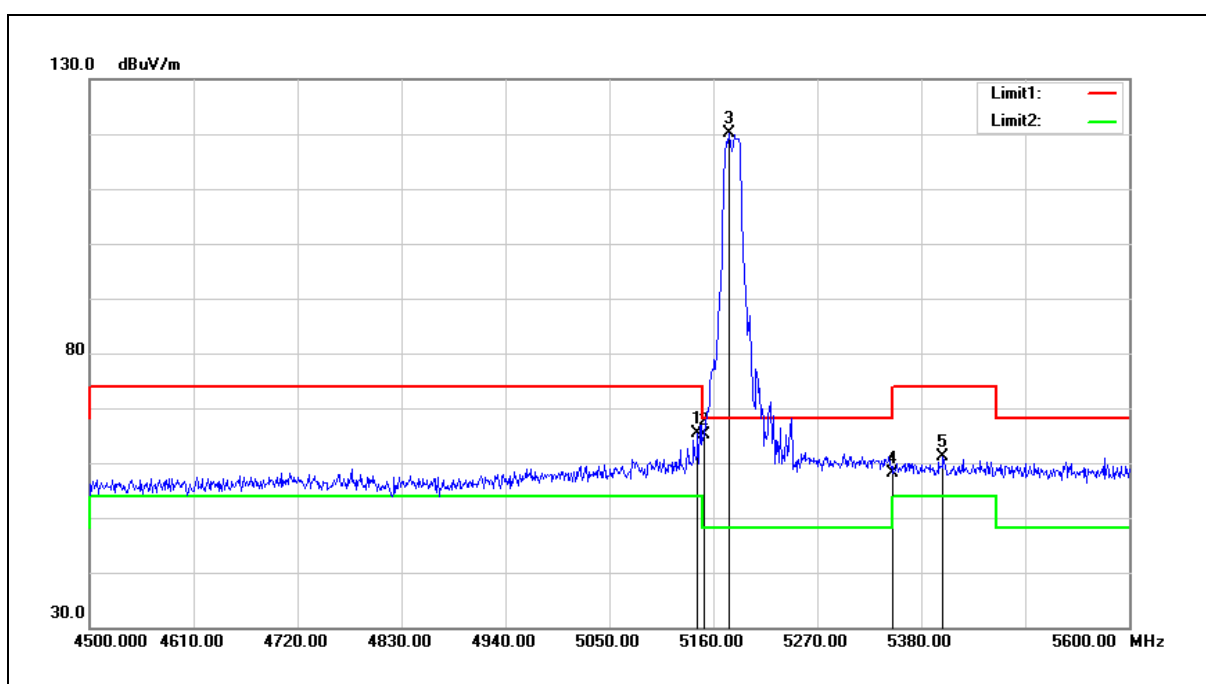


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5143.500        | 66.71          | -1.35                 | 65.36           | 74.00          | -8.64       | peak   |
| 2   | 5150.000        | 66.55          | -1.33                 | 65.22           | 74.00          | -8.78       | peak   |
| 3   | 5176.500        | 121.47         | -1.28                 | 120.19          | --             | --          | peak   |
| 4   | 5350.000        | 59.11          | -0.92                 | 58.19           | 74.00          | -15.81      | peak   |
| 5   | 5403.100        | 61.95          | -0.83                 | 61.12           | 74.00          | -12.88      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

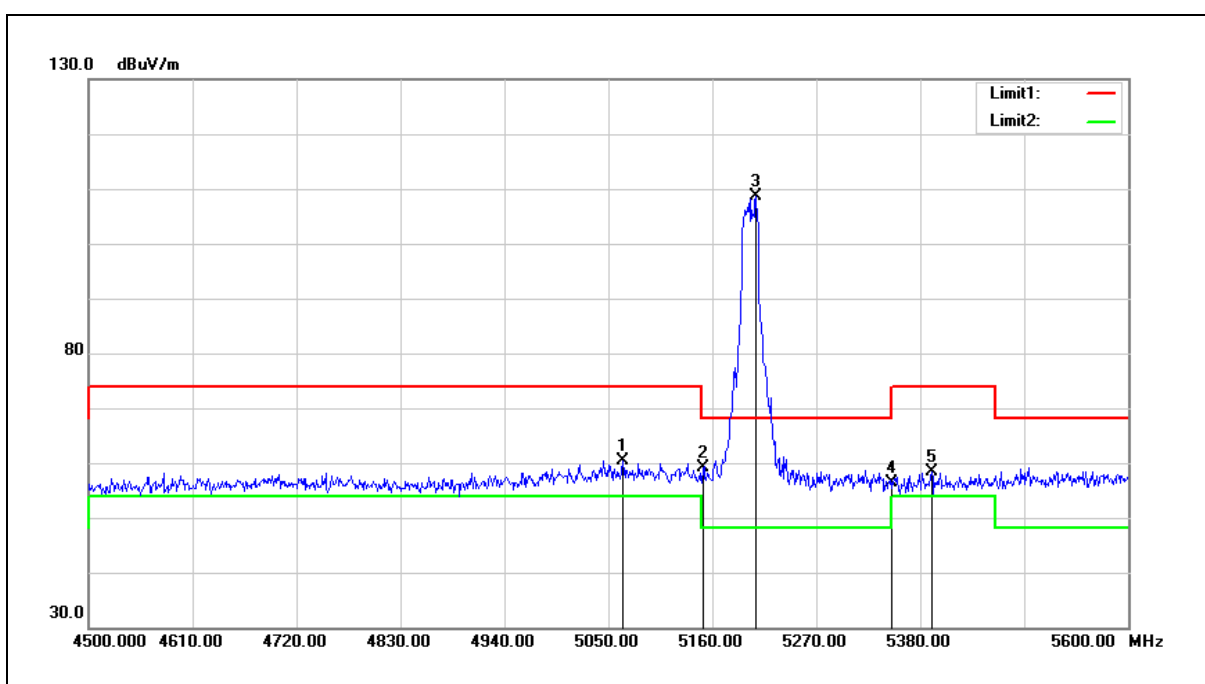


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5065.400           | 61.78             | -1.50                    | 60.28              | 74.00             | -13.72         | peak   |
| 2   | 5150.000           | 60.50             | -1.33                    | 59.17              | 74.00             | -14.83         | peak   |
| 3   | 5206.200           | 109.81            | -1.22                    | 108.59             | --                | --             | peak   |
| 4   | 5350.000           | 57.21             | -0.92                    | 56.29              | 74.00             | -17.71         | peak   |
| 5   | 5392.100           | 59.27             | -0.84                    | 58.43              | 74.00             | -15.57         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5200 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

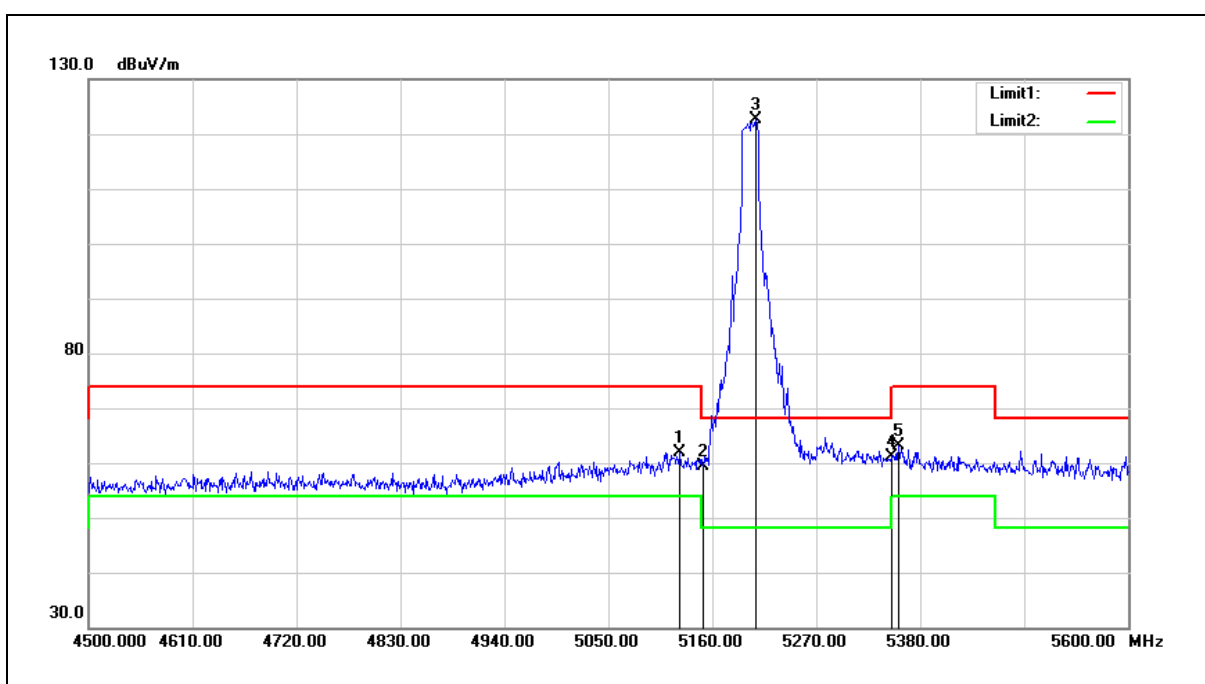


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5125.900           | 63.28             | -1.38                    | 61.90              | 74.00             | -12.10         | peak   |
| 2   | 5150.000           | 60.69             | -1.33                    | 59.36              | 74.00             | -14.64         | peak   |
| 3   | 5206.200           | 123.83            | -1.22                    | 122.61             | --                | --             | peak   |
| 4   | 5350.000           | 61.93             | -0.92                    | 61.01              | 74.00             | -12.99         | peak   |
| 5   | 5356.900           | 63.97             | -0.91                    | 63.06              | 74.00             | -10.94         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

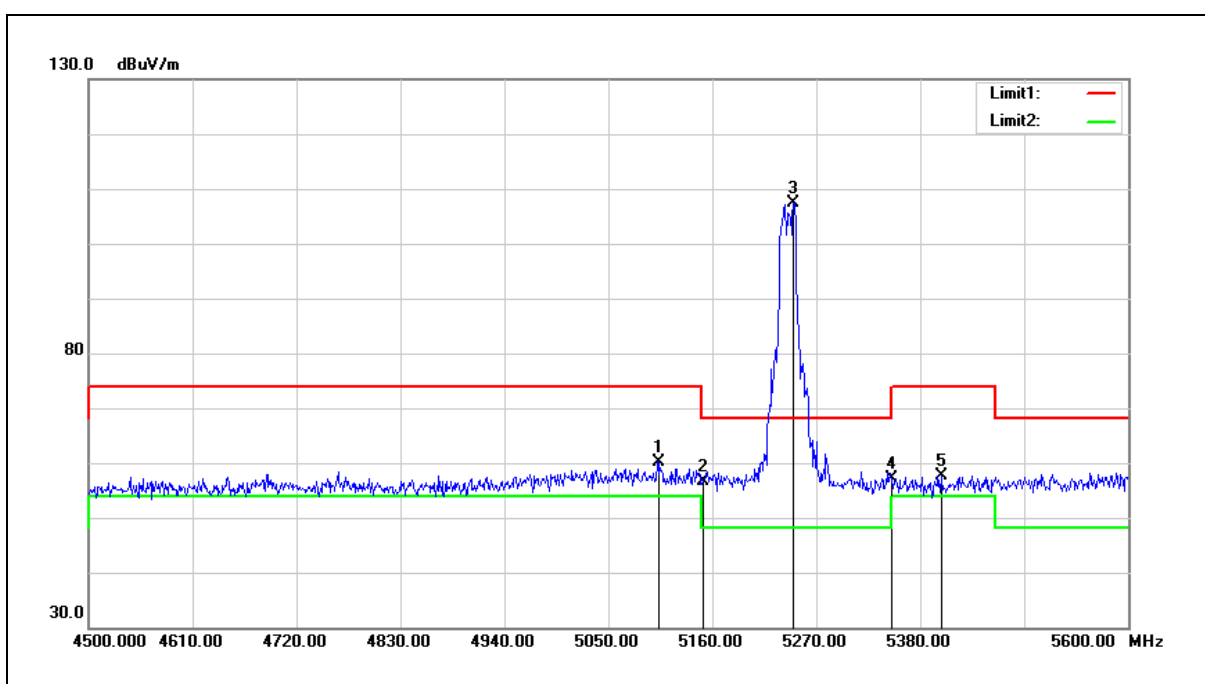


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5102.800           | 61.63             | -1.42                    | 60.21              | 74.00             | -13.79         | peak   |
| 2   | 5150.000           | 57.87             | -1.33                    | 56.54              | 74.00             | -17.46         | peak   |
| 3   | 5245.800           | 108.47            | -1.13                    | 107.34             | --                | --             | peak   |
| 4   | 5350.000           | 57.94             | -0.92                    | 57.02              | 74.00             | -16.98         | peak   |
| 5   | 5402.000           | 58.49             | -0.83                    | 57.66              | 74.00             | -16.34         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5240 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

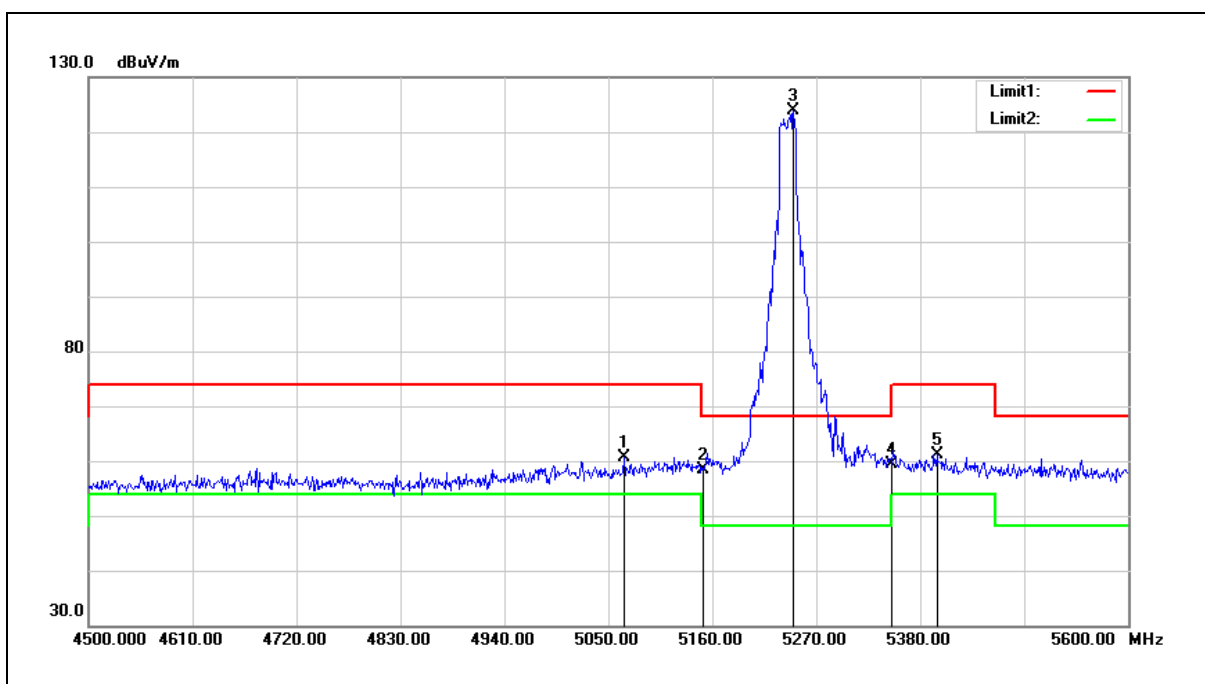


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5066.500        | 62.12          | -1.50                 | 60.62           | 74.00          | -13.38      | peak   |
| 2   | 5150.000        | 59.62          | -1.33                 | 58.29           | 74.00          | -15.71      | peak   |
| 3   | 5245.800        | 124.93         | -1.13                 | 123.80          | --             | --          | peak   |
| 4   | 5350.000        | 60.33          | -0.92                 | 59.41           | 74.00          | -14.59      | peak   |
| 5   | 5397.600        | 62.02          | -0.83                 | 61.19           | 74.00          | -12.81      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

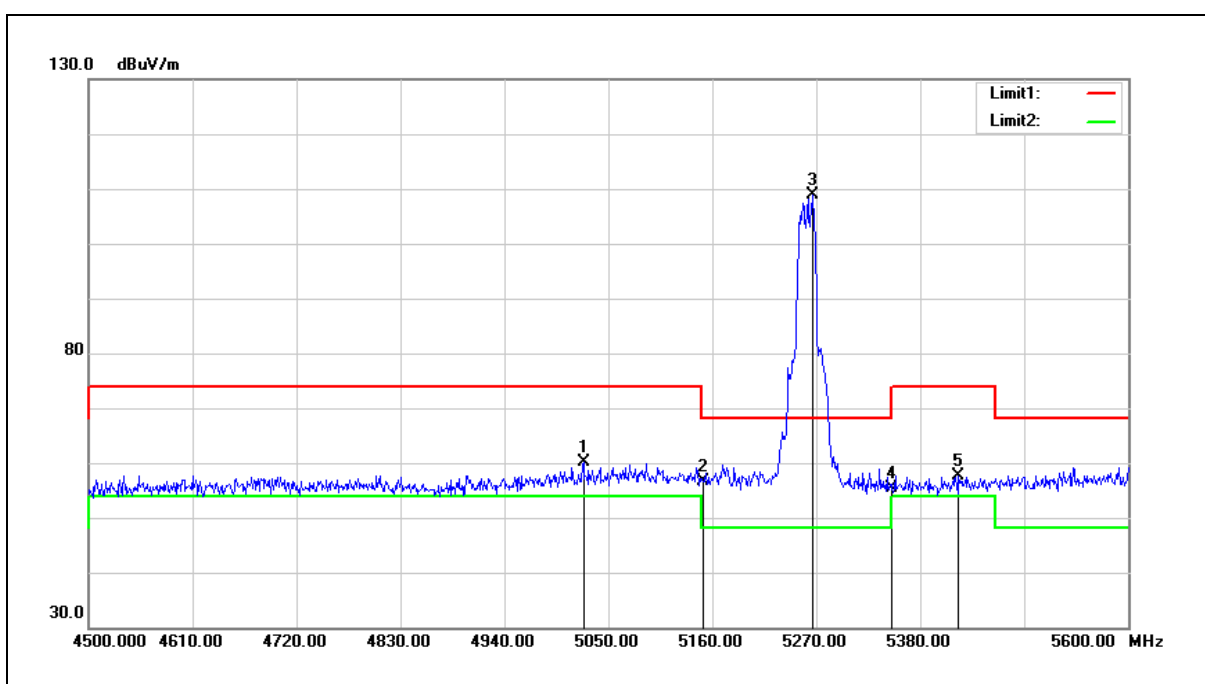


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5023.600           | 61.61             | -1.58                    | 60.03              | 74.00             | -13.97         | peak   |
| 2   | 5150.000           | 57.90             | -1.33                    | 56.57              | 74.00             | -17.43         | peak   |
| 3   | 5266.700           | 109.89            | -1.10                    | 108.79             | --                | --             | peak   |
| 4   | 5350.000           | 56.23             | -0.92                    | 55.31              | 74.00             | -18.69         | peak   |
| 5   | 5420.700           | 58.43             | -0.78                    | 57.65              | 74.00             | -16.35         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5260 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

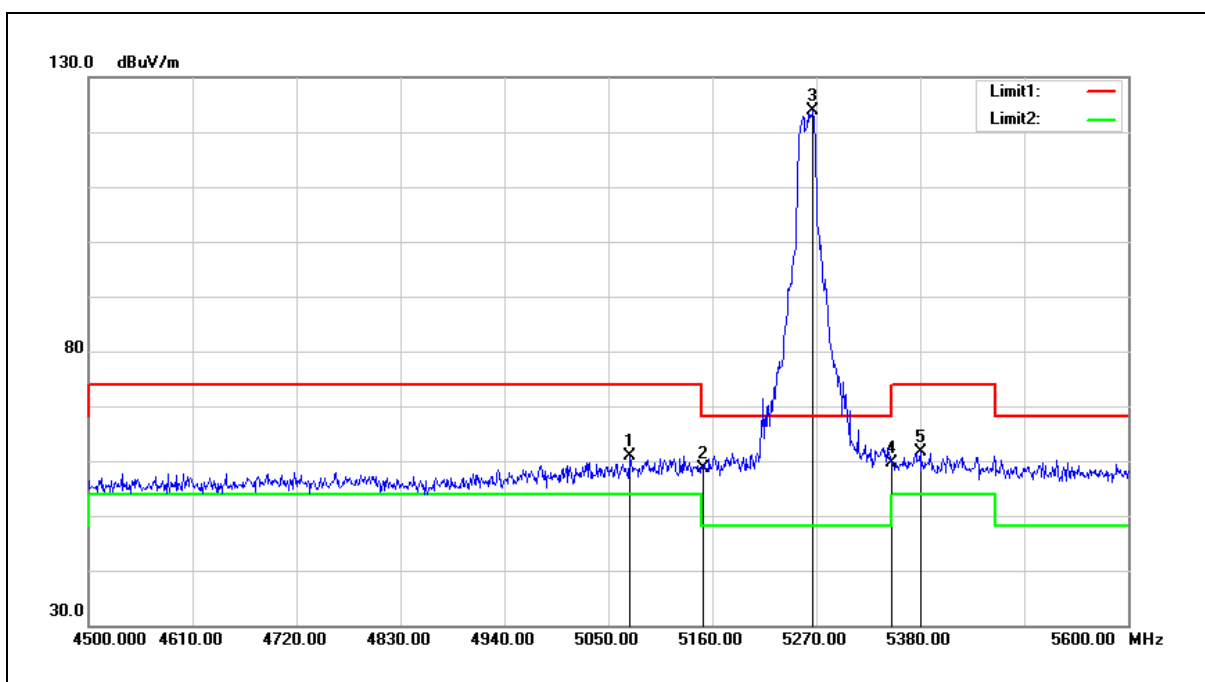


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5073.100           | 62.47             | -1.48                    | 60.99              | 74.00             | -13.01         | peak   |
| 2   | 5150.000           | 60.06             | -1.33                    | 58.73              | 74.00             | -15.27         | peak   |
| 3   | 5266.700           | 124.87            | -1.10                    | 123.77             | --                | --             | peak   |
| 4   | 5350.000           | 60.52             | -0.92                    | 59.60              | 74.00             | -14.40         | peak   |
| 5   | 5380.000           | 62.44             | -0.87                    | 61.57              | 74.00             | -12.43         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

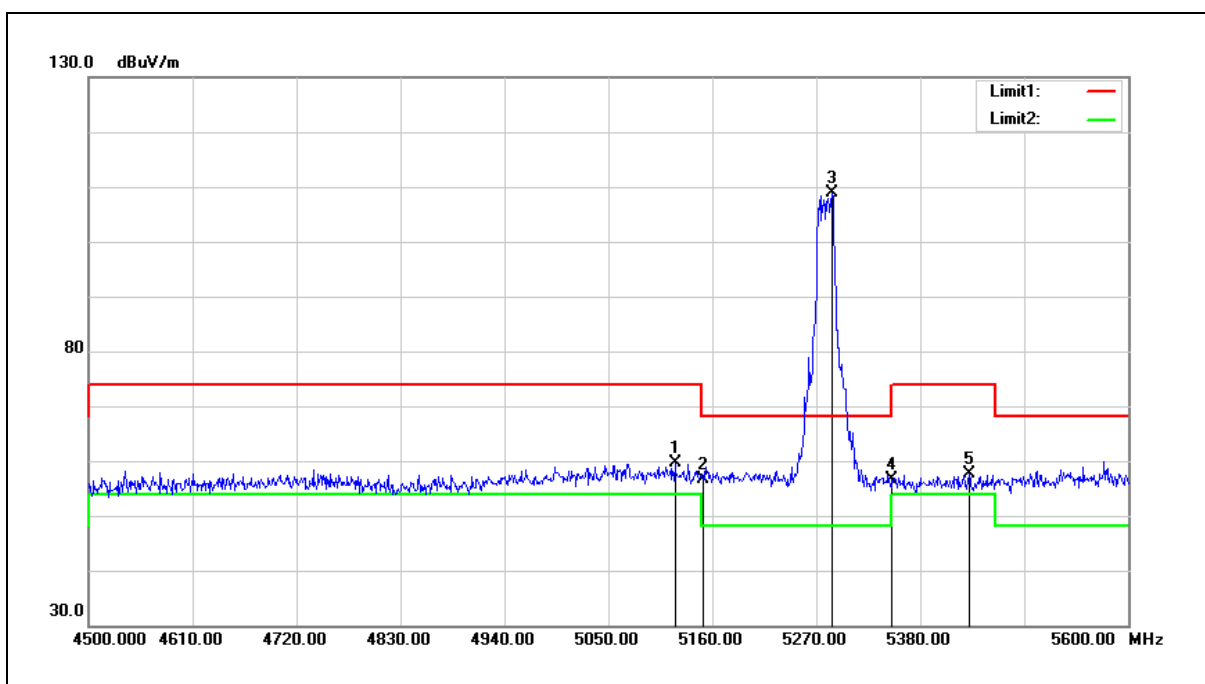


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5120.400        | 60.95          | -1.38                 | 59.57           | 74.00          | -14.43      | peak   |
| 2   | 5150.000        | 57.97          | -1.33                 | 56.64           | 74.00          | -17.36      | peak   |
| 3   | 5286.500        | 110.02         | -1.05                 | 108.97          | --             | --          | peak   |
| 4   | 5350.000        | 57.47          | -0.92                 | 56.55           | 74.00          | -17.45      | peak   |
| 5   | 5431.700        | 58.37          | -0.75                 | 57.62           | 74.00          | -16.38      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5280 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

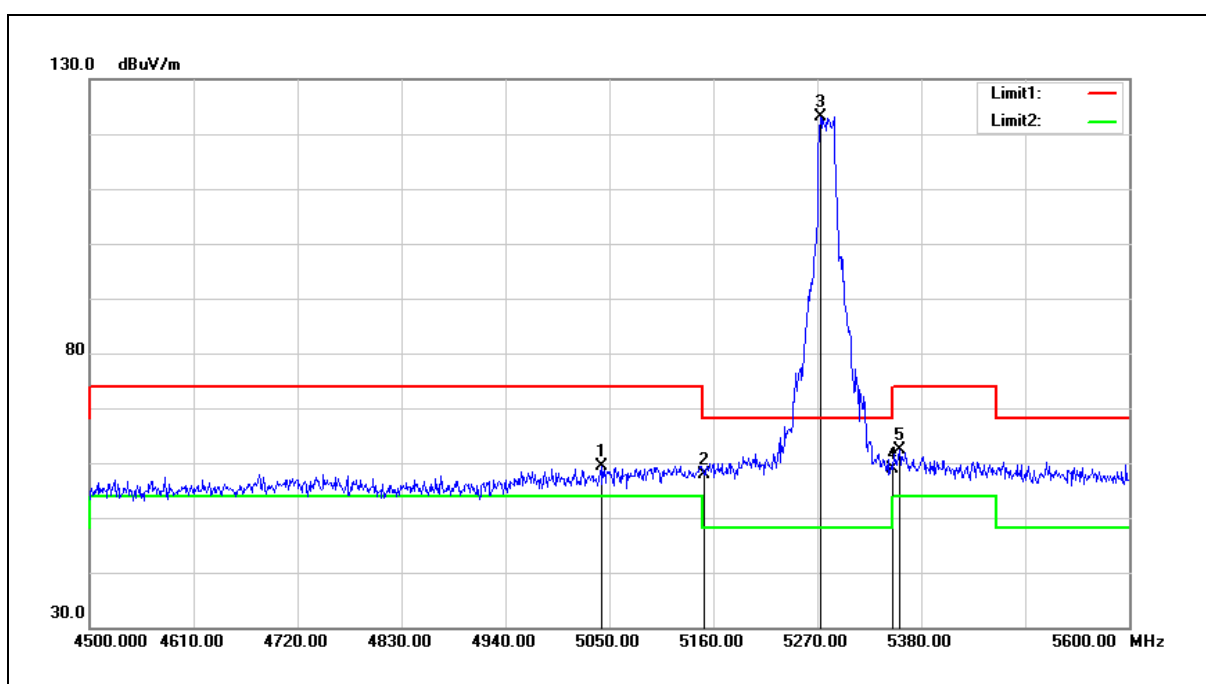


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5041.200           | 60.91             | -1.55                    | 59.36              | 74.00             | -14.64         | peak   |
| 2   | 5150.000           | 59.10             | -1.33                    | 57.77              | 74.00             | -16.23         | peak   |
| 3   | 5273.300           | 124.22            | -1.08                    | 123.14             | --                | --             | peak   |
| 4   | 5350.000           | 59.83             | -0.92                    | 58.91              | 74.00             | -15.09         | peak   |
| 5   | 5356.900           | 63.18             | -0.91                    | 62.27              | 74.00             | -11.73         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

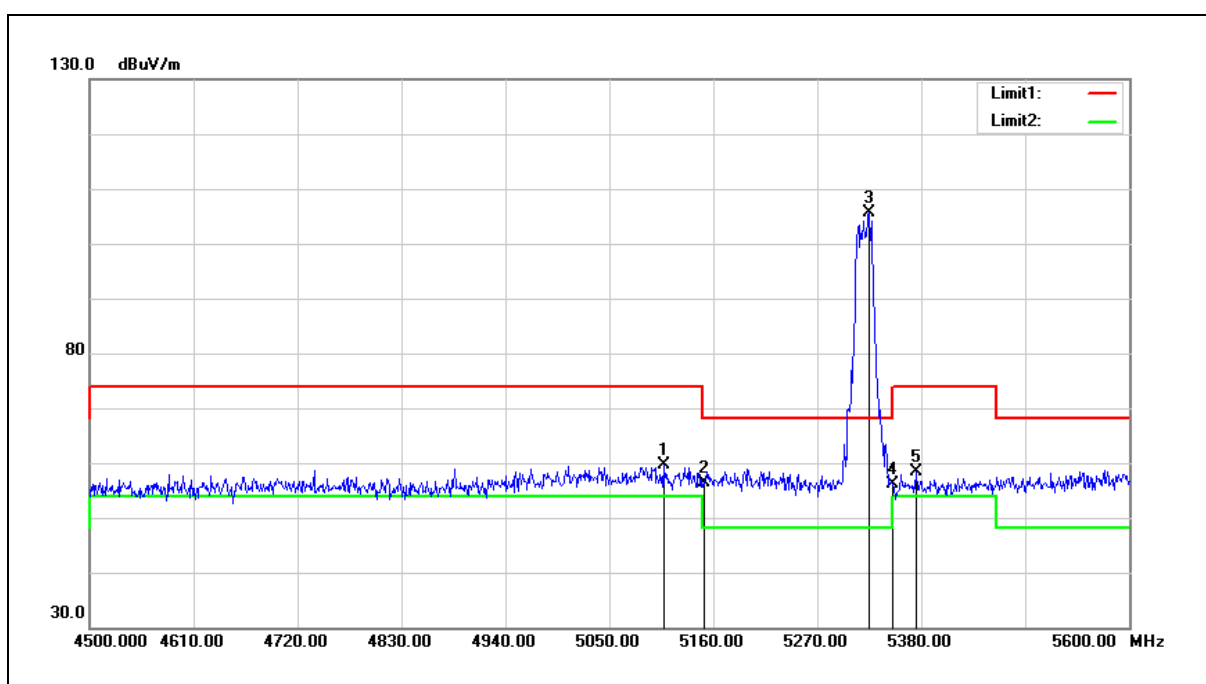


| No. | Frequency<br>(MHz) | Reading<br>(dBUV) | Correct Factor<br>(dB/m) | Result<br>(dBUV/m) | Limit<br>(dBUV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5107.200           | 61.11             | -1.41                    | 59.70              | 74.00             | -14.30         | peak   |
| 2   | 5150.000           | 57.60             | -1.33                    | 56.27              | 74.00             | -17.73         | peak   |
| 3   | 5325.000           | 106.52            | -0.97                    | 105.55             | --                | --             | peak   |
| 4   | 5350.000           | 57.12             | -0.92                    | 56.20              | 74.00             | -17.80         | peak   |
| 5   | 5374.500           | 59.22             | -0.88                    | 58.34              | 74.00             | -15.66         | peak   |

Note:1.Result (dBUV/m) = Correct Factor (dB/m) + Reading(dBUV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5320 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

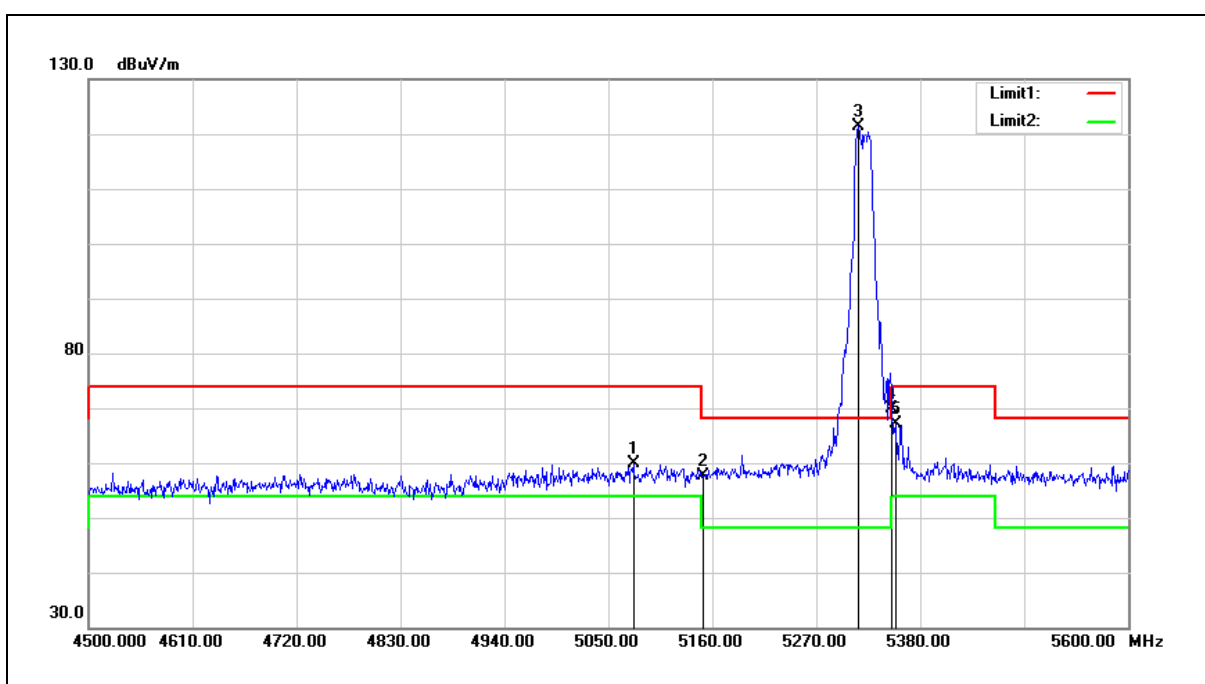


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5076.400           | 61.26             | -1.47                    | 59.79              | 74.00             | -14.21         | peak   |
| 2   | 5150.000           | 58.90             | -1.33                    | 57.57              | 74.00             | -16.43         | peak   |
| 3   | 5315.100           | 122.40            | -1.00                    | 121.40             | --                | --             | peak   |
| 4   | 5350.000           | 70.69             | -0.92                    | 69.77              | 74.00             | -4.23          | peak   |
| 5   | 5353.600           | 68.01             | -0.92                    | 67.09              | 74.00             | -6.91          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

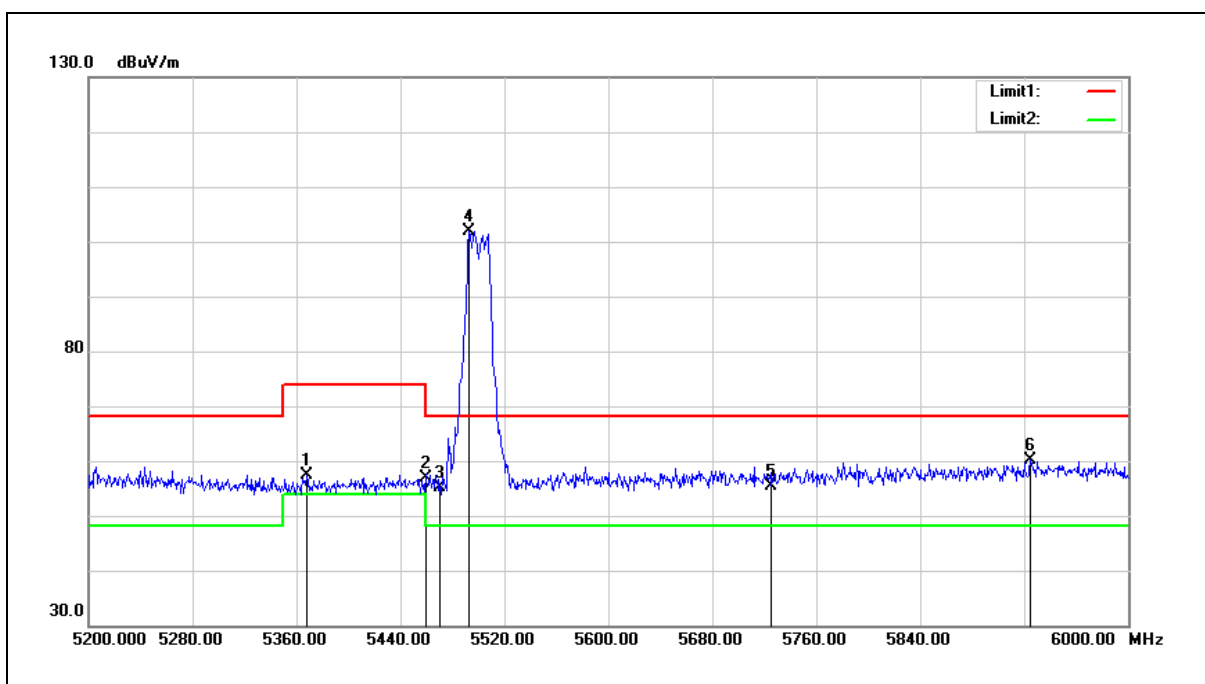


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 5368.000        | 58.18          | -0.89                 | 57.29           | 74.00          | -16.71      | peak   |
| 2   | 5460.000        | 57.59          | -0.70                 | 56.89           | 74.00          | -17.11      | peak   |
| 3   | 5470.000        | 55.71          | -0.68                 | 55.03           | 68.20          | -13.17      | peak   |
| 4   | 5492.800        | 102.64         | -0.64                 | 102.00          | --             | --          | peak   |
| 5   | 5725.000        | 55.37          | -0.10                 | 55.27           | 68.20          | -12.93      | peak   |
| 6   | 5924.800        | 59.63          | 0.38                  | 60.01           | 68.20          | -8.19       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5500 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

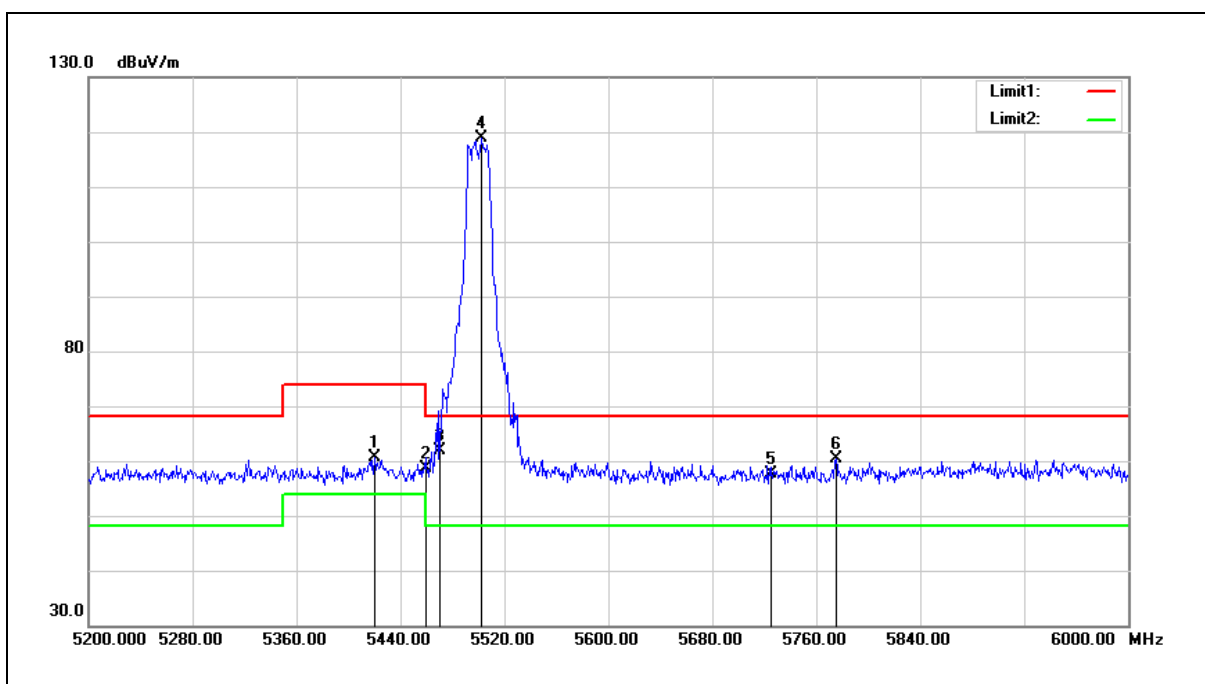


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5420.000           | 61.36             | -0.78                    | 60.58              | 74.00             | -13.42         | peak   |
| 2   | 5460.000           | 59.41             | -0.70                    | 58.71              | 74.00             | -15.29         | peak   |
| 3   | 5470.000           | 62.63             | -0.68                    | 61.95              | 68.20             | -6.25          | peak   |
| 4   | 5502.400           | 119.56            | -0.62                    | 118.94             | --                | --             | peak   |
| 5   | 5725.000           | 57.71             | -0.10                    | 57.61              | 68.20             | -10.59         | peak   |
| 6   | 5775.200           | 60.40             | 0.03                     | 60.43              | 68.20             | -7.77          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

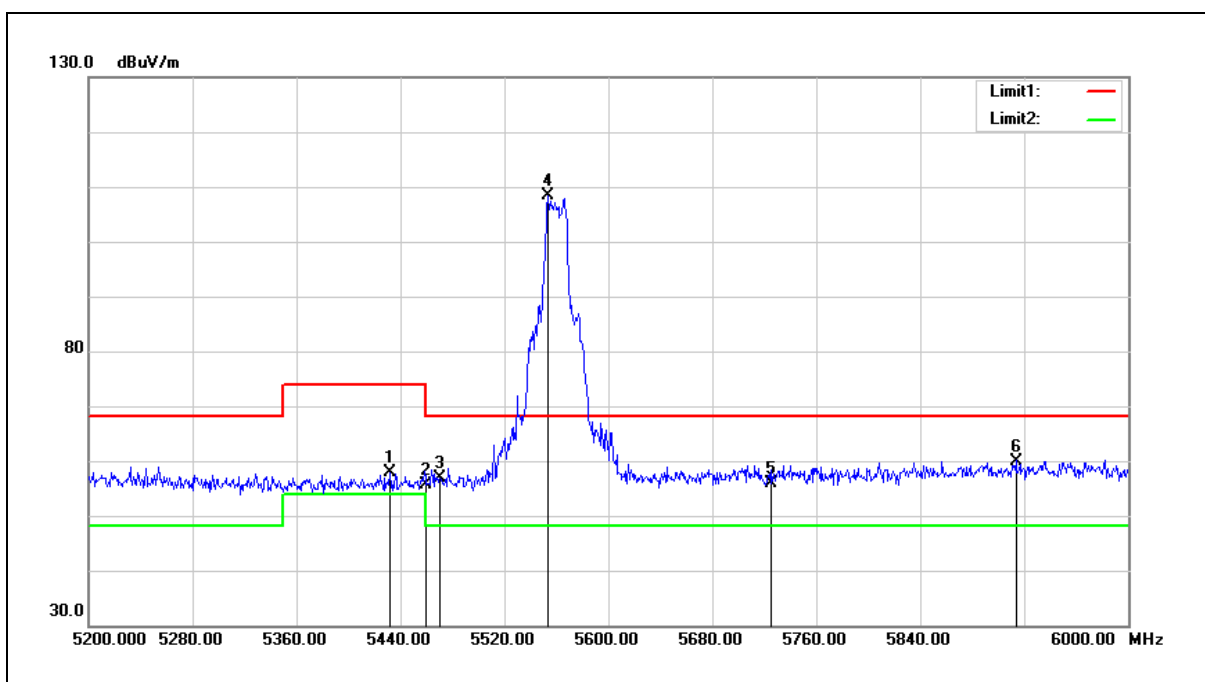


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5432.000           | 58.70             | -0.75                    | 57.95              | 74.00             | -16.05         | peak   |
| 2   | 5460.000           | 56.39             | -0.70                    | 55.69              | 74.00             | -18.31         | peak   |
| 3   | 5470.000           | 57.52             | -0.68                    | 56.84              | 68.20             | -11.36         | peak   |
| 4   | 5553.600           | 108.81            | -0.51                    | 108.30             | --                | --             | peak   |
| 5   | 5725.000           | 55.90             | -0.10                    | 55.80              | 68.20             | -12.40         | peak   |
| 6   | 5913.600           | 59.65             | 0.35                     | 60.00              | 68.20             | -8.20          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5560 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

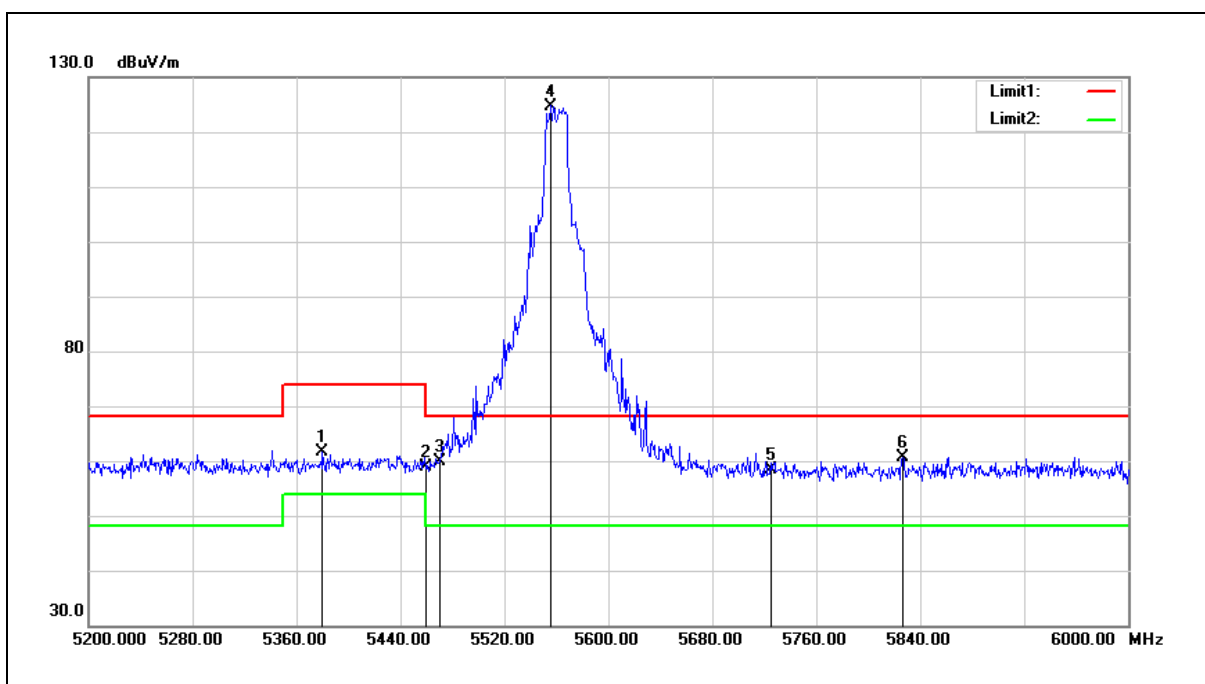


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5380.000           | 62.39             | -0.87                    | 61.52              | 74.00             | -12.48         | peak   |
| 2   | 5460.000           | 59.56             | -0.70                    | 58.86              | 74.00             | -15.14         | peak   |
| 3   | 5470.000           | 60.50             | -0.68                    | 59.82              | 68.20             | -8.38          | peak   |
| 4   | 5556.000           | 125.24            | -0.49                    | 124.75             | --                | --             | peak   |
| 5   | 5725.000           | 58.54             | -0.10                    | 58.44              | 68.20             | -9.76          | peak   |
| 6   | 5826.400           | 60.53             | 0.14                     | 60.67              | 68.20             | -7.53          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

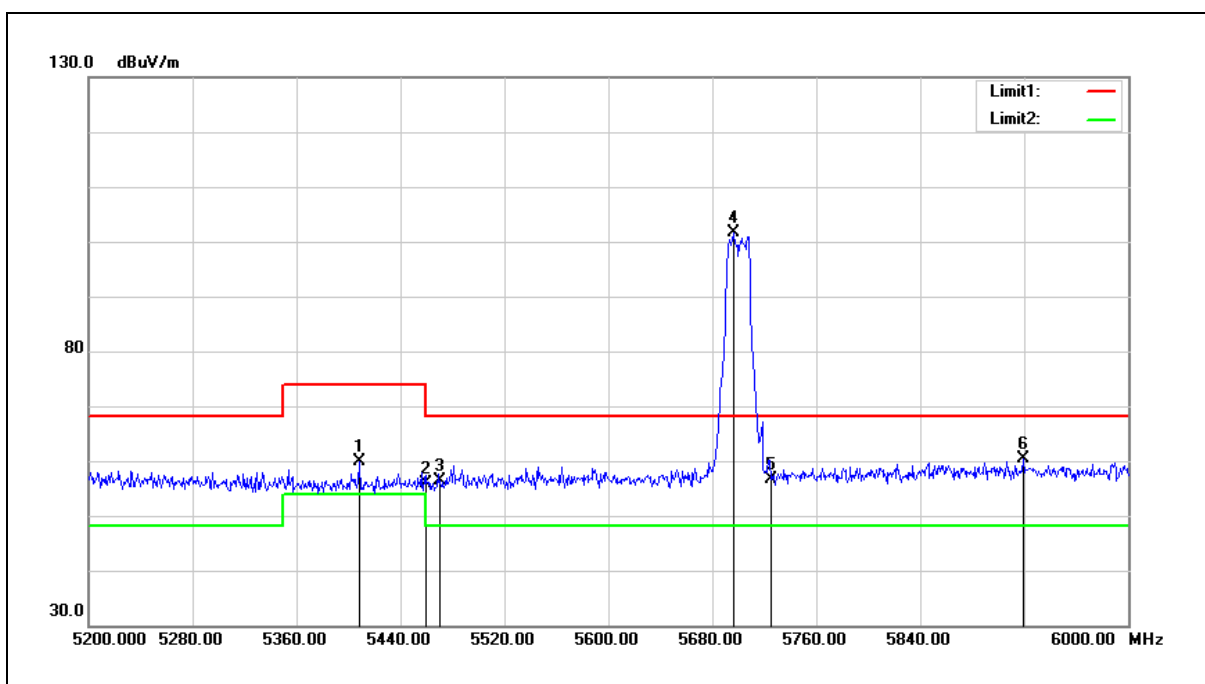


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5408.000           | 60.59             | -0.80                    | 59.79              | 74.00             | -14.21         | peak   |
| 2   | 5460.000           | 56.67             | -0.70                    | 55.97              | 74.00             | -18.03         | peak   |
| 3   | 5470.000           | 57.01             | -0.68                    | 56.33              | 68.20             | -11.87         | peak   |
| 4   | 5696.000           | 101.90            | -0.16                    | 101.74             | --                | --             | peak   |
| 5   | 5725.000           | 56.61             | -0.10                    | 56.51              | 68.20             | -11.69         | peak   |
| 6   | 5919.200           | 60.09             | 0.36                     | 60.45              | 68.20             | -7.75          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5700 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

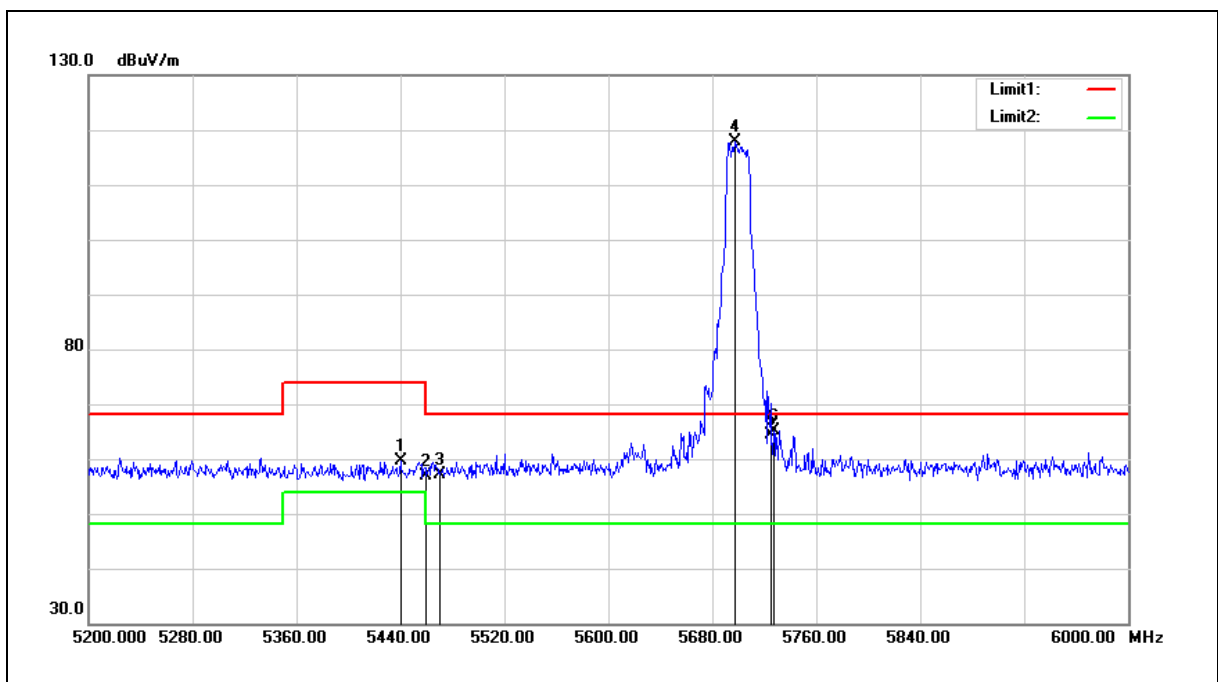


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5440.000           | 60.37             | -0.75                    | 59.62              | 74.00             | -14.38         | peak   |
| 2   | 5460.000           | 57.54             | -0.70                    | 56.84              | 74.00             | -17.16         | peak   |
| 3   | 5470.000           | 57.72             | -0.68                    | 57.04              | 68.20             | -11.16         | peak   |
| 4   | 5697.600           | 118.09            | -0.16                    | 117.93             | --                | --             | peak   |
| 5   | 5725.000           | 64.41             | -0.10                    | 64.31              | 68.20             | -3.89          | peak   |
| 6   | 5727.200           | 65.26             | -0.09                    | 65.17              | 68.20             | -3.03          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

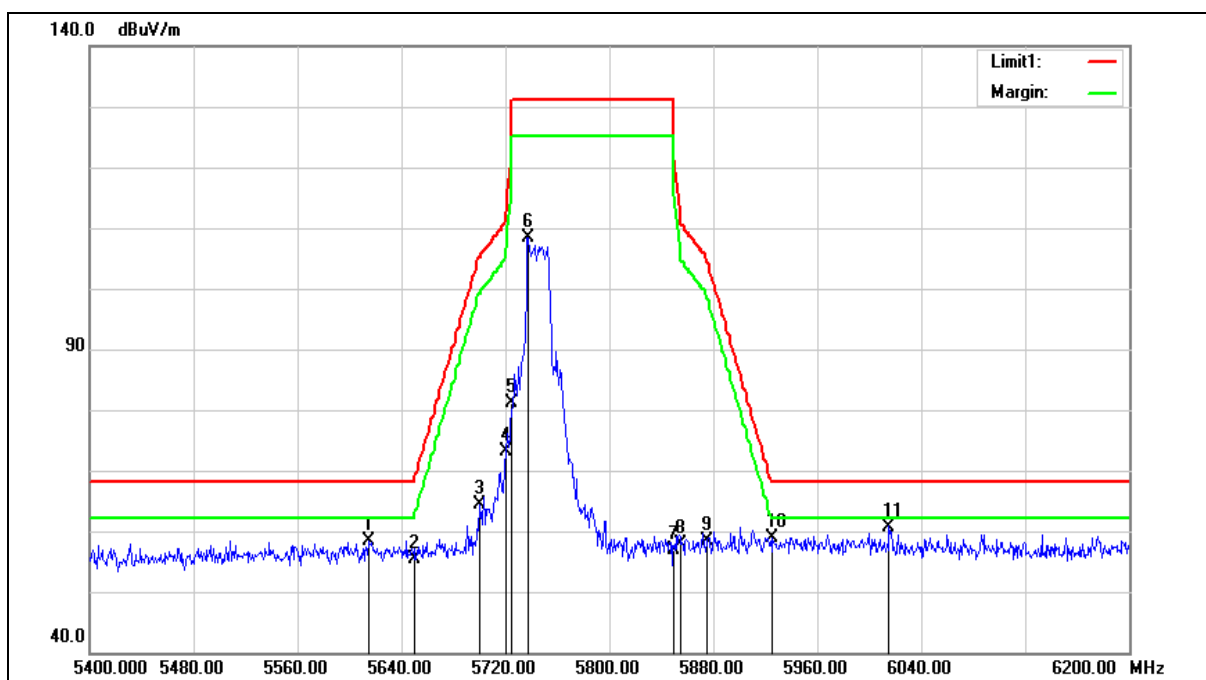

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5614.400           | 58.76             | -0.35                    | 58.41              | 68.20             | -9.79          | peak   |
| 2   | 5650.000           | 55.74             | -0.28                    | 55.46              | 68.20             | -12.74         | peak   |
| 3   | 5700.000           | 64.60             | -0.16                    | 64.44              | 105.20            | -40.76         | peak   |
| 4   | 5720.000           | 73.20             | -0.11                    | 73.09              | 110.80            | -37.71         | peak   |
| 5   | 5725.000           | 81.26             | -0.10                    | 81.16              | 122.20            | -41.04         | peak   |
| 6   | 5737.600           | 108.49            | -0.06                    | 108.43             | --                | --             | peak   |
| 7   | 5850.000           | 56.62             | 0.20                     | 56.82              | 122.20            | -65.38         | peak   |
| 8   | 5855.000           | 57.77             | 0.21                     | 57.98              | 110.80            | -52.82         | peak   |
| 9   | 5875.000           | 58.04             | 0.26                     | 58.30              | 105.20            | -46.90         | peak   |
| 10  | 5925.000           | 58.51             | 0.38                     | 58.89              | 68.20             | -9.31          | peak   |
| 11  | 6015.200           | 60.14             | 0.61                     | 60.75              | 68.20             | -7.45          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

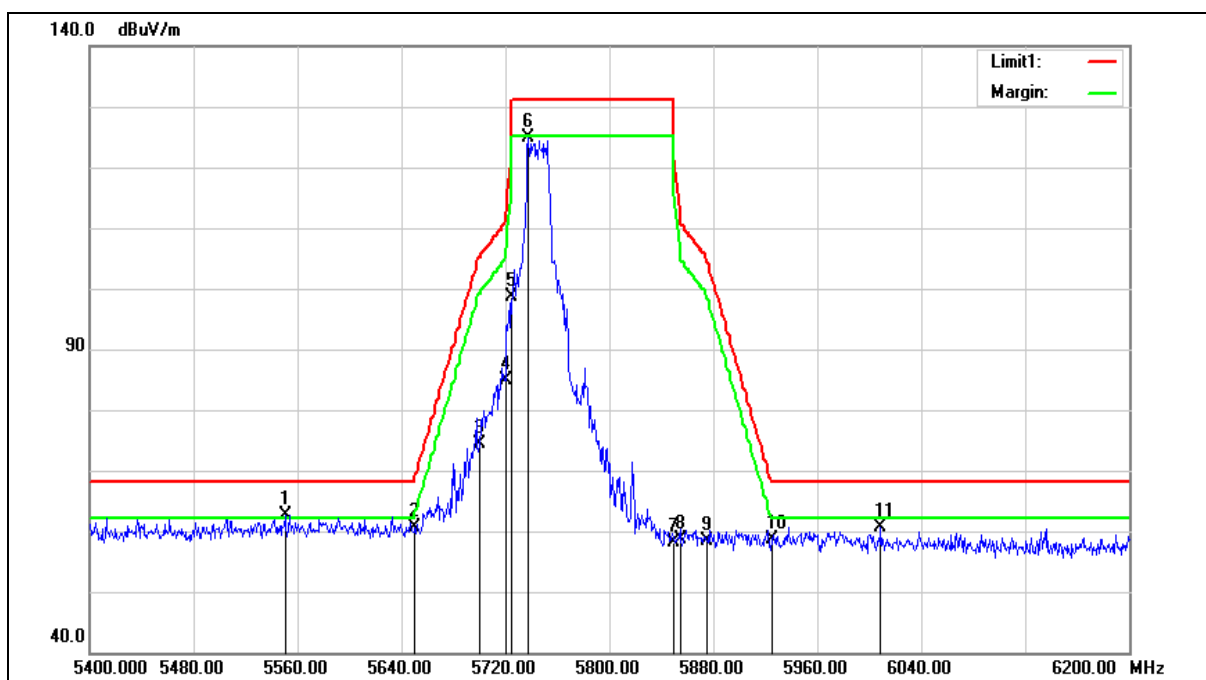

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5745 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5550.400           | 63.16             | -0.51                    | 62.65              | 68.20             | -5.55          | peak   |
| 2   | 5650.000           | 61.00             | -0.28                    | 60.72              | 68.20             | -7.48          | peak   |
| 3   | 5700.000           | 74.55             | -0.16                    | 74.39              | 105.20            | -30.81         | peak   |
| 4   | 5720.000           | 85.11             | -0.11                    | 85.00              | 110.80            | -25.80         | peak   |
| 5   | 5725.000           | 98.68             | -0.10                    | 98.58              | 122.20            | -23.62         | peak   |
| 6   | 5737.600           | 124.95            | -0.06                    | 124.89             | --                | --             | peak   |
| 7   | 5850.000           | 57.86             | 0.20                     | 58.06              | 122.20            | -64.14         | peak   |
| 8   | 5855.000           | 58.49             | 0.21                     | 58.70              | 110.80            | -52.10         | peak   |
| 9   | 5875.000           | 58.04             | 0.26                     | 58.30              | 105.20            | -46.90         | peak   |
| 10  | 5925.000           | 58.23             | 0.38                     | 58.61              | 68.20             | -9.59          | peak   |
| 11  | 6008.800           | 60.12             | 0.58                     | 60.70              | 68.20             | -7.50          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

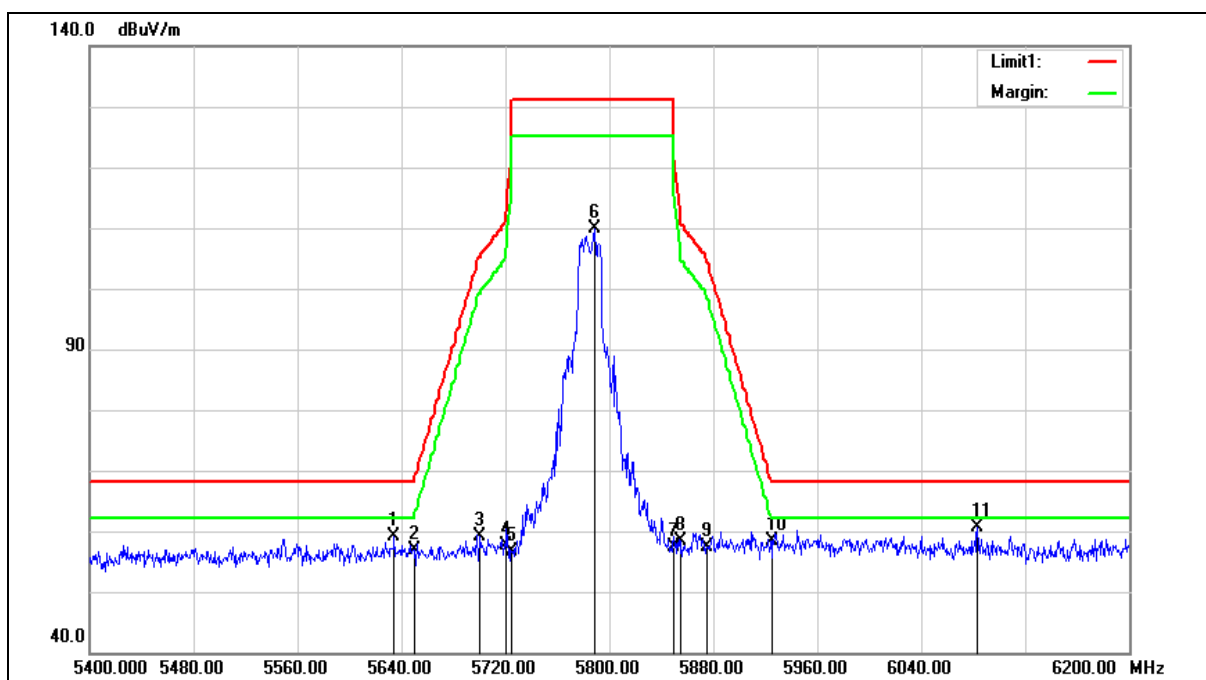

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5634.400           | 59.41             | -0.31                    | 59.10              | 68.20             | -9.10          | peak   |
| 2   | 5650.000           | 57.16             | -0.28                    | 56.88              | 68.20             | -11.32         | peak   |
| 3   | 5700.000           | 59.22             | -0.16                    | 59.06              | 105.20            | -46.14         | peak   |
| 4   | 5720.000           | 57.76             | -0.11                    | 57.65              | 110.80            | -53.15         | peak   |
| 5   | 5725.000           | 56.83             | -0.10                    | 56.73              | 122.20            | -65.47         | peak   |
| 6   | 5788.800           | 109.74            | 0.06                     | 109.80             | --                | --             | peak   |
| 7   | 5850.000           | 57.22             | 0.20                     | 57.42              | 122.20            | -64.78         | peak   |
| 8   | 5855.000           | 58.13             | 0.21                     | 58.34              | 110.80            | -52.46         | peak   |
| 9   | 5875.000           | 57.12             | 0.26                     | 57.38              | 105.20            | -47.82         | peak   |
| 10  | 5925.000           | 58.04             | 0.38                     | 58.42              | 68.20             | -9.78          | peak   |
| 11  | 6083.200           | 59.77             | 0.85                     | 60.62              | 68.20             | -7.58          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

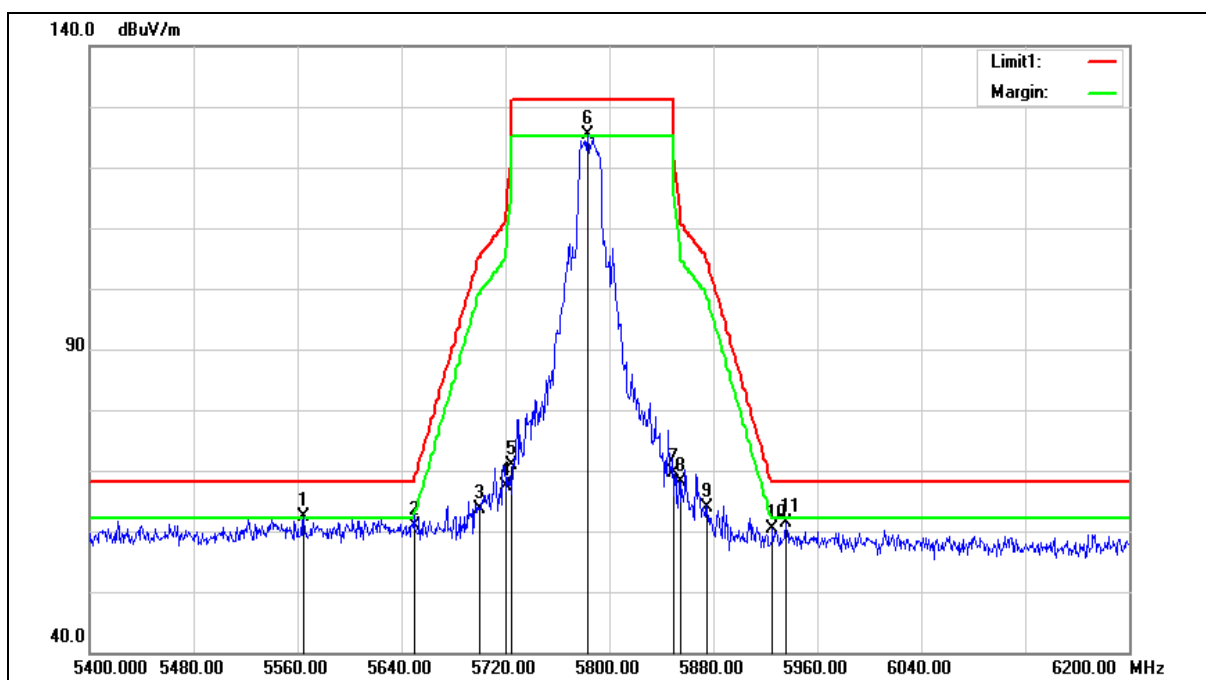

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5785 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Vertical        |                |     |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 5564.800           | 62.83             | -0.47                    | 62.36              | 68.20             | -5.84          | peak   |
| 2   | 5650.000           | 61.10             | -0.28                    | 60.82              | 68.20             | -7.38          | peak   |
| 3   | 5700.000           | 63.88             | -0.16                    | 63.72              | 105.20            | -41.48         | peak   |
| 4   | 5720.000           | 67.54             | -0.11                    | 67.43              | 110.80            | -43.37         | peak   |
| 5   | 5725.000           | 71.03             | -0.10                    | 70.93              | 122.20            | -51.27         | peak   |
| 6   | 5783.200           | 125.29            | 0.04                     | 125.33             | --                | --             | peak   |
| 7   | 5850.000           | 69.47             | 0.20                     | 69.67              | 122.20            | -52.53         | peak   |
| 8   | 5855.000           | 67.90             | 0.21                     | 68.11              | 110.80            | -42.69         | peak   |
| 9   | 5875.000           | 63.71             | 0.26                     | 63.97              | 105.20            | -41.23         | peak   |
| 10  | 5925.000           | 60.03             | 0.38                     | 60.41              | 68.20             | -7.79          | peak   |
| 11  | 5936.000           | 60.93             | 0.39                     | 61.32              | 68.20             | -6.88          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |     |
|-------------|-----------------|----------------|-----|
| Standard:   | FCC Part 15.407 | Test Distance: | 3 m |
| Test item:  | Band edge       |                |     |
| Frequency:  | 5825 MHz        |                |     |
| Mode:       | Mode 2          |                |     |
| Ant.Polar.: | Horizontal      |                |     |

