



MET Laboratories, Inc.

Safety Certification - EMI - Telecom Environmental Simulation

914 W. PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

June 4, 2008

Rajant Corporation
400 E. King Street
Malvern, PA 19355

Dear Brian Hassick,

Enclosed is the EMC Wireless test report for compliance testing of the Rajant Corporation, Breadcrumb Model LX as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 7, June 2007 for Intentional Radiators..

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Rajant Corporation\23702-FCC247)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, A2LA, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by these organizations or any Agency of the U.S. Government. This letter of transmittal is not a part of the attached report.



The Nation's First Licensed Nationally Recognized Testing Laboratory





MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 W. PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230 • PHONE (410) 354-3300 • FAX (410) 354-3313

**Electromagnetic Compatibility Criteria
Test Report**

for the

**Rajant Corporation
Model Breadcrumb Model LX**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

MET Report: EMC23702-FCC247

June 4, 2008

Prepared For:

**Rajant Corporation
400 E. King Street
Malvern, PA 19355**



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Cover Page
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria Test Report

for the

**Rajant Corporation
Model Breadcrumb Model LX**

Tested under
the FCC Certification Rules
contained in
Title 47 of the CFR, Parts 15 Subpart B & ICES-003
for Class A Digital Devices
&
15.247 Subpart C & RSS-210, Issue 7, June 2007
for Intentional Radiators

A handwritten signature in black ink, appearing to read "D. Tennakoon".

Dusmantha Tennakoon, Project Engineer
Electromagnetic Compatibility Lab

A handwritten signature in black ink, appearing to read "Jennifer Warnell".

Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 7, June 2007 under normal use and maintenance.

A handwritten signature in black ink, appearing to read "Shawn McMillen".

Shawn McMillen
Wireless Manager, Electromagnetic Compatibility Lab



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Report Status
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	June 4, 2008	Initial Issue.



Table of Contents

I.	Executive Summary	1
A.	Purpose of Test	2
B.	Executive Summary	2
II.	Equipment Configuration	3
A.	Overview.....	4
B.	References.....	5
C.	Test Site	5
D.	Description of Test Sample.....	5
E.	Equipment Configuration.....	9
F.	Support Equipment	9
G.	Ports and Cabling Information.....	10
H.	Mode of Operation.....	10
I.	Method of Monitoring EUT Operation	10
J.	Modifications	11
a)	Modifications to EUT	11
b)	Modifications to Test Standard.....	11
K.	Disposition of EUT	11
III.	Electromagnetic Compatibility Criteria for Unintentional Radiators	12
§ 15.107(a)	Conducted Emissions Limits.....	13
§ 15.09(a)	Radiated Emissions Limits.....	17
IV.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	27
§ 15.203	Antenna Requirement	28
§ 15.207(a)	Conducted Emissions Limits.....	29
§ 15.247(a)	6 dB and 99% Bandwidth.....	33
§ 15.247(b)	Peak Power Output and RF Exposure	34
§ 15.247(d)	Spurious Emissions Requirements – Radiated and RF Conducted	37
§ 15.247(d)	Peak Power Spectral Density	50
V.	Test Equipment	51
VI.	Certification & User's Manual Information.....	53
A.	Certification Information	54
B.	Label and User's Manual Information	58
VII.	ICES-003 Procedural & Labeling Requirements.....	60



List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. EUT Summary Table.....	4
Table 3. References	5
Table 4. Equipment Configuration.....	9
Table 5. Support Equipment.....	9
Table 6. Ports and Cabling Information	10
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)	13
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz).....	14
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz).....	15
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)	17
Table 11. Radiated Emissions Limits Test Results, AC POE, LX 2450	18
Table 12. Radiated Emissions Limits Test Results, DC POE, LX 2450	19
Table 13. Radiated Emissions Limits Test Results, AC-DC POE, ICES-003, LX 2450.....	21
Table 14. Radiated Emissions Limits Test Results, DC POE, ICES-003, LX 2450	22
Table 15. Radiated Emissions Limits Test Results, LX 2490	23
Table 16. Radiated Emissions Limits Test Results, ICES-003 Limits, LX 2490	24
Table 17. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)	29
Table 18. Conducted Emissions - Voltage, Phase (120 VAC, 60 Hz).....	30
Table 19. Conducted Emissions - Voltage, Neutral (120 VAC, 60 Hz).....	31
Table 20. Output Power Requirements from §15.247	34
Table 21. Peak Output Power, 2.4 GHz and 5.8 GHz	35
Table 22. Peak Output Power, 900 MHz.....	35
Table 23. Restricted Bands of Operation.....	37
Table 24. Radiated Emissions, Low Channel 2412 MHz, b Mode, 2.4 GHz	38
Table 25. Radiated Emissions, Mid Channel 2437 MHz, b Mode, 2.4 GHz.....	38
Table 26. Radiated Emissions, High Channel 2462 MHz, b Mode, 2.4 GHz	38
Table 27. Radiated Emissions, Low Channel 2412 MHz, g Mode, 2.4 GHz	39
Table 28. Radiated Emissions, Mid Channel 2437 MHz, g Mode, 2.4 GHz.....	39
Table 29. Radiated Emissions, High Channel 2462 MHz, g Mode, 2.4 GHz	39
Table 30. Radiated Emissions, Low Channel 5745 MHz, 5.8 GHz	40
Table 31. Radiated Emissions, Mid Channel 5785 MHz, 5.8 GHz	40
Table 32. Radiated Emissions, High Channel 5825 MHz, 5.8 GHz.....	40
Table 33. Radiated Emissions, 900 MHz, Low Channel, b Mode.....	43
Table 34. Radiated Emissions, 900 MHz, Mid Channel, b Mode	43
Table 35. Radiated Emissions, 900 MHz, High Channel, b Mode.....	43
Table 36. Radiated Emissions, 900 MHz, Low Channel, g Mode.....	44
Table 37. Radiated Emissions, 900 MHz, Mid Channel, g Mode	44
Table 38. Radiated Emissions, 900 MHz, High Channel, g Mode	44



List of Figures

Figure 1. Block Diagram of Test Configuration, Ports	6
Figure 2. Block Diagram of Test Configuration, Cabling	7
Figure 3. Block Diagram of Test Configuration, Antennae	8

List of Photographs

Photograph 1. Conducted Emissions Test Setup	16
Photograph 2. Radiated Emission Test Setup, LX 2450	25
Photograph 3. Radiated Emission Test Setup, LX 2490	26
Photograph 4. Conducted Emissions, Test Setup	32
Photograph 5. Radiated Emission Test Setup, b and g Mode, 2.4 GHz	47
Photograph 6. Radiated Emission Test Setup, 5.8 GHz Mode	47
Photograph 7. Radiated Emission Test Setup, 900 MHz.....	48

List of Plots

Plot 1. Conducted Emission, Phase Line Plot, §15.107.....	14
Plot 2. Conducted Emission, Neutral Line Plot, §15.107	15
Plot 3. Radiated Emissions, Pre-Scan with AC POE, LX 2450	20
Plot 4. Radiated Emissions, Pre-Scan with DC POE, LX 2450	20
Plot 5. Radiated Emissions, Pre-Scan, LX 2490	24
Plot 6. Conducted Emissions, Phase Line	30
Plot 7. Conducted Emissions, Neutral Line.....	31



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current μ
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GR-1089-CORE	(GR) General Requirement(s) imposed by the NEBS standard, (CORE) Central Office Recovery Express (AT&T), (I089) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Executive Summary
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

I. Executive Summary



A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Rajant Corporation Breadcrumb Model LX, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Breadcrumb Model LX. Rajant Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Breadcrumb Model LX, has been **permanently** discontinued

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Rajant Corporation, purchase order number 2007334. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	IC Reference	Description	Compliance
47 CFR Part 15.247:2005	RSS-210 Issue 7: 2007	Applicable Standard	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.205	RSS-210(A8.5)	Emissions at Restricted Band	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-210(7.2.2)	Conducted Emission Voltage	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RSS-210(A8.1)	Occupied Bandwidth	Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	RF Output Power	Compliant
Title 47 of the CFR, Part 15 §15.247(c)	RSS-210(A8.4)	Antenna Gain >6dBi	Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.
Title 47 of the CFR, Part 15 §15.209, §15.247(d)	RSS-210(A8.5)	Radiated and Conducted Spurious Emissions	Radiated – Compliant Conducted - Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.3)	Power Spectral Density	Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.
Title 47 of the CFR, Part 15 §15.247(i)	RSSGen(5.5)	Maximum Permissible Exposure	Compliant
N/A	RSSGen(4.8)	Receiver Spurious Emissions	Compliant

Table 1 Executive Summary of EMC Part 15.247 Compliance Testing



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Equipment Configuration
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

II. Equipment Configuration



A. Overview

MET Laboratories, Inc. was contracted by Rajant Corporation to perform testing on the Breadcrumb Model LX, under Rajant Corporation's purchase order number 300560.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Rajant Corporation, Breadcrumb Model LX.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	Breadcrumb Model LX	
Model(s) Covered:	LX-2450 (2.4GHz and 5GHz radio configuration) LX-2490 (2.4GHz and 900MHz radio configuration) LX-2449 (2.4GHz and 4.9GHz radio configuration) LX-2424 (2.4GHz and 2.4GHz radio configuration)	
EUT Specifications:	Primary Power: 120VAC, 60 Hz	
	FCC ID: VJA-LX	
	Type of Modulations:	DSSS, OFDM
	Emission Designators:	D7D
	Equipment Code:	DTS
	Peak RF Output Power:	2.4 GHz: 28.75 dBm 5 GHz: 26.25 dBm 900 MHz: 27.48 dBm
	EUT Frequency Ranges:	2.4 GHz: 2412-2462 MHz 5 GHz: 5745-5825 MHz 900 MHz: 907-917 MHz
	Analysis:	The results obtained relate only to the item(s) tested.
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Dusmantha Tennakoon	
Date(s):	June 4, 2008	

Table 2. EUT Summary Table



B. References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
RSS-210, Issue 7, June 2007	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ICES-003, Issue 4 February 2004	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories

Table 3. References

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Rajant Corporation Breadcrumb Model LX, is a portable networking device that supports wired and wireless routing, and 802.11a/b/g access point/bridging/meshing functionality. The LX can be powered from external batteries, DC source, or AC/DC power supply.

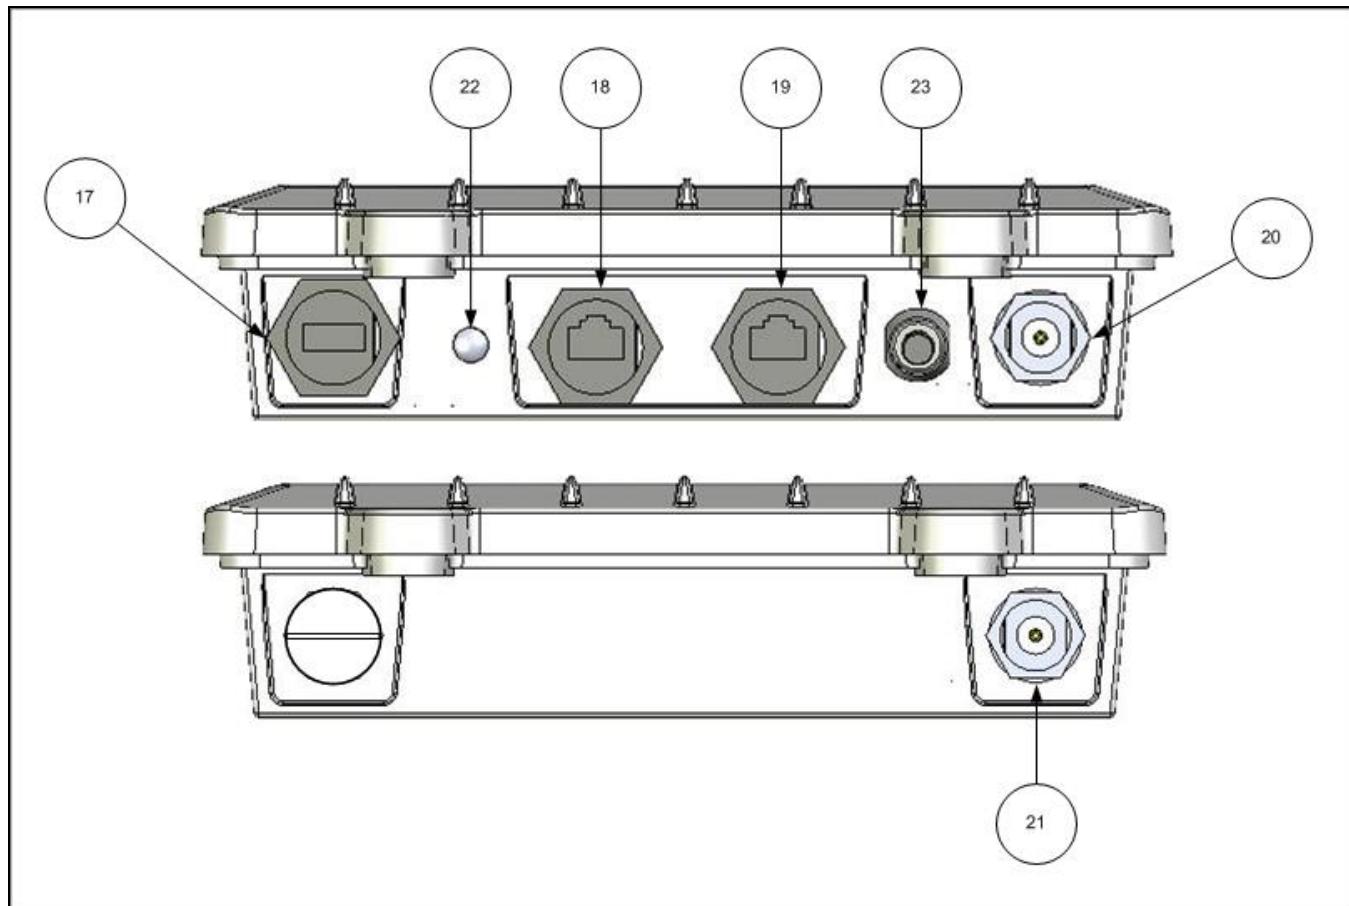


Figure 1. Block Diagram of Test Configuration, Ports

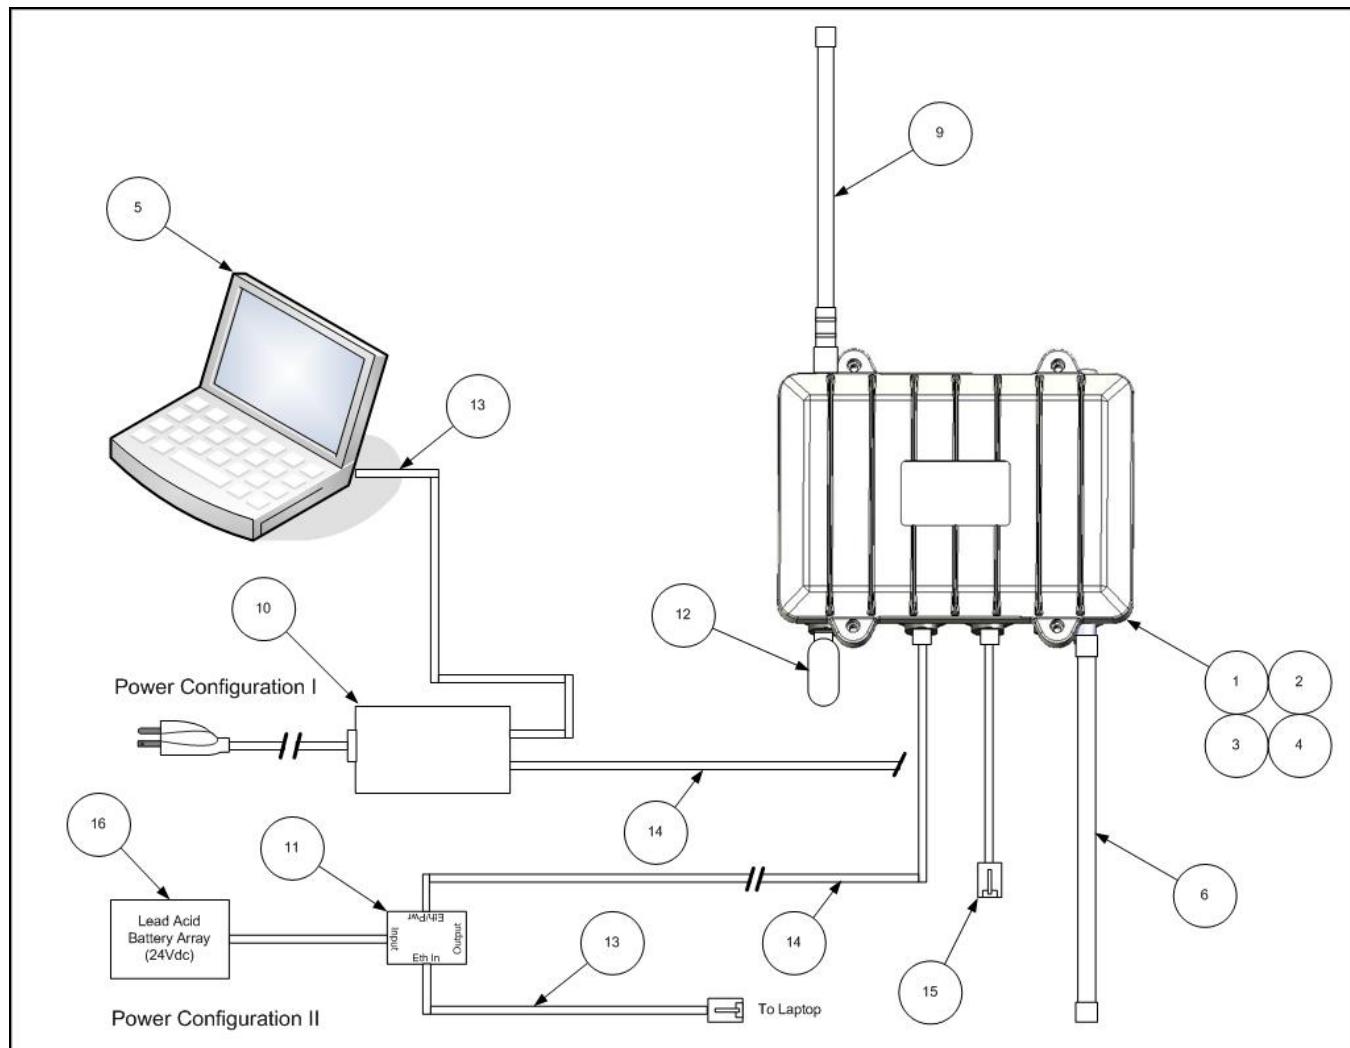


Figure 2. Block Diagram of Test Configuration, Cabling

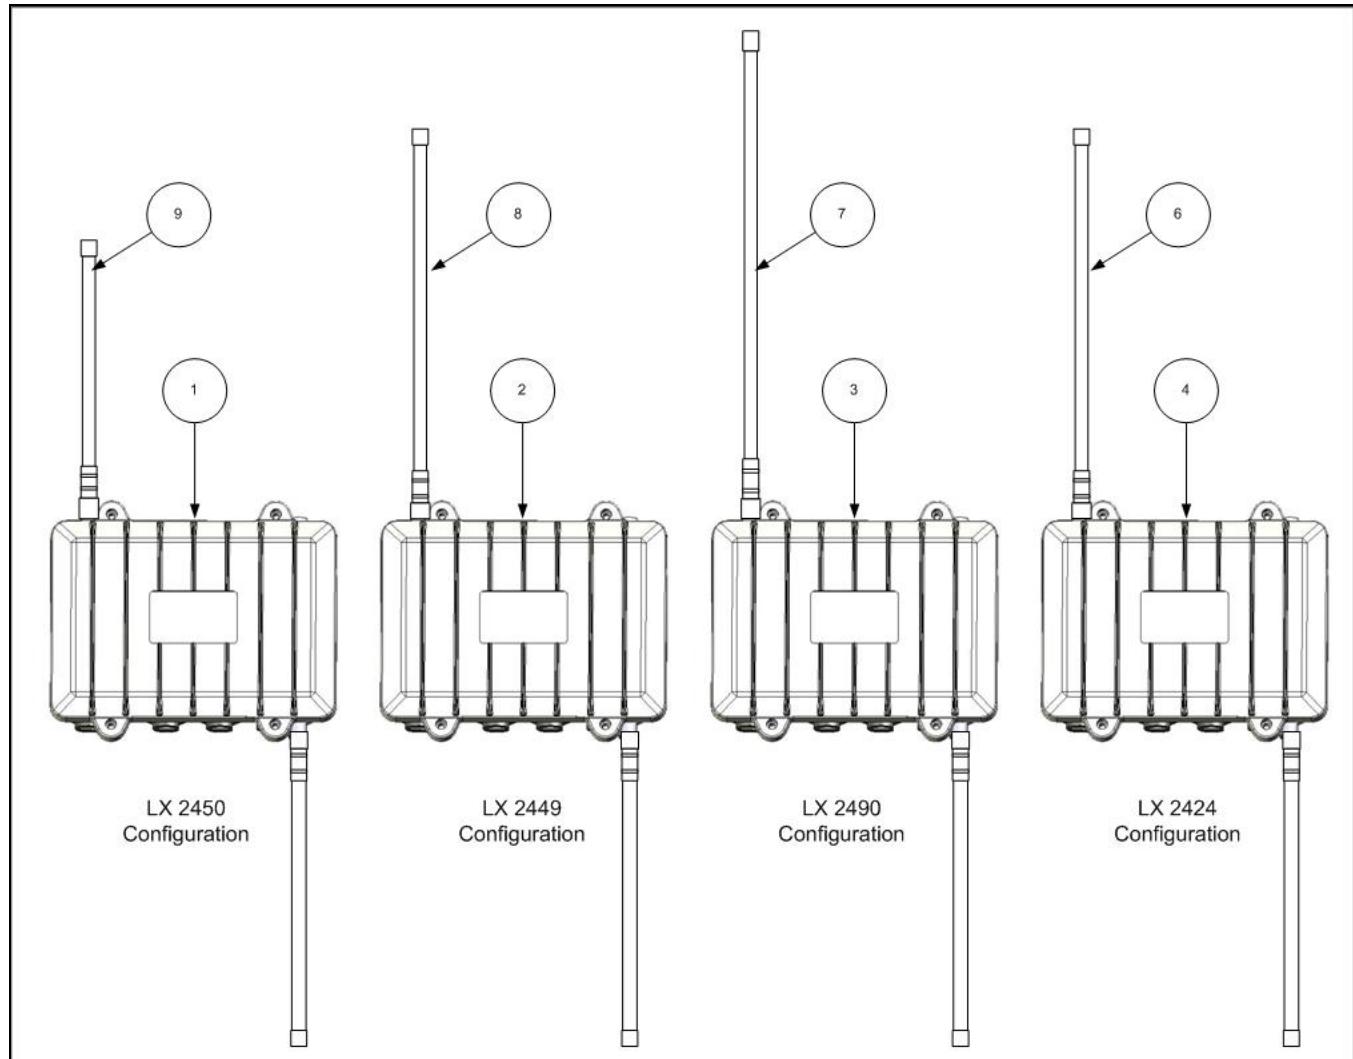


Figure 3. Block Diagram of Test Configuration, Antennae



E. Equipment Configuration

The EUT was set up as outlined in Figure 1 - Figure 3, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
1	BREADCRUMB LX	LX-2450	N/A
2	BREADCRUMB LX	LX-2449	N/A
3	BREADCRUMB LX	LX-2490	N/A
4	BREADCRUMB LX	LX-2424	N/A

Table 4. Equipment Configuration

F. Support Equipment

Rajant Corporation supplied support equipment necessary for the operation and testing of the Breadcrumb Model LX. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
5	LAPTOP	IBM	THINKPAD	N/A
6	5DBI OMNI ANTENNA, 2.4GHZ, TYPE-N	PACIFIC WIRELESS	OD24M-5	N/A
7	5DBI OMNI ANTENNA, 900MHZ, TYPE-N	PACIFIC WIRELESS	ODN9-5	N/A
8	8DBI OMNI ANTENNA 4.9GHZ, TYPE-N	PACIFIC WIRELESS	OD49M-6	N/A
9	6DBI OMNI ANTENNA, 5GHZ, TYPE-N	PACIFIC WIRELESS	OD5WM-6	N/A
10	AC/DC ADAPTER 48VDC POE INJECTOR	CINCON	TR-60A	N/A
11	DC-DC VEHICULAR 24VDC POE INJECTOR	RAJANT CORP.	N/A	N/A
12	USB MEMORY STICK	N/A	N/A	N/A
13	CAT5 ETHERNET CABLE	N/A	N/A	N/A
14	CAT5 ETHERNET CABLE	N/A	N/A	N/A
15	CAT5 ETHERNET CABLE	N/A	N/A	N/A
16	LEAD ACID BATTERY (2 X 12VDC)	N/A	N/A	N/A

Table 5. Support Equipment



G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
17	USB PORT	USB TOKEN	1	N/A	N	ITEM 17 (USB CONNECTOR)
18	POWER AND ETH0 PORT	RJ45 CAT5 (ITEM 14)	1	N/A	N	ITEM 18 (ETH0 PORT)
19	ETH1 PORT	RJ45 CAT5 (ITEM 15)	1	N/A	N	ITEM 19 (ETH1 PORT)
20	RF PORT – BOTTOM (2.4GHZ)	9DBI 2.4GHZ OMNI ANTENNA	1	N/A	N	ITEM 20 (TYPE-N RF CONN.)
21	RF PORT – TOP (ALT FREQ.)	VARIOUS FREQUENCY ANTENNA (ITEM 6,7,8,9)	1	N/A	N	ITEM 21 (TYPE-N RF CONN.)
22	BITE LED	STATUS INDICATOR	N/A	N/A	N	N/A
23	RESET/ZEROIZE SWITCH	RESET UNIT SETTINGS TO DEFAULT	N/A	N/A	N	N/A

Table 6. Ports and Cabling Information

H. Mode of Operation

The unit will simulate a network packing routing operation internally and by fully exercising the radio transceiver cards by forcing them into a mode where they continuously transmit. A setup procedure will be found on the controlling laptop.

I. Method of Monitoring EUT Operation

The DUT will “report in” to the controlling laptop’s management application indicating that the DUT is still operating and relaying operational conditions.



J. Modifications

a) Modifications to EUT

For Radiated Emissions: All models:

Internal USB Cable: Fair-Rite 2631540002 and 0461178181

Internal ETH0 Cable (PoE): Fair-Rite 2631540002

Internal ETH1 Cable: Fair-Rite 2631665702

The DC-DC converter chassis grounded to circuit board.

The power over Ethernet cable was changed to a shielded cable.

b) Modifications to Test Standard

No modifications were made to the test standard.

K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Rajant Corporation upon completion of testing.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

III. Electromagnetic Compatibility Criteria for Unintentional Radiators



Electromagnetic Compatibility Criteria

§ 15.107 Conducted Emissions Limits

Test Requirement(s): **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

15.107 (b) For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

15.207(a), Except as shown in paragraphs (b) and (c) of this section*, charging, AC adapters or battery eliminators the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the Table 7, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency range (MHz)	Class A Conducted Limits (dB μ V)		*Class A Conducted Limits (dB μ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

* -- Limits per Subsection 15.207(a).

Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)


Test Results: The EUT was found compliant with the Class A requirement(s) of this section. Measured emissions were below applicable limits. Pre-scans revealed similar emission profiles. Therefore, final measurements were only taken for the 2450 model.

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): 01/30/08


Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Frequency (MHz)	Quasi-Peak Amplitude (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB μ V)	Average Amplitude (dB μ V)	Average Limit (dB μ V)	Average Margin (dB μ V)
11.89	41.32	73	-31.68	35.46	60	-24.54
12.14	41.45	73	-31.55	37.94	60	-22.06
23.13	43.38992	73	-29.6101	38.92992	60	-21.0701
16.23	38.6	73	-34.4	30.09	60	-29.91
9.938	36.49669333	73	-36.5033	25.76669333	60	-34.2333
4.893	32.08	73	-40.92	23.21	60	-36.79

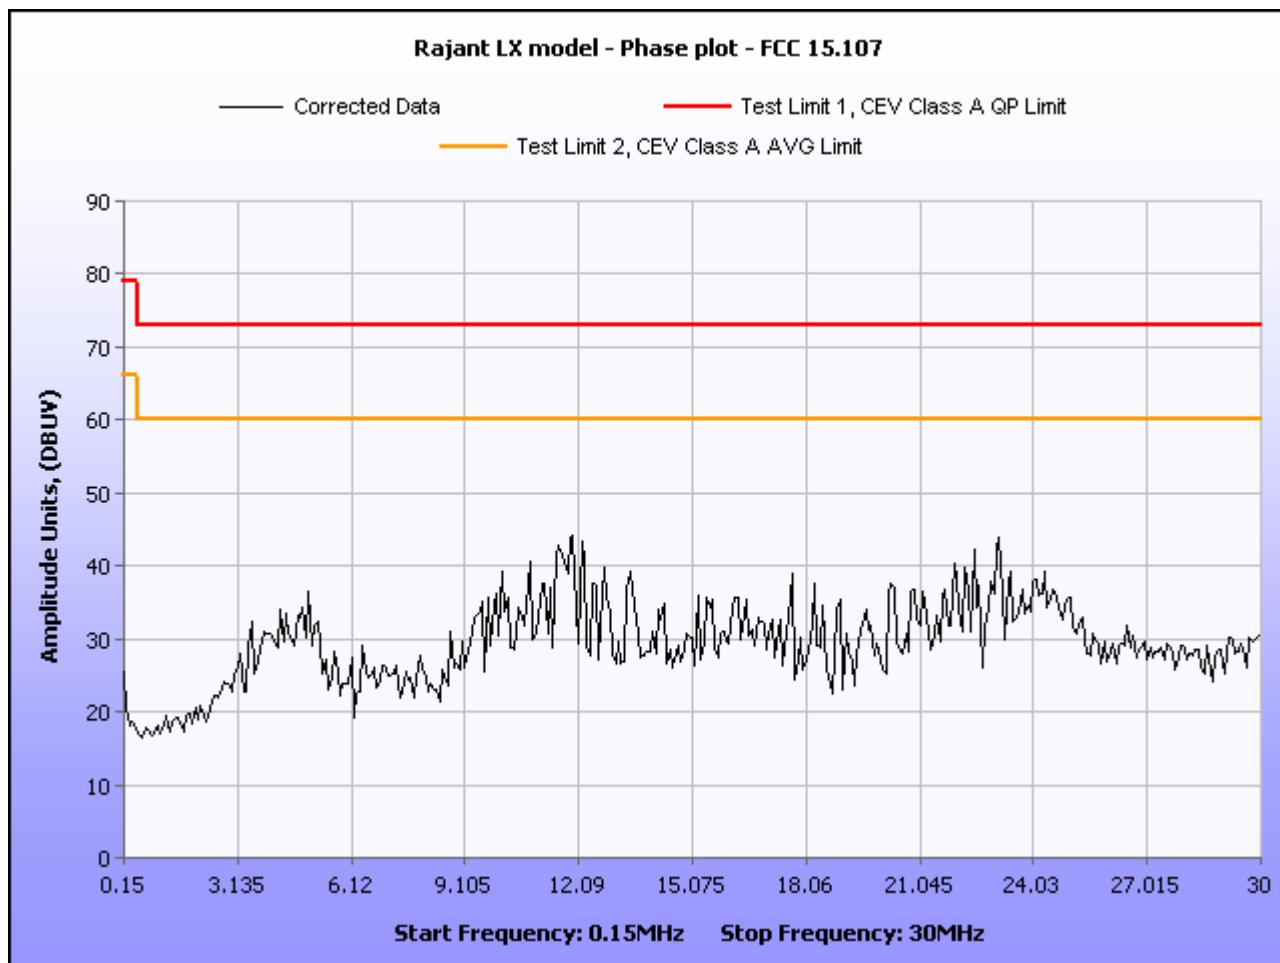Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz)

Plot 1. Conducted Emission, Phase Line Plot, §15.107

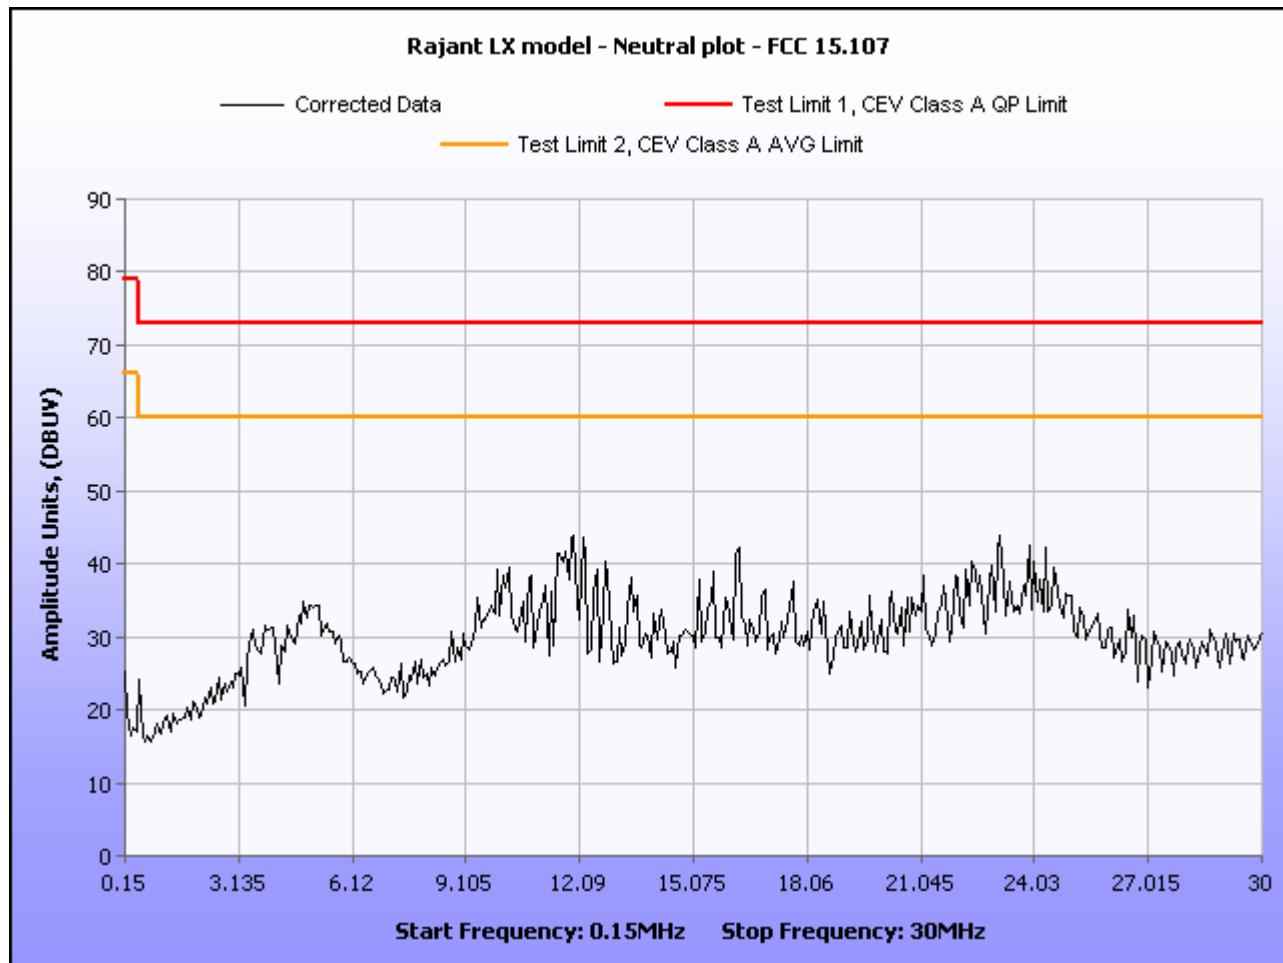Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

Frequency (MHz)	Quasi-Peak Amplitude (dB μ V)	Quasi-Peak Limit (dB μ V)	Quasi-Peak Margin (dB μ V)	Average Amplitude (dB μ V)	Average Limit (dB μ V)	Average Margin (dB μ V)
23.13	45.55992	73	-27.4401	39.49992	60	-20.5001
11.89	44.14	73	-28.86	37.87	60	-22.13
3.895	30.86	73	-42.14	22.84	60	-37.16
5.032	33.85	73	-39.15	21.15	60	-38.85
24.35	41.3804	73	-31.6196	22.8304	60	-37.1696
9.94	37.2368	73	-35.7632	16.7768	60	-43.2232

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)

Plot 2. Conducted Emission, Neutral Line Plot, §15.107

Conducted Emission Limits Test Setup



Photograph 1. Conducted Emissions Test Setup



Radiated Emission Limits

§ 15.109 Radiated Emissions Limits

Test Requirement(s): **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class A limits expressed in Table 10.

15.109 (b) The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB μ V/m)	
	§15.109 (b), Class A Limit (dB μ V) @ 10m	§15.109 (a), Class A Limit (dB μ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)

Test Procedures:

The EUT was placed inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

Test Results:

The EUT was found to comply with the Class A requirement(s) of this section. Measured emissions were below applicable limits. Final measurements have been made on the LX 2450 and the LX 2490. For the LX 2450, measurements were made in two configurations; DC POE and AC POE. For the LX 2490, measurements were made with the AC POE. These particular measurements were made because pre-scans revealed they had the highest emissions.

Test Engineer(s): Len Knight and Dusmantha Tennakoon

Test Date(s): 02/04/08 and 05/23/2008



Radiated Emissions Limits Test Results, Class A

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.624	109	H	2.95	22.05	5.80	0.34	10.46	17.73	39.00	-21.27
30.624	301	V	1.00	41.50	4.40	0.34	10.46	35.78	39.00	-3.22
33.432	242	H	1.31	22.01	7.15	0.41	10.46	19.11	39.00	-19.89
33.432	194	V	1.00	40.06	5.75	0.41	10.46	35.76	39.00	-3.24
38.931	104	H	2.59	13.30	8.92	0.54	10.46	12.30	39.00	-26.70
38.931	361	V	1.04	36.43	7.84	0.54	10.46	34.34	39.00	-4.66
45.233	355	H	2.89	8.78	9.51	0.59	10.46	8.43	39.00	-30.57
45.233	13	V	1.02	34.24	9.03	0.59	10.46	33.40	39.00	-5.60
88.998	243	H	2.59	16.05	6.92	0.75	10.46	13.26	43.50	-30.24
88.998	361	V	0.99	30.10	6.62	0.75	10.46	27.01	43.50	-16.49
124.995	61	H	2.19	26.00	7.40	0.89	10.46	23.83	43.50	-19.67
124.995	108	V	1.00	31.87	7.90	0.89	10.46	30.20	43.50	-13.30
133.326	138	H	1.53	26.12	7.63	0.87	10.46	24.17	43.50	-19.33
133.326	40	V	1.00	33.60	7.80	0.87	10.46	31.81	43.50	-11.69
266.656	232	H	2.42	26.73	12.53	1.40	10.46	30.20	46.40	-16.20
266.656	221	V	1.00	34.90	12.43	1.40	10.46	38.27	46.40	-8.13
299.995	124	H	1.39	28.34	13.20	1.45	10.46	32.53	46.40	-13.87
299.995	0	V	2.45	29.55	12.60	1.45	10.46	33.14	46.40	-13.26
333.317	84	H	1.46	27.70	13.87	1.58	10.46	32.68	46.40	-13.72
333.317	206	V	2.12	28.71	14.43	1.58	10.46	34.26	46.40	-12.14
366.660	260	H	2.46	29.34	14.87	1.63	10.46	35.38	46.40	-11.02
366.660	249	V	2.22	32.86	15.17	1.63	10.46	39.20	46.40	-7.20

Table 11. Radiated Emissions Limits Test Results, AC POE, LX 2450

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.



Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.571	99	H	2.46	20.00	5.77	0.34	10.46	15.66	39.00	-23.34
30.571	131	V	1.00	39.40	4.37	0.34	10.46	33.66	39.00	-5.34
31.421	4	H	2.50	19.38	6.18	0.36	10.46	15.46	39.00	-23.54
31.421	0	V	1.00	39.20	4.78	0.36	10.46	33.88	39.00	-5.12
32.584	338	H	1.33	25.78	6.74	0.39	10.46	22.45	39.00	-16.55
32.584	-1	V	1.00	35.17	5.34	0.39	10.46	30.44	39.00	-8.56
32.625	346	H	2.14	26.83	6.76	0.39	10.46	23.52	39.00	-15.48
32.625	122	V	1.01	36.60	5.36	0.39	10.46	31.89	39.00	-7.11
39.461	57	H	2.25	12.00	9.06	0.55	10.46	11.15	39.00	-27.85
39.461	283	V	1.00	37.75	8.02	0.55	10.46	35.85	39.00	-3.15
42.963	58	H	2.08	15.01	9.38	0.58	10.46	14.51	39.00	-24.49
*42.963	194	V	1.00	39.01	8.67	0.58	10.46	37.80	39.00	-1.20
43.808	63	H	3.07	19.41	9.43	0.58	10.46	18.96	39.00	-20.04
*43.808	239	V	1.00	39.15	8.81	0.58	10.46	38.08	39.00	-0.92
44.209	48	H	3.08	17.50	9.45	0.59	10.46	17.08	39.00	-21.92
44.209	211	V	1.00	35.20	8.87	0.59	10.46	34.20	39.00	-4.80
51.182	234	H	4.01	14.29	9.85	0.63	10.46	14.31	39.00	-24.69
51.182	73	V	1.00	33.34	9.79	0.63	10.46	33.30	39.00	-5.70
53.338	236	H	4.00	16.08	9.93	0.64	10.46	16.20	39.00	-22.80
53.338	217	V	1.03	33.06	9.97	0.64	10.46	33.21	39.00	-5.79
86.070	195	H	2.31	16.61	6.69	0.75	10.46	13.59	39.00	-25.41
86.070	295	V	1.11	30.78	6.68	0.75	10.46	27.75	39.00	-11.25
133.320	108	H	1.47	26.15	7.63	0.87	10.46	24.20	43.50	-19.30
133.320	74	V	1.02	33.98	7.80	0.87	10.46	32.19	43.50	-11.31
299.975	11	H	1.73	37.80	13.20	1.45	10.46	41.99	46.40	-4.41
299.975	163	V	1.00	37.09	12.60	1.45	10.46	40.68	46.40	-5.72
333.319	0	H	1.70	34.14	13.87	1.58	10.46	39.12	46.40	-7.28
333.319	127	V	0.99	34.87	14.43	1.58	10.46	40.42	46.40	-5.98
366.651	343	H	1.22	30.76	14.87	1.63	10.46	36.80	46.40	-9.60
366.651	275	V	0.99	33.70	15.17	1.63	10.46	40.04	46.40	-6.36

Table 12. Radiated Emissions Limits Test Results, DC POE, LX 2450


Note 1: * - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

Note 2: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.




Rajant Corporation
Breadcrumb Model LX

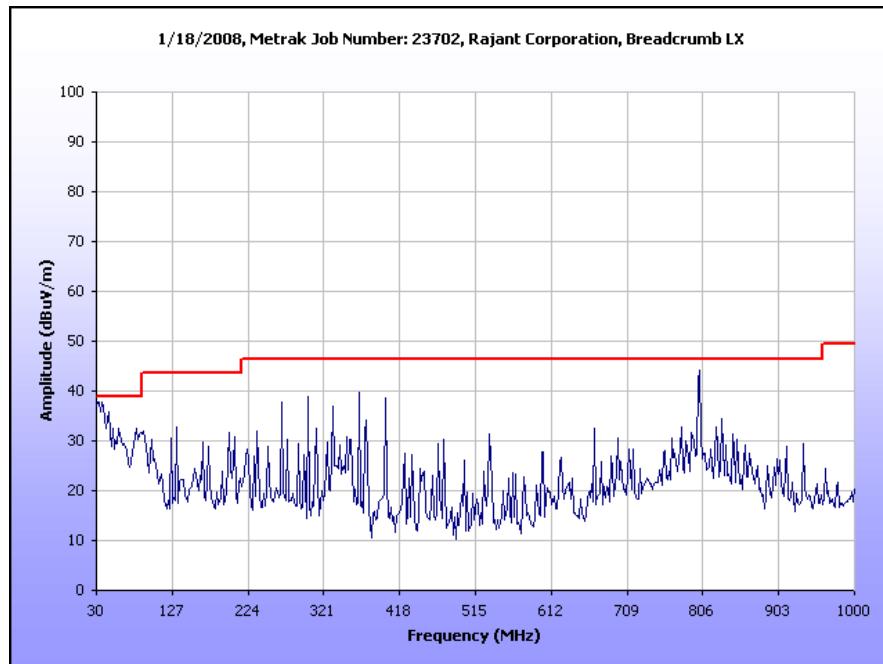Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003



Plot 3. Radiated Emissions, Pre-Scan with AC POE, LX 2450

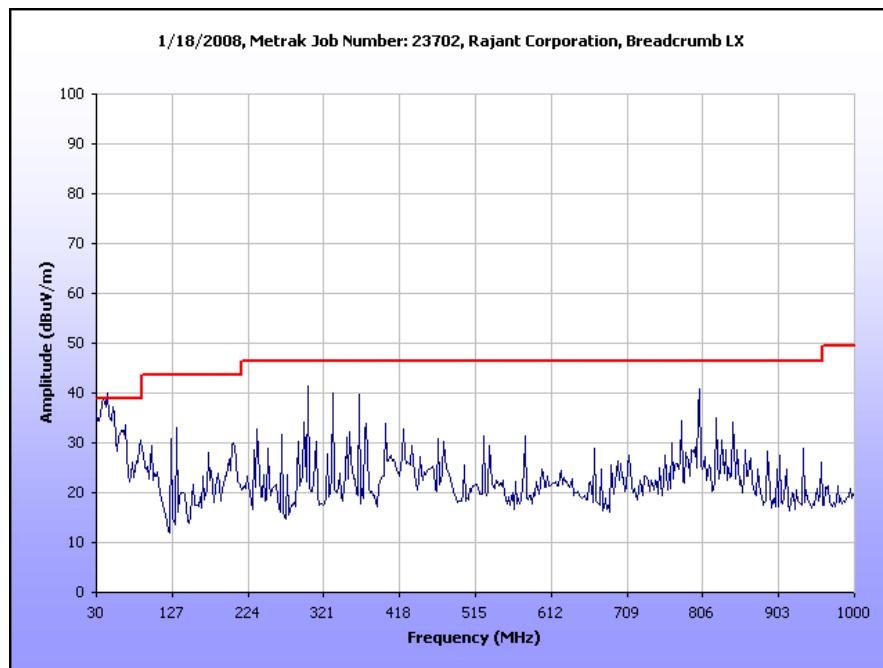

Plot 4. Radiated Emissions, Pre-Scan with DC POE, LX 2450



Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.624	109	H	2.95	22.05	5.80	0.34	10.46	17.73	40.00	-22.27
30.624	301	V	1.00	41.50	4.40	0.34	10.46	35.78	40.00	-4.22
33.432	242	H	1.31	22.01	7.15	0.41	10.46	19.11	40.00	-20.89
33.432	194	V	1.00	40.06	5.75	0.41	10.46	35.76	40.00	-4.24
38.931	104	H	2.59	13.30	8.92	0.54	10.46	12.30	40.00	-27.70
38.931	361	V	1.04	36.43	7.84	0.54	10.46	34.34	40.00	-5.66
45.233	355	H	2.89	8.78	9.51	0.59	10.46	8.43	40.00	-31.57
45.233	13	V	1.02	34.24	9.03	0.59	10.46	33.40	40.00	-6.60
88.998	243	H	2.59	16.05	6.92	0.75	10.46	13.26	40.00	-26.74
88.998	361	V	0.99	30.10	6.62	0.75	10.46	27.01	40.00	-12.99
124.995	61	H	2.19	26.00	7.40	0.89	10.46	23.83	40.00	-16.17
124.995	108	V	1.00	31.87	7.90	0.89	10.46	30.20	40.00	-9.80
133.326	138	H	1.53	26.12	7.63	0.87	10.46	24.17	40.00	-15.83
133.326	40	V	1.00	33.60	7.80	0.87	10.46	31.81	40.00	-8.19
266.656	232	H	2.42	26.73	12.53	1.40	10.46	30.20	47.00	-16.80
266.656	221	V	1.00	34.90	12.43	1.40	10.46	38.27	47.00	-8.73
299.995	124	H	1.39	28.34	13.20	1.45	10.46	32.53	47.00	-14.47
299.995	0	V	2.45	29.55	12.60	1.45	10.46	33.14	47.00	-13.86
333.317	84	H	1.46	27.70	13.87	1.58	10.46	32.68	47.00	-14.32
333.317	206	V	2.12	28.71	14.43	1.58	10.46	34.26	47.00	-12.74
366.660	260	H	2.46	29.34	14.87	1.63	10.46	35.38	47.00	-11.62
366.660	249	V	2.22	32.86	15.17	1.63	10.46	39.20	47.00	-7.80
30.624	109	H	2.95	22.05	5.80	0.34	10.46	17.73	40.00	-22.27
30.624	301	V	1.00	41.50	4.40	0.34	10.46	35.78	40.00	-4.22
33.432	242	H	1.31	22.01	7.15	0.41	10.46	19.11	40.00	-20.89
33.432	194	V	1.00	40.06	5.75	0.41	10.46	35.76	40.00	-4.24
38.931	104	H	2.59	13.30	8.92	0.54	10.46	12.30	40.00	-27.70
38.931	361	V	1.04	36.43	7.84	0.54	10.46	34.34	40.00	-5.66
45.233	355	H	2.89	8.78	9.51	0.59	10.46	8.43	40.00	-31.57
45.233	13	V	1.02	34.24	9.03	0.59	10.46	33.40	40.00	-6.60

Table 13. Radiated Emissions Limits Test Results, AC-DC POE, ICES-003, LX 2450

Note: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3 \text{ m}/10 \text{ m})$ as expressed in the 'Distance Correction' column.



Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.571	99	H	2.46	20.00	5.77	0.34	10.46	15.66	40.00	-24.34
30.571	131	V	1.00	39.40	4.37	0.34	10.46	33.66	40.00	-6.34
31.421	4	H	2.50	19.38	6.18	0.36	10.46	15.46	40.00	-24.54
31.421	0	V	1.00	39.20	4.78	0.36	10.46	33.88	40.00	-6.12
32.584	338	H	1.33	25.78	6.74	0.39	10.46	22.45	40.00	-17.55
32.584	-1	V	1.00	35.17	5.34	0.39	10.46	30.44	40.00	-9.56
32.625	346	H	2.14	26.83	6.76	0.39	10.46	23.52	40.00	-16.48
32.625	122	V	1.01	36.60	5.36	0.39	10.46	31.89	40.00	-8.11
39.461	57	H	2.25	12.00	9.06	0.55	10.46	11.15	40.00	-28.85
39.461	283	V	1.00	37.75	8.02	0.55	10.46	35.85	40.00	-4.15
42.963	58	H	2.08	15.01	9.38	0.58	10.46	14.51	40.00	-25.49
*42.963	194	V	1.00	39.01	8.67	0.58	10.46	37.80	40.00	-2.20
43.808	63	H	3.07	19.41	9.43	0.58	10.46	18.96	40.00	-21.04
*43.808	239	V	1.00	39.15	8.81	0.58	10.46	38.08	40.00	-1.92
44.209	48	H	3.08	17.50	9.45	0.59	10.46	17.08	40.00	-22.92
44.209	211	V	1.00	35.20	8.87	0.59	10.46	34.20	40.00	-5.80
51.182	234	H	4.01	14.29	9.85	0.63	10.46	14.31	40.00	-25.69
51.182	73	V	1.00	33.34	9.79	0.63	10.46	33.30	40.00	-6.70
53.338	236	H	4.00	16.08	9.93	0.64	10.46	16.20	40.00	-23.80
53.338	217	V	1.03	33.06	9.97	0.64	10.46	33.21	40.00	-6.79
86.070	195	H	2.31	16.61	6.69	0.75	10.46	13.59	40.00	-26.41
86.070	295	V	1.11	30.78	6.68	0.75	10.46	27.75	40.00	-12.25
133.320	108	H	1.47	26.15	7.63	0.87	10.46	24.20	40.00	-15.80
133.320	74	V	1.02	33.98	7.80	0.87	10.46	32.19	40.00	-7.81
299.975	11	H	1.73	37.80	13.20	1.45	10.46	41.99	47.00	-5.01
299.975	163	V	1.00	37.09	12.60	1.45	10.46	40.68	47.00	-6.32
333.319	0	H	1.70	34.14	13.87	1.58	10.46	39.12	47.00	-7.88
333.319	127	V	0.99	34.87	14.43	1.58	10.46	40.42	47.00	-6.58
366.651	343	H	1.22	30.76	14.87	1.63	10.46	36.80	47.00	-10.20
366.651	275	V	0.99	33.70	15.17	1.63	10.46	40.04	47.00	-6.96

Table 14. Radiated Emissions Limits Test Results, DC POE, ICES-003, LX 2450

Note 1: * - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

Note 2: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.



Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
399.98109	136	H	1.23	35.92	15.40	1.37	10.46	42.23	46.4	-4.17
*399.98109	360	V	1	38.5	15.30	1.37	10.46	44.71	46.4	-1.69
199.98691	0	H	2.62	27.58	10.30	1.20	10.46	28.62	43.5	-14.88
199.98691	360	V	1.63	38.85	10.30	1.20	10.46	39.89	43.5	-3.61
99.97996	178	H	1.9	35.78	7.80	1.03	10.46	34.15	43.5	-9.35
99.97996	0	V	2.43	42.08	7.30	1.03	10.46	39.95	43.5	-3.55
333.31214	155	H	2.5	27.23	13.87	1.20	10.46	31.84	46.4	-14.56
*333.31214	141	V	1	39.23	14.43	1.20	10.46	44.40	46.4	-2.00
33.331649	252	H	2.42	26.37	7.10	0.64	10.46	23.65	39	-15.35
33.331649	360	V	1	37.76	5.70	0.64	10.46	33.64	39	-5.36
266.64775	296	H	1	33.13	12.53	1.31	10.46	36.52	46.4	-9.88
*266.64775	170	V	1	42.07	12.43	1.31	10.46	45.36	46.4	-1.04


Table 15. Radiated Emissions Limits Test Results, LX 2490

Note 1: * - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

Note 2: The EUT was tested at 3 m. The data has been corrected for comparison with the 10 m limit using the formula: $20\log(3\text{ m}/10\text{ m})$ as expressed in the 'Distance Correction' column.

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna Height (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
399.98109	136	H	1.23	35.92	15.40	1.37	10.46	42.23	47	-4.77
399.98109	360	V	1	38.5	15.30	1.37	10.46	44.71	47	-2.29
199.98691	0	H	2.62	27.58	10.30	1.20	10.46	28.62	40	-11.38
199.98691	360	V	1.63	38.85	10.30	1.20	10.46	39.89	40	-0.11
99.97996	178	H	1.9	35.78	7.80	1.03	10.46	34.15	40	-5.85
99.97996	0	V	2.43	42.08	7.30	1.03	10.46	39.95	40	-0.05
333.31214	155	H	2.5	27.23	13.87	1.20	10.46	31.84	47	-15.16
333.31214	141	V	1	39.23	14.43	1.20	10.46	44.40	47	-2.60
33.331649	252	H	2.42	26.37	7.10	0.64	10.46	23.65	40	-16.35
33.331649	360	V	1	37.76	5.70	0.64	10.46	33.64	40	-6.36
266.64775	296	H	1	33.13	12.53	1.31	10.46	36.52	47	-10.48
266.64775	170	V	1	42.07	12.43	1.31	10.46	45.36	47	-1.64

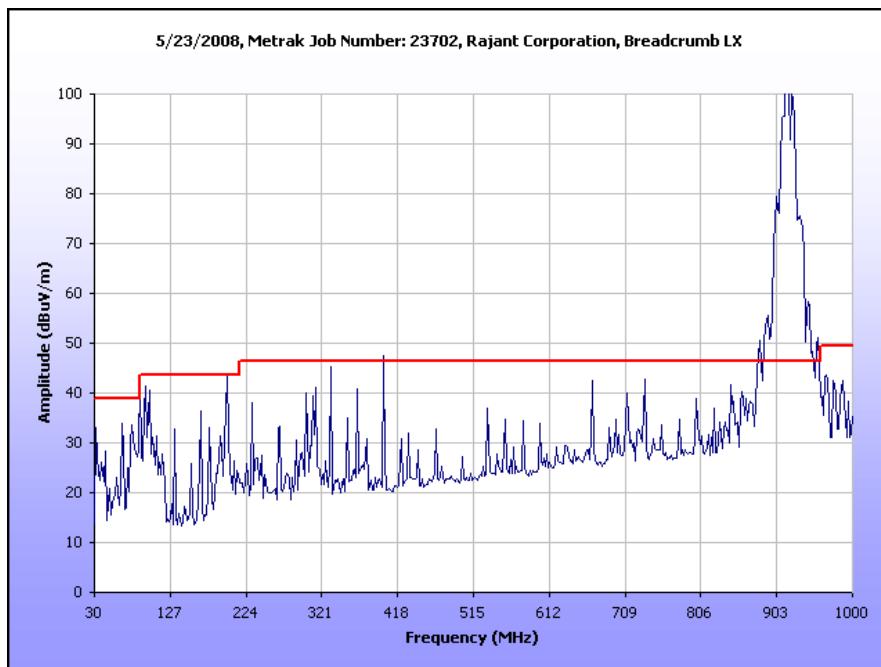Table 16. Radiated Emissions Limits Test Results, ICES-003 Limits, LX 2490




Plot 5. Radiated Emissions, Pre-Scan, LX 2490



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

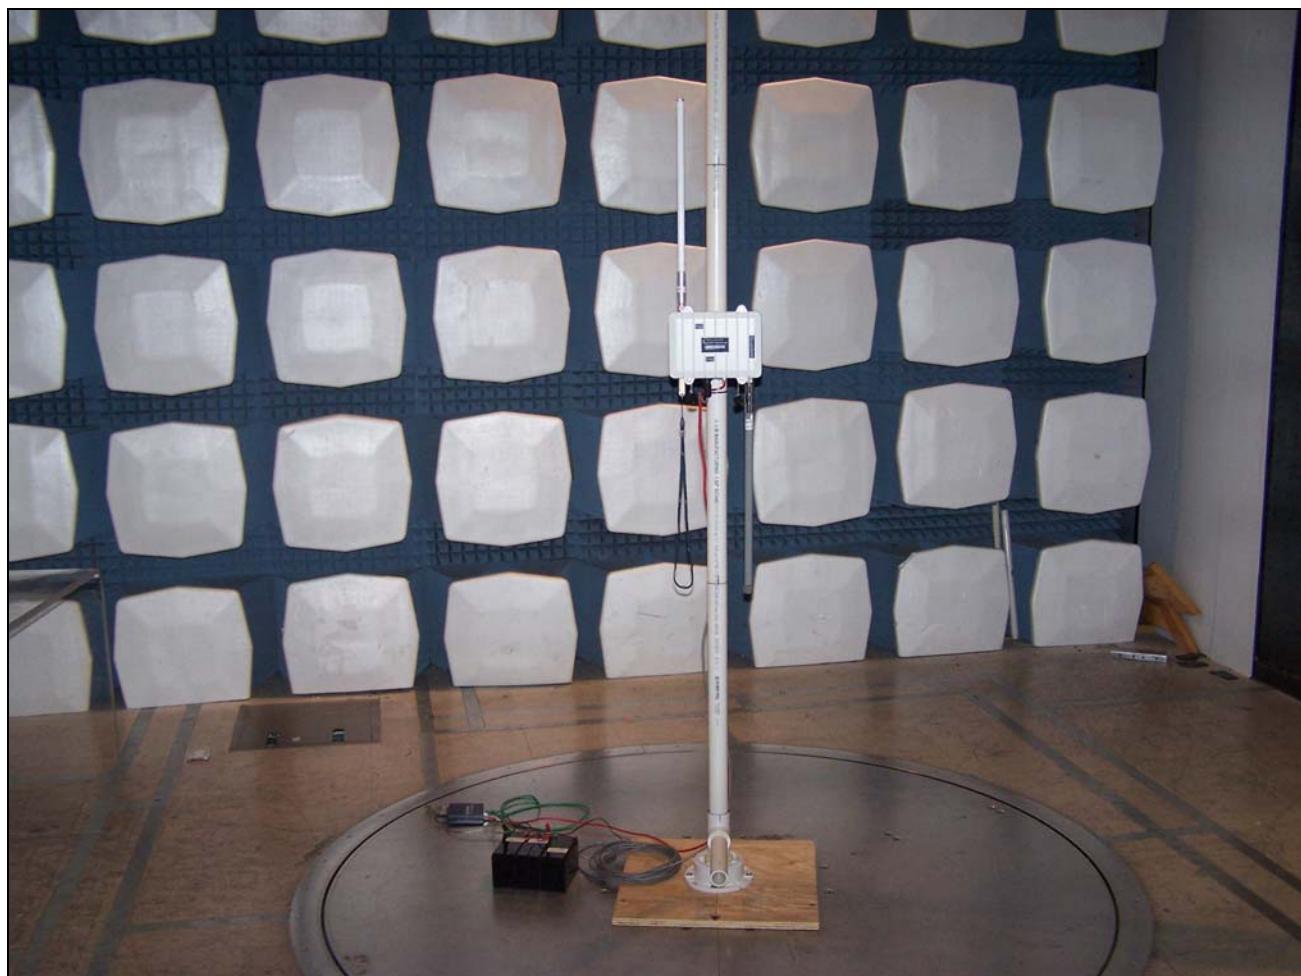Radiated Emission Limits Test Setup




Photograph 2. Radiated Emission Test Setup, LX 2450



Rajant Corporation
Breadcrumb Model LX

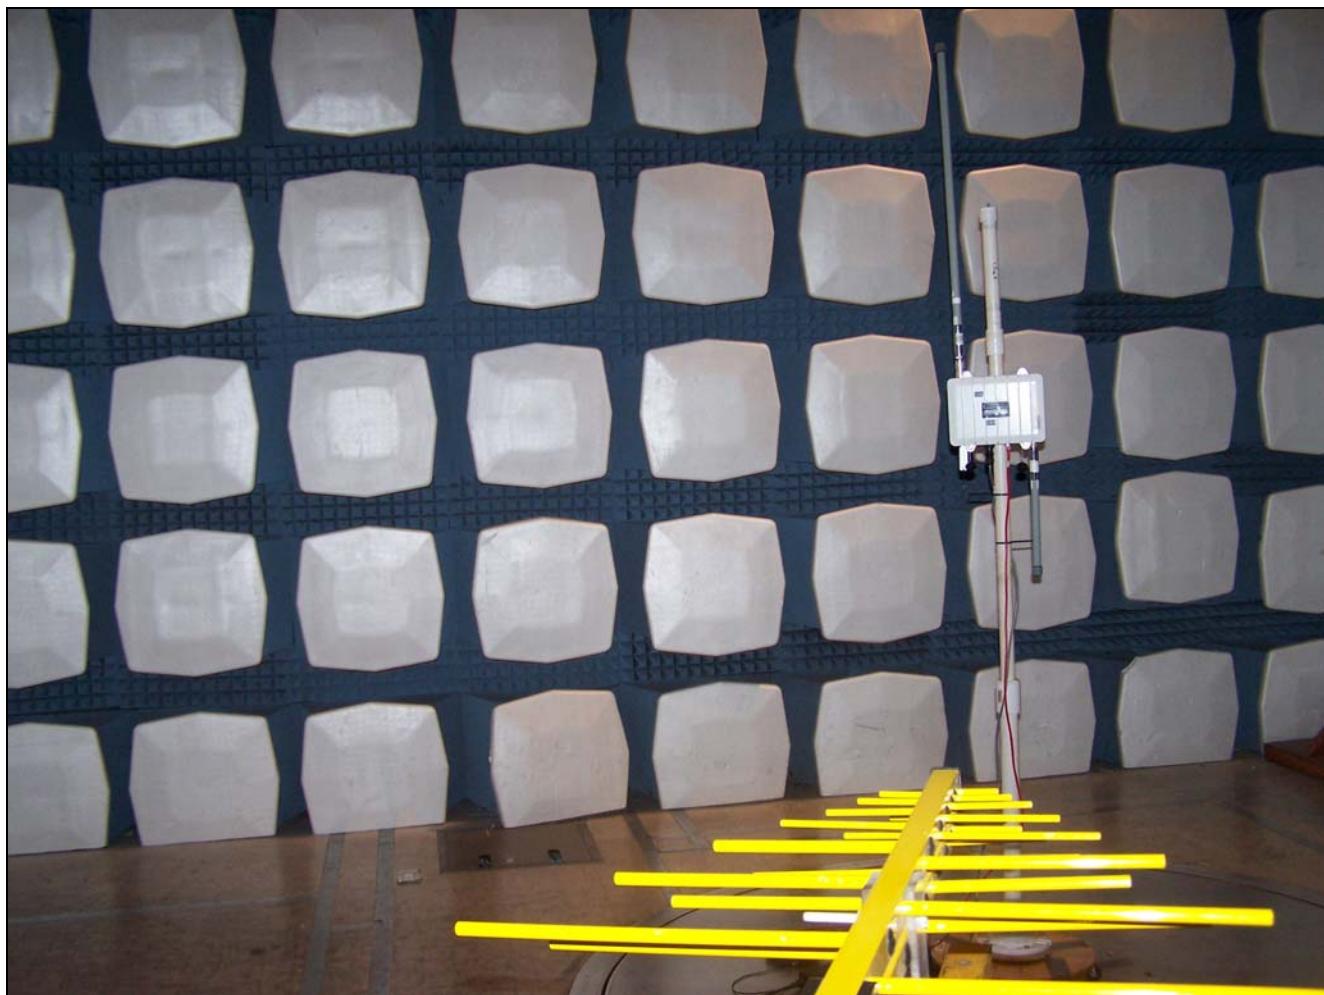Electromagnetic Compatibility
Unintentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003



Photograph 3. Radiated Emission Test Setup, LX 2490



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

IV. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement: **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results: The antennas are professionally installed. The gain of the antenna is 5 dBi for 2.4 GHz and 900 MHz. The gain for the antenna is 6 dBi for 5.8 GHz. The EUT is compliant with §15.203

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): 01/29/08 and 05/20/08



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s): **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 17. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure: The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

Test Results: The EUT was compliant with the Conducted Emission limits of **§15.207(a)** for Intentional Radiators. See following pages for detailed test results. Pre-scans of all models revealed that the emissions profiles are similar. Therefore, final measurements were only made on its 2450 unit.

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): 01/30/08

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1504	17.48	0	17.48	79	-61.52	6.23	0	6.23	66	-59.77
3.58	36.64	0.17	36.81	73	-36.19	29.26	0.17	29.43	60	-30.57
5.143	38.19	0.17	38.36	73	-34.64	31.47	0.17	31.64	60	-28.36
10.06	34.95	0.17096	35.12096	73	-37.87904	29.43	0.17096	29.60096	60	-30.39904
11.89	39.16	0.20024	39.36024	73	-33.63976	33.93	0.20024	34.13024	60	-25.86976
23.13	41.52	0.22671	41.74671	73	-31.25329	35.38	0.22671	35.60671	60	-24.39329

Table 18. Conducted Emissions - Voltage, Phase (120 VAC, 60 Hz)



Plot 6. Conducted Emissions, Phase Line

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1504	19.03	0	19.03	79	-59.97	5.82	0	5.82	66	-60.18
3.579	37.46	0.17	37.63	73	-35.37	35.32	0.17	35.49	60	-24.51
5.142	38.16	0.17	38.33	73	-34.67	35.81	0.17	35.98	60	-24.02
10.06	37.93	0.17096	38.10096	73	-34.89904	35.13	0.17096	35.30096	60	-24.69904
11.89	42.86	0.20024	43.06024	73	-29.93976	38.29	0.20024	38.49024	60	-21.50976
23.13	44.96	0.22671	45.18671	73	-27.81329	38.26	0.22671	38.48671	60	-21.51329

Table 19. Conducted Emissions - Voltage, Neutral (120 VAC, 60 Hz)



Plot 7. Conducted Emissions, Neutral Line



Photograph 4. Conducted Emissions, Test Setup



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB and 99% Bandwidth

Test Requirements: **§ 15.247(a):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Results Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

Test Requirements: **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 20. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 20, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Test Procedure: The transmitters were connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Test Results: Equipment complies with the Peak Power Output limits of § 15.247(b).

Mode	Channel #	Power (dBm)	Maximum Antenna gain (dBi)	Limit (dBm)	Pass/Fail
b mode	1	26.79	5	30	Pass
	6	28.75	5	30	Pass
	11	27.52	5	30	Pass
g mode	1	25.40	5	30	Pass
	6	27.9	5	30	Pass
	11	25.01	5	30	Pass
a mode	149	26.25	6	30	Pass
	157	26.03	6	30	Pass
	165	26.07	6	30	Pass

Table 21. Peak Output Power, 2.4 GHz and 5.8 GHz

Mode	Frequency (MHz)	Conducted Peak power (dBm)	Maximum Antenna Gain (dBi)	Limit (dBm)	Pass/Fail
b mode	907	27.43	5	30	Pass
	912	27.35	5	30	Pass
	917	27.48	5	30	Pass
g mode	907	24.35	5	30	Pass
	912	24.41	5	30	Pass
	917	24.77	5	30	Pass

Table 22. Peak Output Power, 900 MHz

Note: Only the three channels listed are used by the 900 MHz radio.

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): 01/29/08 and 05/22/08



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output and RF Exposure

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

Test Results: The EUT was compliant with the requirements of this section.

2.4 GHz Band	5.8 GHz	900 MHz
$S = PG/4\pi R^2$	$S = PG/4\pi R^2$	$S = PG/4\pi R^2$
$\frac{(751.67\text{mW})(3.16)}{4\pi(20)^2}$	$\frac{(422.69\text{mW})(3.98)}{4\pi(20)^2}$	$\frac{(561.09\text{mW})(3.16)}{4\pi(20)^2}$
$S = 0.472\text{mW/cm}^2$	$S = 0.335\text{mW/cm}^2$	$S = 0.353\text{mW/cm}^2$

Therefore, the EUTs meet the Uncontrolled Exposure limit.

Test Engineer(s): Len Knight and Dusmantha Tennakoon



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions – Radiated and Conducted

Test Requirements: §15.247(d); §15.205: Emissions outside the frequency band.

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

§15.205(a): Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
¹ 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	(²)

Table 23. Restricted Bands of Operation

¹ Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

² Above 38.6



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (2.4 GHz and 5.8 GHz)

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824	pk	V	50.9	33.5	24.7	9.54	50.2	74	-23.8
4824	avg	V	37.61	33.5	24.7	9.54	36.9	54	-17.1
7236	pk	V	50.55	37.0	25.6	9.54	52.4	74	-21.6
7236	avg	V	37.71	37.0	25.6	9.54	39.6	54	-14.4
9648	pk	V	48.04	38.5	22.2	9.54	54.8	74	-19.2

Table 24. Radiated Emissions, Low Channel 2412 MHz, b Mode, 2.4 GHz

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	pk	V	50.07	33.5	24.2	9.54	49.8	74	-24.2
4874	avg	V	37.67	33.5	24.2	9.54	37.4	54	-16.6
7311	pk	V	49.65	37.0	25.5	9.54	51.6	74	-22.4
7311	avg	V	39.86	37.0	25.5	9.54	41.8	54	-12.2
9748	pk	V	47.64	38.5	22.3	9.54	54.3	74	-19.7

Table 25. Radiated Emissions, Mid Channel 2437 MHz, b Mode, 2.4 GHz

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4924	pk	V	47.96	33.5	24.2	9.54	47.7	74	-26.3
4924	avg	V	36.02	33.5	24.2	9.54	35.8	54	-18.2
7386	pk	V	51.03	37.0	25.5	9.54	53.0	74	-21.0
7386	avg	V	38.41	37.0	25.5	9.54	40.4	54	-13.6
9848	pk	V	47.74	38.5	22.3	9.54	54.4	74	-19.6

Table 26. Radiated Emissions, High Channel 2462 MHz, b Mode, 2.4 GHz

Note: All other emissions were measured at the noise floor of the spectrum analyzer.



Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4824	pk	V	48.88	33.5	24.7	9.54	48.1	74	-25.9
4824	avg	V	36.48	33.5	24.7	9.54	35.7	54	-18.3
7236	pk	V	53.51	37.0	25.6	9.54	55.4	74	-18.6
7236	avg	V	38.2	37.0	25.6	9.54	40.1	54	-13.9
9648	pk	V	47.43	38.5	22.2	9.54	54.2	74	-19.8

Table 27. Radiated Emissions, Low Channel 2412 MHz, g Mode, 2.4 GHz

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	pk	V	48.78	33.5	24.2	9.54	48.5	74	-25.5
4874	avg	V	37.11	33.5	24.2	9.54	36.9	54	-17.1
7311	pk	V	70.45	37.0	25.5	9.54	72.4	74	-1.6
7311	avg	V	45.86	37.0	25.5	9.54	47.8	54	-6.2
9748	pk	V	47.63	38.5	22.3	9.54	54.3	74	-19.7

Table 28. Radiated Emissions, Mid Channel 2437 MHz, g Mode, 2.4 GHz

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4874	pk	V	48.29	33.5	24.2	9.54	48.1	74	-26.0
4874	avg	V	36.14	33.5	24.2	9.54	35.9	54	-18.1
7311	pk	V	54.27	37.0	25.5	9.54	56.2	74	-17.8
7311	avg	V	37.21	37.0	25.5	9.54	39.2	54	-14.8
9748	pk	V	47.21	38.5	22.3	9.54	53.9	74	-20.1

Table 29. Radiated Emissions, High Channel 2462 MHz, g Mode, 2.4 GHz

Note: All other emissions were measured at the noise floor of the spectrum analyzer.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11490	pk	V	49.0	39.7	21.29	9.54	57.9	74	-16.2
11490	avg	V	37.5	39.7	21.29	9.54	46.3	54	-7.7
17235	pk	V	41.2	44.5	16.6	9.54	59.6	74	-14.4

Table 30. Radiated Emissions, Low Channel 5745 MHz, 5.8 GHz

Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11570	pk	V	49.5	39.7	21.1	9.54	58.6	74	-15.4
11570	avg	V	35.3	39.7	21.1	9.54	44.4	54	-9.6
17355	pk	V	40.2	44.5	17.9	9.54	57.3	74	-16.7

Table 31. Radiated Emissions, Mid Channel 5785 MHz, 5.8 GHz


Frequency (MHz)	Measurement Type	Antenna Polarity (H/V)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
11650	pk	V	50.2	39.7	21.4	9.54	59.0	74	-15.0
11650	avg	V	39.5	39.7	21.4	9.54	48.3	54	-5.7
17475	pk	V	42.3	44.5	18.5	9.54	58.8	74	-15.2

Table 32. Radiated Emissions, High Channel 5825 MHz, 5.8 GHz




Rajant Corporation
Breadcrumb Model LX

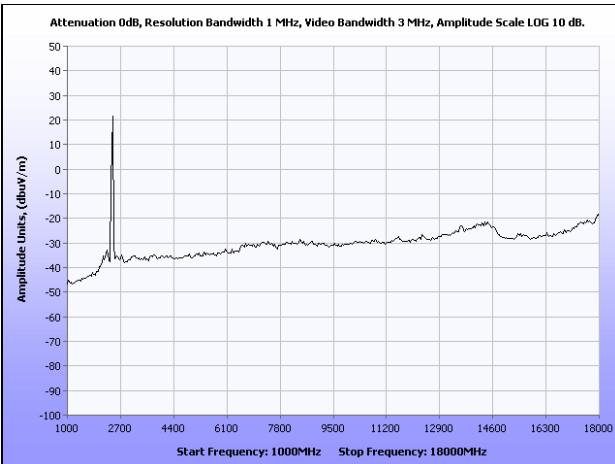
Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003




Low Channel, b mode, 2.4 GHz

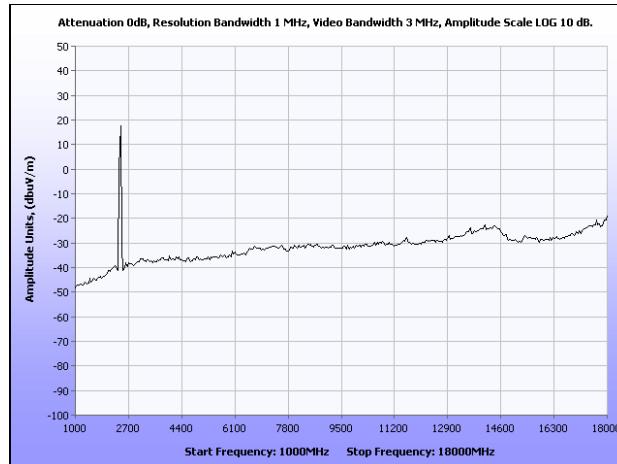


Low Channel, g mode, 2.4 GHz

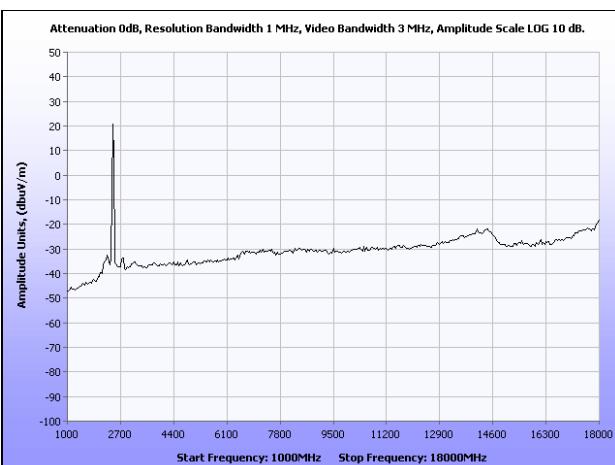


Mid Channel, b mode, 2.4 GHz

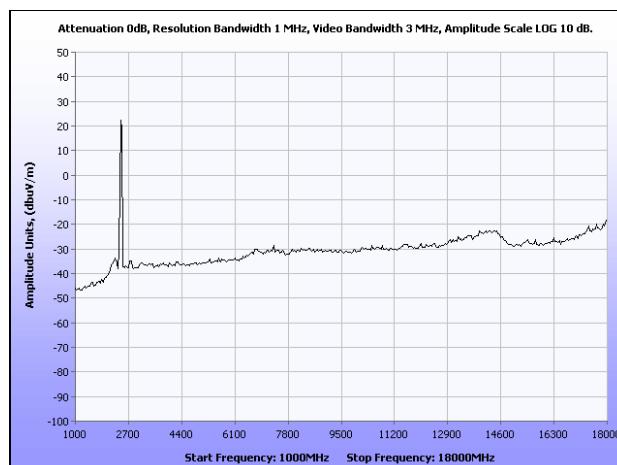

Mid Channel, g mode, 2.4 GHz

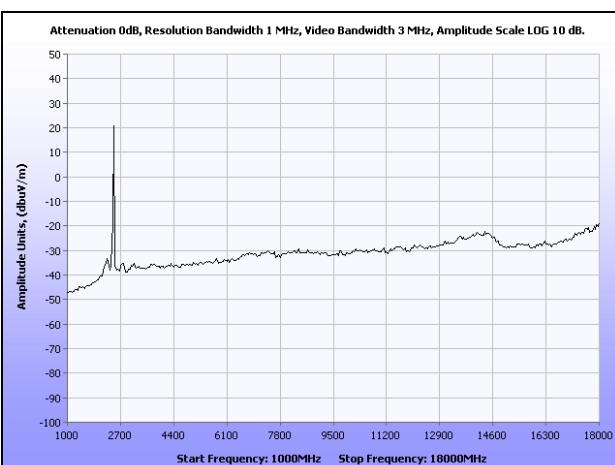

High Channel, b mode, 2.4 GHz

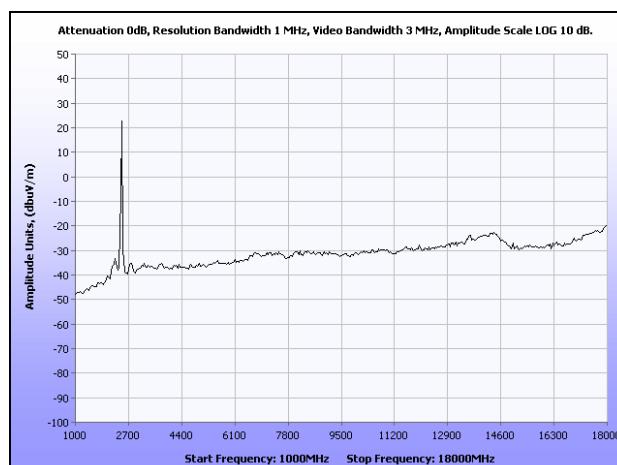


High Channel, g mode, 2.4 GHz




Rajant Corporation
Breadcrumb Model LX

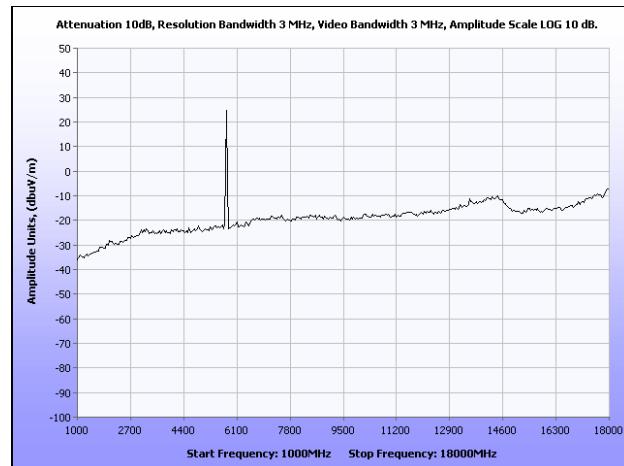
Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003




Low Channel, a mode, 5.8 GHz

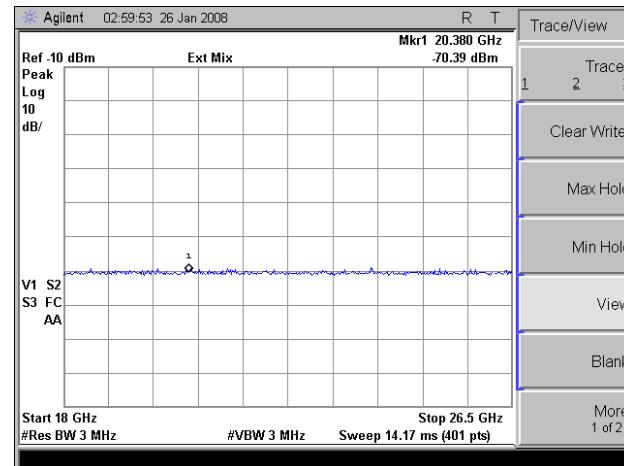


Low Channel, a mode, 5.8 GHz

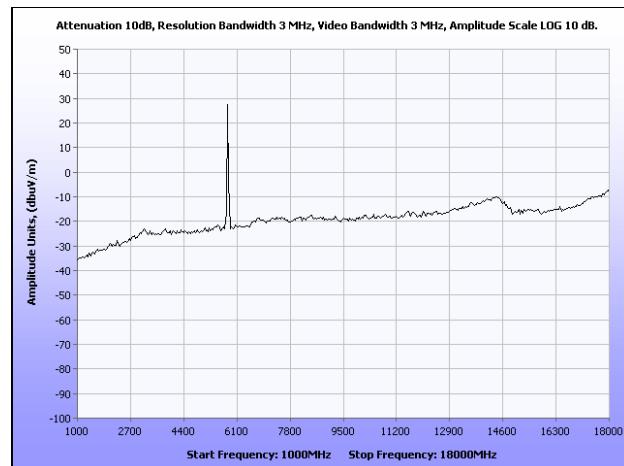


Mid Channel, a mode, 5.8 GHz

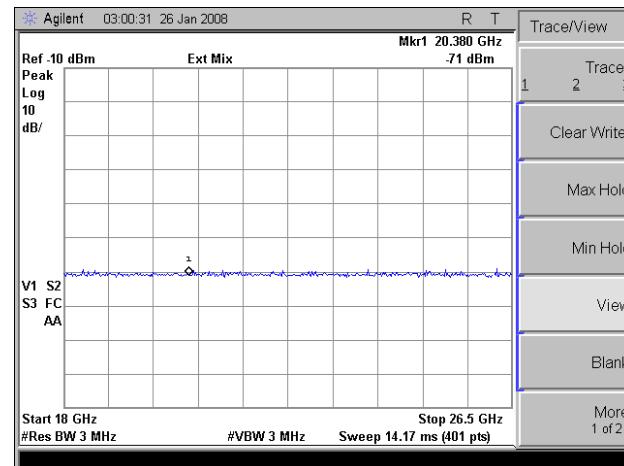

Mid Channel, a mode, 5.8 GHz

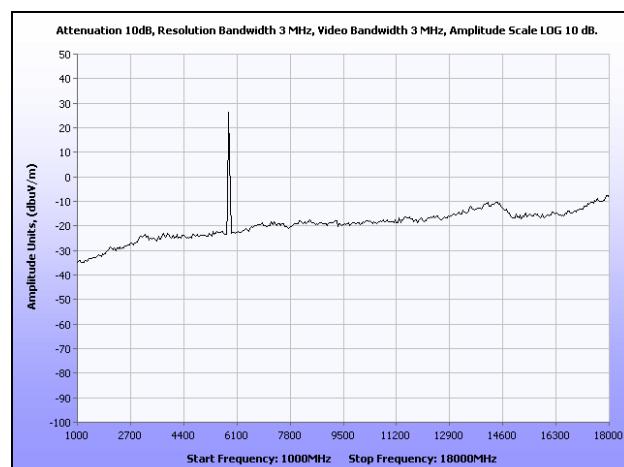

High Channel, a mode, 5.8 GHz

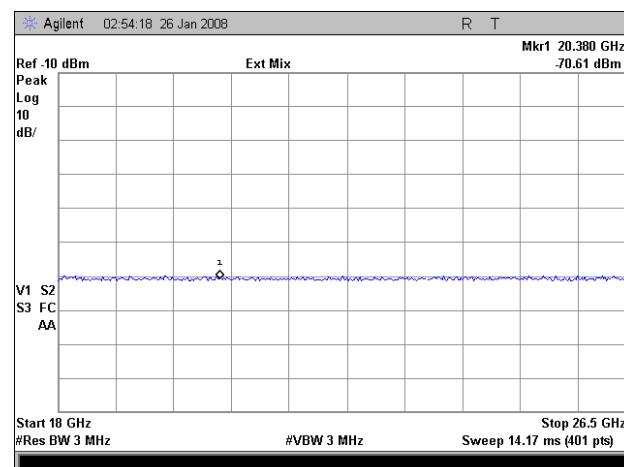

High Channel, a mode, 5.8 GHz



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Harmonic Emissions Requirements – Radiated (900 MHz)

Frequency (MHz)	Antenna Polarity	Corrected Amplitude @ 3m (dBuV/m)	Restricted Band	Measurement Type	Limit
1814	V	47.92	No	Peak	>20dBc
2721	V	59.42	Yes	Peak	74
2721	V	46.59	Yes	Avg	54
3628	V	45.36	Yes	Peak	74
3628	V	34.49	Yes	Avg	54
4535	V	59.53	Yes	Peak	74
4535	V	49.6	Yes	Avg	54

Table 33. Radiated Emissions, 900 MHz, Low Channel, b Mode

Frequency (MHz)	Antenna Polarity	Corrected Amplitude @ 3m (dBuV/m)	Restricted Band	Measurement Type	Limit
1824	V	43.21	No	Peak	>20dBc
2736	V	60.24	Yes	Peak	74
2736	V	45.32	Yes	Avg	54
3648	V	44.89	Yes	Peak	74
3648	V	35.26	Yes	Avg	54
4560	V	58.91	Yes	Peak	74
4560	V	48.9	Yes	Avg	54

Table 34. Radiated Emissions, 900 MHz, Mid Channel, b Mode

Frequency (MHz)	Antenna Polarity	Corrected Amplitude @ 3m (dBuV/m)	Restricted Band	Measurement Type	Limit
1834	V	48.73	No	Peak	>20dBc
2751	V	58.43	Yes	Peak	74
2751	V	50.43	Yes	Avg	54
3668	V	45.32	Yes	Peak	74
3668	V	36.57	Yes	Avg	54
4585	V	50.35	Yes	Peak	74
4585	V	45.25	Yes	Avg	54

Table 35. Radiated Emissions, 900 MHz, High Channel, b Mode

Note: All other emissions were measured at the noise floor of the spectrum analyzer.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Frequency (MHz)	Antenna Polarity	Corrected Amplitude @ 3m (dBuV/m)	Restricted Band	Measurement Type	Limit
1814	V	48.06	No	Peak	>20dBc
2721	V	69.81	Yes	Peak	74
2721	V	34.42	Yes	Avg	54
3628	V	44.21	Yes	Peak	74
3628	V	36.35	Yes	Avg	54
4535	V	66.02	Yes	Peak	74
4535	V	35.99	Yes	Avg	54

Table 36. Radiated Emissions, 900 MHz, Low Channel, g Mode

Frequency (MHz)	Antenna Polarity	Corrected Amplitude @ 3m (dBuV/m)	Restricted Band	Measurement Type	Limit
1824	V	42.57	No	Peak	>20dBc
2736	V	69.73	Yes	Peak	74
2736	V	31.95	Yes	Avg	54
3648	V	45.72	Yes	Peak	74
3648	V	35.46	Yes	Avg	54
4560	V	61.7	Yes	Peak	74
4560	V	39.44	Yes	Avg	54

Table 37. Radiated Emissions, 900 MHz, Mid Channel, g Mode


Frequency (MHz)	Antenna Polarity	Corrected Amplitude @ 3m (dBuV/m)	Restricted Band	Measurement Type	Limit
1834	V	38.68	No	Peak	>20dBc
2751	V	69.61	Yes	Peak	74
2751	V	34.61	Yes	Avg	54
3668	V	43.62	Yes	Peak	74
3668	V	33..24	Yes	Avg	54
4585	V	56.33	Yes	Peak	74
4585	V	36.8	Yes	Avg	54

Table 38. Radiated Emissions, 900 MHz, High Channel, g Mode




Rajant Corporation
Breadcrumb Model LX

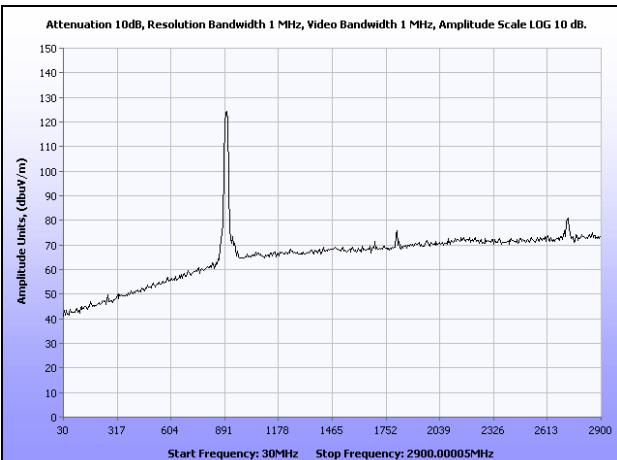
Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003




Low Channel, b mode, 900 MHz

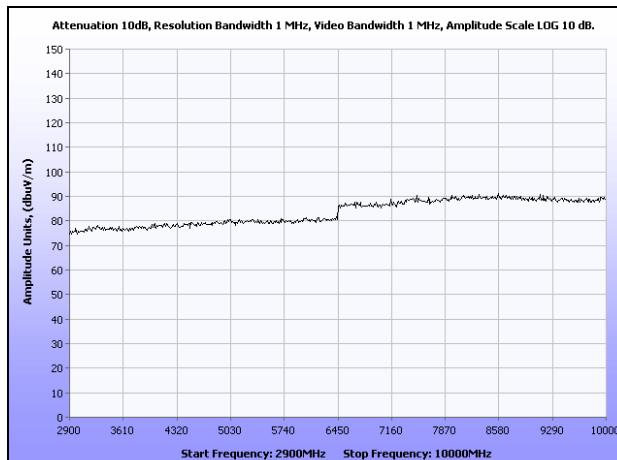


Low Channel, b mode, 900 MHz

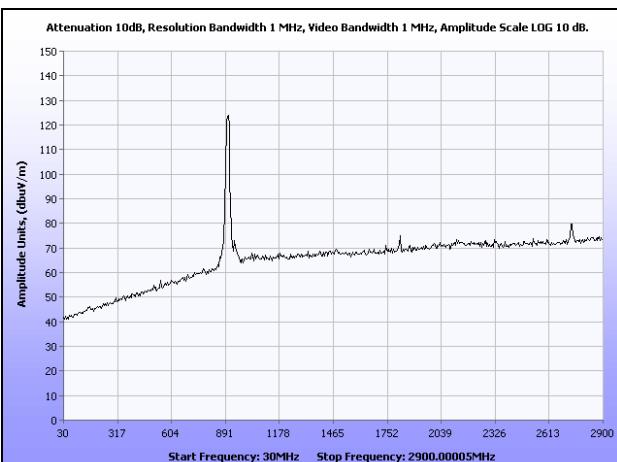


Mid Channel, b mode, 900 MHz

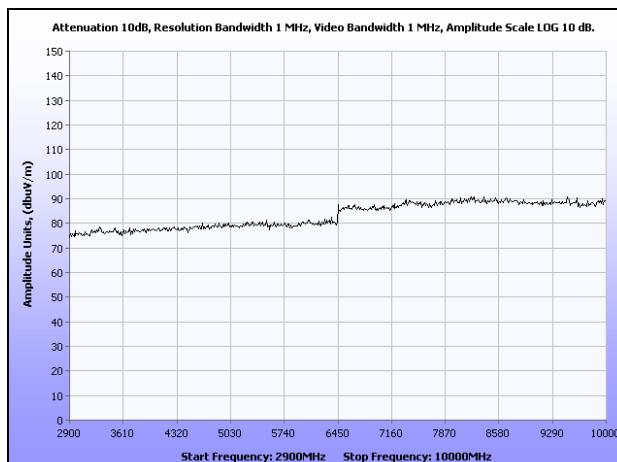

Mid Channel, b mode, 900 MHz

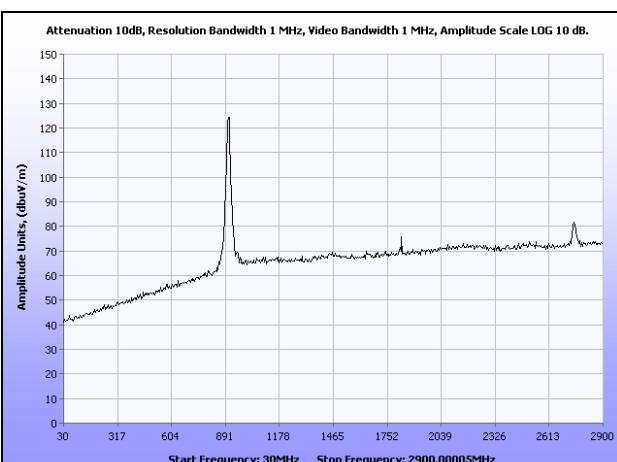

High Channel, b mode, 900 MHz

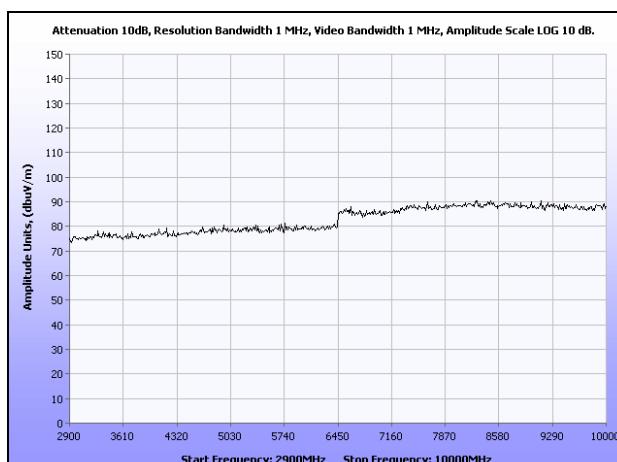


High Channel, b mode, 900 MHz




Rajant Corporation
Breadcrumb Model LX

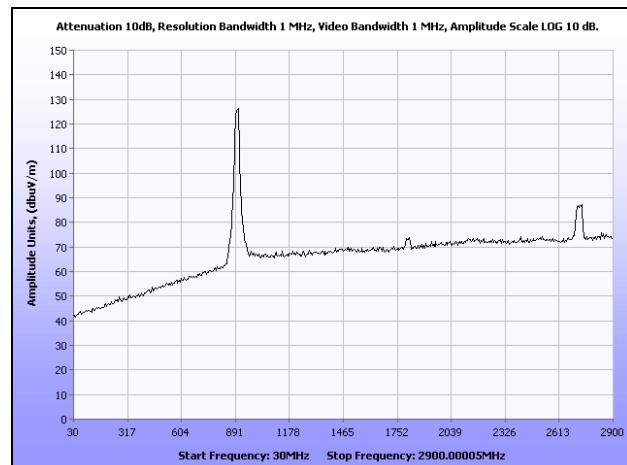
Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003




Low Channel, g mode, 900 MHz

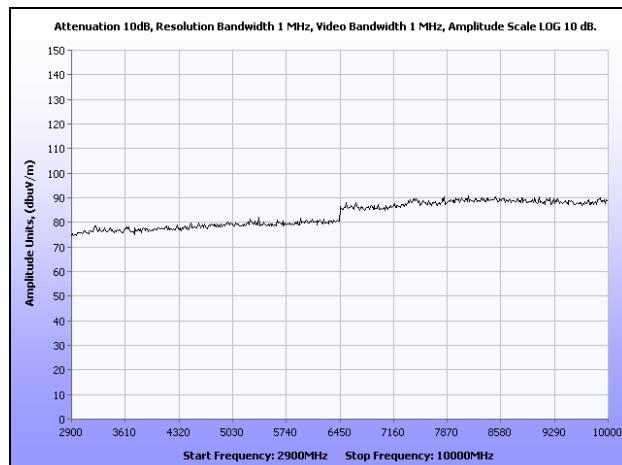


Low Channel, g mode, 900 MHz

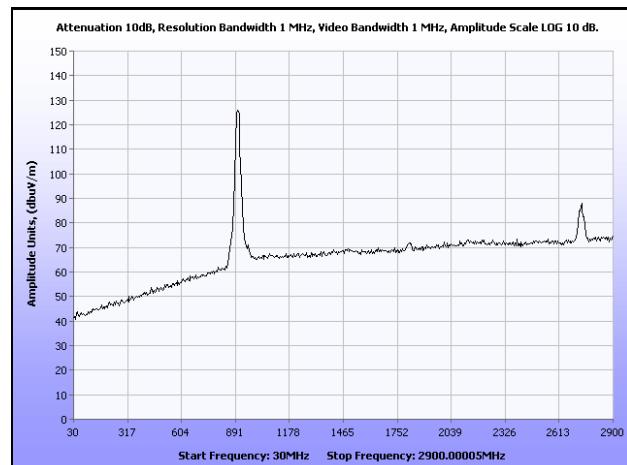


Mid Channel, g mode, 900 MHz

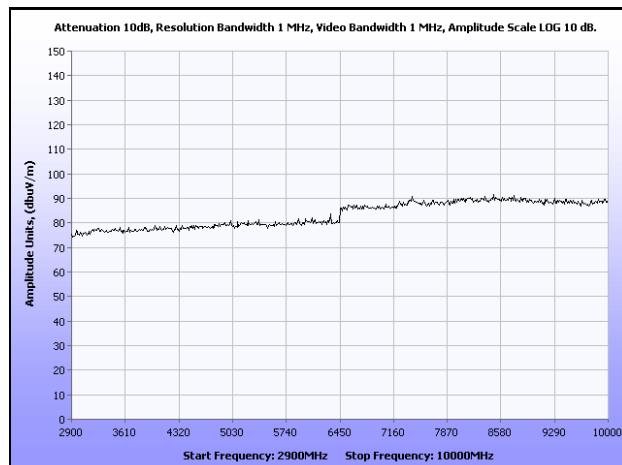


Mid Channel, g mode, 900 MHz

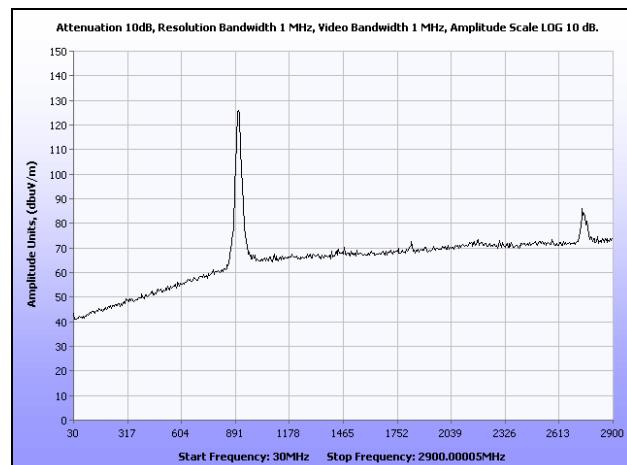

High Channel, g mode, 900 MHz

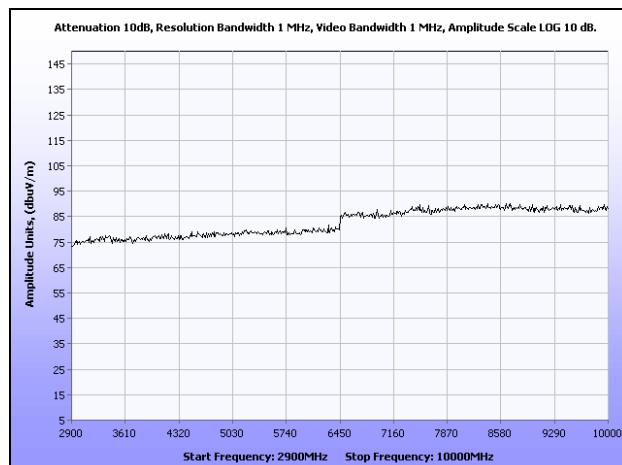

High Channel, g mode, 900 MHz

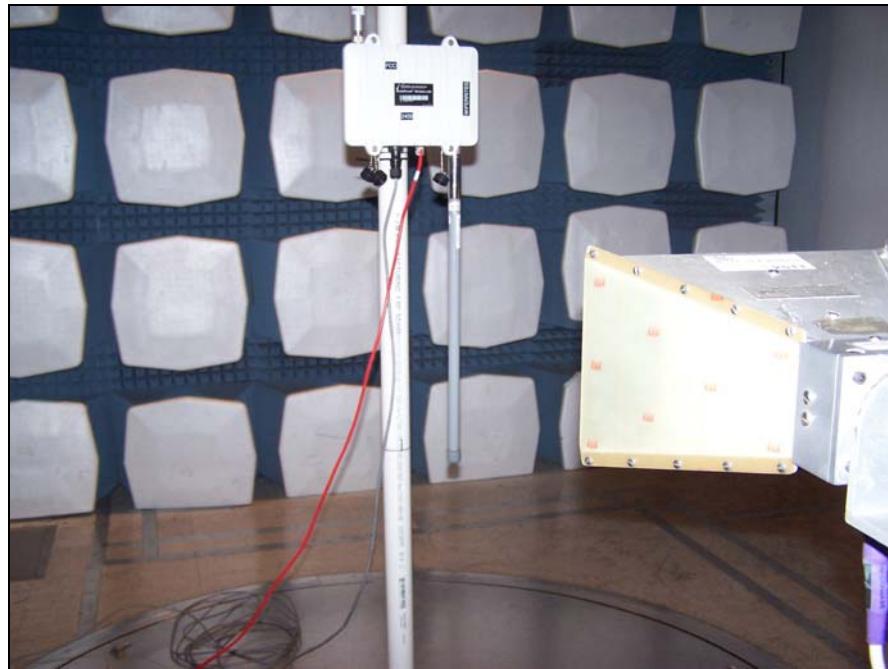

Photograph 5. Radiated Emission Test Setup, b and g Mode, 2.4 GHz




Photograph 6. Radiated Emission Test Setup, 5.8 GHz Mode



Rajant Corporation
Breadcrumb Model LX

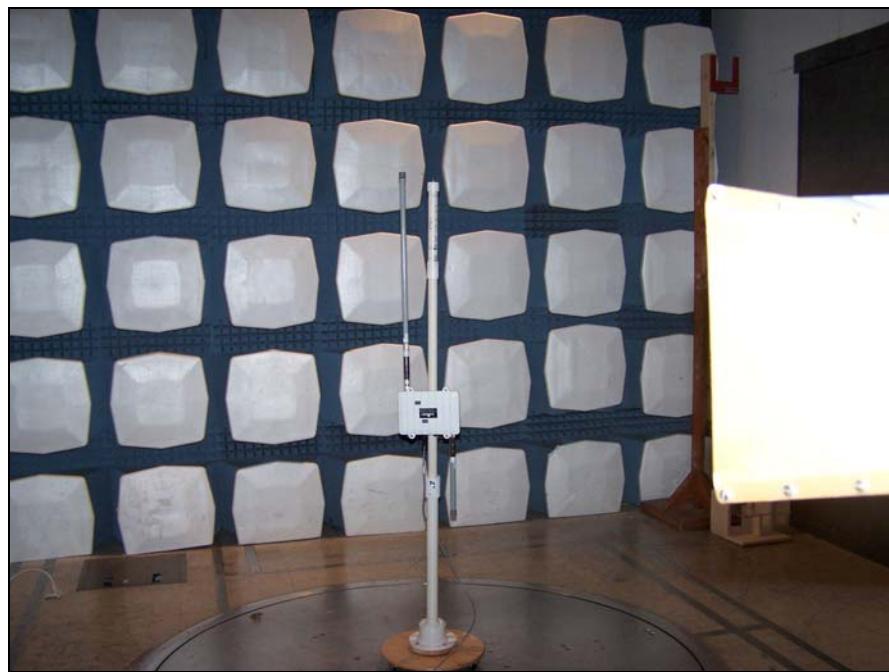Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003



Photograph 7. Radiated Emission Test Setup, 900 MHz



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions Requirements –RF Conducted

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Test Results: Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Intentional Radiators
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Results: Please refer to FCC ID: SWX-XR2, FCC ID: SWX-XR5, and FCC ID: SWX-XR9.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Test Equipment
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

IV. Test Equipment



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Test Equipment
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: Conducted Emissions – Voltage					Test Date(s): 01/30/08
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4079	LISN; SWITCH	SOLAR	8012-50-R-24-BNC	04/02/2007	04/02/2008
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	09/10/2007	09/10/2008
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4612	ESA-E SERIES SPECTRUM ANALYZER	AGILENT	E4407B	01/04/2008	01/04/2009

Test Name: Radiated Emissions					Test Date(s): 02/04/08
MET Asset #	Nomenclature	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4300	SEMI-ANECHOIC CHAMBER #1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T4409	EMI RECEIVER	ROHDE&SCHWARTZ	ESIB7	04/24/2007	04/24/2008
1T4304	ANTENNA; BILOG	SCHAFNER – CHASE EMC	CBL6140A	06/29/2007	06/29/2008
1T4632	THERMO/HYDROMETER	CONTROL COMPANY	S6-627-9	09/25/2007	09/25/2009
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE	

Test Name: Radiated Spurious				Test Date(s): 05/21/08	
MET #	Equipment	Manufacturer	Model#	Cal Date	Cal Due
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T2665	ANTENNA; HORN	EMCO	3115	05/07/2008	05/07/2009
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4592	RF FILTER KIT	VARIOUS	N/A	SEE NOTE	
1T4080	SPECTRUM ANALYZER W/ MEMORY MODULE	HEWLETT PACKARD	8563A	09/28/2007	09/28/2008

Test Name: Peak Output Power				Test Date(s): 05/22/08	
MET #	Equipment	Manufacturer	Model#	Cal Date	Cal Due
1T4612	ESA-E SERIES SPECTRUM ANALYZER	AGILENT	E4407B	01/04/2008	01/04/2009

Test Name: Restricted Bands				Test Date(s): 01/19/08	
MET #	Equipment	Manufacturer	Model#	Cal Date	Cal Due
1T4409	EMI RECEIVER	ROHDE & SCHWARTZ	ESIB7	04/24/2007	04/24/2008
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T2665	ANTENNA; HORN	EMCO	3115	04/17/2007	04/17/2008
1T4612	ESA-E SERIES SPECTRUM ANALYZER	AGILENT	E4407B	01/04/2008	01/04/2009

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
Certification & User's Manual Information
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

V. Certification & User's Manual Information



Certification & User's Manual Information

A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer*, be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [²] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [¹] est conforme à la norme NMB-003 du Canada.

² Insert either A or B but not both as appropriate for the equipment requirements.



Rajant Corporation
Breadcrumb Model LX

Electromagnetic Compatibility
End of Report
CFR Title 47, Part 15B, 15.247; RSS-210, Issue 7, June 2007 & ICES-003

End of Report