

RF Test Report

Applicant : Rajant Corporation

Product Type : Radio Module

Trade Name : VIZMONET

Model Number : RJ-1705

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Jul. 27, 2021

Test Period : Aug. 10, 2021 ~ Feb. 17, 2022

Issued Date : May 24, 2022

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm MRA designation number: TW0010

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Revisions	Revised By
00	May 06, 2022	Initial Issue	Yu Chiang
01	May 24, 2022	Update chapter 2 (P.7) Update chapter 3.4 (P.21)	Snow Wang

Verification of Compliance

Applicant : Rajant Corporation

Product Type : Radio Module

Trade Name : VIZMONET

Model Number : RJ-1705

FCC ID : VJA-RJ1705

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Eoundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By :

(Kai Yu Yang)

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Test Step	16
3.3.	Configuration of Test System Details	17
3.4.	Test Instruments.....	19
3.5.	Test Site Environment	22
4	Measurement Procedure	23
4.1.	AC Power Conducted Emission Measurement	23
4.2.	Transmitter Radiated Emissions Measurement.....	25
4.3.	Maximum Conducted Output Power & Transmit power control Measurement & Additional Rule For Outdoor Operation.....	30
4.4.	26 dB RF Bandwidth Measurement	31
4.5.	6 dB RF Bandwidth Measurement	32
4.6.	Maximum Power Spectral Density Measurement.....	33
4.7.	Automatically discontinue transmission.....	35
4.8.	Antenna Requirement	35
5	Test Results	37
5.1	Conducted Emission	37
5.2	Radiated Emission Measurement	45
5.3	Conducted Test Results	451

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(b)(9) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26 dB RF Bandwidth	Reference	---
15.407(e)	6 dB RF Bandwidth	PASS	---
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(c)	Automatically discontinue transmission	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conducted Emission	150 kHz ~ 30 MHz	2.7 dB
Radiated Emission	9 kHz ~ 30 MHz	2.2 dB
	30 MHz ~ 1000 MHz	5.1 dB
	1000 MHz ~ 18000 MHz	5.2 dB
	18000 MHz ~ 26500 MHz	4.6 dB
	26500 MHz ~ 40000 MHz	4.6 dB
Conducted Output Power		1.1 dB
RF Bandwidth		4.7 %
Power Spectral Density		1.1 dB
Frequency Stability		1.3×10^{-7}
Duty Cycle		1.1 %
Time Occupancy		1.5 %

2 EUT Description

Applicant	Rajant Corporation 11734 S. Election Road, Draper, Utah, 84020, United States				
Product Type	Radio Module				
Trade Name	VIZMONET				
Model Number	RJ-1705				
FCC ID	VJA-RJ1705				
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels	
	IEEE 802.11a	U-NII Band 1	5180 – 5240	4	
		U-NII Band 2-A	5260 – 5320	3	
		U-NII Band 2-C	5500 – 5700	5	
		U-NII Band 3	5745 – 5825	3	
	IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	5180 – 5240	4	
		U-NII Band 2-A	5260 – 5320	3	
		U-NII Band 2-C	5500 – 5700	3	
		U-NII Band 3	5745 – 5825	5	
	IEEE 802.11n 5 GHz 40 MHz	U-NII Band 1	5190 – 5230	2	
		U-NII Band 2-A	5270 – 5310	2	
		U-NII Band 2-C	5510 – 5670	3	
		U-NII Band 3	5755 – 5795	2	
Modulation Type	OFDM				
Equipment Type	Master				
Antenna information	Antenna	Model Number	Type	Max. Gain (dBi)	
	ANT-0 / ANT-1	KMA-5250-7-NM	External type (Omni-directional)	U-NII Band 1	7
		KMA-5550-6-NM		U-NII Band 2-A	7
		KMA-5800-6-NM		U-NII Band 2-C	6
				U-NII Band 3	6
	Note: Modular connectors meet the unique connector requirments of Part 15.203.				
Antenna Delivery	Reference section 3.1				
Operate Temp. Range	-40 ~+85 °C				
EUT Power Rating	DC 3.3 V				

SISO

Frequency Band		RF Output Power (W)
IEEE 802.11a	U-NII Band 1	0.087
	U-NII Band 2-A	0.106
	U-NII Band 2-C	0.100
	U-NII Band 3	0.271
IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	0.085
	U-NII Band 2-A	0.104
	U-NII Band 2-C	0.115
	U-NII Band 3	0.261
IEEE 802.11n 5 GHz 40 MHz	U-NII Band 1	0.038
	U-NII Band 2-A	0.057
	U-NII Band 2-C	0.122
	U-NII Band 3	0.240

MIMO

Frequency Band		RF Output Power (W)
IEEE 802.11a	U-NII Band 1	0.156
	U-NII Band 2-A	0.081
	U-NII Band 2-C	0.101
	U-NII Band 3	0.428
IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	0.117
	U-NII Band 2-A	0.111
	U-NII Band 2-C	0.072
	U-NII Band 3	0.388
IEEE 802.11n 5 GHz 40 MHz	U-NII Band 1	0.084
	U-NII Band 2-A	0.085
	U-NII Band 2-C	0.130
	U-NII Band 3	0.259

Equipment Type		
Outdoor access point	point-to-point	---
	point-to-multipoint	V
Indoor access point		---
Fixed point-to-point access points		---
Client devices		---

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11a Continuous TX mode
Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX mode
Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX mode

Note : ANT-0 is the worst case in the Mode 2 / Mode 3 / Mode 4 (For SISO Mode)

Software used to control the EUT for staying in continuous transmitting mode was programmed.
After verification, all tests were carried out with the worst case test modes.

SISO

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2	V	V	---
Mode 3	V	V	---
Mode 4	V	V	---

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
Mode 2	1TX (Diversity)	6	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140
			U-NII Band 3	149, 157, 165
Mode 3	1TX (Diversity)	6.5	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140
			U-NII Band 3	149, 157, 165
Mode 4	1TX (Diversity)	13.5	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134
			U-NII Band 3	151, 159

MIMO

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2	V	V	V
Mode 3	V	V	V
Mode 4	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Band	Test Channel
Mode 2	2TX (STBC)	6	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140
			U-NII Band 3	149, 157, 165
Mode 3	2TX (STBC)	13	U-NII Band 1	36, 40, 48
			U-NII Band 2-A	52, 56, 64
			U-NII Band 2-C	100, 112, 140
			U-NII Band 3	149, 157, 165
Mode 4	2TX (STBC)	27	U-NII Band 1	38, 46
			U-NII Band 2-A	54, 62
			U-NII Band 2-C	102, 110, 134
			U-NII Band 3	151, 159

Duty cycle

SISO

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	5180	2.045	2.055	0.995	0.021	0.010
Mode 3	5180	1.905	1.935	0.984	0.068	0.010
Mode 4	5190	0.936	0.960	0.975	0.110	1.068

MIMO


Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	5180	2.035	2.070	0.983	0.074	0.010
Mode 3	5180	0.978	1.014	0.964	0.157	1.022
Mode 4	5190	0.494	0.520	0.950	0.224	2.026

Duty Cycle Graphs

SISO


Mode 2: IEEE 802.11a Continuous TX Mode

On+off time

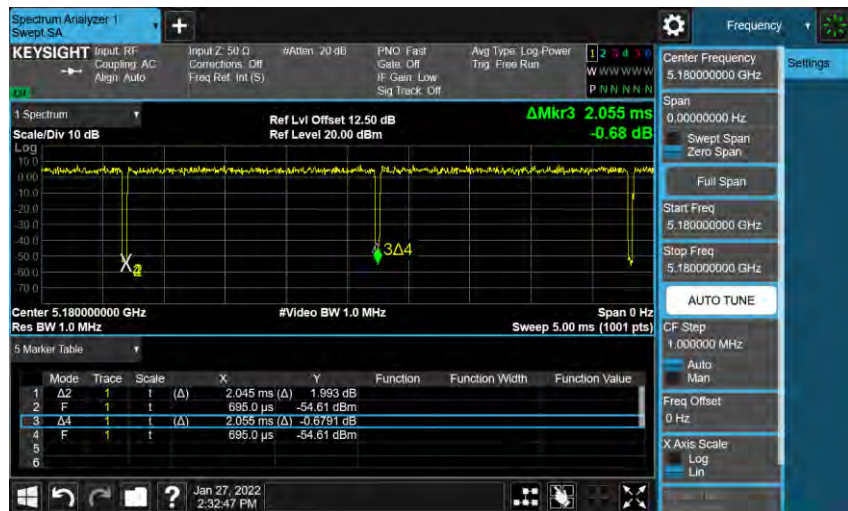


Mode 3: IEEE 802.11n 5 GHz 20 MHz Continuous TX Mode

On+off time

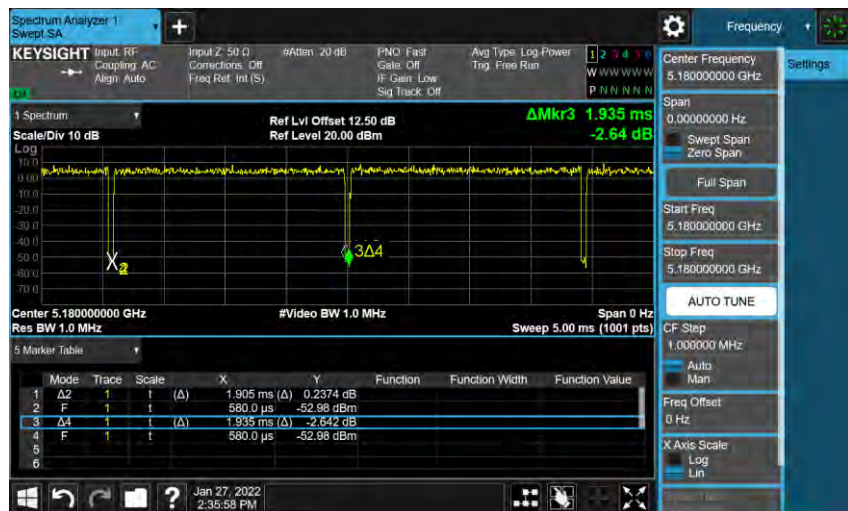

Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode

On+off time

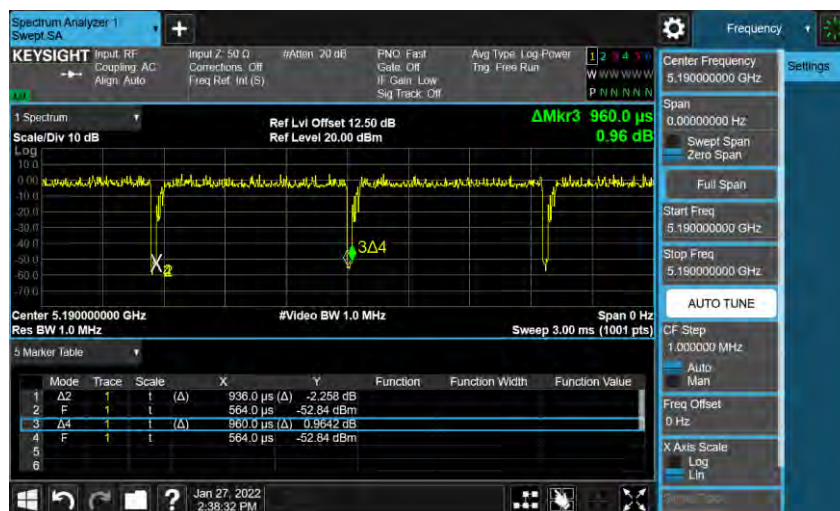

Mode 2: IEEE 802.11a Continuous TX Mode

Spectrum Analyzer 1 Swept SA

KEYSIGHT Input RF: Coupling AC, Align Auto

Input Z: 50 Ω , Corrections: Off, Ref Ref: Int(S)

#Att'n: 20 dB, FMO: Fast Gate: Off, IF Gain: Low, Sig Track: Off

Avg Type: Log, Power Trng: Free Run

1 2 3 4 5 6
W W W W W W
P N N N N N

Center Frequency: 5.180000000 GHz

Span: 0.00000000 Hz

Sweep Span: Zero Span

Full Span

Start Freq: 5.180000000 GHz

Stop Freq: 5.180000000 GHz

AUTO TUNE

CF Step: 1.000000 MHz

Auto Man

Freq Offset: 0 Hz

X Axis Scale: Log Lin

1 Spectrum

Scale/Div 10 dB

Log

Ref Lvl Offset 12.50 dB

Ref Level 20.00 dBm

$\Delta Mkr3$ 2.070 ms

3.54 dB

3 Δ 4

Center 5.180000000 GHz

#Video BW 1.0 MHz

Span 0 Hz

Res BW 1.0 MHz

Sweep 5.00 ms (1001 pts)

5 Marker Table

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	Δ 2	1	t	(Δ)	2.035 ms (Δ)	3.369 dBm	
2	F	1	t		750.0 μ s	-53.99 dBm	
3	Δ 4	1	t	(Δ)	2.070 ms (Δ)	3.543 dBm	
4	F	1	t		750.0 μ s	-53.99 dBm	
5							
6							

Spectrum Analyzer 1
Swept SA

KEYSIGHT Input RF: 50 Ω, Input Z: 50 Ω, #Atten: 20 dB, PNO: Fast, Gate: Off, Avg Type: Log, Power: Free Run, 1 2 3 4 5 6, WWW WWW, P N N N N N N

Input RF: 50 Ω, Input Z: 50 Ω, #Atten: 20 dB, PNO: Fast, Gate: Off, Avg Type: Log, Power: Free Run, 1 2 3 4 5 6, WWW WWW, P N N N N N N

Center Frequency: 5.180000000 GHz, Span: 0.00000000 Hz, Swept Span: Zero Span, Full Span, Start Freq: 5.180000000 GHz, Stop Freq: 5.180000000 GHz, AUTO TUNE, CF Step: 1.000000 MHz, Auto Man, Freq Offset: 0 Hz, X Axis Scale: Log Lin

1 Spectrum, Ref Lvl Offset 12.50 dB, ΔMkr3 1.014 ms, Scale/Div 10 dB, Ref Level 20.00 dBm, 1.58 dB


Center 5.180000000 GHz, #Video BW 1.0 MHz, Span 0 Hz, Res BW 1.0 MHz, Sweep 3.00 ms (1001 pts)

Mode	Trace	Scale	X	Y	Function	Width	Function Value
1	Δ2	1	t (Δ)	978.0 μs (Δ)	1.476 dBm		
2	F	1	t	618.0 μs	-55.94 dBm		
3	Δ4	1	t (Δ)	1.014 ms (Δ)	1.583 dBm		
4	F	1	t	618.0 μs	-55.94 dBm		
5							
6							

Jan 27, 2022 11:03:31 AM

Mode 4: IEEE 802.11n 5 GHz 40 MHz Continuous TX Mode

On+off time

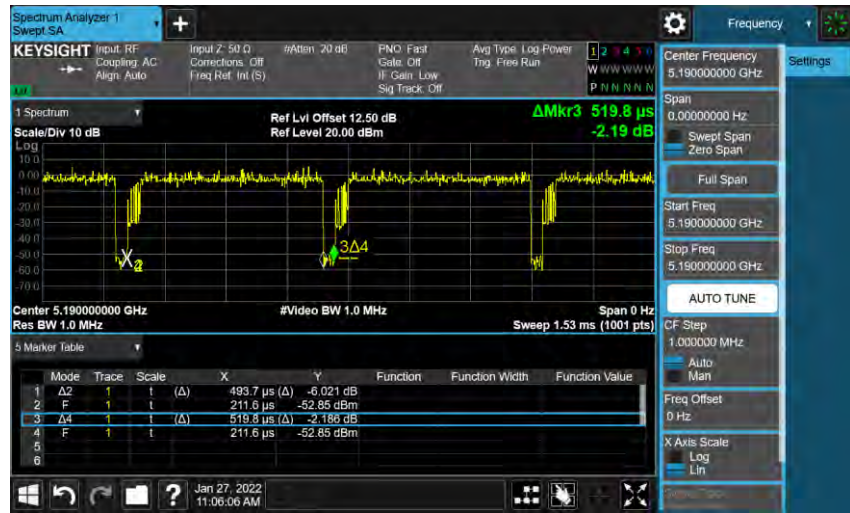

3.2. EUT Test Step


The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.


1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.

3.3. Configuration of Test System Details

Conducted Emission

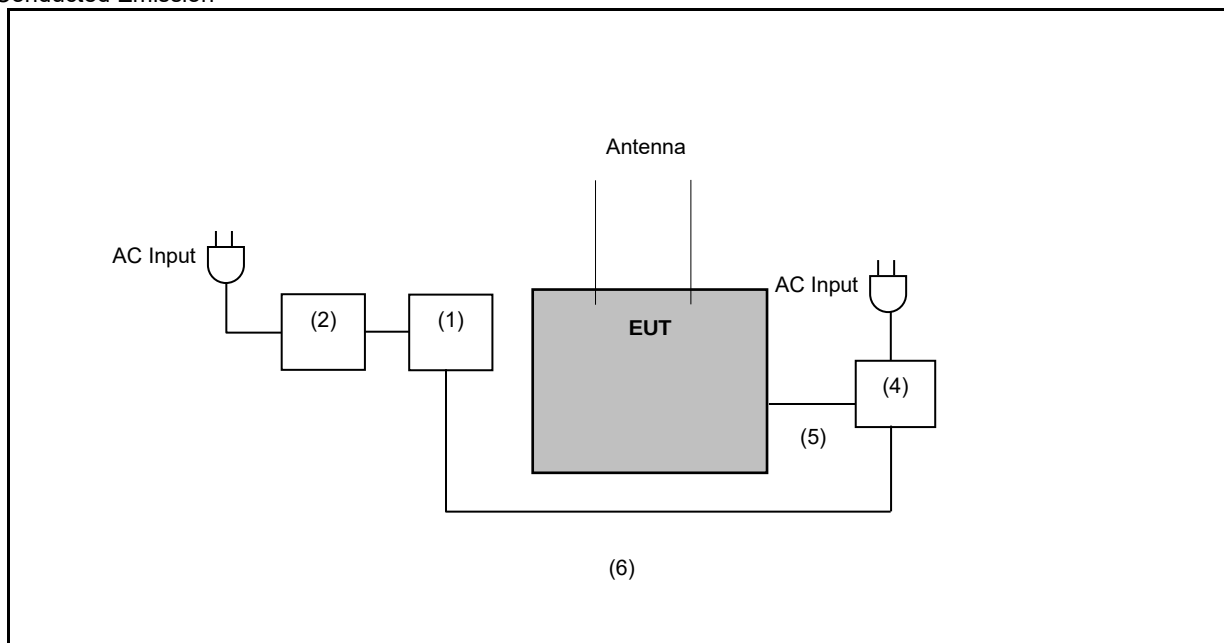

Radiated Emission

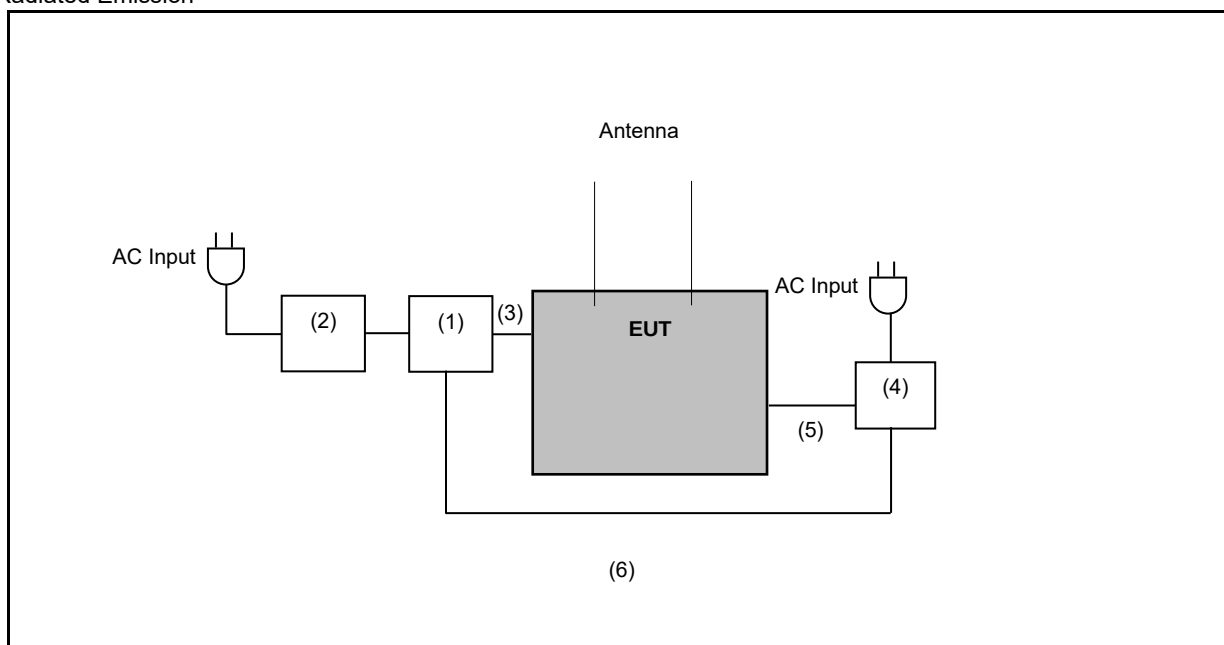

Product		Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	ASUS	P1448U	---	---
(2)	AC Adapter	ASUS	PA-1650-78	---	---
(3)	Fixture	FTDI	TTL-232R-3.3V	---	---
(4)	PoE	Tycon Systems	TP-POE-24G	---	---
(5)	LAN Cable	BELDEN	900000433	---	---
(6)	LAN Cable	HUAWEI	UL2464	---	---

3.4. Test Instruments

For Conducted Emission

Test Period: Oct. 05, 2021

Testing Engineer: JS Liao

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Test Receiver	R&S	ESCI	100367	May 21, 2021	1 year
☐	Test Receiver	R&S	ESCI	100722	Oct. 28, 2020	1 year
☐	Test Receiver	R&S	ESCI	101000	Nov. 27, 2020	1 year
☒	LISN	R&S	ENV216	101040	Mar. 29, 2021	1 year
☒	LISN	R&S	ENV216	101041	Apr. 08, 2021	1 year
☒	RF Cable	Woken	00100D1380194M	TE-02-03	May 28, 2021	1 year
☒	Software	EZ EMC	1.1.4.3	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

For Conducted

Test Period: Oct. 26, 2021 ~ Feb. 17, 2022

Testing Engineer: Brian Lin

Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Power Sensor	Anritsu	MA2411B	1126022	Sep. 01, 2020 Sep. 03, 2021	1 year
☒	Power Meter	Anritsu	ML2495A	1135009	Sep. 01, 2020 Sep. 03, 2021	1 year
☐	Power Sensor	Agilent	N1921A	MY45241957	Dec. 09, 2020 Dec. 06, 2021	1 year
☐	Power Meter	Agilent	N1911A	MY45101619	Dec. 09, 2020 Dec. 06, 2021	1 year
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY59071418	Mar. 17, 2021	1 year
☐	Spectrum Analyzer (9 kHz~26.5 GHz)	Agilent	N9010A	MY48030518	Jul. 23, 2021	1 year
☐	Spectrum Analyzer (20 Hz~26.5 GHz)	Agilent	N9020A	US47520902	Sep. 24, 2020 Sep. 09, 2021	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 08, 2021 Jan. 05, 2022	1 year
☐	Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	Mar. 30, 2021	1 year
☐	Signal Generator	Keysight	N5182B	MY53052569	Apr. 20, 2021	1 year
☐	Signal Generator	Keysight	N5182BX07	MY59360221	Apr. 20, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Feb. 01, 2021 Jan. 19, 2022	1 year
☐	RF Communication Test Set	HP	8920A	3344A03297	Aug. 10, 2021	1 year

Note: N.C.R. = No Calibration Request.

For Radiated Emissions

Test Period: Aug. 10, 2021 ~ Feb. 17, 2022

Testing Engineer: Hung Chou, Brian Lin, Eva Lee

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☐	Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	Jan. 15, 2021 Jan. 13, 2022	1 year
☐	Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	Jan. 08, 2022 Jan. 05, 2022	1 year
☒	Spectrum Analyzer (2 Hz~50 GHz)	Keysight	N9030B	MY57143537	Apr. 19, 2021	1 year
☒	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	Jan. 19, 2021 Jan. 14, 2022	1 year
☐	Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A10961	Jul. 06, 2021	1 year
☐	Broadband Amplifier (100 kHz~1 GHz)	Titan	T0910E00014330 A1F	001	Jul. 23, 2021	1 year
☐	Amplifier (1 GHz~26.5 GHz)	Agilent	8449B	3008A02237	Oct. 21, 2020 Oct. 21, 2021	1 year
☒	Broadband Amplifier (1 GHz~26.5 GHz)	Titan	T0912E01263025 A1F	002	Jul. 26, 2021	1 year
☒	Preamplifier (26.5 GHz~40 GHz)	EMCI	EMC2654045	980028	Aug. 18, 2020 Aug. 19, 2021	1 year
☒	Loop Antenna (9 kHz~30 MHz)	COM-POWER CORPORATION	AL-130	121014	Apr. 07, 2021	1 year
☒	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	01146	Jul. 19, 2021	1 year
☐	Trilog Broadband Antenna (30 kHz~1 GHz)	Schwarzbeck Mess-Elektronik	VULB9168	416	Nov. 11, 2020 Nov. 17, 2021	1 year
☒	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	02207	Jul. 09, 2021	1 year
☐	Broadband Horn Antenna (1 GHz~18 GHz)	Schwarzbeck Mess-Elektronik	9120D	9120D-550	Aug. 17, 2020 Aug. 24, 2021	1 year
☒	Broadband Horn Antenna (18 GHz~40 GHz)	Schwarzbeck Mess-Elektronik	9170	9170-320	Aug. 18, 2020 Aug. 24, 2021	1 year
☐	Horn Antenna (18 GHz~40 GHz)	ETS	3116	00086467	Dec. 03, 2020 Dec. 03, 2021	1 year
☐	RF Cable	EMCI	EMC104-N-N-600 0	TE01-1	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC104-SM-SM- 13000	170814	Feb. 19, 2021	1 year
☐	Microwave Cable	EMCI	EMC102-KM-KM- 14000	151001	Feb. 19, 2021	1 year

Note: N.C.R. = No Calibration Request.

Radiation test sites		Semi Anechoic Room				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Coaxial Cable	Titan	T0710AT327A10A 100	J11005	Aug. 13, 2020 Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	T0710AT327A10A 900	J11004	Aug. 13, 2020 Aug. 06, 2021	1 year
☒	Coaxial Cable	Titan	CFD400NL-LW	001	Aug. 13, 2020 Aug. 06, 2021	1 year
☐	Bluetooth Tester	R&S	CBT	100350	Mar. 17, 2021	2 years
☐	Wireless Connectivity Tester	R&S	CMW270	102208	Jun. 02, 2021	1 year
☐	Power Supply	KEITHLEY	2303	4045290	Feb. 01, 2021 Jan. 19, 2022	1 year
☒	Software	EZ EMC	1.1.4.4	N/A	N.C.R.	---

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

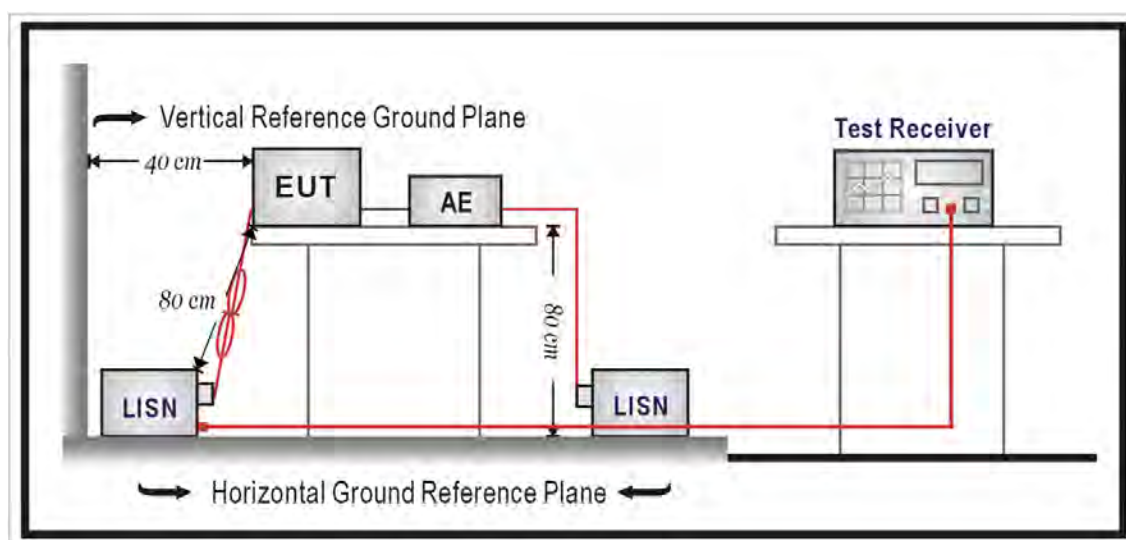

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega$ // $50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega$ // $50\ \mu\text{H}$ coupling impedance with $50\ \Omega$ termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored

4.2. Transmitter Radiated Emissions Measurement

■ Limit

(1)Undesirable emission limits. Except as shown in paragraph (b)(9) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a)For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(b)For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(c)For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(d)For transmitters operating in the 5.725-5.85 GHz band:

(i)All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

EIRP (dBm)	Field Strength at 3 m(dBuV/m)
-27	68.3

(2)Limits of Radiated Emission Measurement

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Note: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).


3. As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

■ Setup


9 kHz ~ 30 MHz

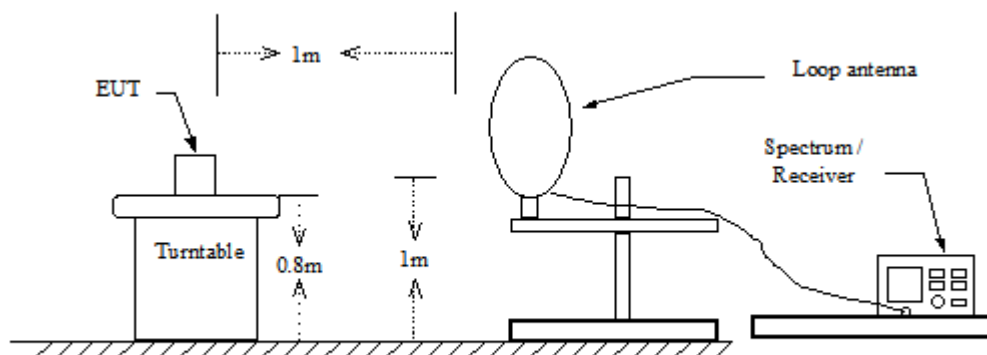

30 MHz ~ 1 GHz

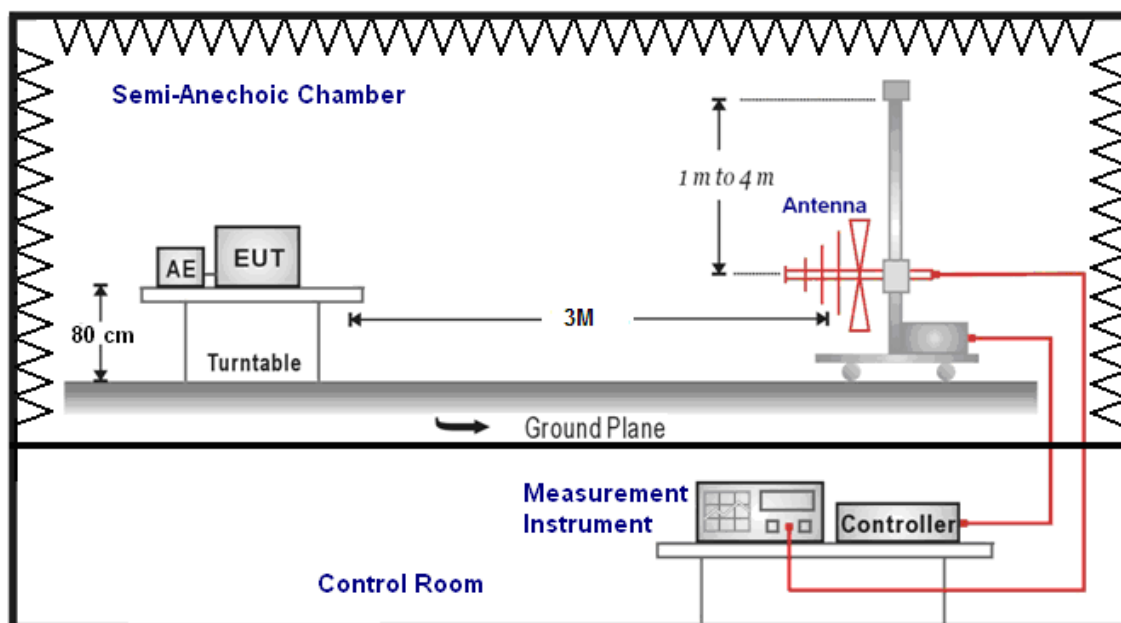

Above 1 GHz

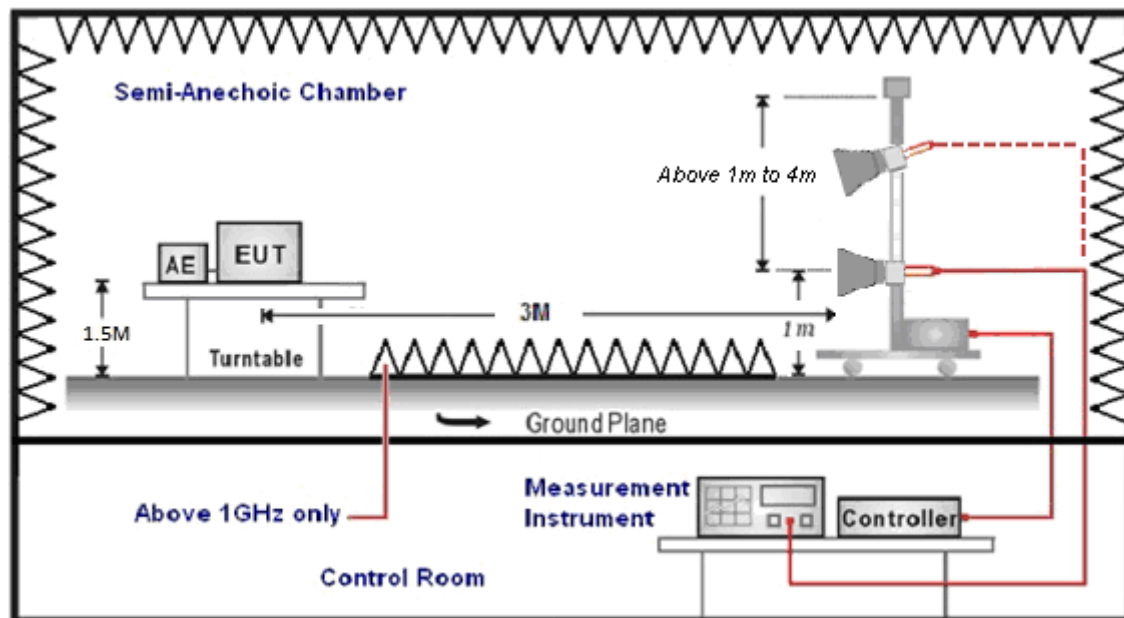

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1 GHz use 0.8 m turntable / above 1 GHz use 1.5 m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW/VBW(Emission in restricted band)	1 MHz / 3 MHz for Peak 1 MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1 MHz / 3 MHz for Peak

4.3. Maximum Conducted Output Power & Transmit power control Measurement & Additional Rule For Outdoor Operation

■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit	Max_EIRP at any elevation angle > 30° from horizon
	Master	Outdoor AP Operation
5.150 ~ 5.250 GHz	The lesser of 1 W (30 dBm)	< 125 mW (21 dBm)
5.250 ~ 5.350 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)	N/A
5.470 ~ 5.725 GHz	The lesser of 250 mW (24 dBm) or 11 dBm + 10 log (B)	N/A
5.725 ~ 5.850 GHz	The lesser of 1 W (30 dBm)	N/A

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz / IEEE 802.11n 5 GHz 40 MHz


Band I :

- * Directional Gain = $G_{ANT} = 7 \text{ dBi} > 6 \text{ dBi}$
- * Power Limit = $30 - 1 = 29 \text{ dBm}$

Band II-A :

- * Directional Gain = $G_{ANT} = 7 \text{ dBi} > 6 \text{ dBi}$
- * Power Limit = $24 - 1 = 23 \text{ dBm}$

■ Test Setup

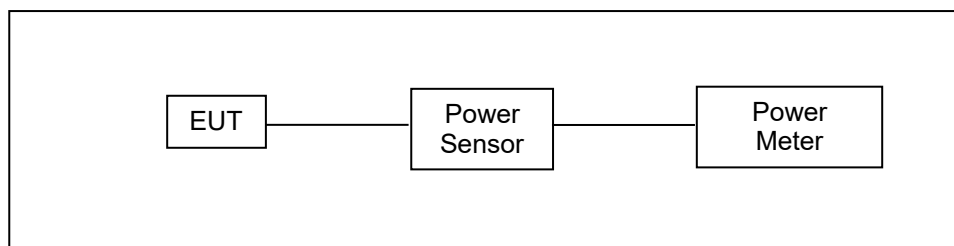

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.3.3.2, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)


b) Method PM-G (Measurement using a gated RF average power meter)

4.4. 26 dB RF Bandwidth Measurement

■ Limit

N/A

■ Test Setup

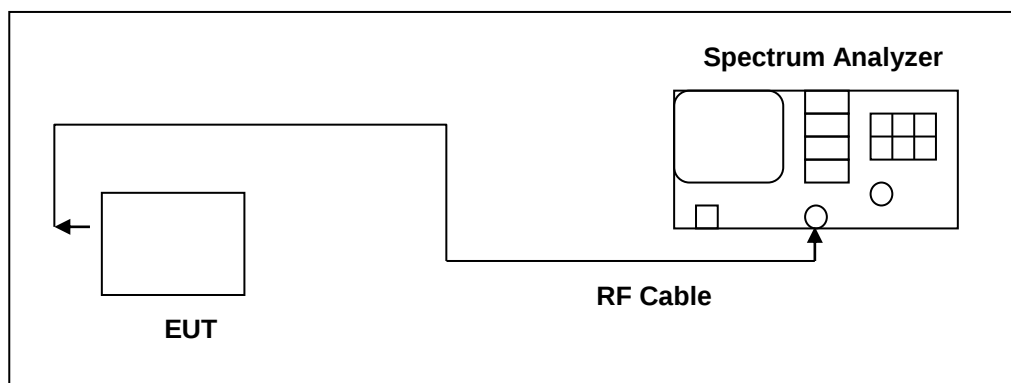

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.4.1, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26 dB Bandwidth
RBW	Approximately 1 % of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


4.5. 6 dB RF Bandwidth Measurement

■ Limit

6 dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5850 MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

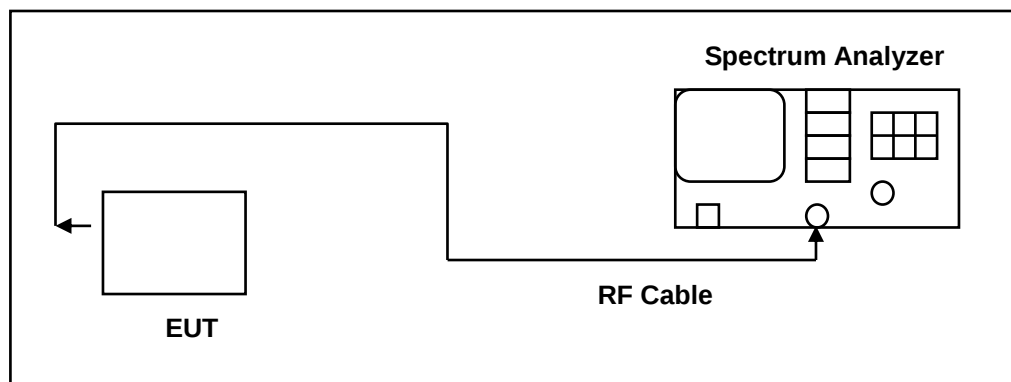

■ Test Procedure

6 dB RF Bandwidth

The EUT tested to UNII test procedure of ANSI C63.10:2013 section 6.9.2 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.

4.6. Maximum Power Spectral Density Measurement

■ Limit

Frequency Range (MHz)	FCC Limit
	Master
5.150 ~ 5.250 GHz	17 dBm/MHz
5.250 ~ 5.350 GHz	11 dBm/MHz
5.470 ~ 5.725 GHz	11 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500 kHz

According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

IEEE 802.11a / IEEE 802.11n 5 GHz 20 MHz / IEEE 802.11n 5 GHz 40 MHz


Band I :

- * Directional Gain = $G_{ANT} = 7 \text{ dBi} > 6 \text{ dBi}$
- * Conducted Power Spectral Density Limit = $17 - 1 = 16 \text{ dBm/MHz}$

Band II-A :

- * Directional Gain = $G_{ANT} = 7 \text{ dBi} > 6 \text{ dBi}$
- * Conducted Power Spectral Density Limit = $11 - 1 = 10 \text{ dBm/MHz}$

■ Test Setup

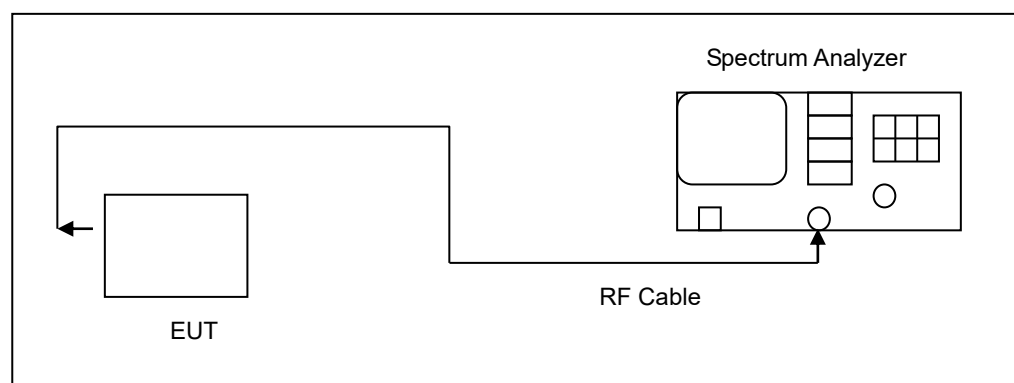

■ Test Procedure

The test is performed in accordance with ANSI C63.10:2013 section 12.5, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850 MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850 MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log(500 \text{ kHz}/100 \text{ kHz})$ to the measured result.	

4.7. Automatically discontinue transmission

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

■ Declare

While the EUT is not transmitting any information, the EUT can automatically discontinue transmission and become standby mode for power saving.

The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.

4.8. Antenna Requirement

■ Requirement

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ Antenna Connector Construction

See section 2 – antenna information.

SISO

■ Directional Gain Calculated

Directional Gain = Max. Gain

Operate Freq. Band		Directional Gain (dBi)
IEEE 802.11a	U-NII Band 1	7
	U-NII Band 2-A	7
	U-NII Band 2-C	6
	U-NII Band 3	6
IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	7
	U-NII Band 2-A	7
	U-NII Band 2-C	6
	U-NII Band 3	6
IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	7
	U-NII Band 2-A	7
	U-NII Band 2-C	6
	U-NII Band 3	6

MIMO

■ Directional Gain Calculated


Directional Gain = GANT

Operate Freq. Band		Directional Gain (dBi)
IEEE 802.11a	U-NII Band 1	7
	U-NII Band 2-A	7
	U-NII Band 2-C	6
	U-NII Band 3	6
IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	7
	U-NII Band 2-A	7
	U-NII Band 2-C	6
	U-NII Band 3	6
IEEE 802.11n 5 GHz 20 MHz	U-NII Band 1	7
	U-NII Band 2-A	7
	U-NII Band 2-C	6
	U-NII Band 3	6

5 Test Results

5.1 Conducted Emission

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

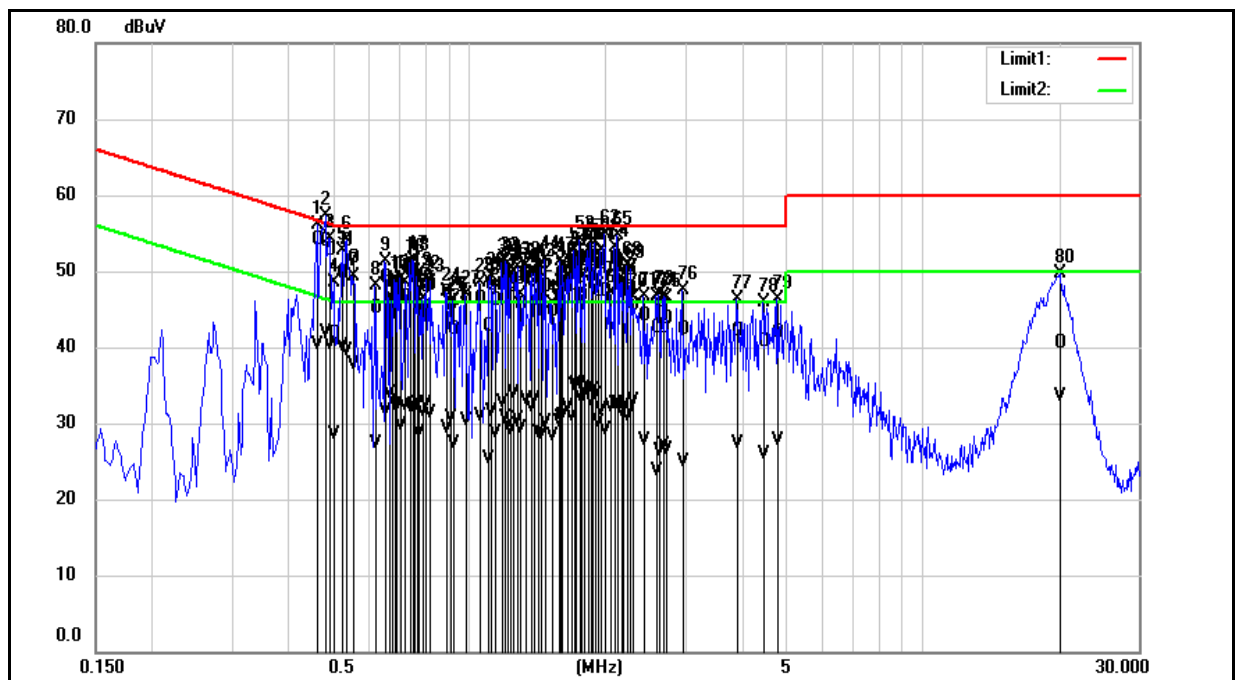

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4620	44.42	30.48	9.74	54.16	40.22	56.66	46.66	-2.50	-6.44	Pass
2	0.4820	44.12	32.16	9.74	53.86	41.90	56.30	46.30	-2.44	-4.40	Pass
3	0.4900	43.02	30.66	9.74	52.76	40.40	56.17	46.17	-3.41	-5.77	Pass
4	0.5020	32.02	18.72	9.74	41.76	28.46	56.00	46.00	-14.24	-17.54	Pass
5	0.5260	39.93	30.27	9.74	49.67	40.01	56.00	46.00	-6.33	-5.99	Pass
6	0.5380	44.24	29.83	9.74	53.98	39.57	56.00	46.00	-2.02	-6.43	Pass
7	0.5540	41.94	28.02	9.74	51.68	37.76	56.00	46.00	-4.32	-8.24	Pass
8	0.6180	35.46	17.50	9.74	45.20	27.24	56.00	46.00	-10.80	-18.76	Pass
9	0.6540	39.40	21.80	9.75	49.15	31.55	56.00	46.00	-6.85	-14.45	Pass
10	0.6660	34.36	24.12	9.75	44.11	33.87	56.00	46.00	-11.89	-12.13	Pass
11	0.6740	35.69	23.29	9.75	45.44	33.04	56.00	46.00	-10.56	-12.96	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
12	0.6860	37.27	22.62	9.75	47.02	32.37	56.00	46.00	-8.98	-13.63	Pass
13	0.6940	38.02	22.28	9.75	47.77	32.03	56.00	46.00	-8.23	-13.97	Pass
14	0.7020	36.84	20.00	9.75	46.59	29.75	56.00	46.00	-9.41	-16.25	Pass
15	0.7220	36.80	22.54	9.75	46.55	32.29	56.00	46.00	-9.45	-13.71	Pass
16	0.7420	40.25	22.38	9.75	50.00	32.13	56.00	46.00	-6.00	-13.87	Pass
17	0.7500	40.01	22.29	9.75	49.76	32.04	56.00	46.00	-6.24	-13.96	Pass
18	0.7580	39.31	22.24	9.75	49.06	31.99	56.00	46.00	-6.94	-14.01	Pass
19	0.7660	38.11	22.72	9.75	47.86	32.47	56.00	46.00	-8.14	-13.53	Pass
20	0.7740	35.45	18.92	9.75	45.20	28.67	56.00	46.00	-10.80	-17.33	Pass
21	0.7900	35.55	21.68	9.75	45.30	31.43	56.00	46.00	-10.70	-14.57	Pass
22	0.8020	38.23	22.81	9.75	47.98	32.56	56.00	46.00	-8.02	-13.44	Pass
23	0.8180	38.39	21.56	9.75	48.14	31.31	56.00	46.00	-7.86	-14.69	Pass
24	0.8860	37.41	19.50	9.76	47.17	29.26	56.00	46.00	-8.83	-16.74	Pass
25	0.9060	35.71	21.01	9.76	45.47	30.77	56.00	46.00	-10.53	-15.23	Pass
26	0.9220	32.48	17.53	9.76	42.24	27.29	56.00	46.00	-13.76	-18.71	Pass
27	0.9820	36.56	20.48	9.76	46.32	30.24	56.00	46.00	-9.68	-15.76	Pass
28	1.0500	36.49	21.20	9.76	46.25	30.96	56.00	46.00	-9.75	-15.04	Pass
29	1.1020	32.88	15.53	9.76	42.64	25.29	56.00	46.00	-13.36	-20.71	Pass
30	1.1140	38.37	21.84	9.76	48.13	31.60	56.00	46.00	-7.87	-14.40	Pass
31	1.1380	36.34	18.91	9.76	46.10	28.67	56.00	46.00	-9.90	-17.33	Pass
32	1.1820	38.28	22.87	9.77	48.05	32.64	56.00	46.00	-7.95	-13.36	Pass
33	1.2020	39.68	21.01	9.77	49.45	30.78	56.00	46.00	-6.55	-15.22	Pass
34	1.2140	38.84	19.87	9.77	48.61	29.64	56.00	46.00	-7.39	-16.36	Pass
35	1.2300	38.07	19.28	9.77	47.84	29.05	56.00	46.00	-8.16	-16.95	Pass
36	1.2540	38.63	24.12	9.77	48.40	33.89	56.00	46.00	-7.60	-12.11	Pass
37	1.2820	39.52	20.71	9.77	49.29	30.48	56.00	46.00	-6.71	-15.52	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
38	1.2940	35.64	19.60	9.77	45.41	29.37	56.00	46.00	-10.59	-16.63	Pass
39	1.3300	39.67	23.31	9.77	49.44	33.08	56.00	46.00	-6.56	-12.92	Pass
40	1.3740	38.94	22.41	9.77	48.71	32.18	56.00	46.00	-7.29	-13.82	Pass
41	1.3900	39.76	23.39	9.77	49.53	33.16	56.00	46.00	-6.47	-12.84	Pass
42	1.4140	36.82	18.94	9.77	46.59	28.71	56.00	46.00	-9.41	-17.29	Pass
43	1.4340	37.99	18.64	9.77	47.76	28.41	56.00	46.00	-8.24	-17.59	Pass
44	1.4700	38.06	20.40	9.77	47.83	30.17	56.00	46.00	-8.17	-15.83	Pass
45	1.5260	34.90	18.53	9.79	44.69	28.32	56.00	46.00	-11.31	-17.68	Pass
46	1.5700	36.70	20.31	9.79	46.49	30.10	56.00	46.00	-9.51	-15.90	Pass
47	1.5860	38.60	20.96	9.79	48.39	30.75	56.00	46.00	-7.61	-15.25	Pass
48	1.6020	38.95	21.19	9.79	48.74	30.98	56.00	46.00	-7.26	-15.02	Pass
49	1.6500	38.18	22.28	9.79	47.97	32.07	56.00	46.00	-8.03	-13.93	Pass
50	1.6740	36.79	21.02	9.79	46.58	30.81	56.00	46.00	-9.42	-15.19	Pass
51	1.7060	41.31	25.14	9.79	51.10	34.93	56.00	46.00	-4.90	-11.07	Pass
52	1.7220	40.35	25.32	9.79	50.14	35.11	56.00	46.00	-5.86	-10.89	Pass
53	1.7500	41.80	25.39	9.79	51.59	35.18	56.00	46.00	-4.41	-10.82	Pass
54	1.7700	36.82	23.27	9.79	46.61	33.06	56.00	46.00	-9.39	-12.94	Pass
55	1.7860	40.85	24.66	9.79	50.64	34.45	56.00	46.00	-5.36	-11.55	Pass
56	1.8220	41.80	24.87	9.79	51.59	34.66	56.00	46.00	-4.41	-11.34	Pass
57	1.8580	42.37	23.19	9.80	52.17	32.99	56.00	46.00	-3.83	-13.01	Pass
58	1.8740	38.46	24.58	9.80	48.26	34.38	56.00	46.00	-7.74	-11.62	Pass
59	1.8900	41.98	23.95	9.80	51.78	33.75	56.00	46.00	-4.22	-12.25	Pass
60	1.9220	37.49	20.34	9.80	47.29	30.14	56.00	46.00	-8.71	-15.86	Pass
61	1.9460	41.10	21.93	9.80	50.90	31.73	56.00	46.00	-5.10	-14.27	Pass
62	1.9860	37.60	19.28	9.80	47.40	29.08	56.00	46.00	-8.60	-16.92	Pass
63	2.0500	36.56	22.24	9.80	46.36	32.04	56.00	46.00	-9.64	-13.96	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).


Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
64	2.0980	41.65	22.78	9.80	51.45	32.58	56.00	46.00	-4.55	-13.42	Pass
65	2.1180	41.48	22.71	9.80	51.28	32.51	56.00	46.00	-4.72	-13.49	Pass
66	2.1620	38.17	21.80	9.80	47.97	31.60	56.00	46.00	-8.03	-14.40	Pass
67	2.1860	38.18	22.22	9.80	47.98	32.02	56.00	46.00	-8.02	-13.98	Pass
68	2.2300	37.50	21.09	9.80	47.30	30.89	56.00	46.00	-8.70	-15.11	Pass
69	2.2700	37.90	21.81	9.80	47.70	31.61	56.00	46.00	-8.30	-14.39	Pass
70	2.2940	35.72	23.04	9.80	45.52	32.84	56.00	46.00	-10.48	-13.16	Pass
71	2.4300	34.36	17.84	9.81	44.17	27.65	56.00	46.00	-11.83	-18.35	Pass
72	2.5820	32.65	13.97	9.81	42.46	23.78	56.00	46.00	-13.54	-22.22	Pass
73	2.6220	34.58	16.47	9.81	44.39	26.28	56.00	46.00	-11.61	-19.72	Pass
74	2.6900	32.74	17.23	9.81	42.55	27.04	56.00	46.00	-13.45	-18.96	Pass
75	2.7100	33.82	16.71	9.81	43.63	26.52	56.00	46.00	-12.37	-19.48	Pass
76	2.9580	32.52	15.17	9.82	42.34	24.99	56.00	46.00	-13.66	-21.01	Pass
77	3.8900	32.35	17.42	9.84	42.19	27.26	56.00	46.00	-13.81	-18.74	Pass
78	4.4380	30.94	16.15	9.85	40.79	26.00	56.00	46.00	-15.21	-20.00	Pass
79	4.7820	32.07	17.90	9.87	41.94	27.77	56.00	46.00	-14.06	-18.23	Pass
80	20.1140	30.41	23.38	10.05	40.46	33.43	60.00	50.00	-19.54	-16.57	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

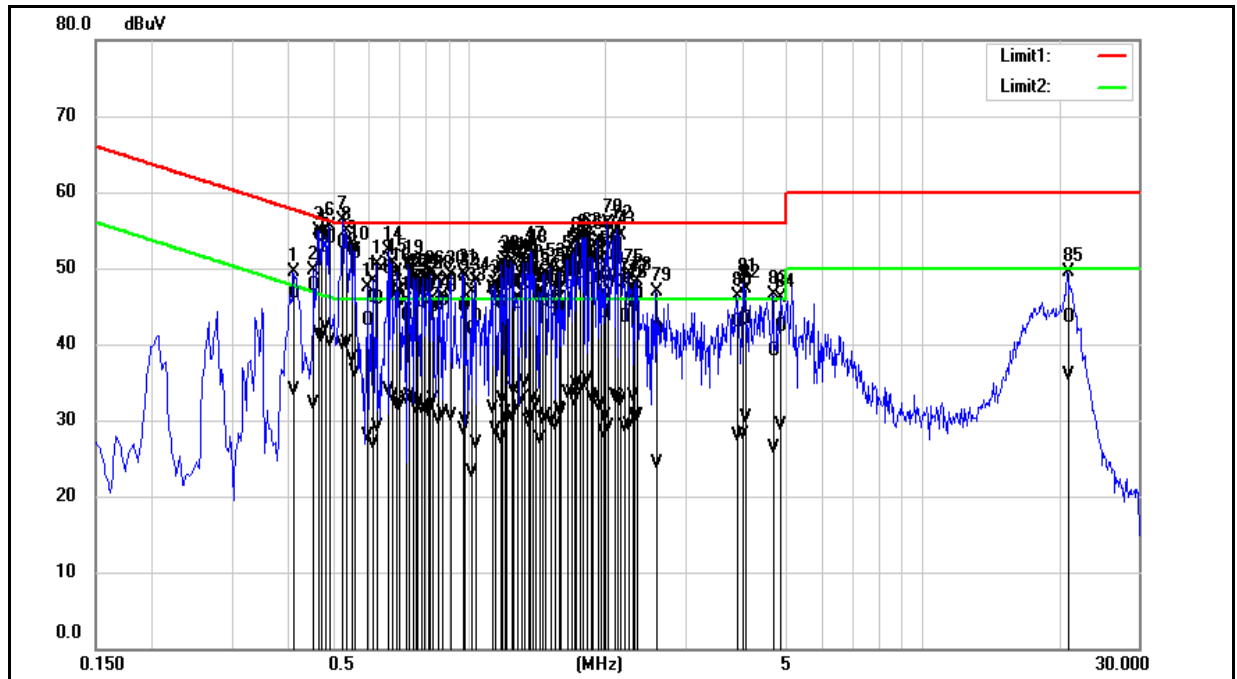

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.4100	37.05	24.26	9.73	46.78	33.99	57.65	47.65	-10.87	-13.66	Pass
2	0.4540	37.95	22.31	9.73	47.68	32.04	56.80	46.80	-9.12	-14.76	Pass
3	0.4660	44.64	31.56	9.73	54.37	41.29	56.58	46.58	-2.21	-5.29	Pass
4	0.4740	44.51	31.19	9.73	54.24	40.92	56.44	46.44	-2.20	-5.52	Pass
5	0.4820	42.96	32.50	9.73	52.69	42.23	56.30	46.30	-3.61	-4.07	Pass
6	0.4900	44.21	30.54	9.73	53.94	40.27	56.17	46.17	-2.23	-5.90	Pass
7	0.5260	43.64	30.18	9.73	53.37	39.91	56.00	46.00	-2.63	-6.09	Pass
8	0.5340	43.41	30.44	9.73	53.14	40.17	56.00	46.00	-2.86	-5.83	Pass
9	0.5500	42.69	28.35	9.73	52.42	38.08	56.00	46.00	-3.58	-7.92	Pass
10	0.5580	42.14	26.67	9.73	51.87	36.40	56.00	46.00	-4.13	-9.60	Pass
11	0.5980	33.36	18.22	9.73	43.09	27.95	56.00	46.00	-12.91	-18.05	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
12	0.6140	36.45	17.22	9.73	46.18	26.95	56.00	46.00	-9.82	-19.05	Pass
13	0.6260	36.22	19.42	9.74	45.96	29.16	56.00	46.00	-10.04	-16.84	Pass
14	0.6620	40.23	24.12	9.74	49.97	33.86	56.00	46.00	-6.03	-12.14	Pass
15	0.6740	39.69	23.35	9.74	49.43	33.09	56.00	46.00	-6.57	-12.91	Pass
16	0.6900	37.54	22.38	9.74	47.28	32.12	56.00	46.00	-8.72	-13.88	Pass
17	0.6980	36.43	22.11	9.74	46.17	31.85	56.00	46.00	-9.83	-14.15	Pass
18	0.7260	33.96	23.00	9.75	43.71	32.75	56.00	46.00	-12.29	-13.25	Pass
19	0.7340	40.46	23.39	9.75	50.21	33.14	56.00	46.00	-5.79	-12.86	Pass
20	0.7540	38.10	23.10	9.75	47.85	32.85	56.00	46.00	-8.15	-13.15	Pass
21	0.7620	37.80	21.82	9.75	47.55	31.57	56.00	46.00	-8.45	-14.43	Pass
22	0.7700	37.93	22.48	9.75	47.68	32.23	56.00	46.00	-8.32	-13.77	Pass
23	0.7860	35.73	21.73	9.75	45.48	31.48	56.00	46.00	-10.52	-14.52	Pass
24	0.7940	38.00	21.97	9.75	47.75	31.72	56.00	46.00	-8.25	-14.28	Pass
25	0.8100	37.85	21.31	9.75	47.60	31.06	56.00	46.00	-8.40	-14.94	Pass
26	0.8180	38.32	21.67	9.75	48.07	31.42	56.00	46.00	-7.93	-14.58	Pass
27	0.8300	35.23	22.95	9.75	44.98	32.70	56.00	46.00	-11.02	-13.30	Pass
28	0.8540	35.37	20.37	9.75	45.12	30.12	56.00	46.00	-10.88	-15.88	Pass
29	0.8740	35.96	21.10	9.75	45.71	30.85	56.00	46.00	-10.29	-15.15	Pass
30	0.9100	37.74	20.78	9.76	47.50	30.54	56.00	46.00	-8.50	-15.46	Pass
31	0.9660	35.10	18.92	9.76	44.86	28.68	56.00	46.00	-11.14	-17.32	Pass
32	0.9780	35.60	20.23	9.76	45.36	29.99	56.00	46.00	-10.64	-16.01	Pass
33	1.0140	32.14	13.31	9.76	41.90	23.07	56.00	46.00	-14.10	-22.93	Pass
34	1.0300	33.71	17.05	9.76	43.47	26.81	56.00	46.00	-12.53	-19.19	Pass
35	1.1220	37.30	21.67	9.76	47.06	31.43	56.00	46.00	-8.94	-14.57	Pass
36	1.1380	36.04	19.04	9.76	45.80	28.80	56.00	46.00	-10.20	-17.20	Pass
37	1.1700	35.58	17.65	9.77	45.35	27.42	56.00	46.00	-10.65	-18.58	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
38	1.1820	38.34	22.94	9.77	48.11	32.71	56.00	46.00	-7.89	-13.29	Pass
39	1.2020	39.92	21.04	9.77	49.69	30.81	56.00	46.00	-6.31	-15.19	Pass
40	1.2100	38.00	20.06	9.77	47.77	29.83	56.00	46.00	-8.23	-16.17	Pass
41	1.2380	38.28	20.72	9.77	48.05	30.49	56.00	46.00	-7.95	-15.51	Pass
42	1.2500	38.34	24.05	9.77	48.11	33.82	56.00	46.00	-7.89	-12.18	Pass
43	1.2700	35.50	22.19	9.77	45.27	31.96	56.00	46.00	-10.73	-14.04	Pass
44	1.3060	37.91	22.89	9.77	47.68	32.66	56.00	46.00	-8.32	-13.34	Pass
45	1.3220	39.66	25.05	9.77	49.43	34.82	56.00	46.00	-6.57	-11.18	Pass
46	1.3500	38.16	19.94	9.77	47.93	29.71	56.00	46.00	-8.07	-16.29	Pass
47	1.3660	40.18	20.77	9.77	49.95	30.54	56.00	46.00	-6.05	-15.46	Pass
48	1.3780	39.94	23.12	9.77	49.71	32.89	56.00	46.00	-6.29	-13.11	Pass
49	1.3980	38.97	22.28	9.77	48.74	32.05	56.00	46.00	-7.26	-13.95	Pass
50	1.4300	36.26	17.70	9.77	46.03	27.47	56.00	46.00	-9.97	-18.53	Pass
51	1.4420	35.93	20.32	9.77	45.70	30.09	56.00	46.00	-10.30	-15.91	Pass
52	1.4700	38.77	20.64	9.77	48.54	30.41	56.00	46.00	-7.46	-15.59	Pass
53	1.5100	35.50	20.02	9.79	45.29	29.81	56.00	46.00	-10.71	-16.19	Pass
54	1.5380	36.11	19.44	9.79	45.90	29.23	56.00	46.00	-10.10	-16.77	Pass
55	1.5740	35.02	21.55	9.79	44.81	31.34	56.00	46.00	-11.19	-14.66	Pass
56	1.5860	38.60	21.30	9.79	48.39	31.09	56.00	46.00	-7.61	-14.91	Pass
57	1.6380	40.56	23.75	9.79	50.35	33.54	56.00	46.00	-5.65	-12.46	Pass
58	1.6820	40.00	23.76	9.79	49.79	33.55	56.00	46.00	-6.21	-12.45	Pass
59	1.7020	39.65	22.77	9.79	49.44	32.56	56.00	46.00	-6.56	-13.44	Pass
60	1.7180	41.16	24.97	9.79	50.95	34.76	56.00	46.00	-5.05	-11.24	Pass
61	1.7540	39.60	24.22	9.79	49.39	34.01	56.00	46.00	-6.61	-11.99	Pass
62	1.7740	42.11	24.69	9.79	51.90	34.48	56.00	46.00	-4.10	-11.52	Pass
63	1.8180	42.06	25.46	9.79	51.85	35.25	56.00	46.00	-4.15	-10.75	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Test Mode:	Mode 1		
Description:			

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
64	1.8540	38.79	23.23	9.80	48.59	33.03	56.00	46.00	-7.41	-12.97	Pass
65	1.8780	40.47	22.89	9.80	50.27	32.69	56.00	46.00	-5.73	-13.31	Pass
66	1.9260	41.33	22.03	9.80	51.13	31.83	56.00	46.00	-4.87	-14.17	Pass
67	1.9580	40.21	22.49	9.80	50.01	32.29	56.00	46.00	-5.99	-13.71	Pass
68	1.9740	34.35	18.51	9.80	44.15	28.31	56.00	46.00	-11.85	-17.69	Pass
69	1.9980	39.21	20.70	9.80	49.01	30.50	56.00	46.00	-6.99	-15.50	Pass
70	2.0220	38.11	19.39	9.80	47.91	29.19	56.00	46.00	-8.09	-16.81	Pass
71	2.0980	41.71	23.22	9.80	51.51	33.02	56.00	46.00	-4.49	-12.98	Pass
72	2.1180	41.31	23.13	9.80	51.11	32.93	56.00	46.00	-4.89	-13.07	Pass
73	2.1540	39.87	22.71	9.80	49.67	32.51	56.00	46.00	-6.33	-13.49	Pass
74	2.1980	33.70	19.35	9.80	43.50	29.15	56.00	46.00	-12.50	-16.85	Pass
75	2.2420	35.86	19.59	9.80	45.66	29.39	56.00	46.00	-10.34	-16.61	Pass
76	2.2940	36.12	23.23	9.80	45.92	33.03	56.00	46.00	-10.08	-12.97	Pass
77	2.3180	35.57	20.68	9.81	45.38	30.49	56.00	46.00	-10.62	-15.51	Pass
78	2.3380	36.76	20.78	9.81	46.57	30.59	56.00	46.00	-9.43	-15.41	Pass
79	2.5820	32.11	14.44	9.82	41.93	24.26	56.00	46.00	-14.07	-21.74	Pass
80	3.8900	33.01	18.13	9.85	42.86	27.98	56.00	46.00	-13.14	-18.02	Pass
81	4.0260	33.30	18.28	9.85	43.15	28.13	56.00	46.00	-12.85	-17.87	Pass
82	4.0620	33.38	20.37	9.85	43.23	30.22	56.00	46.00	-12.77	-15.78	Pass
83	4.6820	29.28	16.35	9.87	39.15	26.22	56.00	46.00	-16.85	-19.78	Pass
84	4.8500	32.45	19.42	9.88	42.33	29.30	56.00	46.00	-13.67	-16.70	Pass
85	20.8860	33.26	25.65	10.20	43.46	35.85	60.00	50.00	-16.54	-14.15	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).


5.2 Radiated Emission Measurement

Harmonic

SISO

Below 1 GHz

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

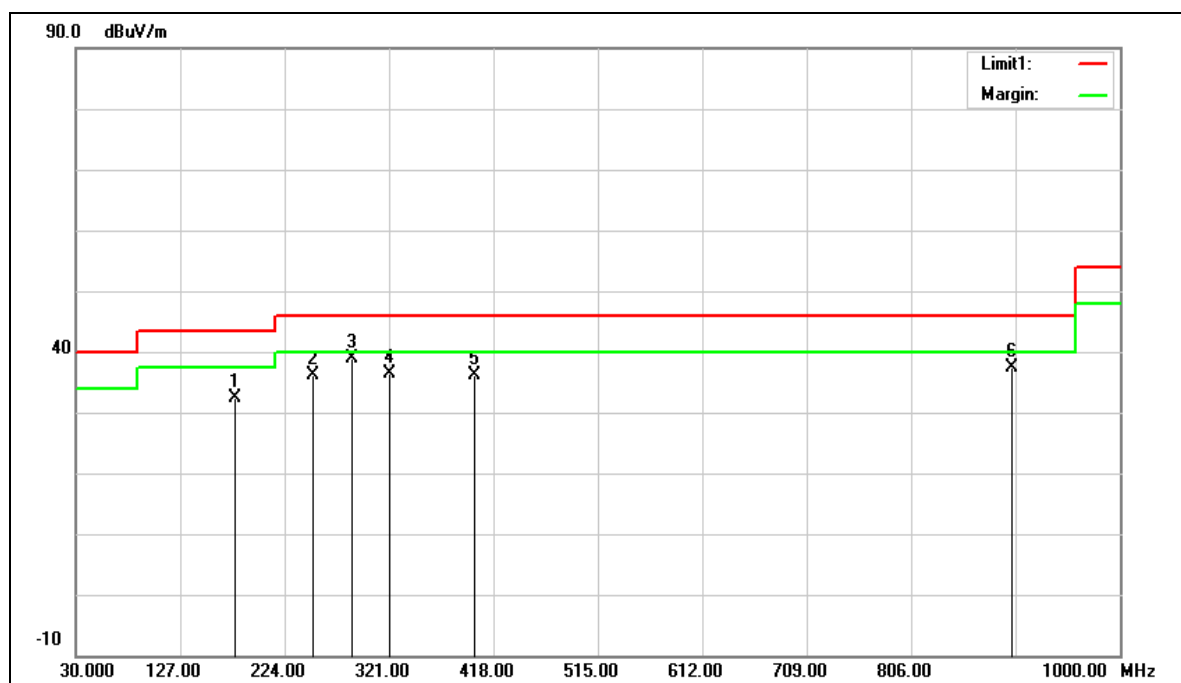

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.4400	56.89	-24.60	32.29	43.50	-11.21	QP
2	250.1900	60.51	-24.26	36.25	46.00	-9.75	QP
3	287.0500	61.84	-23.01	38.83	46.00	-7.17	QP
4	321.9700	58.69	-22.30	36.39	46.00	-9.61	QP
5	400.5400	55.97	-19.90	36.07	46.00	-9.93	QP
6	900.0900	48.22	-10.77	37.45	46.00	-8.55	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 32.29= -24.60+56.89.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

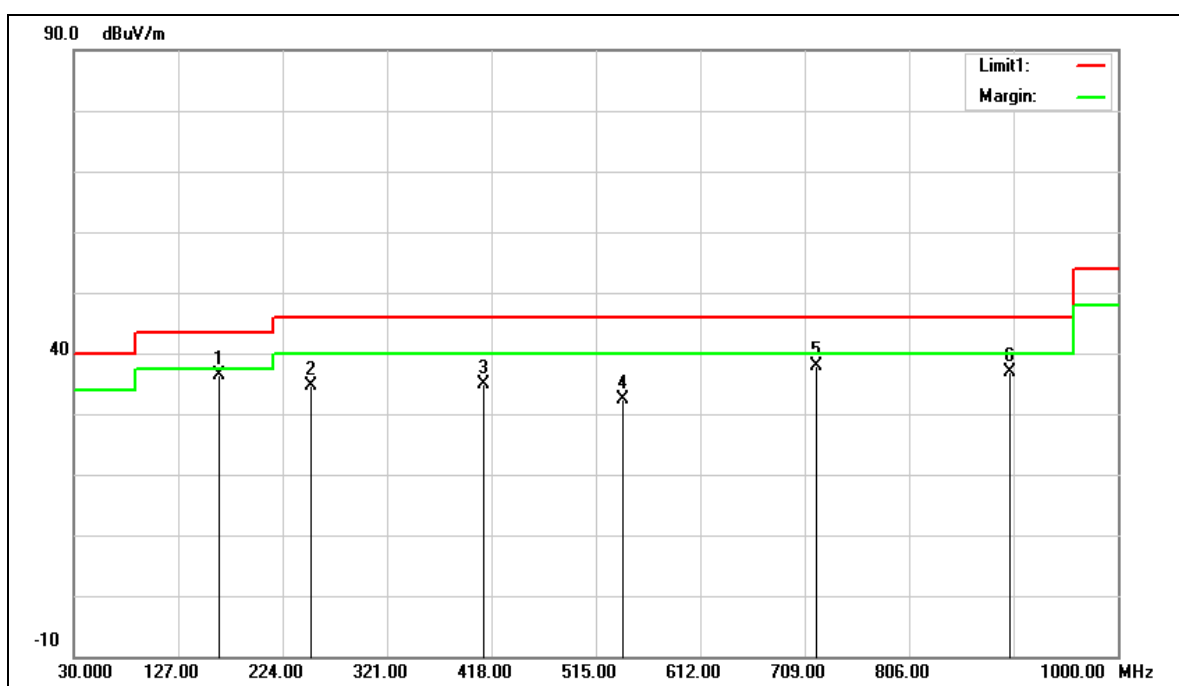

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	164.8300	59.90	-23.54	36.36	43.50	-7.14	QP
2	250.1900	59.00	-24.26	34.74	46.00	-11.26	QP
3	410.2400	54.58	-19.70	34.88	46.00	-11.12	QP
4	540.2200	49.58	-17.19	32.39	46.00	-13.61	QP
5	719.6700	51.37	-13.56	37.81	46.00	-8.19	QP
6	900.0900	47.72	-10.77	36.95	46.00	-9.05	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 36.36= -23.54+59.90.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

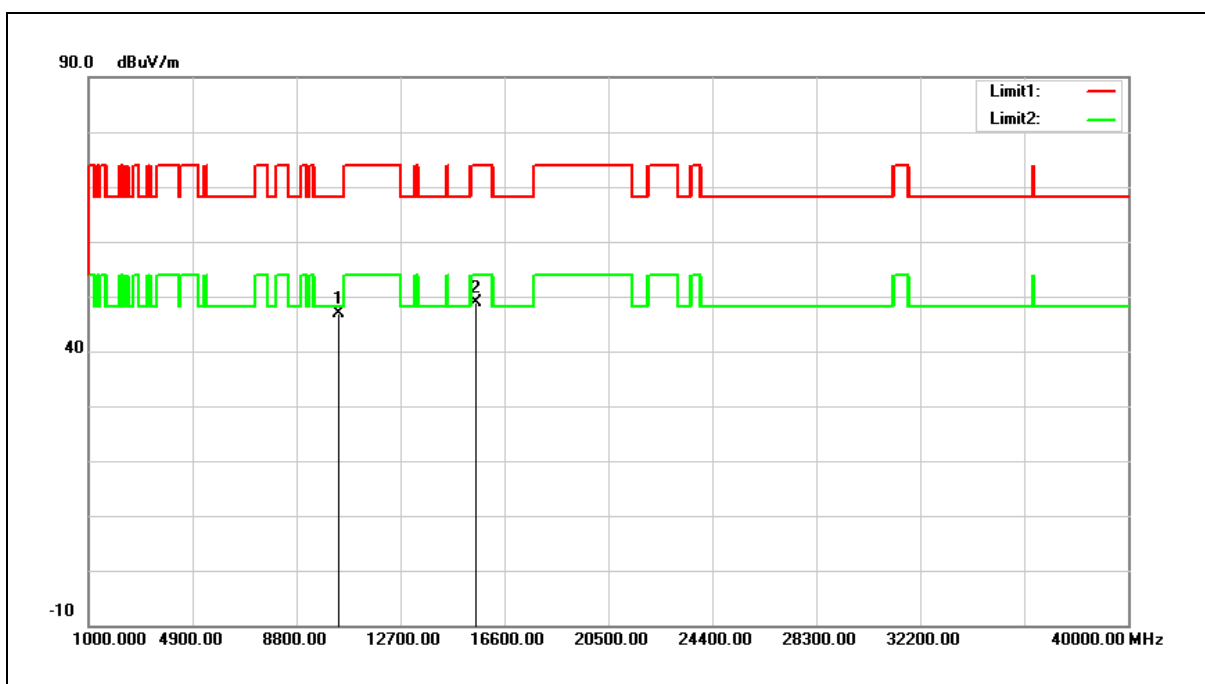


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	32.65	14.29	46.94	68.20	-21.26	peak
2	15540.000	32.13	16.86	48.99	74.00	-25.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

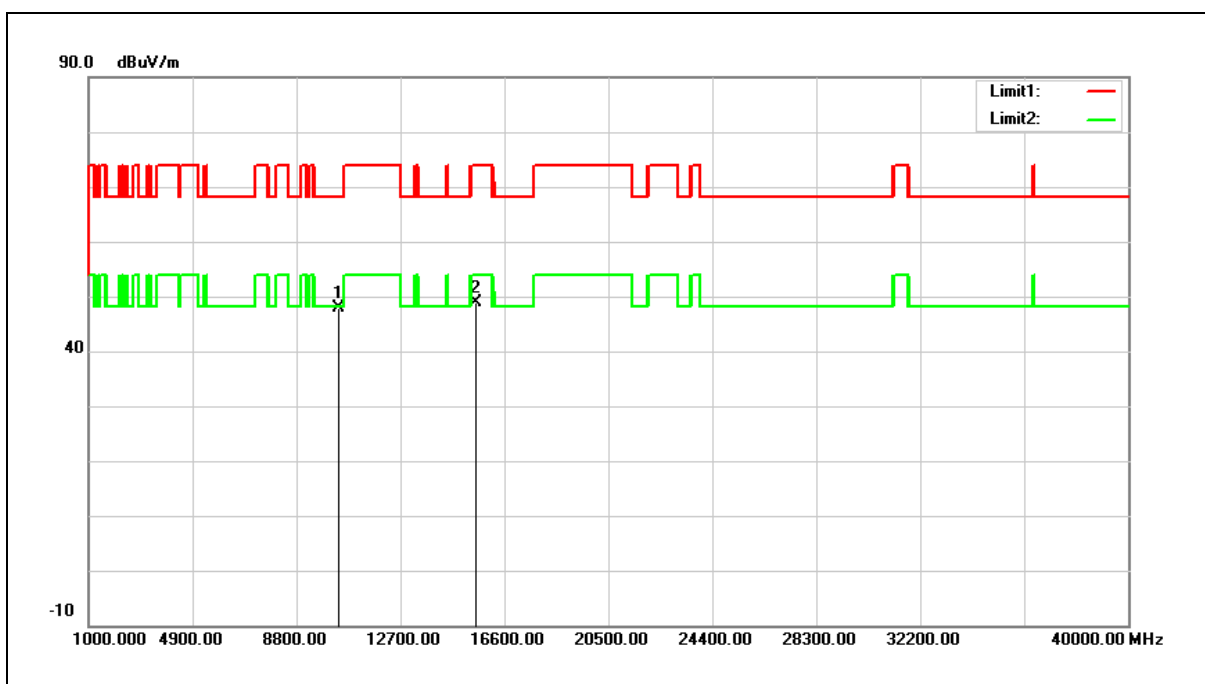


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	33.65	14.29	47.94	68.20	-20.26	peak
2	15540.000	32.09	16.86	48.95	74.00	-25.05	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

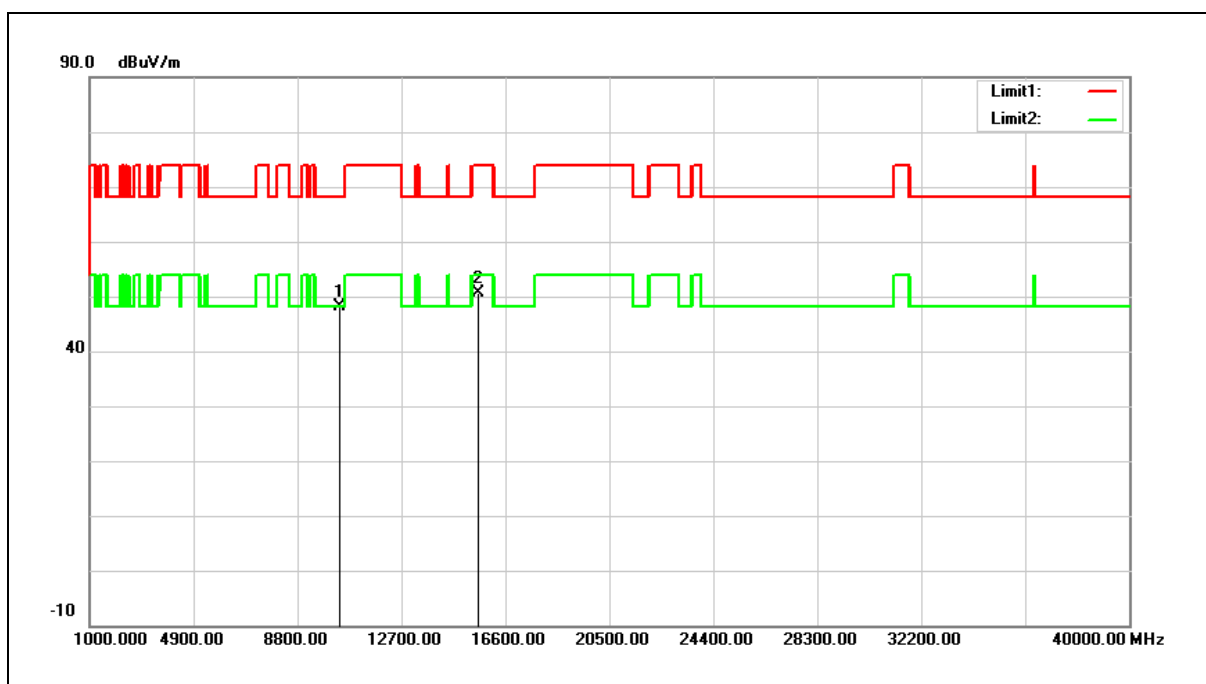


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.75	14.38	48.13	68.20	-20.07	peak
2	15600.000	33.94	16.65	50.59	74.00	-23.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

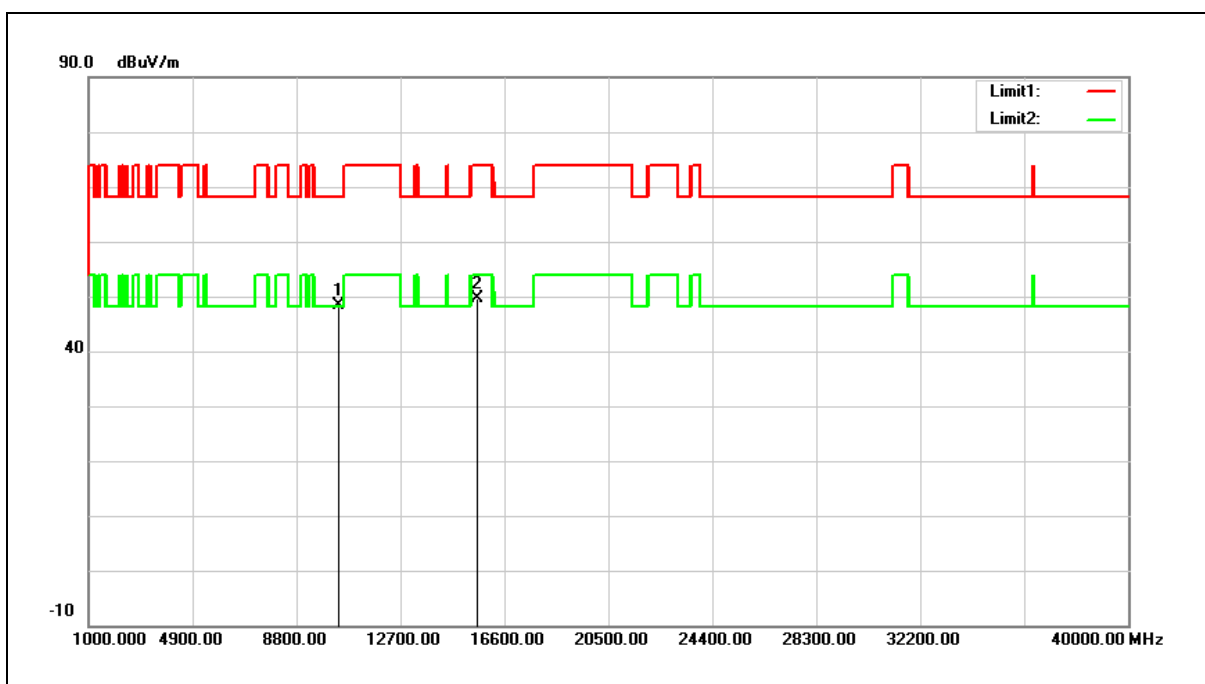


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.96	14.38	48.34	68.20	-19.86	peak
2	15600.000	32.94	16.65	49.59	74.00	-24.41	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

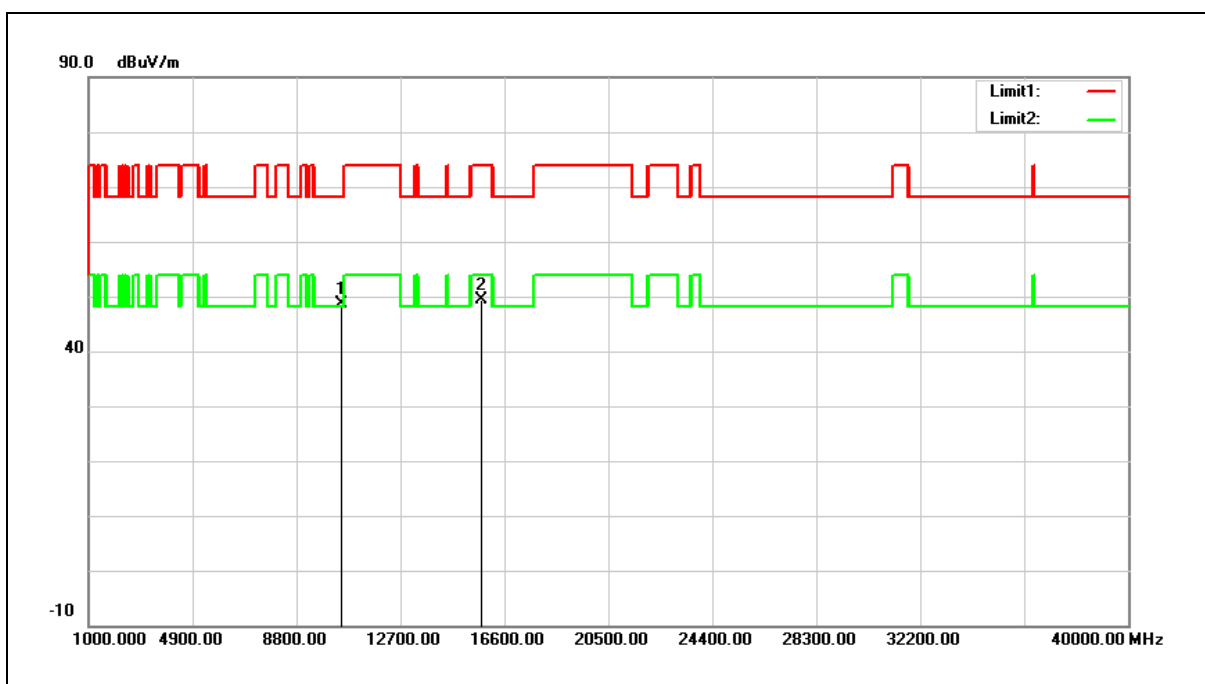


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.07	14.55	48.62	68.20	-19.58	peak
2	15720.000	33.04	16.24	49.28	74.00	-24.72	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

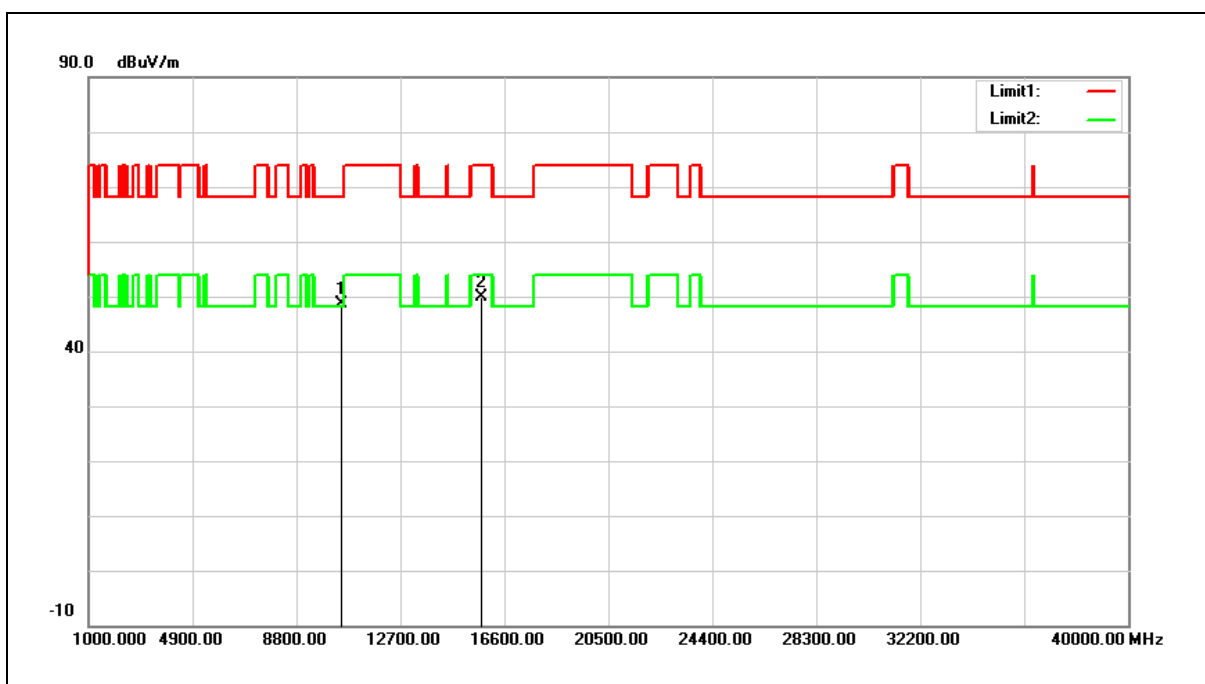


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.20	14.55	48.75	68.20	-19.45	peak
2	15720.000	33.61	16.24	49.85	74.00	-24.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

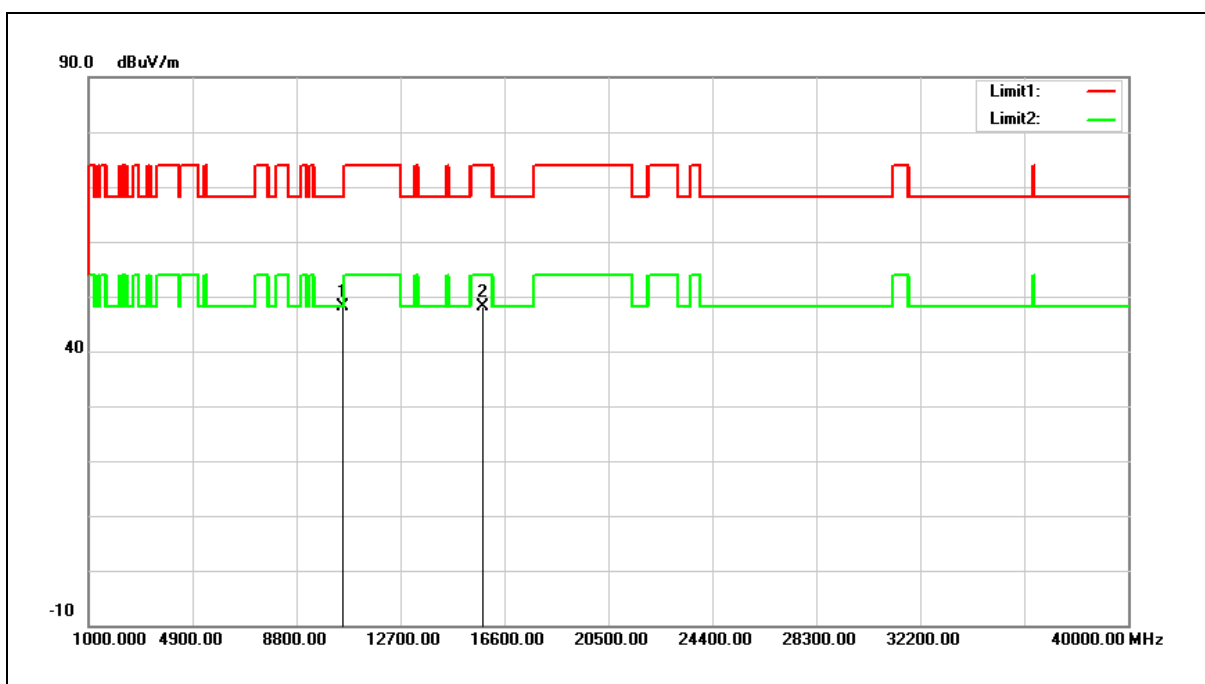


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.49	14.59	48.08	68.20	-20.12	peak
2	15780.000	31.99	16.06	48.05	74.00	-25.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

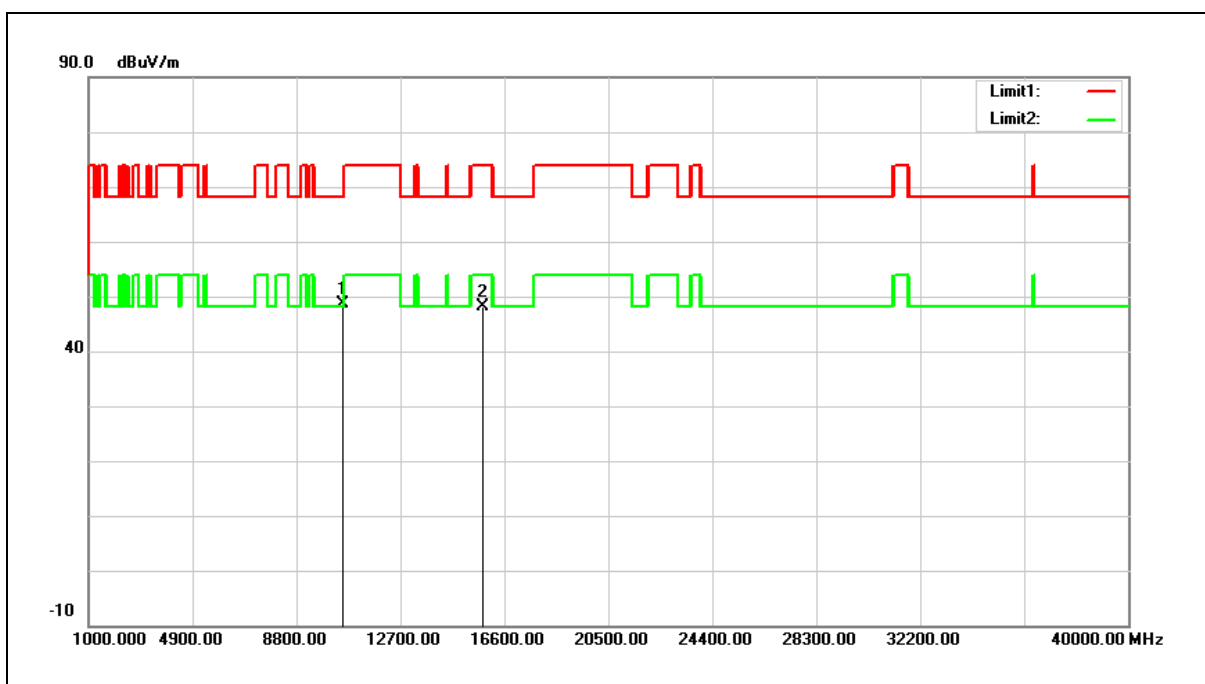


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.12	14.59	48.71	68.20	-19.49	peak
2	15780.000	32.10	16.06	48.16	74.00	-25.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

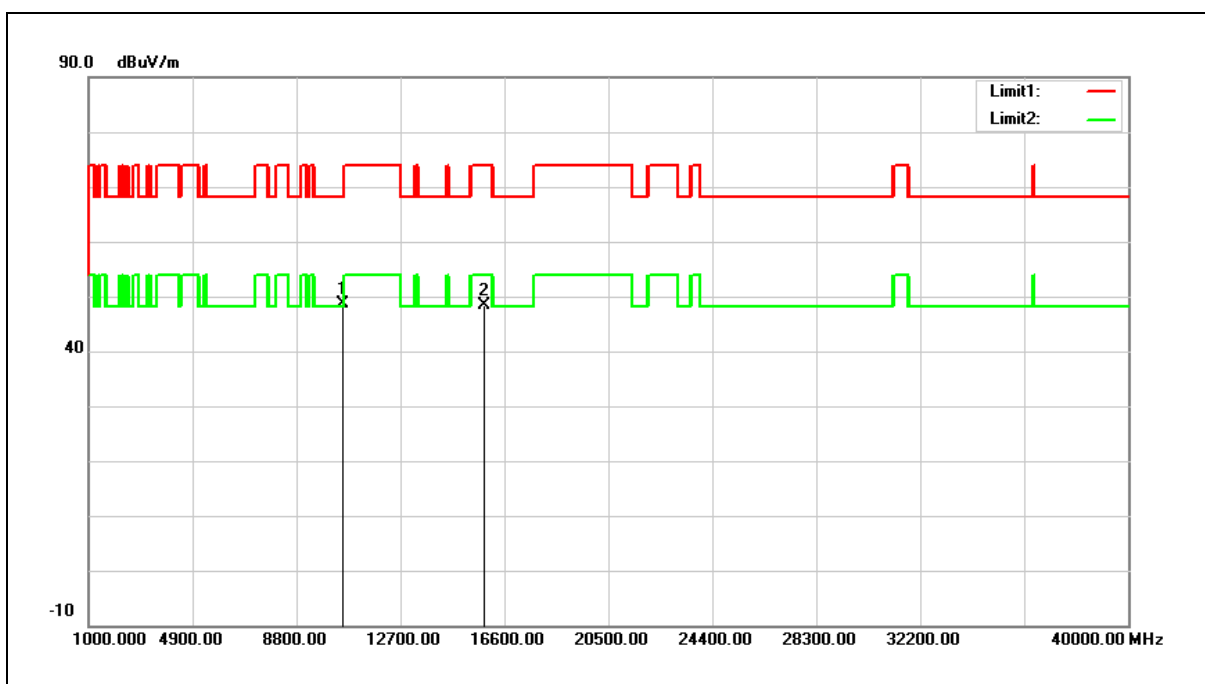


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.08	14.58	48.66	68.20	-19.54	peak
2	15840.000	32.61	15.85	48.46	74.00	-25.54	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

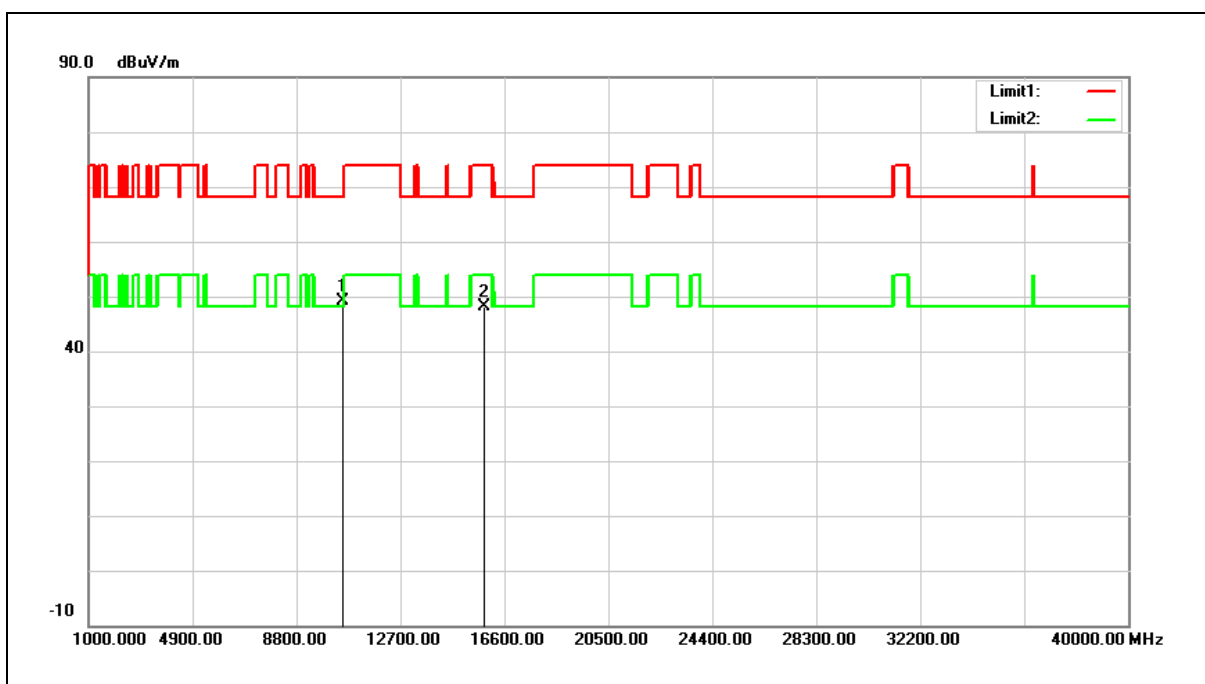


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.55	14.58	49.13	68.20	-19.07	peak
2	15840.000	32.23	15.85	48.08	74.00	-25.92	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

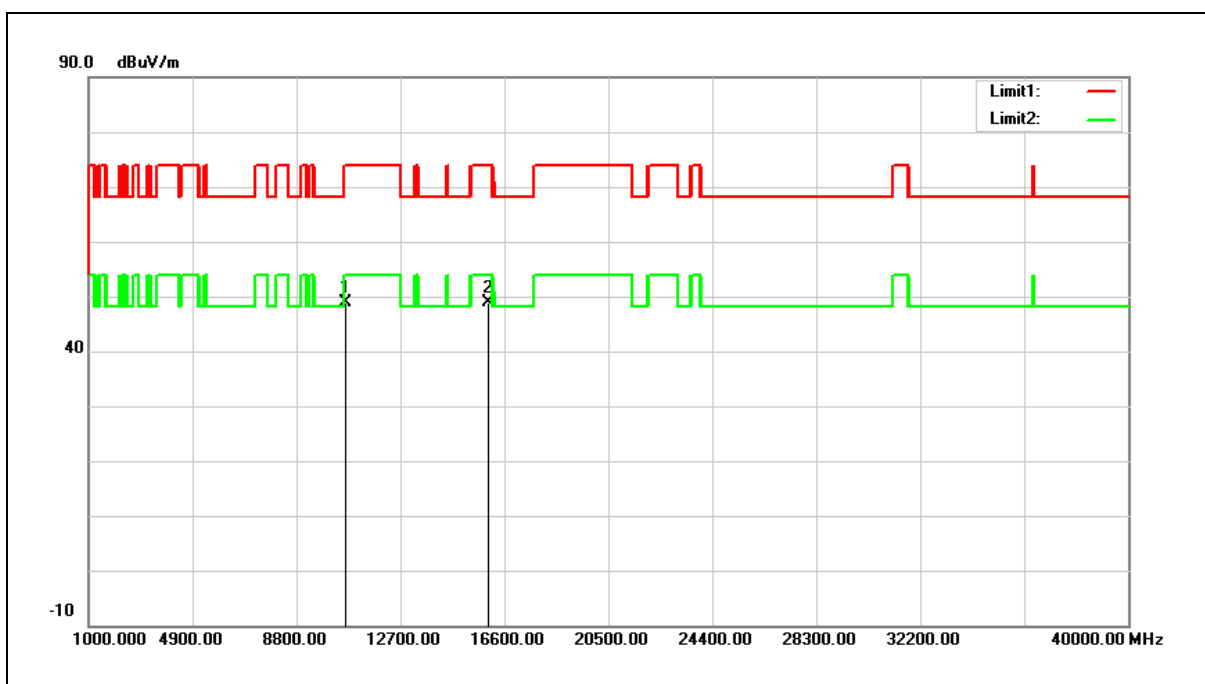


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.29	14.56	48.85	74.00	-25.15	peak
2	15960.000	33.46	15.44	48.90	74.00	-25.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

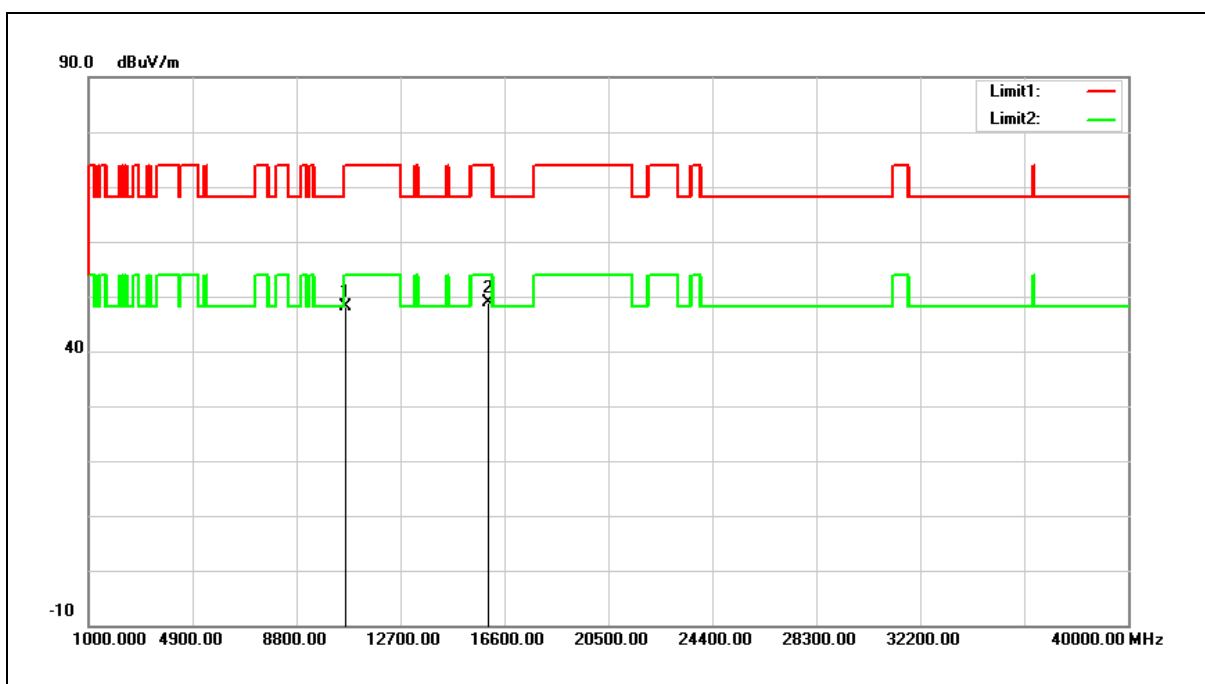


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	33.63	14.56	48.19	74.00	-25.81	peak
2	15960.000	33.42	15.44	48.86	74.00	-25.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

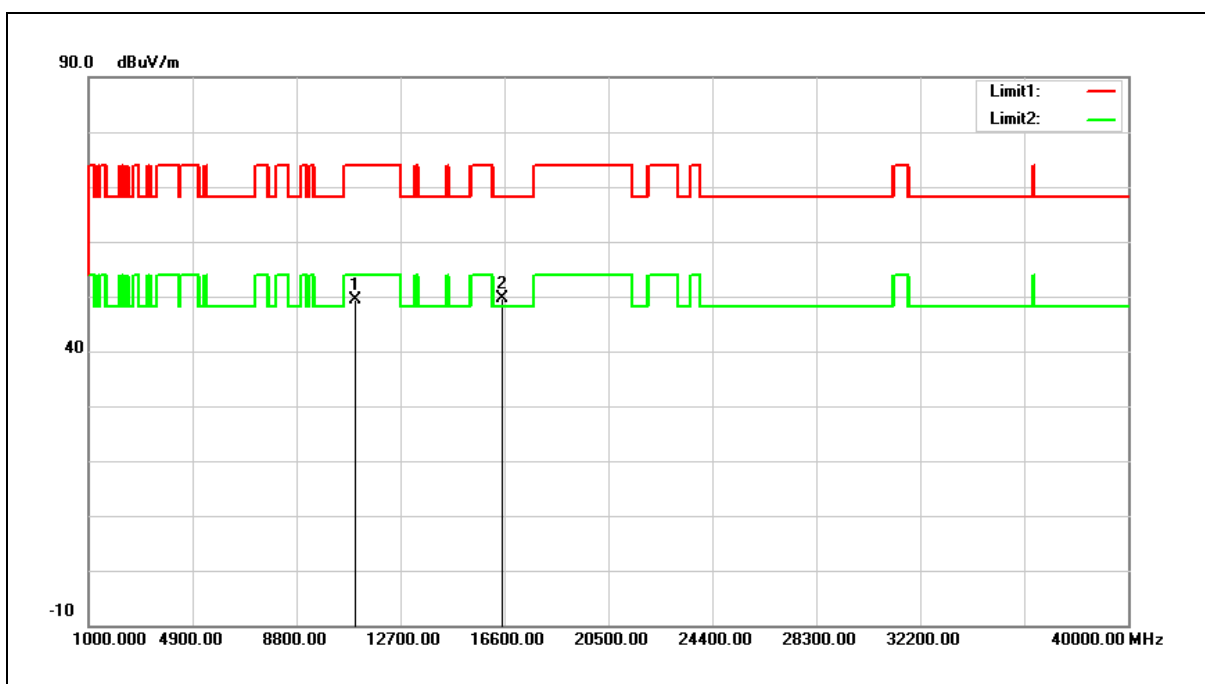


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.96	14.47	49.43	74.00	-24.57	peak
2	16500.000	32.90	16.63	49.53	68.20	-18.67	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

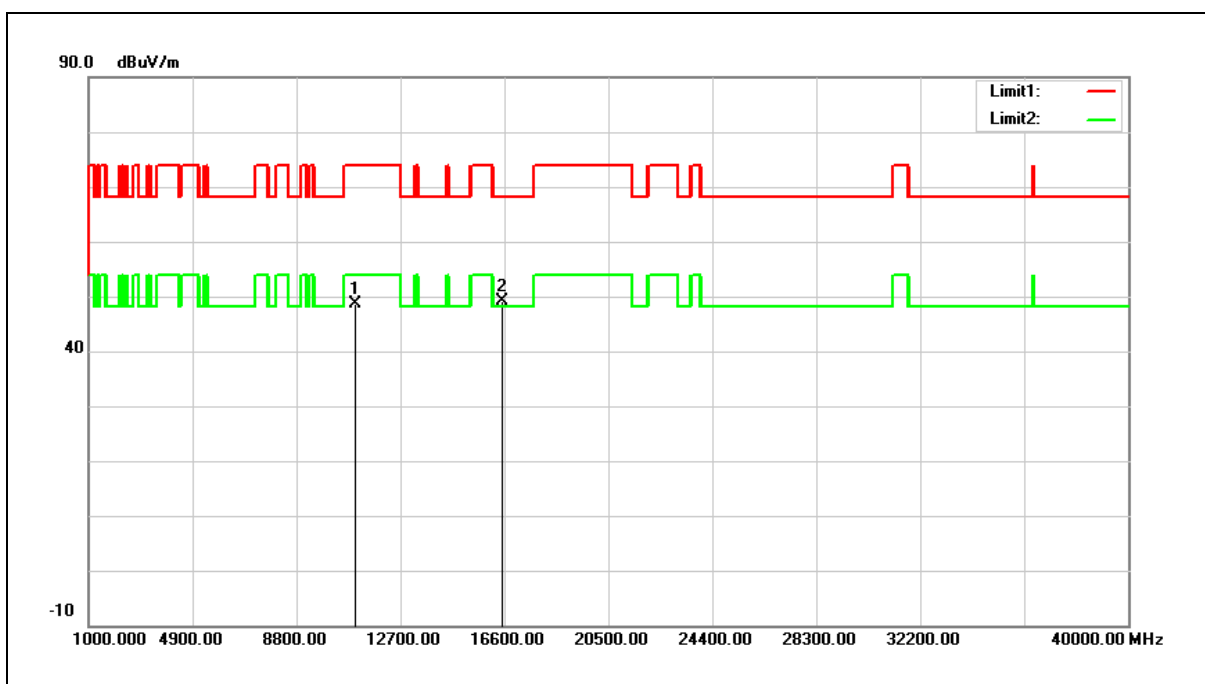


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.17	14.47	48.64	74.00	-25.36	peak
2	16500.000	32.58	16.63	49.21	68.20	-18.99	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

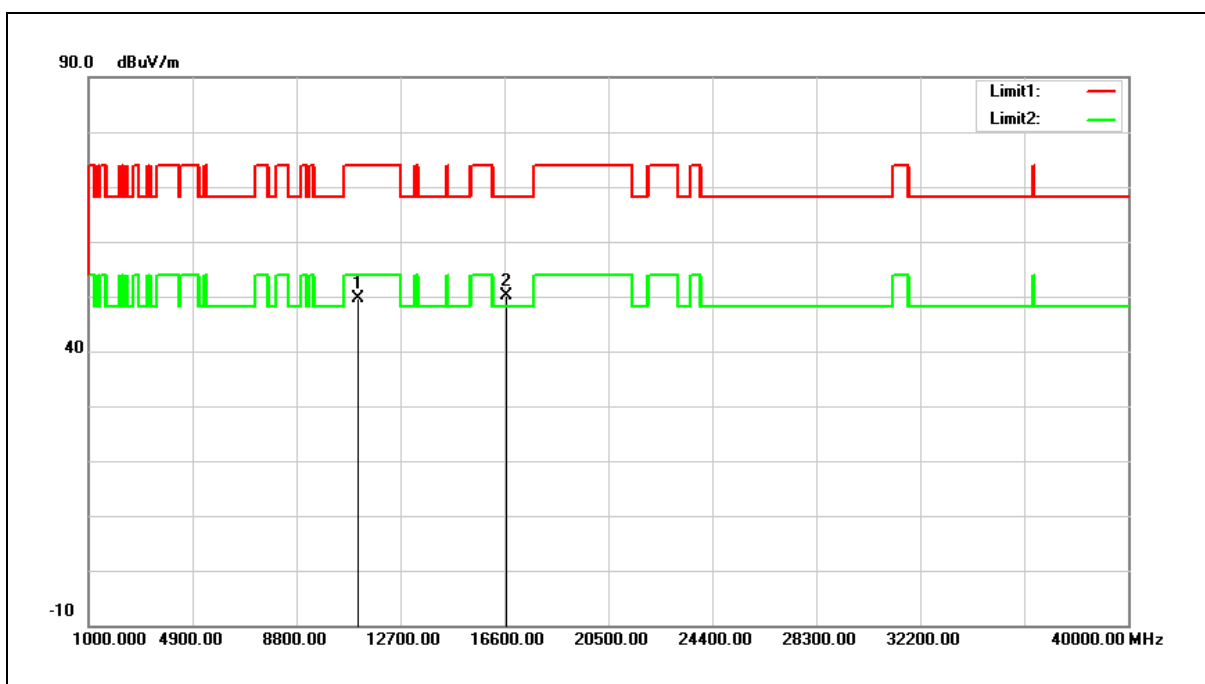


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.02	14.70	49.72	74.00	-24.28	peak
2	16680.000	32.10	17.95	50.05	68.20	-18.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

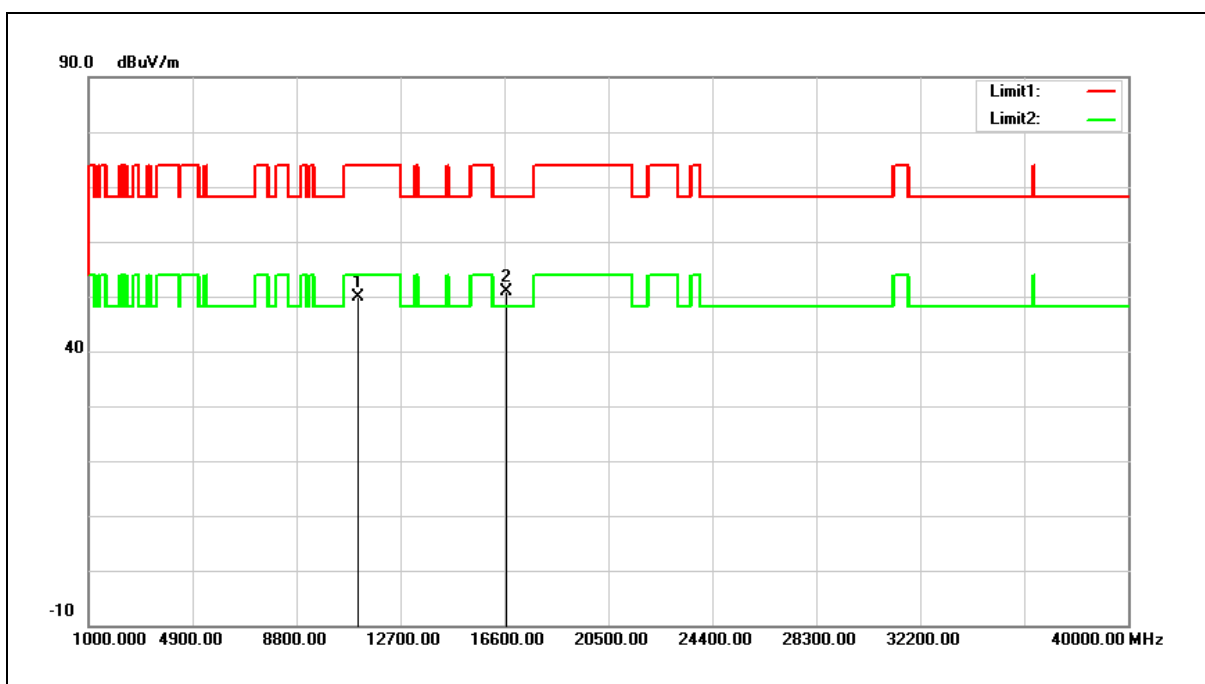


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.06	14.70	49.76	74.00	-24.24	peak
2	16680.000	32.98	17.95	50.93	68.20	-17.27	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

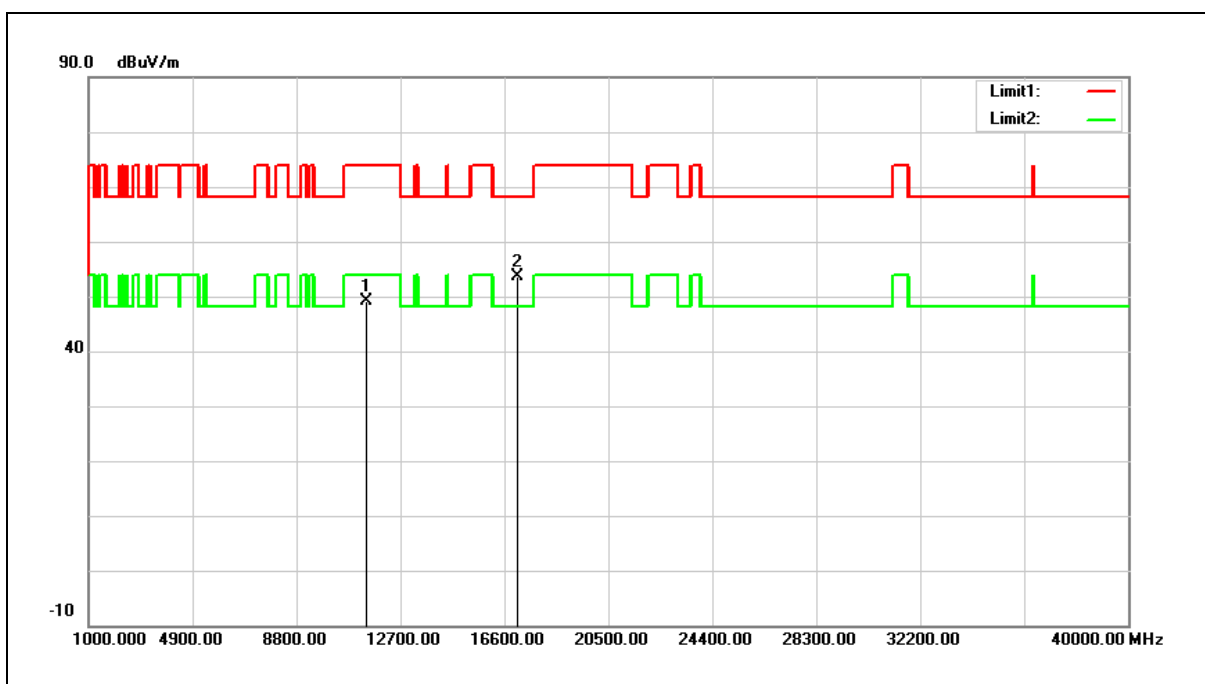


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.92	15.22	49.14	74.00	-24.86	peak
2	17100.000	32.66	20.89	53.55	68.20	-14.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

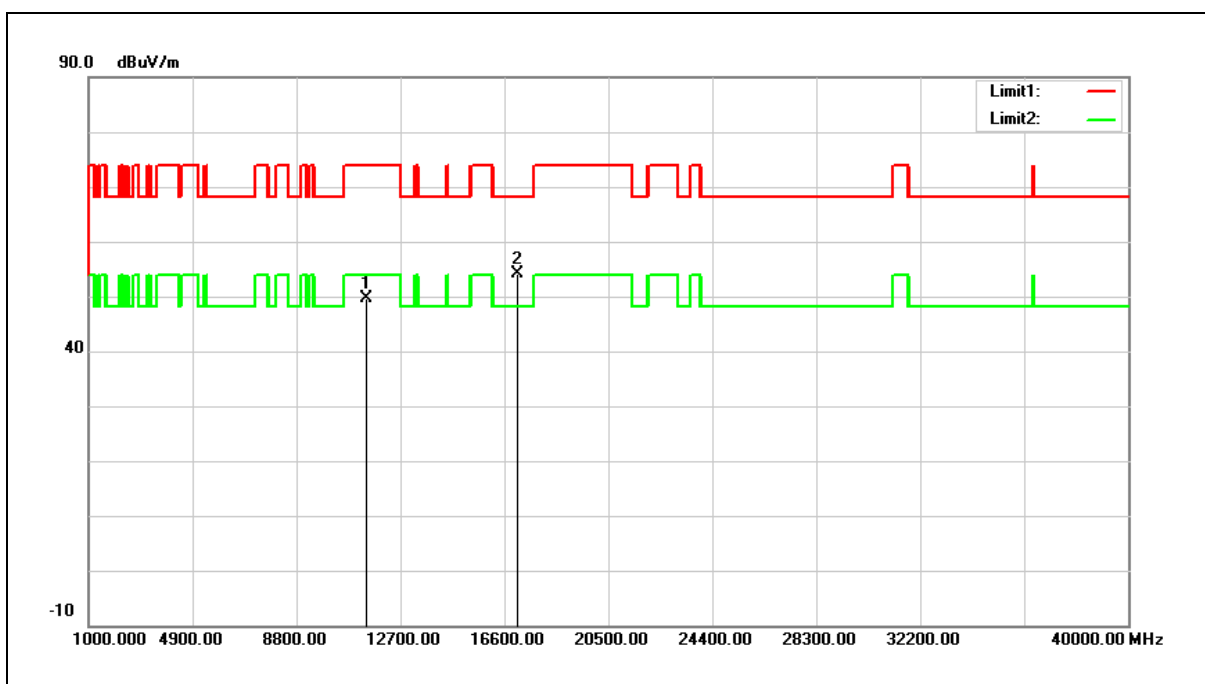


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.38	15.22	49.60	74.00	-24.40	peak
2	17100.000	33.12	20.89	54.01	68.20	-14.19	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

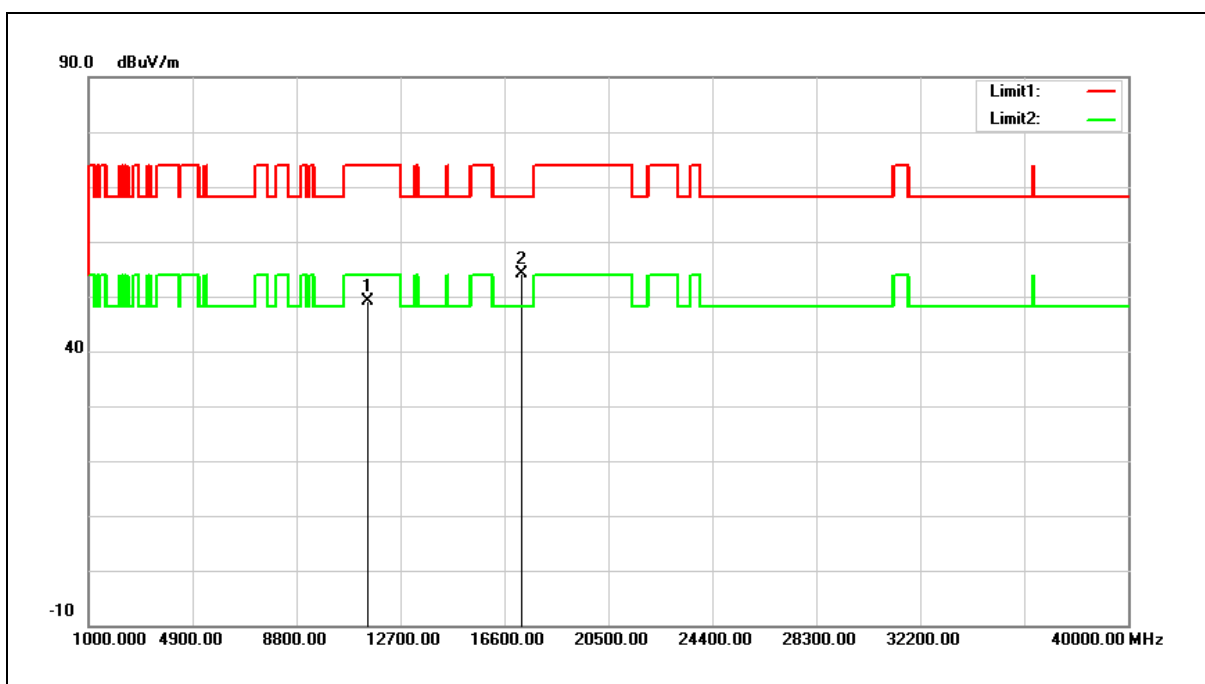


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.71	15.39	49.10	74.00	-24.90	peak
2	17235.000	32.34	21.71	54.05	68.20	-14.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

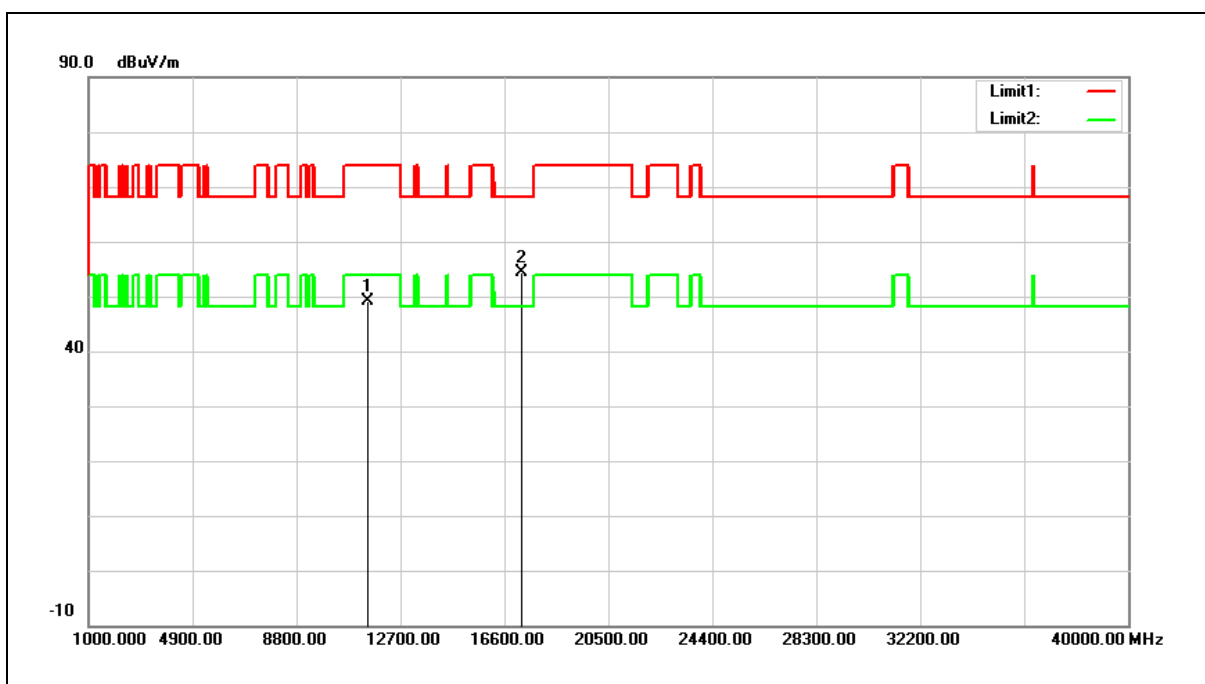


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	33.65	15.39	49.04	74.00	-24.96	peak
2	17235.000	32.73	21.71	54.44	68.20	-13.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

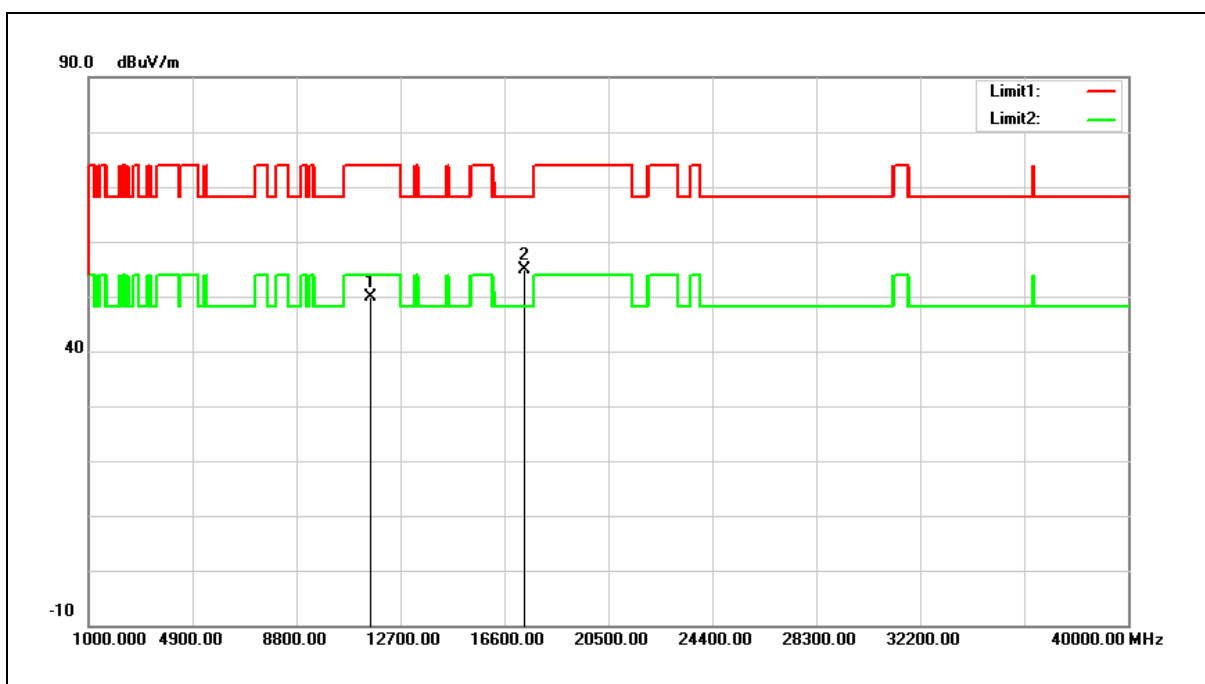


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.51	15.25	49.76	74.00	-24.24	peak
2	17355.000	32.40	22.42	54.82	68.20	-13.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

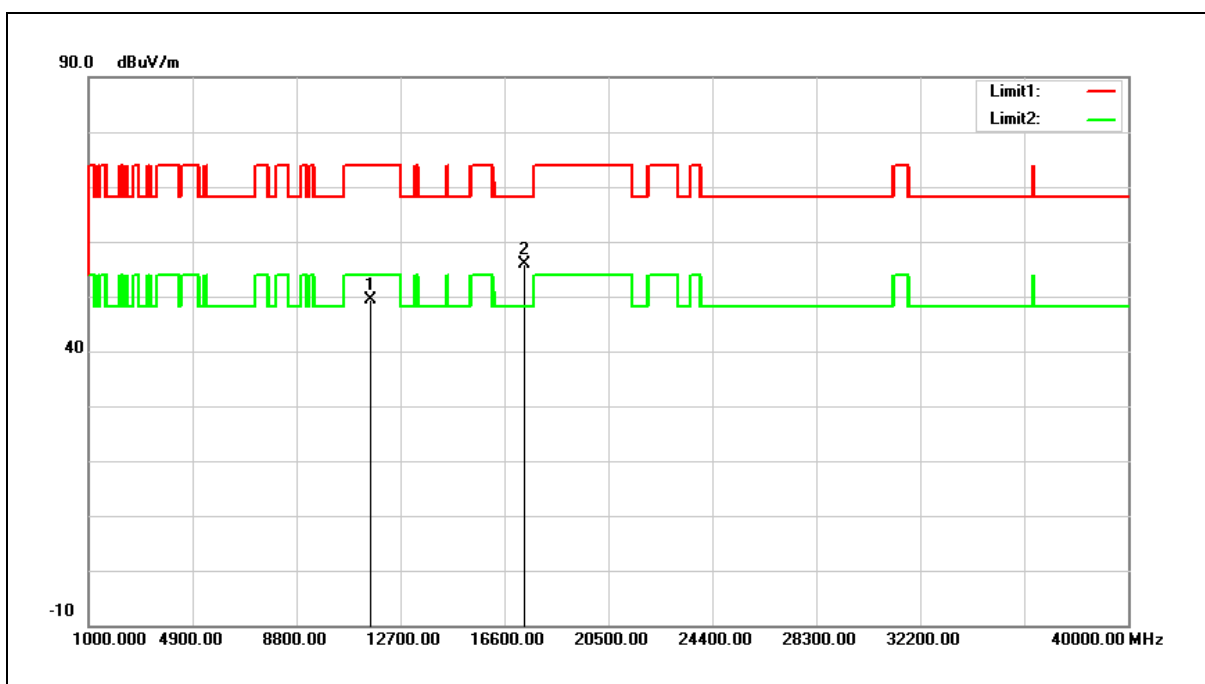


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.01	15.25	49.26	74.00	-24.74	peak
2	17355.000	33.48	22.42	55.90	68.20	-12.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

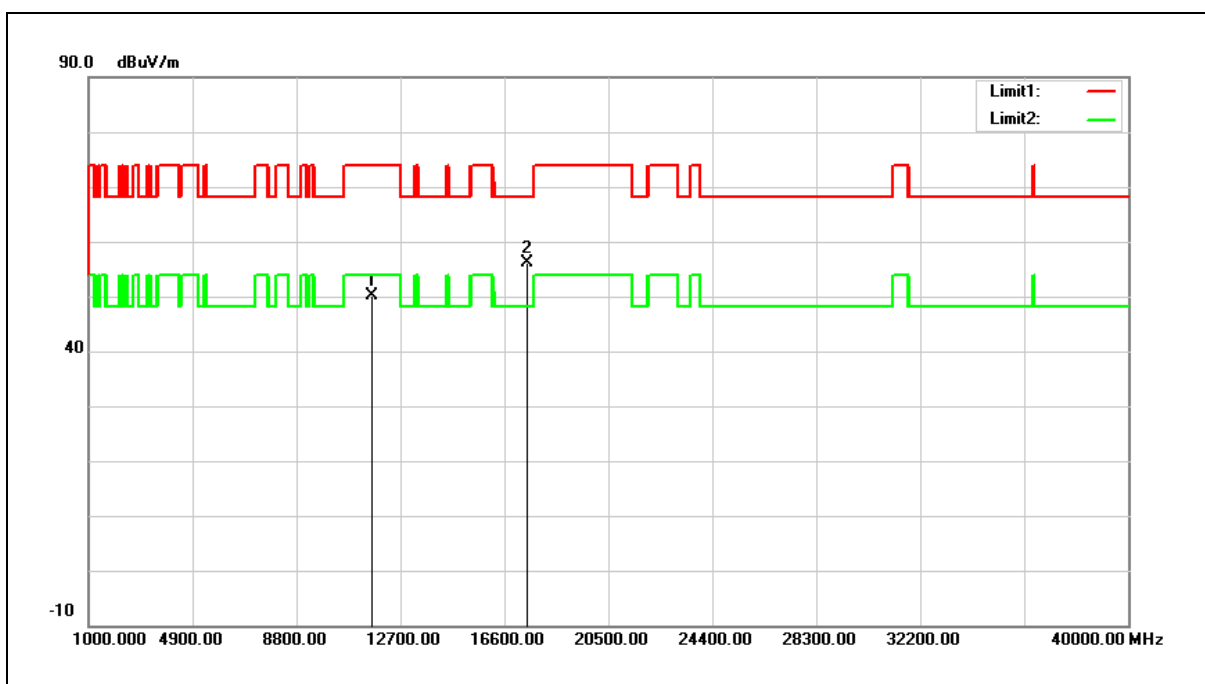


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.12	15.08	50.20	74.00	-23.80	peak
2	17475.000	32.95	23.13	56.08	68.20	-12.12	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

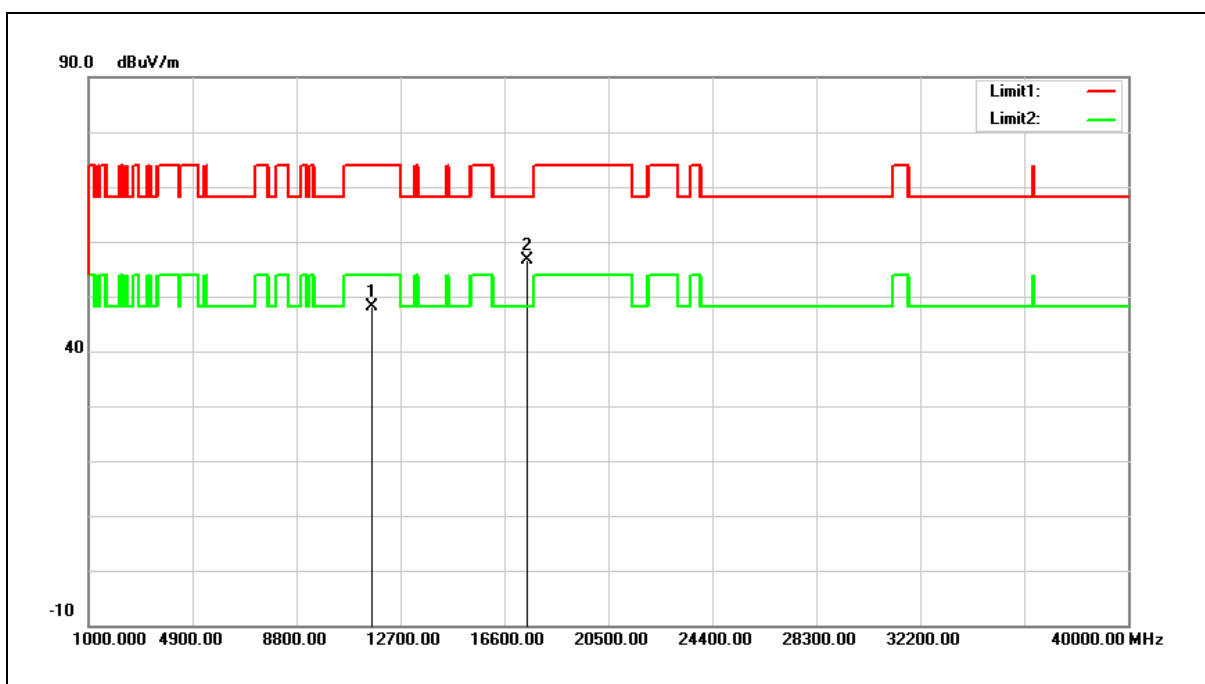


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	33.03	15.08	48.11	74.00	-25.89	peak
2	17475.000	33.42	23.13	56.55	68.20	-11.65	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

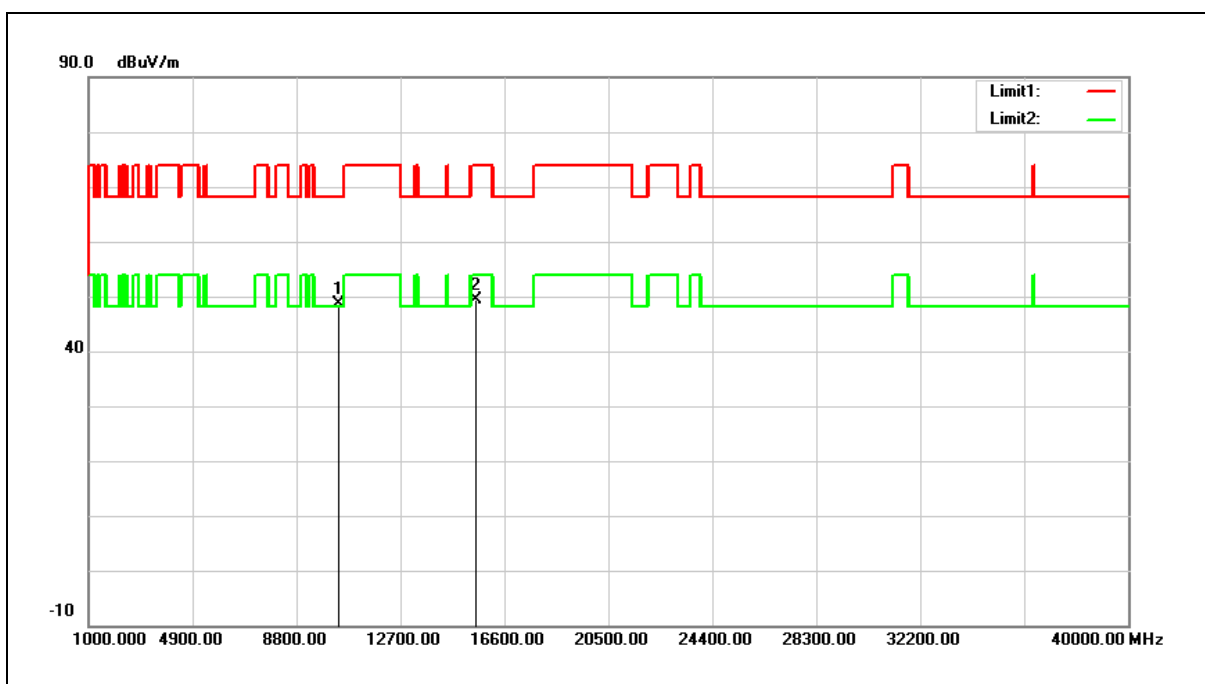


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.37	14.29	48.66	68.20	-19.54	peak
2	15540.000	32.57	16.86	49.43	74.00	-24.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

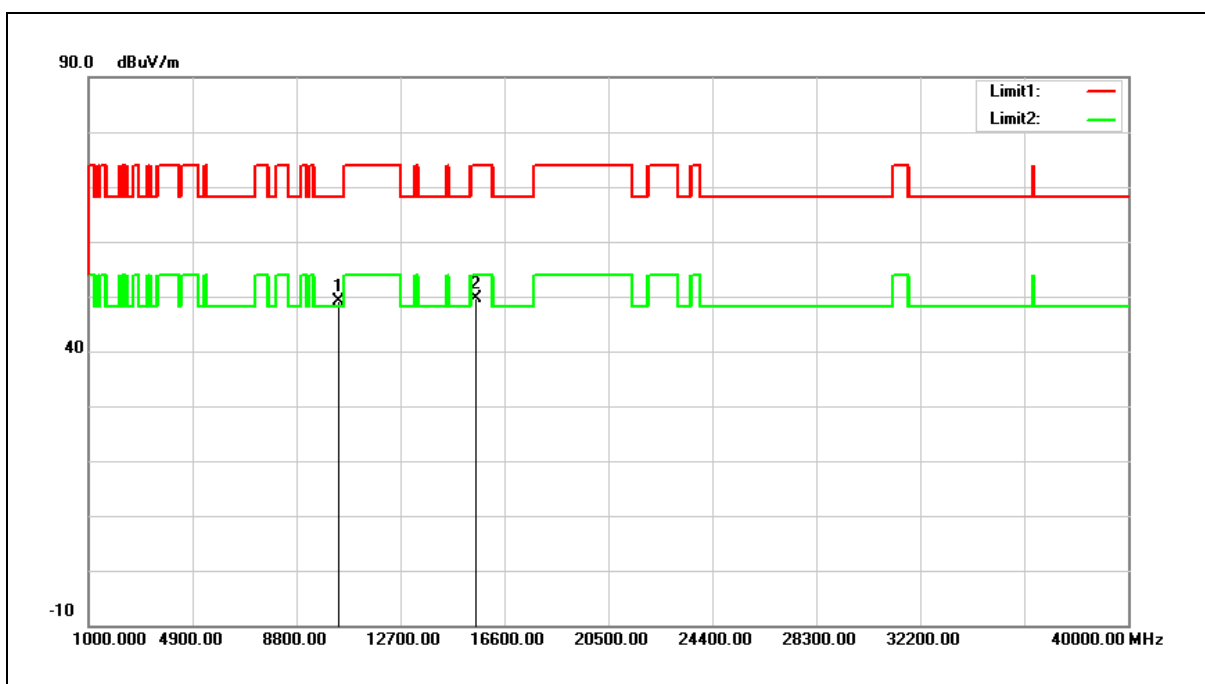


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.85	14.29	49.14	68.20	-19.06	peak
2	15540.000	32.66	16.86	49.52	74.00	-24.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

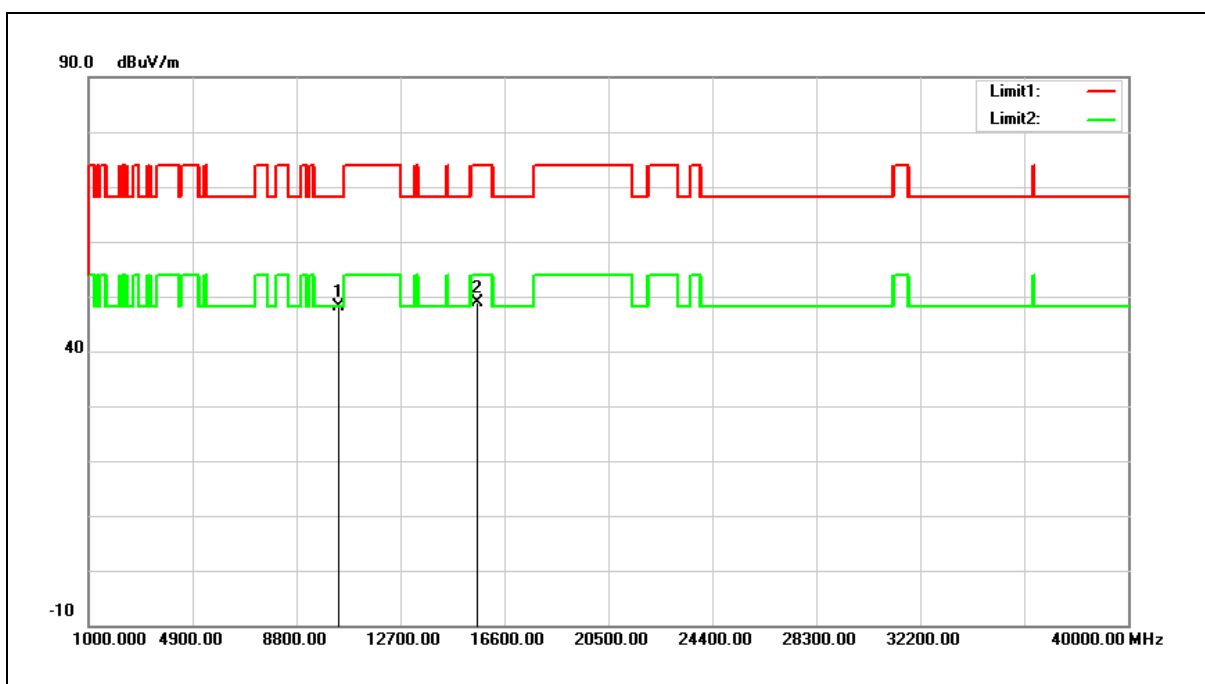


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.67	14.38	48.05	68.20	-20.15	peak
2	15600.000	32.15	16.65	48.80	74.00	-25.20	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

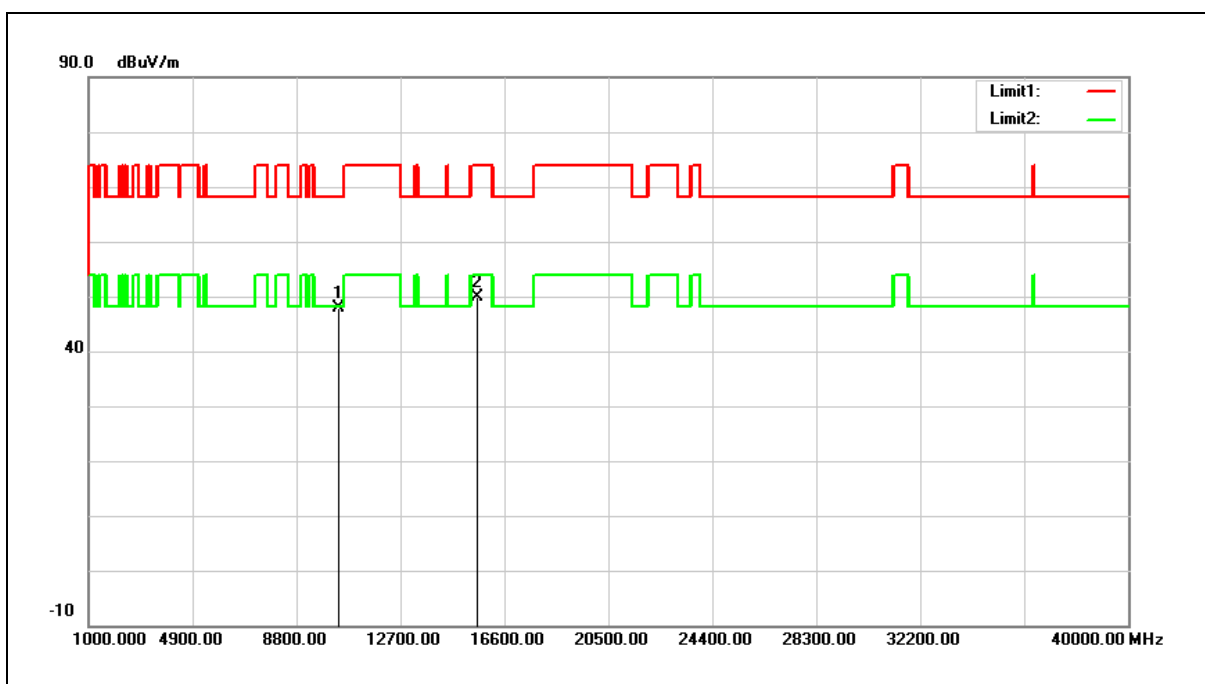


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.40	14.38	47.78	68.20	-20.42	peak
2	15600.000	33.30	16.65	49.95	74.00	-24.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

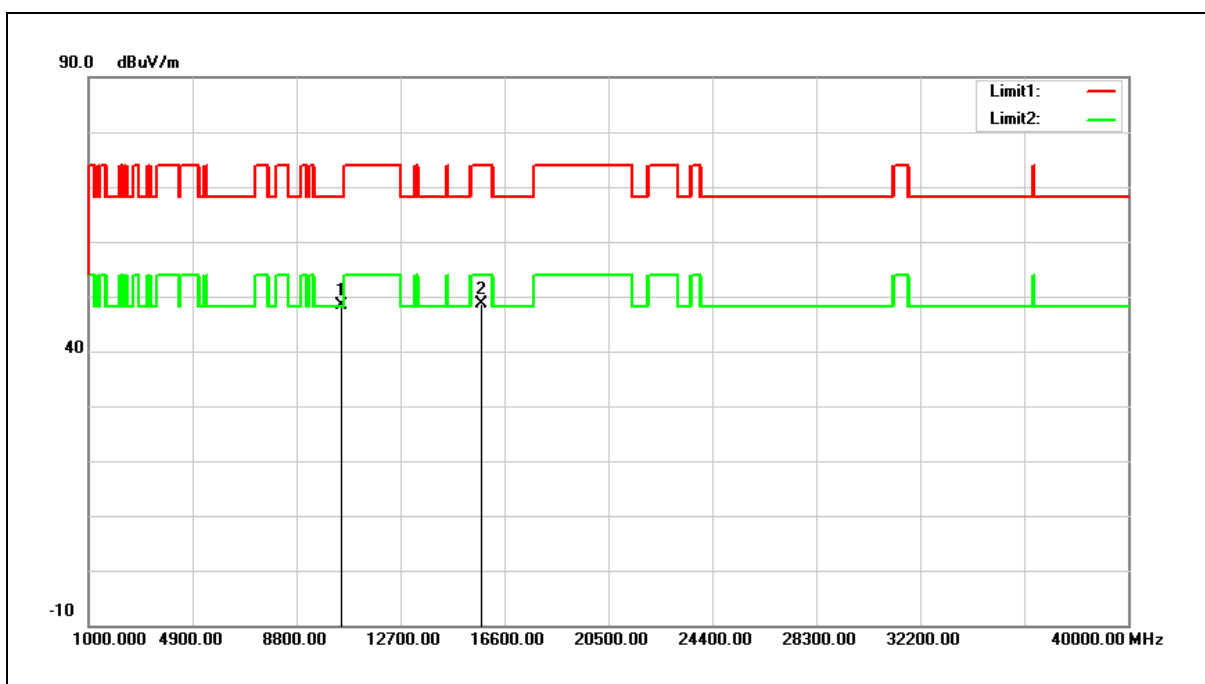


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	33.84	14.55	48.39	68.20	-19.81	peak
2	15720.000	32.45	16.24	48.69	74.00	-25.31	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

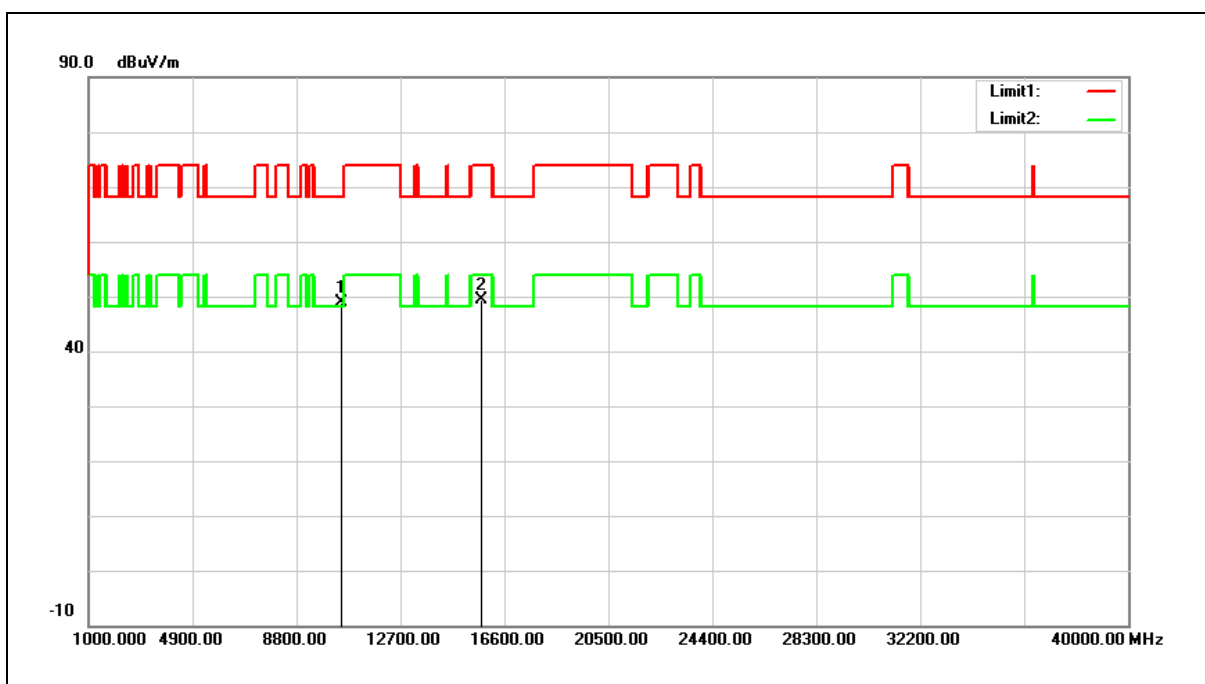


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.26	14.55	48.81	68.20	-19.39	peak
2	15720.000	33.09	16.24	49.33	74.00	-24.67	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

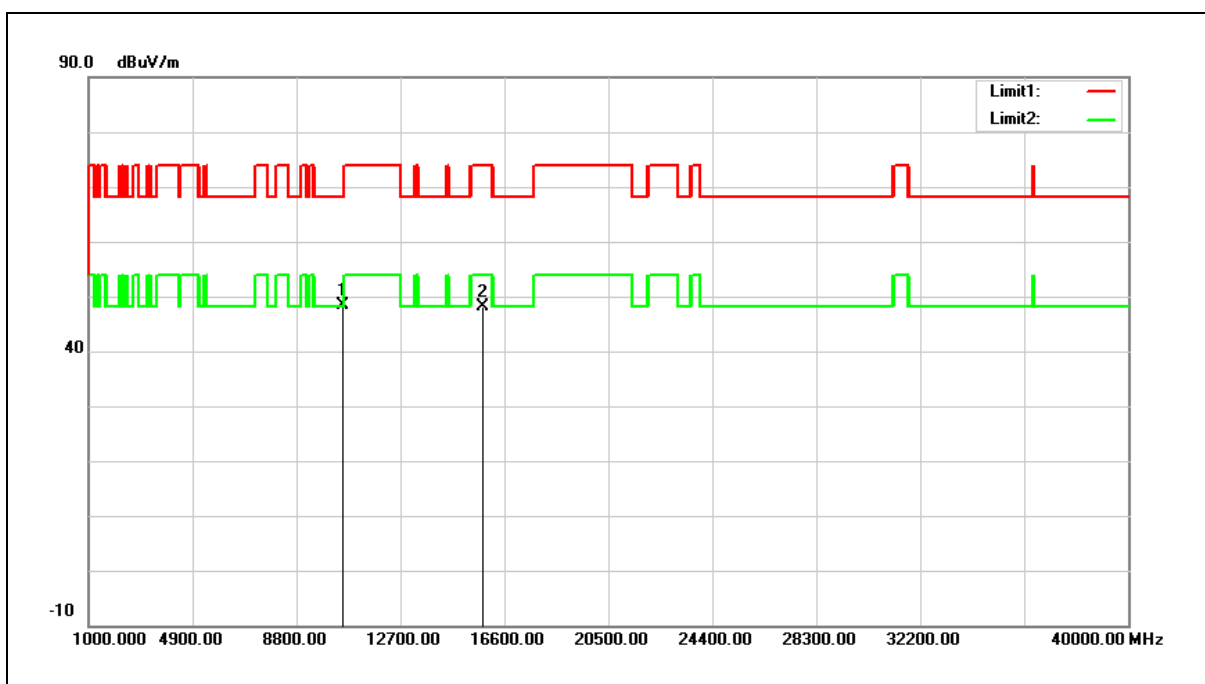


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.79	14.59	48.38	68.20	-19.82	peak
2	15780.000	32.01	16.06	48.07	74.00	-25.93	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

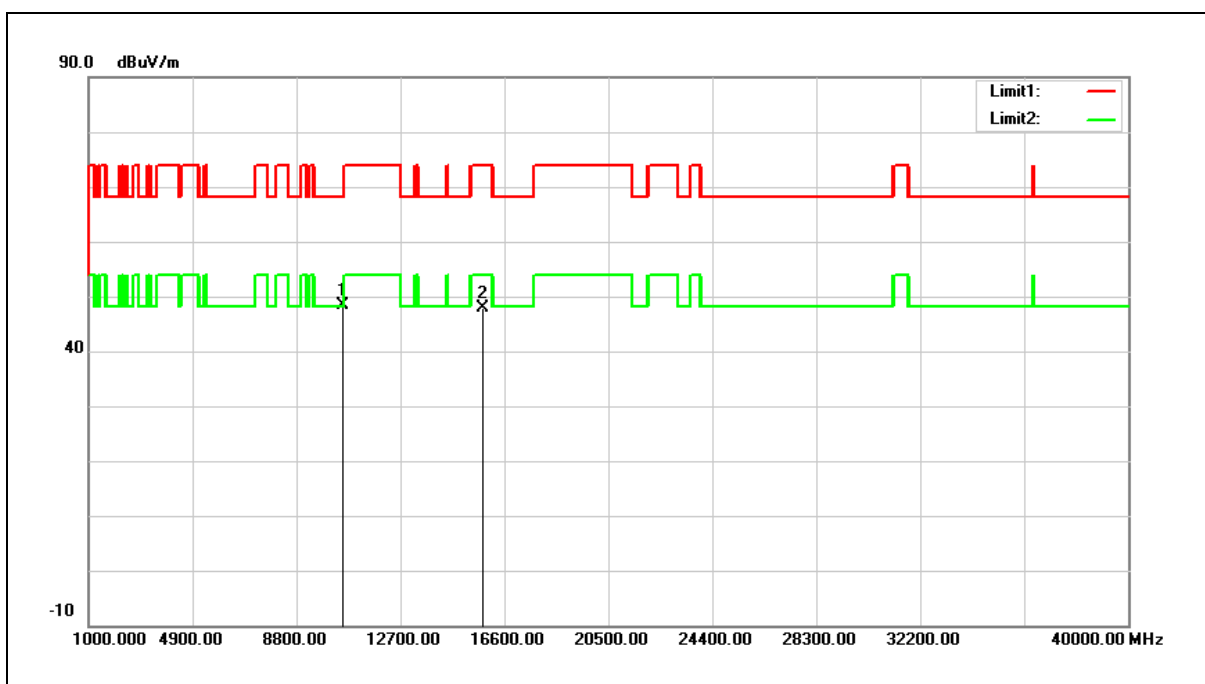


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	33.73	14.59	48.32	68.20	-19.88	peak
2	15780.000	31.92	16.06	47.98	74.00	-26.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

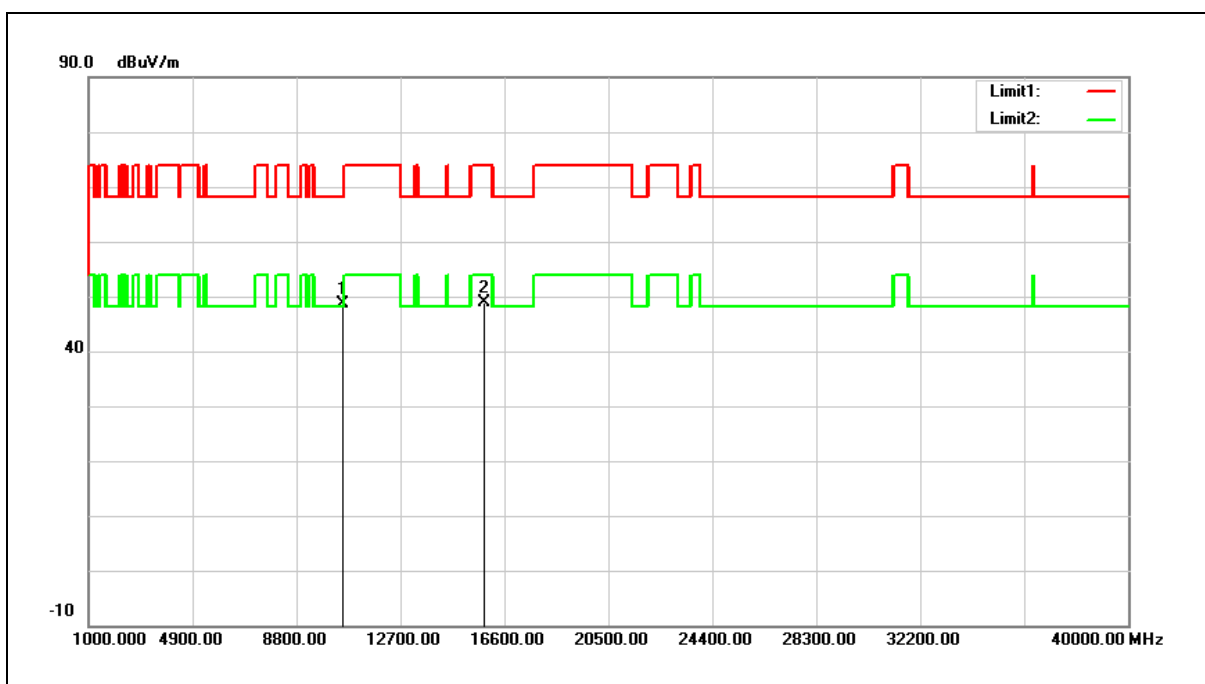


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.10	14.58	48.68	68.20	-19.52	peak
2	15840.000	32.98	15.85	48.83	74.00	-25.17	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

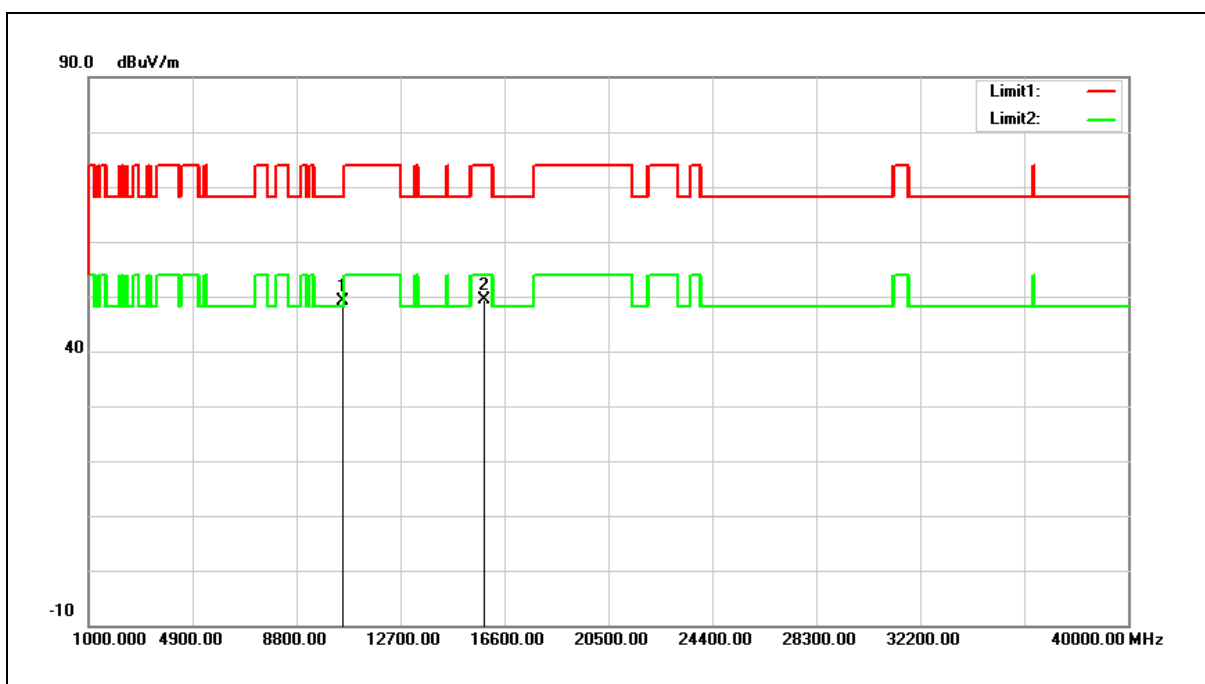


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.53	14.58	49.11	68.20	-19.09	peak
2	15840.000	33.45	15.85	49.30	74.00	-24.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

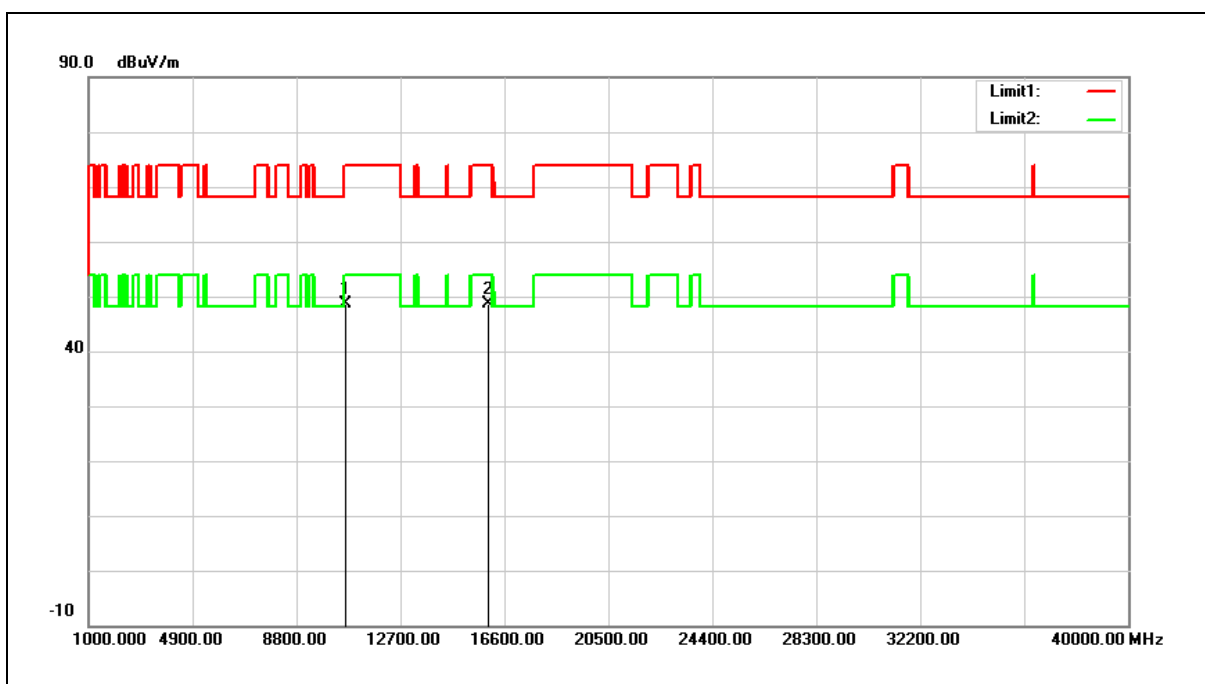


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.18	14.56	48.74	74.00	-25.26	peak
2	15960.000	33.10	15.44	48.54	74.00	-25.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

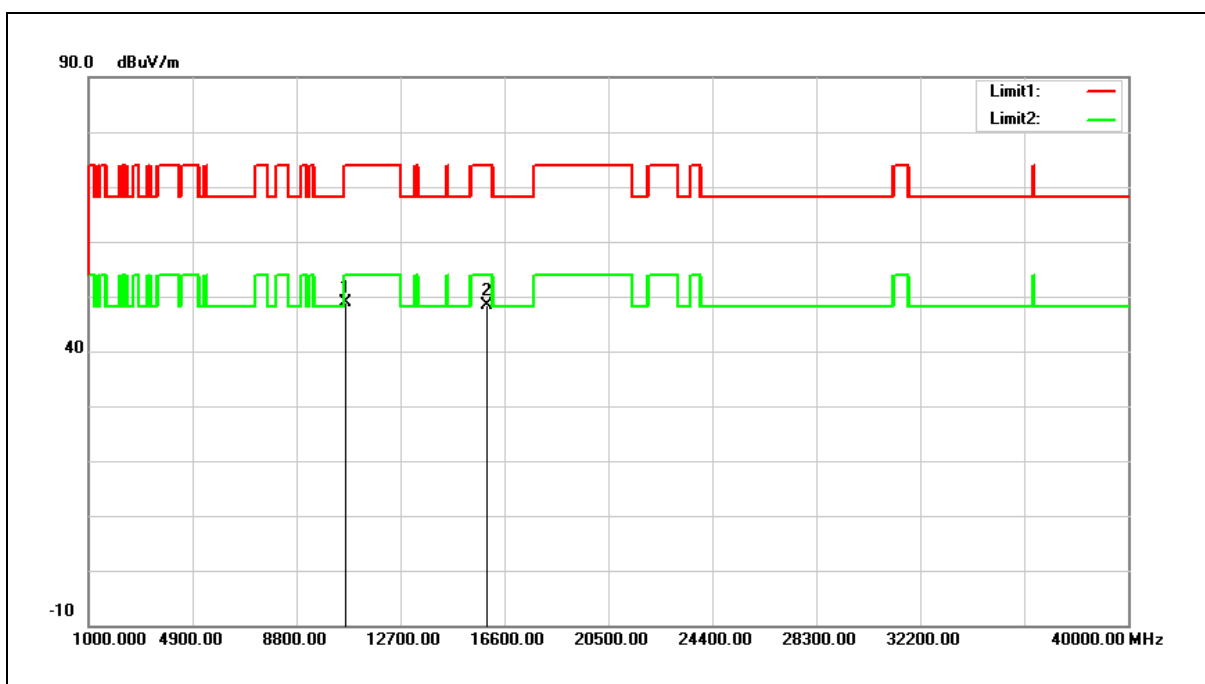


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.29	14.56	48.85	74.00	-25.15	peak
2	15960.000	32.84	15.44	48.28	74.00	-25.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

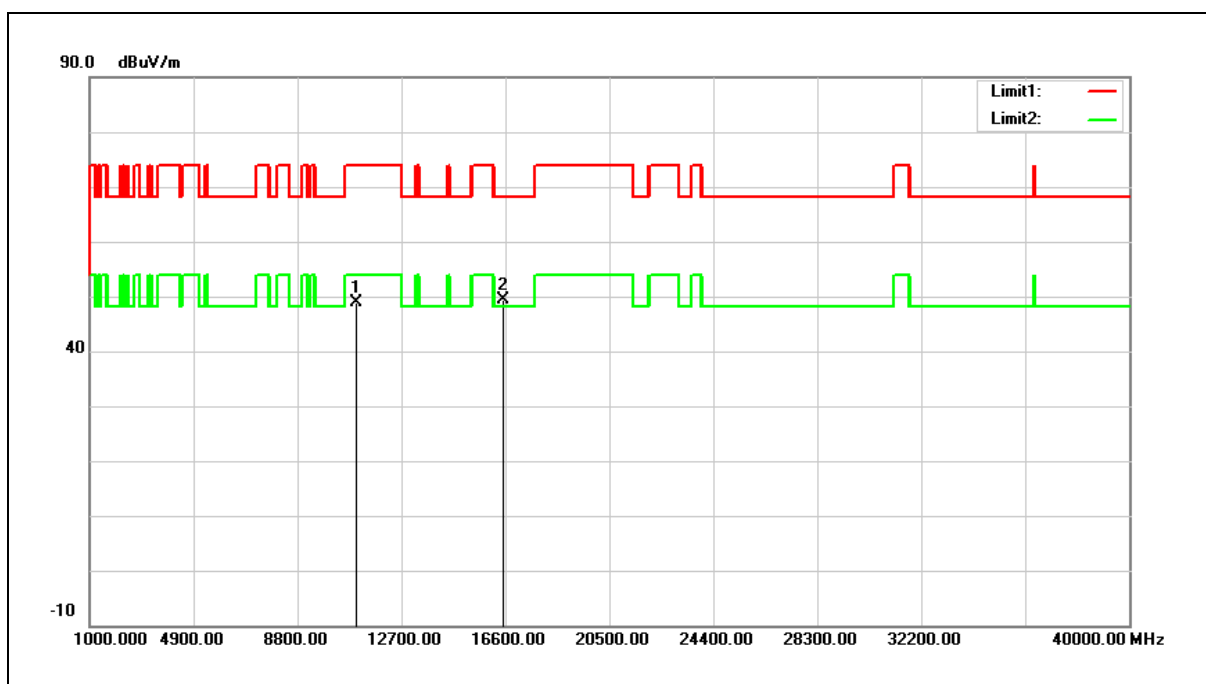


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.43	14.47	48.90	74.00	-25.10	peak
2	16500.000	32.79	16.63	49.42	68.20	-18.78	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

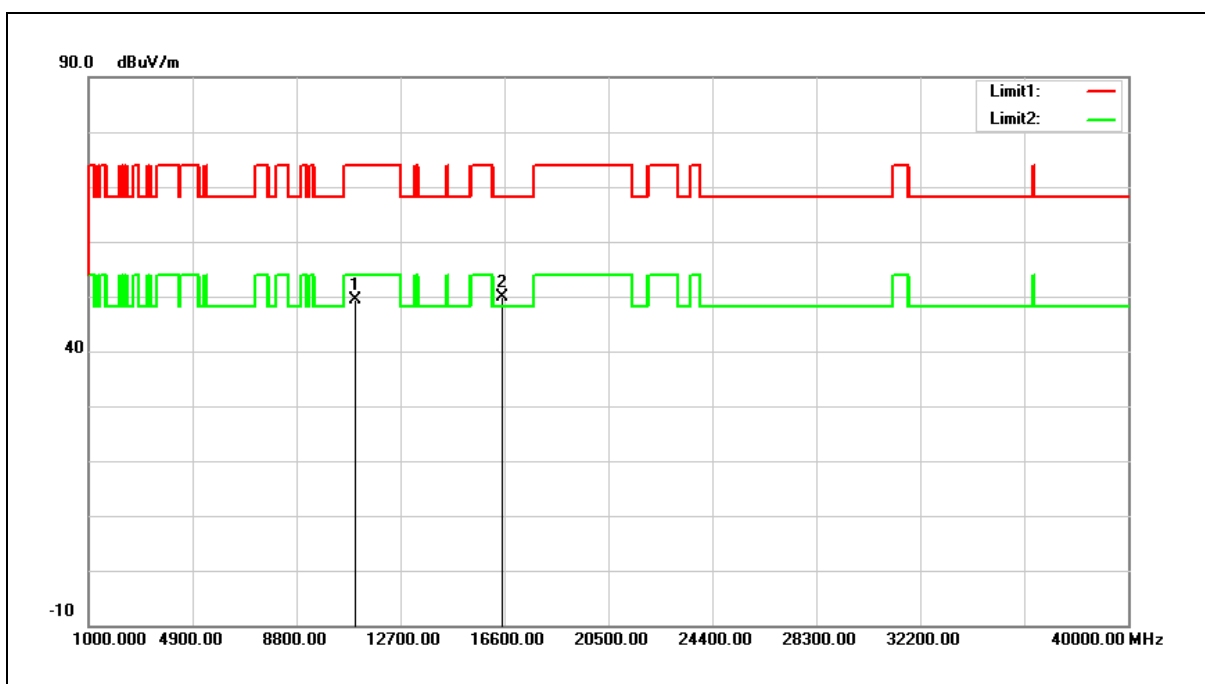


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.89	14.47	49.36	74.00	-24.64	peak
2	16500.000	33.29	16.63	49.92	68.20	-18.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

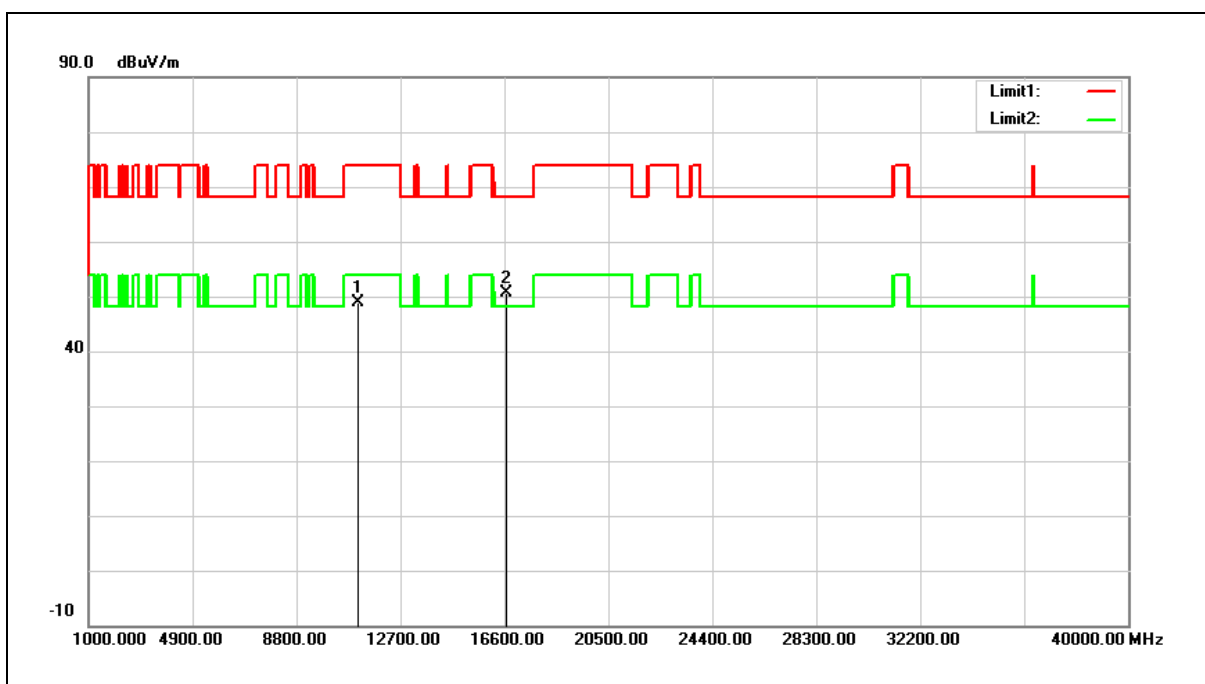


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.10	14.70	48.80	74.00	-25.20	peak
2	16680.000	32.56	17.95	50.51	68.20	-17.69	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

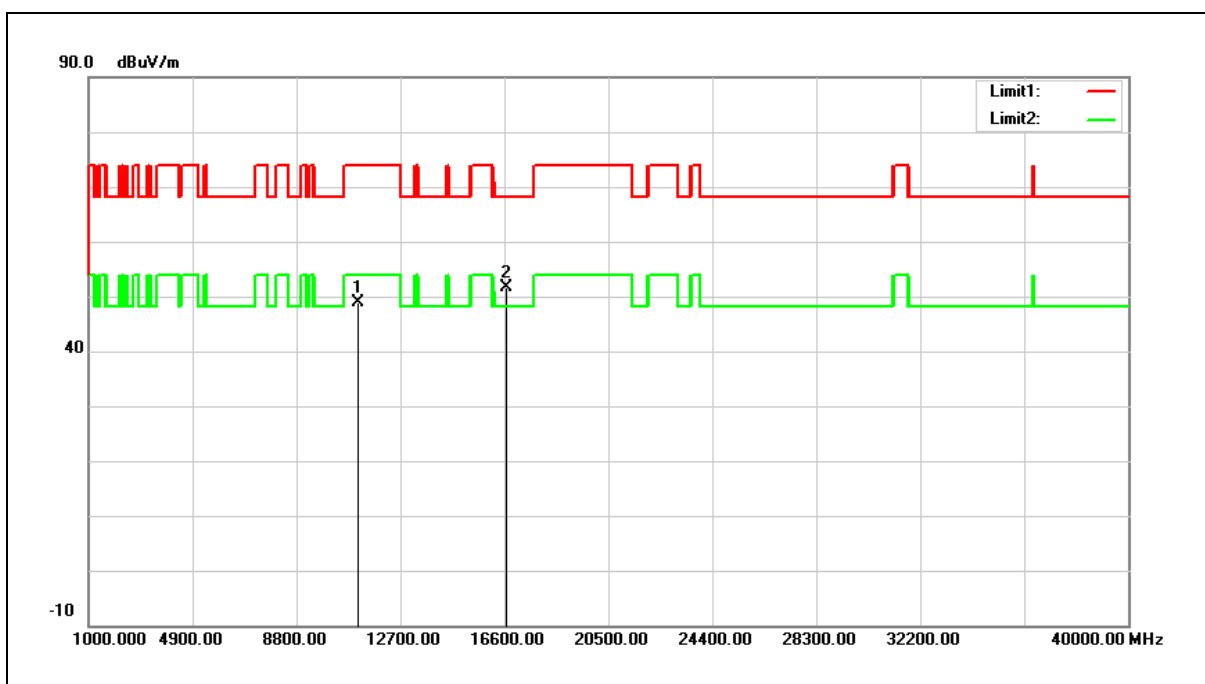


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	34.23	14.70	48.93	74.00	-25.07	peak
2	16680.000	33.57	17.95	51.52	68.20	-16.68	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

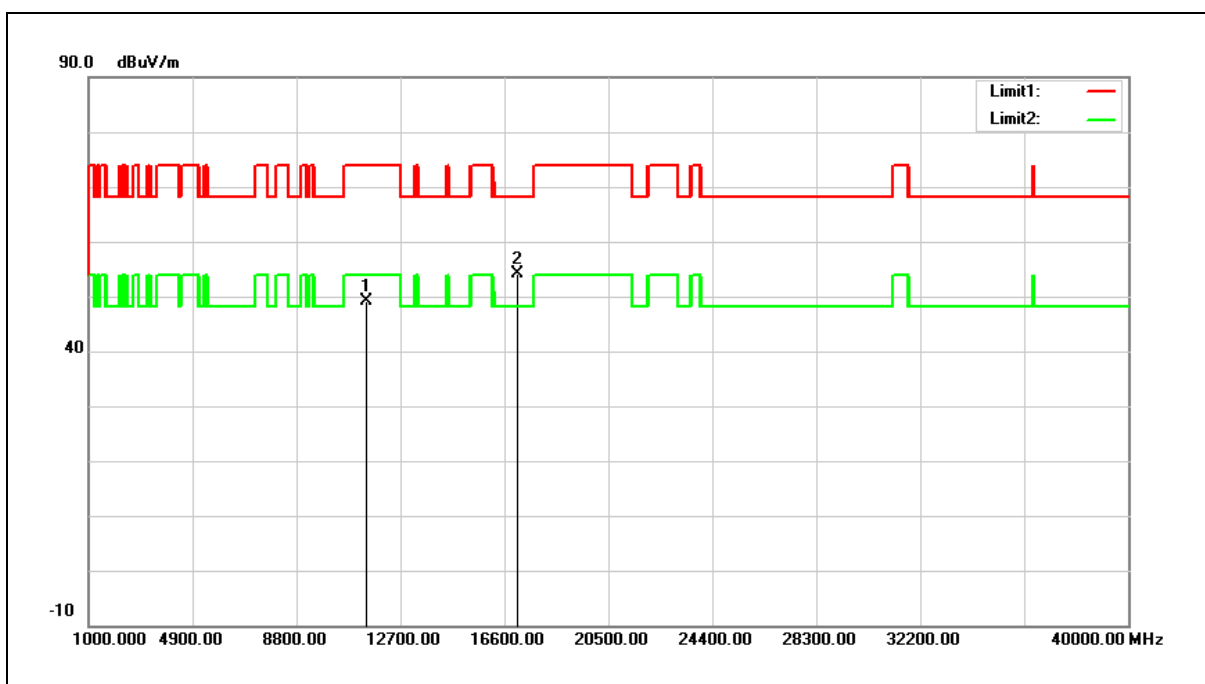


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	33.88	15.22	49.10	74.00	-24.90	peak
2	17100.000	33.15	20.89	54.04	68.20	-14.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

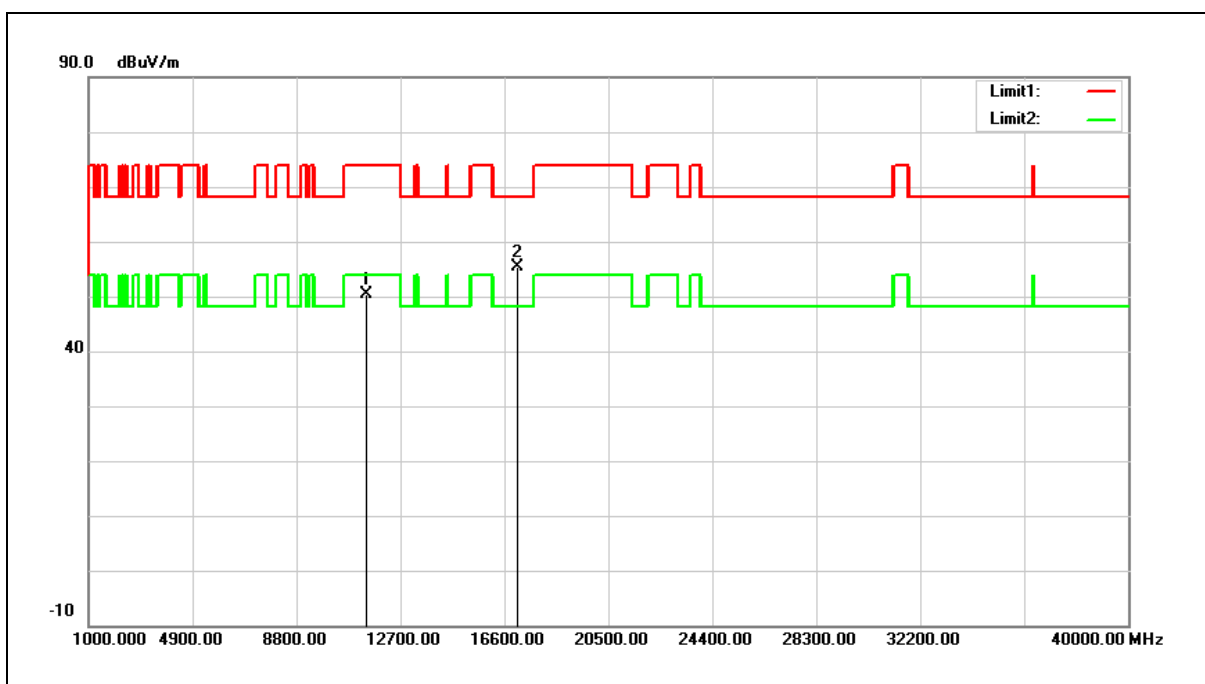


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	35.18	15.22	50.40	74.00	-23.60	peak
2	17100.000	34.57	20.89	55.46	68.20	-12.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

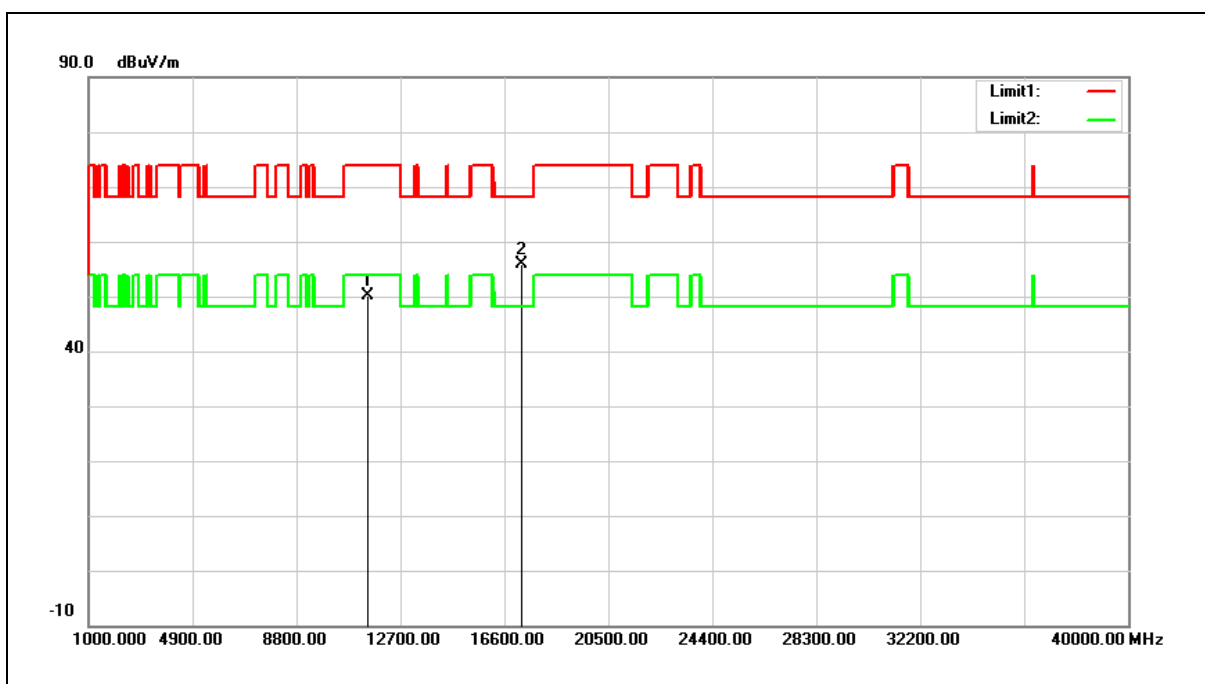


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.81	15.39	50.20	74.00	-23.80	peak
2	17235.000	34.21	21.71	55.92	68.20	-12.28	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

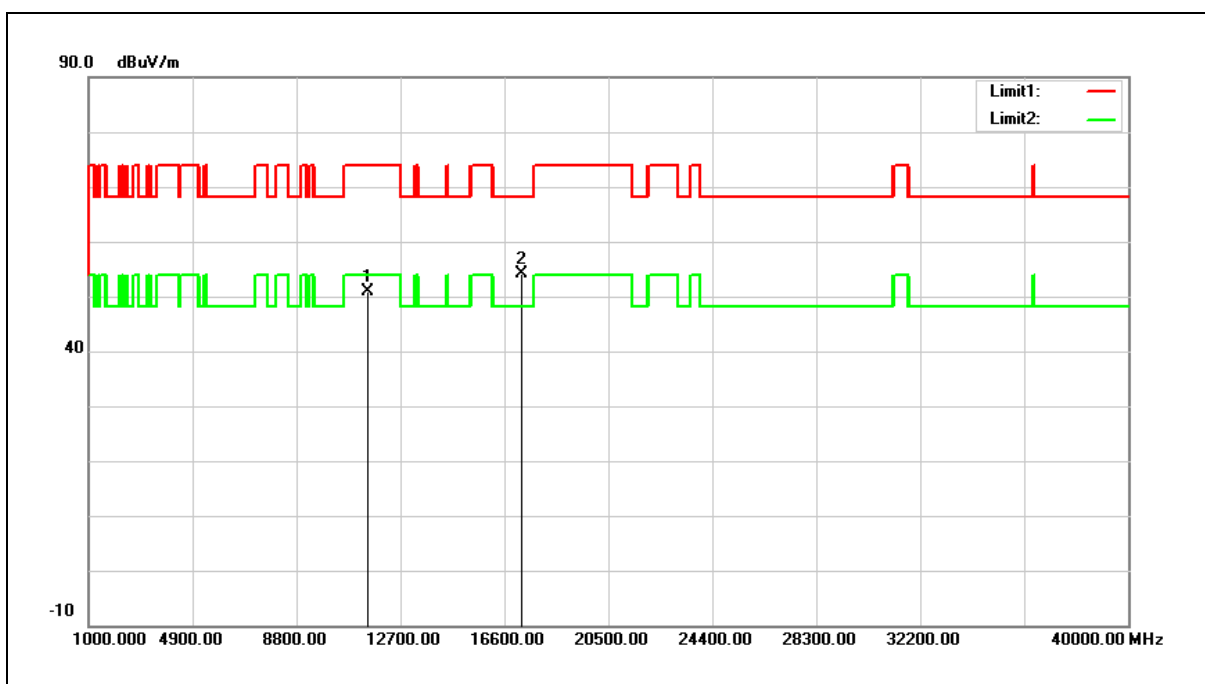


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	35.49	15.39	50.88	74.00	-23.12	peak
2	17235.000	32.50	21.71	54.21	68.20	-13.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

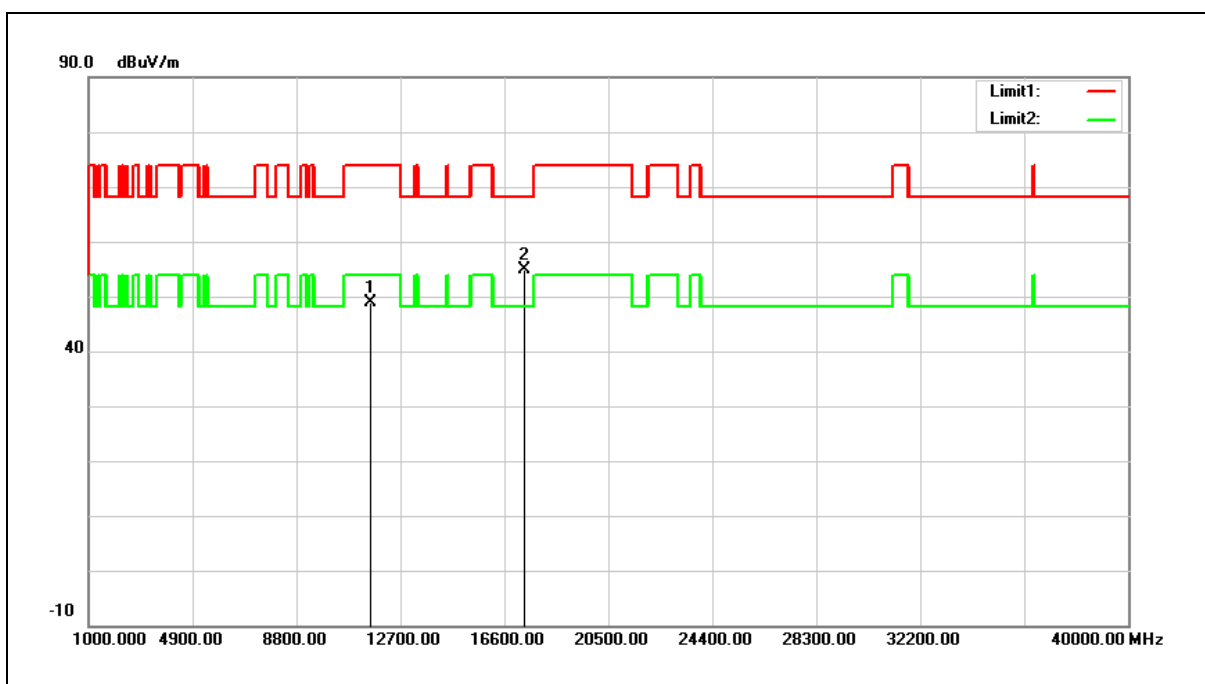


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	33.75	15.25	49.00	74.00	-25.00	peak
2	17355.000	32.50	22.42	54.92	68.20	-13.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

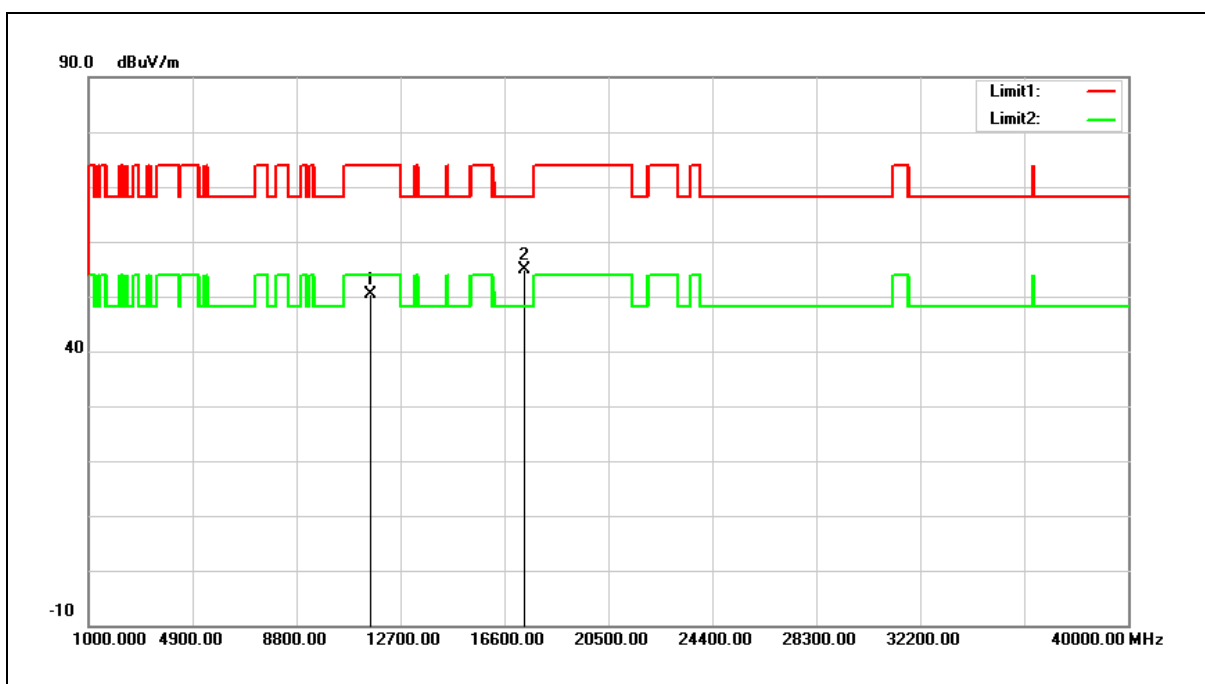


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	35.22	15.25	50.47	74.00	-23.53	peak
2	17355.000	32.58	22.42	55.00	68.20	-13.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

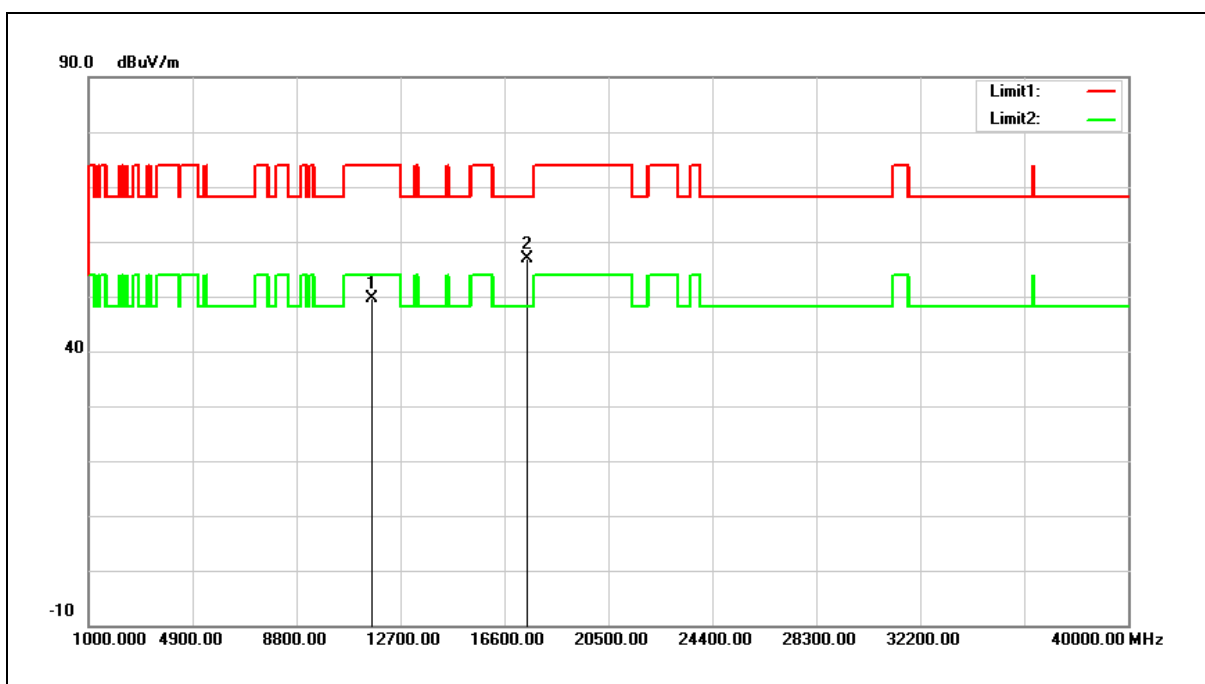


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.48	15.08	49.56	74.00	-24.44	peak
2	17475.000	33.68	23.13	56.81	68.20	-11.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

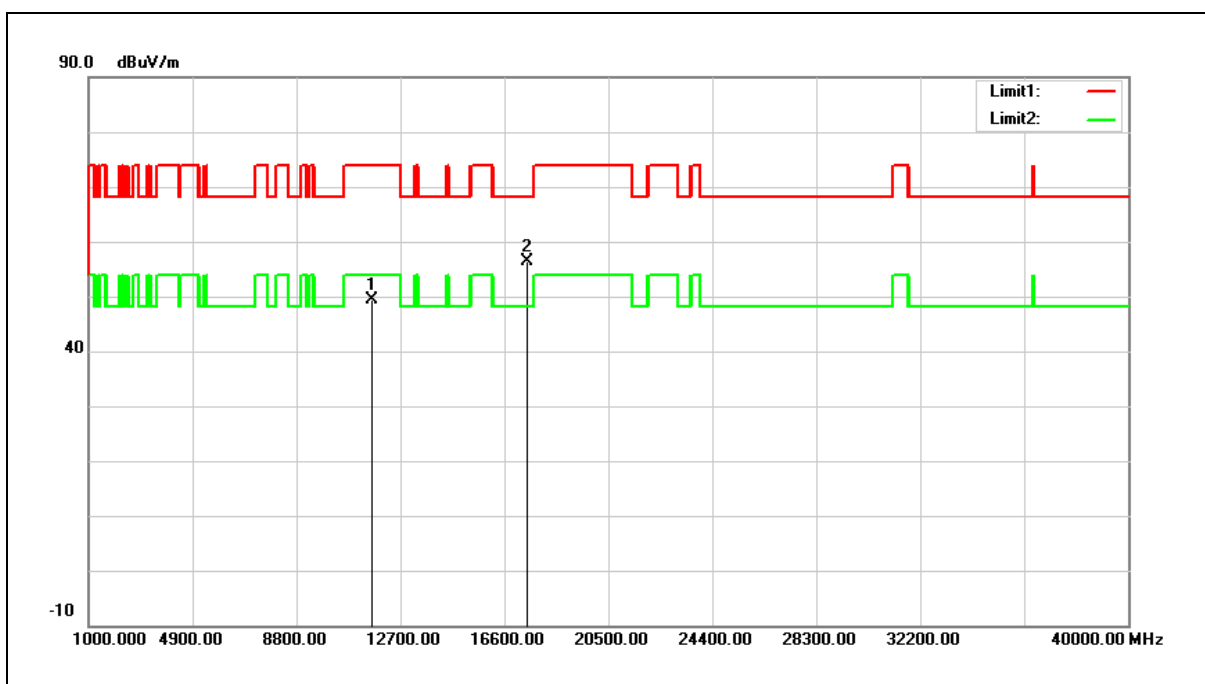


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.30	15.08	49.38	74.00	-24.62	peak
2	17475.000	33.16	23.13	56.29	68.20	-11.91	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

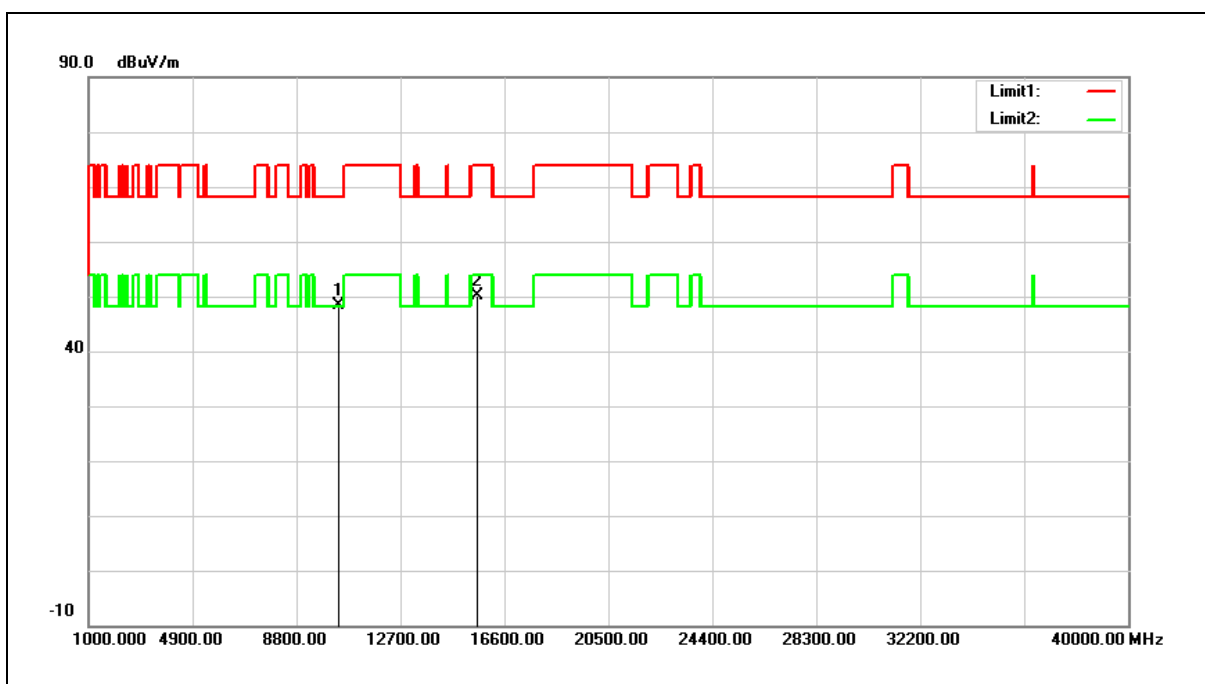


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	34.07	14.35	48.42	68.20	-19.78	peak
2	15570.000	33.33	16.75	50.08	74.00	-23.92	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

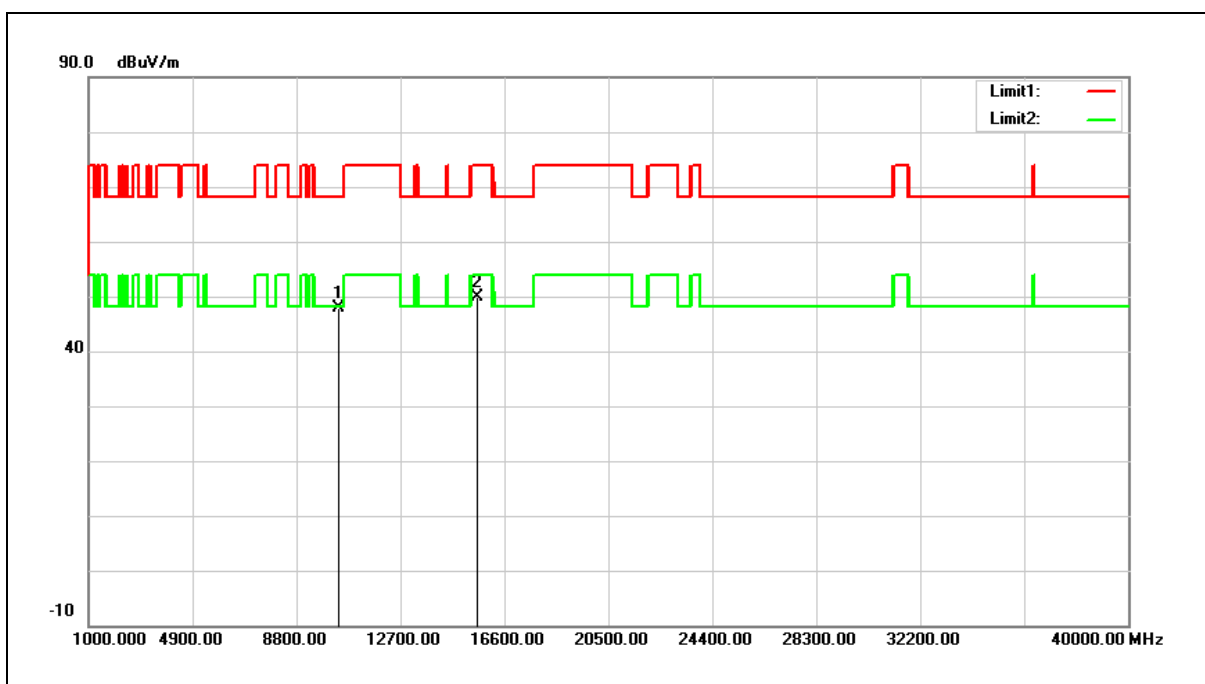


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	33.46	14.35	47.81	68.20	-20.39	peak
2	15570.000	33.07	16.75	49.82	74.00	-24.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

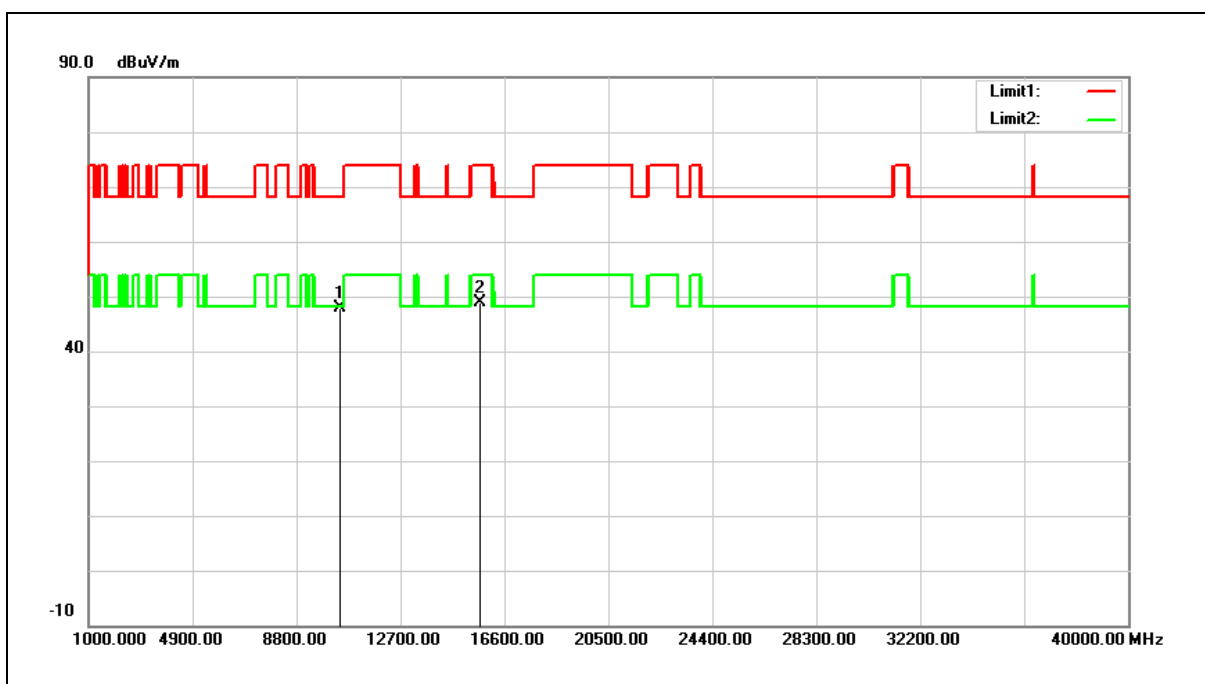


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	33.27	14.51	47.78	68.20	-20.42	peak
2	15690.000	32.63	16.35	48.98	74.00	-25.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5230 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

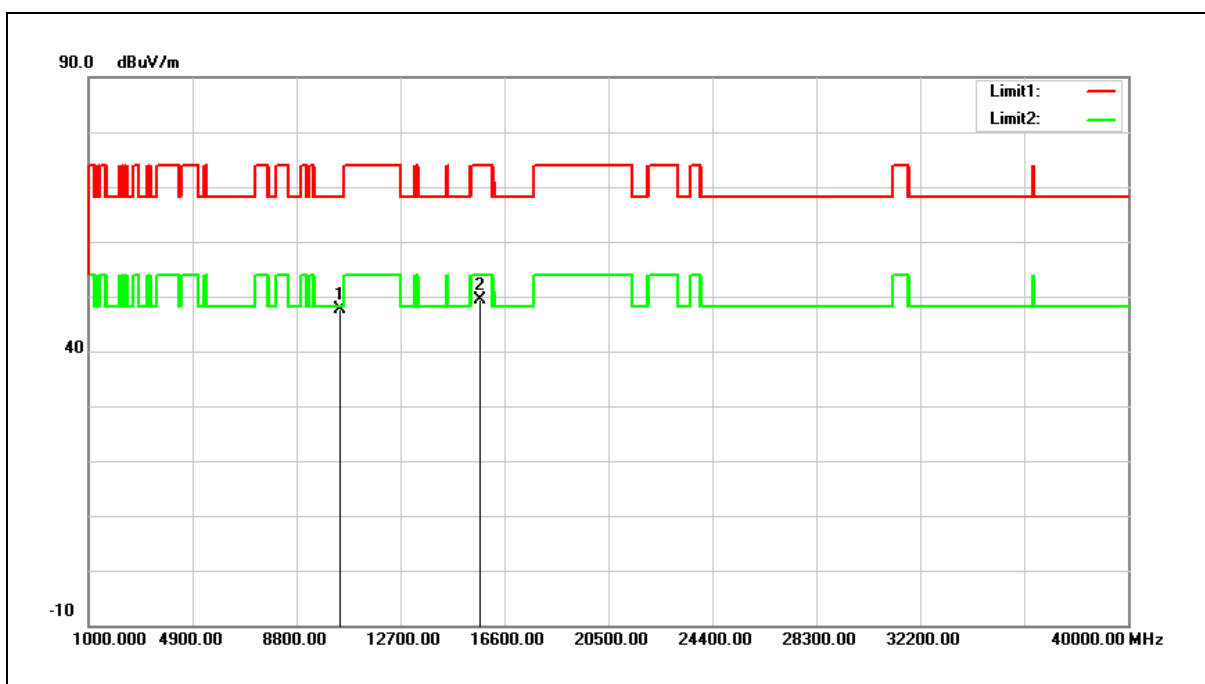


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	33.08	14.51	47.59	68.20	-20.61	peak
2	15690.000	33.04	16.35	49.39	74.00	-24.61	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

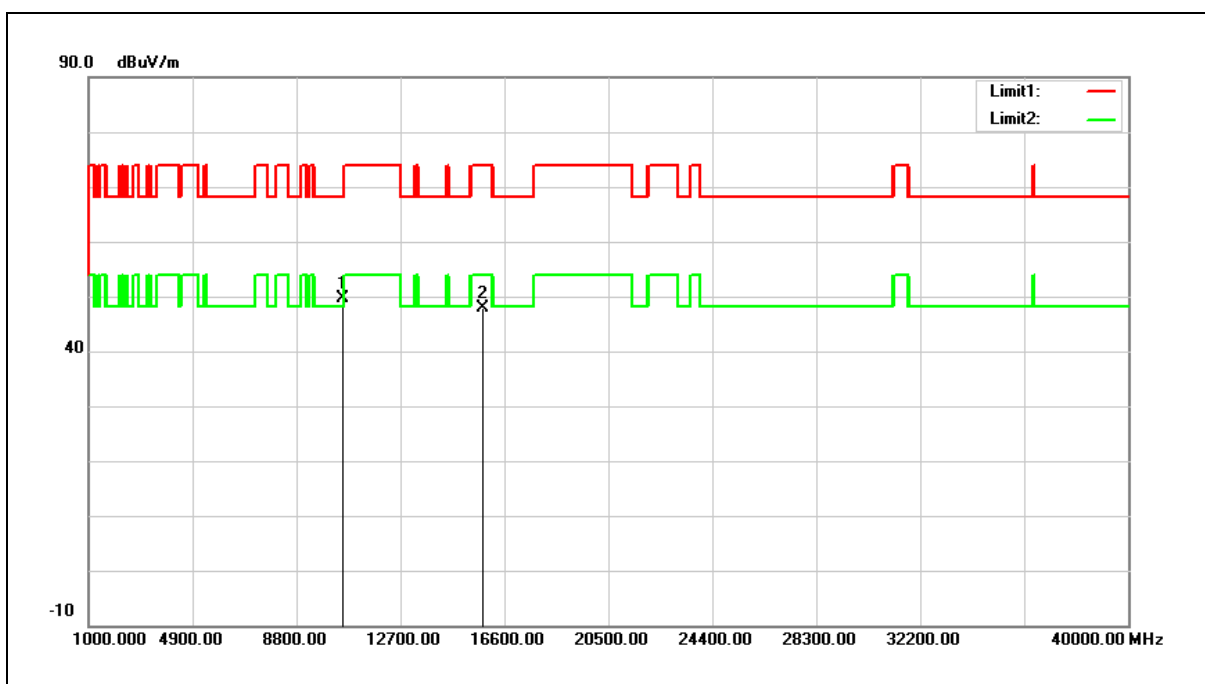


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	35.10	14.58	49.68	68.20	-18.52	peak
2	15810.000	31.90	15.95	47.85	74.00	-26.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5270 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

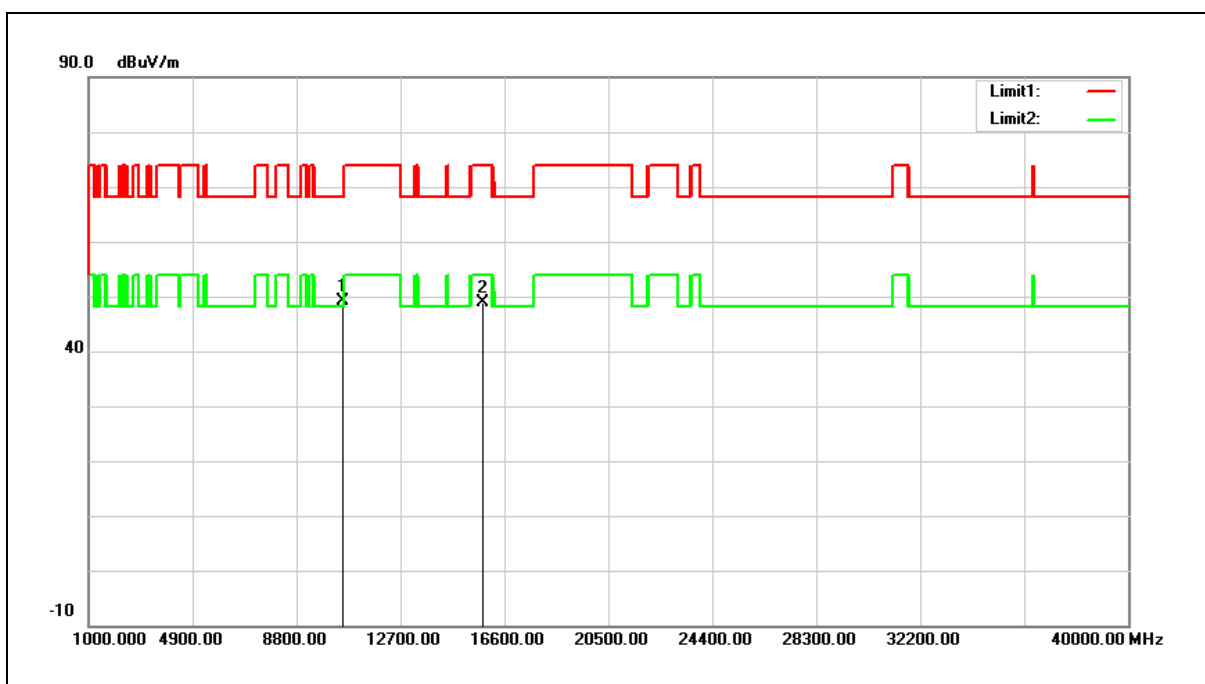


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10540.000	34.43	14.58	49.01	68.20	-19.19	peak
2	15810.000	32.93	15.95	48.88	74.00	-25.12	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

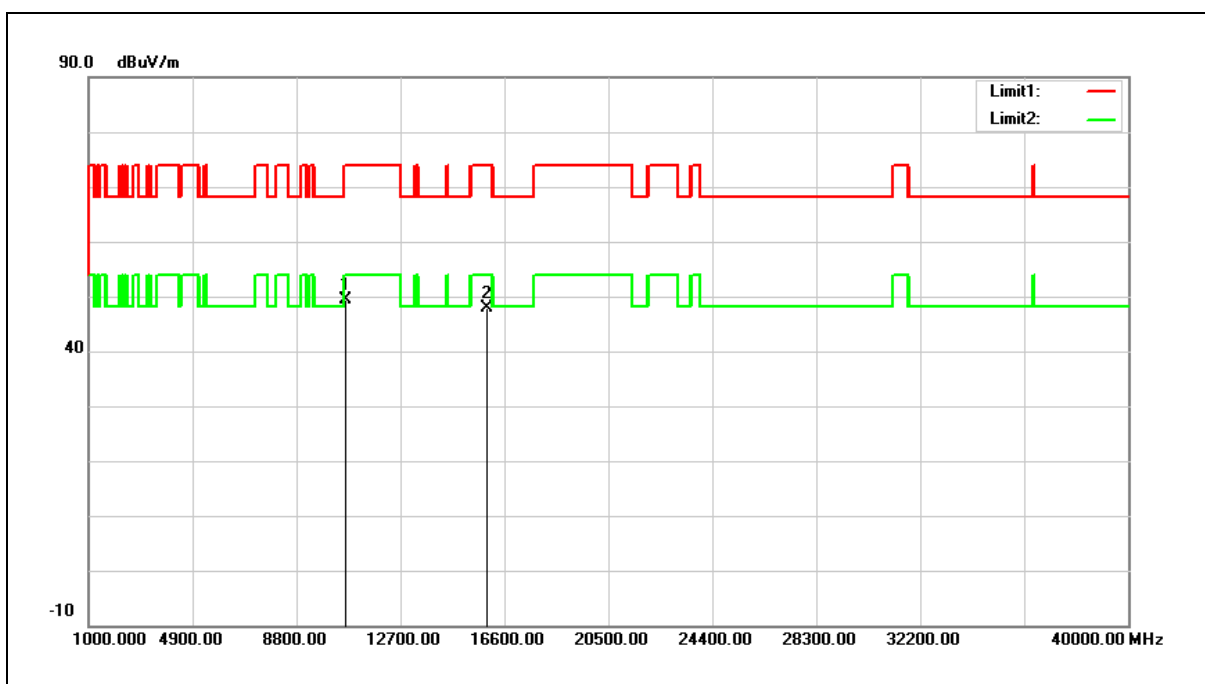


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.78	14.56	49.34	74.00	-24.66	peak
2	15930.000	32.25	15.55	47.80	74.00	-26.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5310 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

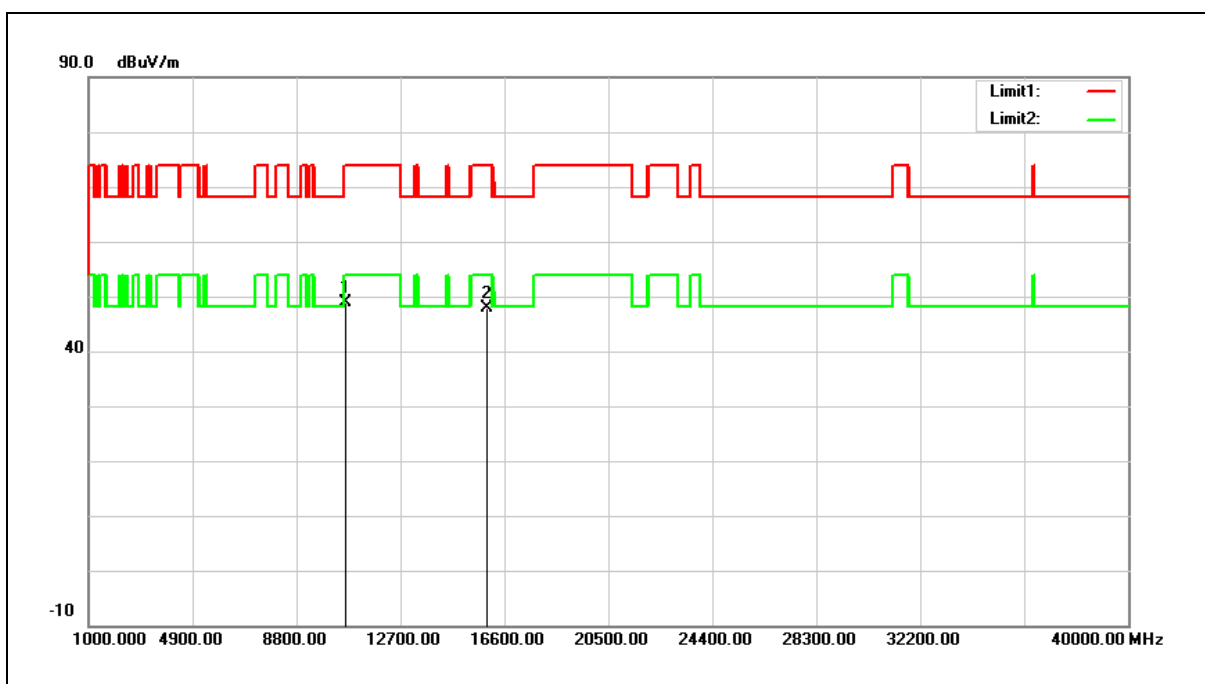


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10620.000	34.42	14.56	48.98	74.00	-25.02	peak
2	15930.000	32.39	15.55	47.94	74.00	-26.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

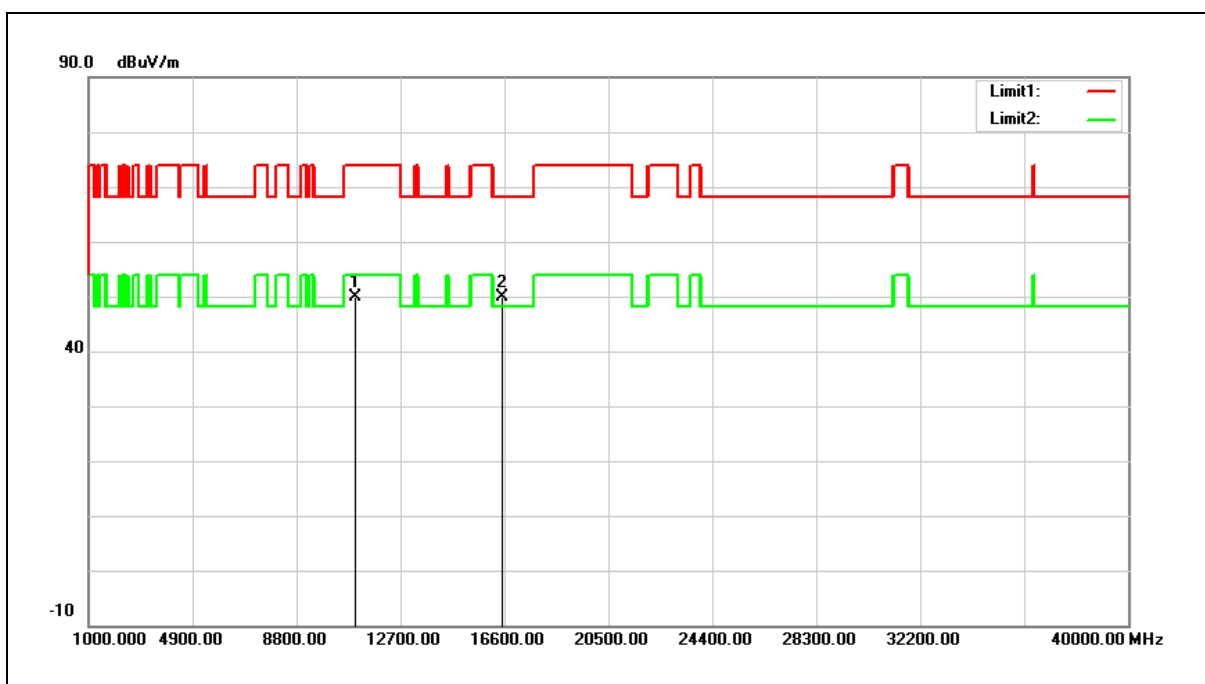


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	35.36	14.51	49.87	74.00	-24.13	peak
2	16530.000	32.91	16.85	49.76	68.20	-18.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

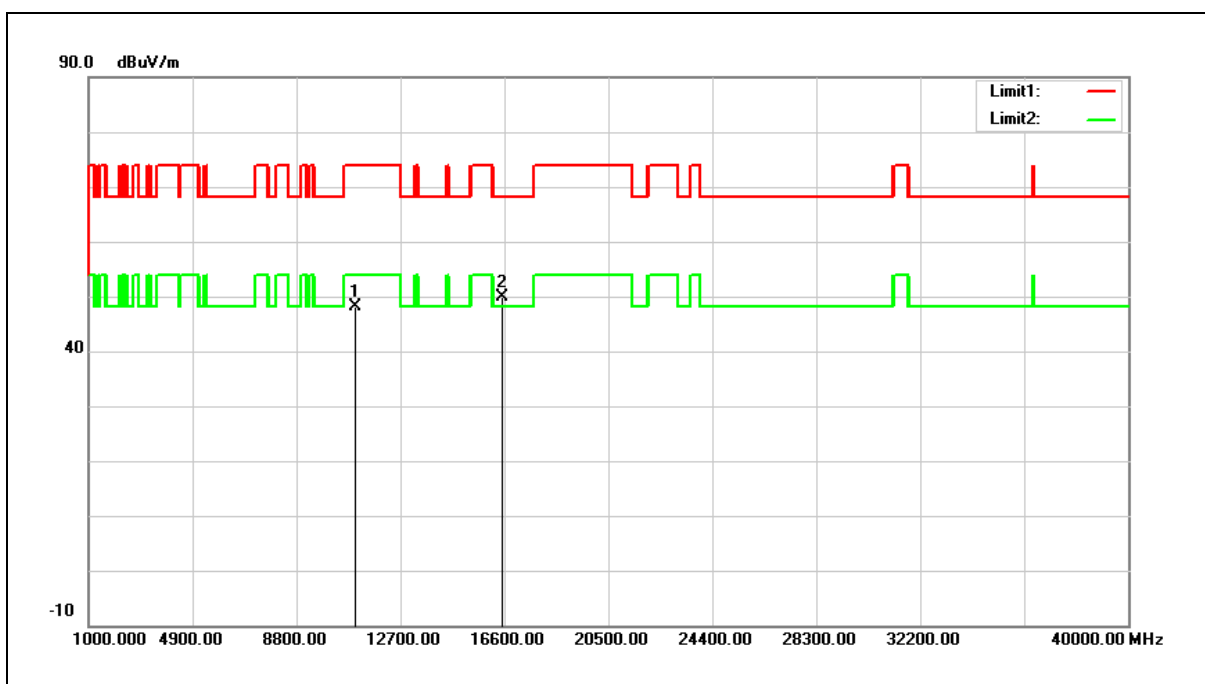


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11020.000	33.58	14.51	48.09	74.00	-25.91	peak
2	16530.000	33.03	16.85	49.88	68.20	-18.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

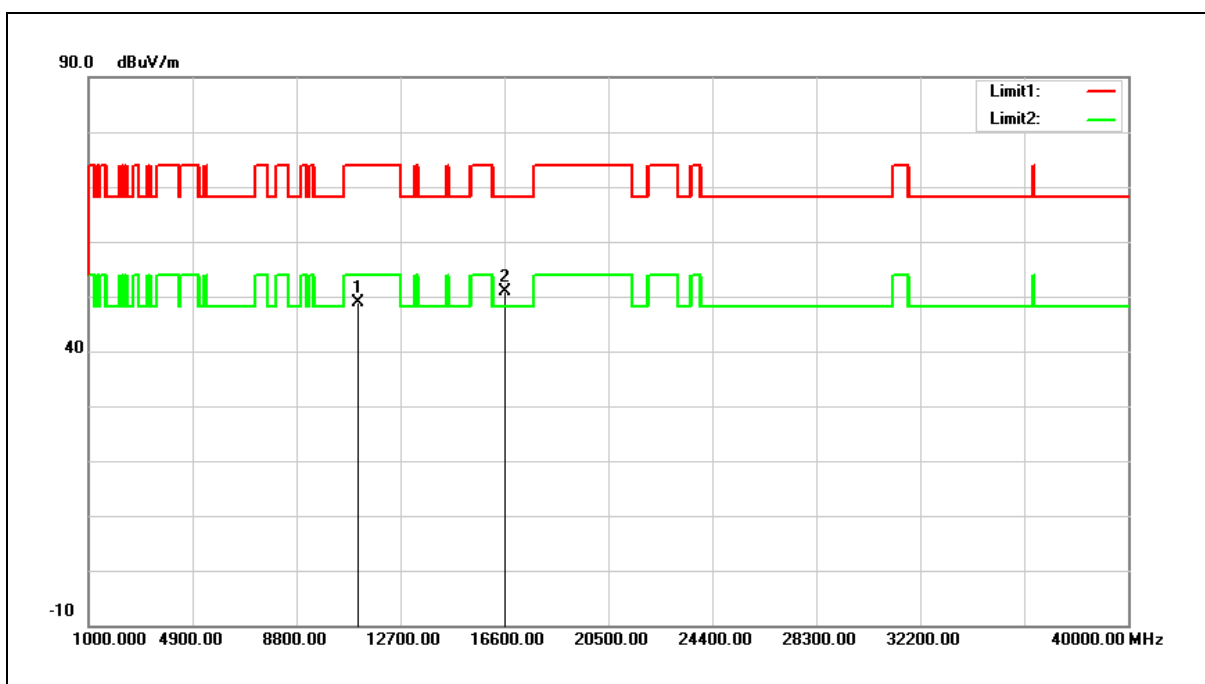


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	34.25	14.66	48.91	74.00	-25.09	peak
2	16650.000	33.26	17.73	50.99	68.20	-17.21	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5550 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

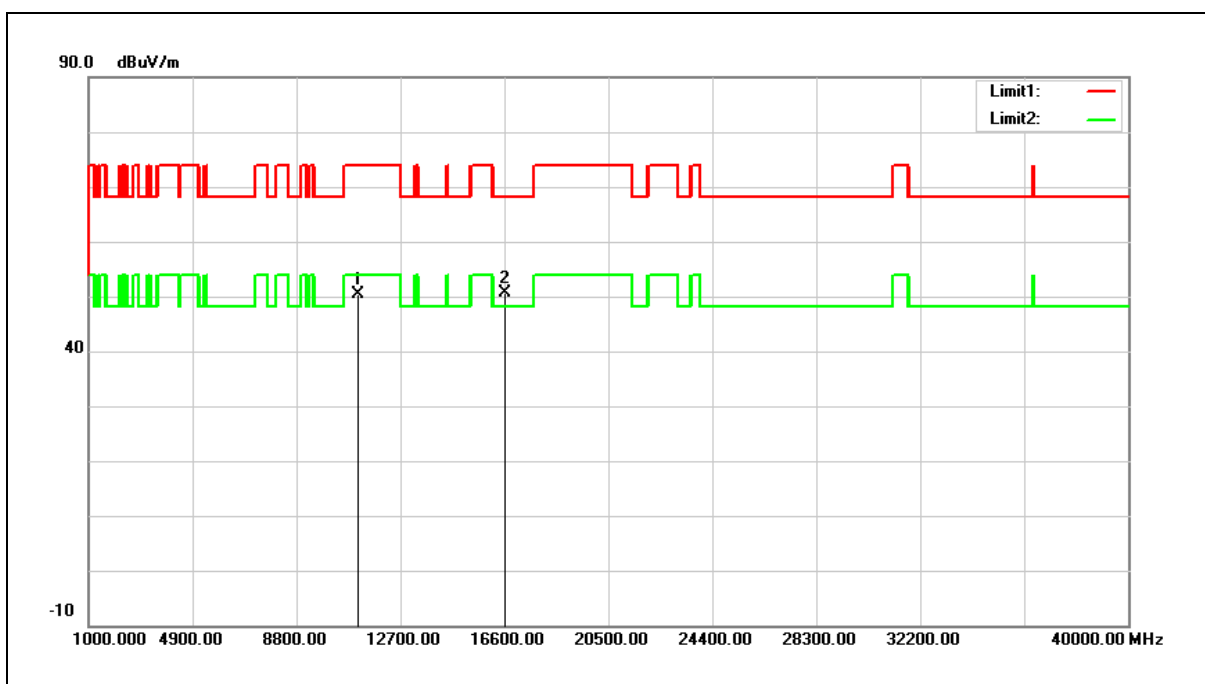


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11100.000	35.81	14.66	50.47	74.00	-23.53	peak
2	16650.000	32.82	17.73	50.55	68.20	-17.65	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

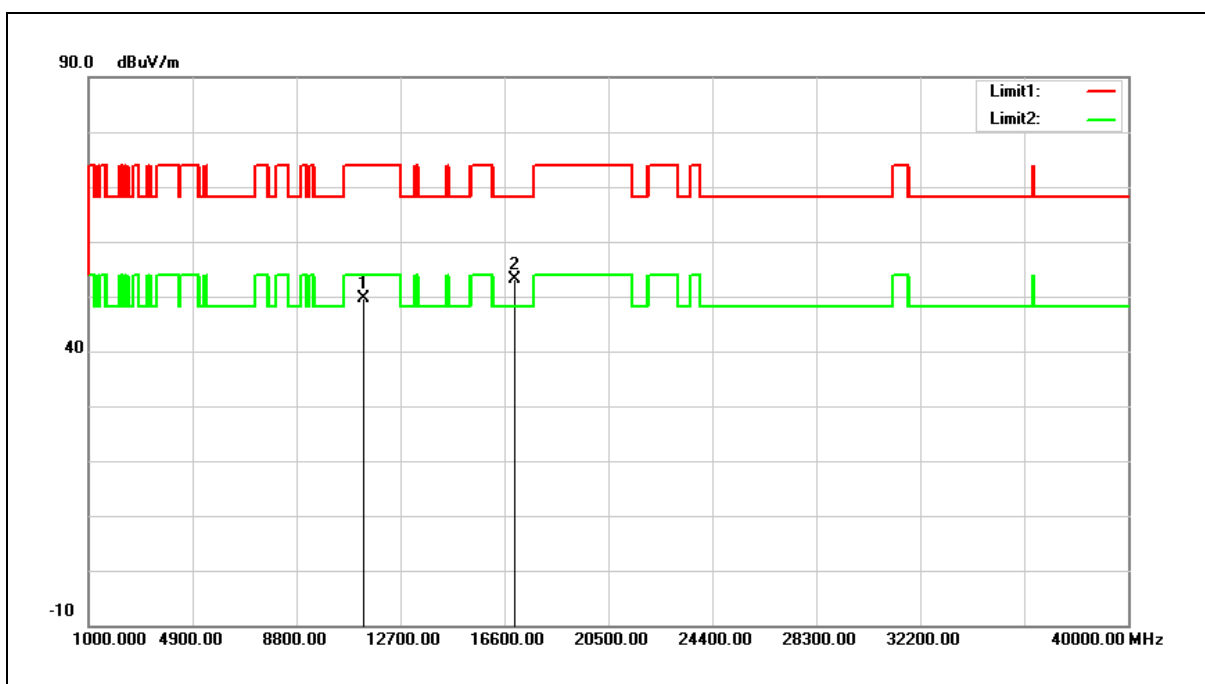


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	34.41	15.11	49.52	74.00	-24.48	peak
2	17010.000	32.84	20.36	53.20	68.20	-15.00	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5670 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

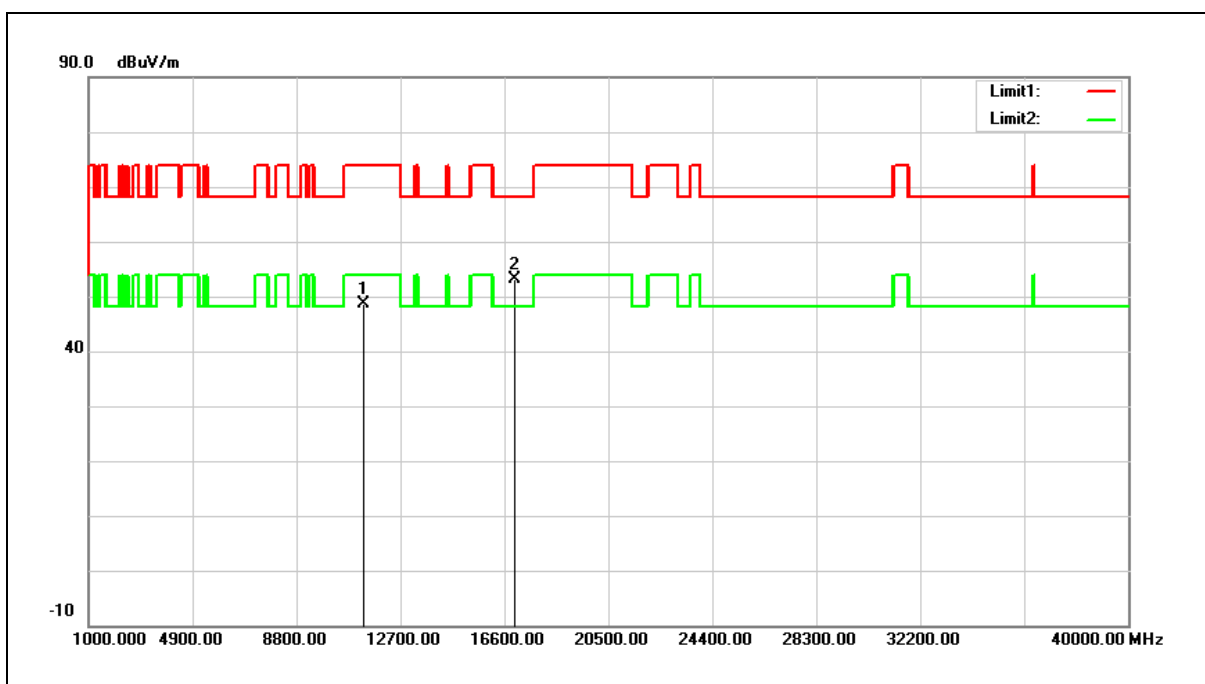


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11340.000	33.60	15.11	48.71	74.00	-25.29	peak
2	17010.000	32.83	20.36	53.19	68.20	-15.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

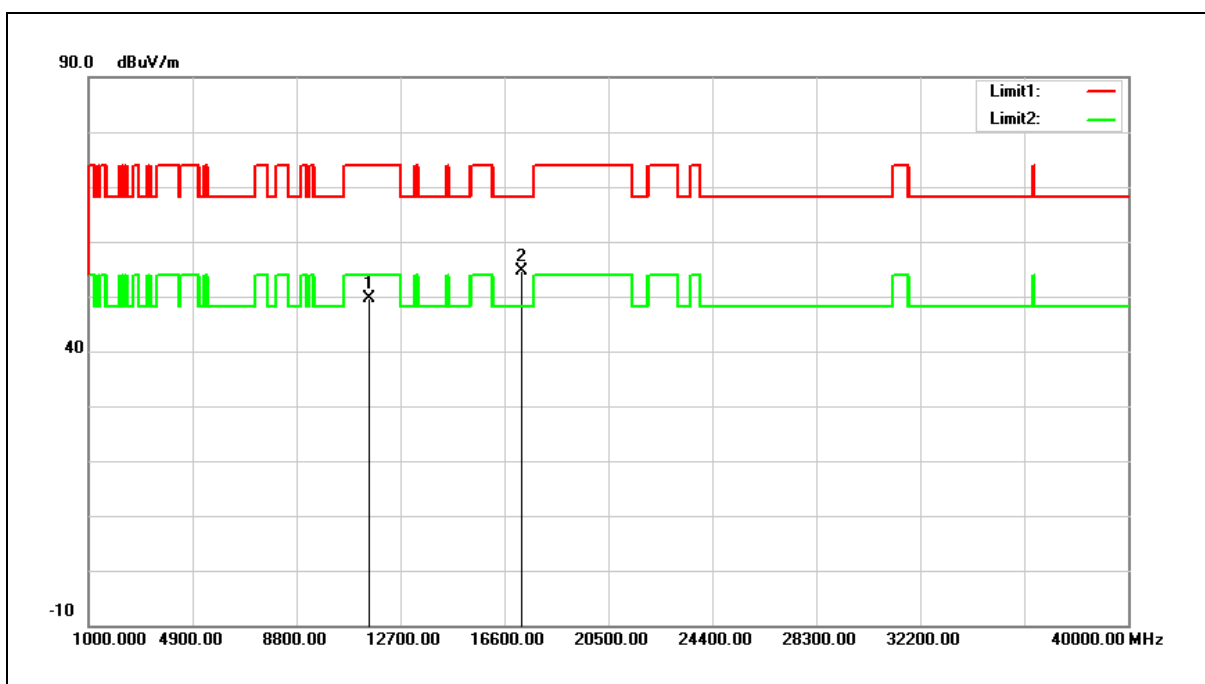


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.35	15.38	49.73	74.00	-24.27	peak
2	17265.000	32.79	21.88	54.67	68.20	-13.53	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5755 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

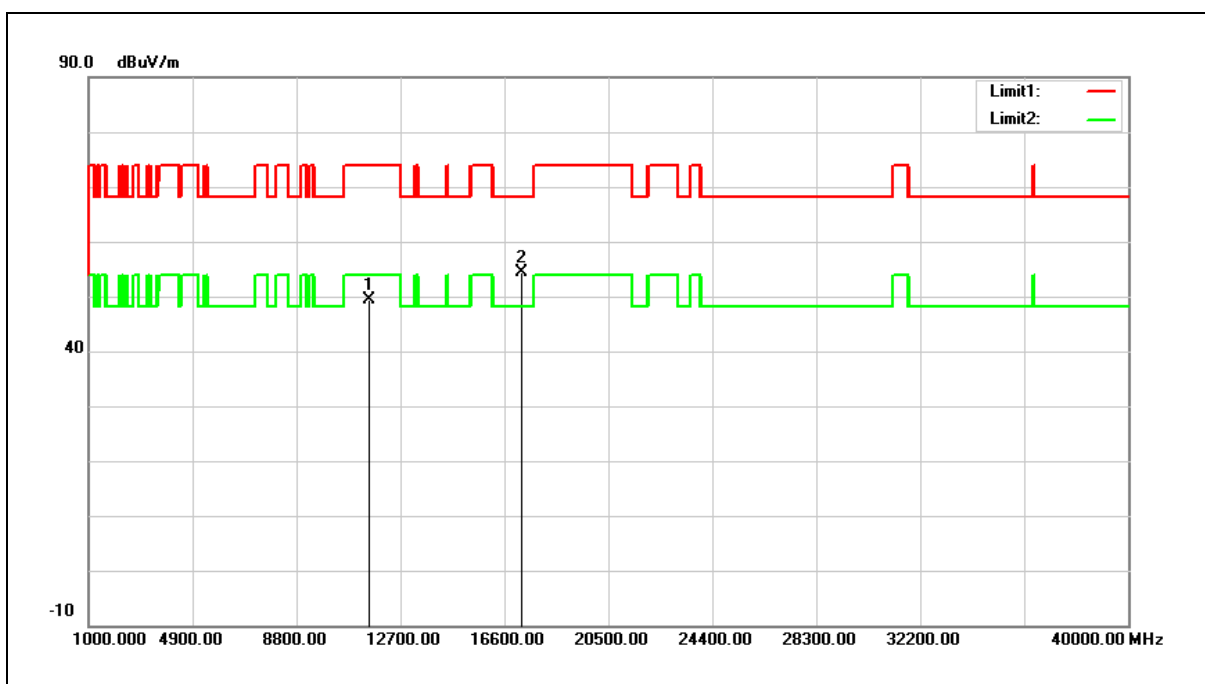


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	34.01	15.38	49.39	74.00	-24.61	peak
2	17265.000	32.48	21.88	54.36	68.20	-13.84	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

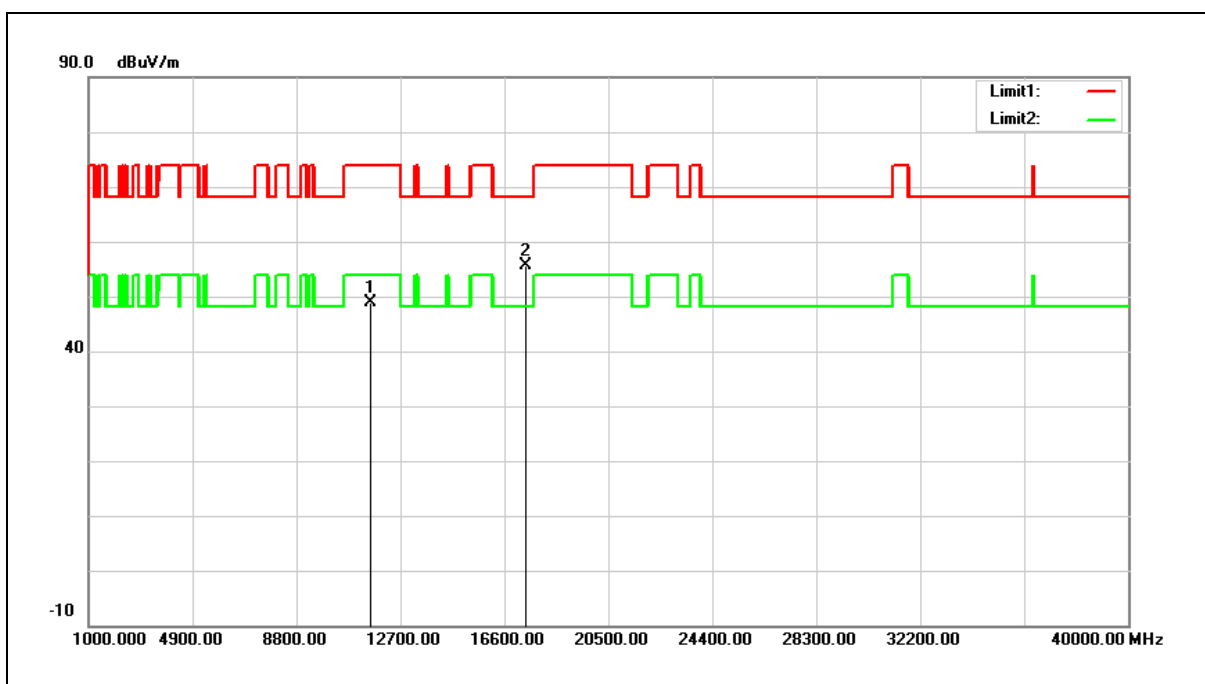


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.76	15.20	48.96	74.00	-25.04	peak
2	17385.000	33.12	22.60	55.72	68.20	-12.48	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5795 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

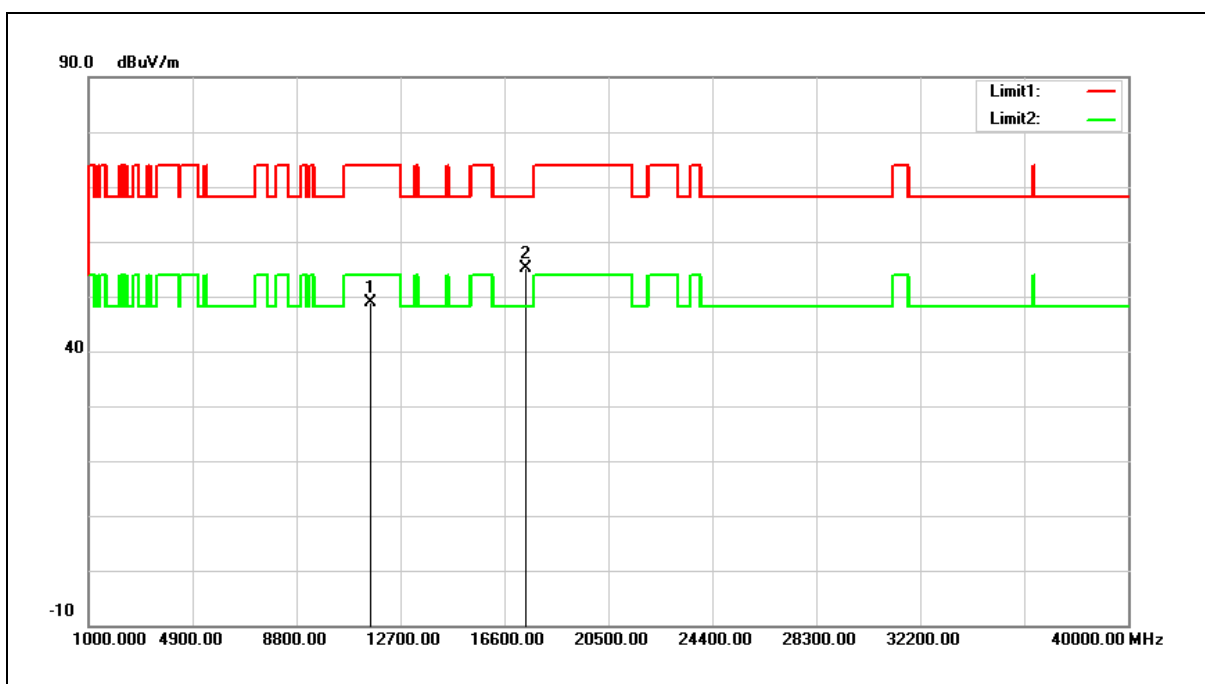


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	33.56	15.20	48.76	74.00	-25.24	peak
2	17385.000	32.50	22.60	55.10	68.20	-13.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		
Description:			

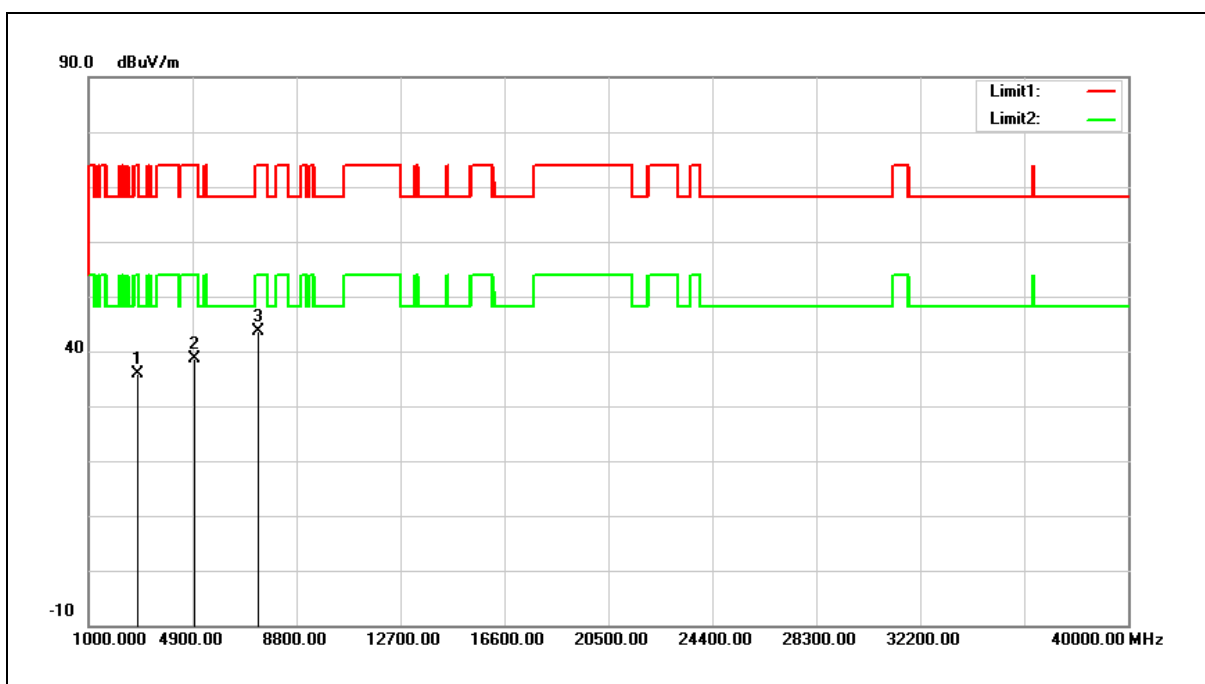


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2836.000	41.62	-5.84	35.78	74.00	-38.22	peak
2	4961.000	39.11	-0.50	38.61	74.00	-35.39	peak
3	7324.000	37.07	6.51	43.58	74.00	-30.42	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Mode 5		
Ant.Polar.:	Vertical		
Description:			

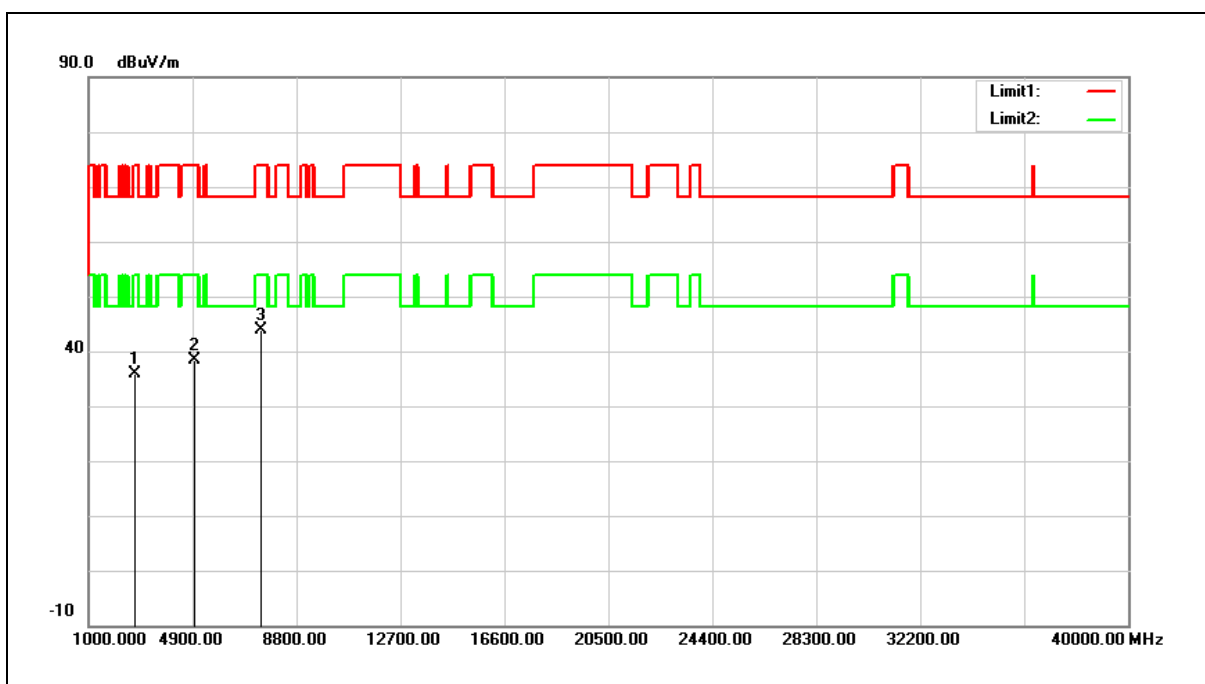

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	42.05	-6.10	35.95	74.00	-38.05	peak
2	4961.000	38.91	-0.50	38.41	74.00	-35.59	peak
3	7460.000	36.80	7.04	43.84	74.00	-30.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Peak

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

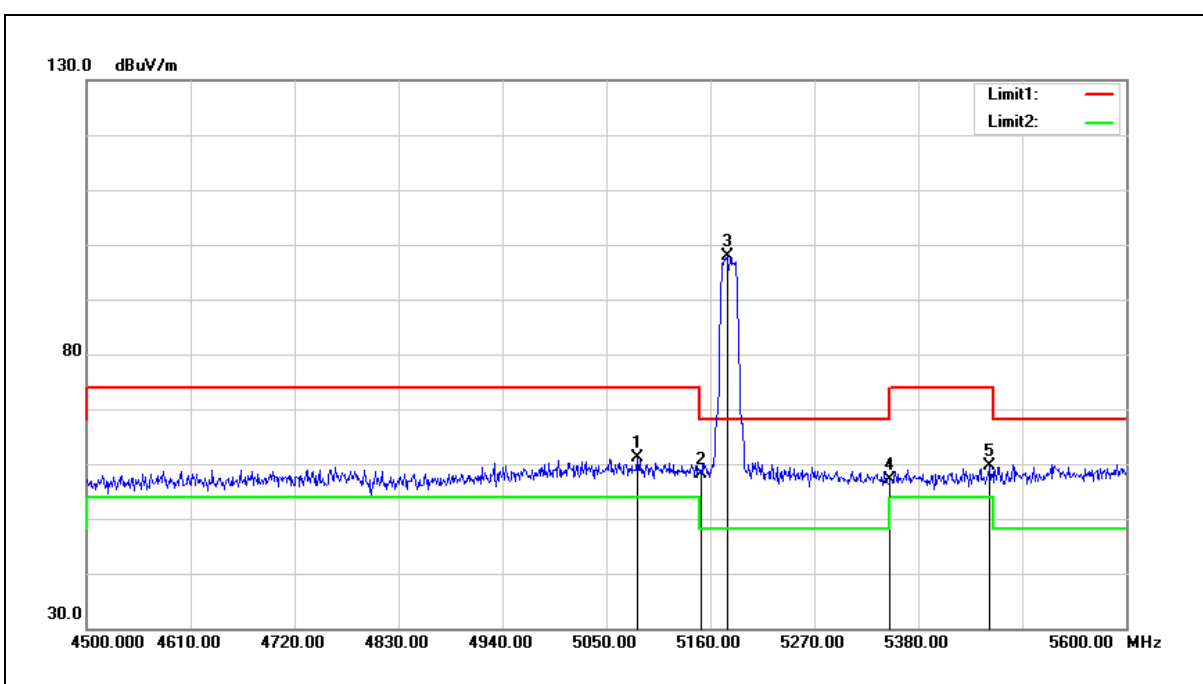


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5083.000	61.25	-0.20	61.05	74.00	-12.95	peak
2	5150.000	58.09	-0.08	58.01	74.00	-15.99	peak
3	5177.600	97.81	-0.03	97.78	68.20	29.58	peak
4	5350.000	56.78	0.30	57.08	74.00	-16.92	peak
5	5454.800	59.15	0.48	59.63	74.00	-14.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

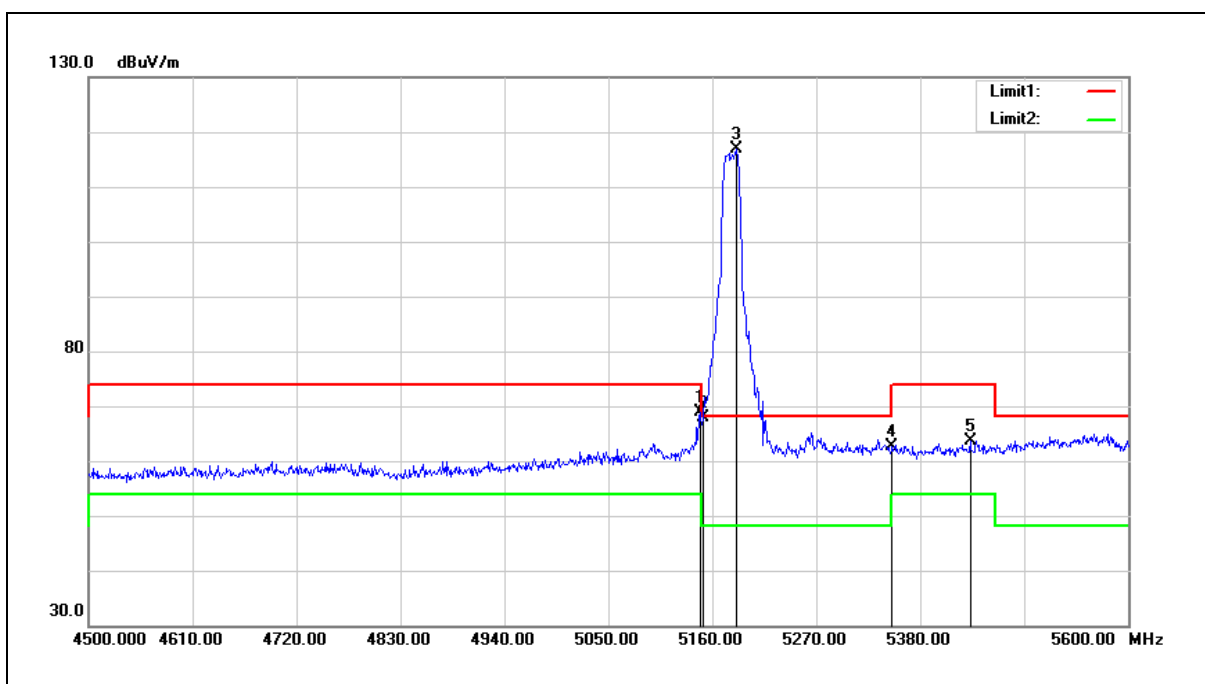


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	68.98	-0.08	68.90	74.00	-5.10	peak
2	5150.000	68.05	-0.08	67.97	74.00	-6.03	peak
3	5185.300	116.82	-0.01	116.81	68.20	48.61	peak
4	5350.000	62.25	0.30	62.55	74.00	-11.45	peak
5	5432.800	63.19	0.46	63.65	74.00	-10.35	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

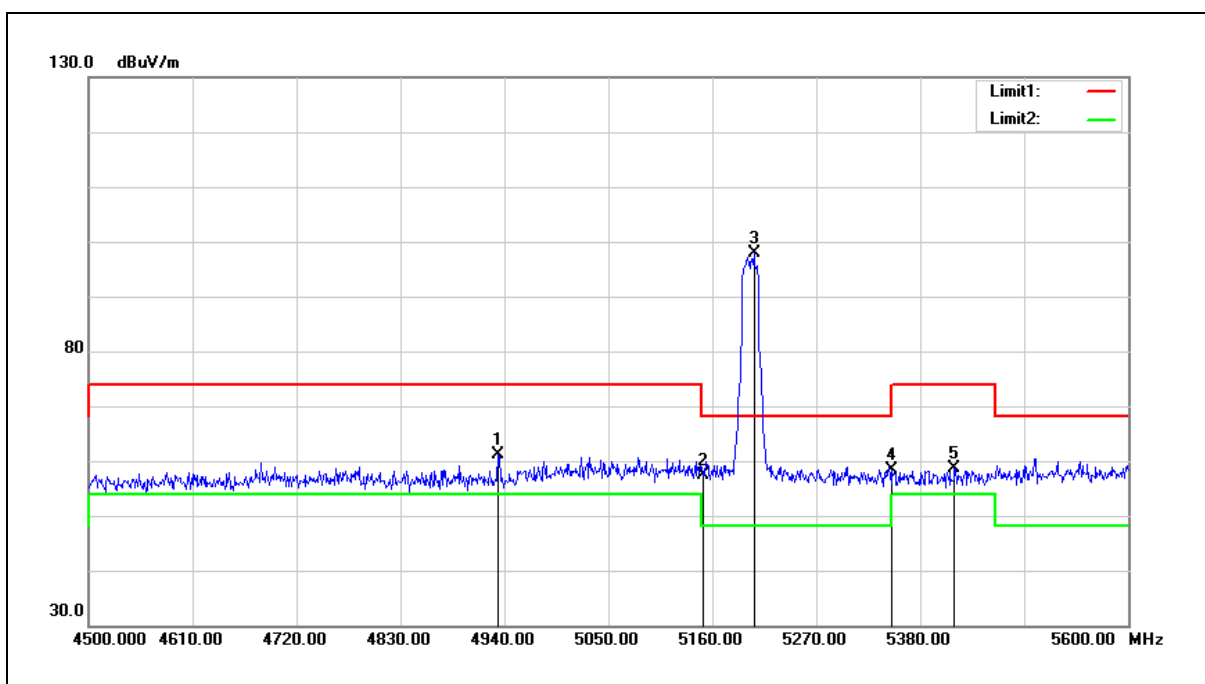


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4933.400	61.78	-0.60	61.18	74.00	-12.82	peak
2	5150.000	57.55	-0.08	57.47	74.00	-16.53	peak
3	5204.000	97.81	0.02	97.83	68.20	29.63	peak
4	5350.000	57.96	0.30	58.26	74.00	-15.74	peak
5	5416.300	58.28	0.41	58.69	74.00	-15.31	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

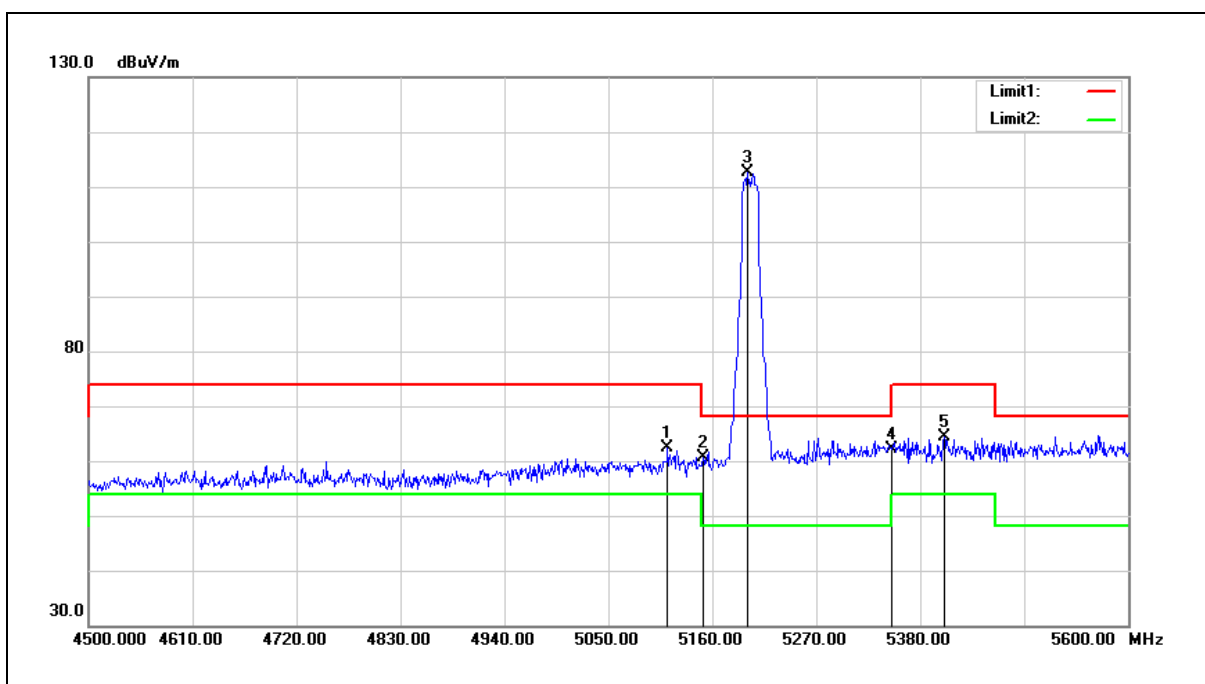


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5112.700	62.47	-0.15	62.32	74.00	-11.68	peak
2	5150.000	60.67	-0.08	60.59	74.00	-13.41	peak
3	5197.400	112.68	0.01	112.69	68.20	44.49	peak
4	5350.000	61.79	0.30	62.09	74.00	-11.91	peak
5	5405.300	63.96	0.40	64.36	74.00	-9.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

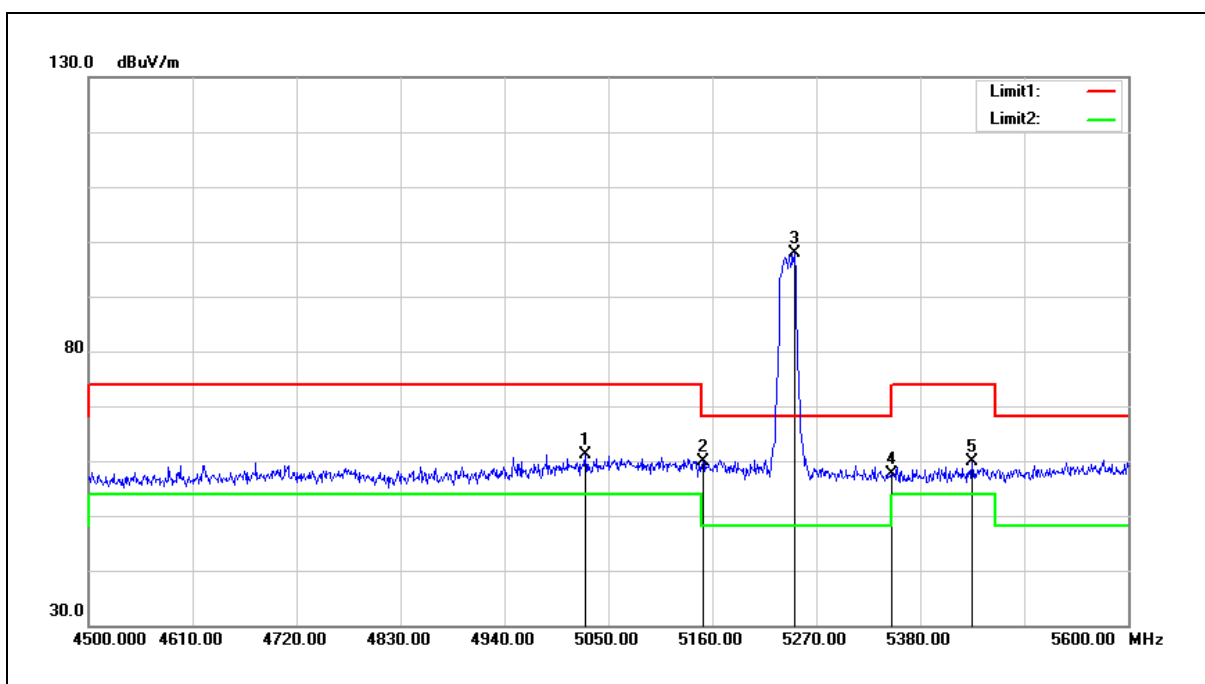


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5025.800	61.47	-0.31	61.16	74.00	-12.84	peak
2	5150.000	59.84	-0.08	59.76	74.00	-14.24	peak
3	5246.900	97.73	0.10	97.83	68.20	29.63	peak
4	5350.000	57.28	0.30	57.58	74.00	-16.42	peak
5	5435.000	59.35	0.46	59.81	74.00	-14.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

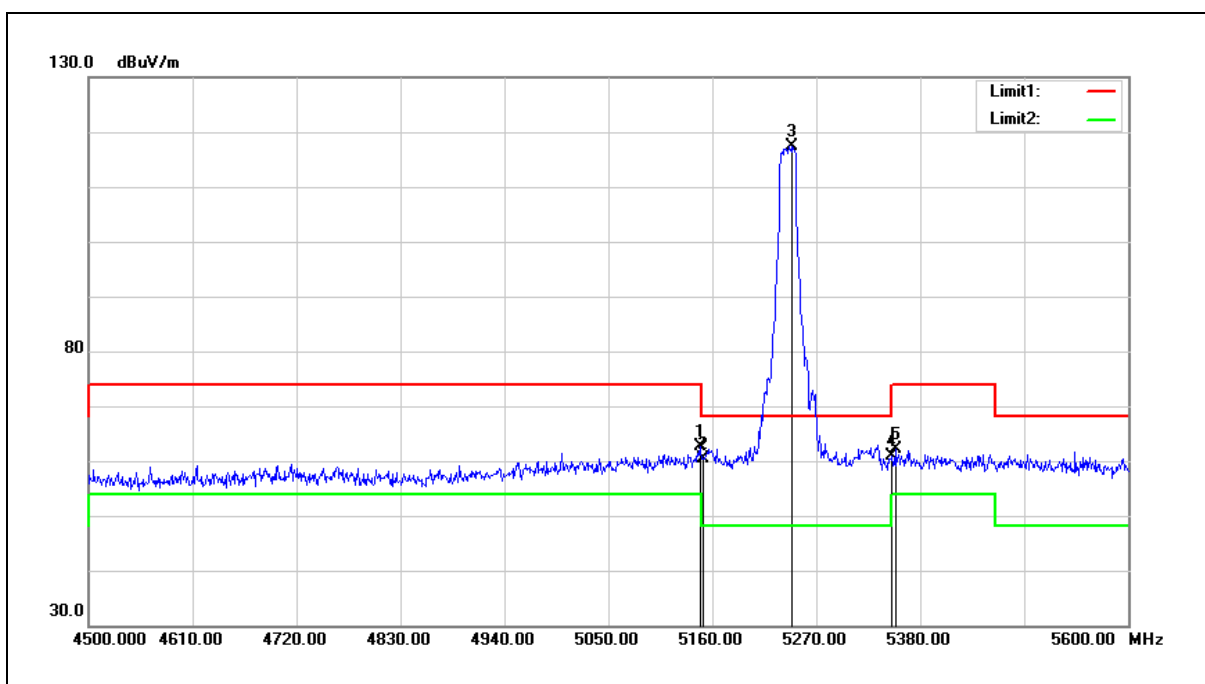


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	62.70	-0.08	62.62	74.00	-11.38	peak
2	5150.000	60.54	-0.08	60.46	74.00	-13.54	peak
3	5244.700	117.40	0.10	117.50	68.20	49.30	peak
4	5350.000	60.58	0.30	60.88	74.00	-13.12	peak
5	5353.600	61.71	0.30	62.01	74.00	-11.99	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

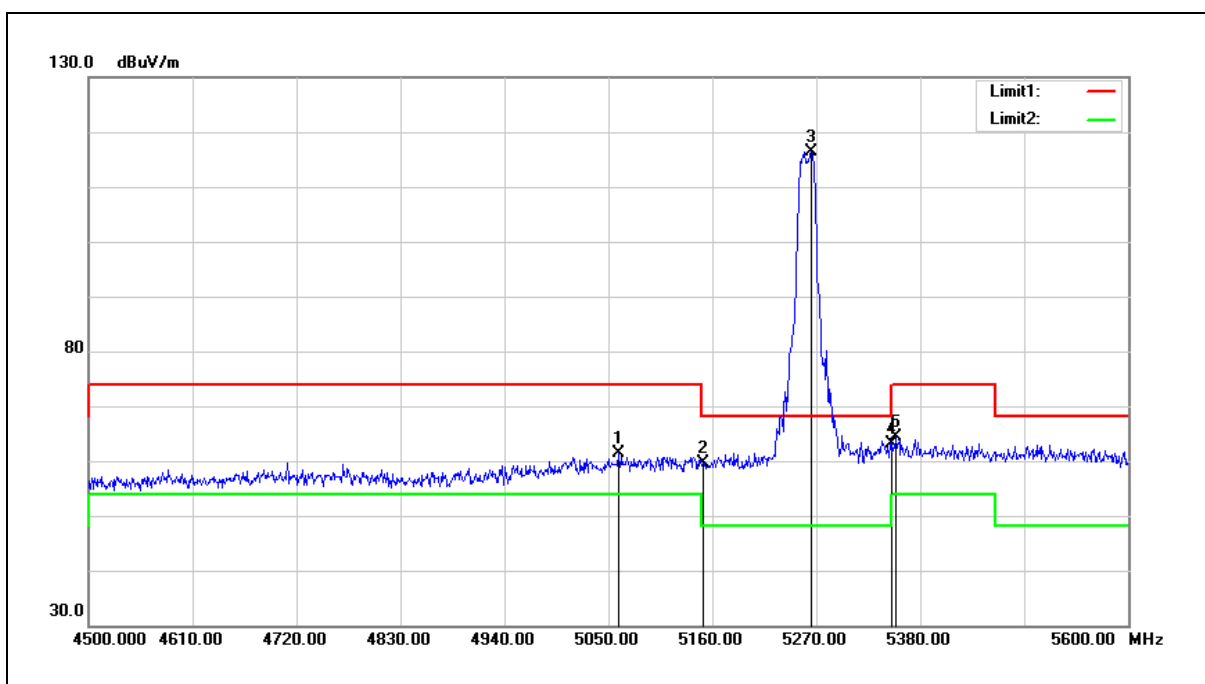


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.000	61.53	-0.25	61.28	74.00	-12.72	peak
2	5150.000	59.80	-0.08	59.72	74.00	-14.28	peak
3	5264.500	116.14	0.13	116.27	68.20	48.07	peak
4	5350.000	62.75	0.30	63.05	74.00	-10.95	peak
5	5354.700	64.15	0.30	64.45	74.00	-9.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

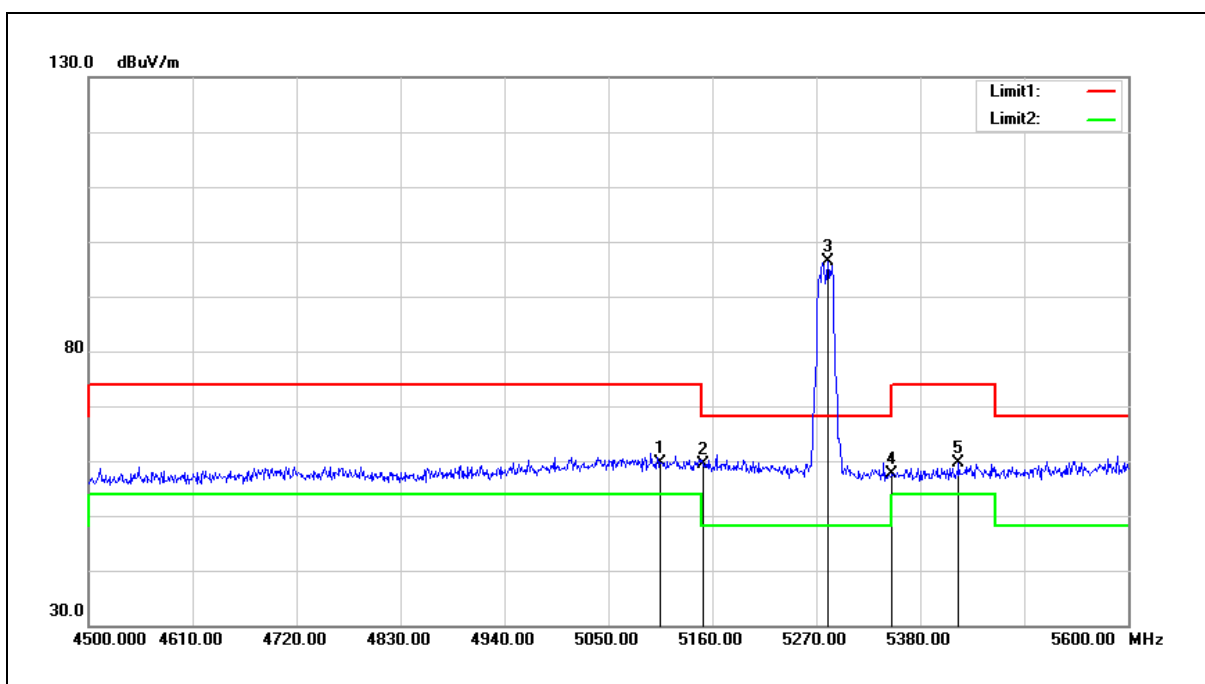


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5105.000	59.76	-0.16	59.60	74.00	-14.40	peak
2	5150.000	59.54	-0.08	59.46	74.00	-14.54	peak
3	5282.100	96.29	0.18	96.47	68.20	28.27	peak
4	5350.000	57.23	0.30	57.53	74.00	-16.47	peak
5	5420.700	59.31	0.43	59.74	74.00	-14.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

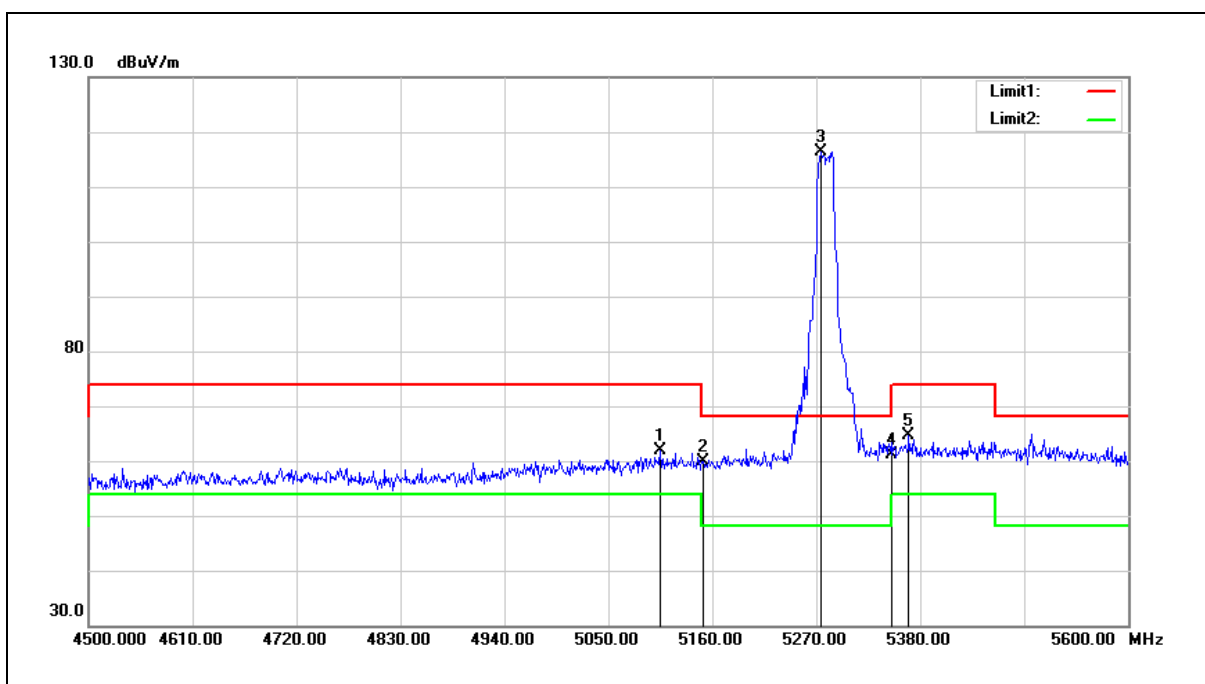


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5105.000	62.06	-0.16	61.90	74.00	-12.10	peak
2	5150.000	59.85	-0.08	59.77	74.00	-14.23	peak
3	5275.500	116.13	0.15	116.28	68.20	48.08	peak
4	5350.000	60.87	0.30	61.17	74.00	-12.83	peak
5	5367.900	64.29	0.33	64.62	74.00	-9.38	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

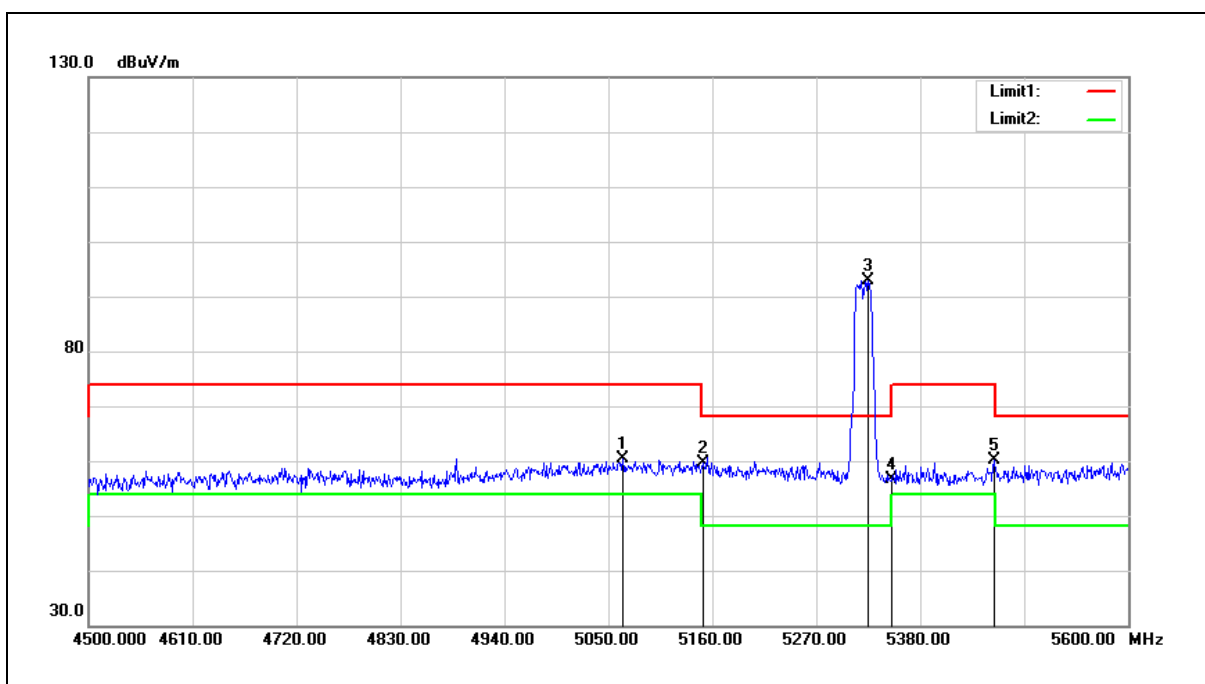


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5065.400	60.55	-0.24	60.31	74.00	-13.69	peak
2	5150.000	59.83	-0.08	59.75	74.00	-14.25	peak
3	5325.000	92.70	0.25	92.95	68.20	24.75	peak
4	5350.000	56.29	0.30	56.59	74.00	-17.41	peak
5	5458.100	59.69	0.50	60.19	74.00	-13.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

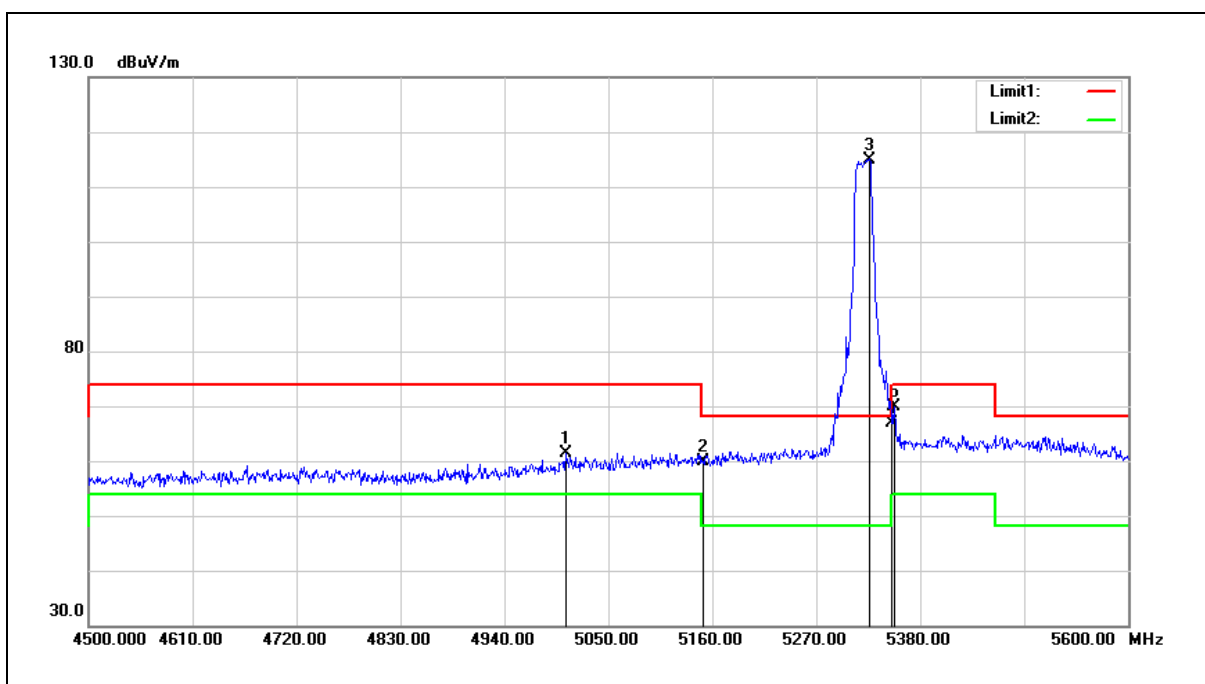


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5004.900	61.86	-0.36	61.50	74.00	-12.50	peak
2	5150.000	59.84	-0.08	59.76	74.00	-14.24	peak
3	5326.100	114.75	0.25	115.00	68.20	46.80	peak
4	5350.000	66.50	0.30	66.80	74.00	-7.20	peak
5	5352.500	69.62	0.30	69.92	74.00	-4.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

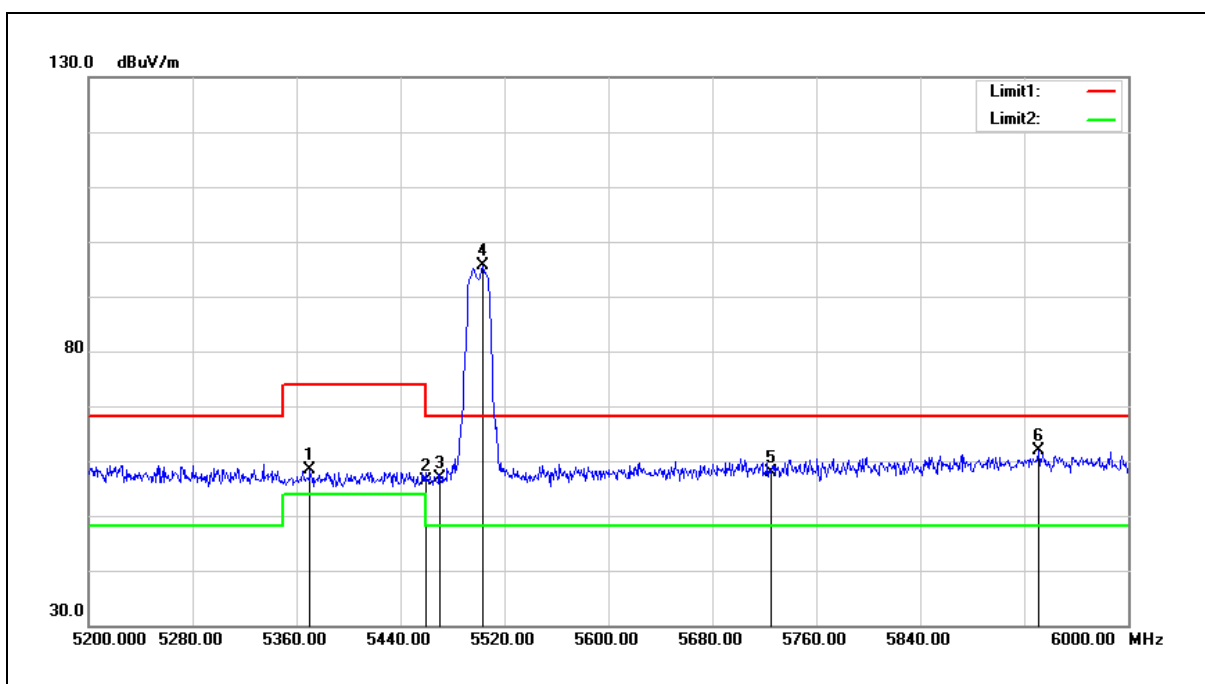


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.400	58.01	0.34	58.35	74.00	-15.65	peak
2	5460.000	55.92	0.51	56.43	74.00	-17.57	peak
3	5470.000	56.40	0.52	56.92	68.20	-11.28	peak
4	5503.200	95.09	0.58	95.67	68.20	27.47	peak
5	5725.000	56.79	1.18	57.97	68.20	-10.23	peak
6	5931.200	60.02	1.74	61.76	68.20	-6.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

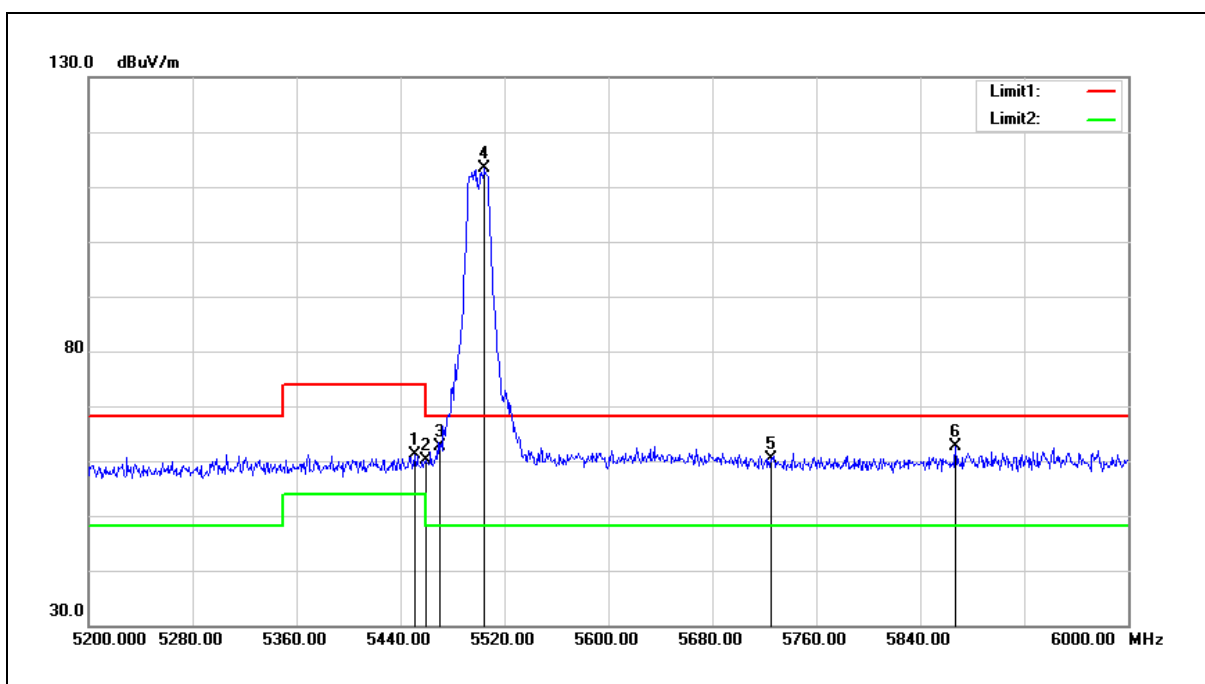


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.200	60.69	0.48	61.17	74.00	-12.83	peak
2	5460.000	59.57	0.51	60.08	74.00	-13.92	peak
3	5470.000	62.12	0.52	62.64	68.20	-5.56	peak
4	5504.800	112.68	0.59	113.27	68.20	45.07	peak
5	5725.000	59.10	1.18	60.28	68.20	-7.92	peak
6	5867.200	61.00	1.56	62.56	68.20	-5.64	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

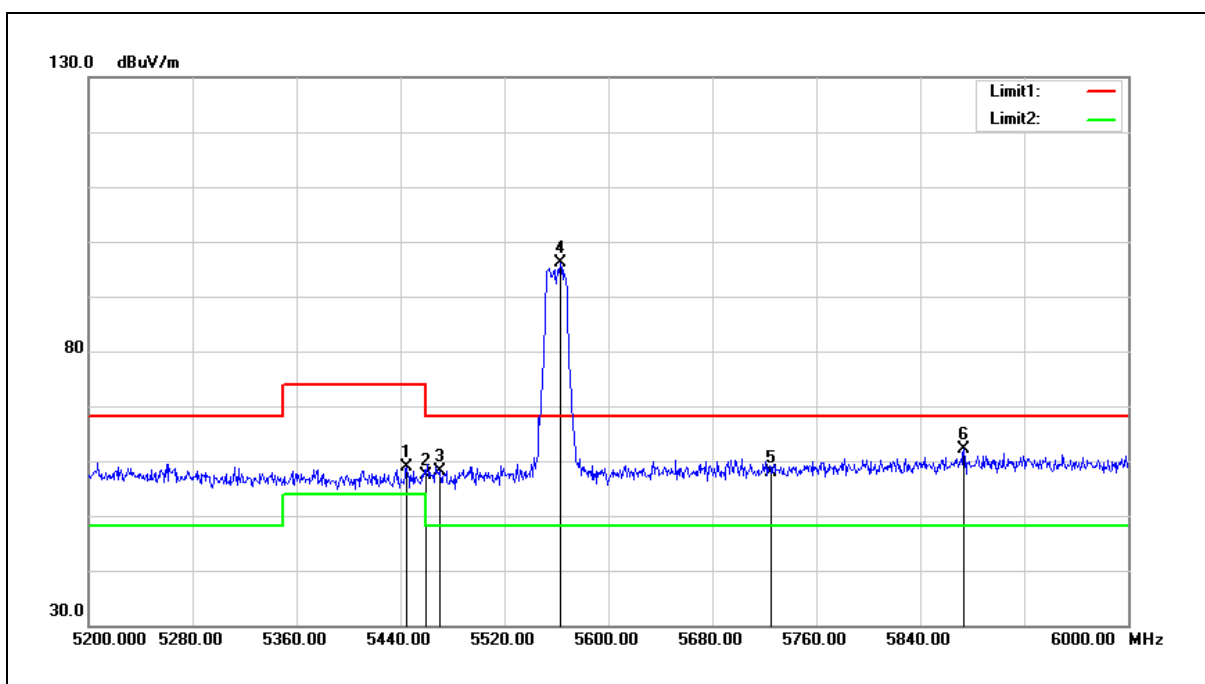


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.800	58.47	0.47	58.94	74.00	-15.06	peak
2	5460.000	56.89	0.51	57.40	74.00	-16.60	peak
3	5470.000	57.50	0.52	58.02	68.20	-10.18	peak
4	5563.200	95.36	0.75	96.11	68.20	27.91	peak
5	5725.000	56.62	1.18	57.80	68.20	-10.40	peak
6	5873.600	60.61	1.58	62.19	68.20	-6.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

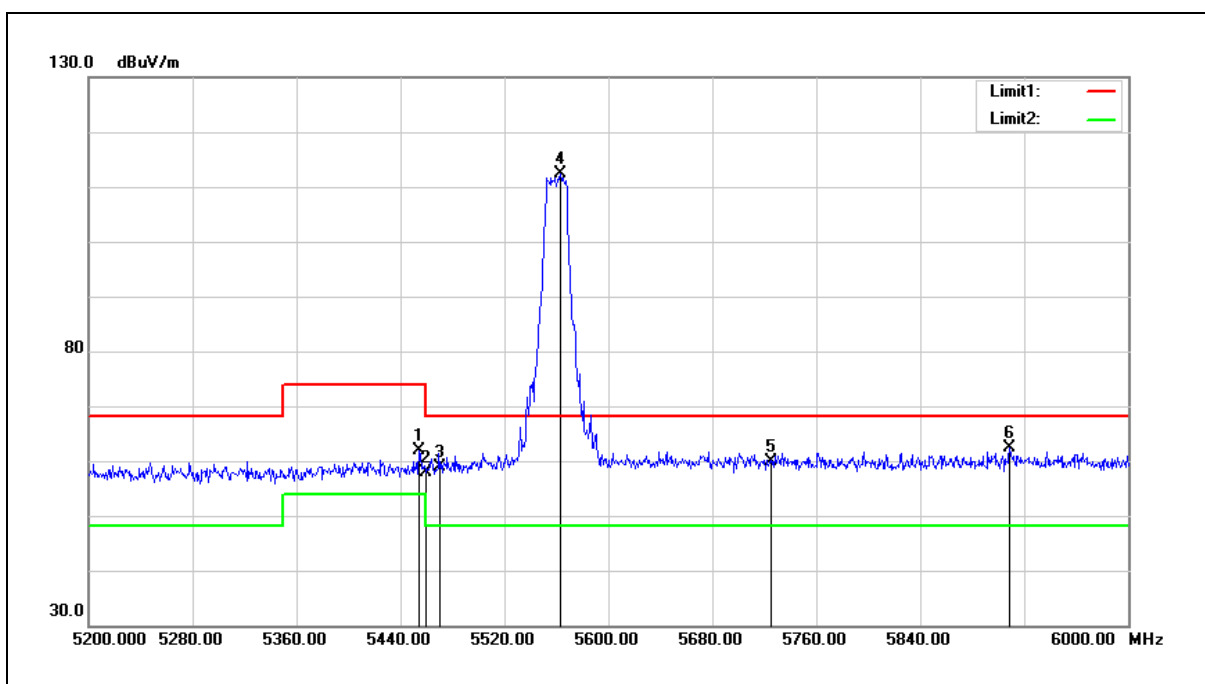


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	61.37	0.48	61.85	74.00	-12.15	peak
2	5460.000	57.36	0.51	57.87	74.00	-16.13	peak
3	5470.000	58.37	0.52	58.89	68.20	-9.31	peak
4	5563.200	111.53	0.75	112.28	68.20	44.08	peak
5	5725.000	58.59	1.18	59.77	68.20	-8.43	peak
6	5908.800	60.74	1.67	62.41	68.20	-5.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

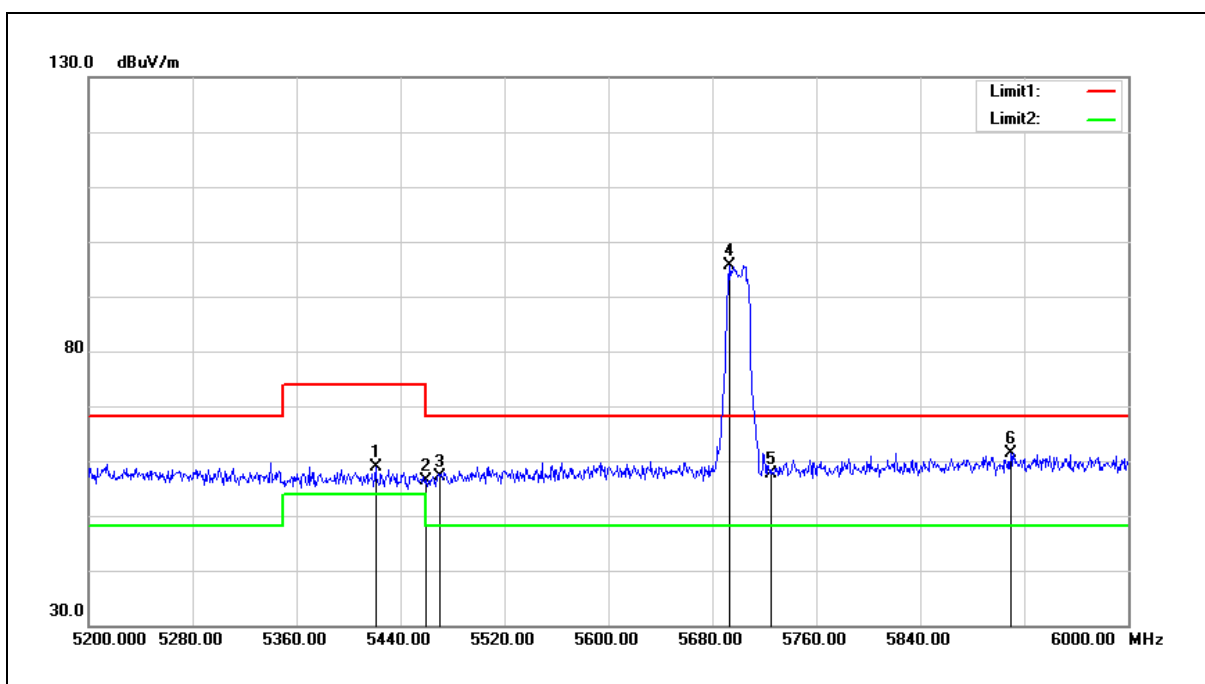


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.800	58.56	0.43	58.99	74.00	-15.01	peak
2	5460.000	55.97	0.51	56.48	74.00	-17.52	peak
3	5470.000	56.67	0.52	57.19	68.20	-11.01	peak
4	5693.600	94.58	1.10	95.68	68.20	27.48	peak
5	5725.000	56.33	1.18	57.51	68.20	-10.69	peak
6	5909.600	59.74	1.67	61.41	68.20	-6.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

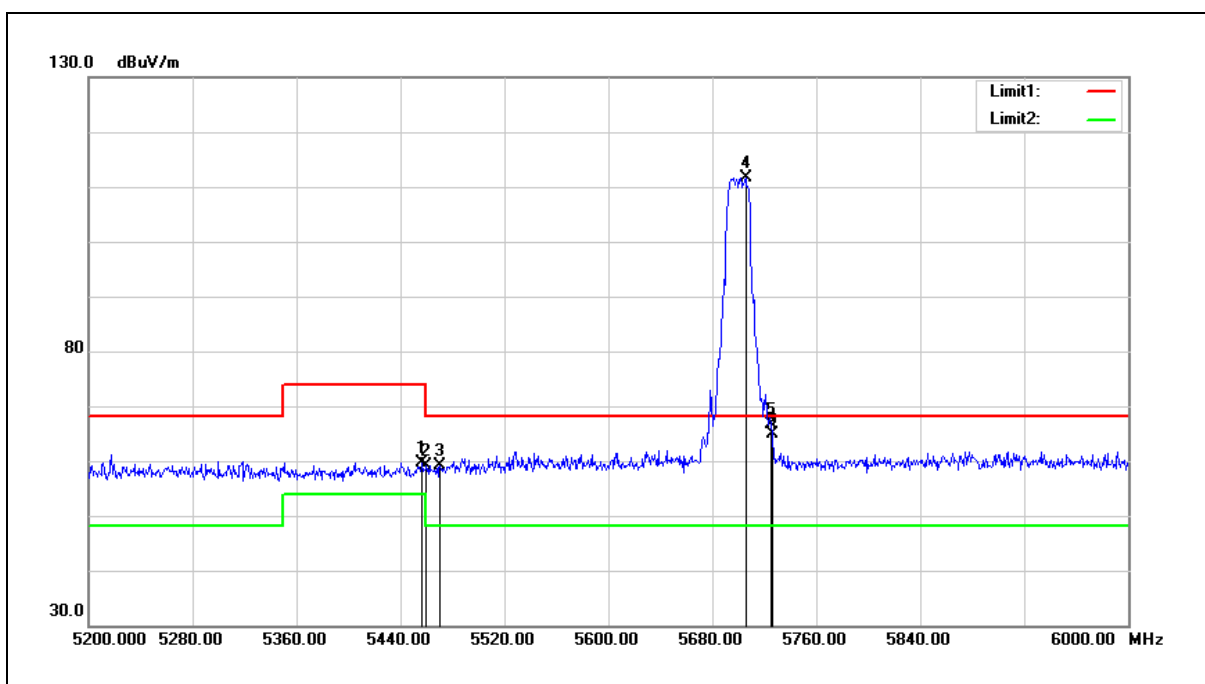


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.800	59.24	0.50	59.74	74.00	-14.26	peak
2	5460.000	58.55	0.51	59.06	74.00	-14.94	peak
3	5470.000	58.64	0.52	59.16	68.20	-9.04	peak
4	5705.600	110.50	1.14	111.64	68.20	43.44	peak
5	5725.000	65.51	1.18	66.69	68.20	-1.51	peak
6	5726.400	63.82	1.18	65.00	68.20	-3.20	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

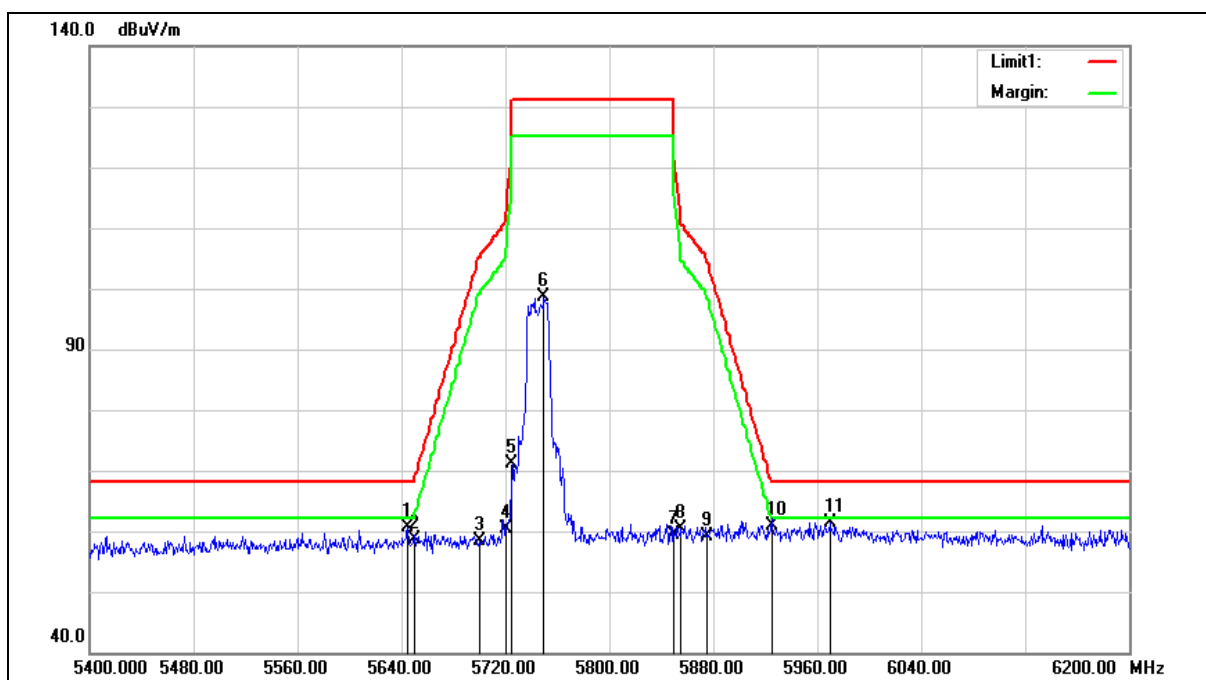

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	59.70	0.96	60.66	68.20	-7.54	peak
2	5650.000	57.74	0.97	58.71	68.20	-9.49	peak
3	5700.000	57.33	1.11	58.44	105.20	-46.76	peak
4	5720.000	59.15	1.17	60.32	110.80	-50.48	peak
5	5725.000	69.93	1.18	71.11	122.20	-51.09	peak
6	5749.600	97.30	1.25	98.55	131.20	-32.65	peak
7	5850.000	57.93	1.52	59.45	122.20	-62.75	peak
8	5855.000	58.93	1.53	60.46	110.80	-50.34	peak
9	5875.000	57.58	1.59	59.17	105.20	-46.03	peak
10	5925.000	59.24	1.72	60.96	68.20	-7.24	peak
11	5969.600	59.66	1.84	61.50	68.20	-6.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

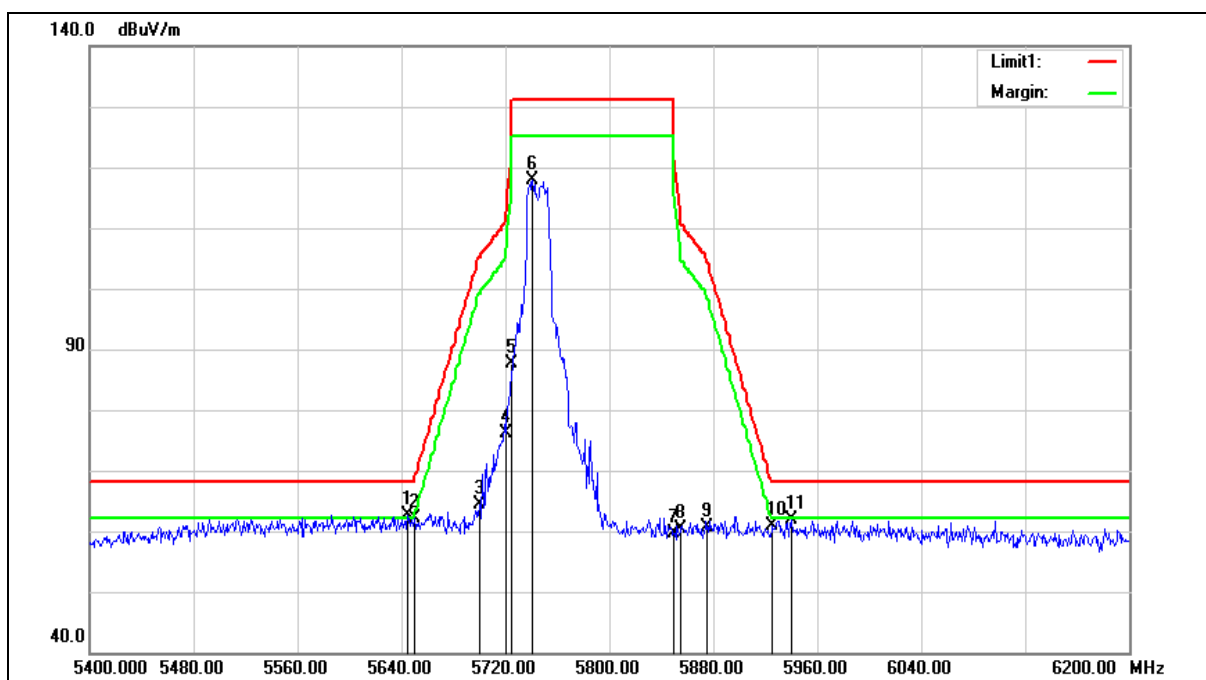

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5644.800	61.69	0.96	62.65	68.20	-5.55	peak
2	5650.000	61.16	0.97	62.13	68.20	-6.07	peak
3	5700.000	63.22	1.11	64.33	105.20	-40.87	peak
4	5720.000	75.06	1.17	76.23	110.80	-34.57	peak
5	5725.000	86.57	1.18	87.75	122.20	-34.45	peak
6	5740.800	116.67	1.22	117.89	131.20	-13.31	peak
7	5850.000	58.08	1.52	59.60	122.20	-62.60	peak
8	5855.000	58.87	1.53	60.40	110.80	-50.40	peak
9	5875.000	58.97	1.59	60.56	105.20	-44.64	peak
10	5925.000	59.06	1.72	60.78	68.20	-7.42	peak
11	5940.000	60.04	1.76	61.80	68.20	-6.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

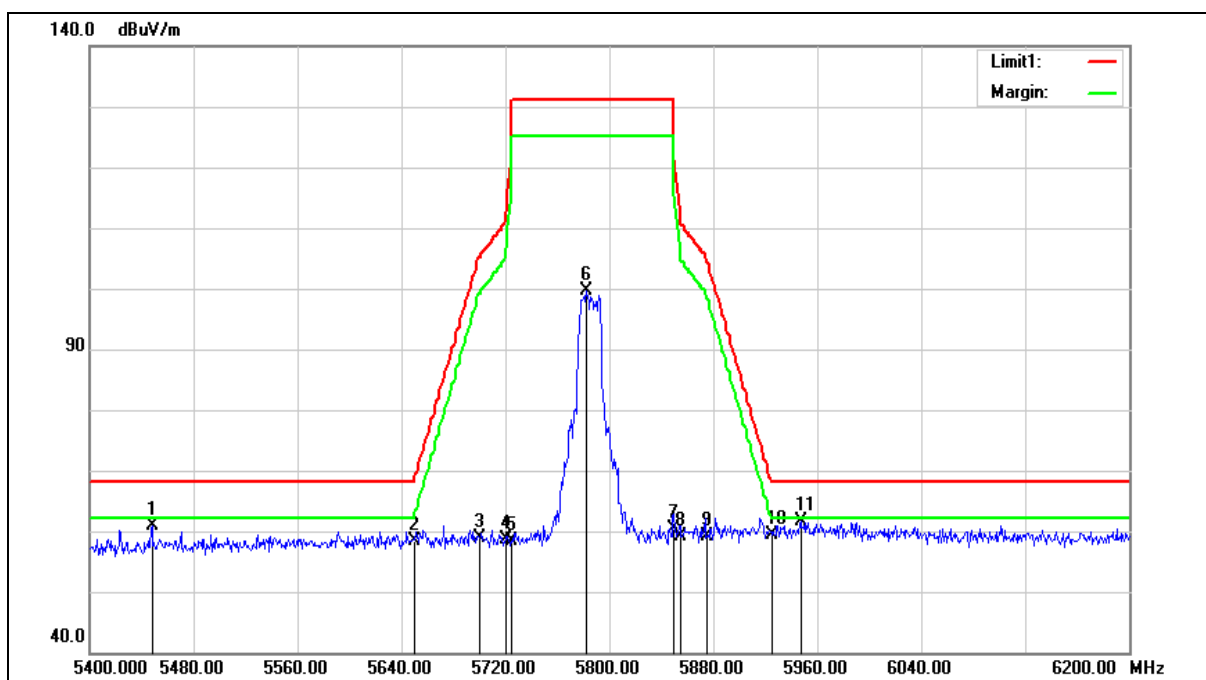

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5448.000	60.49	0.48	60.97	68.20	-7.23	peak
2	5650.000	57.53	0.97	58.50	68.20	-9.70	peak
3	5700.000	57.78	1.11	58.89	105.20	-46.31	peak
4	5720.000	57.47	1.17	58.64	110.80	-52.16	peak
5	5725.000	57.09	1.18	58.27	122.20	-63.93	peak
6	5782.400	98.18	1.33	99.51	131.20	-31.69	peak
7	5850.000	58.76	1.52	60.28	122.20	-61.92	peak
8	5855.000	57.55	1.53	59.08	110.80	-51.72	peak
9	5875.000	57.60	1.59	59.19	105.20	-46.01	peak
10	5925.000	57.55	1.72	59.27	68.20	-8.93	peak
11	5947.200	59.73	1.78	61.51	68.20	-6.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

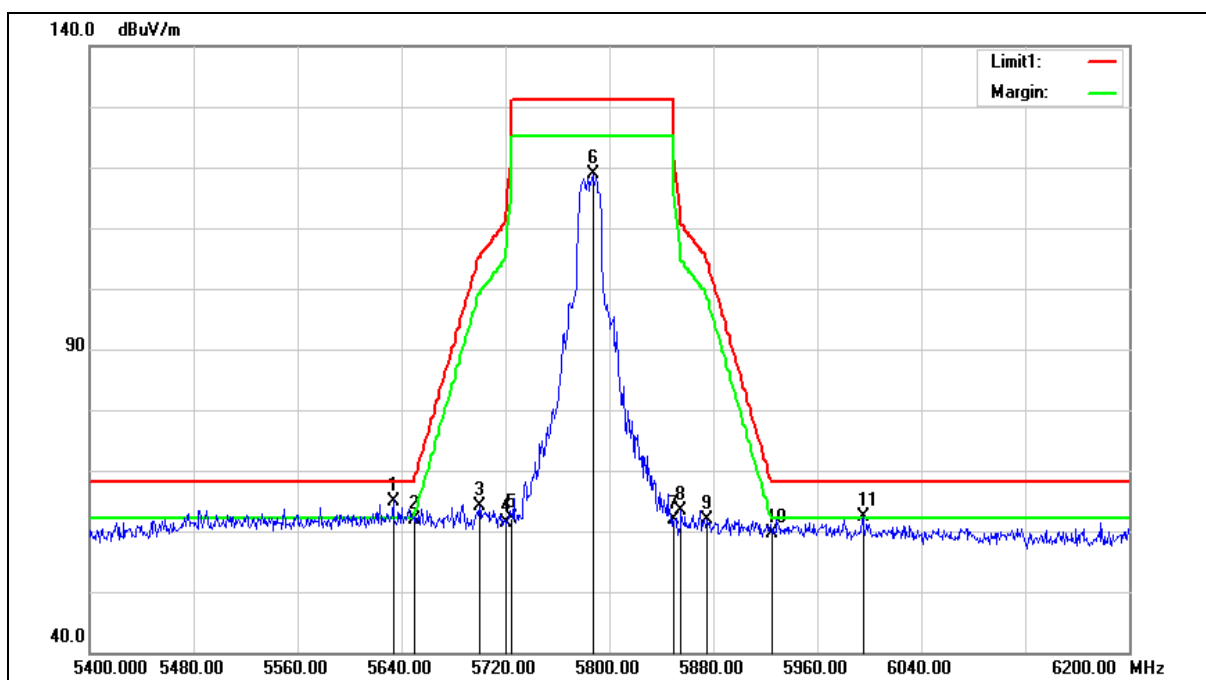

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5633.600	64.07	0.93	65.00	68.20	-3.20	peak
2	5650.000	60.98	0.97	61.95	68.20	-6.25	peak
3	5700.000	63.07	1.11	64.18	105.20	-41.02	peak
4	5720.000	60.30	1.17	61.47	110.80	-49.33	peak
5	5725.000	60.94	1.18	62.12	122.20	-60.08	peak
6	5787.200	117.46	1.34	118.80	131.20	-12.40	peak
7	5850.000	60.37	1.52	61.89	122.20	-60.31	peak
8	5855.000	61.85	1.53	63.38	110.80	-47.42	peak
9	5875.000	60.18	1.59	61.77	105.20	-43.43	peak
10	5925.000	57.82	1.72	59.54	68.20	-8.66	peak
11	5995.200	60.47	1.91	62.38	68.20	-5.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

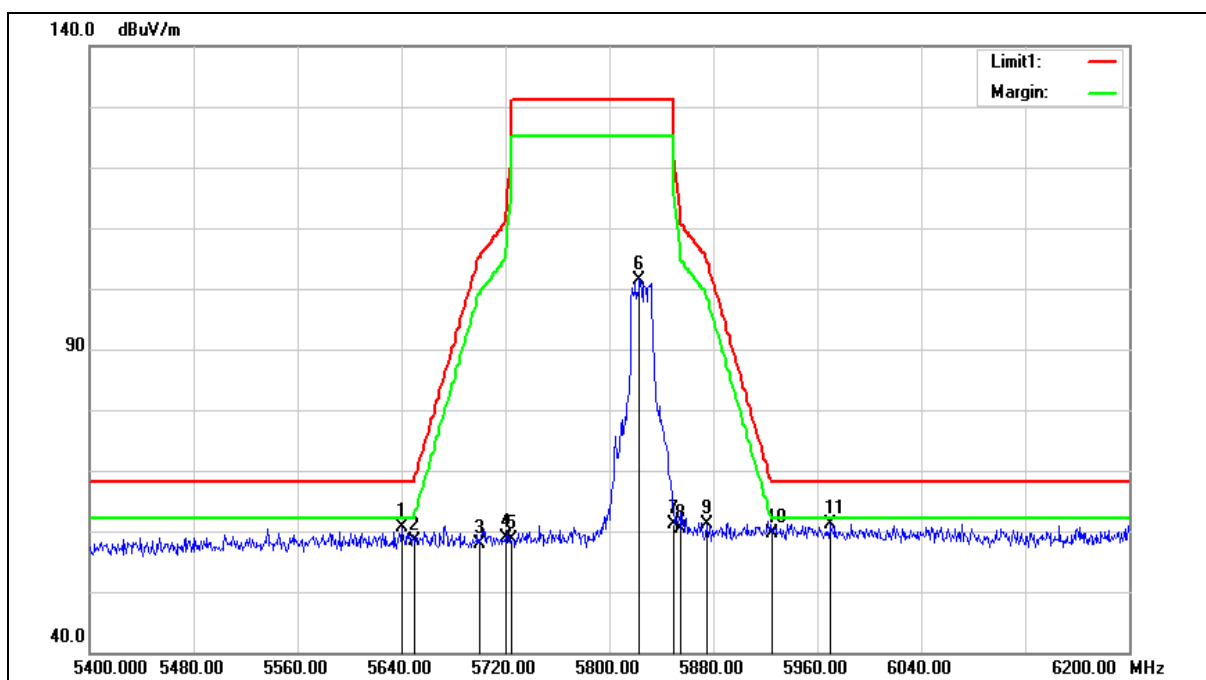

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.000	59.77	0.96	60.73	68.20	-7.47	peak
2	5650.000	57.30	0.97	58.27	68.20	-9.93	peak
3	5700.000	56.68	1.11	57.79	105.20	-47.41	peak
4	5720.000	57.83	1.17	59.00	110.80	-51.80	peak
5	5725.000	57.48	1.18	58.66	122.20	-63.54	peak
6	5823.200	100.05	1.45	101.50	131.20	-29.70	peak
7	5850.000	59.54	1.52	61.06	122.20	-61.14	peak
8	5855.000	58.76	1.53	60.29	110.80	-50.51	peak
9	5875.000	59.46	1.59	61.05	105.20	-44.15	peak
10	5925.000	57.96	1.72	59.68	68.20	-8.52	peak
11	5970.400	59.35	1.84	61.19	68.20	-7.01	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

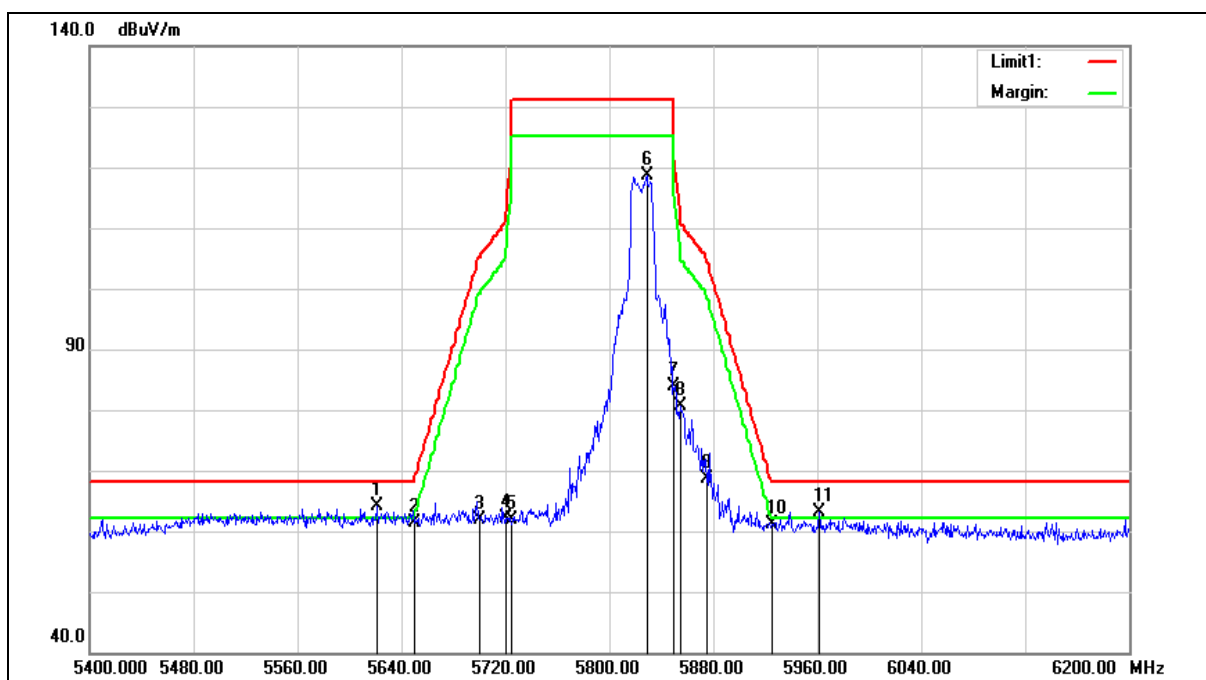

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5620.800	63.32	0.89	64.21	68.20	-3.99	peak
2	5650.000	60.42	0.97	61.39	68.20	-6.81	peak
3	5700.000	60.88	1.11	61.99	105.20	-43.21	peak
4	5720.000	60.94	1.17	62.11	110.80	-48.69	peak
5	5725.000	60.78	1.18	61.96	122.20	-60.24	peak
6	5828.800	117.15	1.46	118.61	131.20	-12.59	peak
7	5850.000	82.40	1.52	83.92	122.20	-38.28	peak
8	5855.000	79.05	1.53	80.58	110.80	-30.22	peak
9	5875.000	67.09	1.59	68.68	105.20	-36.52	peak
10	5925.000	59.47	1.72	61.19	68.20	-7.01	peak
11	5961.600	61.44	1.81	63.25	68.20	-4.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

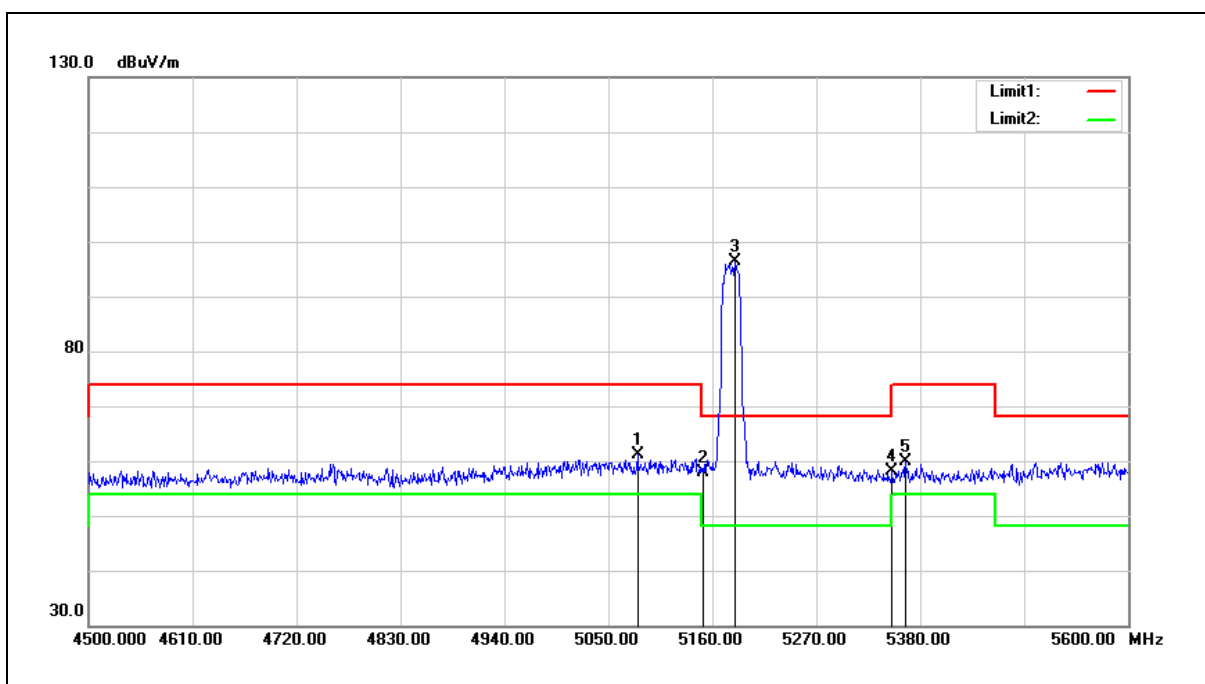


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5080.800	61.40	-0.21	61.19	74.00	-12.81	peak
2	5150.000	57.86	-0.08	57.78	74.00	-16.22	peak
3	5184.200	96.34	-0.02	96.32	68.20	28.12	peak
4	5350.000	57.84	0.30	58.14	74.00	-15.86	peak
5	5364.600	59.50	0.32	59.82	74.00	-14.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

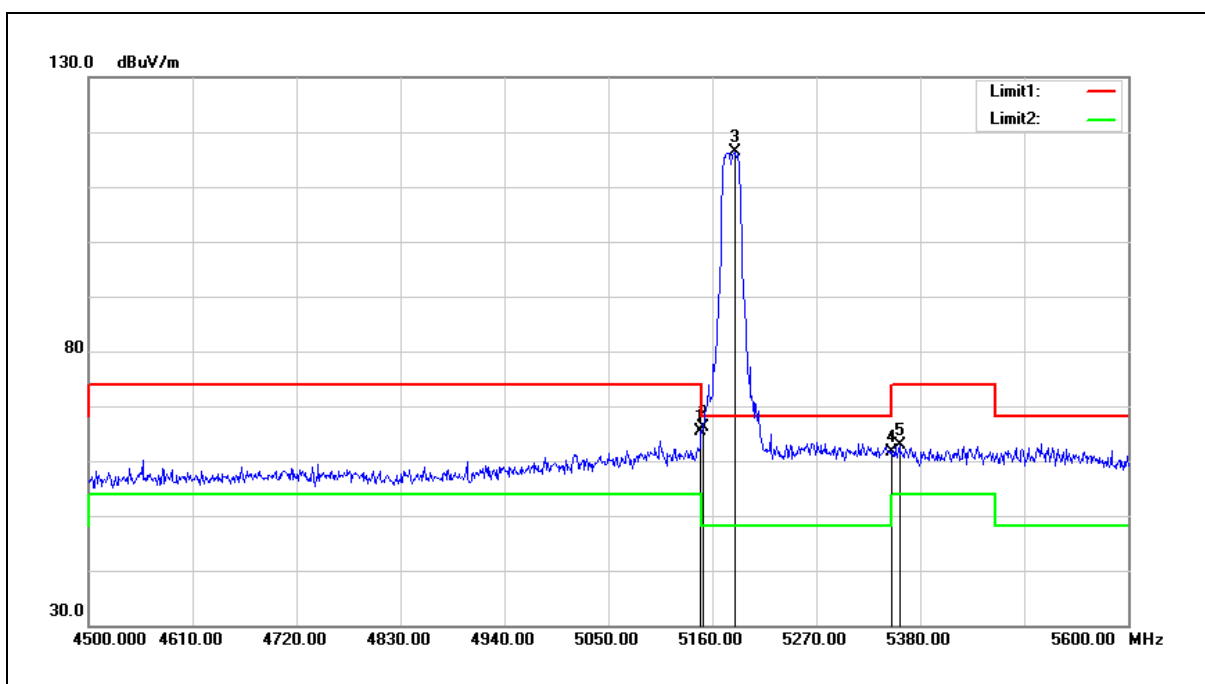


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.900	65.39	-0.08	65.31	74.00	-8.69	peak
2	5150.000	66.27	-0.08	66.19	74.00	-7.81	peak
3	5184.200	116.35	-0.02	116.33	68.20	48.13	peak
4	5350.000	61.43	0.30	61.73	74.00	-12.27	peak
5	5358.000	62.46	0.31	62.77	74.00	-11.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

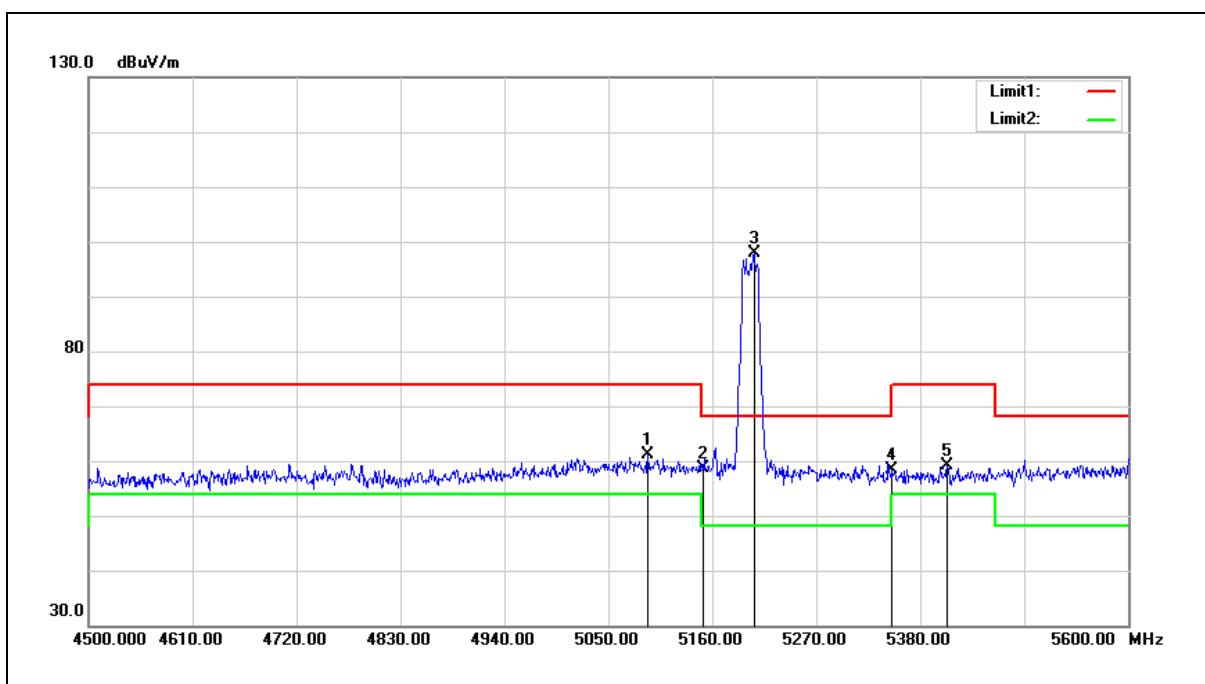


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	61.33	-0.19	61.14	74.00	-12.86	peak
2	5150.000	58.74	-0.08	58.66	74.00	-15.34	peak
3	5204.000	97.78	0.02	97.80	68.20	29.60	peak
4	5350.000	58.06	0.30	58.36	74.00	-15.64	peak
5	5408.600	58.68	0.41	59.09	74.00	-14.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

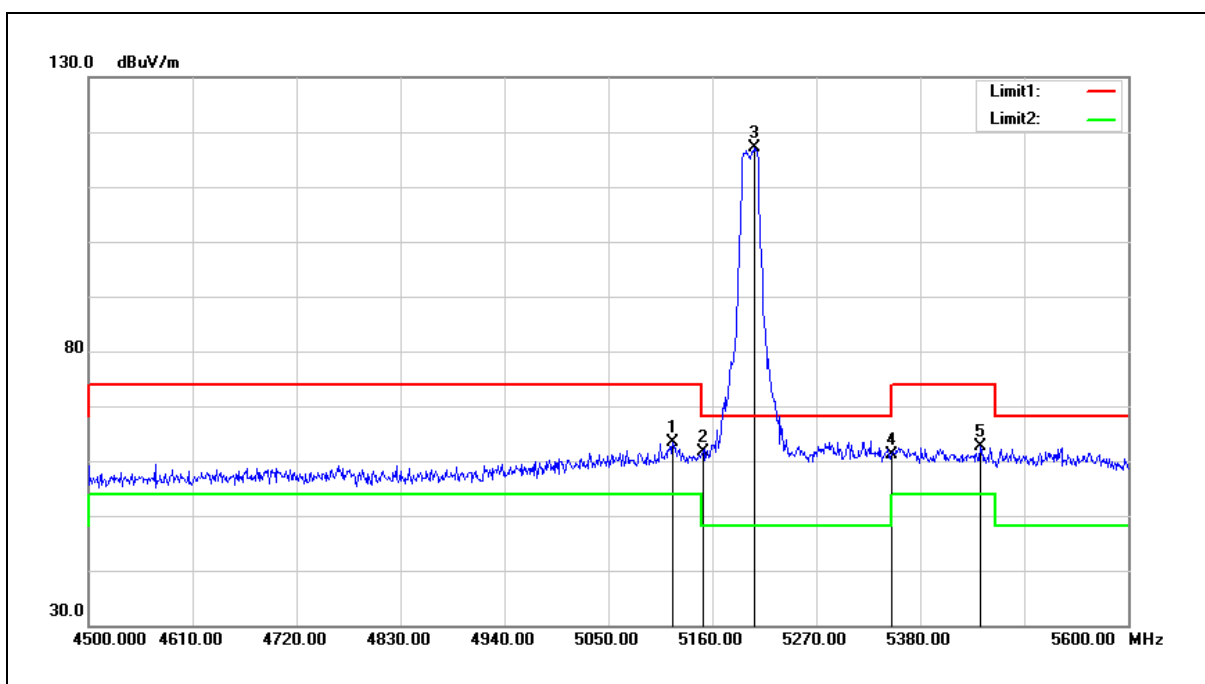


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.200	63.48	-0.14	63.34	74.00	-10.66	peak
2	5150.000	61.76	-0.08	61.68	74.00	-12.32	peak
3	5204.000	117.04	0.02	117.06	68.20	48.86	peak
4	5350.000	60.73	0.30	61.03	74.00	-12.97	peak
5	5443.800	62.17	0.47	62.64	74.00	-11.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

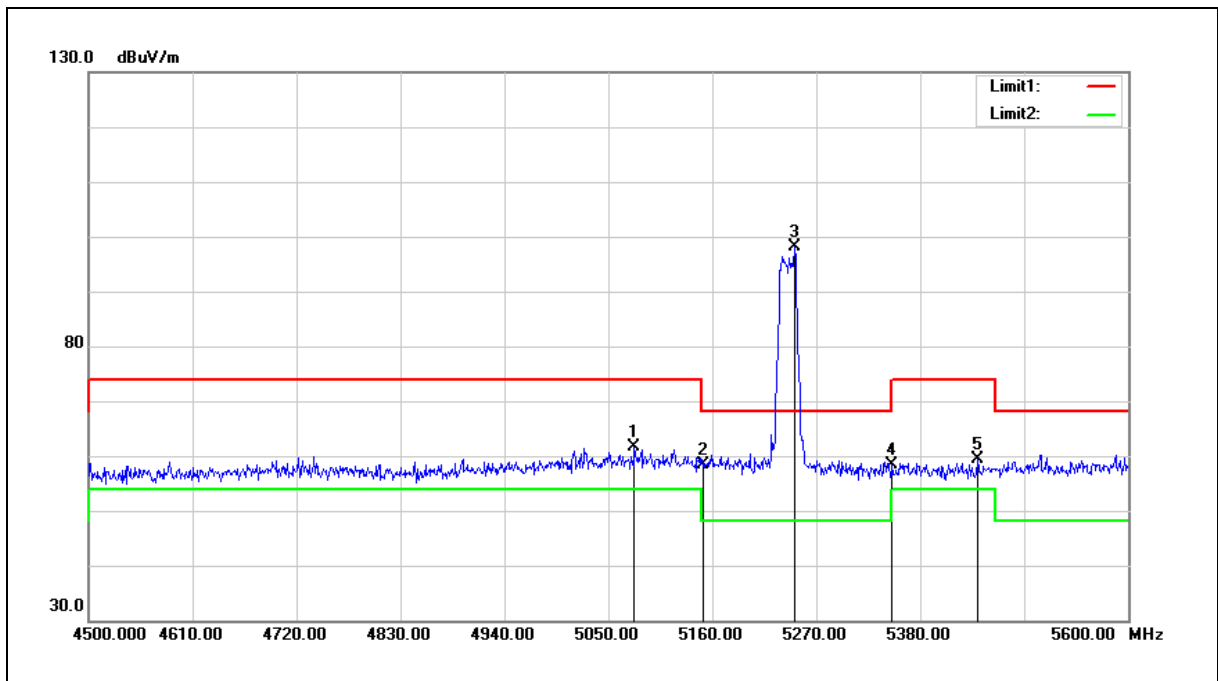


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.500	61.76	-0.21	61.55	74.00	-12.45	peak
2	5150.000	58.54	-0.08	58.46	74.00	-15.54	peak
3	5246.900	97.96	0.10	98.06	68.20	29.86	peak
4	5350.000	57.96	0.30	58.26	74.00	-15.74	peak
5	5440.500	58.84	0.46	59.30	74.00	-14.70	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

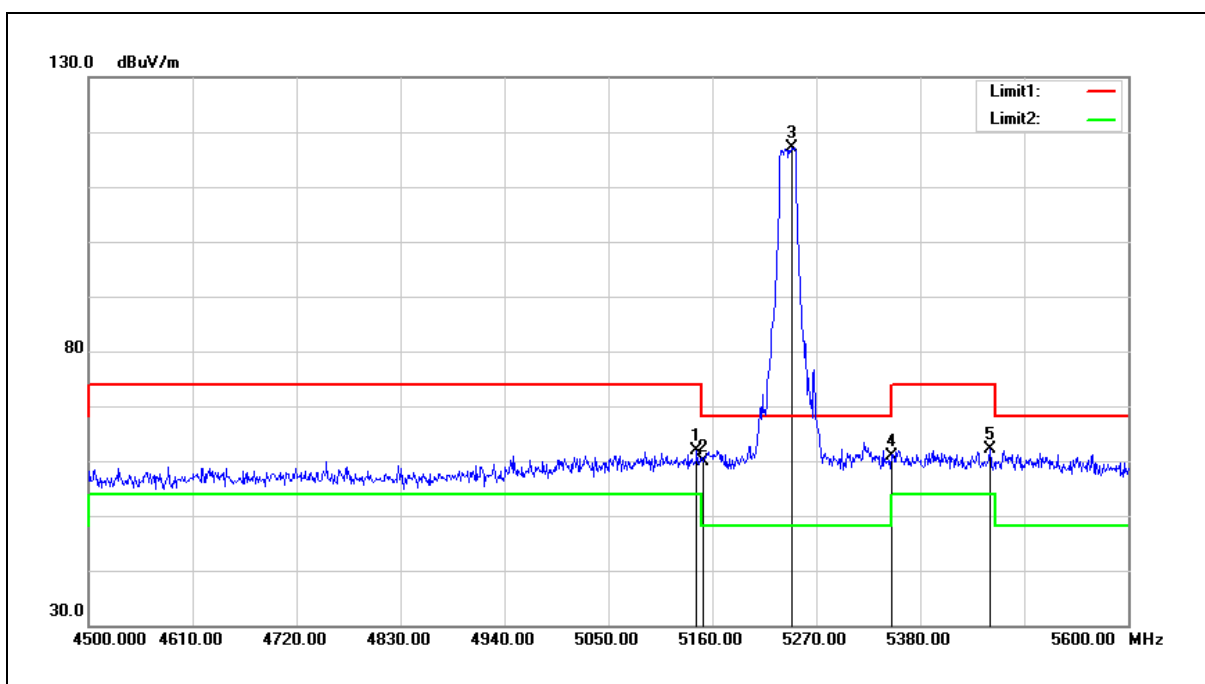


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.500	61.91	-0.10	61.81	74.00	-12.19	peak
2	5150.000	59.85	-0.08	59.77	74.00	-14.23	peak
3	5244.700	117.10	0.10	117.20	68.20	49.00	peak
4	5350.000	60.60	0.30	60.90	74.00	-13.10	peak
5	5453.700	61.75	0.48	62.23	74.00	-11.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

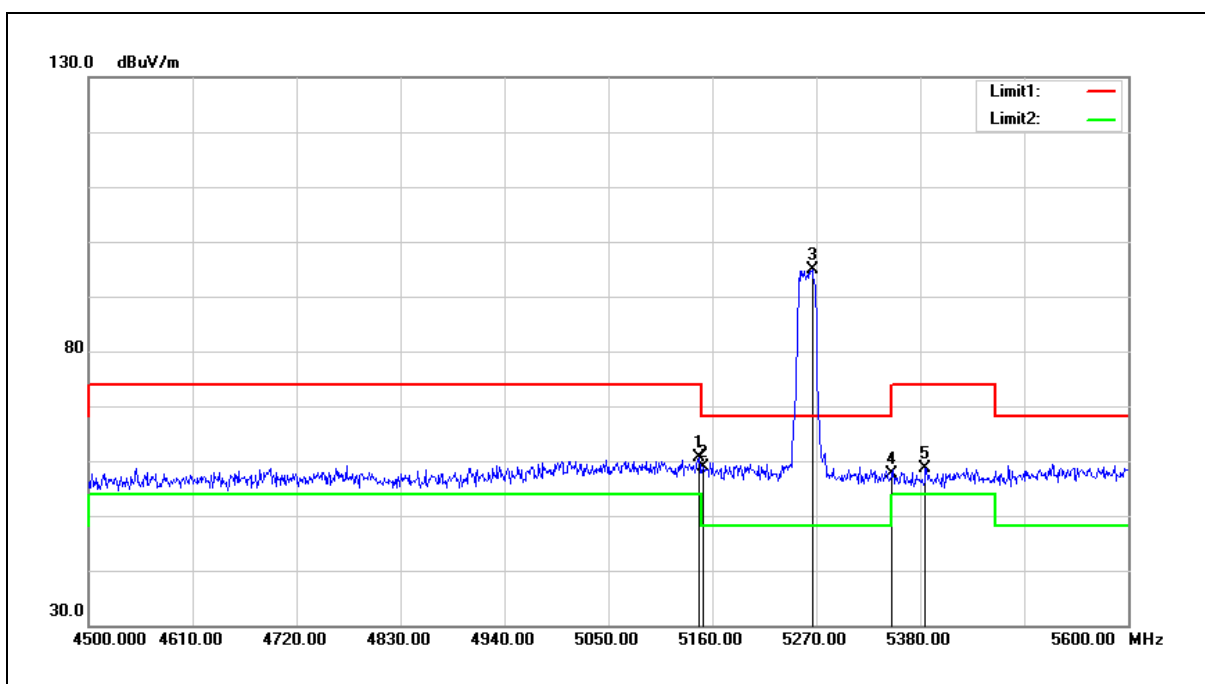


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	60.63	-0.08	60.55	74.00	-13.45	peak
2	5150.000	58.90	-0.08	58.82	74.00	-15.18	peak
3	5265.600	94.87	0.13	95.00	68.20	26.80	peak
4	5350.000	57.23	0.30	57.53	74.00	-16.47	peak
5	5385.500	58.38	0.36	58.74	74.00	-15.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

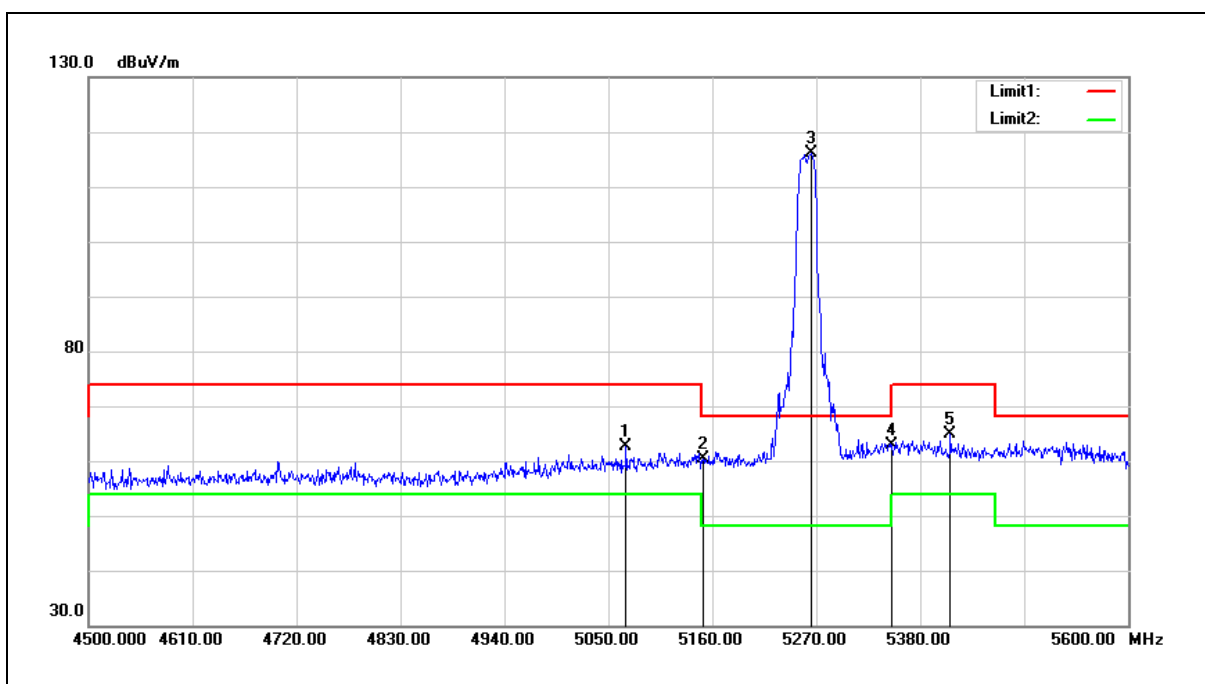


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5068.700	62.96	-0.24	62.72	74.00	-11.28	peak
2	5150.000	60.58	-0.08	60.50	74.00	-13.50	peak
3	5264.500	115.94	0.13	116.07	68.20	47.87	peak
4	5350.000	62.46	0.30	62.76	74.00	-11.24	peak
5	5411.900	64.45	0.41	64.86	74.00	-9.14	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

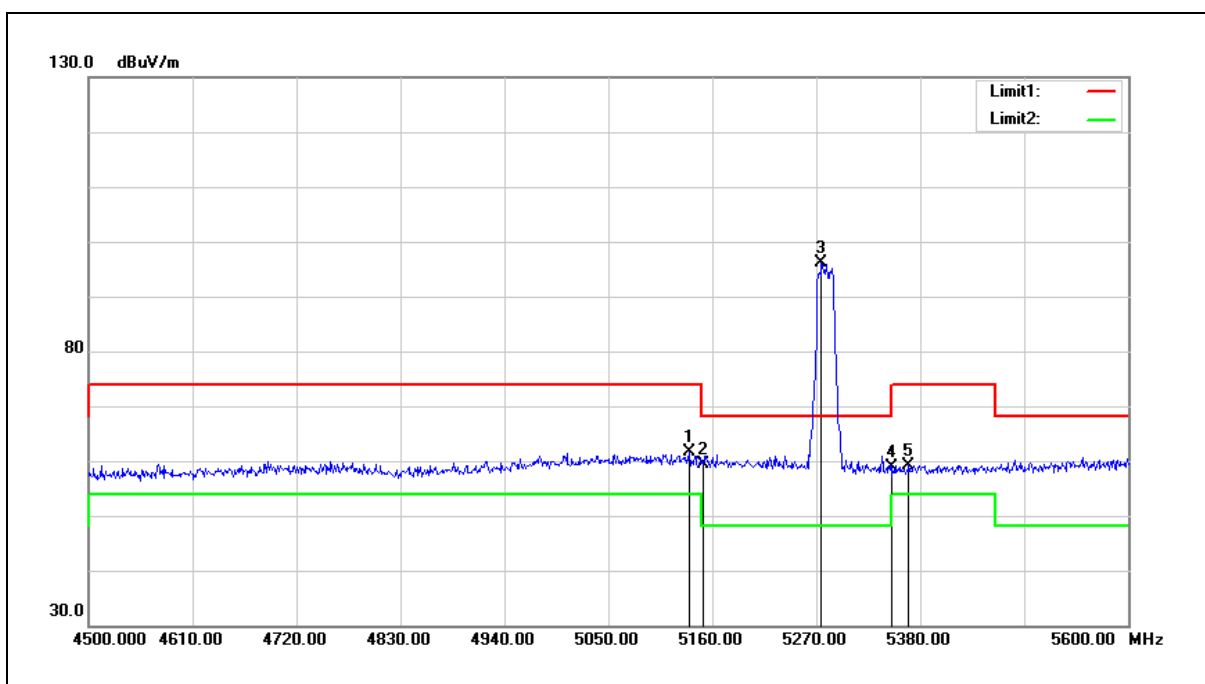


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5135.800	61.69	-0.10	61.59	74.00	-12.41	peak
2	5150.000	59.44	-0.08	59.36	74.00	-14.64	peak
3	5275.500	95.88	0.15	96.03	68.20	27.83	peak
4	5350.000	58.54	0.30	58.84	74.00	-15.16	peak
5	5367.900	58.92	0.33	59.25	74.00	-14.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

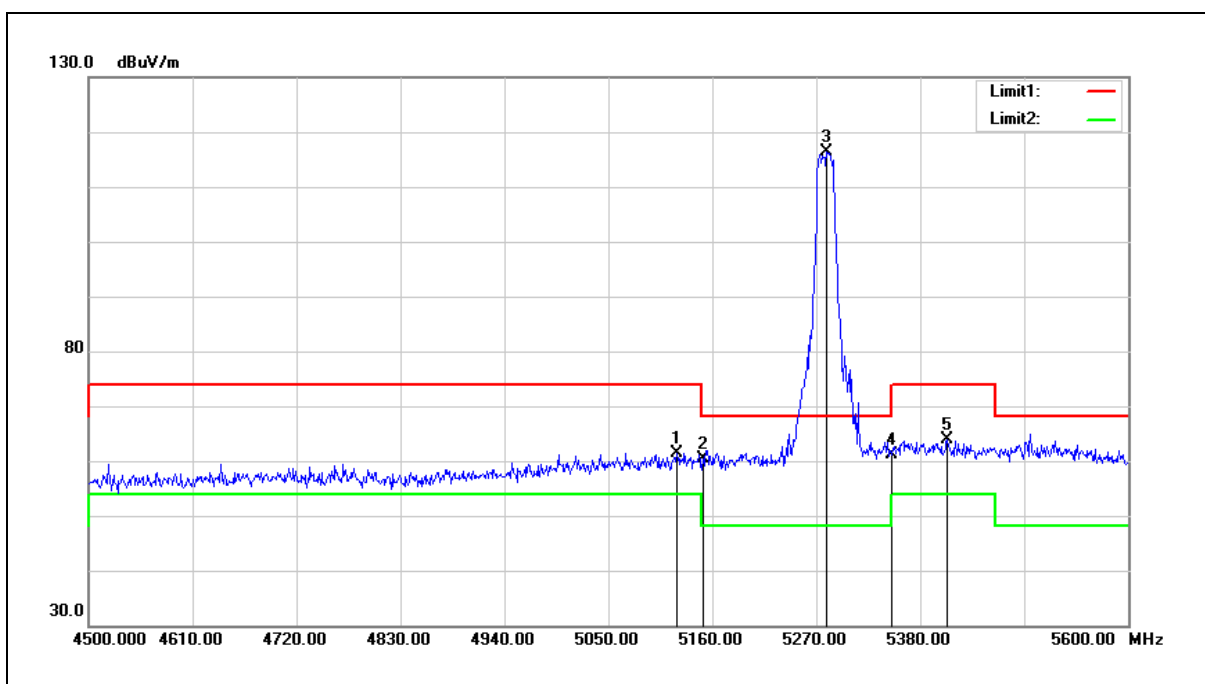


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.600	61.51	-0.13	61.38	74.00	-12.62	peak
2	5150.000	60.34	-0.08	60.26	74.00	-13.74	peak
3	5281.000	116.15	0.17	116.32	68.20	48.12	peak
4	5350.000	60.77	0.30	61.07	74.00	-12.93	peak
5	5408.600	63.51	0.41	63.92	74.00	-10.08	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

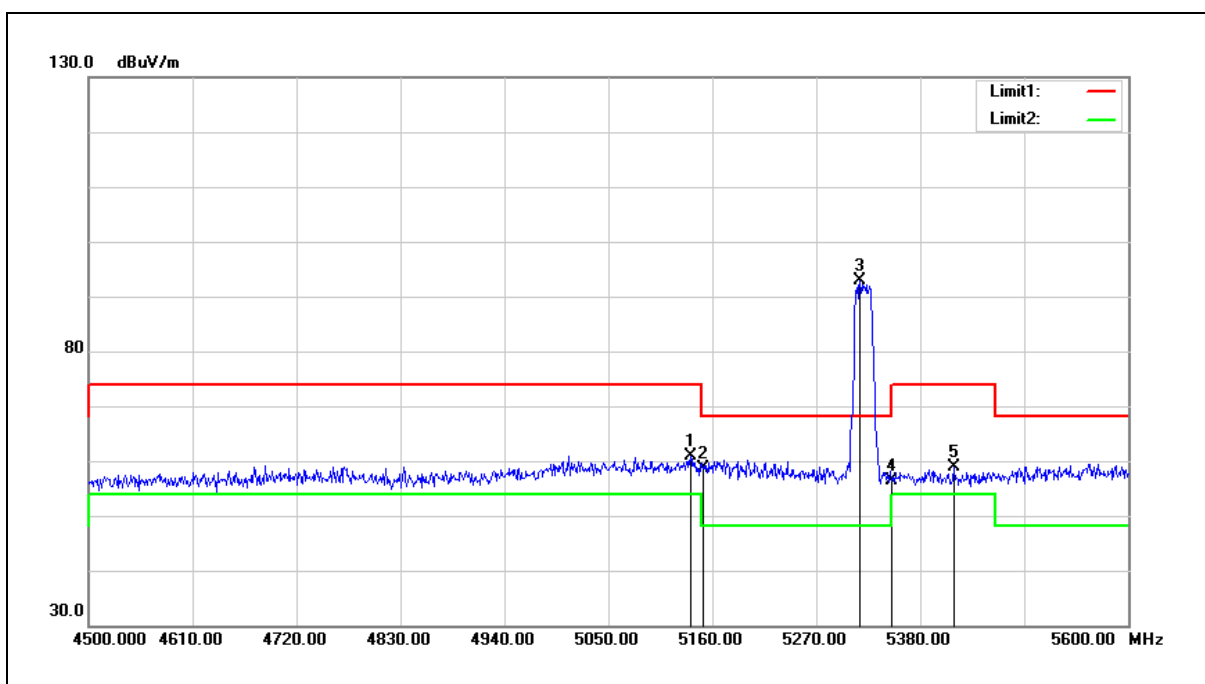


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5136.900	61.05	-0.10	60.95	74.00	-13.05	peak
2	5150.000	58.64	-0.08	58.56	74.00	-15.44	peak
3	5316.200	92.77	0.23	93.00	68.20	24.80	peak
4	5350.000	56.04	0.30	56.34	74.00	-17.66	peak
5	5415.200	58.48	0.41	58.89	74.00	-15.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

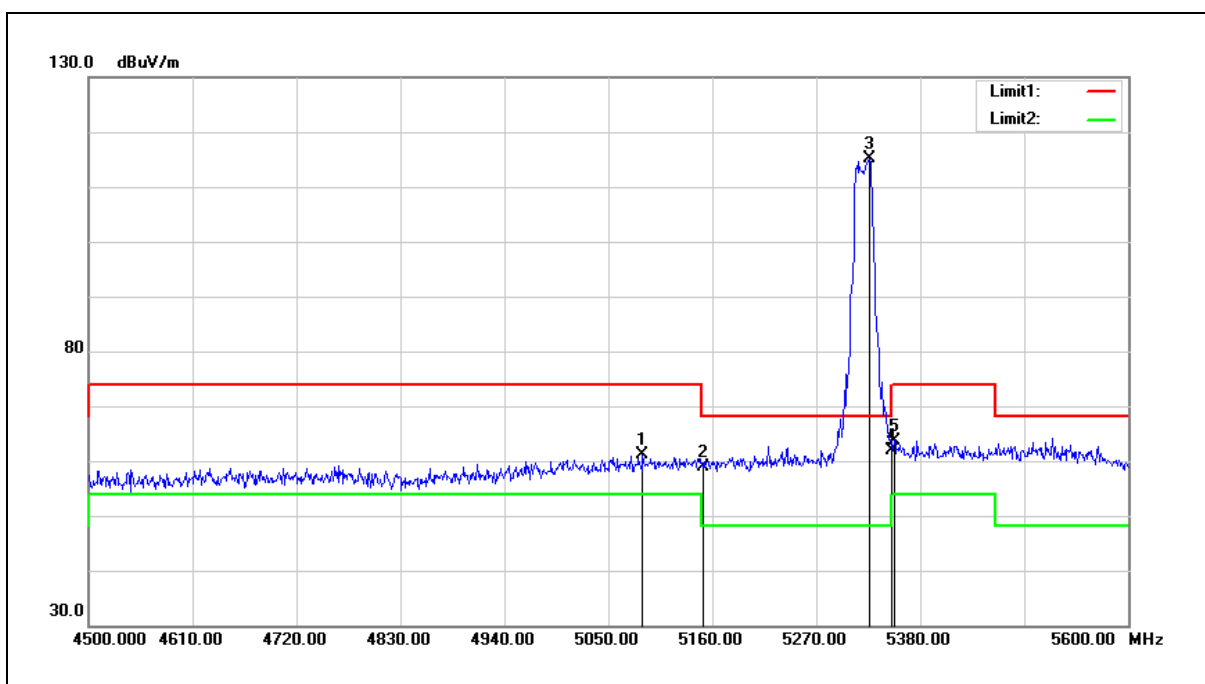


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.300	61.27	-0.20	61.07	74.00	-12.93	peak
2	5150.000	58.98	-0.08	58.90	74.00	-15.10	peak
3	5326.100	114.99	0.25	115.24	68.20	47.04	peak
4	5350.000	61.48	0.30	61.78	74.00	-12.22	peak
5	5352.500	63.45	0.30	63.75	74.00	-10.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

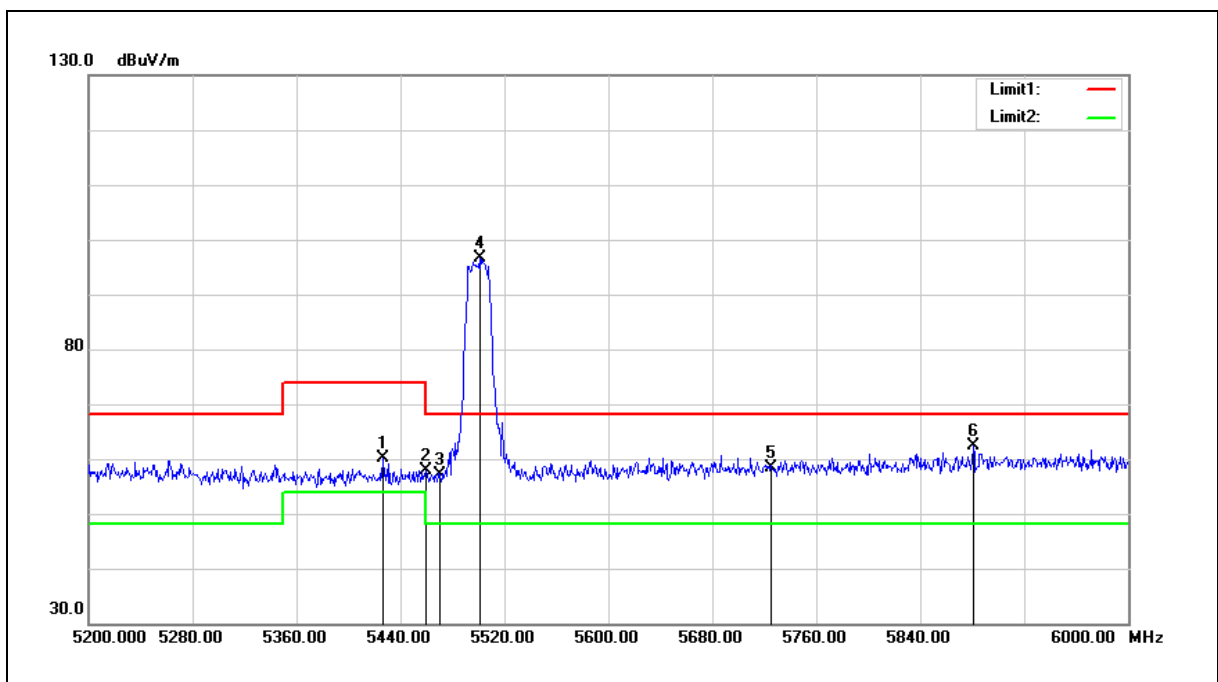


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.400	59.67	0.43	60.10	74.00	-13.90	peak
2	5460.000	57.29	0.51	57.80	74.00	-16.20	peak
3	5470.000	56.53	0.52	57.05	68.20	-11.15	peak
4	5500.800	96.02	0.58	96.60	68.20	28.40	peak
5	5725.000	57.20	1.18	58.38	68.20	-9.82	peak
6	5880.800	60.76	1.60	62.36	68.20	-5.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

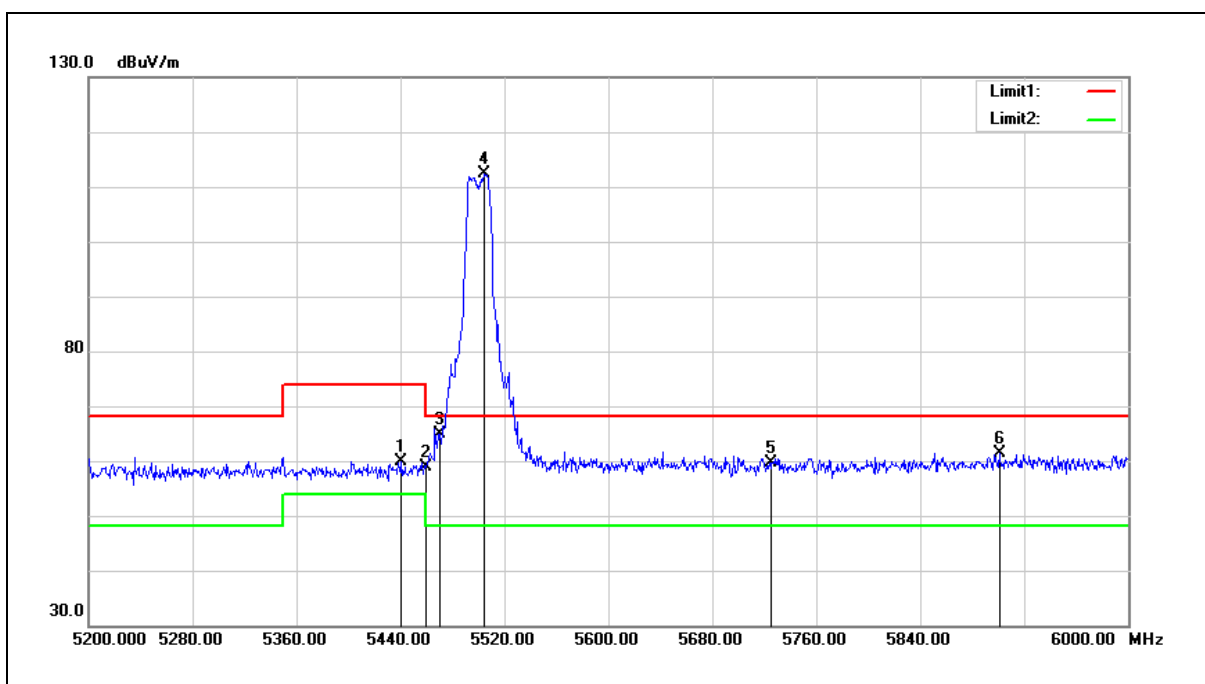


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.800	59.33	0.46	59.79	74.00	-14.21	peak
2	5460.000	58.29	0.51	58.80	74.00	-15.20	peak
3	5470.000	64.43	0.52	64.95	68.20	-3.25	peak
4	5504.000	111.85	0.58	112.43	68.20	44.23	peak
5	5725.000	58.55	1.18	59.73	68.20	-8.47	peak
6	5900.800	59.83	1.65	61.48	68.20	-6.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

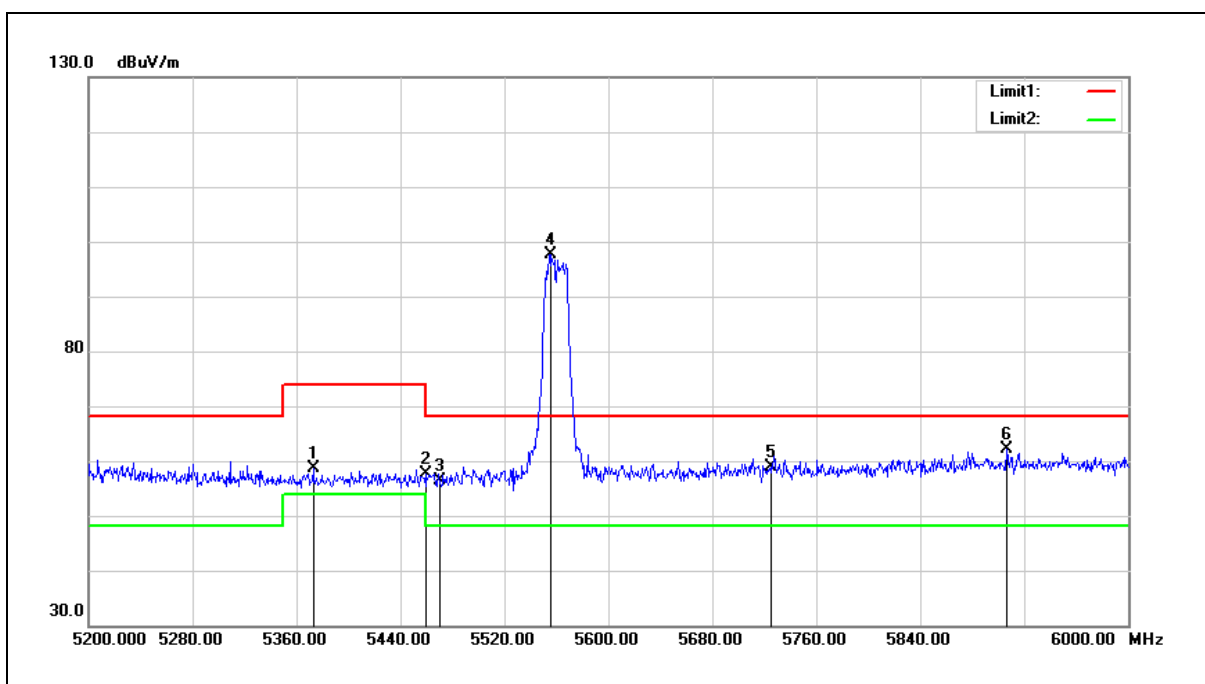


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.800	58.21	0.34	58.55	74.00	-15.45	peak
2	5460.000	57.10	0.51	57.61	74.00	-16.39	peak
3	5470.000	55.85	0.52	56.37	68.20	-11.83	peak
4	5555.200	96.98	0.73	97.71	68.20	29.51	peak
5	5725.000	57.79	1.18	58.97	68.20	-9.23	peak
6	5906.400	60.48	1.67	62.15	68.20	-6.05	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

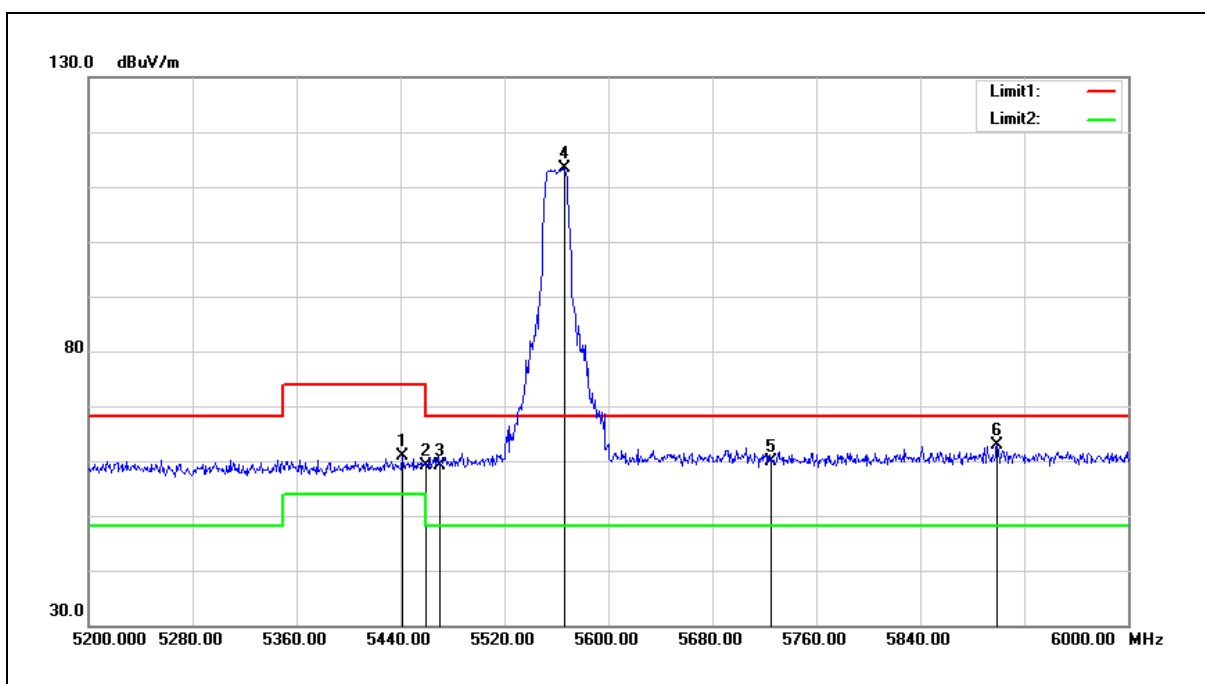


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.600	60.44	0.46	60.90	74.00	-13.10	peak
2	5460.000	58.57	0.51	59.08	74.00	-14.92	peak
3	5470.000	58.66	0.52	59.18	68.20	-9.02	peak
4	5566.400	112.59	0.75	113.34	68.20	45.14	peak
5	5725.000	58.60	1.18	59.78	68.20	-8.42	peak
6	5899.200	61.31	1.65	62.96	68.20	-5.24	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

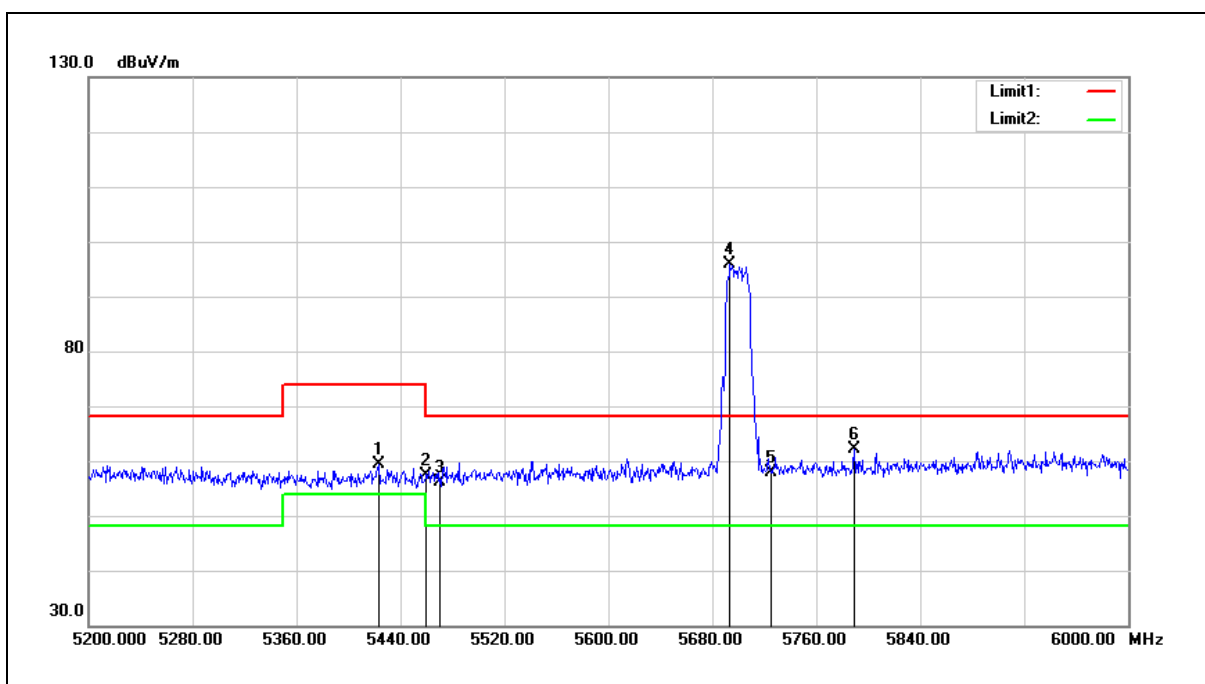


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5423.200	59.06	0.43	59.49	74.00	-14.51	peak
2	5460.000	56.99	0.51	57.50	74.00	-16.50	peak
3	5470.000	55.64	0.52	56.16	68.20	-12.04	peak
4	5693.600	94.76	1.10	95.86	68.20	27.66	peak
5	5725.000	56.68	1.18	57.86	68.20	-10.34	peak
6	5788.800	60.88	1.36	62.24	68.20	-5.96	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

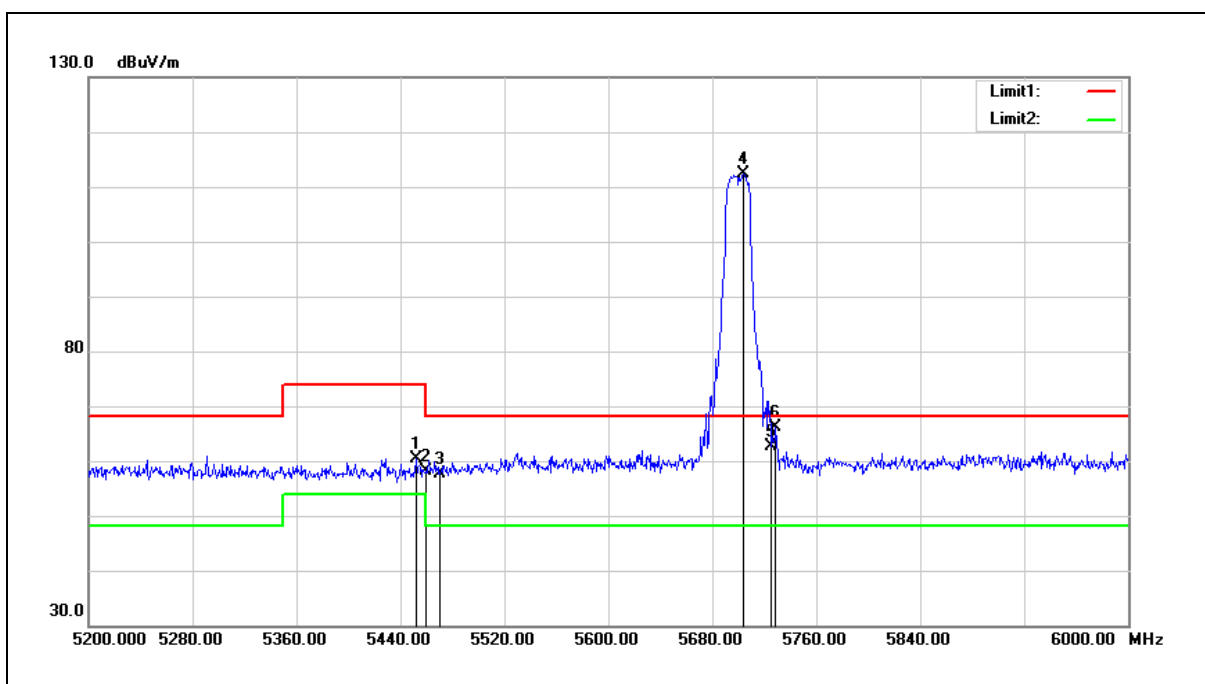


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.000	59.98	0.48	60.46	74.00	-13.54	peak
2	5460.000	57.67	0.51	58.18	74.00	-15.82	peak
3	5470.000	57.06	0.52	57.58	68.20	-10.62	peak
4	5704.000	111.23	1.12	112.35	68.20	44.15	peak
5	5725.000	61.39	1.18	62.57	68.20	-5.63	peak
6	5728.800	64.96	1.18	66.14	68.20	-2.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

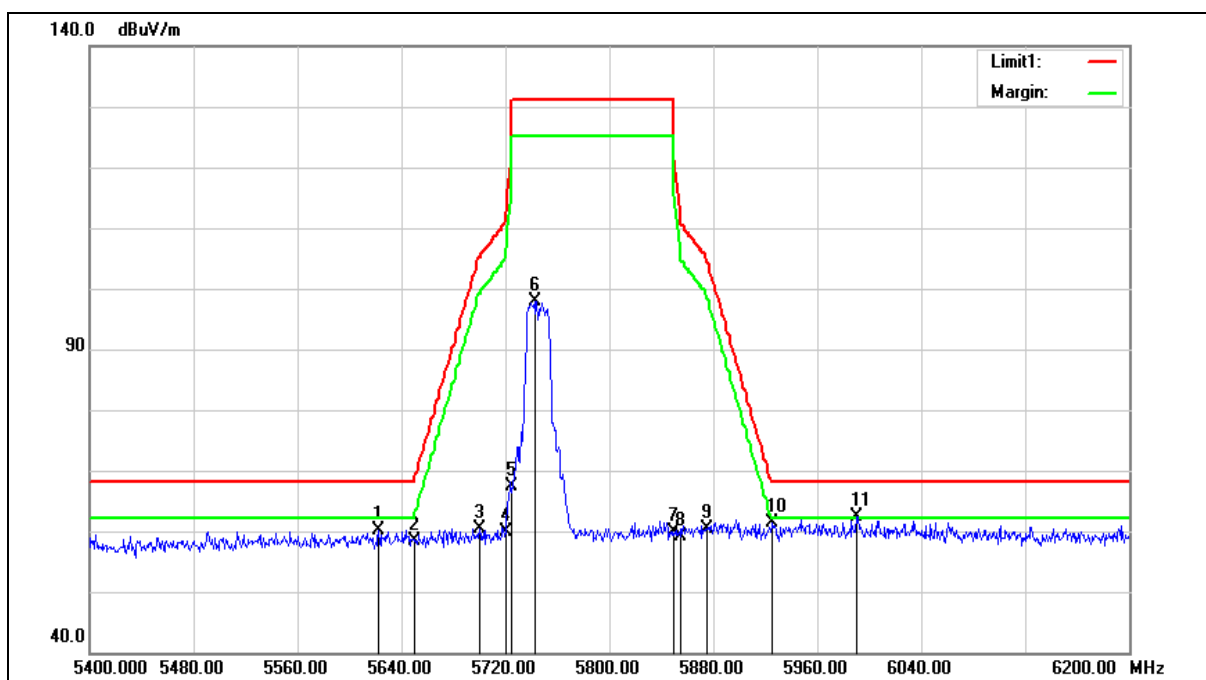

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5622.400	59.23	0.90	60.13	68.20	-8.07	peak
2	5650.000	57.52	0.97	58.49	68.20	-9.71	peak
3	5700.000	59.22	1.11	60.33	105.20	-44.87	peak
4	5720.000	58.78	1.17	59.95	110.80	-50.85	peak
5	5725.000	66.17	1.18	67.35	122.20	-54.85	peak
6	5742.400	96.74	1.22	97.96	131.20	-33.24	peak
7	5850.000	58.48	1.52	60.00	122.20	-62.20	peak
8	5855.000	57.65	1.53	59.18	110.80	-51.62	peak
9	5875.000	58.67	1.59	60.26	105.20	-44.94	peak
10	5925.000	59.78	1.72	61.50	68.20	-6.70	peak
11	5990.400	60.57	1.89	62.46	68.20	-5.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

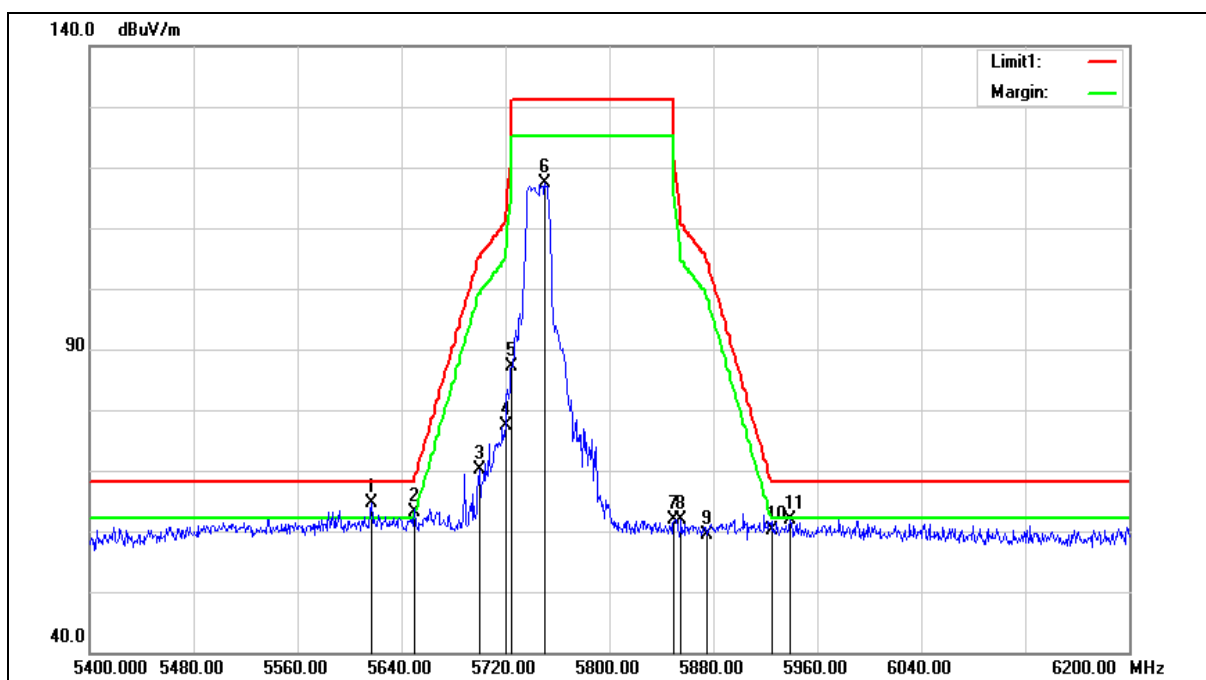

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5745 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5616.800	63.75	0.89	64.64	68.20	-3.56	peak
2	5650.000	62.25	0.97	63.22	68.20	-4.98	peak
3	5700.000	68.97	1.11	70.08	105.20	-35.12	peak
4	5720.000	76.32	1.17	77.49	110.80	-33.31	peak
5	5725.000	85.99	1.18	87.17	122.20	-35.03	peak
6	5750.400	116.05	1.25	117.30	131.20	-13.90	peak
7	5850.000	60.33	1.52	61.85	122.20	-60.35	peak
8	5855.000	60.34	1.53	61.87	110.80	-48.93	peak
9	5875.000	57.75	1.59	59.34	105.20	-45.86	peak
10	5925.000	58.37	1.72	60.09	68.20	-8.11	peak
11	5939.200	60.19	1.76	61.95	68.20	-6.25	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

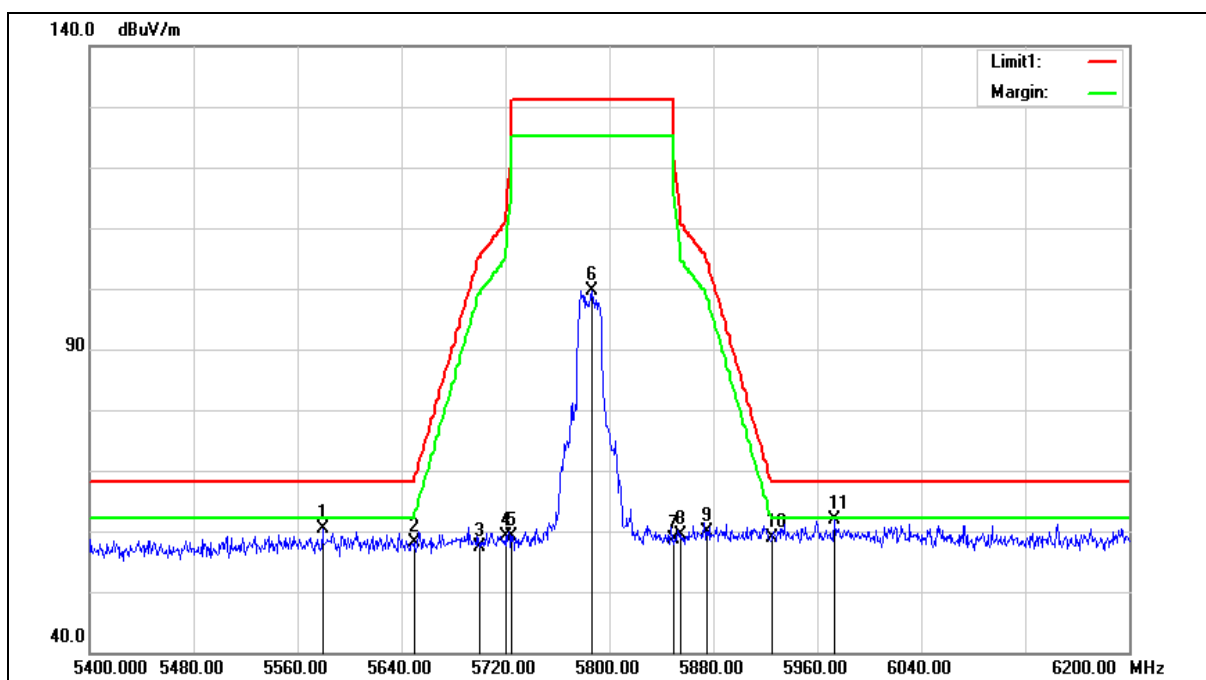

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5579.200	59.53	0.79	60.32	68.20	-7.88	peak
2	5650.000	57.13	0.97	58.10	68.20	-10.10	peak
3	5700.000	56.23	1.11	57.34	105.20	-47.86	peak
4	5720.000	57.99	1.17	59.16	110.80	-51.64	peak
5	5725.000	57.95	1.18	59.13	122.20	-63.07	peak
6	5786.400	98.41	1.34	99.75	131.20	-31.45	peak
7	5850.000	57.14	1.52	58.66	122.20	-63.54	peak
8	5855.000	57.84	1.53	59.37	110.80	-51.43	peak
9	5875.000	58.28	1.59	59.87	105.20	-45.33	peak
10	5925.000	57.24	1.72	58.96	68.20	-9.24	peak
11	5972.800	60.05	1.85	61.90	68.20	-6.30	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

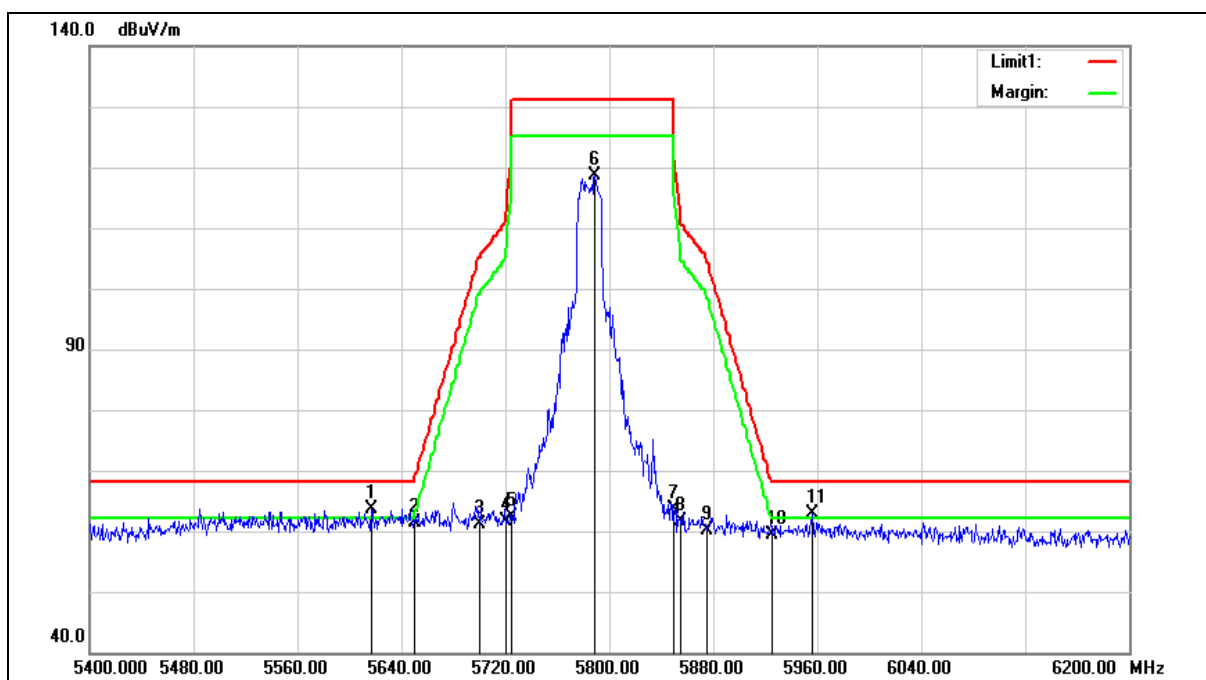

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5785 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5616.800	62.86	0.89	63.75	68.20	-4.45	peak
2	5650.000	60.31	0.97	61.28	68.20	-6.92	peak
3	5700.000	60.10	1.11	61.21	105.20	-43.99	peak
4	5720.000	60.38	1.17	61.55	110.80	-49.25	peak
5	5725.000	61.19	1.18	62.37	122.20	-59.83	peak
6	5788.800	117.23	1.36	118.59	131.20	-12.61	peak
7	5850.000	62.06	1.52	63.58	122.20	-58.62	peak
8	5855.000	60.06	1.53	61.59	110.80	-49.21	peak
9	5875.000	58.54	1.59	60.13	105.20	-45.07	peak
10	5925.000	57.71	1.72	59.43	68.20	-8.77	peak
11	5956.000	61.16	1.81	62.97	68.20	-5.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

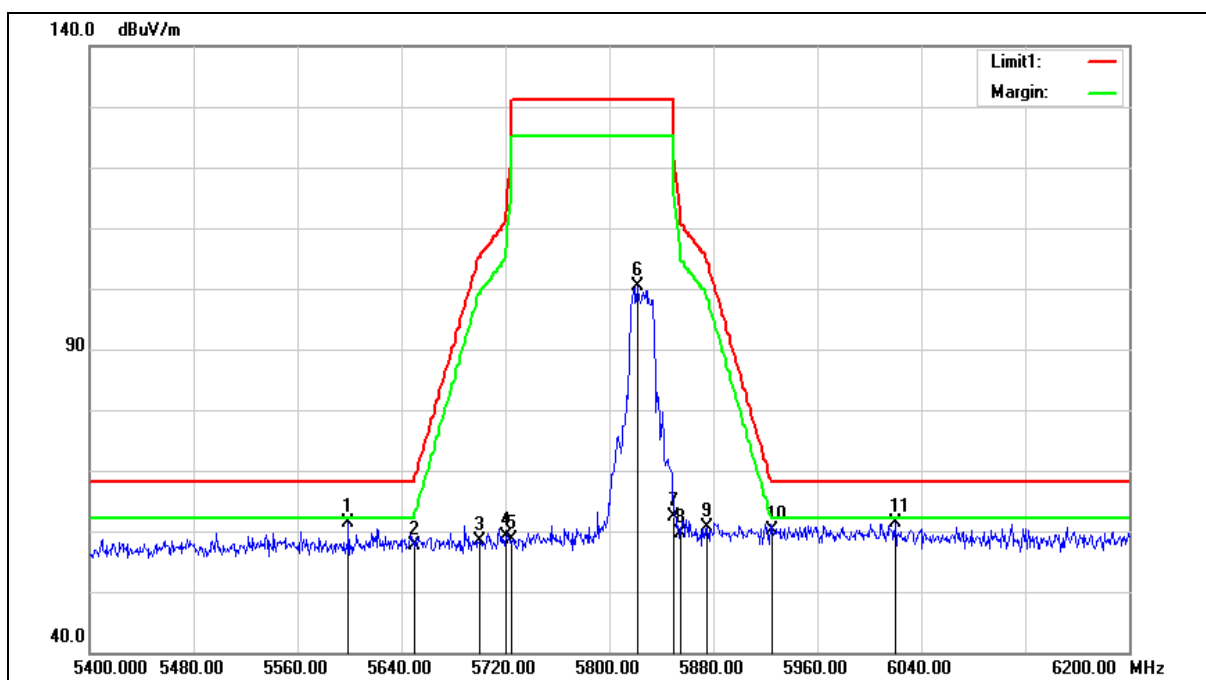

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5599.200	60.42	0.85	61.27	68.20	-6.93	peak
2	5650.000	56.59	0.97	57.56	68.20	-10.64	peak
3	5700.000	57.29	1.11	58.40	105.20	-46.80	peak
4	5720.000	58.00	1.17	59.17	110.80	-51.63	peak
5	5725.000	57.35	1.18	58.53	122.20	-63.67	peak
6	5821.600	99.00	1.44	100.44	131.20	-30.76	peak
7	5850.000	60.75	1.52	62.27	122.20	-59.93	peak
8	5855.000	58.17	1.53	59.70	110.80	-51.10	peak
9	5875.000	59.15	1.59	60.74	105.20	-44.46	peak
10	5925.000	58.36	1.72	60.08	68.20	-8.12	peak
11	6020.000	59.49	1.99	61.48	68.20	-6.72	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

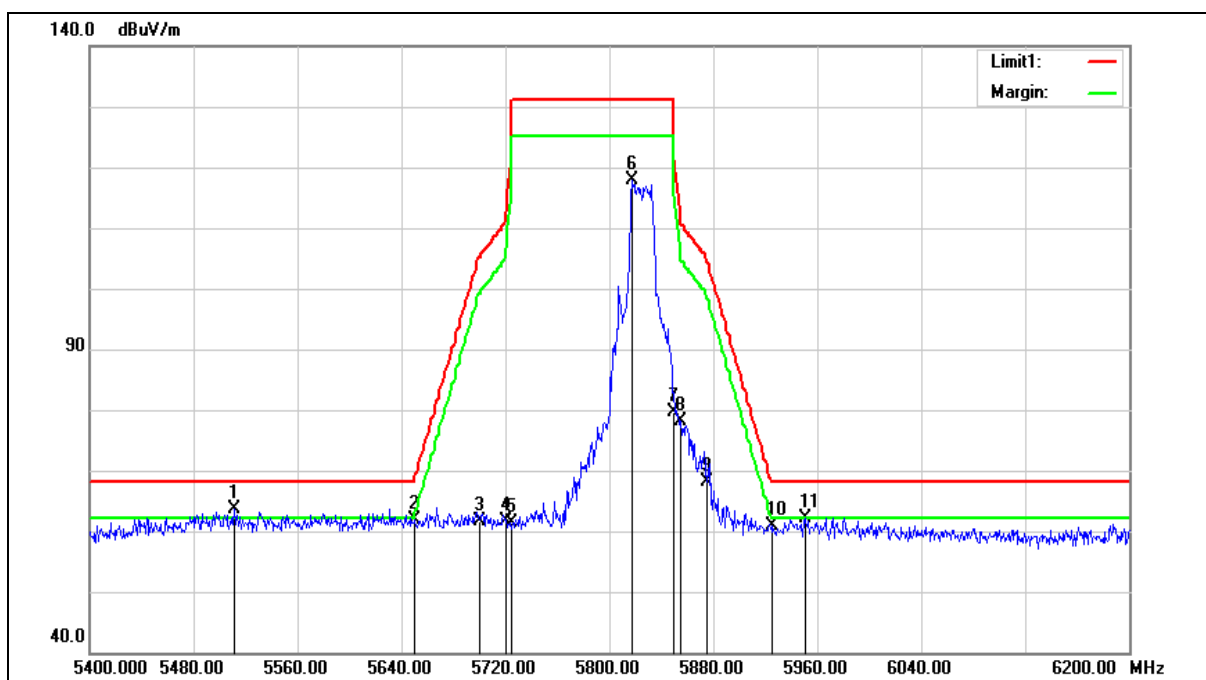

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5825 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5511.200	62.99	0.60	63.59	68.20	-4.61	peak
2	5650.000	60.81	0.97	61.78	68.20	-6.42	peak
3	5700.000	60.64	1.11	61.75	105.20	-43.45	peak
4	5720.000	60.34	1.17	61.51	110.80	-49.29	peak
5	5725.000	60.13	1.18	61.31	122.20	-60.89	peak
6	5817.600	116.42	1.43	117.85	131.20	-13.35	peak
7	5850.000	78.06	1.52	79.58	122.20	-42.62	peak
8	5855.000	76.59	1.53	78.12	110.80	-32.68	peak
9	5875.000	66.47	1.59	68.06	105.20	-37.14	peak
10	5925.000	59.11	1.72	60.83	68.20	-7.37	peak
11	5950.400	60.36	1.78	62.14	68.20	-6.06	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

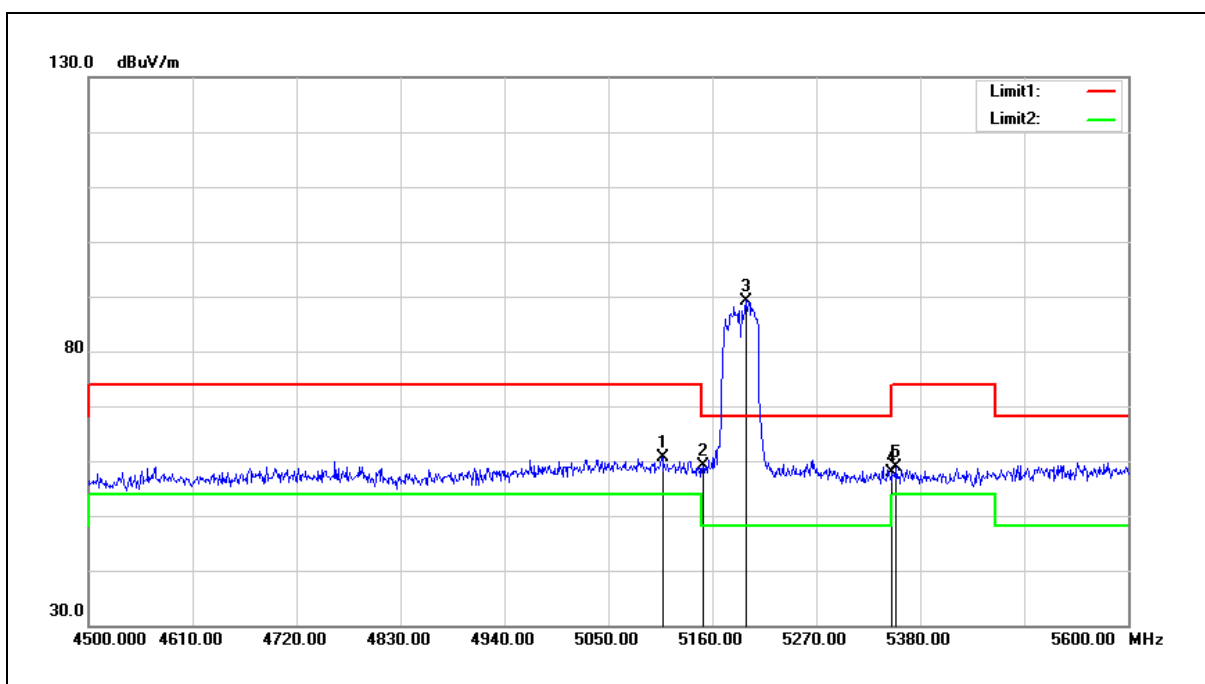


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5107.200	60.87	-0.15	60.72	74.00	-13.28	peak
2	5150.000	59.10	-0.08	59.02	74.00	-14.98	peak
3	5195.200	89.24	0.01	89.25	68.20	21.05	peak
4	5350.000	57.52	0.30	57.82	74.00	-16.18	peak
5	5354.700	58.61	0.30	58.91	74.00	-15.09	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

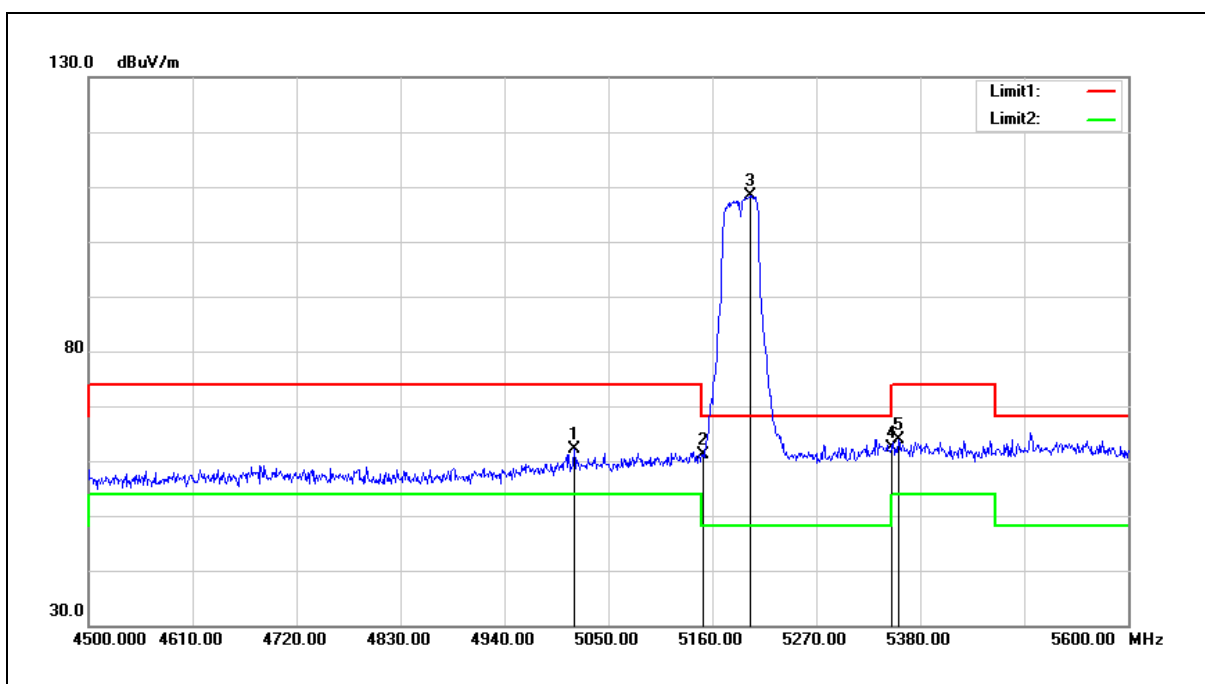


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5013.700	62.35	-0.34	62.01	74.00	-11.99	peak
2	5150.000	61.28	-0.08	61.20	74.00	-12.80	peak
3	5200.700	108.29	0.02	108.31	68.20	40.11	peak
4	5350.000	61.96	0.30	62.26	74.00	-11.74	peak
5	5356.900	63.51	0.31	63.82	74.00	-10.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

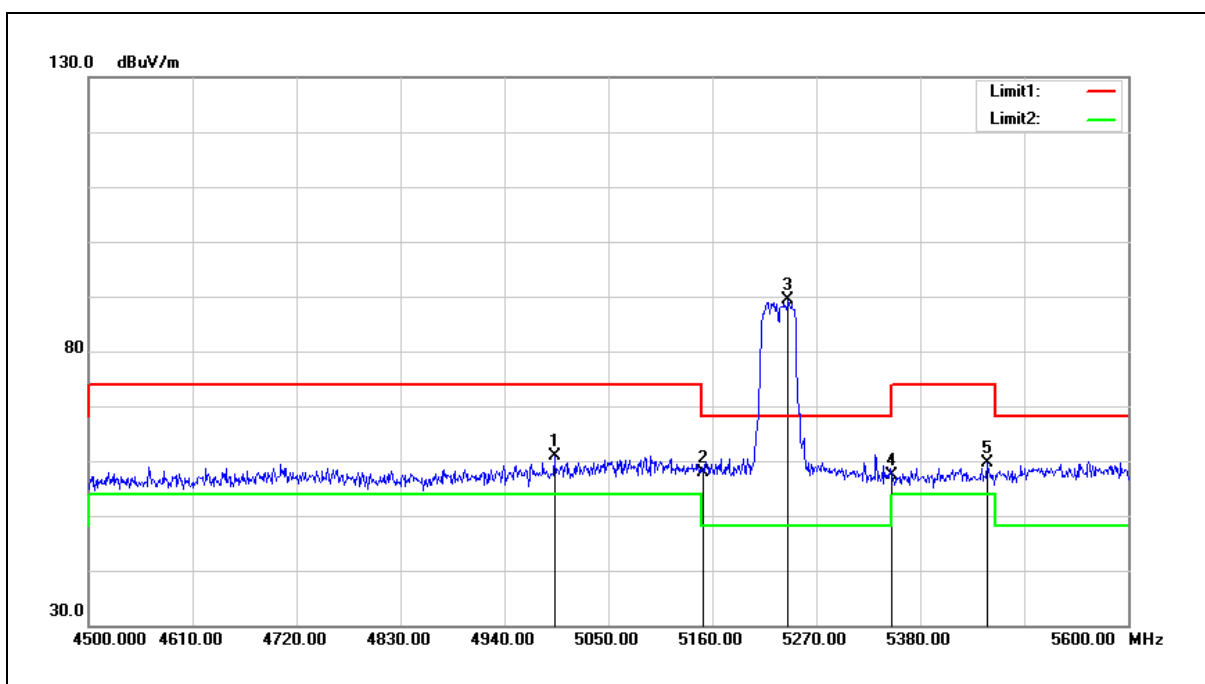


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4992.800	61.31	-0.38	60.93	74.00	-13.07	peak
2	5150.000	57.92	-0.08	57.84	74.00	-16.16	peak
3	5240.300	89.18	0.09	89.27	68.20	21.07	peak
4	5350.000	57.08	0.30	57.38	74.00	-16.62	peak
5	5450.400	59.03	0.48	59.51	74.00	-14.49	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

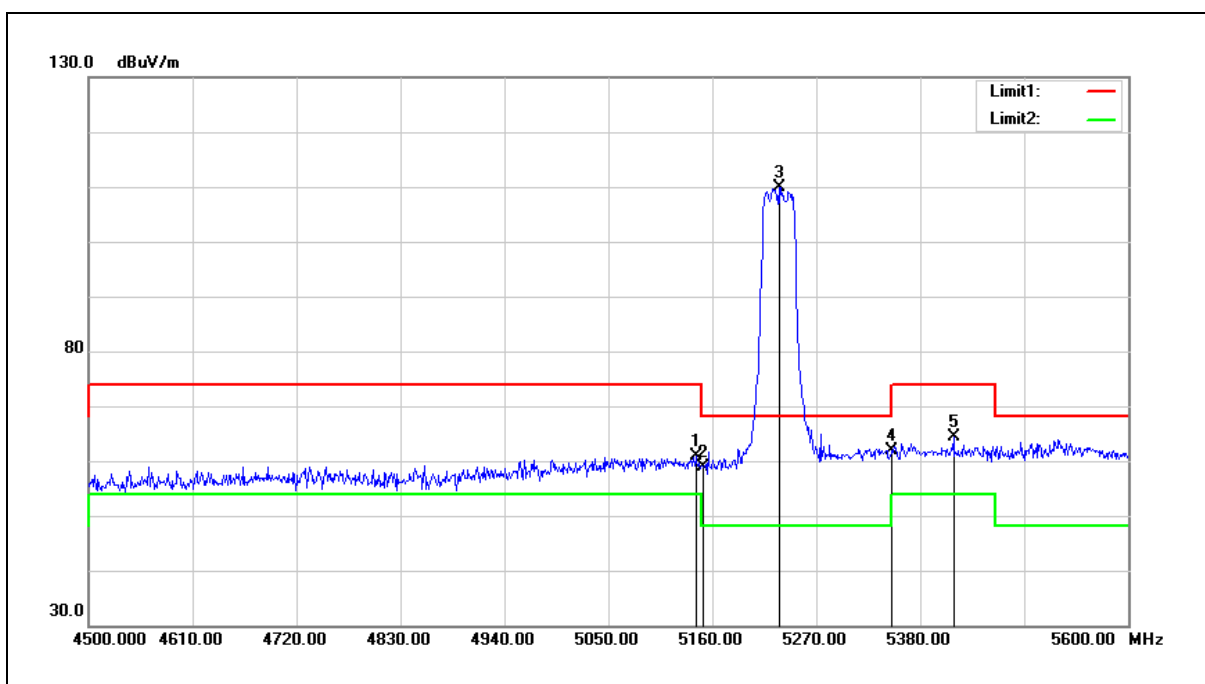


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.400	61.04	-0.10	60.94	74.00	-13.06	peak
2	5150.000	59.02	-0.08	58.94	74.00	-15.06	peak
3	5230.400	109.90	0.07	109.97	68.20	41.77	peak
4	5350.000	61.66	0.30	61.96	74.00	-12.04	peak
5	5415.200	63.85	0.41	64.26	74.00	-9.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

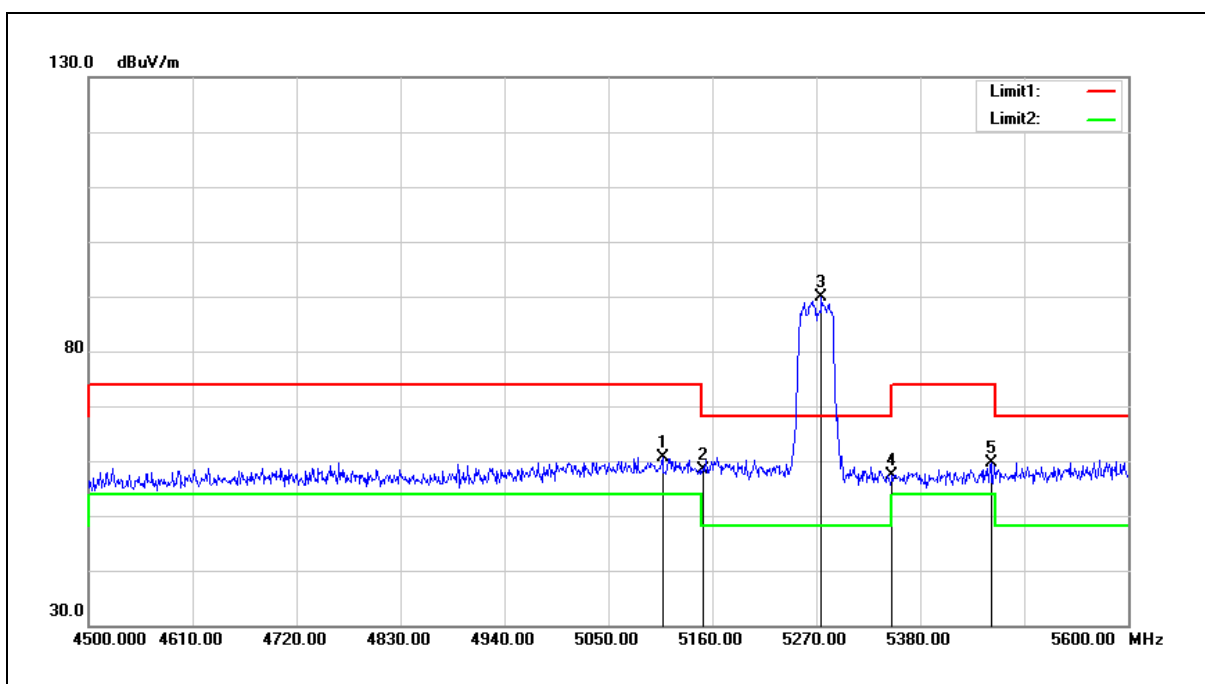


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5107.200	60.81	-0.15	60.66	74.00	-13.34	peak
2	5150.000	58.58	-0.08	58.50	74.00	-15.50	peak
3	5275.500	89.77	0.15	89.92	68.20	21.72	peak
4	5350.000	57.03	0.30	57.33	74.00	-16.67	peak
5	5454.800	59.11	0.48	59.59	74.00	-14.41	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

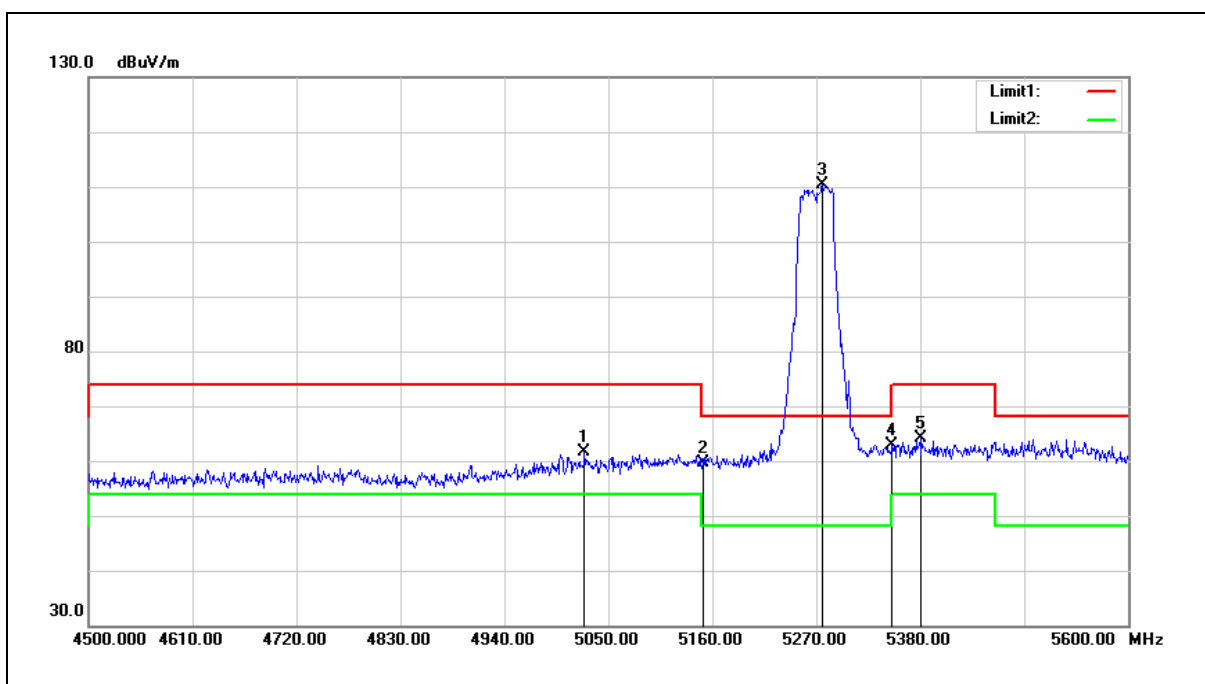


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5024.700	61.98	-0.31	61.67	74.00	-12.33	peak
2	5150.000	59.76	-0.08	59.68	74.00	-14.32	peak
3	5276.600	110.18	0.15	110.33	68.20	42.13	peak
4	5350.000	62.56	0.30	62.86	74.00	-11.14	peak
5	5380.000	63.76	0.35	64.11	74.00	-9.89	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

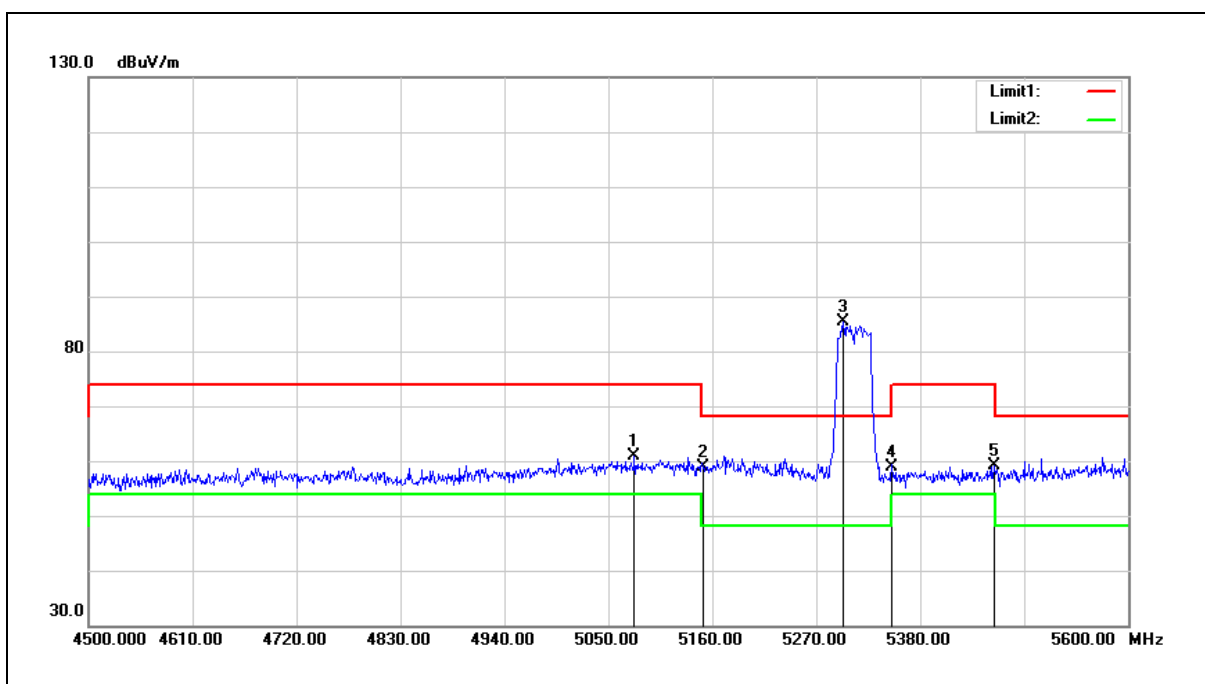


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.500	61.04	-0.21	60.83	74.00	-13.17	peak
2	5150.000	58.93	-0.08	58.85	74.00	-15.15	peak
3	5298.600	85.20	0.20	85.40	68.20	17.20	peak
4	5350.000	58.62	0.30	58.92	74.00	-15.08	peak
5	5458.100	58.63	0.50	59.13	74.00	-14.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

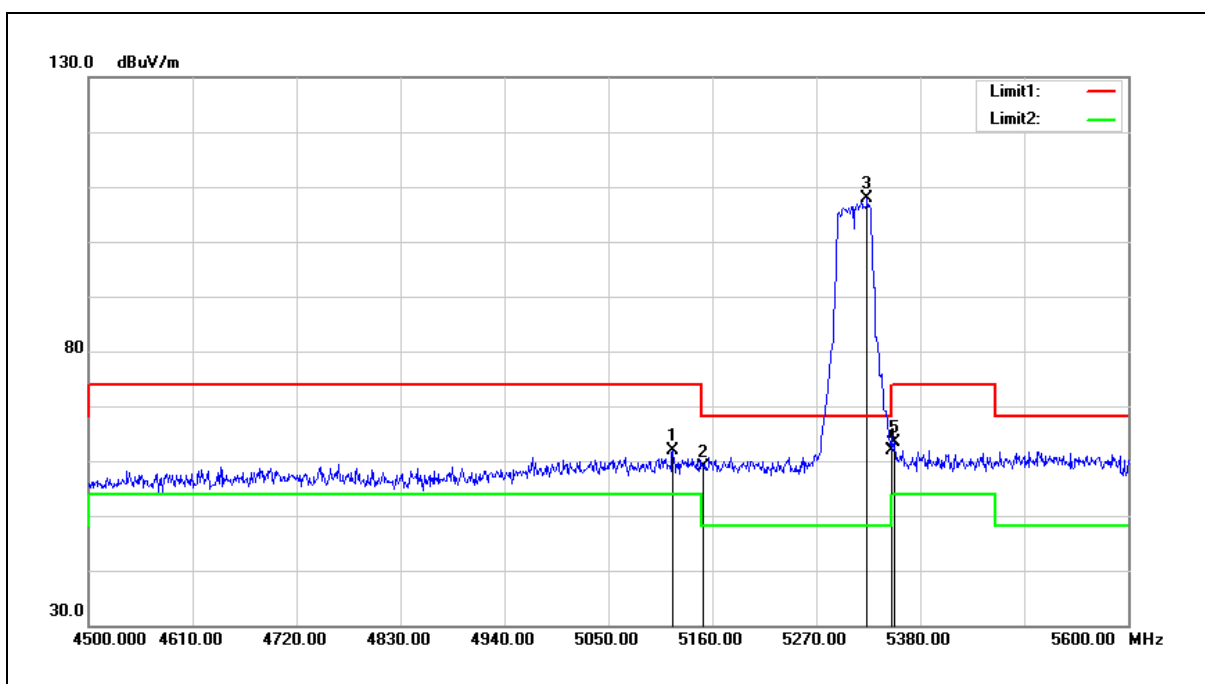


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.200	61.94	-0.14	61.80	74.00	-12.20	peak
2	5150.000	59.05	-0.08	58.97	74.00	-15.03	peak
3	5323.900	107.72	0.25	107.97	68.20	39.77	peak
4	5350.000	61.60	0.30	61.90	74.00	-12.10	peak
5	5352.500	63.07	0.30	63.37	74.00	-10.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

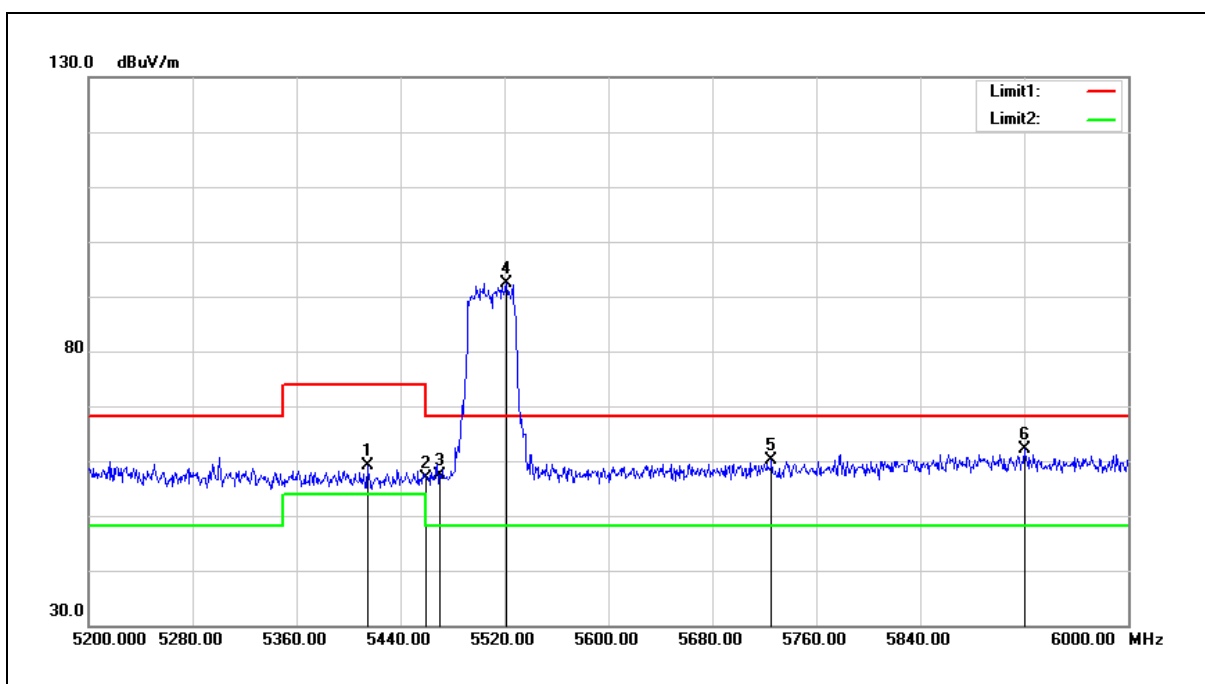


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5414.400	58.65	0.41	59.06	74.00	-14.94	peak
2	5460.000	56.43	0.51	56.94	74.00	-17.06	peak
3	5470.000	56.80	0.52	57.32	68.20	-10.88	peak
4	5521.600	91.72	0.64	92.36	68.20	24.16	peak
5	5725.000	58.84	1.18	60.02	68.20	-8.18	peak
6	5920.000	60.32	1.70	62.02	68.20	-6.18	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

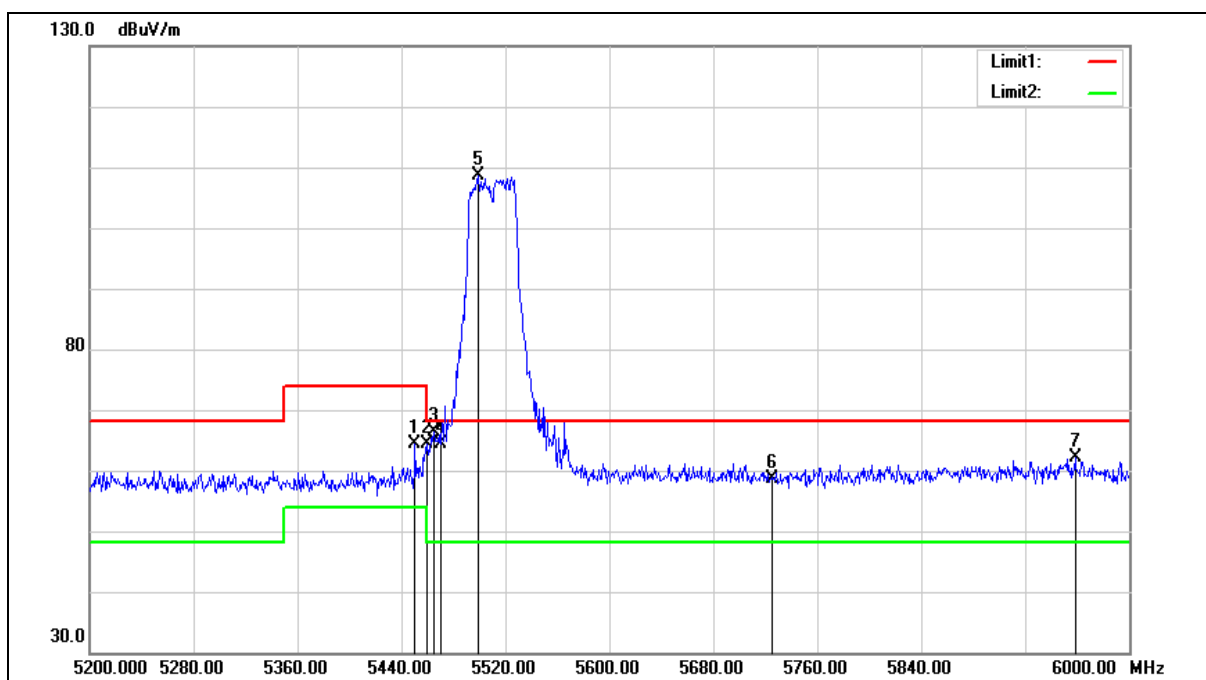

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.400	63.84	0.48	64.32	74.00	-9.68	peak
2	5460.000	63.83	0.51	64.34	74.00	-9.66	peak
3	5464.800	65.92	0.51	66.43	68.20	-1.77	peak
4	5470.000	63.85	0.52	64.37	68.20	-3.83	peak
5	5499.200	107.94	0.57	108.51	68.20	40.31	peak
6	5725.000	57.55	1.18	58.73	68.20	-9.47	peak
7	5958.400	60.29	1.81	62.10	68.20	-6.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

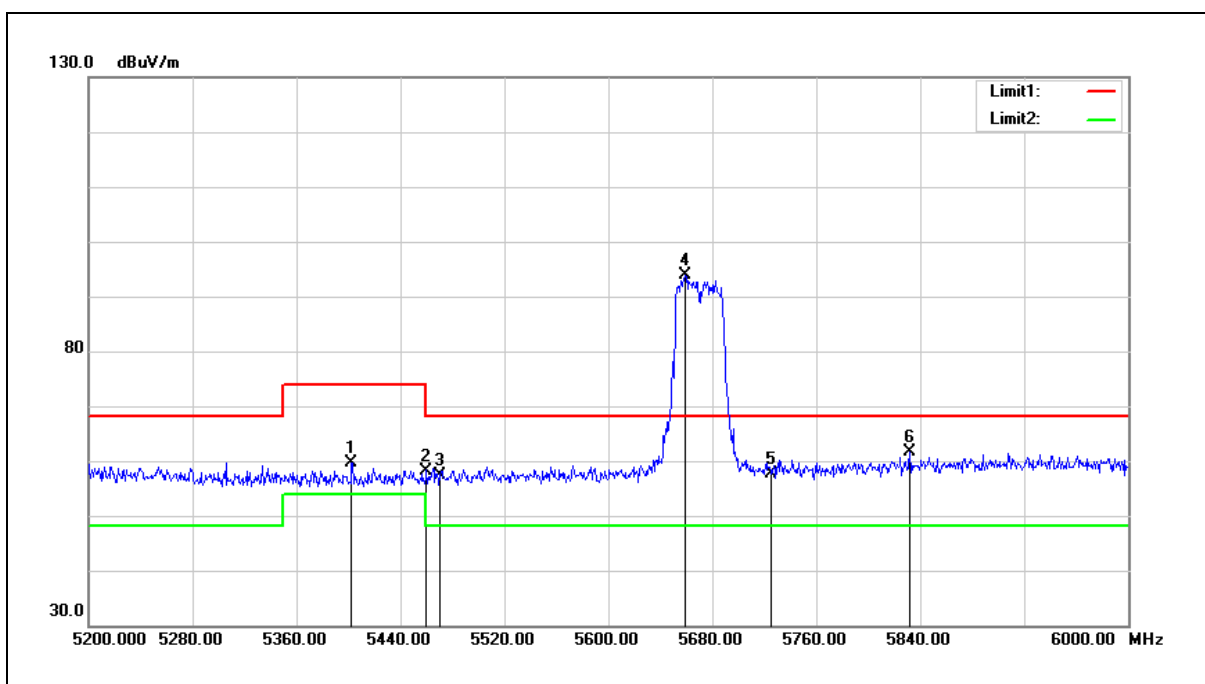


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5402.400	59.28	0.39	59.67	74.00	-14.33	peak
2	5460.000	57.74	0.51	58.25	74.00	-15.75	peak
3	5470.000	56.79	0.52	57.31	68.20	-10.89	peak
4	5659.200	92.97	1.00	93.97	68.20	25.77	peak
5	5725.000	56.51	1.18	57.69	68.20	-10.51	peak
6	5832.000	60.22	1.47	61.69	68.20	-6.51	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

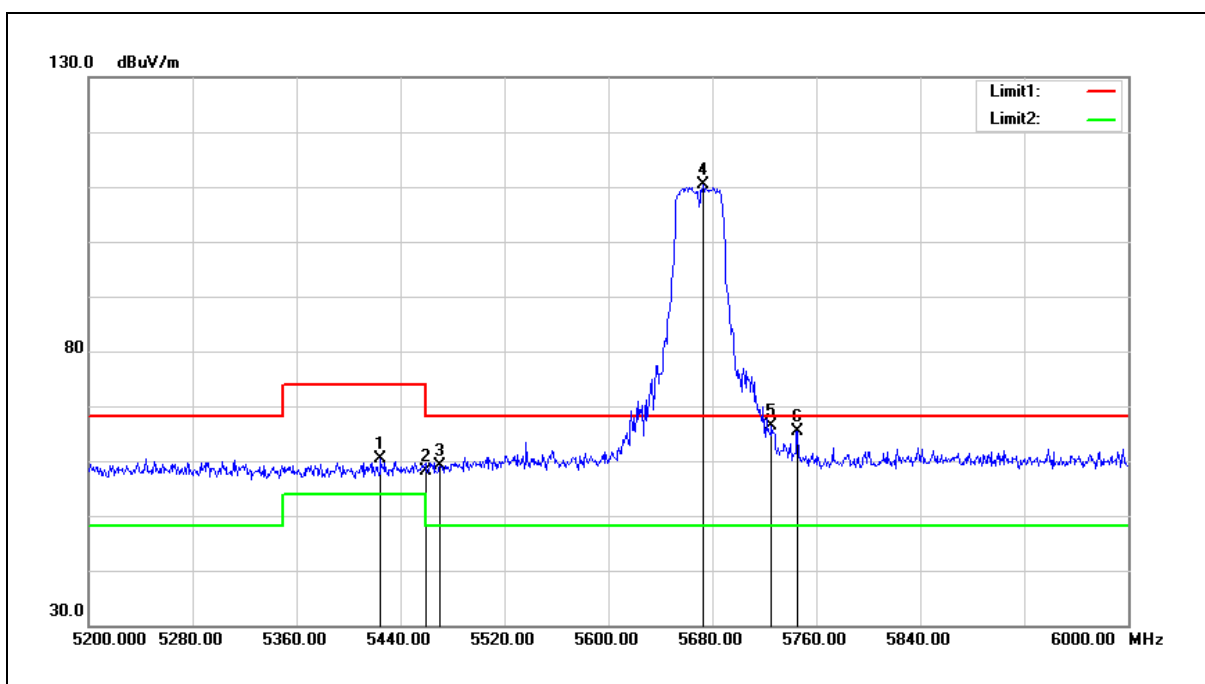


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.800	59.85	0.43	60.28	74.00	-13.72	peak
2	5460.000	57.57	0.51	58.08	74.00	-15.92	peak
3	5470.000	58.53	0.52	59.05	68.20	-9.15	peak
4	5672.800	109.38	1.04	110.42	68.20	42.22	peak
5	5725.000	65.09	1.18	66.27	68.20	-1.93	peak
6	5745.600	64.20	1.23	65.43	68.20	-2.77	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

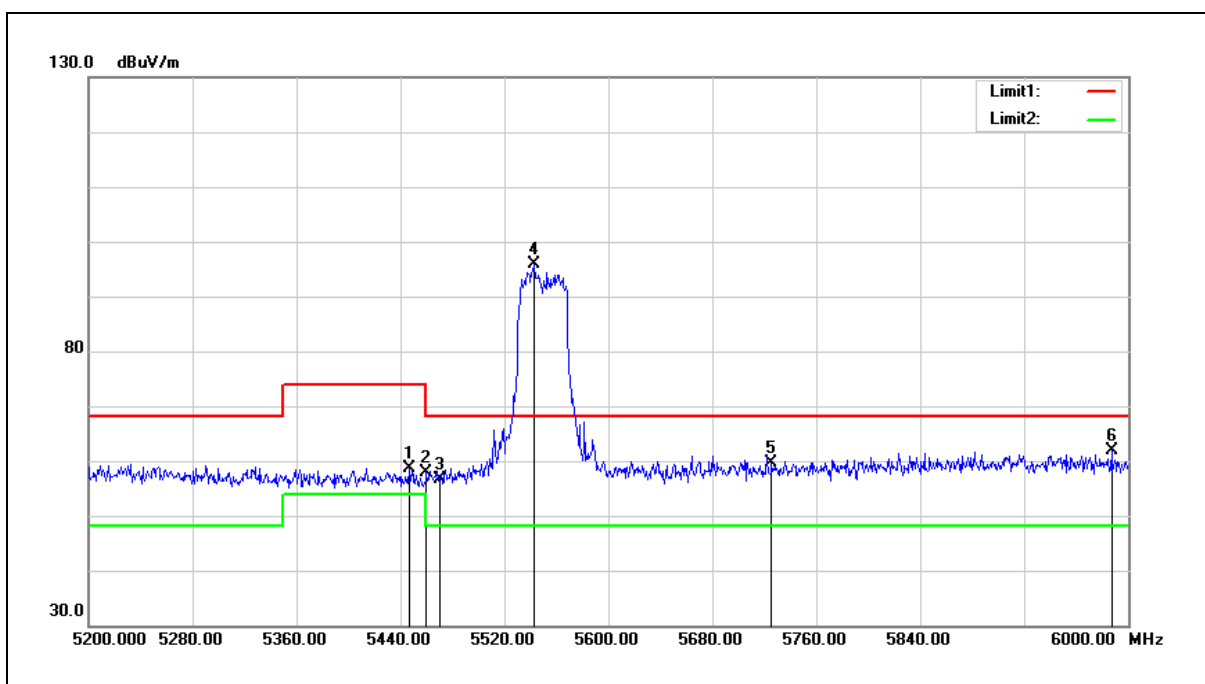


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	58.13	0.48	58.61	74.00	-15.39	peak
2	5460.000	57.34	0.51	57.85	74.00	-16.15	peak
3	5470.000	56.17	0.52	56.69	68.20	-11.51	peak
4	5543.200	95.22	0.69	95.91	68.20	27.71	peak
5	5725.000	58.34	1.18	59.52	68.20	-8.68	peak
6	5987.200	60.09	1.88	61.97	68.20	-6.23	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

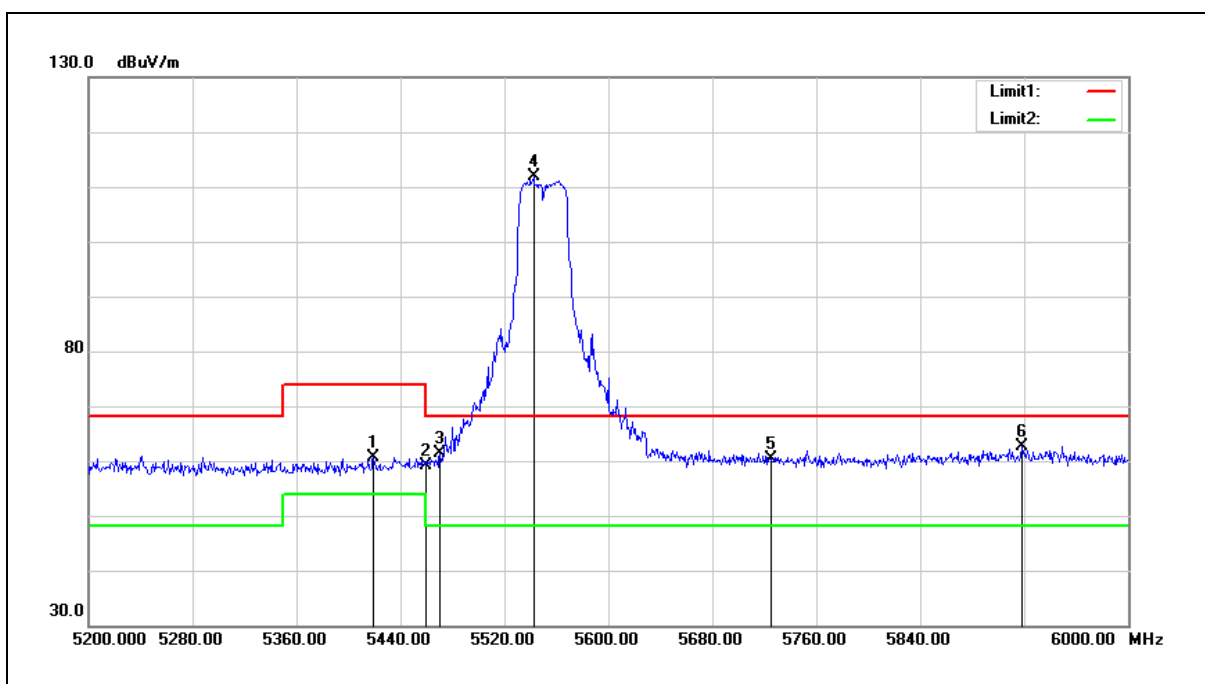


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5419.200	60.21	0.43	60.64	74.00	-13.36	peak
2	5460.000	58.63	0.51	59.14	74.00	-14.86	peak
3	5470.000	60.74	0.52	61.26	68.20	-6.94	peak
4	5542.400	111.12	0.69	111.81	68.20	43.61	peak
5	5725.000	59.23	1.18	60.41	68.20	-7.79	peak
6	5918.400	60.90	1.70	62.60	68.20	-5.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

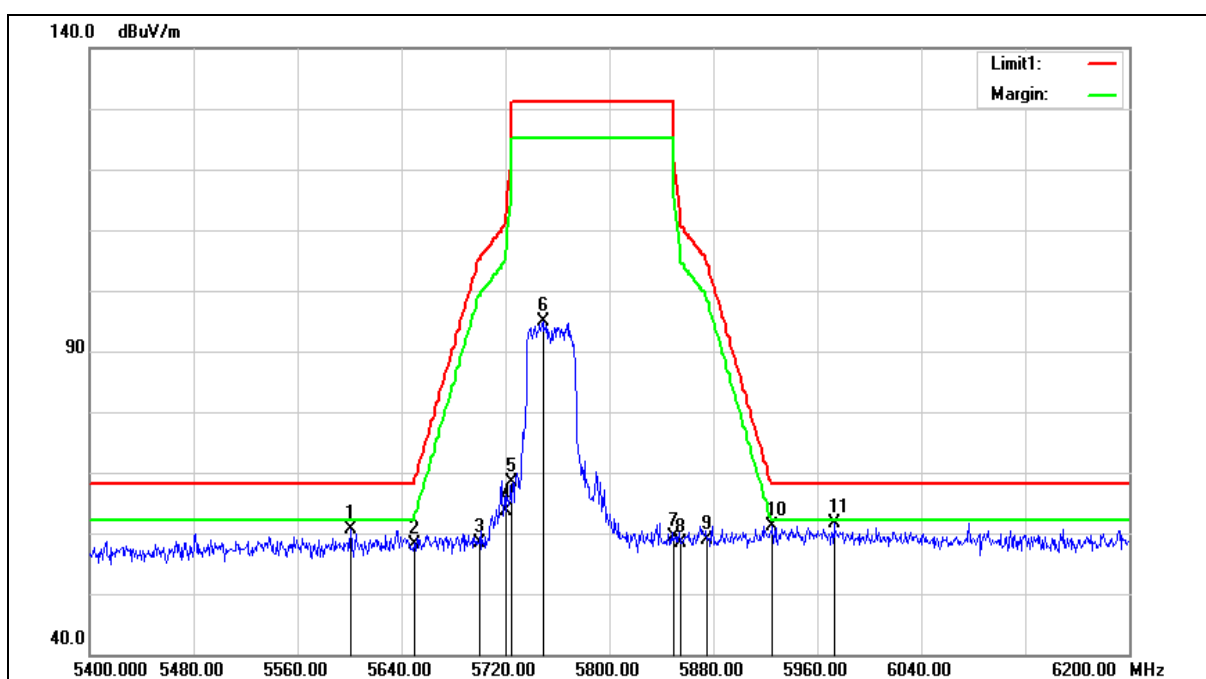

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5600.800	59.87	0.85	60.72	68.20	-7.48	peak
2	5650.000	57.23	0.97	58.20	68.20	-10.00	peak
3	5700.000	57.35	1.11	58.46	105.20	-46.74	peak
4	5720.000	62.47	1.17	63.64	110.80	-47.16	peak
5	5725.000	67.14	1.18	68.32	122.20	-53.88	peak
6	5748.800	93.56	1.25	94.81	131.20	-36.39	peak
7	5850.000	57.98	1.52	59.50	122.20	-62.70	peak
8	5855.000	56.78	1.53	58.31	110.80	-52.49	peak
9	5875.000	57.23	1.59	58.82	105.20	-46.38	peak
10	5925.000	59.30	1.72	61.02	68.20	-7.18	peak
11	5972.800	59.89	1.85	61.74	68.20	-6.46	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

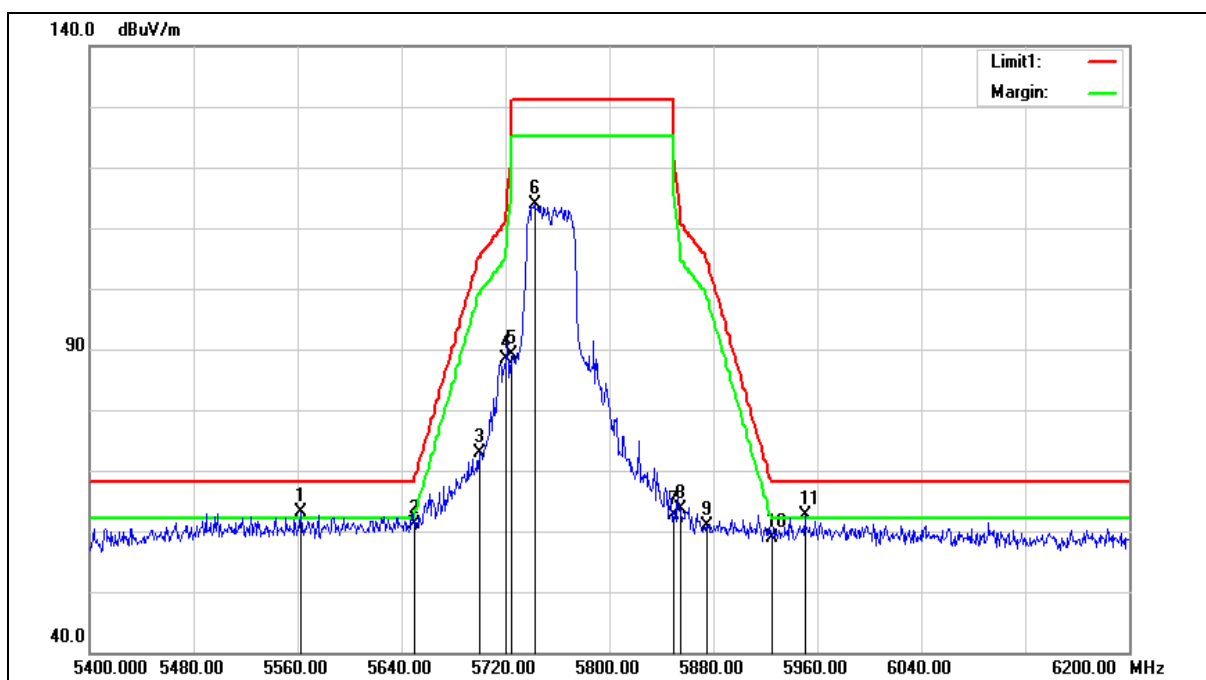

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5755 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5562.400	62.49	0.74	63.23	68.20	-4.97	peak
2	5650.000	60.24	0.97	61.21	68.20	-6.99	peak
3	5700.000	71.74	1.11	72.85	105.20	-32.35	peak
4	5720.000	87.17	1.17	88.34	110.80	-22.46	peak
5	5725.000	87.98	1.18	89.16	122.20	-33.04	peak
6	5742.400	112.69	1.22	113.91	131.20	-17.29	peak
7	5850.000	61.14	1.52	62.66	122.20	-59.54	peak
8	5855.000	62.09	1.53	63.62	110.80	-47.18	peak
9	5875.000	59.24	1.59	60.83	105.20	-44.37	peak
10	5925.000	57.14	1.72	58.86	68.20	-9.34	peak
11	5950.400	60.73	1.78	62.51	68.20	-5.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

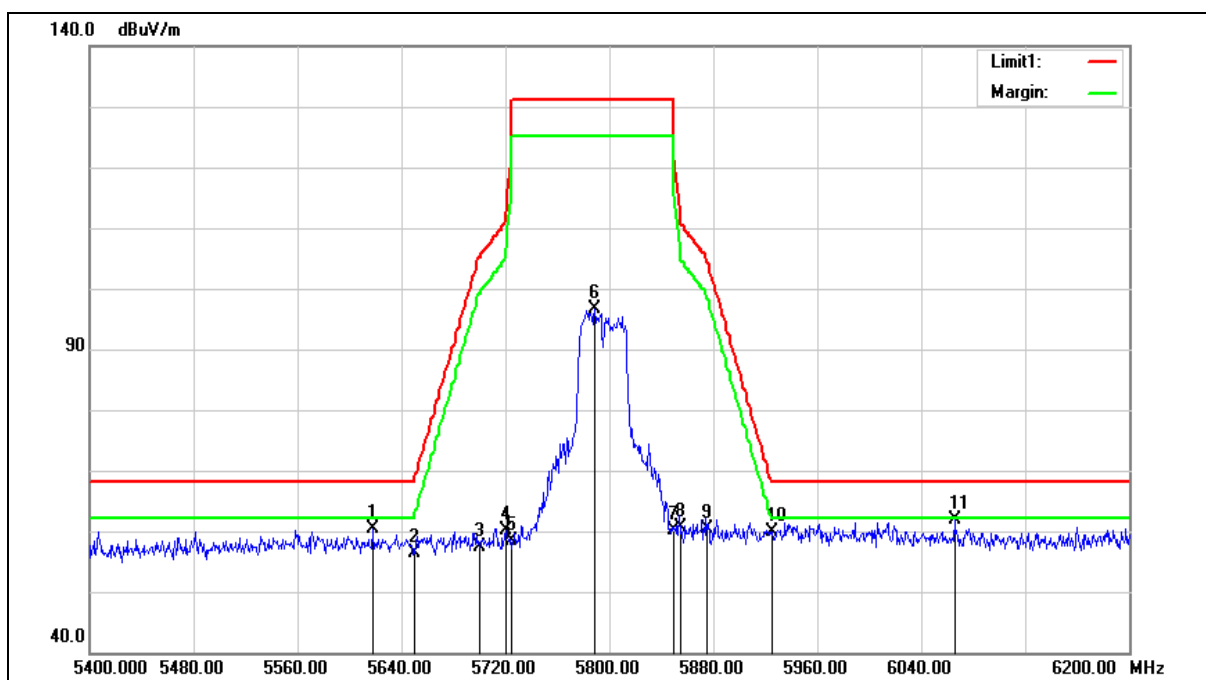

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5617.600	59.48	0.89	60.37	68.20	-7.83	peak
2	5650.000	55.37	0.97	56.34	68.20	-11.86	peak
3	5700.000	56.37	1.11	57.48	105.20	-47.72	peak
4	5720.000	59.04	1.17	60.21	110.80	-50.59	peak
5	5725.000	57.23	1.18	58.41	122.20	-63.79	peak
6	5788.800	95.36	1.36	96.72	131.20	-34.48	peak
7	5850.000	58.72	1.52	60.24	122.20	-61.96	peak
8	5855.000	58.99	1.53	60.52	110.80	-50.28	peak
9	5875.000	58.73	1.59	60.32	105.20	-44.88	peak
10	5925.000	58.26	1.72	59.98	68.20	-8.22	peak
11	6065.600	59.64	2.17	61.81	68.20	-6.39	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

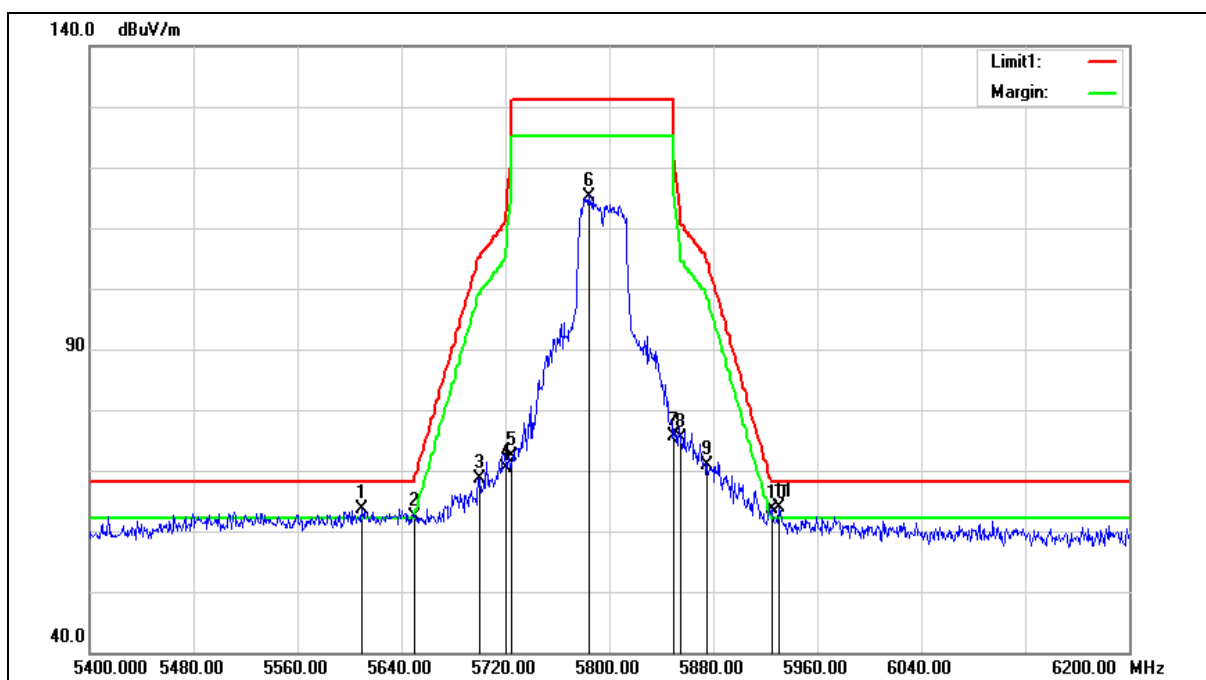

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5795 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5609.600	62.70	0.87	63.57	68.20	-4.63	peak
2	5650.000	61.49	0.97	62.46	68.20	-5.74	peak
3	5700.000	67.44	1.11	68.55	105.20	-36.65	peak
4	5720.000	69.09	1.17	70.26	110.80	-40.54	peak
5	5725.000	71.27	1.18	72.45	122.20	-49.75	peak
6	5784.000	113.91	1.34	115.25	131.20	-15.95	peak
7	5850.000	74.08	1.52	75.60	122.20	-46.60	peak
8	5855.000	73.77	1.53	75.30	110.80	-35.50	peak
9	5875.000	69.28	1.59	70.87	105.20	-34.33	peak
10	5925.000	61.97	1.72	63.69	68.20	-4.51	peak
11	5930.400	62.24	1.74	63.98	68.20	-4.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Average

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

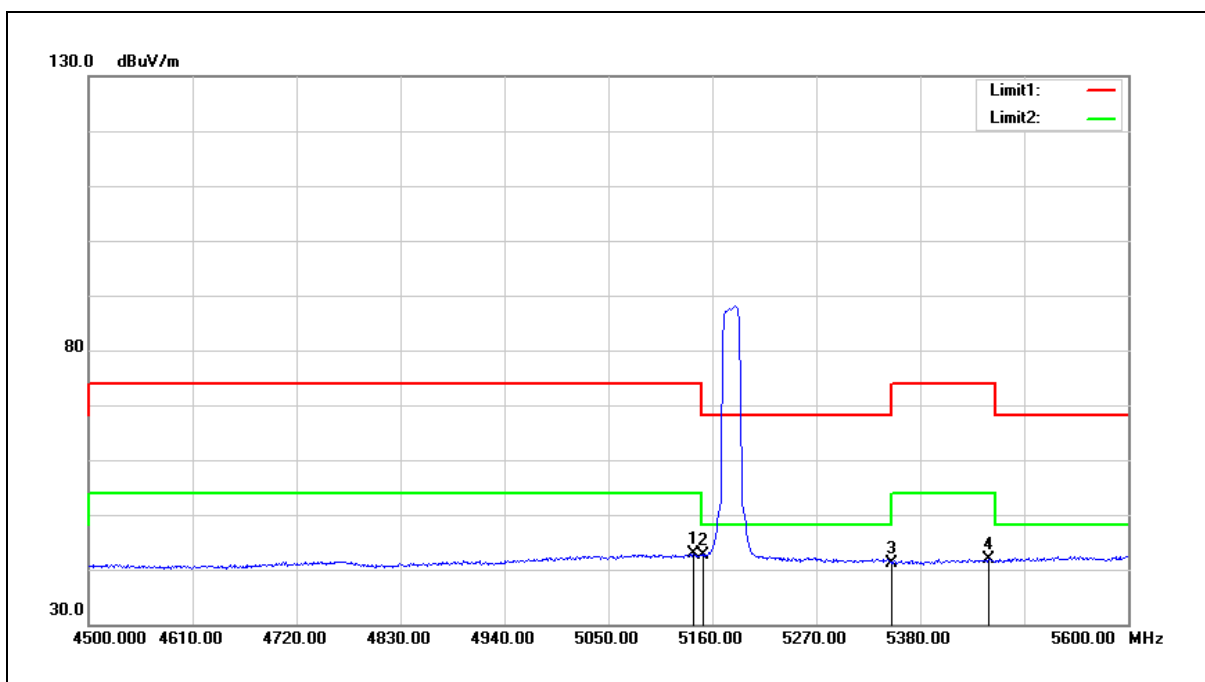


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.200	42.97	-0.10	42.87	54.00	-11.13	AVG
2	5150.000	42.83	-0.08	42.75	54.00	-11.25	AVG
3	5350.000	40.94	0.30	41.24	54.00	-12.76	AVG
4	5452.600	41.35	0.48	41.83	54.00	-12.17	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

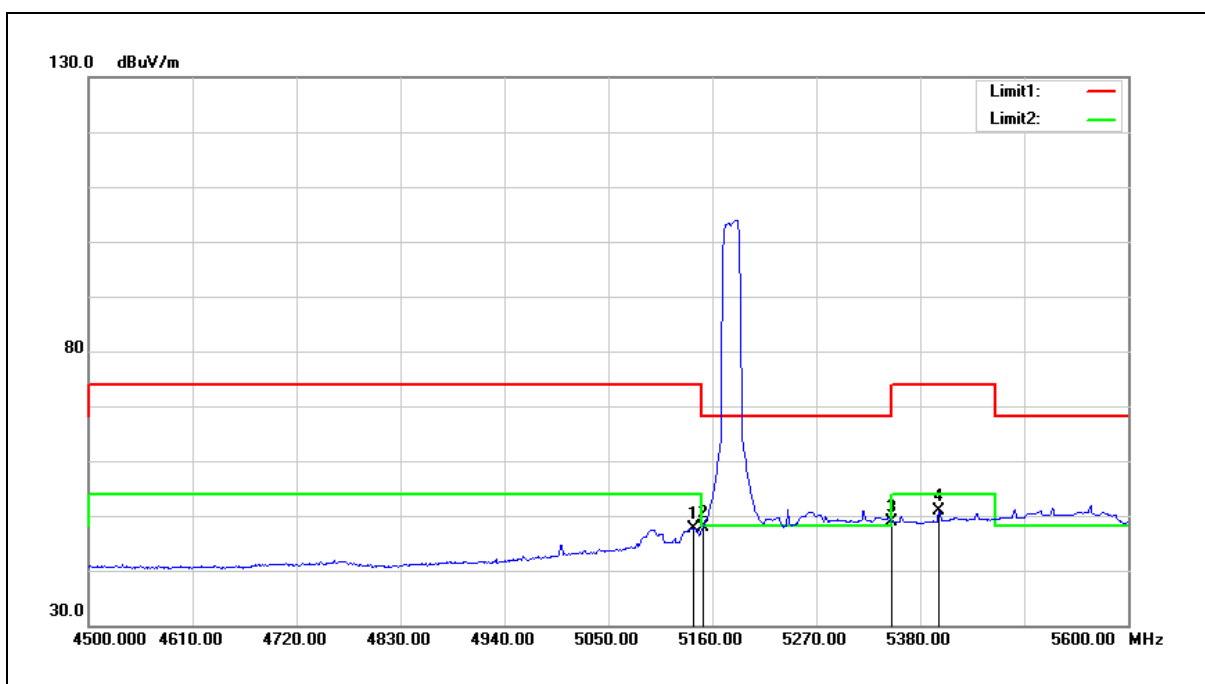


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.200	47.82	-0.10	47.72	54.00	-6.28	AVG
2	5150.000	47.86	-0.08	47.78	54.00	-6.22	AVG
3	5350.000	48.55	0.30	48.85	54.00	-5.15	AVG
4	5399.800	50.51	0.39	50.90	54.00	-3.10	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

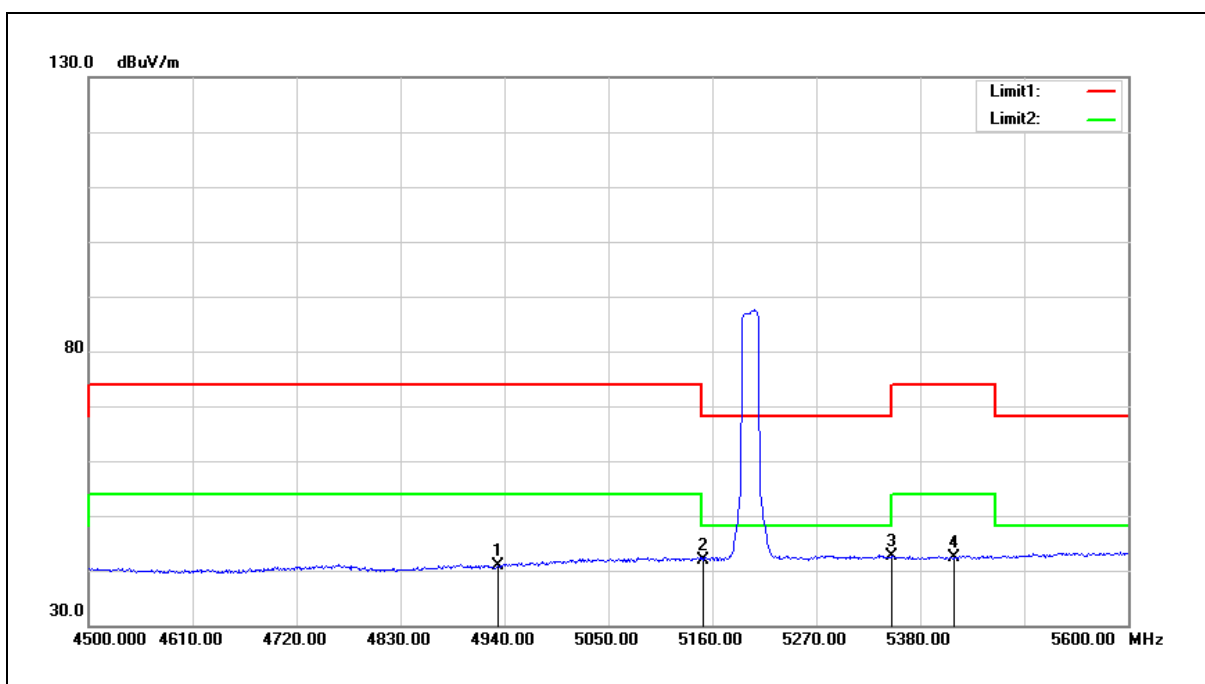


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4933.400	41.44	-0.60	40.84	54.00	-13.16	AVG
2	5150.000	42.05	-0.08	41.97	54.00	-12.03	AVG
3	5350.000	42.29	0.30	42.59	54.00	-11.41	AVG
4	5416.300	41.89	0.41	42.30	54.00	-11.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

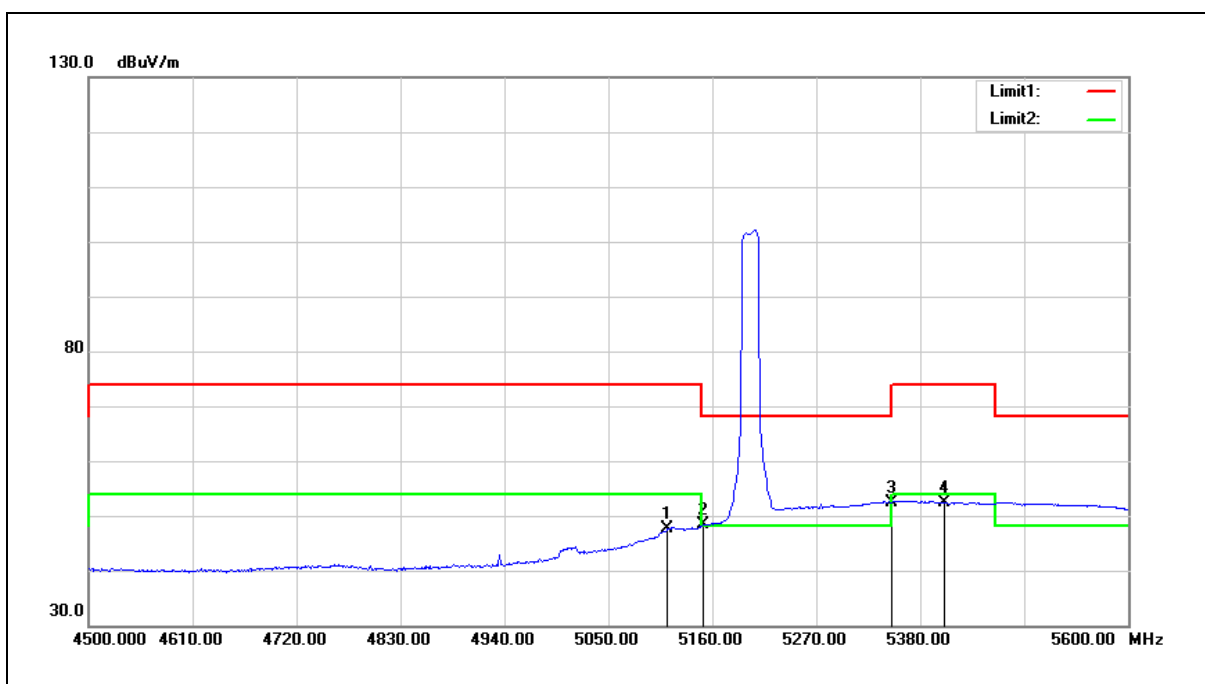


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5112.700	47.71	-0.15	47.56	54.00	-6.44	AVG
2	5150.000	48.36	-0.08	48.28	54.00	-5.72	AVG
3	5350.000	52.18	0.30	52.48	54.00	-1.52	AVG
4	5405.300	51.91	0.40	52.31	54.00	-1.69	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

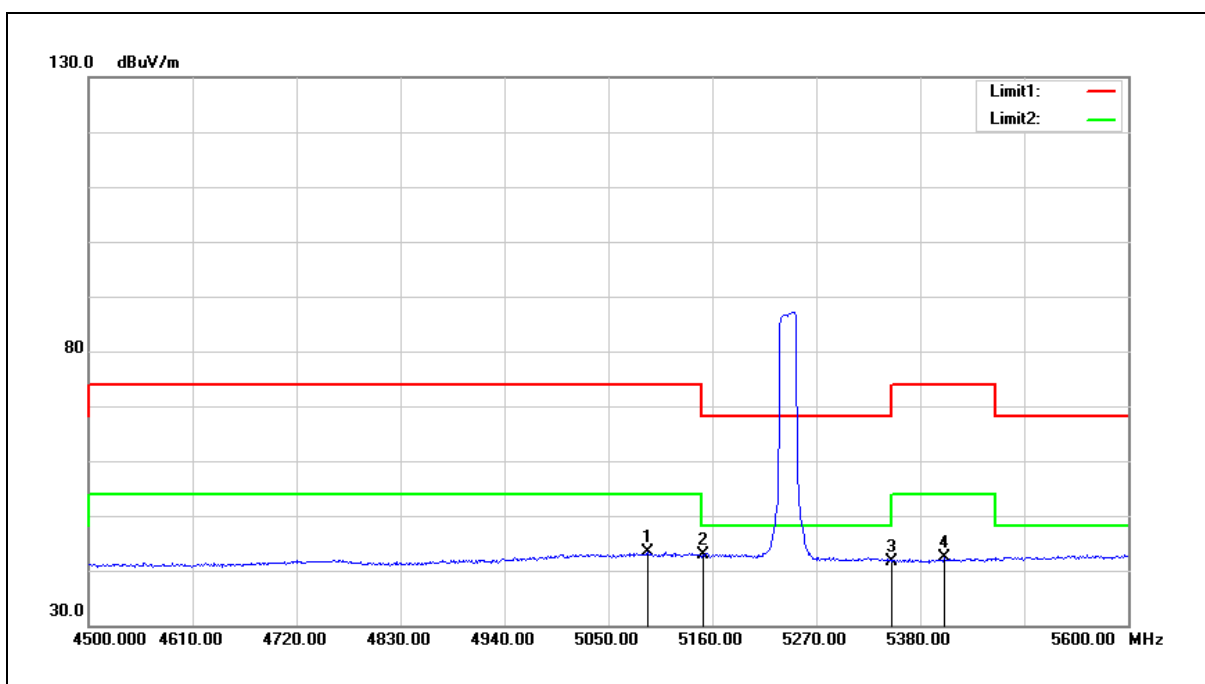


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	43.47	-0.19	43.28	54.00	-10.72	AVG
2	5150.000	42.85	-0.08	42.77	54.00	-11.23	AVG
3	5350.000	41.30	0.30	41.60	54.00	-12.40	AVG
4	5405.300	41.87	0.40	42.27	54.00	-11.73	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

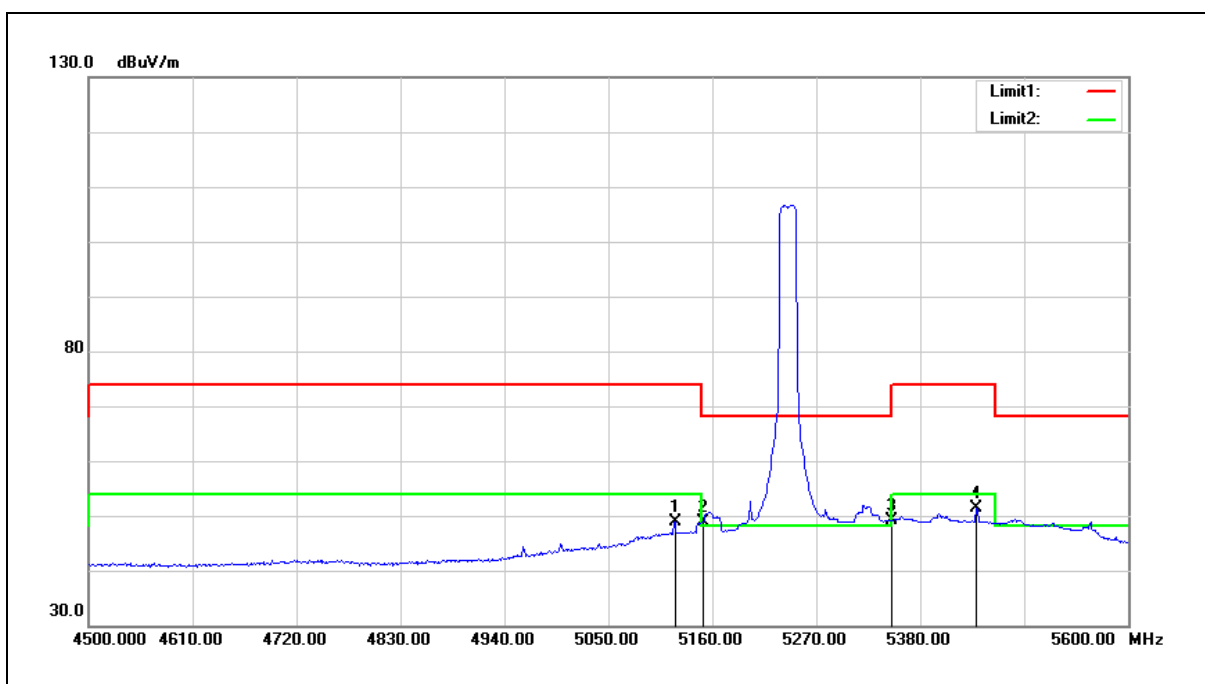


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.400	49.07	-0.13	48.94	54.00	-5.06	AVG
2	5150.000	48.88	-0.08	48.80	54.00	-5.20	AVG
3	5350.000	48.79	0.30	49.09	54.00	-4.91	AVG
4	5439.400	51.03	0.46	51.49	54.00	-2.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

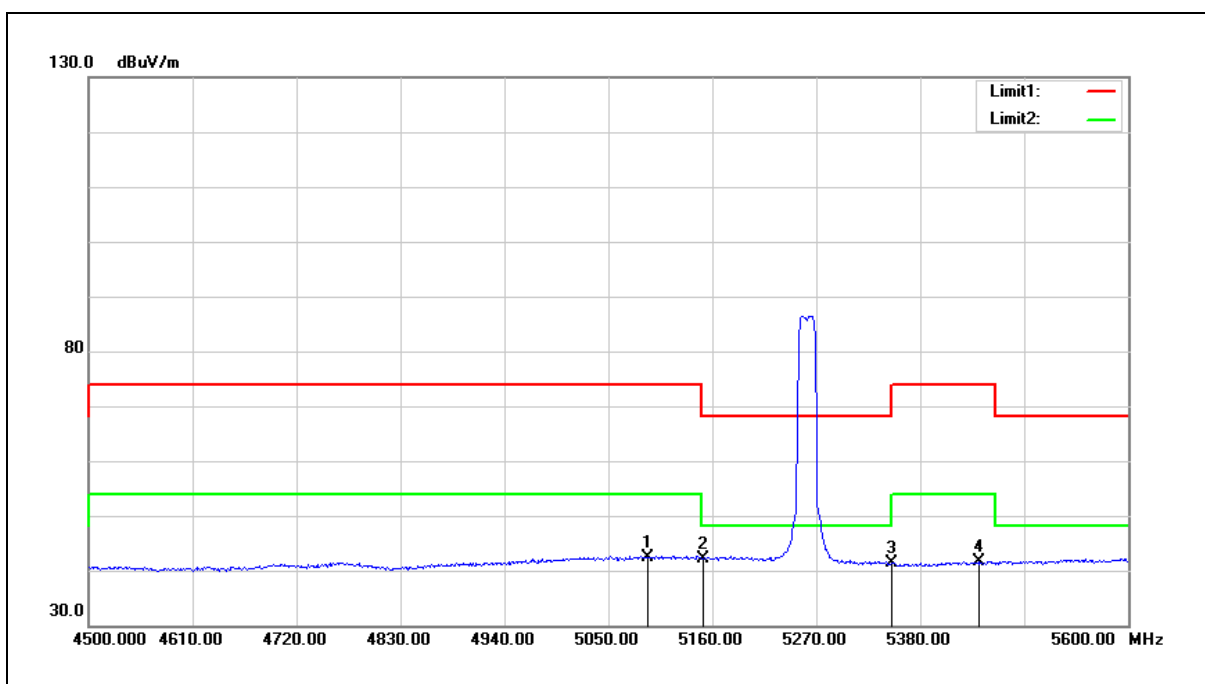


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5091.800	42.53	-0.19	42.34	54.00	-11.66	AVG
2	5150.000	42.15	-0.08	42.07	54.00	-11.93	AVG
3	5350.000	41.04	0.30	41.34	54.00	-12.66	AVG
4	5441.600	41.20	0.46	41.66	54.00	-12.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

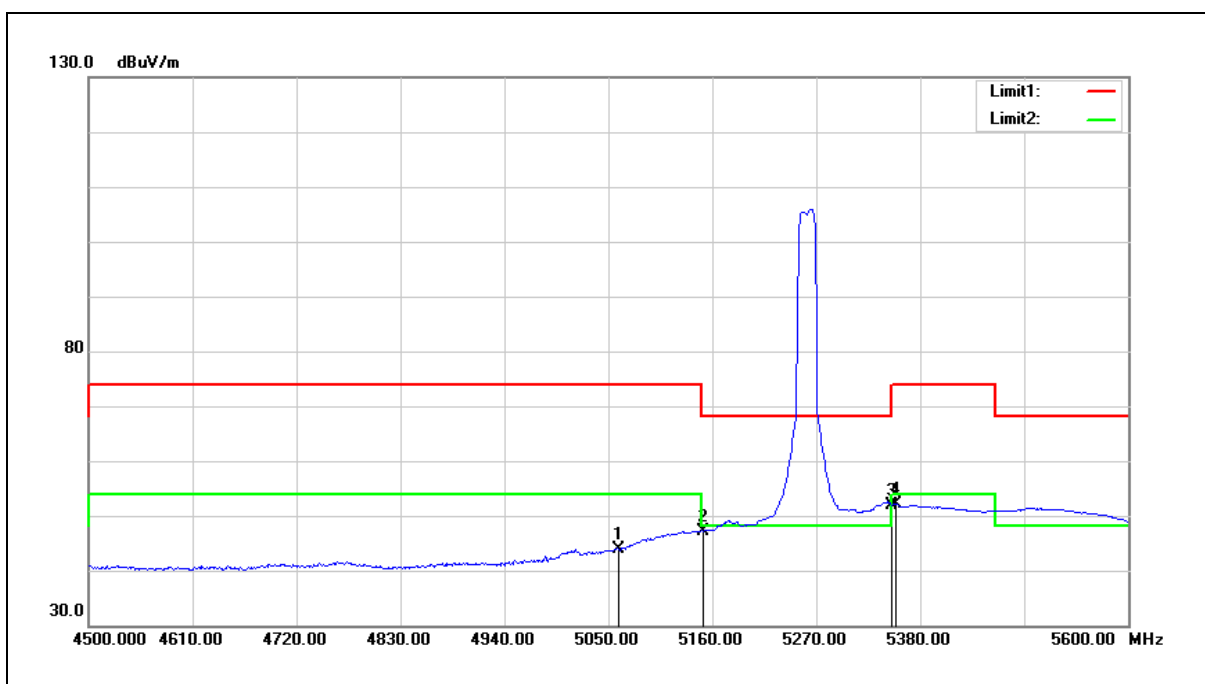


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5061.000	44.11	-0.25	43.86	54.00	-10.14	AVG
2	5150.000	47.28	-0.08	47.20	54.00	-6.80	AVG
3	5350.000	51.66	0.30	51.96	54.00	-2.04	AVG
4	5354.700	51.75	0.30	52.05	54.00	-1.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

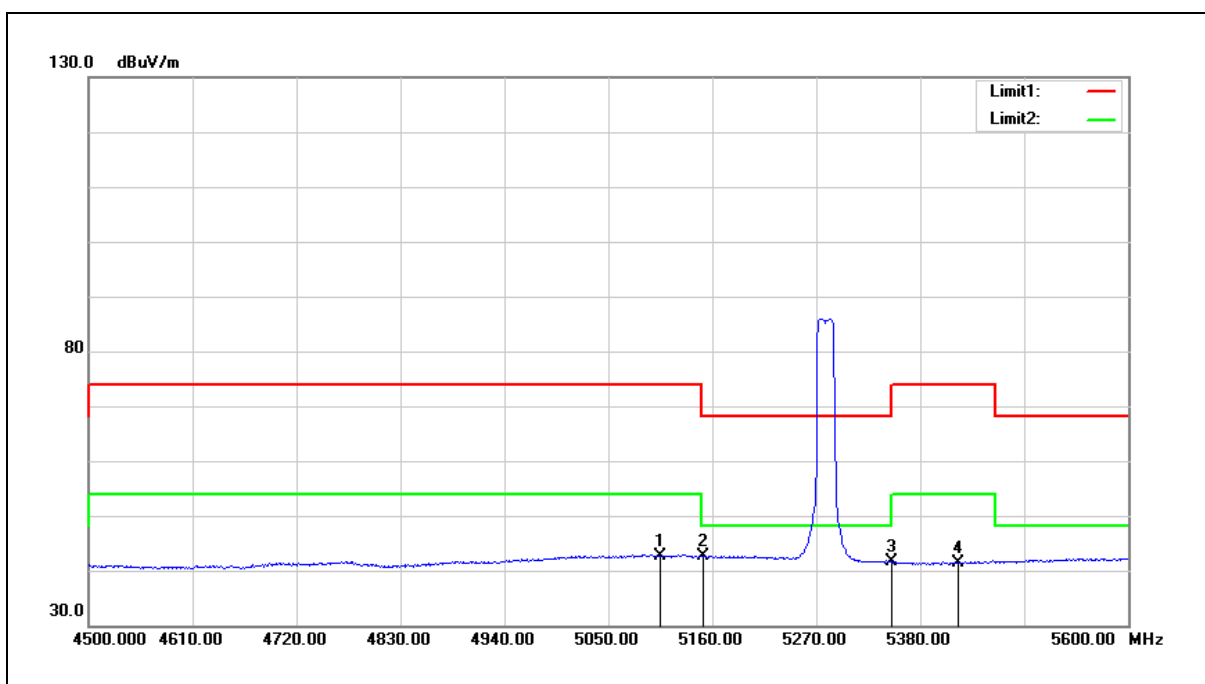


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5105.000	42.87	-0.16	42.71	54.00	-11.29	AVG
2	5150.000	42.69	-0.08	42.61	54.00	-11.39	AVG
3	5350.000	41.23	0.30	41.53	54.00	-12.47	AVG
4	5420.700	41.07	0.43	41.50	54.00	-12.50	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

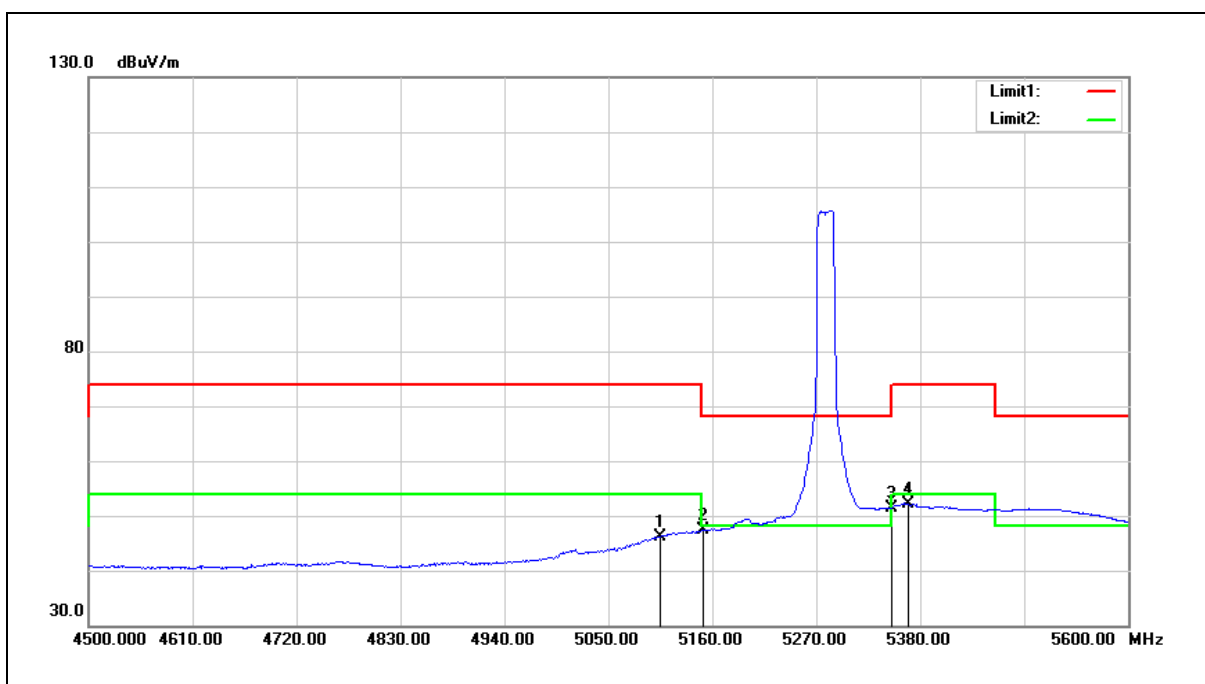


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5105.000	46.39	-0.16	46.23	54.00	-7.77	AVG
2	5150.000	47.40	-0.08	47.32	54.00	-6.68	AVG
3	5350.000	51.16	0.30	51.46	54.00	-2.54	AVG
4	5367.900	51.83	0.33	52.16	54.00	-1.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

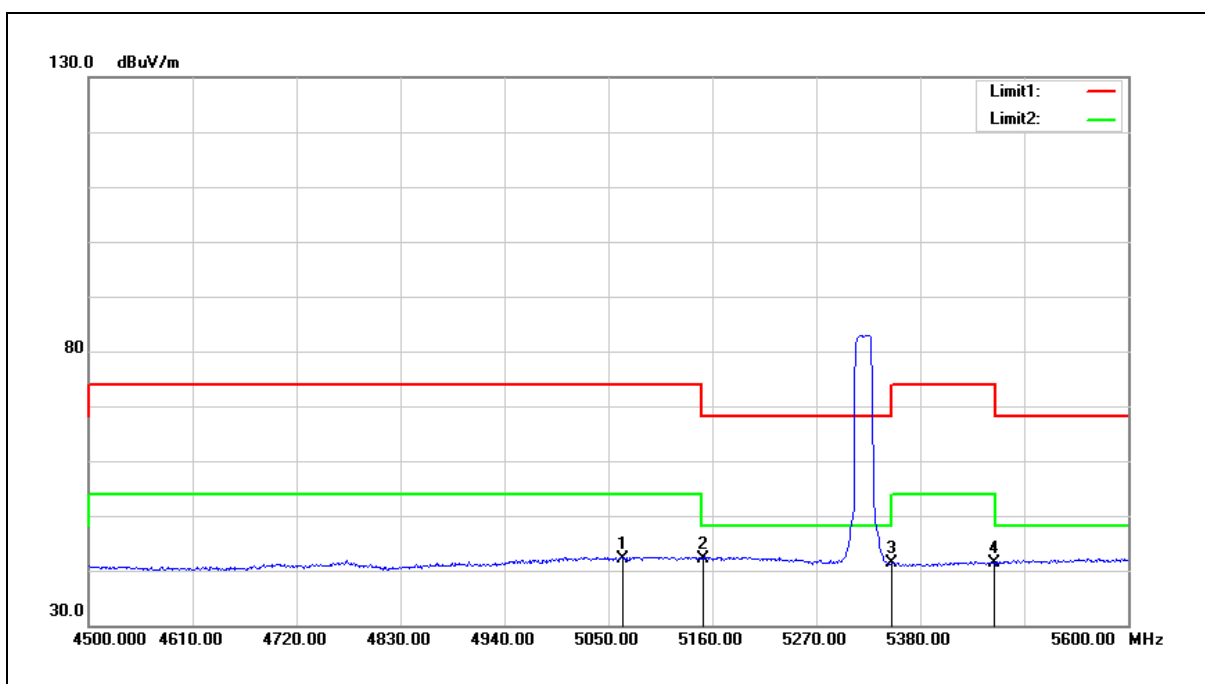


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5065.400	42.43	-0.24	42.19	54.00	-11.81	AVG
2	5150.000	42.33	-0.08	42.25	54.00	-11.75	AVG
3	5350.000	41.05	0.30	41.35	54.00	-12.65	AVG
4	5458.100	40.96	0.50	41.46	54.00	-12.54	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

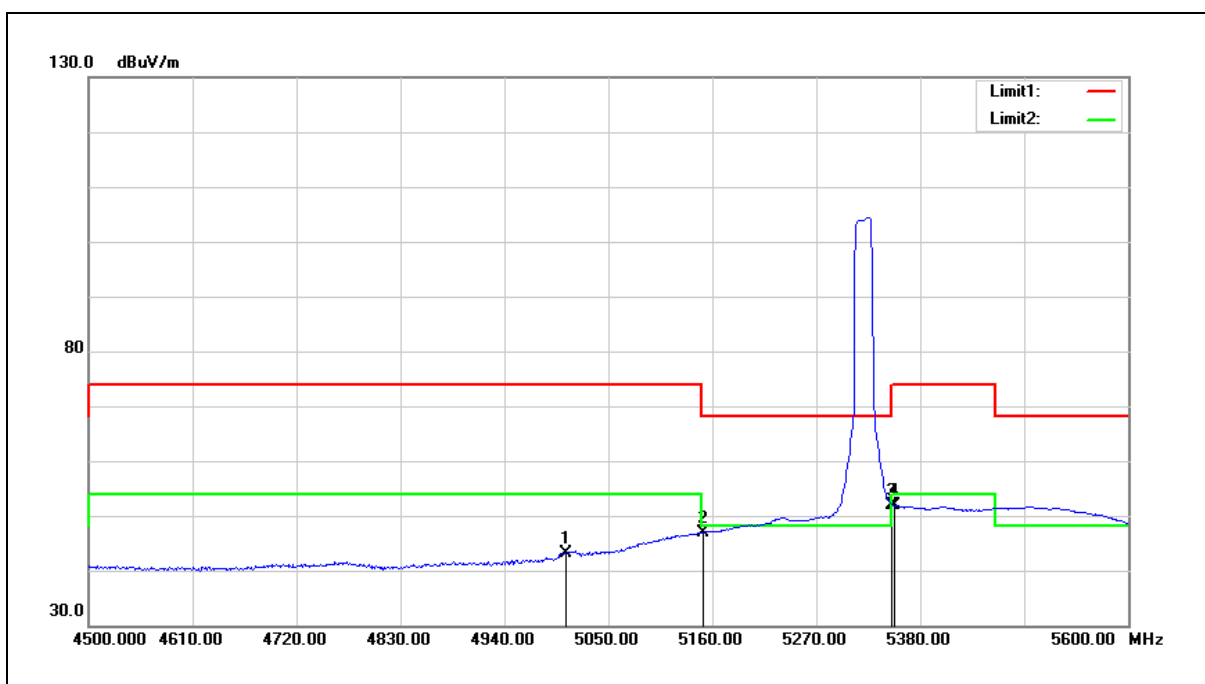


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5004.900	43.61	-0.36	43.25	54.00	-10.75	AVG
2	5150.000	46.99	-0.08	46.91	54.00	-7.09	AVG
3	5350.000	51.70	0.30	52.00	54.00	-2.00	AVG
4	5352.500	51.52	0.30	51.82	54.00	-2.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

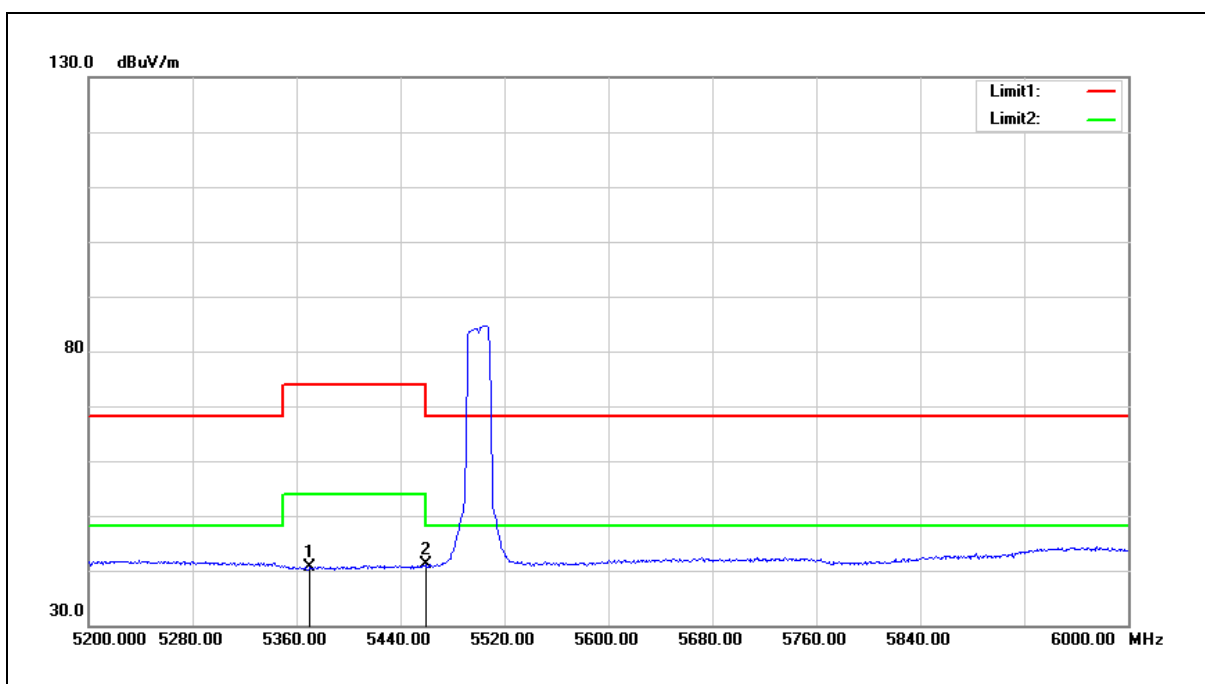


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5370.400	40.31	0.34	40.65	54.00	-13.35	AVG
2	5460.000	40.51	0.51	41.02	54.00	-12.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

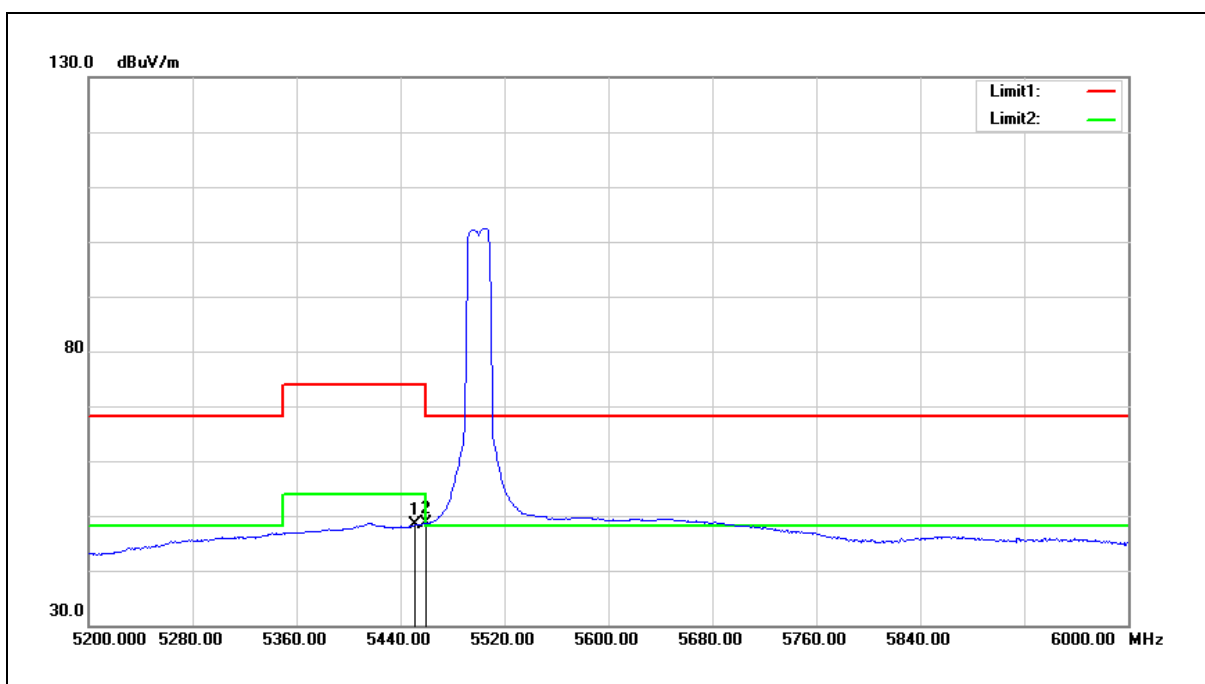


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5451.200	47.85	0.48	48.33	54.00	-5.67	AVG
2	5460.000	48.11	0.51	48.62	54.00	-5.38	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

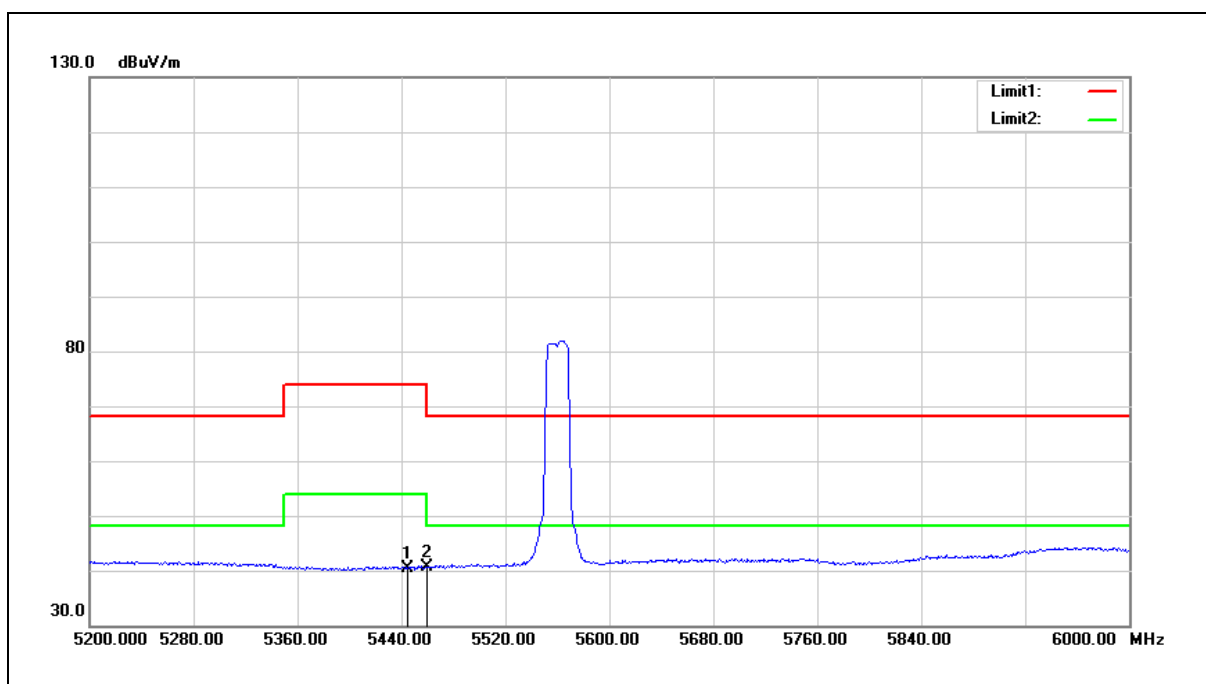


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5444.800	39.82	0.47	40.29	54.00	-13.71	AVG
2	5460.000	40.23	0.51	40.74	54.00	-13.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

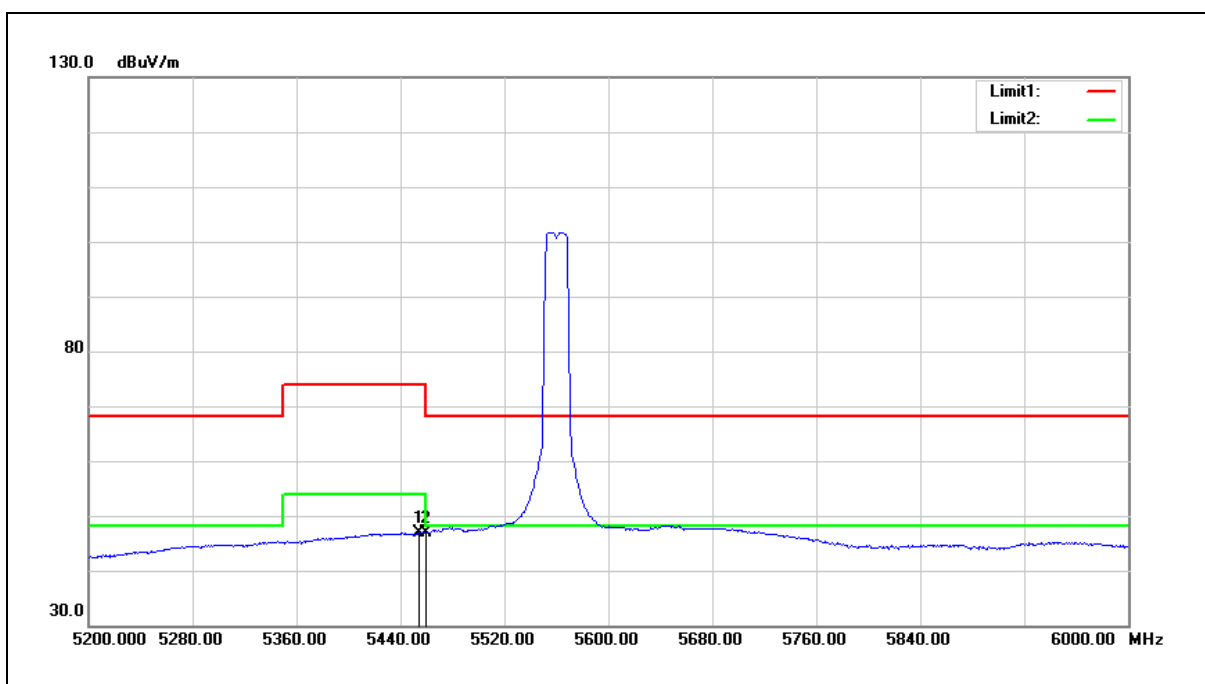


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5454.400	46.30	0.48	46.78	54.00	-7.22	AVG
2	5460.000	46.30	0.51	46.81	54.00	-7.19	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

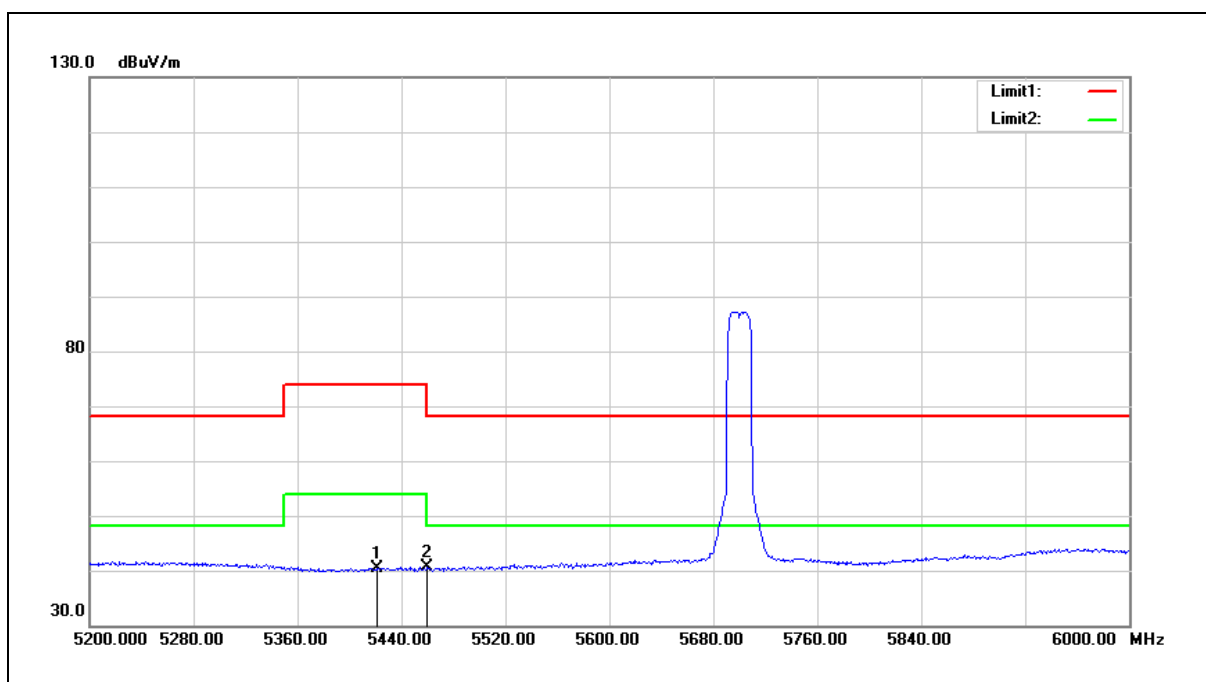


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5420.800	39.89	0.43	40.32	54.00	-13.68	AVG
2	5460.000	40.00	0.51	40.51	54.00	-13.49	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

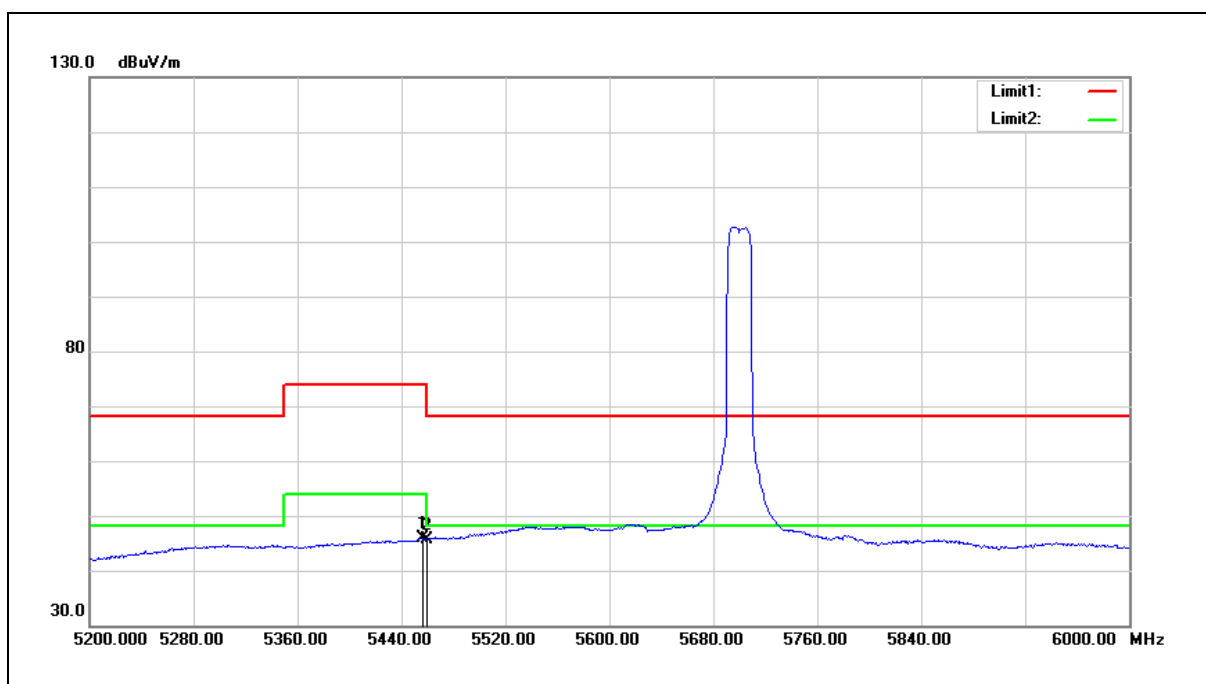


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5456.800	45.48	0.50	45.98	54.00	-8.02	AVG
2	5460.000	45.15	0.51	45.66	54.00	-8.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

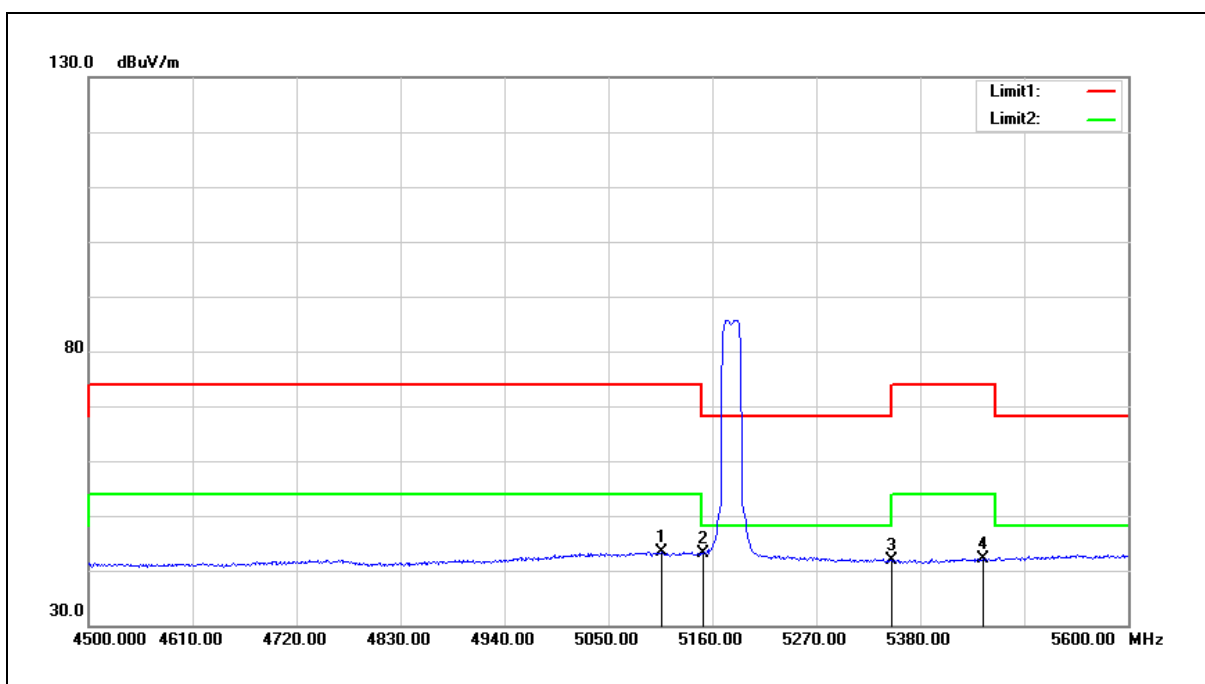


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5106.100	43.53	-0.16	43.37	54.00	-10.63	AVG
2	5150.000	43.32	-0.08	43.24	54.00	-10.76	AVG
3	5350.000	41.47	0.30	41.77	54.00	-12.23	AVG
4	5447.100	41.71	0.48	42.19	54.00	-11.81	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

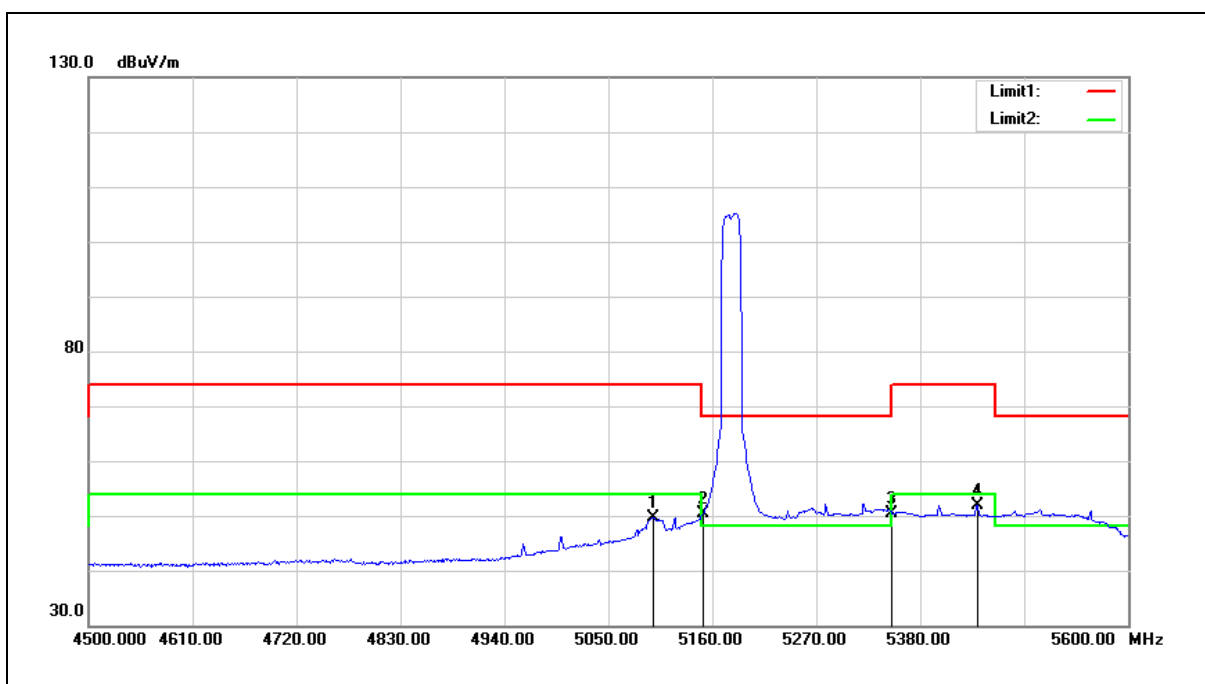


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5097.300	49.81	-0.18	49.63	54.00	-4.37	AVG
2	5150.000	50.55	-0.08	50.47	54.00	-3.53	AVG
3	5350.000	50.14	0.30	50.44	54.00	-3.56	AVG
4	5440.500	51.53	0.46	51.99	54.00	-2.01	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

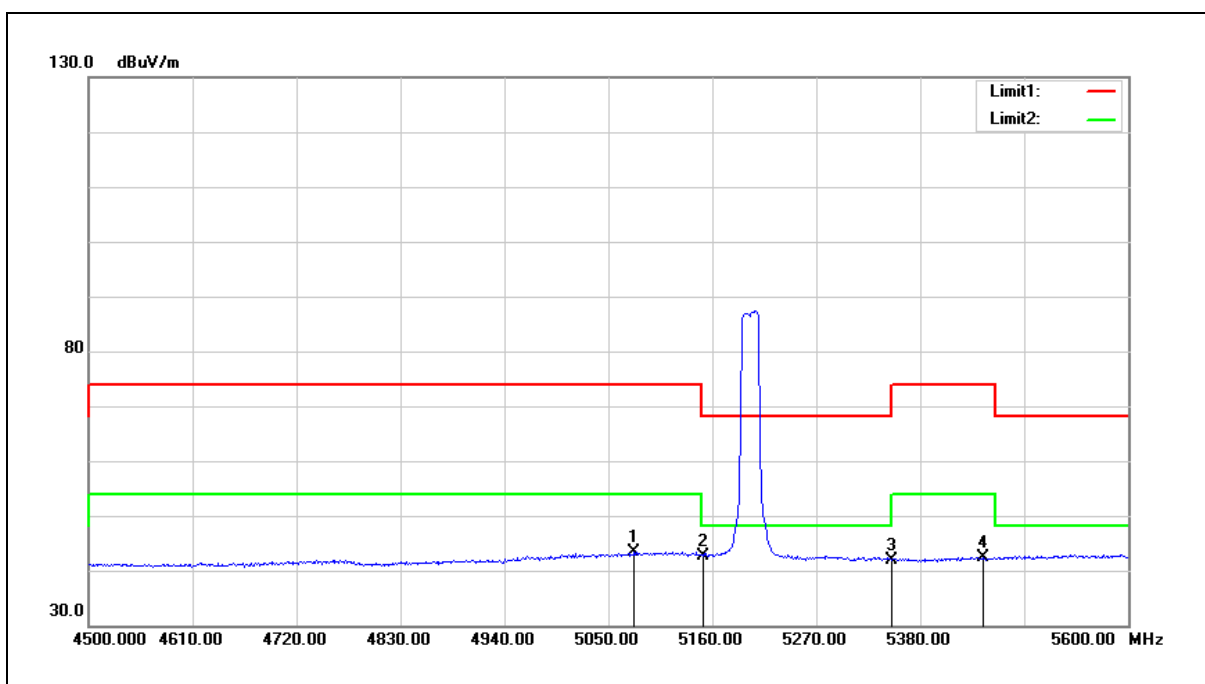


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.500	43.53	-0.21	43.32	54.00	-10.68	AVG
2	5150.000	42.82	-0.08	42.74	54.00	-11.26	AVG
3	5350.000	41.57	0.30	41.87	54.00	-12.13	AVG
4	5447.100	41.96	0.48	42.44	54.00	-11.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

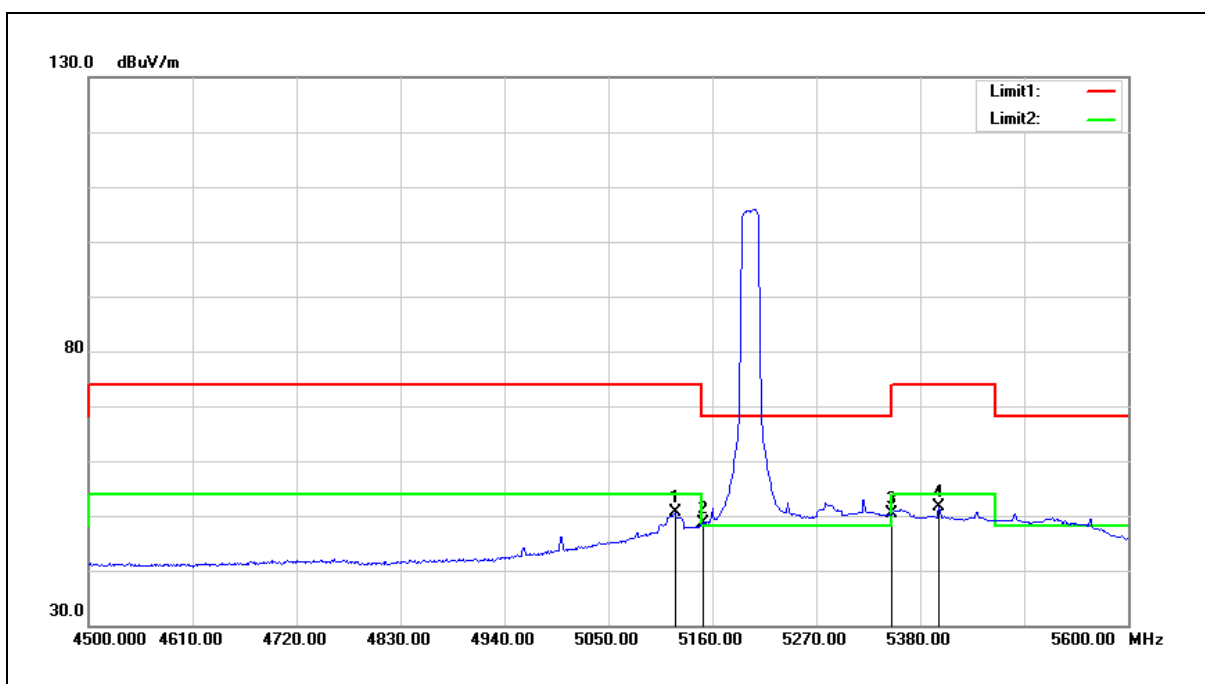


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.400	50.65	-0.13	50.52	54.00	-3.48	AVG
2	5150.000	48.70	-0.08	48.62	54.00	-5.38	AVG
3	5350.000	49.99	0.30	50.29	54.00	-3.71	AVG
4	5399.800	51.23	0.39	51.62	54.00	-2.38	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

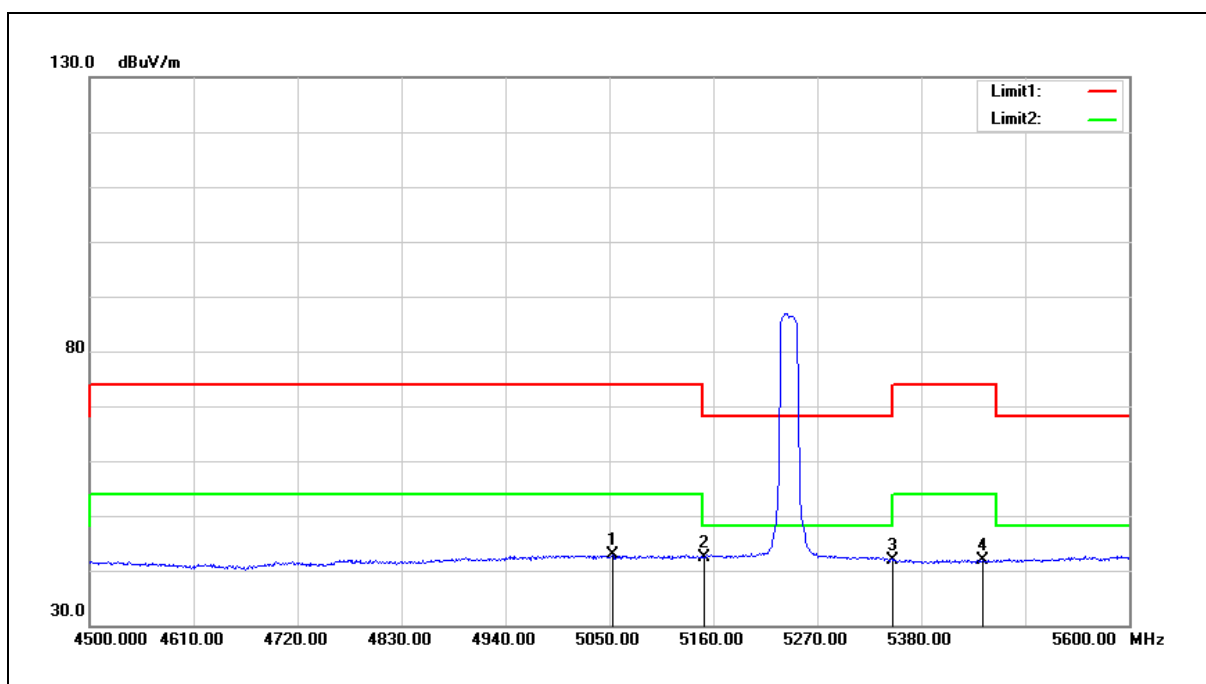


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5053.300	43.08	-0.26	42.82	54.00	-11.18	AVG
2	5150.000	42.53	-0.08	42.45	54.00	-11.55	AVG
3	5350.000	41.56	0.30	41.86	54.00	-12.14	AVG
4	5444.900	41.45	0.47	41.92	54.00	-12.08	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

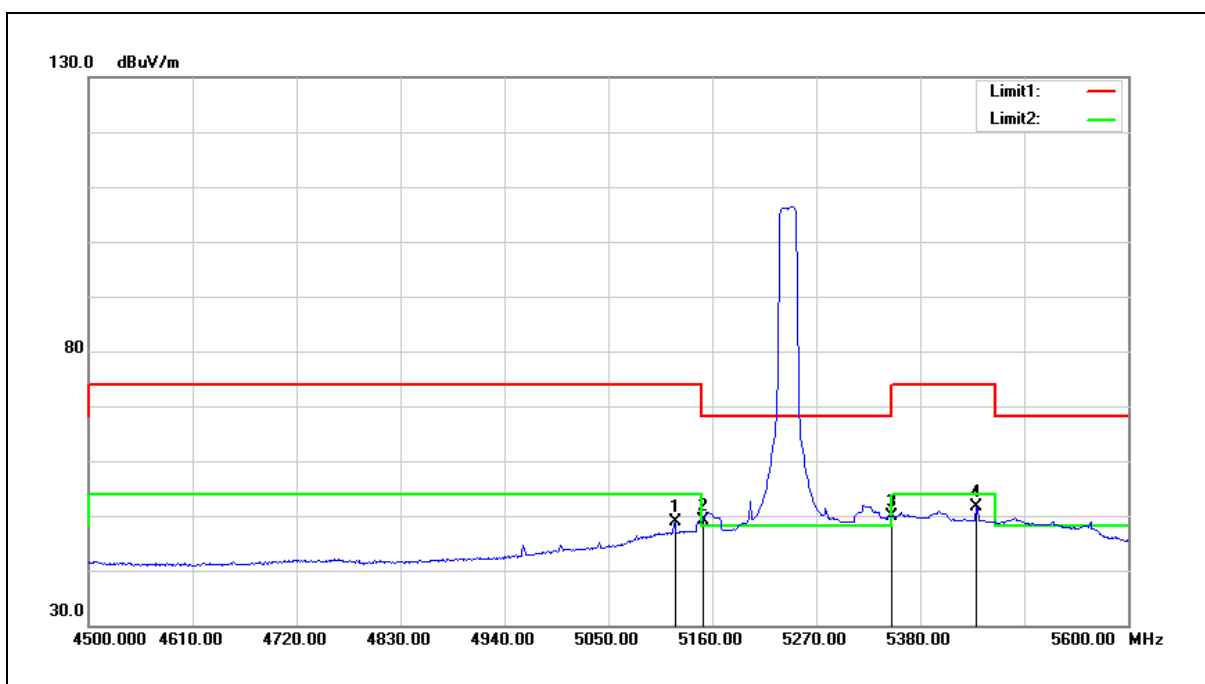


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5120.400	48.94	-0.13	48.81	54.00	-5.19	AVG
2	5150.000	49.10	-0.08	49.02	54.00	-4.98	AVG
3	5350.000	49.47	0.30	49.77	54.00	-4.23	AVG
4	5439.400	51.26	0.46	51.72	54.00	-2.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

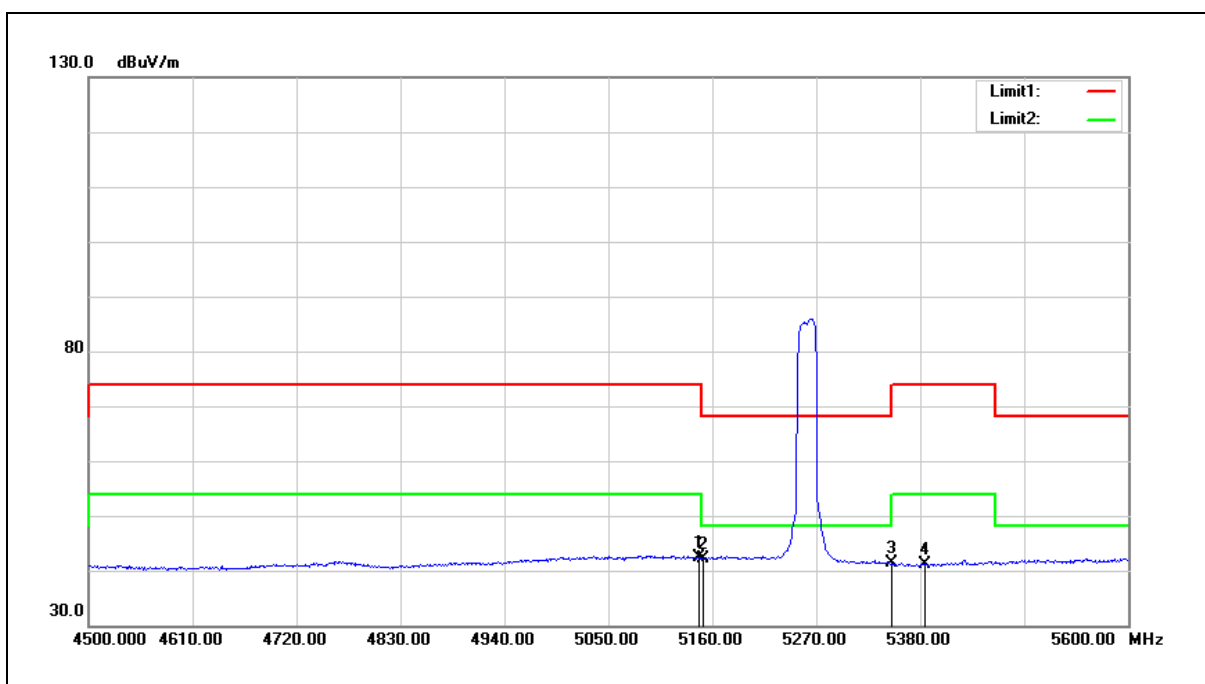


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.700	42.51	-0.08	42.43	54.00	-11.57	AVG
2	5150.000	42.21	-0.08	42.13	54.00	-11.87	AVG
3	5350.000	41.11	0.30	41.41	54.00	-12.59	AVG
4	5385.500	40.68	0.36	41.04	54.00	-12.96	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

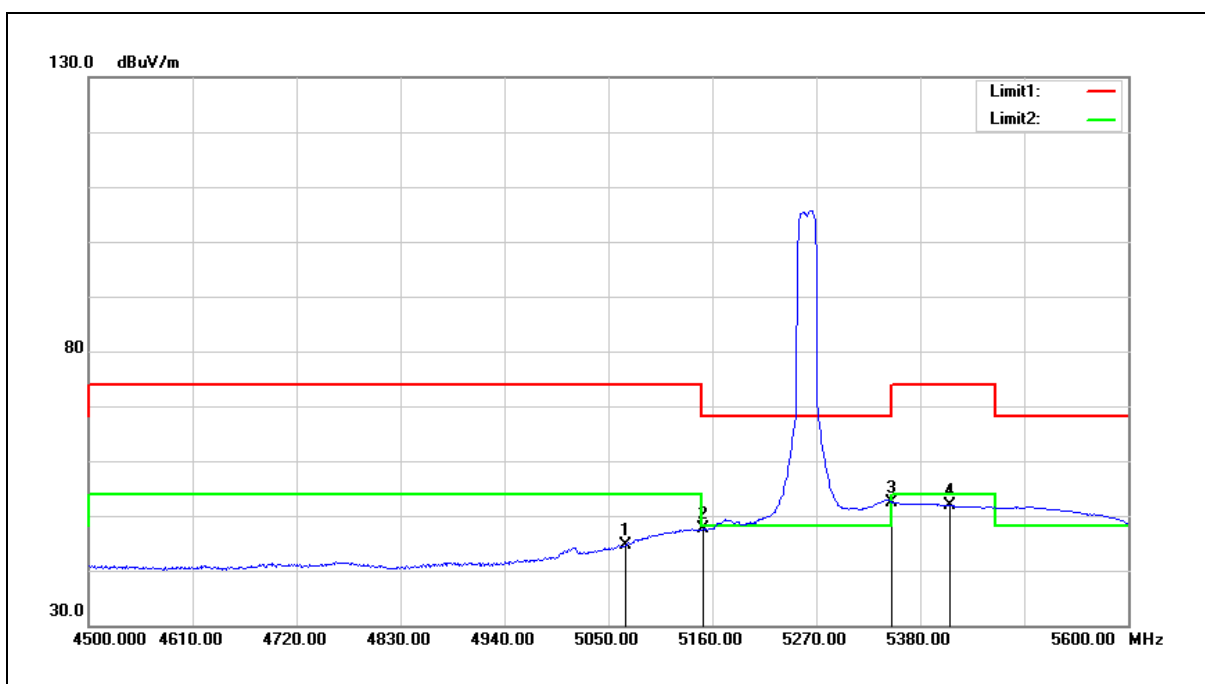


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5068.700	44.75	-0.24	44.51	54.00	-9.49	AVG
2	5150.000	47.67	-0.08	47.59	54.00	-6.41	AVG
3	5350.000	52.10	0.30	52.40	54.00	-1.60	AVG
4	5411.900	51.41	0.41	51.82	54.00	-2.18	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

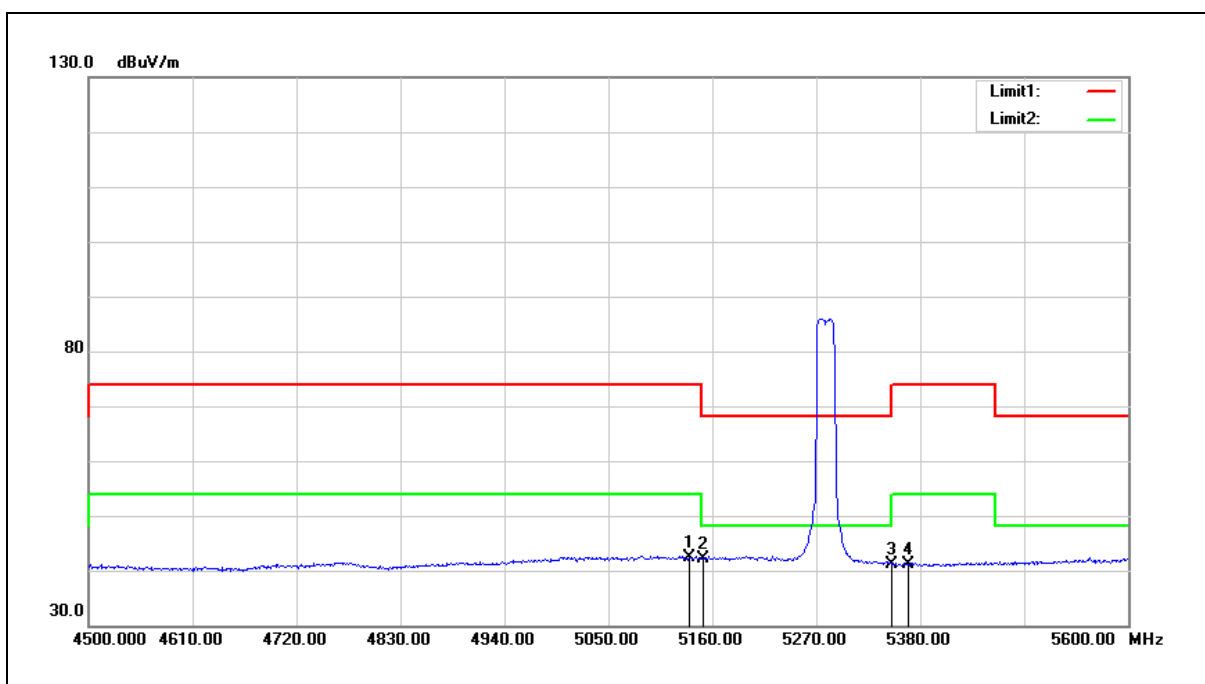


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5135.800	42.40	-0.10	42.30	54.00	-11.70	AVG
2	5150.000	42.30	-0.08	42.22	54.00	-11.78	AVG
3	5350.000	40.77	0.30	41.07	54.00	-12.93	AVG
4	5367.900	40.90	0.33	41.23	54.00	-12.77	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

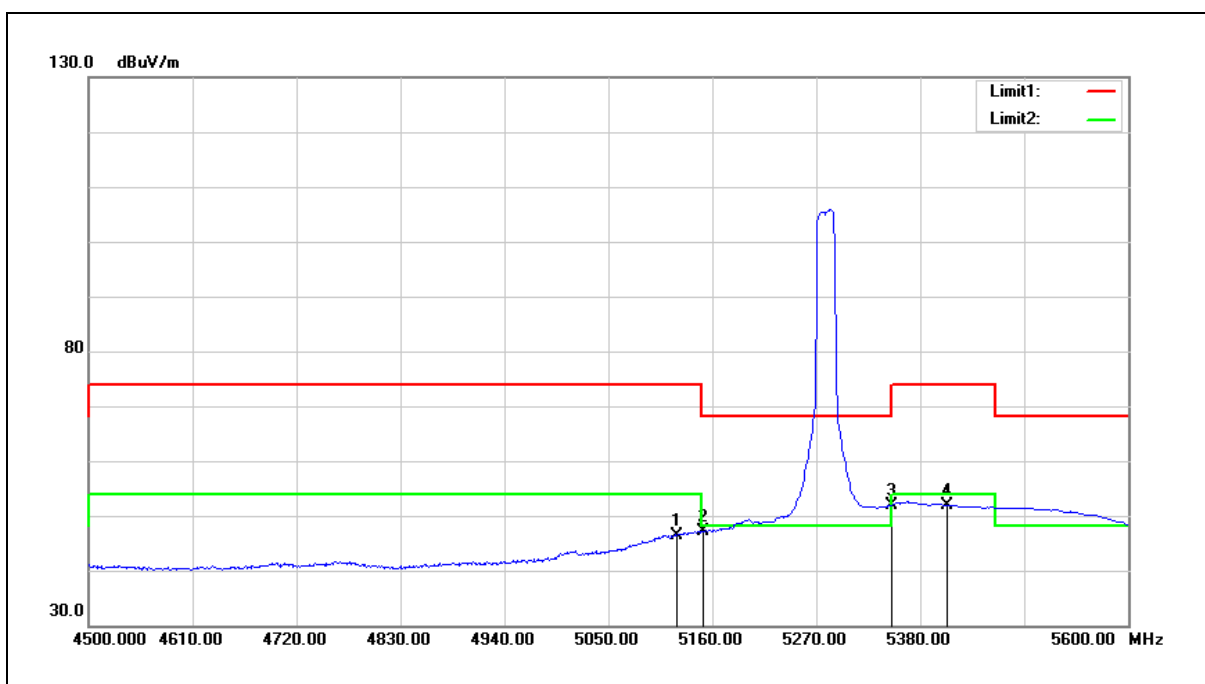


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.600	46.55	-0.13	46.42	54.00	-7.58	AVG
2	5150.000	47.28	-0.08	47.20	54.00	-6.80	AVG
3	5350.000	51.61	0.30	51.91	54.00	-2.09	AVG
4	5408.600	51.48	0.41	51.89	54.00	-2.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

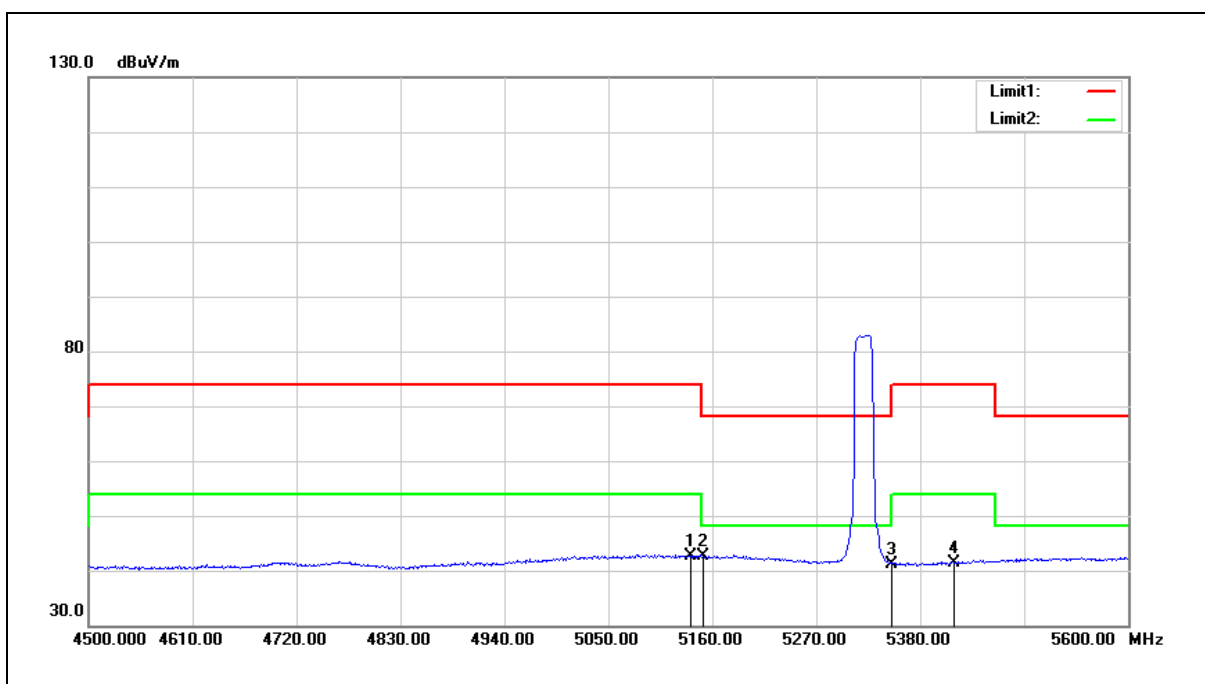


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5136.900	42.61	-0.10	42.51	54.00	-11.49	AVG
2	5150.000	42.61	-0.08	42.53	54.00	-11.47	AVG
3	5350.000	40.77	0.30	41.07	54.00	-12.93	AVG
4	5415.200	40.90	0.41	41.31	54.00	-12.69	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5320 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

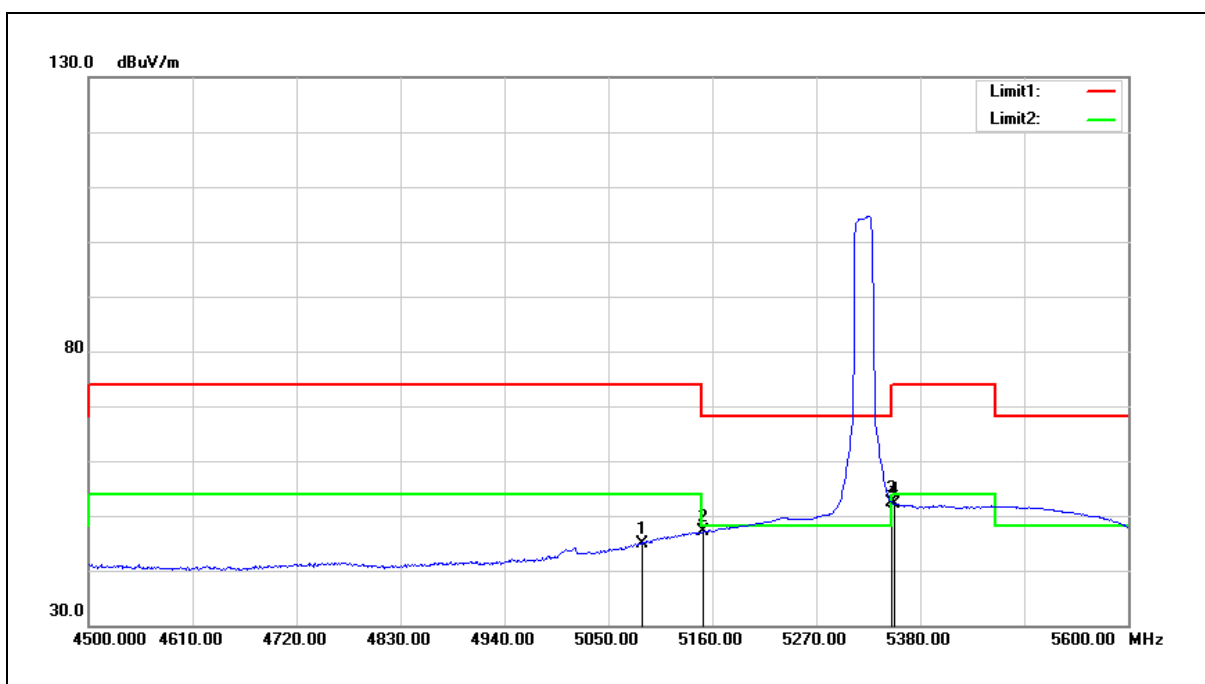


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5086.300	45.12	-0.20	44.92	54.00	-9.08	AVG
2	5150.000	47.10	-0.08	47.02	54.00	-6.98	AVG
3	5350.000	52.15	0.30	52.45	54.00	-1.55	AVG
4	5352.500	51.86	0.30	52.16	54.00	-1.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

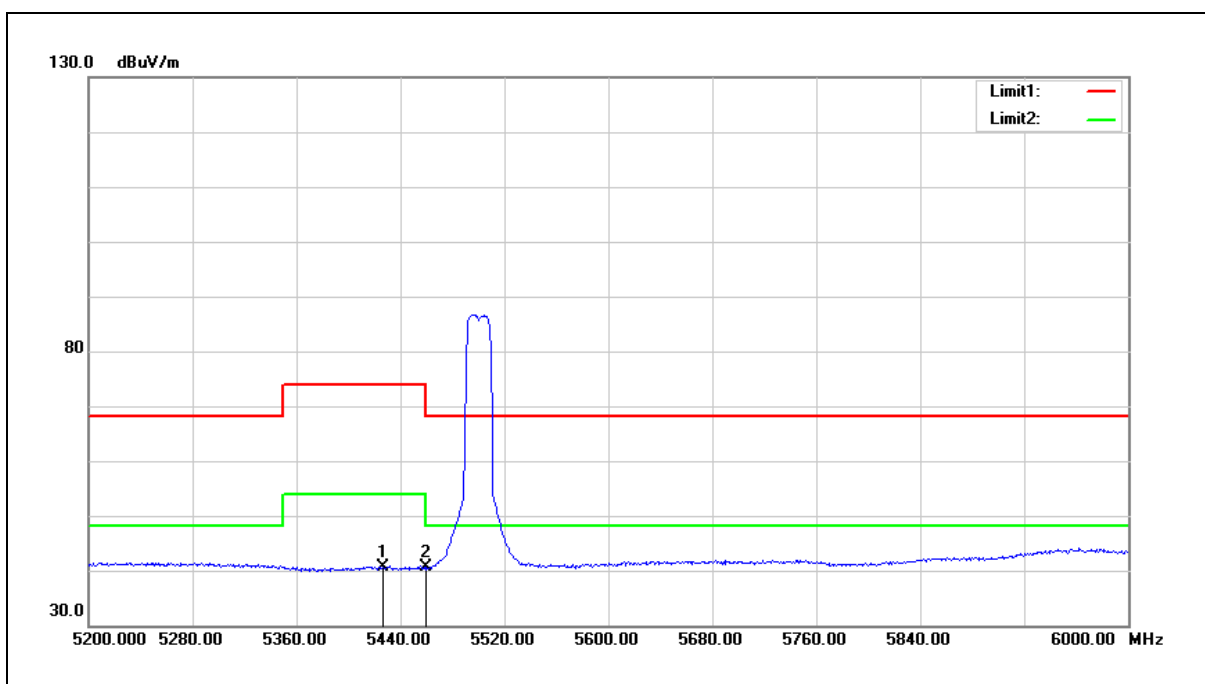


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5426.400	40.08	0.43	40.51	54.00	-13.49	AVG
2	5460.000	40.12	0.51	40.63	54.00	-13.37	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5500 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

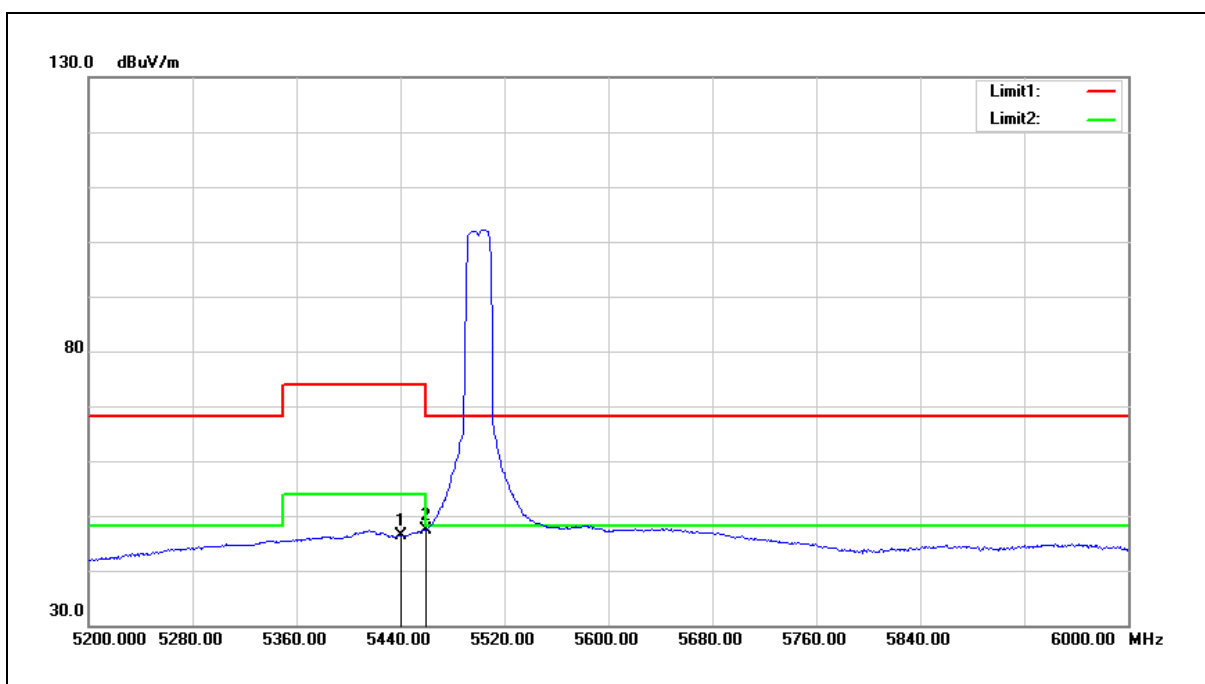


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5440.800	45.89	0.46	46.35	54.00	-7.65	AVG
2	5460.000	46.95	0.51	47.46	54.00	-6.54	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

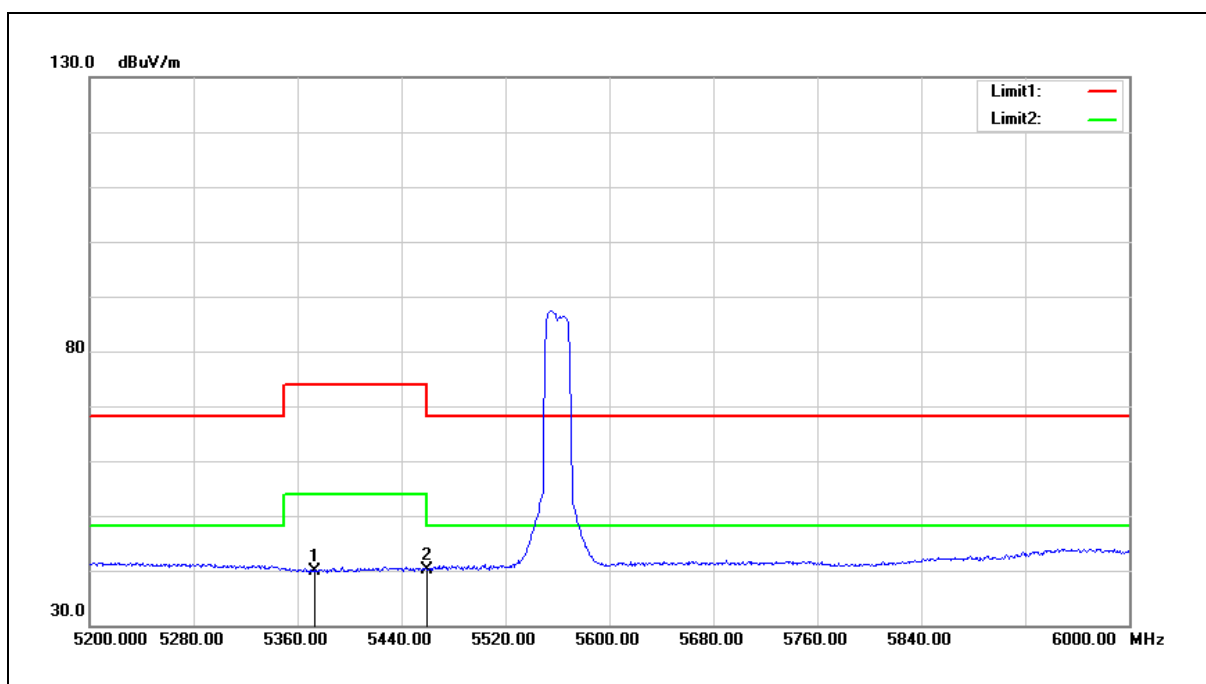


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5372.800	39.47	0.34	39.81	54.00	-14.19	AVG
2	5460.000	39.56	0.51	40.07	54.00	-13.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5560 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

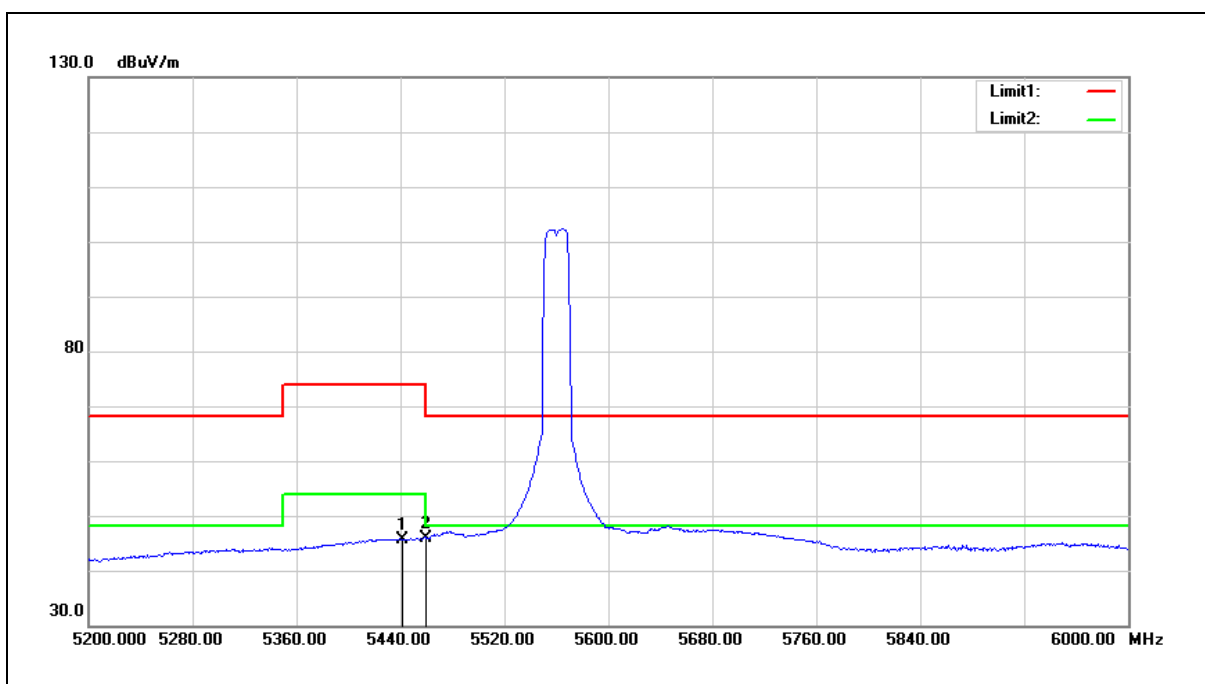


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5441.600	45.26	0.46	45.72	54.00	-8.28	AVG
2	5460.000	45.28	0.51	45.79	54.00	-8.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

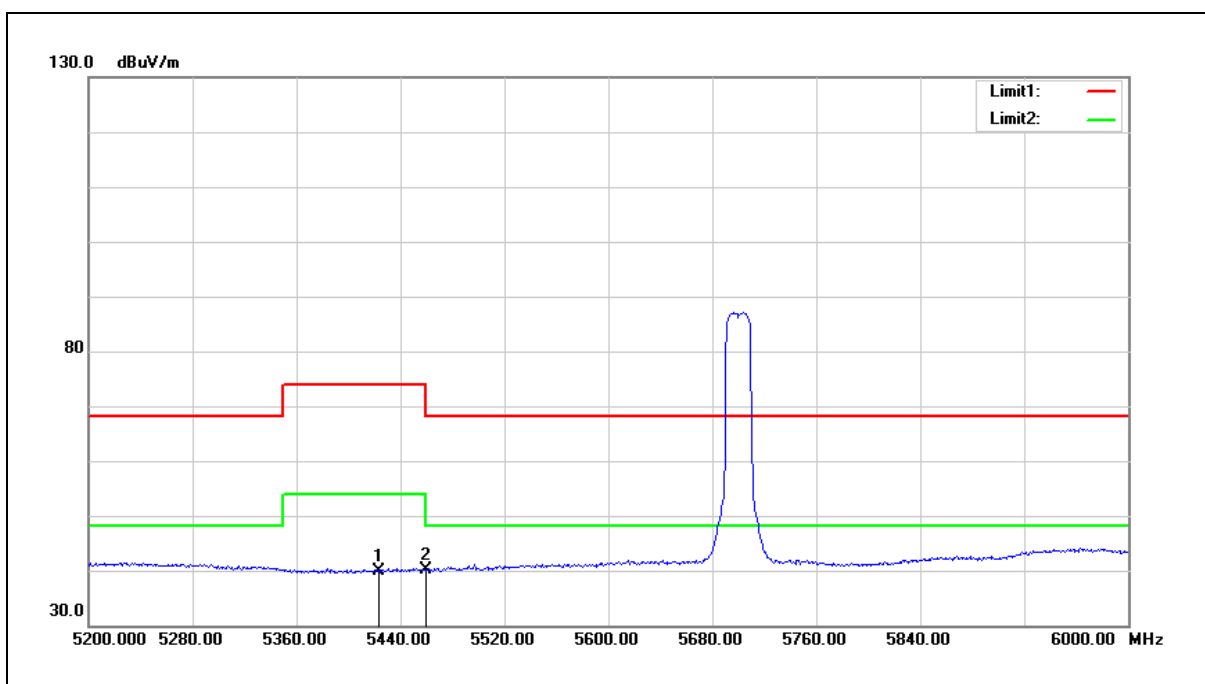


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5423.200	39.52	0.43	39.95	54.00	-14.05	AVG
2	5460.000	39.65	0.51	40.16	54.00	-13.84	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5700 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

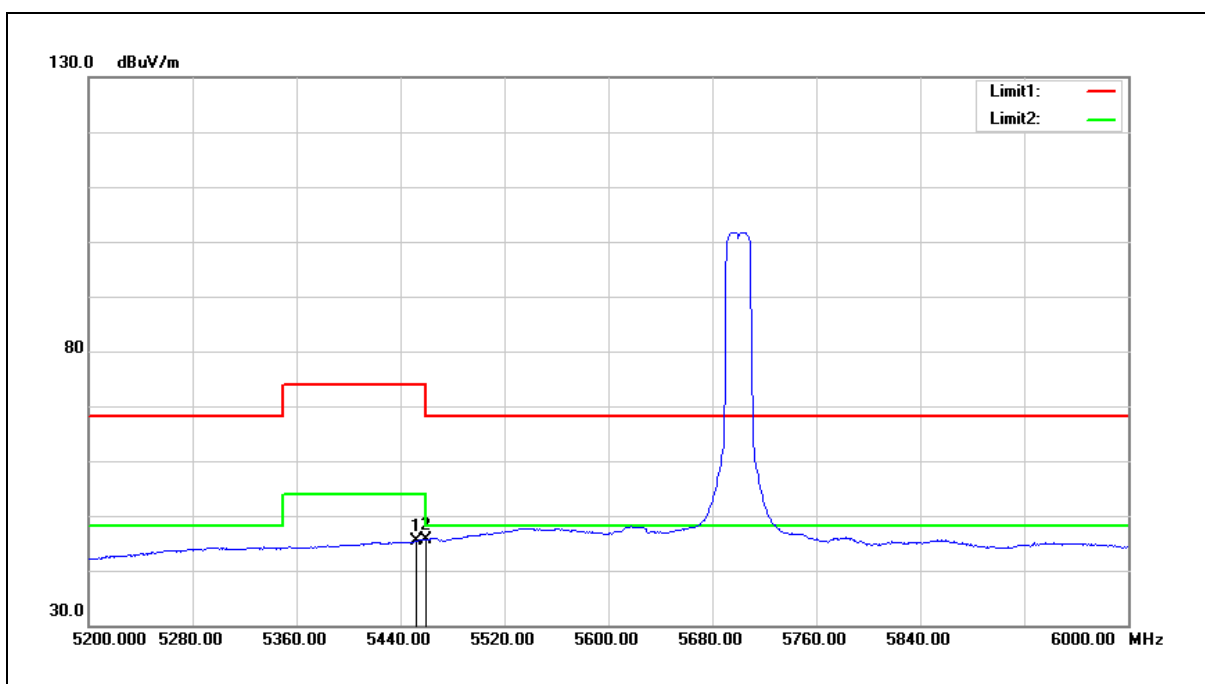


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5452.000	44.94	0.48	45.42	54.00	-8.58	AVG
2	5460.000	45.02	0.51	45.53	54.00	-8.47	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

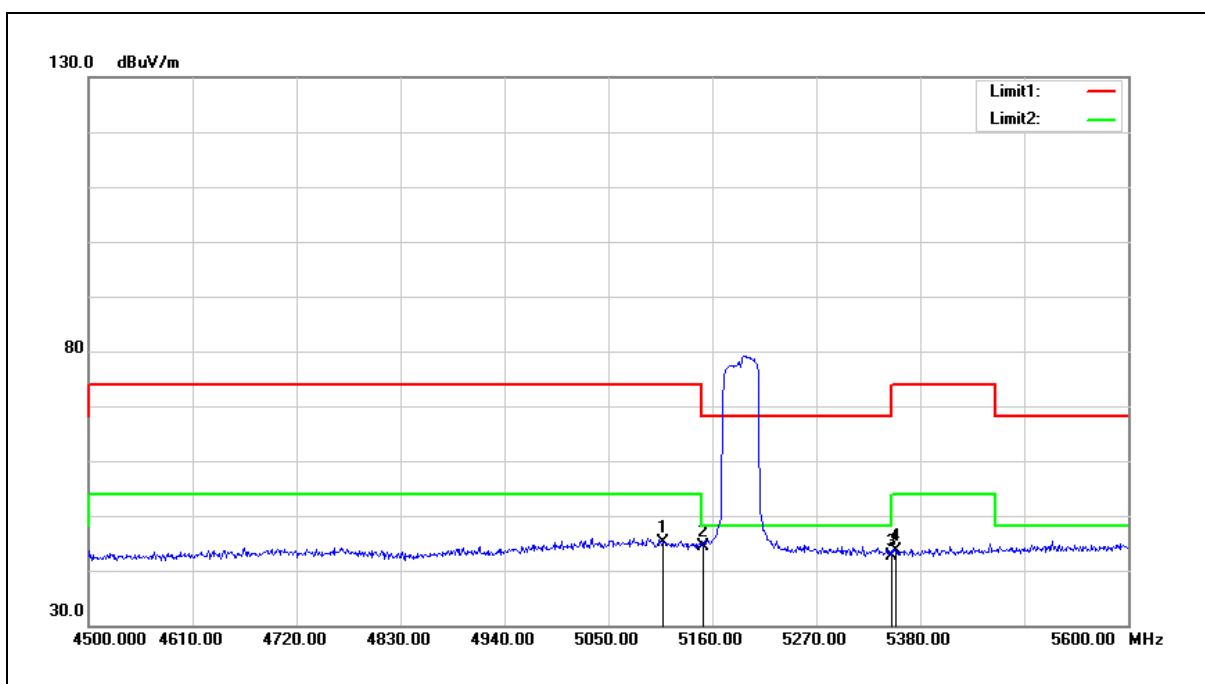


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5107.200	45.23	-0.15	45.08	54.00	-8.92	AVG
2	5150.000	44.56	-0.08	44.48	54.00	-9.52	AVG
3	5350.000	42.44	0.30	42.74	54.00	-11.26	AVG
4	5354.700	43.31	0.30	43.61	54.00	-10.39	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5190 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

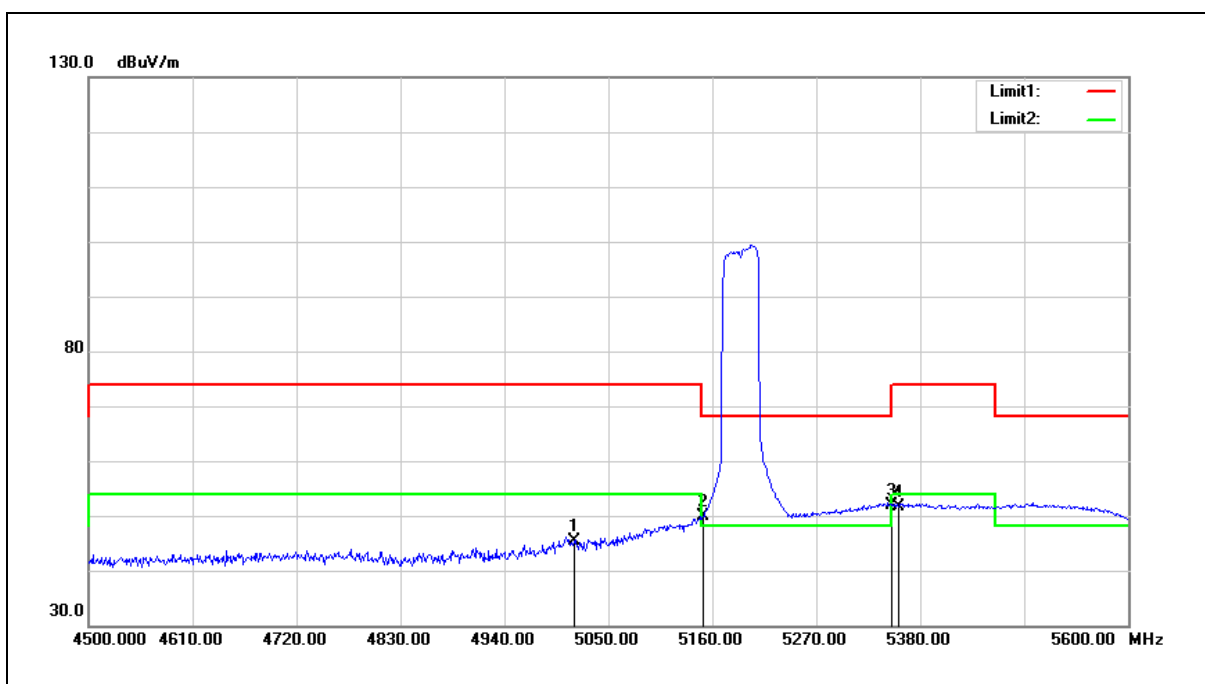


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5013.700	45.81	-0.34	45.47	54.00	-8.53	AVG
2	5150.000	49.99	-0.08	49.91	54.00	-4.09	AVG
3	5350.000	51.46	0.30	51.76	54.00	-2.24	AVG
4	5356.900	51.40	0.31	51.71	54.00	-2.29	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

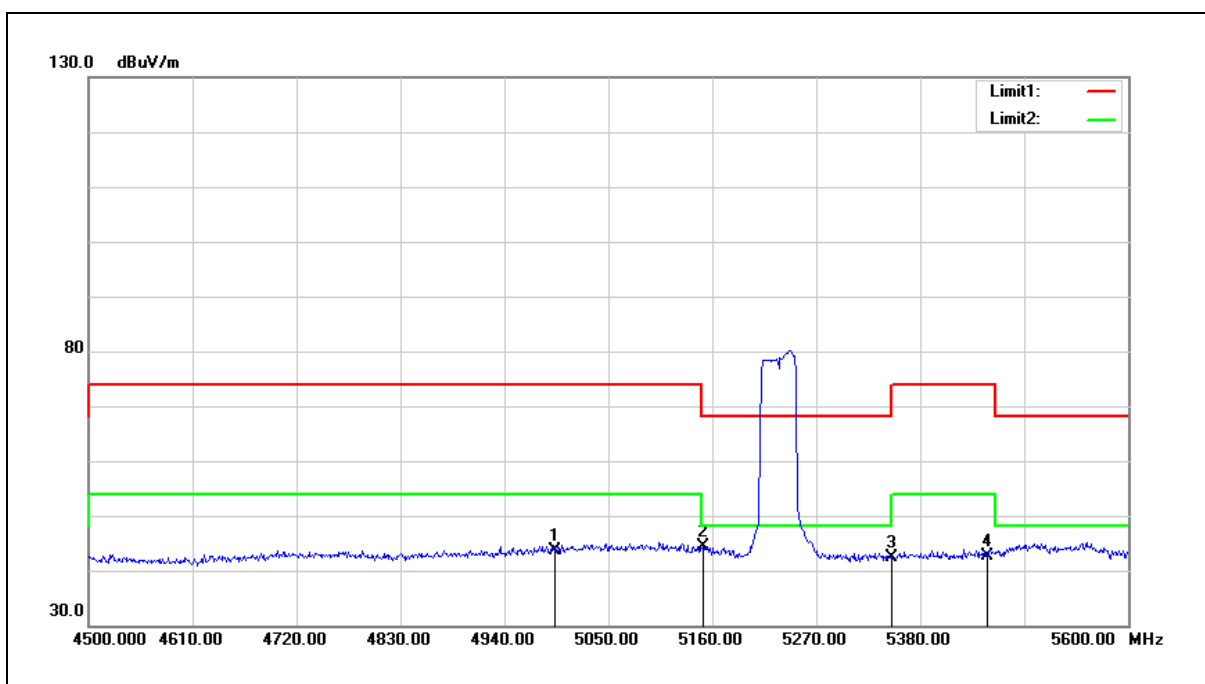


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4992.800	44.08	-0.38	43.70	54.00	-10.30	AVG
2	5150.000	44.56	-0.08	44.48	54.00	-9.52	AVG
3	5350.000	41.99	0.30	42.29	54.00	-11.71	AVG
4	5450.400	42.08	0.48	42.56	54.00	-11.44	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5230 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

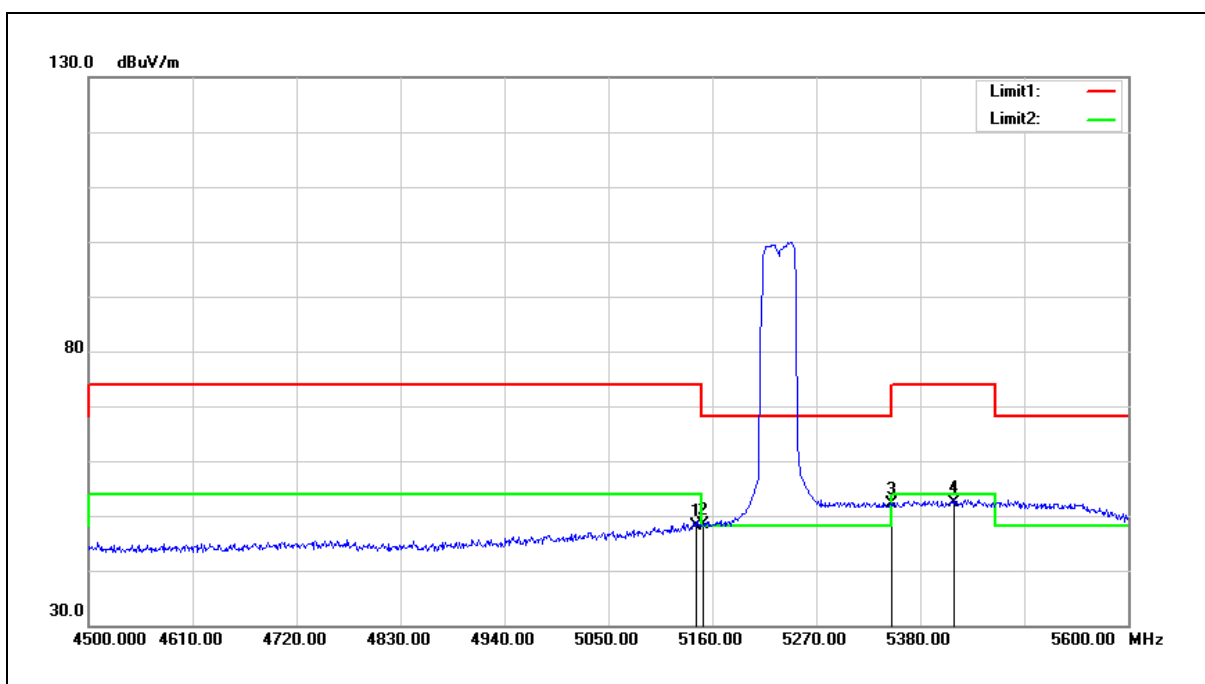


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.400	48.24	-0.10	48.14	54.00	-5.86	AVG
2	5150.000	48.41	-0.08	48.33	54.00	-5.67	AVG
3	5350.000	51.71	0.30	52.01	54.00	-1.99	AVG
4	5415.200	51.96	0.41	52.37	54.00	-1.63	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

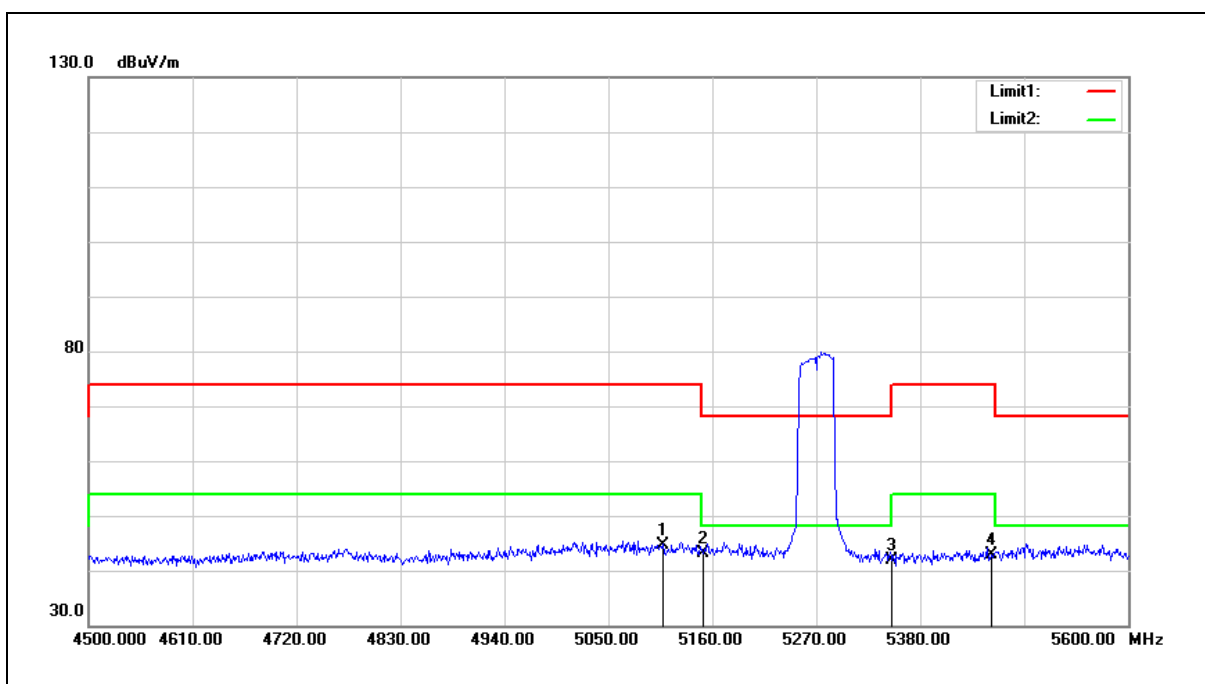


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5107.200	44.86	-0.15	44.71	54.00	-9.29	AVG
2	5150.000	43.12	-0.08	43.04	54.00	-10.96	AVG
3	5350.000	41.54	0.30	41.84	54.00	-12.16	AVG
4	5454.800	42.50	0.48	42.98	54.00	-11.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5270 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

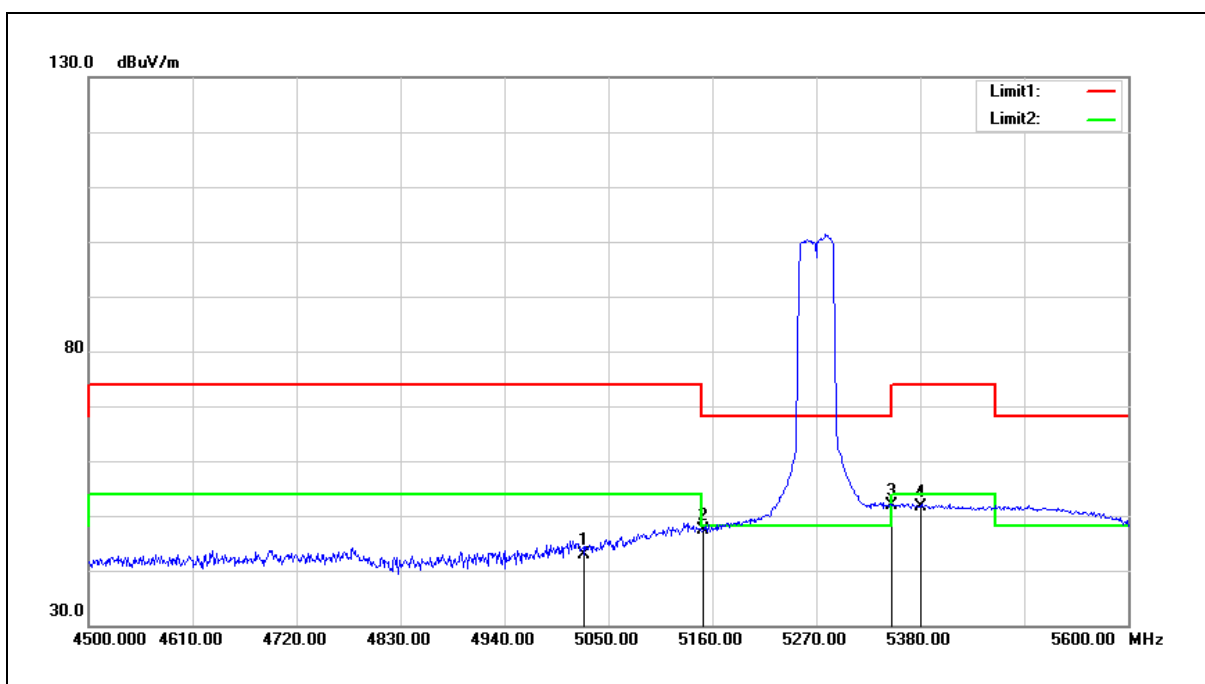


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5024.700	43.22	-0.31	42.91	54.00	-11.09	AVG
2	5150.000	47.53	-0.08	47.45	54.00	-6.55	AVG
3	5350.000	51.48	0.30	51.78	54.00	-2.22	AVG
4	5380.000	51.40	0.35	51.75	54.00	-2.25	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

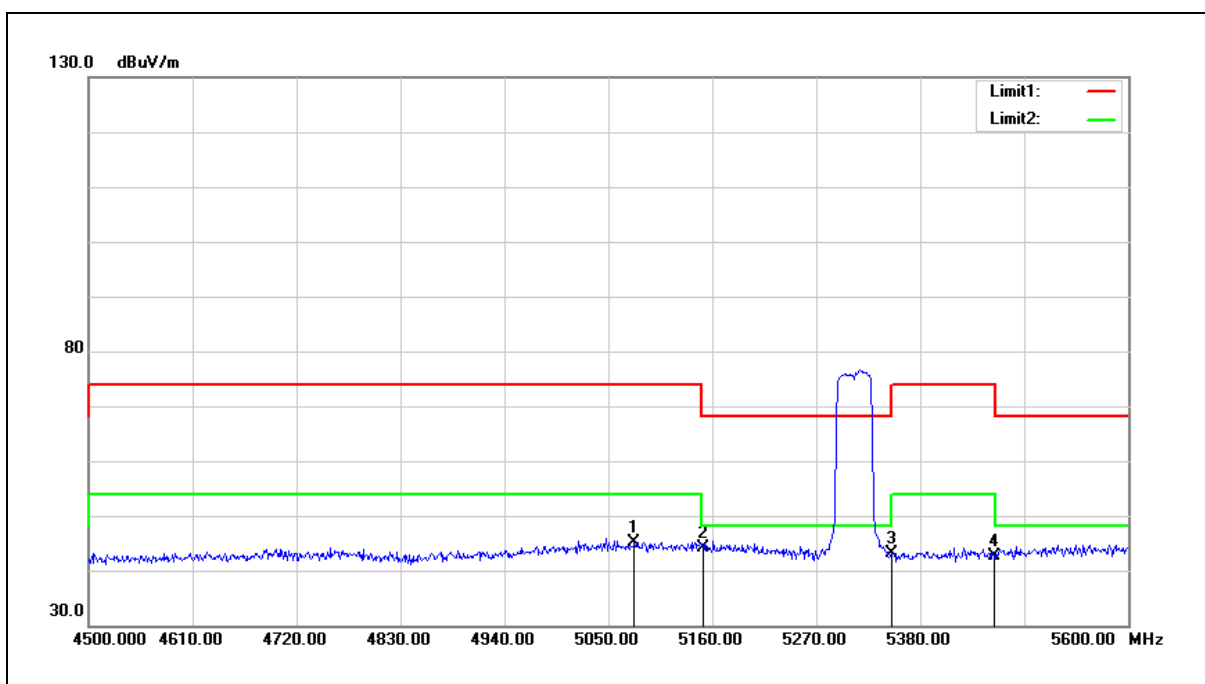


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5077.500	45.45	-0.21	45.24	54.00	-8.76	AVG
2	5150.000	44.22	-0.08	44.14	54.00	-9.86	AVG
3	5350.000	42.72	0.30	43.02	54.00	-10.98	AVG
4	5458.100	42.22	0.50	42.72	54.00	-11.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5310 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

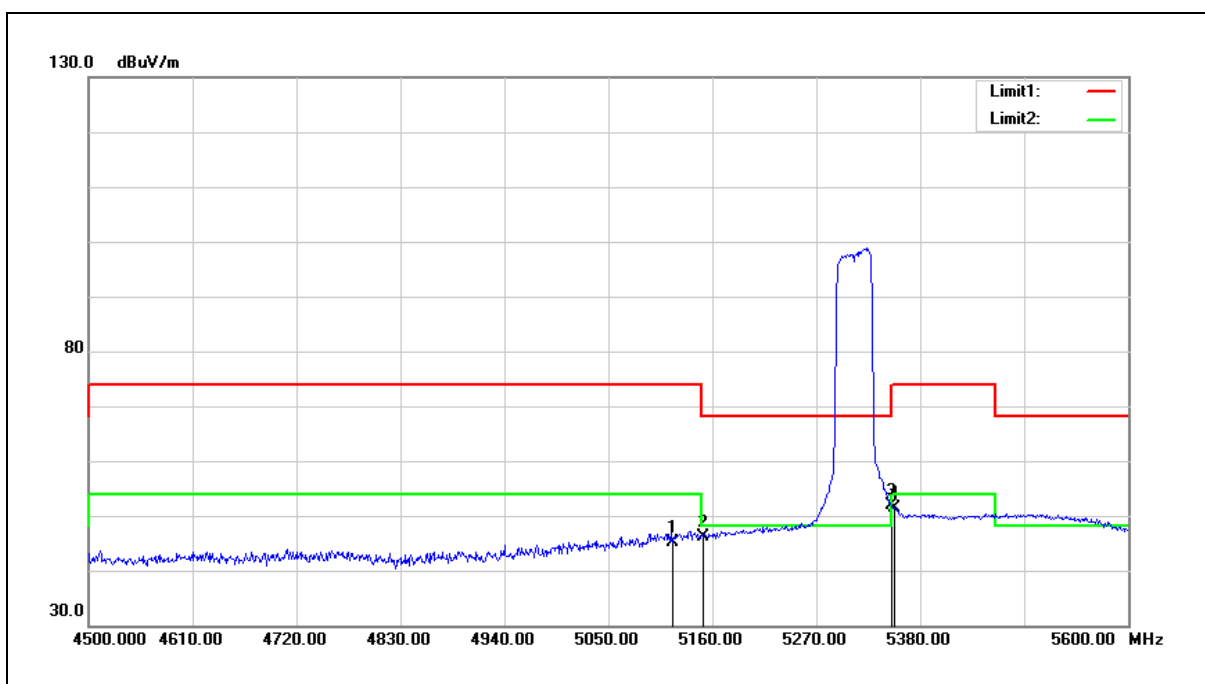


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5118.200	45.32	-0.14	45.18	54.00	-8.82	AVG
2	5150.000	46.13	-0.08	46.05	54.00	-7.95	AVG
3	5350.000	51.51	0.30	51.81	54.00	-2.19	AVG
4	5352.500	51.15	0.30	51.45	54.00	-2.55	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

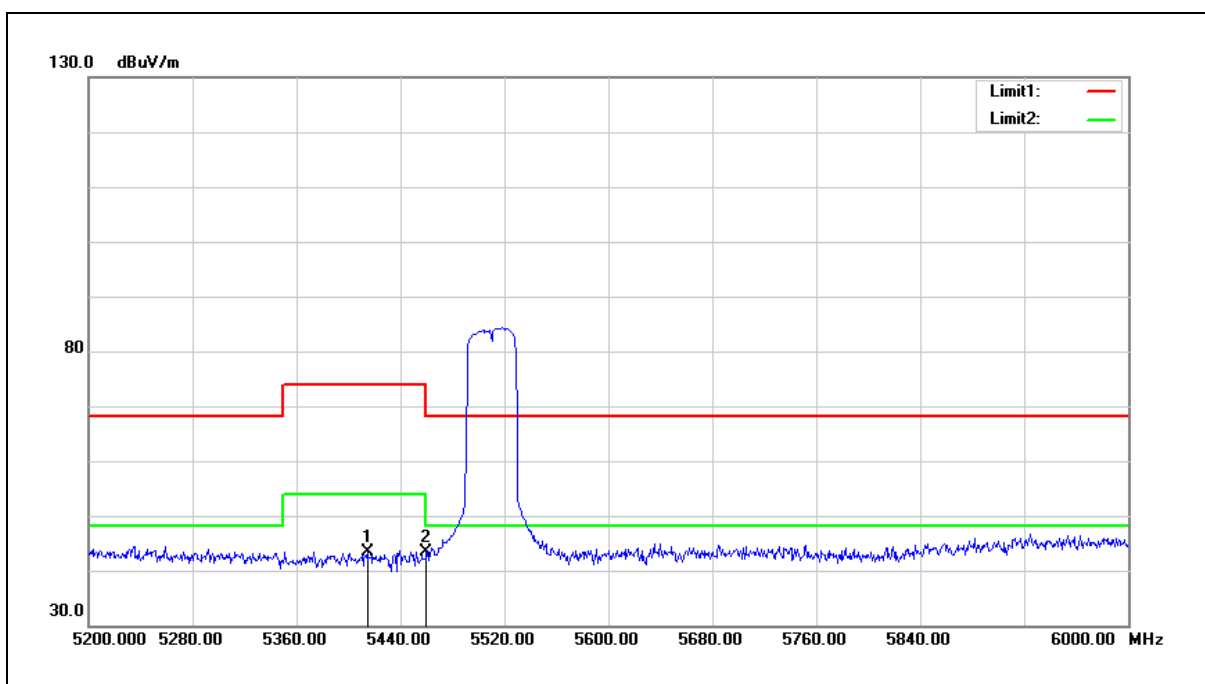


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5414.400	43.04	0.41	43.45	54.00	-10.55	AVG
2	5460.000	42.89	0.51	43.40	54.00	-10.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5510 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

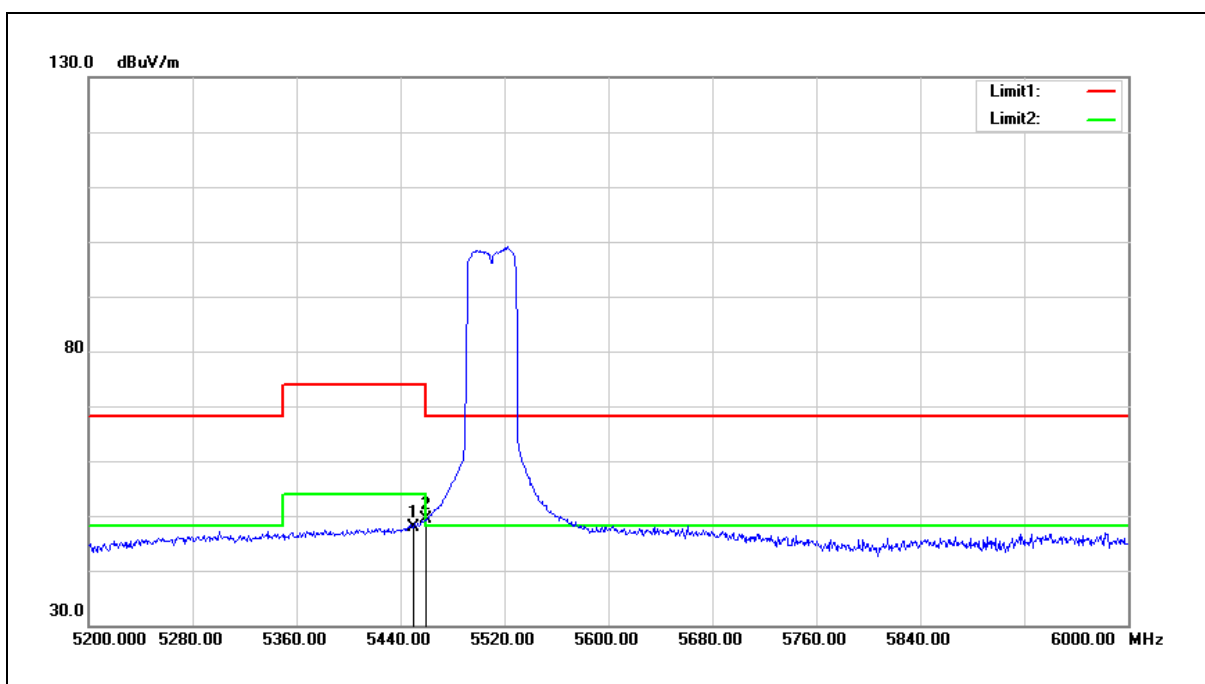


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5450.400	47.30	0.48	47.78	54.00	-6.22	AVG
2	5460.000	48.79	0.51	49.30	54.00	-4.70	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

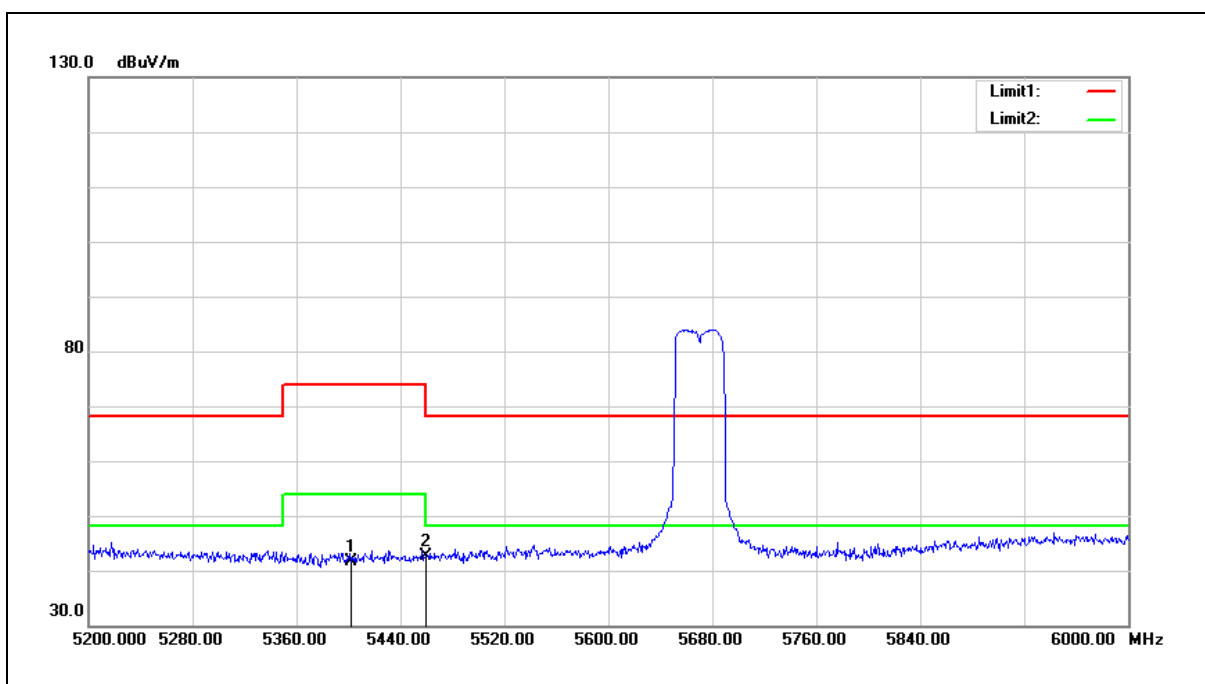


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5402.400	41.26	0.39	41.65	54.00	-12.35	AVG
2	5460.000	42.23	0.51	42.74	54.00	-11.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5550 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

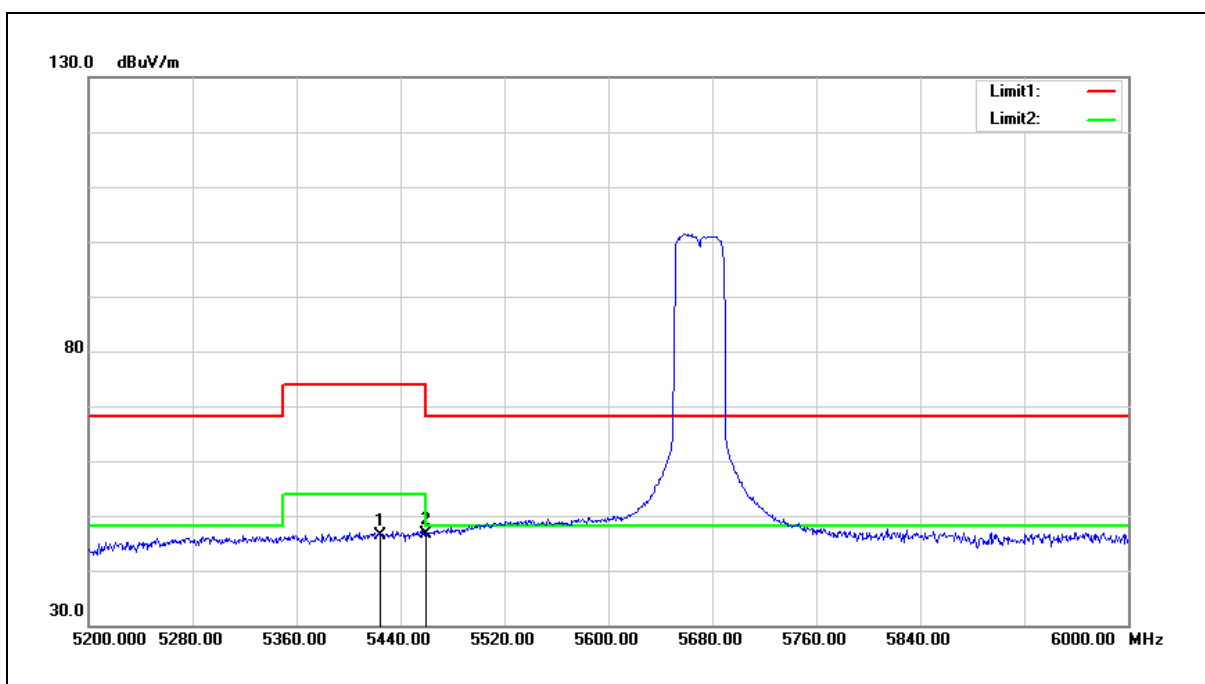


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5424.800	45.91	0.43	46.34	54.00	-7.66	AVG
2	5460.000	46.08	0.51	46.59	54.00	-7.41	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

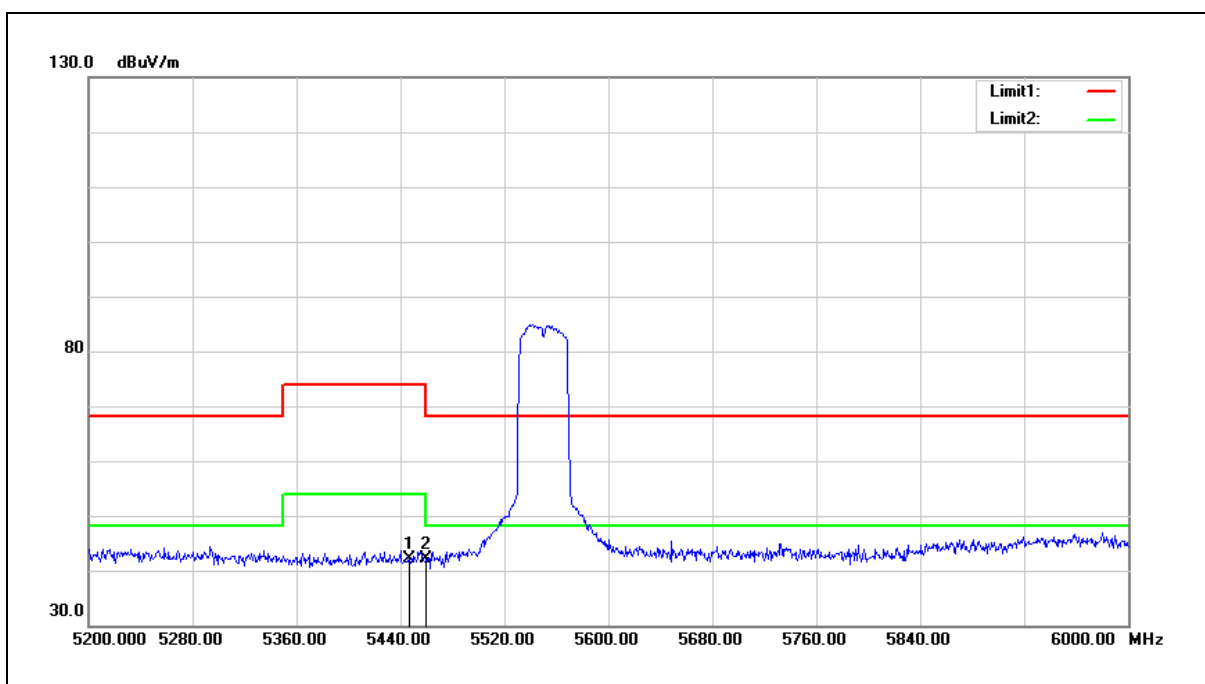


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5447.200	41.74	0.48	42.22	54.00	-11.78	AVG
2	5460.000	41.52	0.51	42.03	54.00	-11.97	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Band edge		
Frequency:	5670 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

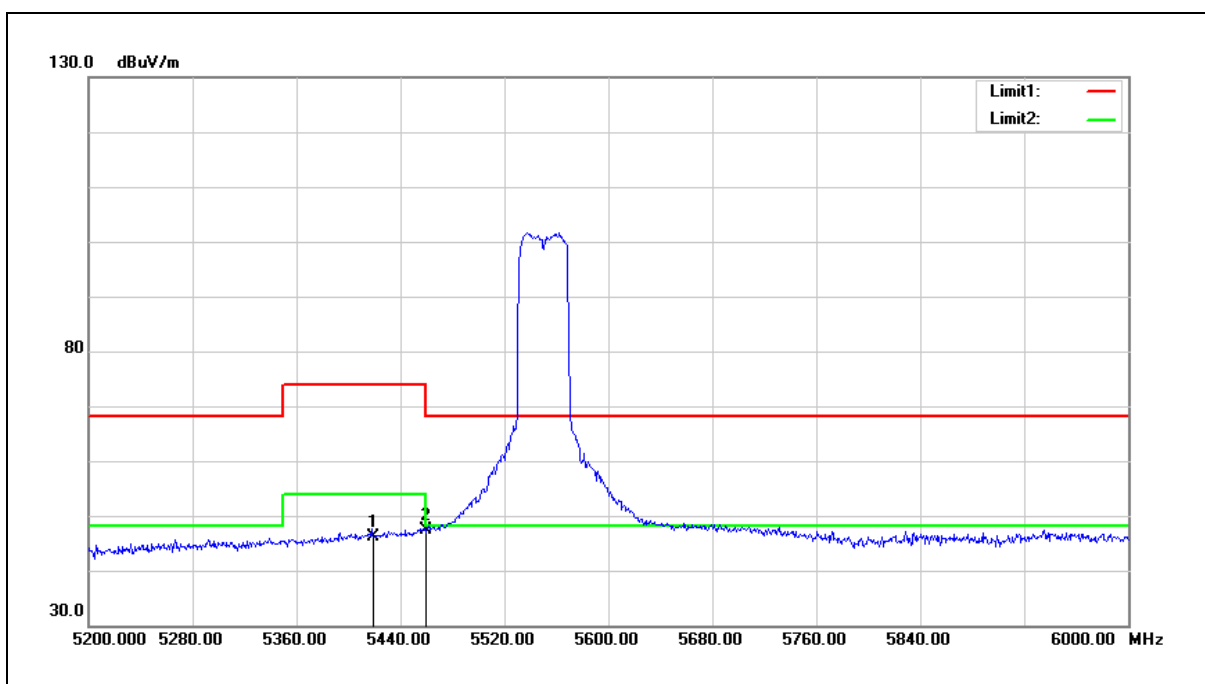

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5419.200	45.78	0.43	46.21	54.00	-7.79	AVG
2	5460.000	46.85	0.51	47.36	54.00	-6.64	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

MIMO

Below 1 GHz

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5190 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

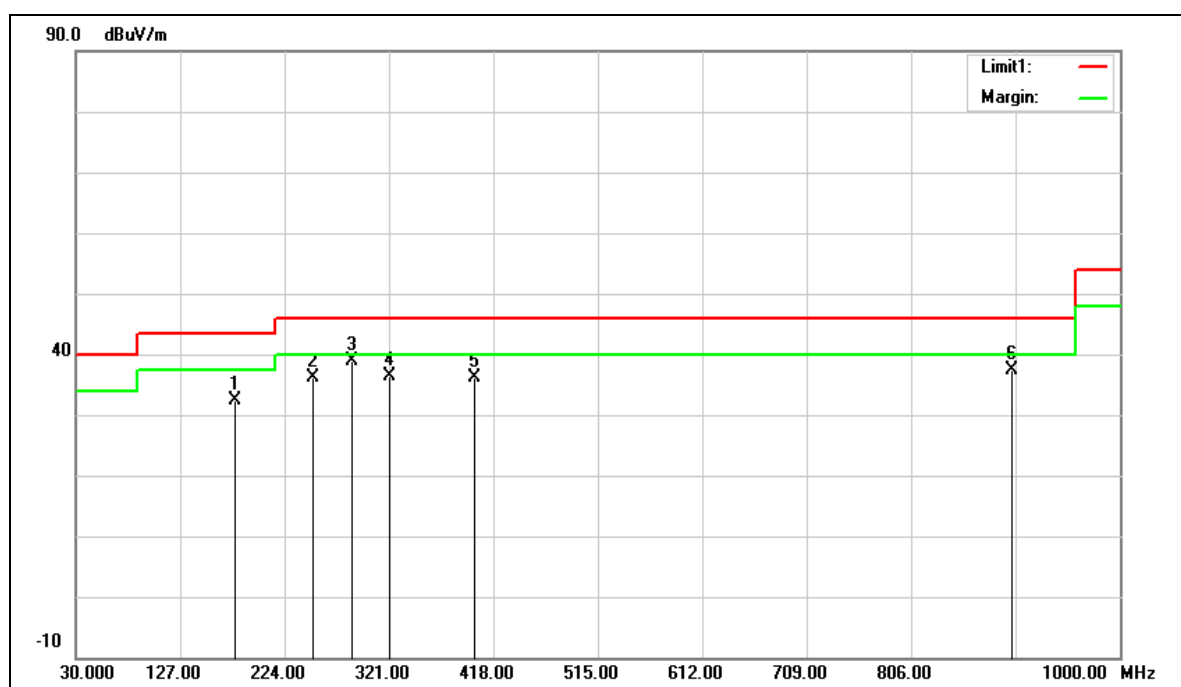

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	177.4400	56.89	-24.60	32.29	43.50	-11.21	QP
2	250.1900	60.51	-24.26	36.25	46.00	-9.75	QP
3	287.0500	61.84	-23.01	38.83	46.00	-7.17	QP
4	321.9700	58.69	-22.30	36.39	46.00	-9.61	QP
5	400.5400	55.97	-19.90	36.07	46.00	-9.93	QP
6	900.0900	48.22	-10.77	37.45	46.00	-8.55	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 32.29= -24.60+56.89.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Radiated Emission		
Frequency:	5190 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

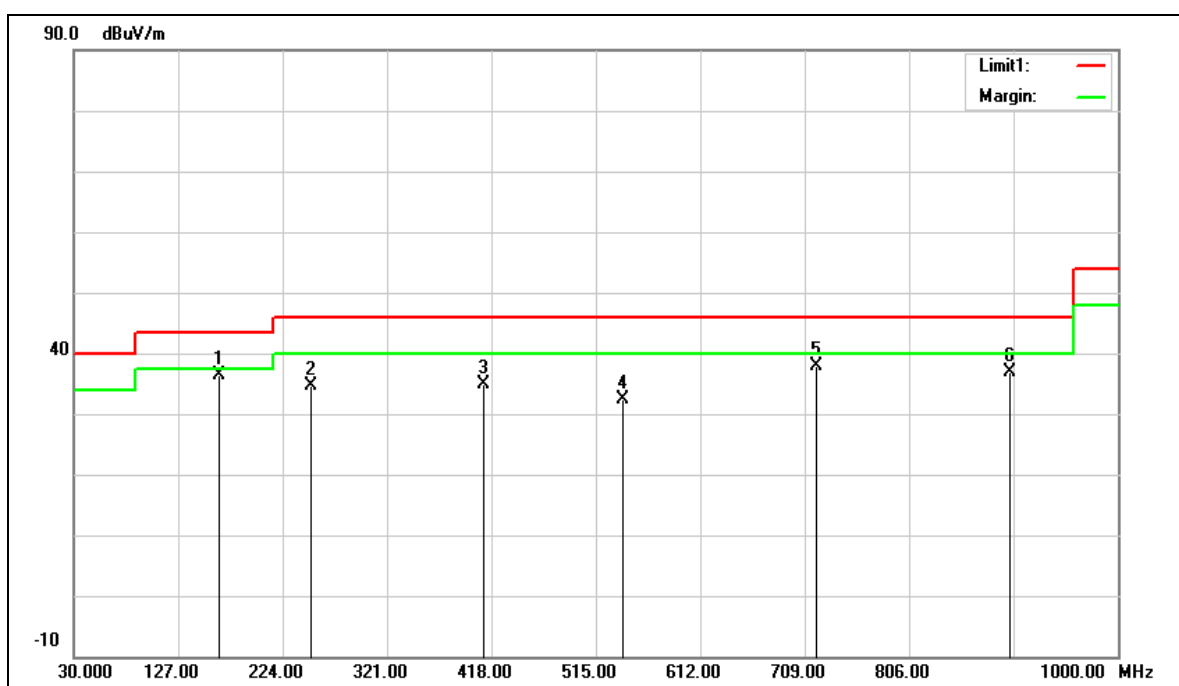

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	164.8300	59.90	-23.54	36.36	43.50	-7.14	QP
2	250.1900	59.00	-24.26	34.74	46.00	-11.26	QP
3	410.2400	54.58	-19.70	34.88	46.00	-11.12	QP
4	540.2200	49.58	-17.19	32.39	46.00	-13.61	QP
5	719.6700	51.37	-13.56	37.81	46.00	-8.19	QP
6	900.0900	47.72	-10.77	36.95	46.00	-9.05	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 36.36= -23.54+59.90.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Above 1 GHz

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

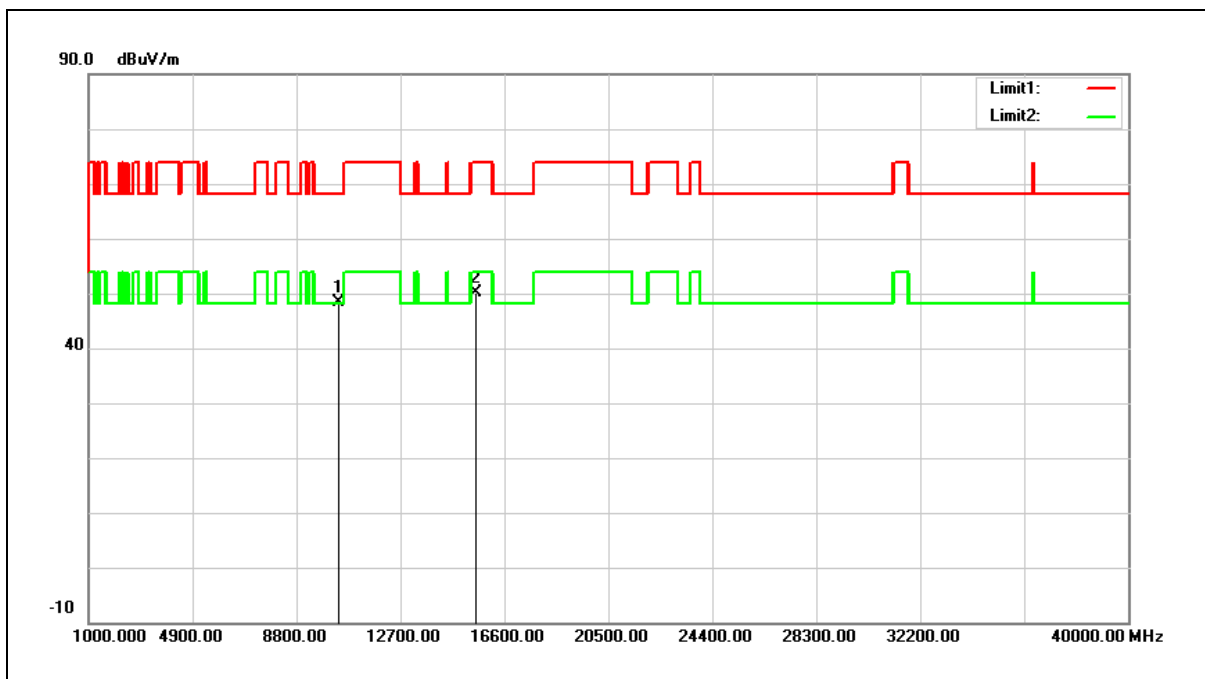


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	34.06	14.29	48.35	68.20	-19.85	peak
2	15540.000	33.32	16.86	50.18	74.00	-23.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

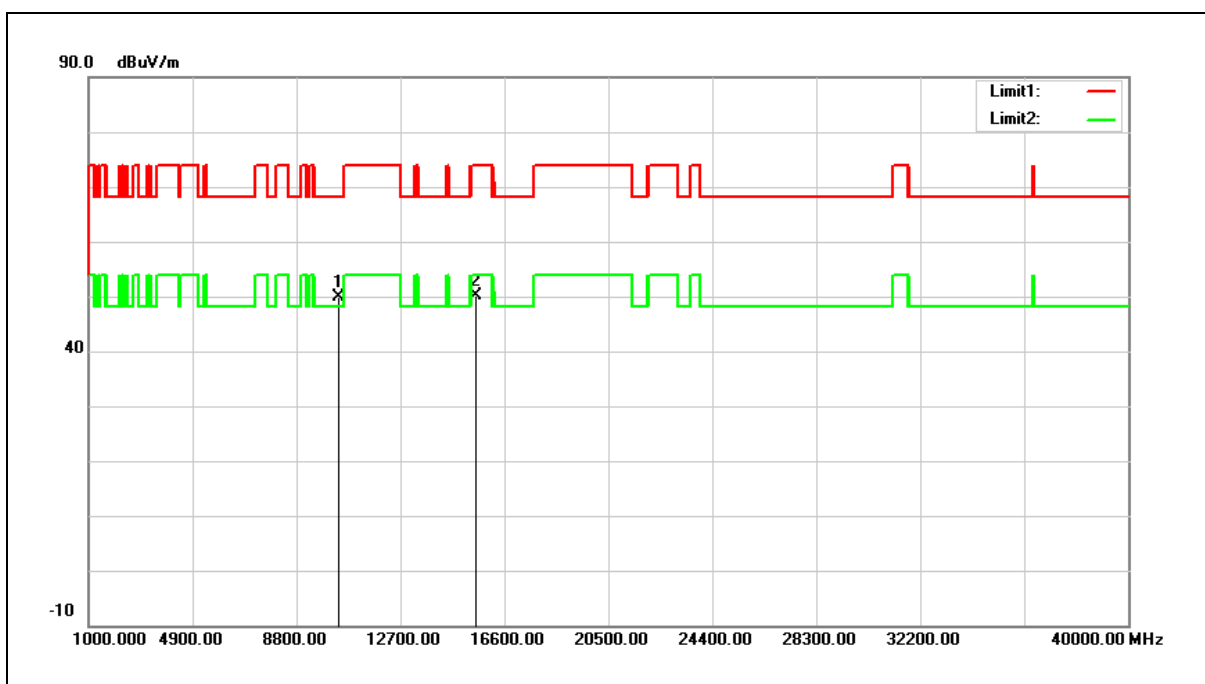


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.53	14.29	49.82	68.20	-18.38	peak
2	15540.000	33.30	16.86	50.16	74.00	-23.84	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

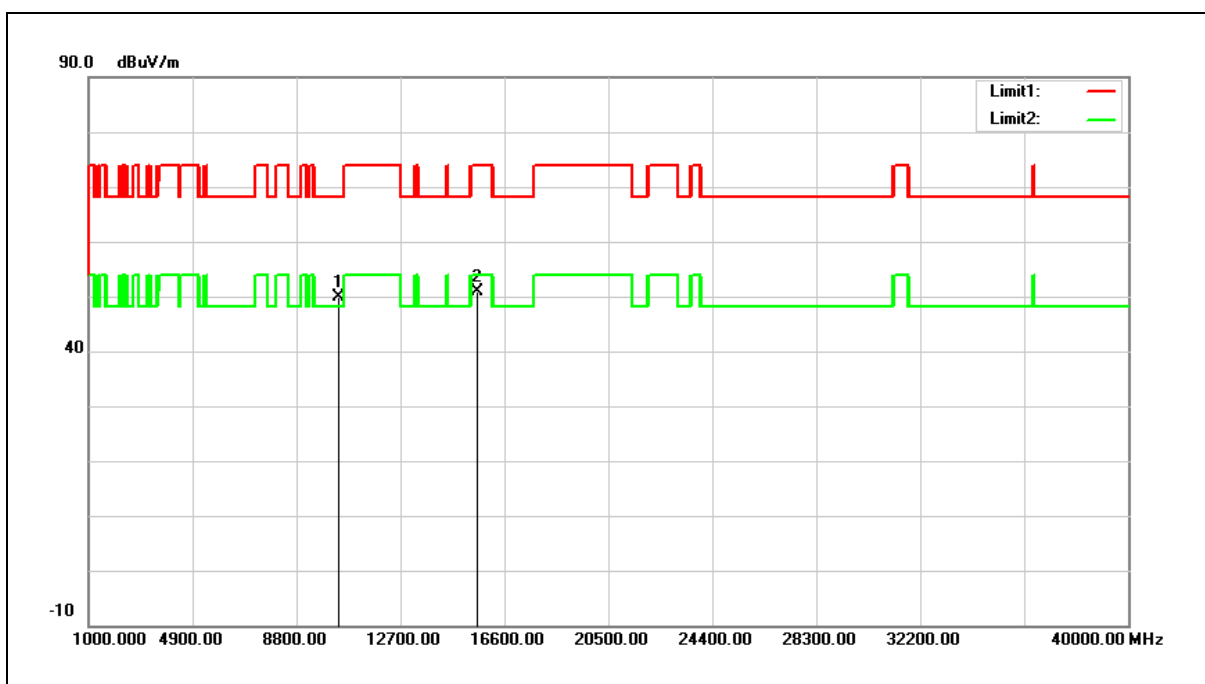


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	35.52	14.38	49.90	68.20	-18.30	peak
2	15600.000	34.24	16.65	50.89	74.00	-23.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

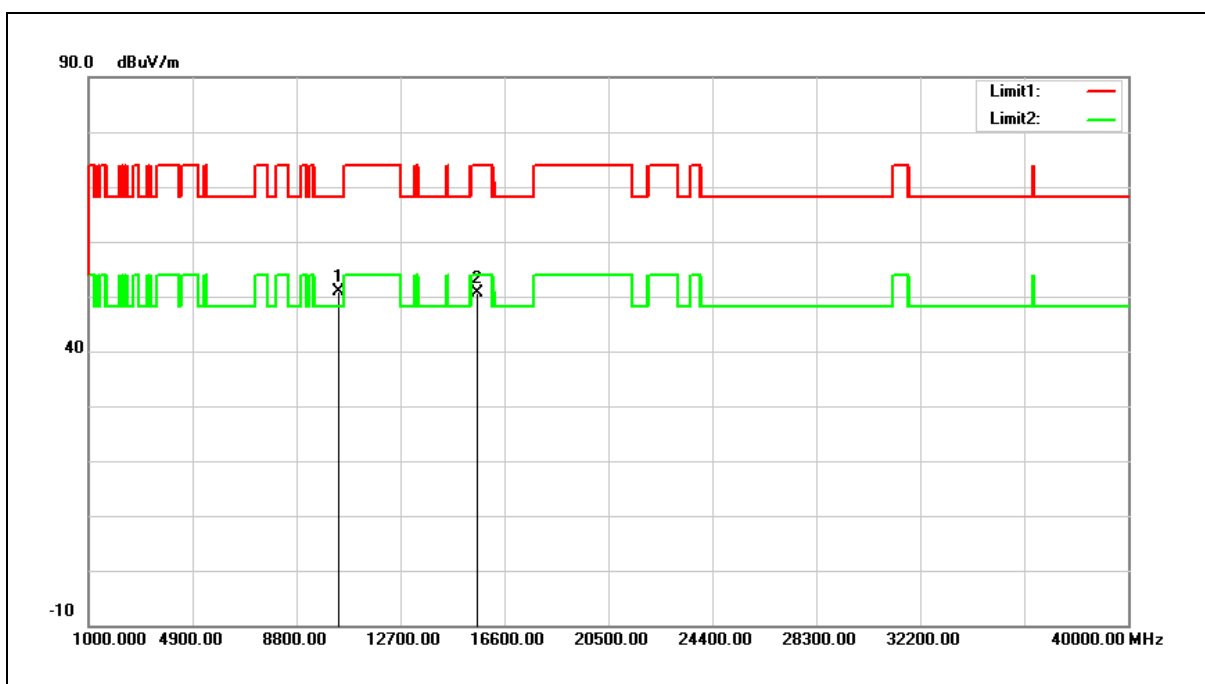


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	36.61	14.38	50.99	68.20	-17.21	peak
2	15600.000	33.95	16.65	50.60	74.00	-23.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

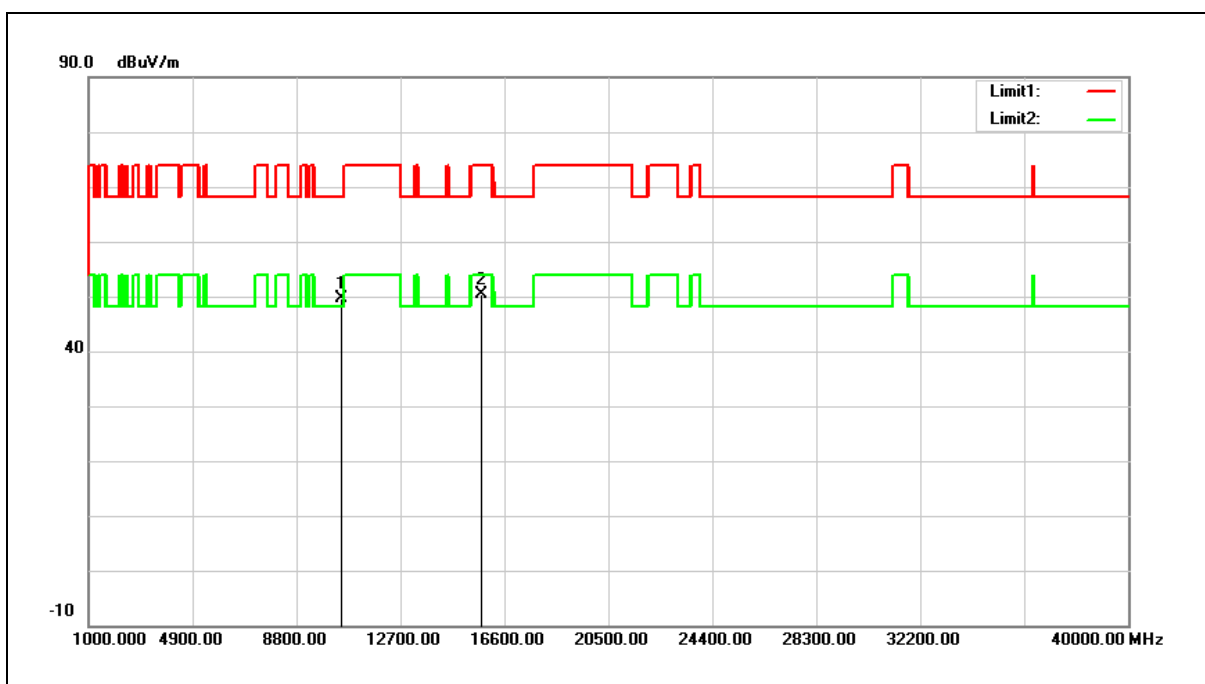


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.18	14.55	49.73	68.20	-18.47	peak
2	15720.000	34.07	16.24	50.31	74.00	-23.69	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

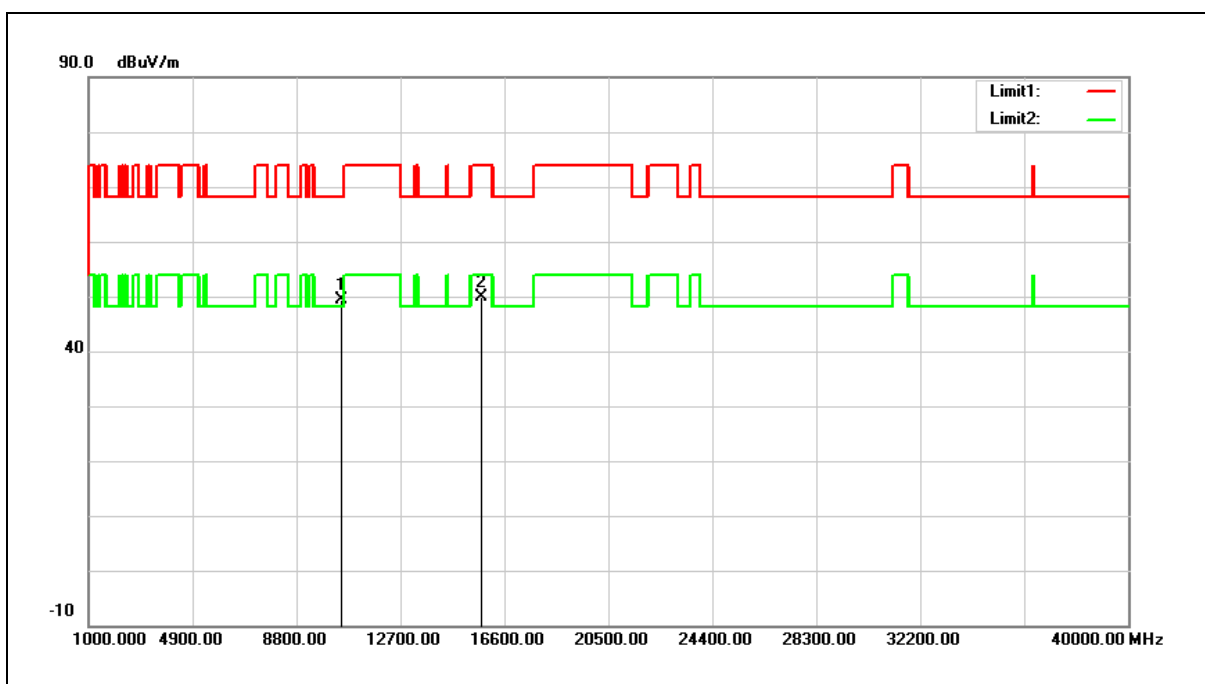


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	34.85	14.55	49.40	68.20	-18.80	peak
2	15720.000	33.74	16.24	49.98	74.00	-24.02	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

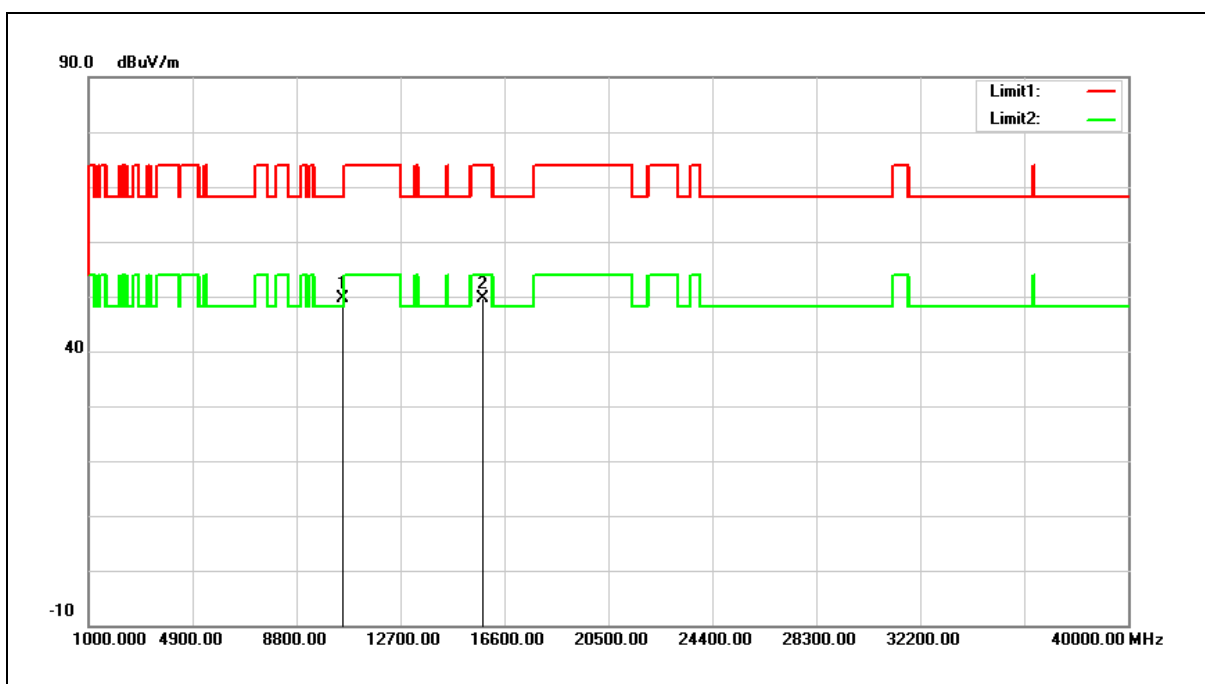


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.98	14.59	49.57	68.20	-18.63	peak
2	15780.000	33.60	16.06	49.66	74.00	-24.34	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

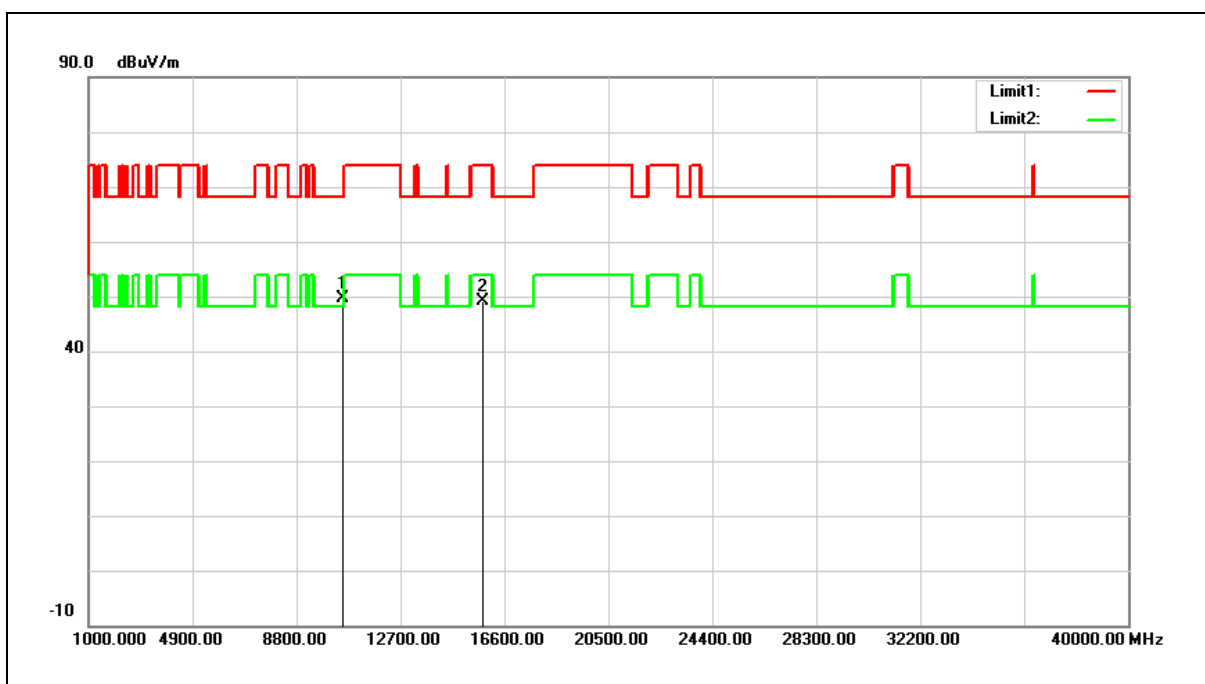


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	35.10	14.59	49.69	68.20	-18.51	peak
2	15780.000	33.04	16.06	49.10	74.00	-24.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

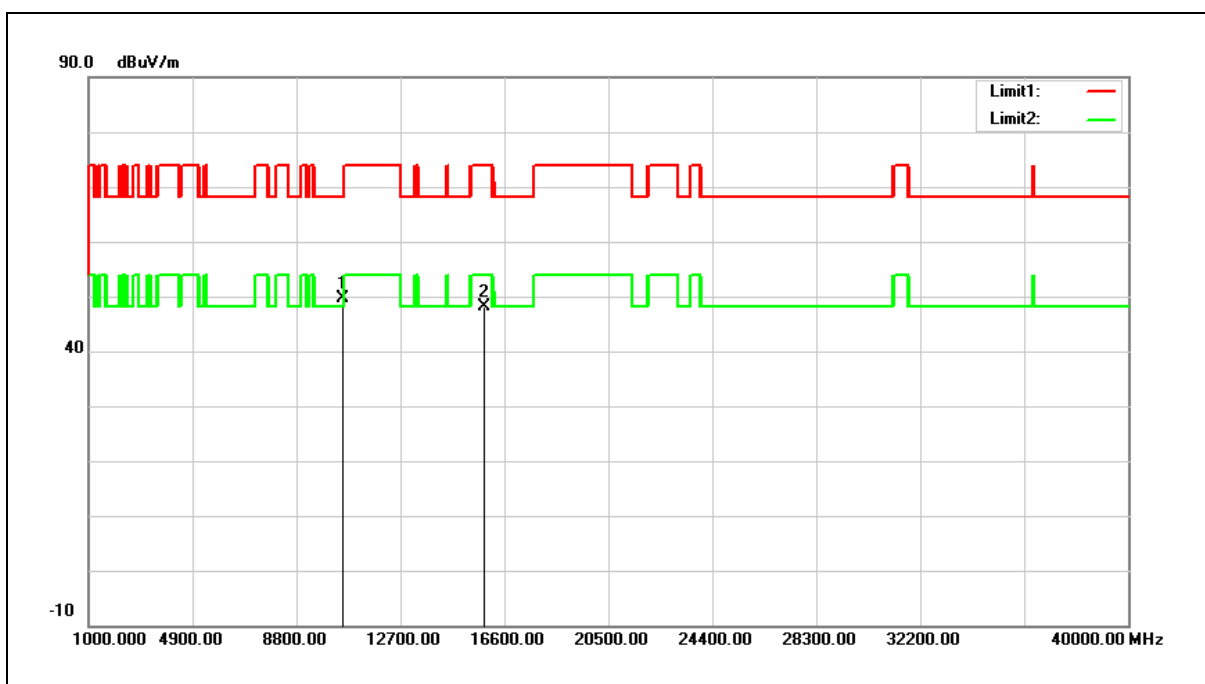


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.95	14.58	49.53	68.20	-18.67	peak
2	15840.000	32.25	15.85	48.10	74.00	-25.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

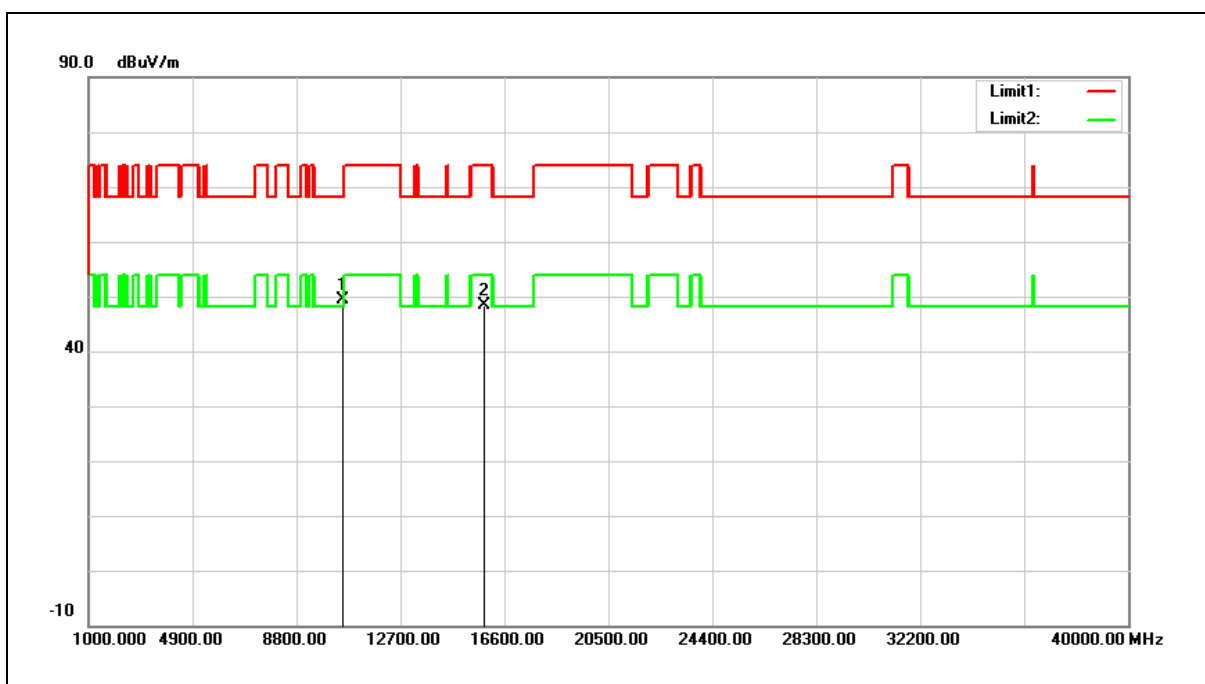


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.86	14.58	49.44	68.20	-18.76	peak
2	15840.000	32.61	15.85	48.46	74.00	-25.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

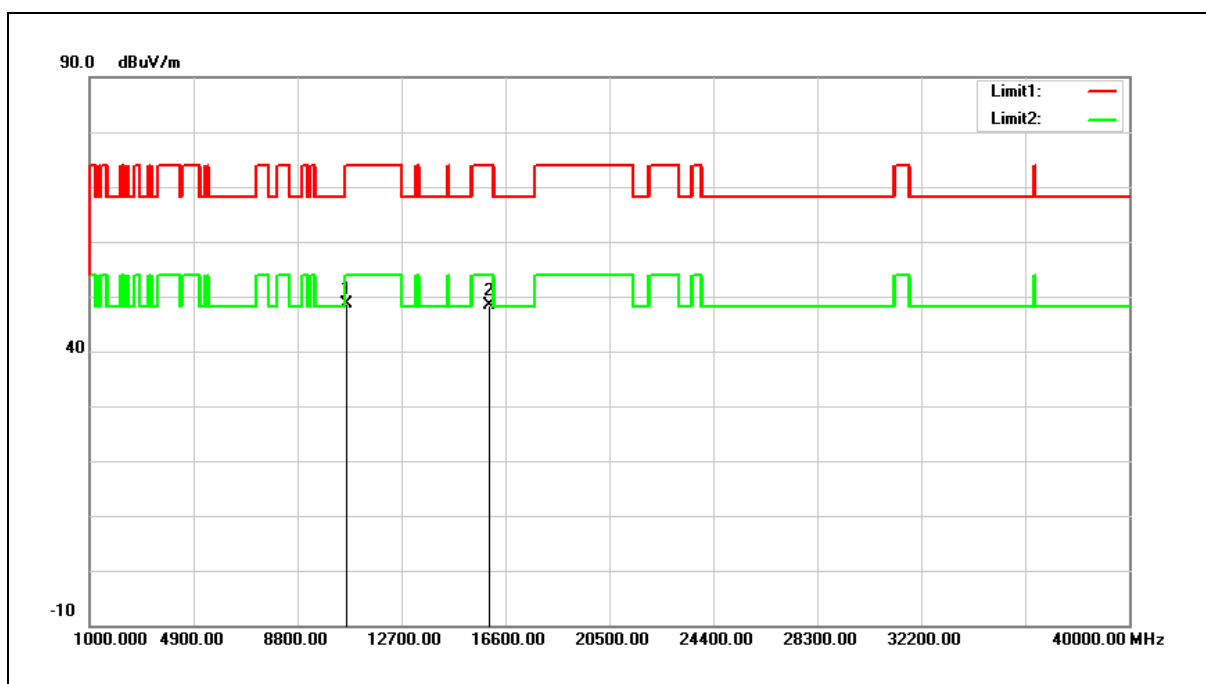


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.13	14.56	48.69	74.00	-25.31	peak
2	15960.000	32.90	15.44	48.34	74.00	-25.66	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5320 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

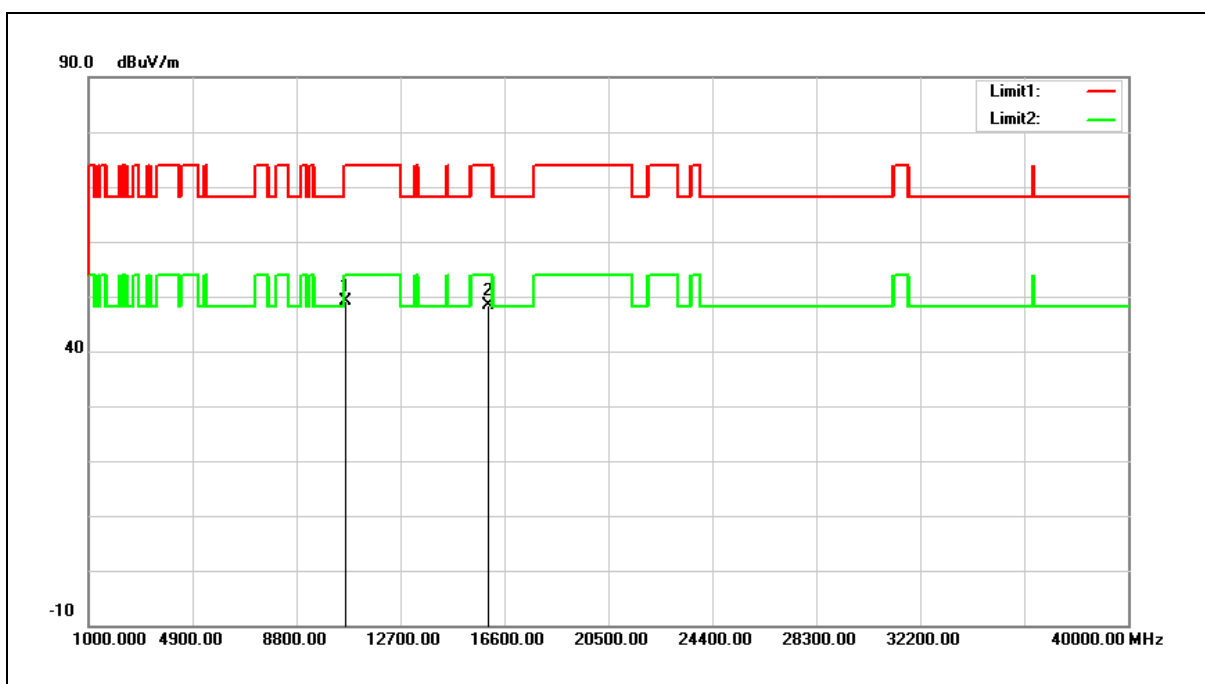


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10640.000	34.55	14.56	49.11	74.00	-24.89	peak
2	15960.000	33.06	15.44	48.50	74.00	-25.50	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

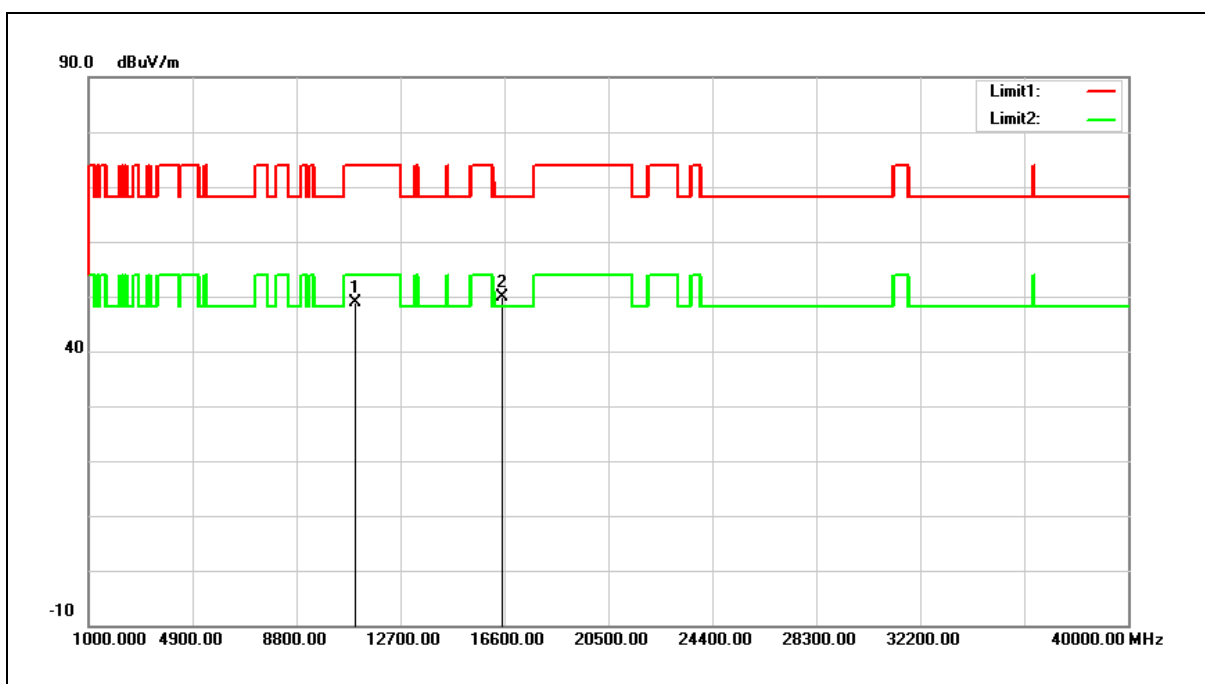


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.37	14.47	48.84	74.00	-25.16	peak
2	16500.000	33.31	16.63	49.94	68.20	-18.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5500 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

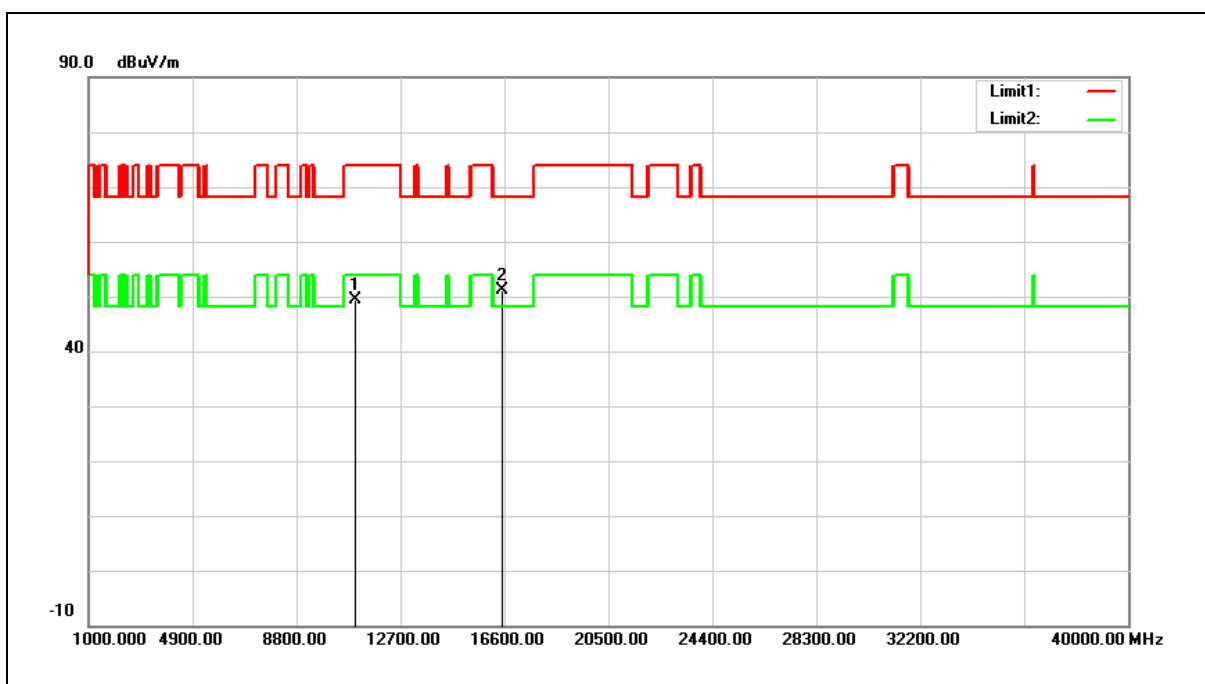


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11000.000	34.83	14.47	49.30	74.00	-24.70	peak
2	16500.000	34.54	16.63	51.17	68.20	-17.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

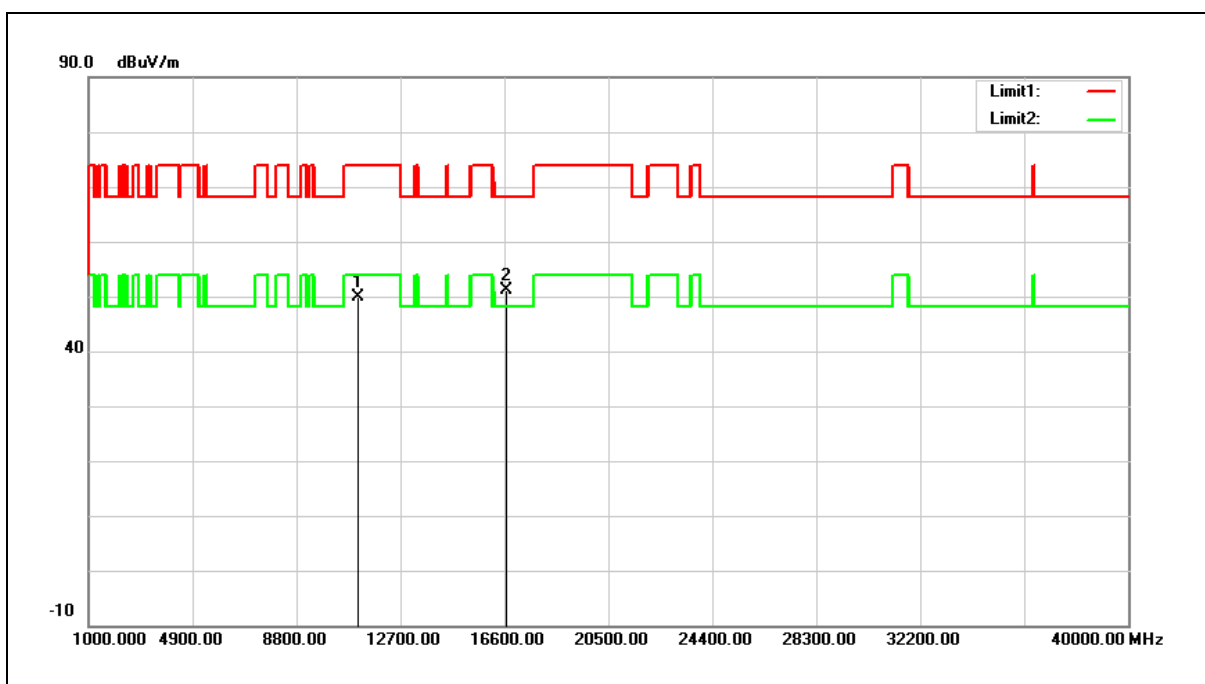


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.06	14.70	49.76	74.00	-24.24	peak
2	16680.000	33.28	17.95	51.23	68.20	-16.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5560 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

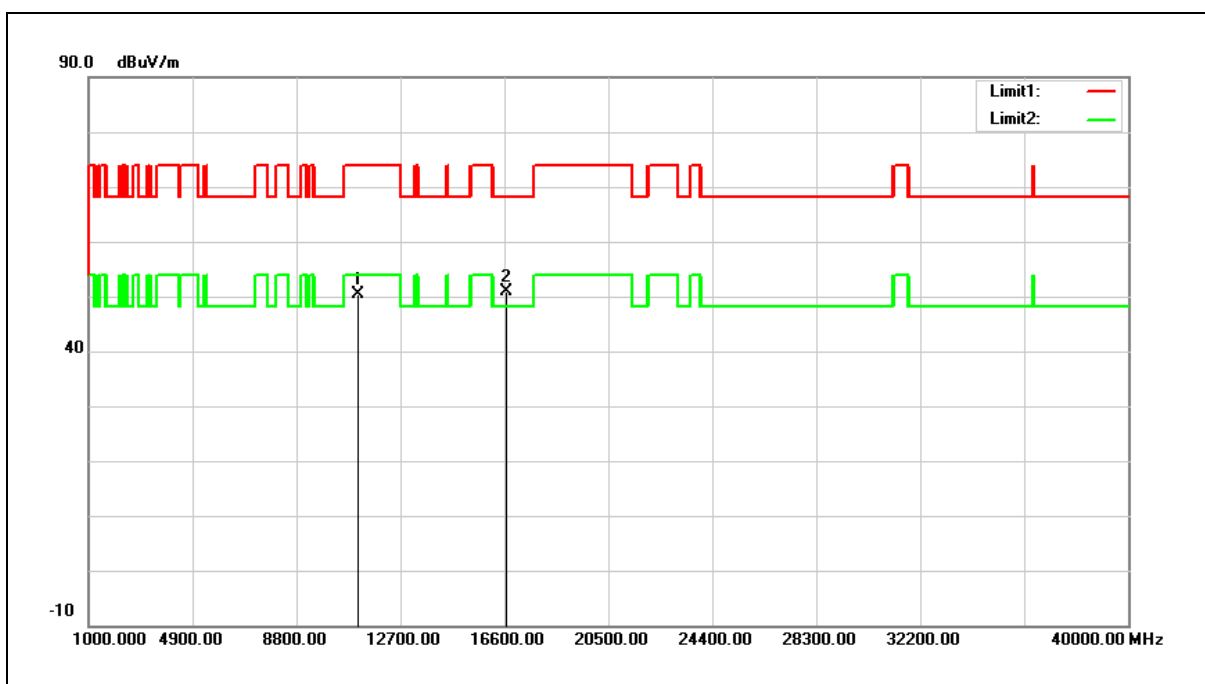


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11120.000	35.61	14.70	50.31	74.00	-23.69	peak
2	16680.000	32.88	17.95	50.83	68.20	-17.37	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

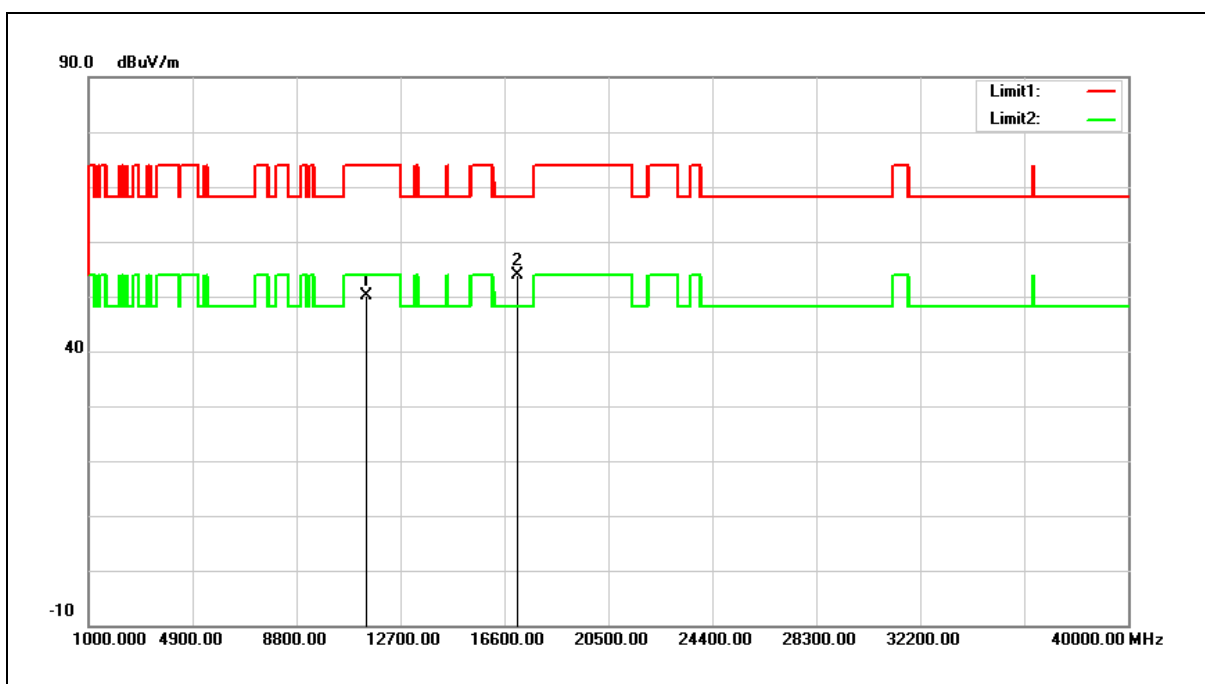


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.81	15.22	50.03	74.00	-23.97	peak
2	17100.000	32.95	20.89	53.84	68.20	-14.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5700 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

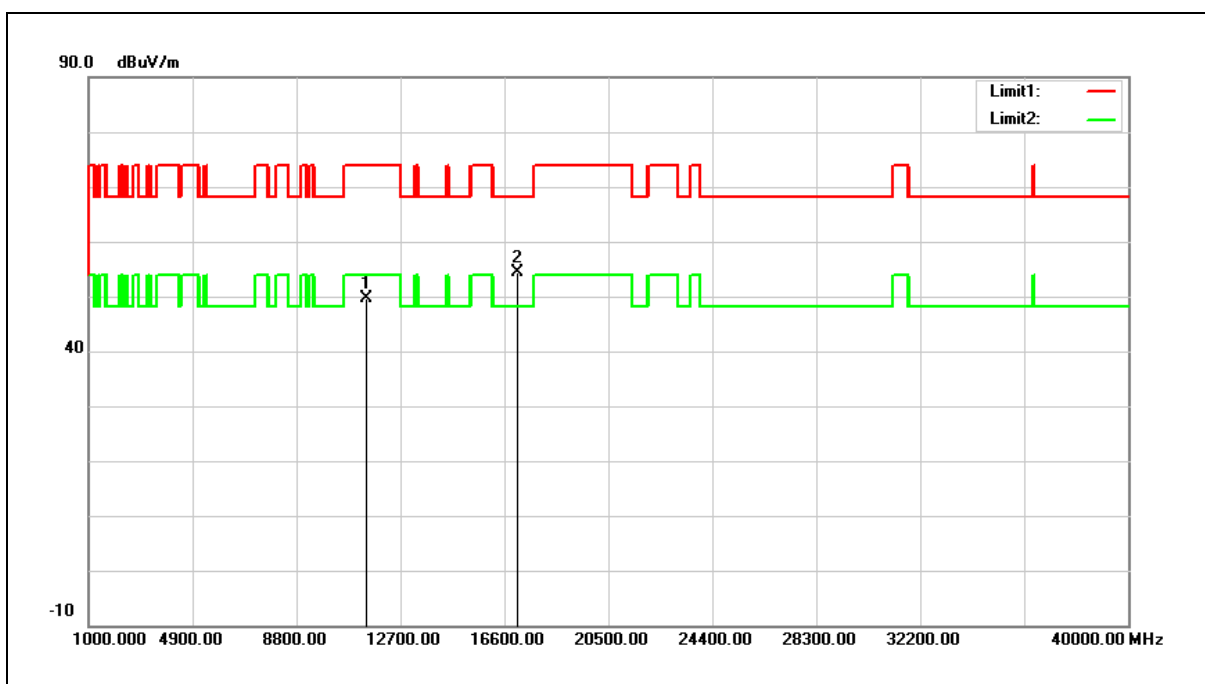


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11400.000	34.53	15.22	49.75	74.00	-24.25	peak
2	17100.000	33.52	20.89	54.41	68.20	-13.79	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

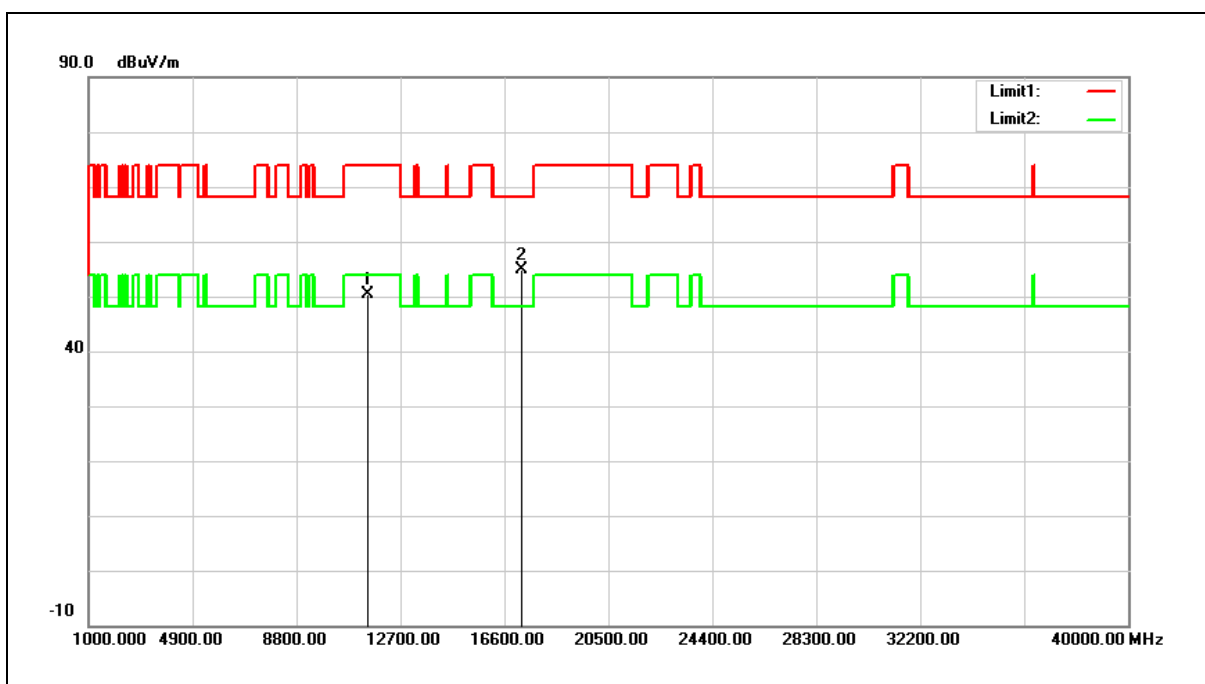


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	34.91	15.39	50.30	74.00	-23.70	peak
2	17235.000	33.20	21.71	54.91	68.20	-13.29	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5745 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

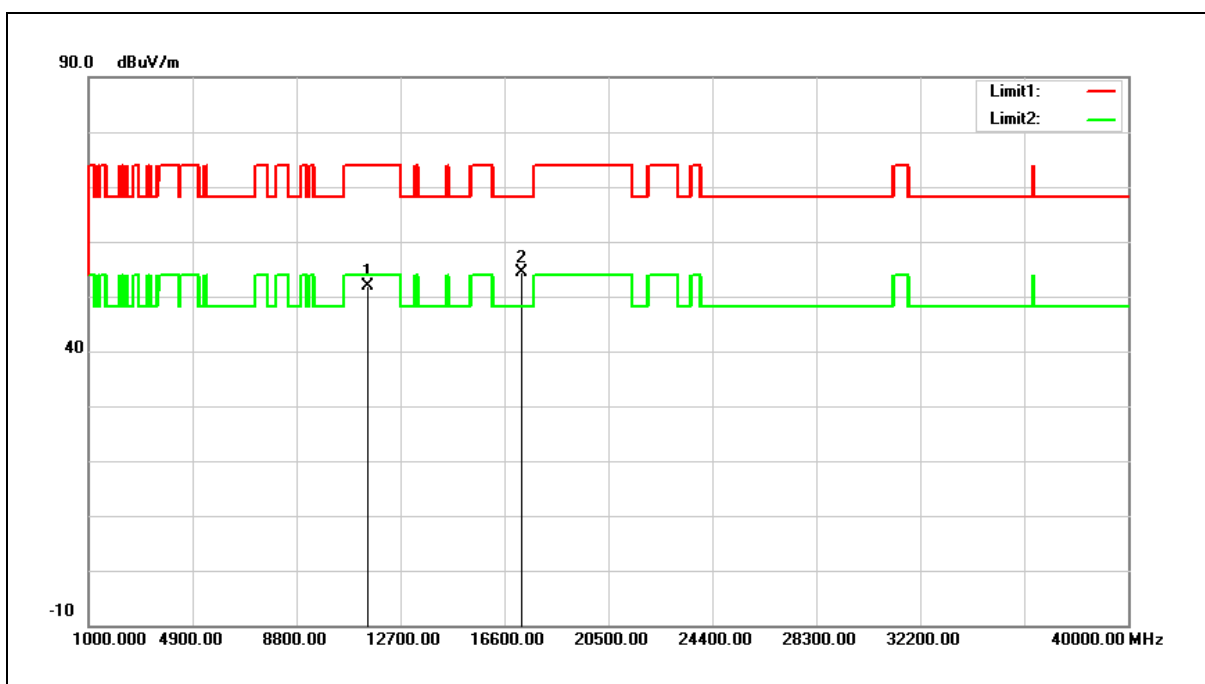


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	36.39	15.39	51.78	74.00	-22.22	peak
2	17235.000	32.59	21.71	54.30	68.20	-13.90	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

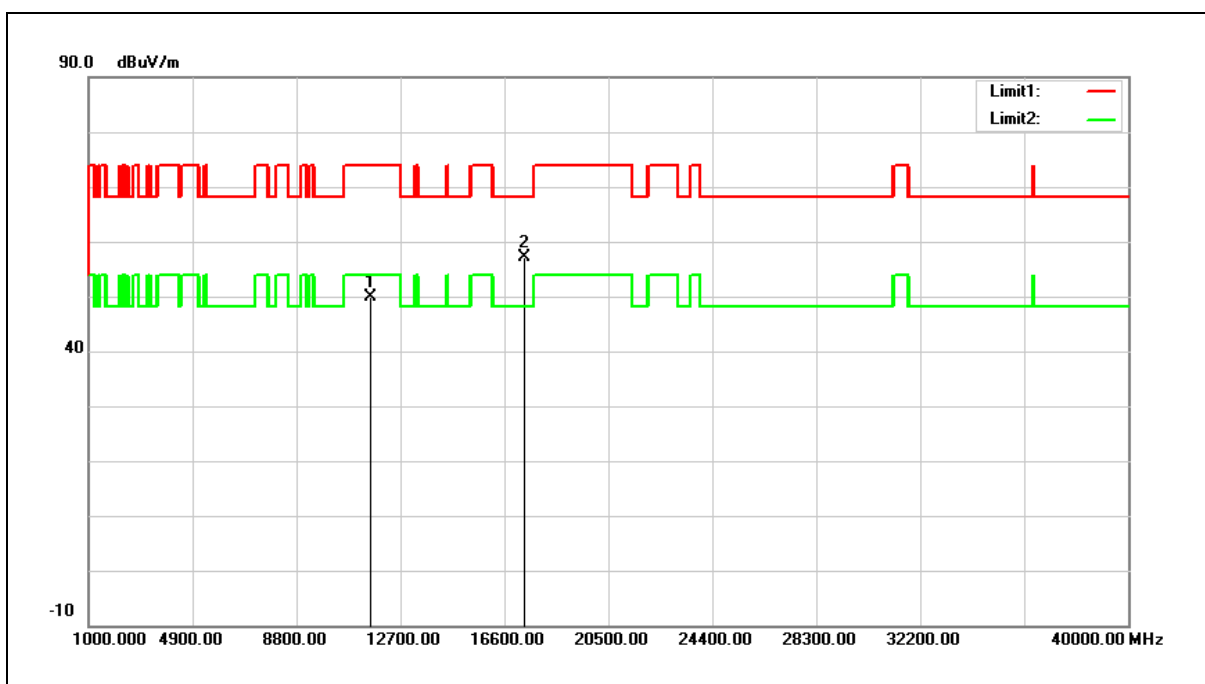


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.55	15.25	49.80	74.00	-24.20	peak
2	17355.000	34.71	22.42	57.13	68.20	-11.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5785 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

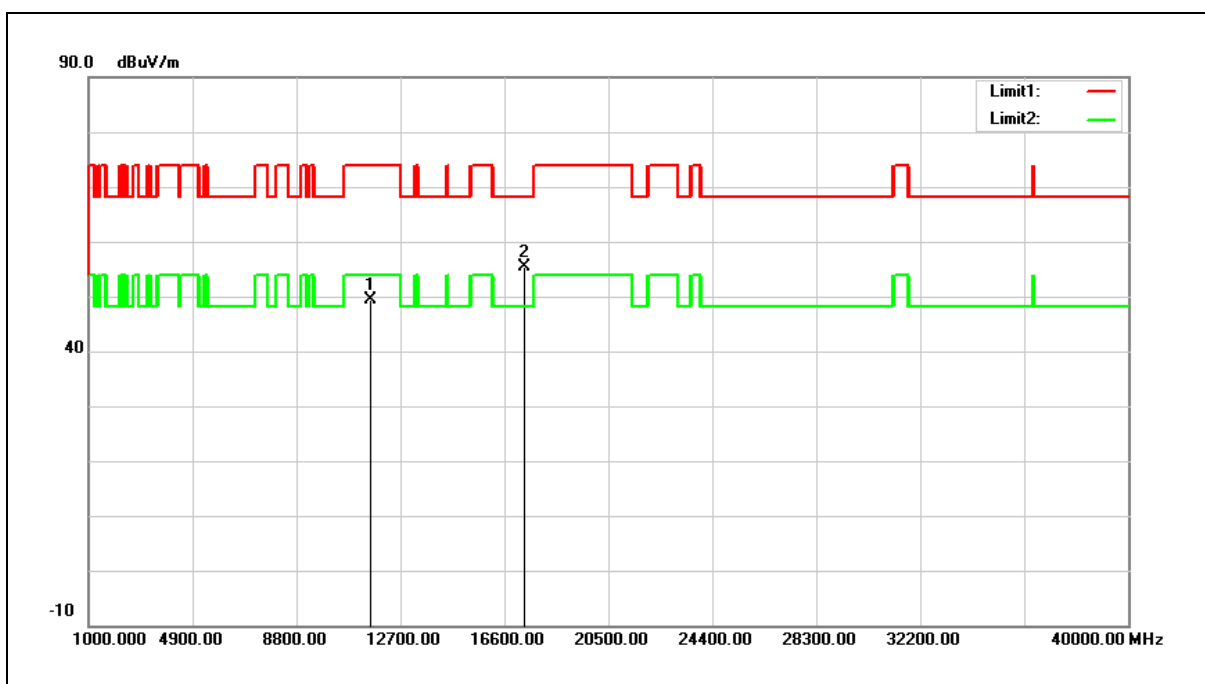


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	34.14	15.25	49.39	74.00	-24.61	peak
2	17355.000	33.08	22.42	55.50	68.20	-12.70	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

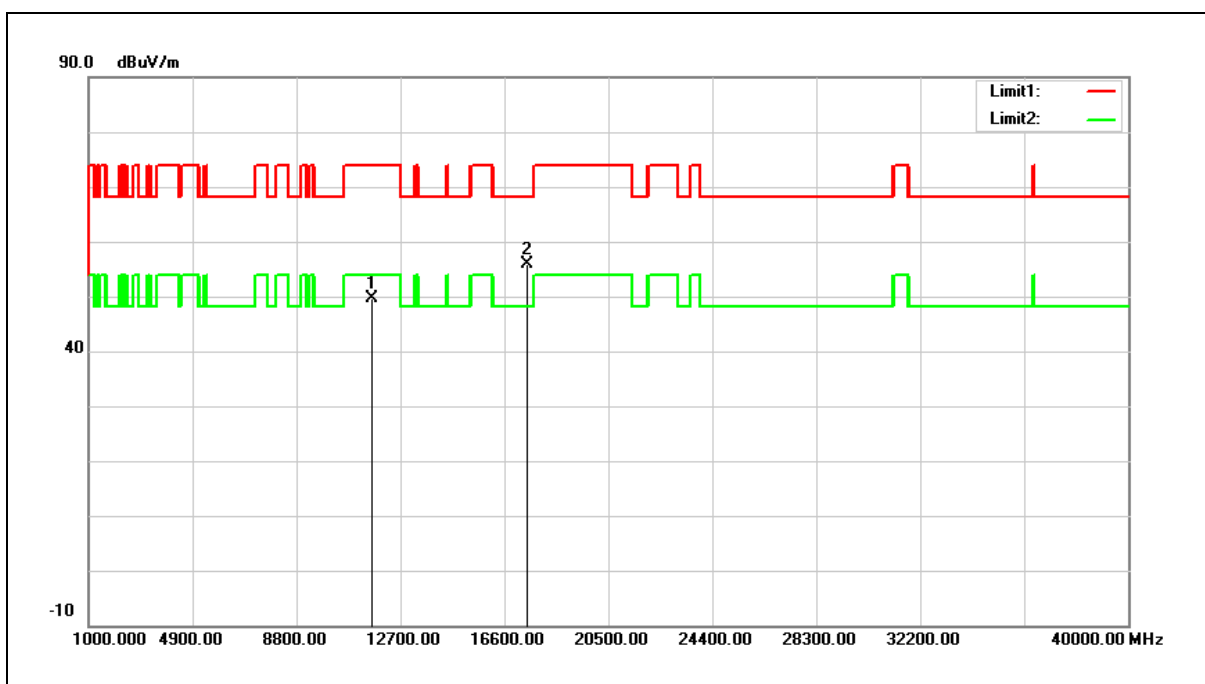


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	34.47	15.08	49.55	74.00	-24.45	peak
2	17475.000	32.75	23.13	55.88	68.20	-12.32	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5825 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

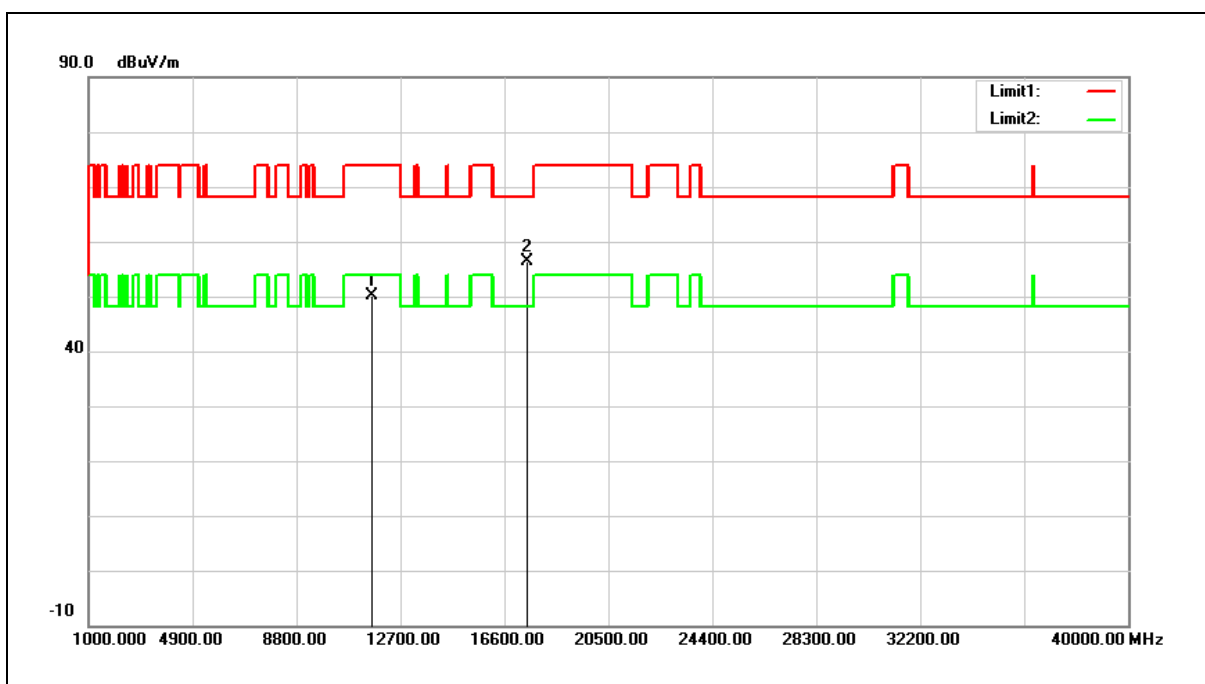


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	35.10	15.08	50.18	74.00	-23.82	peak
2	17475.000	33.31	23.13	56.44	68.20	-11.76	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

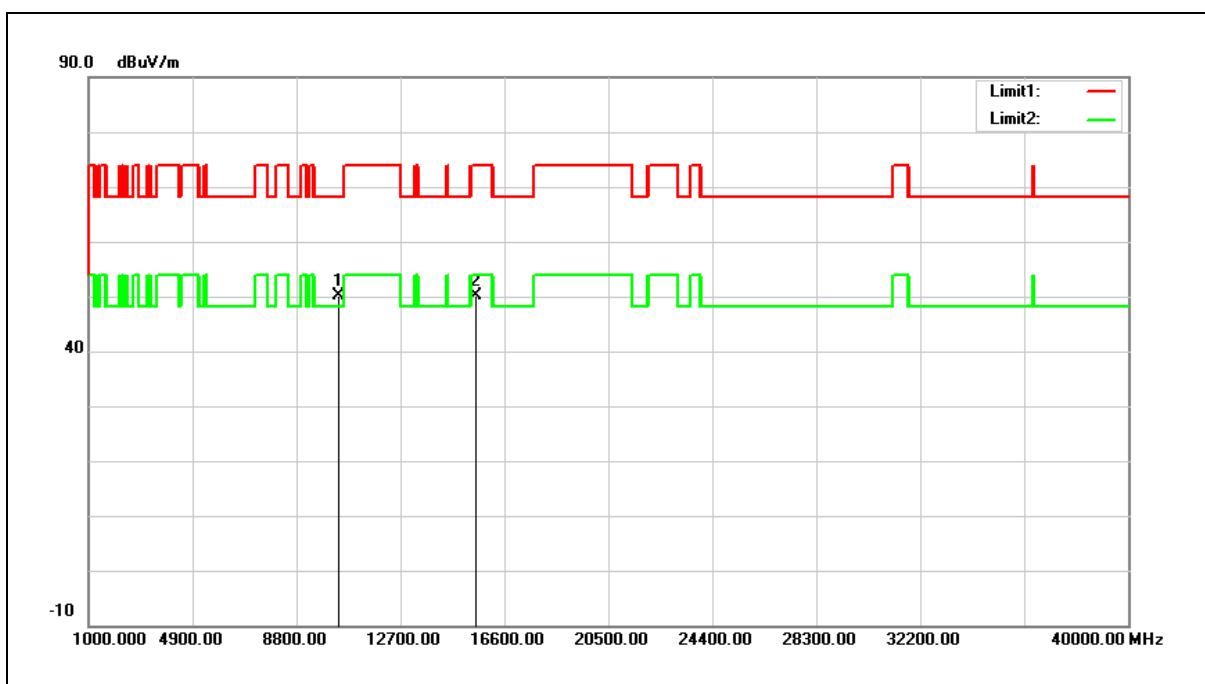


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.84	14.29	50.13	68.20	-18.07	peak
2	15540.000	33.29	16.86	50.15	74.00	-23.85	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5180 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

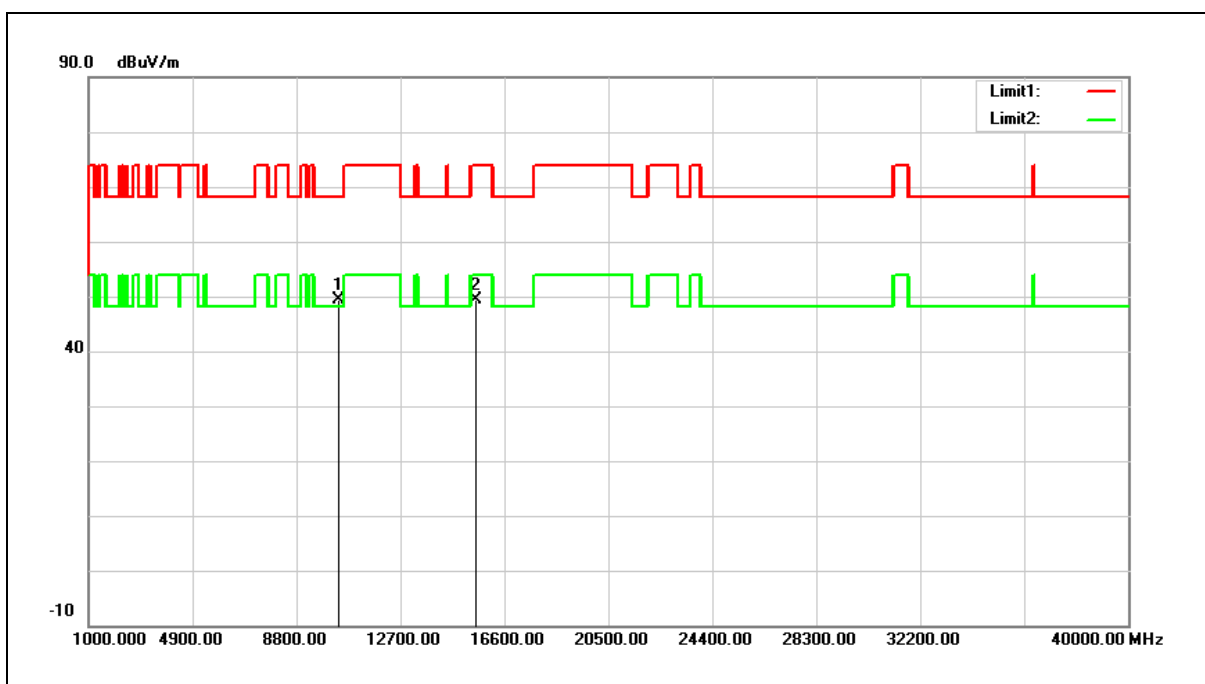


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	35.08	14.29	49.37	68.20	-18.83	peak
2	15540.000	32.46	16.86	49.32	74.00	-24.68	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

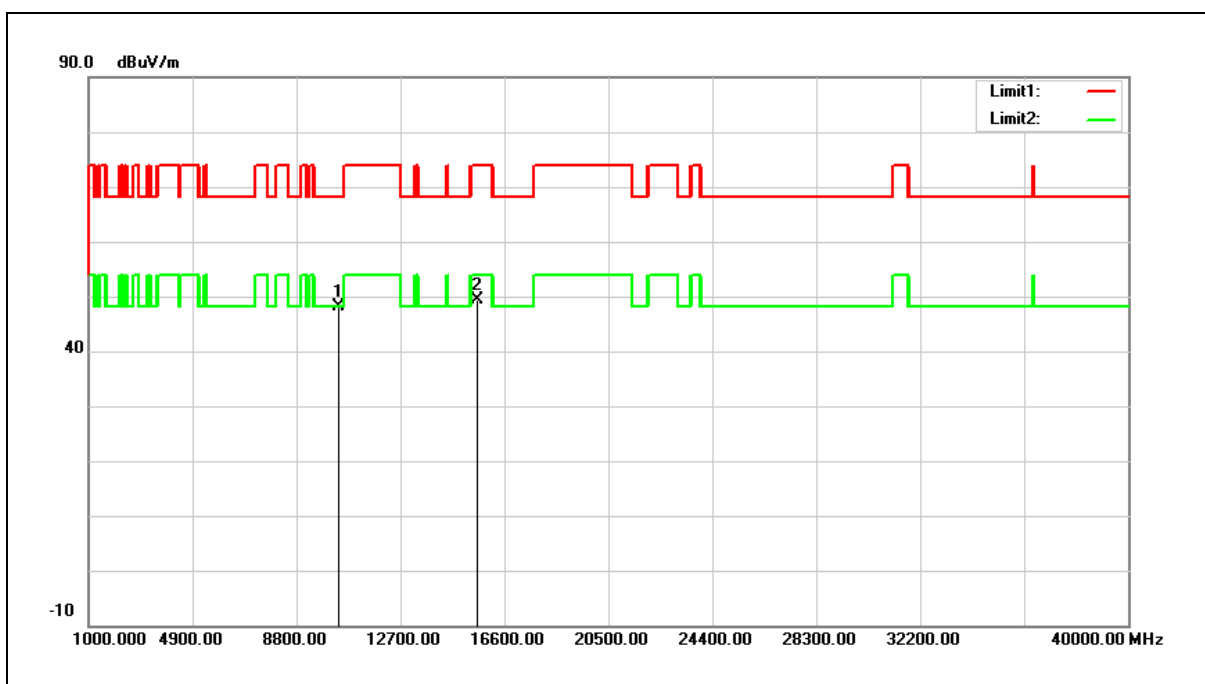


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	33.77	14.38	48.15	68.20	-20.05	peak
2	15600.000	32.80	16.65	49.45	74.00	-24.55	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5200 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

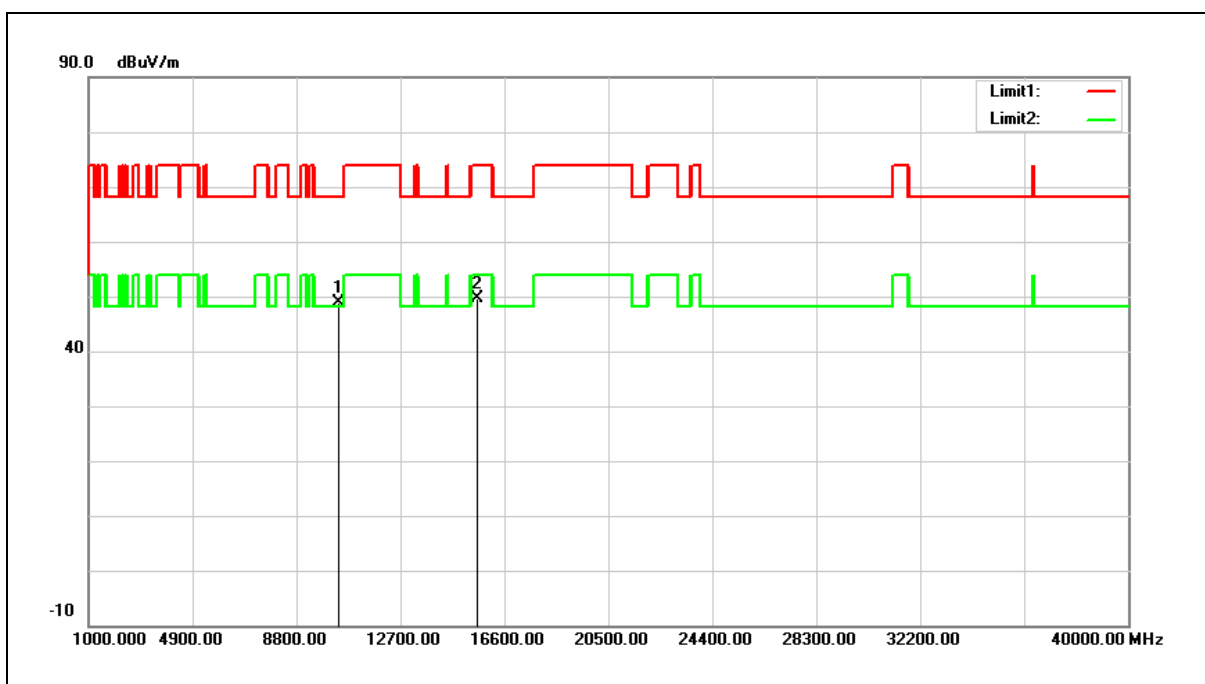


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	34.61	14.38	48.99	68.20	-19.21	peak
2	15600.000	33.05	16.65	49.70	74.00	-24.30	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

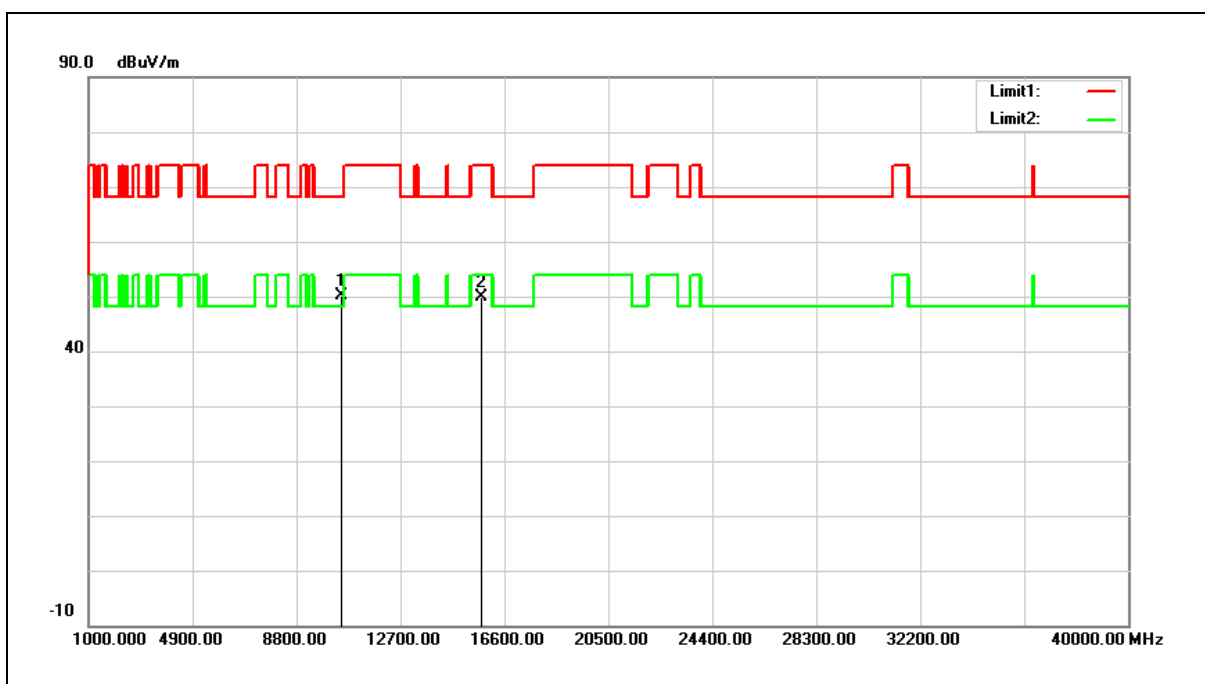


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.55	14.55	50.10	68.20	-18.10	peak
2	15720.000	33.69	16.24	49.93	74.00	-24.07	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5240 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

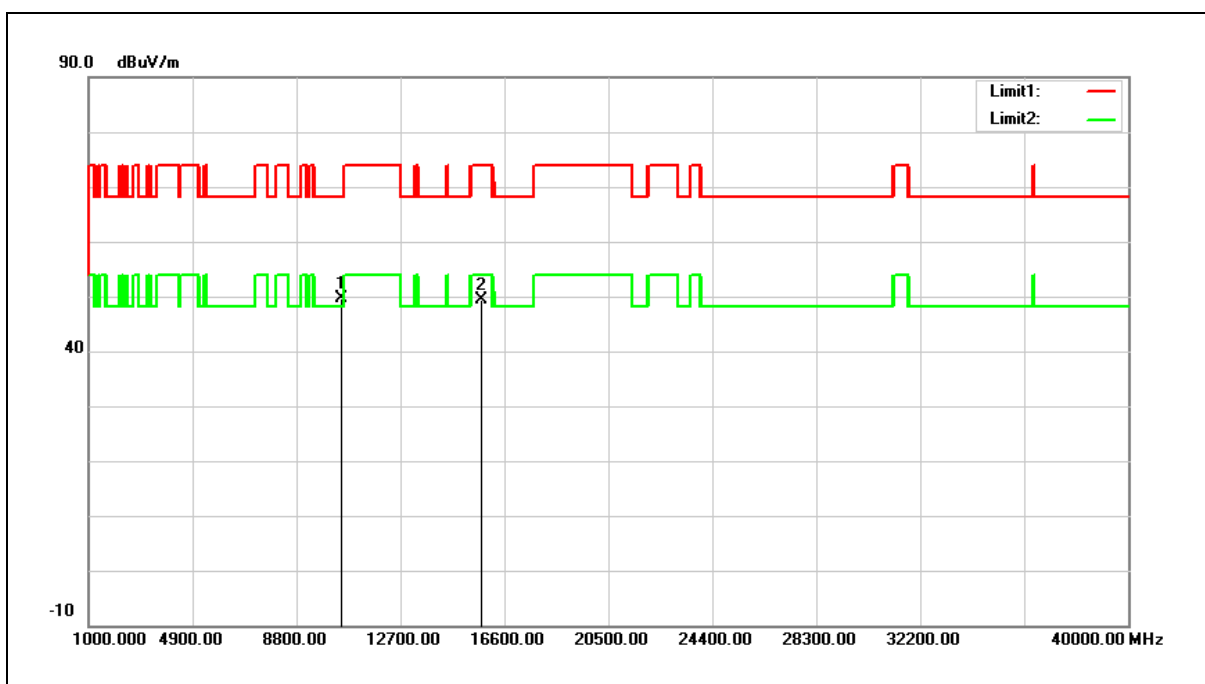


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	35.01	14.55	49.56	68.20	-18.64	peak
2	15720.000	33.14	16.24	49.38	74.00	-24.62	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

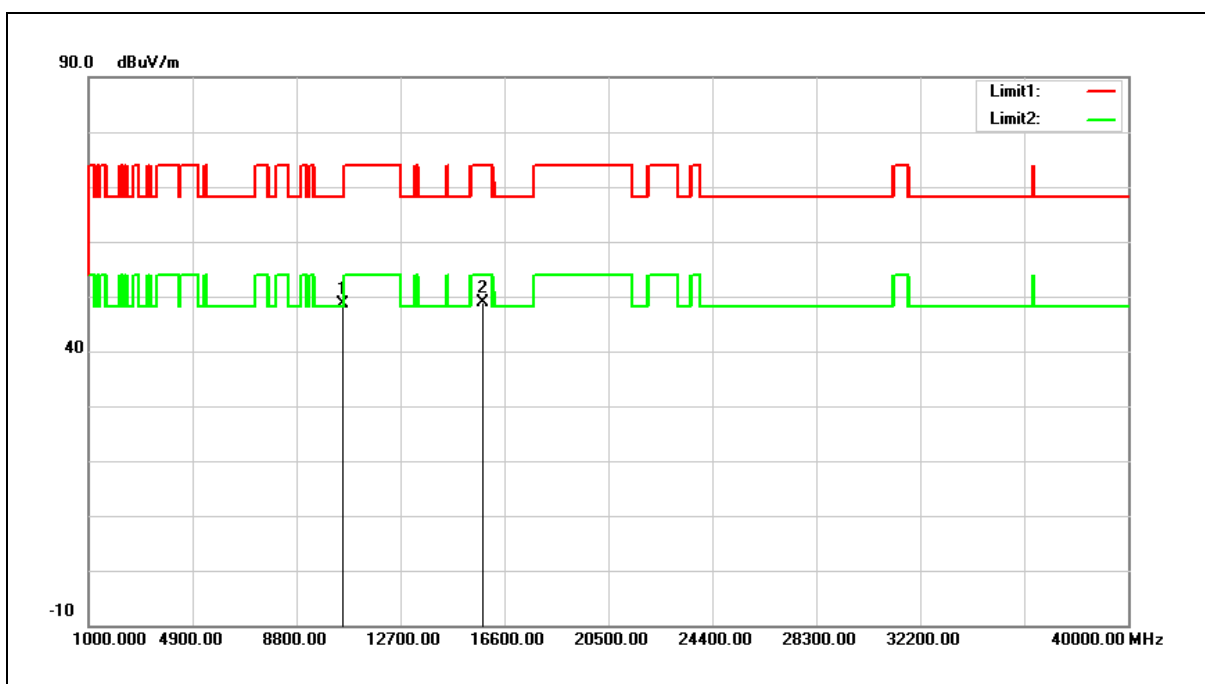


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.10	14.59	48.69	68.20	-19.51	peak
2	15780.000	32.81	16.06	48.87	74.00	-25.13	peak

Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5260 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

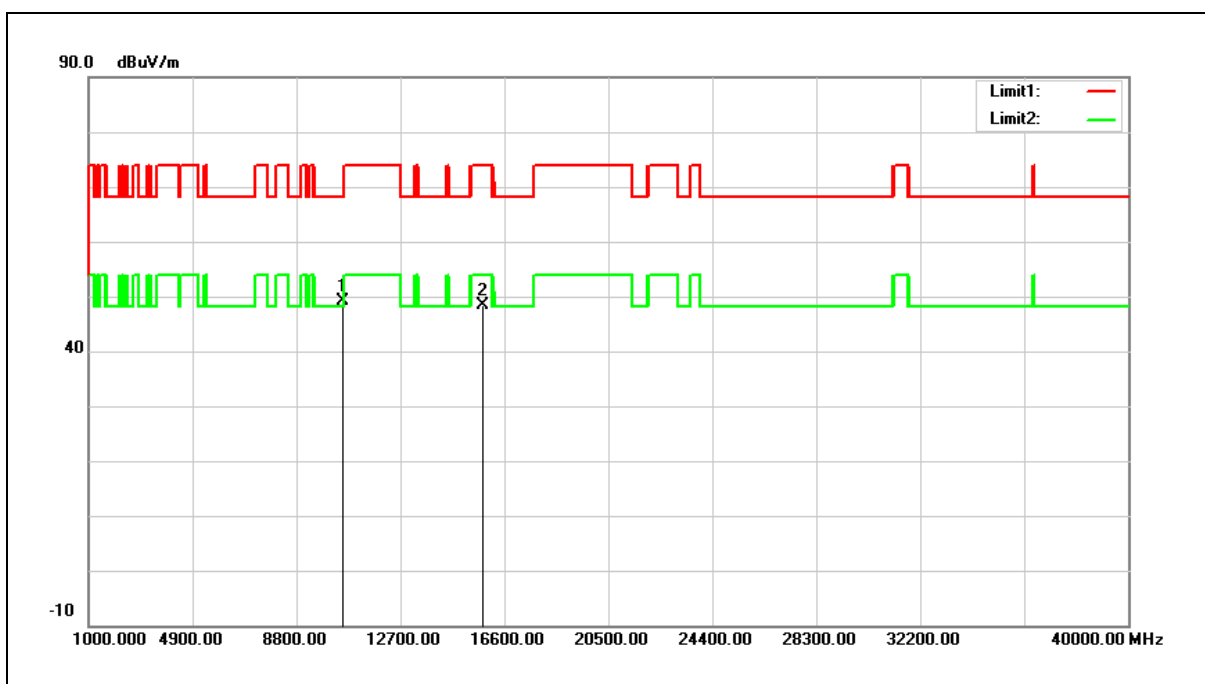


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10520.000	34.54	14.59	49.13	68.20	-19.07	peak
2	15780.000	32.25	16.06	48.31	74.00	-25.69	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

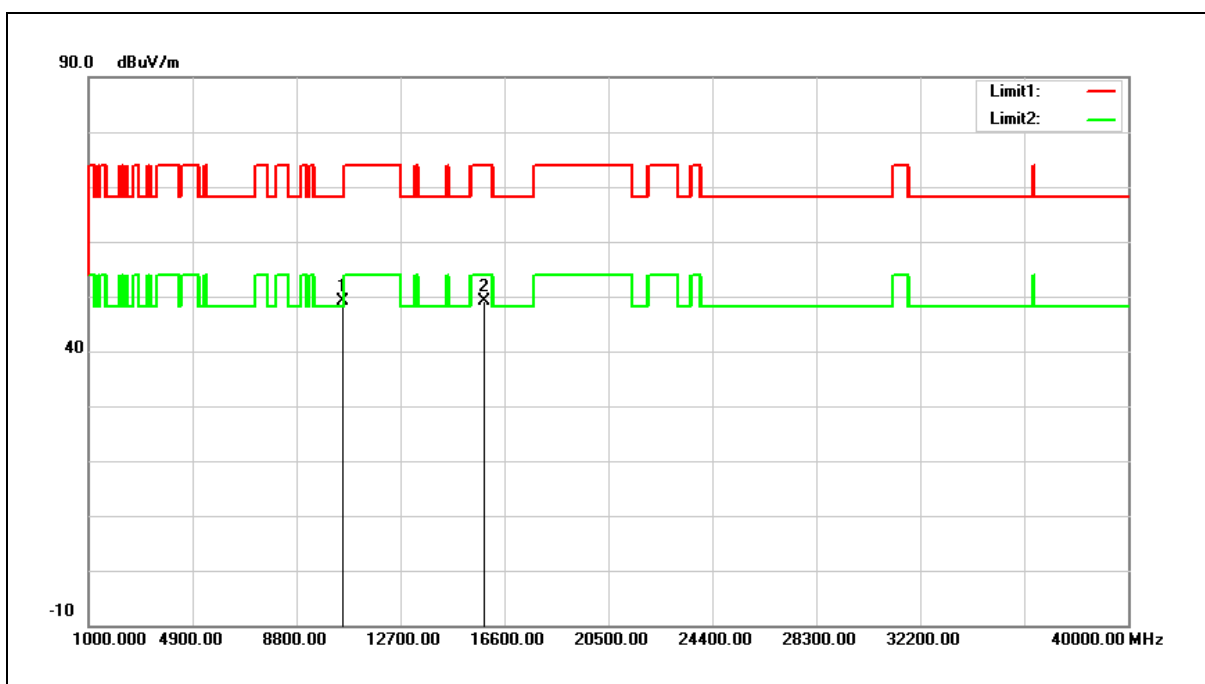


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	34.66	14.58	49.24	68.20	-18.96	peak
2	15840.000	33.17	15.85	49.02	74.00	-24.98	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	5280 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

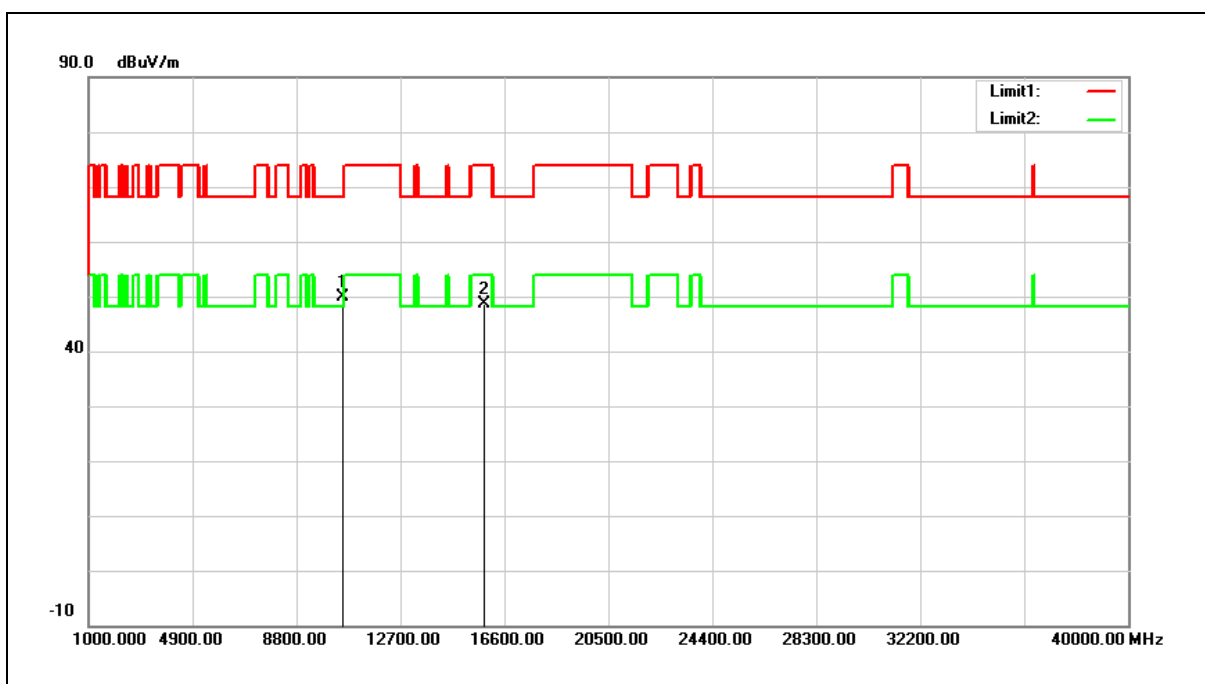

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10560.000	35.28	14.58	49.86	68.20	-18.34	peak
2	15840.000	32.82	15.85	48.67	74.00	-25.33	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.