



TEST REPORT

Test Report No. : UL-RPT-RP88569JD07B

Manufacturer : Aviat Networks
Model No. : Eclipse ODU 600, 5.8GHz, EEH-U5-0084-012
FCC ID : VK6-ODU600HB
IC Certification No. : 4469A-ODU600HB
Test Standard(s) : FCC Parts 15.207, 15.209(a) & 15.247 and Industry Canada RSS-Gen 4.6.1, 4.6.2, 4.8, 4.9, 7.2.4 & RSS-210 A8.2(a), A8.2(b), A8.4(4) & A8.5

1. This test report shall not be reproduced in full or partial, without the written approval of UL VS LTD.
2. The results in this report apply only to the sample(s) tested.
3. This sample tested is in compliance with the above standard(s).
4. The test results in this report are traceable to the national or international standards.
5. Version 1.0

Date of Issue: 29 July 2013

Checked by:

Steven White
WiSE Project Lead

Issued by :

pp

John Newell
Group Quality Manager, WiSE
Basingstoke,
UL VS LTD



This laboratory is accredited by UKAS.
The tests reported herein have been
performed in accordance with its'
terms of accreditation.

UL VS LTD

Pavilion A, Ashwood Park, Ashwood Way, Basingstoke, Hampshire, RG23 8BG, UK
Telephone: +44 (0)1256 312000
Facsimile: +44 (0)1256 312001

This page has been left intentionally blank.

Table of Contents

1. Customer Information.....	4
2. Summary of Testing.....	5
2.1. General Information	5
2.2. Summary of Test Results	5
2.3. Methods and Procedures	6
2.4. Deviations from the Test Specification	6
3. Equipment Under Test (EUT)	7
3.1. Identification of Equipment Under Test (EUT)	7
3.2. Description of EUT	7
3.3. Modifications Incorporated in the EUT	7
3.4. Additional Information Related to Testing	8
3.5. Support Equipment	10
4. Operation and Monitoring of the EUT during Testing	11
4.1. Operating Modes	11
4.2. Configuration and Peripherals	11
5. Measurements, Examinations and Derived Results	12
5.1. General Comments	12
5.2. Test Results	13
5.2.1. Transmitter AC Conducted Spurious Emissions	13
5.2.2. Transmitter 6 dB Bandwidth	16
5.2.3. Transmitter Occupied Bandwidth	22
5.2.4. Transmitter Power Spectral Density	28
5.2.5. Transmitter Maximum Average Output Power	34
5.2.6. Transmitter Radiated Emissions - 4 foot parabolic antenna	40
5.2.7. Transmitter Radiated Emissions - 2 foot flat panel antenna	46
5.2.8. Transmitter Band Edge Conducted Emissions	52
6. Measurement Uncertainty	55
7. Report Revision History	56

1. Customer Information










Company Name:	Aviat Networks
Address:	4 Bell Drive, Hamilton International Technology Park Blantyre Glasgow Lanarkshire G72 0FB United Kingdom

2. Summary of Testing

2.1. General Information

Specification Reference:	47CFR15.247
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart C (Intentional Radiators) - Section 15.247
Specification Reference:	47CFR15.207 and 47CFR15.209
Specification Title:	Code of Federal Regulations Volume 47 (Telecommunications) 2012: Part 15 Subpart C (Intentional Radiators) - Sections 15.207 and 15.209
Specification Reference:	RSS-Gen Issue 3 December 2010
Specification Title:	General Requirements and Information for the Certification of Radio Apparatus
Specification Reference:	RSS-210 Issue 8 December 2010
Specification Title:	Licence-exempt Radio Apparatus (All Frequency Bands): Category I Equipment.
Site Registration:	FCC: 209735; Industry Canada: 3245B-2
Location of Testing:	UL VS LTD, Unit 3 Horizon, Wade Road, Kingsland Business Park, Basingstoke, Hampshire, RG24 8AH, United Kingdom.
Test Dates:	04 March to 12 July 2013

2.2. Summary of Test Results

FCC Reference (47CFR)	IC Reference	Measurement	Result
Part 15.207	RSS-Gen 7.2.4	Transmitter AC Conducted Emissions	
Part 15.247(a)(2)	RSS-Gen 4.6.2 RSS-210 A8.2(a)	Transmitter 6 dB Bandwidth	
N/A	RSS-Gen 4.6.1	Transmitter Occupied Bandwidth	
Part 15.247(e)	RSS-210 A8.2(b)	Transmitter Power Spectral Density	
Part 15.247(b)(3)	RSS-Gen 4.8 RSS-210 A8.4(4)	Transmitter Maximum Average Output Power	
Part 15.247(d)/ 15.209(a)	RSS-Gen 4.9 RSS-210 A8.5	Transmitter Radiated Emissions	
Part 15.247(d)	RSS-Gen 4.9 RSS-210 A8.5	Transmitter Band Edge Conducted Emissions	
Key to Results  = Complied  = Did not comply			

Note(s):

1. The customer declared that there is no idle mode and that the EUT goes into transceive mode as soon as it is powered up.

2.3. Methods and Procedures

Reference:	ANSI C63.4 (2003)
Title:	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
Reference:	ANSI C63.10 (2009)
Title:	American National Standard for Testing Unlicensed Wireless Devices
Reference:	KDB 558074 D01 v02 10/04/2012
Title:	Guidance for Performing Compliance Measurements on Digital Transmission System (DTS) devices operating Under §15.247

2.4. Deviations from the Test Specification

For the measurements contained within this test report, there were no deviations from, additions to, or exclusions from the test specification identified above.

3. Equipment Under Test (EUT)

3.1. Identification of Equipment Under Test (EUT)

Brand Name:	Aviat Networks
Model Name or Number:	Eclipse ODU 600, 5.8GHZ, EEH-U5-0084-012
Serial Number:	FLX1304S026
Hardware Version Number:	001
Software Version Number:	07.02.44
FCC ID:	VK6-ODU600HB
Industry Canada Certification Number:	4469A-ODU600HB

3.2. Description of EUT

The equipment under test was a 5.8 GHz point to point microwave radio transceiver.

3.3. Modifications Incorporated in the EUT

No modifications were applied to the EUT during testing.

3.4. Additional Information Related to Testing

Technology Tested:	Microwave Fixed Link System	
Type of Unit:	Transceiver	
Channel Spacing:	5 MHz, 10 MHz, 20 MHz, 30 MHz and 40 MHz	
Modulation:	QPSK, 16QAM, 32QAM, 64QAM, 128QAM and 256QAM	
Power Supply Requirement(s):	Nominal	-48 VDC
Maximum Conducted Output Power:	26.4 dBm	
Antenna Gains:	Parabolic Antenna: (4 ft Tested)	35.0 dBi
	Parabolic Antenna: (15 ft End product)	45.9 dBi
	2ft Flat Panel Antenna	28.0 dBi
Channel Spacing	5 MHz	
Transmit Frequency Range:	5809.5 MHz to 5849.5 MHz	
Transmit Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5812.0
	Middle	5829.5
	Top	5847.0
Receive Frequency Range:	5725.5 MHz to 5765.5 MHz	
Receive Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5728.0
	Middle	5745.5
	Top	5763.0
Channel Spacing	10 MHz	
Transmit Frequency Range:	5809.5 MHz to 5849.5 MHz	
Transmit Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5814.5
	Middle	5829.5
	Top	5844.5
Receive Frequency Range:	5725.5 MHz to 5765.5 MHz	
Receive Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5730.5
	Middle	5745.5
	Top	5760.5

Additional Information Related to Testing (continued)

Channel Spacing	20 MHz	
Transmit Frequency Range:	5809.5 MHz to 5849.5 MHz	
Transmit Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5819.5
	Middle	5829.5
	Top	5839.5
Receive Frequency Range:	5725.5 MHz to 5765.5 MHz	
Receive Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5735.5
	Middle	5745.5
	Top	5755.5
Channel Spacing	30 MHz	
Transmit Frequency Range:	5809.5 MHz to 5849.5 MHz	
Transmit Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5824.5
	Middle	5829.5
	Top	5834.5
Receive Frequency Range:	5725.5 MHz to 5765.5 MHz	
Receive Test Channels:	Channel ID	Channel Frequency (MHz)
	Bottom	5740.5
	Middle	5745.5
	Top	5750.5
Channel Spacing	40 MHz	
Transmit Frequency Range:	5809.5 MHz to 5849.5 MHz	
Transmit Test Channel:	Channel ID	Channel Frequency (MHz)
	Middle	5829.5
Receive Frequency Range:	5725.5 MHz to 5765.5 MHz	
Receive Test Channel:	Channel ID	Channel Frequency (MHz)
	Middle	5745.5

3.5. Support Equipment

The following support equipment was used to exercise the EUT during testing:

Description:	4ft parabolic antenna, 35 dBi gain
Brand Name:	Andrew Antennas
Model Name or Number:	HP4-57W-P3A/A
Serial Number:	10ACZ10602232

Description:	2ft flat panel antenna, 28 dBi gain
Brand Name:	Radio Frequency Systems
Model Name or Number:	MA0528-28AN
Serial Number:	02205

Description:	Laptop
Brand Name:	Dell
Model Name or Number:	Latitude D610
Serial Number:	RFI Asset Number (PC 8013NT)

Description:	DC Power Supply
Brand Name:	Hewlett Packard
Model Name or Number:	E4356A
Serial Number:	RFI Asset number G0565

4. Operation and Monitoring of the EUT during Testing

4.1. Operating Modes

The EUT was tested in the following operating mode(s):

- Transceiver mode.

4.2. Configuration and Peripherals

The EUT was tested in the following configuration(s):

- The EUT was placed into a continuous transmit mode, with the appropriate modulation scheme enabled, using a bespoke software application which was supplied by the Customer.
- All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power for the different channel bandwidths were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – QPSK / 11 Mbps
 - 20 MHz channel bandwidth – QPSK / 24 Mbps
 - 30 MHz channel bandwidth – QPSK / 38 Mbps
 - 40 MHz channel bandwidth – QPSK / 50 Mbps

Measurements were performed on the required channels dependant on each test case.

- All supported modes and channel widths were initially investigated on one channel. The modes that produced the widest bandwidth for the different channel bandwidths were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – 64QAM / 40 Mbps
 - 20 MHz channel bandwidth – QPSK / 30 Mbps
 - 30 MHz channel bandwidth – QPSK / 43 Mbps
 - 40 MHz channel bandwidth – 64QAM / 186 Mbps

Measurements were performed on the required channels dependant on each test case.

- For radiated emissions testing a smaller 4 foot parabolic antenna of the same type as the 15 foot parabolic dish that would be used in the field was tested. This was done in accordance with FCC OET guidance: 450912 which states a smaller antenna can be used of the same type installed with data being extrapolated up to the specification of the actual antenna.

The antenna gain for the 4 foot antenna used for testing was 35 dBi, the antenna gain for the 15 foot end product is 45.9 dBi, the difference being 10.9 dB.

Within the entire radiated emissions measurement range a clearance exceeding the difference in gain between the two antennas has been achieved, between any emissions and/or the system noise floor. Thus ensuring that any emissions emanating from either the antenna or enclosure pass the emissions limit.

The radiated emission test was additionally performed on a 2 foot flat panel antenna which had an antenna gain of 28dBi.

5. Measurements, Examinations and Derived Results

5.1. General Comments

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to *Section 6. Measurement Uncertainty* for details.

In accordance with UKAS requirements all the measurement equipment is on a calibration schedule. All equipment was within the calibration period on the date of testing.

5.2. Test Results

5.2.1. Transmitter AC Conducted Spurious Emissions

Test Summary:

Test Engineer:	Sandeep Bharat	Test Date:	12 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	Part 15.207
Industry Canada Reference:	RSS-Gen 7.2.4
Test Method Used:	As detailed in ANSI C63.10 Section 6.2 referencing ANSI C63.4

Environmental Conditions:

Temperature (°C):	21
Relative Humidity (%):	30

Results: Live / Quasi Peak

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.317	27.4	59.8	32.4	Complied
0.407	21.1	57.7	36.6	Complied
0.848	18.9	56.0	37.1	Complied
1.626	25.7	56.0	30.3	Complied
1.842	25.6	56.0	30.4	Complied
2.040	27.3	56.0	28.7	Complied

Results: Live / Average

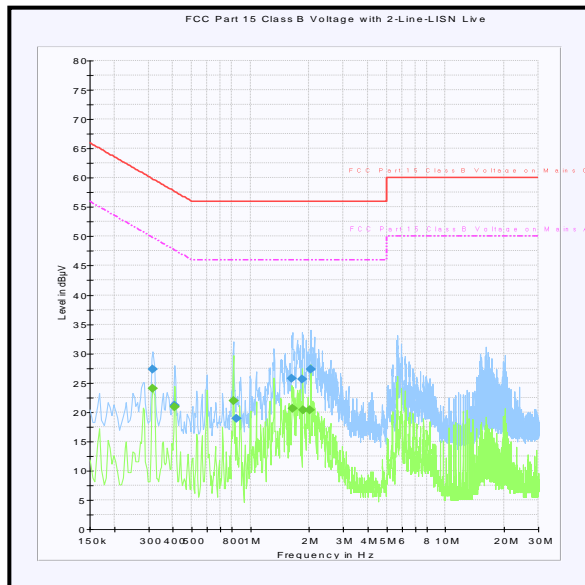
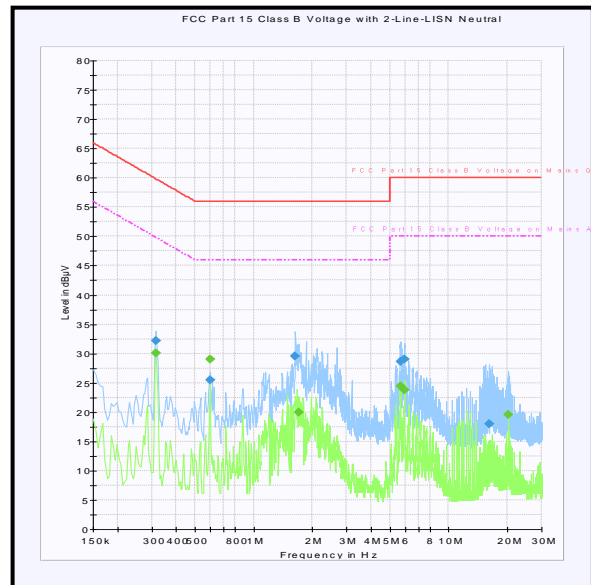
Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.317	24.1	49.8	25.7	Complied
0.407	20.9	47.7	26.8	Complied
0.816	21.9	46.0	24.1	Complied
1.644	20.6	46.0	25.4	Complied
1.856	20.3	46.0	25.7	Complied
2.022	20.3	46.0	25.7	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Results: Neutral / Quasi Peak**

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.317	32.1	59.8	27.7	Complied
0.596	25.5	56.0	30.5	Complied
1.635	29.5	56.0	26.5	Complied
5.667	28.6	60.0	31.4	Complied
5.933	29.1	60.0	30.9	Complied
16.125	18.0	60.0	42.0	Complied

Results: Neutral / Average

Frequency (MHz)	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.317	30.0	49.8	19.8	Complied
0.596	29.0	46.0	17.0	Complied
1.698	20.0	46.0	26.0	Complied
5.654	24.4	50.0	25.6	Complied
5.928	23.8	50.0	26.2	Complied
20.256	19.6	50.0	30.4	Complied

Transmitter AC Conducted Spurious Emissions (continued)**Live****Neutral**

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
A1830	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100668	19 Feb 2014	12
A649	LISN	Rohde & Schwarz	ESH3-Z5	825562/008	19 Apr 2013	12
M1263	Test Receiver	Rohde & Schwarz	ESIB 7	100265	09 Aug 2013	12

5.2.2. Transmitter 6 dB Bandwidth**Test Summary:**

Test Engineer:	Sandeep Bharat	Test Dates:	08 March 2013 & 11 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	Part 15.247(a)(2)
Industry Canada Reference:	RSS-Gen 4.6.2 / RSS-210 A8.2(a)
Test Method Used:	FCC KDB 558074 Section 7.2 Option 1

Environmental Conditions:

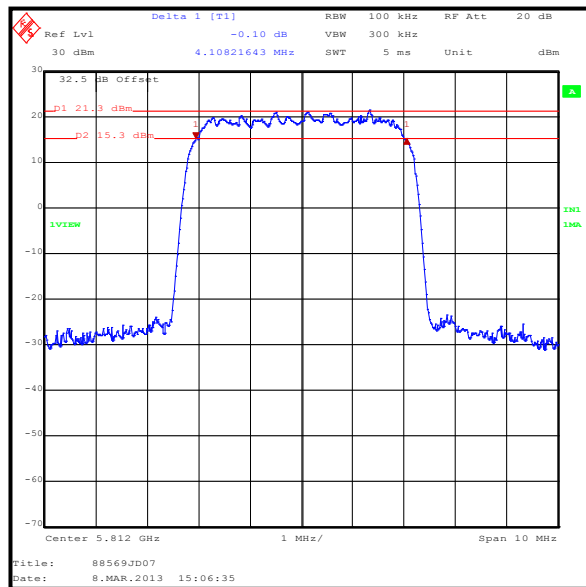
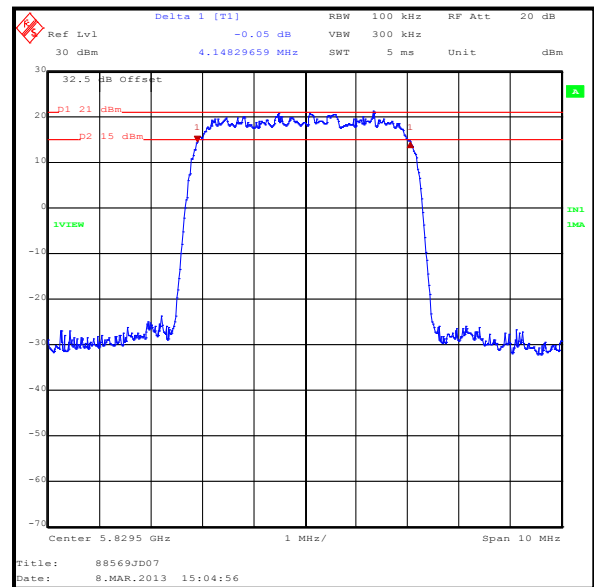
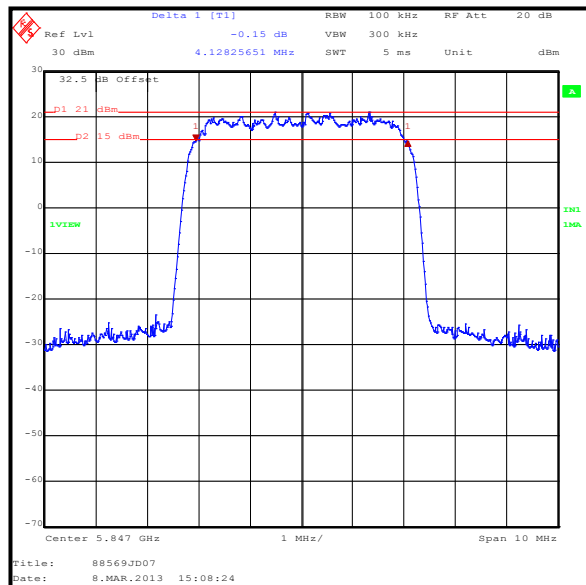
Temperature (°C):	22 to 24
Relative Humidity (%):	31 to 35

Note(s):

1. All supported modes and channel widths were initially investigated on Top channel. The modes that produced the widest bandwidth (worst case) for the different channel bandwidths were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – 64QAM / 40 Mbps
 - 20 MHz channel bandwidth – QPSK / 30 Mbps
 - 30 MHz channel bandwidth – QPSK / 43 Mbps
 - 40 MHz channel bandwidth – 64QAM / 186 Mbps
2. Final measurements were performed using the above configurations on the bottom, middle and top channels.

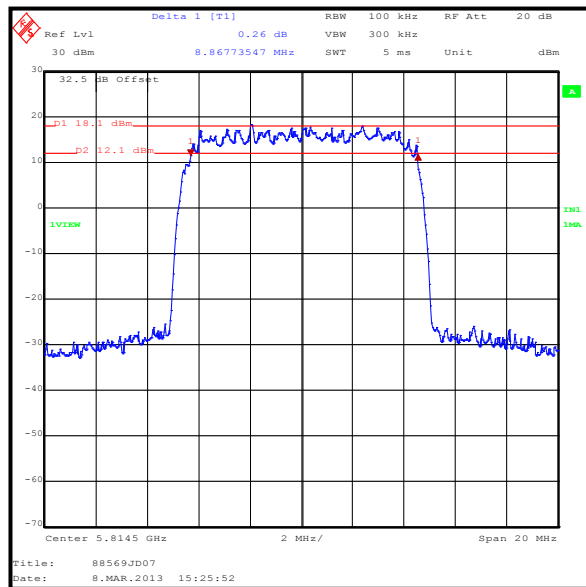
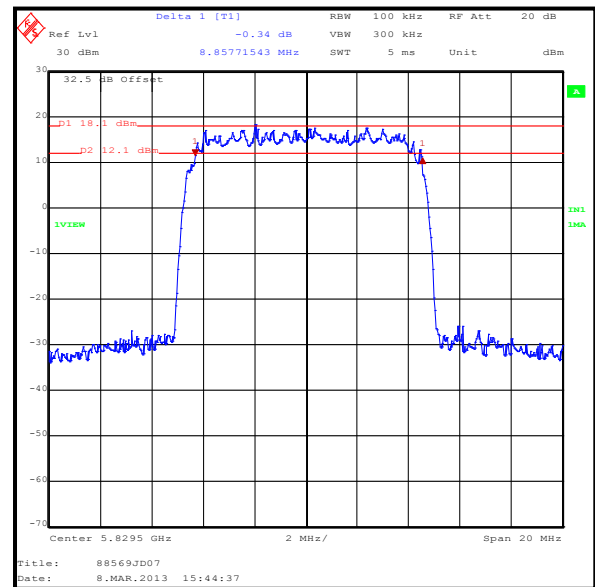
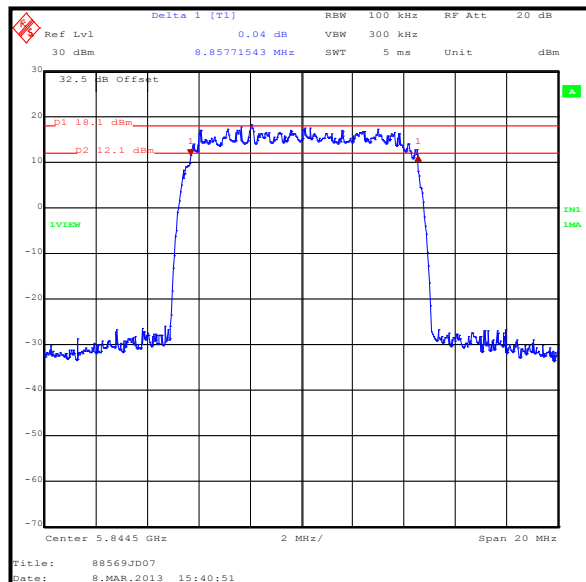
Transmitter 6 dB Bandwidth (continued)**Results: 5 MHz / 128QAM / 24 Mbps**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	4108.216	≥500	3608.216	Complied
Middle	4148.297	≥500	3648.297	Complied
Top	4128.257	≥500	3628.257	Complied

**Bottom Channel****Middle Channel****Top Channel**

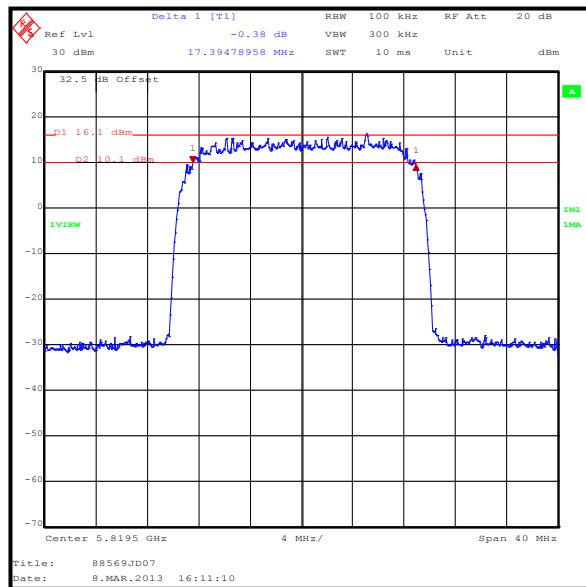
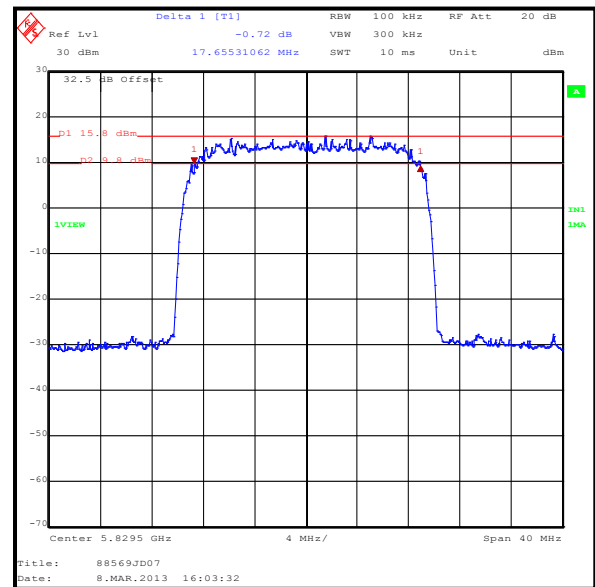
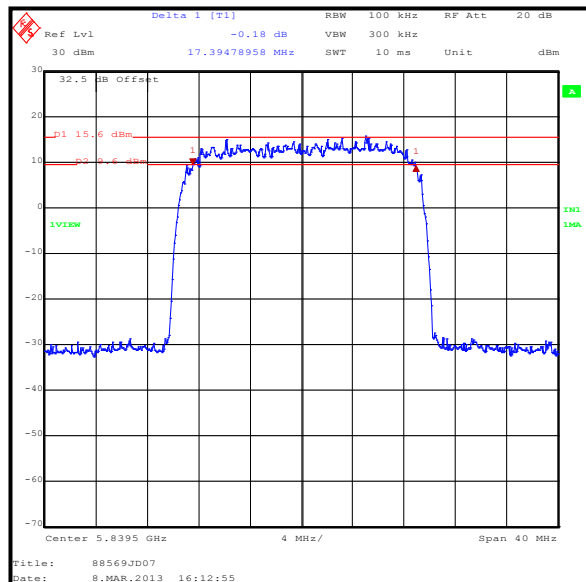
Transmitter 6 dB Bandwidth (continued)**Results: 10 MHz / 64QAM / 40 Mbps**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	8867.735	≥500	8367.735	Complied
Middle	8857.715	≥500	8357.715	Complied
Top	8857.715	≥500	8357.715	Complied

**Bottom Channel****Middle Channel****Top Channel**

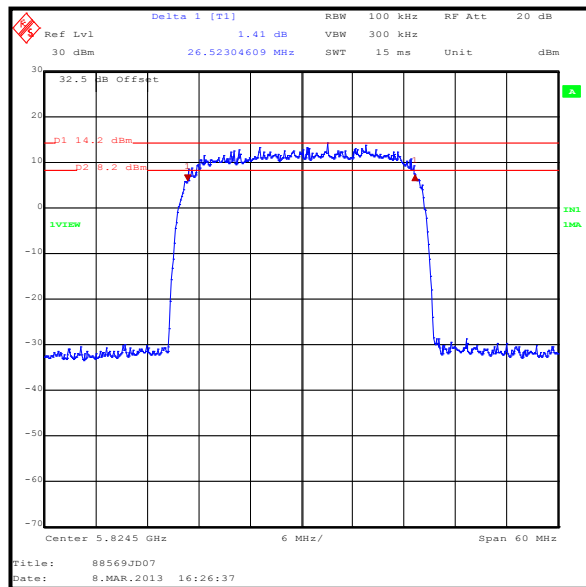
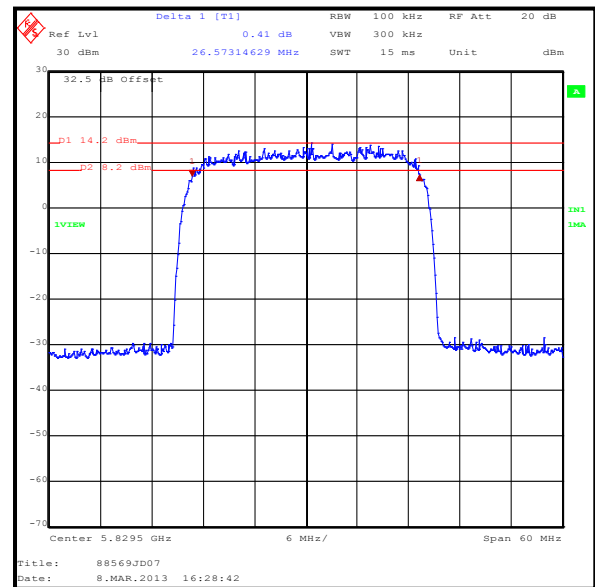
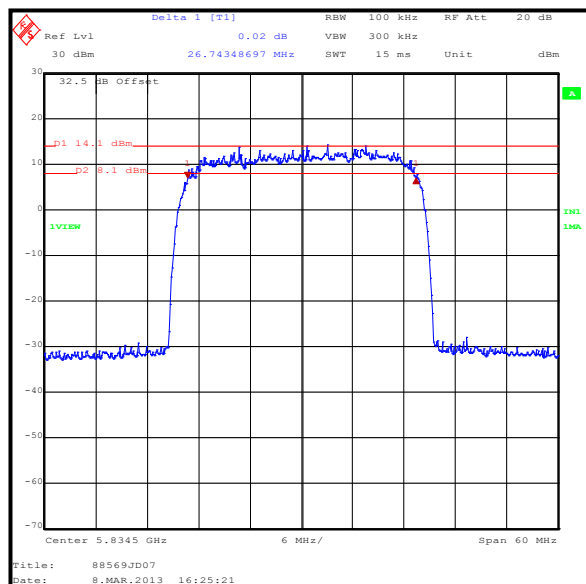
Transmitter 6 dB Bandwidth (continued)**Results: 20 MHz / QPSK / 30 Mbps**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	17394.790	≥500	16894.790	Complied
Middle	17655.311	≥500	17155.311	Complied
Top	17394.790	≥500	16894.790	Complied

**Bottom Channel****Middle Channel****Top Channel**

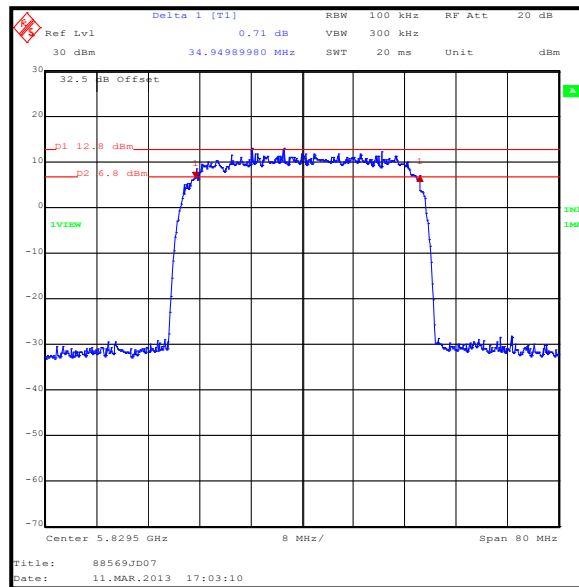
Transmitter 6 dB Bandwidth (continued)**Results: 30 MHz / QPSK / 43 Mbps**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Bottom	26523.046	≥500	26023.046	Complied
Middle	26573.146	≥500	26073.146	Complied
Top	26743.487	≥500	26243.487	Complied

**Bottom Channel****Middle Channel****Top Channel**

Transmitter 6 dB Bandwidth (continued)**Results: 40 MHz / 64QAM / 186 Mbps**

Channel	6 dB Bandwidth (kHz)	Limit (kHz)	Margin (kHz)	Result
Middle	34949.900	≥500	34449.900	Complied

**Middle Channel****Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1490	Attenuator	Weinschel Corp	23-30-34	BH9156	03 Apr 2013	12

5.2.3. Transmitter Occupied Bandwidth**Test Summary:**

Test Engineer:	Sandeep Bharat	Test Date:	08 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	N/A
Industry Canada Reference:	RSS-Gen 4.6.1
Test Method Used:	Tested using the occupied bandwidth function of a test receiver

Environmental Conditions:

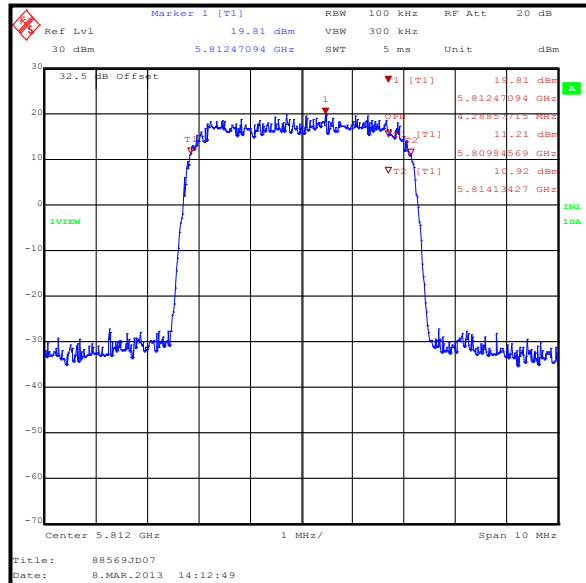
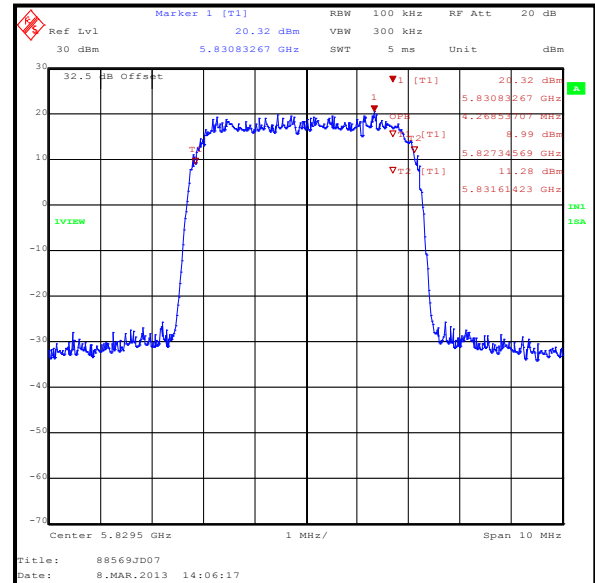
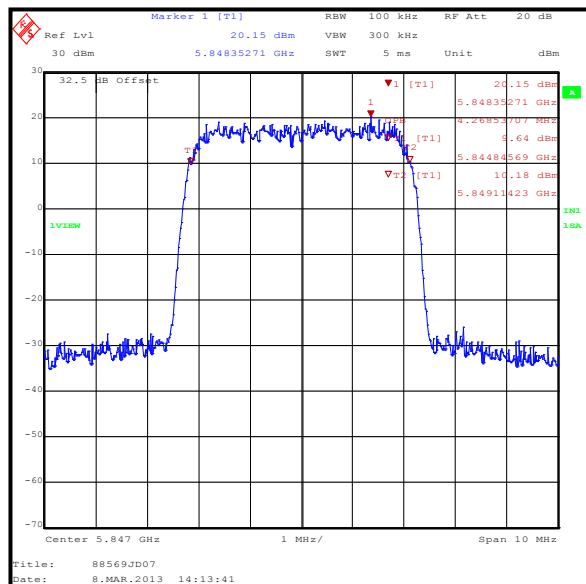
Temperature (°C):	24
Relative Humidity (%):	35

Note(s):

1. Occupied bandwidth (99% bandwidth) was measured using a test receiver occupied bandwidth function with the test receiver set to the appropriate bandwidth according to the channel width under test.
2. All supported modes and channel widths were initially investigated on Top channel. The modes that produced the widest bandwidth (worst case) for the different channel bandwidths were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – 64QAM / 40 Mbps
 - 20 MHz channel bandwidth – QPSK / 30 Mbps
 - 30 MHz channel bandwidth – QPSK / 43 Mbps
 - 40 MHz channel bandwidth – 64QAM / 186 Mbps
3. Final measurements were performed using the above configurations on the bottom, middle and top channels.

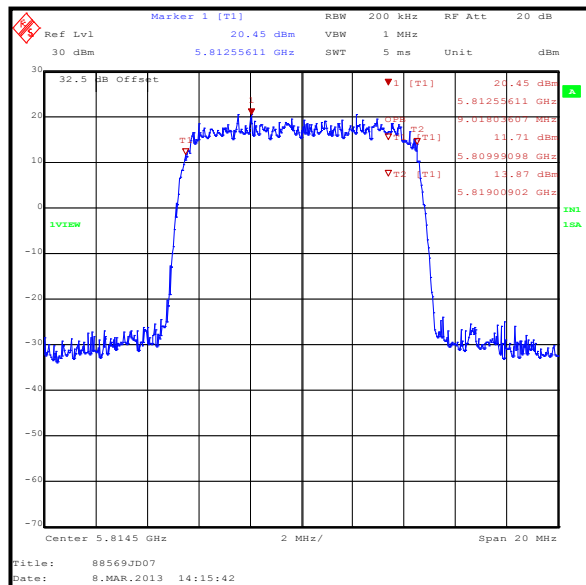
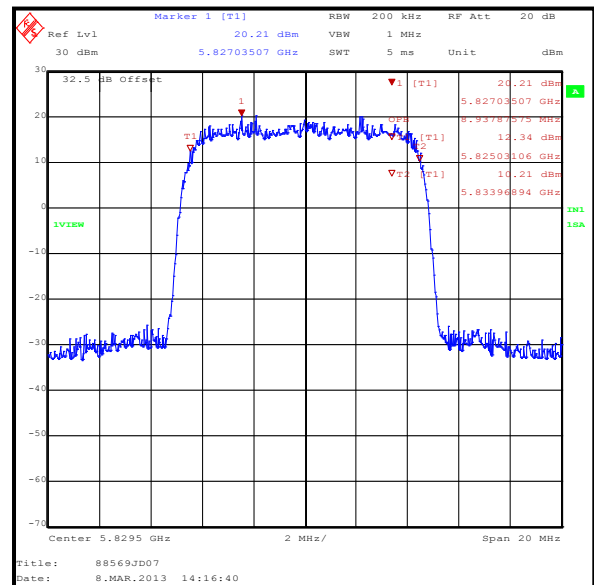
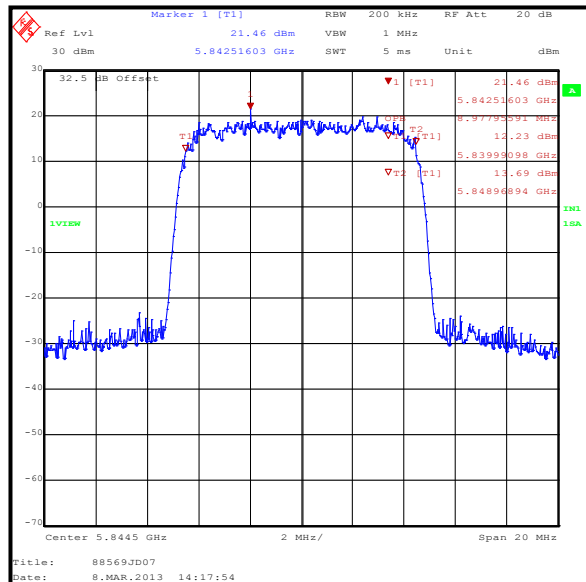
Transmitter Occupied Bandwidth (continued)**Results: 5 MHz / 128QAM / 24 Mbps**

Channel	Occupied Bandwidth (MHz)
Bottom	4.289
Middle	4.269
Top	4.269

**Bottom Channel****Middle Channel****Top Channel**

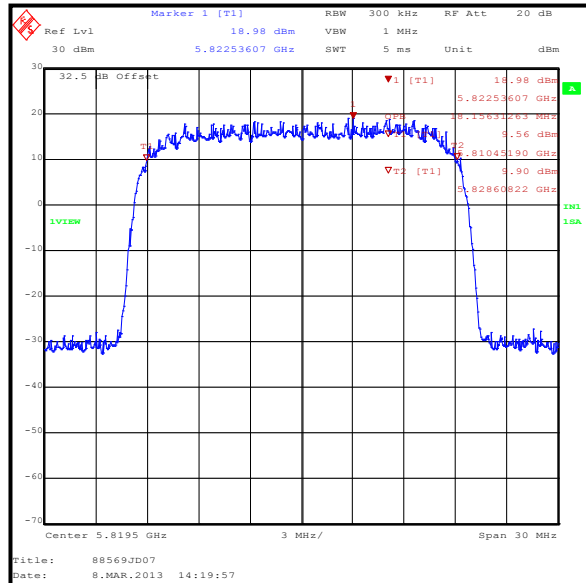
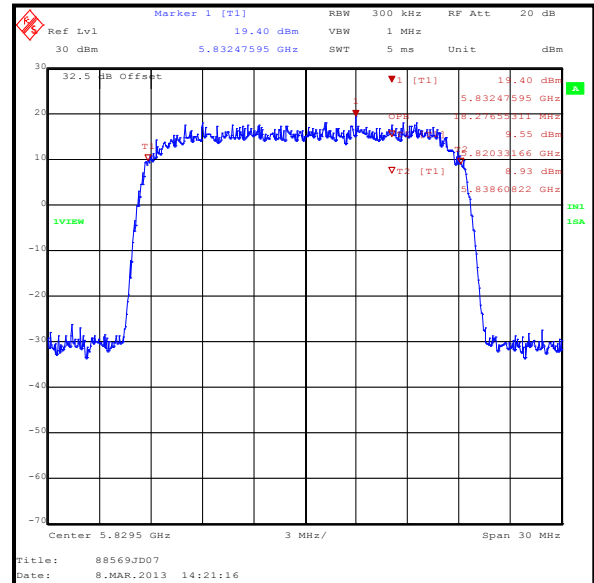
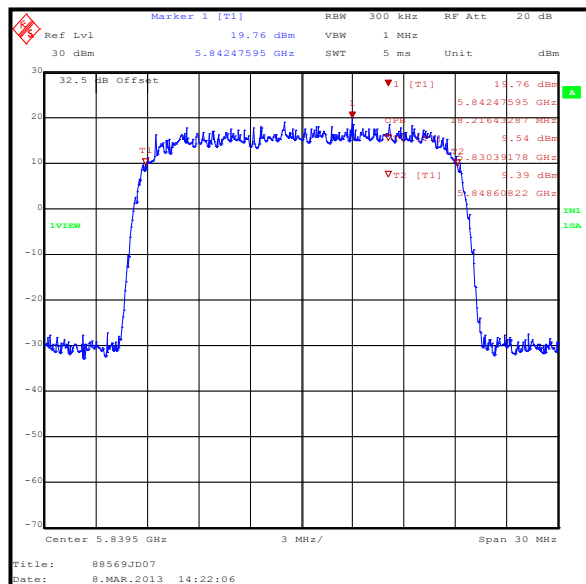
Transmitter Occupied Bandwidth (continued)**Results: 10 MHz / 64QAM / 40 Mbps**

Channel	Occupied Bandwidth (MHz)
Bottom	9.018
Middle	8.938
Top	8.978

**Bottom Channel****Middle Channel****Top Channel**

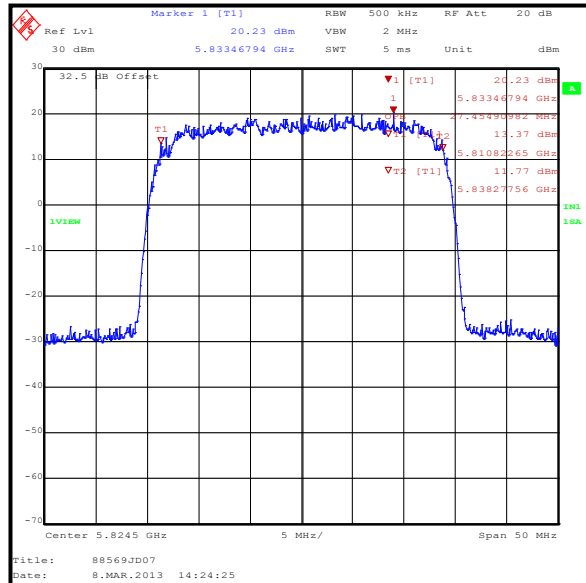
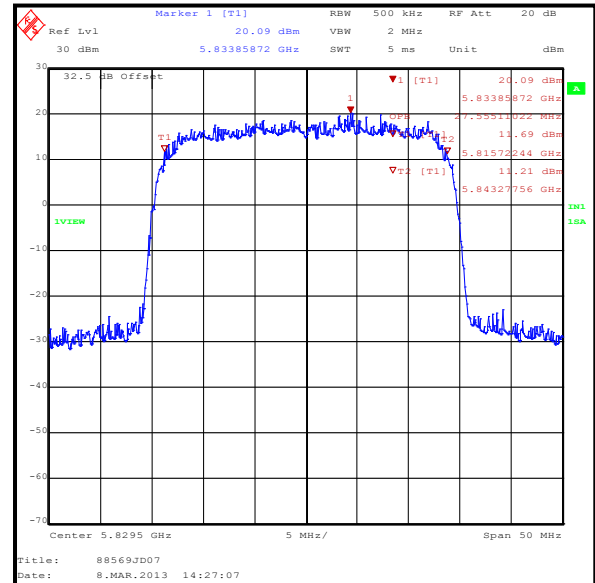
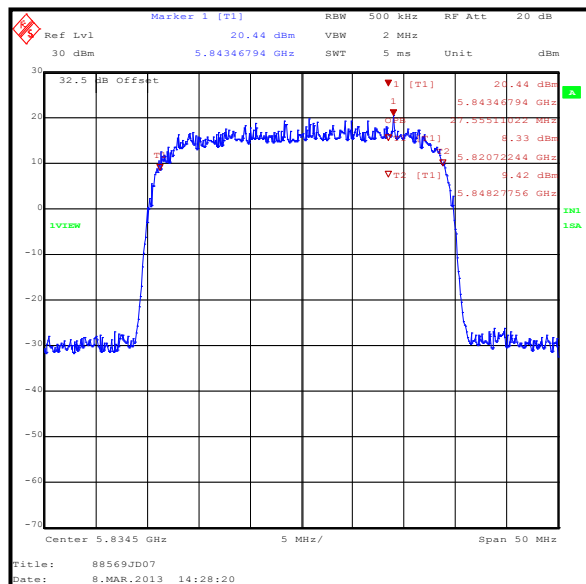
Transmitter Occupied Bandwidth (continued)**Results: 20 MHz / QPSK / 30 Mbps**

Channel	Occupied Bandwidth (MHz)
Bottom	18.156
Middle	18.277
Top	18.216

**Bottom Channel****Middle Channel****Top Channel**

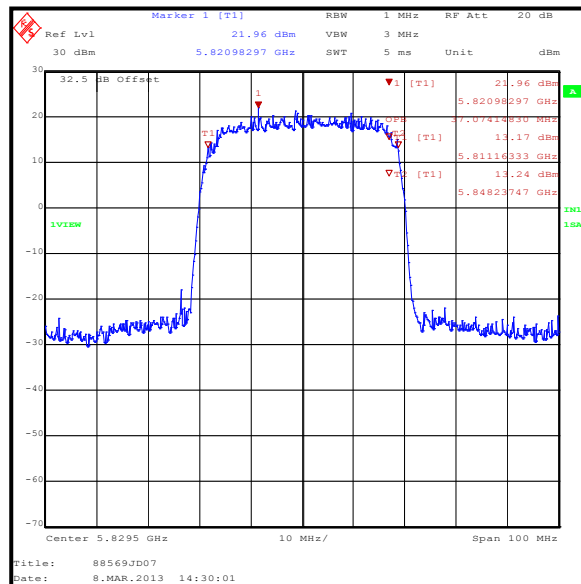
Transmitter Occupied Bandwidth (continued)**Results: 30 MHz / QPSK / 43 Mbps**

Channel	Occupied Bandwidth (MHz)
Bottom	27.455
Middle	27.555
Top	27.555

**Bottom Channel****Middle Channel****Top Channel**

Transmitter Occupied Bandwidth (continued)**Results: 40 MHz / 64QAM / 186 Mbps**

Channel	Occupied Bandwidth (MHz)
Middle	37.074

**Middle Channel****Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1490	Attenuator	Weinschel Corp	23-30-34	BH9156	03 Apr 2013	12

5.2.4. Transmitter Power Spectral Density**Test Summary:**

Test Engineer:	Sandeep Bharat	Test Date:	11 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	Part 15.247(e)
Industry Canada Reference:	RSS-210 A8.2(b)
Test Method Used:	FCC KDB 558074 Section 9.2 Option 2

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	31

Note(s):

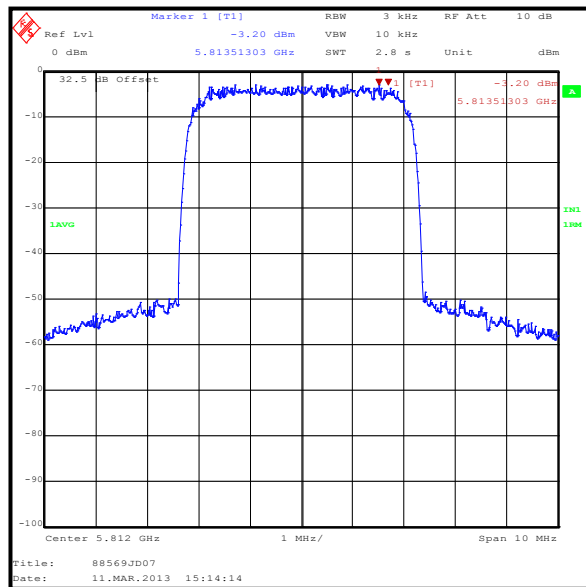
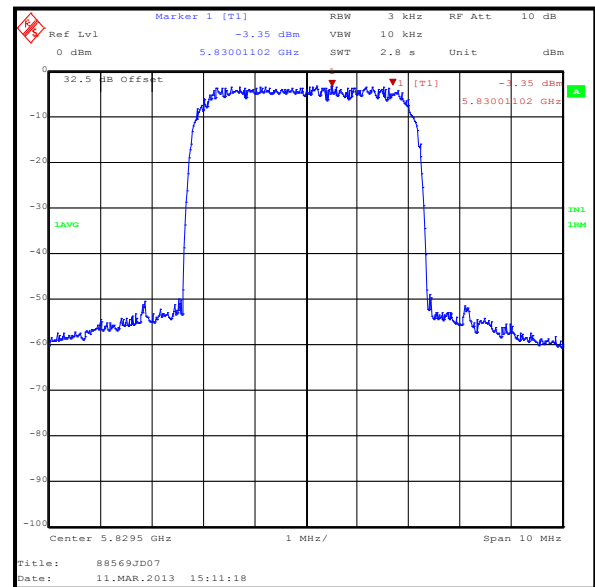
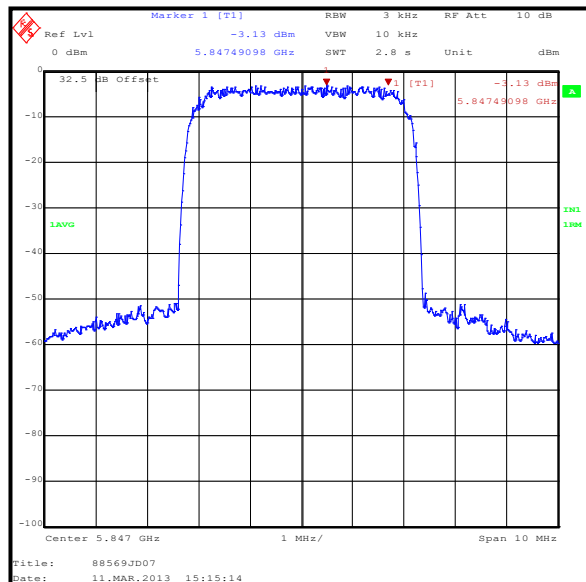
1. Transmitter Power Spectral Density tests were performed using a spectrum analyser in accordance with FCC KDB 558074 Section 9.2 Option 2.
2. All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – QPSK / 11 Mbps
 - 20 MHz channel bandwidth – QPSK / 24 Mbps
 - 30 MHz channel bandwidth – QPSK / 38 Mbps
 - 40 MHz channel bandwidth – QPSK / 50 Mbps

Measurements were performed on the required channels.

3. A 30 dB attenuator and RF cable were used to connect the measurement equipment to the EUT. The combined cable and attenuator loss was measured prior to performing the measurements and the loss compensation incorporated into the measurement results.
4. The EUT was transmitting at 100% duty cycle.

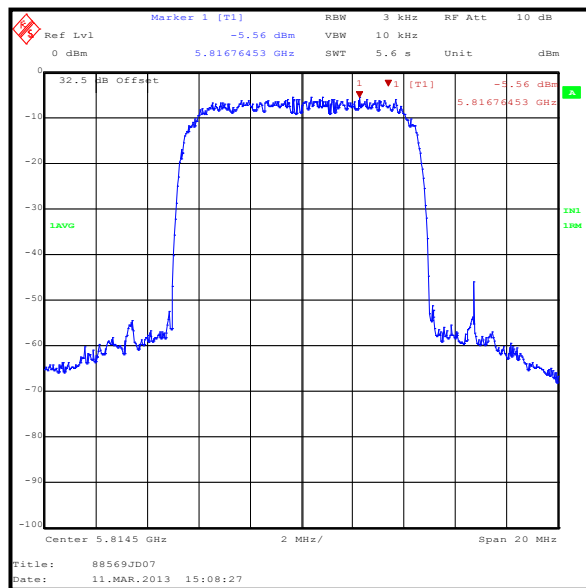
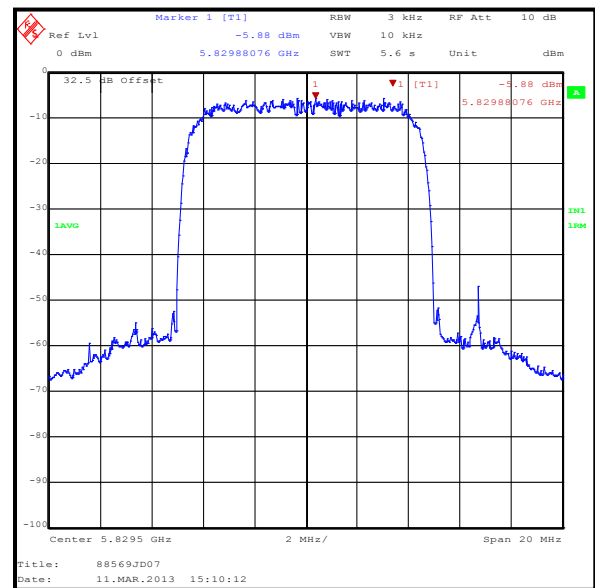
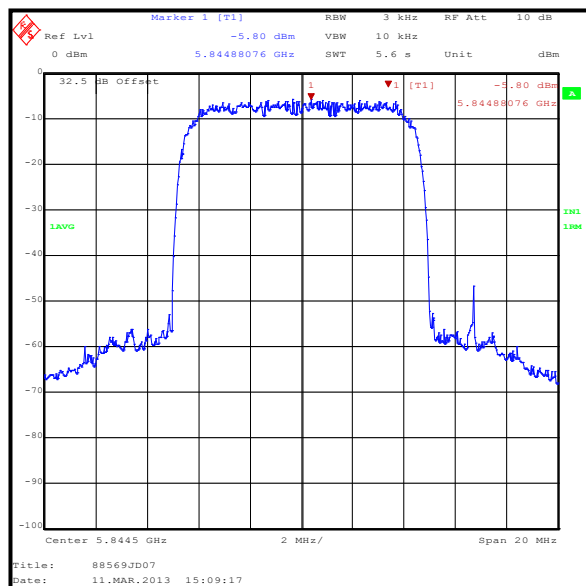
Transmitter Power Spectral Density (continued)**Results: 5 MHz / 128QAM / 24 Mbps**

Channel	Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
Bottom	-3.2	8.0	11.2	Complied
Middle	-3.4	8.0	11.4	Complied
Top	-3.1	8.0	11.1	Complied

**Bottom Channel****Middle Channel****Top Channel**

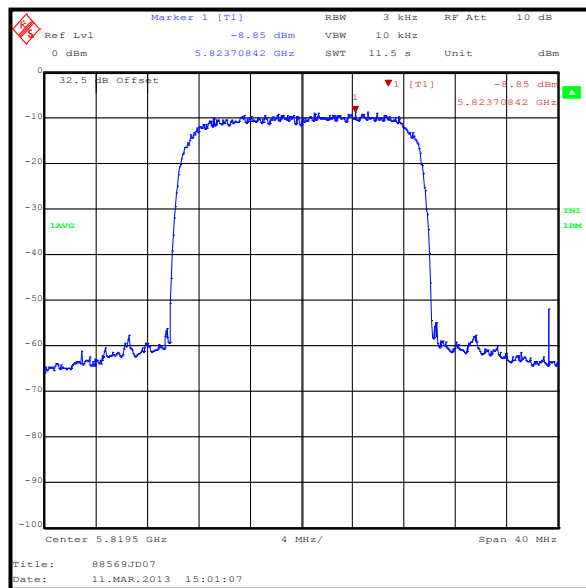
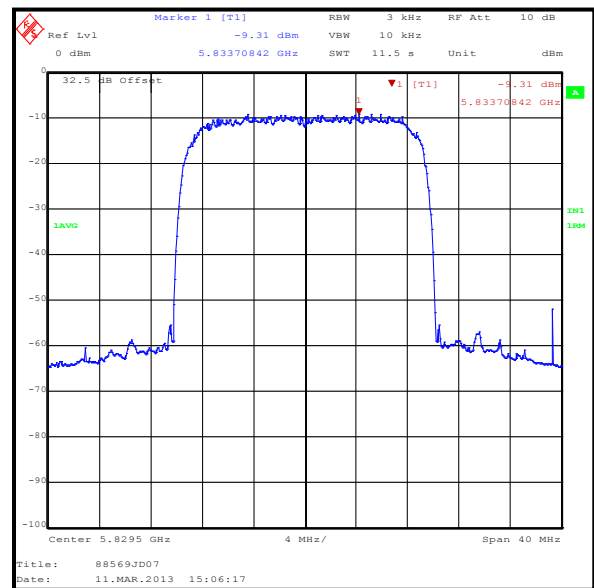
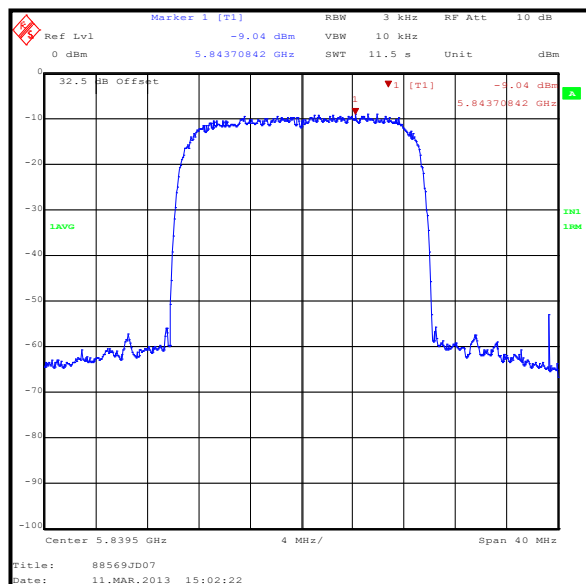
Transmitter Power Spectral Density (continued)**Results: 10 MHz / QPSK / 11 Mbps**

Channel	Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
Bottom	-5.6	8.0	13.6	Complied
Middle	-5.9	8.0	13.9	Complied
Top	-5.8	8.0	13.8	Complied

**Bottom Channel****Middle Channel****Top Channel**

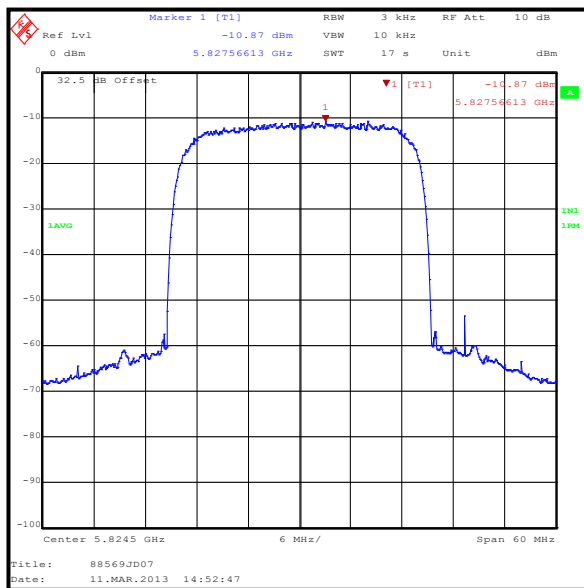
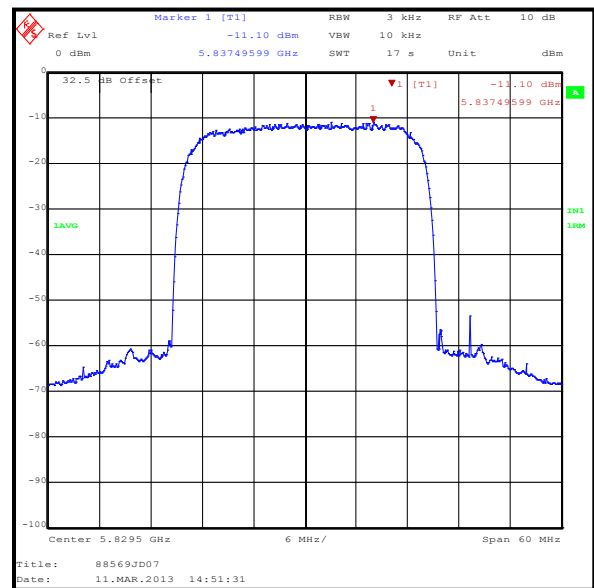
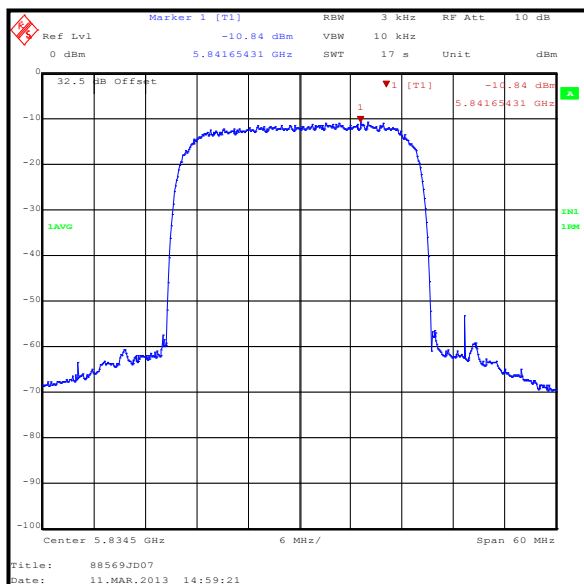
Transmitter Power Spectral Density (continued)**Results: 20 MHz / QPSK / 24 Mbps**

Channel	Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
Bottom	-8.9	8.0	16.9	Complied
Middle	-9.3	8.0	17.3	Complied
Top	-9.0	8.0	17.0	Complied

**Bottom Channel****Middle Channel****Top Channel**

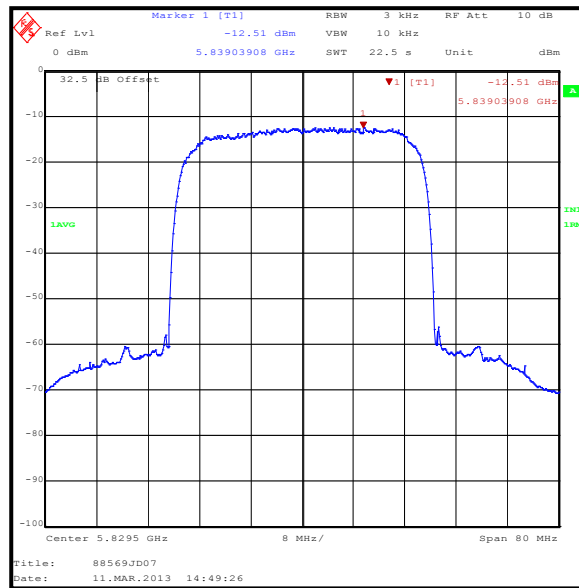
Transmitter Power Spectral Density (continued)**Results: 30 MHz / QPSK / 38 Mbps**

Channel	Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
Bottom	-10.9	8.0	18.9	Complied
Middle	-11.1	8.0	19.1	Complied
Top	-10.8	8.0	18.8	Complied

**Bottom Channel****Middle Channel****Top Channel**

Transmitter Power Spectral Density (continued)**Results: 40 MHz / QPSK / 50 Mbps**

Channel	Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Margin (dB)	Result
Middle	-12.5	8.0	20.5	Complied

**Middle Channel****Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1490	Attenuator	Weinschel Corp	23-30-34	BH9156	03 Apr 2013	12

5.2.5. Transmitter Maximum Average Output Power**Test Summary:**

Test Engineer:	Sandeep Bharat	Test Date:	11 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	Part 15.247(b)(3)
Industry Canada Reference:	RSS-Gen 4.8, RSS-210 A8.4(4)
Test Method Used:	FCC KDB 558074 Section 8.2.1 Option 1

Environmental Conditions:

Temperature (°C):	23
Relative Humidity (%):	31

Note(s):

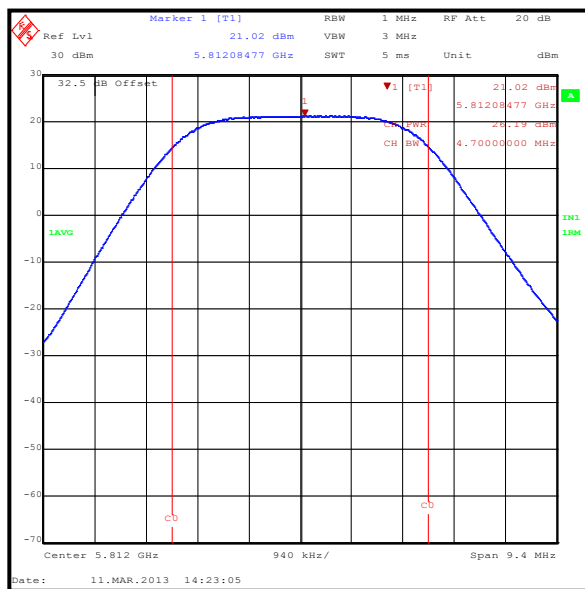
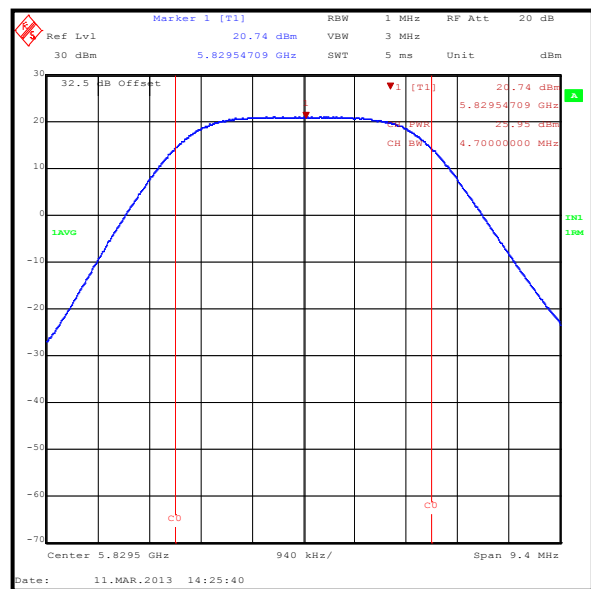
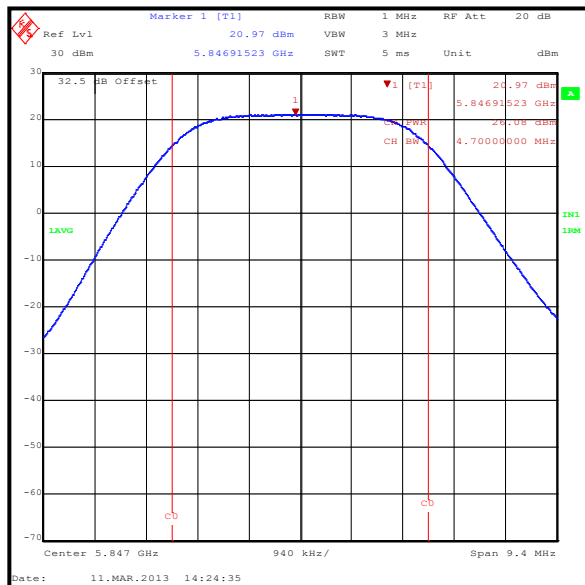
1. Conducted power tests in all bands were performed using a spectrum analyser in accordance with FCC KDB 558074 Section 8.2.1 Option 1.
2. 26 dB Emission Bandwidth tests were performed to calculate the span and to determine widest bandwidth worst case, the results are available upon request.
3. All supported modes and channel widths were initially investigated on one channel. The modes that produced the highest power were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – QPSK / 11 Mbps
 - 20 MHz channel bandwidth – QPSK / 24 Mbps
 - 30 MHz channel bandwidth – QPSK / 38 Mbps
 - 40 MHz channel bandwidth – QPSK / 50 Mbps

Measurements were performed on the required channels.

4. A 30 dB attenuator and RF cable were used to connect the measurement equipment to the EUT. The combined cable and attenuator loss was measured prior to performing the measurements and the loss compensation incorporated into the measurement results.

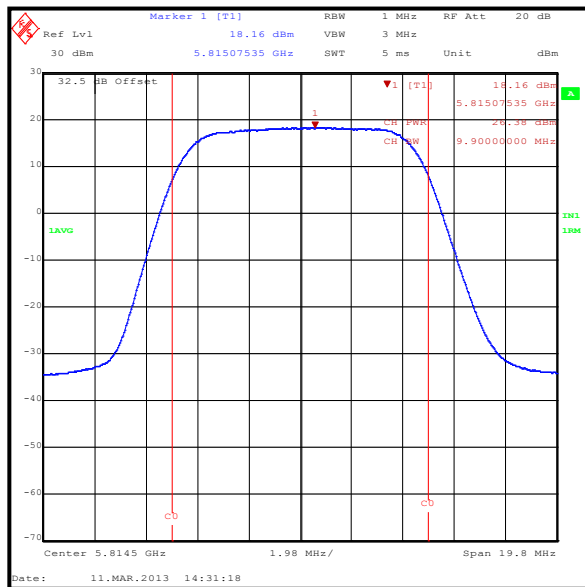
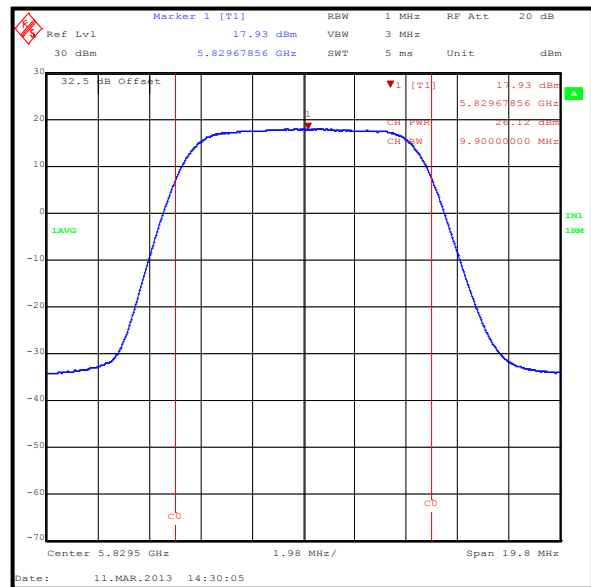
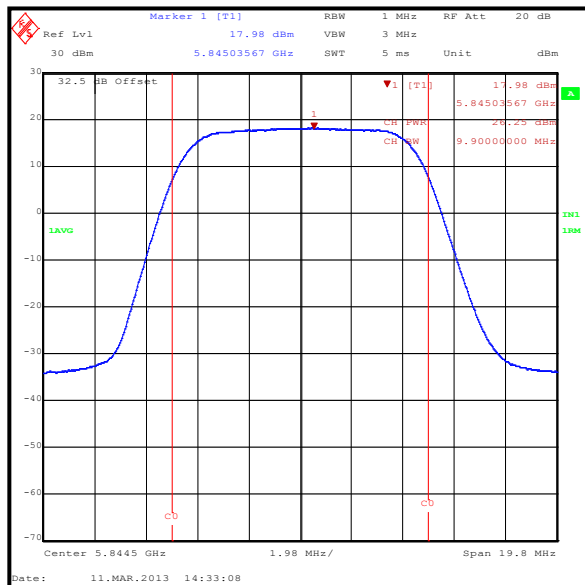
Transmitter Maximum Average Output Power (continued)**Results: 5 MHz / 128QAM / 24 Mbps**

Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	26.2	30.0	3.8	Complied
Middle	26.0	30.0	4.0	Complied
Top	26.1	30.0	3.9	Complied

**Bottom Channel****Middle Channel****Top Channel**

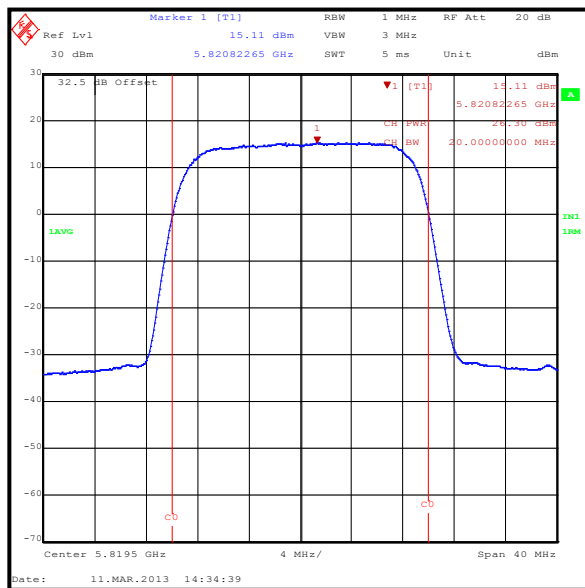
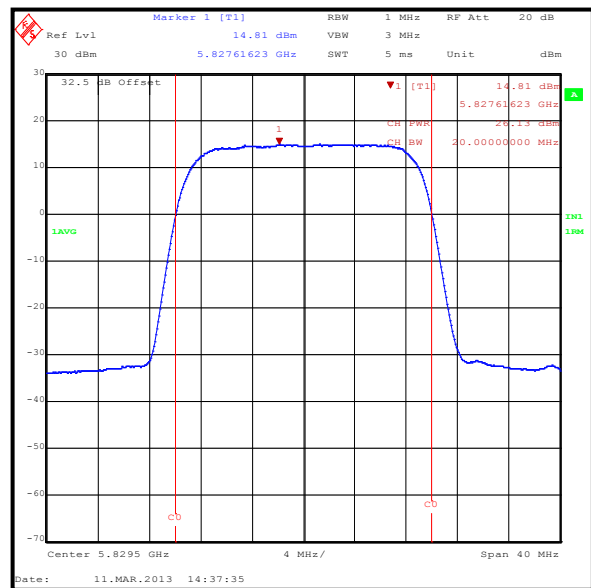
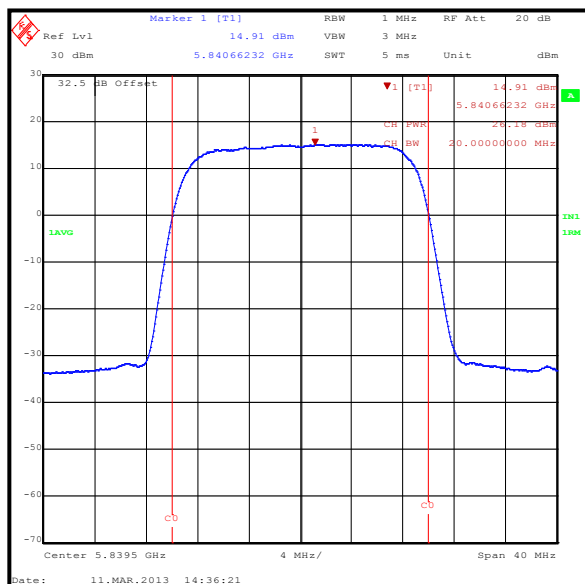
Transmitter Maximum Average Output Power (continued)**Results: 10 MHz / QPSK / 11 Mbps**

Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	26.4	30.0	3.6	Complied
Middle	26.1	30.0	3.9	Complied
Top	26.3	30.0	3.7	Complied

**Bottom Channel****Middle Channel****Top Channel**

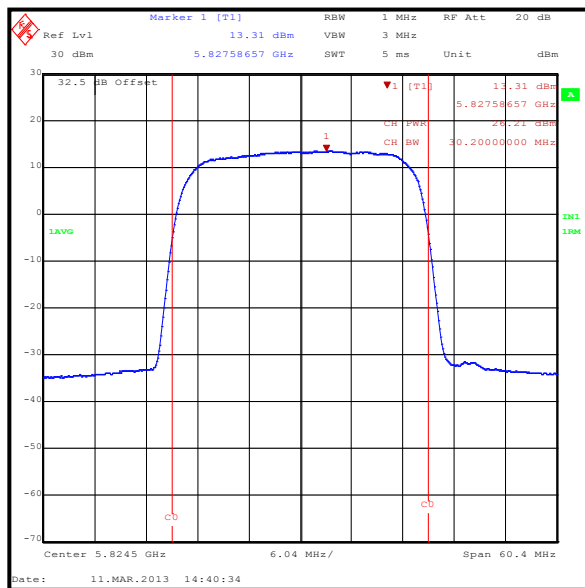
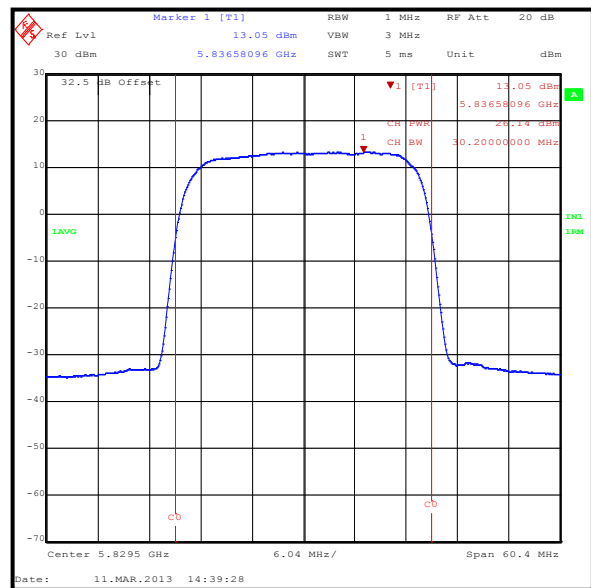
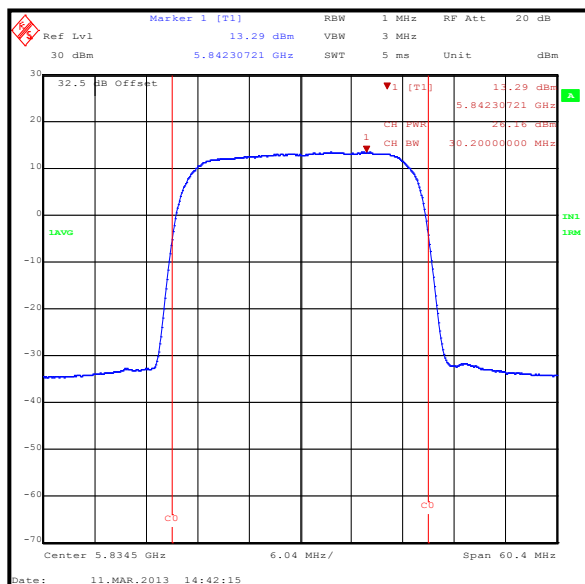
Transmitter Maximum Average Output Power (continued)**Results: 20 MHz / QPSK / 24 Mbps**

Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	26.3	30.0	3.7	Complied
Middle	26.1	30.0	3.9	Complied
Top	26.2	30.0	3.8	Complied

**Bottom Channel****Middle Channel****Top Channel**

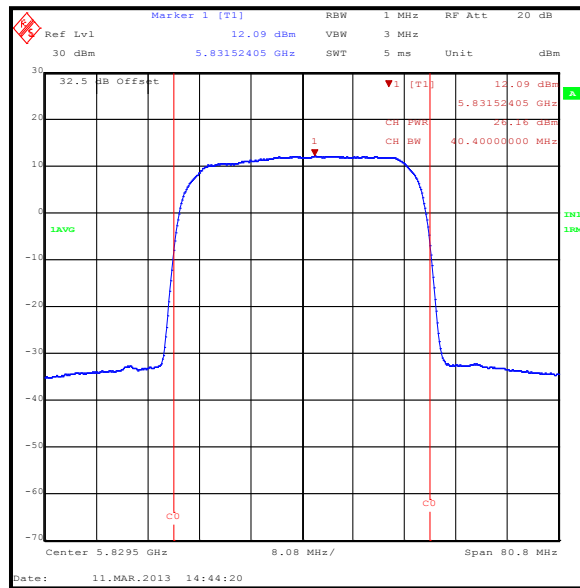
Transmitter Maximum Average Output Power (continued)**Results: 30 MHz / QPSK / 38 Mbps**

Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	26.2	30.0	3.8	Complied
Middle	26.1	30.0	3.9	Complied
Top	26.2	30.0	3.8	Complied

**Bottom Channel****Middle Channel****Top Channel**

Transmitter Maximum Average Output Power (continued)**Results: 40 MHz / QPSK / 50 Mbps**

Channel	Power (dBm)	Limit (dBm)	Margin (dB)	Result
Middle	26.2	30.0	3.8	Complied

**Middle Channel****Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1490	Attenuator	Weinschel Corp	23-30-34	BH9156	03 Apr 2013	12

5.2.6. Transmitter Radiated Emissions - 4 foot parabolic antenna**Test Summary:**

Test Engineers:	Nick Steele & Sandeep Bharat	Test Date:	06 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	Part 15.247(d) / 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9, RSS-210 A8.5
Test Method Used:	As detailed in FCC KDB 558074 Section 10.0, ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

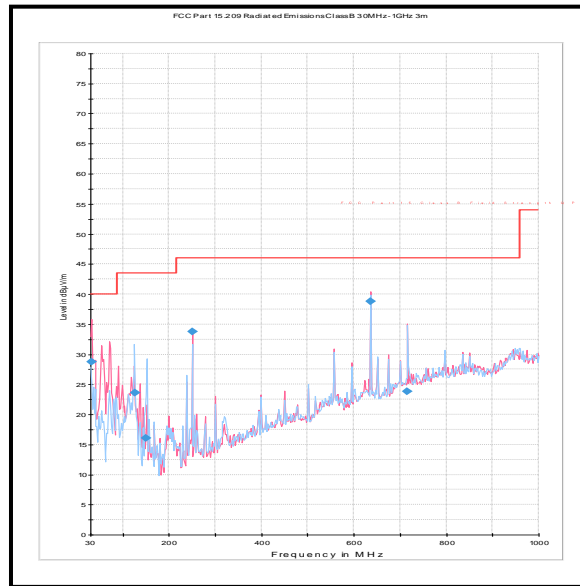
Temperature (°C):	24
Relative Humidity (%):	27

Note(s):

1. Spurious emissions were performed with the EUT transmitting on a 40 MHz / QPSK / 50 Mbps, as this configuration was deemed to be worst case. The EUT was transmitting at >99% duty cycle on the top channel.
2. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
3. Measurements were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss

Results: 40 MHz / QPSK / 50 Mbps

Frequency (MHz)	Antenna Polarity	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Result
126.034	Horizontal	23.6	43.5	19.9	Complied
249.991	Vertical	33.8	46.0	12.2	Complied

Transmitter Radiated Emissions (continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
A490	Bilog Antenna	Chase	CBL6111A	1590	14 May 2013	12
G0543	Pre Amplifier	Sonoma	310N	230801	03 Apr 2013	3
A1834	Attenuator	Hewlett Packard	8491B	10444	27 Jan 2014	12

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineers:	Nick Steele, Sandeep Bharat	Test Dates:	05 -06 March 2013 & 12 July 2013
Test Sample Serial Number:	FLX1304S026		

FCC Part:	15.247(d) / 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9, RSS-210 A8.5
Test Method Used:	As detailed in FCC KDB 558074 Section 10.0, ANSI C63.10 Sections 6.3 and 6.6 referencing ANSI C63.4
Frequency Range	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	24 to 25
Relative Humidity (%):	24 to 27

Note(s):

1. The emission shown at approximately 5829.5 MHz on the 4 GHz to 7 GHz plot is the EUT fundamental.
2. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the results table.
3. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.

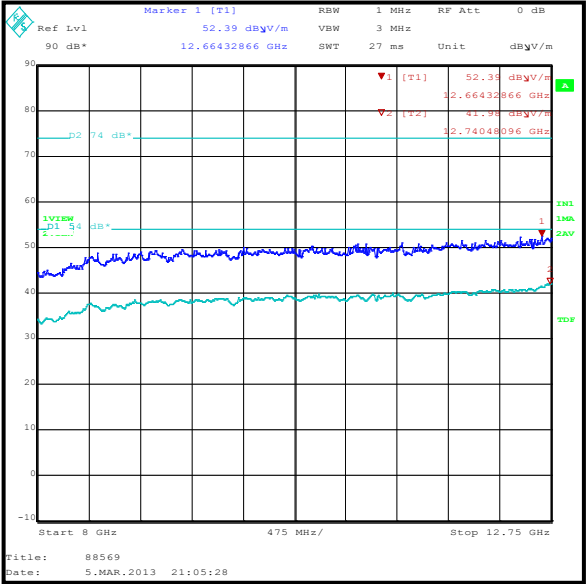
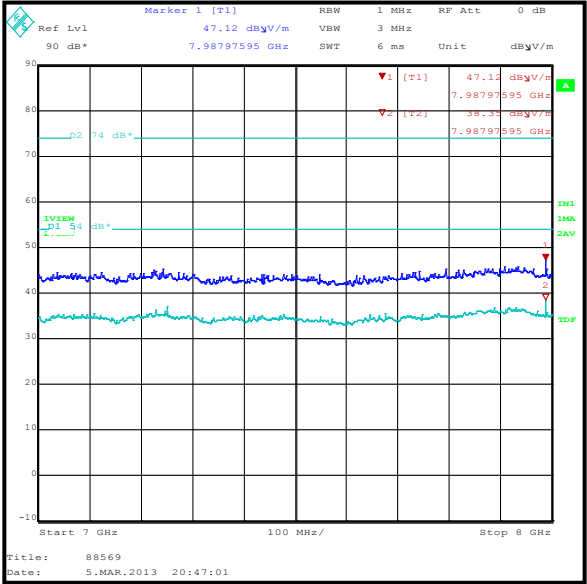
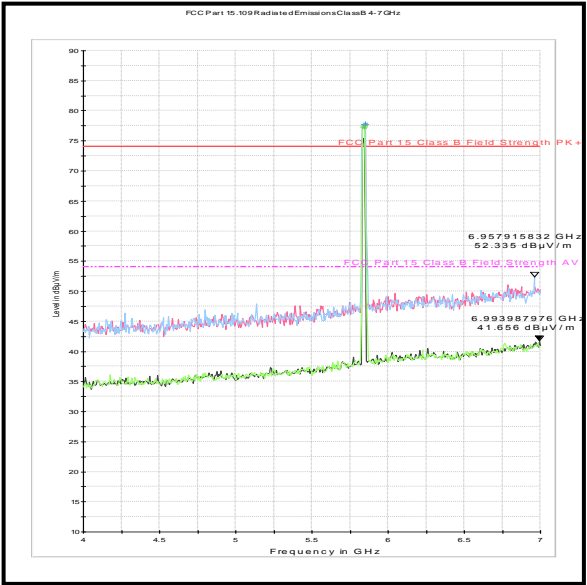
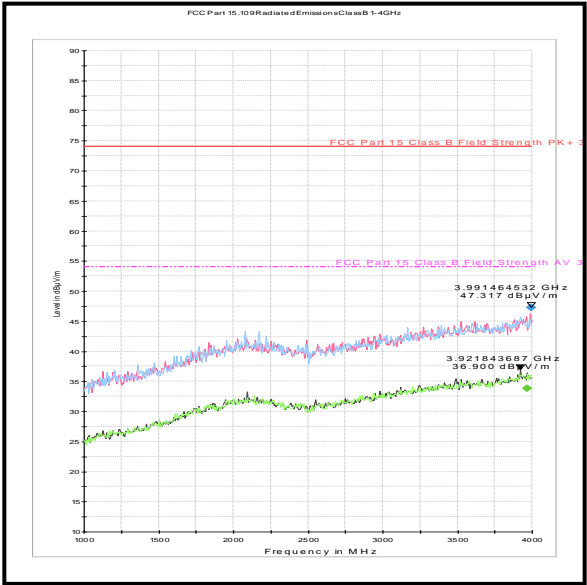
Results: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
17947.395	Vertical	59.9	74.0	14.1	Complied

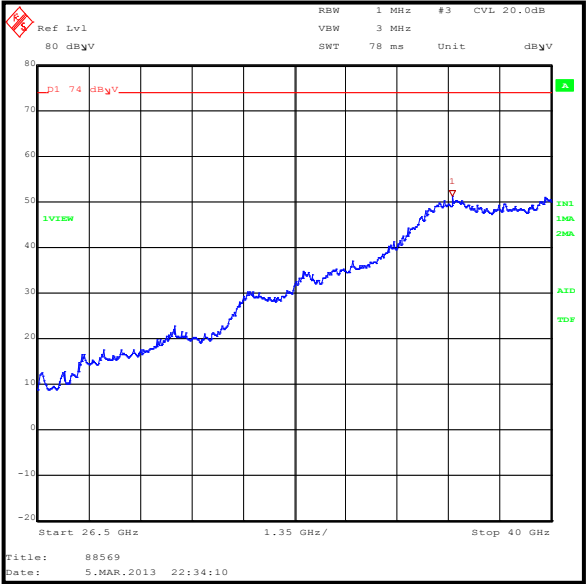
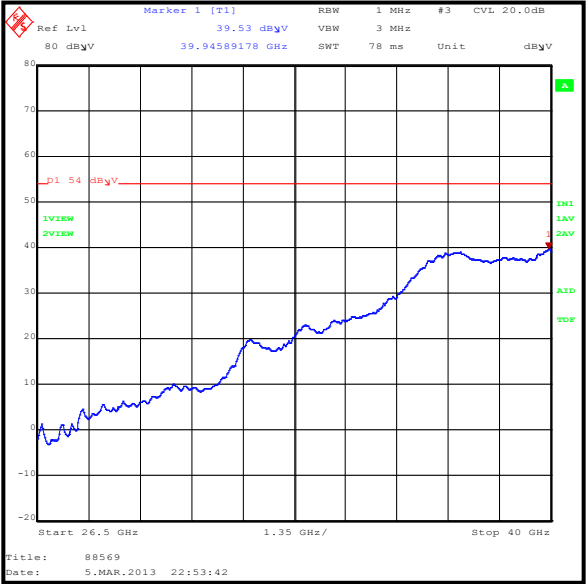
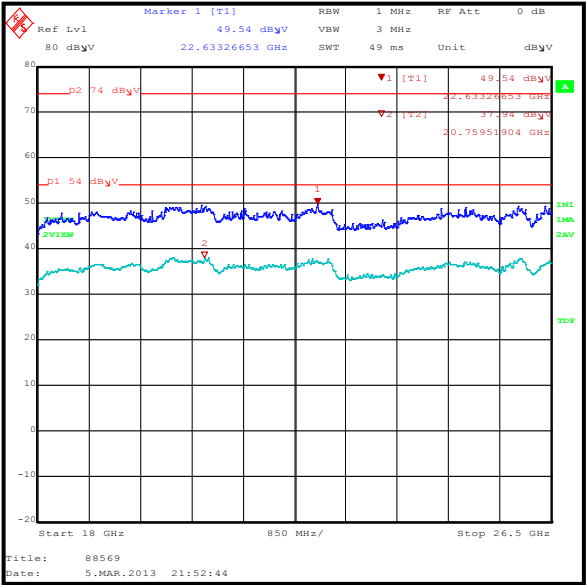
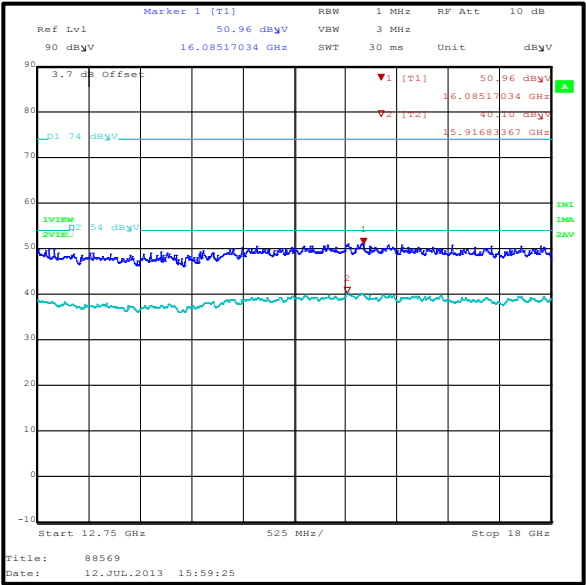
Results: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
17978.958	Vertical	47.8	54.0	6.2	Complied

Transmitter Radiated Emissions (continued)



Transmitter Radiated Emissions (continued)



Transmitter Radiated Emissions (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
A1227	Pre Amplifier	Agilent	8449B	3008A01566	03 Apr 2013	3
A254	Horn Antenna	Flann Microwave	14240-20	139	04 Nov 2013	12
A255	Horn Antenna	Flann Microwave	16240-20	519	04 Nov 2013	12
A256	Horn Antenna	Flann Microwave	18240-20	400	04 Nov 2013	12
A436	Horn Antenna	Flann Microwave	20249-20	330	04 Nov 2013	12
A2176	High Pass Filter	Atlantic Microwave	AFH-07000	800980	25 May 2013	12
A1999	Attenuator	Huber & Suhner	6820.17.B	07101	04 Apr 2013	12
A1997	Attenuator	Huber & Suhner	6810.17.B	301749	03 Apr 2013	12
A512	Horn Antenna	EMCO	3115	3993	12 May 2015	36
A1785	Pre Amplifier	Farran Technology	FLNA-28-30	FTL 6483	Calibrated Before Use	-
M1390	Harmonic Mixer	Farran Technology	WHMP 28	FTL1677B	Calibrated Before Use	-
A366	Isolator	MRI	FRR-400	169	Calibrated Before Use	-
A203	Antenna	Flann Microwave	22240-20	343	11 May 2013	12
A435	Antenna	Flann Microwave	22240-20	400	08 Jan 2016	36

5.2.7. Transmitter Radiated Emissions - 2 foot flat panel antenna**Test Summary:**

Test Engineer:	Nick Steele	Test Date:	04 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Part:	15.247(d) / 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9, RSS-210 A8.5
Test Method Used:	As detailed in FCC KDB 558074 Section 10.0, ANSI C63.10 Sections 6.3 and 6.5 referencing ANSI C63.4
Frequency Range	30 MHz to 1000 MHz

Environmental Conditions:

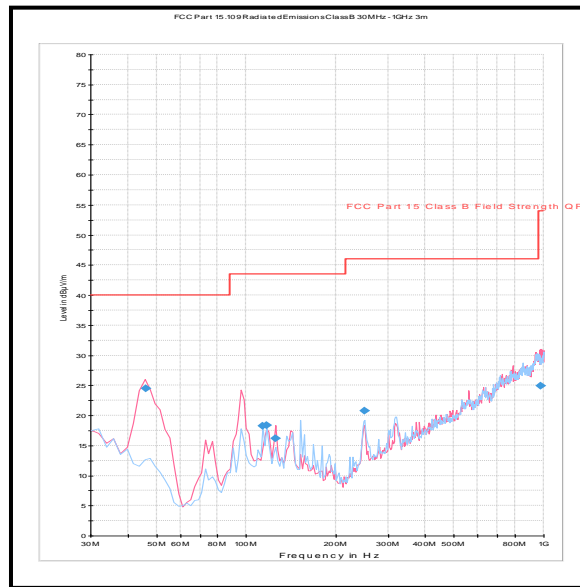
Temperature (°C):	23
Relative Humidity (%):	27

Note(s):

1. Spurious emissions were performed with the EUT transmitting on a 40 MHz / QPSK / 50 Mbps, as this configuration was deemed to be worst case. The EUT was transmitting at >99% duty cycle on the top channel.
2. All other emissions were at least 20 dB below the appropriate limit or below the noise floor of the measurement system.
3. Measurements were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable losses.

Results: 40 MHz / QPSK / 50 Mbps

Frequency (MHz)	Antenna Polarity	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Result
114.025	Horizontal	18.2	43.5	25.3	Complied
117.018	Vertical	18.4	43.5	25.1	Complied
126.034	Vertical	16.1	43.5	27.4	Complied
250.010	Horizontal	20.7	46.0	25.3	Complied
980.546	Vertical	24.9	54.0	29.1	Complied

Transmitter Radiated Emissions (continued)

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying table.

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
A490	Bilog Antenna	Chase	CBL6111A	1590	14 May 2013	12
G0543	Pre Amplifier	Sonoma	310N	230801	03 Apr 2013	3
A1834	Attenuator	Hewlett Packard	8491B	10444	27 Jan 2014	12

Transmitter Radiated Emissions (continued)**Test Summary:**

Test Engineer:	Nick Steele	Test Dates:	04 March 2013 & 05 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Part:	15.247(d) / 15.209(a)
Industry Canada Reference:	RSS-Gen 4.9, RSS-210 A8.5
Test Method Used:	As detailed in FCC KDB 558074 Section 10.0, ANSI C63.10 Sections 6.3 and 6.6 referencing ANSI C63.4
Frequency Range	1 GHz to 40 GHz

Environmental Conditions:

Temperature (°C):	22 to 23
Relative Humidity (%):	25 to 27

Note(s):

1. No spurious emissions were detected above the noise floor of the measuring receiver therefore the highest peak noise floor reading of the measuring receiver was recorded as shown in the results table.
2. The emission shown at approximately 5829.5 MHz on the 4 GHz to 7 GHz plot is the EUT fundamental.
3. Measurements were performed in a semi-anechoic chamber (RFI Asset Number K0001) at a distance of 3 metres. The EUT was placed at a height of 80 cm above the reference ground plane in the centre of the chamber turntable. Maximum emission levels were determined by height searching the measurement antenna over the range 1 metre to 4 metres.
4. The pre-scan plots 12.75 - 18 GHz were performed at 1.5 metres rather than 3 metres because the noise floor at 3 metres exceeded the average 54 dB μ V/m limit. The peak and average limits have been adjusted by 6 dB by using the formula stated below

$$20 \text{ Log } (d1/d2)$$

$$20 \text{ Log } (3\text{m} / 1.5\text{m}) = 6.02 \text{ dB}$$

5. The final measured value, for the given emission, in the table below incorporates the calibrated antenna factor and cable loss.

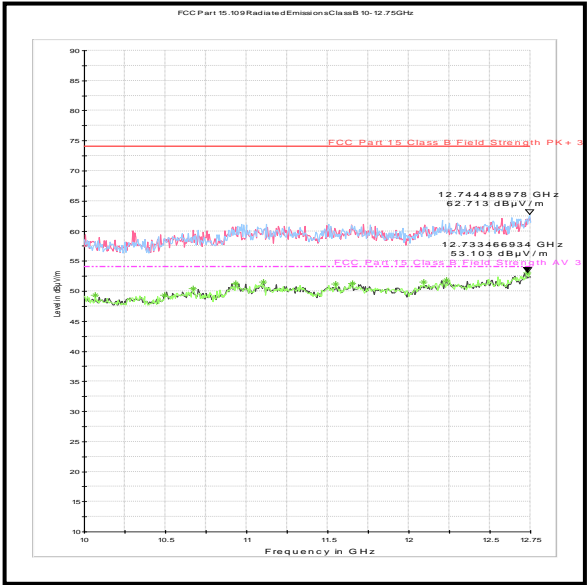
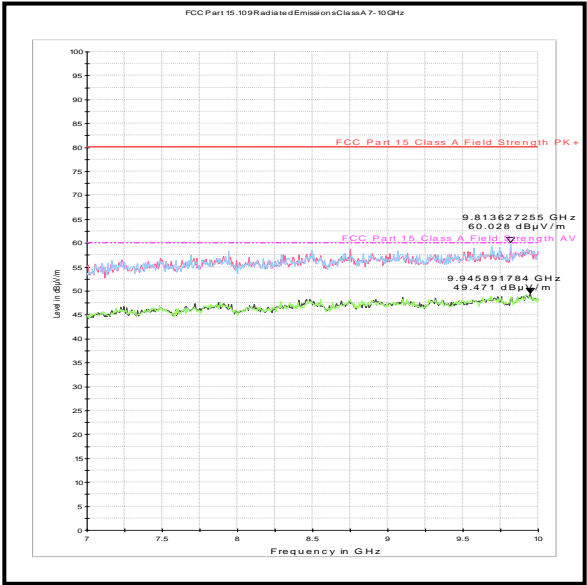
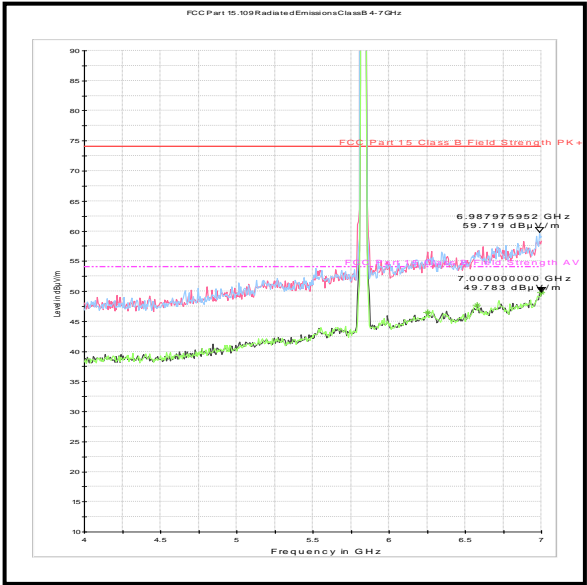
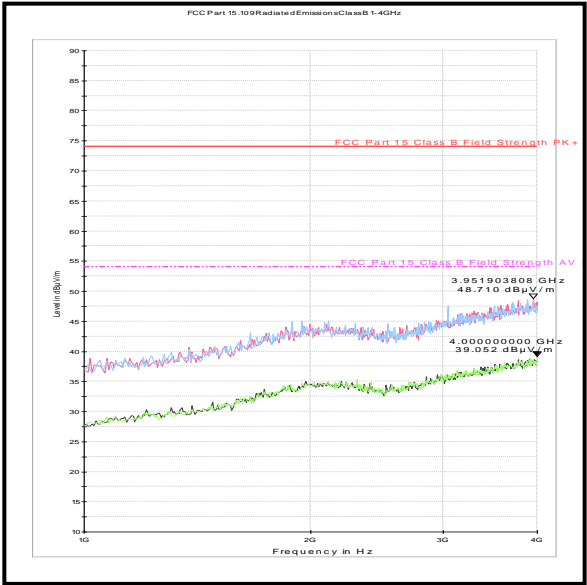
Results: Peak

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
17978.958	Vertical	72.4	80.0	7.6	Complied

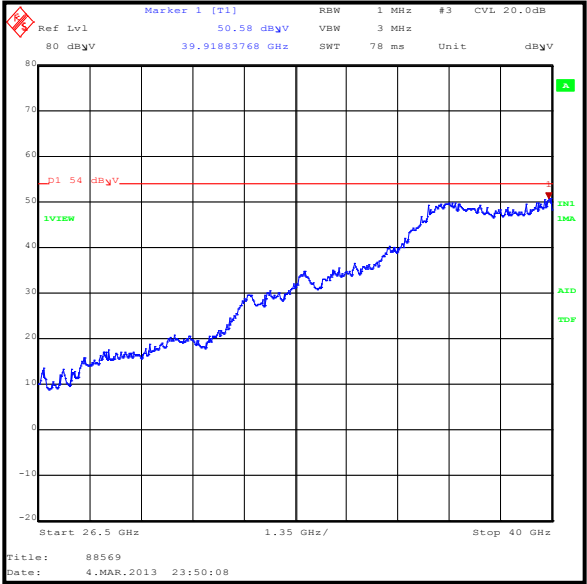
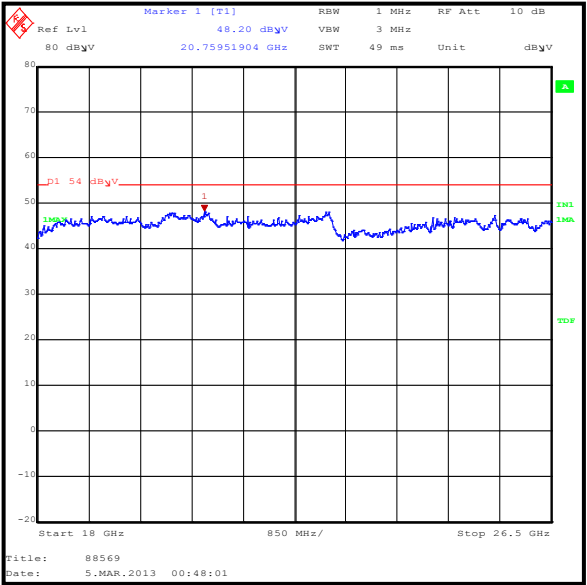
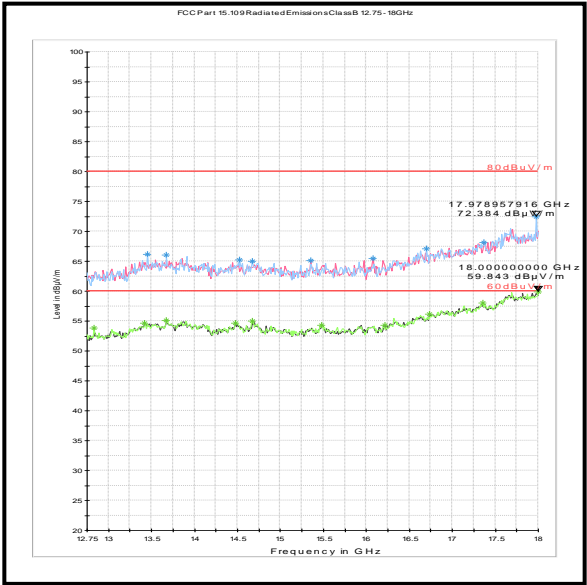
Results: Average

Frequency (MHz)	Antenna Polarity	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
18000.000	Vertical	59.8	60.0	0.2	Complied

Transmitter Radiated Emissions (continued)



Transmitter Radiated Emissions (continued)



Transmitter Radiated Emissions (continued)**Test Equipment Used:**

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
K0001	5m RSE Chamber	Rainford EMC	N/A	N/A	24 Oct 2013	12
M1273	Test Receiver	Rohde & Schwarz	ESIB 26	100275	15 Feb 2014	12
A1227	Pre Amplifier	Agilent	8449B	3008A01566	05 Oct 2013	3
A2176	High Pass Filter	Atlantic Microwave	AFH-07000	800980	10 May 2014	12
A1999	Attenuator	Huber & Suhner	6820.17.B	07101	04 Apr 2014	12
A1997	Attenuator	Huber & Suhner	6810.17.B	301749	06 Apr 2014	12
A512	Horn Antenna	EMCO	3115	3993	12 May 2015	36
A1785	Pre Amplifier	Farran Technology	FLNA-28-30	FTL 6483	Calibrated Before Use	-
M1390	Harmonic Mixer	Farran Technology	WHMP 28	FTL1677B	Calibrated Before Use	-
A366	Isolator	MRI	FRR-400	169	Calibrated Before Use	-
A435	Antenna	Flann Microwave	22240-20	400	08 Jan 2016	36

5.2.8. Transmitter Band Edge Conducted Emissions**Test Summary:**

Test Engineer:	Sandeep Bharat	Test Date:	08 March 2013
Test Sample Serial Number:	FLX1304S026		

FCC Reference:	Part 15.247(d)
Industry Canada Reference:	RSS-Gen 4.9 & RSS-210 A8.5
Test Method Used:	FCC KDB 558074 Section 10.2.5

Environmental Conditions:

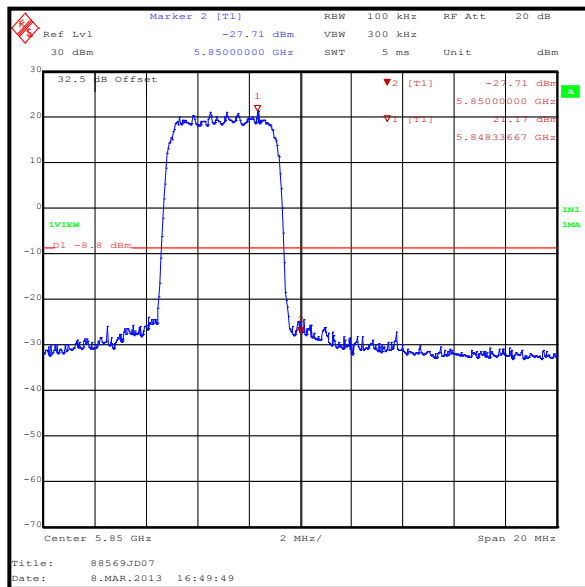
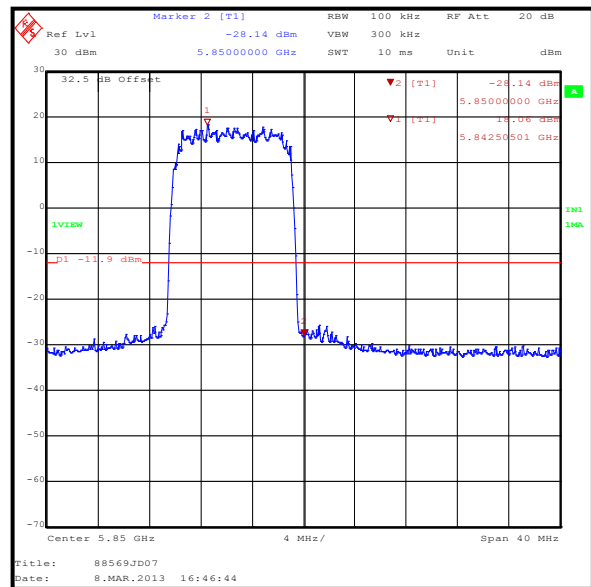
Temperature (°C):	24
Relative Humidity (%):	35

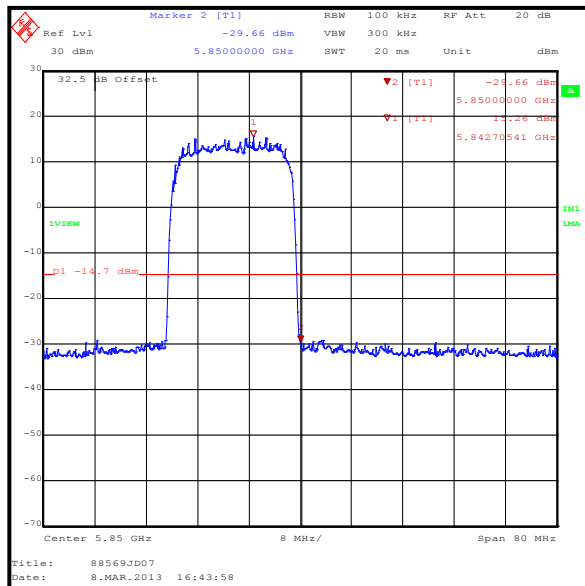
Note(s):

1. The EUT was set to transmit on the bottom channel when performing measurements at the lower band edge and the top channel when performing measurements at the upper band edge.
2. Non-restricted bands are adjacent to the lower and upper band edges and the -30 dBc limit applies as maximum average conducted output power measurements are used to demonstrate compliance with the power limits. In accordance with FCC KDB 558074 Section 10.1 and §15.247(d), the band edge emissions at 5850 MHz were measured using a 100 kHz bandwidth and peak detector. The -30 dBc limit is relative from the peak of the carrier.
3. All supported modes and channel widths were initially investigated on one channel. The modes that produced the widest bandwidth were:
 - 5 MHz channel bandwidth – 128QAM / 24 Mbps
 - 10 MHz channel bandwidth – 64QAM / 40 Mbps
 - 20 MHz channel bandwidth – QPSK / 30 Mbps
 - 30 MHz channel bandwidth – QPSK / 43 Mbps
 - 40 MHz channel bandwidth – 64QAM / 186 Mbps
4. A 30 dB attenuator and RF cable were used to connect the measurement equipment to the EUT. The combined cable and attenuator loss was measured prior to performing the measurements and the loss compensation incorporated into the measurement results.
5. Only higher band edge measurement results are recorded in this report. Lower band edge measurement results can be found in a separate report referenced UL-RPT-RP88569JD07A

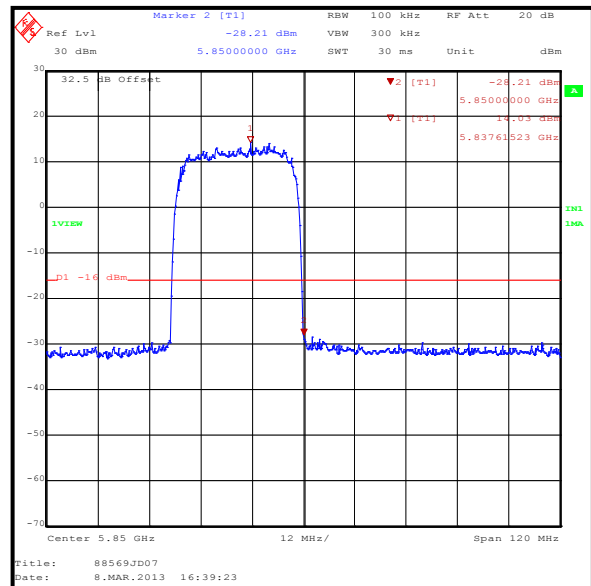
Transmitter Band Edge Conducted Emissions (continued)**Results: Upper Band Edge**

Nominal Channel Bandwidth (MHz)	Level at 5850 MHz (dBm)	30 dBc Limit (dBm)	Margin (dB)	Result
5	-27.7	-8.8	18.9	Complied
10	-28.1	-11.9	16.2	Complied
20	-29.7	-14.7	15.0	Complied
30	-28.2	-16.0	12.2	Complied
40	-21.3	-17.2	4.1	Complied

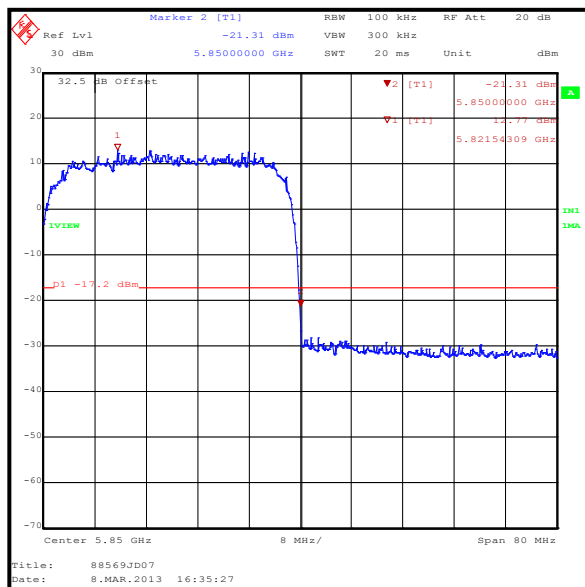
**5 MHz Channel****10 MHz Channel**



20 MHz Channel



30 MHz Channel



40 MHz Channel

Test Equipment Used:

RFI No.	Instrument	Manufacturer	Type No.	Serial No.	Date Calibration Due	Cal. Interval (Months)
M1124	Test Receiver	Rohde & Schwarz	ESIB 26	100046K	14 Aug 2013	12
A1490	Attenuator	Weinschel Corp	23-30-34	BH9156	03 Apr 2013	12

6. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±4.69 dB
Conducted Maximum Peak Output Power	5.72 GHz to 5.85 GHz	95%	±1.13 dB
Spectral Power Density	5.72 GHz to 5.85 GHz	95%	±1.13 dB
6 dB Bandwidth	5.72 GHz to 5.85 GHz	95%	±0.92 ppm
Occupied Bandwidth	5.72 GHz to 5.85 GHz	95%	±0.92 ppm
Conducted Spurious Emissions	5.72 GHz to 5.85 GHz	95%	±2.62 dB
Radiated Spurious Emissions	30 MHz to 40 GHz	95%	±5.65 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty the published guidance of the appropriate accreditation body is followed.

7. Report Revision History

Version Number	Revision Details		
	Page No(s)	Clause	Details
1.0	-	-	Initial Version