

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT					
Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4440A	AAX	10/1/2007	12

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The peak power spectral density measurements were measured with the EUT set to low, mid, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate for each modulation type available. Per the procedure outlined in FCC KDB 558074, March 23, 2005, the spectrum analyzer was used as follows:

The emission peak(s) were located and zoom in on within the passband. The resolution bandwidth was set to 3 kHz, the video bandwidth was set to greater than or equal to the resolution bandwidth. The sweep speed was set equal to the span divided by 3 kHz (sweep = (SPAN/3 kHz)). For example, given a span of 1.5 MHz, the sweep should be $1.5 \times 10^6 \div 3 \times 10^3 = 500$ seconds. External attenuation was used and added to the reading. The following FCC procedure was used for modifying the power spectral density measurements:

"If the spectrum line spacing cannot be resolved on the available spectrum analyzer, the noise density function on most modern conventional spectrum analyzers will directly measure the noise power density normalized to a 1 Hz noise power bandwidth. Add 35 dB for correction to 3 kHz."

Power Spectral Density

EUT: Rad-87		Work Order: MASI0009		
Serial Number: J00073		Date: 09/17/08		
Customer: Masimo Corporation		Temperature: 21.88°C		
Attendees: Eugene Kim		Humidity: 53%		
Project: None		Barometric Pres.: 1011.7		
Tested by: Jaemi Suh	Power: 120V/60Hz	Job Site: OC11		
TEST SPECIFICATIONS				
FCC 15.247 (DTS):2007	Test Method	ANSI C63.4:2003 KDB No. 558074		
COMMENTS				
None				
DEVIATIONS FROM TEST STANDARD				
No deviations.				
Configuration #	2	 Signature		
		Value	Limit	Results
802.11(a), 6 Mbps	Low Channel	-25.84 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-25.61 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-25.35 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(a), 36 Mbps	Low Channel	-25.24 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-26.79 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-25.09 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(a), 54 Mbps	Low Channel	-27.53 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-25.86 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-26.36 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(b), 1 Mbps	Low Channel	-27.68 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-28.16 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-20.47 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(b), 11 Mbps	Low Channel	-22.94 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-23.36 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-21.38 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(g), 6 Mbps	Low Channel	-21.51 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-28.56 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-23.29 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(g), 36 Mbps	Low Channel	-27.31 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-27.95 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-17.67 dBm / 3 kHz	8 dBm / 3 kHz	Pass
802.11(g), 54 Mbps	Low Channel	-27.37 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	Mid Channel	-21.66 dBm / 3 kHz	8 dBm / 3 kHz	Pass
	High Channel	-17.22 dBm / 3 kHz	8 dBm / 3 kHz	Pass


Power Spectral Density

802.11(a), 6 Mbps, Low Channel

Result: Pass

Value: -25.84 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

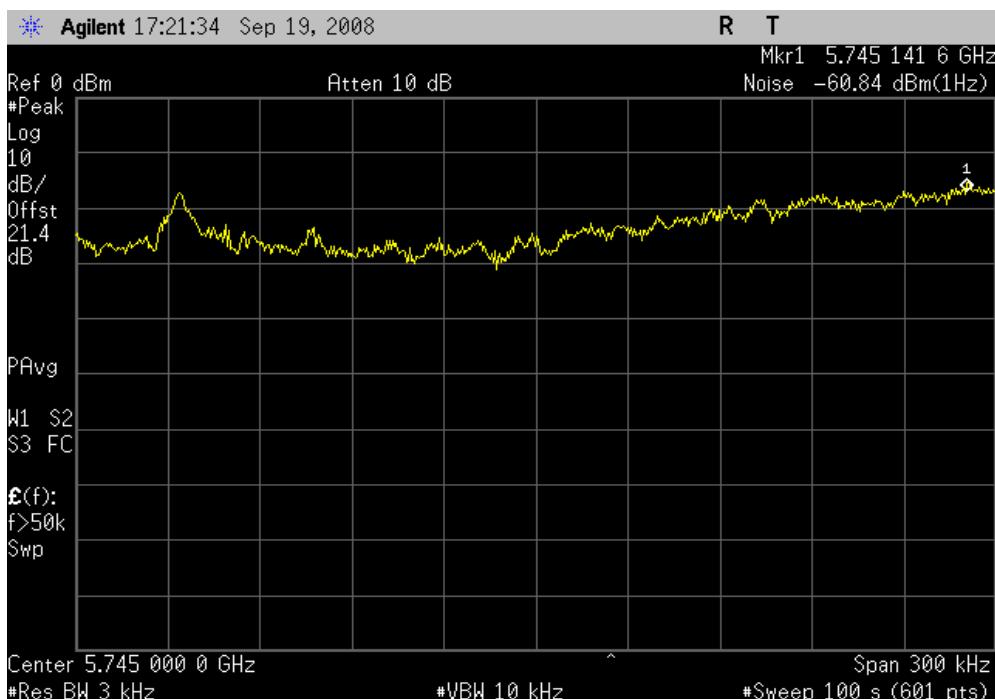


802.11(a), 6 Mbps, Mid Channel

Result: Pass

Value: -25.61 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

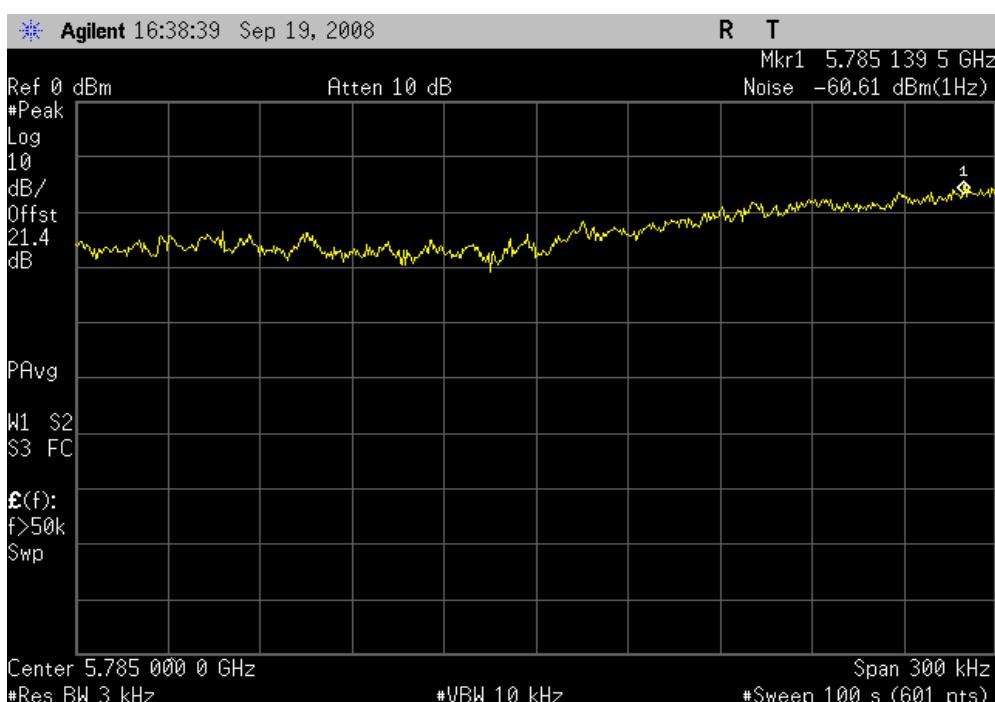


Power Spectral Density

802.11(a), 6 Mbps, High Channel

Result: Pass

Value: -25.35 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

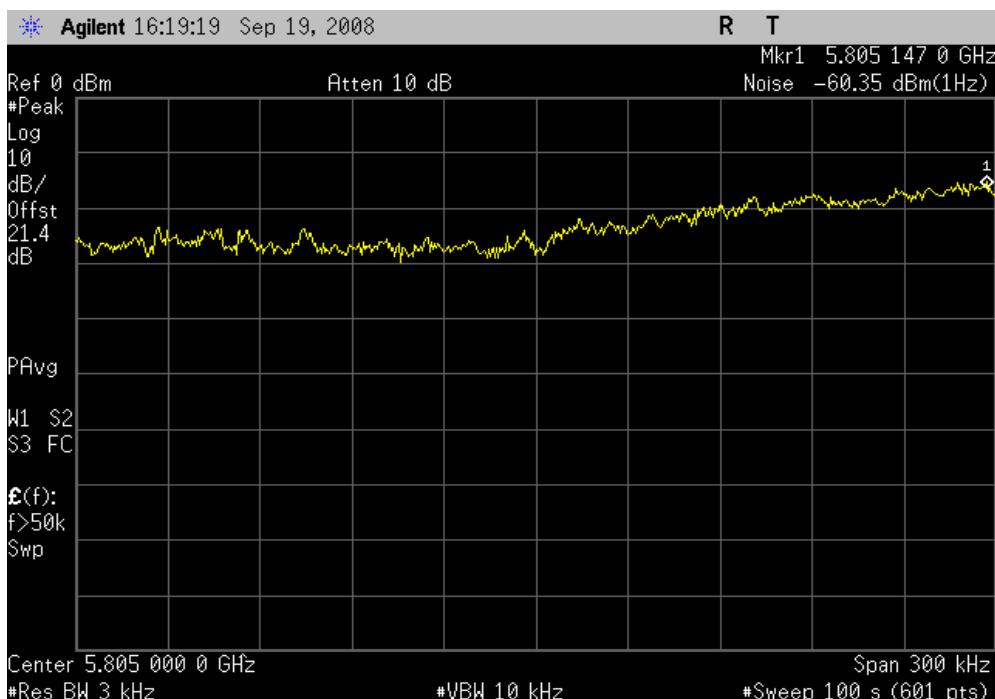


802.11(a), 36 Mbps, Low Channel

Result: Pass

Value: -25.24 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

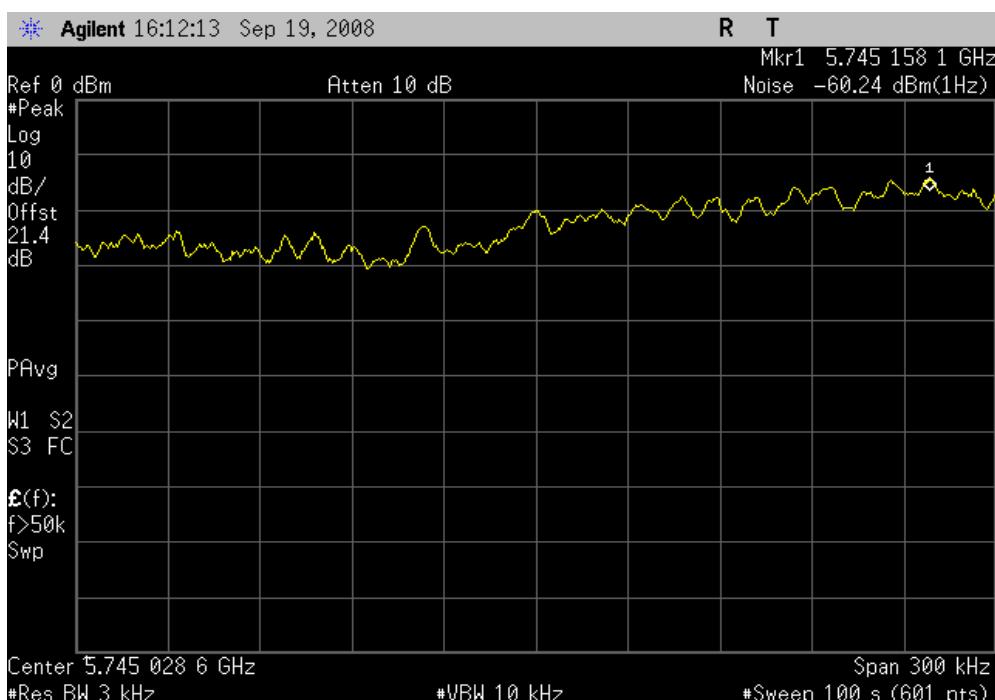


Power Spectral Density

802.11(a), 36 Mbps, Mid Channel

Result: Pass

Value: -26.79 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

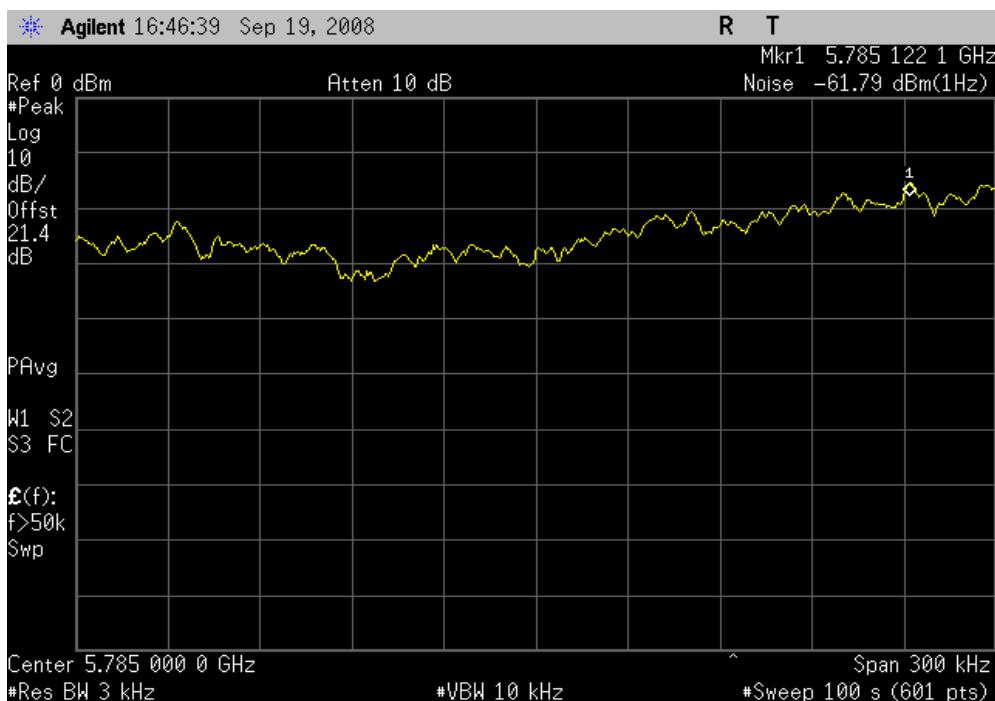


802.11(a), 36 Mbps, High Channel

Result: Pass

Value: -25.09 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

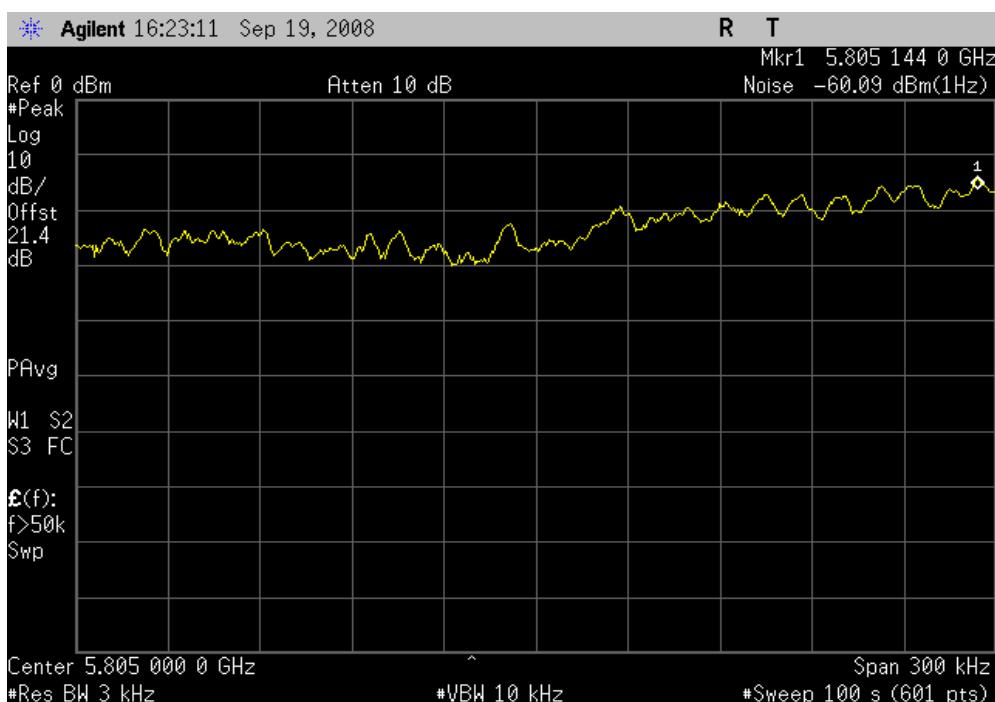


Power Spectral Density

802.11(a), 54 Mbps, Low Channel

Result: Pass

Value: -27.53 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

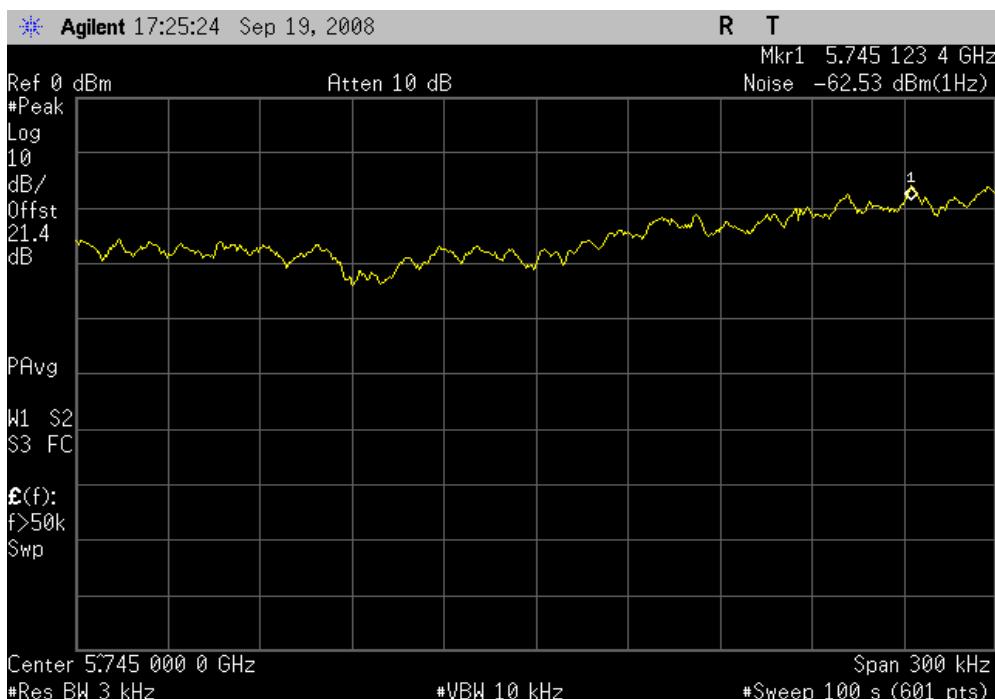


802.11(a), 54 Mbps, Mid Channel

Result: Pass

Value: -25.86 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

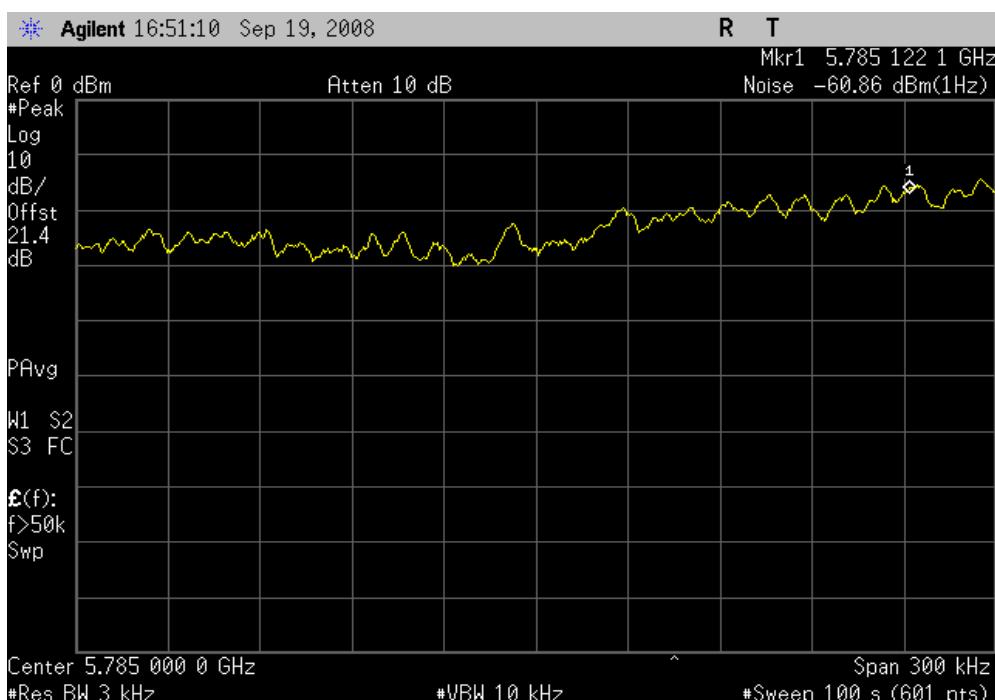


Power Spectral Density

802.11(a), 54 Mbps, High Channel

Result: Pass

Value: -26.36 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

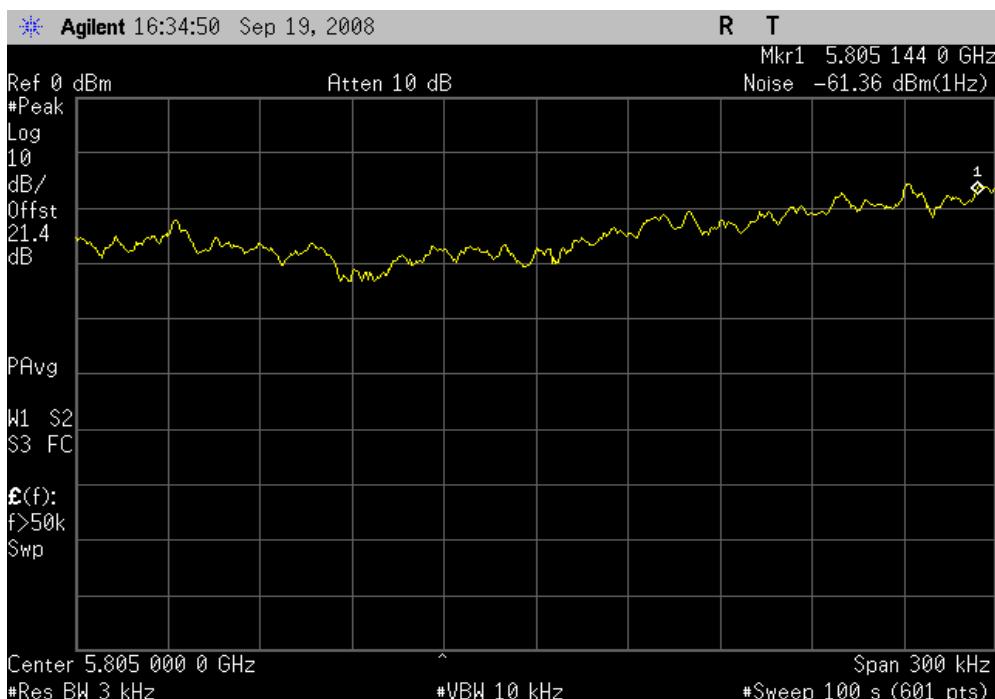


802.11(b), 1 Mbps, Low Channel

Result: Pass

Value: -27.68 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

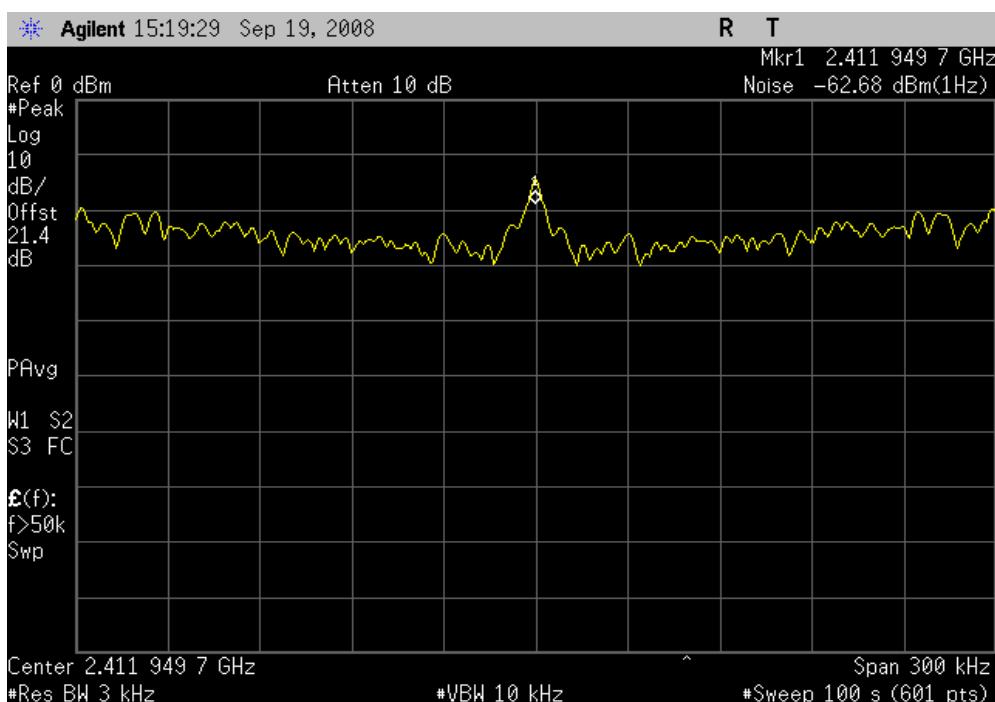


802.11(b), 1 Mbps, Mid Channel

Result: Pass

Value: -28.16 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

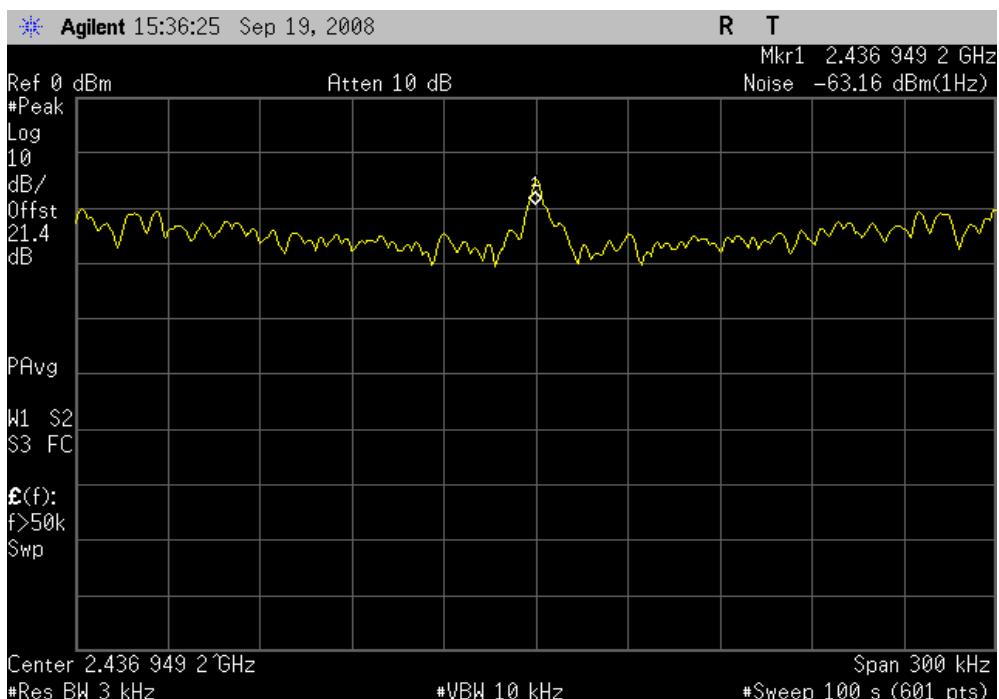


802.11(b), 1 Mbps, High Channel

Result: Pass

Value: -20.47 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

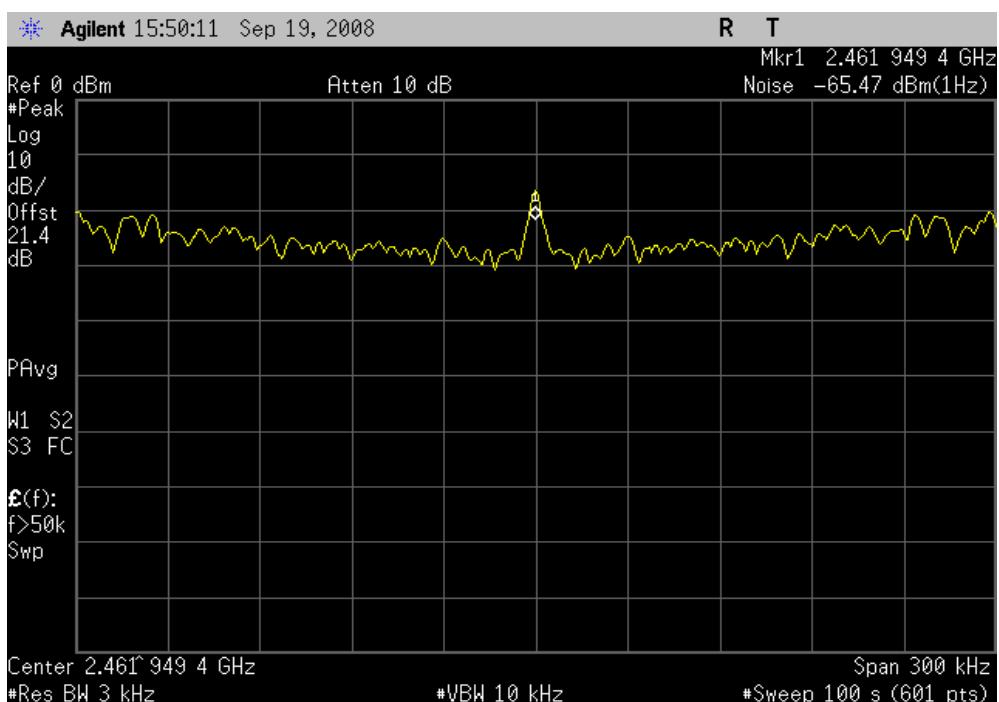


Power Spectral Density

802.11(b), 11 Mbps, Low Channel

Result: Pass

Value: -22.94 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

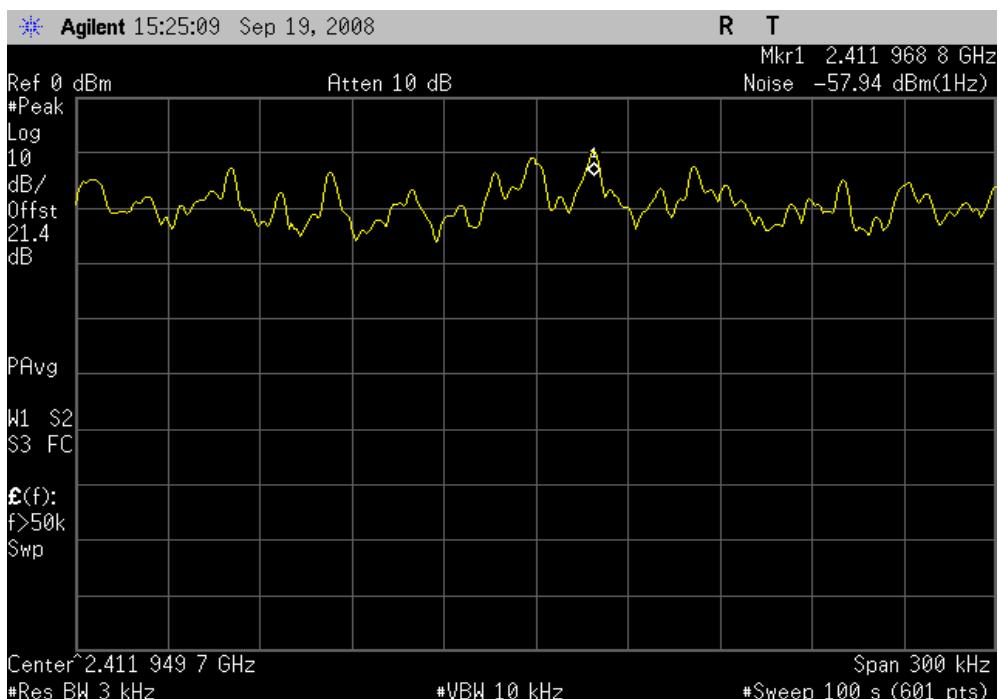


802.11(b), 11 Mbps, Mid Channel

Result: Pass

Value: -23.36 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

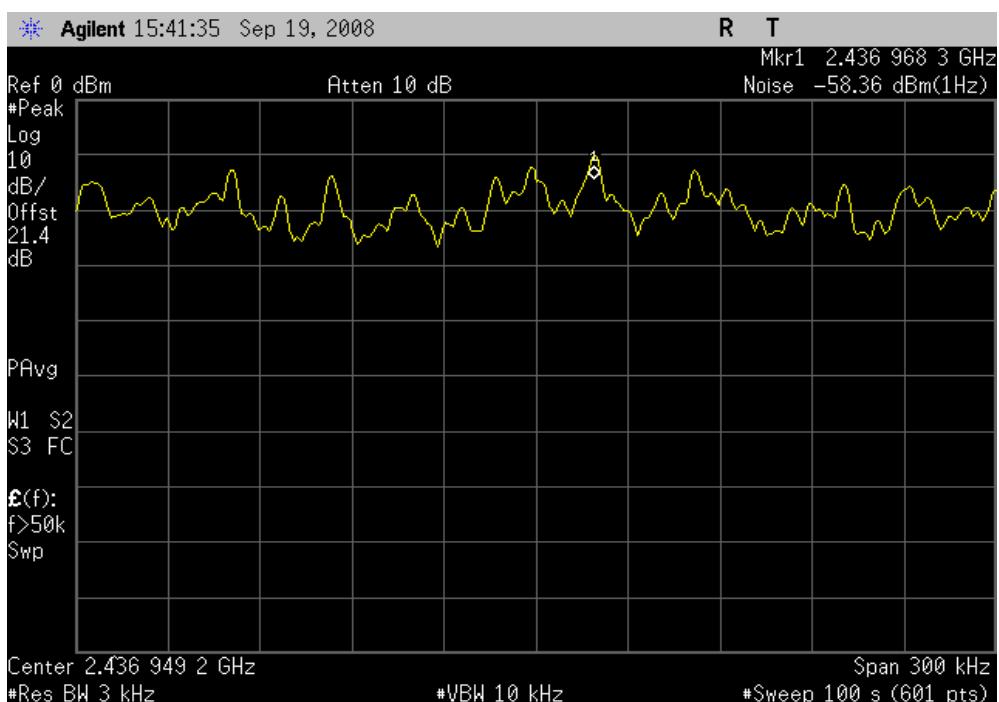


Power Spectral Density

802.11(b), 11 Mbps, High Channel

Result: Pass

Value: -21.38 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

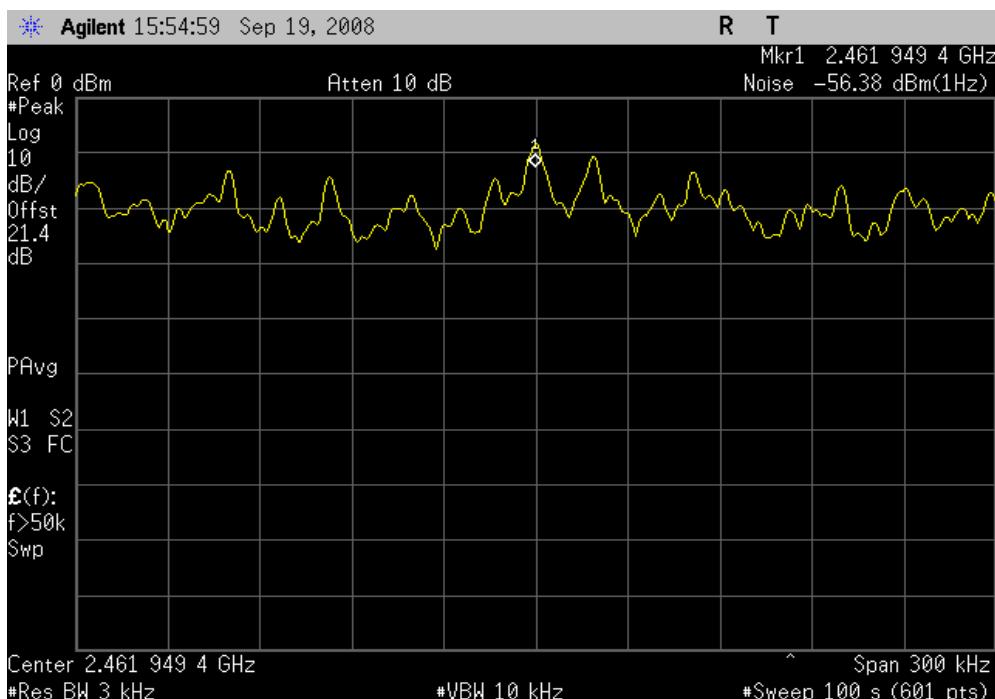


802.11(g), 6 Mbps, Low Channel

Result: Pass

Value: -21.51 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

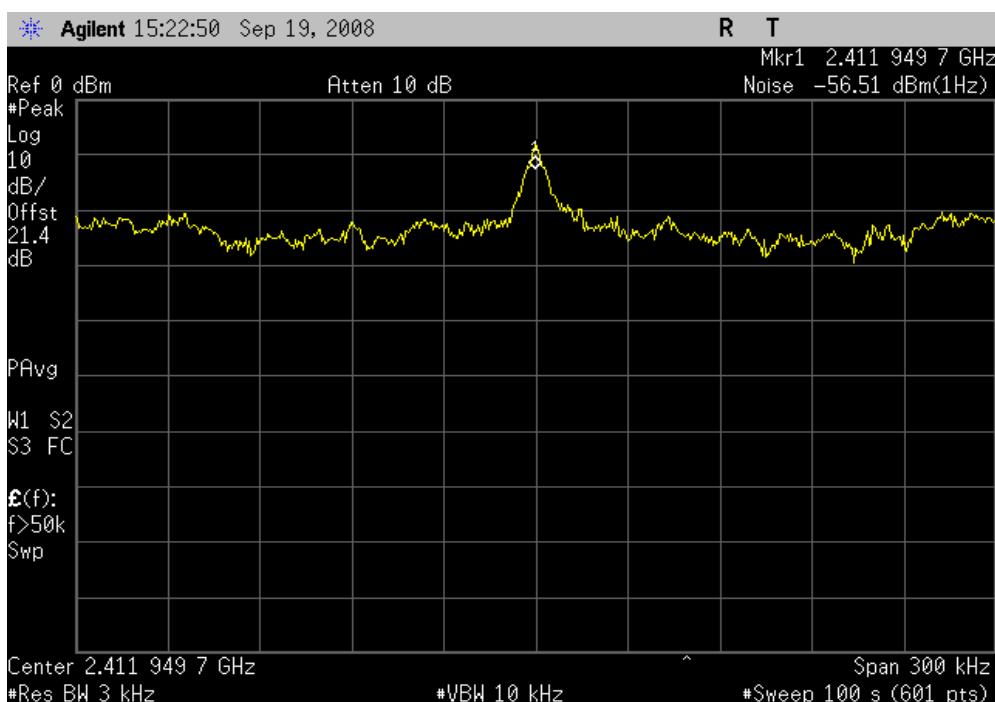


Power Spectral Density

802.11(g), 6 Mbps, Mid Channel

Result: Pass

Value: -28.56 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

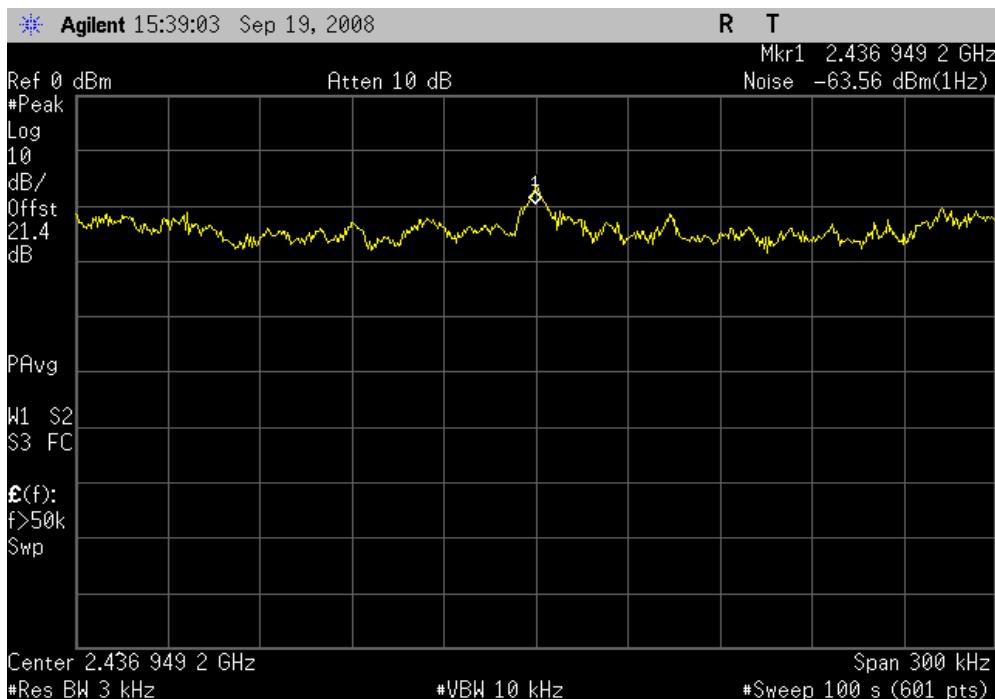


802.11(g), 6 Mbps, High Channel

Result: Pass

Value: -23.29 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

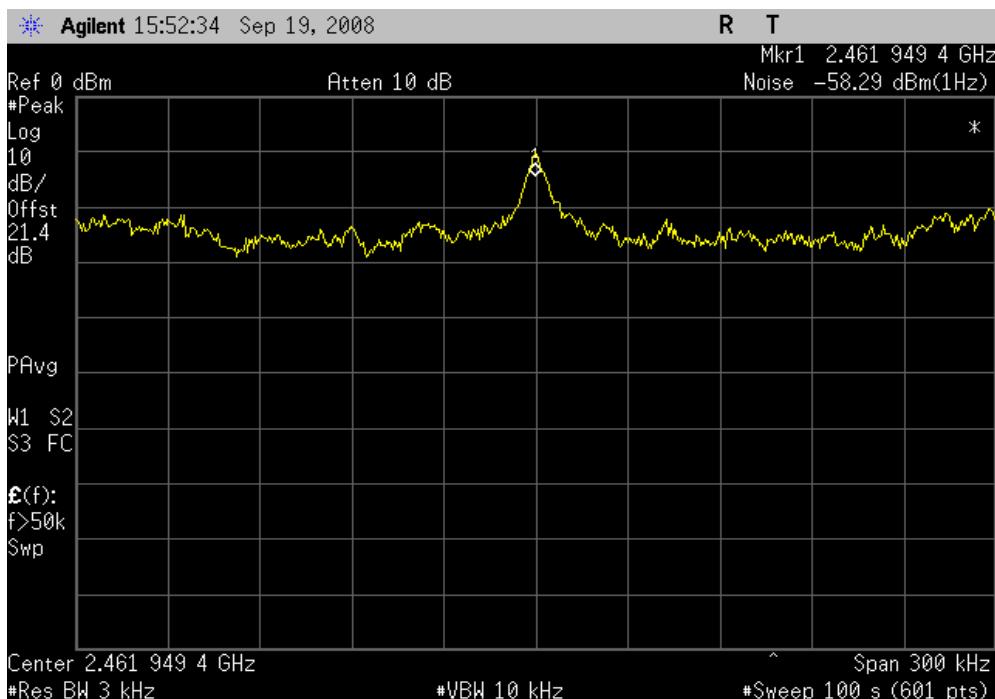


Power Spectral Density

802.11(g), 36 Mbps, Low Channel

Result: Pass

Value: -27.31 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

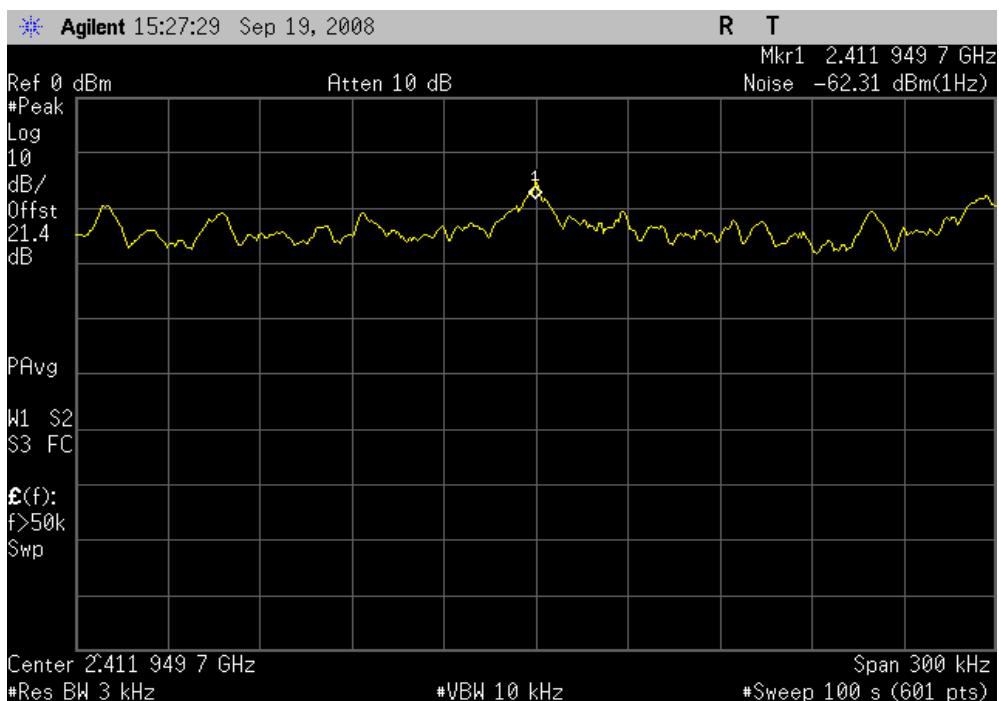


802.11(g), 36 Mbps, Mid Channel

Result: Pass

Value: -27.95 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

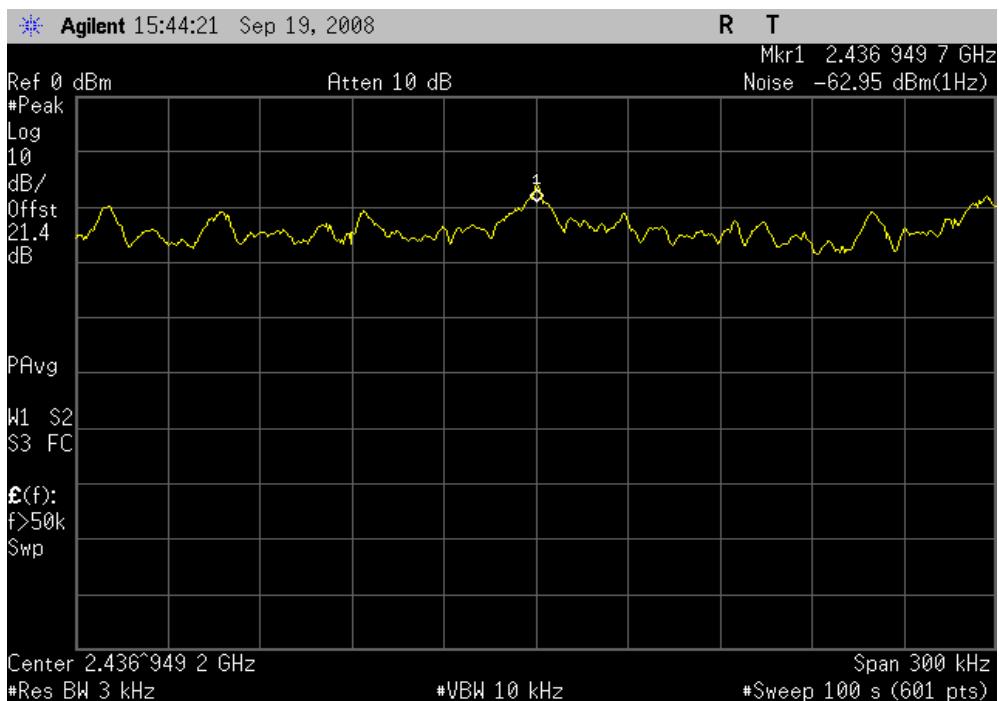


802.11(g), 36 Mbps, High Channel

Result: Pass

Value: -17.67 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

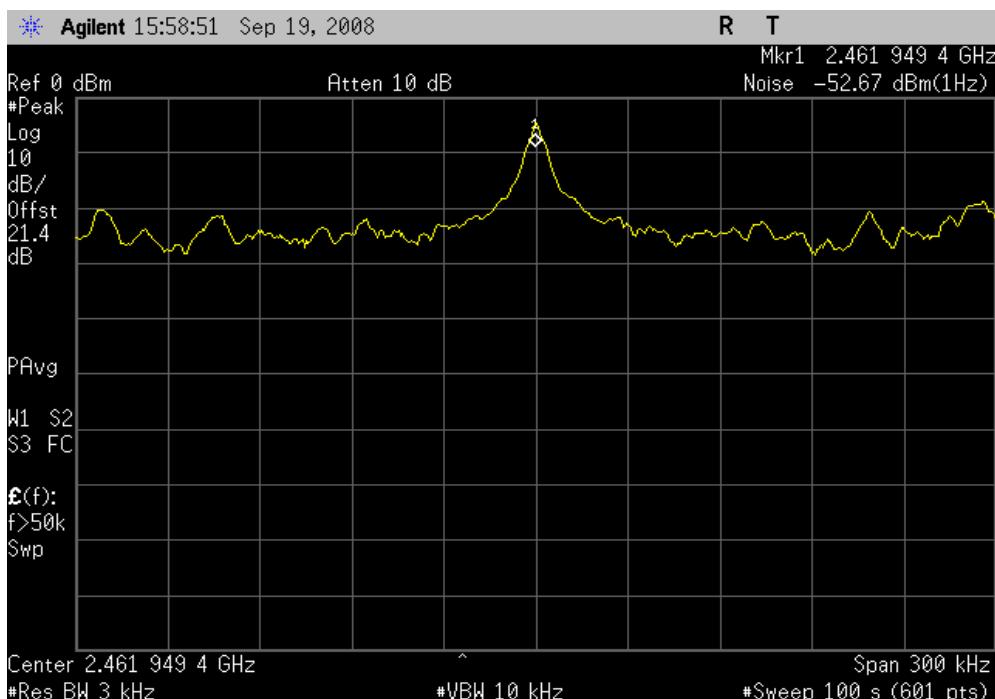


802.11(g), 54 Mbps, Low Channel

Result: Pass

Value: -27.37 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

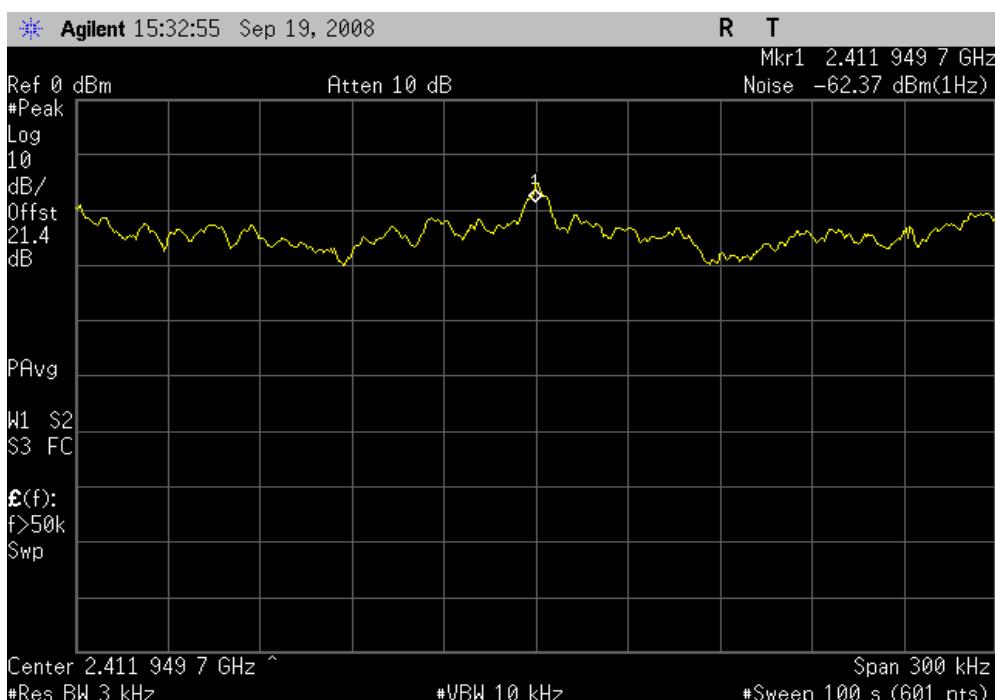


Power Spectral Density

802.11(g), 54 Mbps, Mid Channel

Result: Pass

Value: -21.66 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

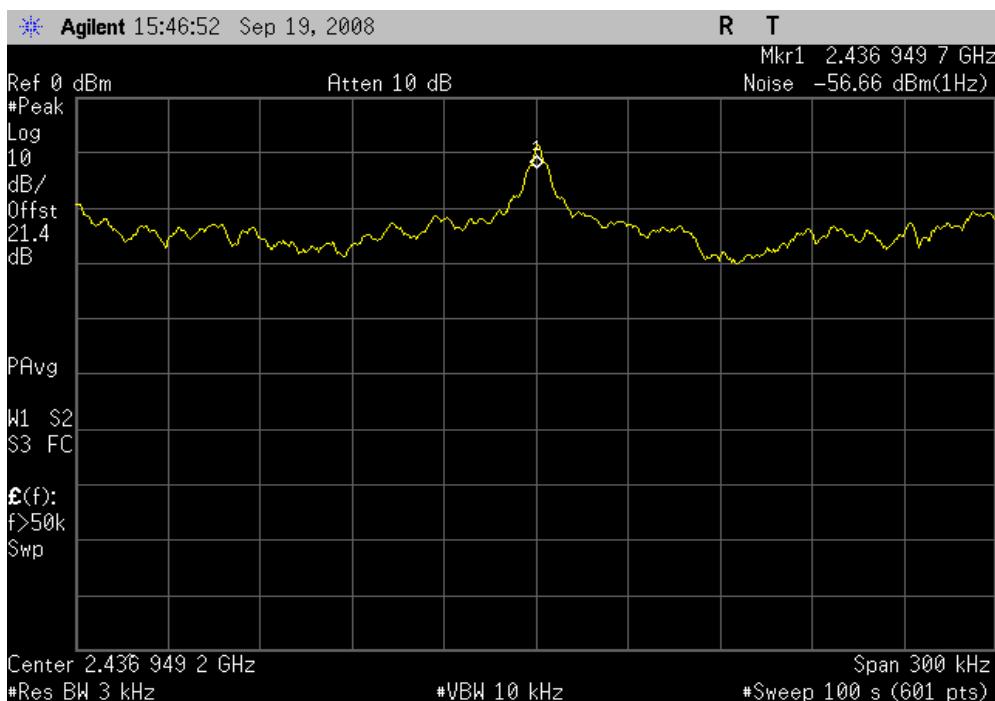




802.11(g), 54 Mbps, High Channel

Result: Pass


Value: -17.22 dBm / 3 kHz

Limit: 8 dBm / 3 kHz

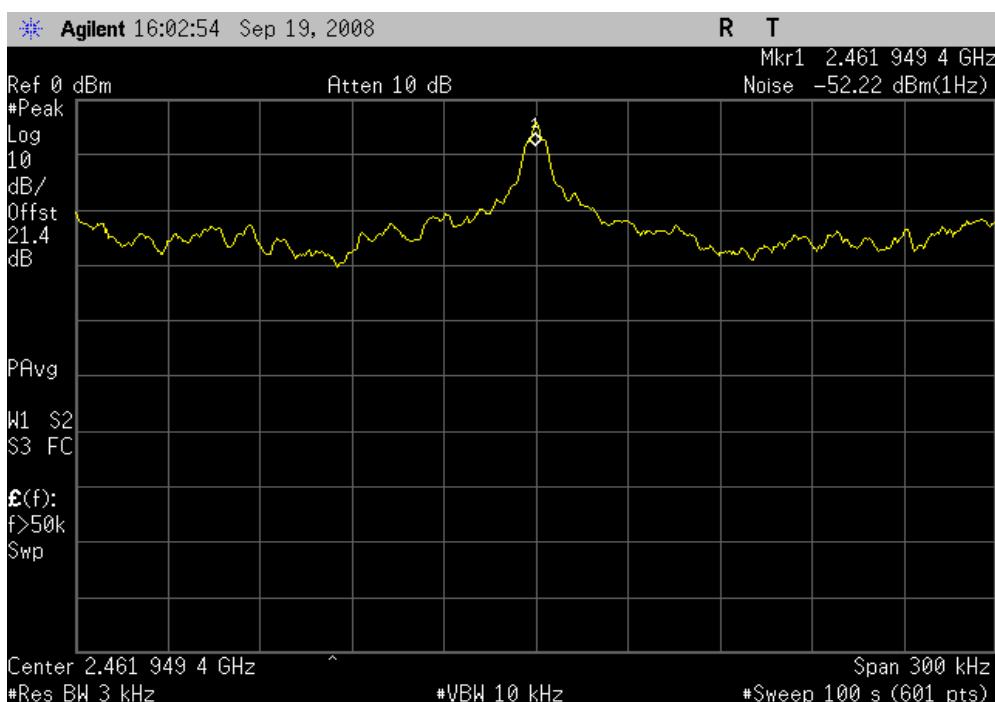

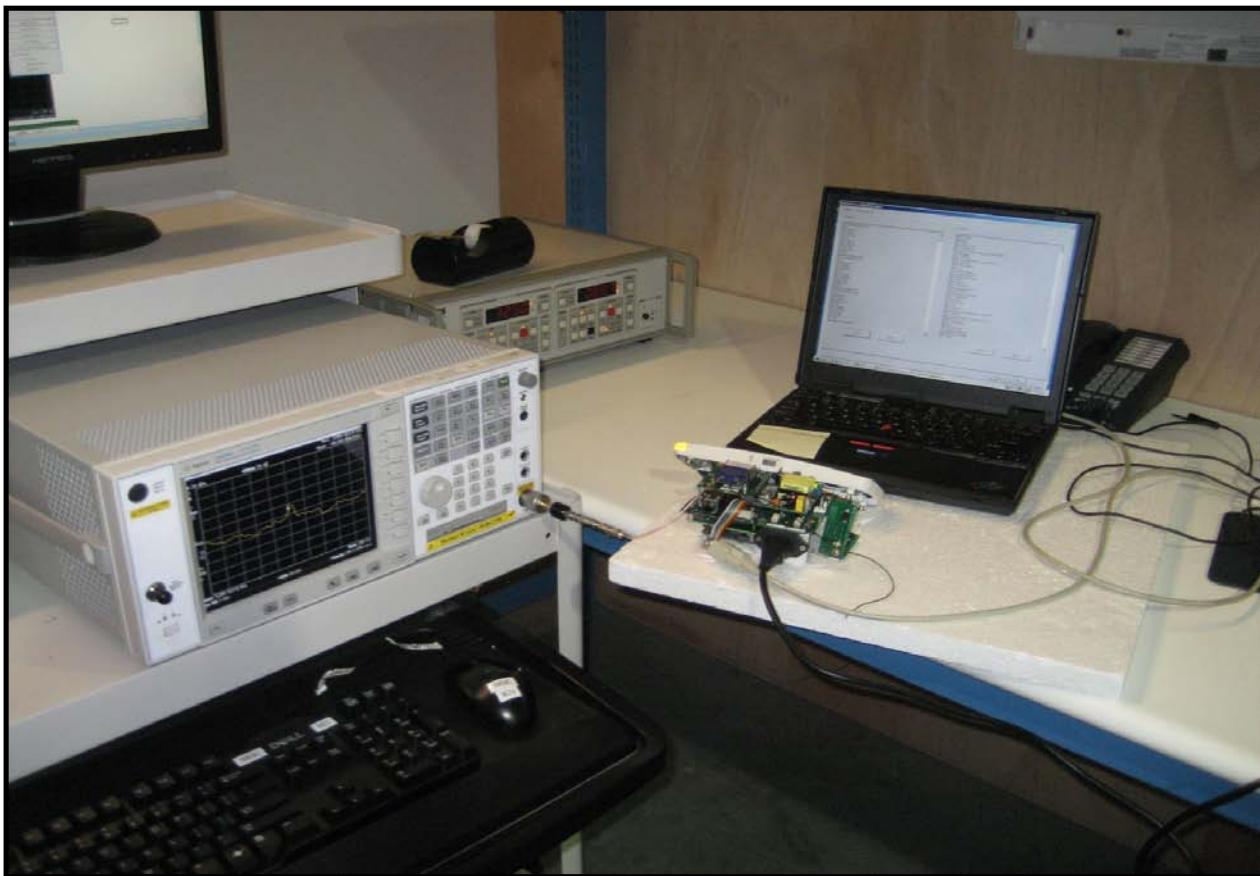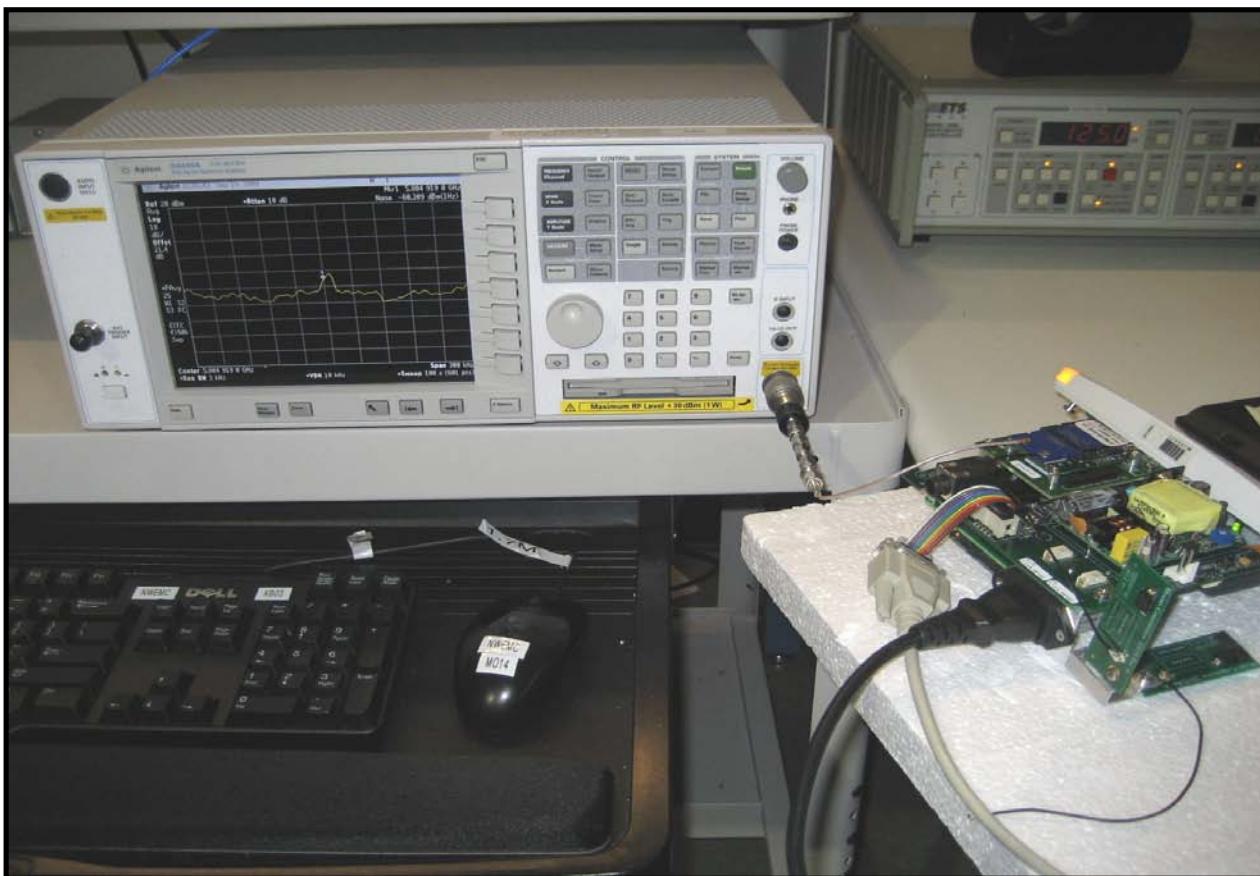

Power Spectral Density

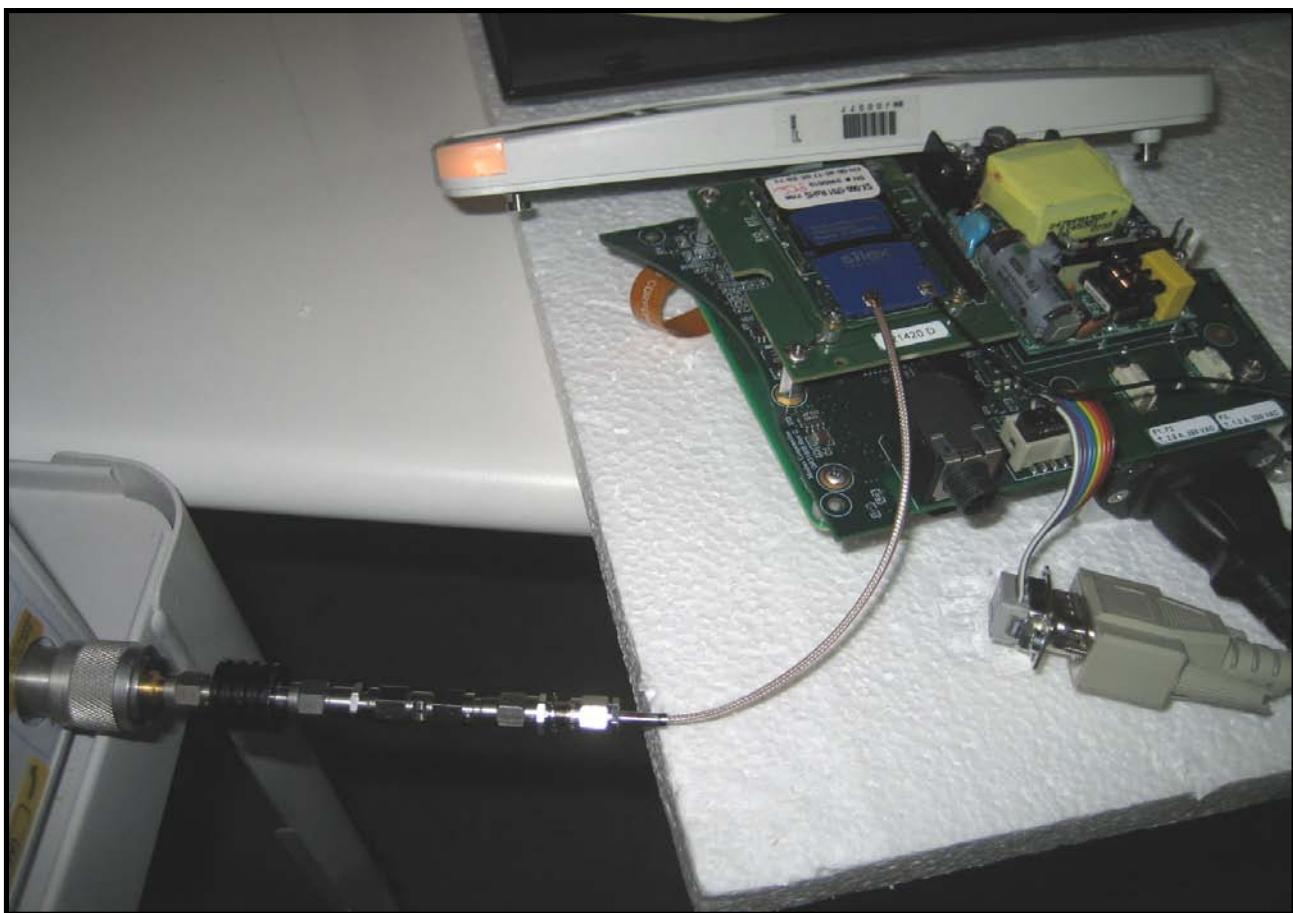

OCCUPIED BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4440A	AAX	10/1/2007	12

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The occupied bandwidth was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

EMC**OCCUPIED BANDWIDTH**


EUT: Rad-87	Work Order: MASI0009		
Serial Number: J00073	Date: 09/04/08		
Customer: Masimo Corporation	Temperature: 21.88°C		
Attendees: Eugene Kim	Humidity: 53%		
Project: None	Barometric Pres.: 1011.7		
Tested by: Jaemi Suh	Job Site: OC11		
TEST SPECIFICATIONS	Test Method		
FCC 15.247 (DTS):2006	ANSI C63.4:2003 KDB No. 55807		
COMMENTS			
None			
DEVIATIONS FROM TEST STANDARD			
No Deviations			
Configuration #	2		
	<i>Jaemi Suh</i> Signature		
	Value	Limit	Results
802.11(a) 6 Mbps			
Low Channel	16.345 MHz	≥ 500 kHz	Pass
Mid Channel	16.259 MHz	≥ 500 kHz	Pass
High Channel	16.379 MHz	≥ 500 kHz	Pass
802.11(a) 36 Mbps			
Low Channel	16.439 MHz	≥ 500 kHz	Pass
Mid Channel	16.465 MHz	≥ 500 kHz	Pass
High Channel	16.465 MHz	≥ 500 kHz	Pass
802.11(a) 54 Mbps			
Low Channel	16.485 MHz	≥ 500 kHz	Pass
Mid Channel	16.506 MHz	≥ 500 kHz	Pass
High Channel	16.479 MHz	≥ 500 kHz	Pass
802.11(b) 1 Mbps			
Low Channel	12.024 MHz	≥ 500 kHz	Pass
Mid Channel	12.117 MHz	≥ 500 kHz	Pass
High Channel	12.104 MHz	≥ 500 kHz	Pass
802.11(b) 11 Mbps			
Low Channel	10.557 MHz	≥ 500 kHz	Pass
Mid Channel	10.557 MHz	≥ 500 kHz	Pass
High Channel	11.164 MHz	≥ 500 kHz	Pass
802.11(g) 6 Mbps			
Low Channel	16.165 MHz	≥ 500 kHz	Pass
Mid Channel	16.279 MHz	≥ 500 kHz	Pass
High Channel	16.279 MHz	≥ 500 kHz	Pass
802.11(g) 36 Mbps			
Low Channel	16.472 MHz	≥ 500 kHz	Pass
Mid Channel	16.485 MHz	≥ 500 kHz	Pass
High Channel	16.459 MHz	≥ 500 kHz	Pass
802.11(g) 54 Mbps			
Low Channel	16.492 MHz	≥ 500 kHz	Pass
Mid Channel	16.485 MHz	≥ 500 kHz	Pass
High Channel	16.506 MHz	≥ 500 kHz	Pass

OCCUPIED BANDWIDTH

802.11(a) 6 Mbps, Low Channel

Result: Pass


Value: 16.345 MHz

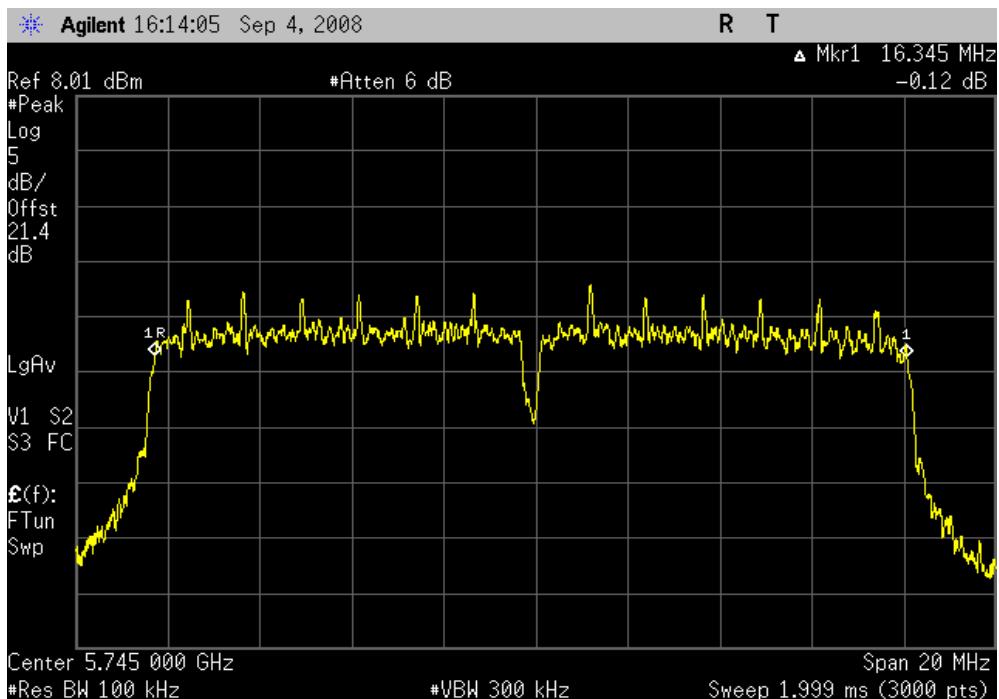Limit: \geq 500 kHz

802.11(a) 6 Mbps, Mid Channel

Result: Pass

Value: 16.259 MHz

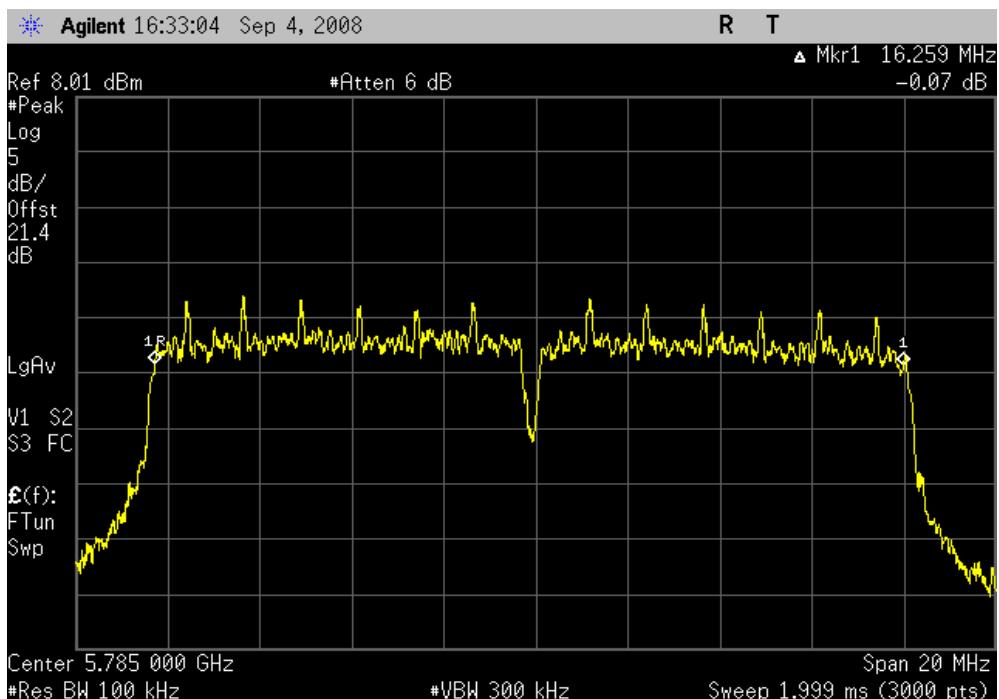
Limit: \geq 500 kHz

OCCUPIED BANDWIDTH

802.11(a) 6 Mbps, High Channel

Result: Pass


Value: 16.379 MHz

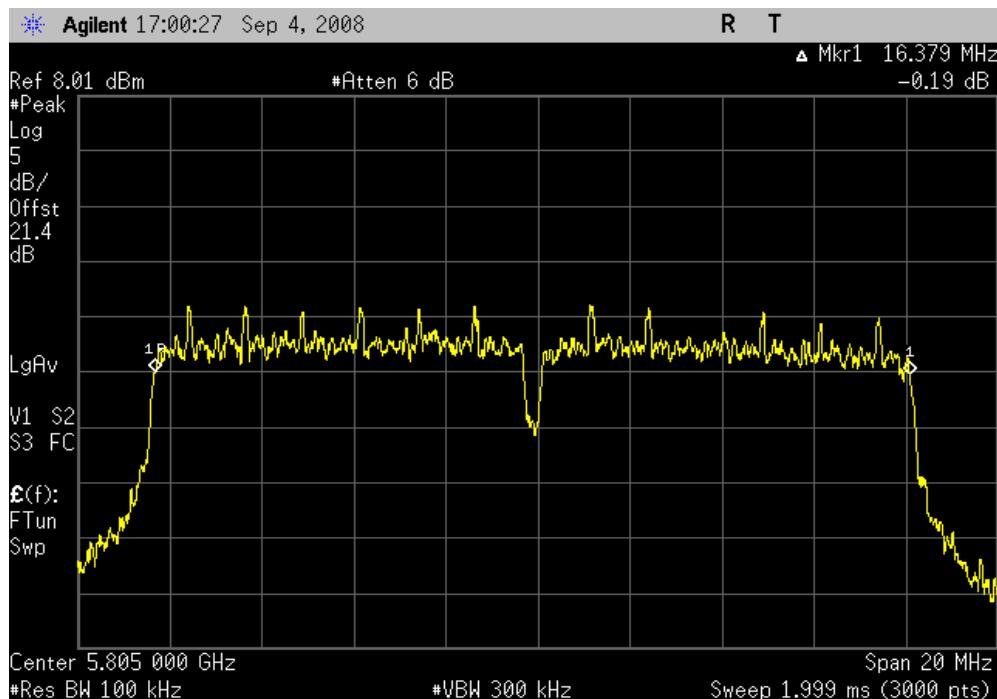Limit: ≥ 500 kHz

802.11(a) 36 Mbps, Low Channel

Result: Pass

Value: 16.439 MHz

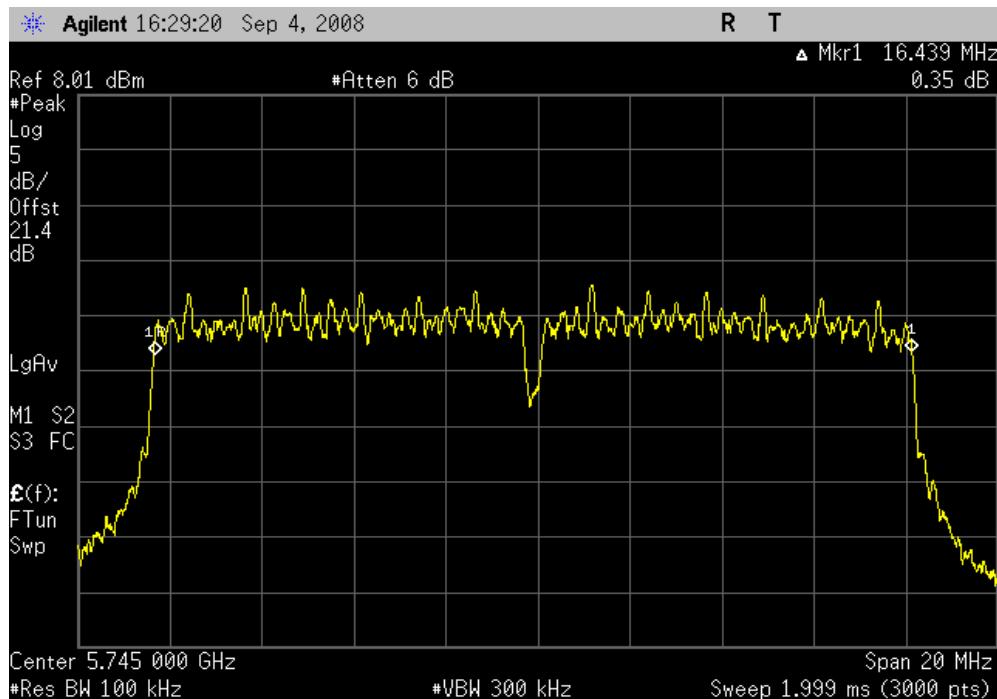
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(a) 36 Mbps, Mid Channel

Result: Pass


Value: 16.465 MHz

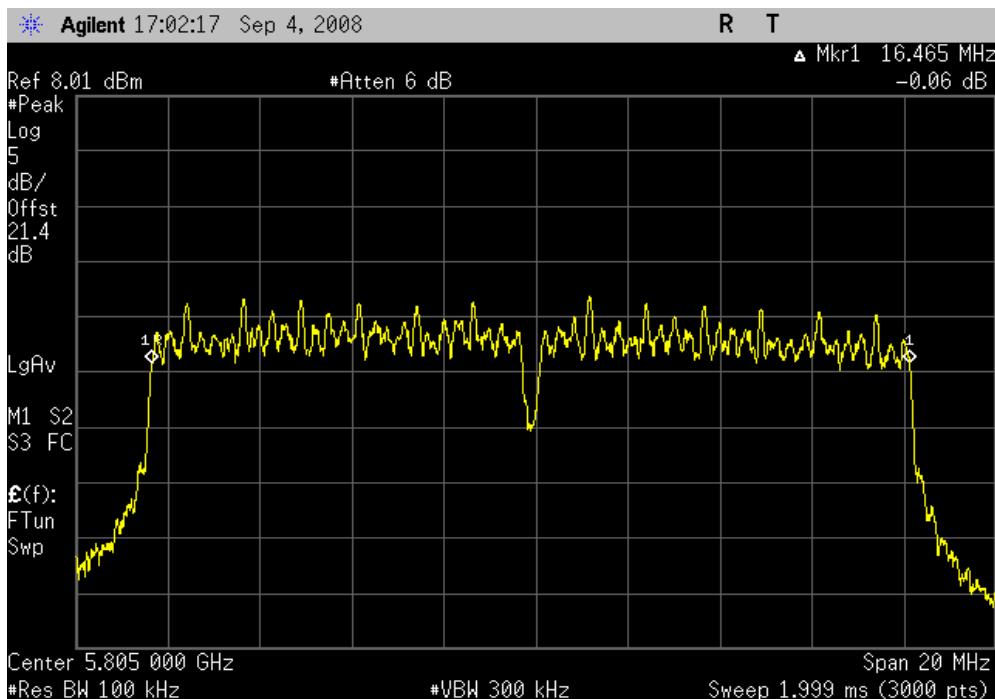Limit: ≥ 500 kHz

802.11(a) 36 Mbps, High Channel

Result: Pass

Value: 16.465 MHz

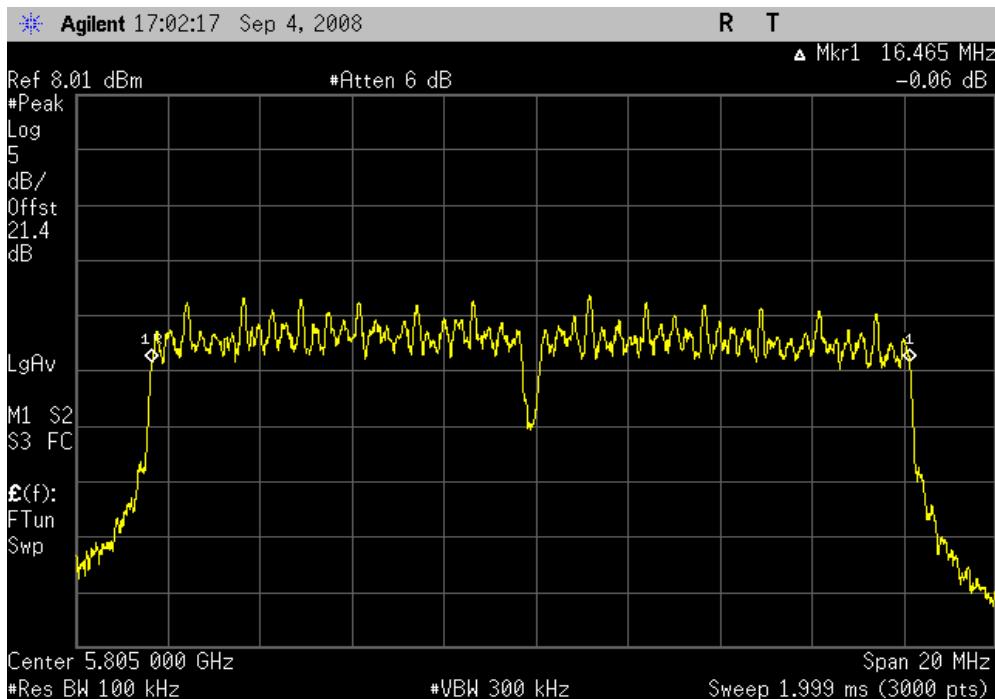
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(a) 54 Mbps, Low Channel

Result: Pass


Value: 16.485 MHz

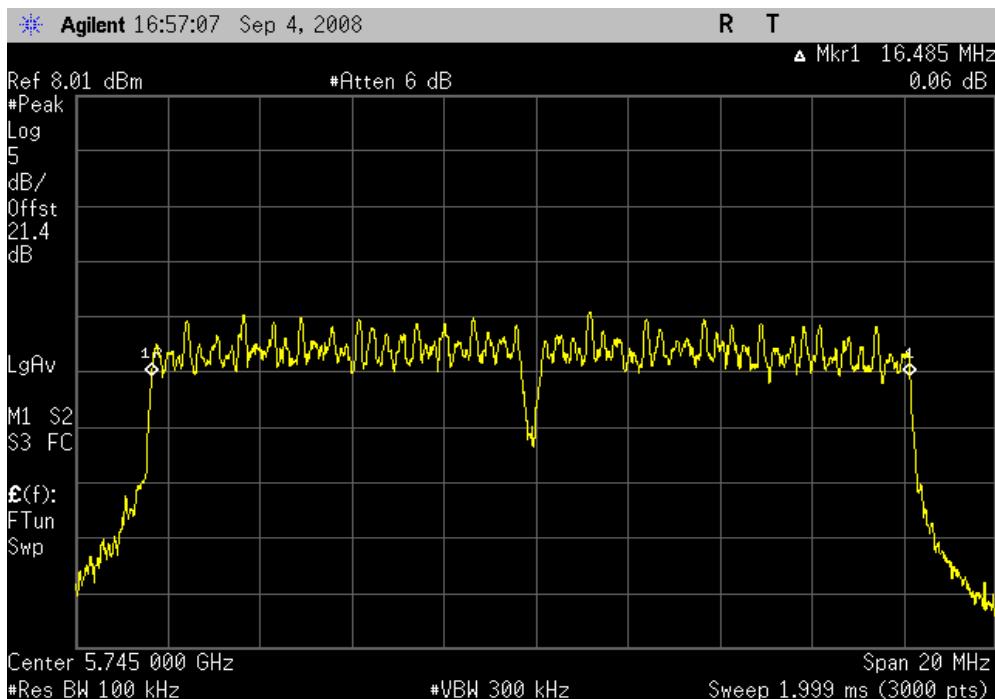Limit: ≥ 500 kHz

802.11(a) 54 Mbps, Mid Channel

Result: Pass

Value: 16.506 MHz

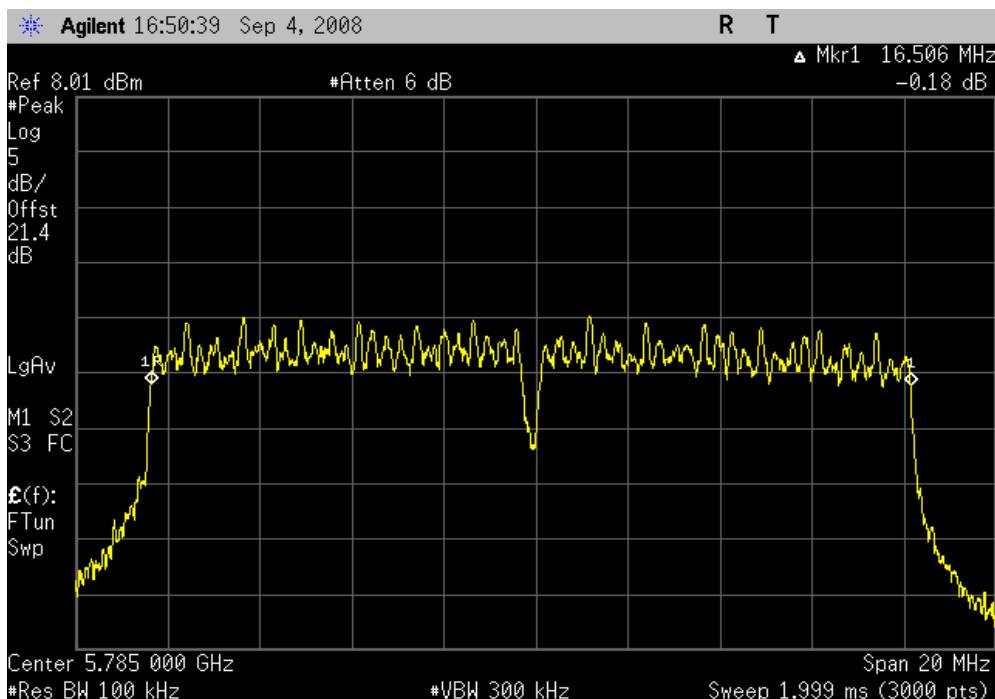Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(a) 54 Mbps, High Channel

Result: Pass


Value: 16.479 MHz

Limit: ≥ 500 kHz

802.11(b) 1 Mbps, Low Channel

Result: Pass

Value: 12.024 MHz

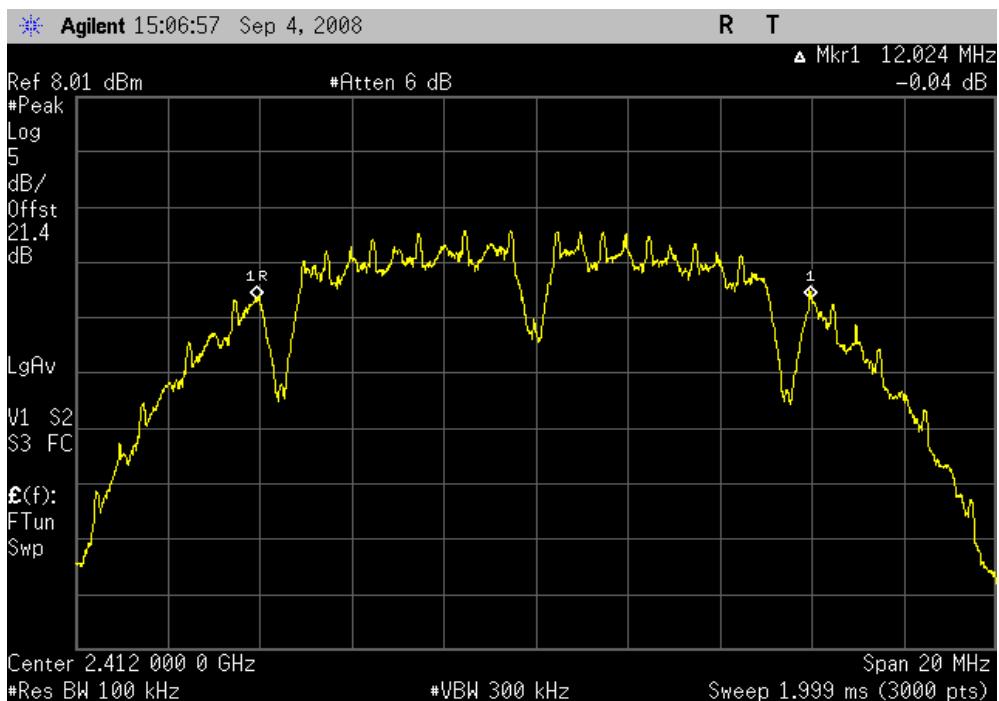
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(b) 1 Mbps, Mid Channel

Result: Pass


Value: 12.117 MHz

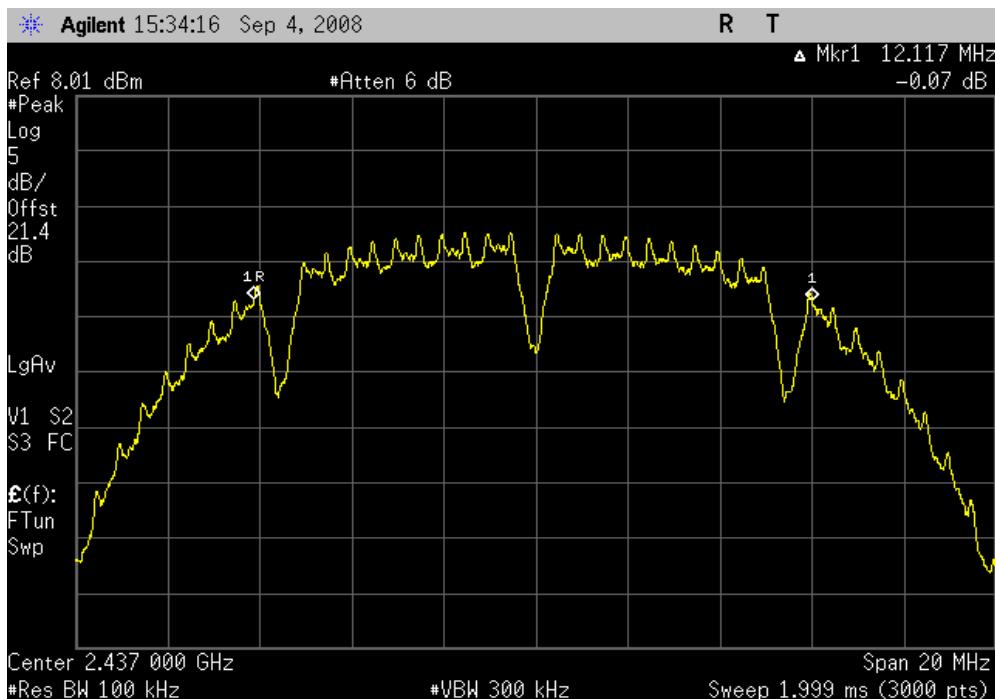Limit: ≥ 500 kHz

802.11(b) 1 Mbps, High Channel

Result: Pass

Value: 12.104 MHz

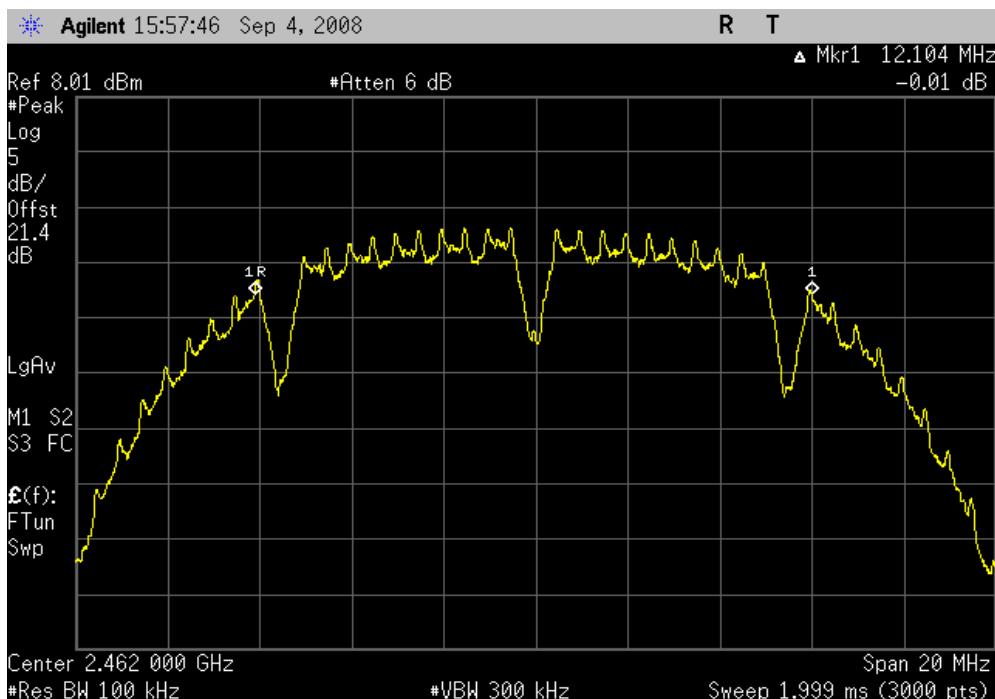
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(b) 11 Mbps, Low Channel

Result: Pass


Value: 10.557 MHz

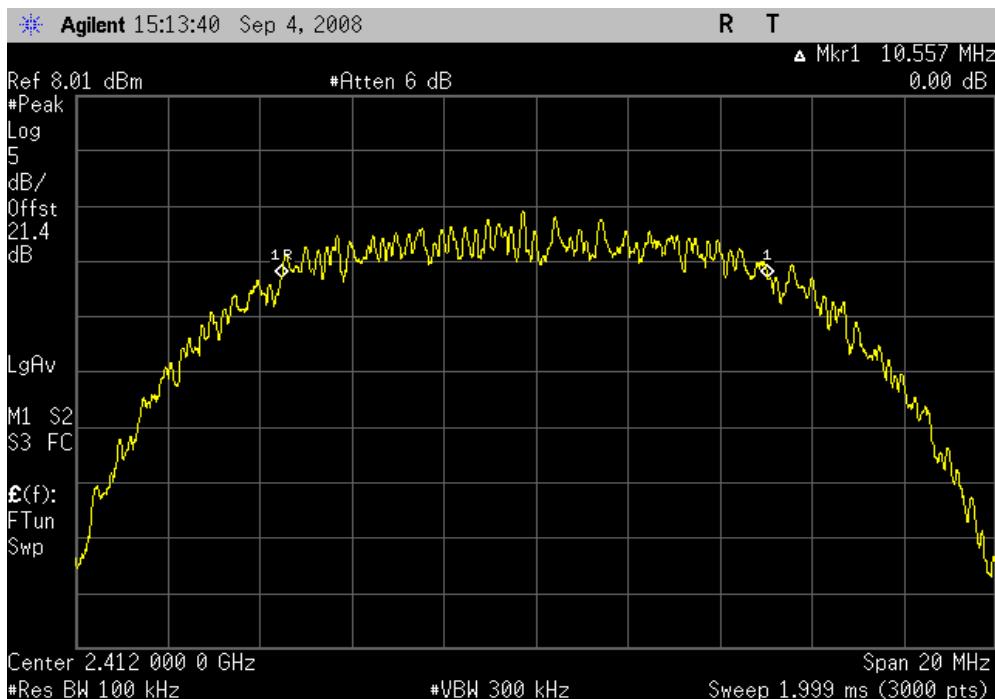Limit: ≥ 500 kHz

802.11(b) 11 Mbps, Mid Channel

Result: Pass

Value: 10.557 MHz

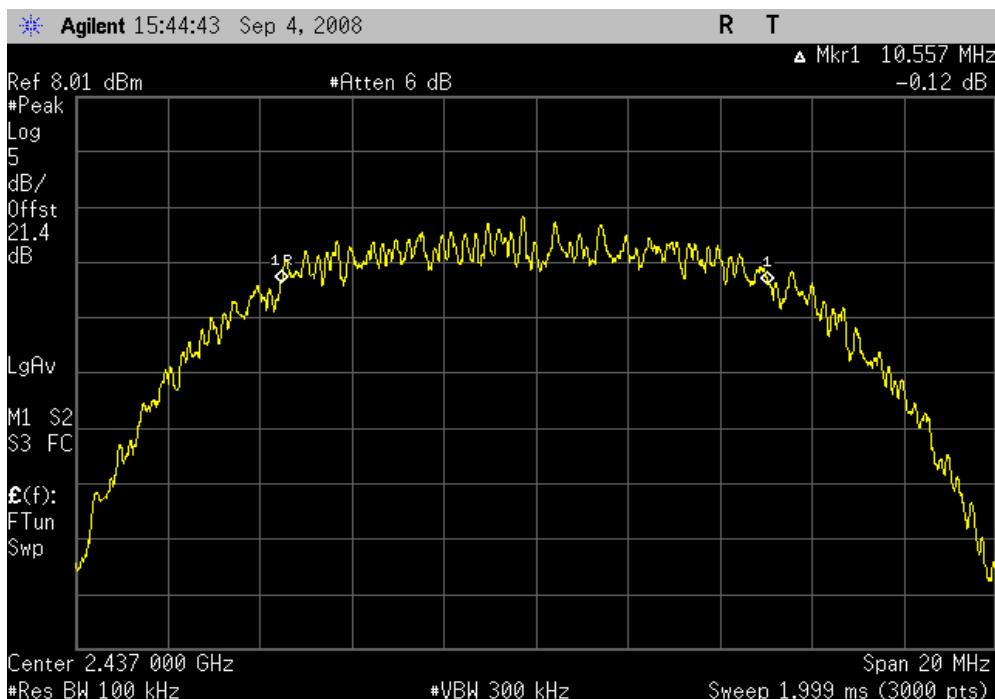
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(b) 11 Mbps, High Channel

Result: Pass


Value: 11.164 MHz

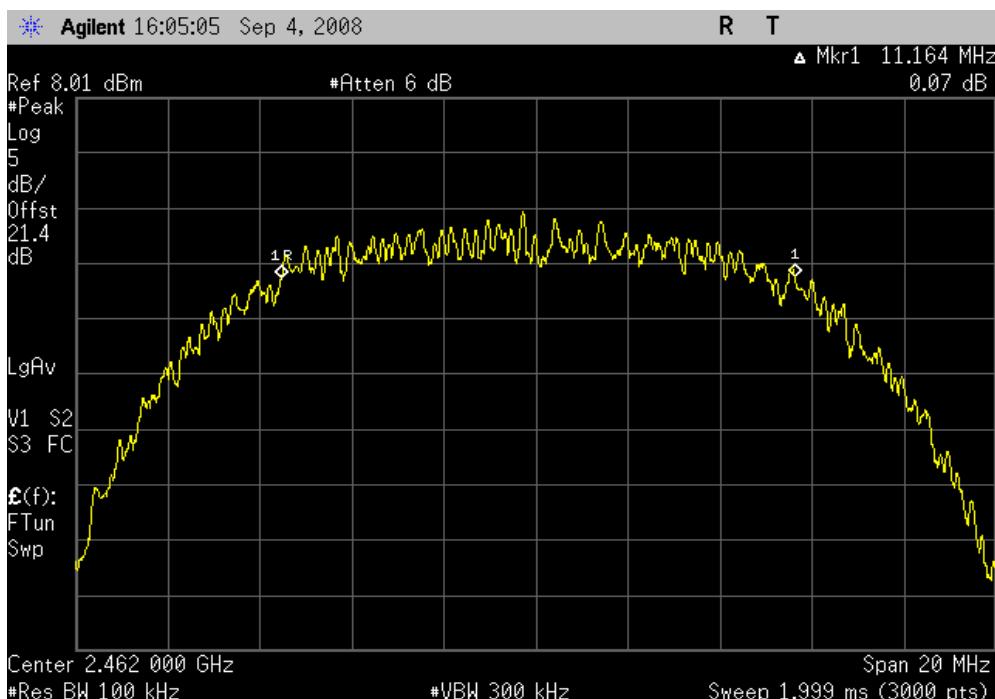Limit: ≥ 500 kHz

802.11(g) 6 Mbps, Low Channel

Result: Pass

Value: 16.165 MHz

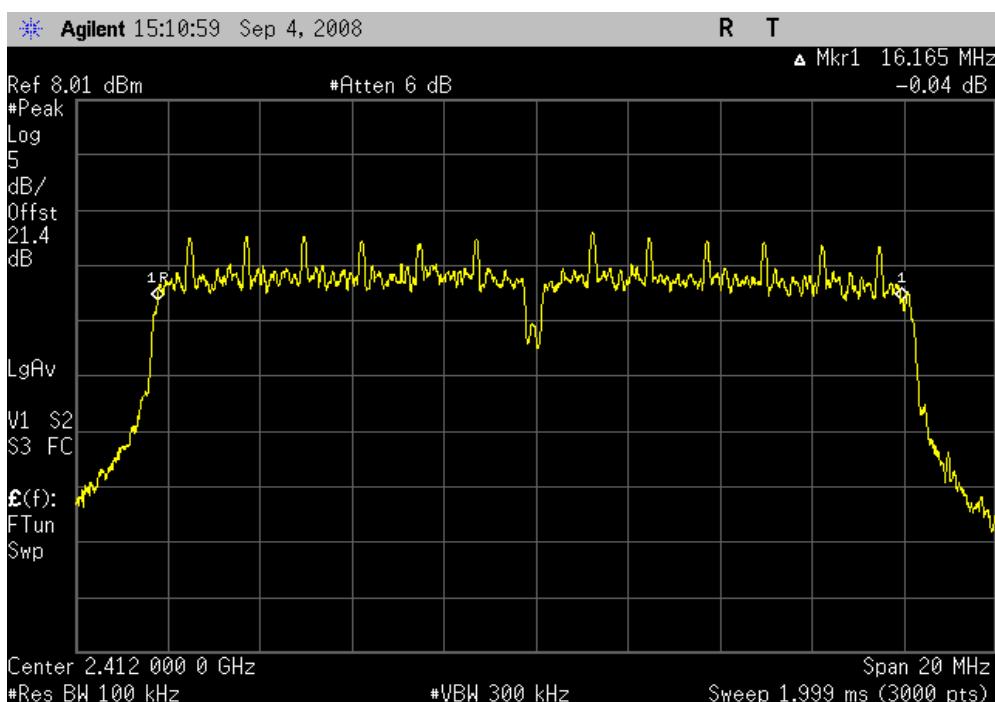
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(g) 6 Mbps, Mid Channel

Result: Pass


Value: 16.279 MHz

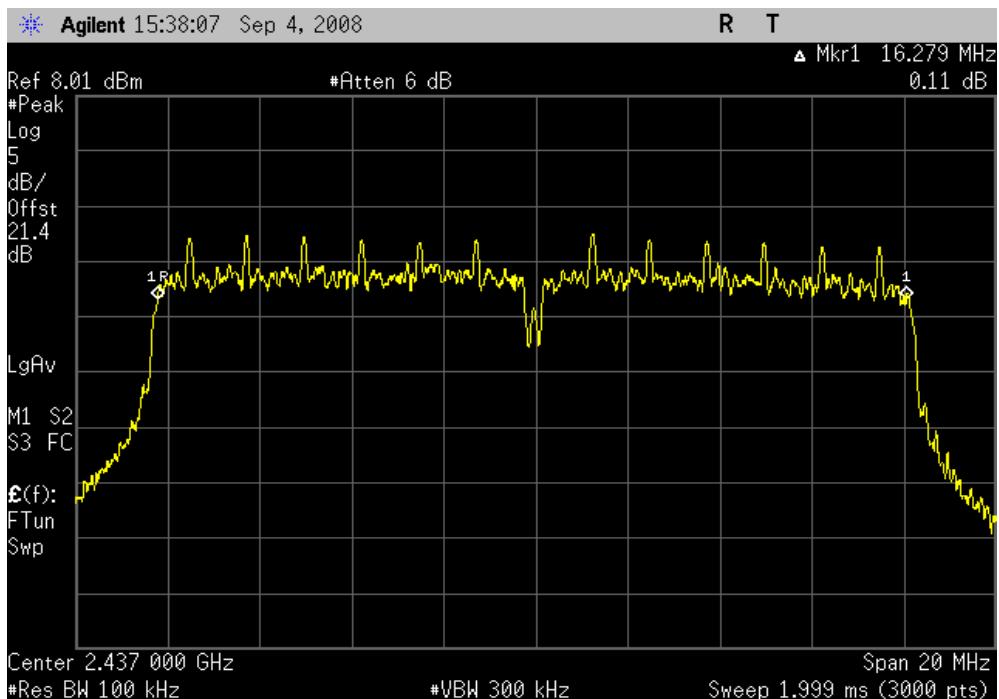Limit: ≥ 500 kHz

802.11(g) 6 Mbps, High Channel

Result: Pass

Value: 16.279 MHz

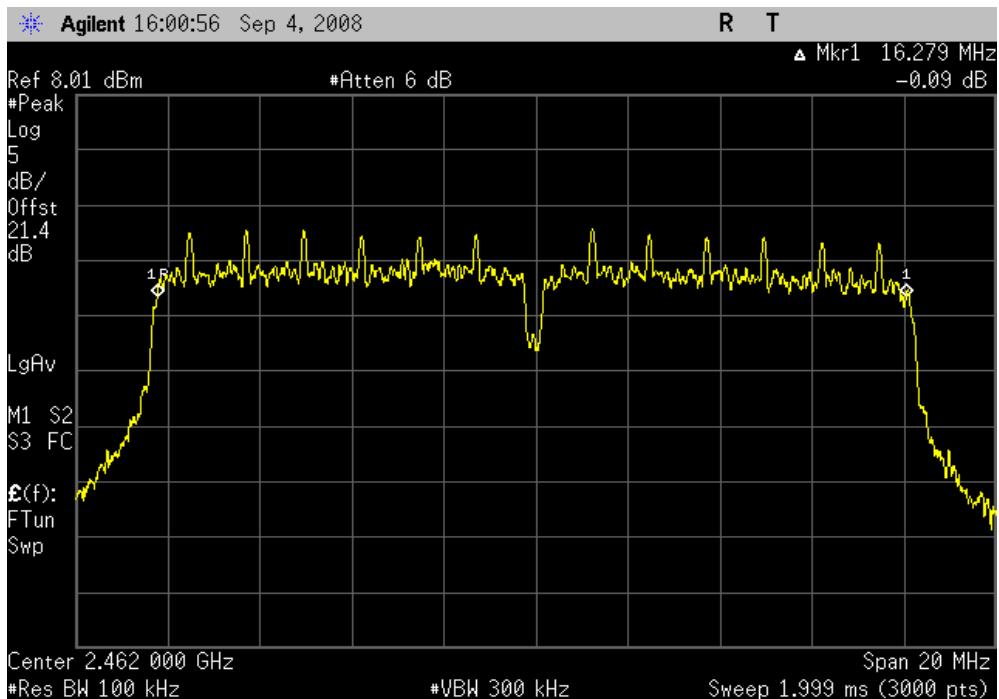
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(g) 36 Mbps, Low Channel

Result: Pass

Value: 16.472 MHz

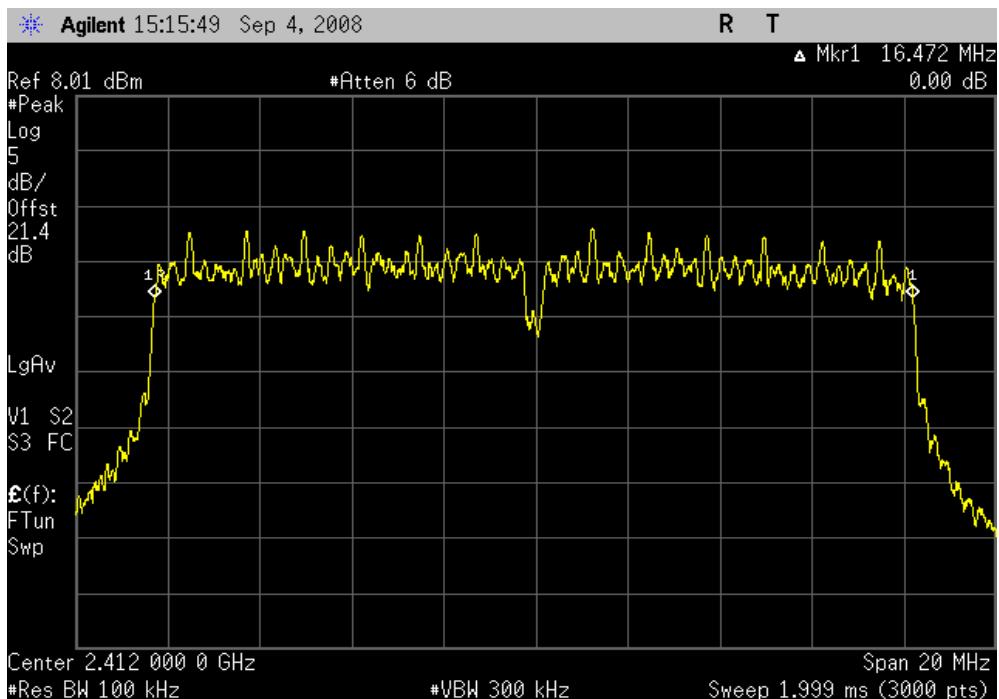Limit: ≥ 500 kHz

802.11(g) 36 Mbps, Mid Channel

Result: Pass

Value: 16.485 MHz

Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(g) 36 Mbps, High Channel

Result: Pass


Value: 16.459 MHz

Limit: ≥ 500 kHz

802.11(g) 54 Mbps, Low Channel

Result: Pass

Value: 16.492 MHz

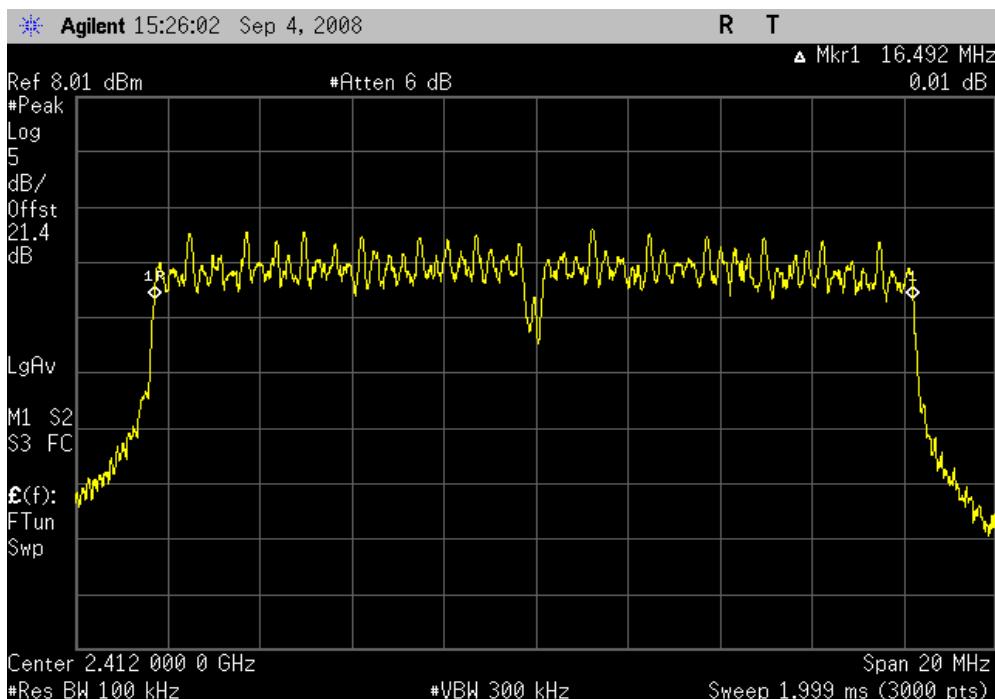
Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

802.11(g) 54 Mbps, Mid Channel

Result: Pass

Value: 16.485 MHz

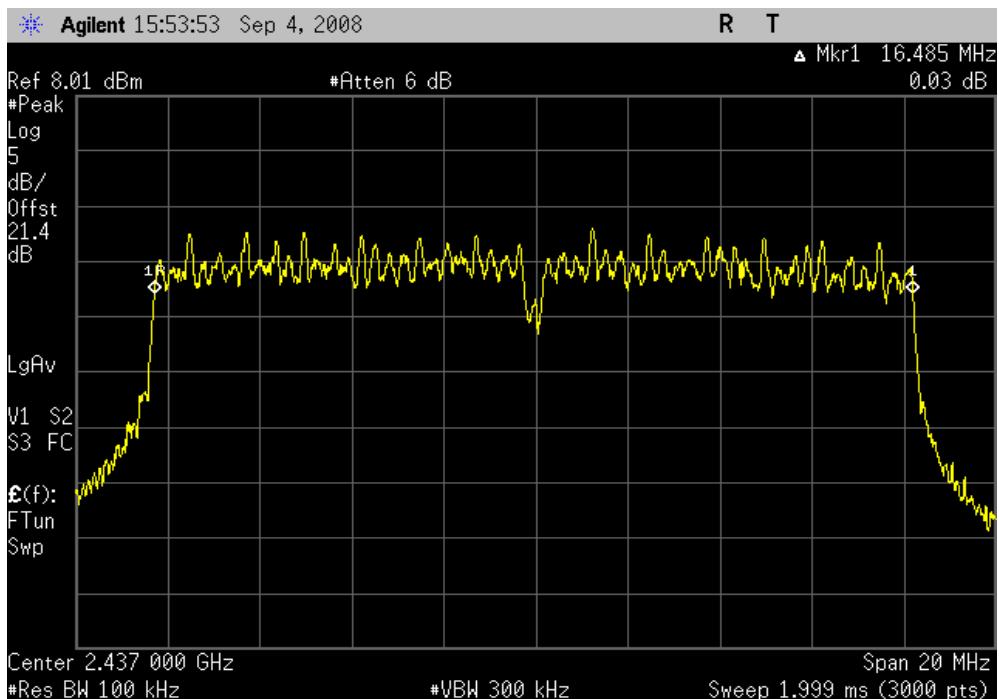Limit: ≥ 500 kHz



802.11(g) 54 Mbps, High Channel

Result: Pass

Value: 16.506 MHz

Limit: ≥ 500 kHz

OCCUPIED BANDWIDTH

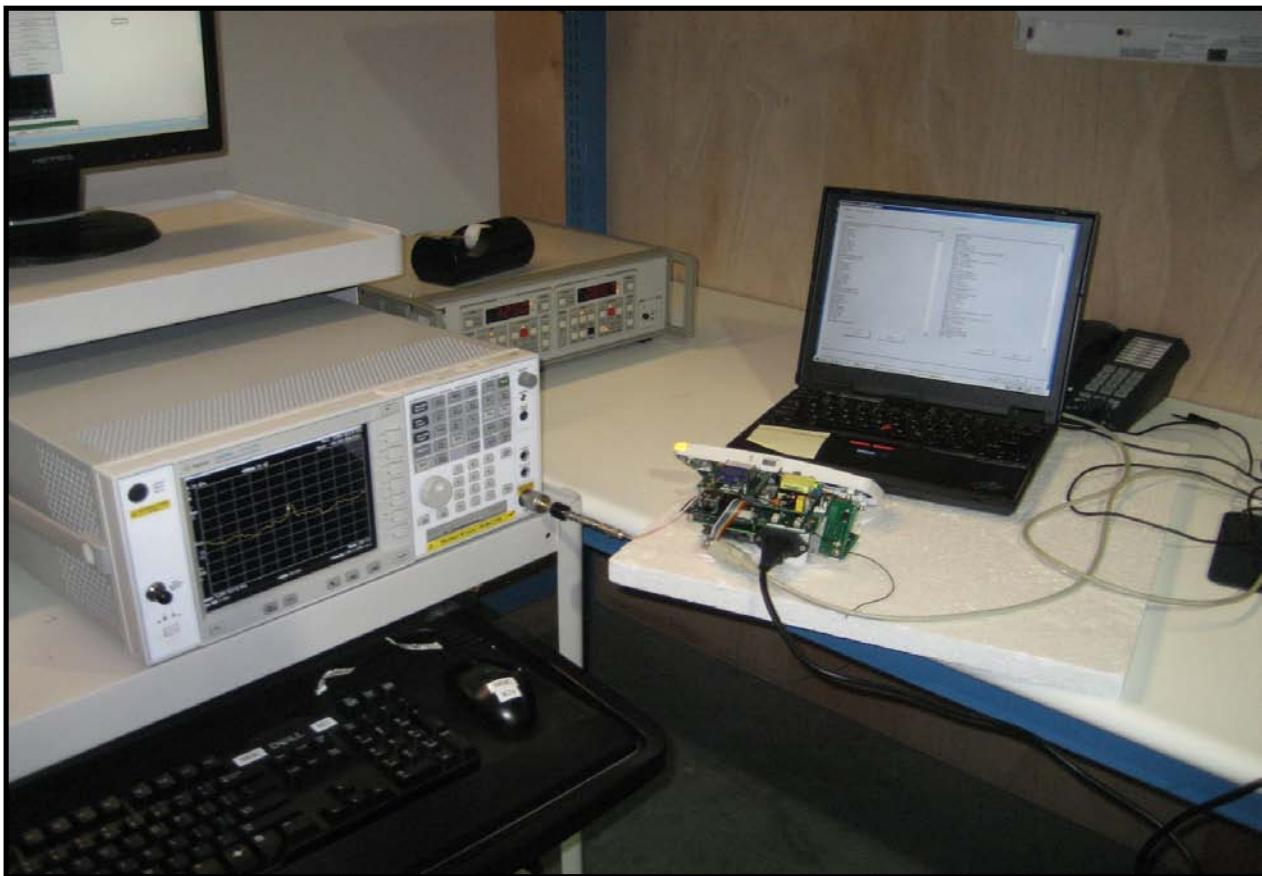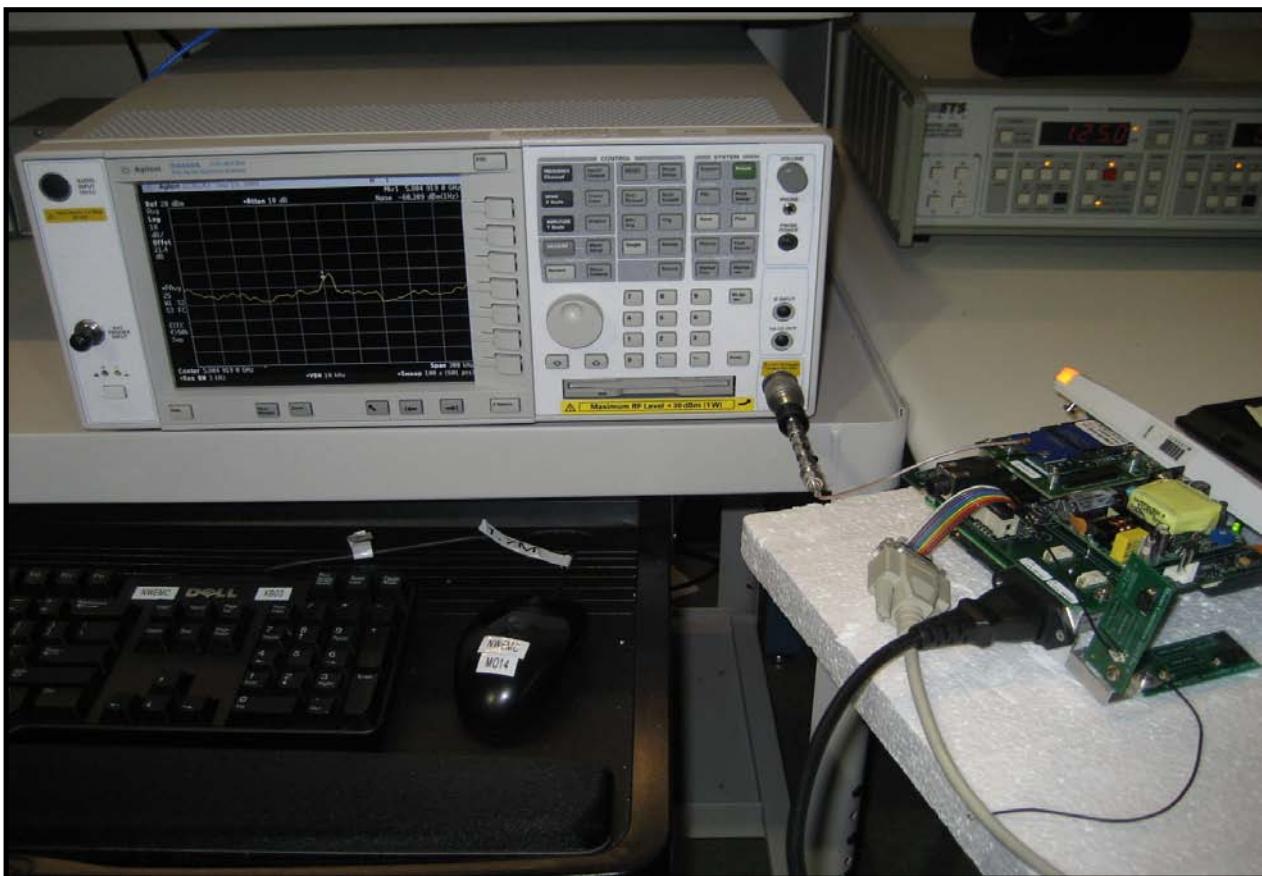

OCCUPIED BANDWIDTH

Output Power

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Spectrum Analyzer	Agilent	E4440A	AAX	10/1/2007	12

MEASUREMENT UNCERTAINTY

Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION

The peak output power was measured with the EUT set to low, medium, and high transmit frequencies. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was transmitting at its maximum data rate in a no hop mode.

De Facto EIRP Limit: Per 47 CFR 15.247 (b)(1-3), the EUT meets the de facto EIRP limit of +36dBm.

EMC**Output Power**

EUT: Rad-87

Work Order: MASI0009

Serial Number: J00073

Date: 09/17/08

Customer: Masimo Corporation

Temperature: 21.88°C

Attendees: Eugene Kim

Humidity: 53%

Project: None

Barometric Pres.: 1011.7

Tested by: Jaemi Suh

Power: 120V/60Hz

Job Site: OC11

TEST SPECIFICATIONS**Test Method**

FCC 15.247 (DTS):2006

ANSI C63.4:2003 KDB No. 558074

COMMENTS

None

DEVIATIONS FROM TEST STANDARD

No Deviations.

Configuration #	2	Signature		Value	Limit	Results
-----------------	---	-----------	--	-------	-------	---------


802.11(a) 6 Mbps	Low Channel	16.43 mW	1 Watt	Pass
	Mid Channel	19.13 mW	1 Watt	Pass
	High Channel	19.38 mW	1 Watt	Pass
802.11(a) 36 Mbps	Low Channel	17.69 mW	1 Watt	Pass
	Mid Channel	16.56 mW	1 Watt	Pass
	High Channel	17.38 mW	1 Watt	Pass
802.11(a) 54 Mbps	Low Channel	12.85 mW	1 Watt	Pass
	Mid Channel	12.71 mW	1 Watt	Pass
	High Channel	13.44 mW	1 Watt	Pass
802.11(b) 1 Mbps	Low Channel	28.47 mW	1 Watt	Pass
	Mid Channel	27.27 mW	1 Watt	Pass
	High Channel	25.36 mW	1 Watt	Pass
802.11(b) 11 Mbps	Low Channel	28.88 mW	1 Watt	Pass
	Mid Channel	28.52 mW	1 Watt	Pass
	High Channel	26.74 mW	1 Watt	Pass
802.11(g) 6 Mbps	Low Channel	25.77 mW	1 Watt	Pass
	Mid Channel	27.63 mW	1 Watt	Pass
	High Channel	24.01 mW	1 Watt	Pass
802.11(g) 36 Mbps	Low Channel	27.07 mW	1 Watt	Pass
	Mid Channel	25.29 mW	1 Watt	Pass
	High Channel	25.15 mW	1 Watt	Pass
802.11(g) 54 Mbps	Low Channel	26.54 mW	1 Watt	Pass
	Mid Channel	25.10 mW	1 Watt	Pass
	High Channel	23.77 mW	1 Watt	Pass

802.11(a) 6 Mbps, Low Channel

Result: Pass

Value: 16.43 mW

Limit: 1 Watt

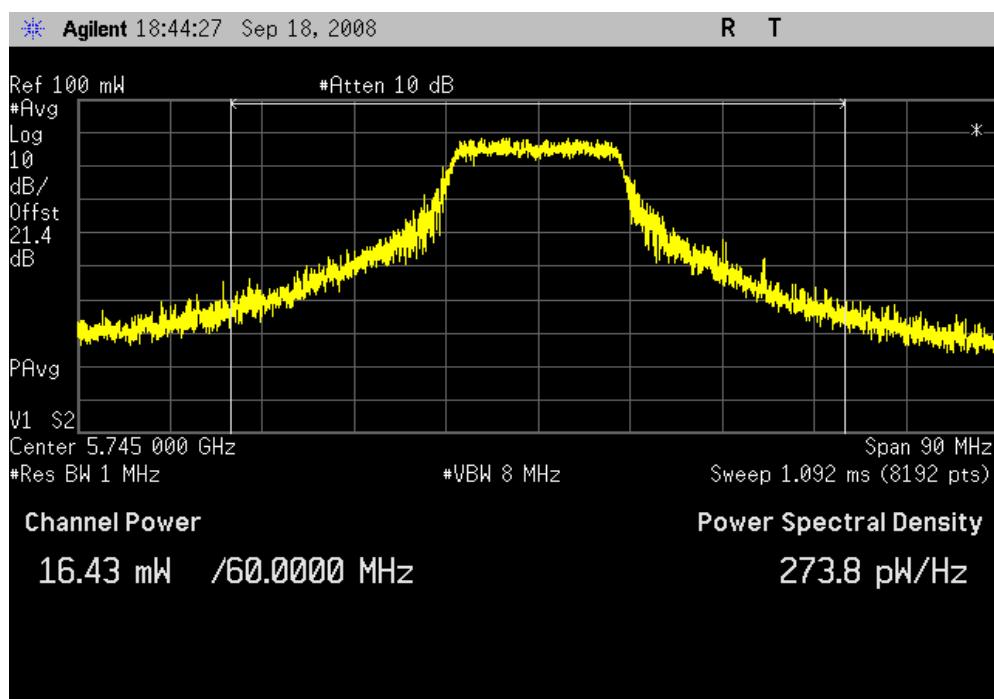


802.11(a) 6 Mbps, Mid Channel

Result: Pass

Value: 19.13 mW

Limit: 1 Watt

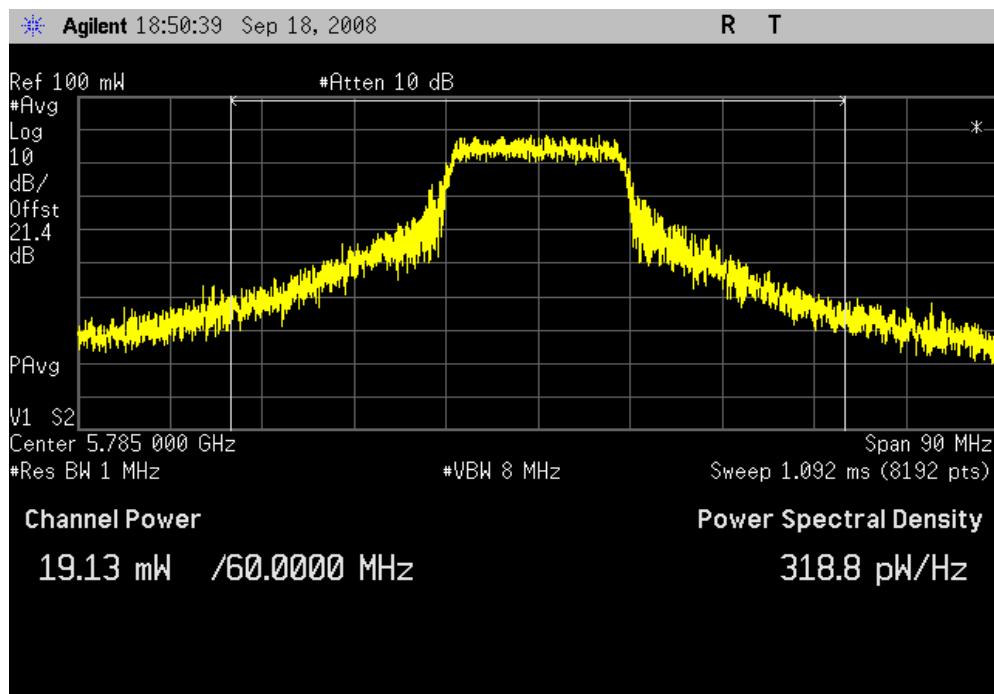


802.11(a) 6 Mbps, High Channel

Result: Pass

Value: 19.38 mW

Limit: 1 Watt

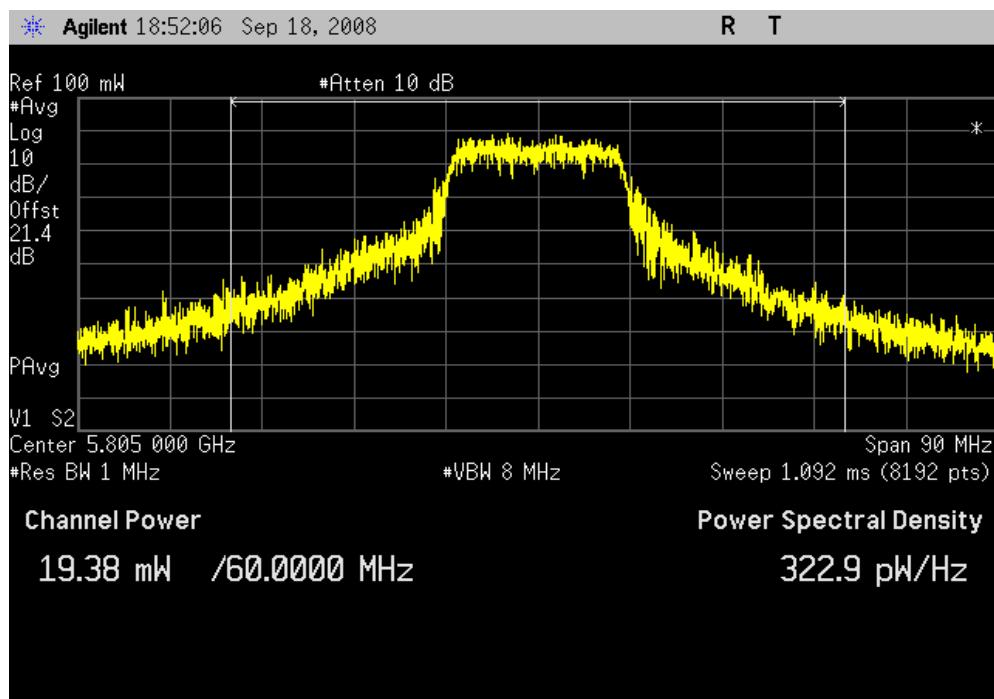


802.11(a) 36 Mbps, Low Channel

Result: Pass

Value: 17.69 mW

Limit: 1 Watt

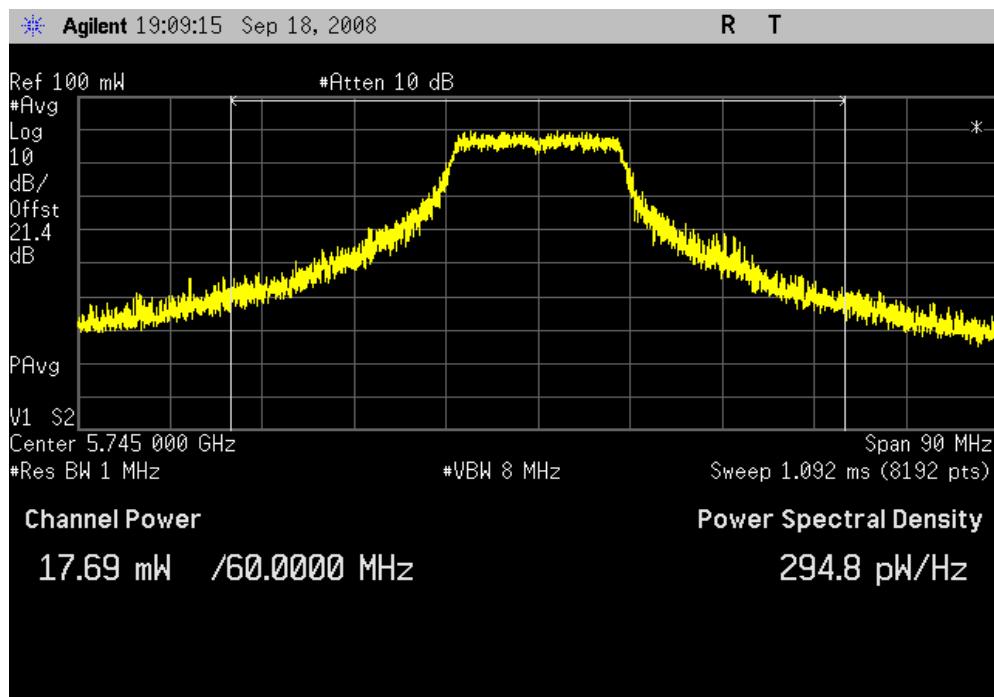


802.11(a) 36 Mbps, Mid Channel

Result: Pass

Value: 16.56 mW

Limit: 1 Watt

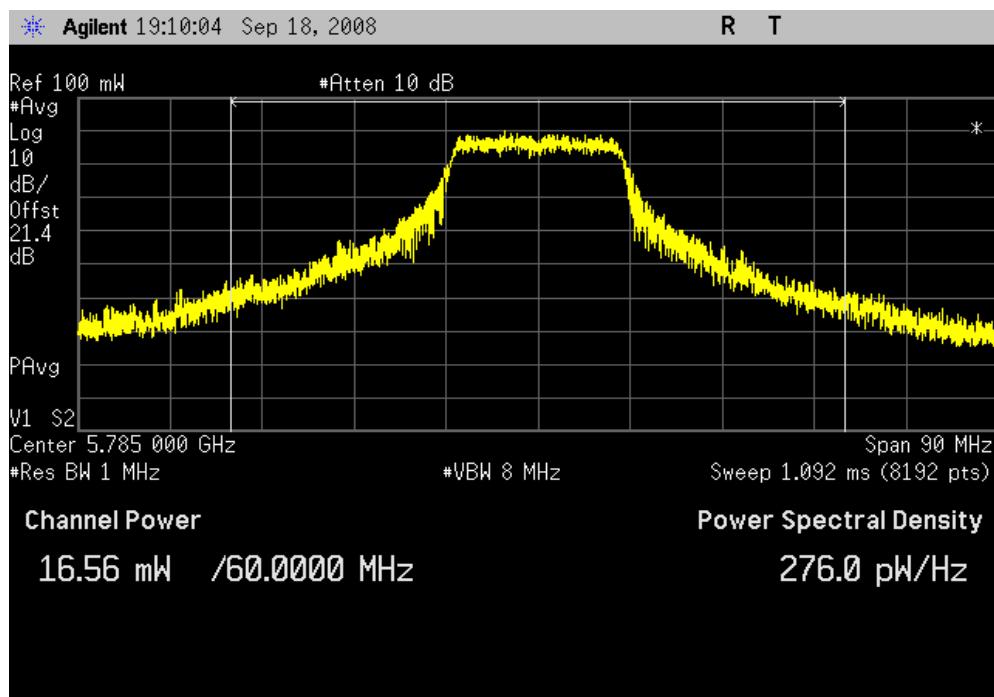


802.11(a) 36 Mbps, High Channel

Result: Pass

Value: 17.38 mW

Limit: 1 Watt

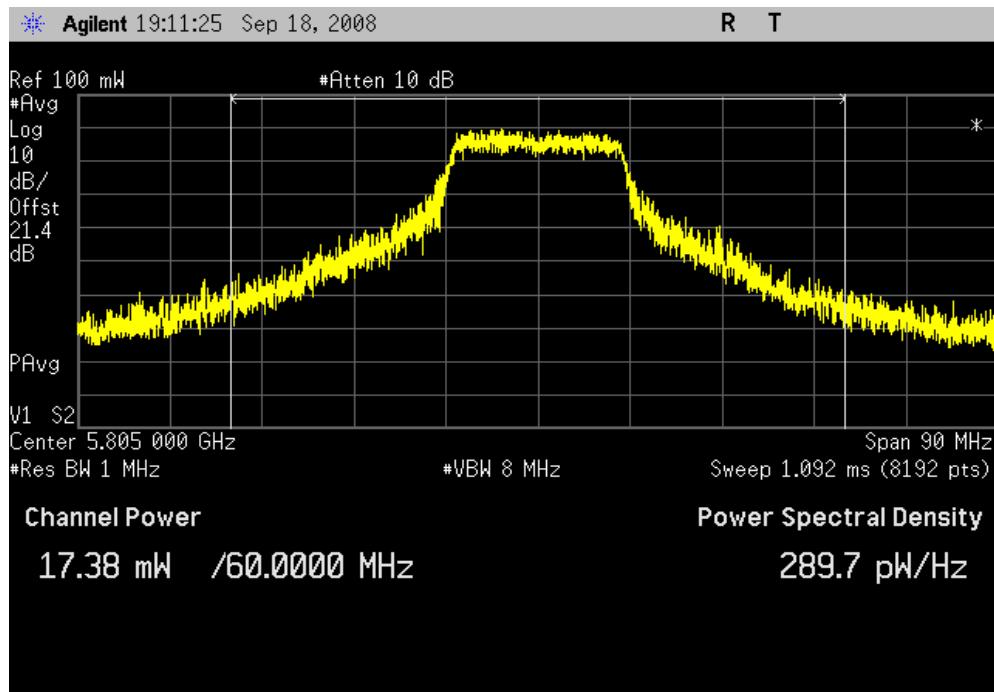


802.11(a) 54 Mbps, Low Channel

Result: Pass

Value: 12.85 mW

Limit: 1 Watt

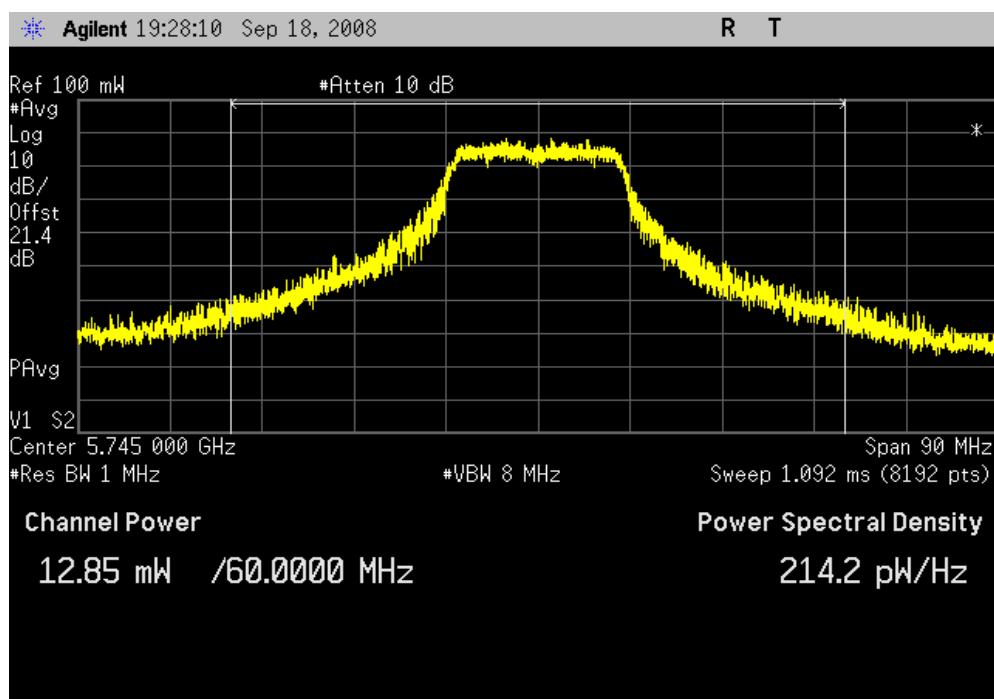


802.11(a) 54 Mbps, Mid Channel

Result: Pass

Value: 12.71 mW

Limit: 1 Watt

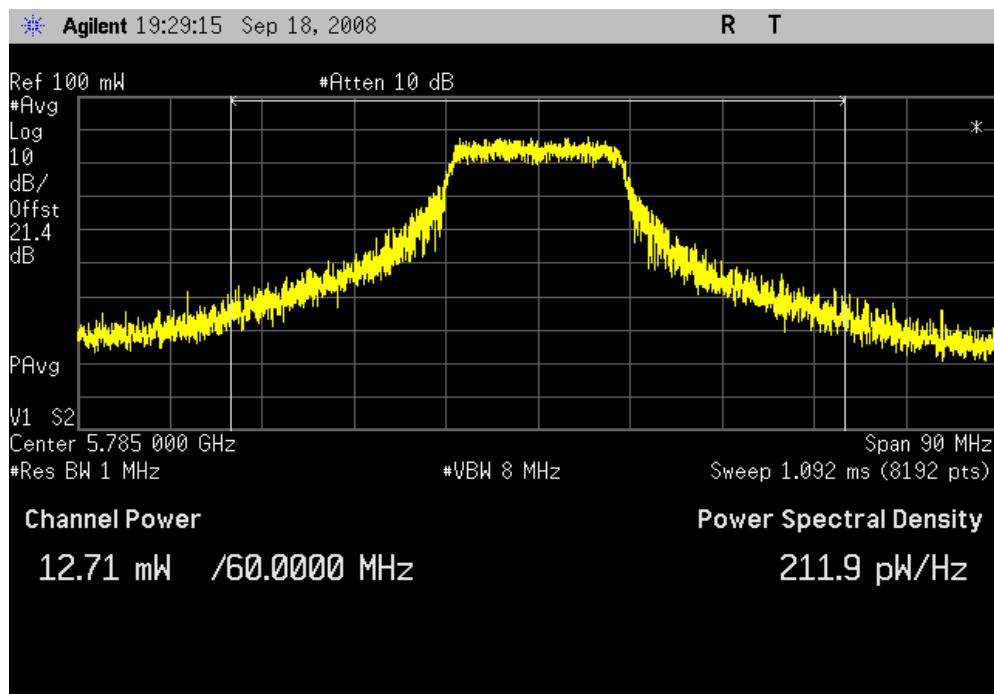


802.11(a) 54 Mbps, High Channel

Result: Pass

Value: 13.44 mW

Limit: 1 Watt

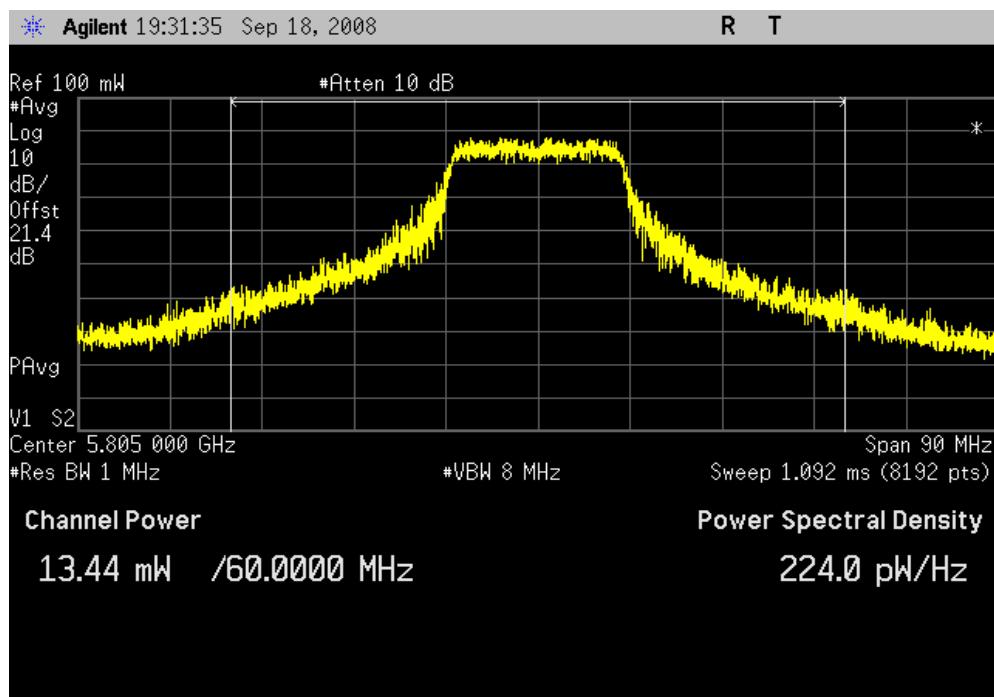


802.11(b) 1 Mbps, Low Channel

Result: Pass

Value: 28.47 mW

Limit: 1 Watt

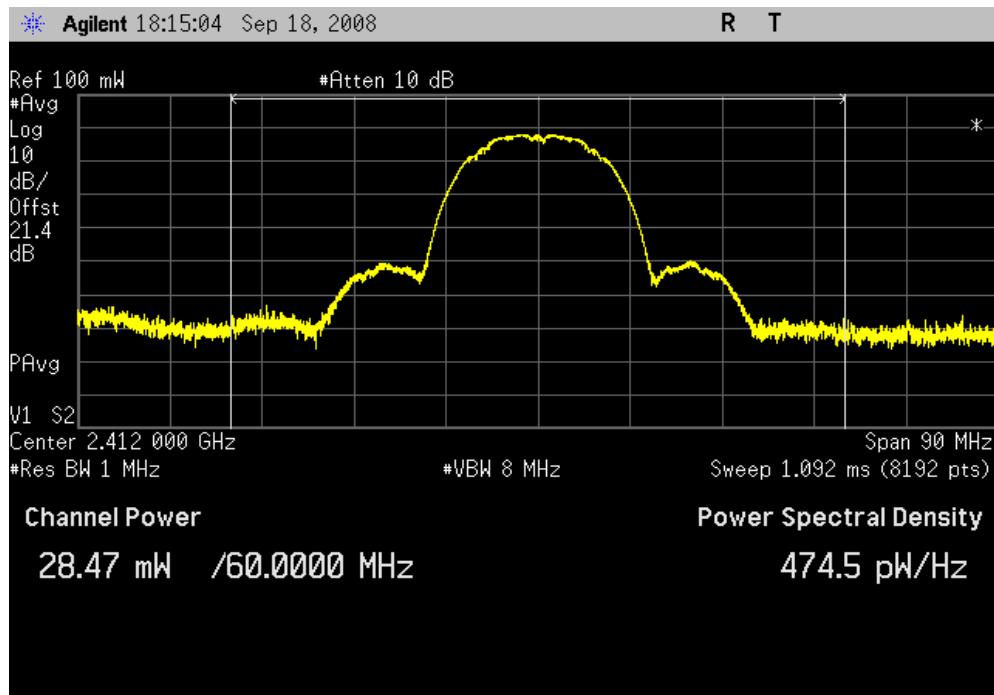


802.11(b) 1 Mbps, Mid Channel

Result: Pass

Value: 27.27 mW

Limit: 1 Watt

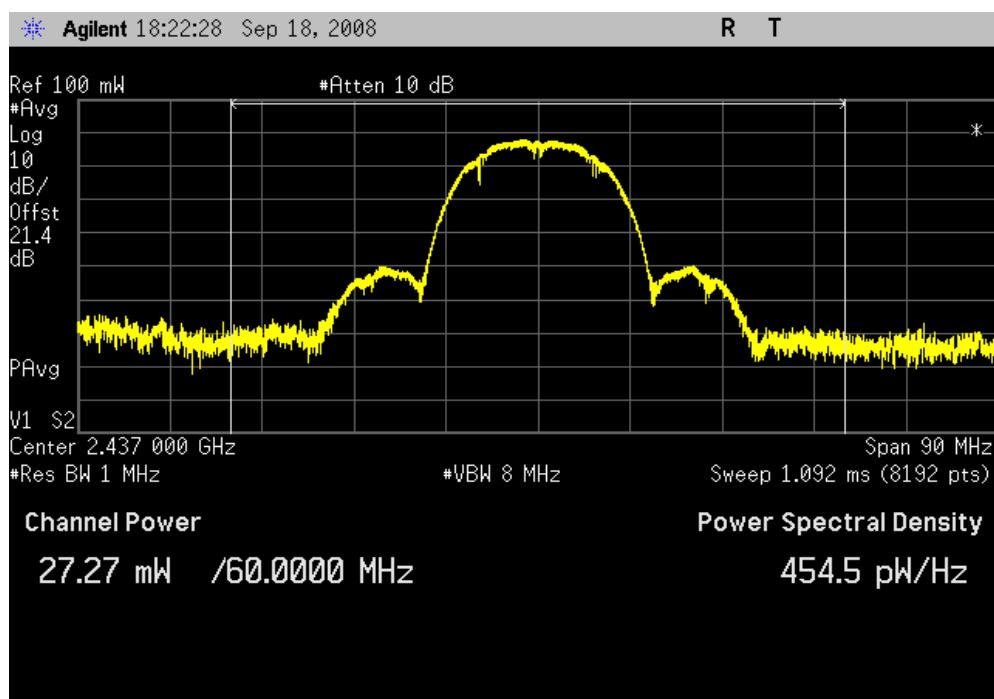


802.11(b) 1 Mbps, High Channel

Result: Pass

Value: 25.36 mW

Limit: 1 Watt

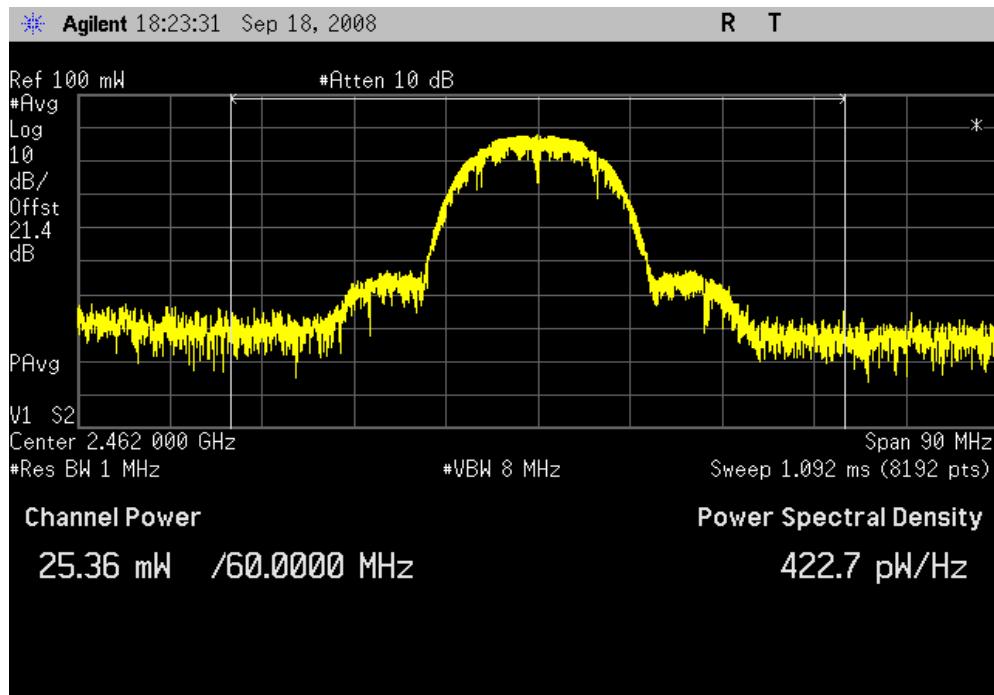


802.11(b) 11 Mbps, Low Channel

Result: Pass

Value: 28.88 mW

Limit: 1 Watt

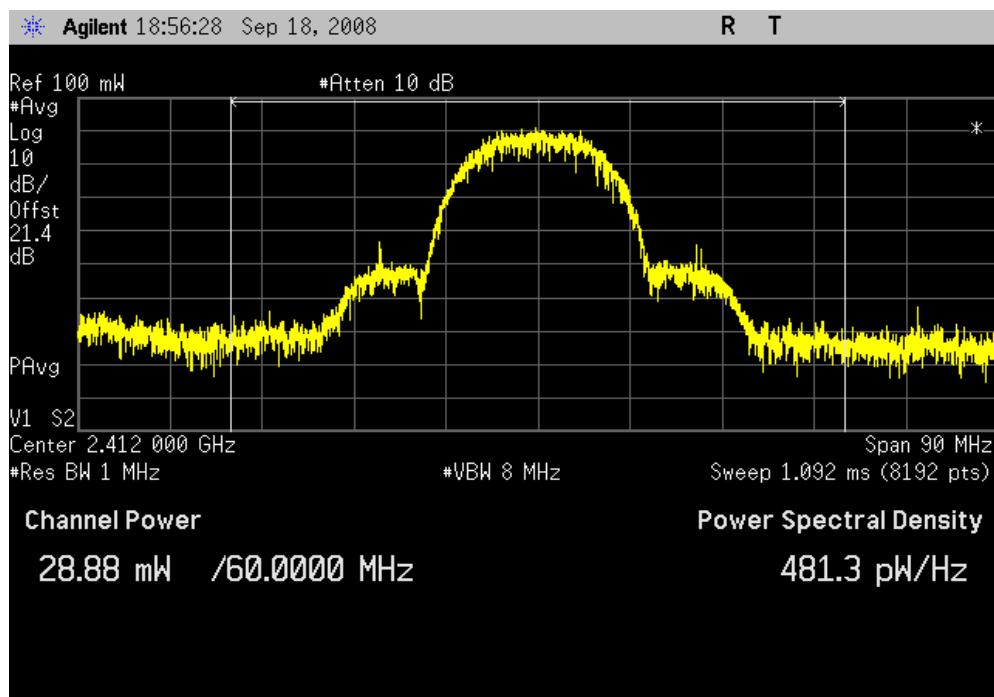


802.11(b) 11 Mbps, Mid Channel

Result: Pass

Value: 28.52 mW

Limit: 1 Watt

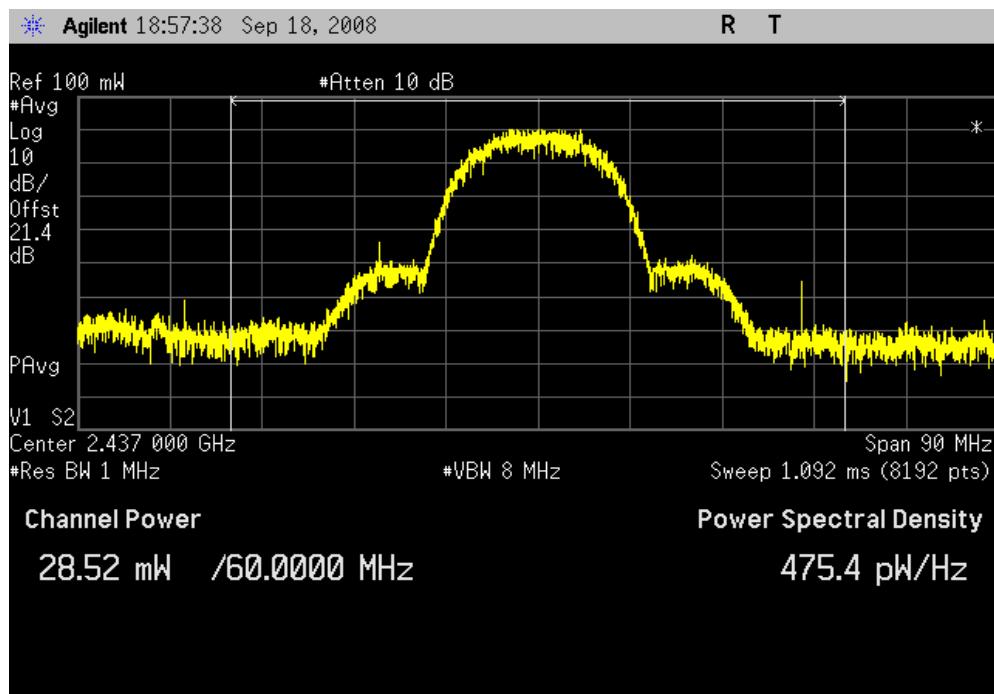


802.11(b) 11 Mbps, High Channel

Result: Pass

Value: 26.74 mW

Limit: 1 Watt

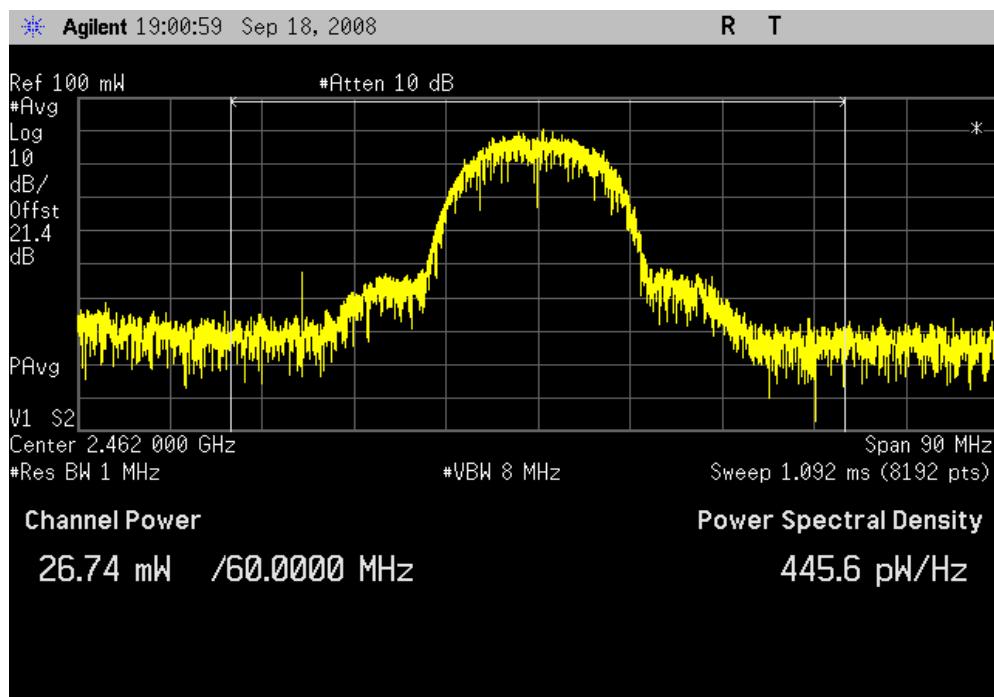


802.11(g) 6 Mbps, Low Channel

Result: Pass

Value: 25.77 mW

Limit: 1 Watt

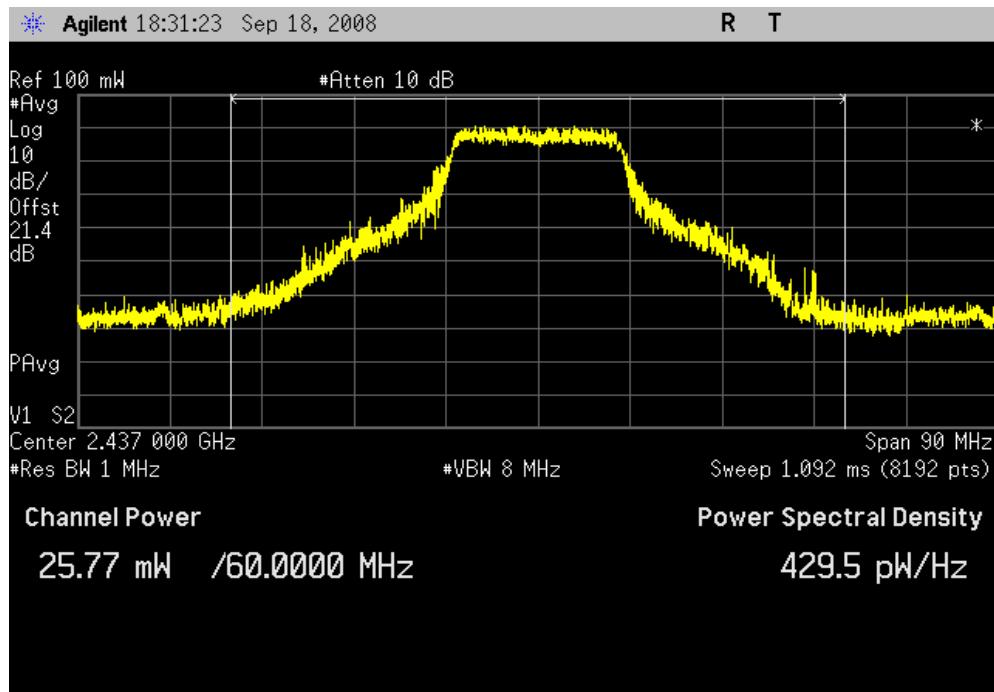


802.11(g) 6 Mbps, Mid Channel

Result: Pass

Value: 27.63 mW

Limit: 1 Watt

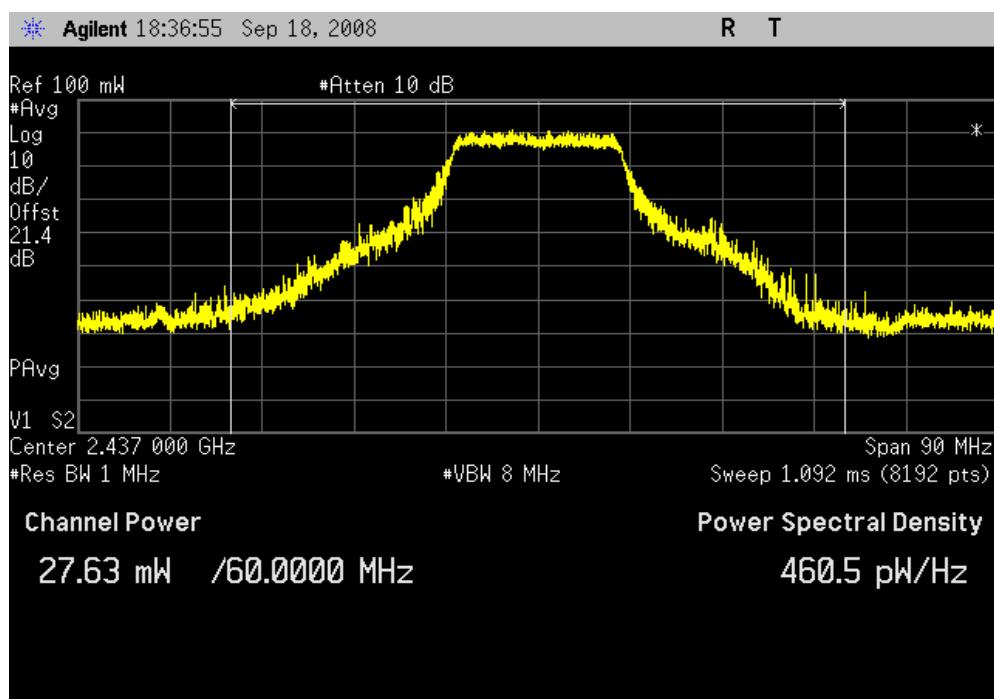


802.11(g) 6 Mbps, High Channel

Result: Pass

Value: 24.01 mW

Limit: 1 Watt

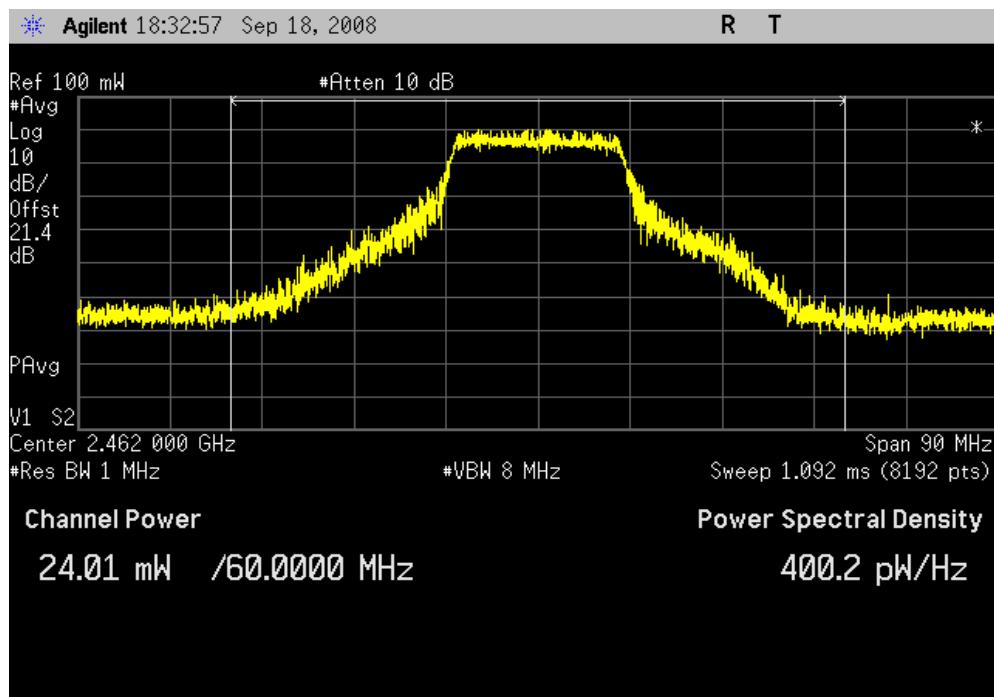


802.11(g) 36 Mbps, Low Channel

Result: Pass

Value: 27.07 mW

Limit: 1 Watt

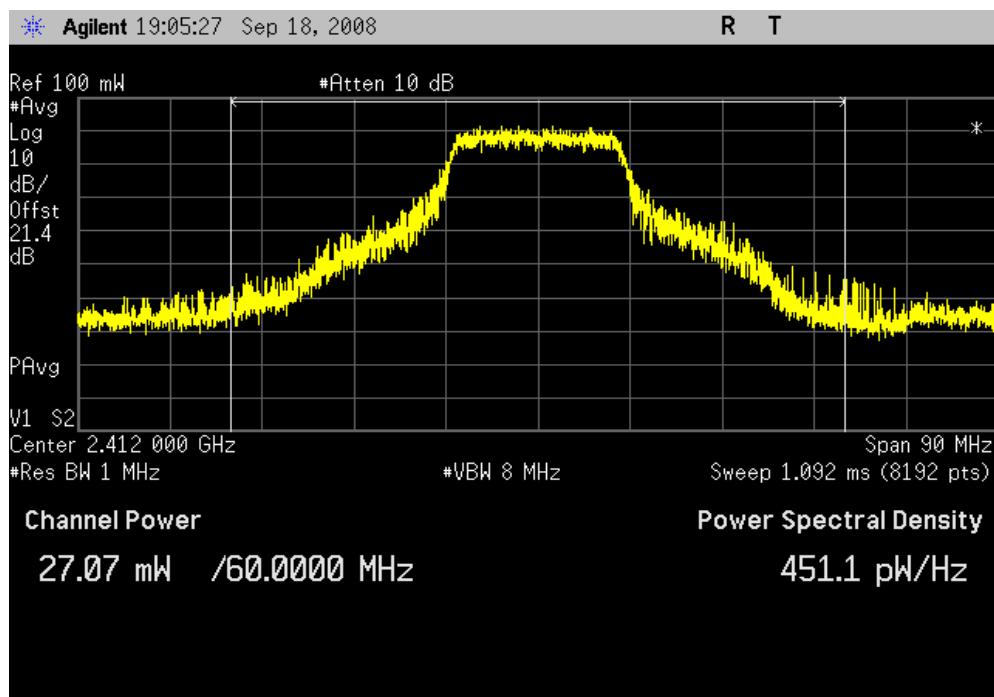


802.11(g) 36 Mbps, Mid Channel

Result: Pass

Value: 25.29 mW

Limit: 1 Watt

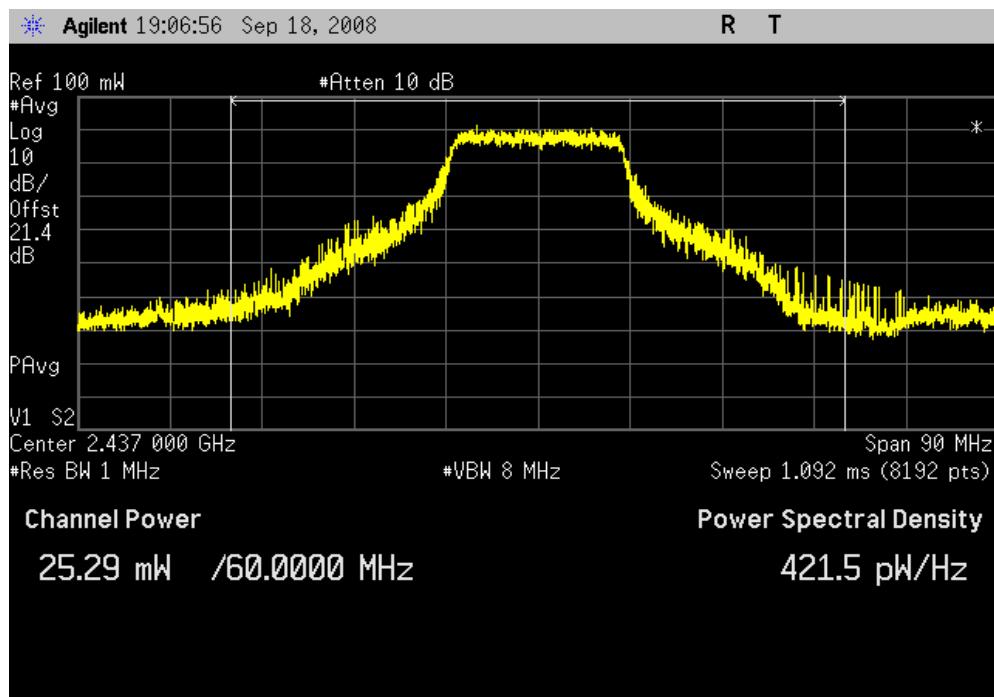


802.11(g) 36 Mbps, High Channel

Result: Pass

Value: 25.15 mW

Limit: 1 Watt

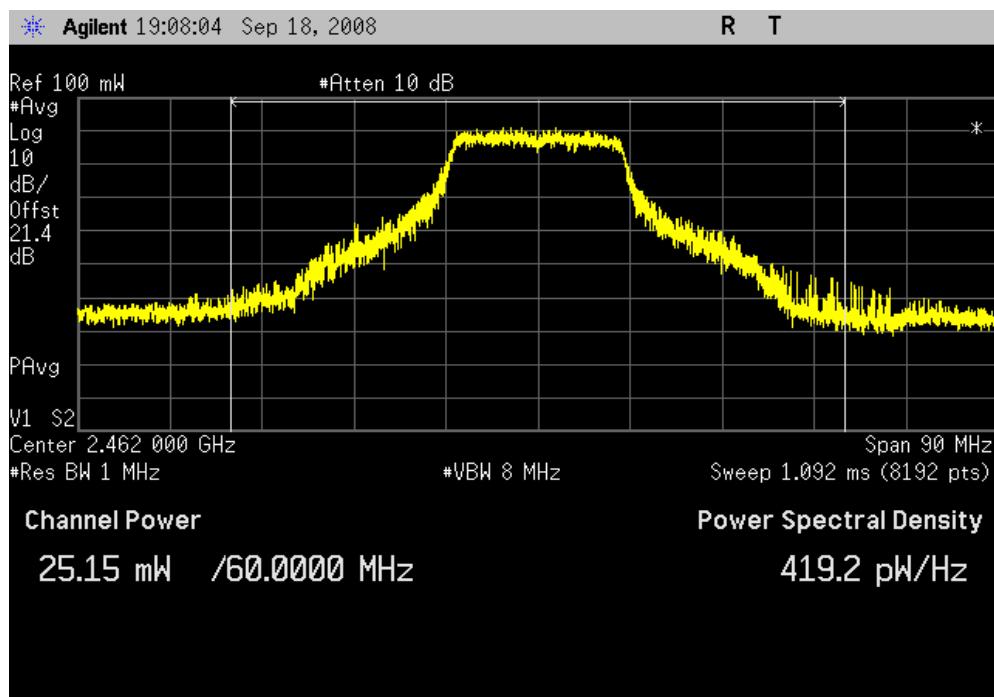


802.11(g) 54 Mbps, Low Channel

Result: Pass

Value: 26.54 mW

Limit: 1 Watt

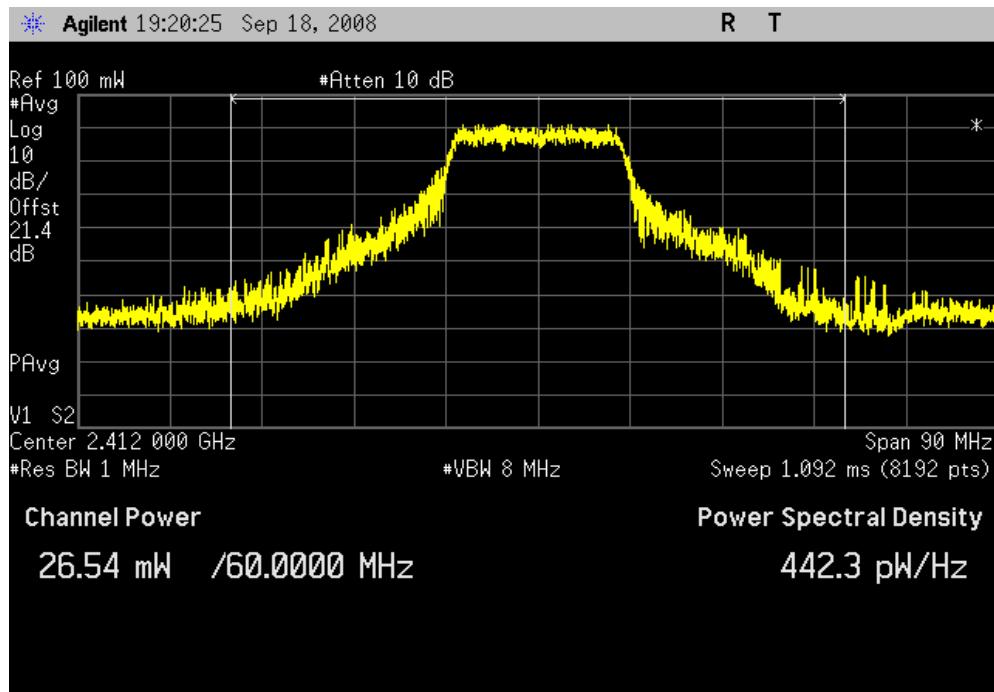


802.11(g) 54 Mbps, Mid Channel

Result: Pass

Value: 25.10 mW

Limit: 1 Watt

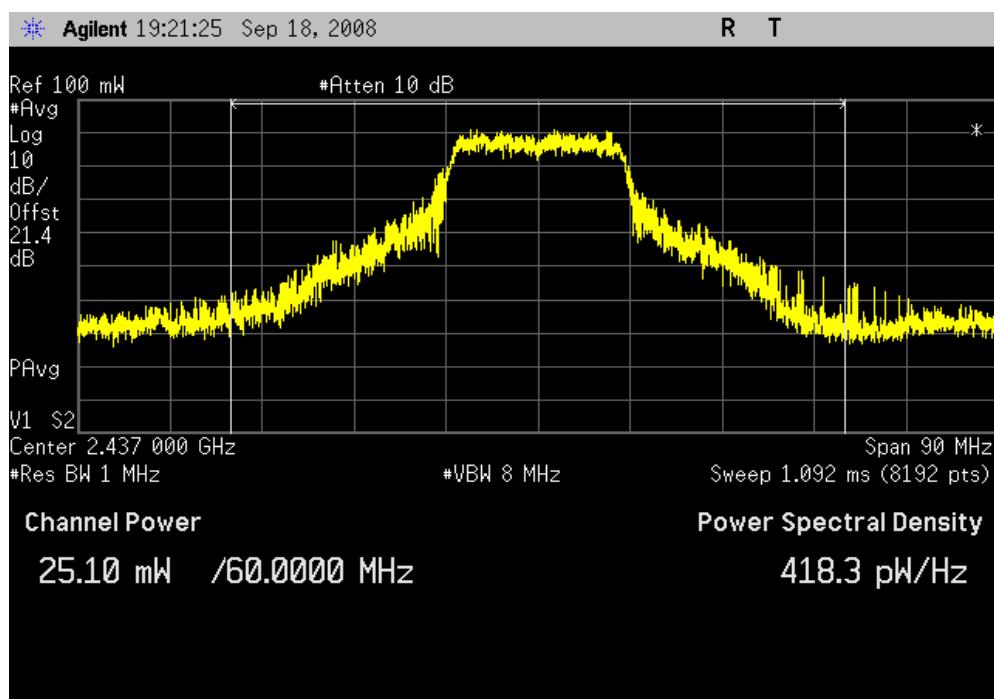


802.11(g) 54 Mbps, High Channel

Result: Pass



Value: 23.77 mW

Limit: 1 Watt

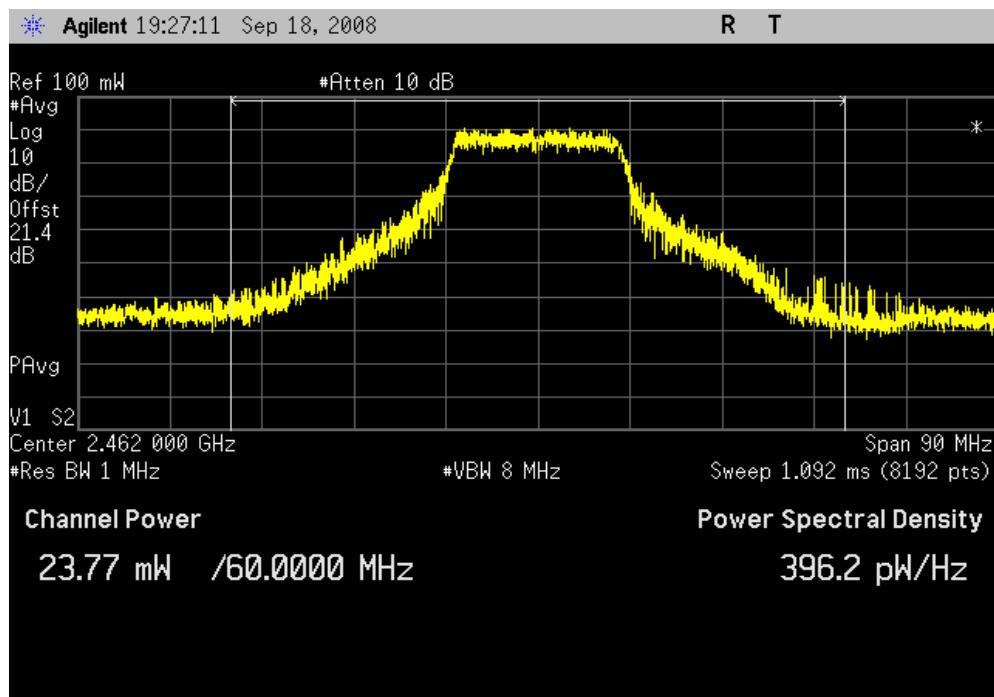


Output Power

XMit 2007.06.13

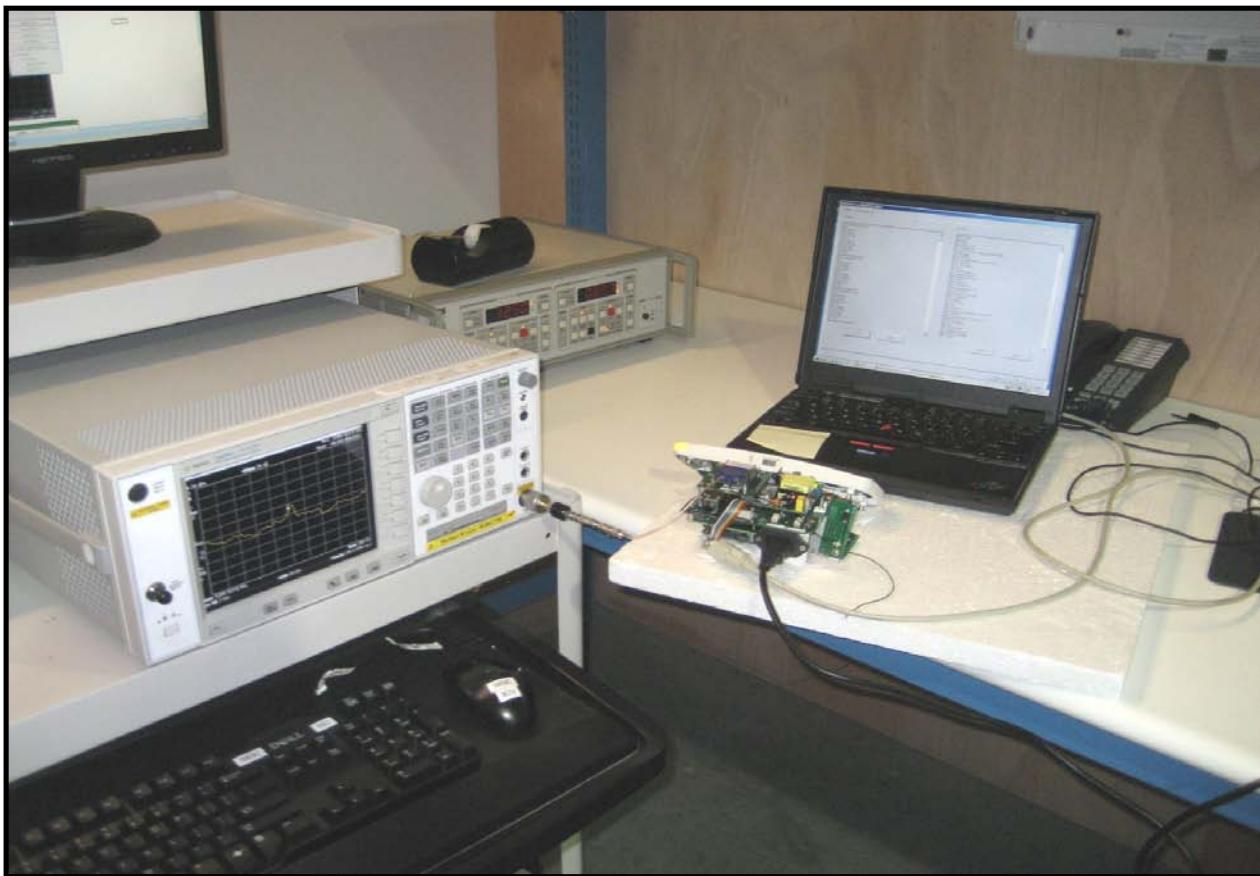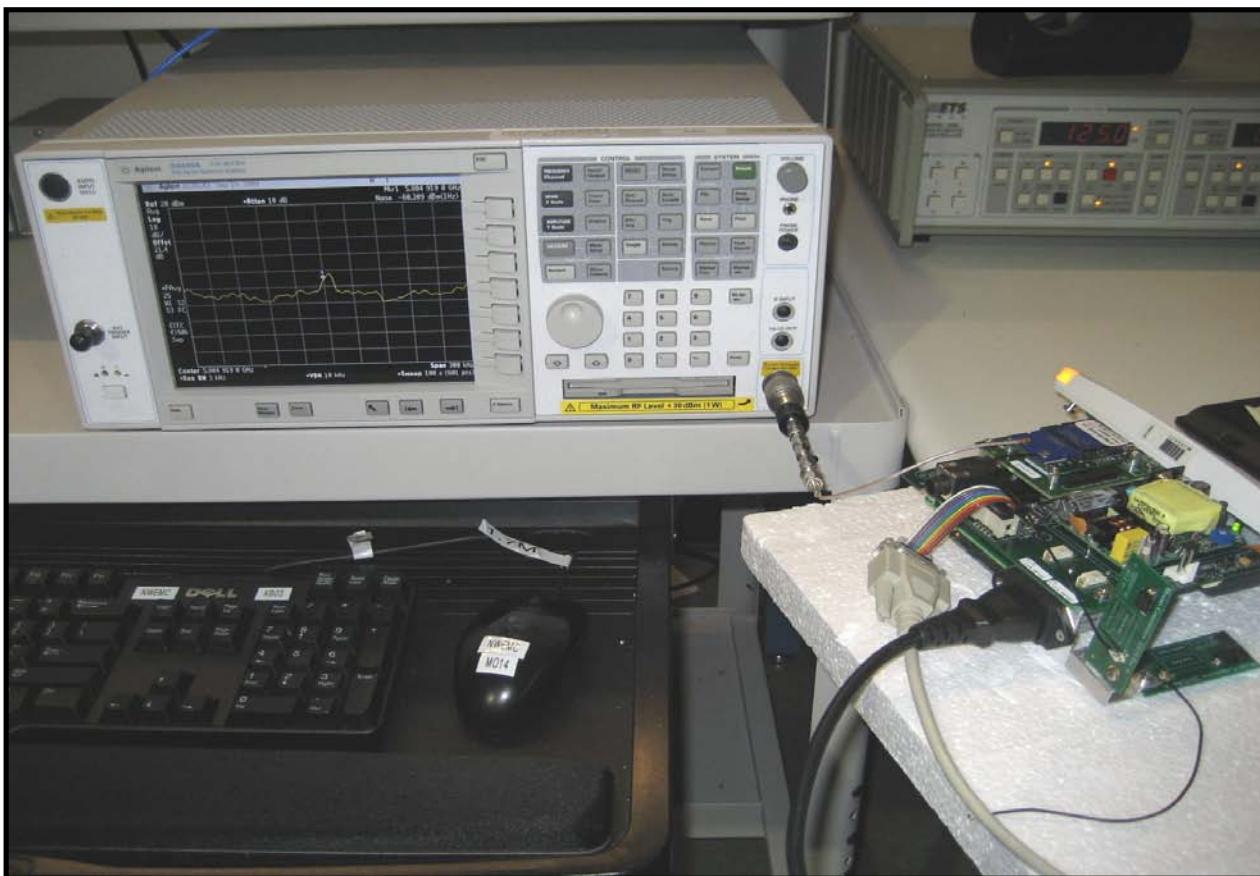

Output Power

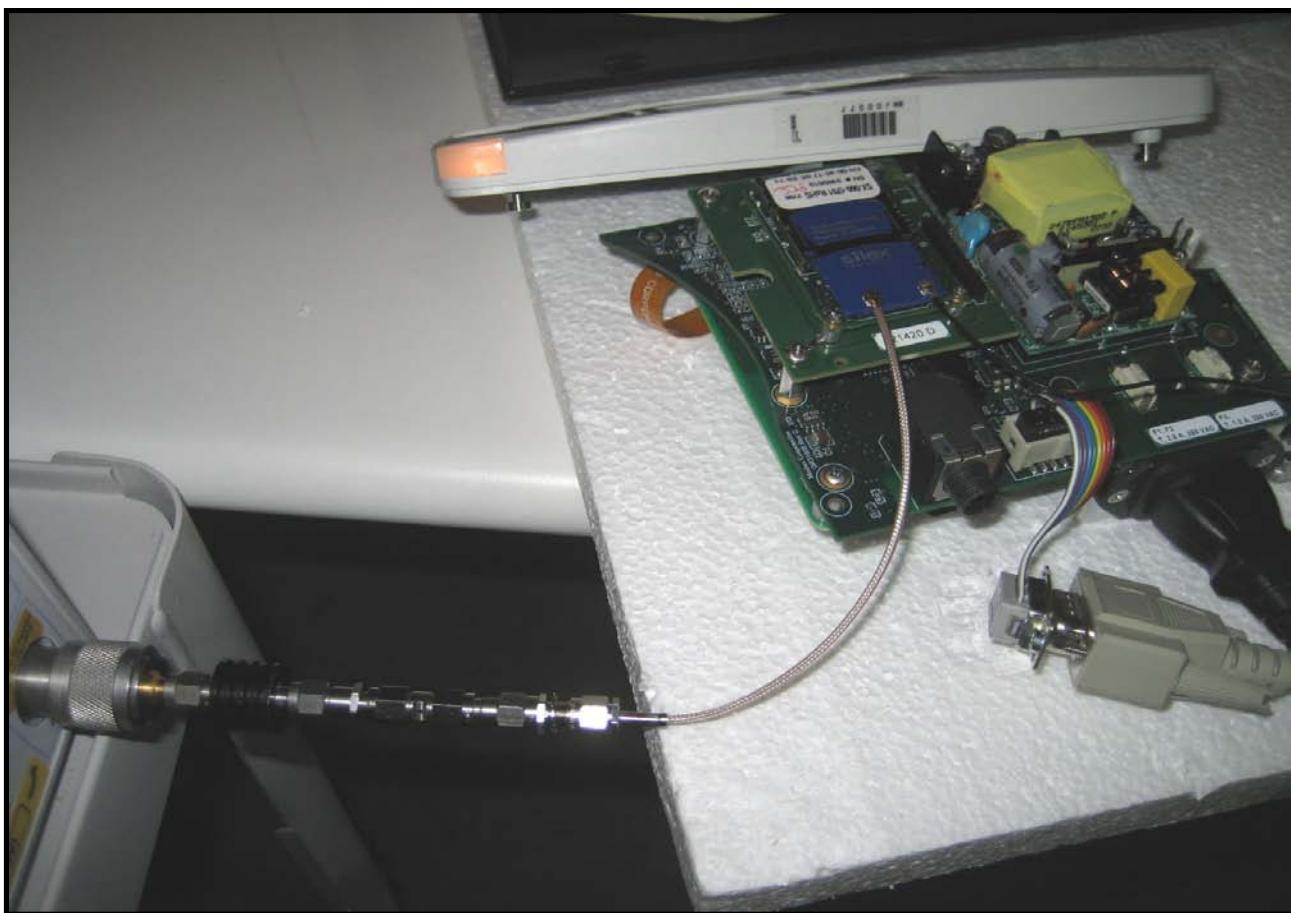

EMC**AC POWERLINE CONDUCTED EMISSIONS**

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

MODES OF OPERATION

Transmitting 802.11(a), 6 Mbps, Channel 149
Transmitting 802.11(a), 6 Mbps, Channel 157
Transmitting 802.11(a), 6 Mbps, Channel 161
Transmitting 802.11(b), 11 Mbps, Channel 1
Transmitting 802.11(b), 11 Mbps, Channel 11
Transmitting 802.11(g), 11 Mbps, Channel 6
Transmitting 802.11(g), 11 Mbps, Channel 36
Transmitting 802.11(g), 11 Mbps, Channel 54

POWER SETTINGS INVESTIGATED

120V/60Hz

CONFIGURATIONS INVESTIGATED

1

SAMPLE CALCULATIONS

Conducted Emissions: Adjusted Level = Measured Level + Transducer Factor + Cable Attenuation Factor + External Attenuator

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
LISN	Solar	9252-50-R-24-BNC	LIC	2/6/2008	13 mo
OC06 Cables B and C			OCM	1/10/2008	13 mo
Receiver	Rohde & Schwarz	ESCI	ARF	12/14/2007	13 mo

MEASUREMENT BANDWIDTHS

	Frequency Range	Peak Data	Quasi-Peak Data	Average Data
	(MHz)	(kHz)	(kHz)	(kHz)
0.01 - 0.15	1.0	0.2	0.2	
0.15 - 30.0	10.0	9.0	9.0	
30.0 - 1000	100.0	120.0	120.0	
Above 1000	1000.0	N/A	1000.0	

Measurements were made using the bandwidths and detectors specified. No video filter was used.

MEASUREMENT UNCERTAINTY


Measurement uncertainty is used to reflect the accuracy of the measured result as compared with its "true" or theoretically correct value. Our measurement data meets or exceeds the measurement uncertainty requirements of CISPR 16-4. In the case of transient tests our test equipment has been demonstrated by calibration to provide at least a 95% confidence that it complies with the test specification requirements. The measurement uncertainty for any test is available upon request.

TEST DESCRIPTION


Using the mode of operation and configuration noted within this report, conducted emissions tests were performed. The frequency range investigated (scanned), is also noted in this report. Conducted power line measurements are made, unless otherwise specified, over the frequency range from 150 kHz to 30 MHz to determine the line-to-ground radio-noise voltage that is conducted from the EUT power-input terminals that are directly (or indirectly via separate transformer or power supplies) connected to a public power network. Equipment is tested with power cords that are normally used or that have electrical or shielding characteristics that are the same as those cords normally used. Typically those measurements are made using a LISN (Line Impedance Stabilization Network), the 50ohm measuring port is terminated by a 50ohm EMI meter or a 50ohm resistive load. All 50ohm measuring ports of the LISN are terminated by 50ohm.

Work Order:	MASI0009	Date:	09/03/08	<i>[Signature]</i>			
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 1. 11 Mbps.						
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003					
Run #	1	Line:	High Line	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

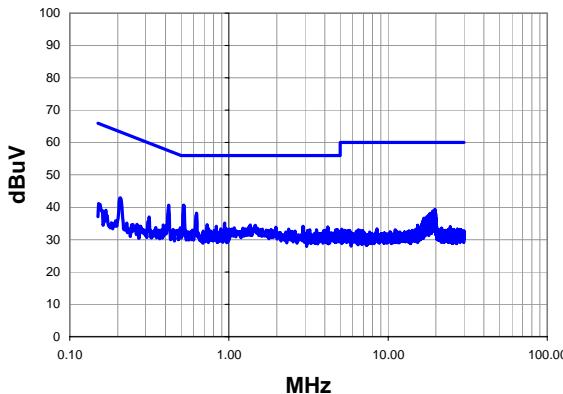

Peak Data - vs - Average Limit

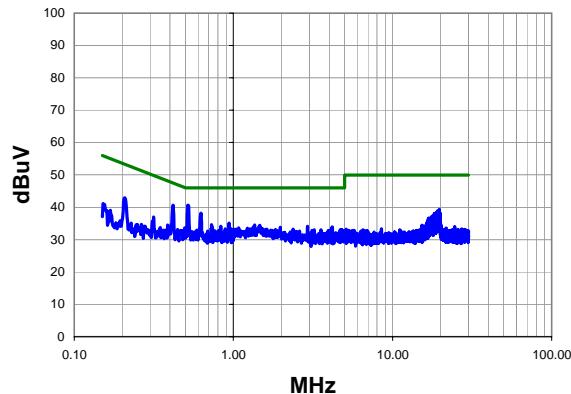

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.521	19.8	20.8	40.6	56.0	-15.4
0.419	19.6	21.0	40.6	57.5	-16.9
0.626	17.4	20.8	38.2	56.0	-17.8
0.208	21.6	21.4	43.0	63.3	-20.3
19.730	18.2	21.2	39.4	60.0	-20.6
0.939	14.6	20.6	35.2	56.0	-20.8
19.190	17.7	21.2	38.9	60.0	-21.1
19.490	17.6	21.2	38.8	60.0	-21.2
0.730	13.9	20.7	34.6	56.0	-21.4
19.040	17.4	21.1	38.5	60.0	-21.5
1.360	14.0	20.5	34.5	56.0	-21.5
1.464	13.8	20.6	34.4	56.0	-21.6
19.560	17.1	21.2	38.3	60.0	-21.7
19.890	17.0	21.2	38.2	60.0	-21.8
0.832	13.5	20.6	34.1	56.0	-21.9
18.420	17.0	21.1	38.1	60.0	-21.9
2.920	13.5	20.6	34.1	56.0	-21.9
18.680	16.8	21.1	37.9	60.0	-22.1
4.168	13.2	20.7	33.9	56.0	-22.1
1.976	13.2	20.6	33.8	56.0	-22.2

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.521	19.8	20.8	40.6	46.0	-5.4
0.419	19.6	21.0	40.6	47.5	-6.9
0.626	17.4	20.8	38.2	46.0	-7.8
0.208	21.6	21.4	43.0	53.3	-10.3
19.730	18.2	21.2	39.4	50.0	-10.6
0.939	14.6	20.6	35.2	46.0	-10.8
19.190	17.7	21.2	38.9	50.0	-11.1
19.490	17.6	21.2	38.8	50.0	-11.2
0.730	13.9	20.7	34.6	46.0	-11.4
19.040	17.4	21.1	38.5	50.0	-11.5
1.360	14.0	20.5	34.5	46.0	-11.5
1.464	13.8	20.6	34.4	46.0	-11.6
19.560	17.1	21.2	38.3	50.0	-11.7
19.890	17.0	21.2	38.2	50.0	-11.8
0.832	13.5	20.6	34.1	46.0	-11.9
18.420	17.0	21.1	38.1	50.0	-11.9
2.920	13.5	20.6	34.1	46.0	-11.9
18.680	16.8	21.1	37.9	50.0	-12.1
4.168	13.2	20.7	33.9	46.0	-12.1
1.976	13.2	20.6	33.8	46.0	-12.2

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>
Project:	None	Temperature:	21.88	
Job Site:	OC06	Humidity:	53.1	
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan
EUT:	Rad-87			
Configuration:	1			
Customer:	Masimo Corporation			
Attendees:	Eugene Kim			
EUT Power:	120V/60Hz			
Operating Mode:	Transmitting.			
Deviations:	No deviations.			
Comments:	Channel 1. 11 Mbps.			
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003		
Run #	2	Line:	Neutral	Ext. Attenuation: 20
				Results
				Pass

Peak Data - vs - Quasi Peak Limit

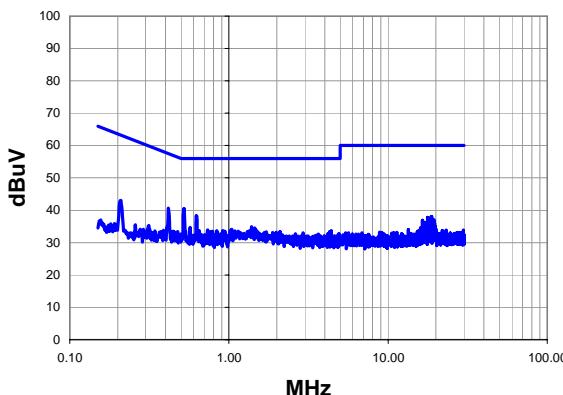

Peak Data - vs - Average Limit

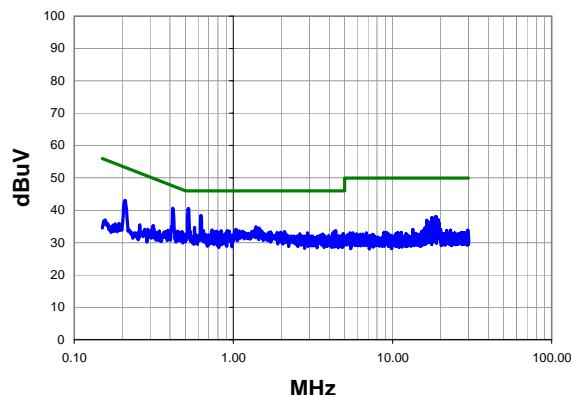

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	19.7	20.8	40.5	56.0	-15.5
0.417	19.6	21.0	40.6	57.5	-16.9
0.626	17.5	20.8	38.3	56.0	-17.7
0.208	21.7	21.4	43.1	63.3	-20.2
1.384	14.4	20.5	34.9	56.0	-21.1
0.570	13.8	20.9	34.7	56.0	-21.3
1.456	13.9	20.6	34.5	56.0	-21.5
1.040	13.6	20.5	34.1	56.0	-21.9
18.600	16.9	21.1	38.0	60.0	-22.0
18.800	16.8	21.1	37.9	60.0	-22.1
0.735	13.2	20.7	33.9	56.0	-22.1
0.915	13.2	20.6	33.8	56.0	-22.2
17.670	16.7	21.1	37.8	60.0	-22.2
4.400	13.0	20.7	33.7	56.0	-22.3
0.648	12.9	20.8	33.7	56.0	-22.3
0.837	13.0	20.6	33.6	56.0	-22.4
0.789	12.8	20.7	33.5	56.0	-22.5
4.288	12.7	20.7	33.4	56.0	-22.6
18.200	16.3	21.1	37.4	60.0	-22.6
0.759	12.6	20.7	33.3	56.0	-22.7

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	19.7	20.8	40.5	46.0	-5.5
0.417	19.6	21.0	40.6	47.5	-6.9
0.626	17.5	20.8	38.3	46.0	-7.7
0.208	21.7	21.4	43.1	53.3	-10.2
1.384	14.4	20.5	34.9	46.0	-11.1
0.570	13.8	20.9	34.7	46.0	-11.3
1.456	13.9	20.6	34.5	46.0	-11.5
1.040	13.6	20.5	34.1	46.0	-11.9
18.600	16.9	21.1	38.0	50.0	-12.0
18.800	16.8	21.1	37.9	50.0	-12.1
0.735	13.2	20.7	33.9	46.0	-12.1
0.915	13.2	20.6	33.8	46.0	-12.2
17.670	16.7	21.1	37.8	50.0	-12.2
4.400	13.0	20.7	33.7	46.0	-12.3
0.648	12.9	20.8	33.7	46.0	-12.3
0.837	13.0	20.6	33.6	46.0	-12.4
0.789	12.8	20.7	33.5	46.0	-12.5
4.288	12.7	20.7	33.4	46.0	-12.6
18.200	16.3	21.1	37.4	50.0	-12.6
0.759	12.6	20.7	33.3	46.0	-12.7

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>			
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 6. 11 Mbps.						
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003					
Run #	3	Line:	High Line	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

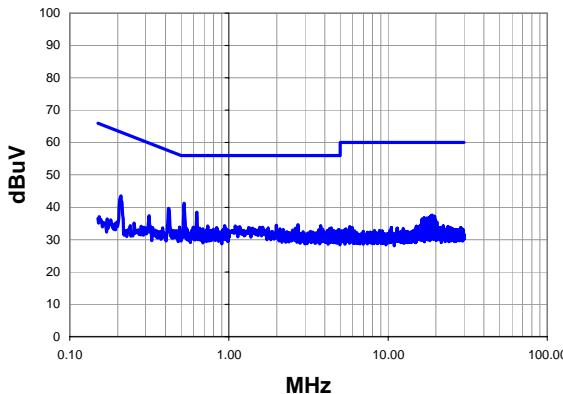

Peak Data - vs - Average Limit

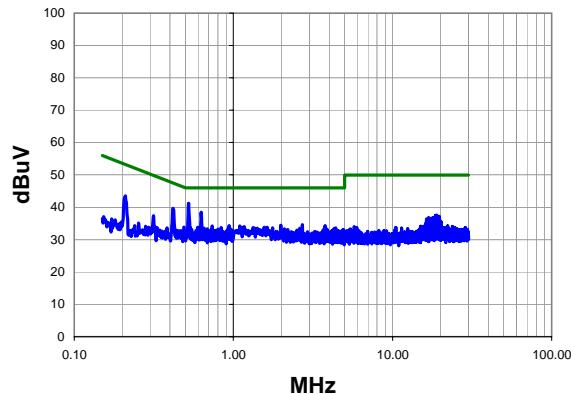

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	20.4	20.8	41.2	56.0	-14.8
0.628	17.7	20.8	38.5	56.0	-17.5
0.419	18.7	21.0	39.7	57.5	-17.8
0.210	22.2	21.3	43.5	63.2	-19.7
2.720	14.0	20.6	34.6	56.0	-21.4
1.984	13.8	20.6	34.4	56.0	-21.6
0.942	13.8	20.6	34.4	56.0	-21.6
3.768	13.6	20.7	34.3	56.0	-21.7
0.736	13.5	20.7	34.2	56.0	-21.8
1.096	13.7	20.5	34.2	56.0	-21.8
1.168	13.5	20.5	34.0	56.0	-22.0
0.597	13.0	20.9	33.9	56.0	-22.1
1.632	13.2	20.6	33.8	56.0	-22.2
0.838	13.1	20.6	33.7	56.0	-22.3
0.538	12.9	20.8	33.7	56.0	-22.3
0.490	12.9	20.9	33.8	56.2	-22.4
18.850	16.5	21.1	37.6	60.0	-22.4
4.400	12.9	20.7	33.6	56.0	-22.4
1.768	13.0	20.6	33.6	56.0	-22.4
0.315	16.3	21.1	37.4	59.8	-22.4

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	20.4	20.8	41.2	46.0	-4.8
0.628	17.7	20.8	38.5	46.0	-7.5
0.419	18.7	21.0	39.7	47.5	-7.8
0.210	22.2	21.3	43.5	53.2	-9.7
2.720	14.0	20.6	34.6	46.0	-11.4
1.984	13.8	20.6	34.4	46.0	-11.6
0.942	13.8	20.6	34.4	46.0	-11.6
3.768	13.6	20.7	34.3	46.0	-11.7
0.736	13.5	20.7	34.2	46.0	-11.8
1.096	13.7	20.5	34.2	46.0	-11.8
1.168	13.5	20.5	34.0	46.0	-12.0
0.597	13.0	20.9	33.9	46.0	-12.1
1.632	13.2	20.6	33.8	46.0	-12.2
0.838	13.1	20.6	33.7	46.0	-12.3
0.538	12.9	20.8	33.7	46.0	-12.3
0.490	12.9	20.9	33.8	46.2	-12.4
18.850	16.5	21.1	37.6	50.0	-12.4
4.400	12.9	20.7	33.6	46.0	-12.4
1.768	13.0	20.6	33.6	46.0	-12.4
0.315	16.3	21.1	37.4	49.8	-12.4

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>
Project:	None	Temperature:	21.88	
Job Site:	OC06	Humidity:	53.1	
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan
EUT:	Rad-87			
Configuration:	1			
Customer:	Masimo Corporation			
Attendees:	Eugene Kim			
EUT Power:	120V/60Hz			
Operating Mode:	Transmitting.			
Deviations:	No deviations.			
Comments:	Channel 6. 11 Mbps.			
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003		
Run #	4	Line:	Neutral	Ext. Attenuation: 20
				Results
				Pass

Peak Data - vs - Quasi Peak Limit

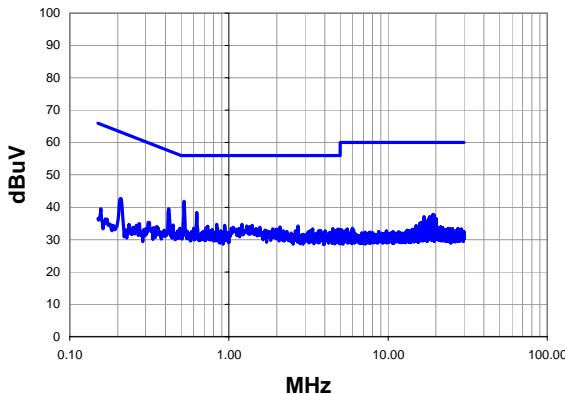

Peak Data - vs - Average Limit

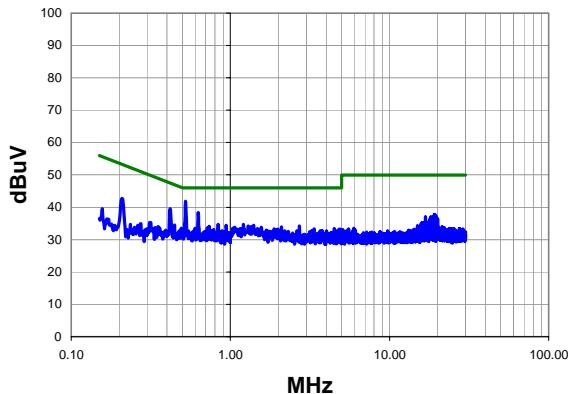

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	21.0	20.8	41.8	56.0	-14.2
0.628	17.6	20.8	38.4	56.0	-17.6
0.419	18.6	21.0	39.6	57.5	-17.9
0.208	21.4	21.4	42.8	63.3	-20.5
0.838	14.1	20.6	34.7	56.0	-21.3
1.208	14.2	20.5	34.7	56.0	-21.3
0.940	13.9	20.6	34.5	56.0	-21.5
2.720	13.6	20.6	34.2	56.0	-21.8
0.735	13.4	20.7	34.1	56.0	-21.9
2.096	13.3	20.6	33.9	56.0	-22.1
19.170	16.6	21.2	37.8	60.0	-22.2
0.716	12.9	20.7	33.6	56.0	-22.4
19.280	16.4	21.2	37.6	60.0	-22.4
0.601	12.7	20.8	33.5	56.0	-22.5
0.446	13.5	21.0	34.5	57.0	-22.5
19.480	16.3	21.2	37.5	60.0	-22.5
4.504	12.7	20.7	33.4	56.0	-22.6
3.352	12.7	20.7	33.4	56.0	-22.6
0.492	12.6	20.9	33.5	56.1	-22.6
19.060	16.2	21.1	37.3	60.0	-22.7

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	21.0	20.8	41.8	46.0	-4.2
0.628	17.6	20.8	38.4	46.0	-7.6
0.419	18.6	21.0	39.6	47.5	-7.9
0.208	21.4	21.4	42.8	53.3	-10.5
0.838	14.1	20.6	34.7	46.0	-11.3
1.208	14.2	20.5	34.7	46.0	-11.3
0.940	13.9	20.6	34.5	46.0	-11.5
2.720	13.6	20.6	34.2	46.0	-11.8
0.735	13.4	20.7	34.1	46.0	-11.9
2.096	13.3	20.6	33.9	46.0	-12.1
19.170	16.6	21.2	37.8	50.0	-12.2
0.716	12.9	20.7	33.6	46.0	-12.4
19.280	16.4	21.2	37.6	50.0	-12.4
0.601	12.7	20.8	33.5	46.0	-12.5
0.446	13.5	21.0	34.5	47.0	-12.5
19.480	16.3	21.2	37.5	50.0	-12.5
4.504	12.7	20.7	33.4	46.0	-12.6
3.352	12.7	20.7	33.4	46.0	-12.6
0.492	12.6	20.9	33.5	46.1	-12.6
19.060	16.2	21.1	37.3	50.0	-12.7

Work Order:	MASI0009	Date:	09/03/08	<i>[Signature]</i>			
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 11. 11 Mbps.						
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003					
Run #	5	Line:	High Line	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

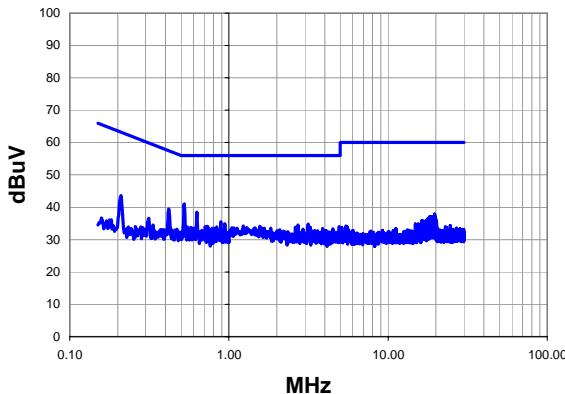

Peak Data - vs - Average Limit

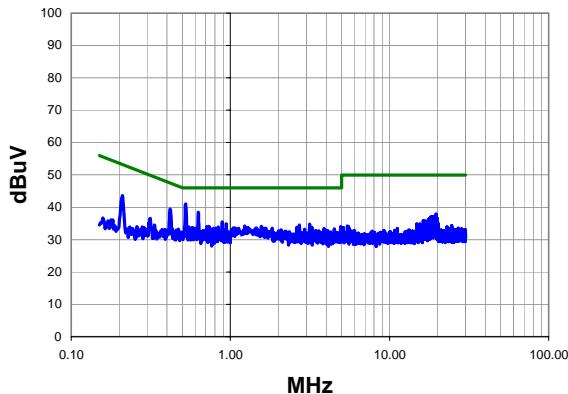

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.2	20.8	41.0	56.0	-15.0
0.629	17.7	20.8	38.5	56.0	-17.5
0.419	18.5	21.0	39.5	57.5	-18.0
0.210	22.3	21.3	43.6	63.2	-19.6
0.888	14.9	20.6	35.5	56.0	-20.5
0.942	14.4	20.6	35.0	56.0	-21.0
3.144	14.2	20.6	34.8	56.0	-21.2
2.720	13.9	20.6	34.5	56.0	-21.5
1.232	13.7	20.5	34.2	56.0	-21.8
0.733	13.4	20.7	34.1	56.0	-21.9
1.568	13.5	20.6	34.1	56.0	-21.9
0.709	13.3	20.8	34.1	56.0	-21.9
4.928	13.3	20.7	34.0	56.0	-22.0
0.546	13.1	20.8	33.9	56.0	-22.1
0.838	13.3	20.6	33.9	56.0	-22.1
19.570	16.7	21.2	37.9	60.0	-22.1
3.248	13.2	20.6	33.8	56.0	-22.2
2.616	13.2	20.6	33.8	56.0	-22.2
0.582	12.9	20.9	33.8	56.0	-22.2
0.808	12.9	20.7	33.6	56.0	-22.4

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.2	20.8	41.0	46.0	-5.0
0.629	17.7	20.8	38.5	46.0	-7.5
0.419	18.5	21.0	39.5	47.5	-8.0
0.210	22.3	21.3	43.6	53.2	-9.6
0.888	14.9	20.6	35.5	46.0	-10.5
0.942	14.4	20.6	35.0	46.0	-11.0
3.144	14.2	20.6	34.8	46.0	-11.2
2.720	13.9	20.6	34.5	46.0	-11.5
1.232	13.7	20.5	34.2	46.0	-11.8
0.733	13.4	20.7	34.1	46.0	-11.9
1.568	13.5	20.6	34.1	46.0	-11.9
0.709	13.3	20.8	34.1	46.0	-11.9
4.928	13.3	20.7	34.0	46.0	-12.0
0.546	13.1	20.8	33.9	46.0	-12.1
0.838	13.3	20.6	33.9	46.0	-12.1
19.570	16.7	21.2	37.9	50.0	-12.1
3.248	13.2	20.6	33.8	46.0	-12.2
2.616	13.2	20.6	33.8	46.0	-12.2
0.582	12.9	20.9	33.8	46.0	-12.2
0.808	12.9	20.7	33.6	46.0	-12.4

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>
Project:	None	Temperature:	21.88	
Job Site:	OC06	Humidity:	53.1	
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan
EUT:	Rad-87			
Configuration:	1			
Customer:	Masimo Corporation			
Attendees:	Eugene Kim			
EUT Power:	120V/60Hz			
Operating Mode:	Transmitting.			
Deviations:	No deviations.			
Comments:	Channel 11. 11 Mbps.			
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003		
Run #	6	Line:	Neutral	Ext. Attenuation: 20
				Results
				Pass

Peak Data - vs - Quasi Peak Limit

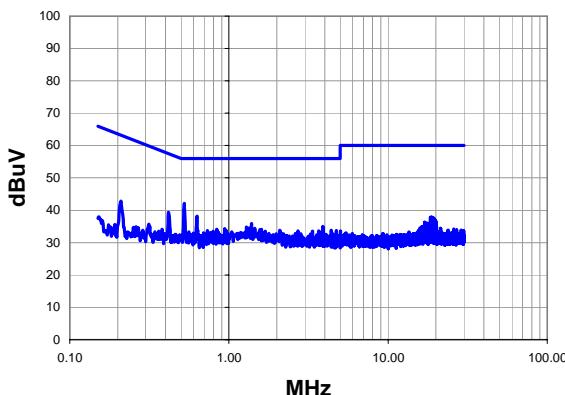

Peak Data - vs - Average Limit

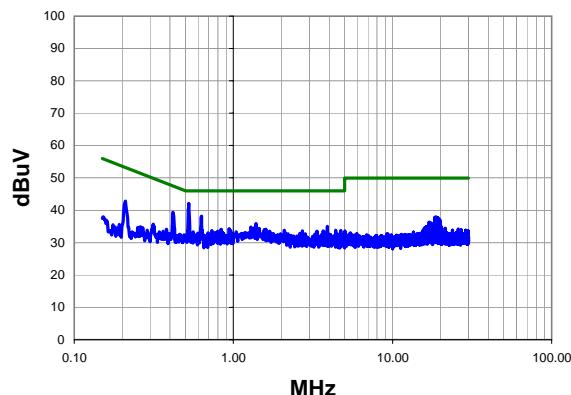

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	21.3	20.8	42.1	56.0	-13.9
0.631	17.4	20.8	38.2	56.0	-17.8
0.417	18.4	21.0	39.4	57.5	-18.1
1.384	15.4	20.5	35.9	56.0	-20.1
0.210	21.5	21.3	42.8	63.2	-20.4
3.896	14.3	20.7	35.0	56.0	-21.0
1.288	14.3	20.5	34.8	56.0	-21.2
1.456	13.8	20.6	34.4	56.0	-21.6
0.942	13.8	20.6	34.4	56.0	-21.6
0.837	13.5	20.6	34.1	56.0	-21.9
1.600	13.5	20.6	34.1	56.0	-21.9
18.750	16.9	21.1	38.0	60.0	-22.0
1.568	13.4	20.6	34.0	56.0	-22.0
4.400	13.1	20.7	33.8	56.0	-22.2
18.430	16.7	21.1	37.8	60.0	-22.2
2.088	13.2	20.6	33.8	56.0	-22.2
0.961	13.2	20.5	33.7	56.0	-22.3
0.733	13.0	20.7	33.7	56.0	-22.3
19.180	16.5	21.2	37.7	60.0	-22.3
19.050	16.5	21.1	37.6	60.0	-22.4

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	21.3	20.8	42.1	46.0	-3.9
0.631	17.4	20.8	38.2	46.0	-7.8
0.417	18.4	21.0	39.4	47.5	-8.1
1.384	15.4	20.5	35.9	46.0	-10.1
0.210	21.5	21.3	42.8	53.2	-10.4
3.896	14.3	20.7	35.0	46.0	-11.0
1.288	14.3	20.5	34.8	46.0	-11.2
1.456	13.8	20.6	34.4	46.0	-11.6
0.942	13.8	20.6	34.4	46.0	-11.6
0.837	13.5	20.6	34.1	46.0	-11.9
1.600	13.5	20.6	34.1	46.0	-11.9
18.750	16.9	21.1	38.0	50.0	-12.0
1.568	13.4	20.6	34.0	46.0	-12.0
4.400	13.1	20.7	33.8	46.0	-12.2
18.430	16.7	21.1	37.8	50.0	-12.2
2.088	13.2	20.6	33.8	46.0	-12.2
0.961	13.2	20.5	33.7	46.0	-12.3
0.733	13.0	20.7	33.7	46.0	-12.3
19.180	16.5	21.2	37.7	50.0	-12.3
19.050	16.5	21.1	37.6	50.0	-12.4

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>			
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 149. 6 Mbps.						
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003					
Run #	7	Line:	High Line	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

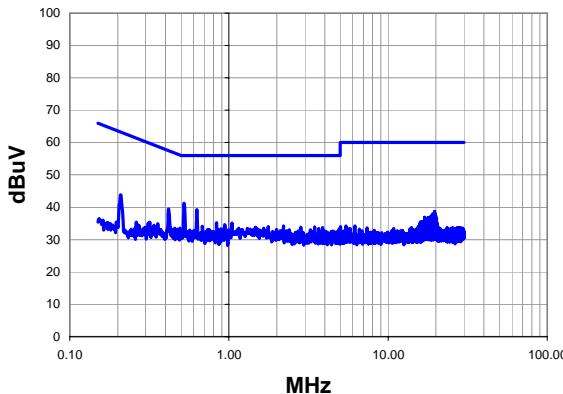

Peak Data - vs - Average Limit

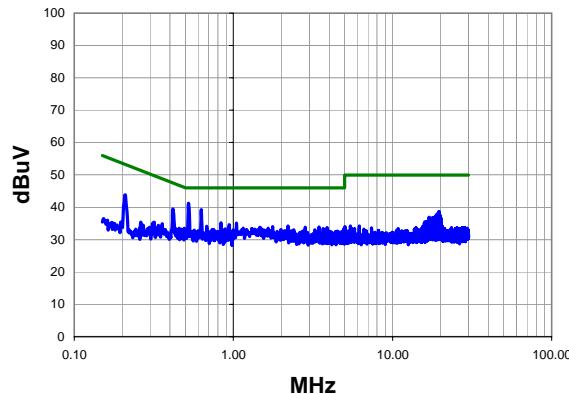

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	20.4	20.8	41.2	56.0	-14.8
0.629	18.4	20.8	39.2	56.0	-16.8
0.417	18.5	21.0	39.5	57.5	-18.0
0.208	22.5	21.4	43.9	63.3	-19.4
0.837	14.6	20.6	35.2	56.0	-20.8
1.048	14.6	20.5	35.1	56.0	-20.9
19.590	17.5	21.2	38.7	60.0	-21.3
0.942	14.1	20.6	34.7	56.0	-21.3
2.200	13.6	20.6	34.2	56.0	-21.8
0.680	13.3	20.8	34.1	56.0	-21.9
1.768	13.4	20.6	34.0	56.0	-22.0
3.456	13.2	20.7	33.9	56.0	-22.1
19.690	16.7	21.2	37.9	60.0	-22.1
0.934	13.3	20.6	33.9	56.0	-22.1
19.080	16.7	21.1	37.8	60.0	-22.2
2.824	13.2	20.6	33.8	56.0	-22.2
1.464	13.2	20.6	33.8	56.0	-22.2
3.880	13.0	20.7	33.7	56.0	-22.3
19.380	16.5	21.2	37.7	60.0	-22.3
19.270	16.5	21.2	37.7	60.0	-22.3

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	20.4	20.8	41.2	46.0	-4.8
0.629	18.4	20.8	39.2	46.0	-6.8
0.417	18.5	21.0	39.5	47.5	-8.0
0.208	22.5	21.4	43.9	53.3	-9.4
0.837	14.6	20.6	35.2	46.0	-10.8
1.048	14.6	20.5	35.1	46.0	-10.9
19.590	17.5	21.2	38.7	50.0	-11.3
0.942	14.1	20.6	34.7	46.0	-11.3
2.200	13.6	20.6	34.2	46.0	-11.8
0.680	13.3	20.8	34.1	46.0	-11.9
1.768	13.4	20.6	34.0	46.0	-12.0
3.456	13.2	20.7	33.9	46.0	-12.1
19.690	16.7	21.2	37.9	50.0	-12.1
0.934	13.3	20.6	33.9	46.0	-12.1
19.080	16.7	21.1	37.8	50.0	-12.2
2.824	13.2	20.6	33.8	46.0	-12.2
1.464	13.2	20.6	33.8	46.0	-12.2
3.880	13.0	20.7	33.7	46.0	-12.3
19.380	16.5	21.2	37.7	50.0	-12.3
19.270	16.5	21.2	37.7	50.0	-12.3

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>
Project:	None	Temperature:	21.88	
Job Site:	OC06	Humidity:	53.1	
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan
EUT:	Rad-87			
Configuration:	1			
Customer:	Masimo Corporation			
Attendees:	Eugene Kim			
EUT Power:	120V/60Hz			
Operating Mode:	Transmitting.			
Deviations:	No deviations.			
Comments:	Channel 149. 6 Mbps.			
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003		
Run #	8	Line:	Neutral	Ext. Attenuation: 20
				Results
				Pass

Peak Data - vs - Quasi Peak Limit

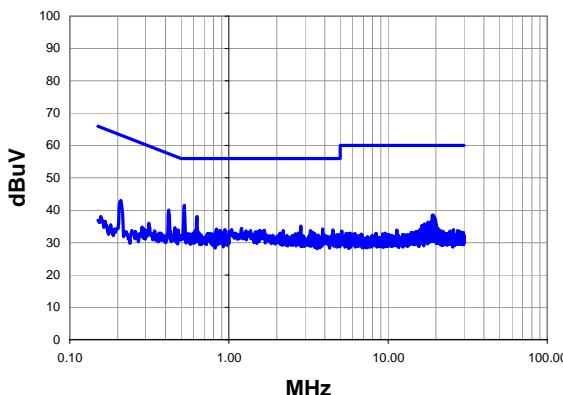

Peak Data - vs - Average Limit

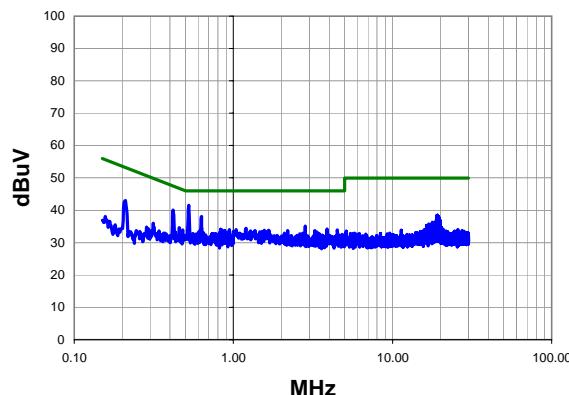

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.7	20.8	41.5	56.0	-14.5
0.419	19.1	21.0	40.1	57.5	-17.4
0.631	17.3	20.8	38.1	56.0	-17.9
0.210	21.7	21.3	43.0	63.2	-20.2
2.824	14.5	20.6	35.1	56.0	-20.9
19.170	17.3	21.2	38.5	60.0	-21.5
1.200	13.9	20.5	34.4	56.0	-21.6
18.960	17.2	21.1	38.3	60.0	-21.7
3.880	13.5	20.7	34.2	56.0	-21.8
0.833	13.5	20.6	34.1	56.0	-21.9
0.944	13.5	20.5	34.0	56.0	-22.0
19.490	16.8	21.2	38.0	60.0	-22.0
4.504	13.2	20.7	33.9	56.0	-22.1
19.290	16.7	21.2	37.9	60.0	-22.1
0.456	13.6	21.0	34.6	56.8	-22.2
1.672	13.2	20.6	33.8	56.0	-22.2
3.248	13.1	20.6	33.7	56.0	-22.3
2.192	13.1	20.6	33.7	56.0	-22.3
0.881	13.1	20.6	33.7	56.0	-22.3
0.480	13.0	20.9	33.9	56.3	-22.4

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.7	20.8	41.5	46.0	-4.5
0.419	19.1	21.0	40.1	47.5	-7.4
0.631	17.3	20.8	38.1	46.0	-7.9
0.210	21.7	21.3	43.0	53.2	-10.2
2.824	14.5	20.6	35.1	46.0	-10.9
19.170	17.3	21.2	38.5	50.0	-11.5
1.200	13.9	20.5	34.4	46.0	-11.6
18.960	17.2	21.1	38.3	50.0	-11.7
3.880	13.5	20.7	34.2	46.0	-11.8
0.833	13.5	20.6	34.1	46.0	-11.9
0.944	13.5	20.5	34.0	46.0	-12.0
19.490	16.8	21.2	38.0	50.0	-12.0
4.504	13.2	20.7	33.9	46.0	-12.1
19.290	16.7	21.2	37.9	50.0	-12.1
0.456	13.6	21.0	34.6	46.8	-12.2
1.672	13.2	20.6	33.8	46.0	-12.2
3.248	13.1	20.6	33.7	46.0	-12.3
2.192	13.1	20.6	33.7	46.0	-12.3
0.881	13.1	20.6	33.7	46.0	-12.3
0.480	13.0	20.9	33.9	46.3	-12.4

Work Order:	MASI0009	Date:	09/03/08				
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	<i>Mark Baytan</i>			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 157. 6 Mbps.						
Test Specifications		Test Method					
FCC 15.207:2007		ANSI C63.4:2003					
Run #	9	Line:	High Line	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

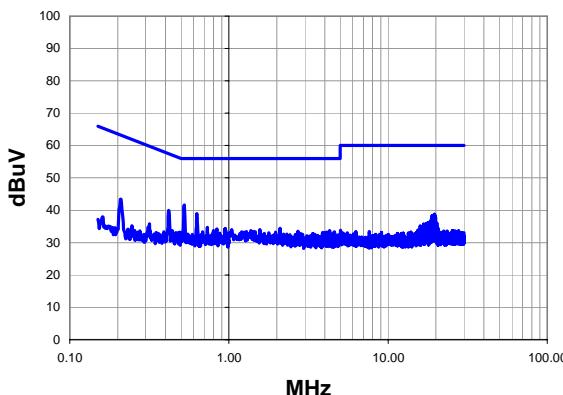

Peak Data - vs - Average Limit

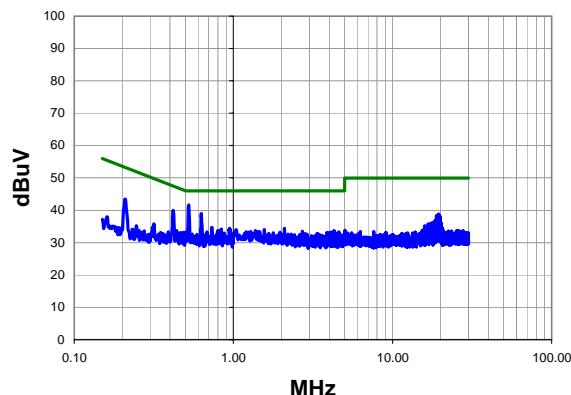

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.8	20.8	41.6	56.0	-14.4
0.628	18.1	20.8	38.9	56.0	-17.1
0.419	19.0	21.0	40.0	57.5	-17.5
0.208	22.1	21.4	43.5	63.3	-19.8
19.490	17.6	21.2	38.8	60.0	-21.2
0.731	14.0	20.7	34.7	56.0	-21.3
19.590	17.3	21.2	38.5	60.0	-21.5
2.096	13.8	20.6	34.4	56.0	-21.6
0.949	13.8	20.5	34.3	56.0	-21.7
19.780	17.1	21.2	38.3	60.0	-21.7
19.270	17.1	21.2	38.3	60.0	-21.7
19.070	17.1	21.1	38.2	60.0	-21.8
0.840	13.6	20.6	34.2	56.0	-21.8
18.870	17.1	21.1	38.2	60.0	-21.8
19.390	16.9	21.2	38.1	60.0	-21.9
19.180	16.9	21.2	38.1	60.0	-21.9
1.568	13.4	20.6	34.0	56.0	-22.0
1.040	13.5	20.5	34.0	56.0	-22.0
0.954	13.3	20.5	33.8	56.0	-22.2
19.890	16.6	21.2	37.8	60.0	-22.2

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.8	20.8	41.6	46.0	-4.4
0.628	18.1	20.8	38.9	46.0	-7.1
0.419	19.0	21.0	40.0	47.5	-7.5
0.208	22.1	21.4	43.5	53.3	-9.8
19.490	17.6	21.2	38.8	50.0	-11.2
0.731	14.0	20.7	34.7	46.0	-11.3
19.590	17.3	21.2	38.5	50.0	-11.5
2.096	13.8	20.6	34.4	46.0	-11.6
0.949	13.8	20.5	34.3	46.0	-11.7
19.780	17.1	21.2	38.3	50.0	-11.7
19.270	17.1	21.2	38.3	50.0	-11.7
19.070	17.1	21.1	38.2	50.0	-11.8
0.840	13.6	20.6	34.2	46.0	-11.8
18.870	17.1	21.1	38.2	50.0	-11.8
19.390	16.9	21.2	38.1	50.0	-11.9
19.180	16.9	21.2	38.1	50.0	-11.9
1.568	13.4	20.6	34.0	46.0	-12.0
1.040	13.5	20.5	34.0	46.0	-12.0
0.954	13.3	20.5	33.8	46.0	-12.2
19.890	16.6	21.2	37.8	50.0	-12.2

Work Order:	MASI0009	Date:	09/03/08				
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	<i>Mark Baytan</i>			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 157. 6 Mbps.						
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003					
Run #	10	Line:	Neutral	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

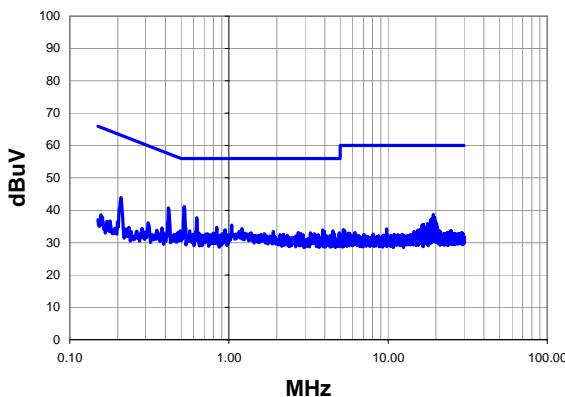

Peak Data - vs - Average Limit

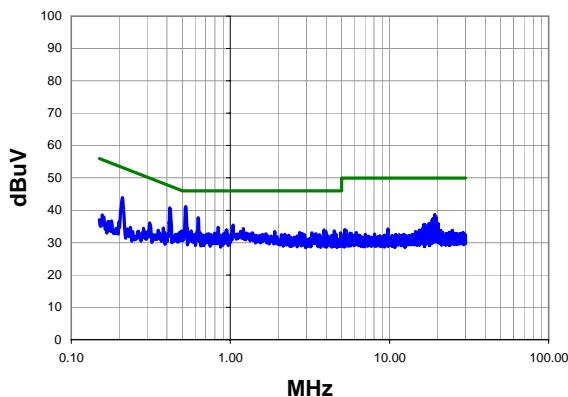

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.3	20.8	41.1	56.0	-14.9
0.417	19.7	21.0	40.7	57.5	-16.8
0.628	16.9	20.8	37.7	56.0	-18.3
0.210	22.6	21.3	43.9	63.2	-19.3
1.040	14.9	20.5	35.4	56.0	-20.6
0.838	14.1	20.6	34.7	56.0	-21.3
19.280	17.5	21.2	38.7	60.0	-21.3
1.208	13.8	20.5	34.3	56.0	-21.7
0.947	13.4	20.5	33.9	56.0	-22.1
3.880	13.2	20.7	33.9	56.0	-22.1
19.600	16.6	21.2	37.8	60.0	-22.2
19.500	16.5	21.2	37.7	60.0	-22.3
0.567	12.8	20.9	33.7	56.0	-22.3
4.504	12.9	20.7	33.6	56.0	-22.4
0.493	12.7	20.9	33.6	56.1	-22.5
19.370	16.3	21.2	37.5	60.0	-22.5
18.870	16.3	21.1	37.4	60.0	-22.6
3.984	12.7	20.7	33.4	56.0	-22.6
1.896	12.8	20.6	33.4	56.0	-22.6
19.070	16.1	21.1	37.2	60.0	-22.8

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	20.3	20.8	41.1	46.0	-4.9
0.417	19.7	21.0	40.7	47.5	-6.8
0.628	16.9	20.8	37.7	46.0	-8.3
0.210	22.6	21.3	43.9	53.2	-9.3
1.040	14.9	20.5	35.4	46.0	-10.6
0.838	14.1	20.6	34.7	46.0	-11.3
19.280	17.5	21.2	38.7	50.0	-11.3
1.208	13.8	20.5	34.3	46.0	-11.7
0.947	13.4	20.5	33.9	46.0	-12.1
3.880	13.2	20.7	33.9	46.0	-12.1
19.600	16.6	21.2	37.8	50.0	-12.2
19.500	16.5	21.2	37.7	50.0	-12.3
0.567	12.8	20.9	33.7	46.0	-12.3
4.504	12.9	20.7	33.6	46.0	-12.4
0.493	12.7	20.9	33.6	46.1	-12.5
19.370	16.3	21.2	37.5	50.0	-12.5
18.870	16.3	21.1	37.4	50.0	-12.6
3.984	12.7	20.7	33.4	46.0	-12.6
1.896	12.8	20.6	33.4	46.0	-12.6
19.070	16.1	21.1	37.2	50.0	-12.8

Work Order:	MASI0009	Date:	09/03/08				
Project:	None	Temperature:	21.88				
Job Site:	OC06	Humidity:	53.1				
Serial Number:	J00073	Barometric Pres.:	1011.7	<i>Mark Baytan</i>			
EUT:	Rad-87						
Configuration:	1						
Customer:	Masimo Corporation						
Attendees:	Eugene Kim						
EUT Power:	120V/60Hz						
Operating Mode:	Transmitting.						
Deviations:	No deviations.						
Comments:	Channel 161. 6 Mbps.						
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003					
Run #	11	Line:	High Line	Ext. Attenuation:	20	Results	Pass

Peak Data - vs - Quasi Peak Limit

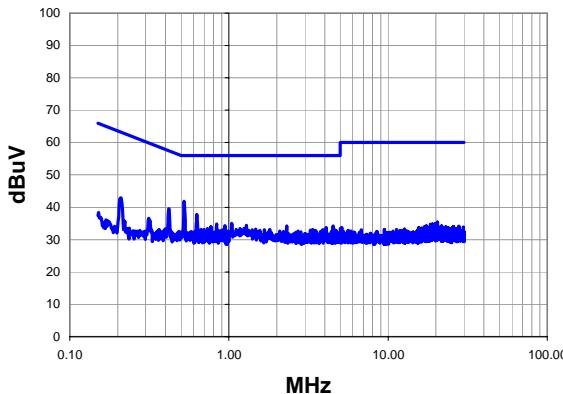

Peak Data - vs - Average Limit

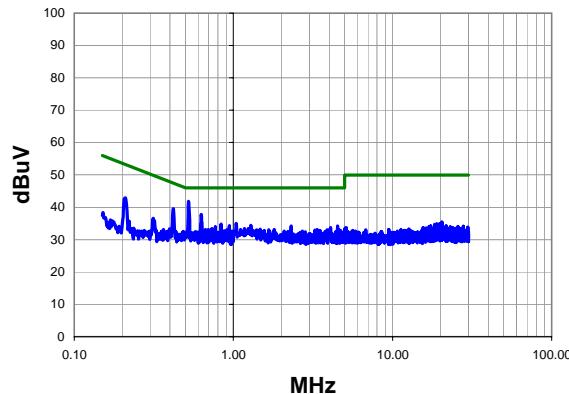

Peak Data - vs - Quasi Peak Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	21.0	20.8	41.8	56.0	-14.2
0.420	18.6	21.0	39.6	57.4	-17.8
0.628	17.0	20.8	37.8	56.0	-18.2
0.210	21.6	21.3	42.9	63.2	-20.3
1.040	14.5	20.5	35.0	56.0	-21.0
0.837	14.2	20.6	34.8	56.0	-21.2
1.288	13.9	20.5	34.4	56.0	-21.6
0.944	13.8	20.5	34.3	56.0	-21.7
4.512	13.5	20.7	34.2	56.0	-21.8
2.304	13.6	20.6	34.2	56.0	-21.8
0.770	13.2	20.7	33.9	56.0	-22.1
4.088	13.0	20.7	33.7	56.0	-22.3
0.731	12.7	20.7	33.4	56.0	-22.6
1.472	12.6	20.6	33.2	56.0	-22.8
3.352	12.5	20.7	33.2	56.0	-22.8
0.697	12.4	20.8	33.2	56.0	-22.8
1.808	12.5	20.6	33.1	56.0	-22.9
0.667	12.3	20.8	33.1	56.0	-22.9
0.912	12.5	20.6	33.1	56.0	-22.9
4.616	12.3	20.7	33.0	56.0	-23.0

Peak Data - vs - Average Limit


Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.522	21.0	20.8	41.8	46.0	-4.2
0.420	18.6	21.0	39.6	47.4	-7.8
0.628	17.0	20.8	37.8	46.0	-8.2
0.210	21.6	21.3	42.9	53.2	-10.3
1.040	14.5	20.5	35.0	46.0	-11.0
0.837	14.2	20.6	34.8	46.0	-11.2
1.288	13.9	20.5	34.4	46.0	-11.6
0.944	13.8	20.5	34.3	46.0	-11.7
4.512	13.5	20.7	34.2	46.0	-11.8
2.304	13.6	20.6	34.2	46.0	-11.8
0.770	13.2	20.7	33.9	46.0	-12.1
4.088	13.0	20.7	33.7	46.0	-12.3
0.731	12.7	20.7	33.4	46.0	-12.6
1.472	12.6	20.6	33.2	46.0	-12.8
3.352	12.5	20.7	33.2	46.0	-12.8
0.697	12.4	20.8	33.2	46.0	-12.8
1.808	12.5	20.6	33.1	46.0	-12.9
0.667	12.3	20.8	33.1	46.0	-12.9
0.912	12.5	20.6	33.1	46.0	-12.9
4.616	12.3	20.7	33.0	46.0	-13.0

Work Order:	MASI0009	Date:	09/03/08	<i>Mark Baytan</i>
Project:	None	Temperature:	21.88	
Job Site:	OC06	Humidity:	53.1	
Serial Number:	J00073	Barometric Pres.:	1011.7	Tested by: Mark Baytan
EUT:	Rad-87			
Configuration:	1			
Customer:	Masimo Corporation			
Attendees:	Eugene Kim			
EUT Power:	120V/60Hz			
Operating Mode:	Transmitting.			
Deviations:	No deviations.			
Comments:	Channel 161. 6 Mbps.			
Test Specifications FCC 15.207:2007		Test Method ANSI C63.4:2003		
Run #	12	Line:	Neutral	Ext. Attenuation: 20
				Results
				Pass

Peak Data - vs - Quasi Peak Limit

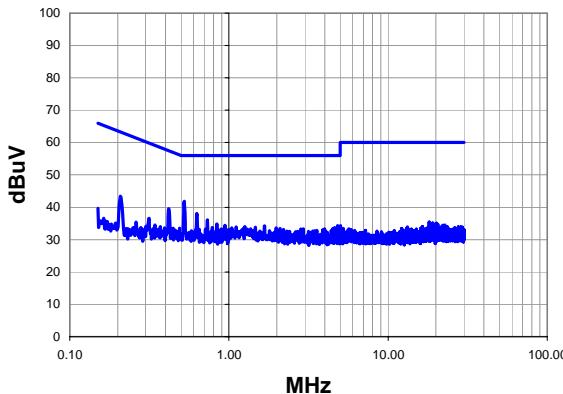

Peak Data - vs - Average Limit

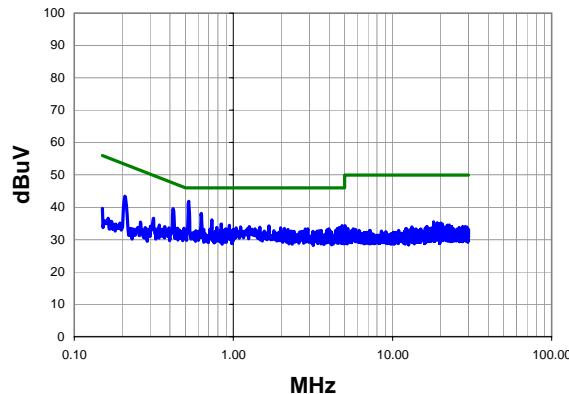

Peak Data - vs - Quasi Peak Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	21.0	20.8	41.8	56.0	-14.2
0.419	18.6	21.0	39.6	57.5	-17.9
0.628	17.3	20.8	38.1	56.0	-17.9
0.208	22.1	21.4	43.5	63.3	-19.8
0.733	15.4	20.7	36.1	56.0	-19.9
0.838	14.2	20.6	34.8	56.0	-21.2
0.944	13.9	20.5	34.4	56.0	-21.6
4.824	13.6	20.7	34.3	56.0	-21.7
1.672	13.6	20.6	34.2	56.0	-21.8
1.256	13.5	20.5	34.0	56.0	-22.0
1.112	13.4	20.5	33.9	56.0	-22.1
1.464	13.2	20.6	33.8	56.0	-22.2
4.616	13.0	20.7	33.7	56.0	-22.3
0.786	13.0	20.7	33.7	56.0	-22.3
1.984	13.0	20.6	33.6	56.0	-22.4
1.040	13.1	20.5	33.6	56.0	-22.4
4.504	12.7	20.7	33.4	56.0	-22.6
2.096	12.8	20.6	33.4	56.0	-22.6
0.488	12.6	20.9	33.5	56.2	-22.7
3.984	12.6	20.7	33.3	56.0	-22.7

Peak Data - vs - Average Limit

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Adjusted (dBuV)	Spec. Limit (dBuV)	Compared to Spec. (dB)
0.524	21.0	20.8	41.8	46.0	-4.2
0.419	18.6	21.0	39.6	47.5	-7.9
0.628	17.3	20.8	38.1	46.0	-7.9
0.208	22.1	21.4	43.5	53.3	-9.8
0.733	15.4	20.7	36.1	46.0	-9.9
0.838	14.2	20.6	34.8	46.0	-11.2
0.944	13.9	20.5	34.4	46.0	-11.6
4.824	13.6	20.7	34.3	46.0	-11.7
1.672	13.6	20.6	34.2	46.0	-11.8
1.256	13.5	20.5	34.0	46.0	-12.0
1.112	13.4	20.5	33.9	46.0	-12.1
1.464	13.2	20.6	33.8	46.0	-12.2
4.616	13.0	20.7	33.7	46.0	-12.3
0.786	13.0	20.7	33.7	46.0	-12.3
1.984	13.0	20.6	33.6	46.0	-12.4
1.040	13.1	20.5	33.6	46.0	-12.4
4.504	12.7	20.7	33.4	46.0	-12.6
2.096	12.8	20.6	33.4	46.0	-12.6
0.488	12.6	20.9	33.5	46.2	-12.7
3.984	12.6	20.7	33.3	46.0	-12.7

