

Appendix B: Test Results of 2.4GHz FHSS

APPENDIX B: TEST RESULTS OF 2.4GHZ FHSS.....	1
APPENDIX B.1: TEST RESULTS OF 99% BANDWIDTH.....	2
<i>Low Channel.....</i>	<i>2</i>
<i>Middle Channel.....</i>	<i>3</i>
<i>High Channel.....</i>	<i>4</i>
APPENDIX B.2: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH.....	5
<i>Low Channel.....</i>	<i>5</i>
<i>Middle Channel.....</i>	<i>5</i>
<i>High Channel.....</i>	<i>6</i>
<i>Band Edge, Low Channel.....</i>	<i>7</i>
<i>Band Edge, High Channel.....</i>	<i>7</i>
<i>Band Edge, Hopping Mode, Low Channel.....</i>	<i>8</i>
<i>Band Edge, Hopping Mode, High Channle.....</i>	<i>8</i>
APPENDIX B.3: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS	9
<i>30MHz - 1GHz (Worst case).....</i>	<i>9</i>
<i>1GHz - 18GHz.....</i>	<i>13</i>
APPENDIX B.4: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS.....	19
<i>Low channel.....</i>	<i>19</i>
<i>High channel.....</i>	<i>21</i>
APPENDIX B.5: TEST RESULTS OF 20DB BANDWIDTH	23
<i>Low Channel.....</i>	<i>23</i>
<i>Middle Channel.....</i>	<i>24</i>
<i>High Channel.....</i>	<i>25</i>
APPENDIX B.6: TEST RESULTS OF CARRIER FREQUENCY SEPARATION.....	26
<i>Low Channel.....</i>	<i>26</i>
<i>Middle Channel.....</i>	<i>27</i>
<i>High Channel.....</i>	<i>28</i>
APPENDIX B.7: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY.....	29
<i>All hopping channels.....</i>	<i>29</i>
APPENDIX B.8: TEST RESULTS OF TIME OF OCCUPANCY.....	30
APPENDIX B.9: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	31
<i>FHSS Connecting mode with adapter #1(YWK).....</i>	<i>31</i>
<i>FHSS Connecting mode with adapter #2(BECKY).....</i>	<i>33</i>

Appendix B.1: Test Results of 99% Bandwidth

Low Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2402 MHz; 18.000 dBm; 2 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.630000	---	---	2401.215000	2402.845000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

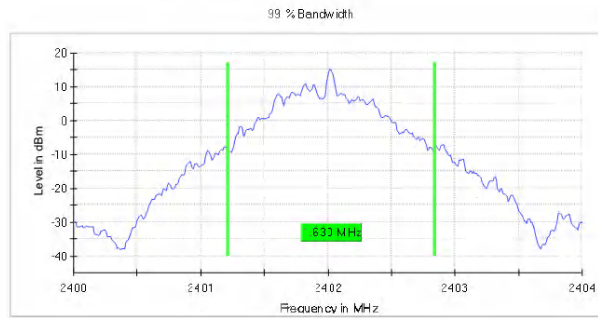

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	31 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.07 dB	0.30 dB

Middle Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2440 MHz; 18.000 dBm; 2 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.640000	---	---	2439.215000	2440.855000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

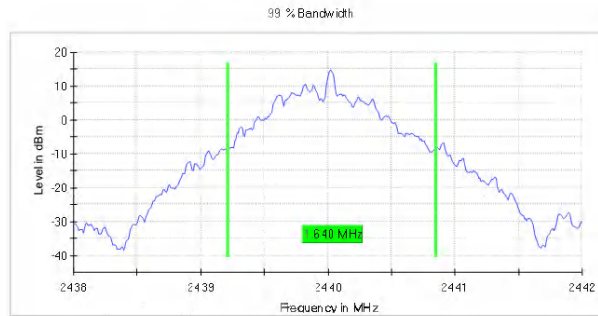

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
StableValue	0.30 dB	0.30 dB
Run	23 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

High Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2477 MHz; 18.000 dBm; 2 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2477.000000	1.660000	---	---	2476.205000	2477.865000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2477.000000	PASS

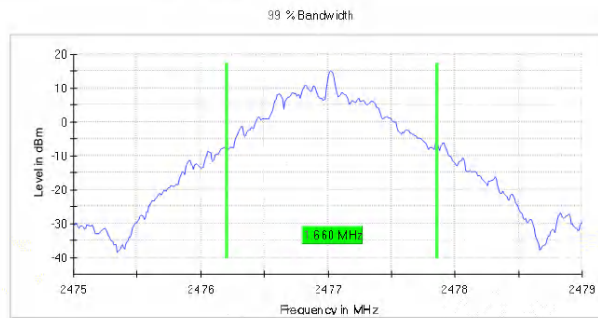


Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47500 GHz	2.47500 GHz
Stop Frequency	2.47900 GHz	2.47900 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
Sweeptime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	500	500
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	21 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.14 dB	0.30 dB

Appendix B.2: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth


Low Channel

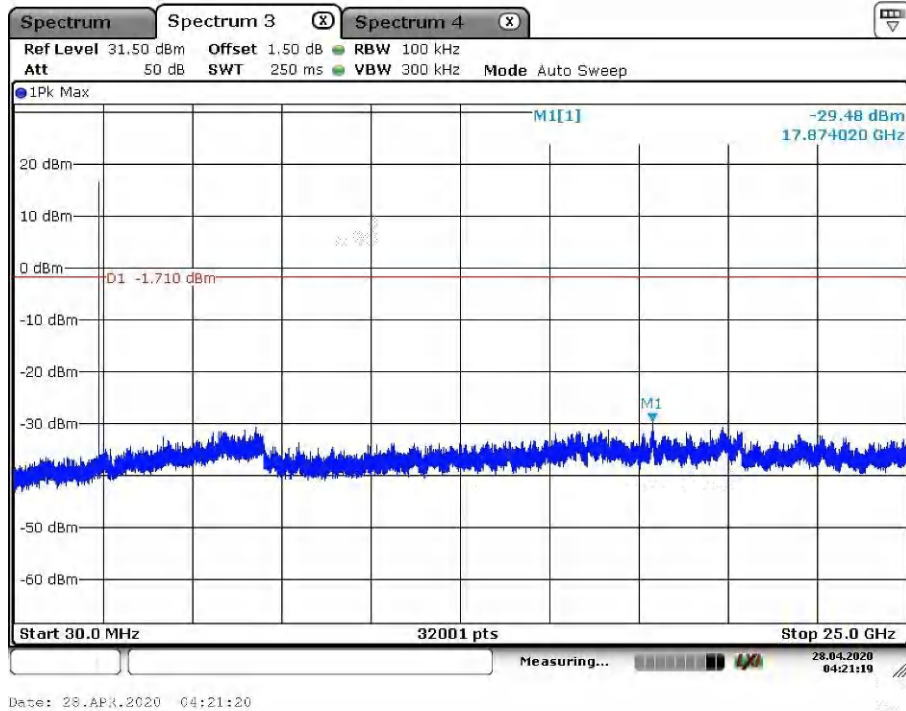

Middle Channel

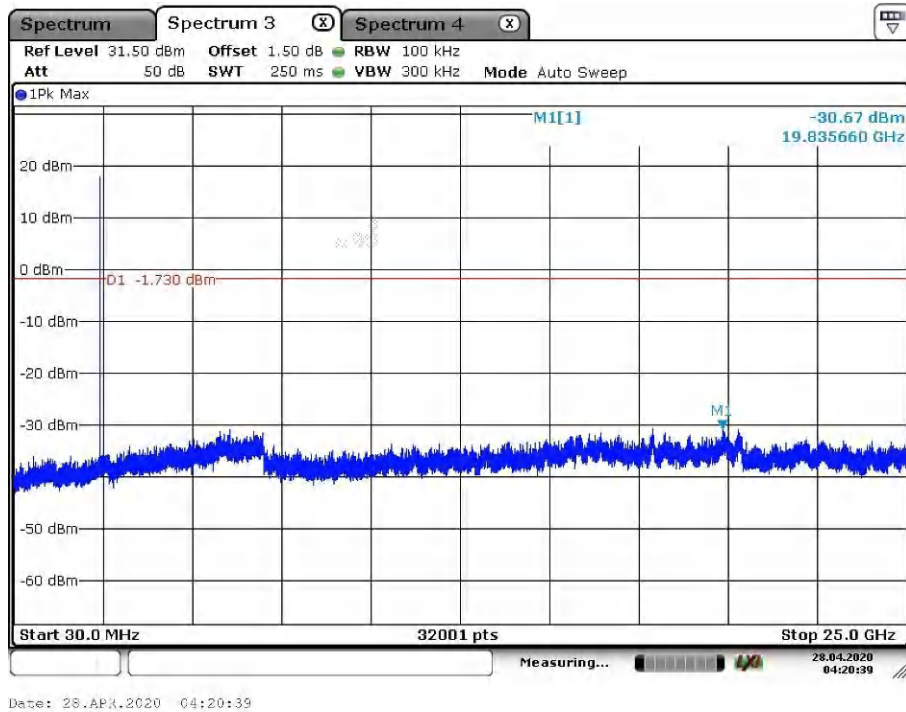


High Channel

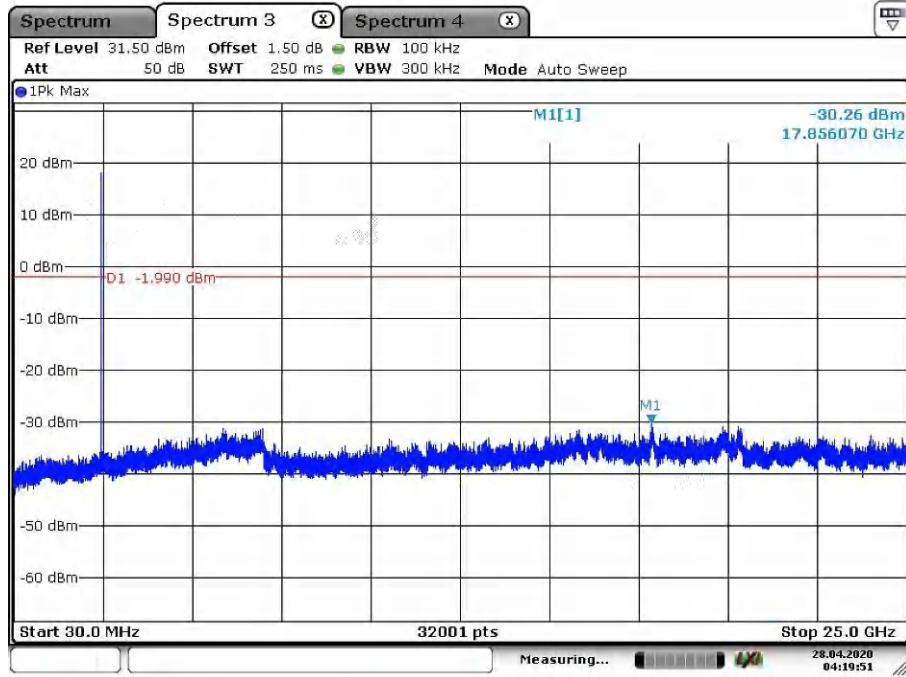


Date: 28.APR.2020 04:19:51

Band Edge, Low Channel

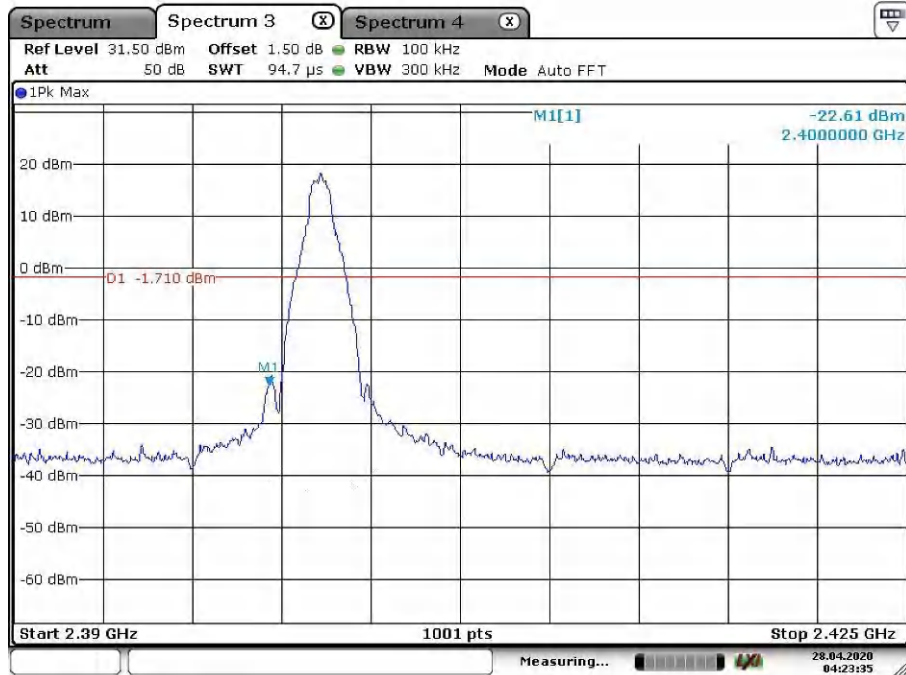


Date: 28.APR.2020 04:23:35

Band Edge, High Channel

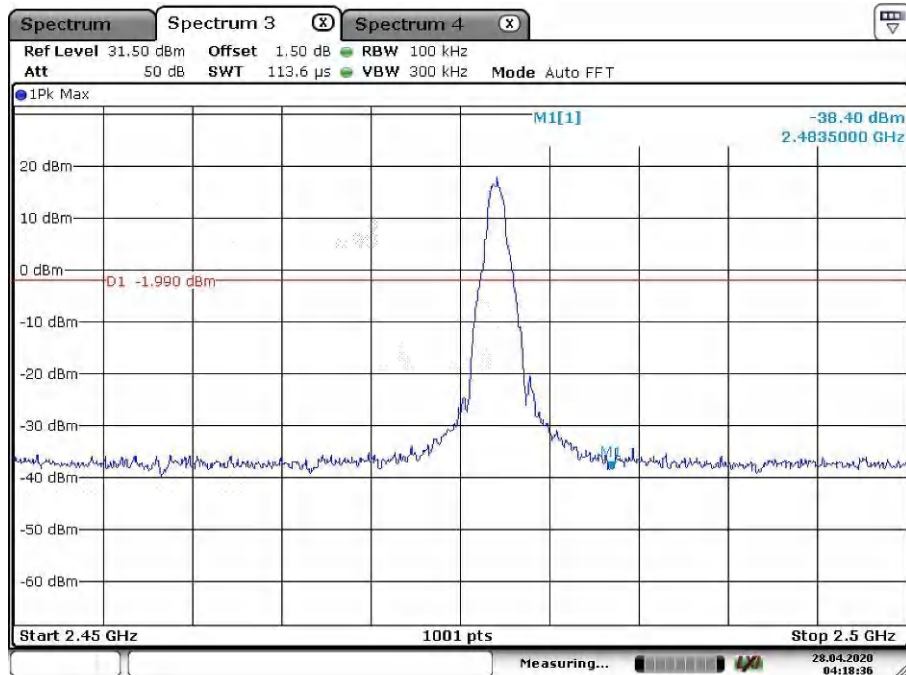


Date: 28.APR.2020 04:18:36

Band Edge, Hopping Mode, Low Channel

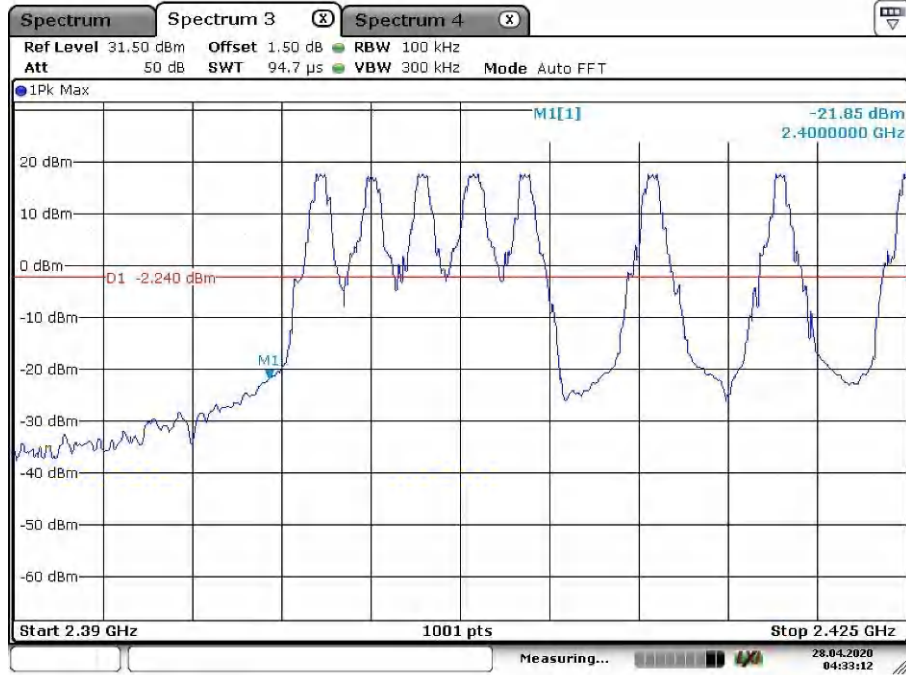

Date: 28.APR.2020 04:33:12

Band Edge, Hopping Mode, High Channel

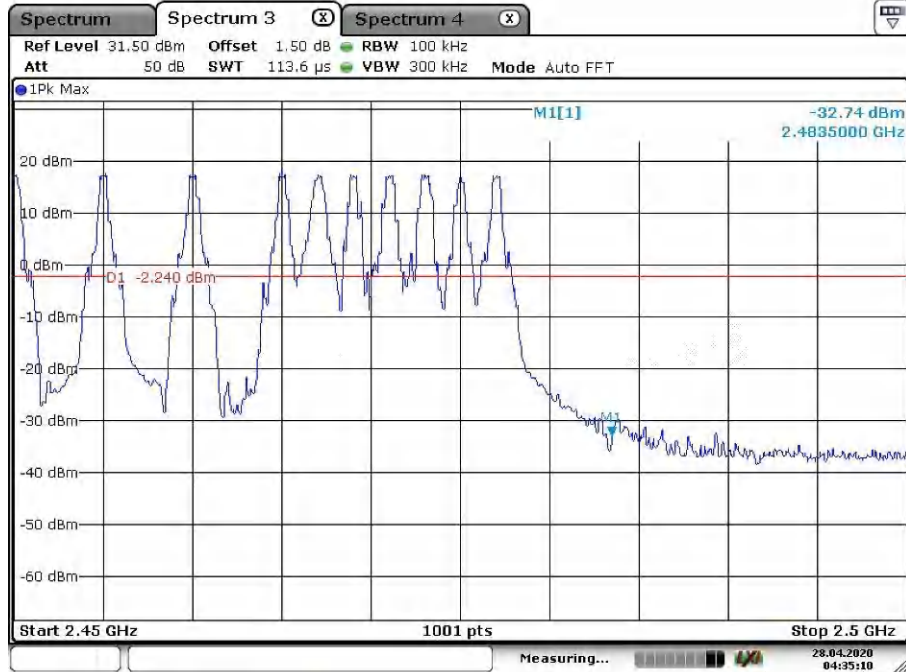

Date: 28.APR.2020 04:35:10

Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

Appendix B.3: Test Results of Radiated Spurious Emissions 30MHz - 1GHz (Worst case)


EMI Auto Test(1)

1 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Low Channel
Test Voltage::	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

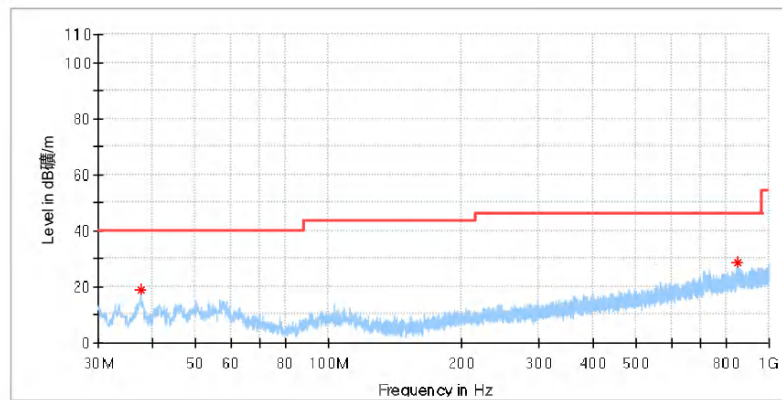

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
37.469000	18.98	--	40.00	21.02	100.0	H	21.0	-21.3
847.370500	28.52	--	46.00	17.48	100.0	H	195.0	-6.0


EMI Auto Test(1)

2 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Low Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

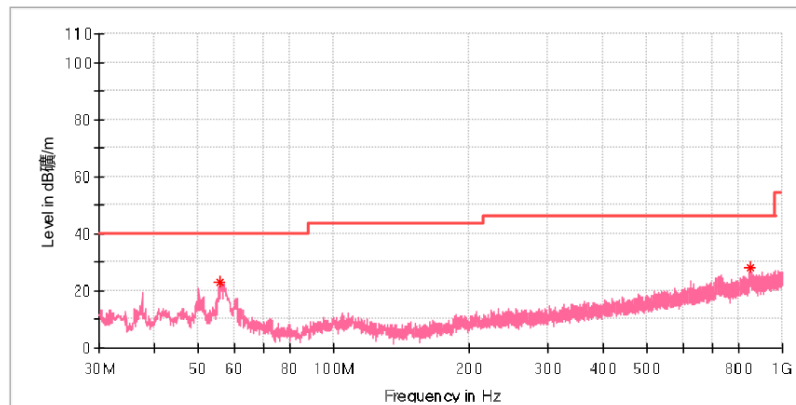

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)
55.947500	22.78	---	40.00	17.22	100.0	V	101.0	-18.8
845.236500	28.08	---	46.00	17.92	100.0	V	135.0	-6.0

25/4/2020

4:54:43 PM


EMI Auto Test(1)

3 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_High Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

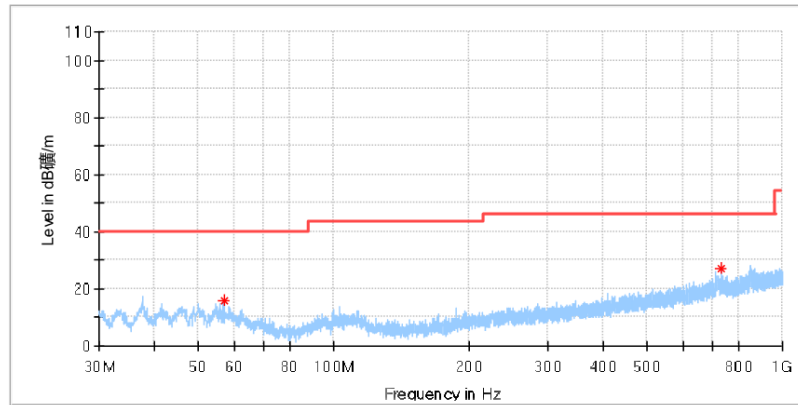

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)
56.869000	15.67	---	40.00	24.33	100.0	H	186.0	-18.9
728.594000	27.32	---	46.00	18.68	100.0	H	14.0	-7.9

25/4/2020

4:54:43 PM


EMI Auto Test(1)

4 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_High Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

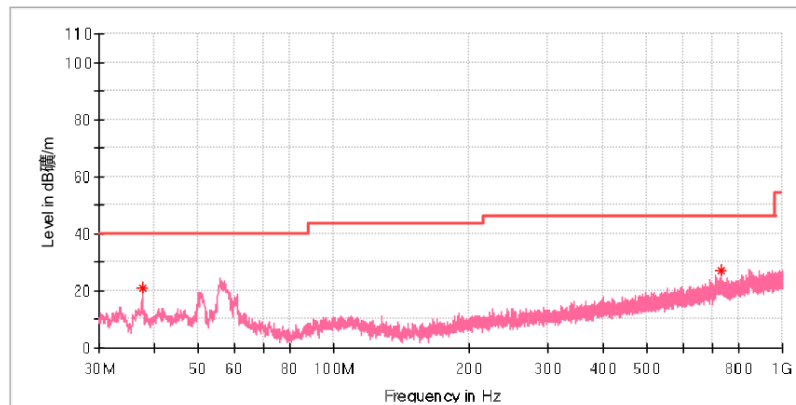

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)
37.469000	21.00	---	40.00	19.00	100.0	V	14.0	-21.3
729.709500	27.34	---	46.00	18.66	100.0	V	154.0	-7.9

25/4/2020

4:54:43 PM

Produkte
Products

1GHz - 18GHz
Low Channel


EMI Auto Test(1)

1 / 6

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Low Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

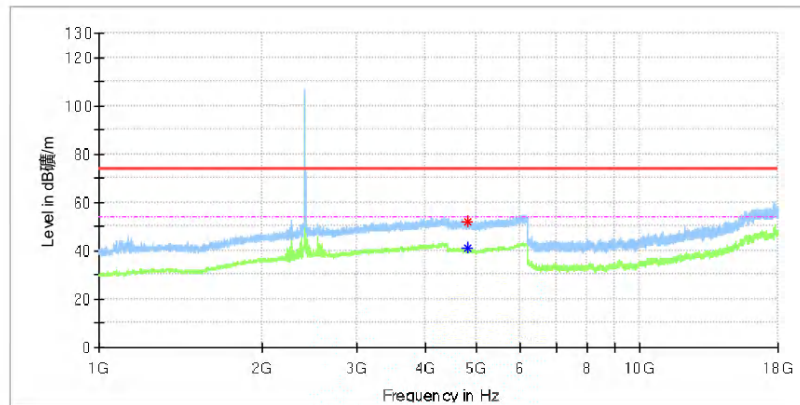

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	---	41.19	54.00	12.81	100.0	H	200.0	13.6
4814.000000	51.73	---	74.00	22.27	100.0	H	200.0	13.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

9:57:40 AM


EMI Auto Test(1)

2 / 6

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Low Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

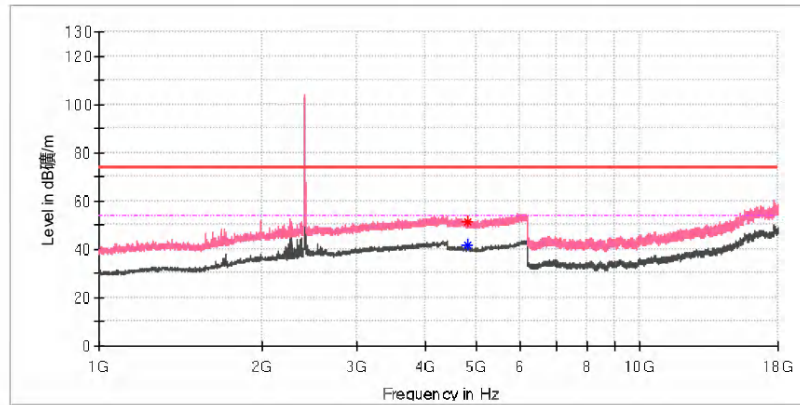

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4803.000000	51.31	---	74.00	22.69	100.0	V	74.0	13.6
4803.500000	---	41.62	54.00	12.38	100.0	V	2.0	13.6

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

9:57:40 AM

Middle Channel


EMI Auto Test(1)

3 / 6

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Mid Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

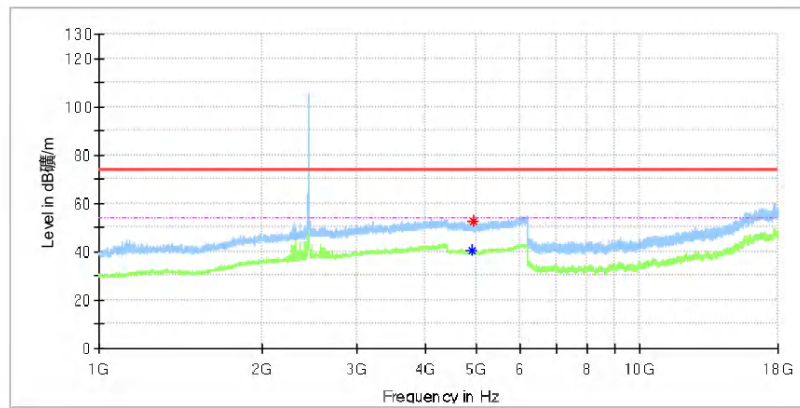

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.500000	--	40.65	54.00	13.35	100.0	H	233.0	13.4
4910.000000	52.32	--	74.00	21.68	100.0	H	127.0	13.3

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
--	--	--	--	--	--	--	--


EMI Auto Test(1)

4 / 6

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Mid Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

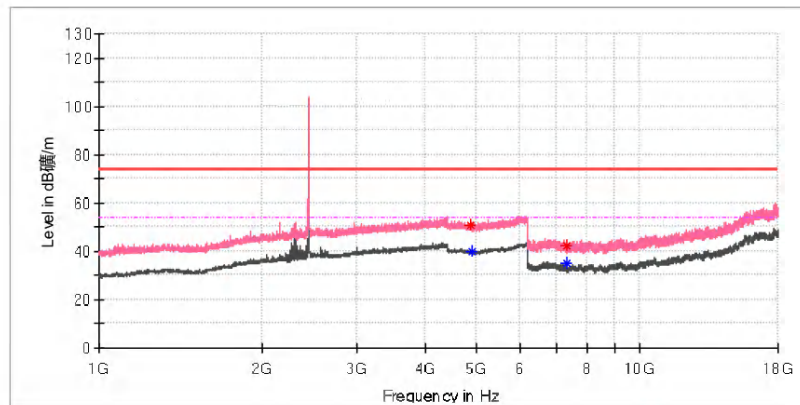

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4877.500000	51.06	---	74.00	22.94	100.0	V	288.0	13.4
4880.000000	---	40.10	54.00	13.90	100.0	V	204.0	13.4
7311.658333	---	34.97	54.00	19.03	100.0	V	189.0	8.2
7319.033333	42.38	---	74.00	31.62	100.0	V	189.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

9:57:40 AM

High Channel


EMI Auto Test(1)

5 / 6

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_High Channel
Test Voltage::	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

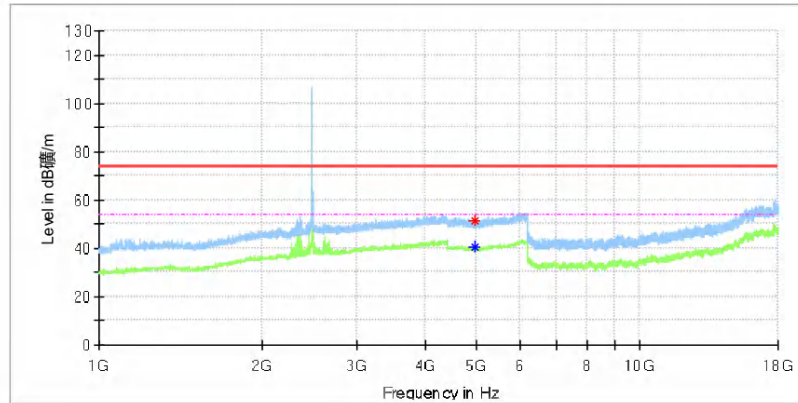

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4955.500000	51.25	---	74.00	22.75	100.0	H	39.0	13.2
4958.000000	---	40.25	54.00	13.75	100.0	H	1.0	13.2

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

6 / 6

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_High Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

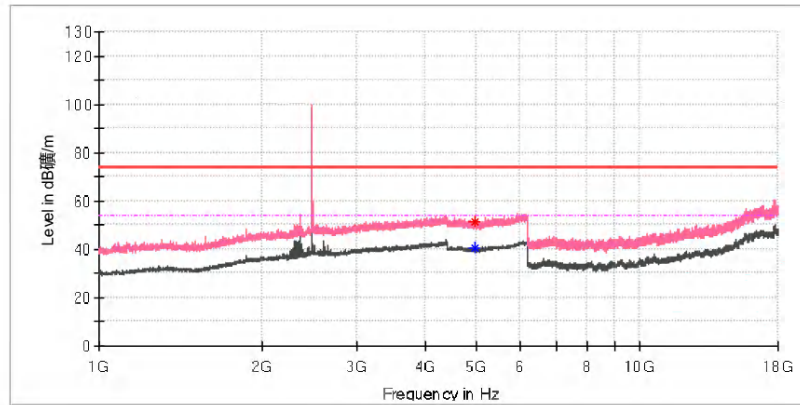

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4959.000000	51.57	---	74.00	22.43	100.0	V	135.0	13.2
4960.500000	---	40.38	54.00	13.62	100.0	V	193.0	13.2

Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

26/4/2020

9:57:40 AM

Note: The highest waveform in the figure is FHSS Fundamental.

Appendix B.4: Test Results of Radiated Emissions in Restricted Bands

Low channel


EMI Auto Test(1)

1 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Low Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

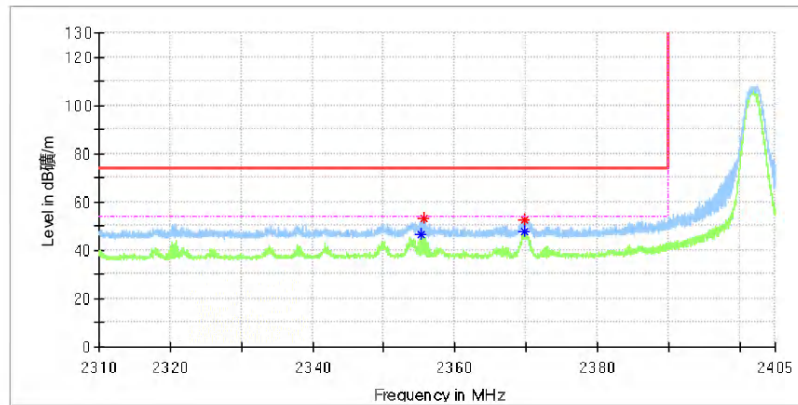

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2355.320588	---	46.77	54.00	7.23	100.0	H	175.0	6.9
2355.600000	53.41	---	74.00	20.59	100.0	H	175.0	6.9
2369.724265	---	47.68	54.00	6.32	100.0	H	335.0	6.9
2369.738235	52.39	---	74.00	21.61	100.0	H	335.0	6.9


EMI Auto Test(1)

2 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_Low Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

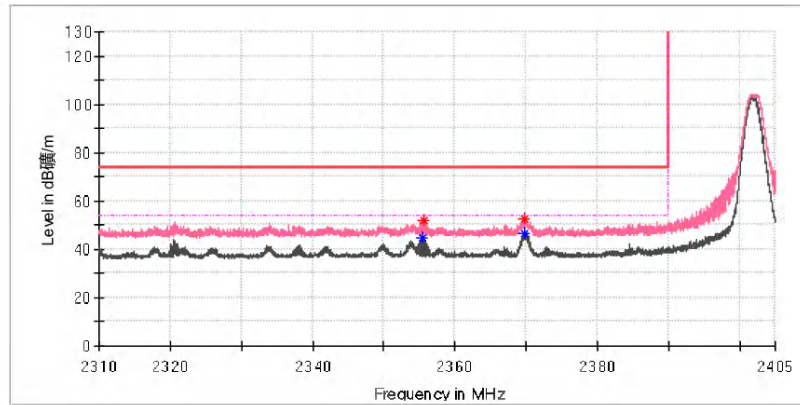

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2355.460294	--	44.82	54.00	9.18	100.0	V	342.0	6.9
2355.586030	52.20	--	74.00	21.80	100.0	V	31.0	6.9
2369.752206	52.59	--	74.00	21.41	100.0	V	350.0	6.9
2369.808088	--	46.65	54.00	7.35	100.0	V	336.0	6.9

26/4/2020

10:02:49 AM

High channel


EMI Auto Test(1)

3 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_High Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

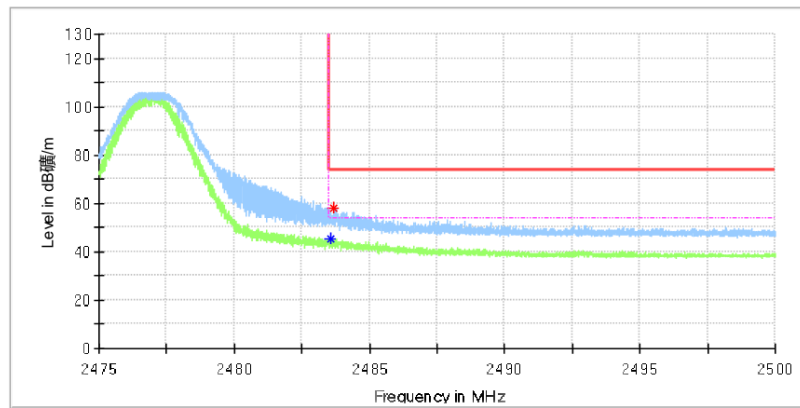

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.562500	--	45.47	54.00	8.53	100.0	H	183.0	7.4
2483.658088	58.32	--	74.00	15.68	100.0	H	183.0	7.4


EMI Auto Test(1)

4 / 4

Test Report

EUT Information

EUT Name:	Baby Monitor_BU
Model:	EASE44BU
Test Mode:	TX_High Channel
Test Voltage:	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

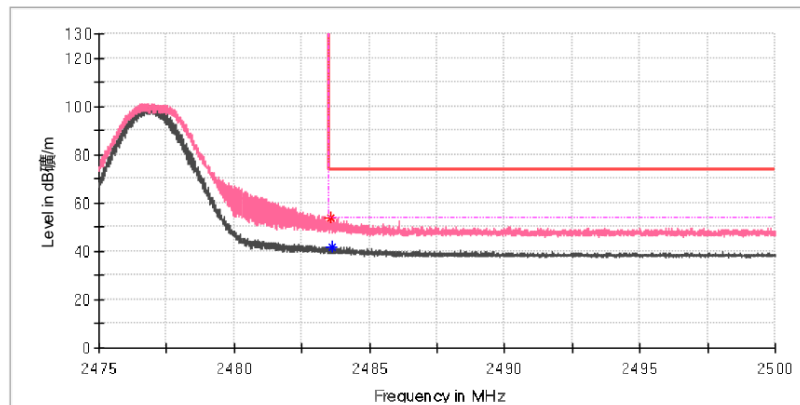

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Poi	Azimuth (deg)	Corr. (dB/m)
2483.573530	53.77	---	74.00	20.23	100.0	V	68.0	7.4
2483.647059	---	41.81	54.00	12.19	100.0	V	297.0	7.4

26/4/2020

10:02:49 AM

Appendix B.5: Test Results of 20dB Bandwidth

Low Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Emission Bandwidth 20 dB (2402 MHz; 18.000 dBm; 2 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.450000	---	---	2401.275000	2402.725000

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	15.0	PASS

20 dB Bandwidth

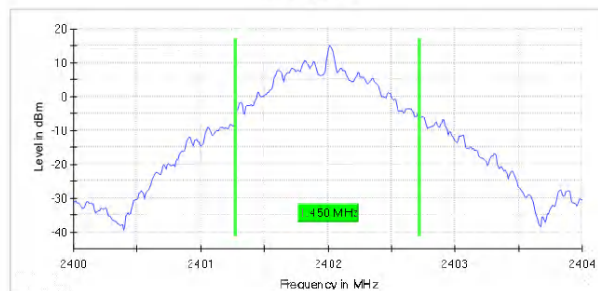

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	28 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

Middle Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Emission Bandwidth 20 dB (2440 MHz; 18.000 dBm; 2 MHz; Test Mode)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.410000	---	---	2439.275000	2440.685000

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	14.7	PASS

20 dB Bandwidth

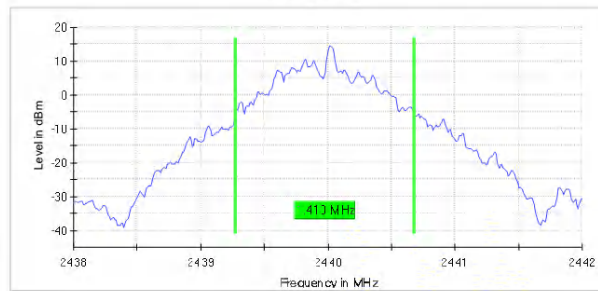

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
StableValue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

High Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Emission Bandwidth 20 dB (2477 MHz; 18.000 dBm; 2 MHz; Test Mode)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

20 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2477.000000	1.400000	---	---	2476.275000	2477.675000

(continuation of the "20 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2477.000000	15.4	PASS

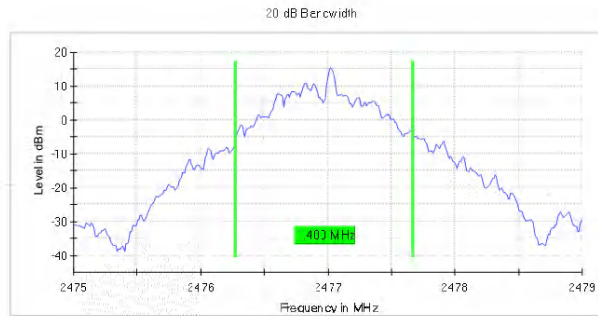

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47500 GHz	2.47500 GHz
Stop Frequency	2.47900 GHz	2.47900 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.27 dB	0.50 dB

Appendix B.6: Test Results of Carrier Frequency Separation

Low Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Carrier Frequency Separation (2402 MHz; 18.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2402.000000	1.930694	0.966667	---	2404.054455	2405.985149

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

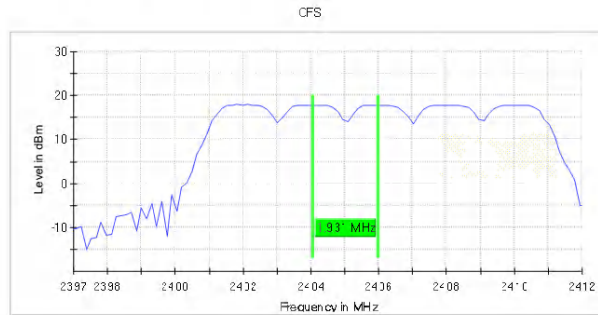

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.39700 GHz	2.39700 GHz
Stop Frequency	2.41200 GHz	2.41200 GHz
Span	15.000 MHz	15.000 MHz
RBW	1.000 MHz	<= 1.500 MHz
VBW	1.000 MHz	>= 1.000 MHz
SweepPoints	101	~ 15
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	52 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.00 dB	0.50 dB

Middle Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Carrier Frequency Separation (2440 MHz; 18.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 § 15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2440.000000	5.049504	0.940000	---	2439.975248	2445.024752

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

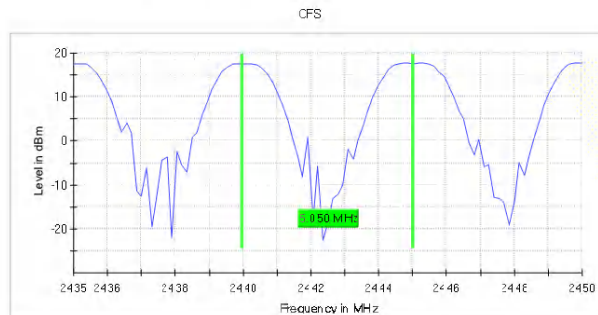

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43500 GHz	2.43500 GHz
Stop Frequency	2.45000 GHz	2.45000 GHz
Span	15.000 MHz	15.000 MHz
RBW	1.000 MHz	<= 1.500 MHz
VBW	1.000 MHz	>= 1.000 MHz
SweepPoints	101	~ 15
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.10 dB	0.50 dB

High Channel

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Carrier Frequency Separation (2477 MHz; 18.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 § 15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency Separation (MHz)	Limit Min (MHz)	Limit Max (MHz)	Center Frequency low Channel (MHz)	Center Frequency high Channel (MHz)
2477.000000	1.930694	0.933333	---	2469.004950	2470.935644

(continuation of the "Result" table from column 6 ...)

DUT Frequency (MHz)	Result
2477.000000	PASS

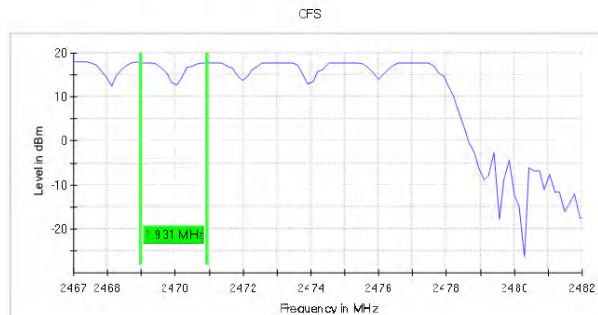

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.46700 GHz	2.46700 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	15.000 MHz	15.000 MHz
RBW	1.000 MHz	<= 1.500 MHz
VBW	1.000 MHz	>= 1.000 MHz
SweepPoints	101	~ 15
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	200	200
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	20 / max. 150	max. 150
Stable	10 / 10	10
Max Stable Difference	0.01 dB	0.50 dB

Appendix B.7: Test Results of Number of Hopping Frequency

All hopping channels


FCC Part 47 §15.247 2400-2483.5 MHz 2017

Hopping Frequencies (frequency independent; 18.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a),(g), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Channels

Channels	Limit Min	Limit Max	Result
22	15	—	PASS

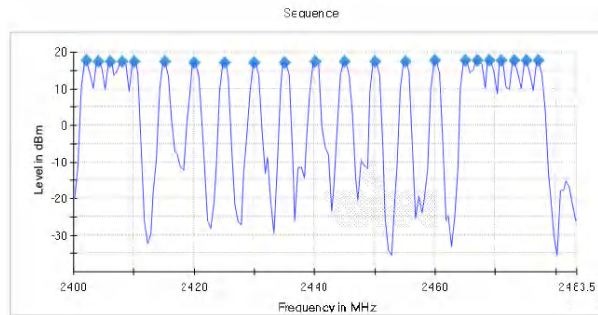

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	500.000 kHz	<= 598.000 kHz
VBW	500.000 kHz	>= 500.000 kHz
SweepPoints	167	~ 167
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.50 dB

Appendix B.8: Test Results of Time of Occupancy

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Time of Channel Occupancy (2440 MHz; 18.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result	Number of Hops	Average time of occupancy (ms)	Threshold (dBm)
2440.000000	PASS	103	219.846	-2.0

Periode

Min (ms)	Max (ms)	Mean (ms)
53.054	227.866	84.886


Transmit Time per Hop

Min (ms)	Max (ms)	Limit Max for Max (ms)	Limit Min for Max (ms)	Mean (ms)
1.234	2.326	400.000	0.000	2.113

DwellTime

Min (ms)	Max (ms)	Mean (ms)
1.234	2.326	2.113

Time of Channel Occupancy

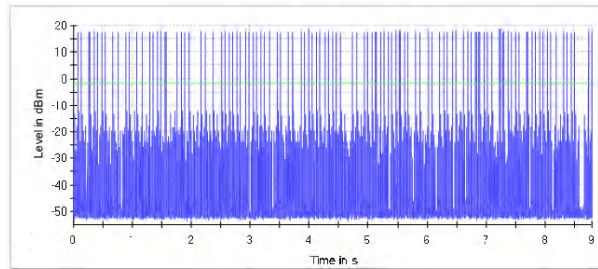

Measurement

Setting	Instrument Value	Target Value
Center Frequency	2.44000 GHz	2.44000 GHz
Span	ZeroSpan	ZeroSpan
RBW	1.000 MHz	~ 1.000 MHz
VBW	3.000 MHz	~ 3.000 MHz
SweepPoints	30001	~ 30001
SweepTime	8.800 s	8.800 s
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	0.000 dB	0.000 dB
Detector	MaxPeak	MaxPeak
SweepCount	1	1
Filter	Channel	Channel
Trace Mode	Clear Write	Clear Write
SweepType	Sweep	AUTO
Preamp	off	off
Trigger	External	External
Trigger Offset	0.000 s	0.000 s

OSP

Setting	Instrument Value	Target Value
Measurement Time	8.800 s	8.800 s
Tracepoints	8800000	8800000
Time resolution	1.000 µs	1.000 µs
Detector	RMS	RMS


Appendix B.9: Test Results of Conducted Emission on AC Mains
FHSS Connecting mode with adapter #1(YWK)

1 / 1

Test Report

EUT Information

EUT Name:	Baby Monitor(Baby Unit)
Model:	EASE44BU
Order No.:	168150307 270-280
Test Mode:	Normal operation mode
Test Voltage:	AC 120V/60Hz
Test By:	Shower.Dai
Review By:	Gary Chen
Remark:	YWK-AD050100-U

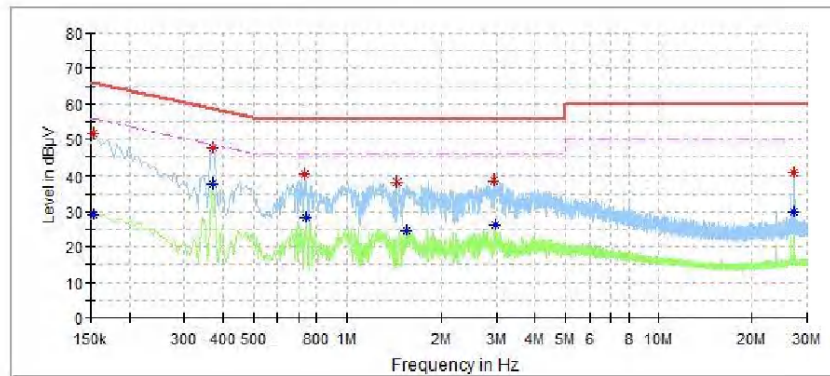


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.154000	---	28.95	55.78	26.83	L1	9.6
0.154000	51.84	---	65.78	13.94	L1	9.6
0.370000	47.63	---	58.50	10.87	L1	9.7
0.370000	---	37.64	48.50	10.86	L1	9.7
0.732000	40.02	---	56.00	15.98	L1	9.7
0.744000	---	28.44	46.00	17.56	L1	9.7
1.440000	38.09	---	56.00	17.91	L1	9.7
1.540000	---	24.74	46.00	21.27	L1	9.7
2.948000	38.39	---	56.00	17.61	L1	9.8
2.988000	---	26.29	46.00	19.71	L1	9.8
27.272000	---	29.82	50.00	20.18	L1	10.4
27.272000	40.53	---	60.00	19.47	L1	10.4

Test Report

EUT Information

EUT Name:	Baby Monitor(Baby Unit)
Model:	EASE44BU
Order No.:	168150307 270-280
Test Mode:	Normal operation mode
Test Voltage:	AC 120V/60Hz
Test By:	Shower.Dai
Review By:	Gary Chen
Remark:	YWK-AD050100-U

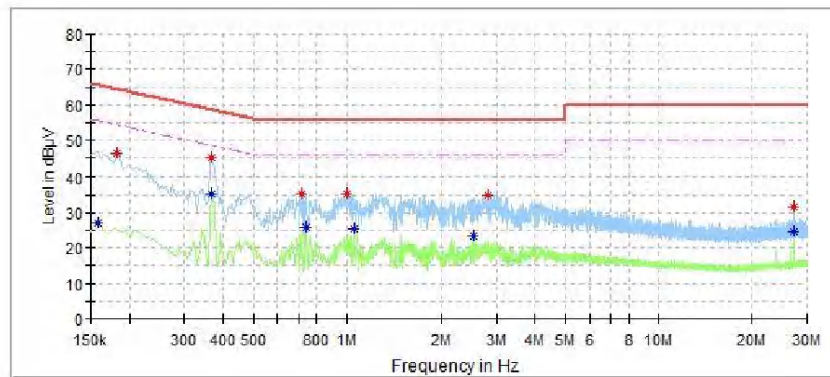

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.158000	---	26.88	55.57	28.69	N	9.6
0.182000	46.53	---	64.39	17.86	N	9.6
0.366000	45.04	---	58.59	13.55	N	9.7
0.366000	---	35.38	48.59	13.21	N	9.7
0.716000	35.12	---	56.00	20.88	N	9.7
0.740000	---	25.65	46.00	20.35	N	9.7
1.004000	35.26	---	56.00	20.74	N	9.7
1.056000	---	25.42	46.00	20.58	N	9.7
2.544000	---	23.53	46.00	22.47	N	9.8
2.828000	34.74	---	56.00	21.26	N	9.8
27.272000	---	24.42	50.00	25.58	N	10.5
27.276000	31.75	---	60.00	28.25	N	10.5


FHSS Connecting mode with adapter #2(BECKY)

1 / 1

Test Report

EUT Information

EUT Name:	Baby Monitor(Baby Unit)
Model:	EASE44BU
Order No.:	168150307 270-280
Test Mode:	Normal operation mode
Test Voltage:	AC 120V/60Hz
Test By:	Shower.Dai
Review By:	Gary Chen
Remark:	BQ06A-0501000-U

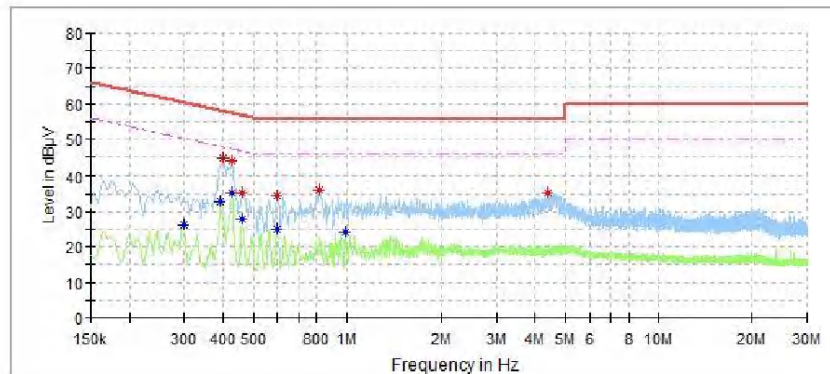


Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.298000	---	26.09	50.30	24.21	L1	9.6
0.394000	---	33.01	47.98	14.97	L1	9.7
0.402000	44.82	---	57.81	13.00	L1	9.7
0.426000	44.10	---	57.33	13.23	L1	9.7
0.426000	---	35.26	47.33	12.07	L1	9.7
0.462000	---	27.84	46.66	18.81	L1	9.7
0.462000	35.10	---	56.66	21.56	L1	9.7
0.596000	---	24.94	46.00	21.06	L1	9.7
0.600000	34.63	---	56.00	21.37	L1	9.7
0.816000	36.08	---	56.00	19.92	L1	9.7
0.988000	---	24.00	46.00	22.00	L1	9.7
4.412000	35.14	---	56.00	20.86	L1	9.8

Test Report

EUT Information

EUT Name:	Baby Monitor(Baby Unit)
Model:	EASE44BU
Order No.:	168150307 270-280
Test Mode:	Normal operation mode
Test Voltage:	AC 120V/60Hz
Test By:	Shower.Dai
Review By:	Gary Chen
Remark:	BQ06A-0501000-U

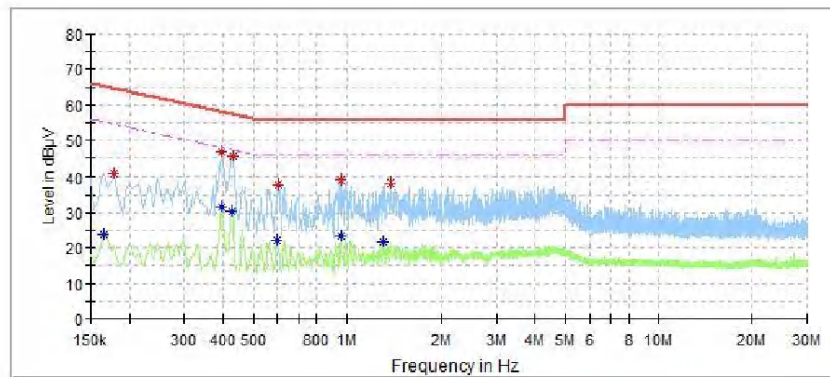

Critical Freqs

Frequency (MHz)	MaxPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Line	Corr. (dB)
0.166000	---	23.87	55.16	31.29	N	9.6
0.178000	40.62	---	64.58	23.96	N	9.6
0.398000	46.59	---	57.90	11.30	N	9.7
0.398000	---	31.41	47.90	16.49	N	9.7
0.426000	---	30.23	47.33	17.10	N	9.7
0.430000	45.45	---	57.25	11.80	N	9.7
0.600000	---	22.18	46.00	23.82	N	9.7
0.604000	37.90	---	56.00	18.10	N	9.7
0.956000	---	23.24	46.00	22.76	N	9.7
0.956000	38.78	---	56.00	17.22	N	9.7
1.316000	---	21.82	46.00	24.18	N	9.7
1.384000	38.06	---	56.00	17.94	N	9.7