

## Appendix C: Test Results of Radiated Testing

<b>APPENDIX C: TEST RESULTS OF RADIATED TESTING</b> .....	<b>1</b>
<b>APPENDIX C.1: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS</b> .....	<b>2</b>
<i>General 2.4GHz</i> .....	2
<i>Wi-Fi 802.11 b mode, 11 Mbps</i> .....	21
<i>Wi-Fi 802.11 g mode, 54 Mbps</i> .....	40
<i>Wi-Fi 802.11 n(HT20) mode, MCS7 Mbps</i> .....	58
<i>Wi-Fi 802.11 n(HT40) mode, MCS7 Mbps</i> .....	76
<b>APPENDIX C.2: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS</b> .....	<b>94</b>
<i>General 2.4GHz</i> .....	94
<i>Wi-Fi 802.11 b mode, 11 Mbps</i> .....	98
<i>Wi-Fi 802.11 g mode, 54 Mbps</i> .....	106
<i>Wi-Fi 802.11 n(HT20) mode, MCS7 Mbps</i> .....	114
<i>Wi-Fi 802.11 n(HT40) mode, MCS7 Mbps</i> .....	122
<b>APPENDIX C.3: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS</b> .....	<b>130</b>
<i>D mode with adapter #1</i> .....	130
<i>D mode with adapter #2</i> .....	132
<i>E mode with adapter #1</i> .....	134
<i>E mode with adapter #2</i> .....	136


Note: Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and above 18GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

**Appendix C.1: Test Results of Radiated Spurious Emissions**  
**General 2.4GHz**  
**30MHz - 1GHz**



No.6 Ke Feng Road, Science & Technology Park  
 Nanshan District, Shenzhen, Guangdong, China  
 Tel: +86-755-26639495-7  
 Fax: +86-755-26632877  
 Postcode: 518057

Data: 1 File: E:\2016 Test Data\TUV20161026-rf-667&845.EM6 (42) Date: 2016-10-31

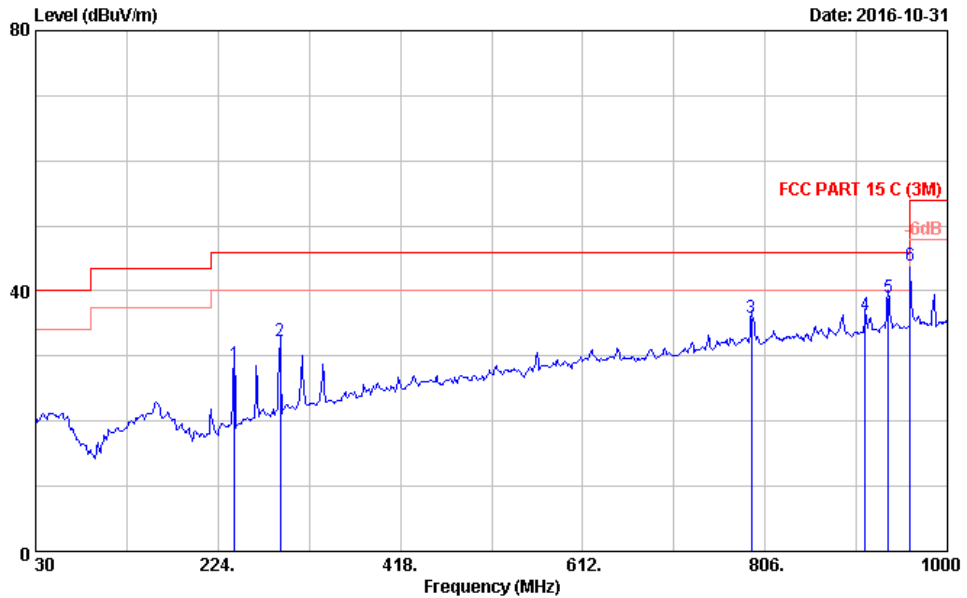

Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	241.460	18.04	1.41	9.32	28.77	46.00	17.23	QP
2	289.960	19.59	1.89	10.73	32.21	46.00	13.79	QP
3	791.450	28.22	3.95	3.74	35.91	46.00	10.09	QP
4	912.700	29.55	4.37	2.29	36.21	46.00	9.79	QP
5	936.950	29.83	4.43	4.85	39.11	46.00	6.89	QP
6	960.000	30.01	4.49	9.50	44.00	46.00	2.00	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 2

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

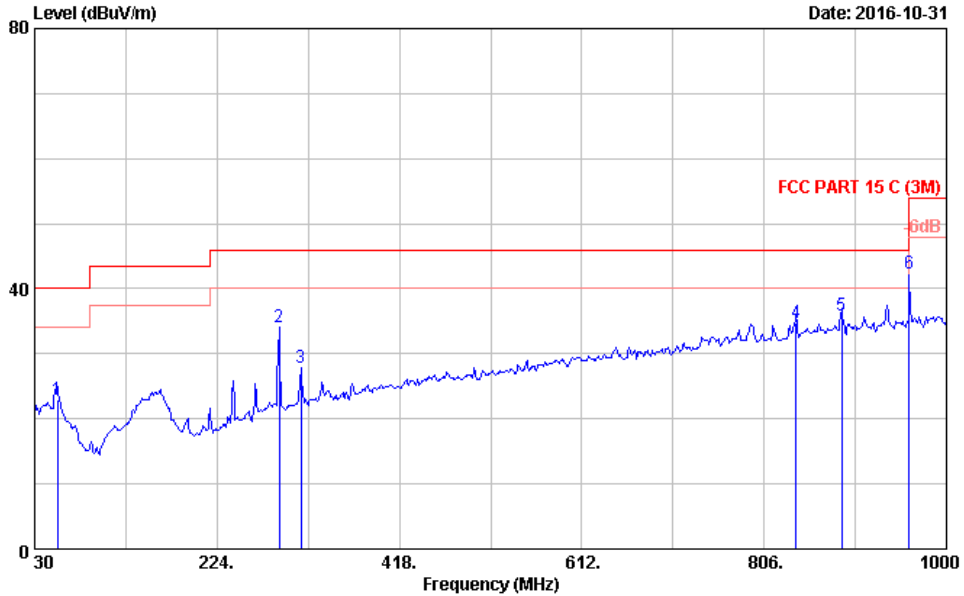

Site no. : 3m Chamber Data no. : 2  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	20.31	0.86	1.85	23.02	40.00	16.98	QP
2	289.960	19.59	1.89	12.61	34.09	46.00	11.91	QP
3	313.240	20.16	2.05	5.63	27.84	46.00	18.16	QP
4	839.950	28.66	4.13	2.00	34.79	46.00	11.21	QP
5	888.450	29.11	4.30	2.53	35.94	46.00	10.06	QP
6	960.000	30.01	4.49	7.88	42.38	46.00	3.62	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 3

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

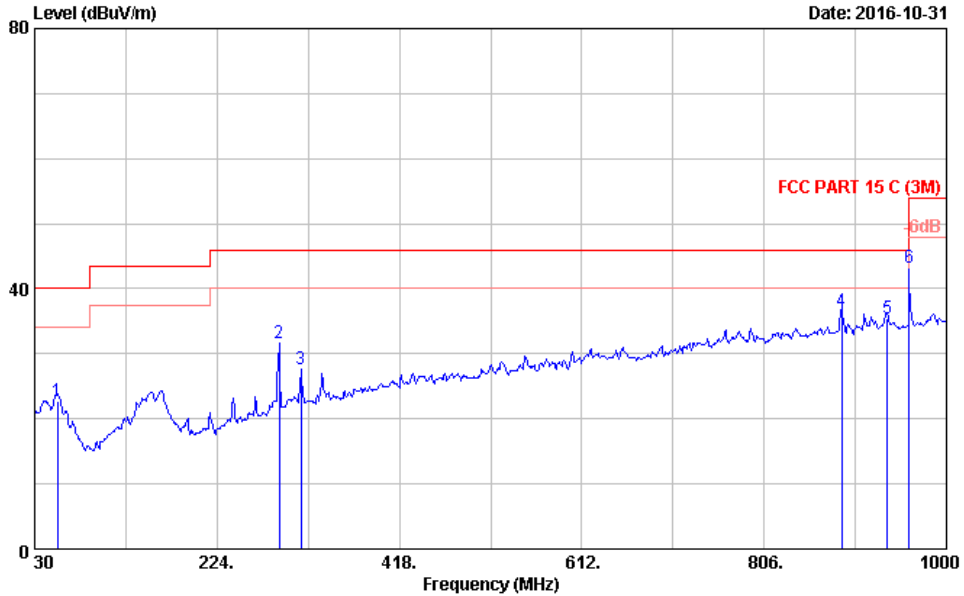

Site no. : 3m Chamber Data no. : 3  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	20.31	0.86	1.58	22.75	40.00	17.25	QP
2	289.960	19.59	1.89	10.27	31.75	46.00	14.25	QP
3	313.240	20.16	2.05	5.41	27.62	46.00	18.38	QP
4	888.450	29.11	4.30	3.11	36.52	46.00	9.48	QP
5	936.950	29.83	4.43	1.15	35.41	46.00	10.59	QP
6	960.000	30.01	4.49	8.77	43.27	46.00	2.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 4

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

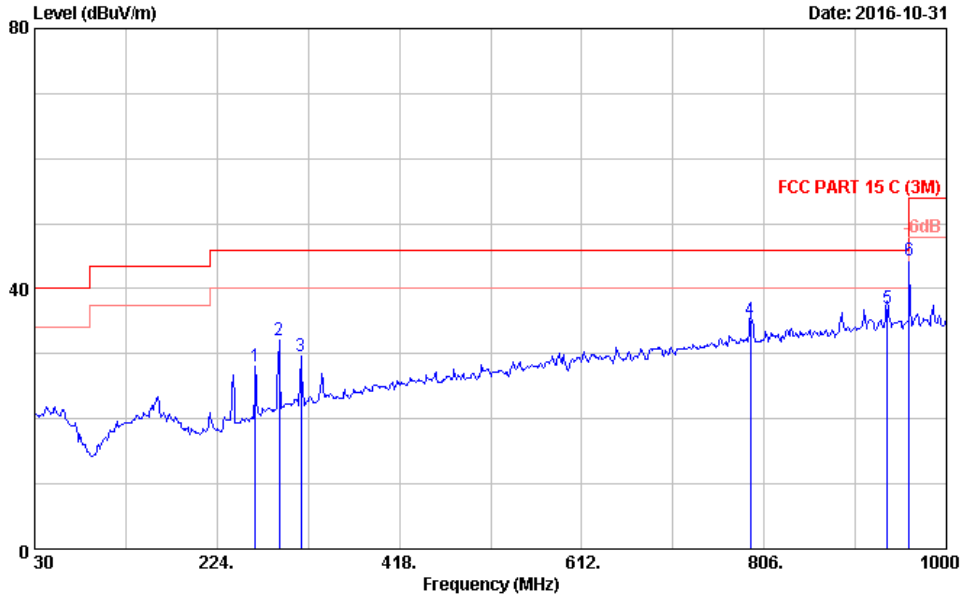

Site no. : 3m Chamber Data no. : 4  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	264.740	18.80	1.64	7.53	27.97	46.00	18.03	QP
2	289.960	19.59	1.89	10.52	32.00	46.00	14.00	QP
3	313.240	20.16	2.05	7.33	29.54	46.00	16.46	QP
4	791.450	28.22	3.95	3.06	35.23	46.00	10.77	QP
5	936.950	29.83	4.43	2.79	37.05	46.00	8.95	QP
6	960.000	30.01	4.49	9.80	44.30	46.00	1.70	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 5

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

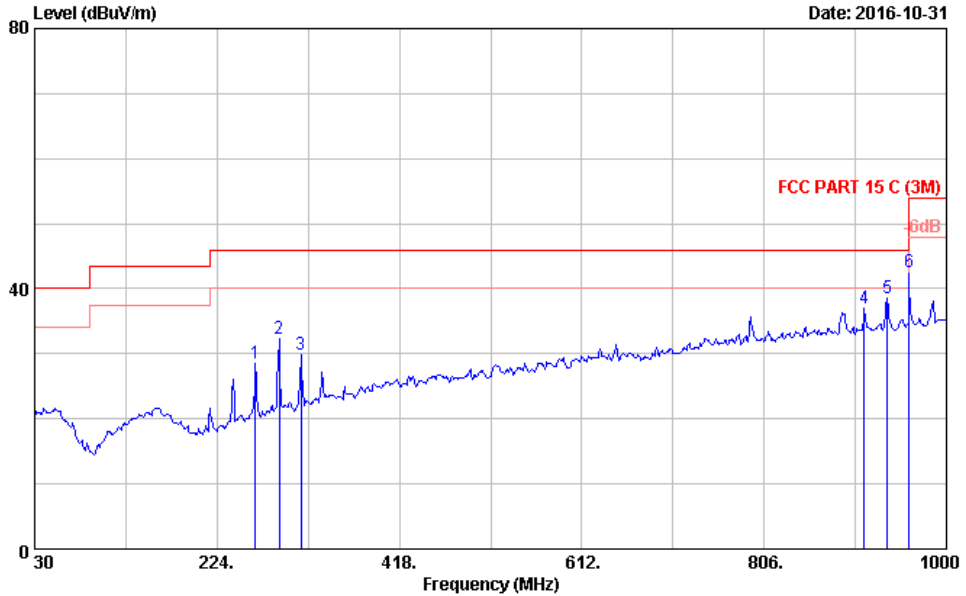

Site no. : 3m Chamber Data no. : 5  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	264.740	18.80	1.64	8.15	28.59	46.00	17.41	QP
2	289.960	19.59	1.89	10.92	32.40	46.00	13.60	QP
3	313.240	20.16	2.05	7.68	29.89	46.00	16.11	QP
4	912.700	29.55	4.37	3.12	37.04	46.00	8.96	QP
5	936.950	29.83	4.43	4.19	38.45	46.00	7.55	QP
6	960.000	30.01	4.49	8.06	42.56	46.00	3.44	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 6

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31


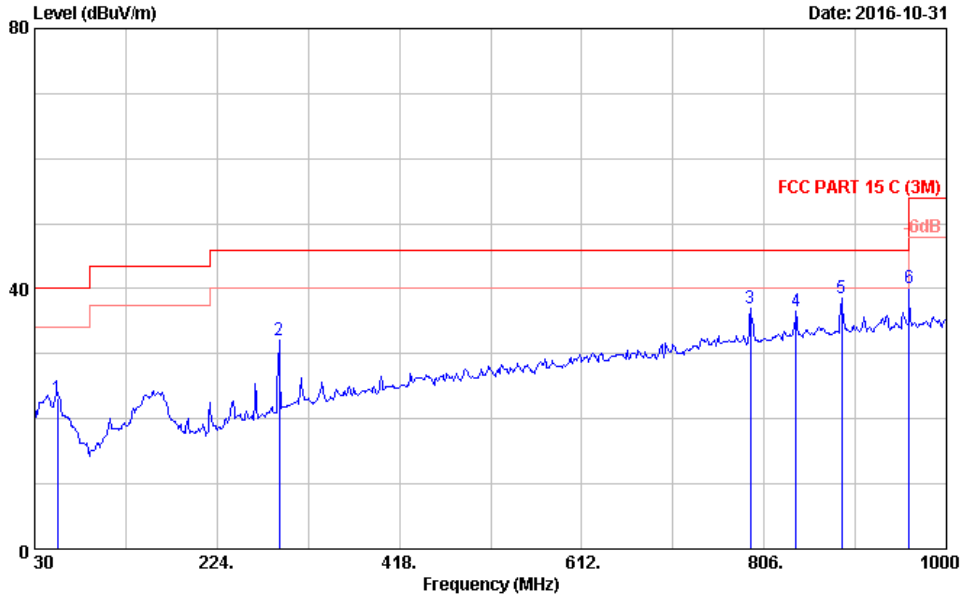


Site no. : 3m Chamber Data no. : 6  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	20.31	0.86	1.94	23.11	40.00	16.89	QP
2	289.960	19.59	1.89	10.56	32.04	46.00	13.96	QP
3	791.450	28.22	3.95	4.86	37.03	46.00	8.97	QP
4	839.950	28.66	4.13	3.71	36.50	46.00	9.50	QP
5	888.450	29.11	4.30	5.22	38.63	46.00	7.37	QP
6	960.000	30.01	4.49	5.60	40.10	46.00	5.90	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.

1GHz - 18GHz  
Duty Cycle

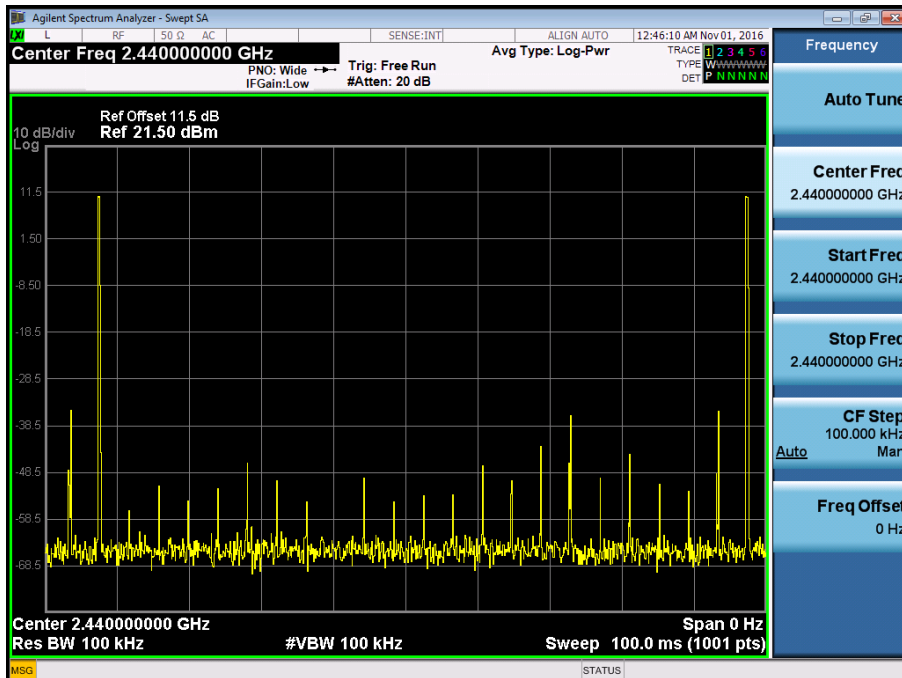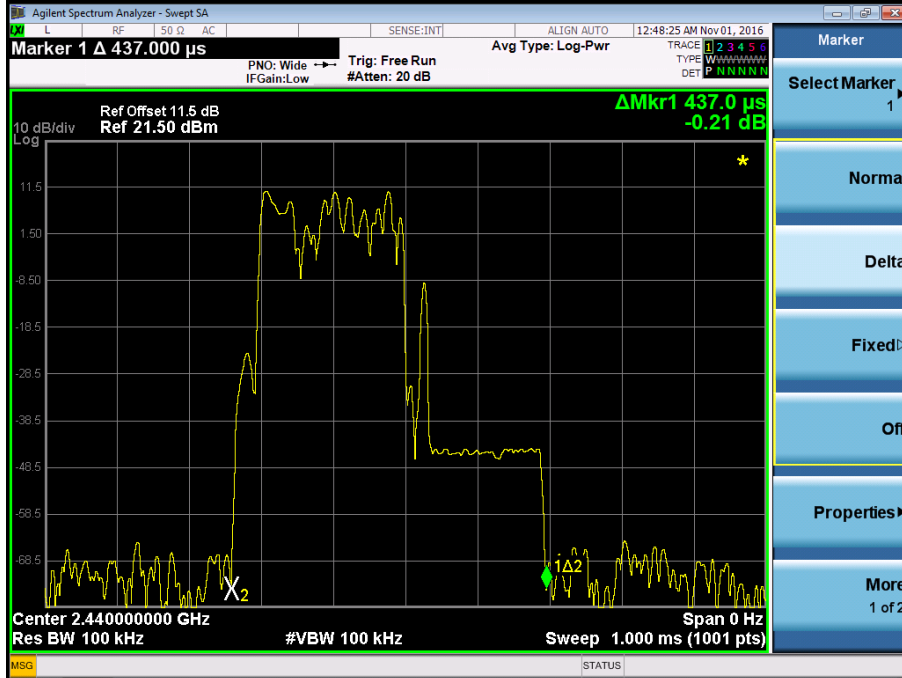


Duty Cycle Correction Factor =  $20 \cdot \log(\text{dwell time}/T_{on}) = 20 \cdot \log(0.437\text{ms}/100\text{ms}) = -47.19 \text{ dB}$





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

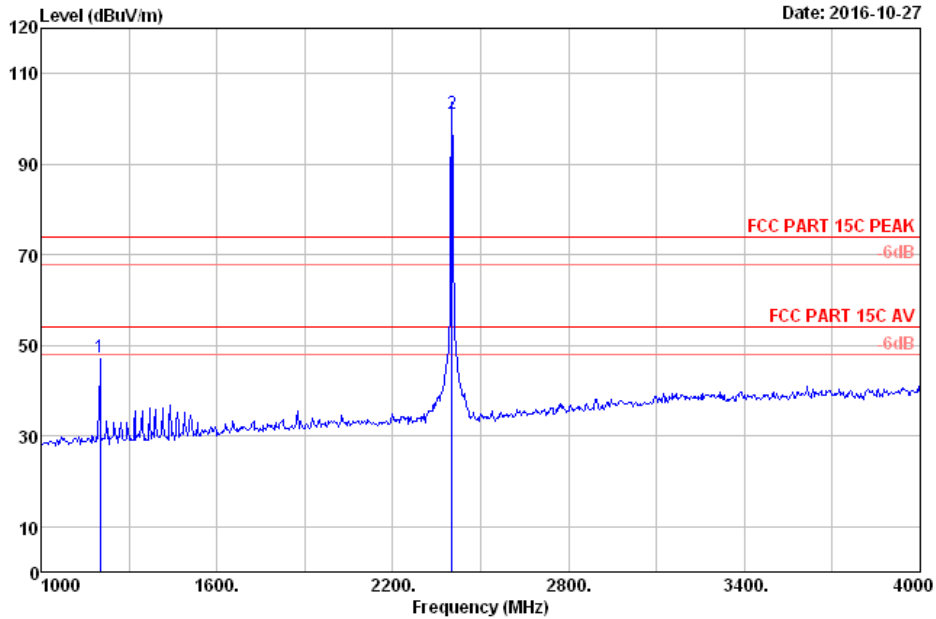


Site no. : 3m Chamber Data no. : 1  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.00	24.34	6.05	53.59	36.48	47.50	74.00	26.50	Peak
2	2402.00	28.14	8.34	101.08	36.39	101.17	74.00	-27.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

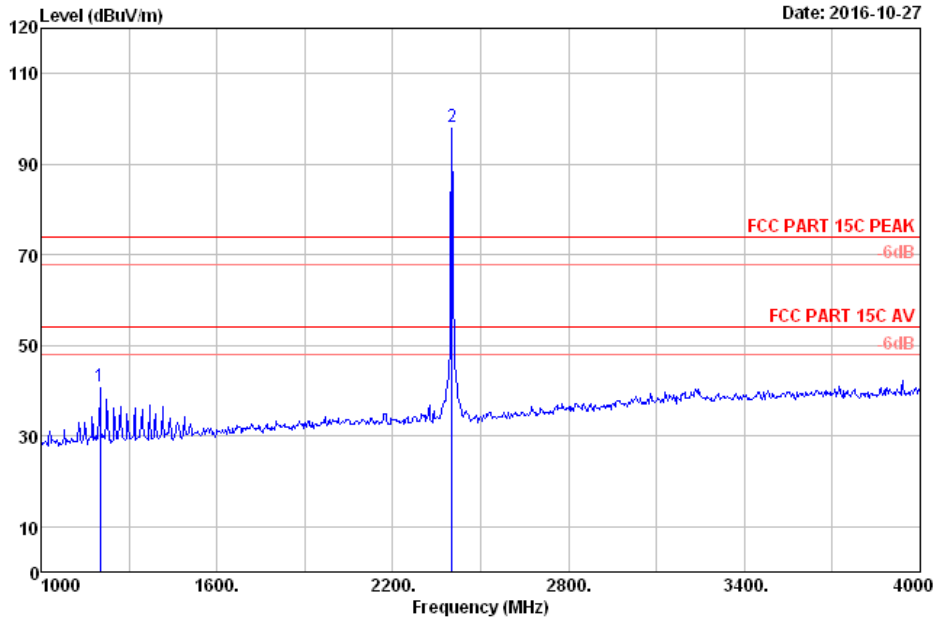


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.00	24.34	6.05	47.09	36.48	41.00	74.00	33.00	Peak
2	2402.00	28.14	8.34	98.02	36.39	98.11	74.00	-24.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

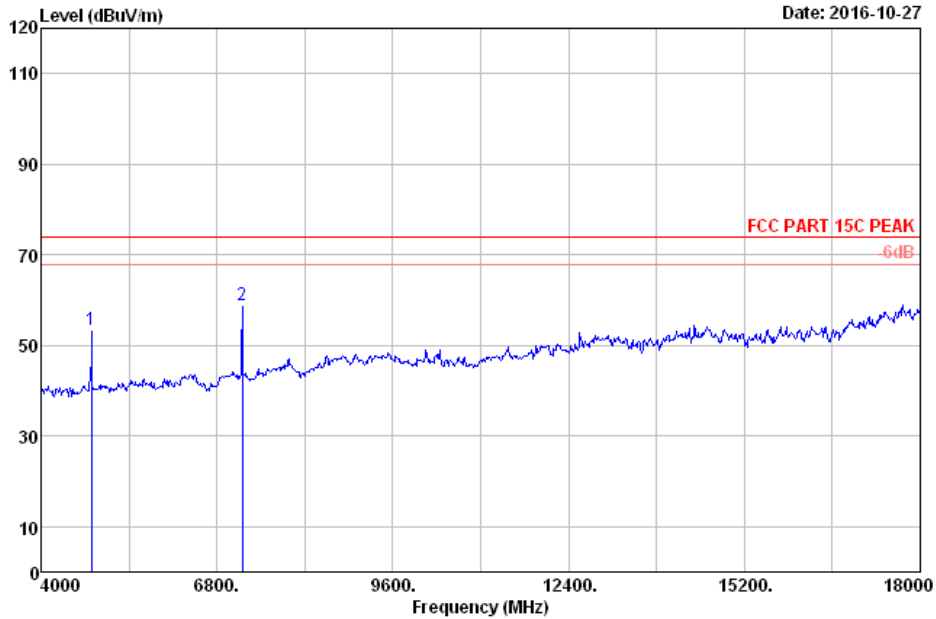


Site no. : 3m Chamber Data no. : 3  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	32.79	11.75	44.67	35.67	53.54	74.00	20.46	Peak
2	7206.00	35.88	12.44	46.00	35.55	58.77	74.00	15.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

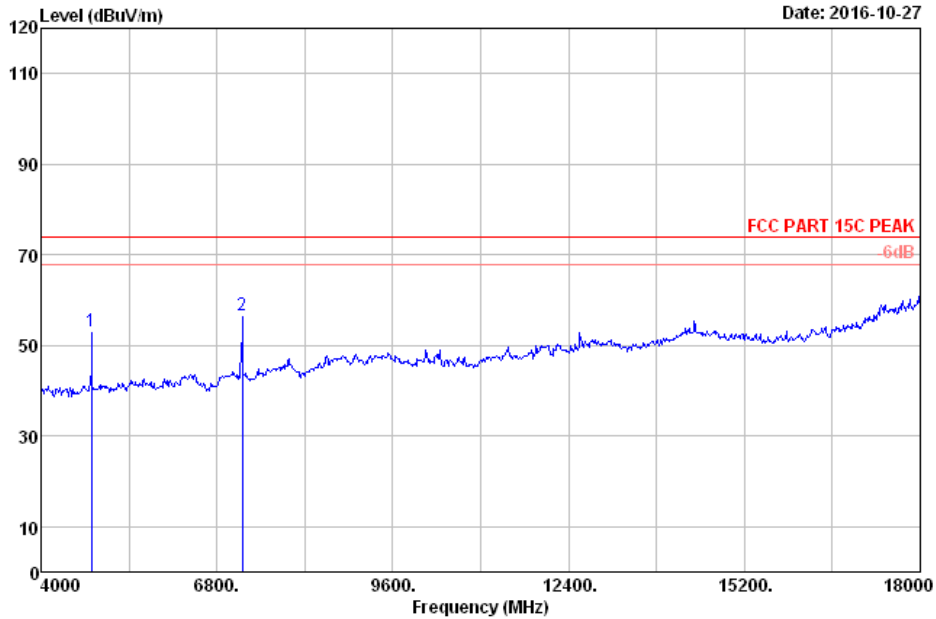


Site no. : 3m Chamber Data no. : 4  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1\*C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4804.00	32.79	11.75	44.17	35.67	53.04	74.00	20.96	Peak
2	7206.00	35.88	12.44	43.89	35.55	56.66	74.00	17.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

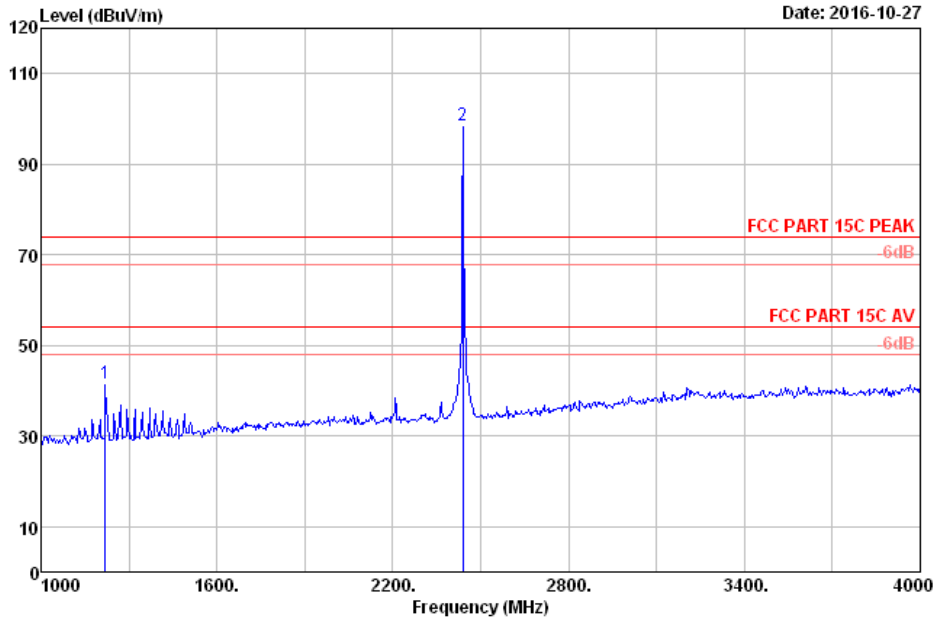


Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1219.00	24.38	6.10	47.57	36.48	41.57	74.00	32.43	Peak
2	2440.00	28.20	8.38	98.27	36.38	98.47	74.00	-24.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

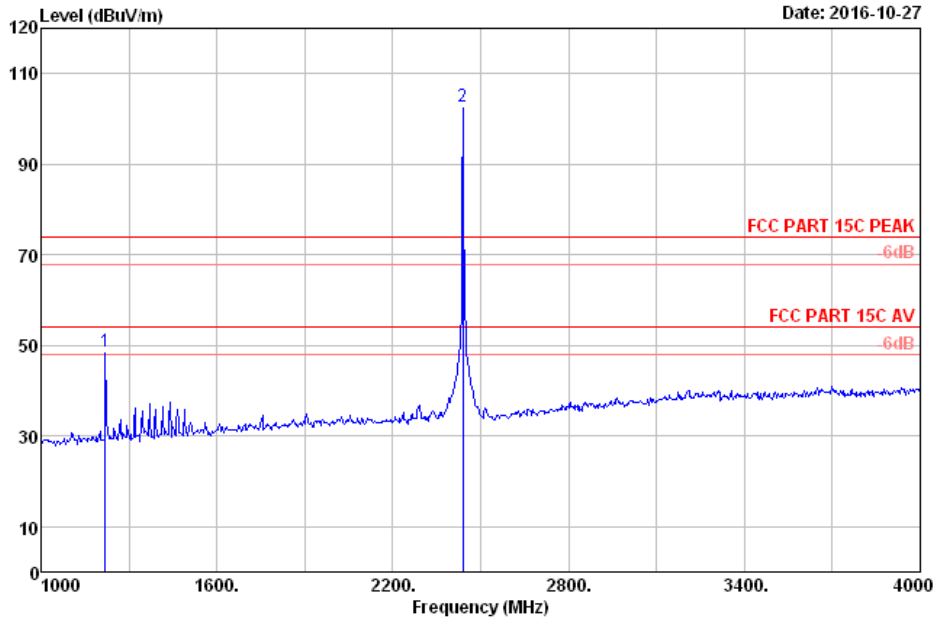


Site no. : 3m Chamber Data no. : 6  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1219.00	24.38	6.10	54.76	36.48	48.76	74.00	25.24	Peak
2	2440.00	28.20	8.38	102.67	36.38	102.87	74.00	-28.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

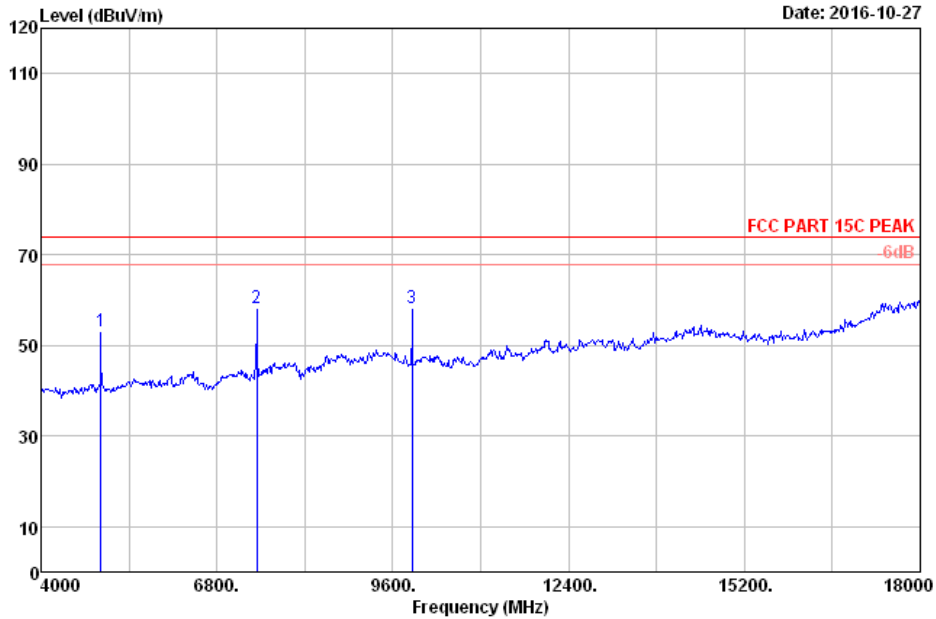


Site no. : 3m Chamber Data no. : 7  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2440MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4954.00	32.49	11.85	44.58	35.71	53.21	74.00	20.79	Peak
2	7431.00	35.97	12.63	45.31	35.59	58.32	74.00	15.68	Peak
3	9908.00	37.84	13.23	43.24	36.10	58.21	74.00	15.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

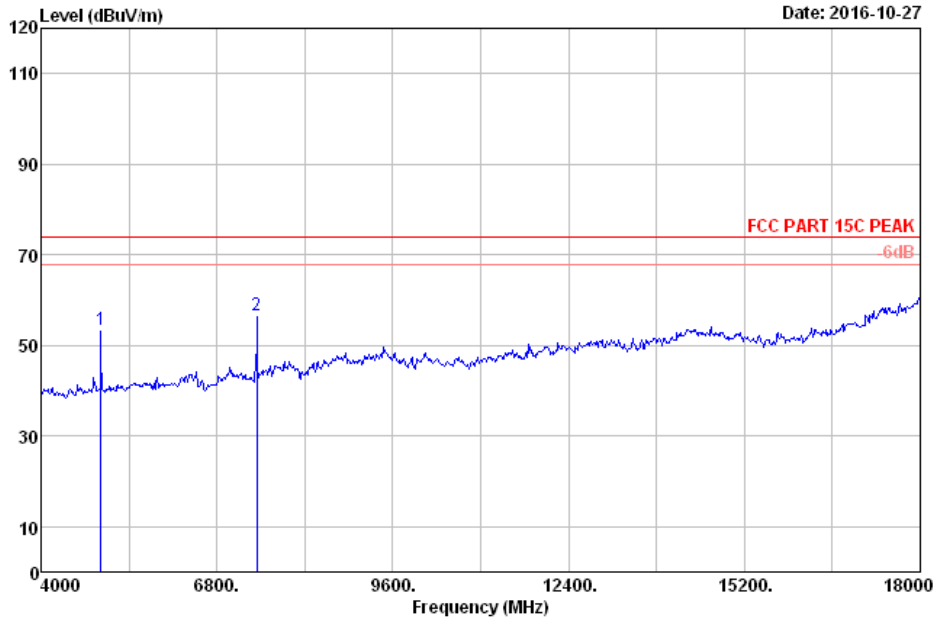

Date: 2016-10-27

Site no. : 3m Chamber Data no. : 8  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2440MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4954.00	32.49	11.85	44.79	35.71	53.42	74.00	20.58	Peak
2	7431.00	35.97	12.63	43.51	35.59	56.52	74.00	17.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

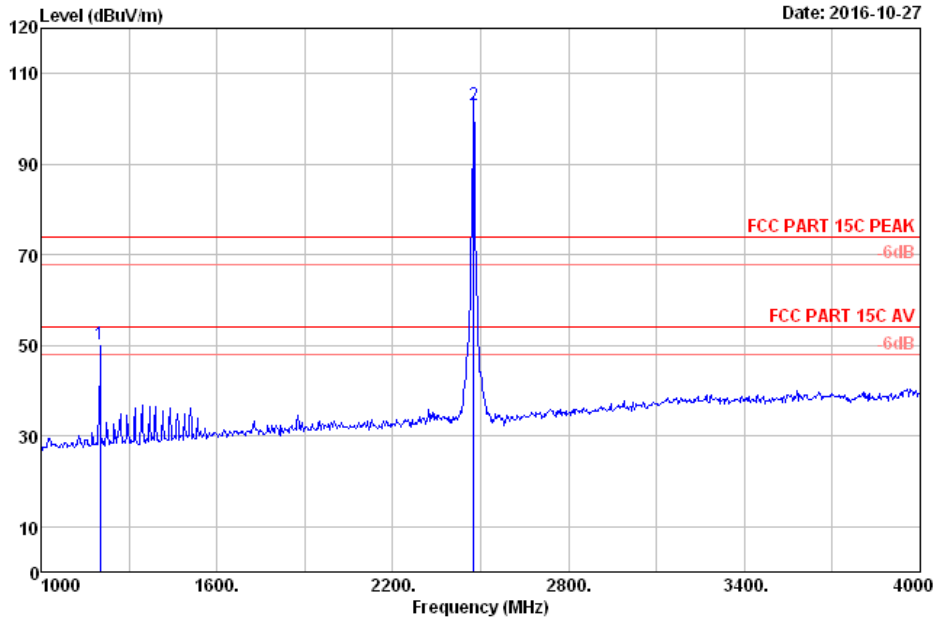


Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.00	24.34	6.05	56.18	36.48	50.09	74.00	23.91	Peak
2	2477.00	28.26	8.42	102.85	36.38	103.15	74.00	-29.15	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

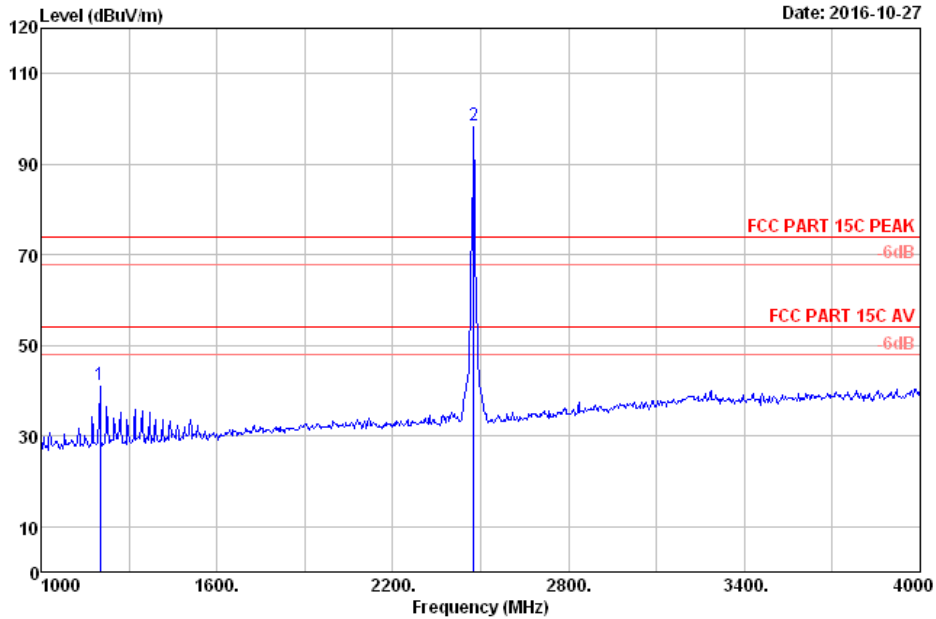


Site no. : 3m Chamber Data no. : 10  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1201.00	24.34	6.05	47.26	36.48	41.17	74.00	32.83	Peak
2	2477.00	28.26	8.42	98.11	36.38	98.41	74.00	-24.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

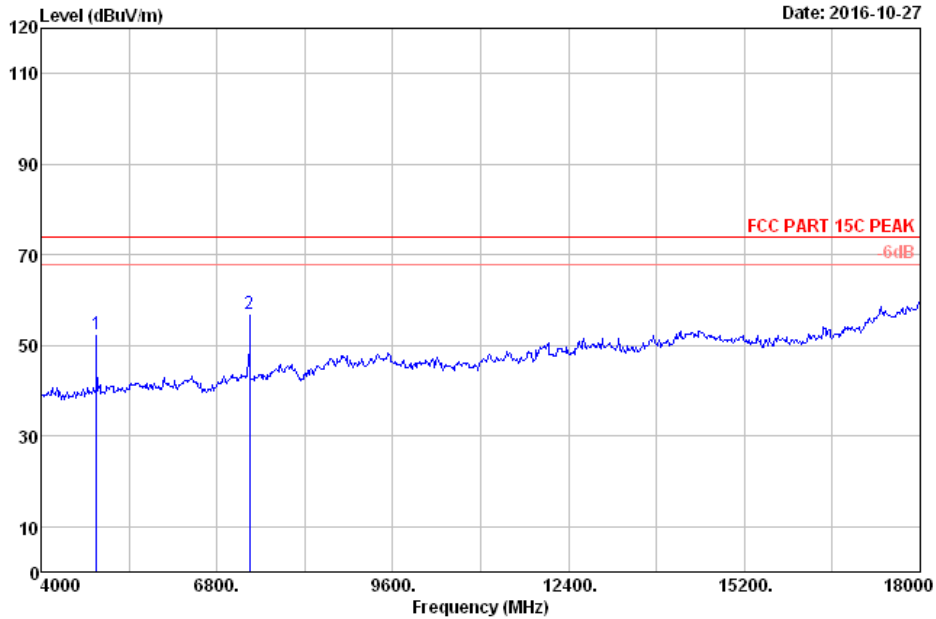


Site no. : 3m Chamber Data no. : 11  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1\*C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : GFSK 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4880.00	32.64	11.80	43.82	35.69	52.57	74.00	21.43	Peak
2	7320.00	35.93	12.54	44.11	35.57	57.01	74.00	16.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

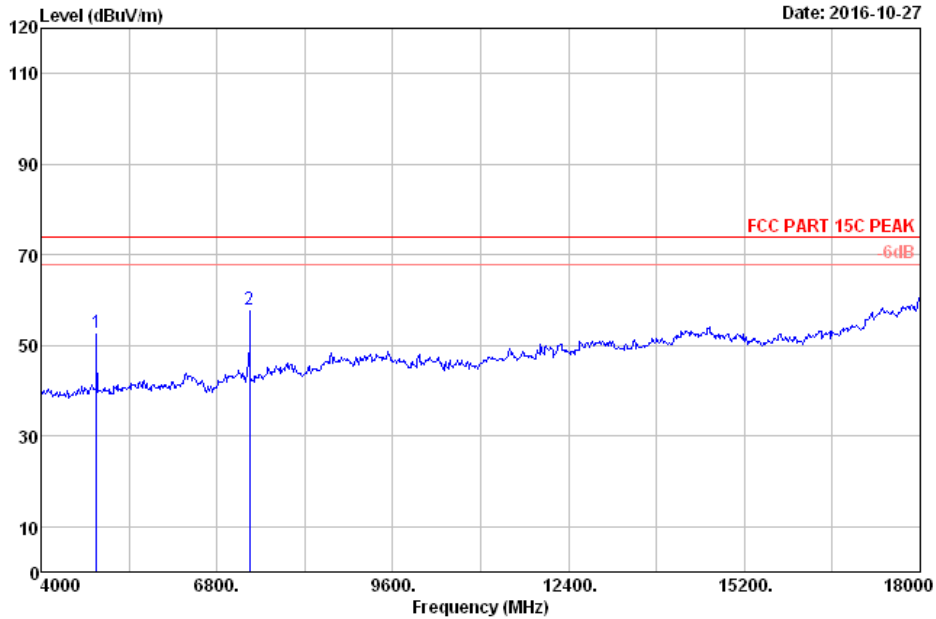

Site no. : 3m Chamber Data no. : 12  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2477MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4880.00	32.64	11.80	44.19	35.69	52.94	74.00	21.06	Peak
2	7320.00	35.93	12.54	44.94	35.57	57.84	74.00	16.16	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

Wi-Fi 802.11 b mode, 11 Mbps  
30MHz - 1GHz



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 19 File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42) Date: 2016-10-31

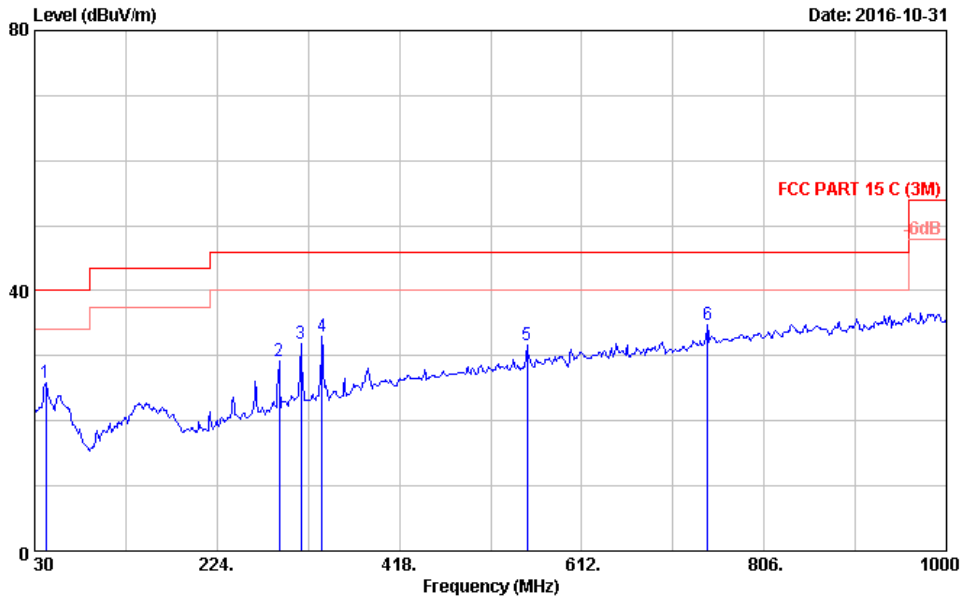

Site no. : 3m Chamber Data no. : 19  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	4.97	25.92	40.00	14.08	QP
2	289.960	19.59	1.89	7.68	29.16	46.00	16.84	QP
3	313.240	20.16	2.05	9.76	31.97	46.00	14.03	QP
4	335.550	20.86	2.15	10.01	33.02	46.00	12.98	QP
5	553.800	24.86	2.95	3.80	31.61	46.00	14.39	QP
6	745.860	27.78	3.74	3.22	34.74	46.00	11.26	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 20

File: E:2016 Test Data\TUV20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

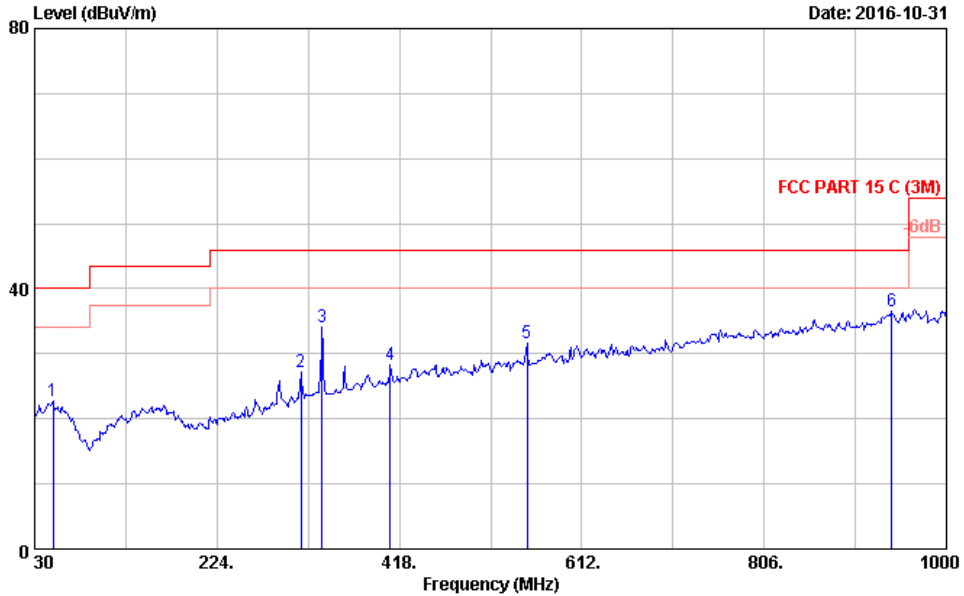

Site no. : 3m Chamber Data no. : 20  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	49.400	20.52	0.80	1.35	22.67	40.00	17.33	QP
2	313.240	20.16	2.05	4.96	27.17	46.00	18.83	QP
3	335.550	20.86	2.15	11.13	34.14	46.00	11.86	QP
4	408.300	22.21	2.46	3.71	28.38	46.00	17.62	QP
5	553.800	24.86	2.95	3.93	31.74	46.00	14.26	QP
6	941.800	29.90	4.45	2.17	36.52	46.00	9.48	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 21

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

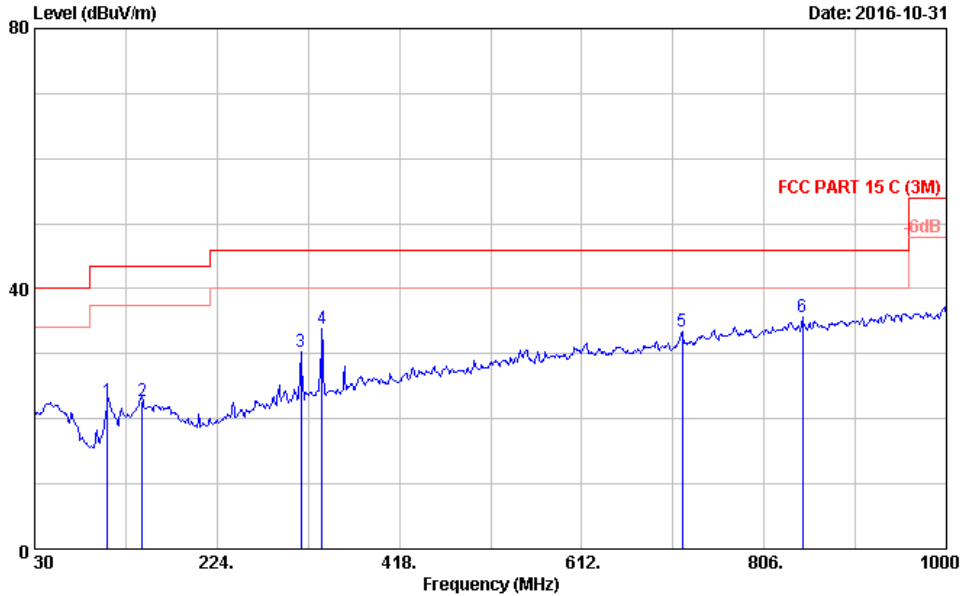

Site no. : 3m Chamber Data no. : 21  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	107.600	16.49	1.13	5.01	22.63	43.50	20.87	QP
2	144.460	19.51	1.08	2.13	22.72	43.50	20.78	QP
3	313.240	20.16	2.05	8.05	30.26	46.00	15.74	QP
4	335.550	20.86	2.15	10.78	33.79	46.00	12.21	QP
5	718.700	27.18	3.62	2.70	33.50	46.00	12.50	QP
6	846.740	28.60	4.15	2.95	35.70	46.00	10.30	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 22

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

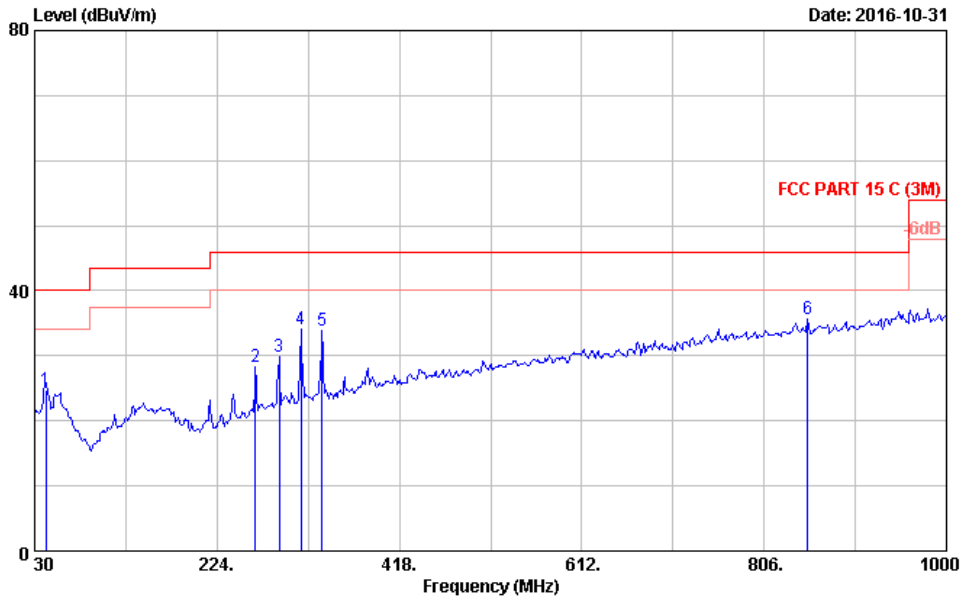

Site no. : 3m Chamber Data no. : 22  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	3.81	24.76	40.00	15.24	QP
2	264.740	18.80	1.64	7.87	28.31	46.00	17.69	QP
3	289.960	19.59	1.89	8.35	29.83	46.00	16.17	QP
4	313.240	20.16	2.05	11.97	34.18	46.00	11.82	QP
5	335.550	20.86	2.15	10.87	33.88	46.00	12.12	QP
6	852.560	28.63	4.18	2.92	35.73	46.00	10.27	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 23

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

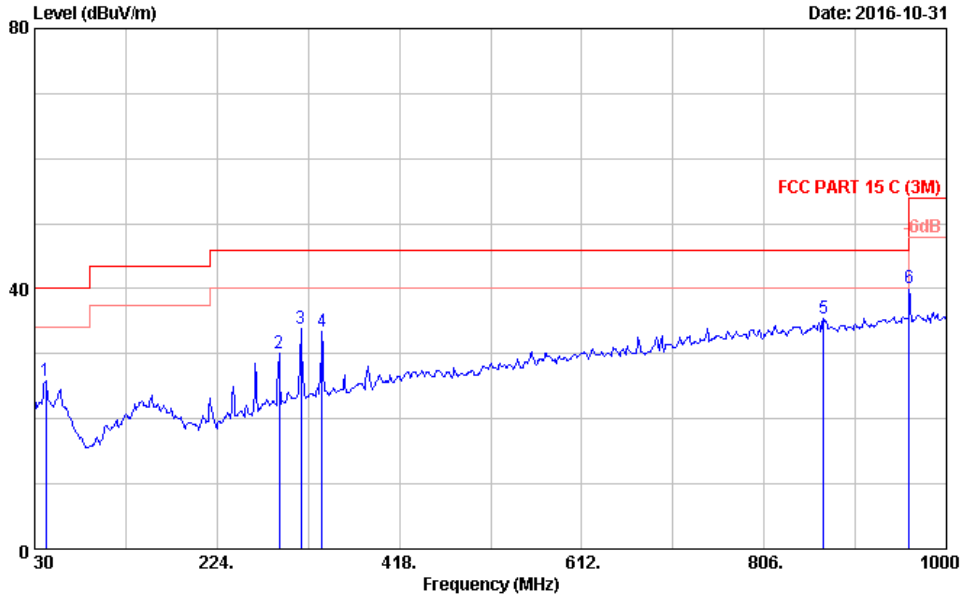

Site no. : 3m Chamber Data no. : 23  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	4.99	25.94	40.00	14.06	QP
2	289.960	19.59	1.89	8.59	30.07	46.00	15.93	QP
3	313.240	20.16	2.05	11.69	33.90	46.00	12.10	QP
4	335.550	20.86	2.15	10.48	33.49	46.00	12.51	QP
5	869.050	28.84	4.23	2.28	35.35	46.00	10.65	QP
6	960.000	30.01	4.49	5.62	40.12	46.00	5.88	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 24

File: E:2016 Test Data\TUV20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

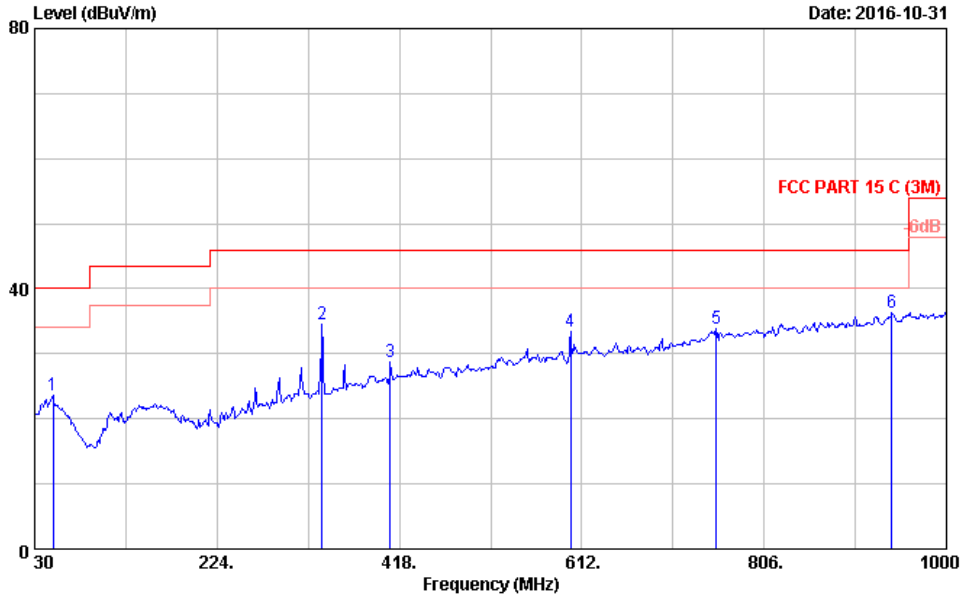


Site no. : 3m Chamber Data no. : 24  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	49.400	20.52	0.80	2.23	23.55	40.00	16.45	QP
2	335.550	20.86	2.15	11.55	34.56	46.00	11.44	QP
3	408.300	22.21	2.46	4.02	28.69	46.00	17.31	QP
4	600.360	25.28	3.12	4.97	33.37	46.00	12.63	QP
5	755.560	28.01	3.79	2.11	33.91	46.00	12.09	QP
6	941.800	29.90	4.45	1.96	36.31	46.00	9.69	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.


### 1GHz - 18GHz Duty Cycle

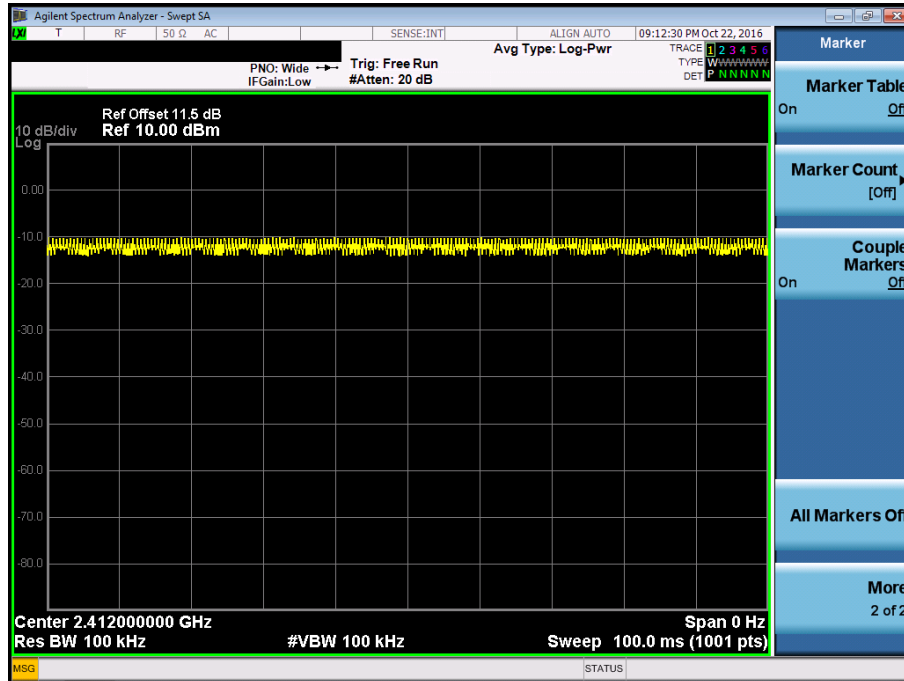

Duty Cycle Correction Factor =  $20 \cdot \log(\text{dwell time}/T_{\text{on}}) = 100\%$



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

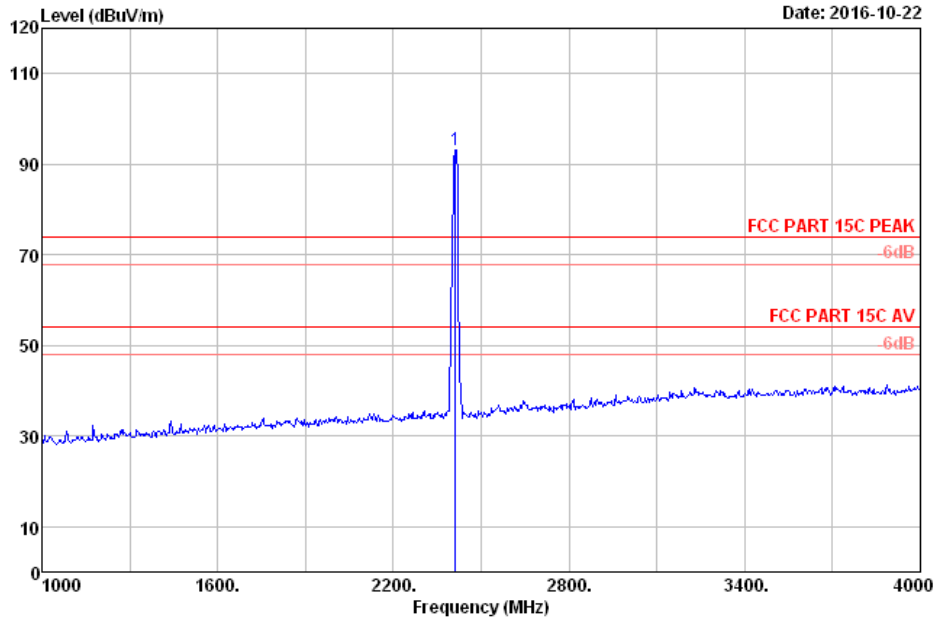


Site no. : 3m Chamber Data no. : 33  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	92.86	36.39	92.98	74.00	-18.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

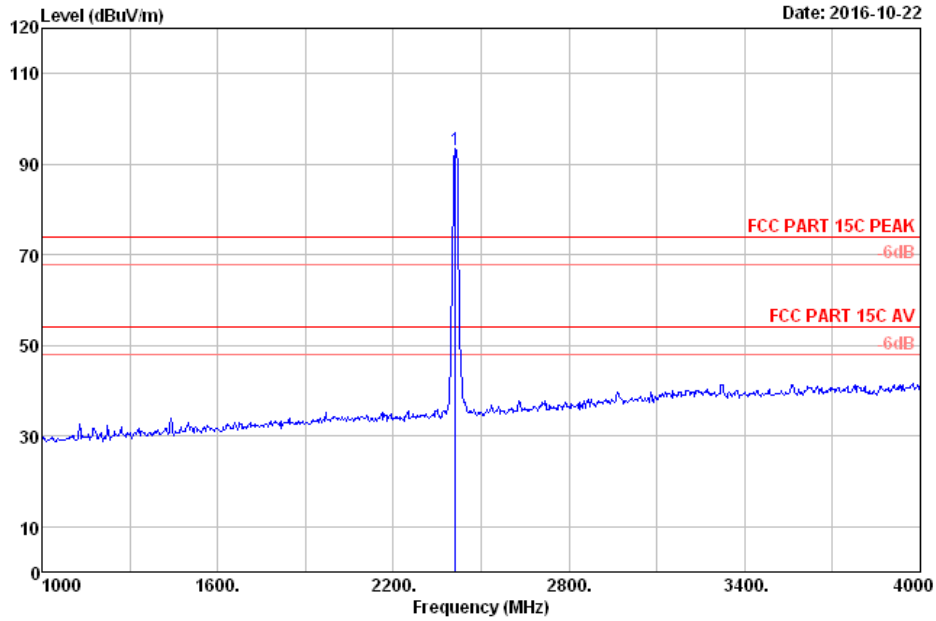

Date: 2016-10-22


Site no. : 3m Chamber Data no. : 34  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	93.11	36.39	93.23	74.00	-19.23	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

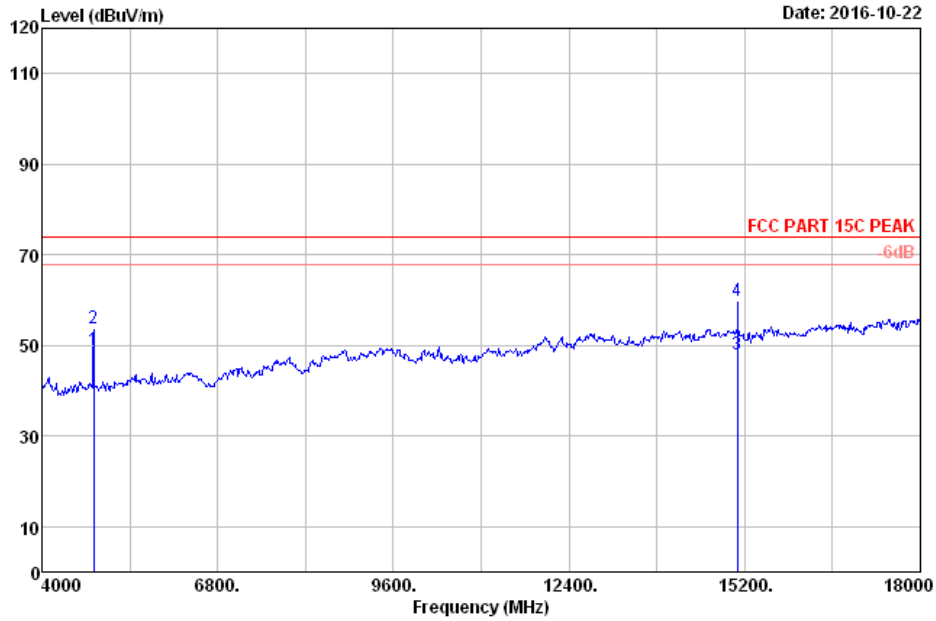


Site no. : 3m Chamber Data no. : 35  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	40.14	35.68	48.98	54.00	5.02	Average
2	4824.00	32.75	11.77	45.01	35.68	53.85	74.00	20.15	Peak
3	15088.00	38.93	14.95	28.67	34.63	47.92	54.00	6.08	Average
4	15088.00	38.93	14.95	40.58	34.63	59.83	74.00	14.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

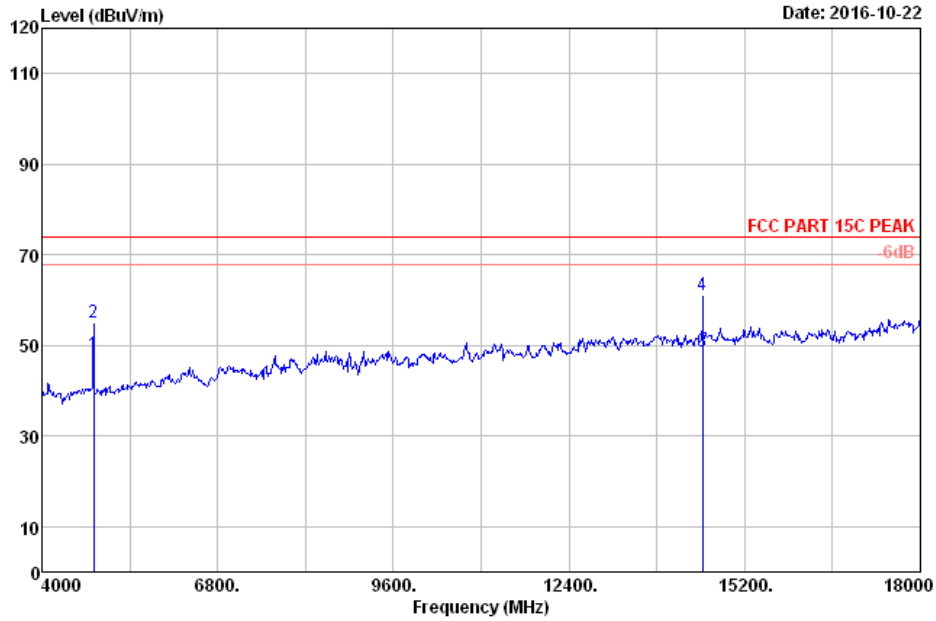


Site no. : 3m Chamber Data no. : 36  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	39.27	35.68	48.11	54.00	5.89	Average
2	4824.00	32.75	11.77	46.23	35.68	55.07	74.00	18.93	Peak
3	14528.00	39.94	14.55	28.70	34.54	48.65	54.00	5.35	Average
4	14528.00	39.94	14.55	41.26	34.54	61.21	74.00	12.79	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

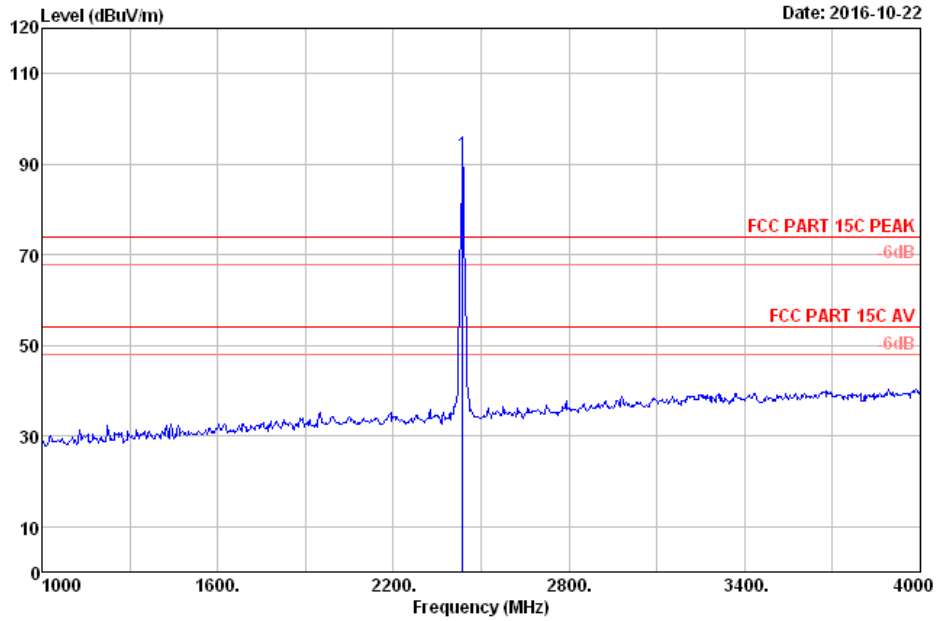

Site no. : 3m Chamber Data no. : 37  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2437MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	91.83	36.38	92.03	74.00	-18.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

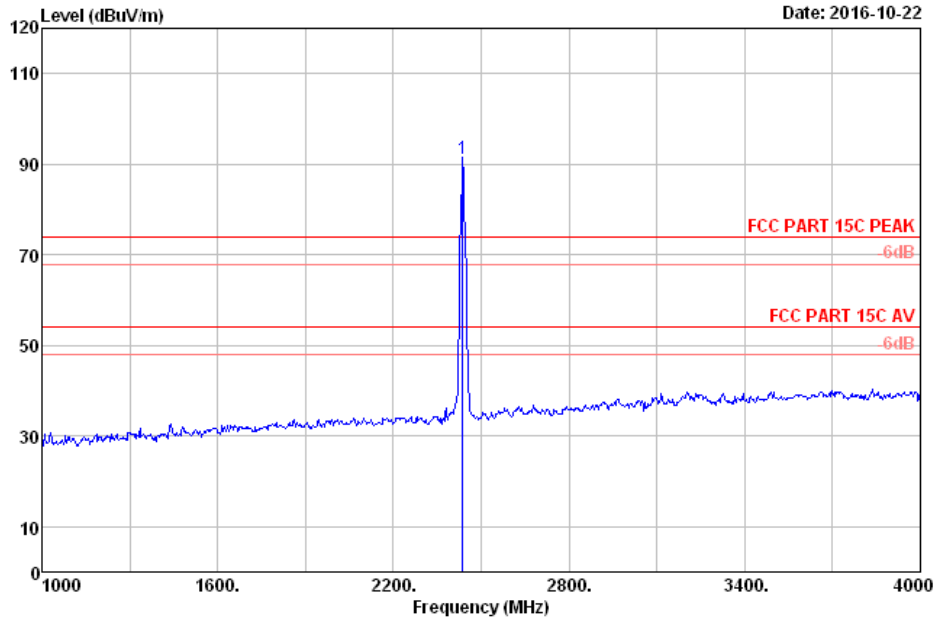


Site no. : 3m Chamber Data no. : 38  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	91.12	36.38	91.32	74.00	-17.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

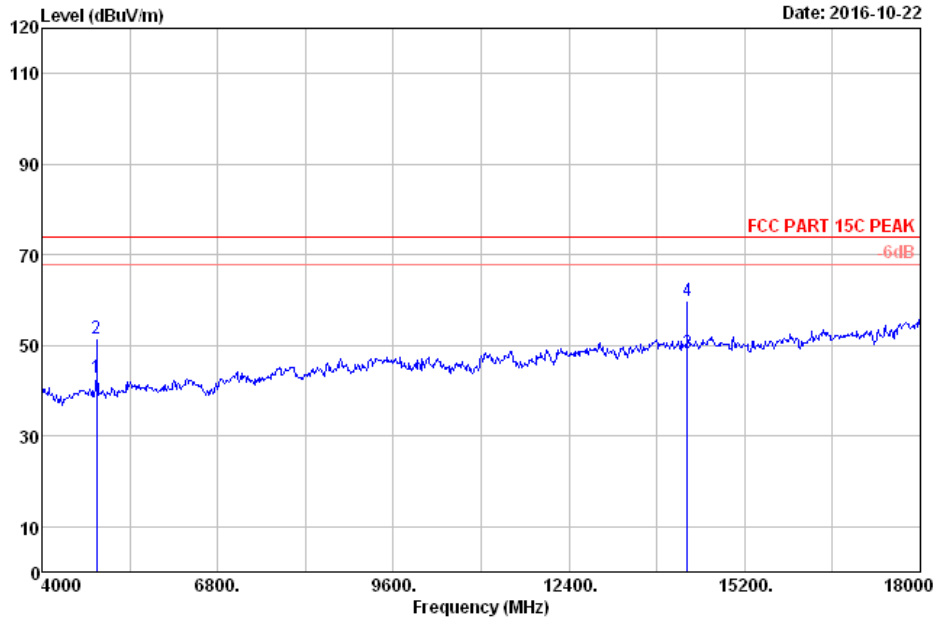

Date: 2016-10-22


Site no. : 3m Chamber Data no. : 39  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	34.12	35.69	42.88	54.00	11.12	Average
2	4874.00	32.65	11.80	42.71	35.69	51.47	74.00	22.53	Peak
3	14290.00	40.21	14.36	28.14	34.25	48.46	54.00	5.54	Average
4	14290.00	40.21	14.36	39.57	34.25	59.89	74.00	14.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

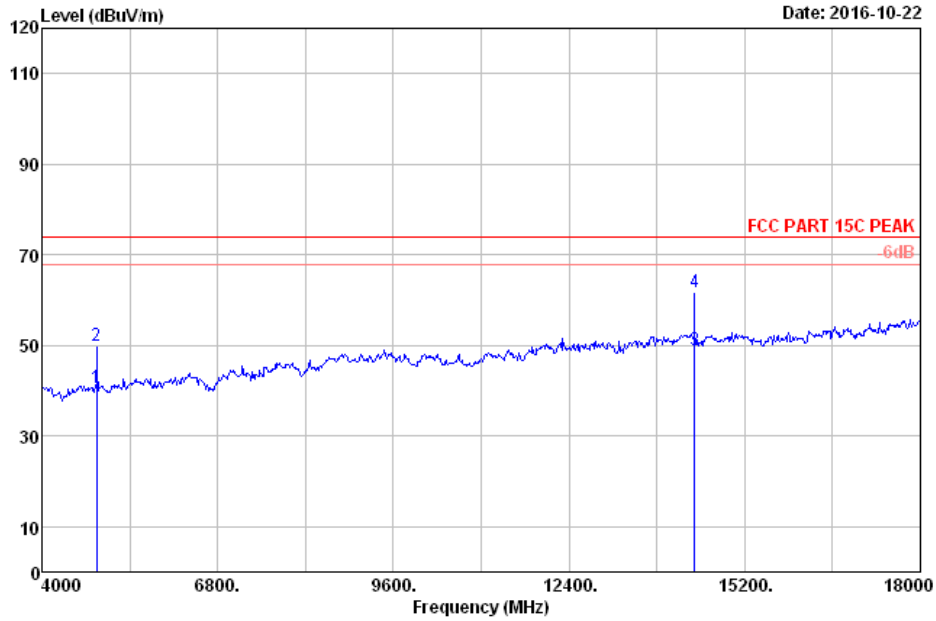


Site no. : 3m Chamber Data no. : 40  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.88	35.69	40.64	54.00	13.36	Average
2	4874.00	32.65	11.80	41.21	35.69	49.97	74.00	24.03	Peak
3	14402.00	40.10	14.45	28.71	34.40	48.86	54.00	5.14	Average
4	14402.00	40.10	14.45	41.59	34.40	61.74	74.00	12.26	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

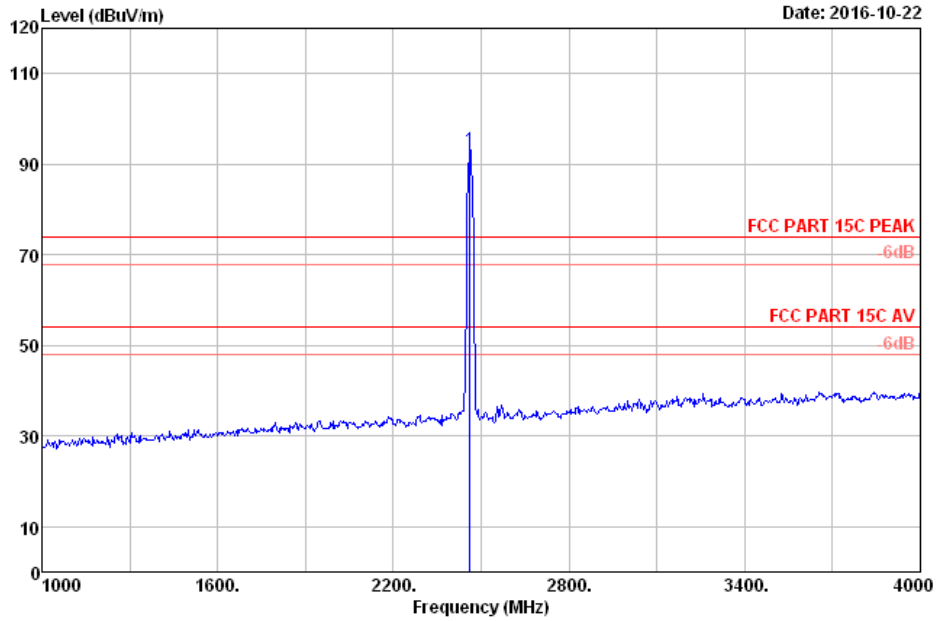


Site no. : 3m Chamber Data no. : 41  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	92.85	36.38	93.11	74.00	-19.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

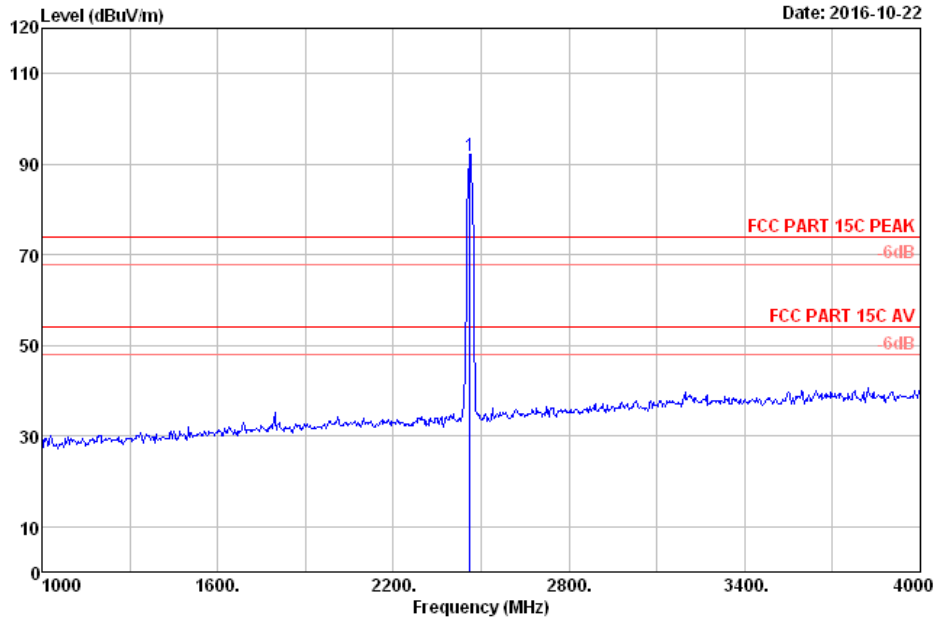

Date: 2016-10-22


Site no. : 3m Chamber Data no. : 42  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	91.66	36.38	91.92	74.00	-17.92	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

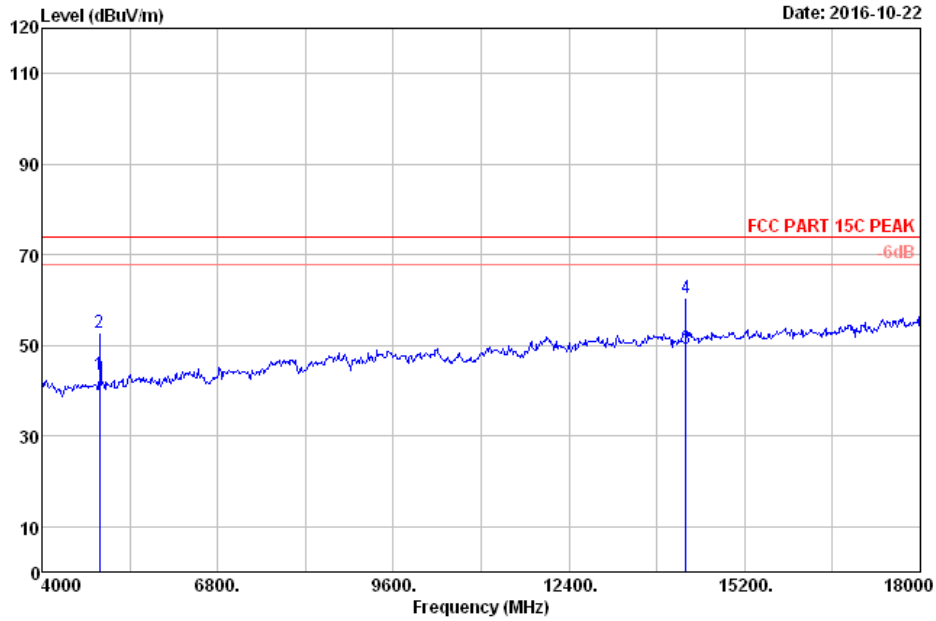


Site no. : 3m Chamber Data no. : 43  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	34.69	35.70	43.37	54.00	10.63	Average
2	4924.00	32.55	11.83	44.25	35.70	52.93	74.00	21.07	Peak
3	14262.00	40.24	14.33	28.96	34.21	49.32	54.00	4.68	Average
4	14262.00	40.24	14.33	40.15	34.21	60.51	74.00	13.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

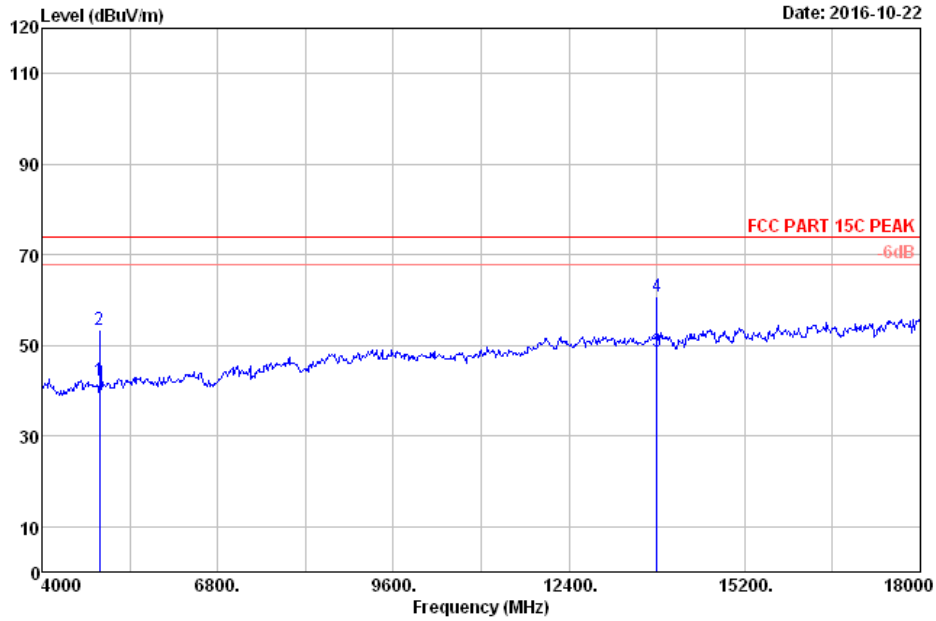

Site no. : 3m Chamber Data no. : 44  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	33.55	35.70	42.23	54.00	11.77	Average
2	4924.00	32.55	11.83	44.86	35.70	53.54	74.00	20.46	Peak
3	13800.00	40.18	14.04	28.28	34.00	48.50	54.00	5.50	Average
4	13800.00	40.18	14.04	40.67	34.00	60.89	74.00	13.11	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

Wi-Fi 802.11 g mode, 54 Mbps  
30MHz - 1GHz



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 25 File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42) Date: 2016-10-31

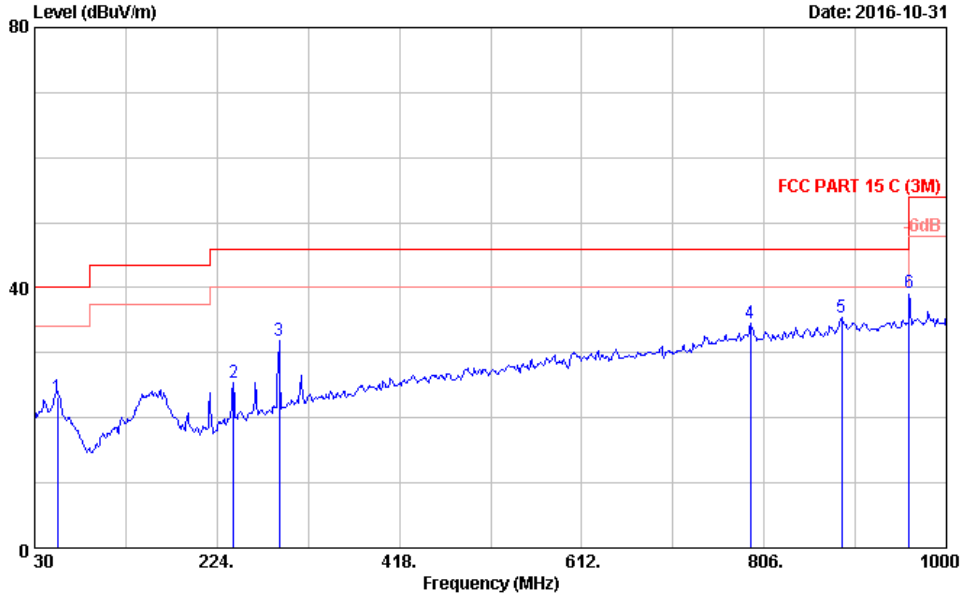

Site no. : 3m Chamber Data no. : 25  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	54.250	20.31	0.86	1.91	23.08	40.00	16.92	QP
2	241.460	18.04	1.41	6.06	25.51	46.00	20.49	QP
3	289.960	19.59	1.89	10.43	31.91	46.00	14.09	QP
4	791.450	28.22	3.95	2.43	34.60	46.00	11.40	QP
5	888.450	29.11	4.30	1.92	35.33	46.00	10.67	QP
6	960.000	30.01	4.49	4.77	39.27	46.00	6.73	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 26

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

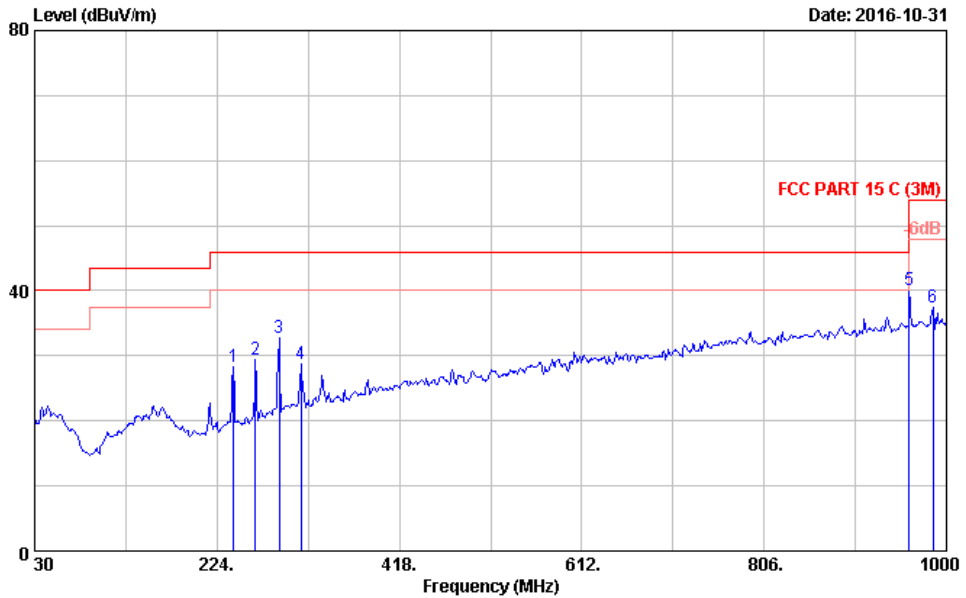

Site no. : 3m Chamber Data no. : 26  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	241.460	18.04	1.41	8.93	28.38	46.00	17.62	QP
2	264.740	18.80	1.64	9.02	29.46	46.00	16.54	QP
3	289.960	19.59	1.89	11.33	32.81	46.00	13.19	QP
4	313.240	20.16	2.05	6.58	28.79	46.00	17.21	QP
5	960.000	30.01	4.49	5.59	40.09	46.00	5.91	QP
6	985.450	30.13	4.55	2.71	37.39	54.00	16.61	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 27

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

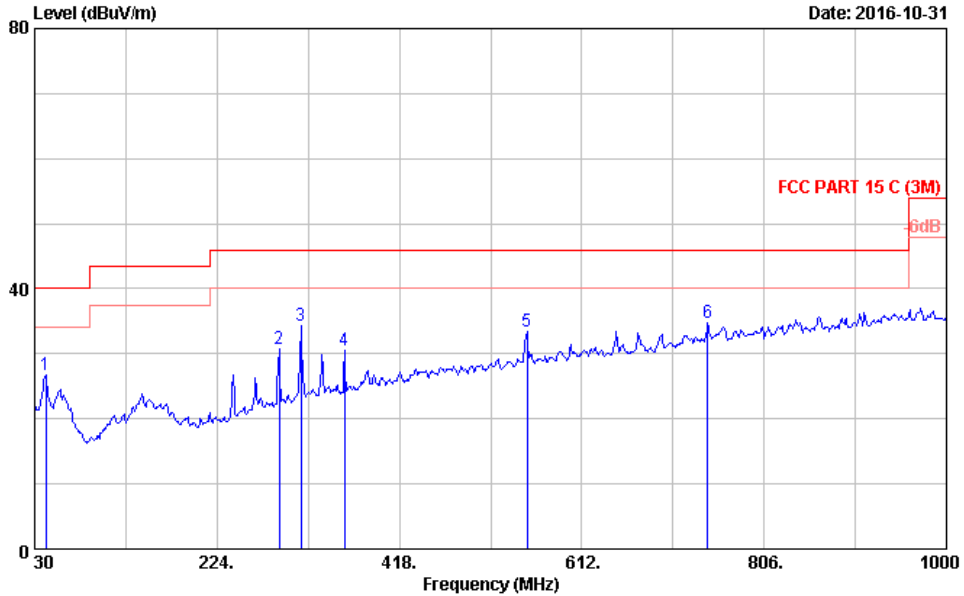

Site no. : 3m Chamber Data no. : 27  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	5.73	26.68	40.00	13.32	QP
2	289.960	19.59	1.89	9.38	30.86	46.00	15.14	QP
3	313.240	20.16	2.05	12.18	34.39	46.00	11.61	QP
4	359.800	21.09	2.26	7.14	30.49	46.00	15.51	QP
5	553.800	24.86	2.95	5.59	33.40	46.00	12.60	QP
6	745.860	27.78	3.74	3.23	34.75	46.00	11.25	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 28

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

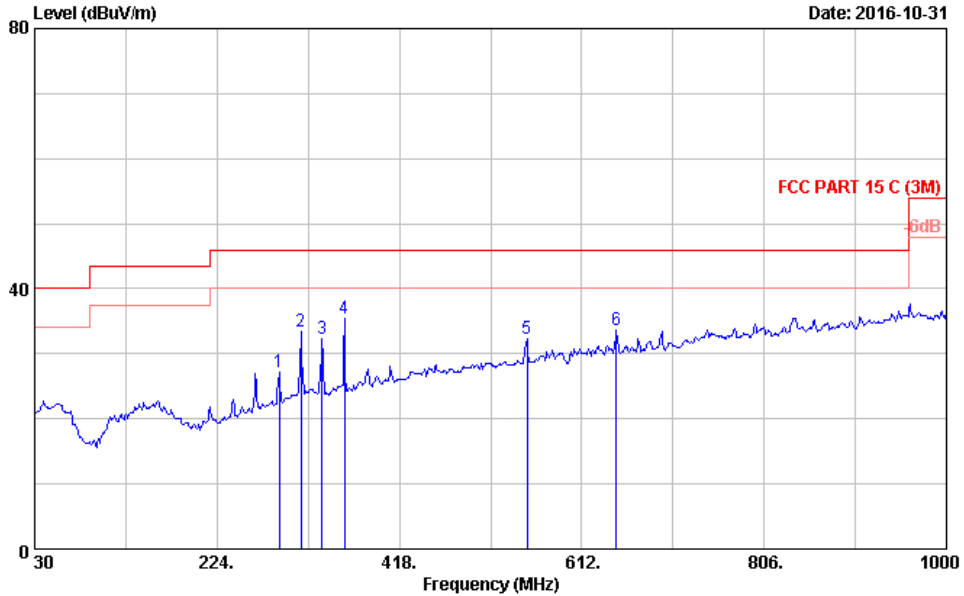

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	289.960	19.59	1.89	5.80	27.28	46.00	18.72	QP
2	313.240	20.16	2.05	11.12	33.33	46.00	12.67	QP
3	335.550	20.86	2.15	9.27	32.28	46.00	13.72	QP
4	359.800	21.09	2.26	12.01	35.36	46.00	10.64	QP
5	553.800	24.86	2.95	4.58	32.39	46.00	13.61	QP
6	648.860	26.42	3.32	3.93	33.67	46.00	12.33	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, Guangdong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 29

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

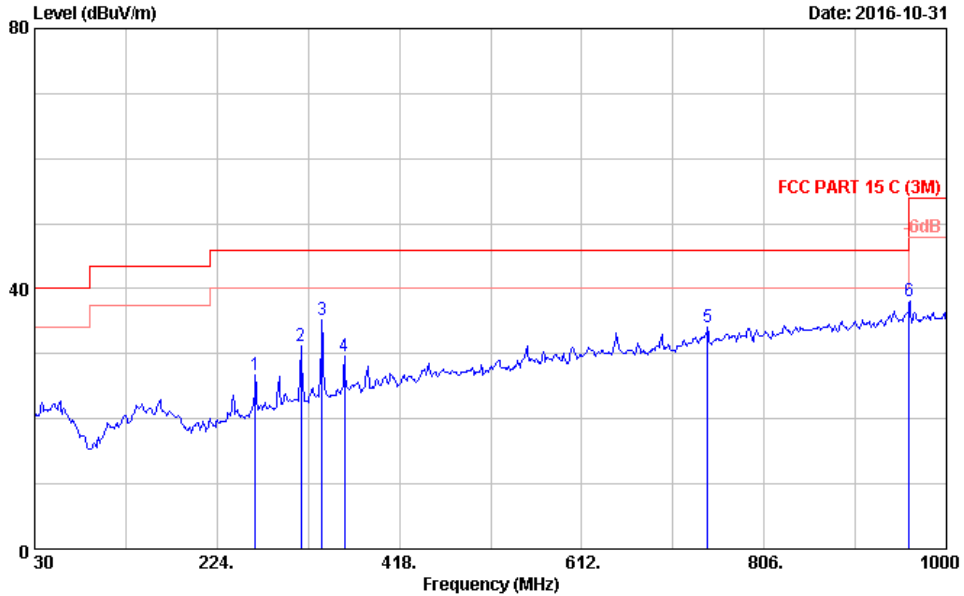

Site no. : 3m Chamber Data no. : 29  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	264.740	18.80	1.64	6.30	26.74	46.00	19.26	QP
2	313.240	20.16	2.05	9.04	31.25	46.00	14.75	QP
3	335.550	20.86	2.15	12.11	35.12	46.00	10.88	QP
4	359.800	21.09	2.26	6.22	29.57	46.00	16.43	QP
5	745.860	27.78	3.74	2.64	34.16	46.00	11.84	QP
6	960.000	30.01	4.49	3.59	38.09	46.00	7.91	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 30

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

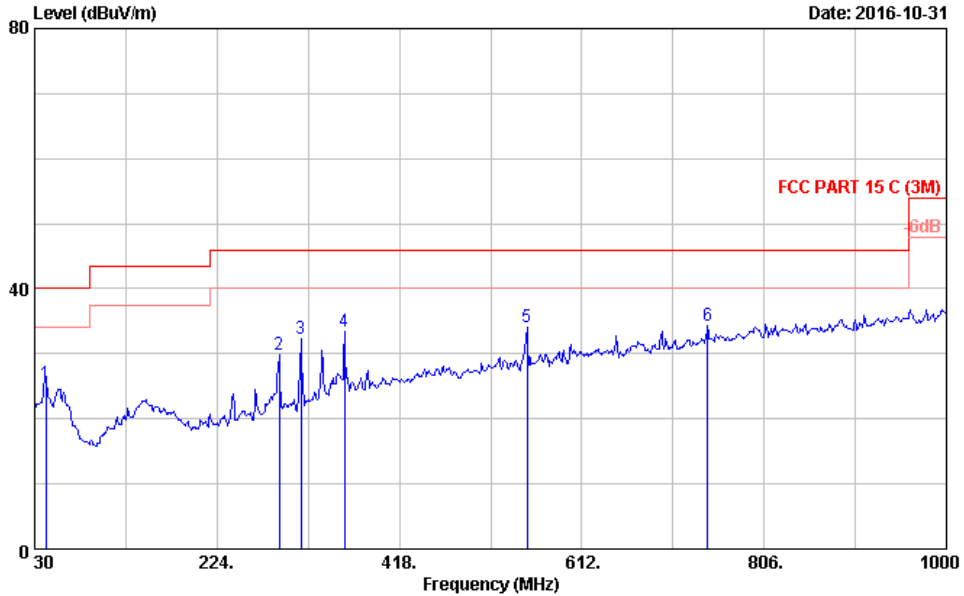

Site no. : 3m Chamber Data no. : 30  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	4.55	25.50	40.00	14.50	QP
2	289.960	19.59	1.89	8.46	29.94	46.00	16.06	QP
3	313.240	20.16	2.05	10.18	32.39	46.00	13.61	QP
4	359.800	21.09	2.26	10.13	33.48	46.00	12.52	QP
5	553.800	24.86	2.95	6.19	34.00	46.00	12.00	QP
6	745.860	27.78	3.74	2.69	34.21	46.00	11.79	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.

1GHz - 18GHz



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

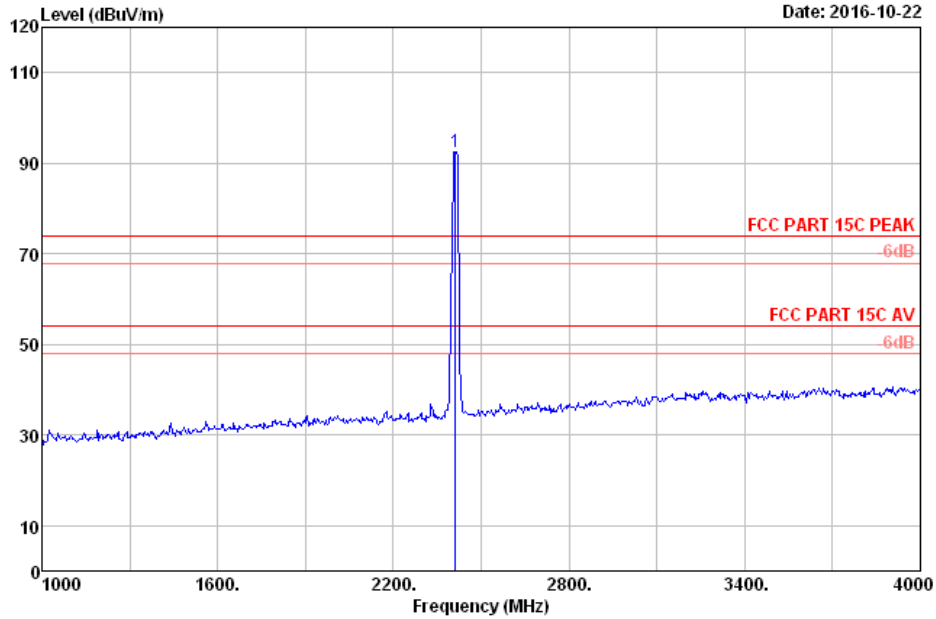


Site no. : 3m Chamber Data no. : 45  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP687 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	92.38	36.39	92.50	74.00	-18.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

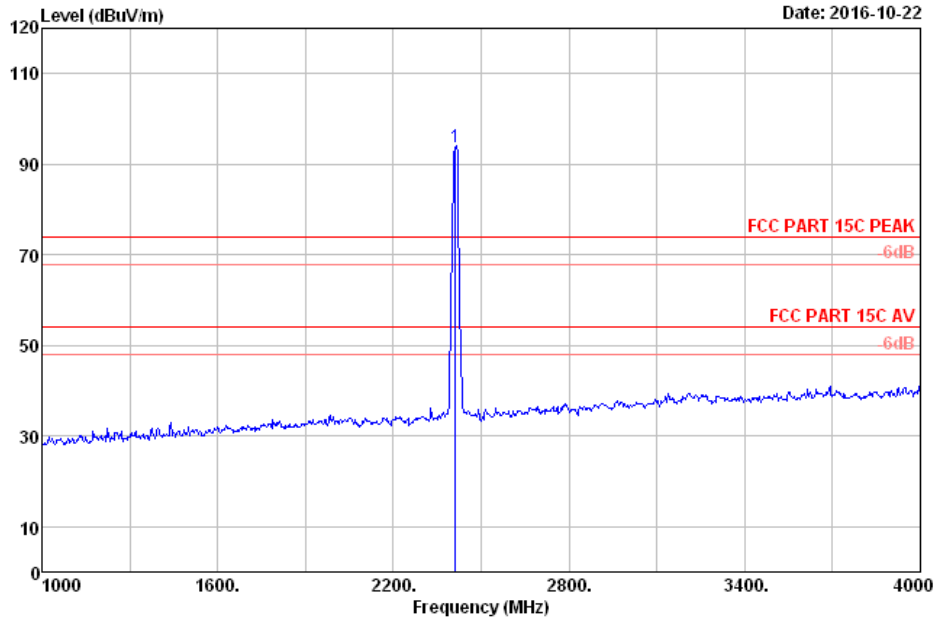


Site no. : 3m Chamber Data no. : 46  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	93.66	36.39	93.78	74.00	-19.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

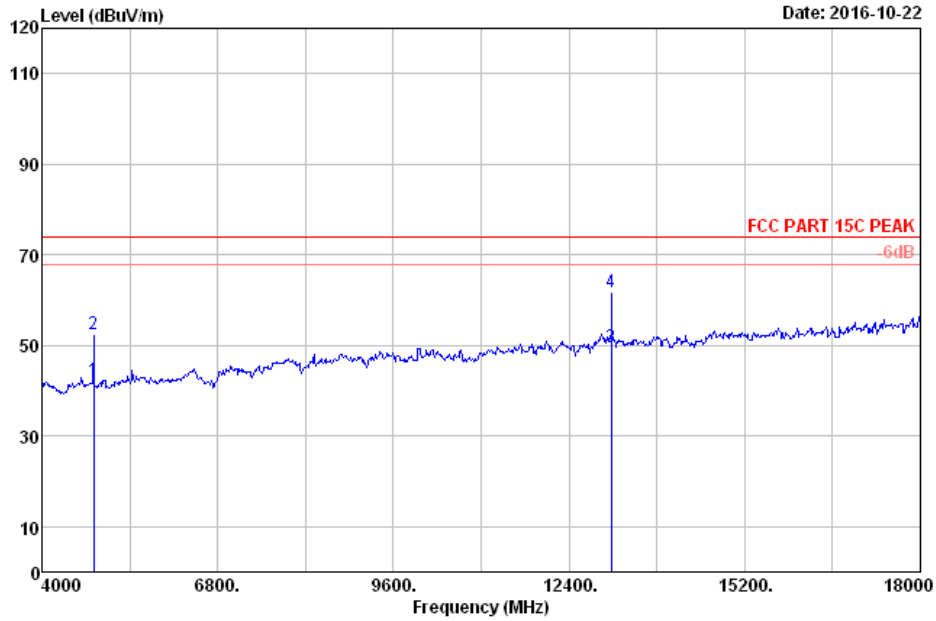

Site no. : 3m Chamber Data no. : 47  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2412MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	33.28	35.68	42.12	54.00	11.88	Average
2	4824.00	32.75	11.77	43.75	35.68	52.59	74.00	21.41	Peak
3	13072.00	39.36	13.88	29.45	33.25	49.44	54.00	4.56	Average
4	13072.00	39.36	13.88	41.84	33.25	61.83	74.00	12.17	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

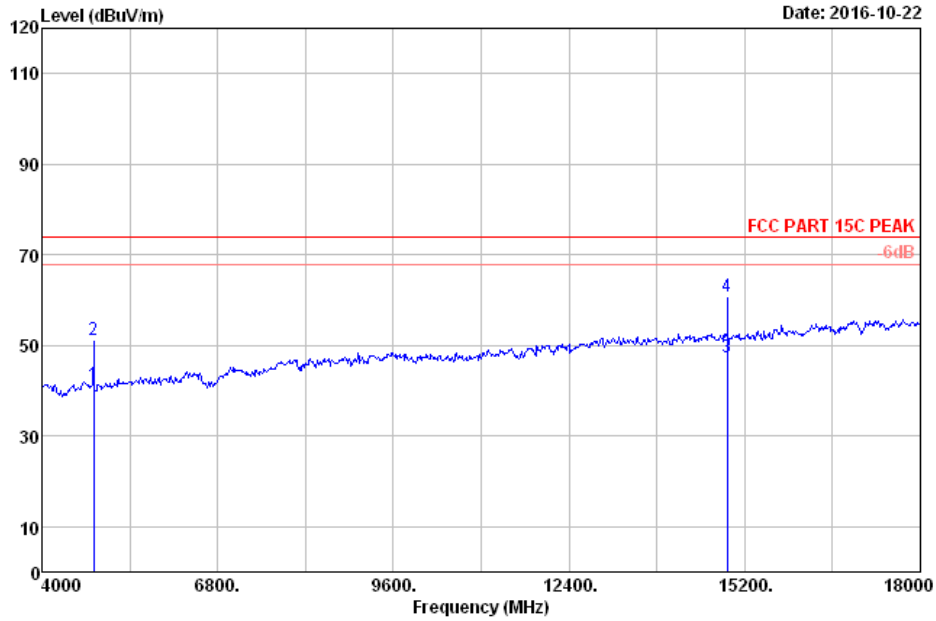


Site no. : 3m Chamber Data no. : 48  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	32.52	35.68	41.36	54.00	12.64	Average
2	4824.00	32.75	11.77	42.49	35.68	51.33	74.00	22.67	Peak
3	14920.00	39.16	14.85	28.11	34.65	47.47	54.00	6.53	Average
4	14920.00	39.16	14.85	41.29	34.65	60.65	74.00	13.35	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

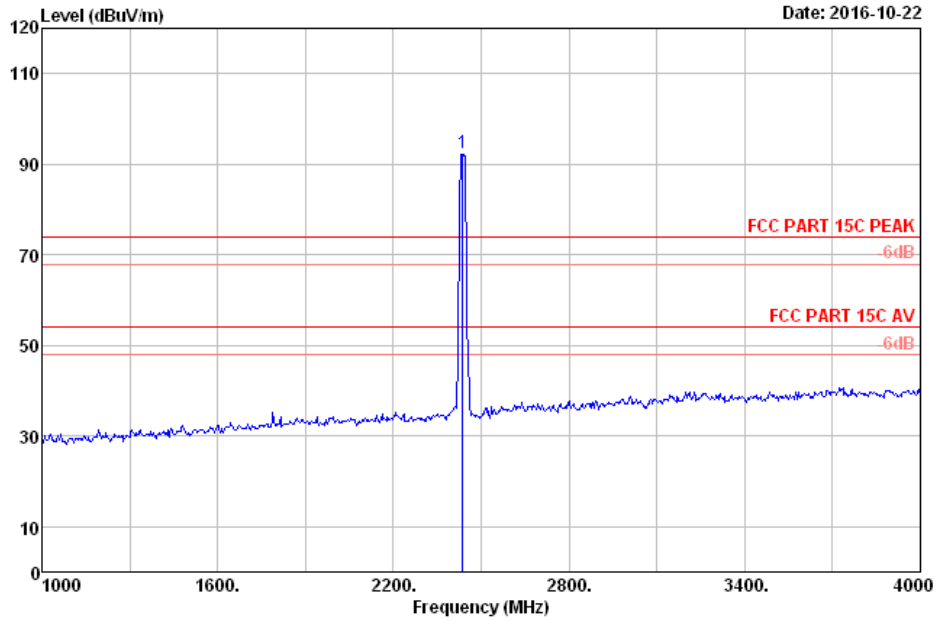

Date: 2016-10-22


Site no. : 3m Chamber Data no. : 49  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	92.30	36.38	92.50	74.00	-18.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

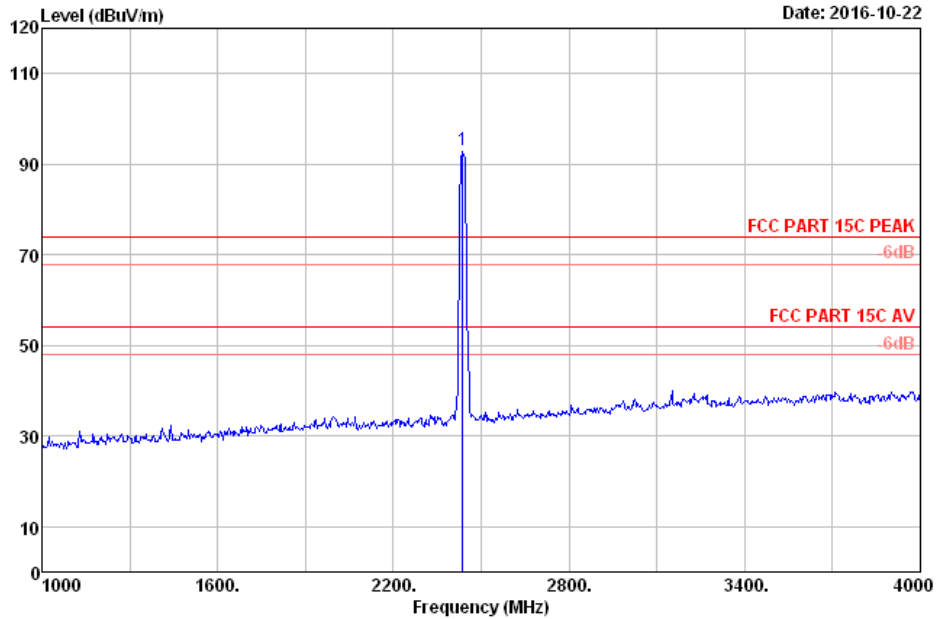


Site no. : 3m Chamber Data no. : 50  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	92.77	36.38	92.97	74.00	-18.97	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

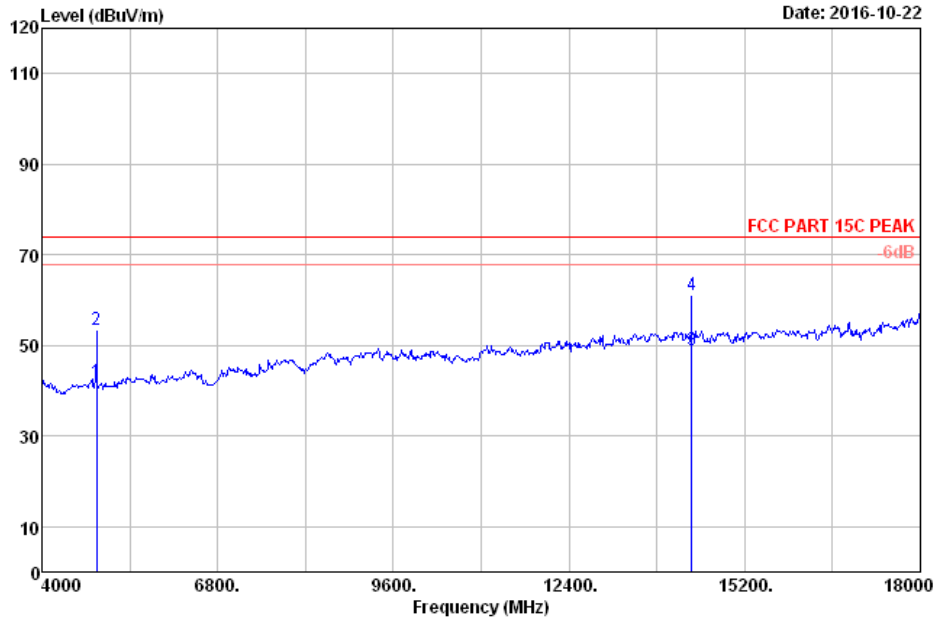


Site no. : 3m Chamber Data no. : 51  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	33.05	35.69	41.81	54.00	12.19	Average
2	4874.00	32.65	11.80	44.58	35.69	53.34	74.00	20.66	Peak
3	14360.00	40.14	14.42	28.84	34.34	49.06	54.00	4.94	Average
4	14360.00	40.14	14.42	40.74	34.34	60.96	74.00	13.04	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

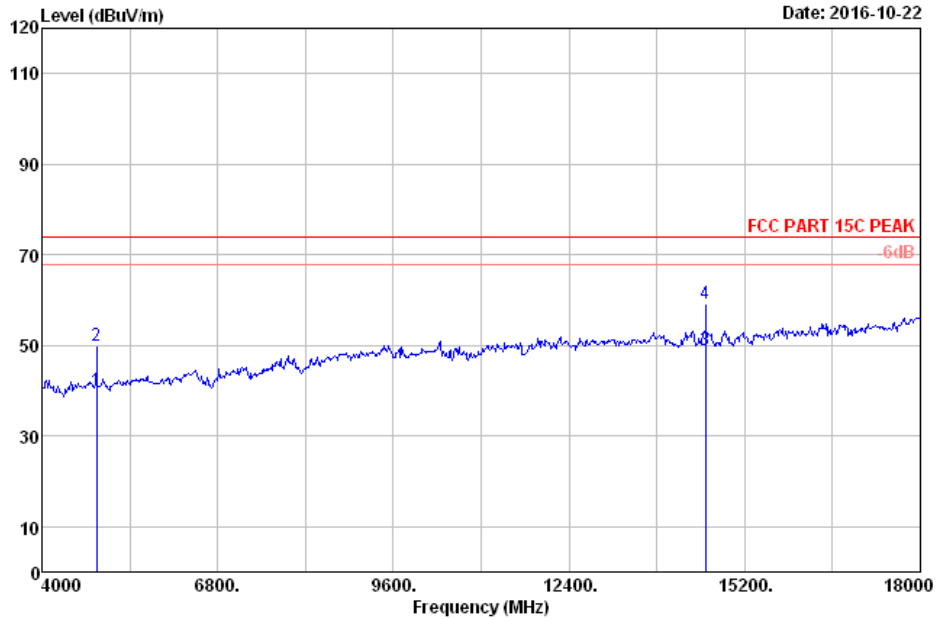


Site no. : 3m Chamber Data no. : 52  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.22	35.69	39.98	54.00	14.02	Average
2	4874.00	32.65	11.80	41.28	35.69	50.04	74.00	23.96	Peak
3	14570.00	39.86	14.58	29.11	34.55	49.00	54.00	5.00	Average
4	14570.00	39.86	14.58	39.22	34.55	59.11	74.00	14.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

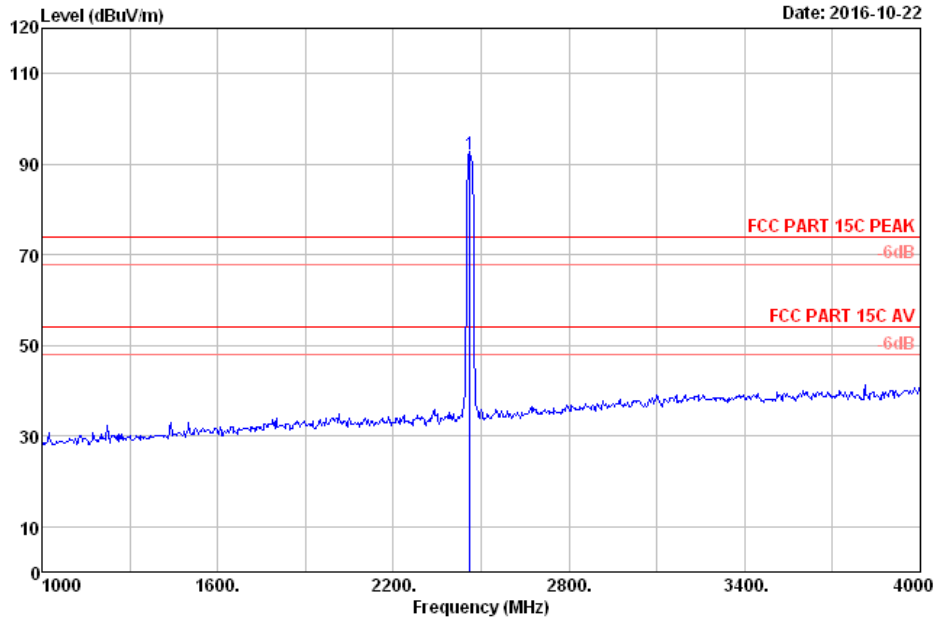

Date: 2016-10-22


Site no. : 3m Chamber Data no. : 53  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	91.83	36.38	92.09	74.00	-18.09	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

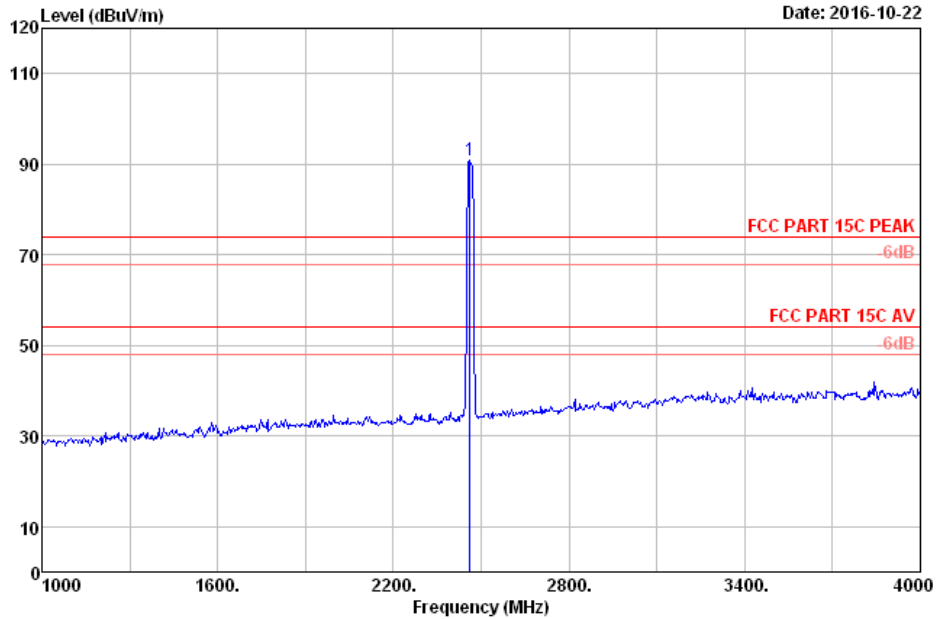


Site no. : 3m Chamber Data no. : 54  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	90.67	36.38	90.93	74.00	-16.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

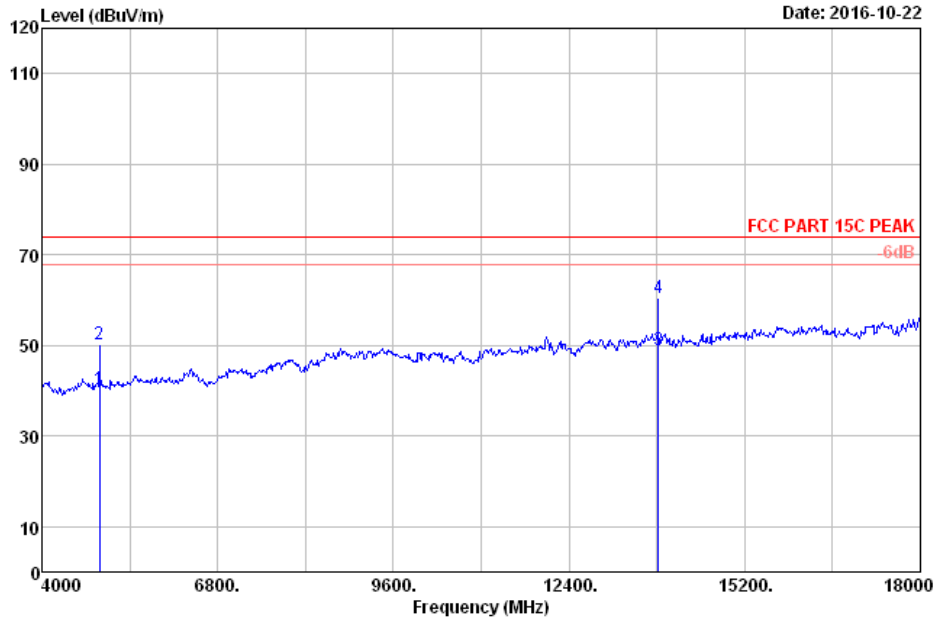

Site no. : 3m Chamber Data no. : 55  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	31.68	35.70	40.36	54.00	13.64	Average
2	4924.00	32.55	11.83	41.67	35.70	50.35	74.00	23.65	Peak
3	13828.00	40.22	14.05	28.59	33.98	48.88	54.00	5.12	Average
4	13828.00	40.22	14.05	40.30	33.98	60.59	74.00	13.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

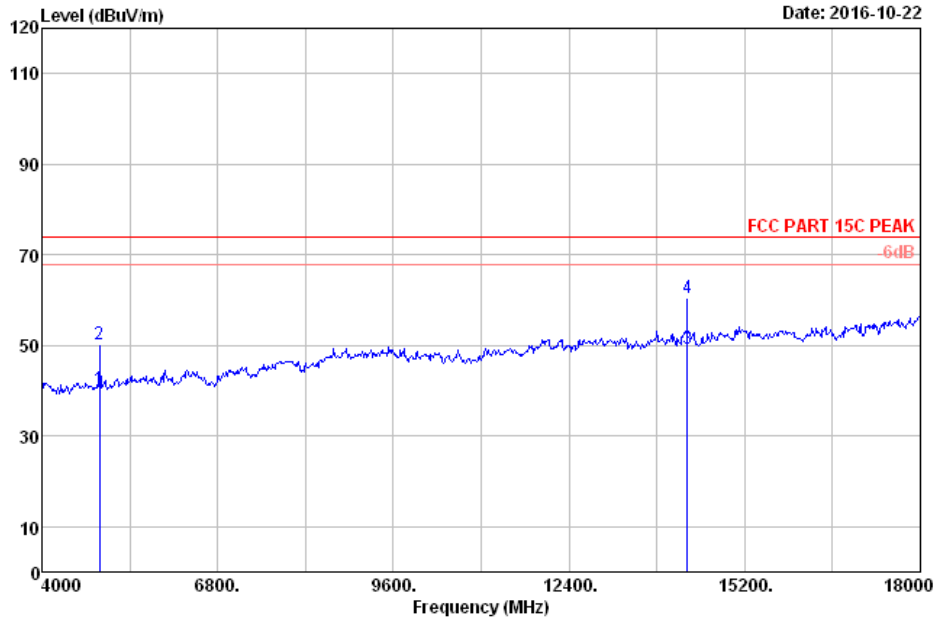

Site no. : 3m Chamber Data no. : 56  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	31.56	35.70	40.24	54.00	13.76	Average
2	4924.00	32.55	11.83	41.67	35.70	50.35	74.00	23.65	Peak
3	14290.00	40.21	14.36	28.89	34.25	49.21	54.00	4.79	Average
4	14290.00	40.21	14.36	40.28	34.25	60.60	74.00	13.40	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

Wi-Fi 802.11 n(HT20) mode, MCS7 Mbps  
30MHz - 1GHz



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 31 File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42) Date: 2016-10-31

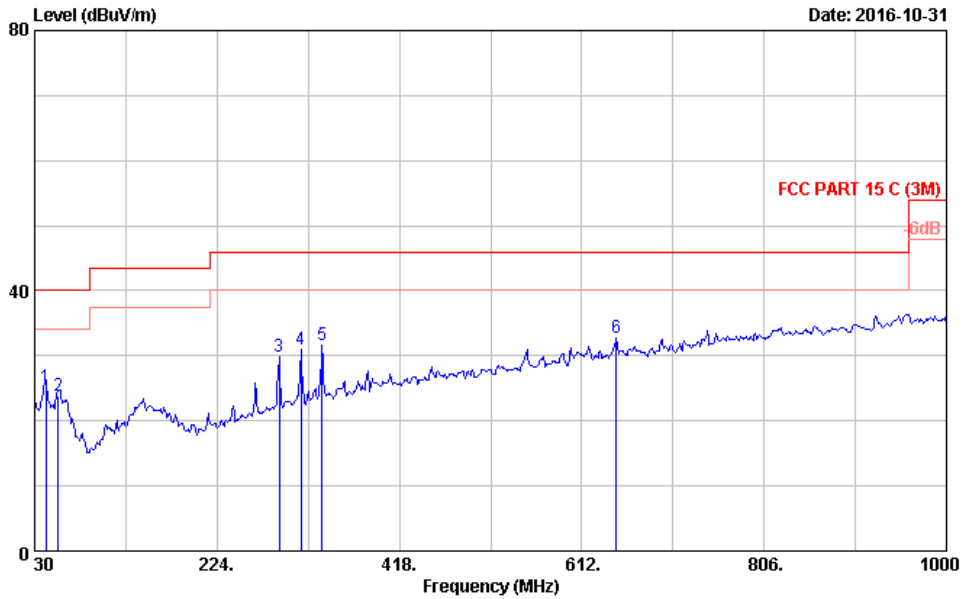

Site no. : 3m Chamber Data no. : 31  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	4.25	25.20	40.00	14.80	QP
2	55.220	20.24	0.87	2.69	23.80	40.00	16.20	QP
3	289.960	19.59	1.89	8.44	29.92	46.00	16.08	QP
4	313.240	20.16	2.05	8.71	30.92	46.00	15.08	QP
5	335.550	20.86	2.15	8.74	31.75	46.00	14.25	QP
6	648.860	26.42	3.32	3.07	32.81	46.00	13.19	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 32

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

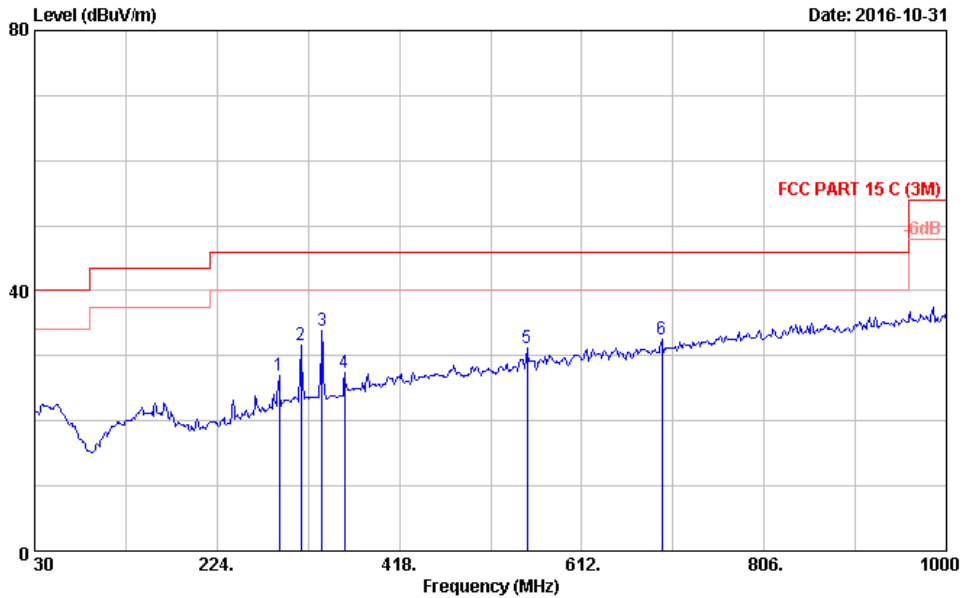

Site no. : 3m Chamber Data no. : 32  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	289.960	19.59	1.89	5.53	27.01	46.00	18.99	QP
2	313.240	20.16	2.05	9.43	31.64	46.00	14.36	QP
3	335.550	20.86	2.15	10.92	33.93	46.00	12.07	QP
4	359.800	21.09	2.26	4.14	27.49	46.00	18.51	QP
5	553.800	24.86	2.95	3.47	31.28	46.00	14.72	QP
6	697.360	26.96	3.52	2.10	32.58	46.00	13.42	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 33

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

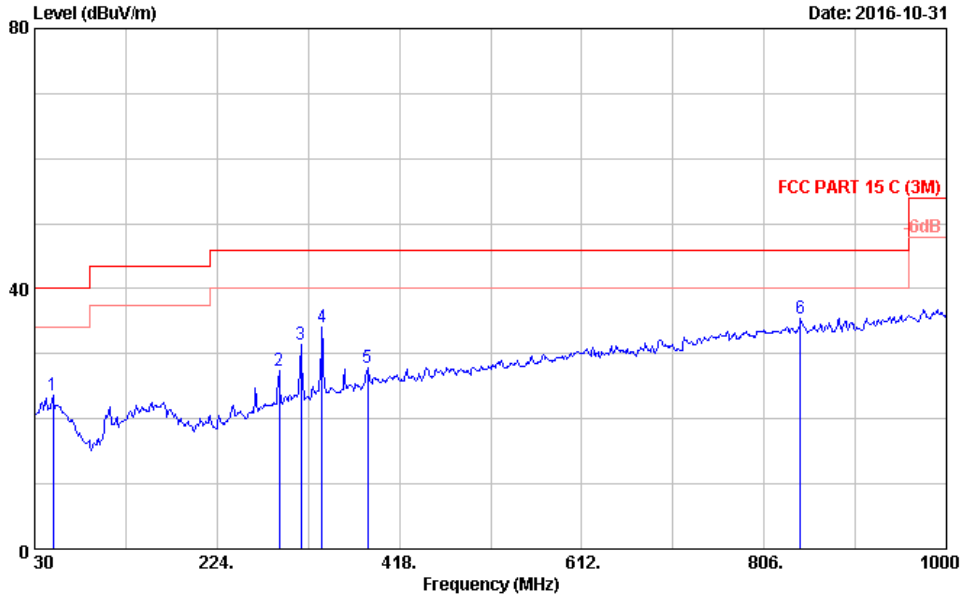

Site no. : 3m Chamber Data no. : 33  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	49.400	20.52	0.80	2.37	23.69	40.00	16.31	QP
2	289.960	19.59	1.89	5.89	27.37	46.00	18.63	QP
3	313.240	20.16	2.05	9.12	31.33	46.00	14.67	QP
4	335.550	20.86	2.15	11.06	34.07	46.00	11.93	QP
5	384.050	21.84	2.37	3.75	27.96	46.00	18.04	QP
6	844.800	28.62	4.15	2.62	35.39	46.00	10.61	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 34

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

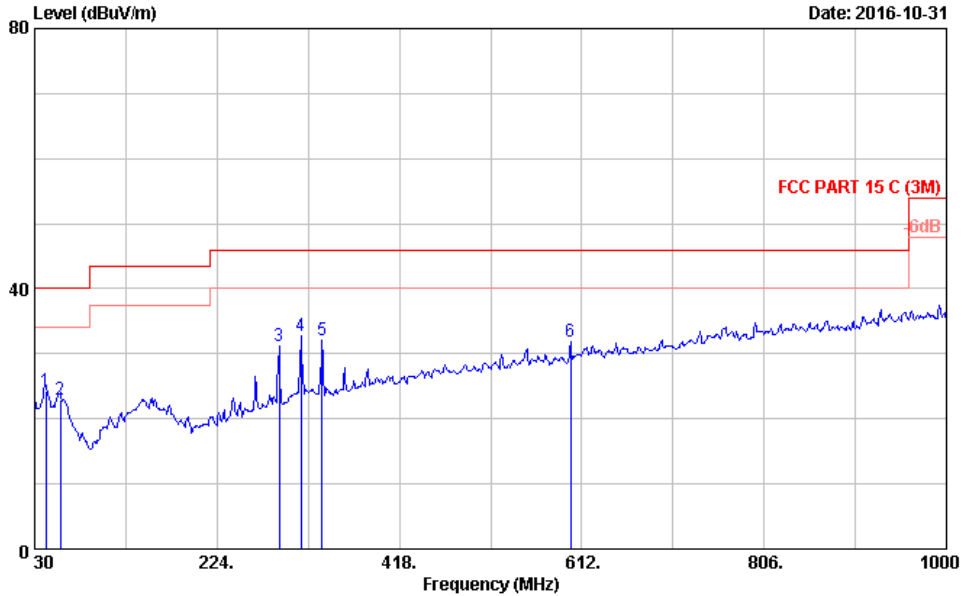

Site no. : 3m Chamber Data no. : 34  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	3.34	24.29	40.00	15.71	QP
2	57.160	20.03	0.89	2.05	22.97	40.00	17.03	QP
3	289.960	19.59	1.89	9.78	31.26	46.00	14.74	QP
4	313.240	20.16	2.05	10.64	32.85	46.00	13.15	QP
5	335.550	20.86	2.15	9.07	32.08	46.00	13.92	QP
6	600.360	25.28	3.12	3.50	31.90	46.00	14.10	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 35

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

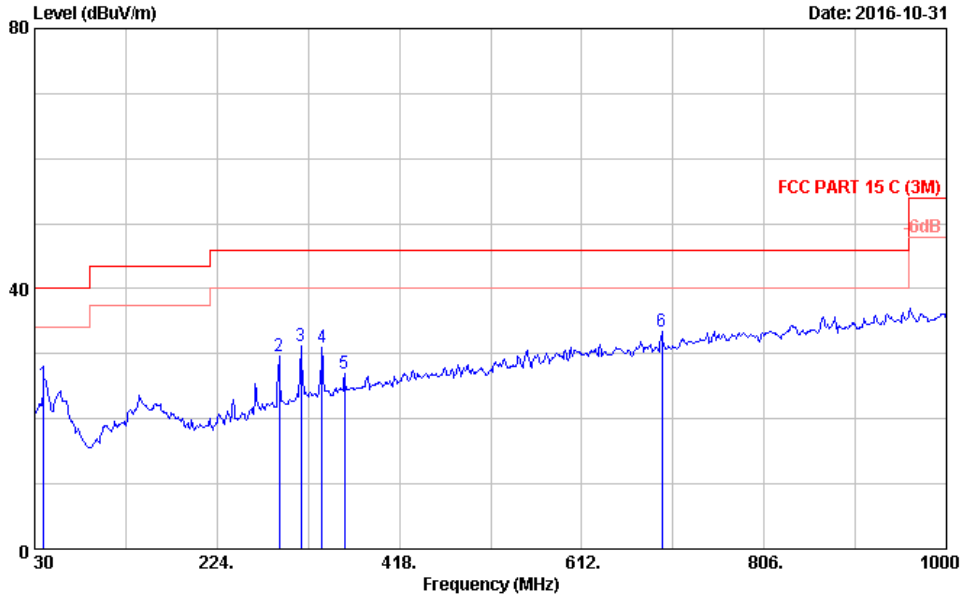

Site no. : 3m Chamber Data no. : 35  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	39.700	20.03	0.70	4.60	25.33	40.00	14.67	QP
2	289.960	19.59	1.89	8.05	29.53	46.00	16.47	QP
3	313.240	20.16	2.05	8.97	31.18	46.00	14.82	QP
4	335.550	20.86	2.15	7.99	31.00	46.00	15.00	QP
5	359.800	21.09	2.26	3.50	26.85	46.00	19.15	QP
6	697.360	26.96	3.52	2.96	33.44	46.00	12.56	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 36

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

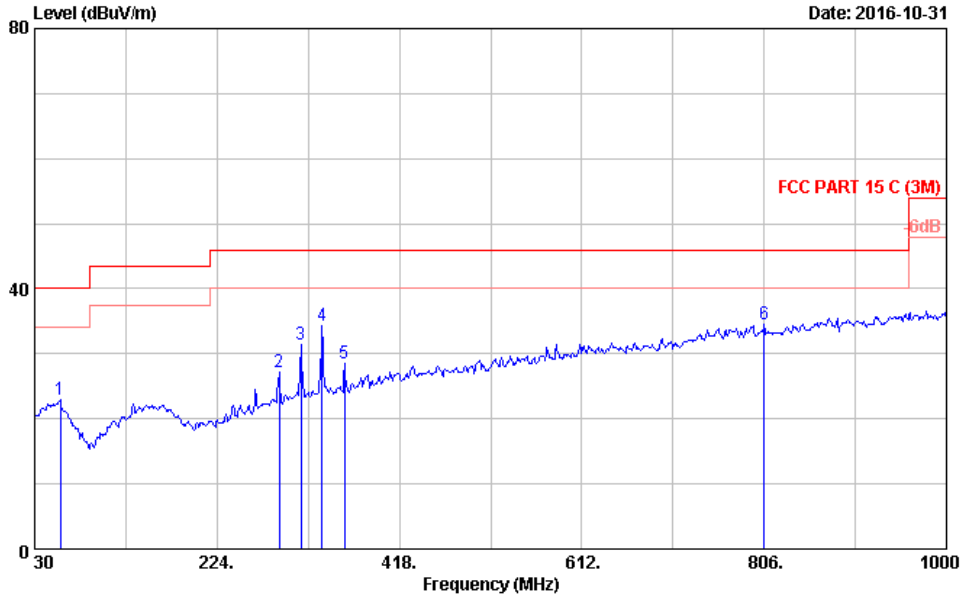

Site no. : 3m Chamber Data no. : 36  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT20 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	57.160	20.03	0.89	2.07	22.99	40.00	17.01	QP
2	289.960	19.59	1.89	5.61	27.09	46.00	18.91	QP
3	313.240	20.16	2.05	9.14	31.35	46.00	14.65	QP
4	335.550	20.86	2.15	11.33	34.34	46.00	11.66	QP
5	359.800	21.09	2.26	5.10	28.45	46.00	17.55	QP
6	806.000	28.35	4.01	2.12	34.48	46.00	11.52	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.

1GHz - 18GHz



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

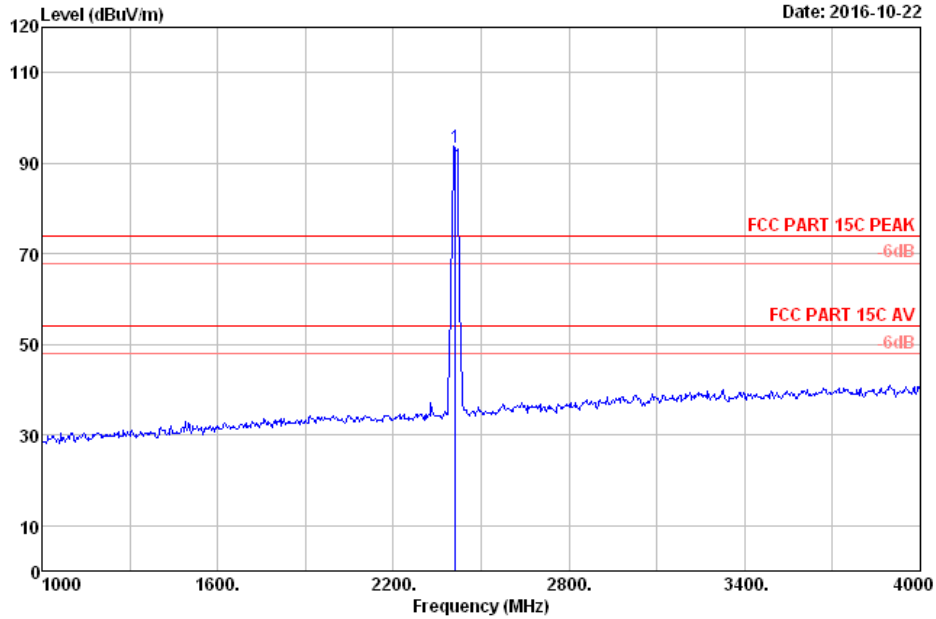

Site no. : 3m Chamber Data no. : 57  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP687 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2412MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	93.22	36.39	93.34	74.00	-19.34	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

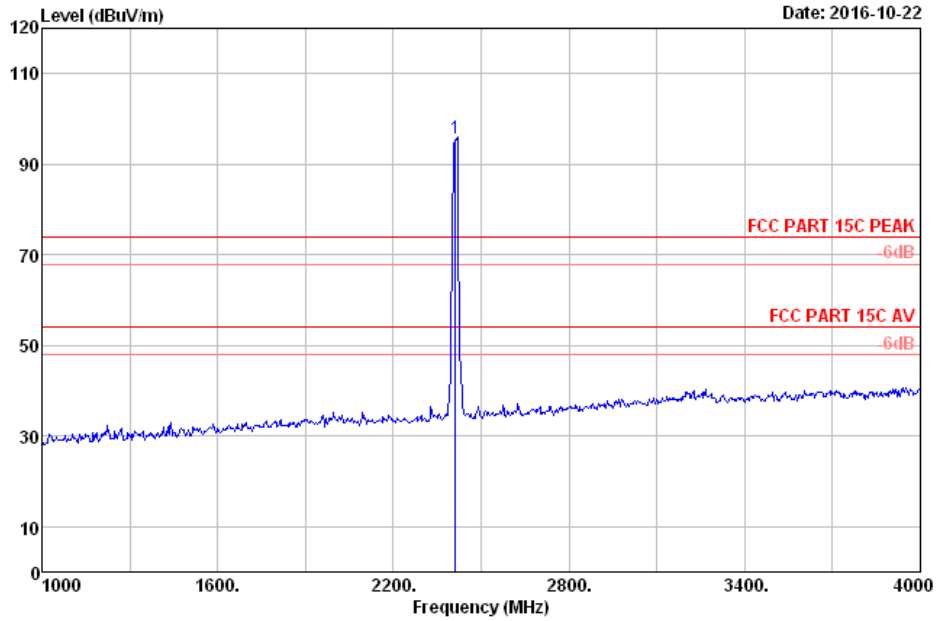


Site no. : 3m Chamber Data no. : 58  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	28.16	8.35	95.64	36.39	95.76	74.00	-21.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

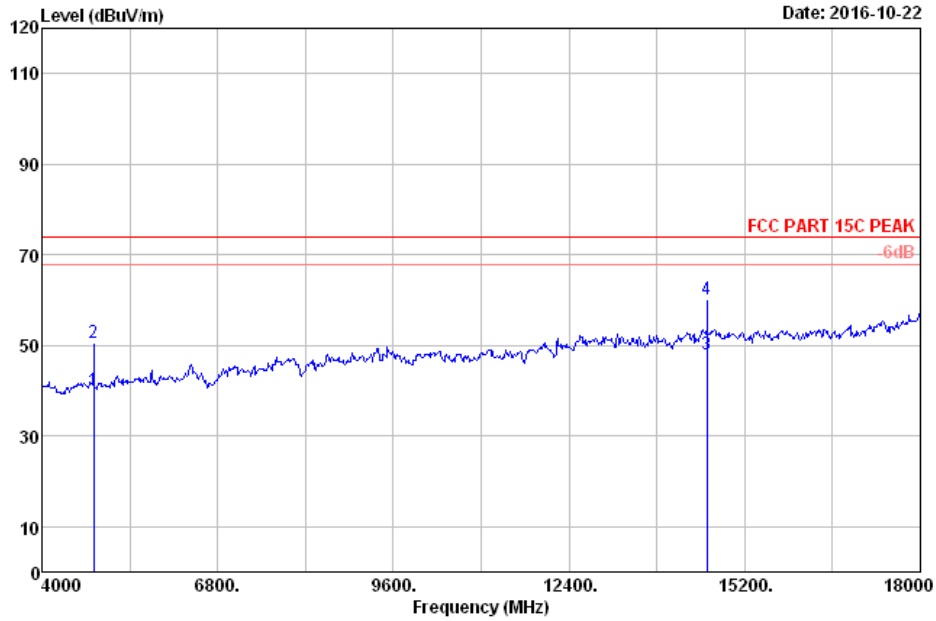


Site no. : 3m Chamber Data no. : 59  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	31.24	35.68	40.08	54.00	13.92	Average
2	4824.00	32.75	11.77	41.57	35.68	50.41	74.00	23.59	Peak
3	14598.00	39.80	14.60	28.15	34.56	47.99	54.00	6.01	Average
4	14598.00	39.80	14.60	40.39	34.56	60.23	74.00	13.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

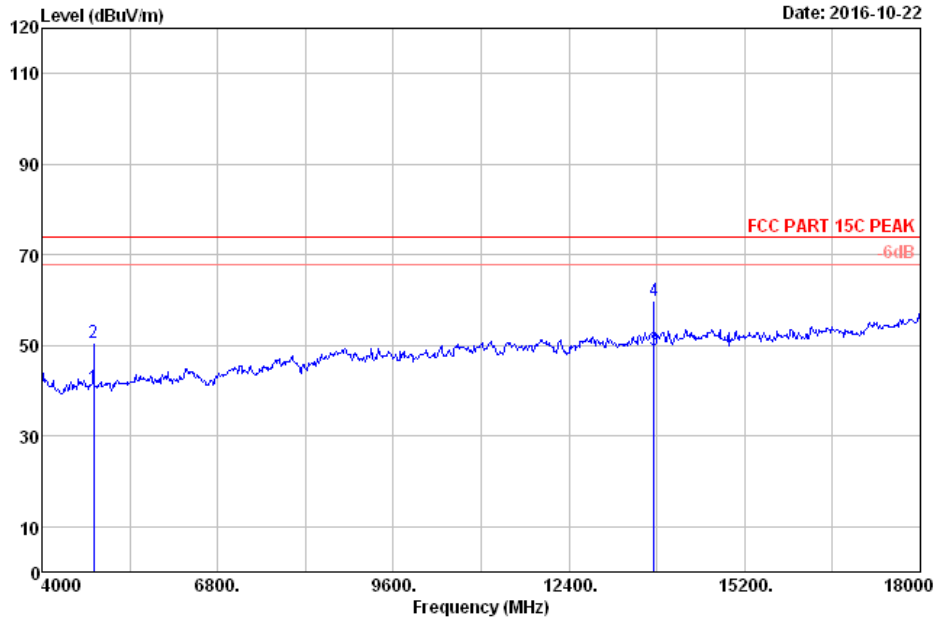


Site no. : 3m Chamber Data no. : 60  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4824.00	32.75	11.77	31.87	35.68	40.71	54.00	13.29	Average
2	4824.00	32.75	11.77	41.68	35.68	50.52	74.00	23.48	Peak
3	13758.00	40.11	14.02	28.76	34.03	48.86	54.00	5.14	Average
4	13758.00	40.11	14.02	39.90	34.03	60.00	74.00	14.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

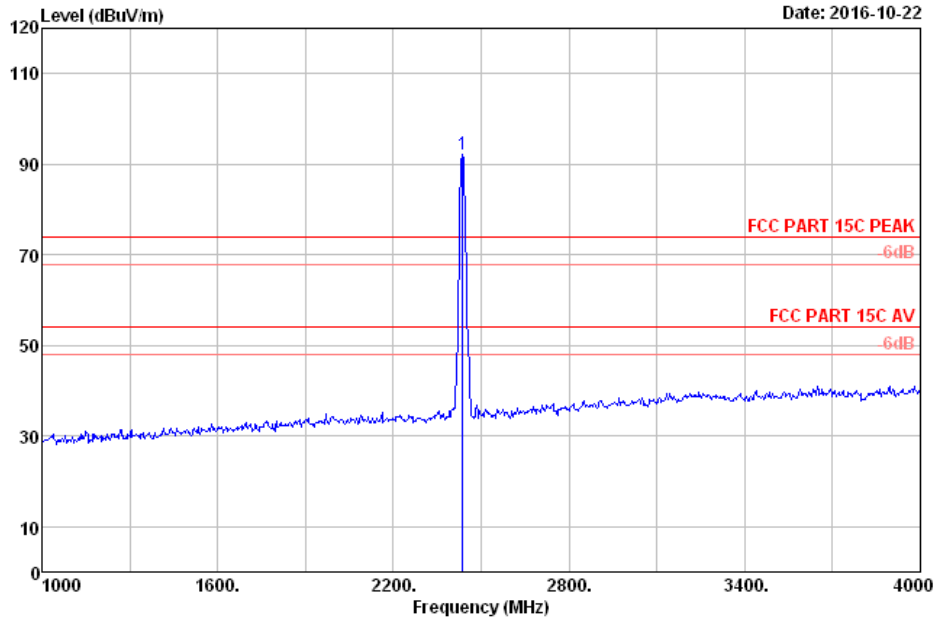

Date: 2016-10-22


Site no. : 3m Chamber Data no. : 61  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	91.87	36.38	92.07	74.00	-18.07	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

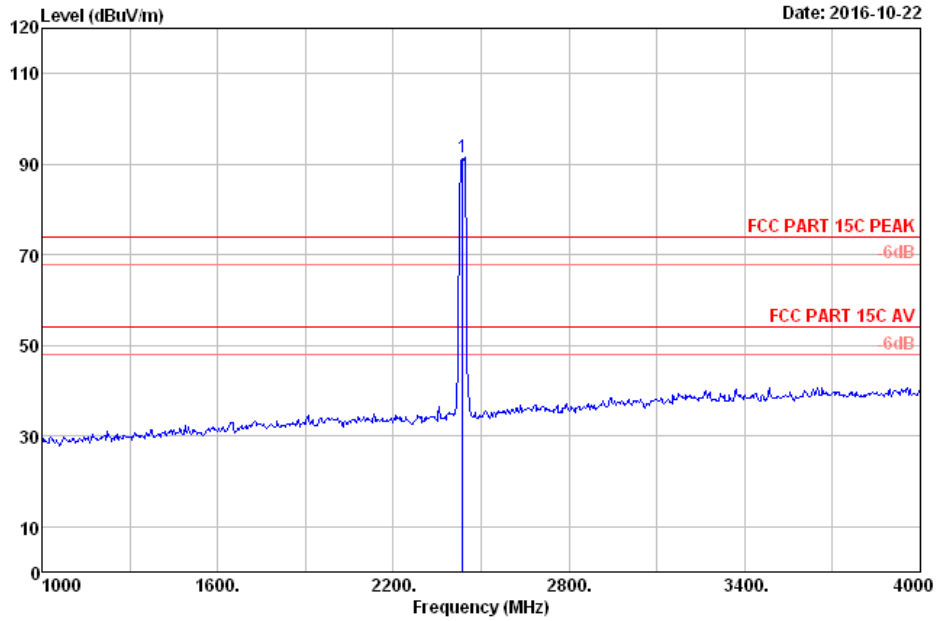


Site no. : 3m Chamber Data no. : 62  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	91.27	36.38	91.47	74.00	-17.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

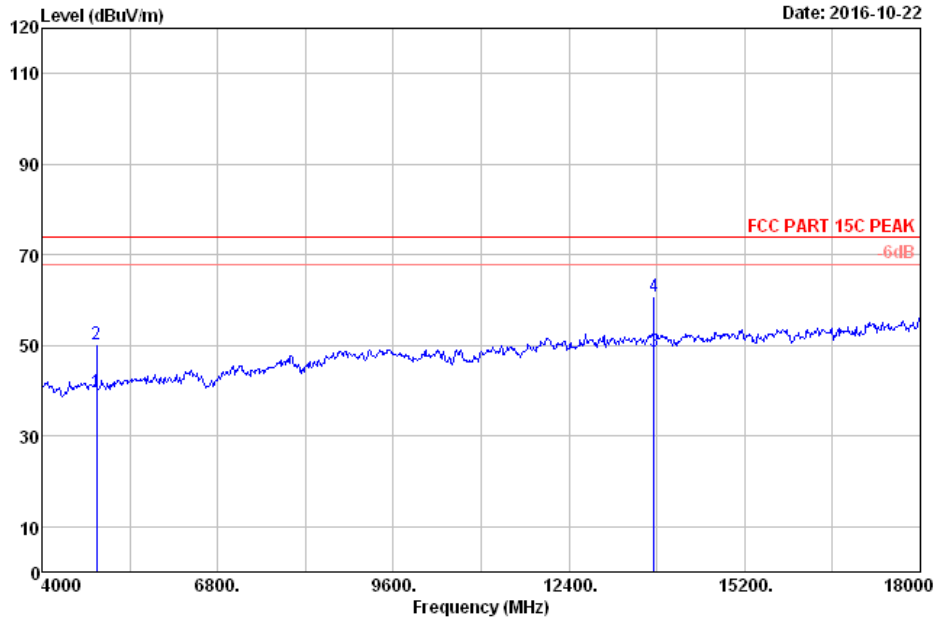


Site no. : 3m Chamber Data no. : 63  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.06	35.69	39.82	54.00	14.18	Average
2	4874.00	32.65	11.80	41.44	35.69	50.20	74.00	23.80	Peak
3	13758.00	40.11	14.02	28.68	34.03	48.78	54.00	5.22	Average
4	13758.00	40.11	14.02	40.68	34.03	60.78	74.00	13.22	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

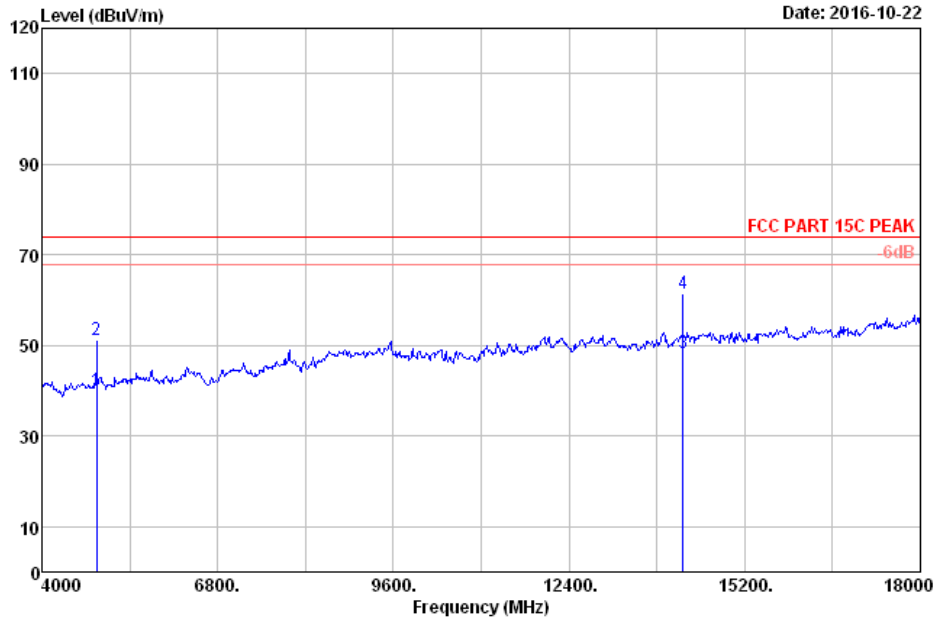


Site no. : 3m Chamber Data no. : 64  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.18	35.69	39.94	54.00	14.06	Average
2	4874.00	32.65	11.80	42.59	35.69	51.35	74.00	22.65	Peak
3	14220.00	40.28	14.30	27.95	34.15	48.38	54.00	5.62	Average
4	14220.00	40.28	14.30	40.86	34.15	61.29	74.00	12.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

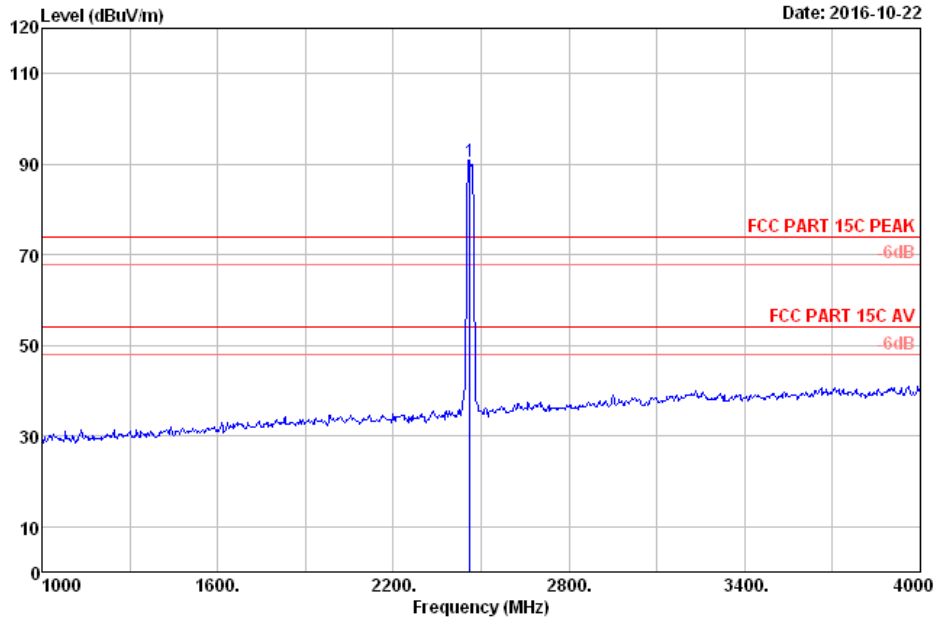

Date: 2016-10-22

Site no. : 3m Chamber Data no. : 65  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	90.37	36.38	90.63	74.00	-16.63	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

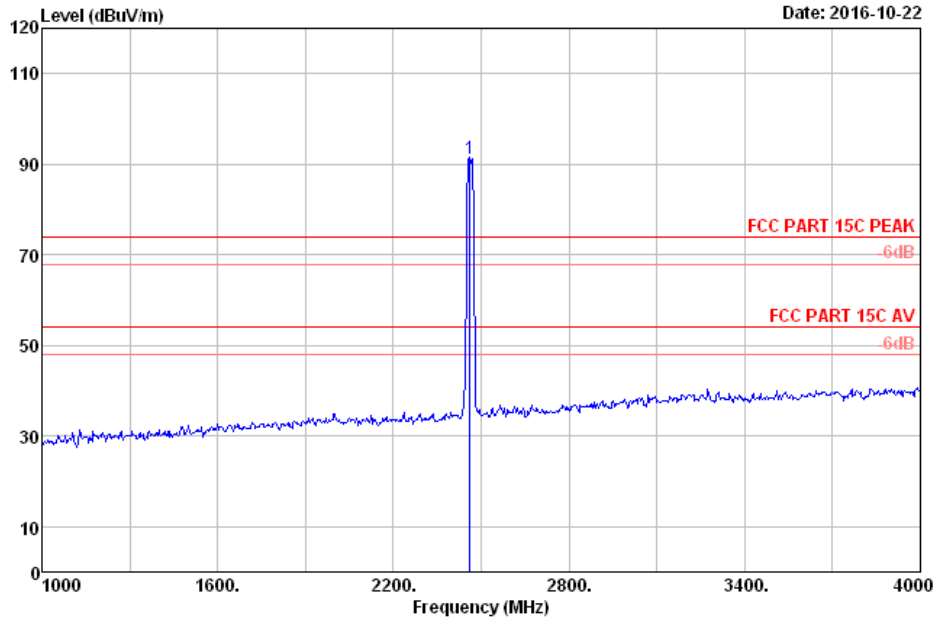


Site no. : 3m Chamber Data no. : 66  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	28.24	8.40	90.85	36.38	91.11	74.00	-17.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

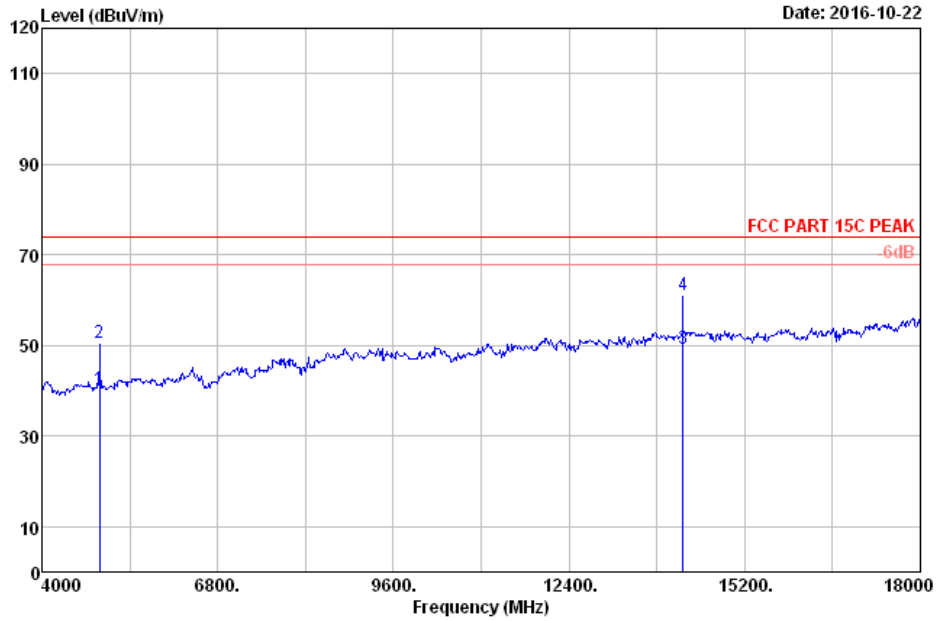


Site no. : 3m Chamber Data no. : 67  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	31.52	35.70	40.20	54.00	13.80	Average
2	4924.00	32.55	11.83	41.82	35.70	50.50	74.00	23.50	Peak
3	14220.00	40.28	14.30	28.76	34.15	49.19	54.00	4.81	Average
4	14220.00	40.28	14.30	40.85	34.15	61.28	74.00	12.72	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

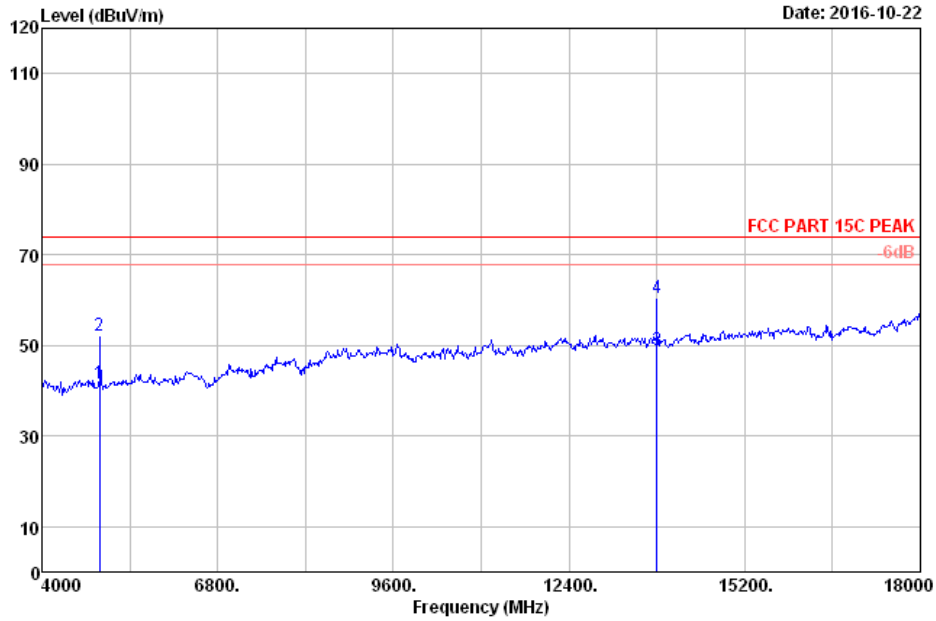

Date: 2016-10-22

Site no. : 3m Chamber Data no. : 68  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4924.00	32.55	11.83	32.89	35.70	41.57	54.00	12.43	Average
2	4924.00	32.55	11.83	43.58	35.70	52.26	74.00	21.74	Peak
3	13800.00	40.18	14.04	28.86	34.00	49.08	54.00	4.92	Average
4	13800.00	40.18	14.04	40.37	34.00	60.59	74.00	13.41	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

Wi-Fi 802.11 n(HT40) mode, MCS7 Mbps  
30MHz - 1GHz



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 37 File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42) Date: 2016-10-31

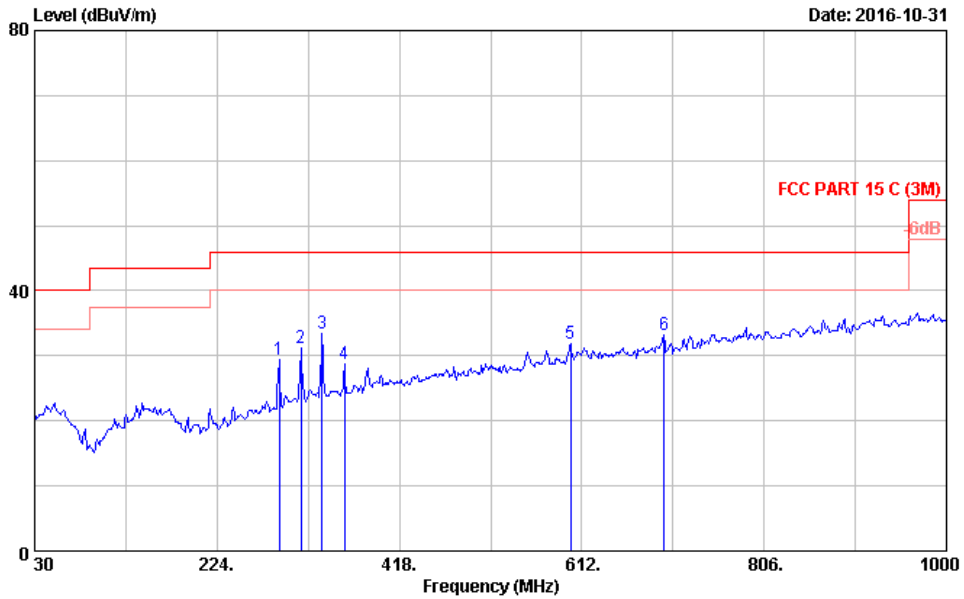

Site no. : 3m Chamber Data no. : 37  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	289.960	19.59	1.89	8.04	29.52	46.00	16.48	QP
2	313.240	20.16	2.05	9.00	31.21	46.00	14.79	QP
3	335.550	20.86	2.15	10.32	33.33	46.00	12.67	QP
4	359.800	21.09	2.26	5.36	28.71	46.00	17.29	QP
5	600.360	25.28	3.12	3.48	31.88	46.00	14.12	QP
6	699.300	27.00	3.53	2.70	33.23	46.00	12.77	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 38

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

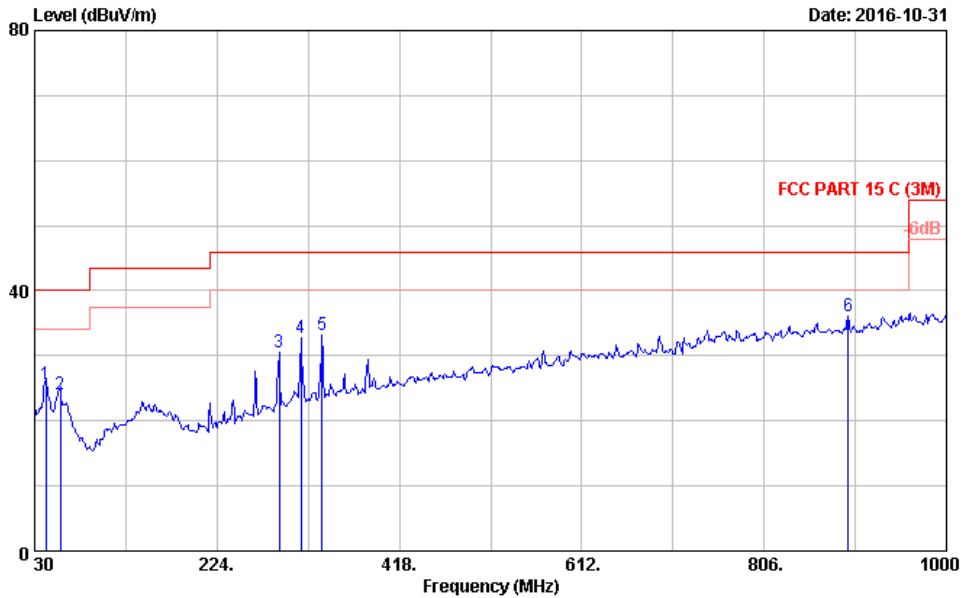

Site no. : 3m Chamber Data no. : 38  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	4.63	25.58	40.00	14.42	QP
2	57.160	20.03	0.89	3.25	24.17	40.00	15.83	QP
3	289.960	19.59	1.89	9.04	30.52	46.00	15.48	QP
4	313.240	20.16	2.05	10.53	32.74	46.00	13.26	QP
5	335.550	20.86	2.15	10.26	33.27	46.00	12.73	QP
6	895.240	29.22	4.32	2.50	36.04	46.00	9.96	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 39

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

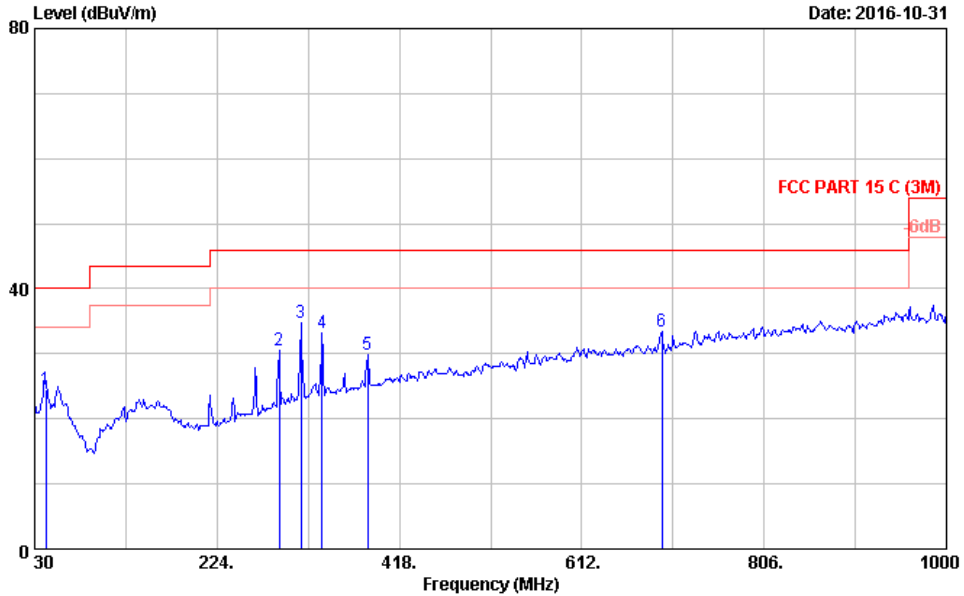

Site no. : 3m Chamber Data no. : 39  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	3.63	24.58	40.00	15.42	QP
2	289.960	19.59	1.89	8.99	30.47	46.00	15.53	QP
3	313.240	20.16	2.05	12.47	34.68	46.00	11.32	QP
4	335.550	20.86	2.15	10.29	33.30	46.00	12.70	QP
5	384.050	21.84	2.37	5.76	29.97	46.00	16.03	QP
6	697.360	26.96	3.52	3.04	33.52	46.00	12.48	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 40

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

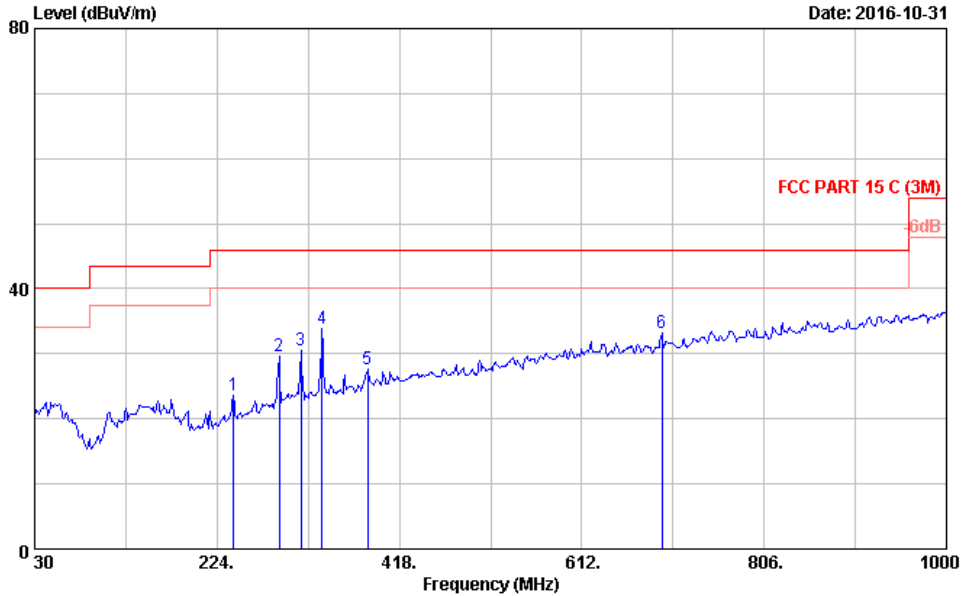

Site no. : 3m Chamber Data no. : 40  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	241.460	18.04	1.41	4.07	23.52	46.00	22.48	QP
2	289.960	19.59	1.89	8.15	29.63	46.00	16.37	QP
3	313.240	20.16	2.05	8.21	30.42	46.00	15.58	QP
4	335.550	20.86	2.15	10.86	33.87	46.00	12.13	QP
5	384.050	21.84	2.37	3.32	27.53	46.00	18.47	QP
6	697.360	26.96	3.52	2.77	33.25	46.00	12.75	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.




No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 41

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

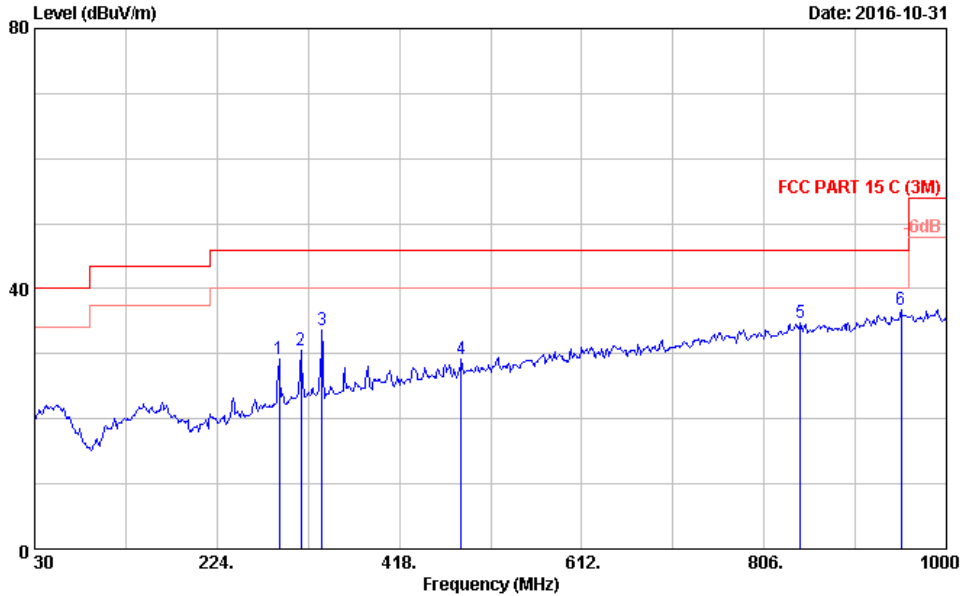

Site no. : 3m Chamber Data no. : 41  
 Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15 C (3M)  
 Env. / Ins. : 22.1°C/55% Engineer : Lynn  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11nHT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	289.960	19.59	1.89	7.70	29.18	46.00	16.82	QP
2	313.240	20.16	2.05	8.40	30.61	46.00	15.39	QP
3	335.550	20.86	2.15	10.70	33.71	46.00	12.29	QP
4	483.960	23.72	2.70	2.70	29.12	46.00	16.88	QP
5	844.800	28.62	4.15	1.92	34.69	46.00	11.31	QP
6	951.500	29.97	4.47	2.27	36.71	46.00	9.29	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
 2. The emission levels that are 20dB below the official limit are not reported.






No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

Data: 42

File: E:\2016 Test Data\TUV\20161026-rf-667&845.EM6 (42)

Date: 2016-10-31

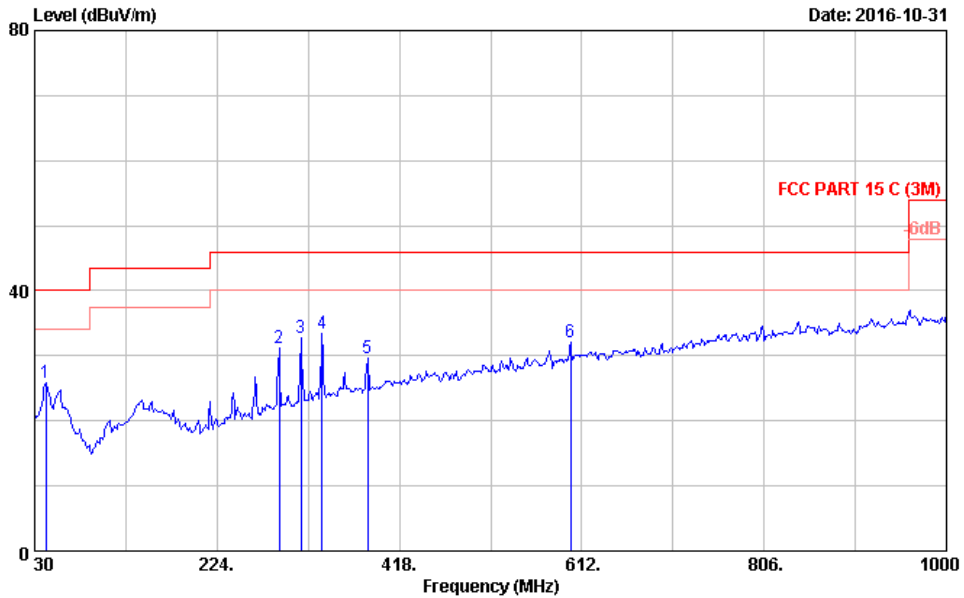

Site no. : 3m Chamber Data no. : 42  
Dis. / Ant. : 3m ANT 2016 9168 710 Ant. pol. : VERTICAL  
Limit : FCC PART 15 C (3M)  
Env. / Ins. : 22.1°C/55% Engineer : Lynn  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11nHT40 2452MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	41.640	20.23	0.72	4.84	25.79	40.00	14.21	QP
2	289.960	19.59	1.89	9.64	31.12	46.00	14.88	QP
3	313.240	20.16	2.05	10.64	32.85	46.00	13.15	QP
4	335.550	20.86	2.15	10.32	33.33	46.00	12.67	QP
5	384.050	21.84	2.37	5.52	29.73	46.00	16.27	QP
6	600.360	25.28	3.12	3.62	32.02	46.00	13.98	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.  
2. The emission levels that are 20dB below the official limit are not reported.

1GHz - 18GHz



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

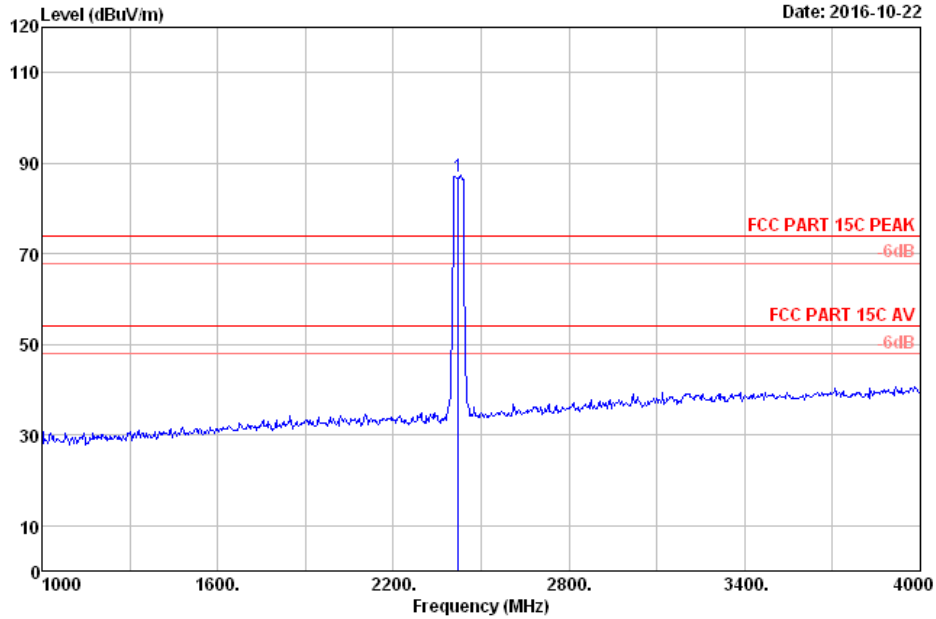


Site no. : 3m Chamber Data no. : 69  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP687 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	28.18	8.36	86.78	36.38	86.94	74.00	-12.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

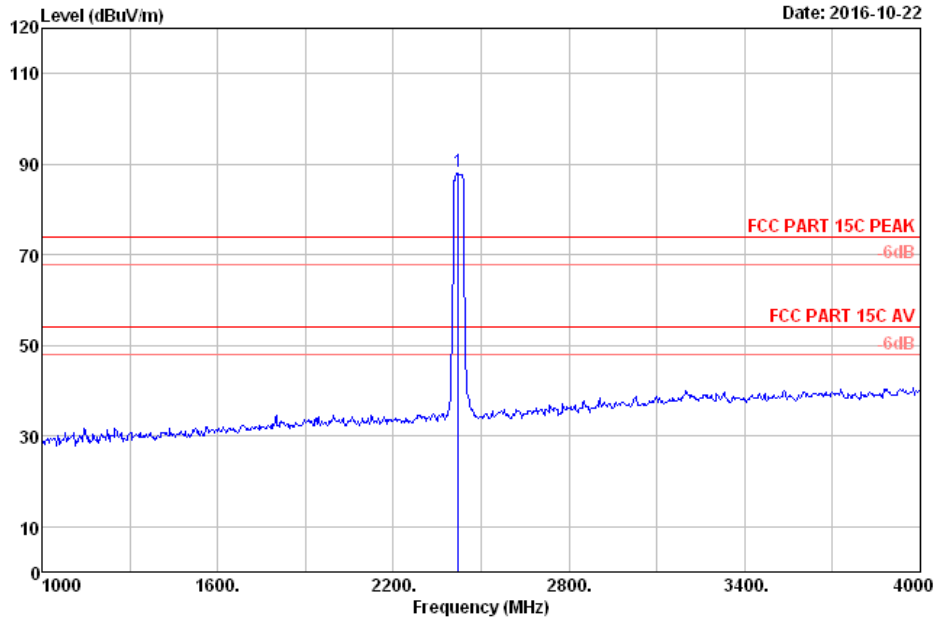


Site no. : 3m Chamber Data no. : 70  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	28.18	8.36	88.05	36.38	88.21	74.00	-14.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

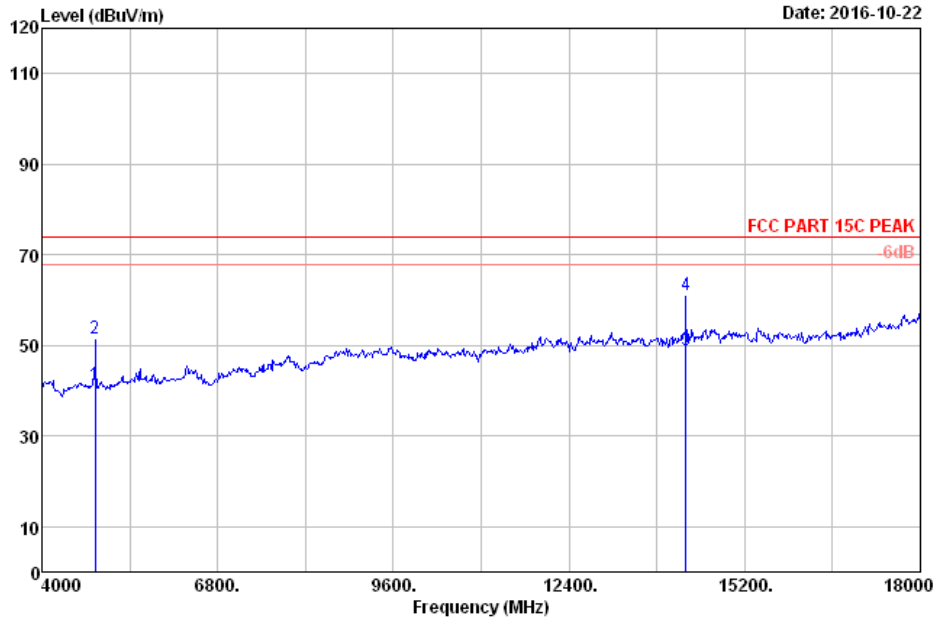


Site no. : 3m Chamber Data no. : 71  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	32.71	11.78	32.48	35.68	41.29	54.00	12.71	Average
2	4844.00	32.71	11.78	42.60	35.68	51.41	74.00	22.59	Peak
3	14262.00	40.24	14.33	28.75	34.21	49.11	54.00	4.89	Average
4	14262.00	40.24	14.33	40.88	34.21	61.24	74.00	12.76	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

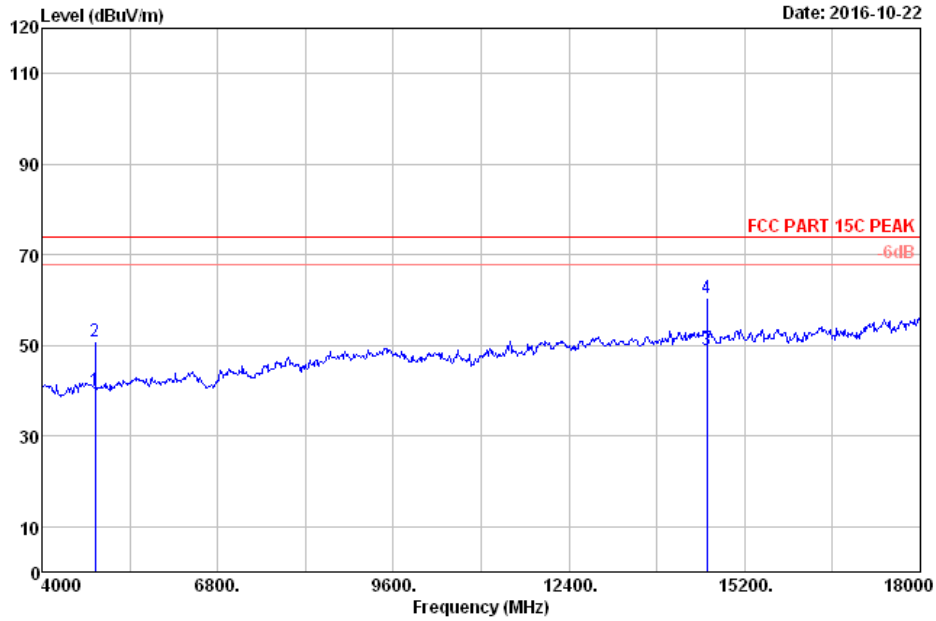


Site no. : 3m Chamber Data no. : 72  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4844.00	32.71	11.78	31.27	35.68	40.08	54.00	13.92	Average
2	4844.00	32.71	11.78	41.97	35.68	50.78	74.00	23.22	Peak
3	14598.00	39.80	14.60	28.99	34.56	48.83	54.00	5.17	Average
4	14598.00	39.80	14.60	40.78	34.56	60.62	74.00	13.38	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

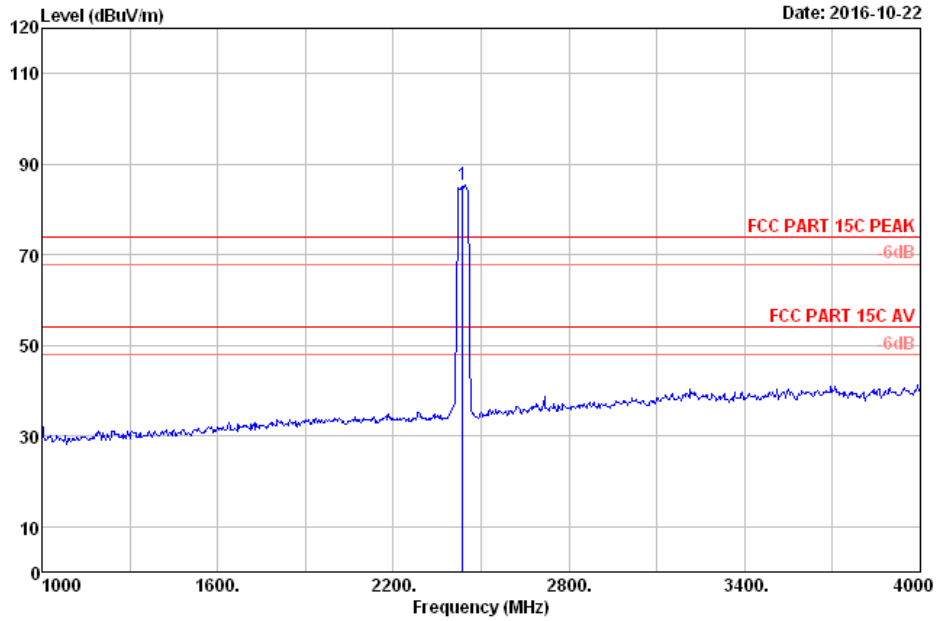


Site no. : 3m Chamber Data no. : 73  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	85.36	36.38	85.56	74.00	-11.56	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

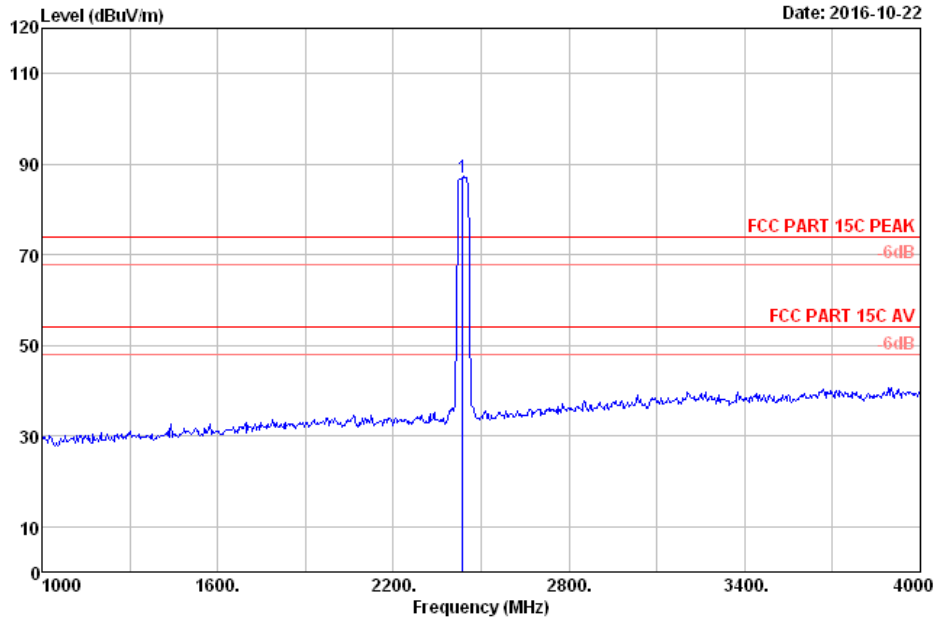


Site no. : 3m Chamber Data no. : 74  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	28.20	8.38	86.74	36.38	86.94	74.00	-12.94	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

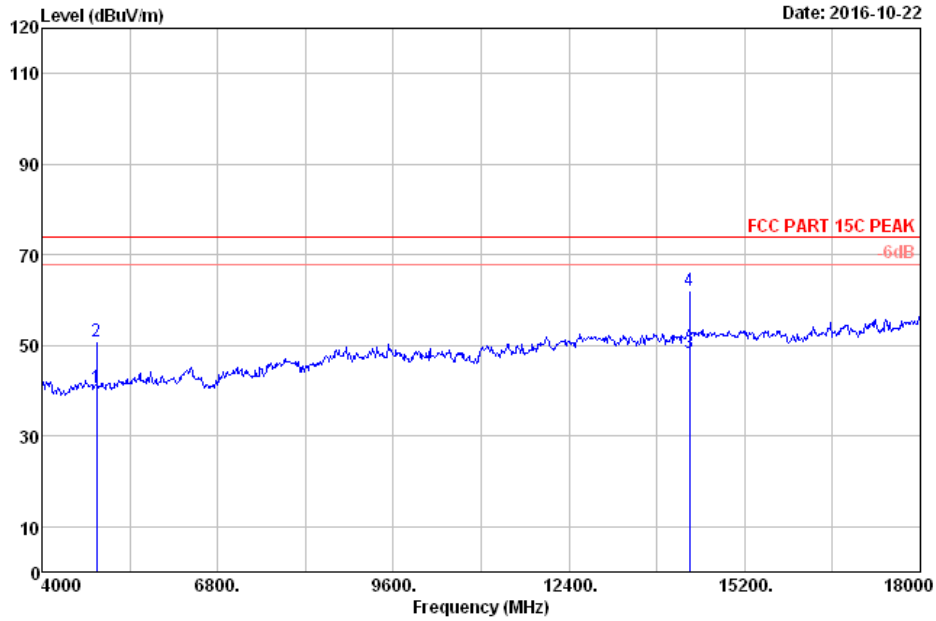

Site no. : 3m Chamber Data no. : 75  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2437MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.78	35.69	40.54	54.00	13.46	Average
2	4874.00	32.65	11.80	42.04	35.69	50.80	74.00	23.20	Peak
3	14318.00	40.18	14.38	28.17	34.29	48.44	54.00	5.56	Average
4	14318.00	40.18	14.38	41.75	34.29	62.02	74.00	11.98	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

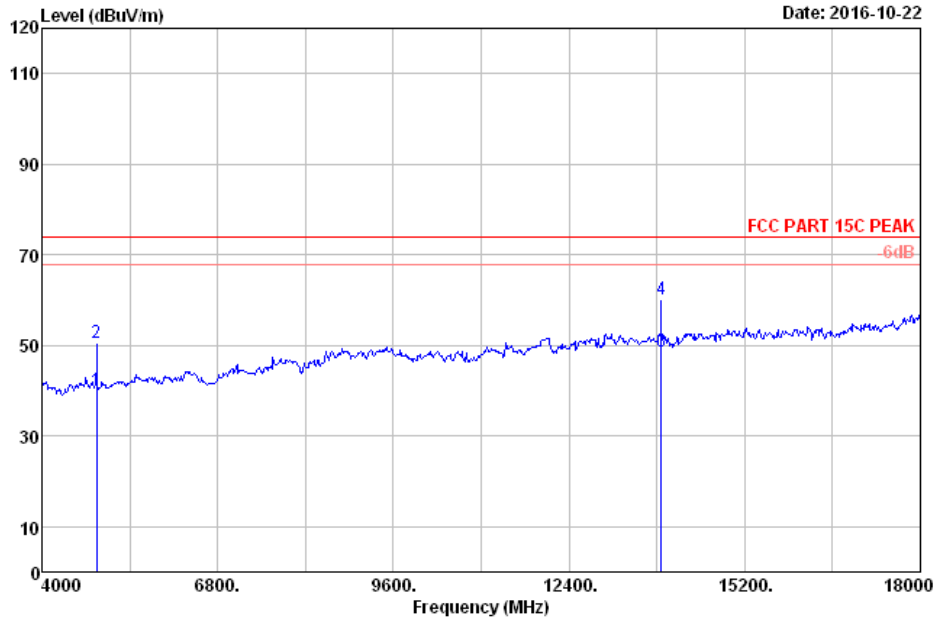


Site no. : 3m Chamber Data no. : 76  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2437MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4874.00	32.65	11.80	31.27	35.69	40.03	54.00	13.97	Average
2	4874.00	32.65	11.80	41.73	35.69	50.49	74.00	23.51	Peak
3	13870.00	40.29	14.07	28.11	33.95	48.52	54.00	5.48	Average
4	13870.00	40.29	14.07	39.86	33.95	60.27	74.00	13.73	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

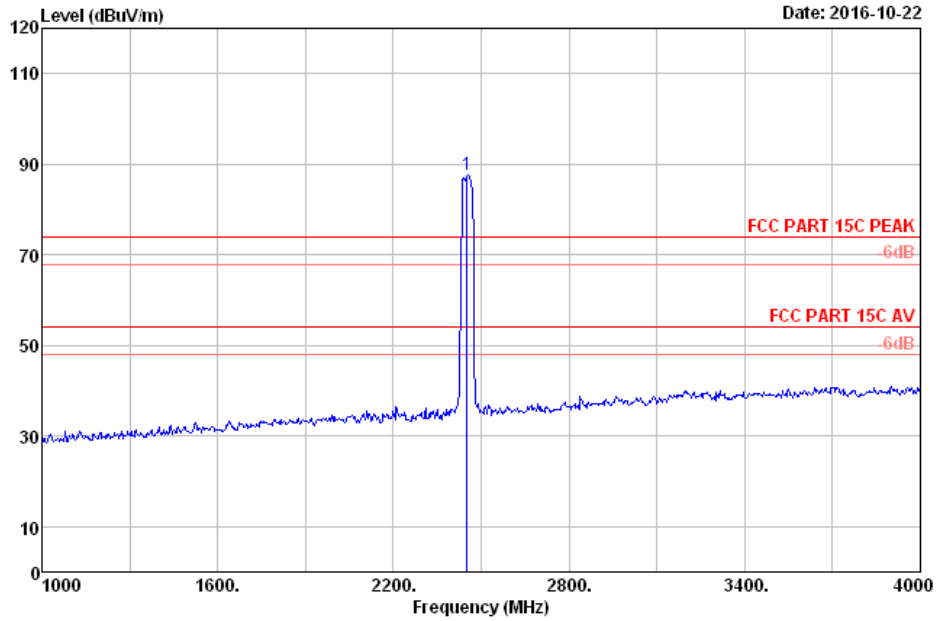


Site no. : 3m Chamber Data no. : 77  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	28.22	8.39	87.59	36.38	87.82	74.00	-13.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

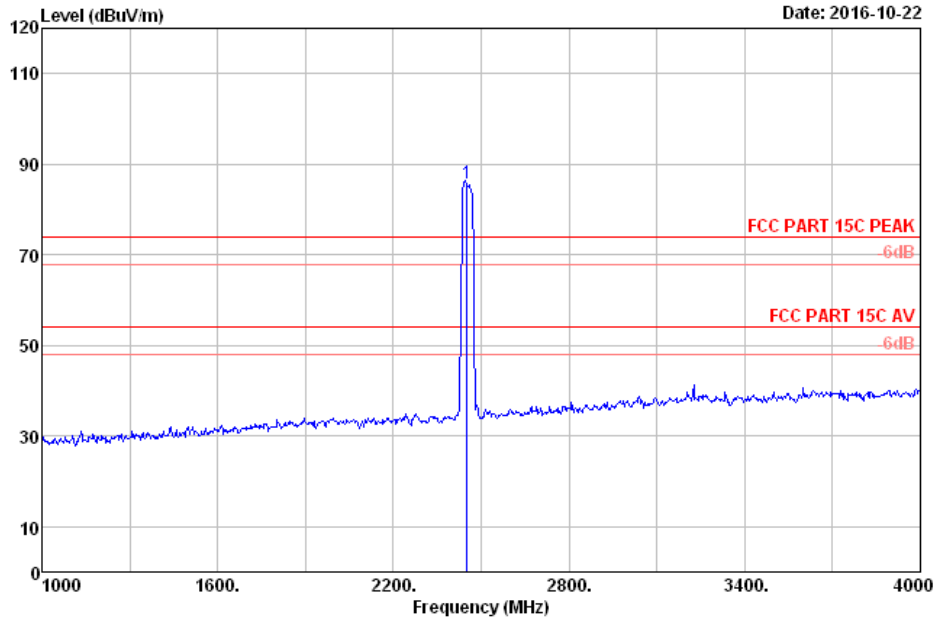


Site no. : 3m Chamber Data no. : 78  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	28.22	8.39	85.68	36.38	85.91	74.00	-11.91	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

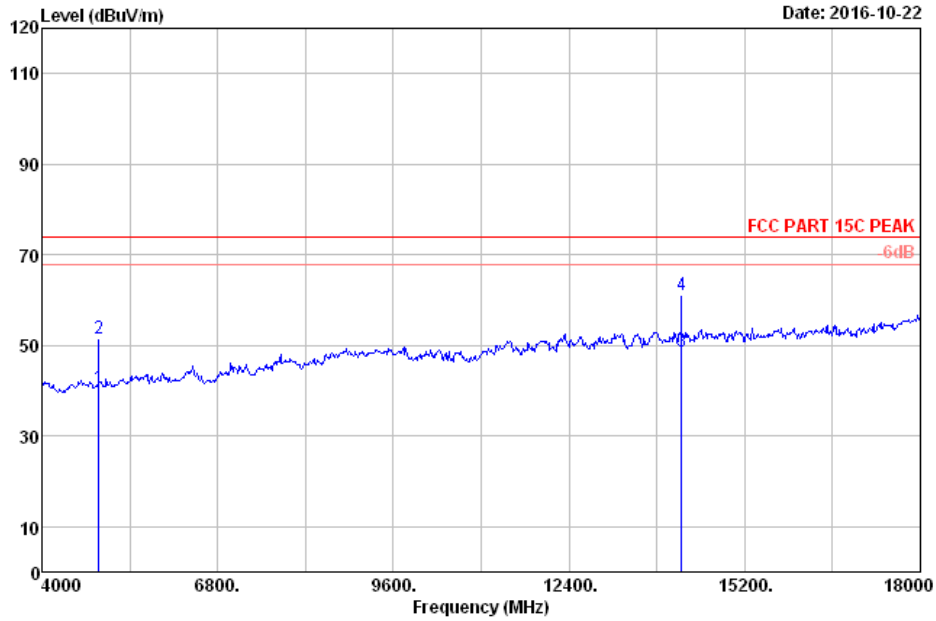


Site no. : 3m Chamber Data no. : 79  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	32.59	11.82	31.83	35.70	40.54	54.00	13.46	Average
2	4904.00	32.59	11.82	42.73	35.70	51.44	74.00	22.56	Peak
3	14192.00	40.31	14.28	28.05	34.12	48.52	54.00	5.48	Average
4	14192.00	40.31	14.28	40.63	34.12	61.10	74.00	12.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

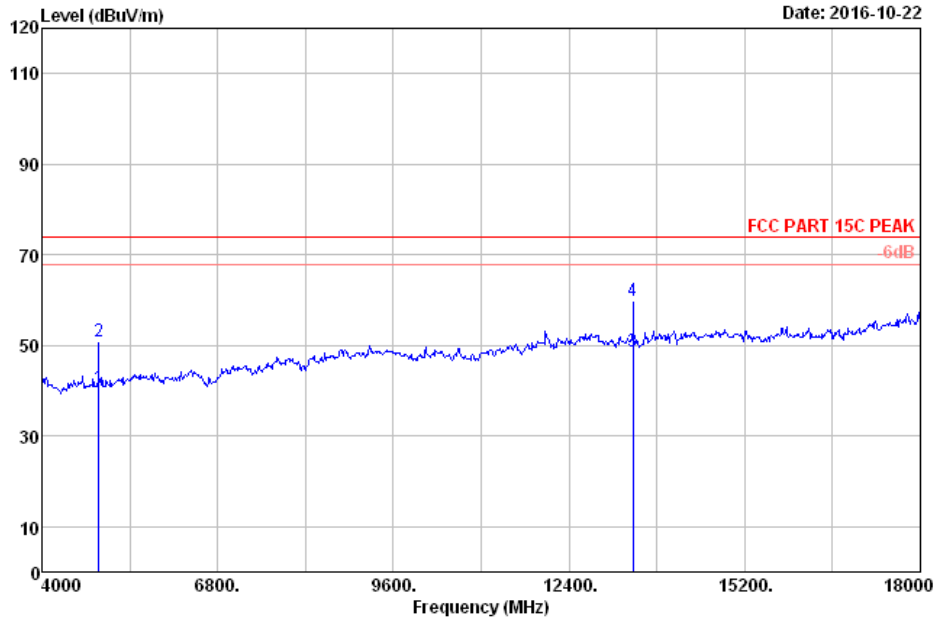

Site no. : 3m Chamber Data no. : 80  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2452MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	4904.00	32.59	11.82	31.95	35.70	40.66	54.00	13.34	Average
2	4904.00	32.59	11.82	42.12	35.70	50.83	74.00	23.17	Peak
3	13422.00	39.64	13.91	29.04	34.04	48.55	54.00	5.45	Average
4	13422.00	39.64	13.91	40.41	34.04	59.92	74.00	14.08	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.

**Appendix C.2: Test Results of Radiated Emissions in Restricted Bands**  
**General 2.4GHz**  
**Low channel**



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

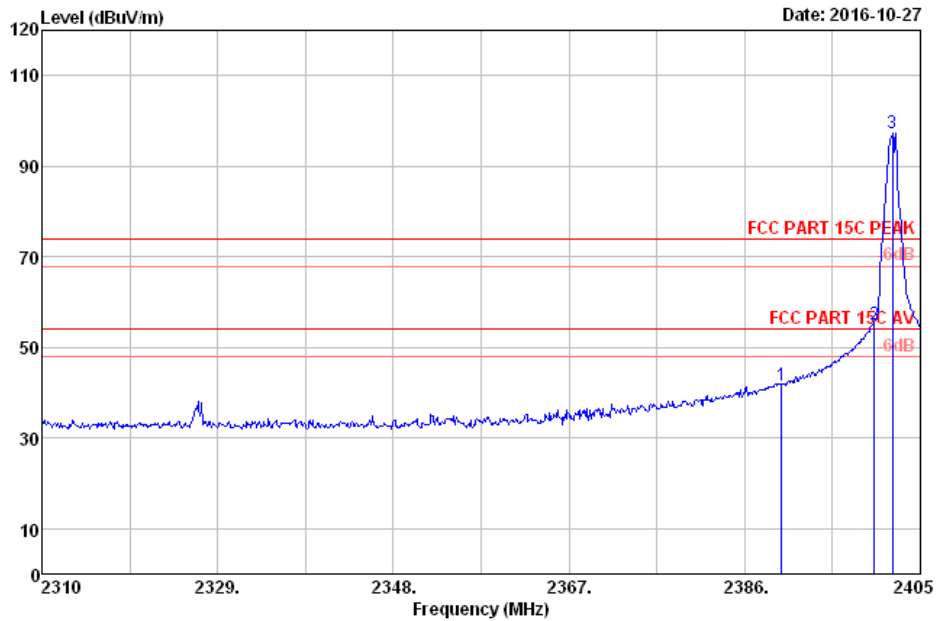


Site no. : 3m Chamber Data no. : 13  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	41.48	36.39	41.54	74.00	32.46	Peak
2	2400.00	28.14	8.34	54.92	36.39	55.01	74.00	18.99	Peak
3	2401.96	28.14	8.34	97.11	36.39	97.20	74.00	-23.20	Peak

- Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

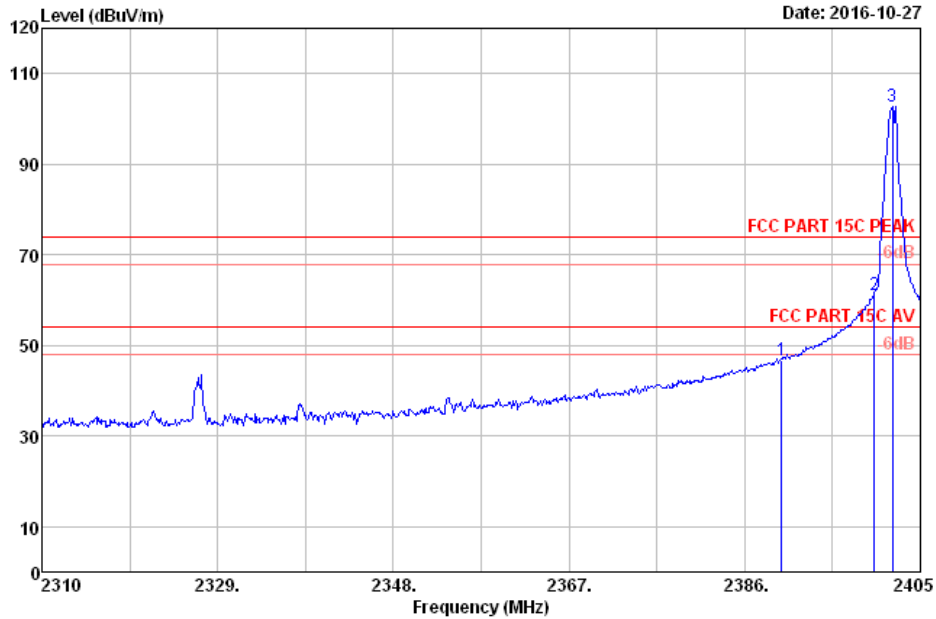

Site no. : 3m Chamber Data no. : 14  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2402MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	46.81	36.39	46.87	74.00	27.13	Peak
2	2400.00	28.14	8.34	60.95	36.39	61.04	74.00	12.96	Peak
3	2401.96	28.14	8.34	102.58	36.39	102.67	74.00	-28.67	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

High channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

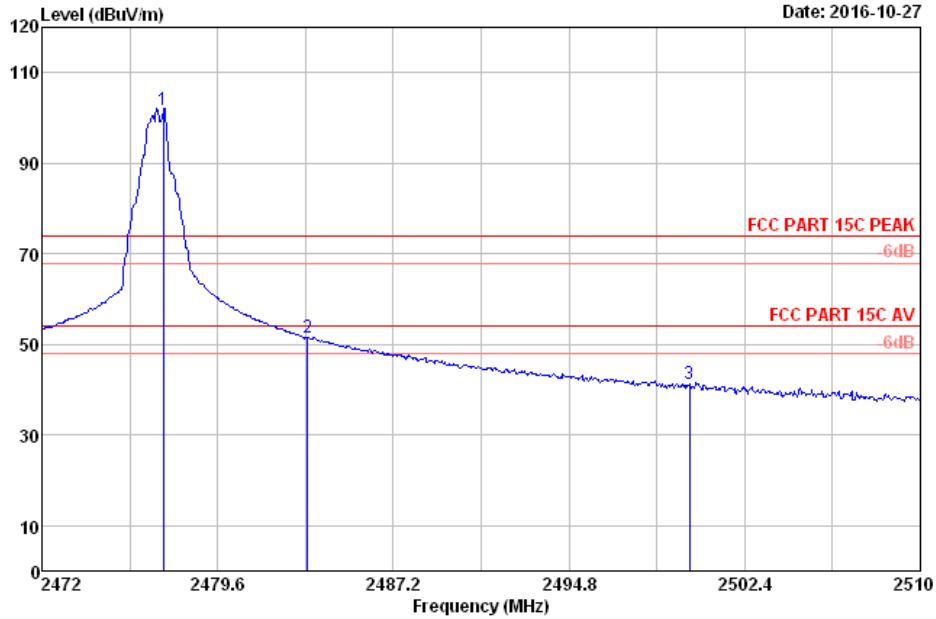

Site no. : 3m Chamber Data no. : 15  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP687 BU  
 Power rating : DC 5W From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2477MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.24	28.26	8.42	101.53	36.38	101.83	74.00	-27.83	Peak
2	2483.50	28.27	8.42	51.15	36.38	51.46	74.00	22.54	Peak
3	2500.00	28.30	8.44	40.78	36.38	41.14	74.00	32.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

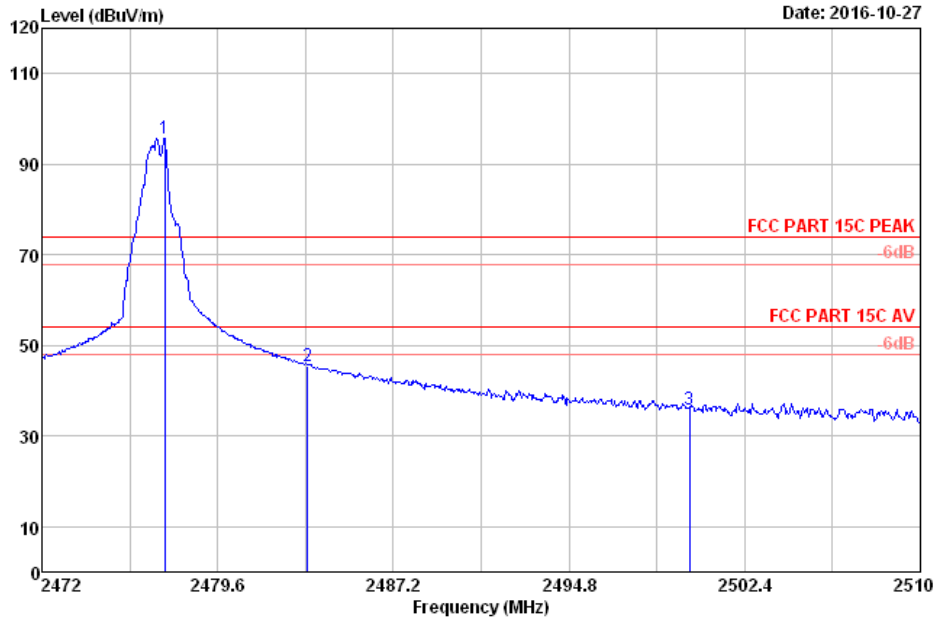

Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : GFSK 2477MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2477.32	28.26	8.42	95.24	36.38	95.54	74.00	-21.54	Peak
2	2483.50	28.27	8.42	45.29	36.38	45.60	74.00	28.40	Peak
3	2500.00	28.30	8.44	35.51	36.38	35.87	74.00	38.13	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

Wi-Fi 802.11 b mode, 11 Mbps  
Low channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

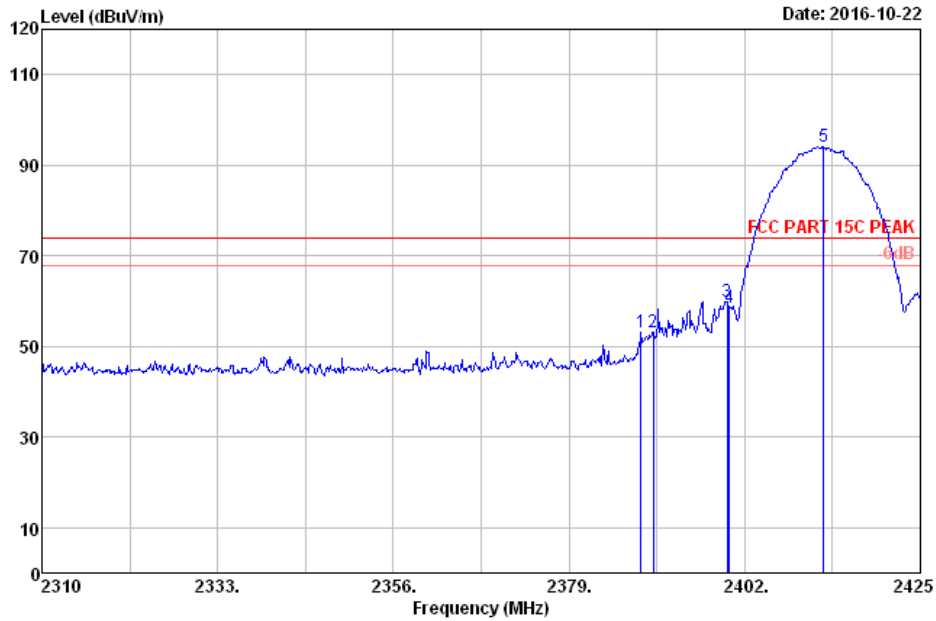


Site no. : 3m Chamber Data no. : 1  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.43	28.12	8.33	53.06	36.39	53.12	74.00	20.88	Peak
2	2390.00	28.12	8.33	52.97	36.39	53.03	74.00	20.97	Peak
3	2399.70	28.14	8.34	59.73	36.39	59.82	74.00	14.18	Peak
4	2400.00	28.14	8.34	58.45	36.39	58.54	74.00	15.46	Peak
5	2412.35	28.16	8.35	93.87	36.39	93.99	74.00	-19.99	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

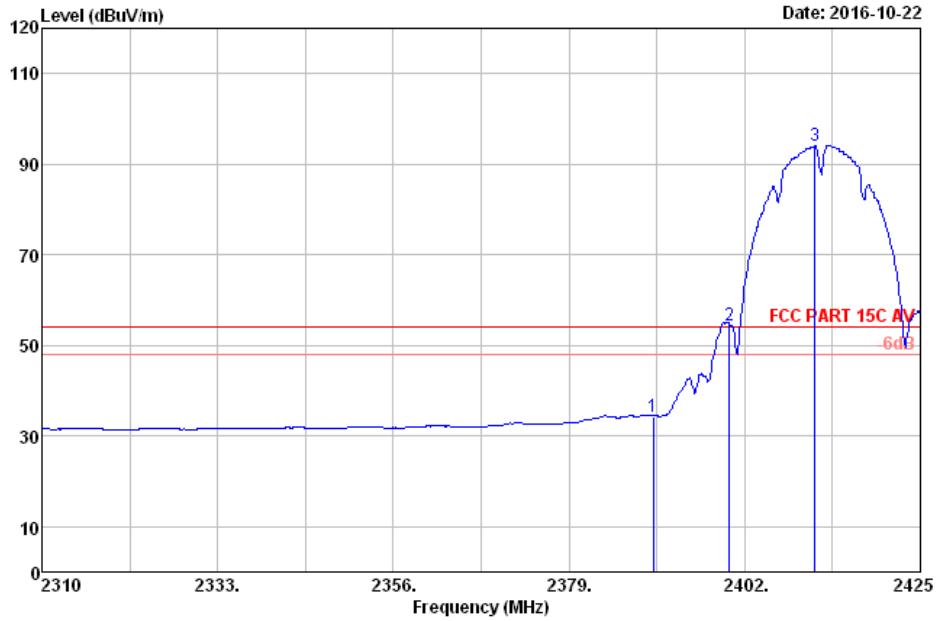


Site no. : 3m Chamber Data no. : 2  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	34.32	36.39	34.38	54.00	19.62	Average
2	2400.00	28.14	8.34	54.17	36.39	54.26	54.00	-0.26	Average
3	2411.20	28.16	8.35	93.84	36.39	93.96	54.00	-39.96	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

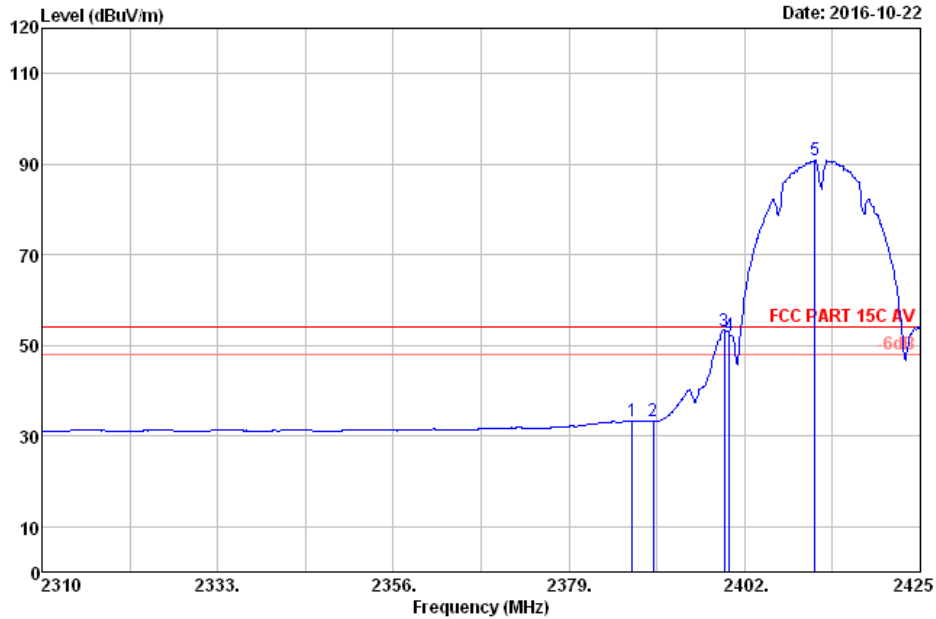


Site no. : 3m Chamber Data no. : 3  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.28	28.12	8.33	33.23	36.39	33.29	54.00	20.71	Average
2	2390.00	28.12	8.33	33.11	36.39	33.17	54.00	20.83	Average
3	2399.36	28.14	8.34	53.17	36.39	53.26	54.00	0.74	Average
4	2400.00	28.14	8.34	52.07	36.39	52.16	54.00	1.84	Average
5	2411.20	28.16	8.35	90.61	36.39	90.73	54.00	-36.73	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

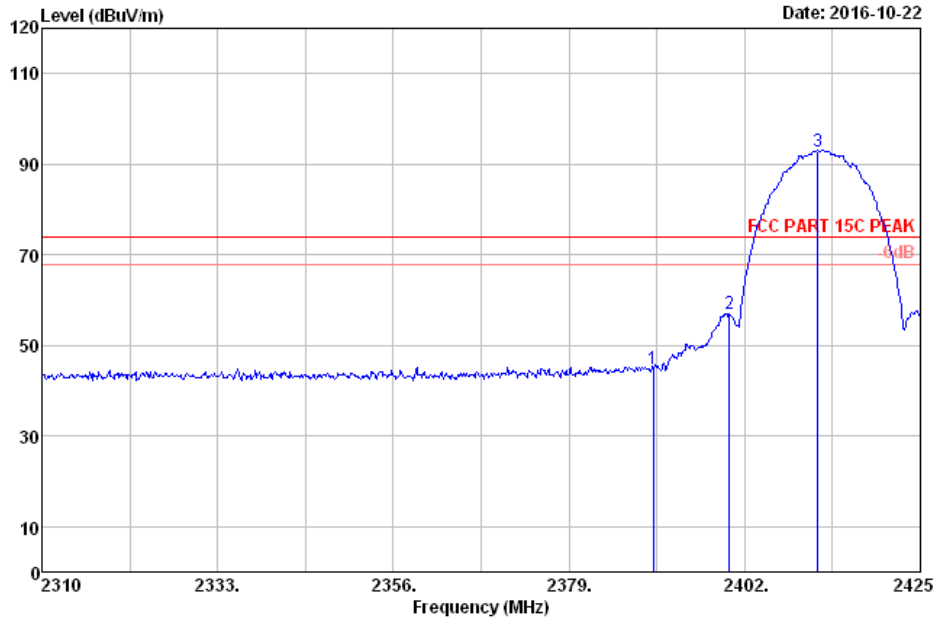

Site no. : 3m Chamber Data no. : 4  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2412MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	44.65	36.39	44.71	74.00	29.29	Peak
2	2400.00	28.14	8.34	56.85	36.39	56.94	74.00	17.06	Peak
3	2411.55	28.16	8.35	92.77	36.39	92.89	74.00	-18.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.

High channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

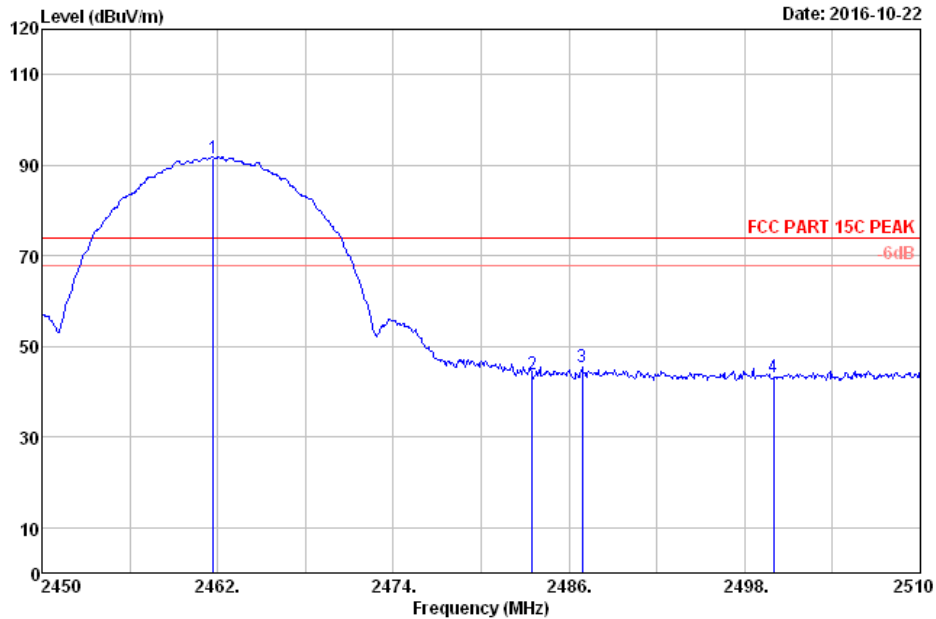


Site no. : 3m Chamber Data no. : 5  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP687 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.70	28.24	8.40	91.37	36.38	91.63	74.00	-17.63	Peak
2	2483.50	28.27	8.42	43.40	36.38	43.71	74.00	30.29	Peak
3	2486.90	28.28	8.43	44.99	36.38	45.32	74.00	28.68	Peak
4	2500.00	28.30	8.44	42.82	36.38	43.18	74.00	30.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

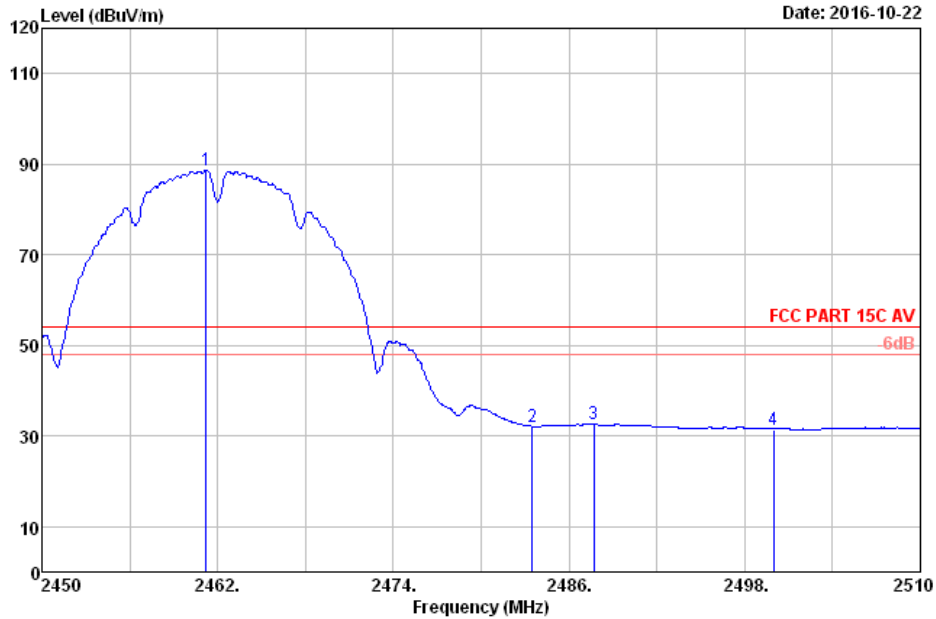


Site no. : 3m Chamber Data no. : 6  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.22	28.24	8.40	88.25	36.38	88.51	54.00	-34.51	Average
2	2483.50	28.27	8.42	31.74	36.38	32.05	54.00	21.95	Average
3	2487.68	28.28	8.43	32.17	36.38	32.50	54.00	21.50	Average
4	2500.00	28.30	8.44	31.15	36.38	31.51	54.00	22.49	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

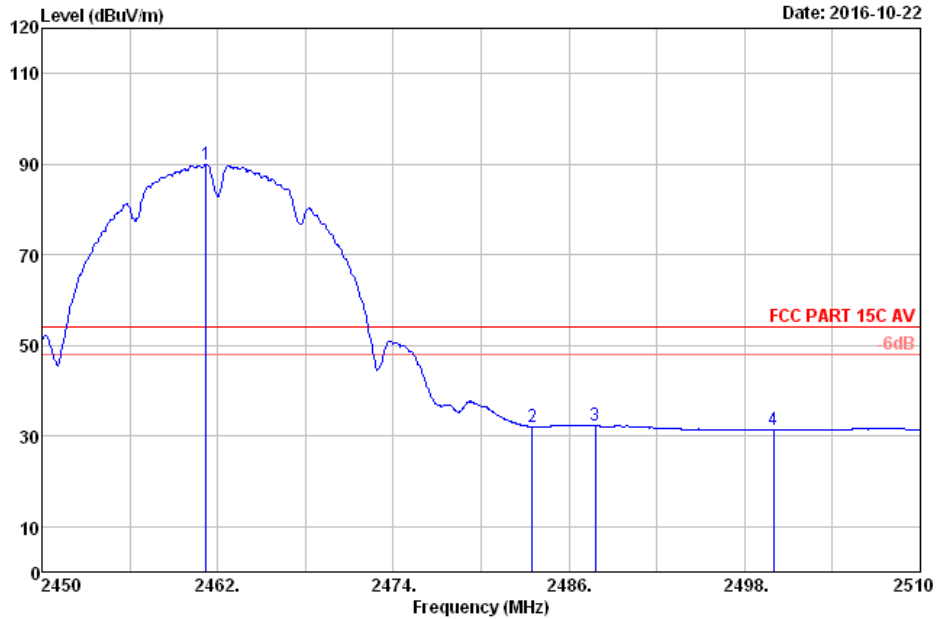

Site no. : 3m Chamber Data no. : 7  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.22	28.24	8.40	89.51	36.38	89.77	54.00	-35.77	Average
2	2483.50	28.27	8.42	31.70	36.38	32.01	54.00	21.99	Average
3	2487.80	28.28	8.43	31.92	36.38	32.25	54.00	21.75	Average
4	2500.00	28.30	8.44	30.96	36.38	31.32	54.00	22.68	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

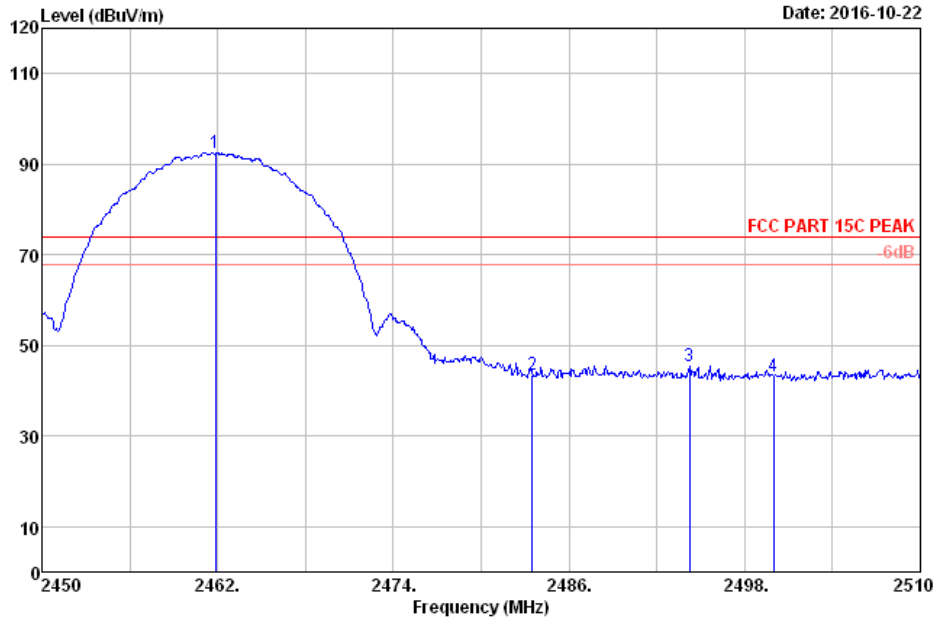

Site no. : 3m Chamber Data no. : 8  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11b 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.88	28.24	8.40	92.15	36.38	92.41	74.00	-18.41	Peak
2	2483.50	28.27	8.42	43.31	36.38	43.62	74.00	30.38	Peak
3	2494.22	28.29	8.43	45.14	36.38	45.48	74.00	28.52	Peak
4	2500.00	28.30	8.44	42.71	36.38	43.07	74.00	30.93	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.

Wi-Fi 802.11 g mode, 54 Mbps  
Low channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

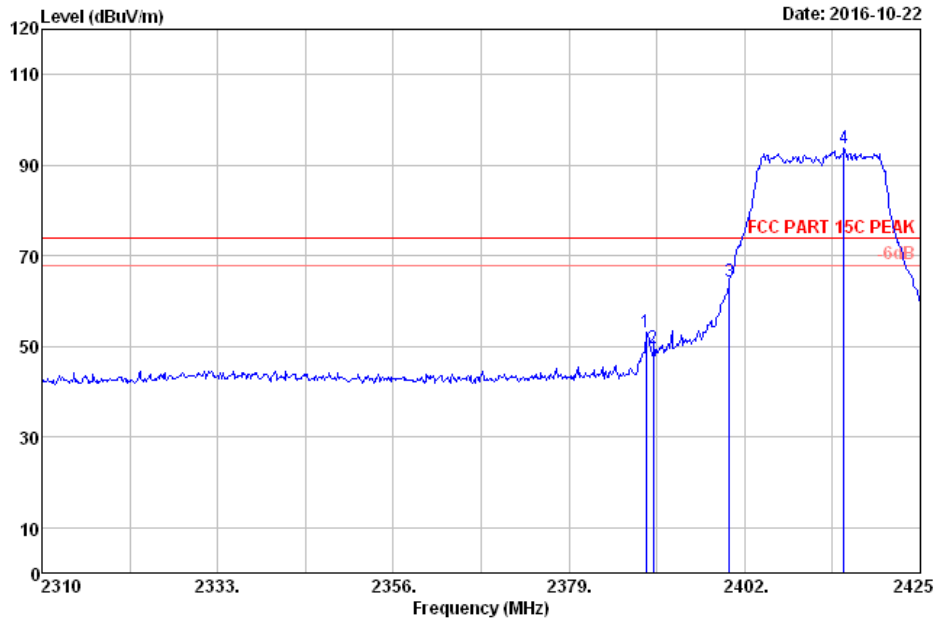


Site no. : 3m Chamber Data no. : 9  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.12	28.12	8.33	52.94	36.39	53.00	74.00	21.00	Peak
2	2390.00	28.12	8.33	49.39	36.39	49.45	74.00	24.55	Peak
3	2400.00	28.14	8.34	64.31	36.39	64.40	74.00	9.60	Peak
4	2415.00	28.16	8.35	93.58	36.39	93.70	74.00	-19.70	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

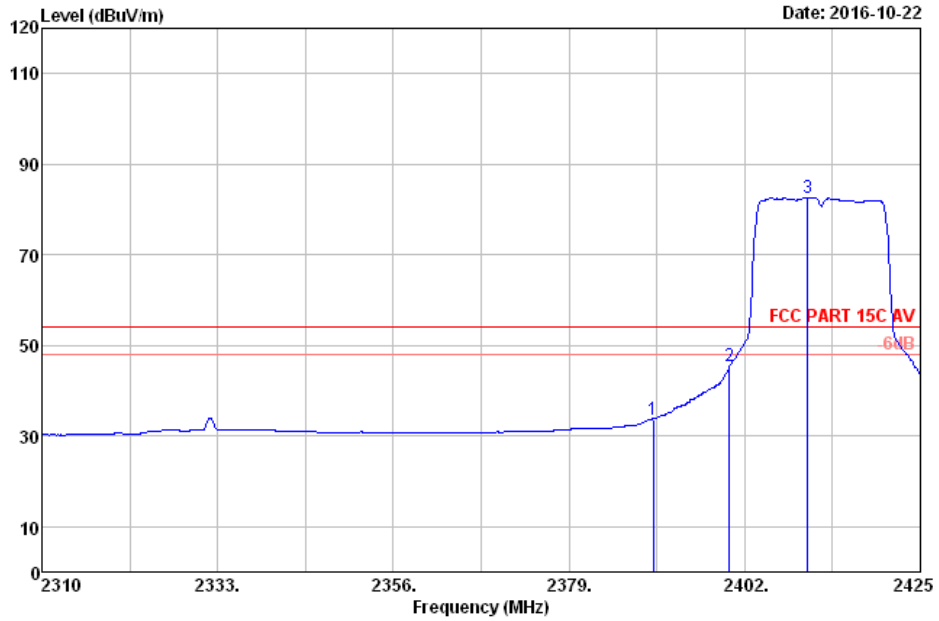


Site no. : 3m Chamber Data no. : 10  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	33.68	36.39	33.74	54.00	20.26	Average
2	2400.00	28.14	8.34	45.27	36.39	45.36	54.00	8.64	Average
3	2410.28	28.16	8.35	82.40	36.39	82.52	54.00	-28.52	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

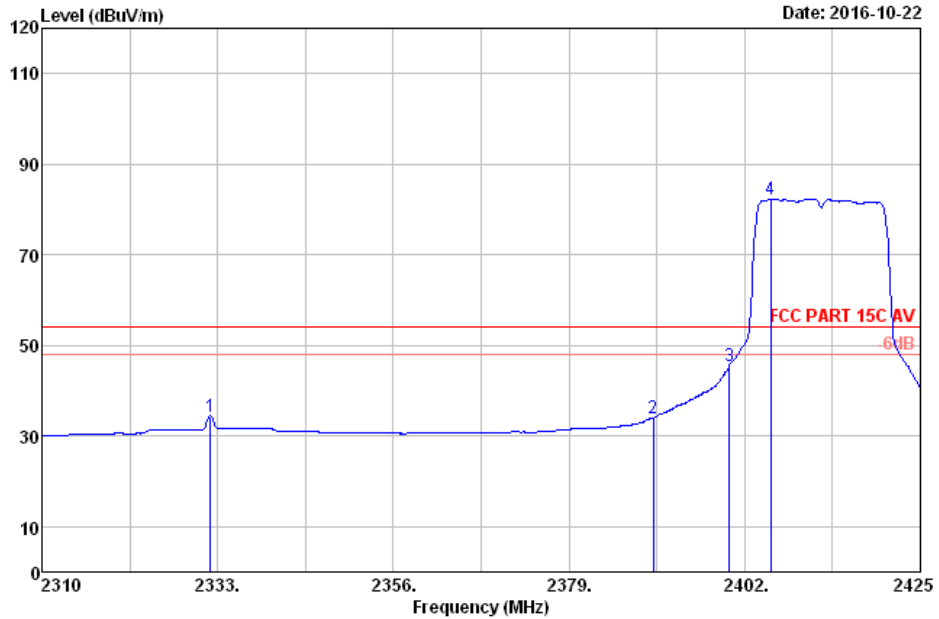


Site no. : 3m Chamber Data no. : 11  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2332.08	28.03	8.27	34.39	36.39	34.30	54.00	19.70	Average
2	2390.00	28.12	8.33	33.81	36.39	33.87	54.00	20.13	Average
3	2400.00	28.14	8.34	45.47	36.39	45.56	54.00	8.44	Average
4	2405.45	28.15	8.34	82.09	36.39	82.19	54.00	-28.19	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

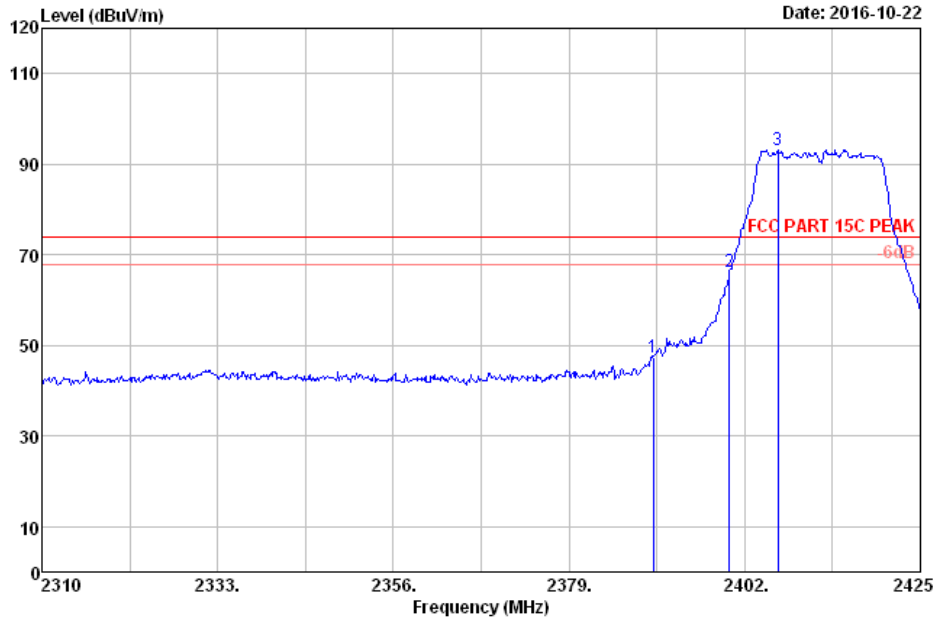

Site no. : 3m Chamber Data no. : 12  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2412MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	47.38	36.39	47.44	74.00	26.56	Peak
2	2400.00	28.14	8.34	66.24	36.39	66.33	74.00	7.67	Peak
3	2406.37	28.15	8.34	93.01	36.39	93.11	74.00	-19.11	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

High channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

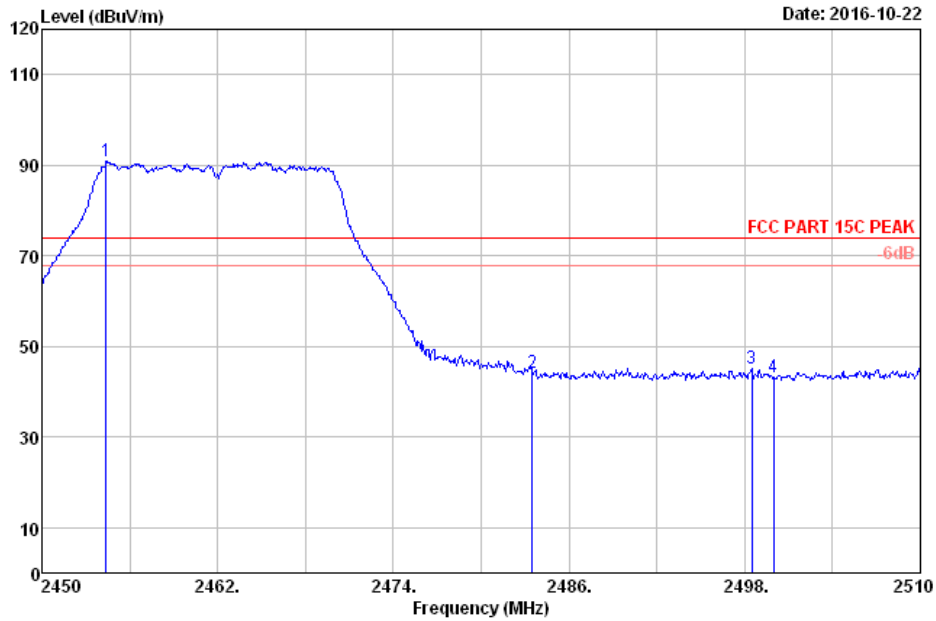


Site no. : 3m Chamber Data no. : 13  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.38	28.23	8.39	90.55	36.38	90.79	74.00	-16.79	Peak
2	2483.50	28.27	8.42	43.81	36.38	44.12	74.00	29.88	Peak
3	2498.48	28.30	8.44	44.69	36.38	45.05	74.00	28.95	Peak
4	2500.00	28.30	8.44	42.75	36.38	43.11	74.00	30.89	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

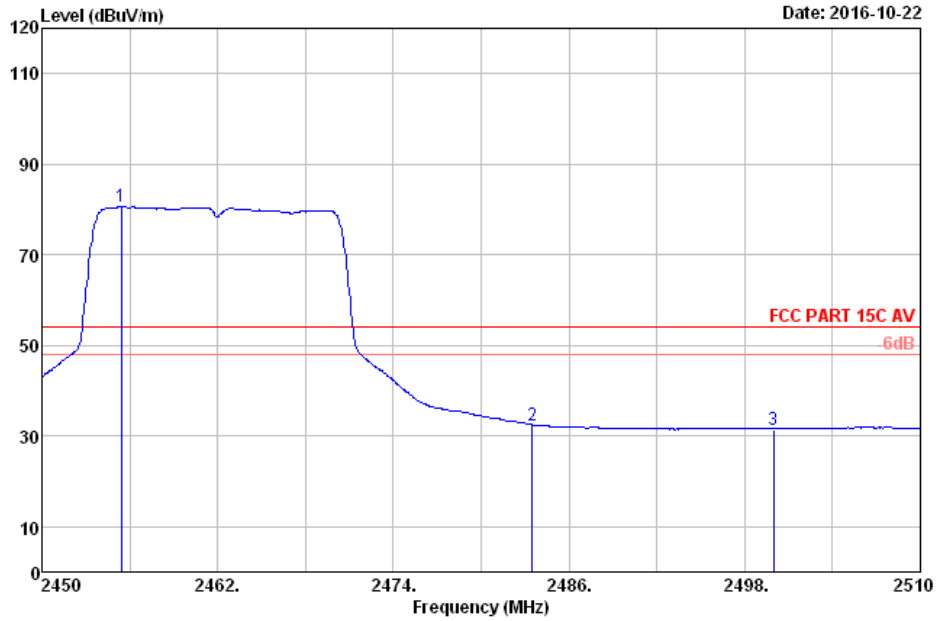


Site no. : 3m Chamber Data no. : 14  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11g 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.40	28.23	8.39	80.27	36.38	80.51	54.00	-26.51	Average
2	2483.50	28.27	8.42	32.06	36.38	32.37	54.00	21.63	Average
3	2500.00	28.30	8.44	31.13	36.38	31.49	54.00	22.51	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

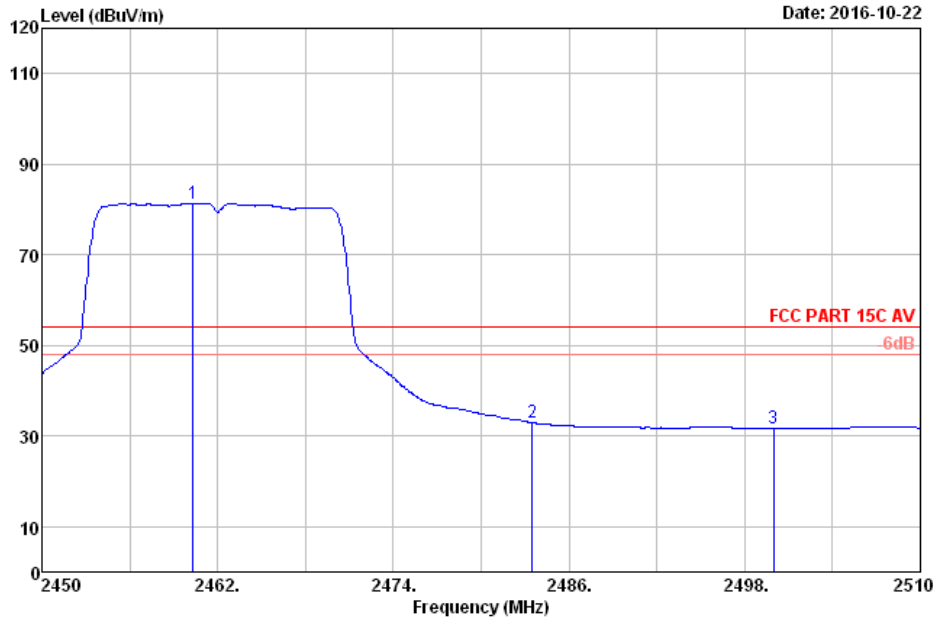

Site no. : 3m Chamber Data no. : 15  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.32	28.24	8.40	81.05	36.38	81.31	54.00	-27.31	Average
2	2483.50	28.27	8.42	32.51	36.38	32.82	54.00	21.18	Average
3	2500.00	28.30	8.44	31.23	36.38	31.59	54.00	22.41	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

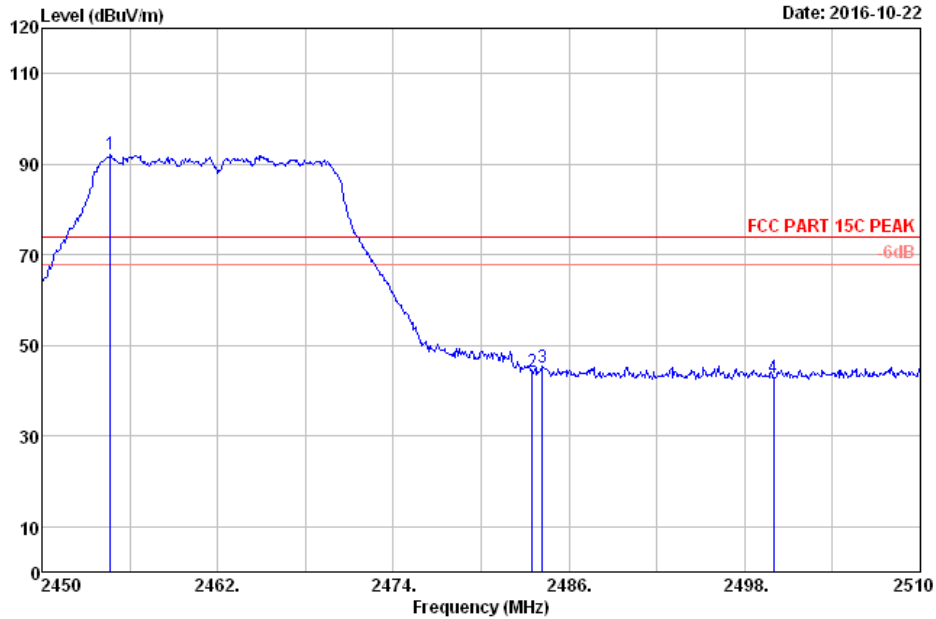

Site no. : 3m Chamber Data no. : 16  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11g 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.68	28.23	8.39	91.80	36.38	92.04	74.00	-18.04	Peak
2	2483.50	28.27	8.42	44.00	36.38	44.31	74.00	29.69	Peak
3	2484.20	28.27	8.42	44.89	36.38	45.20	74.00	28.80	Peak
4	2500.00	28.30	8.44	42.43	36.38	42.79	74.00	31.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

Wi-Fi 802.11 n(HT20) mode, MCS7 Mbps  
Low channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

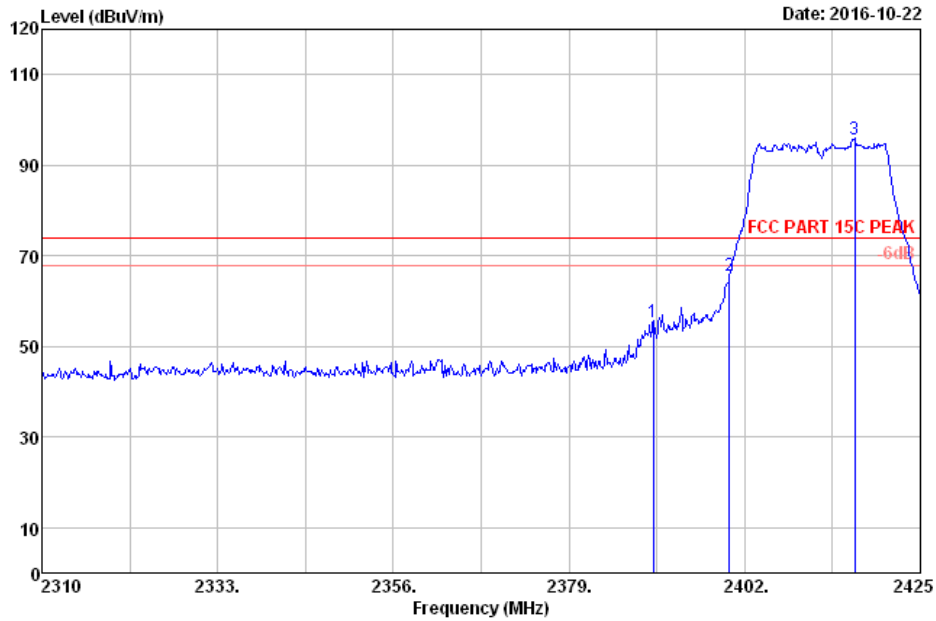


Site no. : 3m Chamber Data no. : 17  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	AMP factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	55.21	36.39	55.27	74.00	18.73	Peak
2	2400.00	28.14	8.34	65.62	36.39	65.71	74.00	8.29	Peak
3	2416.38	28.17	8.35	95.64	36.39	95.77	74.00	-21.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

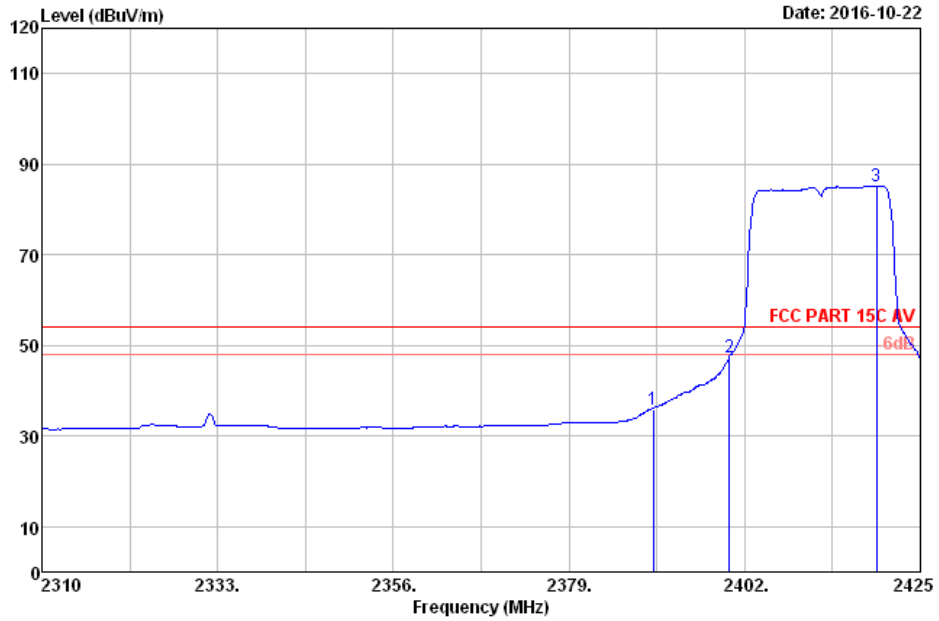


Site no. : 3m Chamber Data no. : 18  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	35.94	36.39	36.00	54.00	18.00	Average
2	2400.00	28.14	8.34	47.34	36.39	47.43	54.00	6.57	Average
3	2419.25	28.17	8.36	84.96	36.38	85.11	54.00	-31.11	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

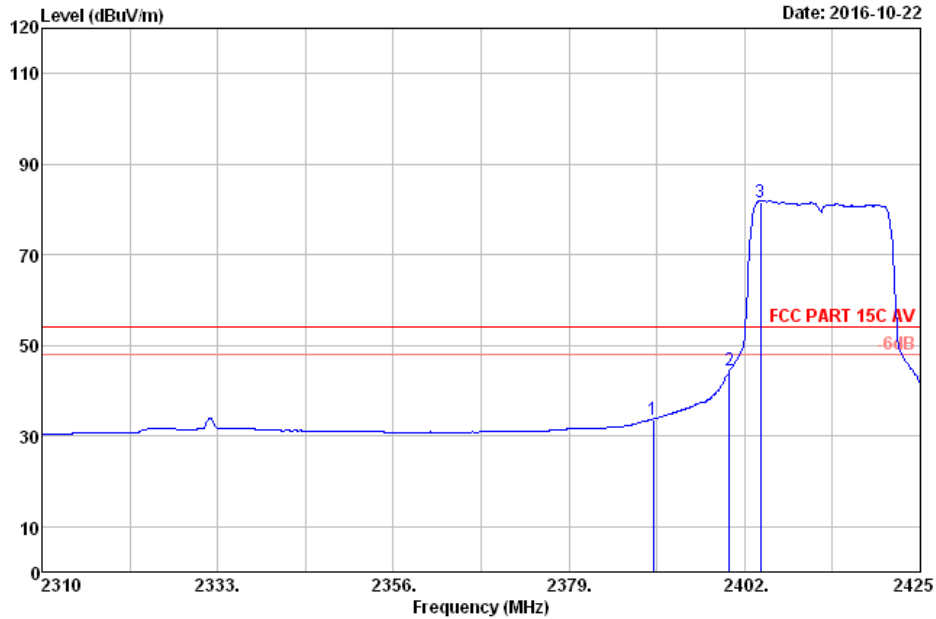


Site no. : 3m Chamber Data no. : 19  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2412MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	33.59	36.39	33.65	54.00	20.35	Average
2	2400.00	28.14	8.34	44.24	36.39	44.33	54.00	9.67	Average
3	2404.07	28.15	8.34	81.63	36.39	81.73	54.00	-27.73	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

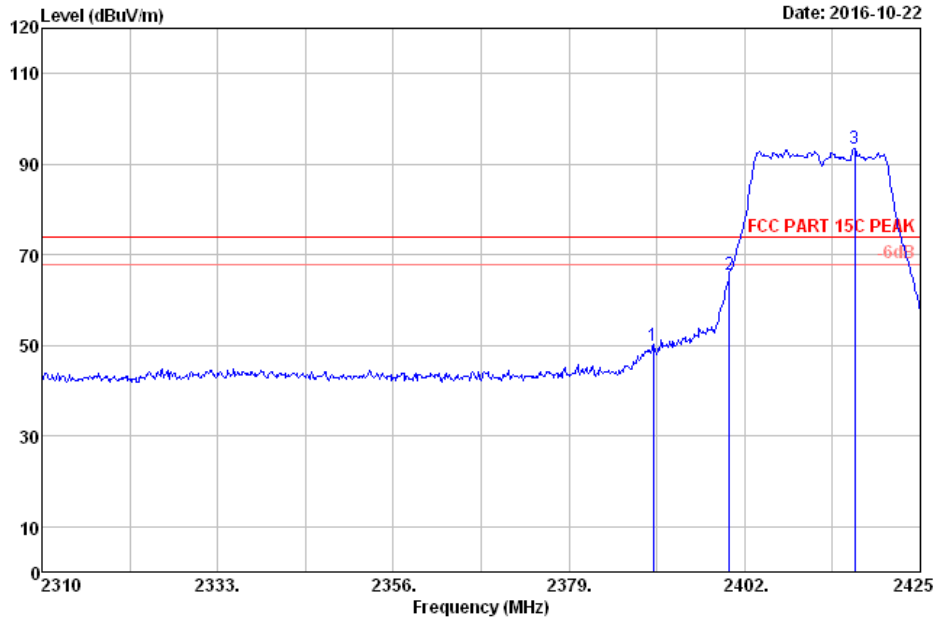

Site no. : 3m Chamber Data no. : 20  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2412MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	49.88	36.39	49.94	74.00	24.06	Peak
2	2400.00	28.14	8.34	65.64	36.39	65.73	74.00	8.27	Peak
3	2416.38	28.17	8.35	93.16	36.39	93.29	74.00	-19.29	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.

High channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

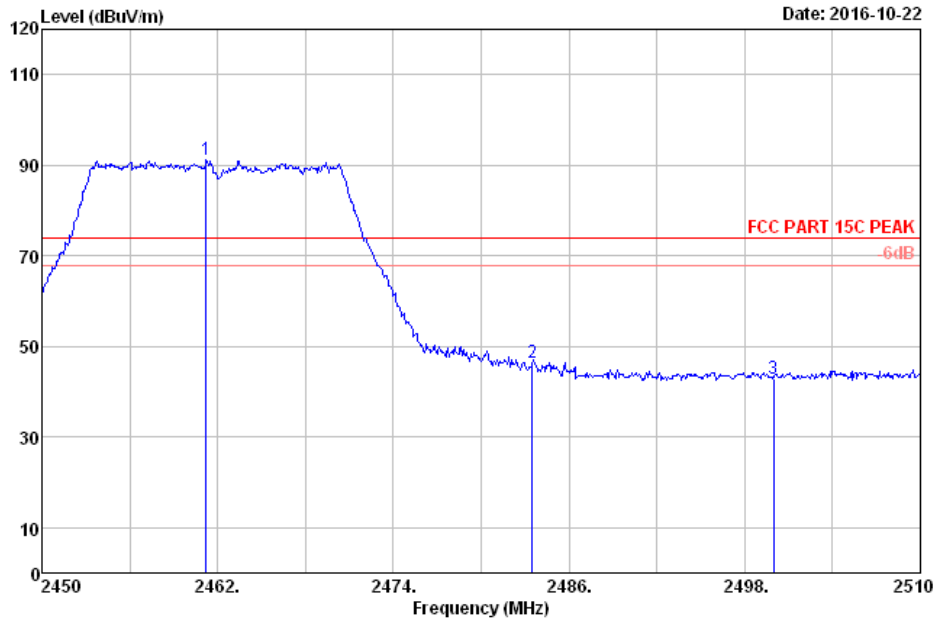


Site no. : 3m Chamber Data no. : 21  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5W From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.22	28.24	8.40	90.86	36.38	91.12	74.00	-17.12	Peak
2	2483.50	28.27	8.42	45.93	36.38	46.24	74.00	27.76	Peak
3	2500.00	28.30	8.44	42.61	36.38	42.97	74.00	31.03	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading -Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

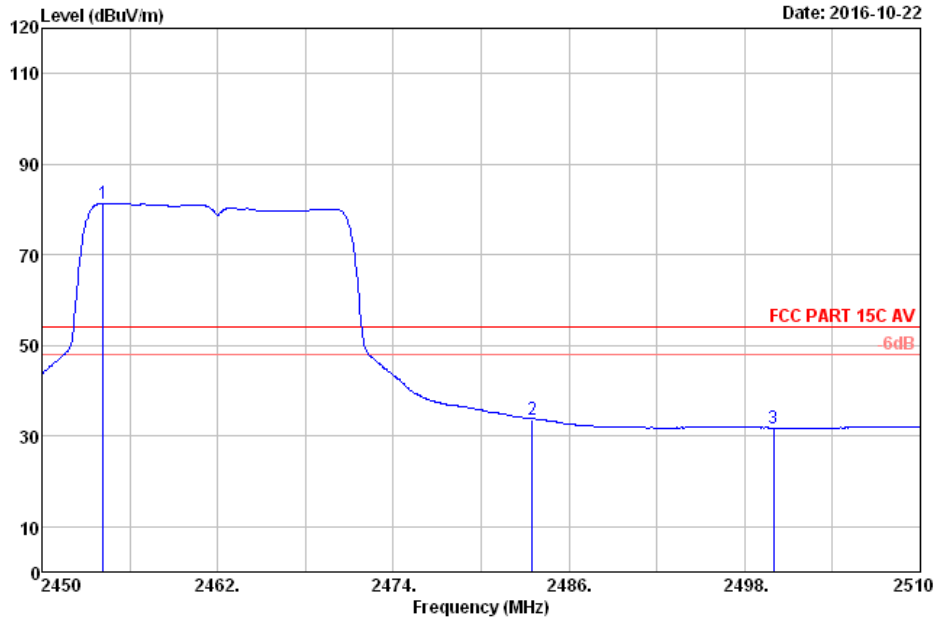


Site no. : 3m Chamber Data no. : 22  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT20 2462MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.20	28.23	8.39	80.94	36.38	81.18	54.00	-27.18	Average
2	2483.50	28.27	8.42	33.43	36.38	33.74	54.00	20.26	Average
3	2500.00	28.30	8.44	31.33	36.38	31.69	54.00	22.31	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

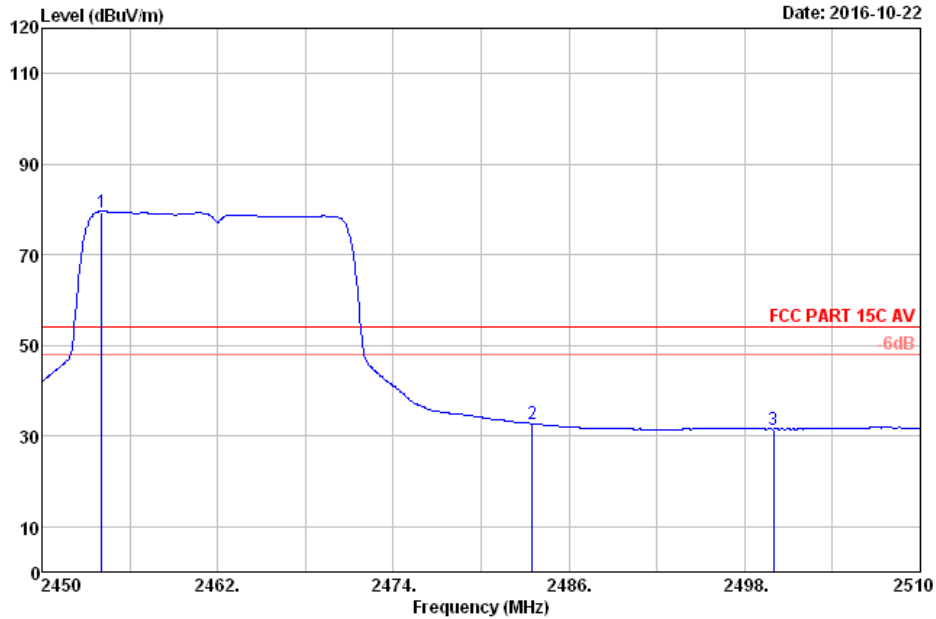

Site no. : 3m Chamber Data no. : 23  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.08	28.23	8.39	79.22	36.38	79.46	54.00	-25.46	Average
2	2483.50	28.27	8.42	32.32	36.38	32.63	54.00	21.37	Average
3	2500.00	28.30	8.44	31.07	36.38	31.43	54.00	22.57	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

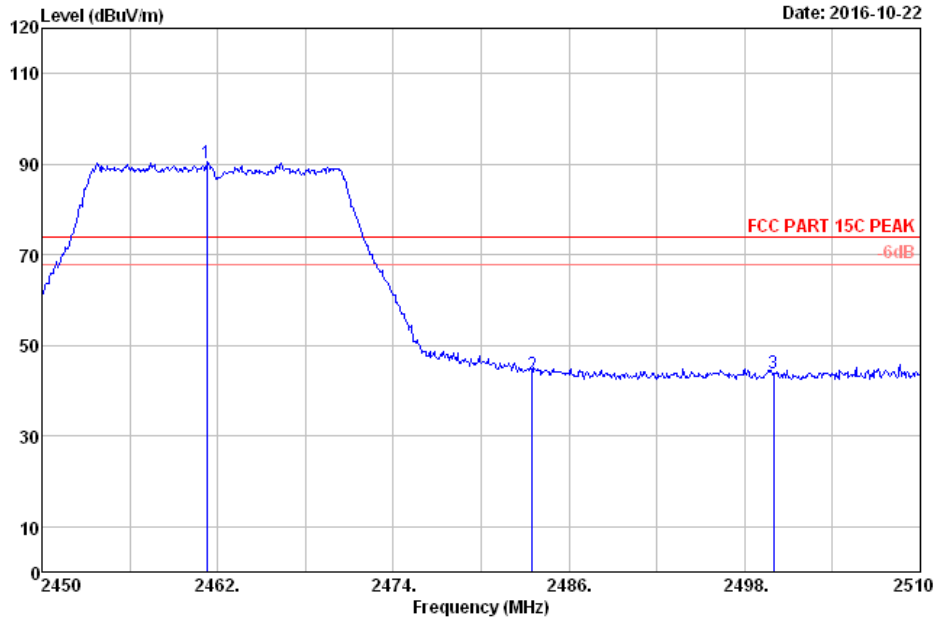

Site no. : 3m Chamber Data no. : 24  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT20 2462MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.28	28.24	8.40	90.03	36.38	90.29	74.00	-16.29	Peak
2	2483.50	28.27	8.42	43.18	36.38	43.49	74.00	30.51	Peak
3	2500.00	28.30	8.44	43.45	36.38	43.81	74.00	30.19	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

Wi-Fi 802.11 n(HT40) mode, MCS7 Mbps  
Low channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

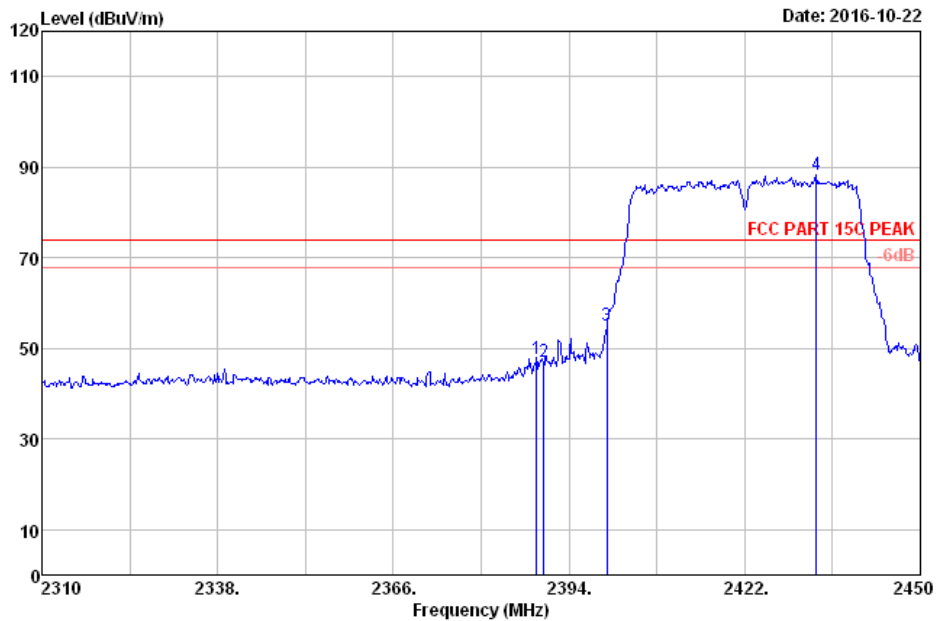


Site no. : 3m Chamber Data no. : 25  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2388.82	28.12	8.33	47.75	36.39	47.81	74.00	26.19	Peak
2	2390.00	28.12	8.33	46.88	36.39	46.94	74.00	27.06	Peak
3	2400.00	28.14	8.34	54.83	36.39	54.92	74.00	19.08	Peak
4	2433.48	28.19	8.37	87.98	36.38	88.16	74.00	-14.16	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official  
limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

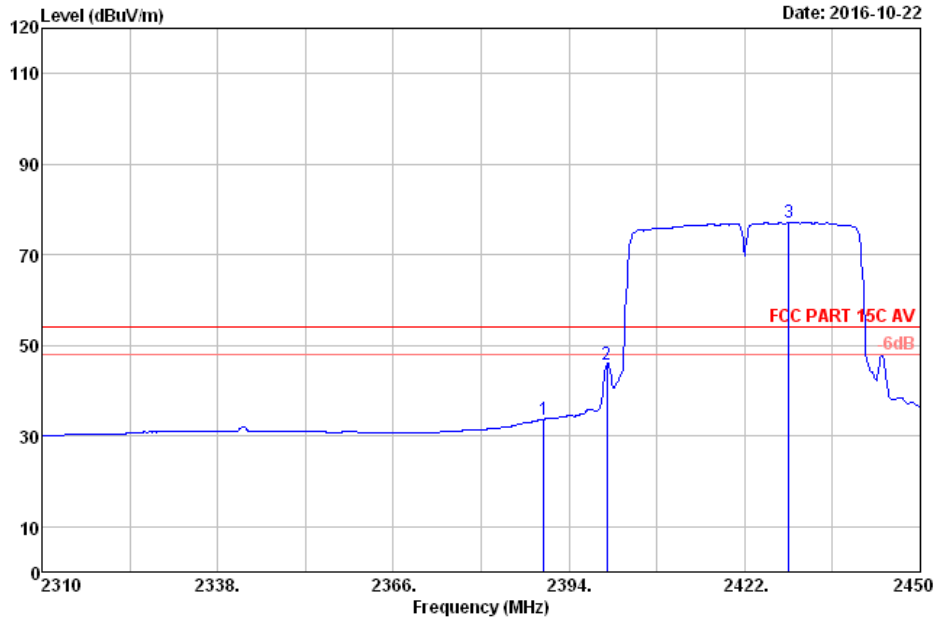


Site no. : 3m Chamber Data no. : 26  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	33.54	36.39	33.60	54.00	20.40	Average
2	2400.00	28.14	8.34	45.73	36.39	45.82	54.00	8.18	Average
3	2429.00	28.19	8.37	76.81	36.38	76.99	54.00	-22.99	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
-Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

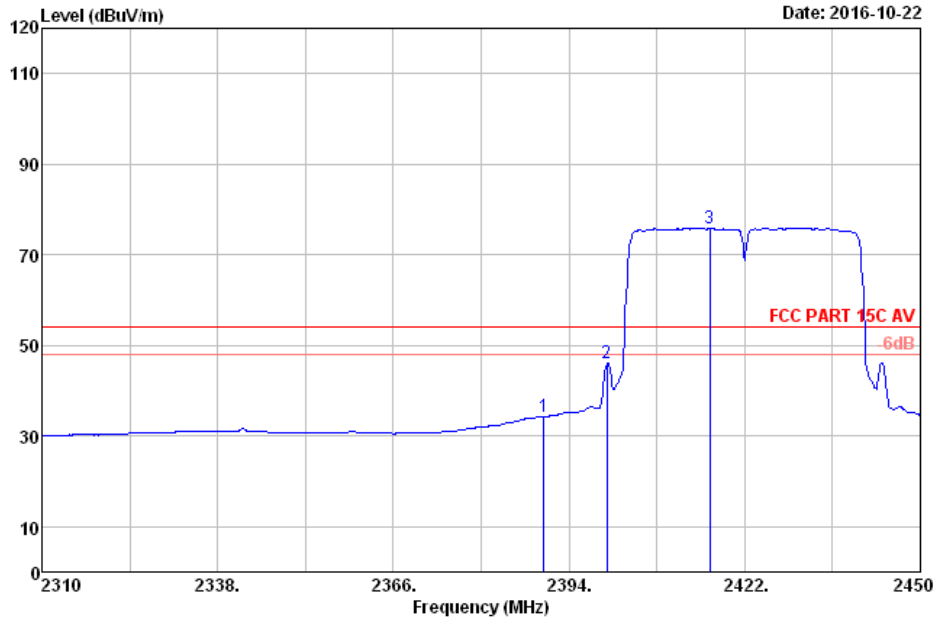


Site no. : 3m Chamber Data no. : 27  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2422MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	34.11	36.39	34.17	54.00	19.83	Average
2	2400.00	28.14	8.34	45.93	36.39	46.02	54.00	7.98	Average
3	2416.40	28.17	8.35	75.66	36.39	75.79	54.00	-21.79	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

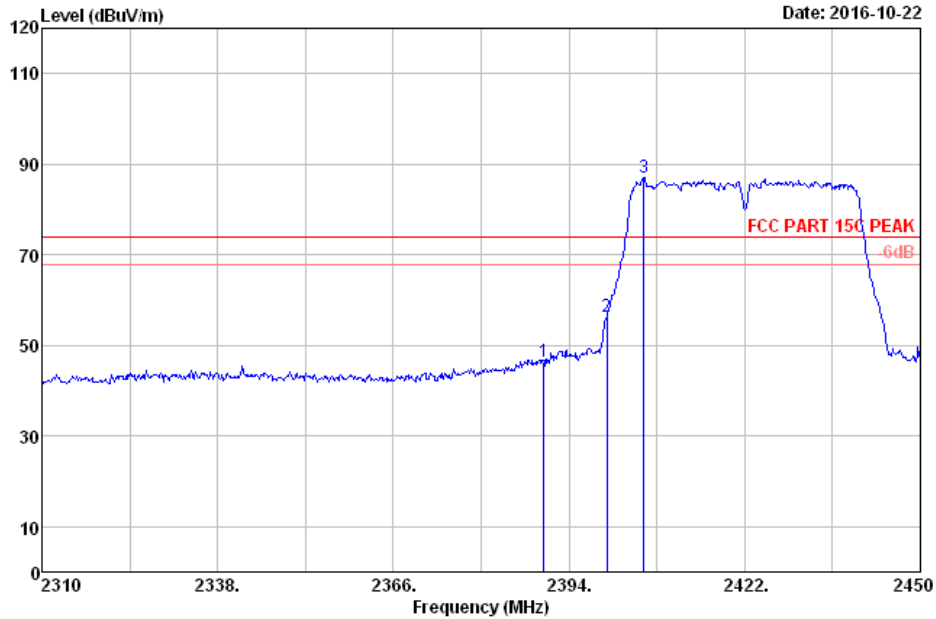

Site no. : 3m Chamber Data no. : 28  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2422MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	28.12	8.33	46.50	36.39	46.56	74.00	27.44	Peak
2	2400.00	28.14	8.34	56.37	36.39	56.46	74.00	17.54	Peak
3	2405.90	28.15	8.34	86.86	36.39	86.96	74.00	-12.96	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading  
 -Amp Factor  
 2. The emission levels that are 20dB below the official  
 limit are not reported.

High channel



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

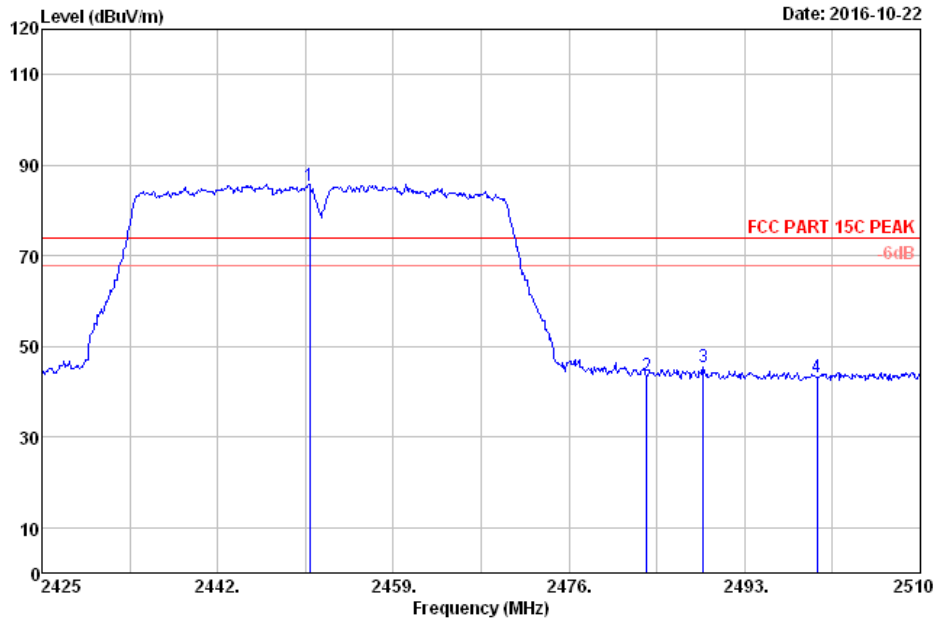


Site no. : 3m Chamber Data no. : 29  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
 Limit : FCC PART 15C PEAK Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2450.93	28.22	8.39	85.33	36.38	85.56	74.00	-11.56	Peak
2	2483.50	28.27	8.42	43.26	36.38	43.57	74.00	30.43	Peak
3	2489.01	28.28	8.43	45.00	36.38	45.33	74.00	28.67	Peak
4	2500.00	28.30	8.44	42.77	36.38	43.13	74.00	30.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

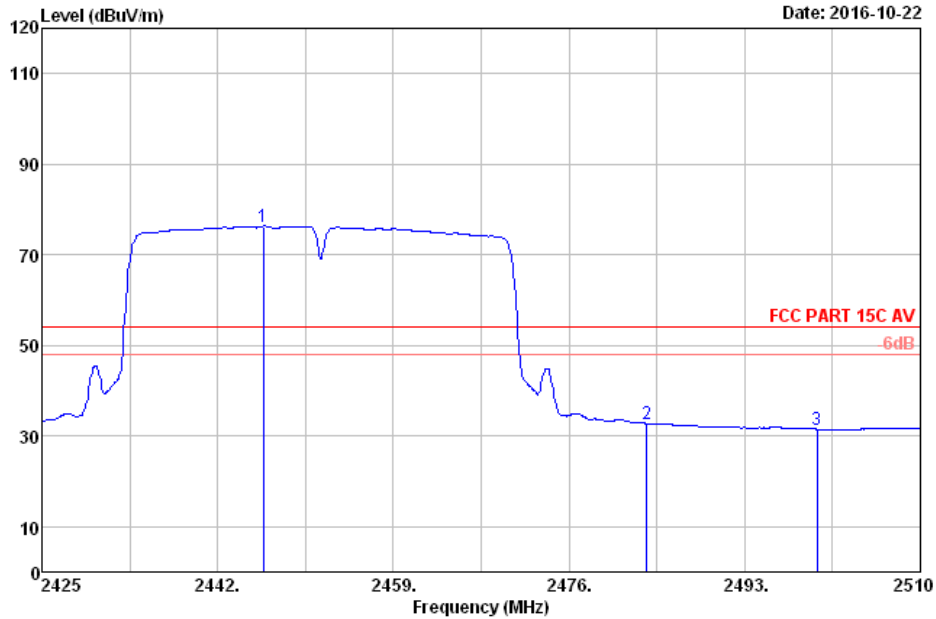


Site no. : 3m Chamber Data no. : 30  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : HORIZONTAL  
Limit : FCC PART 15C AV Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT40 2452MHz Tx Mode

No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	AMP factor (dB)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	2446.42	28.21	8.39	75.99	36.38	76.21	54.00	-22.21	Average
2	2483.50	28.27	8.42	32.32	36.38	32.63	54.00	21.37	Average
3	2500.00	28.30	8.44	31.05	36.38	31.41	54.00	22.59	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.



No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

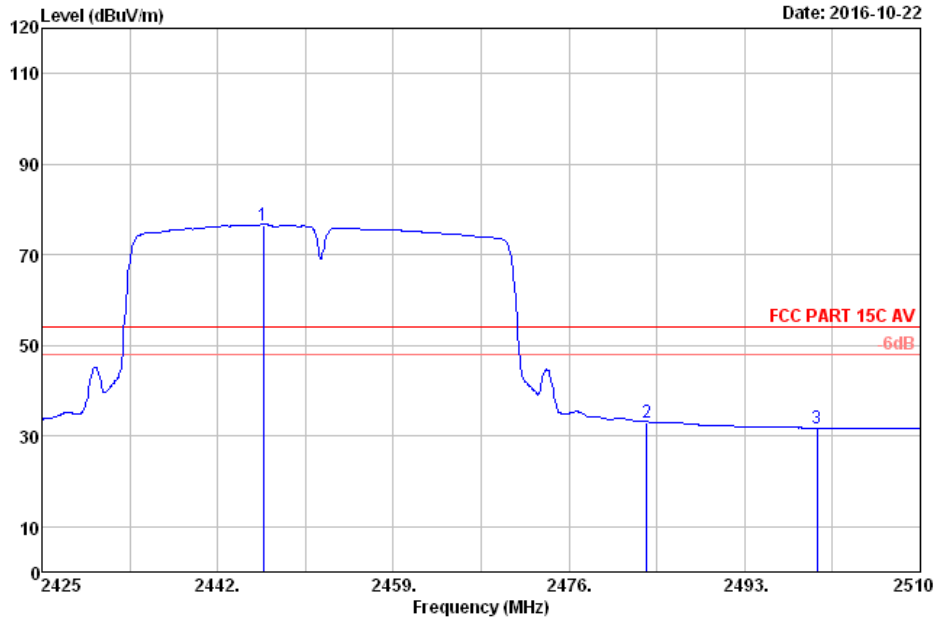

Site no. : 3m Chamber Data no. : 31  
 Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
 Limit : FCC PART 15C AV Pre : 104.2kPa  
 Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
 EUT : Baby Monitor M/N:MBP667 BU  
 Power rating : DC 5V From Adapter Input AC 120V/60Hz  
 Test Mode : IEEE802.11n HT40 2452MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2446.42	28.21	8.39	76.41	36.38	76.63	54.00	-22.63	Average
2	2483.50	28.27	8.42	32.75	36.38	33.06	54.00	20.94	Average
3	2500.00	28.30	8.44	31.25	36.38	31.61	54.00	22.39	Average

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
 2. The emission levels that are 20dB below the official limit are not reported.





No.6 Ke Feng Road,Block 52,  
ShenZhen Science & Industry Park  
Nantou, ShenZhen, GuangDong, China  
Tel:+86-755-26639495-7  
Fax:+86-755-26632877  
Postcode:518057

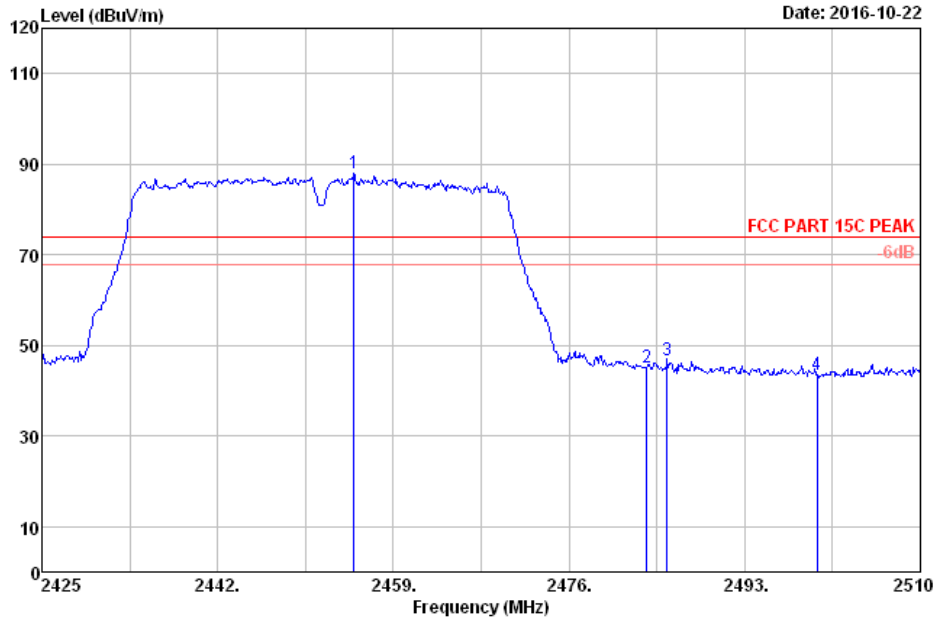

Site no. : 3m Chamber Data no. : 32  
Dis. / Ant. : 3m 2016 MCTD1209 3007 Ant. pol. : VERTICAL  
Limit : FCC PART 15C PEAK Pre : 104.2kPa  
Env. / Ins. : 23.1°C/53.5% Engineer : Alice\_yang  
EUT : Baby Monitor M/N:MBP667 BU  
Power rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : IEEE802.11n HT40 2452MHz Tx Mode


No.	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	AMP factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2455.18	28.23	8.39	87.69	36.38	87.93	74.00	-13.93	Peak
2	2483.50	28.27	8.42	44.71	36.38	45.02	74.00	28.98	Peak
3	2485.52	28.28	8.43	46.53	36.38	46.86	74.00	27.14	Peak
4	2500.00	28.30	8.44	43.05	36.38	43.41	74.00	30.59	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading - Amp Factor  
2. The emission levels that are 20dB below the official limit are not reported.

**Appendix C.3: Test Results of Conducted Emission on AC Mains  
D mode with adapter #1**



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

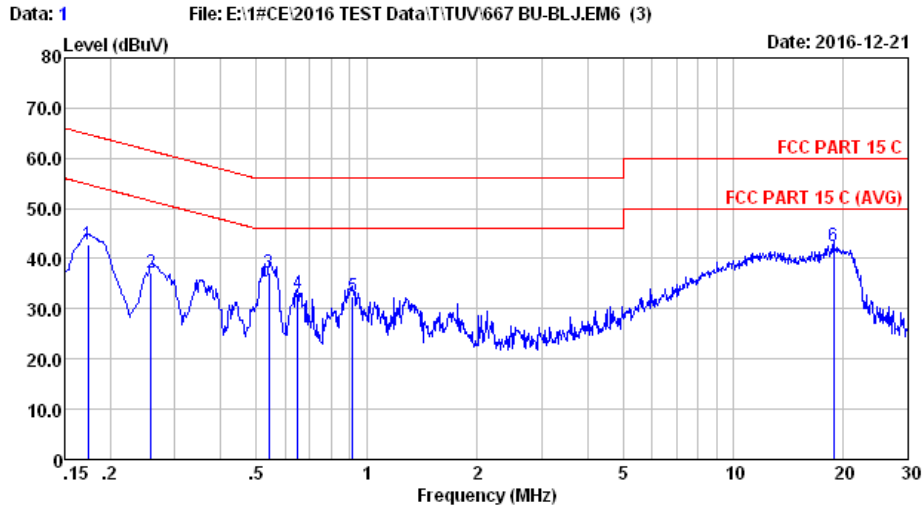


Site no :1# Conduction Data No :1  
Dis./Lisn :2016 ESH2-25 LINE  
Limit :FCC PART 15 C  
Env./Ins. :23.4\*C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_BLJ

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.174	0.13	0.02	42.73	42.88	64.77	21.89	QP
2	0.258	0.13	0.02	36.90	37.05	61.51	24.46	QP
3	0.541	0.12	0.03	37.16	37.31	56.00	18.69	QP
4	0.647	0.13	0.04	32.80	32.97	56.00	23.03	QP
5	0.914	0.17	0.06	32.31	32.54	56.00	23.46	QP
6	18.820	0.75	0.20	41.46	42.41	60.00	17.59	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

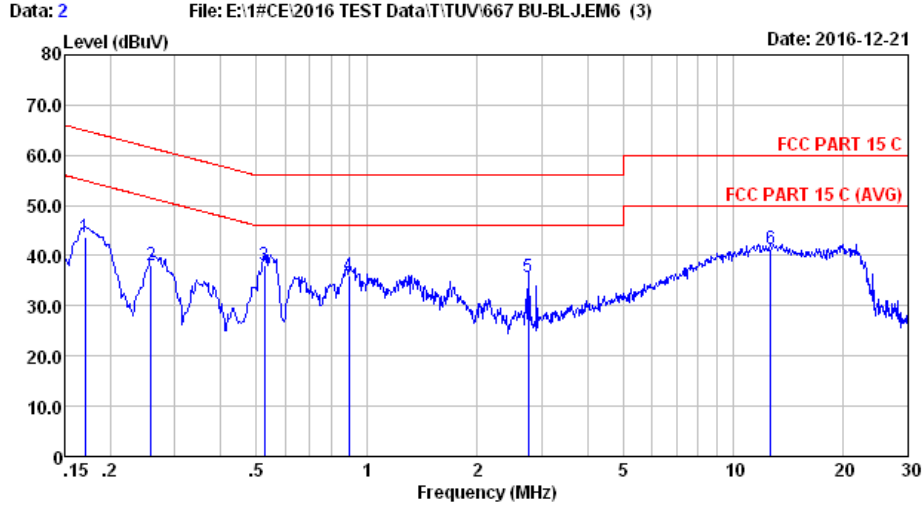

Site no :1# Conduction Data No :2  
Dis./Lisn :2016 ESH2-25 NEUTRAL  
Limit :FCC PART 15 C  
Env./Ins. :23.4°C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_B LJ


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.170	0.13	0.02	43.59	43.74	64.94	21.20	QP
2	0.258	0.13	0.02	37.95	38.10	61.51	23.41	QP
3	0.527	0.15	0.03	37.97	38.15	56.00	17.85	QP
4	0.894	0.16	0.06	35.94	36.16	56.00	19.84	QP
5	2.765	0.21	0.08	35.47	35.76	56.00	20.24	QP
6	12.649	0.45	0.16	40.73	41.34	60.00	18.66	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.  
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

D mode with adapter #2



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

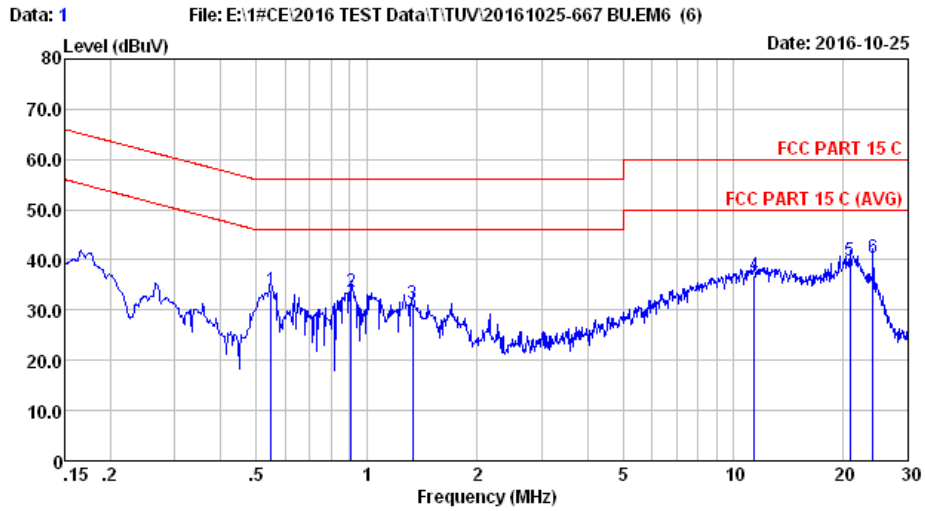


Site no :1# Conduction Data No :1  
Dis./Lisn :2015 ESH2-25 NEUTRAL  
Limit :FCC PART 15 C  
Env./Ins. :23.4\*C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_Tenpao

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.549	0.15	0.03	33.68	33.86	56.00	22.14	QP
2	0.909	0.16	0.06	33.37	33.59	56.00	22.41	QP
3	1.338	0.18	0.07	30.96	31.21	56.00	24.79	QP
4	11.438	0.53	0.15	36.25	36.93	60.00	23.07	QP
5	20.814	1.05	0.20	38.60	39.85	60.00	20.15	QP
6	24.015	1.10	0.22	39.03	40.35	60.00	19.65	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, ShenZhen, GuangDong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

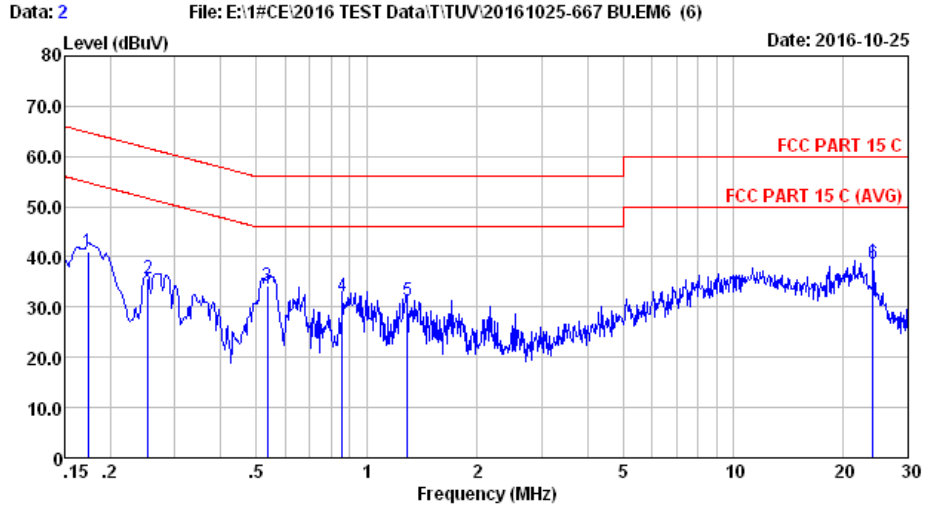

Site no :1# Conduction Data No :2  
Dis./Lisn :2015 ESH2-25 LINE  
Limit :FCC PART 15 C  
Env./Ins. :23.4\*C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_Tenpao


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.174	0.12	0.02	40.78	40.92	64.77	23.85	QP
2	0.253	0.12	0.02	35.72	35.86	61.64	25.78	QP
3	0.535	0.14	0.03	34.13	34.30	56.00	21.70	QP
4	0.857	0.16	0.06	31.92	32.14	56.00	23.86	QP
5	1.289	0.16	0.07	31.14	31.37	56.00	24.63	QP
6	23.998	0.93	0.22	37.50	38.65	60.00	21.35	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

E mode with adapter #1



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

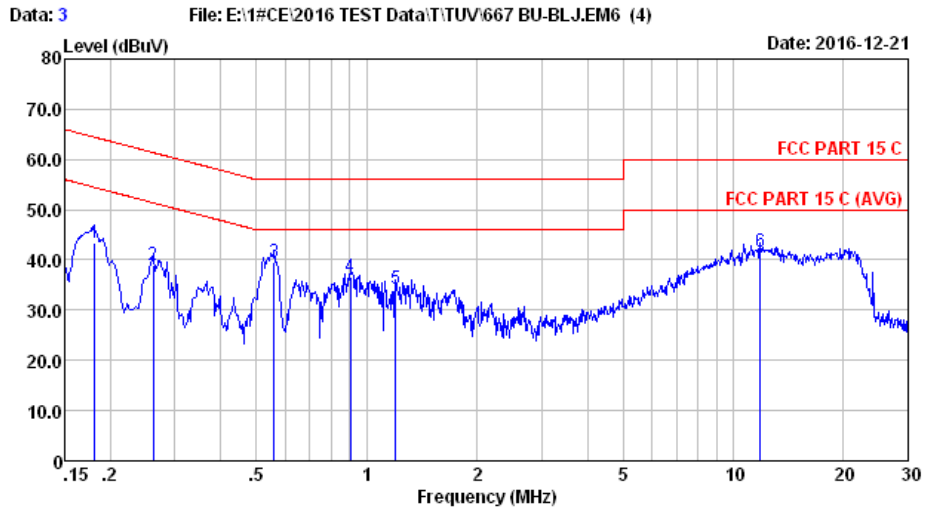


Site no :1# Conduction Data No :3  
Dis./Lisn :2016 ESH2-25 NEUTRAL  
Limit :FCC PART 15 C  
Env./Ins. :23.4\*C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_BLJ

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.182	0.13	0.02	43.29	43.44	64.42	20.98	QP
2	0.262	0.13	0.02	38.78	38.93	61.38	22.45	QP
3	0.558	0.15	0.03	39.39	39.57	56.00	16.43	QP
4	0.904	0.16	0.06	36.50	36.72	56.00	19.28	QP
5	1.197	0.19	0.07	33.84	34.10	56.00	21.90	QP
6	11.870	0.43	0.15	40.91	41.49	60.00	18.51	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

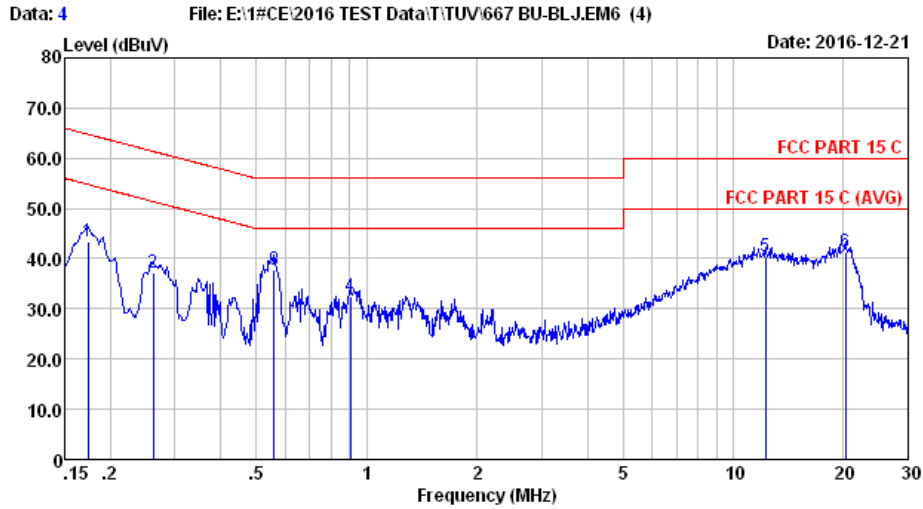

Site no : 1# Conduction Data No : 4  
Dis./Lisn : 2016 ESH2-25 LINE  
Limit : FCC PART 15 C  
Env./Ins. : 23.4°C/53% Engineer : Evan  
EUT : Baby Monitor M/N:MBP667 BU  
Power Rating : DC 5V From Adapter Input AC 120V/60Hz  
Test Mode : Wireless connecting mode  
Adapter\_UL\_B LJ

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.174	0.13	0.02	43.10	43.25	64.77	21.52	QP
2	0.262	0.13	0.02	37.19	37.34	61.38	24.04	QP
3	0.558	0.12	0.03	37.62	37.77	56.00	18.23	QP
4	0.904	0.17	0.06	32.19	32.42	56.00	23.58	QP
5	12.253	0.44	0.16	39.71	40.31	60.00	19.69	QP
6	20.270	0.81	0.20	40.34	41.35	60.00	18.65	QP


Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.  
2. If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

E mode with adapter #2



No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

Data: 1 File: E:\1#CE\2016 TEST Data\TUV\20161025-667 BU-wifi2.4G.EM6 (24) Date: 2016-10-26

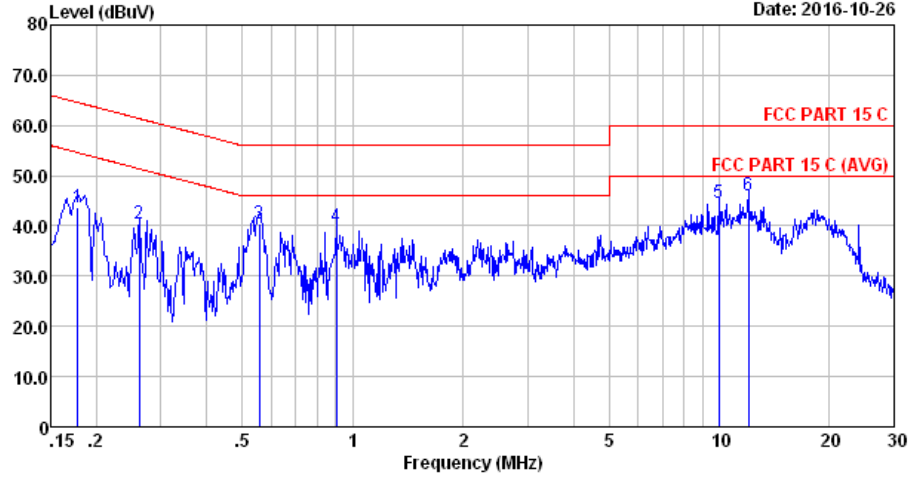

Site no :1# Conduction Data No :1  
Dis./Lisn :2015 ESH2-25 LINE  
Limit :FCC PART 15 C  
Env./Ins. :23.7°C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_Tenpao


No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	0.12	0.02	43.45	43.59	64.59	21.00	QP
2	0.262	0.12	0.02	40.17	40.31	61.38	21.07	QP
3	0.555	0.14	0.03	40.22	40.39	56.00	15.61	QP
4	0.904	0.16	0.06	39.73	39.95	56.00	16.05	QP
5	9.966	0.36	0.14	43.97	44.47	60.00	15.53	QP
6	11.996	0.44	0.16	45.35	45.95	60.00	14.05	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector. the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.





No.6 Ke Feng Road, Science & Technology Park  
Nanshan District, Shenzhen, Guangdong, China  
Tel: +86-755-26639495-7  
Fax: +86-755-26632877  
Postcode: 518057

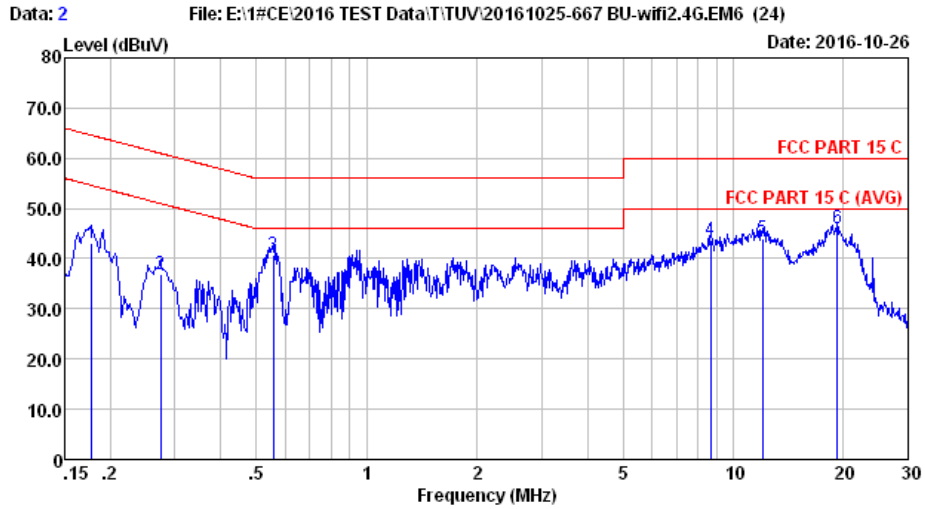

Site no :1# Conduction Data No :2  
Dis./Lisn :2015 ESH2-25 NEUTRAL  
Limit :FCC PART 15 C  
Env./Ins. :23.7°C/53% Engineer :Evan  
EUT :Baby Monitor M/N:MBP667 BU  
Power Rating :DC 5V From Adapter Input AC 120V/60Hz  
Test Mode :Wireless connecting mode  
Adapter\_UL\_Tenpao

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	0.12	0.02	43.05	43.19	64.59	21.40	QP
2	0.274	0.13	0.02	36.74	36.89	60.98	24.09	QP
3	0.555	0.15	0.03	40.63	40.81	56.00	15.19	QP
4	8.683	0.39	0.13	43.12	43.64	60.00	16.36	QP
5	11.996	0.57	0.16	43.40	44.13	60.00	15.87	QP
6	19.224	1.00	0.20	44.73	45.93	60.00	14.07	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.  
2.If the average limit is met when using a quasi-peak detector.  
the EUT shall be deemed to meet both limits and measurement  
with average detector is unnecessary.