



TEST REPORT

Date: 2014-04-21

Report No.: 60.870.14.003.03F

Applicant: Binatone Electronics International Limited
Floor 23, 9 Des Voeux Road West, Sheung Wan, Hong Kong

Description of Samples: Model name: Video Baby Monitor (Baby Unit)
Brand name: motorola
Model no.: MBP36SPU, SCOUT36SPU, FOCUS36SPU
FCCID: VLJ-MBP36SPU

Date Samples Received: 2014-02-19

Date Tested: 2014-02-20 to 2014-04-12

Investigation Requested: FCC Part 15 Subpart B

Conclusions: The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remarks:

Checked by:

Approved by:-

Ray Cheung
Project Engineer
Wireless & Telecom department

Jeff Pong
Operation Manager
Wireless & Telecom department



CONTENT:

Cover	Page 1 of 13	
Content	Page 2 of 13	
<u>1.0</u>	<u>General Details</u>	
1.1	Test Laboratory	Page 3 of 13
1.2	Applicant Details	Page 3 of 13
1.3	Equipment Under Test [EUT]	Page 4 of 13
1.4	Equipment Modification	Page 4 of 13
1.5	Related Submittal(s) Grants	Page 4 of 13
<u>2.0</u>	<u>Technical Details</u>	
2.1	Investigations Requested	Page 5 of 13
2.2	Test Standards and Results Summary	Page 5 of 13
<u>3.0</u>	<u>Test Methodology</u>	
3.1	Radiated Emission	Page 6 of 13
3.2	Field Strength Calculation	Page 6 of 13
3.3	Conducted Emission	Page 6 of 13
<u>4.0</u>	<u>Test Result</u>	
4.1	Spurious Radiated Emission	Page 7-9 of 13
4.2	Conducted Emission	Page 10-12 of 13
<u>5.0</u>	<u>List of Equipment</u>	Page 13 of 13
<u>Appendix A</u>		
Photos of Test Setup		
<u>Appendix B</u>		
External EUT Photos		
<u>Appendix C</u>		
Internal EUT Photos		



1.0 **General Details**

1.1 **Test Laboratory**

Attestation of Global Compliance SZ Co Ltd.
2/F, Building 2, No.1-No.4, Chaxi Sanwei, Technical
Industrial Park, Gushu, Xixiang, Shenzhen, China.
Registration Number: 259865

Tested by:

A handwritten signature in blue ink that reads 'John Zhi'.

John Zhi

1.2 **Applicant Details**

Applicant

Binatone Electronics International Ltd.
Floor 23A, 9 Des Voeux Road West, Sheung Wan,
Hong Kong

Manufacturer

VTech(Dongguan) Telecommunications Limited
VTech Science Park, Xia Ling Bei Management Zone,
Liaobu, Dongguan, Guangdong, China



1.3 Equipment Under Test [EUT]

Description of Sample

Product Description: Video Baby Monitor (Parent Unit)
Model No: MBP36SPU, SCOUT36SPU, FOCUS36SPU
Brand Name: motorola
FCCID: VLJ-MBP36SPU
Rating: DC 5.0V, 600mA powered by AC/DC power adaptor
Or
DC 3.6V 900mAh (Ni-MH package rechargeable battery)
Accessories and Auxiliary Equipment: AC/DC Adaptor, Computer
EUT Exercising Software: None

Description of EUT

The Equipment Under Test (EUT) is a Monitor of Wireless Monitoring System.

As per Client Declaration, the circuit design, PCB Layout, shielding and interface of MBP36SPU, SCOUT36SPU & FOCUS36SPU are identical. So we use MBP36SPU as a representative model to perform all testing.

1.4 Equipment Modification

No modification was conducted on the tested sample by TÜV SÜD Hong Kong Ltd.

1.5 Related Submittal(s) Grants

This is a signal application subjected to Certificate Authorization.



2.0 Technical Details

2.1 Investigations Requested

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2012 and ANSI C63.4: 2009

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary					
Test Condition	FCC Test Requirement	Class / Severity	Test Result		
			Pass	Failed	N/A
Radiated Emissions, 30MHz to 4.5GHz	Part 15.109	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Conducted Emissions on AC, 0.15MHz to 30MHz	Part 15.107	Class B	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable



3.0 Test Methodology

3.1 Radiated Emission

The sample was placed 0.8m above the ground plane on a standard emission test site *. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

3.2 Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:

$$\text{FS} = \text{R} + \text{System Factor}$$
$$\text{System Factor} = \text{AF} + \text{CF} + \text{FA} - \text{PA}$$

Where FS = Net Field Strength in dBuV/m at 3 meters.

R = Reading of Spectrum Analyzer / Test Receiver in dBuV.

AF = Antenna Factor in dB.

CF = Cable Attenuation Factor in dB.

FA = Filter Attenuation Factor in dB.

PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.

3.3 Conducted Emissions

The EUT was placed on a non-metallic table 0.8m above the horizontal metal reference place and 0.4m from a vertical ground plane which is connected to the horizontal metal ground plane. Meanwhile, the AC main of EUT was connected to the distance of 0.8m line impedance stabilization network (LISN) during measurement.

Initial measurements were performed in quasi-peak and average detection modes by the test receiver, any emissions recorded within 30dB of the relevant limit lines were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.


4.0 Test Results

4.1 Spurious Radiated Emissions (30MHz to 4.5GHz)

Test Requirement: FCC Part 15 section 15.109 Class B
Test Method: ANSI C63.4:2009
Test Date: 2014-03-10
Mode of Operation: PC Communication mode

Detector Function: Quasi-peak (Below 1000 MHz)
Average (Above 1000 MHz)

Measurement BW: 120 kHz (Below 1000 MHz)
1 MHz (Above 1000 MHz)

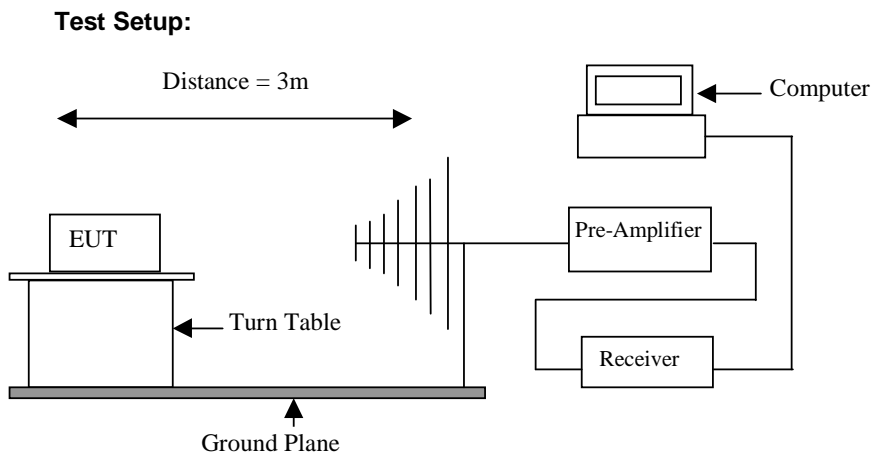



Results: PASS

Radiated Emissions					
Emissions Frequency MHz	Value	E-Field Polarity	Field Strength at 3m dBuV/m	Limit dBuV/m	Delta to Limit dBuV/m
53.72	QP	V	34.83	40.00	-5.17
192.04	QP	V	34.14	43.50	-9.36
288.08	QP	V	38.32	46.00	-7.68
456.12	QP	V	40.30	46.00	-5.70
665.88	QP	V	38.66	46.00	-7.34
827.72	QP	V	39.35	46.00	-6.65
139.64	QP	H	39.61	43.50	-3.89
160.44	QP	H	38.80	43.50	-4.70
237.68	QP	H	38.37	46.00	-7.63
263.56	QP	H	34.24	46.00	-11.76
665.36	QP	H	34.28	46.00	-11.72

Note:

- No further spurious emissions found between 30 MHz and lowest internal used/generated frequency.
- Result data graph is attached at the page 11 to page12 for reference.

Remark:

- Calculated measurement uncertainty: $\pm 5.0\text{dB}$.


Limits for Radiated Emissions [Section 15.109 Class B] :

Frequency Range [MHz]	Quasi-Peak Limits [$\mu\text{V}/\text{m}$]
30-88	100
88-216	150
216-960	200
Above960	500


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.



Vertical

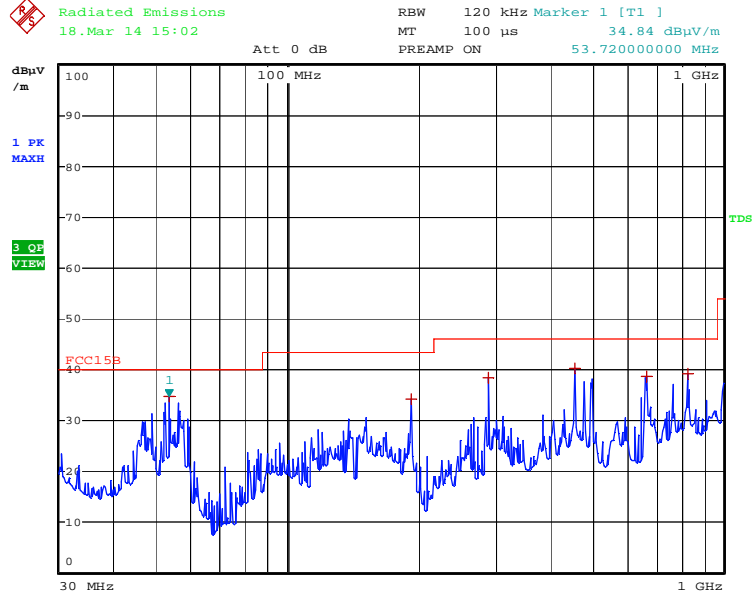


Horizontal

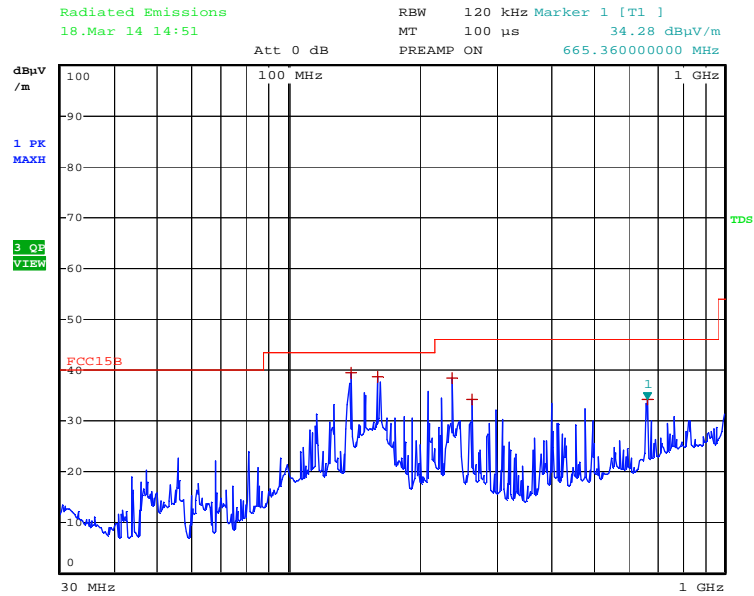

4.2 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement:	FCC part 15 Section 15.107 Class B
Test Method:	ANSI C63.4:2003
Test Date:	2014-03-10
Mode of Operation:	Transmitting mode
Detector Function	Quasi-peak, average
Measurement BW	9kHz (150kHz to 30MHz)

Test Setup:

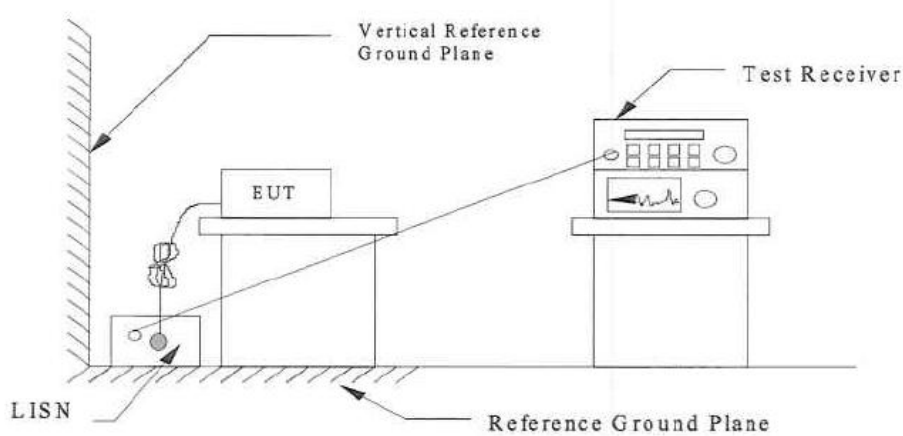

Result: PASS

Refer Figures and tables for the result.

Limits for Conducted Emission [Section 15.107]:

Frequency Range [MHz]	Quasi-Peak Limit [dB μ V]	Average Limit [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50


* Decreases with the logarithm of the frequency.

Remarks:

Calculated measurement uncertainty: ± 2.8 dB



Result data graph shows the conducted emission (Live).

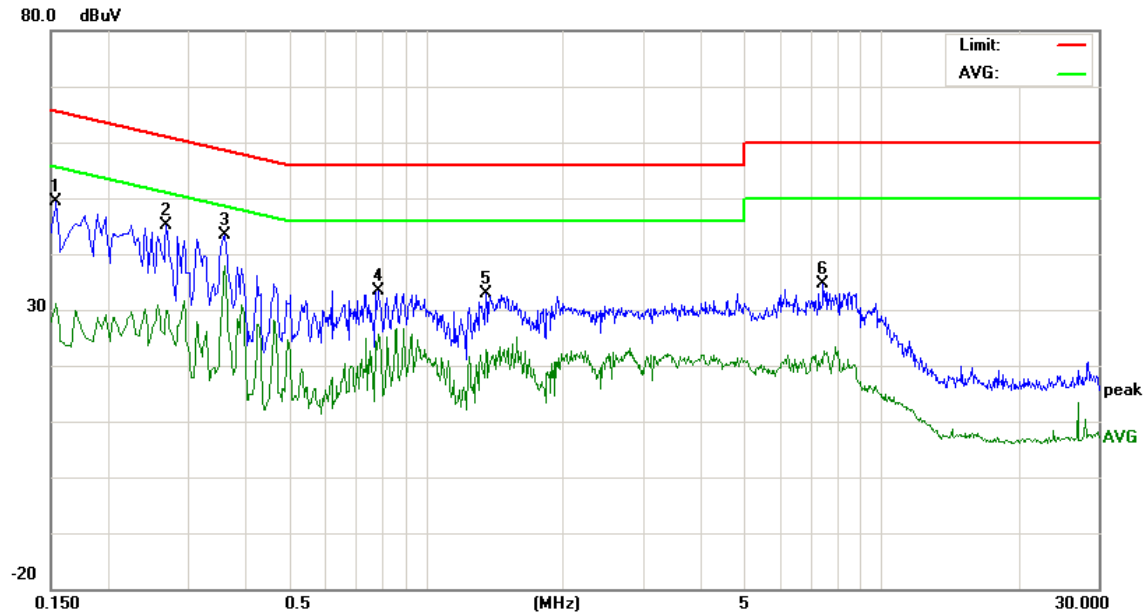


Refer to the following table for the result details:

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dBμV)	Limit (dBμV)	Margin
0.154	QP	L	49.26	65.78	-16.52
0.270	QP	L	45.10	61.12	-16.02
0.362	QP	L	43.35	58.68	-15.33
0.786	QP	L	33.47	56.00	-22.53
1.358	QP	L	32.82	56.00	-23.18
7.486	QP	L	34.67	60.00	-25.33



Result data graph shows the conducted emission (Neutral).

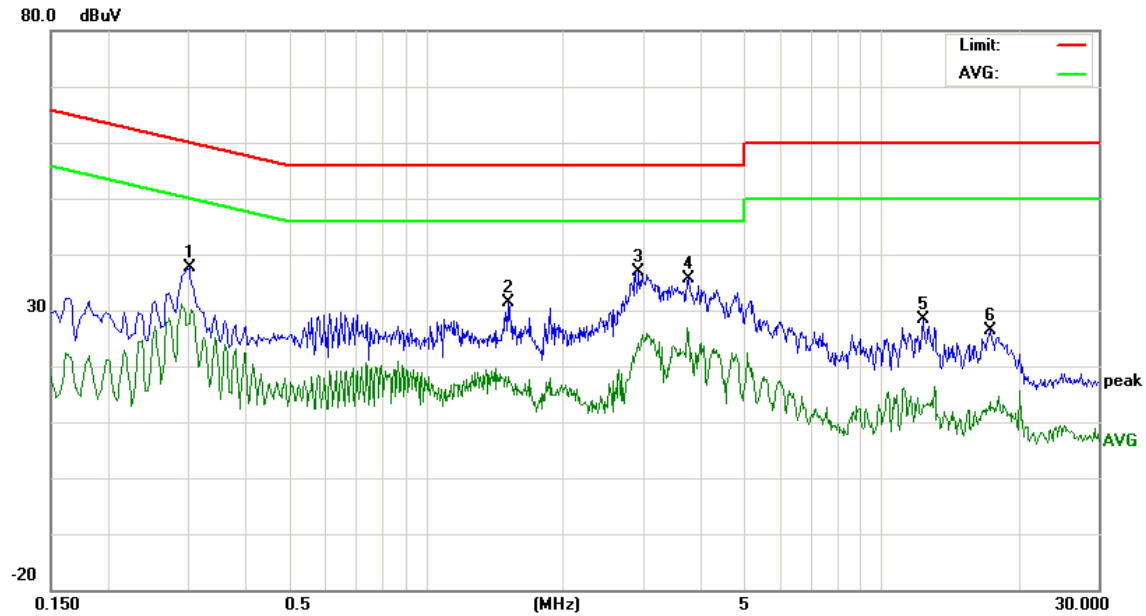

Refer to the following table for the result details:

Conducted Emission					
Frequency (MHz)	Detector (QP/AV)	Phase	Result (dBμV)	Limit (dBμV)	Margin
0.150	QP	N	46.17	65.99	-19.82
0.178	QP	N	44.91	64.57	-19.66
0.354	QP	N	44.00	58.87	-14.87
0.774	QP	N	34.64	56.00	-21.36
1.114	QP	N	33.13	56.00	-22.87
7.702	QP	N	38.94	60.00	-21.06



5.0 List of Measurement Equipment

Radiated Emission Test

Description	Manufacturer	Model no.	Serial no.	CAL due
N/A	3m Semi- Anechoic Chamber	9.0(L)*6.0(W)*6.0(H)	N/A	Jul. 16 2014
Agilent	Spectrum Analyzer	E4440A	US41421290	Jul. 16 2014
R&S	EMI Test Receiver	ESCI	100694	Jul. 16 2014
A.H.	Wideband Antenna	SAS-521-4	26	Jul. 16 2014
EMCO	Antenna	3142C	60447	Jul. 16 2014
EM	Horn Antenna	EM-AH-10180	67	Jul. 16 2014
EM	Power Amplifier	EM30180	0607030	Jul. 16 2014
MF	Position Controller	MF-7802	MF780208138	N/A

Conducted Emissions

Description	Manufacturer	Model no.	Serial no.	CAL due
N/A	Shielding Room	7.(L)x4(W)x3(H)	N/A	Jul. 16 2014
R&S	EMI Test Receiver	ESCI	100694	Jul. 16 2014
R&S	LISN	ESH3-Z5	8389791009	Jul. 16 2014

Remarks:

CM Corrective Maintenance
 N/A Not Applicable or Not Available
 TBD To Be Determined