



Valued Quality. Delivered.

## TEST REPORT

**Report Number: 16061618HKG-001**

Application  
for  
Original Grant of 47 CFR Part 15 Certification  
New family of RSS-247 Issue 1 Equipment Certification

Video Baby Monitor - Parent Unit

**FCC ID: VLJ-MBP481PU**

**IC: 4522A-MBP481PU**

Prepared and Checked by:

Approved by:

***Signed on File***  
Lee Shui Tim, Tim  
Lead Engineer

Digitally signed  
by Koo Wai Ip  
Location:  
Intertek Testing  
Services Hong  
Kong Ltd.

---

Koo Wai Ip  
Assistant Supervisor  
June 15, 2016

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-ettsemko.com](http://www.hk.intertek-ettsemko.com)

## INTERTEK TESTING SERVICES

---

### GENERAL INFORMATION

|                                    |                                                             |
|------------------------------------|-------------------------------------------------------------|
| <b>Applicant Name:</b>             | Binatone Electronics International Limited                  |
| <b>Applicant Address:</b>          | Floor 23A, 9 Des Voeux Road West,<br>Sheung Wan, Hong Kong  |
| <b>FCC Specification Standard:</b> | FCC Part 15, October 1, 2014 Edition                        |
| <b>FCC ID:</b>                     | VLJ-MBP481PU                                                |
| <b>FCC Model(s):</b>               | MBP481PU                                                    |
| <b>IC Specification Standard:</b>  | RSS-247 Issue 1, May 2015<br>RSS-Gen Issue 4, December 2014 |
| <b>IC:</b>                         | 4522A-MBP481PU                                              |
| <b>IC HVIN:</b>                    | MBP481PU                                                    |
| <b>IC PMN:</b>                     | MBP481, MBP481-2, MBP481-3, MBP481-4                        |
| <b>Type of EUT:</b>                | Spread Spectrum Transmitter                                 |
| <b>Description of EUT:</b>         | Video Baby Monitor - Parent Unit                            |
| <b>Serial Number:</b>              | N/A                                                         |
| <b>Sample Receipt Date:</b>        | June 23, 2016                                               |
| <b>Date of Test:</b>               | July 19, 2016 to August 04, 2016                            |
| <b>Report Date:</b>                | August 10, 2016                                             |
| <b>Environmental Conditions:</b>   | Temperature: +10 to 40°C<br>Humidity: 10 to 90%             |

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

|                                                                                     |    |
|-------------------------------------------------------------------------------------|----|
| <b>1.0 Test Results Summary &amp; Statement of Compliance</b> .....                 | 4  |
| 1.1 Summary of Test Results .....                                                   | 4  |
| 1.2 Statement of Compliance .....                                                   | 4  |
| <b>2.0 General Description</b> .....                                                | 6  |
| 2.1 Product Description .....                                                       | 6  |
| 2.2 Test Methodology .....                                                          | 6  |
| 2.3 Test Facility .....                                                             | 6  |
| <b>3.0 System Test Configuration</b> .....                                          | 8  |
| 3.1 Justification .....                                                             | 8  |
| 3.2 EUT Exercising Software .....                                                   | 9  |
| 3.3 Details of EUT and Description of Accessories .....                             | 10 |
| 3.4 Measurement Uncertainty .....                                                   | 10 |
| <b>4.0 Test Results</b> .....                                                       | 12 |
| 4.1 Maximum Conducted Output Power at Antenna Terminals .....                       | 12 |
| 4.2 Maximum 20 dB RF Bandwidth .....                                                | 15 |
| 4.3 Minimum Number of Hopping Frequencies .....                                     | 18 |
| 4.4 Minimum Hopping Channel Carrier Frequency Separation .....                      | 21 |
| 4.5 Average Channel Occupancy Time .....                                            | 23 |
| 4.6 Out of Band Conducted Emissions .....                                           | 26 |
| 4.7 Field Strength Calculation .....                                                | 31 |
| 4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions ..... | 32 |
| 4.8.1 Radiated Emission Configuration Photograph .....                              | 33 |
| 4.8.2 Radiated Emission Data .....                                                  | 33 |
| 4.8.3 Radiated Emission Test Setup .....                                            | 34 |
| 4.8.4 Transmitter Duty Cycle Calculation .....                                      | 39 |
| 4.9 AC Power Line Conducted Emission .....                                          | 41 |
| 4.9.1 AC Power Line Conducted Emission Configuration Photograph .....               | 41 |
| 4.9.2 AC Power Line Conducted Emission Data .....                                   | 41 |
| <b>5.0 Equipment List</b> .....                                                     | 46 |

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 1  
TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

# INTERTEK TESTING SERVICES

---

## 1.0 Test Results Summary & Statement of Compliance

### 1.1 Summary of Test Results

| Test Items                                                      | FCC Part 15 Section | RSS-247/<br>RSS-Gen <sup>#</sup><br>Section | Results | Details<br>see<br>section |
|-----------------------------------------------------------------|---------------------|---------------------------------------------|---------|---------------------------|
| Antenna Requirement                                             | 15.203              | 7.1.2 <sup>#</sup>                          | Pass    | 2.1                       |
| Max. Conducted Output Power                                     | 15.247(b)(1)        | 5.1(2)                                      | Pass    | 4.1                       |
| Max. 20dB RF Bandwidth                                          | 15.247(a)(1)(iii)   | 5.1(1)                                      | Pass    | 4.2                       |
| Min. No. of Hopping Frequencies                                 | 15.247(a)(1)(iii)   | 5.1(3)                                      | Pass    | 4.3                       |
| Min. Hopping Channel Carrier<br>Frequency Separation            | 15.247(a)(1)        | 5.1                                         | Pass    | 4.4                       |
| Average Time of Occupancy                                       | 15.247(a)(1)(iii)   | 5.1(3)                                      | Pass    | 4.5                       |
| Out of Band Antenna Conducted<br>Emission                       | 15.247(d)           | 5.5                                         | Pass    | 4.6                       |
| Radiated Emission in Restricted Bands<br>and Spurious Emissions | 15.247(d) & 15.109  | 5.4                                         | Pass    | 4.8                       |
| AC Power Line Conducted Emission                                | 15.207 & 15.107     | 7.2.4 <sup>#</sup>                          | Pass    | 4.9                       |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2014 Edition  
RSS-247 Issue 1, May 2015  
RSS-Gen Issue 4, November 2014

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 2  
GENERAL DESCRIPTION**

---

## INTERTEK TESTING SERVICES

---

### 2.0 General Description

#### 2.1 Product Description

The MBP481PU is a Video Baby Monitor - Parent Unit. It operates at frequency range of 2407.5MHz to 2475MHz. There are total 21 channels. The Parent Unit is powered by an adaptor 100-120VAC to 6.0VDC 400mA and/or powered by a "Ni-MH" type rechargeable battery pack (3.6V 800mAh).

The antenna(s) used in the Parent Unit is integral, and the test sample is a prototype.

For FCC and IC, commercial name: MBP481, MBP481-2, MBP481-3 and MBP481-4 are the same as the Model: MBP481PU in electronics/electrical designs including software & firmware, PCB layout and construction design/physical design/enclosure. The only differences between these commercial names are color and number of parent unit in packaging to be sold for marketing purpose

The circuit description and frequency hopping algorithm are saved with filename: descri.pdf.

#### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013). All other measurements were made in accordance with the procedures in 47 CFR Part 2.

#### 2.3 Test Facility

The radiated emission test site, AC power line conducted measurement facility and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Intertek Testing Services Hong Kong Ltd., which is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with FCC and Industry Canada No. 2042V.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 3  
SYSTEM TEST CONFIGURATION**



---

## INTERTEK TESTING SERVICES

---

### 3.0 System Test Configuration

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The Parent Unit was powered by a 100-120VAC to 6.0VDC 400mA adaptor and/or powered by a "Ni-MH" type rechargeable battery pack (3.6V 800mAh).

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the parent unit attached to peripherals, they were connected and operational (as typical as possible). For measurement below 1GHz, the EUT was placed on wooden turntable 80cm above ground. For measurement above 1GHz, the EUT was placed 1.5m above ground.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209/ RSS-247 5. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109/ RSS-247 Section 5.5 Limits.

## INTERTEK TESTING SERVICES

---

### 3.1 Justification - Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data is included in this report.

### 3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## INTERTEK TESTING SERVICES

---

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor and/or a battery (provided with the unit) were used to power the device. Their description are listed below.

- (1) An AC adaptor (100-120VAC 60Hz 150mA to 6VDC 400mA, Model: S003AKU0600040, Brand: Ten Pao) (Supplied by Client)
- (2) A "Ni-MH" type rechargeable battery pack (3.6V 800mAh, Model: BT166342/BT266342, Brand: GPI) (Supplied by Client).

#### Description of Accessories:

- (1) Baby Unit, Model: MBP482BU, FCC ID: VLJ-MBP482BU (Provided by Client)

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

**INTERTEK TESTING SERVICES**

---


**EXHIBIT 4  
TEST RESULTS**

## INTERTEK TESTING SERVICES

---

### 4.0 Test Results

#### 4.1 Maximum Conducted Output Power at Antenna Terminals



- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyzer.

| Antenna Gain = 0dBi |         |               |              |
|---------------------|---------|---------------|--------------|
| Frequency (MHz)     |         | Output in dBm | Output in mW |
| Low Channel:        | 2407.5  | 17.38         | 54.702       |
| Middle Channel:     | 2441.25 | 17.32         | 53.951       |
| High Channel:       | 2475    | 16.70         | 46.774       |

Cable loss / external attenuation : 0.5 dB

Cable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

dBm max. output level = 17.38 dBm


Limits:

- 0.125W (21dBm) for antennas with gains of 6dBi or less
- 0.25W (24dBm) for antennas with gains of 6dBi or less
- 1W (30dBm) for antennas with gains of 6dBi or less
- \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi


The plots of conducted output power are saved as below.

# INTERTEK TESTING SERVICES

## Plots of conducted output power Lowest Channel

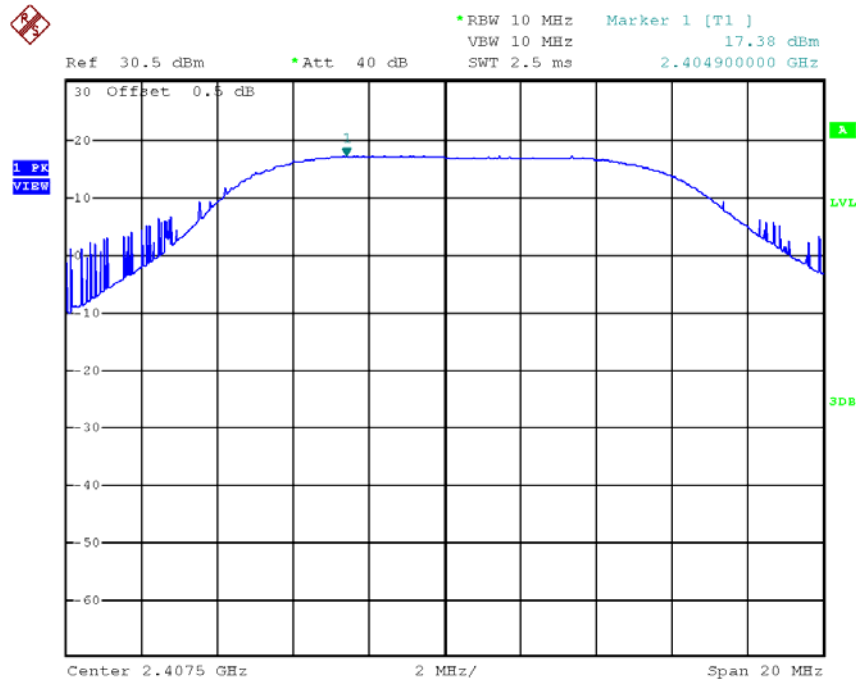


## Middle Channel

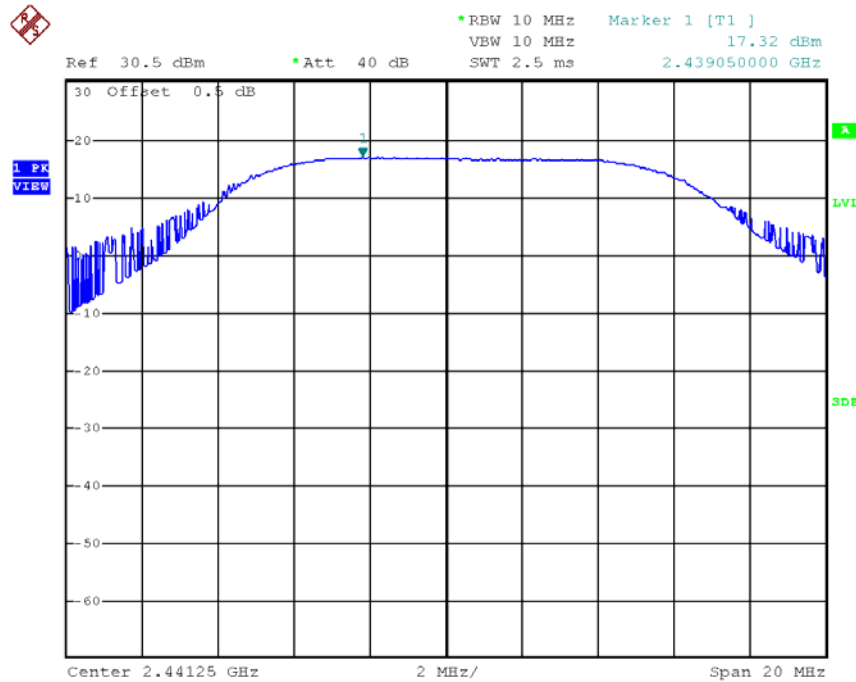

# INTERTEK TESTING SERVICES

## Plots of conducted output power


### Highest Channel

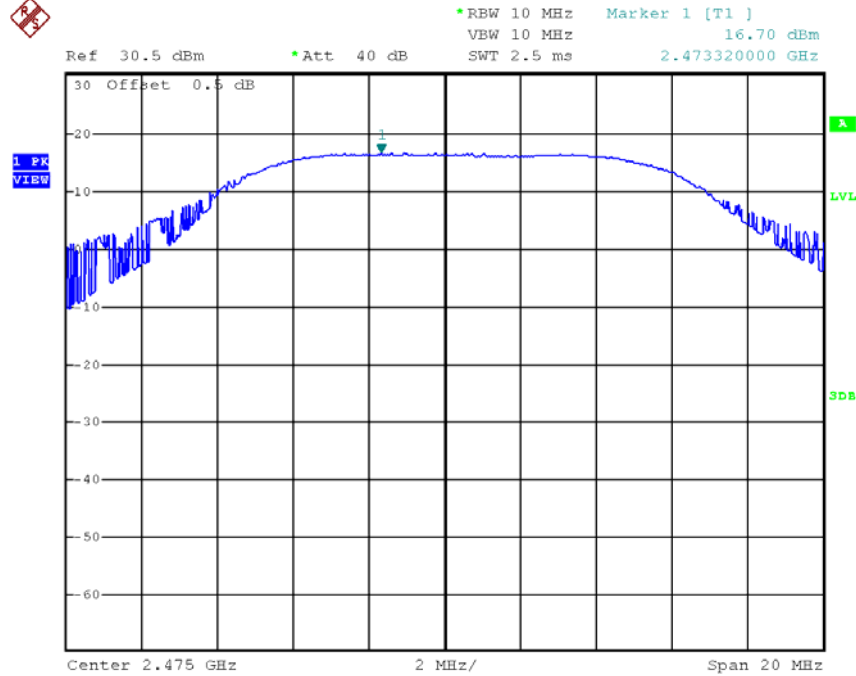

## INTERTEK TESTING SERVICES

---

### 4.2 Maximum 20 dB RF Bandwidth



The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

| Frequency (MHz)         | 20 dB Bandwidth (kHz) |
|-------------------------|-----------------------|
| Low Channel: 2407.5     | 3960                  |
| Middle Channel: 2441.25 | 3980                  |
| High Channel: 2475      | 3980                  |

#### Limits


- $\leq 500\text{kHz}$  for 902-928MHz
- N/A for 2400-2483.5MHz
- $\leq 1\text{MHz}$  for 5725-5850MHz

The plots of 20dB RF bandwidth and occupied bandwidth are saved as below.




# INTERTEK TESTING SERVICES

## Plots of 20dB RF bandwidth Lowest Channel

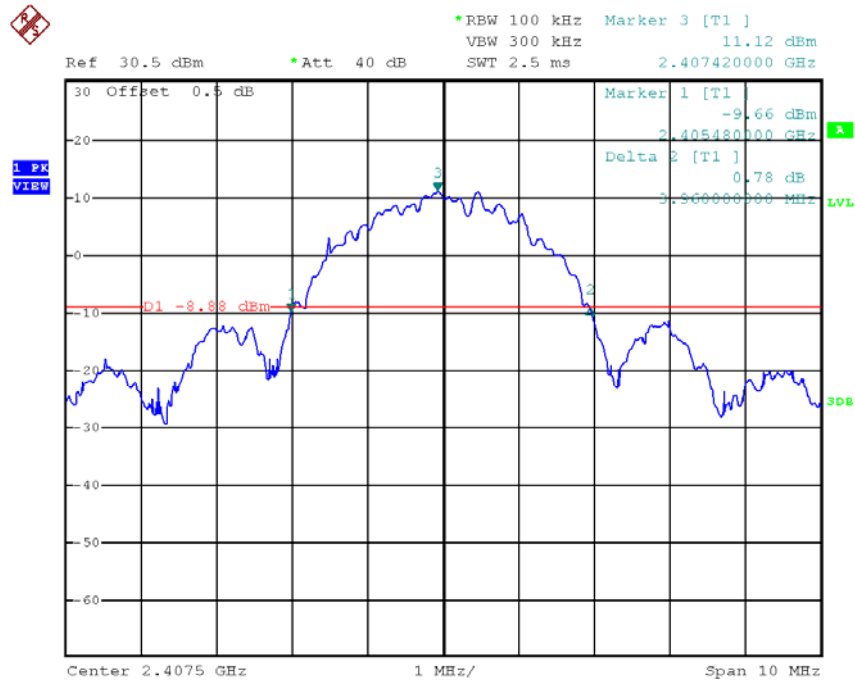


## Middle Channel

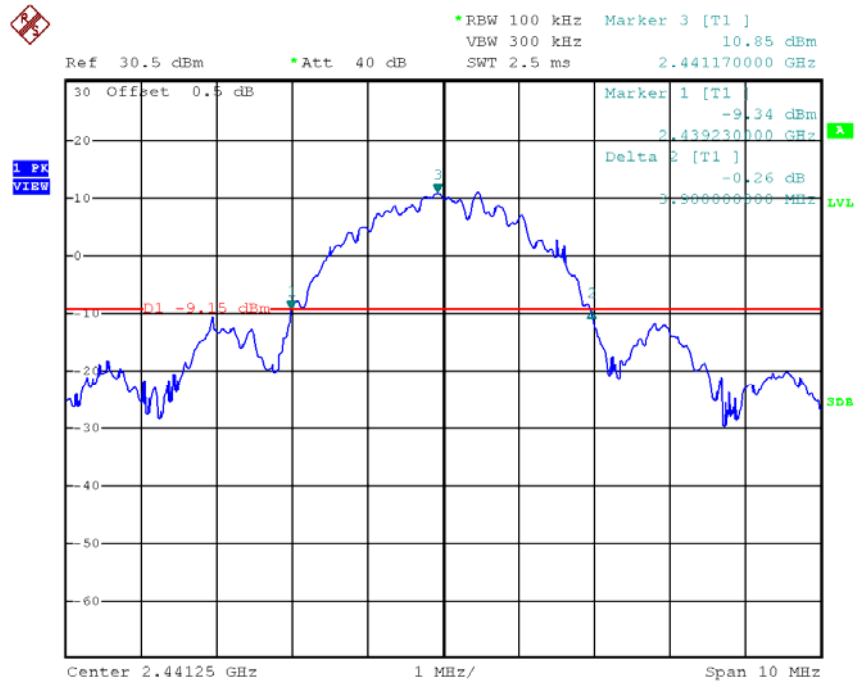

# INTERTEK TESTING SERVICES


## Highest Channel

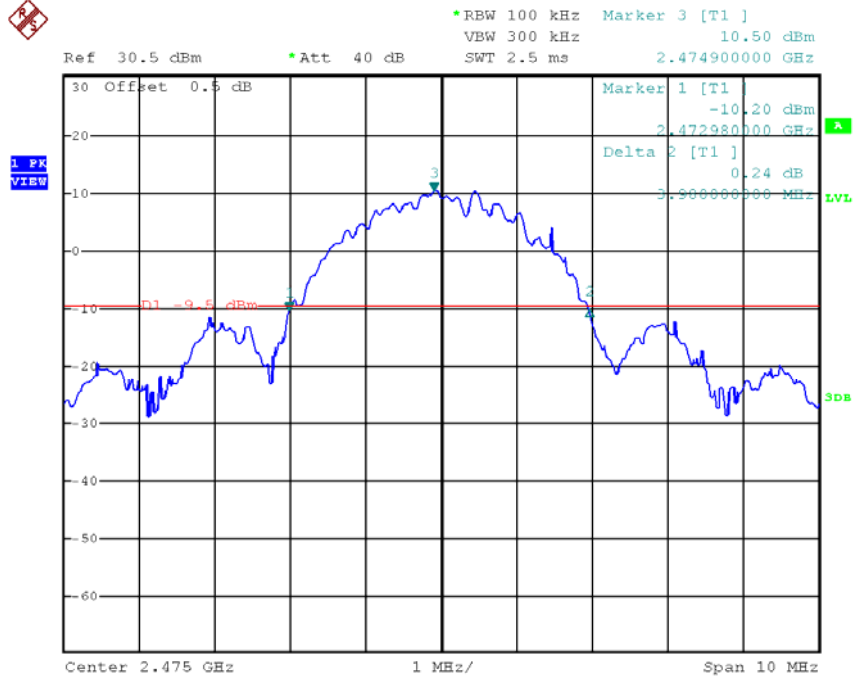

## INTERTEK TESTING SERVICES

---

### 4.3 Minimum Number of Hopping Frequencies



With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

|                         |    |
|-------------------------|----|
| No. of hopping channels | 16 |
|-------------------------|----|

#### Minimum Requirements:


- at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel  $\geq$  250kHz)
- at least 15 hopping channels for 2400MHz-2483.5MHz.
- at least 75 hopping channels for 5725MHz-5850MHz.

The plots of number of hopping frequencies are saved as below.


# INTERTEK TESTING SERVICES

## Plots of number of hopping frequencies

### Plot A

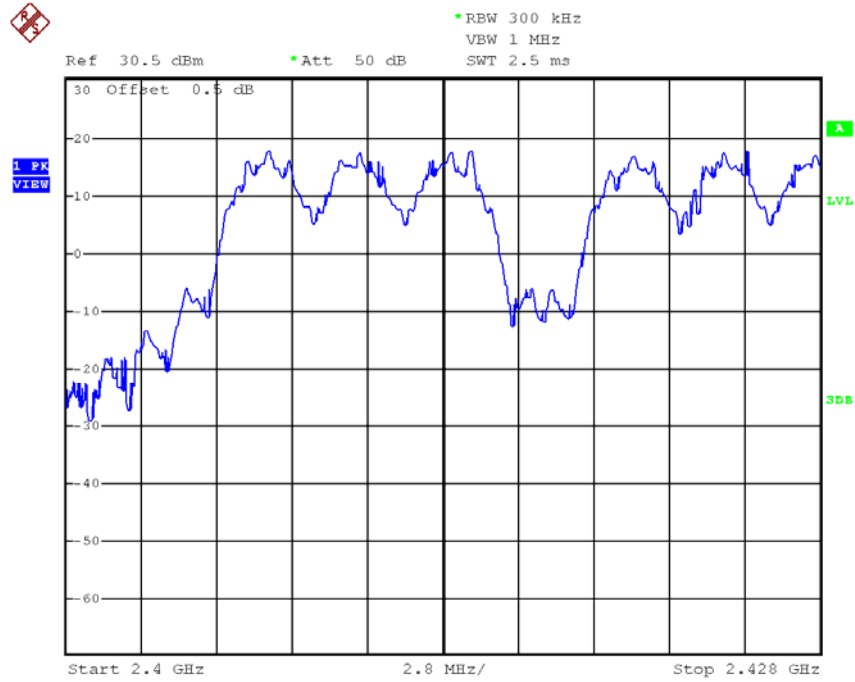


### Plot B

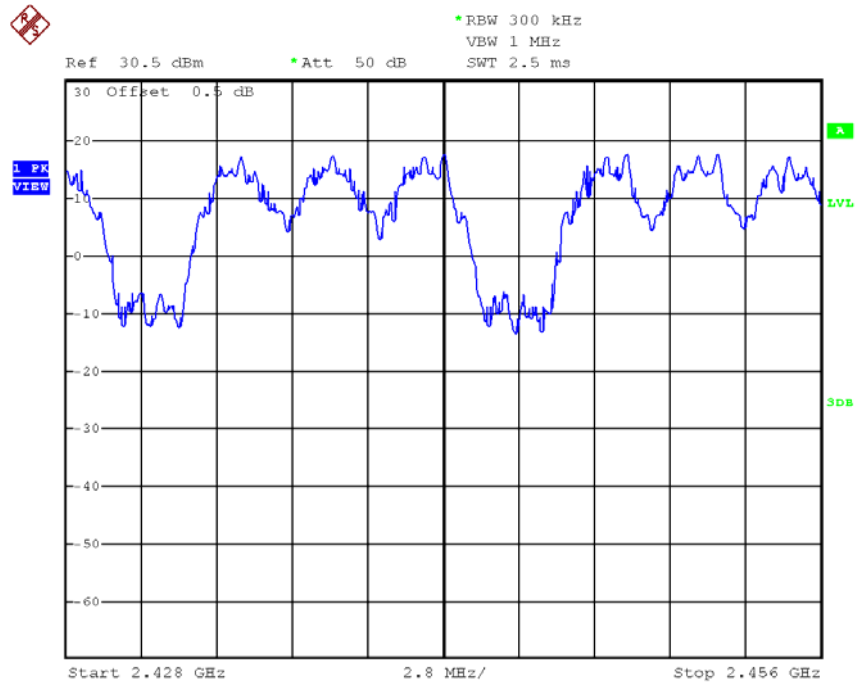

# INTERTEK TESTING SERVICES


## Plot C

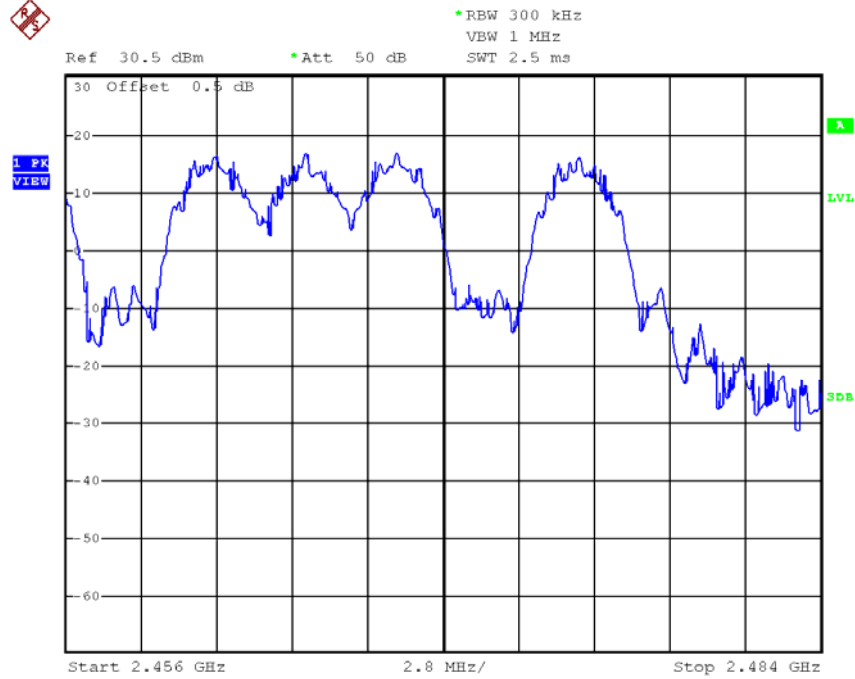

## INTERTEK TESTING SERVICES

---

### 4.4 Minimum Hopping Channel Carrier Frequency Separation



Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

|                                                           |         |
|-----------------------------------------------------------|---------|
| Channel Separation (Channel <u>1</u> & Channel <u>2</u> ) | 3360kHz |
|-----------------------------------------------------------|---------|

#### Limits:

The channel separation must be larger than:


- 25 kHz
- 20 dB bandwidth of hopping channel: \_\_Hz
- 2/3 of 20dB bandwidth of hopping channel: 2654 kHz

The plot(s) of hopping channel carrier frequency separation is saved as below.

# INTERTEK TESTING SERVICES

## Plots of hopping channel carrier frequency separation


### Between channel 1 and channel 2

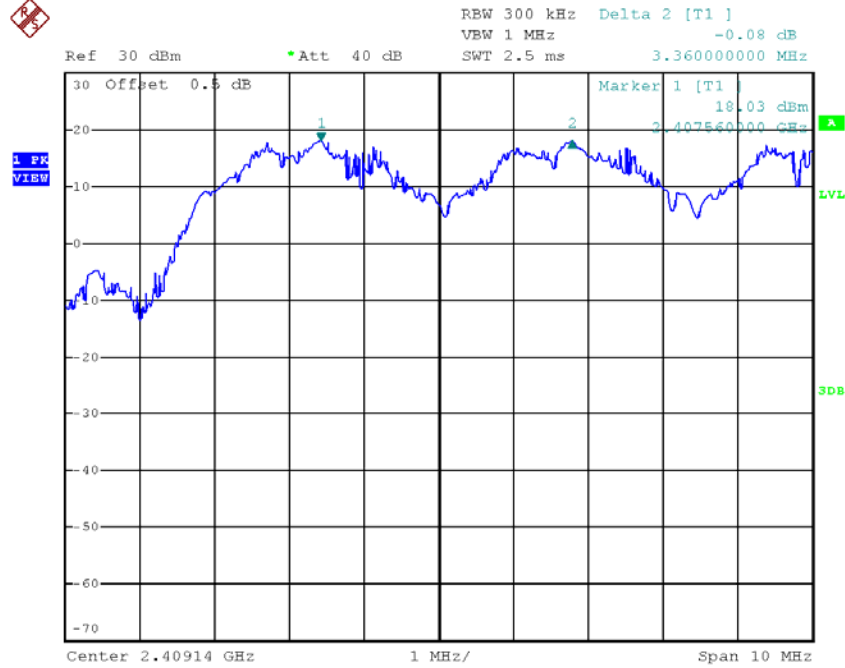

## INTERTEK TESTING SERVICES

---

### 4.5 Average Channel Occupancy Time



The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 200 $\mu$ s, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, “0.4 seconds x Number of hopping channels employed” seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

| Parent Unit (worst-case: )                                               |          |
|--------------------------------------------------------------------------|----------|
| Average Occupancy Time = 0.1124 ms x 11 x 5                              | 6.182 ms |
| Average Occupancy Time by description<br>= 0.25 ms x 11 x 5 (worst case) | 13.75 ms |

**Limits:**

Average 0.4 seconds maximum occupancy in:

- 6.4 seconds (0.4 sec. x 16) for 2400MHz-2483.5MHz
- 20 seconds for 902MHz-928MHz  $\geq$  50 hopping channels
- 10 seconds for 902MHz-928MHz  $\geq$  25 hopping channels
- 30 seconds for 5725-5850MHz


The plots of average channel occupancy time are saved as below.




# INTERTEK TESTING SERVICES

## Plots of average channel occupancy time

### Plot A, TX time for on pulse

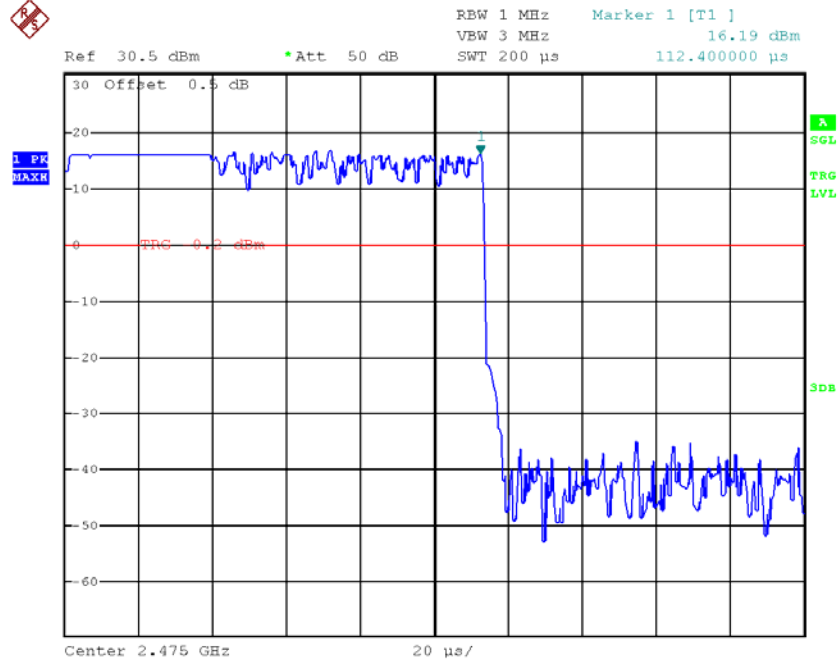


### Plot B, No. of TX in 6.4s

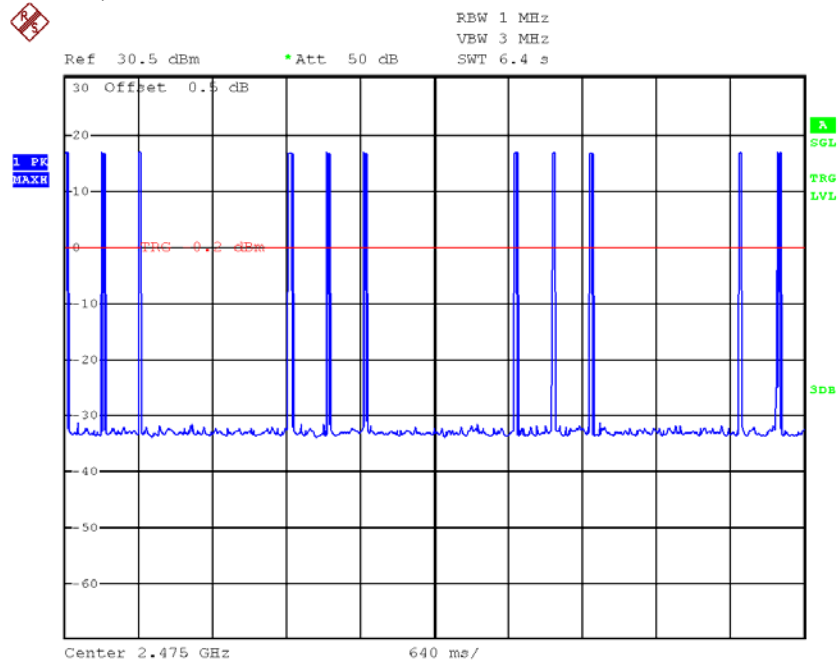


# INTERTEK TESTING SERVICES

## Plots of average channel occupancy time

### Plot C, No. of TX in 6.4s

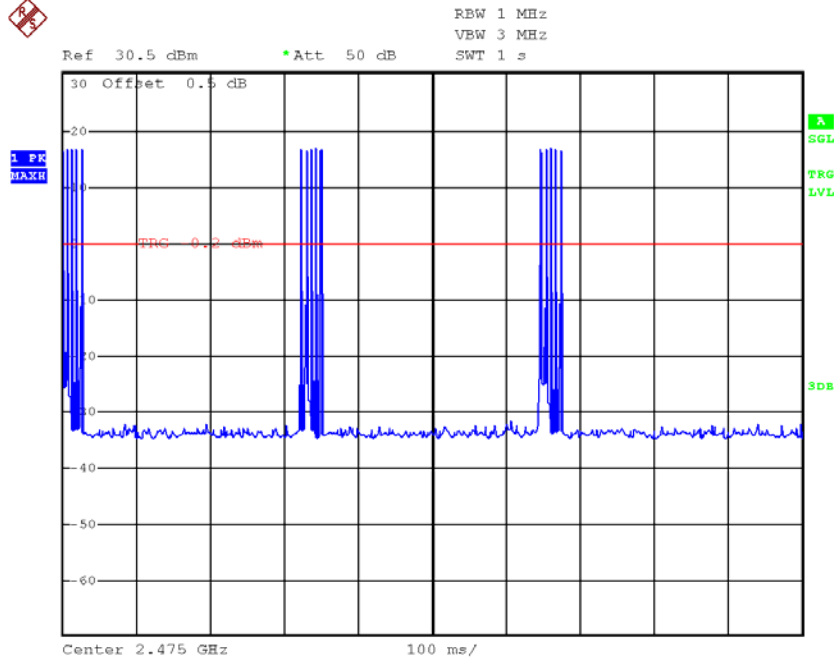


### Plot D, No. of TX in 6.4s

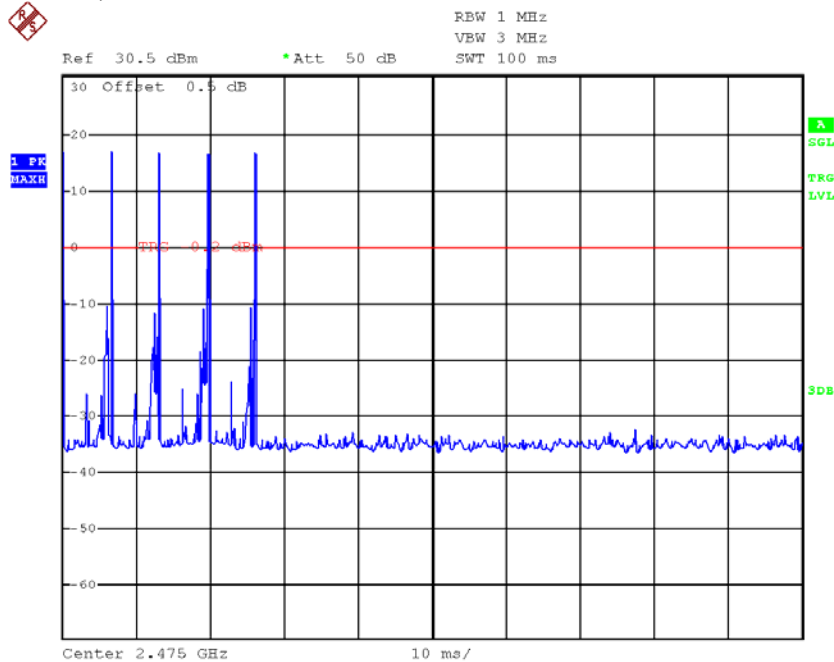

## INTERTEK TESTING SERVICES

---

### 4.6 Out of Band Conducted Emissions



In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

#### Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions and bandedge are saved as below.


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

### Lowest channel, Plot 1

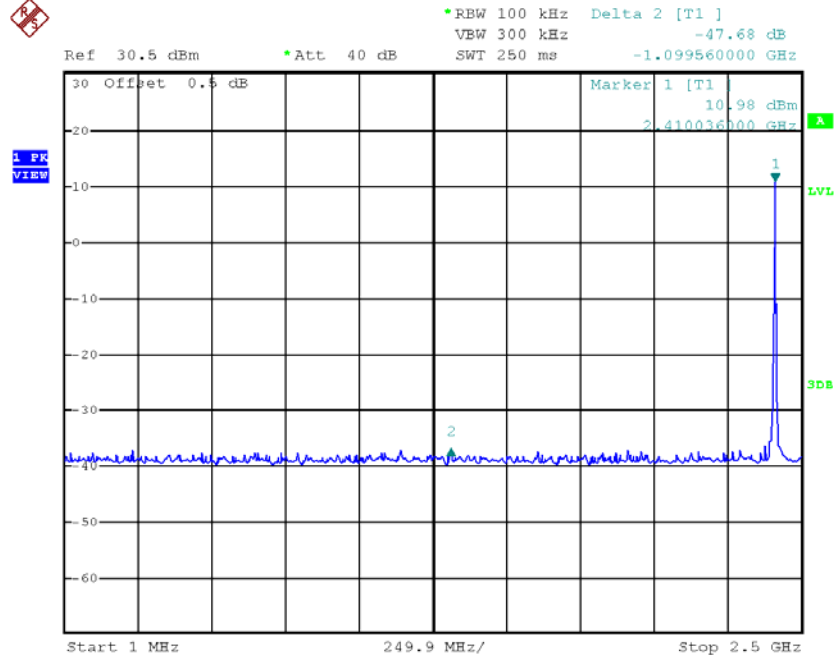


### Lowest channel, Plot 2

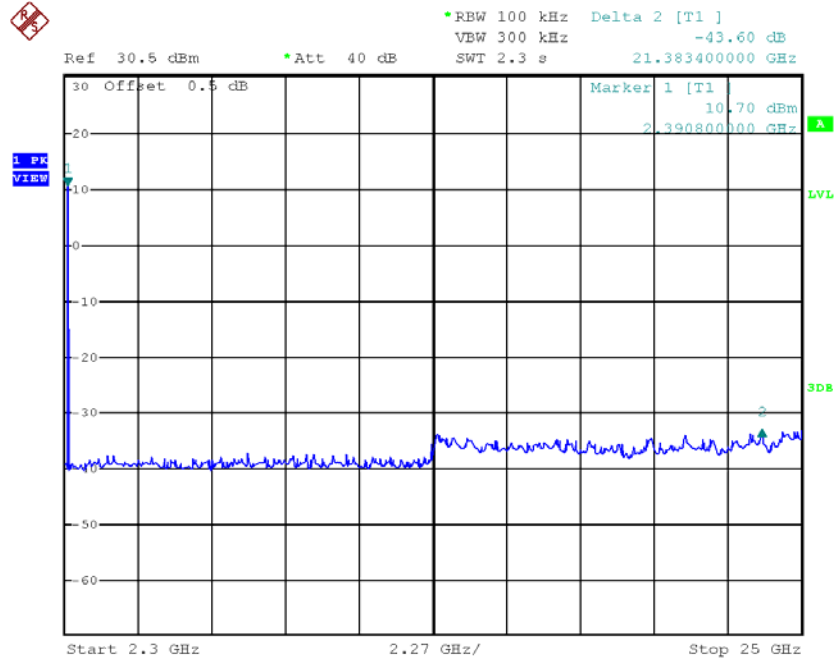


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

### Middle channel, Plot 1

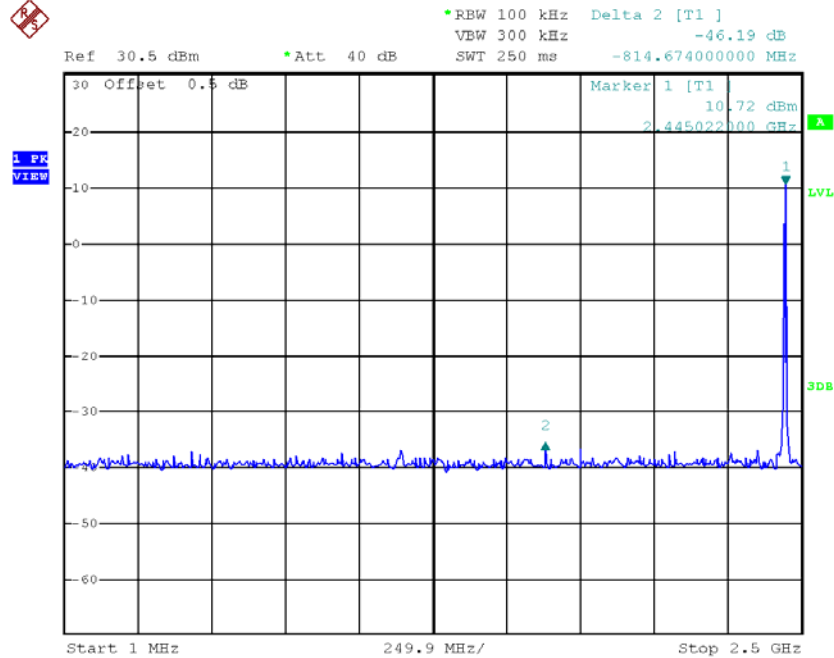


### Middle channel, Plot 2

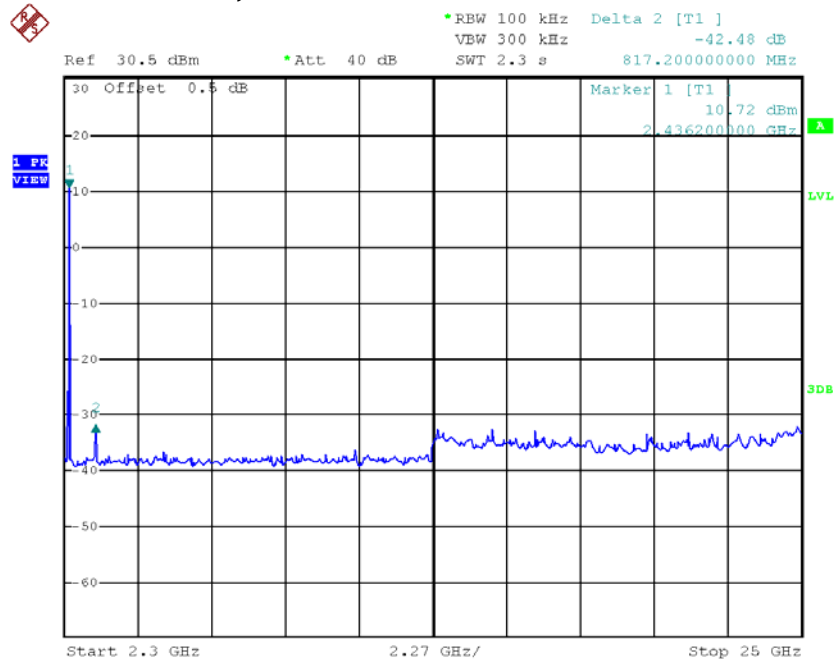


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

### Highest channel, Plot 1

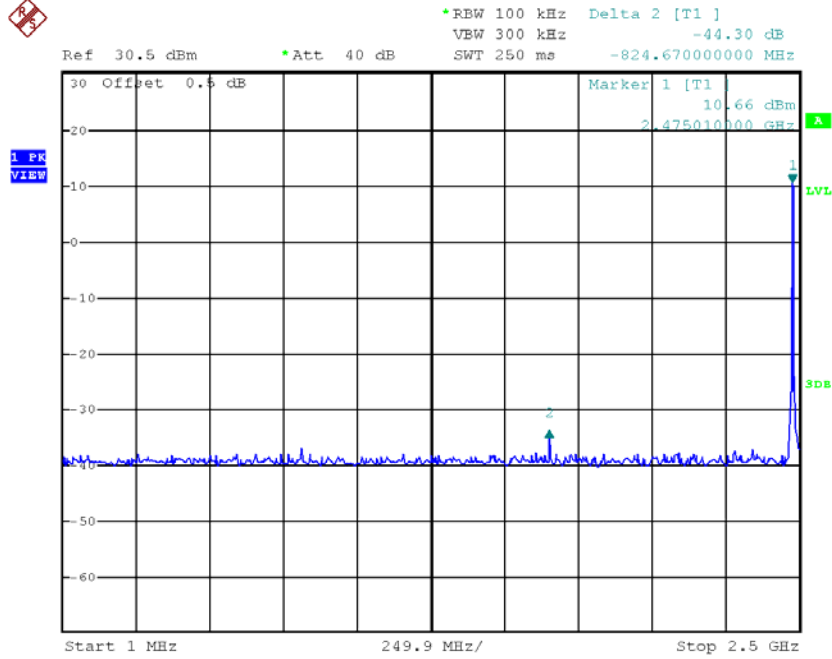


### Highest channel, Plot 2

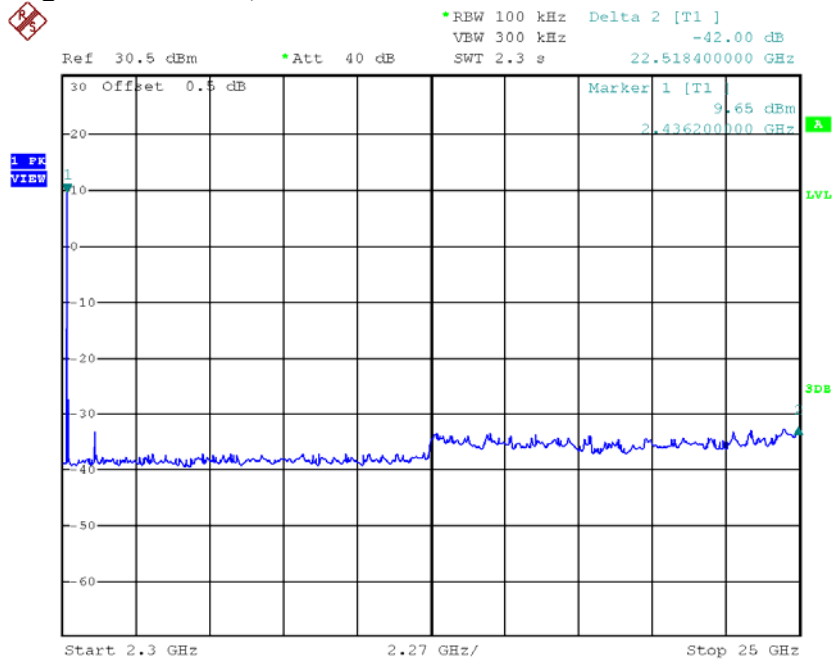


# INTERTEK TESTING SERVICES

## Plots of bandedge

### Lowest bandedge

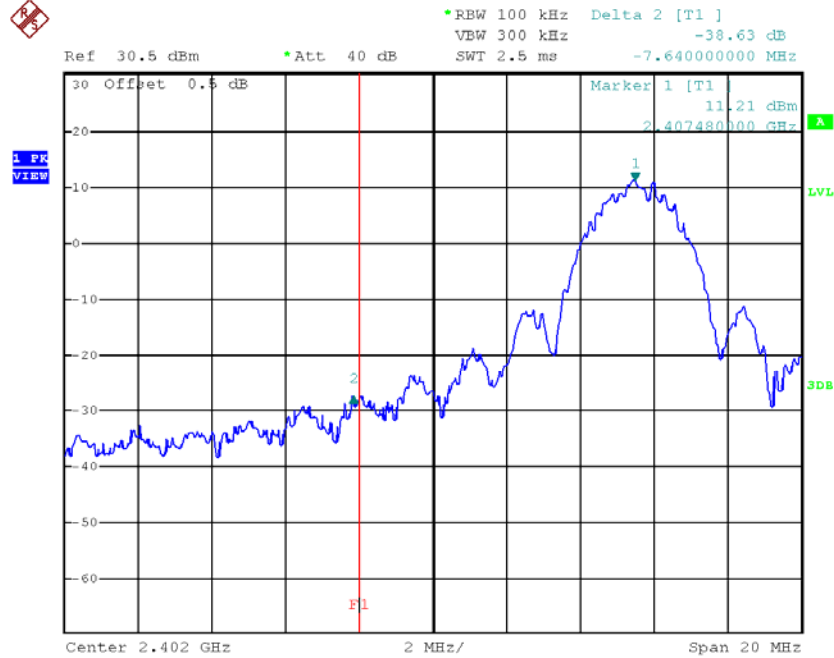

### Highest bandedge

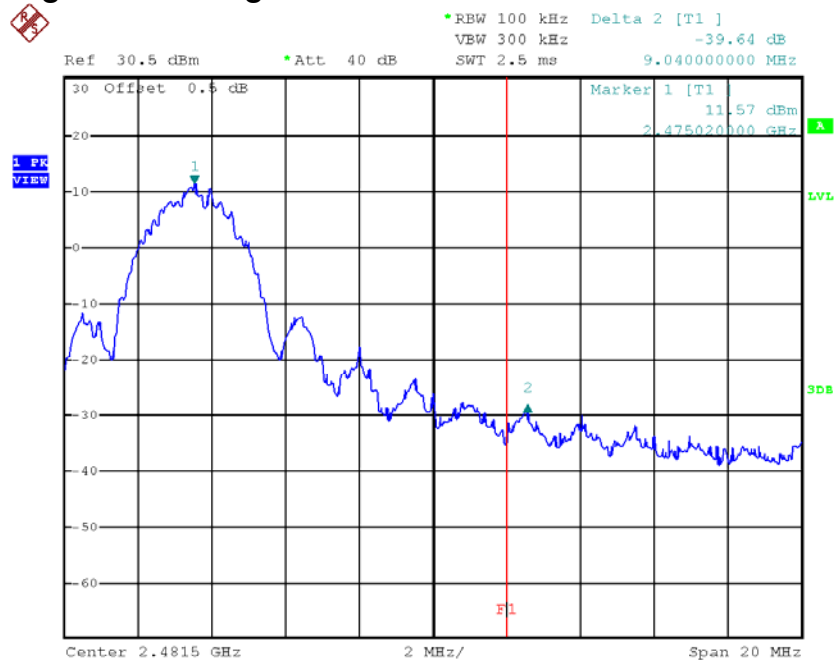

---

## INTERTEK TESTING SERVICES

---

### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$



## INTERTEK TESTING SERVICES

---

### 4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## INTERTEK TESTING SERVICES

---

### 4.8.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

2483.5 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

### 4.8.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.


Judgement -

Passed by 4.7 dB margin


# INTERTEK TESTING SERVICES

## 4.8.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

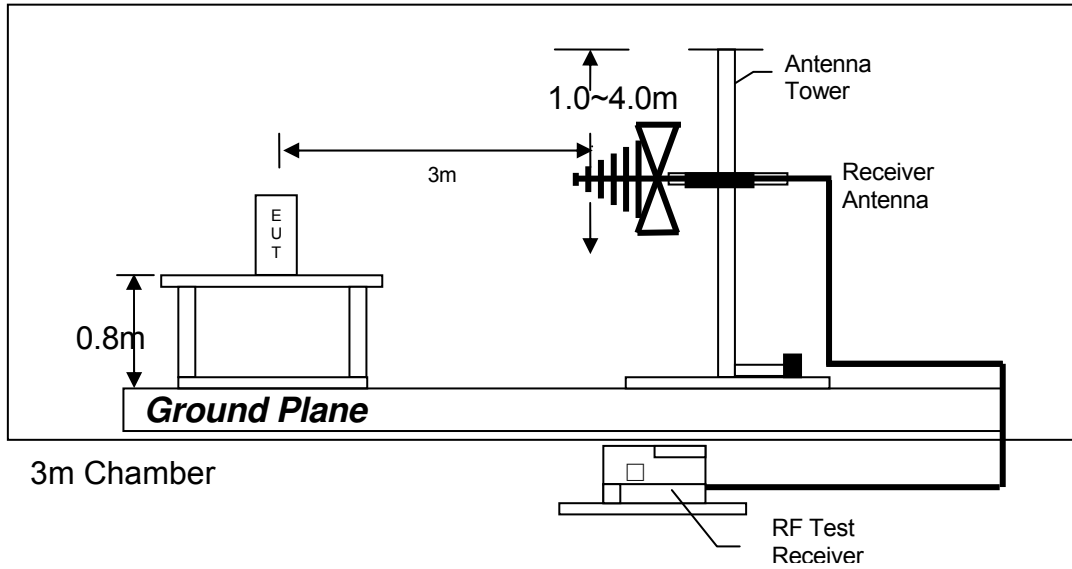

Test setup of radiated emissions up to 1GHz

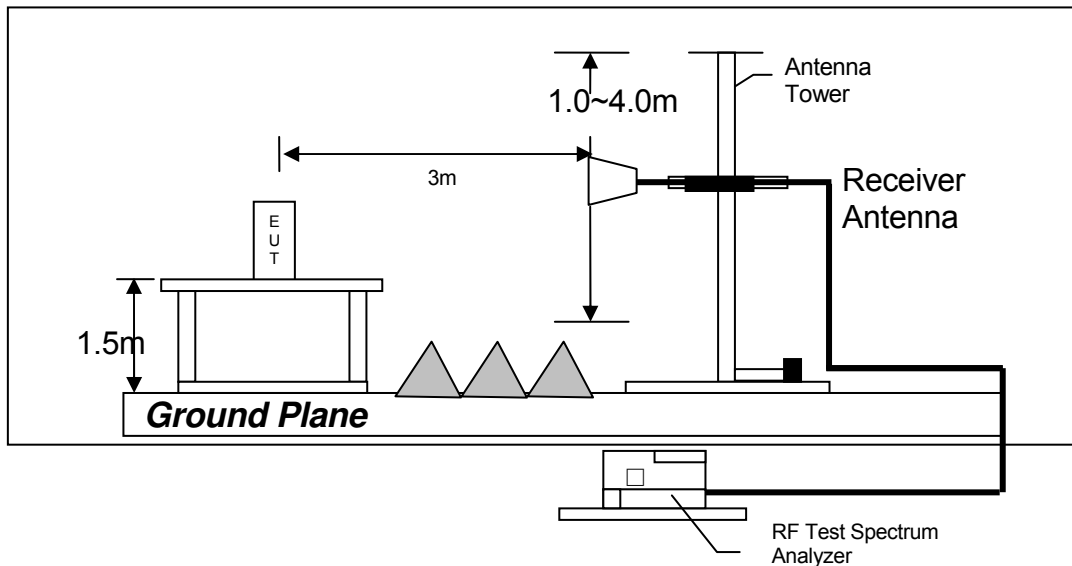

Test setup of radiated emissions above 1GHz

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 00

Table 1

### Radiated Emission Data

| Polarization    | Frequency (MHz)         | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (dB) | Calculated at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB)         |
|-----------------|-------------------------|----------------------|-------------------|---------------------|---------------------|---------------------------------|------------------------------------|---------------------|
| <b><i>H</i></b> | <b><i>2390.000</i></b>  | <b><i>72.2</i></b>   | <b><i>33</i></b>  | <b><i>29.4</i></b>  | <b><i>38.06</i></b> | <b><i>30.5</i></b>              | <b><i>54.0</i></b>                 | <b><i>-23.5</i></b> |
| <b><i>V</i></b> | <b><i>4815.000</i></b>  | <b><i>51.9</i></b>   | <b><i>33</i></b>  | <b><i>34.9</i></b>  | <b><i>38.06</i></b> | <b><i>15.7</i></b>              | <b><i>54.0</i></b>                 | <b><i>-38.3</i></b> |
| <b><i>H</i></b> | <b><i>12037.500</i></b> | <b><i>42.2</i></b>   | <b><i>33</i></b>  | <b><i>40.5</i></b>  | <b><i>38.06</i></b> | <b><i>11.6</i></b>              | <b><i>54.0</i></b>                 | <b><i>-42.4</i></b> |

| Polarization    | Frequency (MHz)         | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB)         |
|-----------------|-------------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|---------------------|
| <b><i>H</i></b> | <b><i>2390.000</i></b>  | <b><i>72.2</i></b>   | <b><i>33</i></b>  | <b><i>29.4</i></b>  | <b><i>68.6</i></b>              | <b><i>74.0</i></b>              | <b><i>-5.4</i></b>  |
| <b><i>V</i></b> | <b><i>4815.000</i></b>  | <b><i>51.9</i></b>   | <b><i>33</i></b>  | <b><i>34.9</i></b>  | <b><i>53.8</i></b>              | <b><i>74.0</i></b>              | <b><i>-20.2</i></b> |
| <b><i>H</i></b> | <b><i>12037.500</i></b> | <b><i>42.2</i></b>   | <b><i>33</i></b>  | <b><i>40.5</i></b>  | <b><i>49.7</i></b>              | <b><i>74.0</i></b>              | <b><i>-24.3</i></b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 5.5.
  6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyser with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 10

Table 2

### Radiated Emission Data

| Polarization | Frequency (MHz)  | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (dB) | Calculated at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------|---------------------------------|------------------------------------|--------------|
| <i>V</i>     | <i>4882.500</i>  | <i>50.5</i>          | <i>33</i>         | <i>34.9</i>         | <i>38.06</i>        | <i>14.3</i>                     | <i>54.0</i>                        | <i>-39.7</i> |
| <i>V</i>     | <i>7323.750</i>  | <i>38.8</i>          | <i>33</i>         | <i>37.9</i>         | <i>38.06</i>        | <i>5.6</i>                      | <i>54.0</i>                        | <i>-48.4</i> |
| <i>H</i>     | <i>12206.250</i> | <i>42.6</i>          | <i>33</i>         | <i>40.5</i>         | <i>38.06</i>        | <i>12.0</i>                     | <i>54.0</i>                        | <i>-42.0</i> |

| Polarization | Frequency (MHz)  | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|--------------|
| <i>V</i>     | <i>4882.500</i>  | <i>50.5</i>          | <i>33</i>         | <i>34.9</i>         | <i>52.4</i>                     | <i>74.0</i>                     | <i>-21.6</i> |
| <i>V</i>     | <i>7323.750</i>  | <i>38.8</i>          | <i>33</i>         | <i>37.9</i>         | <i>43.7</i>                     | <i>74.0</i>                     | <i>-30.3</i> |
| <i>H</i>     | <i>12206.250</i> | <i>42.6</i>          | <i>33</i>         | <i>40.5</i>         | <i>50.1</i>                     | <i>74.0</i>                     | <i>-23.9</i> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 5.5.
  6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyser with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

Mode: TX-Channel 20

Table 3

### Radiated Emission Data

| Polarization    | Frequency (MHz)         | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (dB) | Calculated at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB)         |
|-----------------|-------------------------|----------------------|-------------------|---------------------|---------------------|---------------------------------|------------------------------------|---------------------|
| <b><i>H</i></b> | <b><i>2483.500</i></b>  | <b><i>72.9</i></b>   | <b><i>33</i></b>  | <b><i>29.4</i></b>  | <b><i>38.06</i></b> | <b><i>31.2</i></b>              | <b><i>54.0</i></b>                 | <b><i>-22.8</i></b> |
| <b><i>V</i></b> | <b><i>4950.000</i></b>  | <b><i>50.2</i></b>   | <b><i>33</i></b>  | <b><i>34.9</i></b>  | <b><i>38.06</i></b> | <b><i>14.0</i></b>              | <b><i>54.0</i></b>                 | <b><i>-40.0</i></b> |
| <b><i>V</i></b> | <b><i>7425.000</i></b>  | <b><i>39.1</i></b>   | <b><i>33</i></b>  | <b><i>37.9</i></b>  | <b><i>38.06</i></b> | <b><i>5.9</i></b>               | <b><i>54.0</i></b>                 | <b><i>-48.1</i></b> |
| <b><i>H</i></b> | <b><i>12375.000</i></b> | <b><i>42.1</i></b>   | <b><i>33</i></b>  | <b><i>40.5</i></b>  | <b><i>38.06</i></b> | <b><i>11.5</i></b>              | <b><i>54.0</i></b>                 | <b><i>-42.5</i></b> |

| Polarization    | Frequency (MHz)         | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB)         |
|-----------------|-------------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|---------------------|
| <b><i>H</i></b> | <b><i>2483.500</i></b>  | <b><i>72.9</i></b>   | <b><i>33</i></b>  | <b><i>29.4</i></b>  | <b><i>69.3</i></b>              | <b><i>74.0</i></b>              | <b><i>-4.7</i></b>  |
| <b><i>V</i></b> | <b><i>4950.000</i></b>  | <b><i>50.2</i></b>   | <b><i>33</i></b>  | <b><i>34.9</i></b>  | <b><i>52.1</i></b>              | <b><i>74.0</i></b>              | <b><i>-21.9</i></b> |
| <b><i>V</i></b> | <b><i>7425.000</i></b>  | <b><i>39.1</i></b>   | <b><i>33</i></b>  | <b><i>37.9</i></b>  | <b><i>44.0</i></b>              | <b><i>74.0</i></b>              | <b><i>-30.0</i></b> |
| <b><i>H</i></b> | <b><i>12375.000</i></b> | <b><i>42.1</i></b>   | <b><i>33</i></b>  | <b><i>40.5</i></b>  | <b><i>49.6</i></b>              | <b><i>74.0</i></b>              | <b><i>-24.4</i></b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 5.5.
  6. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
  7. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyser with 1MHz resolution bandwidth.

---

## INTERTEK TESTING SERVICES

---

Mode: Live

Table 4

### Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|--------------|
| <b>V</b>     | <b>37.638</b>   | <b>32.4</b>          | <b>16</b>    | <b>10.0</b>         | <b>26.4</b>              | <b>40.0</b>                | <b>-13.6</b> |
| <b>V</b>     | <b>111.965</b>  | <b>28.5</b>          | <b>16</b>    | <b>14.0</b>         | <b>26.5</b>              | <b>43.5</b>                | <b>-17.0</b> |
| V            | 191.990         | 28.2                 | 16           | 16.0                | 28.2                     | 43.5                       | -15.3        |
| H            | 383.928         | 22.3                 | 16           | 24.0                | 30.3                     | 46.0                       | -15.7        |
| V            | 816.063         | 13.6                 | 16           | 31.0                | 28.6                     | 46.0                       | -17.4        |
| V            | 864.078         | 14.9                 | 16           | 31.0                | 29.9                     | 46.0                       | -16.1        |

- NOTES:
1. Quasi-peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-247 Section 5.5.

## INTERTEK TESTING SERVICES

---

### 4.8.4 Transmitter Duty Cycle Calculation

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in 100ms}/100\text{ms} \\ &= (0.1124\text{ms} \times 5)/100\text{ms}\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF)} &= 20 \log (\text{DC}) \\ &= 20 * \log (0.00562) \\ &= -45.01\text{dB}\end{aligned}$$

**By description worst case:**

$$\begin{aligned}\text{Duty Cycle (DC)} &= \text{Maximum On time in 100ms}/100\text{ms} \\ &= (0.25\text{ms} \times 5)/100\text{ms}\end{aligned}$$

$$\begin{aligned}\text{Average Factor (AF)} &= 20 \log (\text{DC}) \\ &= 20 * \log (0.0125) \\ &= -38.06\text{dB}\end{aligned}$$

So description's duty cycle will be used.

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SPAN function on the analyzer was set to ZERO. The transmitter ON time was determined from the resultant time-amplitude display.


Please refer to the attached plot(s) for more details.




# INTERTEK TESTING SERVICES

## Plots of transmitter On time

### Plot A, Tx on time

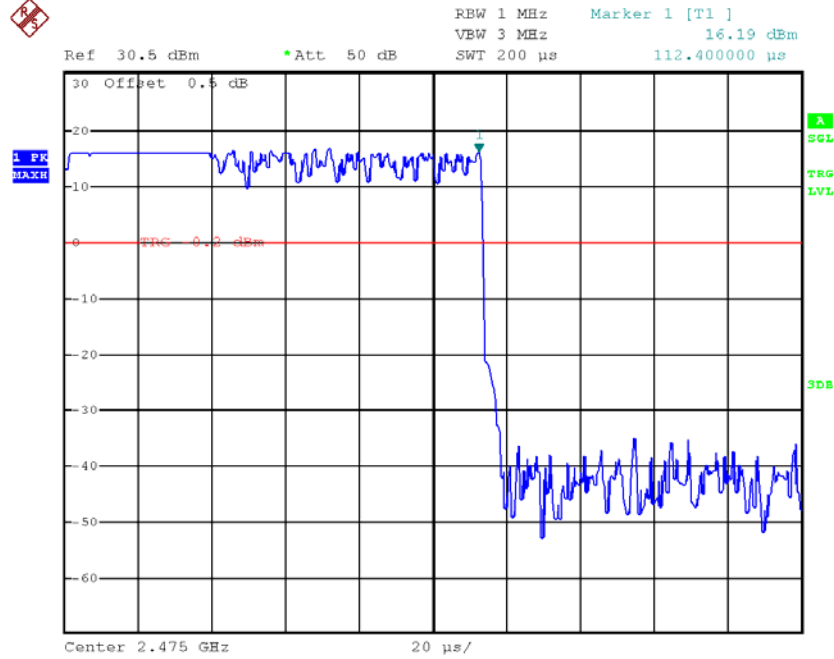


### Plot B, Tx time in 100ms

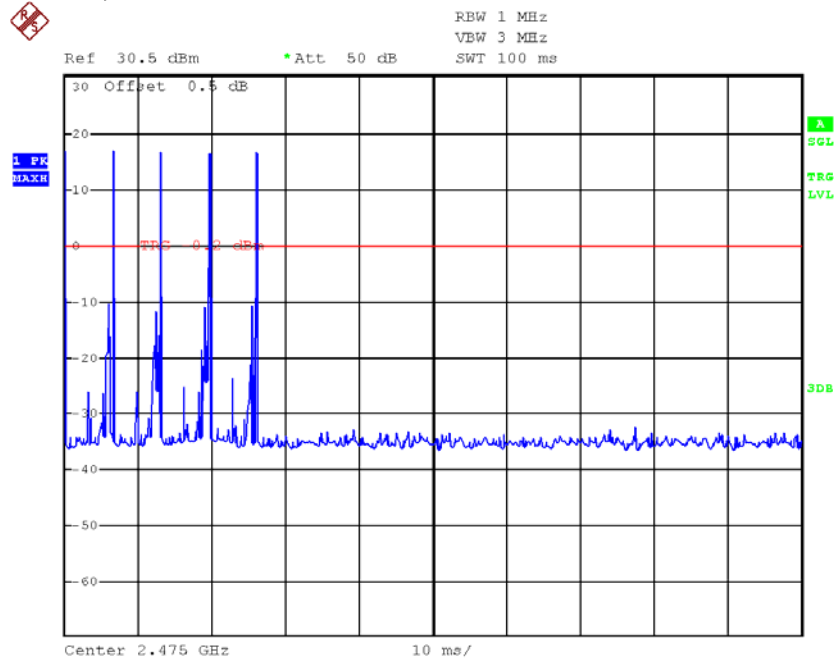

## INTERTEK TESTING SERVICES

---

### 4.9 AC Power Line Conducted Emission

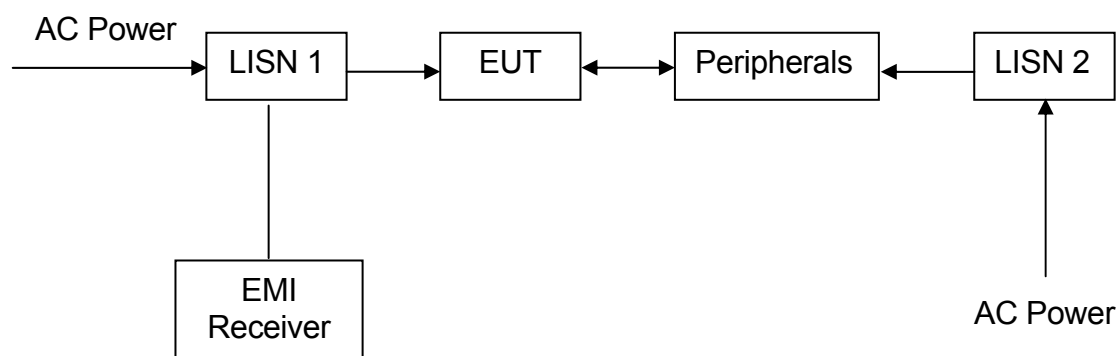

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.9.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

1.671 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.9.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 13.43 dB margin compare with average limit


# INTERTEK TESTING SERVICES

Worst Case: Live Mode (Video On)



RBW 9 kHz  
MT 1 s

Att 10 dB AUTO PREAMP OFF

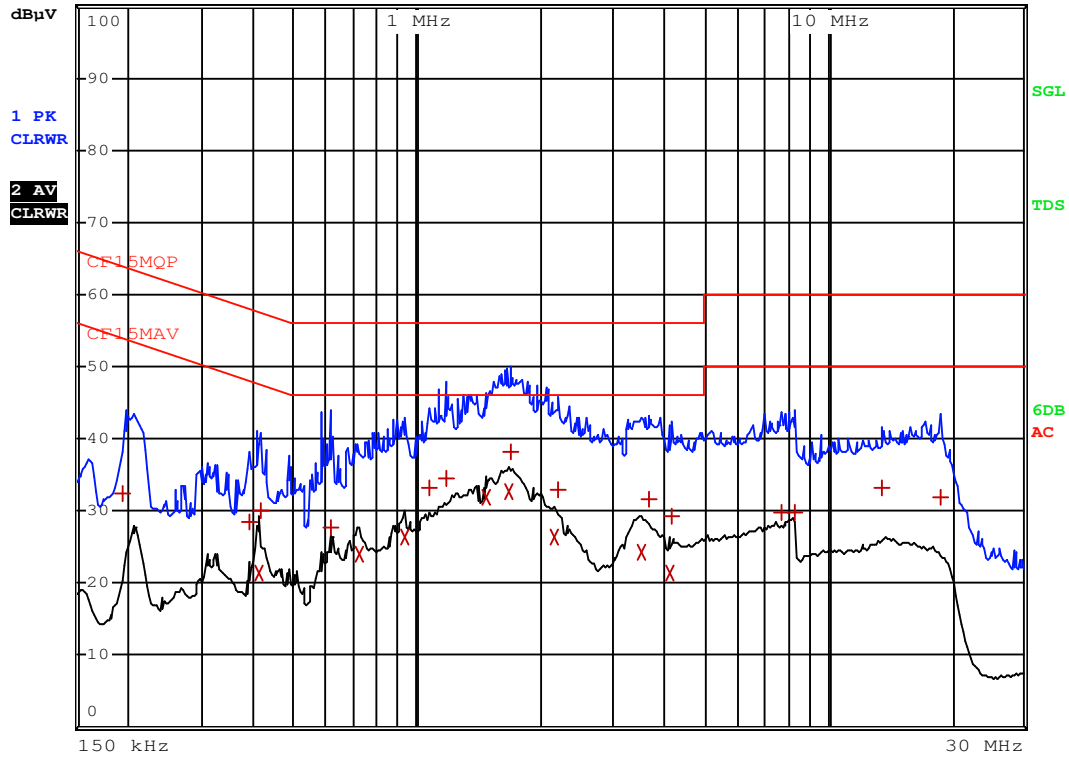

# INTERTEK TESTING SERVICES

Worst Case: Live Mode (Video On)

## EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

|   | TRACE         | FREQUENCY  | LEVEL | dB $\mu$ V | DELTA LIMIT | dB |
|---|---------------|------------|-------|------------|-------------|----|
| 1 | Quasi Peak    | 195 kHz    | 32.52 | N          | -31.29      |    |
| 1 | Quasi Peak    | 388.5 kHz  | 28.41 | N          | -29.67      |    |
| 2 | CISPR Average | 411 kHz    | 21.32 | N          | -26.30      |    |
| 1 | Quasi Peak    | 415.5 kHz  | 30.17 | L1         | -27.36      |    |
| 1 | Quasi Peak    | 613.5 kHz  | 27.65 | N          | -28.34      |    |
| 2 | CISPR Average | 726 kHz    | 24.13 | N          | -21.86      |    |
| 2 | CISPR Average | 933 kHz    | 26.28 | L1         | -19.71      |    |
| 1 | Quasi Peak    | 1.0725 MHz | 33.31 | L1         | -22.68      |    |
| 1 | Quasi Peak    | 1.1805 MHz | 34.61 | N          | -21.38      |    |
| 2 | CISPR Average | 1.4685 MHz | 31.92 | L1         | -14.07      |    |
| 2 | CISPR Average | 1.671 MHz  | 32.56 | L1         | -13.43      |    |
| 1 | Quasi Peak    | 1.698 MHz  | 38.21 | N          | -17.79      |    |
| 2 | CISPR Average | 2.166 MHz  | 26.44 | L1         | -19.55      |    |
| 1 | Quasi Peak    | 2.2065 MHz | 32.90 | L1         | -23.09      |    |
| 2 | CISPR Average | 3.5385 MHz | 24.17 | L1         | -21.82      |    |
| 1 | Quasi Peak    | 3.678 MHz  | 31.66 | L1         | -24.33      |    |
| 2 | CISPR Average | 4.137 MHz  | 21.31 | N          | -24.68      |    |
| 1 | Quasi Peak    | 4.155 MHz  | 29.31 | N          | -26.68      |    |
| 1 | Quasi Peak    | 7.701 MHz  | 29.77 | N          | -30.22      |    |
| 1 | Quasi Peak    | 8.3175 MHz | 29.88 | N          | -30.11      |    |

# INTERTEK TESTING SERVICES

---

Worst Case: Live Mode (Video On)

## EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

|   | TRACE      | FREQUENCY   | LEVEL dB $\mu$ V | DELTA LIMIT dB |
|---|------------|-------------|------------------|----------------|
| 1 | Quasi Peak | 13.5375 MHz | 33.21 L1         | -26.78         |
| 1 | Quasi Peak | 18.879 MHz  | 31.80 N          | -28.19         |

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 5  
EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

---

### 5.0 Equipment List

#### 1) Radiated Emissions Test

|                      |                   |                   |                   |
|----------------------|-------------------|-------------------|-------------------|
| Equipment            | EMI Test Receiver | Spectrum Analyzer | Biconical Antenna |
| Registration No.     | EW-3156           | EW-2249           | EW-0571           |
| Manufacturer         | R&S               | R&S               | EMCO              |
| Model No.            | ESR26             | FSP30             | 3104C             |
| Calibration Date     | Nov 3, 2015       | Nov. 27, 2015     | Jun. 23, 2015     |
| Calibration Due Date | Nov 3, 2016       | Nov. 27, 2016     | Dec. 23, 2016     |

|                      |                      |                                            |
|----------------------|----------------------|--------------------------------------------|
| Equipment            | Log Periodic Antenna | Pyramidal Horn Antenna<br>(18.0 - 26.5)GHz |
| Registration No.     | EW-1133              | EW-0905                                    |
| Manufacturer         | EMCO                 | EMCO                                       |
| Model No.            | 3115                 | 3160-09                                    |
| Calibration Date     | Nov. 05, 2015        | Feb. 12, 2016                              |
| Calibration Due Date | May 05, 2017         | Aug 12, 2017                               |

#### 2) Conducted Emissions Test

|                      |                   |               |
|----------------------|-------------------|---------------|
| Equipment            | EMI Test Receiver | LISN          |
| Registration No.     | EW-3095           | EW-2501       |
| Manufacturer         | R&S               | R&S           |
| Model No.            | ESCI              | ENV-216       |
| Calibration Date     | Nov. 05, 2015     | Jan. 28, 2016 |
| Calibration Due Date | Nov. 05, 2016     | Jan. 28, 2017 |

#### 3) Conductive Measurement Test

|                      |                   |
|----------------------|-------------------|
| Equipment            | Spectrum Analyzer |
| Registration No.     | EW-2466           |
| Manufacturer         | R&S               |
| Model No.            | FSP30             |
| Calibration Date     | Sep. 16, 2015     |
| Calibration Due Date | Aug. 20, 2016     |

**END OF TEST REPORT**