



849 NW State Road 45  
Newberry, FL 32669 USA  
Ph: 888.472.2424 or 352.472.5500  
Fax: 352.472.2030  
Email: [info@timcoengr.com](mailto:info@timcoengr.com)  
Website: [www.timcoengr.com](http://www.timcoengr.com)

## FCC PART 15.249 TEST REPORT UNLICENSED INTENTIONAL RADIATOR

<b>Applicant</b>	ONE WORLD TECHNOLOGIES, INC
<b>Address</b>	1428 PEARMAN DAIRY ROAD ANDERSON SOUTH CAROLINA 29625 USA
<b>FCC ID</b>	VMZEL2200
<b>Model Number</b>	EL2200
<b>Product Description</b>	AM/FM RADIO WITH BT
<b>FCC Standard Applied</b>	47 CFR §15.249
<b>Date Sample Received</b>	8/14/2014
<b>Date Tested</b>	8/19/2014
<b>Tested By</b>	Sid SANDERS
<b>Approved By</b>	Cory Leverett
<b>Report Number</b>	1439AUT14TestReport.docx
<b>Test Results</b>	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL

**THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL  
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.**

## TABLE OF CONTENTS

GENERAL REMARKS .....	2
GENERAL INFORMATION .....	3
TEST RESULTS SUMMARY .....	3
TEST PROCEDURES .....	4
RADIATION INTERFERENCE.....	5
POWER LINE CONDUCTED INTERFERENCE .....	6
POWER LINE CONDUCTED INTERFERENCE .....	7
POWER LINE CONDUCTED INTERFERENCE .....	8
RADIATION INTERFERENCE.....	9
EMC EQUIPMENT LIST .....	10
TEST EQUIPMENT LIST .....	10

## GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

## Summary

The device under test does:

- fulfill the general approval requirements as identified in this test report  
 not fulfill the general approval requirements as identified in this test report

## Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025: 2005 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.  
849 NW State Road 45  
Newberry, FL 32669

## Authorized Signatory Name:



Sid Sanders  
**Project Manager:**

**Date: 8/20/2014**

APPLICANT: ONE WORLD TECHNOLOGIES, INC  
FCC ID: VMZEL2200  
REPORT: O\ONE WORLD\_VMZ\1439AUT14\1439AUT14TestReport.docx

## GENERAL INFORMATION

### EUT Specification

The test results relate only to the items tested.			
<b>Applicable Standard</b>	Part 15.249		
<b>EUT Description</b>	AM/FM RADIO WITH BT		
<b>FCC ID</b>	VMZEL2200		
<b>Model Number</b>	EL2200		
<b>Operating Frequency</b>	TX:	RX: Same	
<b>No. of Channels</b>		<b>Modulations</b>	
<b>EUT Power Source</b>	<input checked="" type="checkbox"/> 110–120Vac/50– 60Hz		
	<input checked="" type="checkbox"/> DC Power		
	<input type="checkbox"/> Battery Operated Exclusively		
<b>Test Item</b>	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
<b>Type of Equipment</b>	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable
<b>Antenna Connector</b>	FCC Rules require that the antenna connector be unique.		
<b>Test Facility</b>	Timco Engineering Inc. located at 849 NW State Road 45 Newberry, FL 32669 USA.		
<b>Conditions in the Test laboratory</b>	Temperature: 27°C Relative humidity: 59%		
<b>Test Exercise</b>	The EUT was placed in continuous transmit mode of operation.		
<b>Revision History of EUT</b>	New		

### Test Supporting Equipment

Supporting Device	Manufacturer	Model / FCC ID	Serial Number
N/A			

### TEST RESULTS SUMMARY

Specification – Rules Part No.	RESULTS – Pass/Fail/NA
FCC Rule 15.249 Fundamental	Pass
FCC Rule 15.249 Harmonics & Spurious	Pass
Bandedge	Pass
Power Line Emissions 15.207	Pass

### [TABLE OF CONTENTS](#)

## TEST PROCEDURES

**Radiation Interference:** ANSI C63.4-2003 using a spectrum analyzer, a preselector, a quasi-peak adapter, and an appropriate antenna. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz with an appropriate sweep speed and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worst case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

**Formula Of Conversion Factors:** The field strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the preselector was accounted for in the spectrum analyzer meter reading.

Example:

Freq (MHz)	Meter Reading	+ ACF	+ CL = FS
33	20 dBuV	+ 10.36 dB	+ 0.5 = 30.86 dBuV/m @ 3m

**Power Line Conducted Interference:** The procedure used was ANSI C63.4-2003 using a 50uH LISN. Both lines were observed. The bandwidth of the spectrum analyzer was 10kHz with an appropriate sweep speed. The spectrum was scanned from 0.15 to 30 MHz.

**Occupied Bandwidth:** A small sample of the transmitter output was fed into the spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dBm per division.

**ANSI C63.4-2003 10.1 Measurement Procedures:** The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. Emissions attenuated more than 20 dB below the permissible value are not reported.

## [TABLE OF CONTENTS](#)

## RADIATION INTERFERENCE

Rules Part No.: 15.249, 15.209

### Requirements:

Frequency	Limits
Part 15.209	
9 to 490 kHz	2400/F (kHz) $\mu$ V/m @ 300 meters
490 to 1705 kHz	24000/F (kHz) $\mu$ V/m @ 30 meters
1705 kHz to 30 MHz	29.54 dB $\mu$ V/m @ 30 meters
30 – 88	40.0 dB $\mu$ V/m @ 3 meters
80 – 216	43.5 dB $\mu$ V/m @ 3 meters
216 – 960	46.0 dB $\mu$ V/m @ 3 meters
Above 960	54.0 dB $\mu$ V/m @ 3 meters
Part 15.249	
Fundamental 902 – 928 MHz	94.0 dB $\mu$ V/m @ 3 meters
Fundamental 2.4 – 2.4835 GHz	94.0 dB $\mu$ V/m @ 3 meters
Harmonics	54.0 dB $\mu$ V/m @ 3 meters

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Field Strength dBuV/m	Margin dB
2,402.0	2,402.00	41.1	H	3.18	32.48	76.76	17.24
2,402.0	2,402.00	44.3	V	3.18	32.48	79.96	14.04
2402.0	4808.00	2.0	V	4.904	34.1	41.004	12.99
2402.0	7208.00	2.2	H	5.7236	35.82	43.004	10.25
2,443.0	2,443.00	42.2	H	3.21	32.57	77.98	16.02
2,443.0	2,443.00	43.6	V	3.21	32.57	79.38	14.02
2443.0	4886.00	1.8	V	4.943	34,1	40.84	13.15
2443.0	7329.00	1.6	H	5.79	35.77	43.16	10.83
2,480.0	2,480.00	43.0	H	3.24	32.66	78.90	15.10
2,480.0	2,480.00	44.1	V	3.24	32.66	80.00	14.00
2,480.0	2,483.50	-1.5	V	3.24	32.66	34.40	19.60
2480.0	7440	1.6	H	5.86	35.72	43.18	10.81

**Results: Meet requirements**

APPLICANT: ONE WORLD TECHNOLOGIES, INC

FCC ID: VMZEL2200

REPORT: O\ONE WORLD\_VMZ\1439AUT14\1439AUT14TestReport.docx

## POWER LINE CONDUCTED INTERFERENCE


Rules Part No.: 15.207

Requirements:

Frequency (MHz)	Quasi Peak Limits (dBuV)	Average Limits (dBuV)
0.15 – 0.5	66 – 56	56 – 46
0.5 – 5.0	56	46
5.0 – 30	60	50

**Test Data:** The attached graphs represent the emissions read for power line conducted for this device. Both lines were observed.

Rules Part No.: 15.207 Line 1

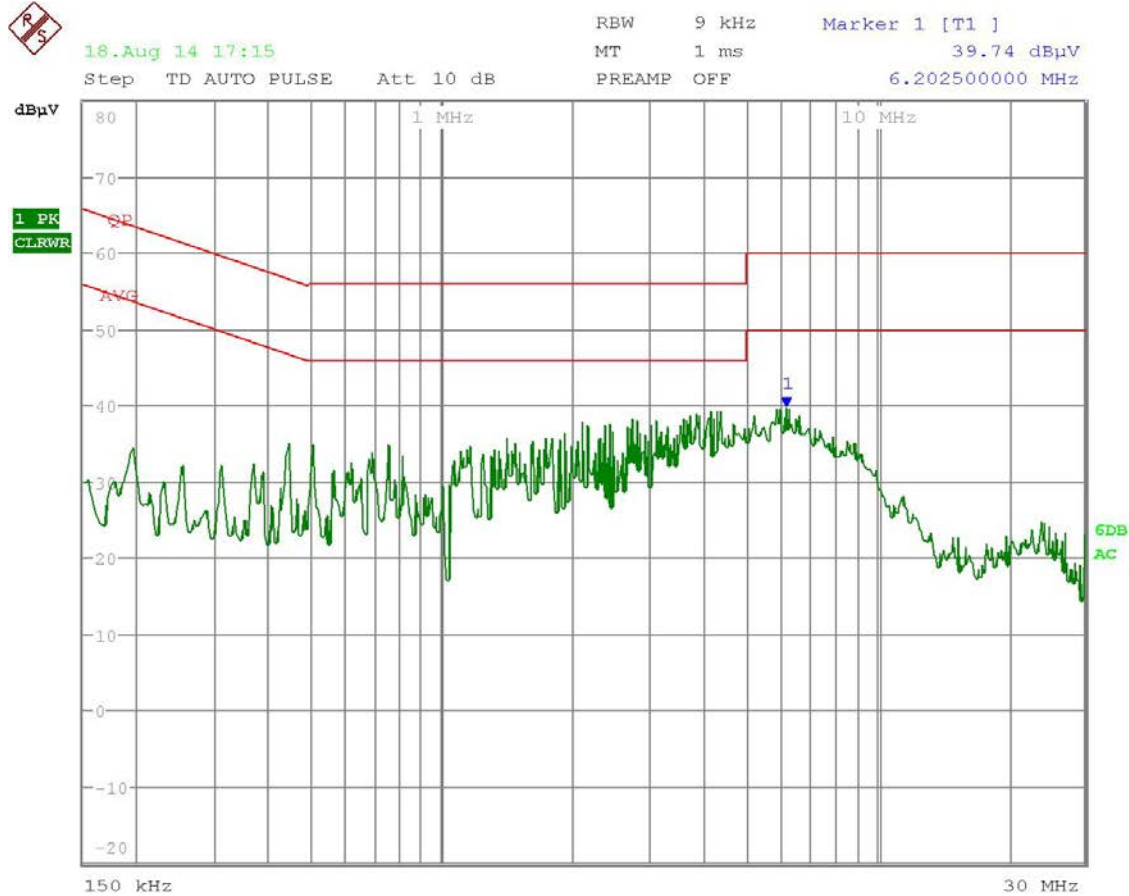

Date: 18.AUG.2014 17:15:20

### Results: Meets Requirements

APPLICANT: ONE WORLD TECHNOLOGIES, INC


FCC ID: VMZEL2200

REPORT: O\ONE WORLD\_VMZ\1439AUT14\1439AUT14TestReport.docx

# POWER LINE CONDUCTED INTERFERENCE

Rules Part No.: 15.207 Neutral

PwrLineCond2

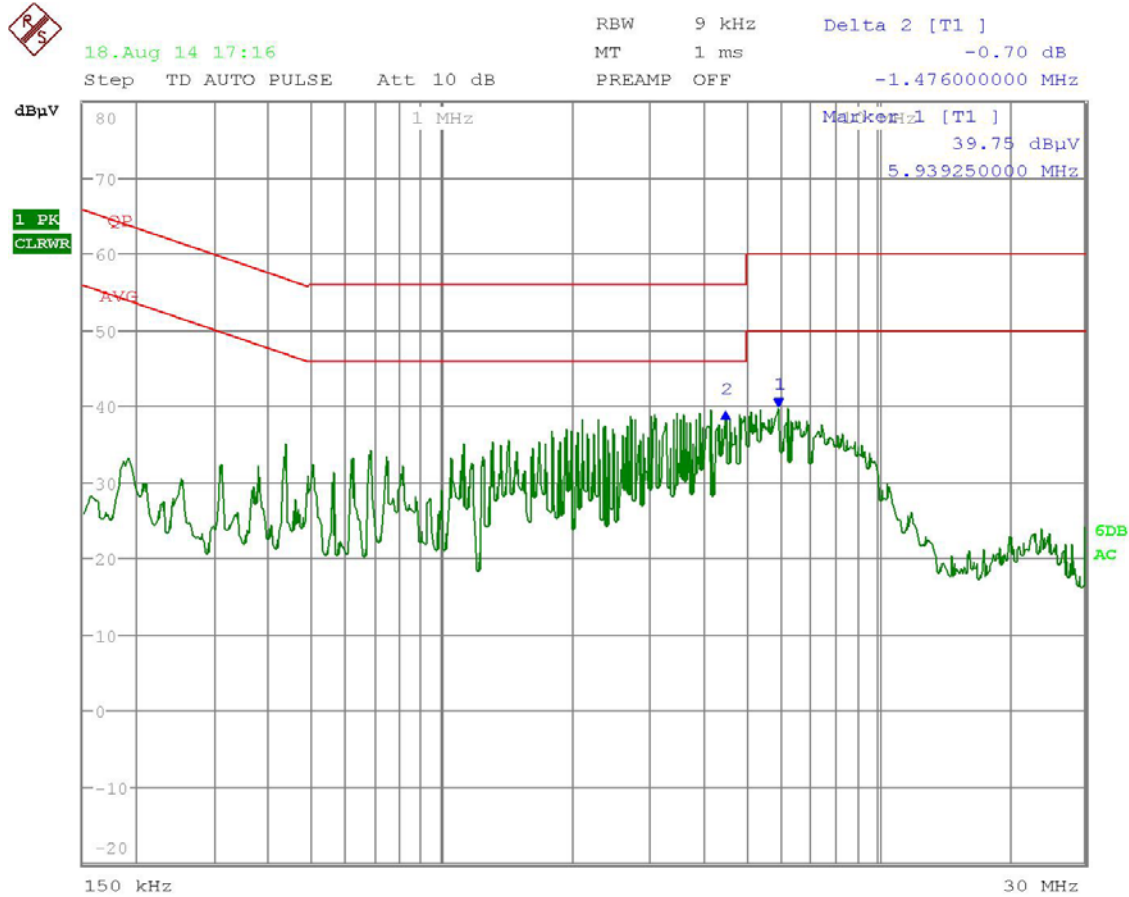

Date: 18.AUG.2014 17:16:50

**Results: Meets Requirements**

APPLICANT: ONE WORLD TECHNOLOGIES, INC

FCC ID: VMZEL2200

REPORT: O\ONE WORLD\_VMZ\1439AUT14\1439AUT14TestReport.docx



## POWER LINE CONDUCTED INTERFERENCE

Test Set Up Photo




APPLICANT: ONE WORLD TECHNOLOGIES, INC

FCC ID: VMZEL2200

REPORT: O\ONE WORLD\_VMZ\1439AUT14\1439AUT14TestReport.docx

## RADIATION INTERFERENCE

Test Set up Photo

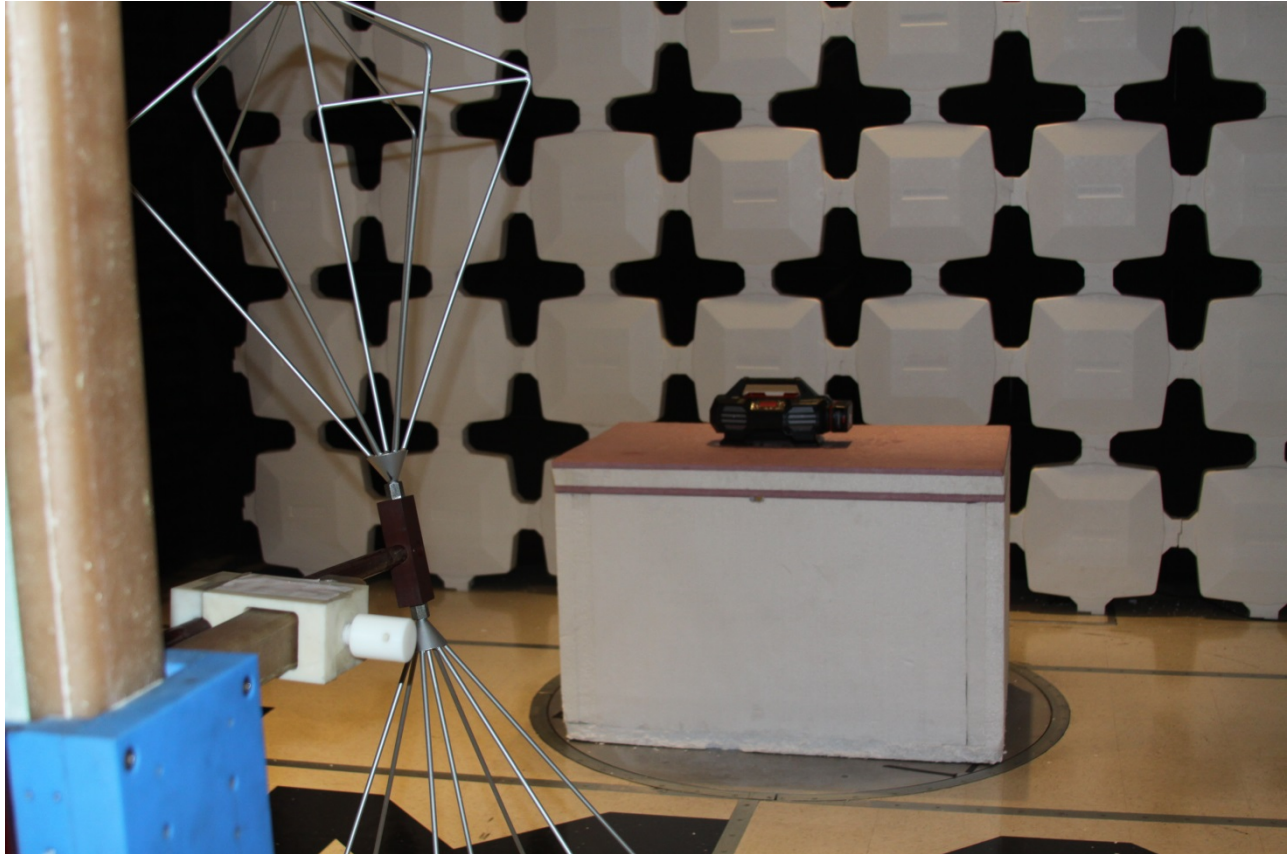

### [TABLE OF CONTENTS](#)

APPLICANT: ONE WORLD TECHNOLOGIES, INC

FCC ID: VMZEL2200

REPORT: O\ONE WORLD\_VMZ\1439AUT14\1439AUT14TestReport.docx

## EMC EQUIPMENT LIST

### TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconnical	Eaton	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic	Eaton	96005	1243	05/31/13	05/31/15
LISN	Electro-Metrics	ANS-25/2	2604	01/07/14	01/07/16
LISN	Electro-Metrics	EM-7820	2682	02/26/13	02/26/15
3-Meter Semi- Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Antenna: Double- Ridged Horn/ETS Horn 2	ETS-Lindgren	3117	00041534	10/05/12	10/05/14
EMI Test Receiver R & S ESIB 40	Rohde & Schwarz	ESIB 40	100274	08/12/14	08/12/16
Software: Field Strength Program	Timco	N/A	Version 4.0	12/12/99	12/12/99
EMI Test Receiver R & S ESU 40	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

\*EMI RECEIVER SOFTWARE VERSION

[TABLE OF CONTENTS](#)