

# FCC Part 15 Subpart C §15.247

## Test Report

<b>Equipment Under Test</b>	<b>HDMI Dongle</b>
<b>Model Name</b>	<b>VUDU SPARK</b>
<b>Applicant</b>	<b>Inkel Corporation.</b>
<b>FCC ID</b>	<b>VNH-T001M</b>
<b>Manufacturer</b>	<b>Inkel Corporation.</b>
<b>Date of Test(s)</b>	<b>2014. 10. 15 ~ 2014. 10. 27</b>
<b>Date of Issue</b>	<b>2014. 10. 28</b>

In the configuration tested, the EUT complied with the standards specified above.

<b>Issue to</b>	<b>Issue by</b>
<b>Inkel Corporation.</b> 93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea  Tel.: +82-32-650-6141 Fax: +82-32-650-6466	<b>MOVON CORPORATION</b> 498-2, Geumeo-ro, Pogok-eup, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea, 449-812  Tel.: +82-31-338-8837 Fax: +82-31-338-8847



## Revision history

Revision	Date of issue	Description	Revised by
--	August 28, 2014	Initial	--

## Table of contents

<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. DETAILS OF APPLICANT.....	4
1.2. MANUFACTURER / FACTORY INFORMATION.....	4
1.3. SUMMARY OF TEST RESULTS.....	5
<b>2. EUT DESCRIPTION.....</b>	<b>6</b>
2.1. DECLARATIONS BY THE MANUFACTURER.....	6
2.2. DETAILS OF MODIFICATION.....	6
<b>3. MEASUREMENT EQUIPMENT.....</b>	<b>7</b>
<b>4. TRANSMITTER RADIATED SPURIOUS EMISSIONS AND CONDUCTED SPURIOUS EMISSIONS .....</b>	<b>8</b>
4.1. TEST SETUP.....	8
4.1.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS .....	8
4.2. LIMIT .....	9
4.3. TEST PROCEDURES.....	11
4.3.1. TEST PROCEDURES FOR RADIATED SPURIOUS EMISSIONS.....	11
4.3.2. TEST PROCEDURES FOR CONDUCTED SPURIOUS EMISSIONS.....	11
4.4. TEST RESULT .....	12
4.4.1. SPURIOUS RADIATED EMISSION .....	12
4.4.4. BAND EDGE .....	32
4.4.5. OUT OF BAND EMISSIONS IN NON-RESTRICTED FREQUENCY BAND.....	38
<b>5. 6 dB BANDWIDTH .....</b>	<b>63</b>
5.1. TEST SETUP.....	63
6.2. LIMIT .....	63
6.3. TEST PROCEDURE .....	63
6.4. TEST RESULTS .....	63
<b>6. MAXIMUM OUTPUT POWER MEASUREMENT.....</b>	<b>72</b>
6.1. TEST SETUP. .....	72
6.2. LIMIT.....	72
6.3 TEST PROCEDURE.....	72
6.4 TEST RESULTS .....	73
<b>7. POWER SPECTRAL DENSITY MEASUREMENT.....</b>	<b>76</b>
7.1. TEST SETUP.....	76
7.2. LIMIT .....	76
7.3. TEST PROCEDURE (PKPSD) .....	76
7.4. TEST RESULTS .....	76
<b>8. ANTENNA REQUIREMENT .....</b>	<b>85</b>
8.1. STANDARD APPLICABLE .....	85
8.2. ANTENNA CONNECTED CONSTRUCTION.....	85
<b>9. RF EXPOSURE EVALUATION .....</b>	<b>86</b>
9.1. ENVIRONMENTAL EVALUATION AND EXPOSURE LIMIT ACCORDING TO FCC CFR 47 PART 1, 1.1307(B), 1.1310.....	86
9.2. FRIIS TRANSMISSION FORMULA : $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$ .....	86
9.3. TEST RESULT OF RF EXPOSURE EVALUATION .....	87
9.4. OUTPUT POWER INTO ANTENNA & RF EXPOSURE EVALUATION DISTANCE .....	87
<b>10. TEST SETUP PHOTO OF EUT .....</b>	<b>88</b>

## 1. General information

### 1.1. Details of applicant

Applicant : Inkel Corporation  
Address : 93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea  
Contact Person : Bon-Keun, Koo  
Telephone : + 82-32-650-6141  
Fax : + 82-32-650-6466

### 1.2. Manufacturer / Factory Information

Manufacturer : Inkel Corporation.  
Address : 93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea

Factory 1 : Inkel Corporation.  
Address : 93, Cheongjung-ro, Bupyeong-Gu, Incheon, 403-853, Korea

Factory 2 : Dongguan Inkel Electronics Co., Ltd.  
Address : Shang qiao Industrial Road No.36, Dongcheng District, Dongguan City, Guangdong Province, 523111, People's Republic of China

Factory 3 : Inkel Vietnam Co., Ltd.  
Address : Block 26, Quang minh industrial Zone, Quang Minh Town, Me Linh District, Hanoi City, 100000, Vietnam

**1.3. Summary of test results**

The EUT has been tested according to the following specifications;

Section in FCC part 15	Description	Result
§15.205 §15.209 §15.247(d)	Transmitter radiated spurious emissions, Conducted spurious emission	C
§15.247(a)(2)	6 dB Bandwidth	C
§15.247(b)(e)	Maximum Conducted Output Power	C
§15.247(e)	Transmitter Power Spectral Density	C
§1.1307(b)(1)	RF exposure evaluation	C

*The sample was tested according to the following specification:*

**FCC Parts 15.247; ANSI C-63.4-2009**

**FCC Public Notice KDB 558074 D01 v03r02**

**TEST SITE REGISTRATION NUMBER: FCC(670686)**

**※ Abbreviation**

C Complied  
N/A Not applicable  
F Fail

**Approval Signatories**

Test and Report Completed by :	Report Approval by :
 Jungmoo Her Test Engineer MOVON CORPORATION	 Issac Jin Technical Manager MOVON CORPORATION

## 2. EUT Description

Kind of product	HDMI Dongle
FCC ID	VNH-T001M
Model Name	VUDU SPARK
Serial Number	N/A
Power supply	DC 5.0V
Frequency range	2 412 MHz ~ 2 462 MHz (802.11b/g/n20)
	2 422 MHz ~ 2 452 MHz (802.11n40)
	2 405 MHz ~ 2 480 MHz (Zigbee)
Modulation technique	CCK, DQPSK, DBPSK (802.11b)
	64QAM, 16QAM, QPSK, BPSK (802.11g/n20/n40)
	O-QPSK (Zigbee)
Number of channels	11 (802.11b/g/n20)
	9 (802.11n40)
	16 (Zigbee)
Antenna gain	0.64 dB i (Max.) (WLAN)
	5.3 dB i (Max.) (Zigbee)
Test Site Registration Number	FCC(670686)

### 2.1. Declarations by the manufacturer

None

### 2.2. Details of modification

None

### 2.3. Table for Test Modes (WLAN)

Preliminary tests were performed in different data rate to find the worst radiated emission.

The data rate shown in the table below is the worst-case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases.

The following table is a list of the test modes shown in this test report.

Mode	Data rate (Worst case)	Channel No. (Freq. MHz)
802.11b	11 Mbps	01 (2 412) / 06 (2 437) / 11 (2 472)
802.11g	54 Mbps	01 (2 412) / 06 (2 437) / 11 (2 472)
802.11n_20	MCS7	01 (2 412) / 06 (2 437) / 11 (2 472)
802.11n_40	MCS7	03 (2 422) / 06 (2 437) / 09 (2 452)

### 3. Measurement equipment

Equipment	Manufacturer	Model	Serial number	Calibration Interval	Calibration due.
EMI Test Receiver	R&S	ESIB26	100196/026	1 year	2014-12-12
Signal Generator	R&S	SMR27	100089	1 year	2014-12-13
Spectrum Analyzer	R&S	FSV-40	100832	1 year	2015-08-13
Power Meter	Agilent	E4416A	GB41290645	1 year	2015-09-29
Power Sensor	Agilent	9327A	US40441490	1 year	2015-07-09
Double Redge Horn Antenna	R&S	HF906	100236	2 year	2015-02-28
Ultra Broadband Antenna	R&S	HL562	100170	1 year	2014-12-13
Power Amplifier	MITEQ	AM-1431	1497315	1 year	2015-09-29
Power Amplifier	MITEQ	AFS43-01002600	1374382	1 year	2015-09-29
High Pass Filter	Wainwright	WHK3.0/18G-10SS	508	1 year	2015-09-29
DC Power Supply	HP	6674A	3637A01351	1 year	2015-09-29
Controller	INNCO	CO2000	co200/064/6961003/L	N/A	N/A
Antenna Master	INNCO	MA4000	MA4000/038/6961003/L	N/A	N/A
Loop Antenna	ETS LINDGREN	6502	00118166	2 year	2015-09-27
Two LINE-V-BETWORK	R&S	ESH3-Z5	100296	1 year	2014-12-12
Two LINE-V-BETWORK	Rolf Heine	NNB-2/16Z	99023	1 year	2014-12-12

**\* Remark;**  
**Support equipment**


Description	Manufacturer	Model	Serial number
Notebook computer	DELL	Latitude D510	-

## 4. Transmitter radiated spurious emissions and conducted spurious emissions


### 4.1. Test setup

#### 4.1.1. Transmitter radiated spurious emissions


The diagram below shows the test setup that is utilized to make the measurements for emission from 9kHz to 30MHz Emissions.

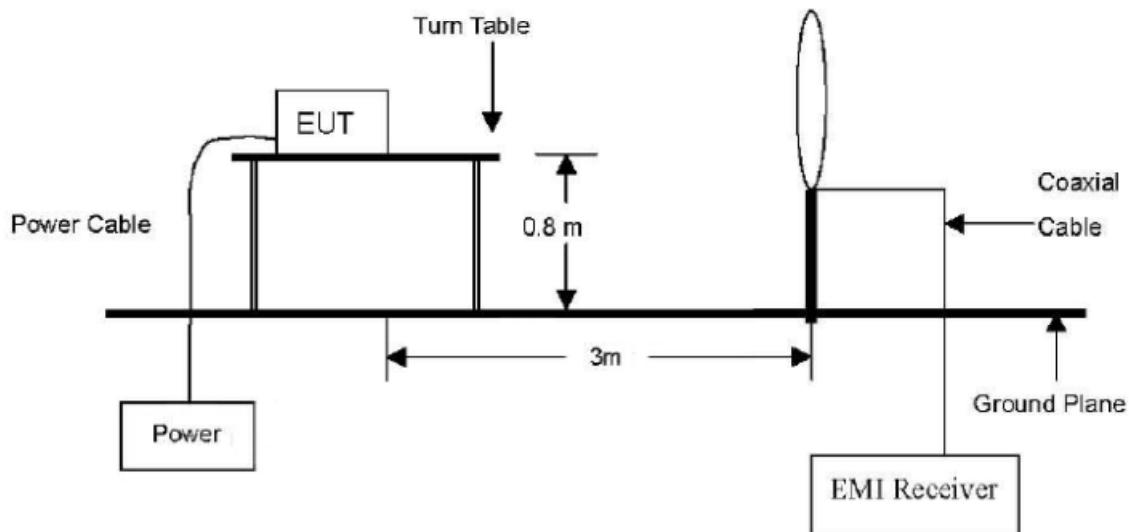

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 MHz to 1 GHz emissions.

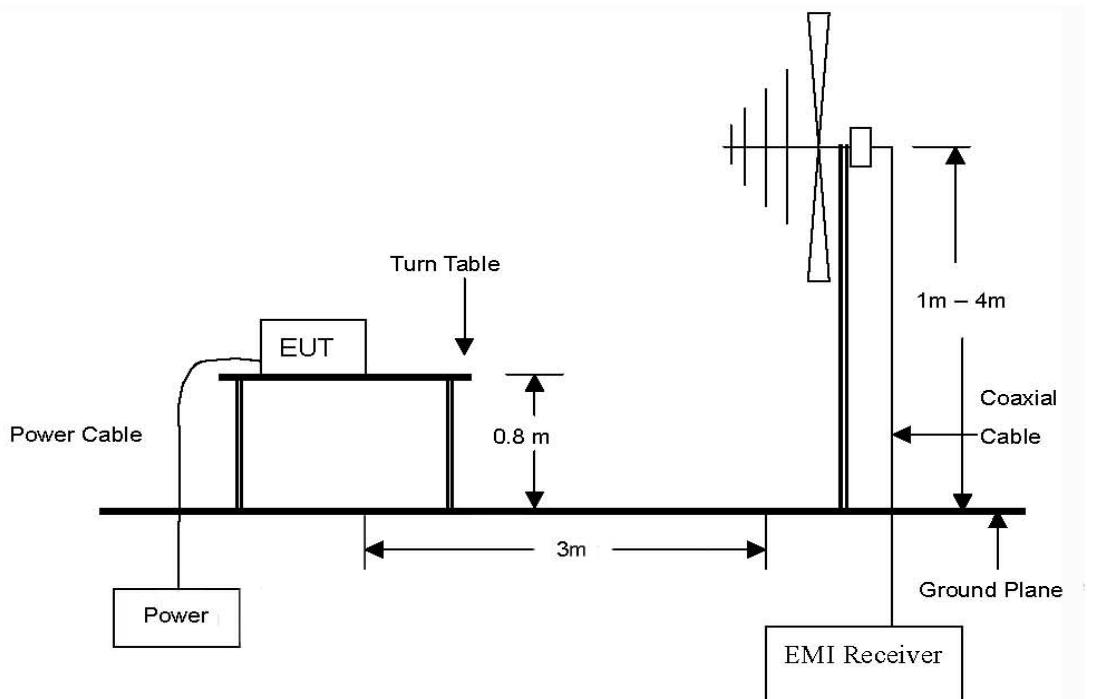

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 GHz to 40 GHz emissions.

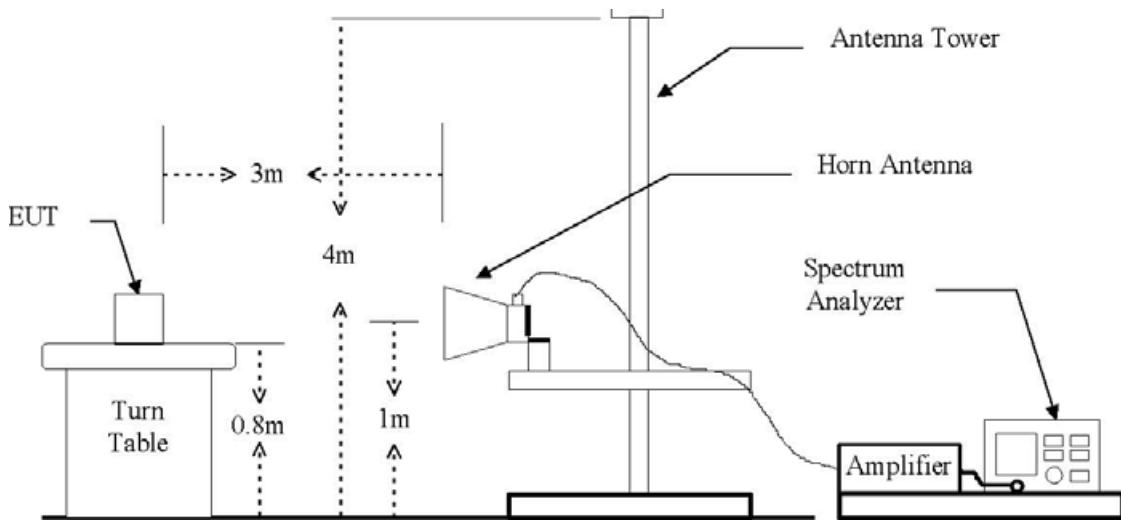

#### 4.2. Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based in either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in section §15.209(a) is not required. In addition, radiated emission which in the restricted band, as defined in section §15.209(a), must also comply the radiated emission limits specified in section §15.209(a) (see section §15.205(c))

According to §15.209(a), Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Distance (Meters)	Radiated at 3M (dB $\mu$ V/m)	Radiated ( $\mu$ V/m)
0.009–0.490	300	See the remark	2400/F(kHz)
0.490–1.705	30		24000/F(kHz)
1.705–30.0	30		30
30 - 88	3	40.0	100
88 – 216	3	43.5	150
216 – 960	3	46.0	200
Above 960	3	54.0	500

According to §15.205(a), Except as provided elsewhere in this Subpart, the emissions from Restricted bands of operation shall not exceed the field strength levels specified in the following table:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.694 75 – 16.695 25	608 – 614	5.35 – 5.46
2.173 5 – 2.190 5	16.804 25 -16.804 75	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.177 25 – 4.177 75	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.207 25 – 4.207 75	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.267 75 – 6.268 25	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.311 75 – 6.312 25	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
9.362 – 8.366	156.524 75 – 156.525 25	2483.5 – 2500	17.7 – 21.4
8.376 25 – 8.386 75	156.7 – 156.9	2655 – 2900	22.01 – 23.12
8.414 25 – 8.414 75	162.012 5 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 - 3339	31.2 – 31.8
12.519 75 – 12.520 25	240 – 285	3345.8 – 3358	36.43 – 36.5
12.576 75 – 12.577 25	322 -335.4	3600 – 4400	
13.36 – 13.41			

**\*Remark**

1. Emission level in dB uV/m =  $20 \log (\mu\text{V}/\text{m})$
2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
3. Distance extrapolation factor =  $40\log(\text{Specific distance}/\text{test distance})$  (dB)  
Limit line=Specific limits(dB uV) + distance extrapolation factor.

#### 4.3. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

##### 4.3.1. Test procedures for radiated spurious emissions

1. The EUT is placed on a turntable, which is 0.8 m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3 m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.

**\* Remark:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 10 kHz for Peak detection (PK) at frequency below 30 MHz
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Peak detection (PK) or Quasi-peak detection (QP) at frequency below 1 GHz.
3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1 GHz.

##### 4.3.2. Test procedures for conducted spurious emissions

All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

Per the guidance of KDB 558074, section 5.4.1.1, the reference level for out of band emissions is established from the plots of this section since the band edge emissions are measured with a RBW of 100 kHz. This reference level is then used as the limit in subsequent plots for out of band spurious emissions shown in section 4.4.4. The limit for out of band spurious emission at the band edge is 30 dB below the fundamental emission level measured in a 100 kHz bandwidth.

#### 4.4. Test result

Ambient temperature: 23 °C

Relative humidity: 40 % R.H.

##### 4.4.1. Spurious radiated emission

The frequency spectrum from 9 kHz to 30 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

**Operation mode: 802.11b mode**

###### A. Low channel (2 412 MHz)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

###### B. Middle channel (2 437 MHz)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

###### C. High channel (2 462 MHz)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

##### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: 802.11g mode**
**A. Low channel (2 412 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: 802.11n\_20MHz mode**
**A. Low channel (2 412 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: 802.11n\_40MHz mode**
**A. Low channel (2 422 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**C. High channel (2 452 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: Zigbee mode**
**A. Low channel (2 405 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**B. Middle channel (2 440 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**C. High channel (2 480 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
No other emissions were detected at a level greater than 20dB below limit.								

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB)
3. Limit line = specific Limits (dB $\mu$ V) + Distance extrapolation factor
4. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.2. Spurious radiated emission

The frequency spectrum from 30 MHz to 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB. All reading values are peak values.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

##### Operation mode: 802.11b mode

###### A. Low channel (2 412 MHz)

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode				Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)
35.83	23.90	Peak	H	-9.4	33.30	46.00	12.70
134.97	27.80	Peak	H	-9.5	37.30	46.00	8.70
144.69	28.90	Peak	V	-1.7	30.60	46.00	15.40
162.18	29.00	Peak	V	-1.6	30.60	46.00	15.40
255.49	24.90	Peak	H	-1.3	26.20	46.00	19.80
453.77	40.40	Peak	H	3.7	36.70	46.00	9.30
Above 500	Not detected	-	-	-	-	-	-

##### ※ Remark

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	21.81	Peak	H	-9.4	31.21	46.00	14.79
134.97	26.05	Peak	H	-9.5	35.55	46.00	10.45
144.69	29.34	Peak	V	-1.7	31.04	46.00	14.96
162.18	28.24	Peak	V	-1.6	29.84	46.00	16.16
255.49	27.61	Peak	H	-1.3	28.91	46.00	17.09
453.77	37.93	Peak	H	3.7	34.23	46.00	11.77
Above 500	Not detected	-	-	-	-	-	-

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	23.65	Peak	H	-9.4	33.05	46.00	12.95
134.97	26.71	Peak	H	-9.5	36.21	46.00	9.79
144.69	28.78	Peak	V	-1.7	30.48	46.00	15.52
162.18	27.98	Peak	V	-1.6	29.58	46.00	16.42
255.49	24.82	Peak	H	-1.3	26.12	46.00	19.88
453.77	39.71	Peak	H	3.7	36.01	46.00	9.99
Above 500	Not detected	-	-	-	-	-	-

**\* Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: 802.11g mode**
**A. Low channel (2 412 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	21.20	Peak	H		-9.4	30.60	46.00	15.40
134.97	25.92	Peak	H		-9.5	35.42	46.00	10.58
144.69	29.40	Peak	V		-1.7	31.10	46.00	14.90
162.18	29.91	Peak	V		-1.6	31.51	46.00	14.49
255.49	24.47	Peak	H		-1.3	25.77	46.00	20.23
453.77	37.14	Peak	H		3.7	33.44	46.00	12.56
Above 500	Not detected	-	-		-	-	-	-

**B. Middle channel (2 437 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	21.19	Peak	H		-9.4	30.59	46.00	15.41
134.97	25.34	Peak	H		-9.5	34.84	46.00	11.16
144.69	28.57	Peak	V		-1.7	30.27	46.00	15.73
162.18	29.30	Peak	V		-1.6	30.90	46.00	15.10
255.49	25.58	Peak	H		-1.3	26.88	46.00	19.12
453.77	38.11	Peak	H		3.7	34.41	46.00	11.59
Above 500	Not detected	-	-		-	-	-	-

**\* Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	21.15	Peak	H	-9.4	30.55	46.00	15.45
134.97	24.98	Peak	H	-9.5	34.48	46.00	11.52
144.69	28.54	Peak	V	-1.7	30.24	46.00	15.76
162.18	29.45	Peak	V	-1.6	31.05	46.00	14.95
255.49	24.99	Peak	H	-1.3	26.29	46.00	19.71
453.77	35.90	Peak	H	3.7	32.20	46.00	13.80
Above 500	Not detected	-	-	-	-	-	-

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: 802.11n\_20 mode**
**A. Low channel (2 412 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	24.01	Peak	H		-9.4	33.41	46.00	12.59
134.97	26.10	Peak	H		-9.5	35.60	46.00	10.40
144.69	30.61	Peak	V		-1.7	32.31	46.00	13.69
162.18	30.24	Peak	V		-1.6	31.84	46.00	14.16
255.49	27.62	Peak	H		-1.3	28.92	46.00	17.08
453.77	39.15	Peak	H		3.7	35.45	46.00	10.55
Above 500	Not detected	-	-		-	-	-	-

**B. Middle channel (2 437 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	23.40	Peak	H		-9.4	32.80	46.00	13.20
134.97	25.38	Peak	H		-9.5	34.88	46.00	11.12
144.69	31.32	Peak	V		-1.7	33.02	46.00	12.98
162.18	30.64	Peak	V		-1.6	32.24	46.00	13.76
255.49	28.18	Peak	H		-1.3	29.48	46.00	16.52
453.77	39.71	Peak	H		3.7	36.01	46.00	9.99
Above 500	Not detected	-	-		-	-	-	-

**\* Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	23.90	Peak	H	-9.4	33.30	46.00	12.70
134.97	25.77	Peak	H	-9.5	35.27	46.00	10.73
144.69	30.21	Peak	V	-1.7	31.91	46.00	14.09
162.18	30.05	Peak	V	-1.6	31.65	46.00	14.35
255.49	28.24	Peak	H	-1.3	29.54	46.00	16.46
453.77	38.18	Peak	H	3.7	34.48	46.00	11.52
Above 500	Not detected	-	-	-	-	-	-

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: 802.11n\_40 mode**
**A. Low channel (2 422 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	23.48	Peak	H		-9.4	32.88	46.00	13.12
134.97	25.90	Peak	H		-9.5	35.40	46.00	10.60
144.69	31.35	Peak	V		-1.7	33.05	46.00	12.95
162.18	28.64	Peak	V		-1.6	30.24	46.00	15.76
255.49	28.87	Peak	H		-1.3	30.17	46.00	15.83
453.77	39.72	Peak	H		3.7	36.02	46.00	9.98
Above 500	Not detected	-	-		-	-	-	-

**B. Middle channel (2 437 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	24.05	Peak	H		-9.4	33.45	46.00	12.55
134.97	25.72	Peak	H		-9.5	35.22	46.00	10.78
144.69	31.20	Peak	V		-1.7	32.90	46.00	13.10
162.18	28.95	Peak	V		-1.6	30.55	46.00	15.45
255.49	29.02	Peak	H		-1.3	30.32	46.00	15.68
453.77	39.68	Peak	H		3.7	35.98	46.00	10.02
Above 500	Not detected	-	-		-	-	-	-

**\* Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**C. High channel (2 452 MHz)**

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	23.67	Peak	H	-9.4	33.07	46.00	12.93
134.97	25.60	Peak	H	-9.5	35.10	46.00	10.90
144.69	31.44	Peak	V	-1.7	33.14	46.00	12.86
162.18	29.29	Peak	V	-1.6	30.89	46.00	15.11
255.49	29.56	Peak	H	-1.3	30.86	46.00	15.14
453.77	39.62	Peak	H	3.7	35.92	46.00	10.08
Above 500	Not detected	-	-	-	-	-	-

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**Operation mode: Zigbee mode**
**A. Low channel (2 405 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	22.64	Peak	H		-9.4	32.04	46.00	13.96
134.97	25.34	Peak	H		-9.5	34.84	46.00	11.16
144.69	30.86	Peak	V		-1.7	32.56	46.00	13.44
162.18	30.42	Peak	V		-1.6	32.02	46.00	13.98
255.49	28.19	Peak	H		-1.3	29.49	46.00	16.51
453.77	38.14	Peak	H		3.7	34.44	46.00	11.56
Above 500	Not detected	-	-		-	-	-	-

**B. Middle channel (2 440 MHz)**

Radiated emissions				Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	22.91	Peak	H		-9.4	32.31	46.00	13.69
134.97	25.06	Peak	H		-9.5	34.56	46.00	11.44
144.69	31.21	Peak	V		-1.7	32.91	46.00	13.09
162.18	31.25	Peak	V		-1.6	32.85	46.00	13.15
255.49	28.49	Peak	H		-1.3	29.79	46.00	16.21
453.77	35.21	Peak	H		3.7	31.51	46.00	14.49
Above 500	Not detected	-	-		-	-	-	-

**\* Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)
2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

**C. High channel (2 480 MHz)**

Radiated emissions			Ant.	Correction factors (Ant. Factor + C.L)	Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode			Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
35.83	23.26	Peak	H	-9.4	32.66	46.00	13.34
134.97	25.98	Peak	H	-9.5	35.48	46.00	10.52
144.69	31.54	Peak	V	-1.7	33.24	46.00	12.76
162.18	31.46	Peak	V	-1.6	33.06	46.00	12.94
255.49	28.82	Peak	H	-1.3	30.12	46.00	15.88
453.77	34.70	Peak	H	3.7	31.00	46.00	15.00
Above 500	Not detected	-	-	-	-	-	-

**※ Remark**

1. Actual = Reading + Ant. factor + CL (Cable loss)

2. 15.31 Measurement standards.

The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

#### 4.4.3. Spurious radiated emission

The frequency spectrum above 1 000 MHz was investigated. Emission levels are not reported much lower than the limits by over 20 dB.

To get a maximum emission levels from the EUT, the EUT was moved throughout the XY, XZ, and YZ planes.

##### Operation mode: 802.11b mode

###### A. Low channel (2 412 MHz)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4 823.99	76.33	Peak	H	33.26	44.10	65.49	74.00	8.51
4 823.99	60.12	Avg	H	33.26	44.10	49.28	54.00	4.72
7 235.97	71.10	Peak	H	35.66	43.05	63.71	74.00	10.29
7 235.97	54.58	Avg	H	35.66	43.05	47.19	54.00	6.81
Above 8 000	Not detected	-	-	-	-	-	-	-

###### B. Middle channel (2 437 MHz)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874.05	77.44	Peak	H	33.26	44.10	66.60	74.00	7.40
4874.05	60.62	Avg	H	33.26	44.10	49.78	54.00	4.22
7312.19	72.14	Peak	H	35.66	43.05	64.75	74.00	9.25
7312.19	55.02	Avg	H	35.66	43.05	47.63	54.00	6.37
Above 8 000	Not detected	-	-	-	-	-	-	-

###### C. High channel (2 462 MHz)

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4924.14	75.77	Peak	H	33.26	44.10	64.93	74.00	9.07
4924.14	59.54	Avg	H	33.26	44.10	48.70	54.00	5.30
7387.38	73.61	Peak	H	35.66	43.05	66.22	74.00	7.78
7387.38	56.99	Avg	H	35.66	43.05	49.60	54.00	4.40
Above 8 000	Not detected	-	-	-	-	-	-	-

##### ※ Remark

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

*The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.*

**Operation mode: 802.11g mode**
**A. Low channel (2 412 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4823.48	77.53	Peak	H	33.26	44.10	66.69	74.00	7.31
4823.48	52.81	Avg	H	33.26	44.10	41.97	54.00	12.03
7235.59	74.69	Peak	H	35.66	43.05	67.30	74.00	6.70
7235.59	41.22	Avg	H	35.66	43.05	33.83	54.00	20.17
Above 8 000	Not detected	-	-	-	-	-	-	-

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4882.38	78.09	Peak	H	33.26	44.10	67.25	74.00	6.75
4882.38	53.36	Avg	H	33.26	44.10	42.52	54.00	11.48
7311.12	73.83	Peak	H	35.66	43.05	66.44	74.00	7.56
7311.12	43.11	Avg	H	35.66	43.05	35.72	54.00	18.28
Above 8 000	Not detected	-	-	-	-	-	-	-

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4918.22	76.42	Peak	H	33.26	44.10	65.58	74.00	8.42
4918.22	52.83	Avg	H	33.26	44.10	41.99	54.00	12.01
7383.29	74.10	Peak	H	35.66	43.05	66.71	74.00	7.29
7383.29	44.84	Avg	H	35.66	43.05	37.45	54.00	16.55
Above 8 000	Not detected	-	-	-	-	-	-	-

**\* Remark**

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

*The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.*

**Operation mode: 802.11n\_20 mode**
**A. Low channel (2 412 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4828.51	74.42	Peak	H	33.26	44.10	63.58	74.00	10.42
4828.51	51.91	Avg	H	33.26	44.10	41.07	54.00	12.93
7236.06	72.23	Peak	H	35.66	43.05	64.84	74.00	9.16
7236.06	43.12	Avg	H	35.66	43.05	35.73	54.00	18.27
Above 8 000	Not detected	-	-	-	-	-	-	-

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4874.94	76.00	Peak	H	33.26	44.10	65.16	74.00	8.84
4874.94	51.94	Avg	H	33.26	44.10	41.10	54.00	12.90
7304.16	75.34	Peak	H	35.66	43.05	67.95	74.00	6.05
7304.16	43.50	Avg	H	35.66	43.05	36.11	54.00	17.89
Above 8 000	Not detected	-	-	-	-	-	-	-

**C. High channel (2 462 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4923.62	74.16	Peak	H	33.26	44.10	63.32	74.00	10.68
4923.62	51.79	Avg	H	33.26	44.10	40.95	54.00	13.05
7386.04	74.93	Peak	H	35.66	43.05	67.54	74.00	6.46
7386.04	42.98	Avg	H	35.66	43.05	35.59	54.00	18.41
Above 8 000	Not detected	-	-	-	-	-	-	-

**\* Remark**

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

*The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.*

**Operation mode: 802.11n\_40 mode**
**A. Low channel (2 422 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4838.03	76.90	Peak	H	33.26	44.10	66.06	74.00	7.94
4838.03	56.20	Avg	H	33.26	44.10	45.36	54.00	8.64
7256.56	72.64	Peak	H	35.66	43.05	65.25	74.00	8.75
7256.56	54.35	Avg	H	35.66	43.05	46.96	54.00	7.04
Above 8 000	Not detected	-	-	-	-	-	-	-

**B. Middle channel (2 437 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4873.91	77.67	Peak	H	33.26	44.10	66.83	74.00	7.17
4873.91	54.21	Avg	H	33.26	44.10	43.37	54.00	10.63
7311.51	71.79	Peak	H	35.66	43.05	64.40	74.00	9.60
7311.51	53.81	Avg	H	35.66	43.05	46.42	54.00	7.58
Above 8 000	Not detected	-	-	-	-	-	-	-

**C. High channel (2 452 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4905.47	75.88	Peak	H	33.26	44.10	65.04	74.00	8.96
4905.47	55.08	Avg	H	33.26	44.10	44.24	54.00	9.76
7368.03	72.77	Peak	H	35.66	43.05	65.38	74.00	8.62
7368.03	54.34	Avg	H	35.66	43.05	46.95	54.00	7.05
Above 8 000	Not detected	-	-	-	-	-	-	-

**\* Remark**

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

*The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.*

**Operation mode: Zigbee mode**
**A. Low channel (2 405 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4810.84	55.50	Peak	H	33.26	44.10	44.66	74.00	29.34
4810.84	45.90	Avg	H	33.26	44.10	35.06	54.00	18.94
Above 5 000	Not detected	-	-	-	-	-	-	-

**B. Middle channel (2 440 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4879.07	54.35	Peak	H	33.26	44.10	43.51	74.00	30.49
4879.07	44.29	Avg	H	33.26	44.10	33.45	54.00	20.55
Above 5 000	Not detected	-	-	-	-	-	-	-

**C. High channel (2 480 MHz)**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ V)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
4959.23	52.23	Peak	H	33.26	44.10	41.39	74.00	32.61
4959.23	41.74	Avg	H	33.26	44.10	30.90	54.00	23.10
Above 5 000	Not detected	-	-	-	-	-	-	-

**※ Remark**

1. Measuring frequencies from 1 GHz to the 40 GHz.
2. Radiated emissions measured in frequency above 1 000 MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Actual = Reading + Ant. factor + Amp + CL (Cable loss)
5. 15.31 Measurement standards.

*The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.*

#### 4.4.4. Band Edge

**Operation mode: 802.11b mode**

**A. 2 310 - 2 390 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2389.83	60.01	Peak	H	28.86	43.65	45.22	74.00	28.78
2389.83	44.15	Average	H	28.86	43.65	29.36	54.00	24.64
2389.83	58.66	Peak	V	28.86	43.65	43.87	74.00	30.13
2389.83	43.13	Average	V	28.86	43.65	28.34	54.00	25.66

**B. 2 483.5 – 2 500 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2483.89	57.97	Peak	H	28.86	43.65	43.18	74.00	30.82
2483.89	43.58	Average	H	28.86	43.65	28.79	54.00	25.21
2483.89	55.22	Peak	V	28.86	43.65	40.43	74.00	33.57
2483.89	41.06	Average	V	28.86	43.65	26.27	54.00	27.73

**Operation mode: 802.11g mode**

**A. 2 310 - 2 390 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2389.02	69.40	Peak	H	28.86	43.65	54.61	74.00	19.39
2389.02	44.27	Average	H	28.86	43.65	29.48	54.00	24.52
2389.02	65.22	Peak	V	28.86	43.65	50.43	74.00	23.57
2389.02	40.70	Average	V	28.86	43.65	25.91	54.00	28.09

**B. 2 483.5 – 2 500 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2484.70	74.86	Peak	H	28.86	43.65	60.07	74.00	13.93
2484.70	44.97	Average	H	28.86	43.65	30.18	54.00	23.82
2484.70	70.25	Peak	V	28.86	43.65	55.46	74.00	18.54
2484.70	41.72	Average	V	28.86	43.65	26.93	54.00	27.07

**Operation mode: 802.11n\_20 mode**
**A. 2 310 - 2 390 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2389.19	69.98	Peak	H	28.86	43.65	55.19	74.00	18.81
2389.19	41.42	Average	H	28.86	43.65	26.63	54.00	27.37
2389.19	65.61	Peak	V	28.86	43.65	50.82	74.00	23.18
2389.19	38.94	Average	V	28.86	43.65	24.15	54.00	29.85

**B. 2 483.5 – 2 500 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2483.51	74.93	Peak	H	28.86	43.65	60.14	74.00	13.86
2483.51	44.33	Average	H	28.86	43.65	29.54	54.00	24.46
2483.51	72.11	Peak	V	28.86	43.65	57.32	74.00	16.68
2483.51	42.52	Average	V	28.86	43.65	27.73	54.00	26.27

**Operation mode: 802.11n\_40 mode**
**A. 2 310 - 2 390 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2386.74	78.14	Peak	H	28.86	43.65	63.35	74.00	10.65
2386.74	61.51	Average	H	28.86	43.65	46.72	54.00	7.28
2386.74	75.55	Peak	V	28.86	43.65	60.76	74.00	13.24
2386.74	58.49	Average	V	28.86	43.65	43.7	54.00	10.30

**B. 2 483.5 – 2 500 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2483.75	78.91	Peak	H	28.86	43.65	64.12	74.00	9.88
2483.75	61.68	Average	H	28.86	43.65	46.89	54.00	7.11
2483.75	74.06	Peak	V	28.86	43.65	59.27	74.00	14.73
2483.75	59.58	Average	V	28.86	43.65	44.79	54.00	9.21

**Operation mode: Zigbee mode**  
**A. 2 310 - 2 390 MHz measurement**


Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2385.90	48.01	Peak	H	28.86	43.65	33.22	74.00	40.78
2385.90	34.08	Average	H	28.86	43.65	19.29	54.00	34.71
2385.90	46.48	Peak	V	28.86	43.65	31.69	74.00	42.31
2385.90	33.27	Average	V	28.86	43.65	18.48	54.00	35.52

**B. 2 483.5 – 2 500 MHz measurement**

Radiated emissions			Ant.	Correction factors		Total	Limit	
Frequency (MHz)	Reading (dB $\mu$ N)	Detector mode	Pol.	Ant. factor (dB/m)	Amp + CL (dB)	Actual (dB $\mu$ N/m)	Limit (dB $\mu$ N/m)	Margin (dB)
2483.51	65.92	Peak	H	28.86	43.65	51.13	74.00	22.87
2483.51	55.51	Average	H	28.86	43.65	40.72	54.00	13.28
2483.51	64.68	Peak	V	28.86	43.65	49.89	74.00	24.11
2483.51	54.02	Average	V	28.86	43.65	39.23	54.00	14.77

#### 4.4.5 Conducted power line test

##### 4.4.5.1 Test setup

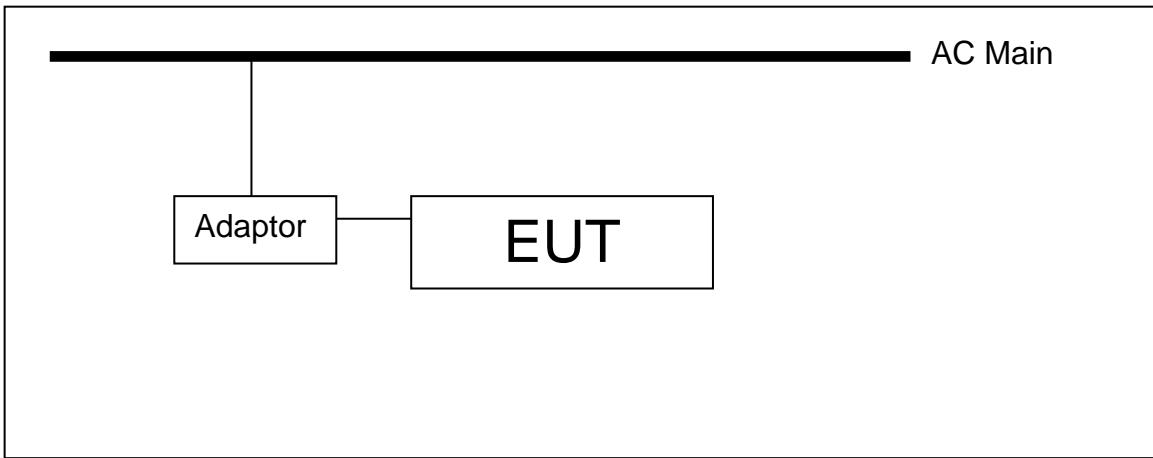

##### 4.4.5.2 Limit

According to §15.107(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 uH/ 50 ohm line impedance stabilization network (LISN). Compliance with the provision of this paragraph shall be on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted limit (dB $\mu$ V/m)	
	Quasi-peak	Average
0.15 – 0.50	66 - 56*	56 - 46*
0.50 – 5.00	56	46
5.00 – 30.0	60	50

##### \* Remark

Decreases with the logarithm of the frequency.

##### 4.4.5.3 Test procedures

The test procedure is performed in a 6.5 m x 3.6 m x 3.6 m (L x W x H) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W) x 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.

The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.

#### 4.4.5.4 Test results

 Ambient temperature: 24 °C

 Relative humidity: 49 % R.H.

Frequency range: 0.15 MHz ~ 30 MHz

Measured bandwidth: 9 kHz

Freq. (MHz)	Line	Q-Peak		
		Level(dB $\mu$ N/m)	Limit(dB $\mu$ N/m)	Margin(dB)
0.189	H	54.3	64.1	9.8
0.190	H	54.3	64.0	9.7
0.190	N	54.6	64.0	9.4
0.192	N	54.8	63.9	9.1
0.193	N	54.5	63.9	9.4
0.196	N	54.1	63.8	9.7

Freq. (MHz)	Line	Average		
		Level(dB $\mu$ N/m)	Limit(dB $\mu$ N/m)	Margin(dB)
0.194	N	40.6	53.9	13.3
0.196	H	41.1	53.8	12.7
6.760	N	36.1	50.0	13.9
6.951	N	35.3	50.0	14.7
23.602	H	36.2	50.0	13.8
24.031	N	35.7	50.0	14.3


##### ※ Remark

Line(H): Hot


Line(N): Neutral

**Plot of conducted power line**

Test mode: Hot

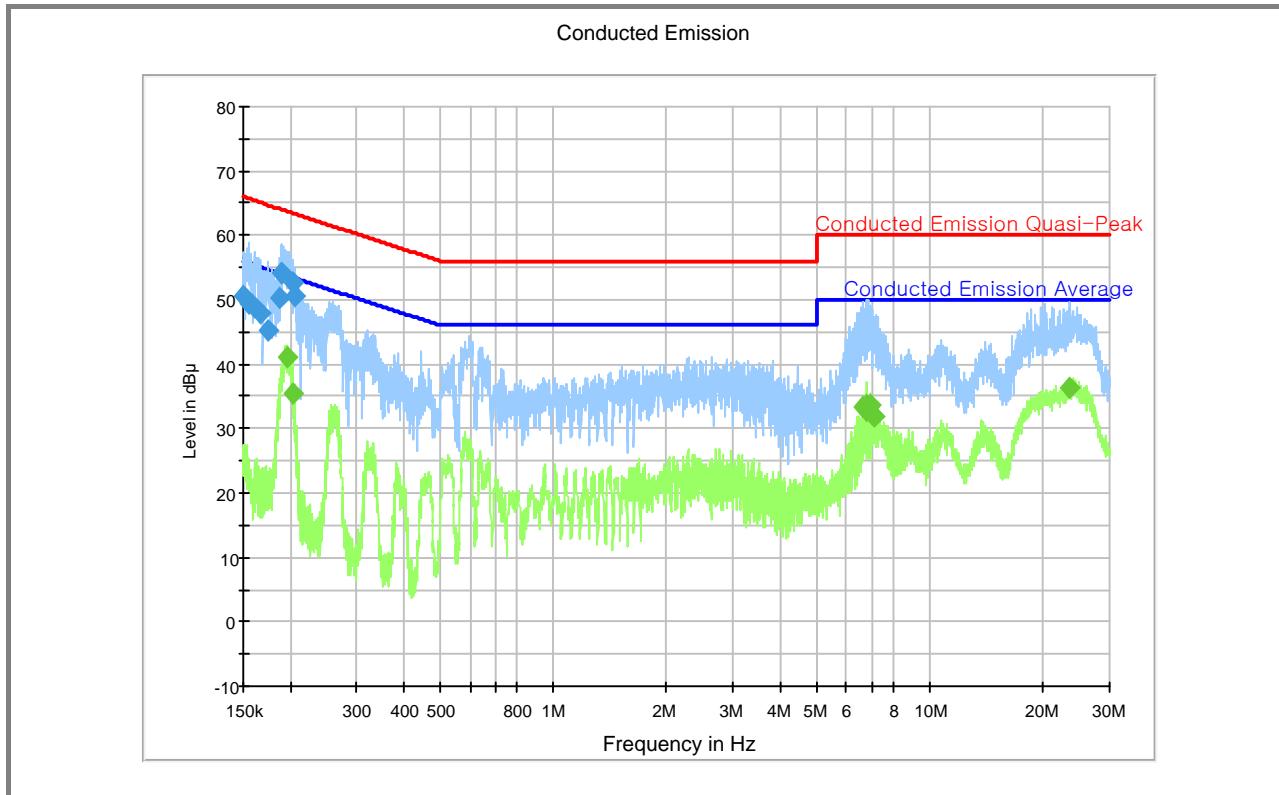

Test mode: Neutral

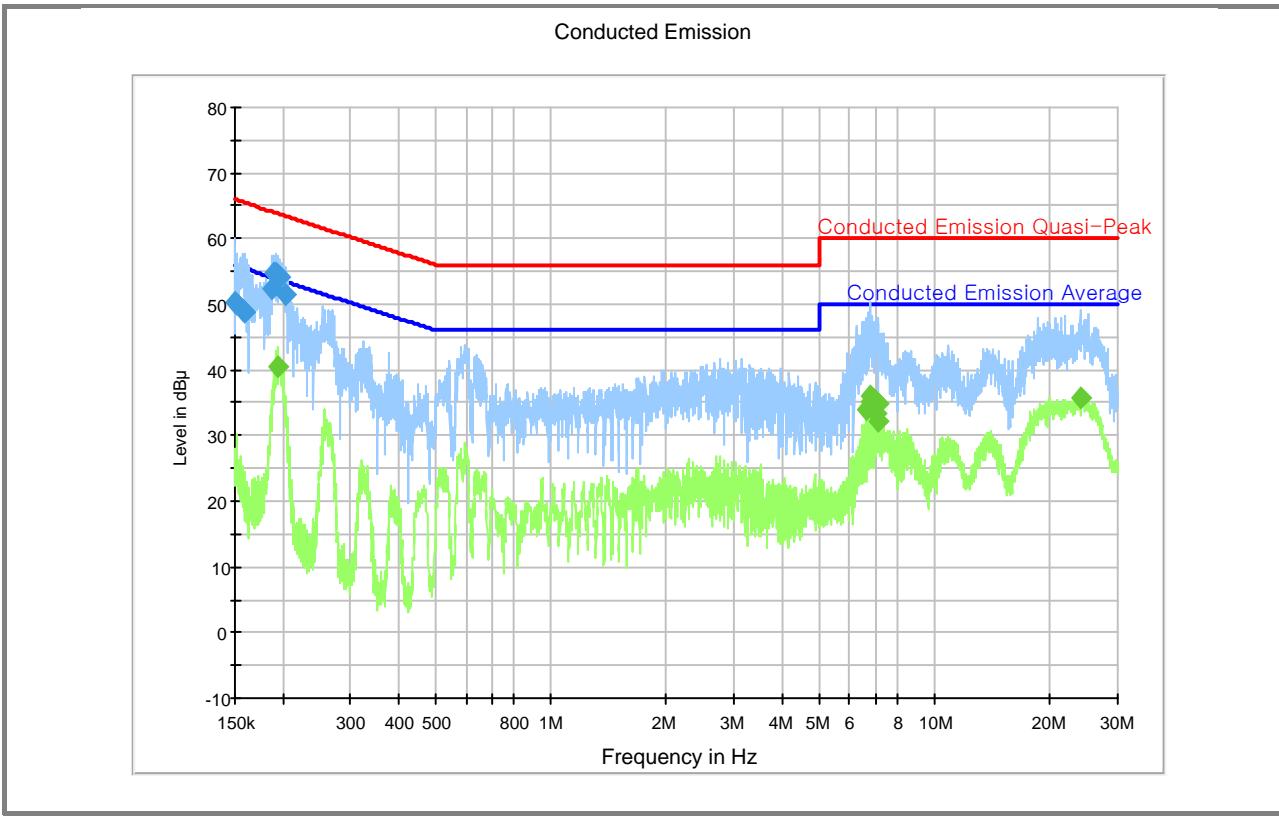

#### 4.4.6. Out of Band Emissions in non-restricted frequency band

##### 4.4.6.1. Test requirements and limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc). If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). In either case, attenuation to levels below the 15.209 general radiated emissions limits is not required.

##### 4.4.6.2. Test procedure

The transmitter output is connected to a spectrum analyzer.

###### **•Measurement Procedure 1 – Reference level measurement**

1. Set instrument center frequency to DTS channel center frequency.
2. Set the span to  $\geq 1.5$  times the DTS bandwidth.
3. Set the RBW = 100 kHz.
4. Set the VBW  $\geq 3 \times$  RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum PSD level

###### **•Measurement Procedure 2– Emissions level measurement**



1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz(See below note for actual setting)
3. Set the VBW  $\geq 3 \times$  RBW (See below note for actual setting)
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow the trace to stabilize.
8. Use the peak marker function to determine the maximum amplitude level.

*(Note:This test item was tested with below settings.)*


- RBW= 100kHz, VBW= 300kHz for frequency range: 9 kHz ~ 30 MHz
- RBW= 1MHz, VBW= 3MHz for frequency range: 30 MHz ~ 10 GHz and 10 GHz~25 GHz

If the emission level with above setting was close to the limit (ie, less than 3 dB margin) then zoom scan is required using RBW = 100 kHz, VBW = 300 kHz, SPAN = 100 MHz and BINS = 2001 to get accurate emission level within 100 kHz BW.

##### 4.4.6.3. Test results : **Comply** (refer to Next page – test plots)

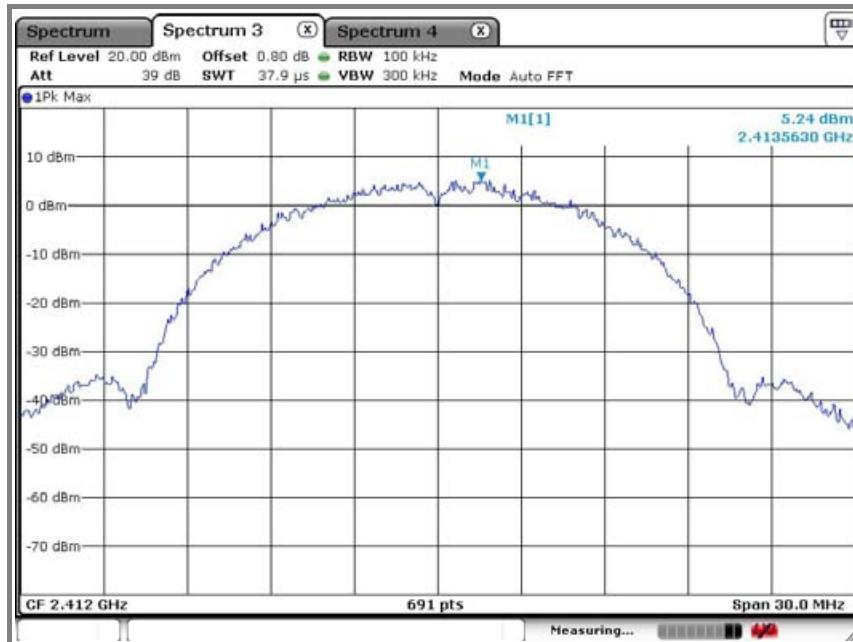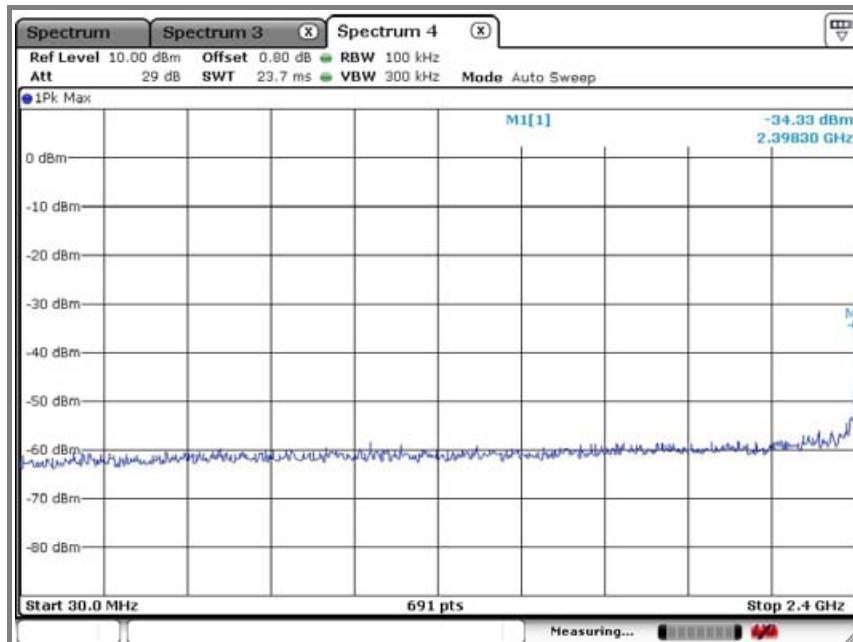
**Operation mode: 802.11b mode****A. Low channel (2.412 MHz)****Reference level measurement****Emission level measurement 1**



## Emission level measurement 2

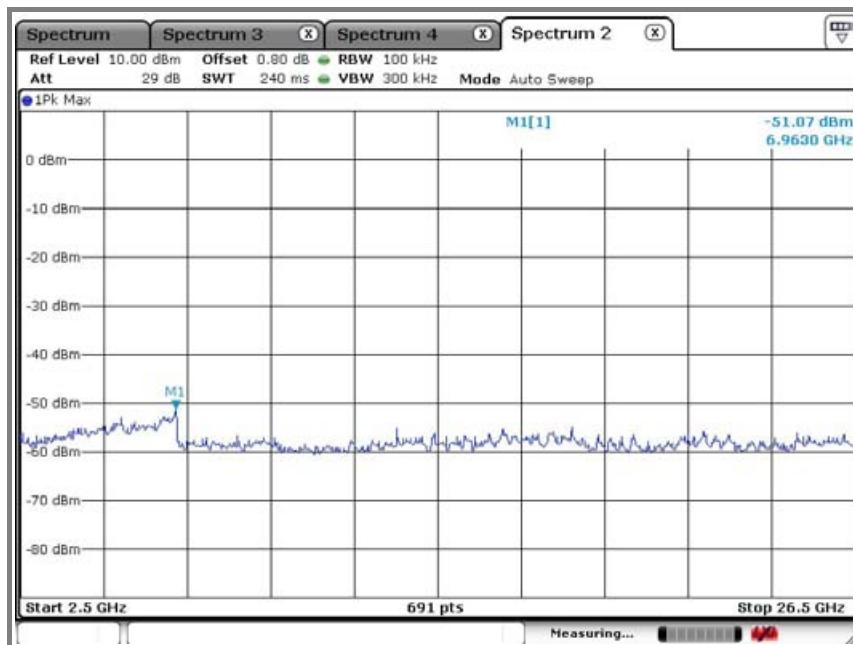

## B. Middle channel (2.437 GHz)


### Reference level measurement

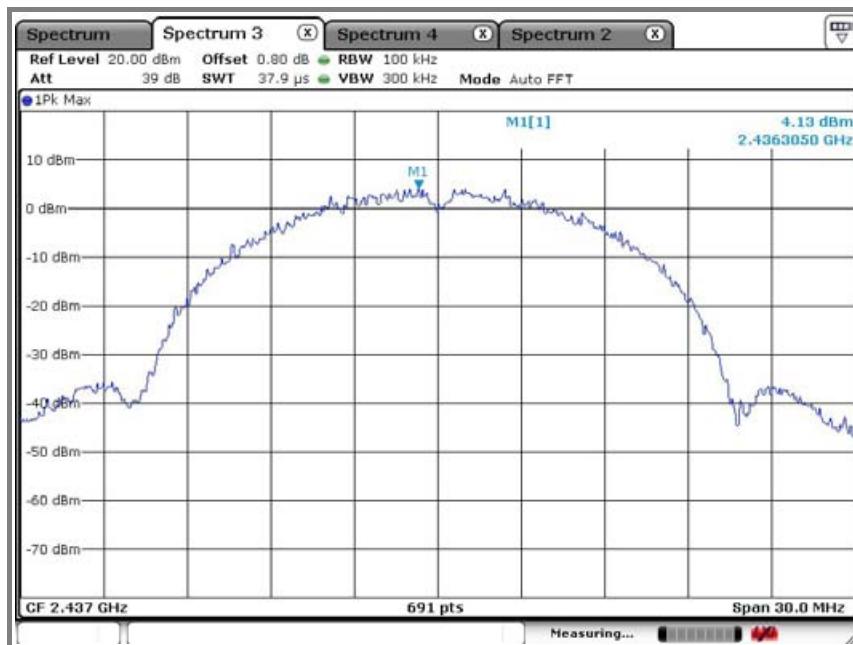

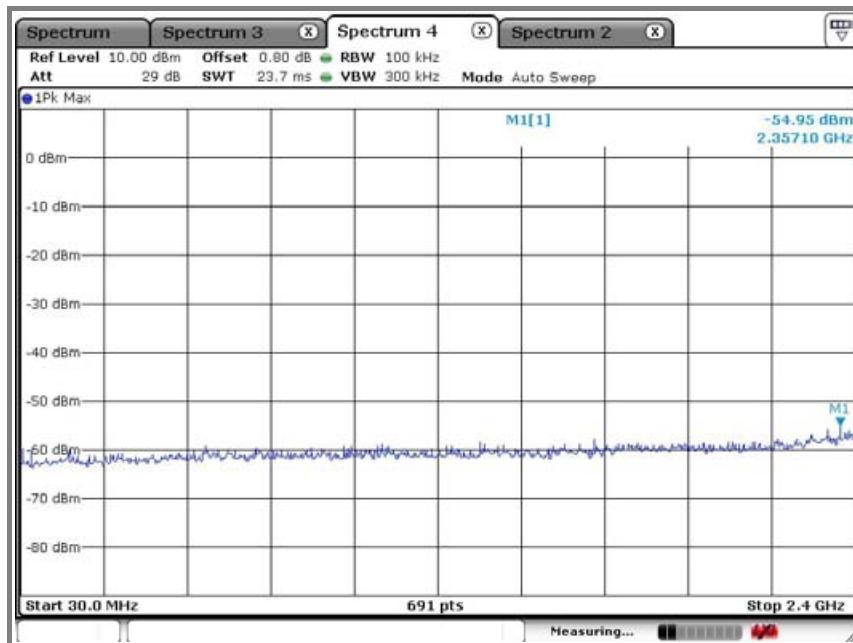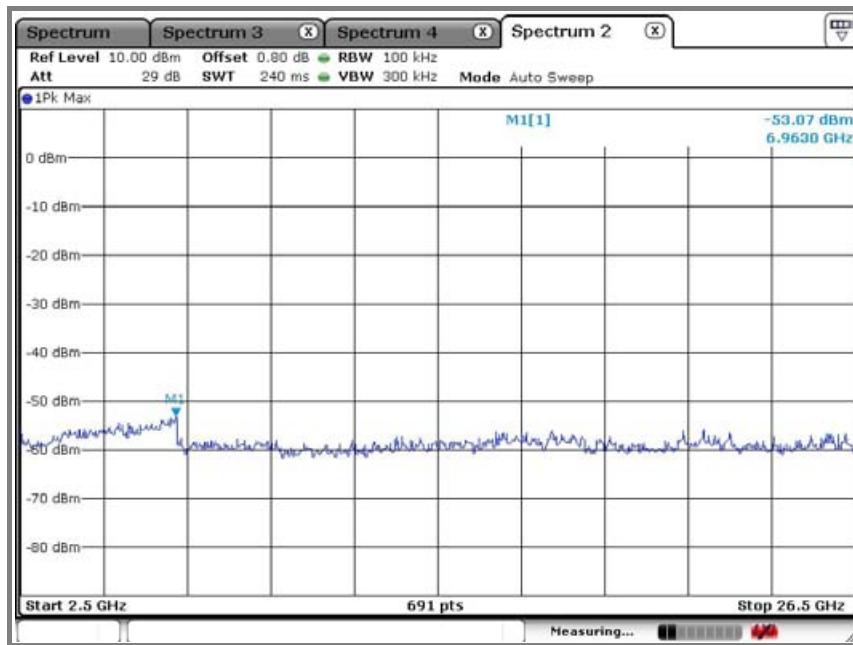
**Emission level measurement 1****Emission level measurement 2**

### C. High channel (2.462 MHz)


#### Reference level measurement

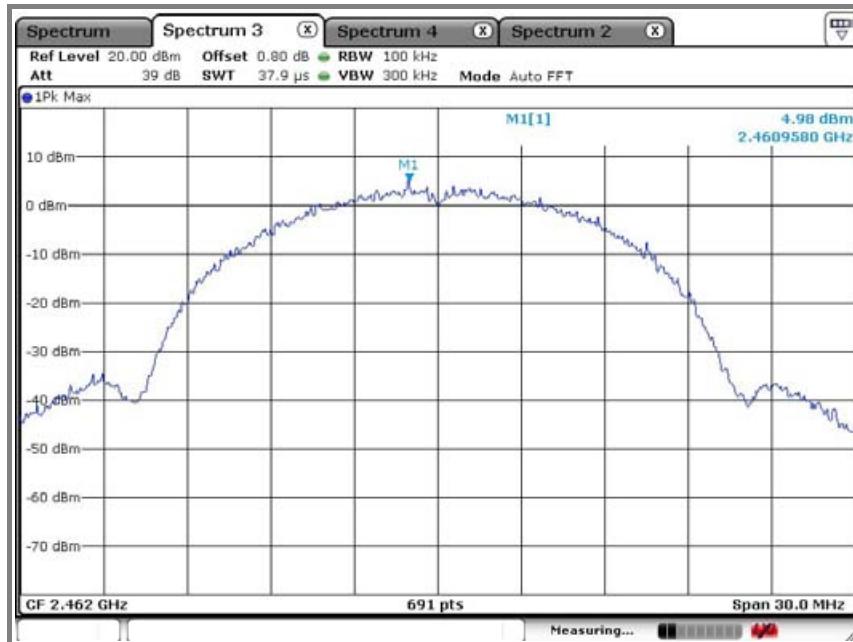

#### Emission level measurement 1

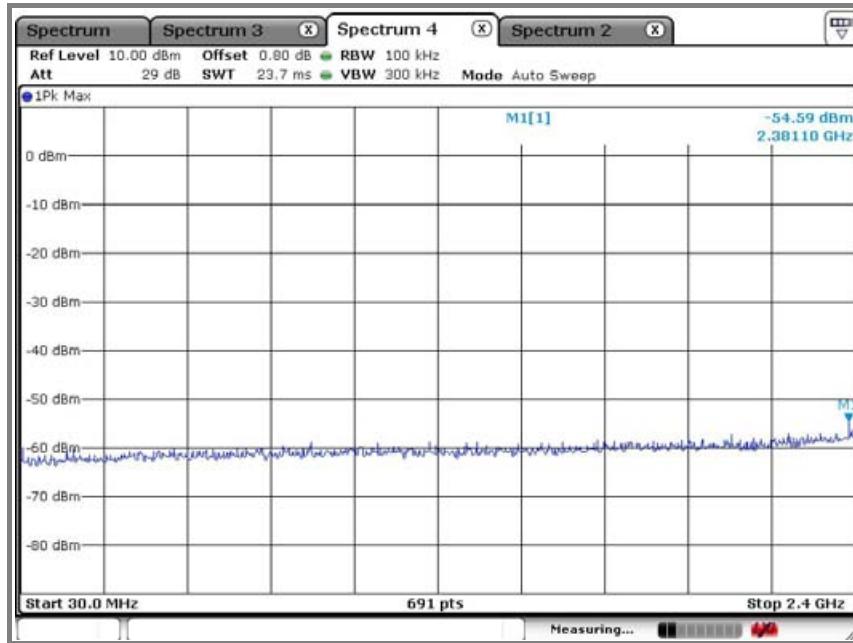


## Emission level measurement 2


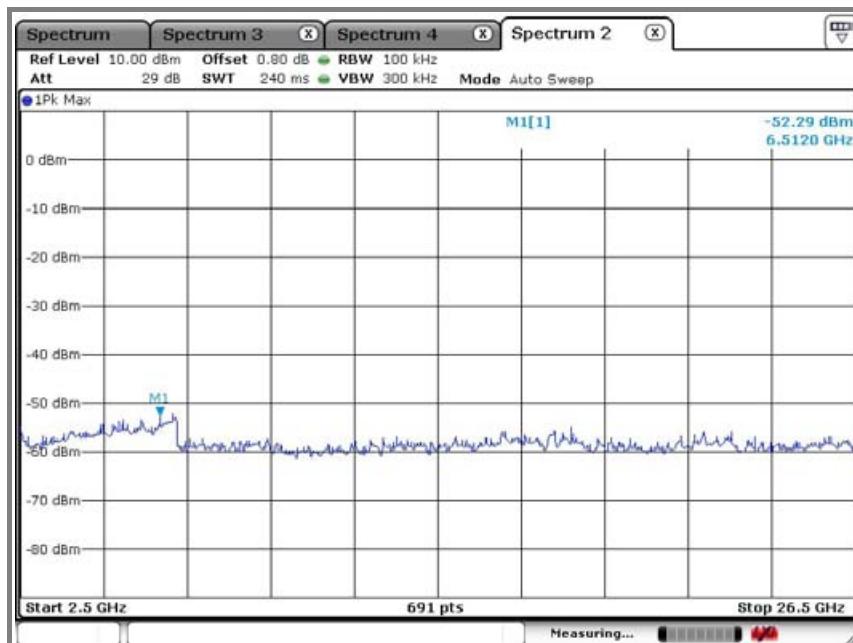


## Operation mode: 802.11g mode

### A. Low channel (2.412 MHz)


#### Reference level measurement

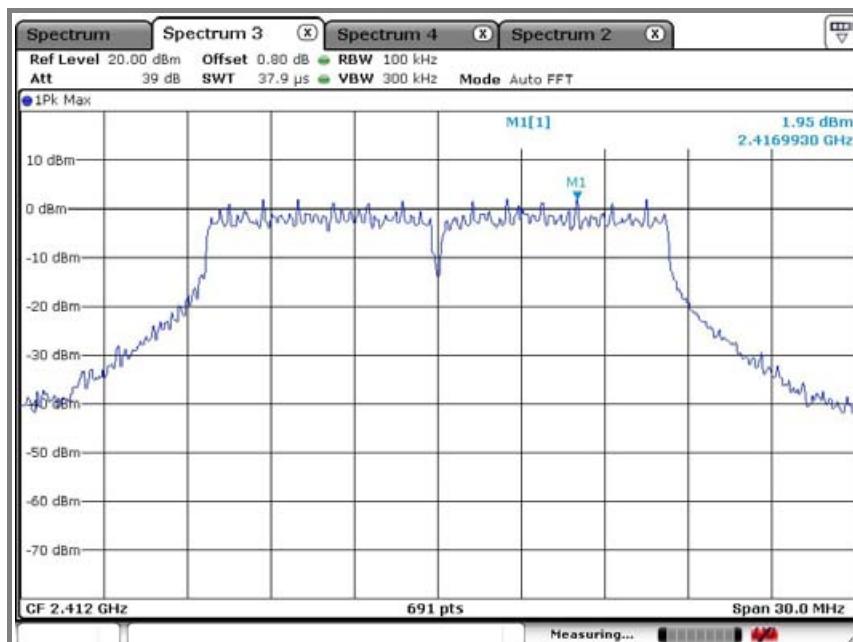

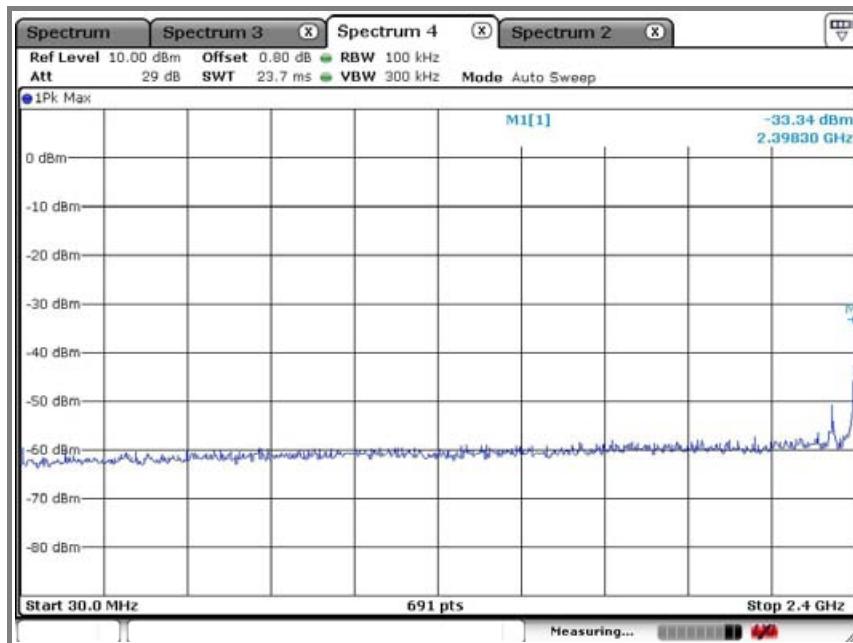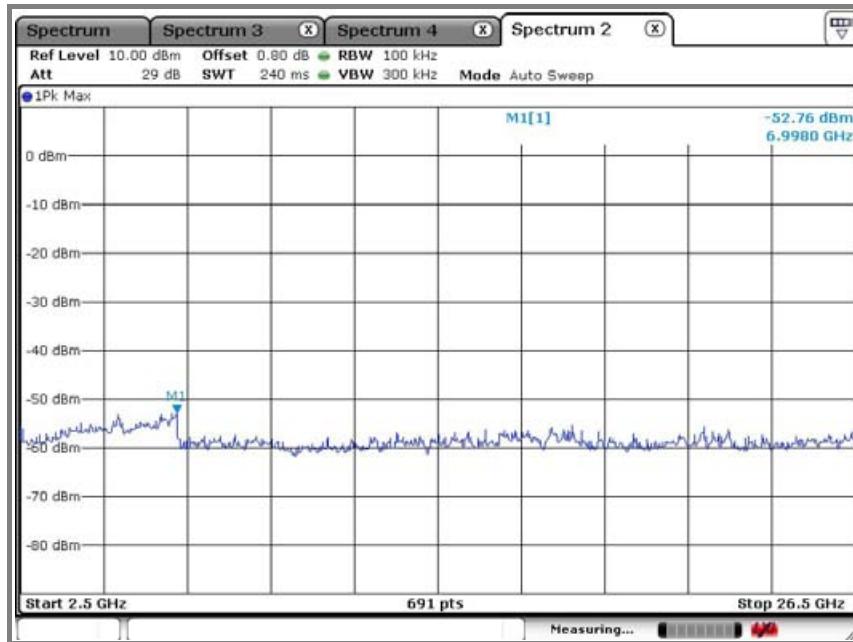
**Emission level measurement 1****Emission level measurement 2**

## B. Middle channel (2.437 GHz)


### Reference level measurement

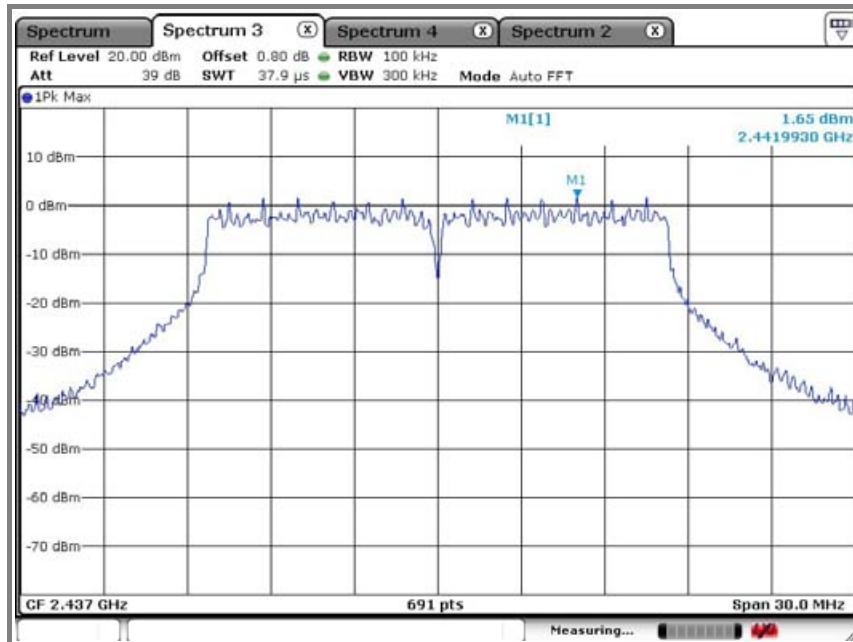

### Emission level measurement 1

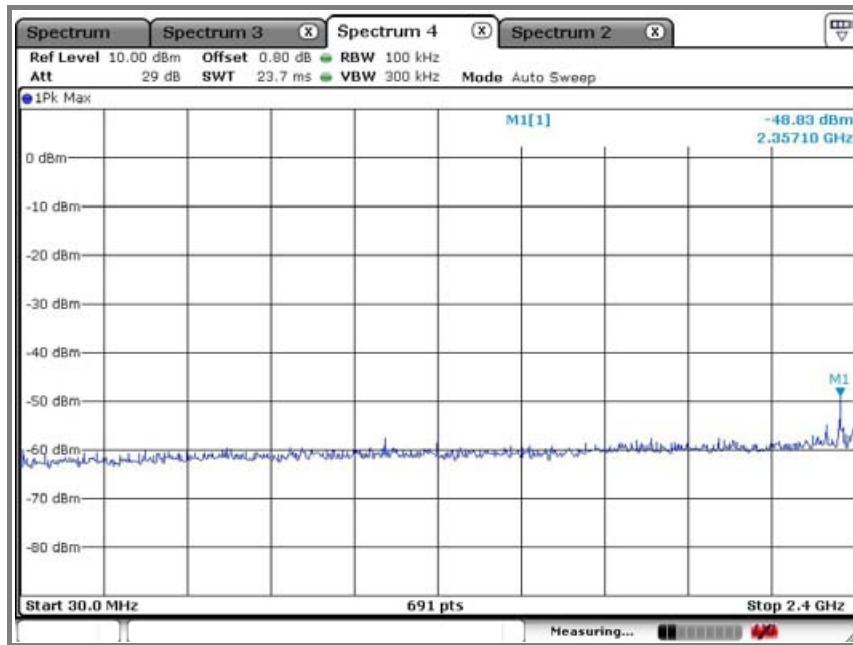




### Emission level measurement 2

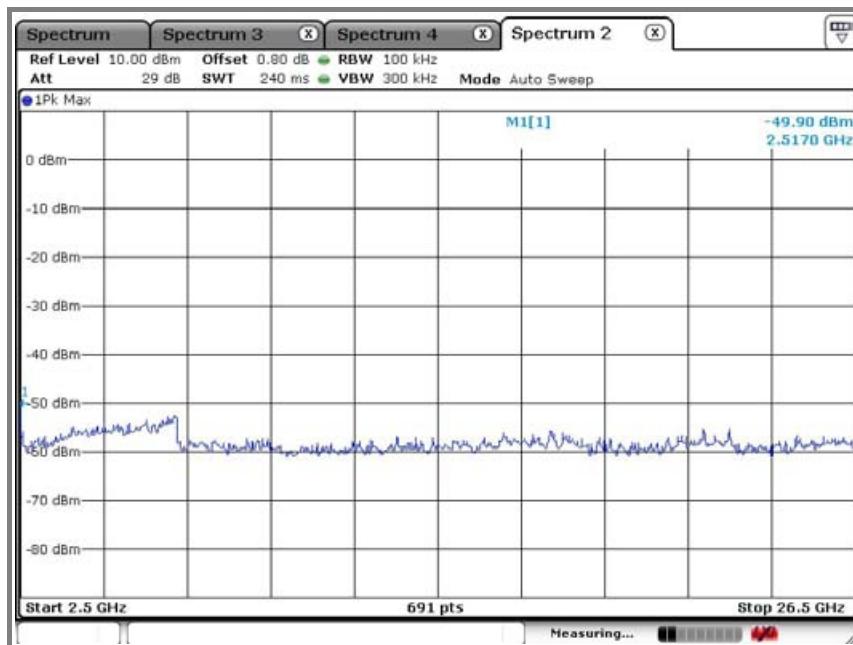

### C. High channel (2 462 MHz)

#### Reference level measurement

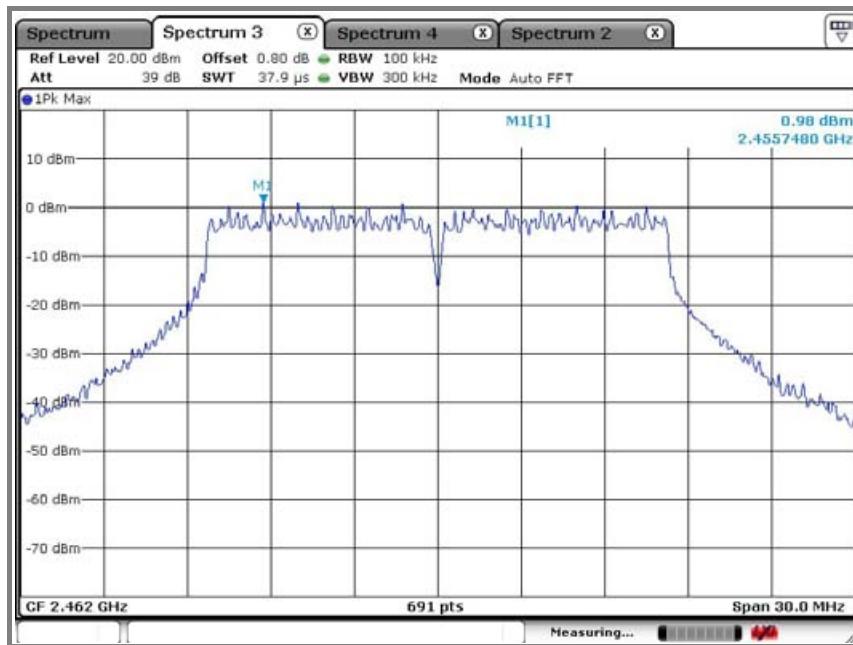


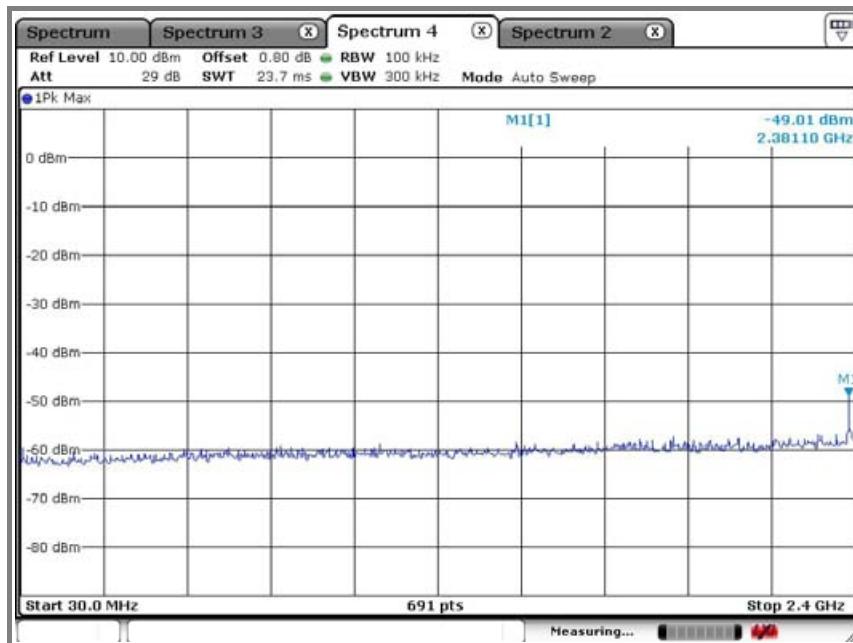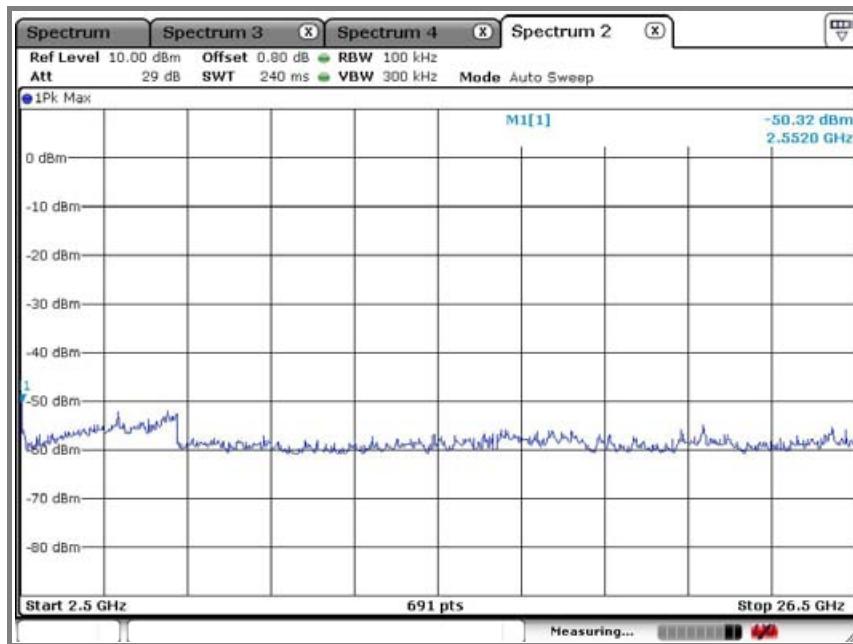**Emission level measurement 1****Emission level measurement 2**


Operation mode: 802.11n\_20 mode

A. Low channel (2.412 MHz)


Reference level measurement

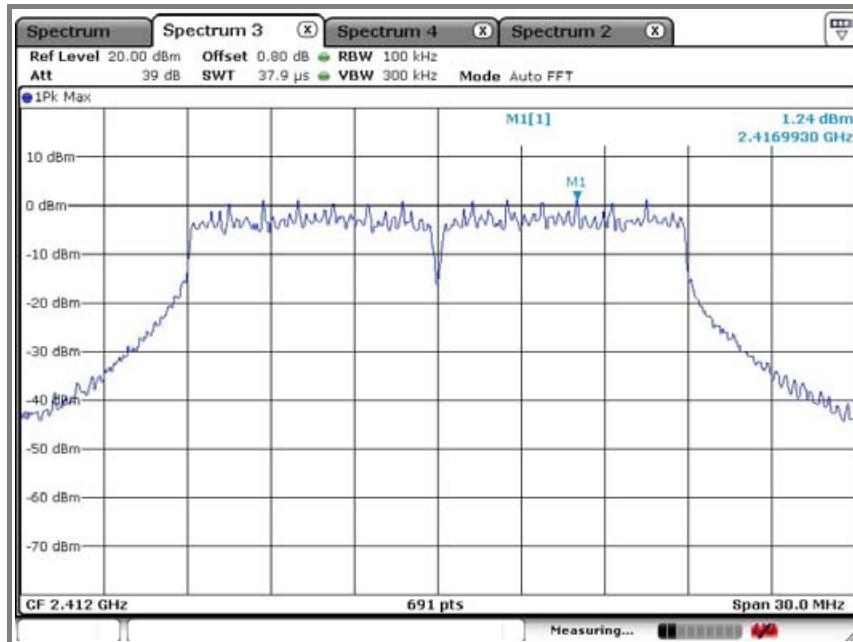

Emission level measurement 1

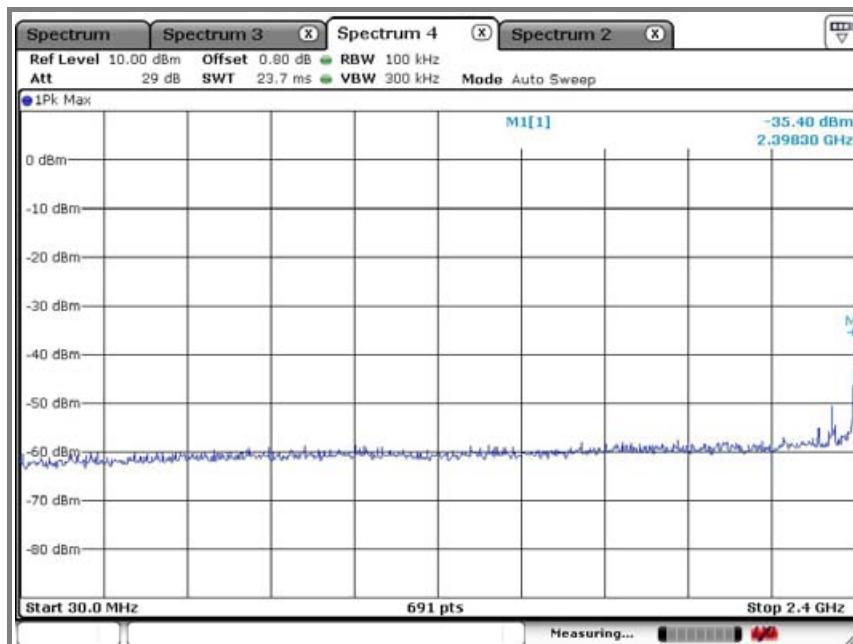




### Emission level measurement 2

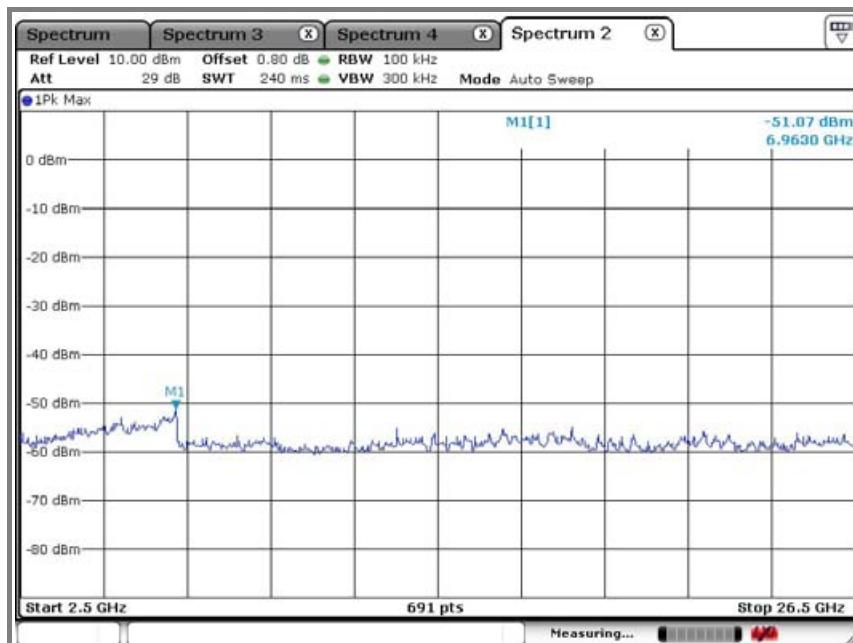

### B. Middle channel (2.437 GHz)


#### Reference level measurement

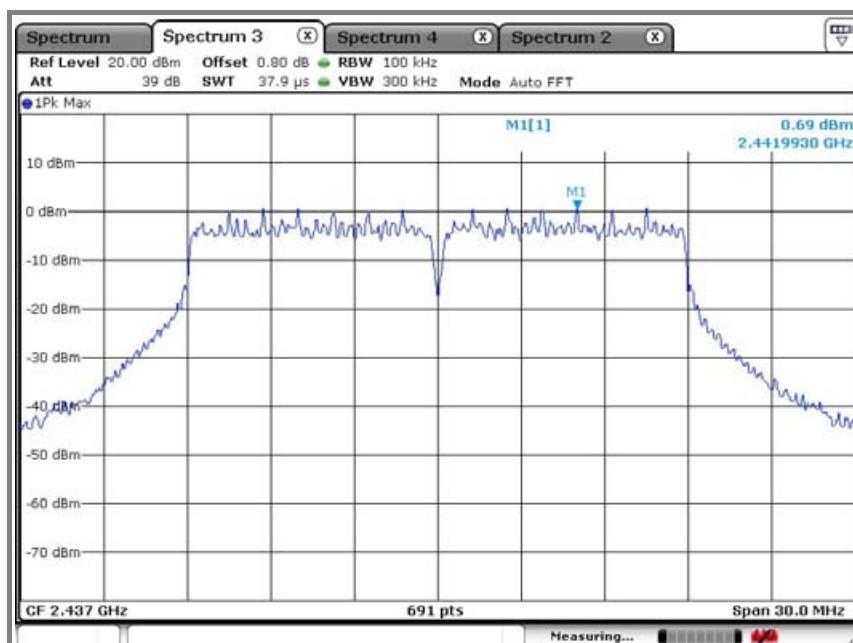

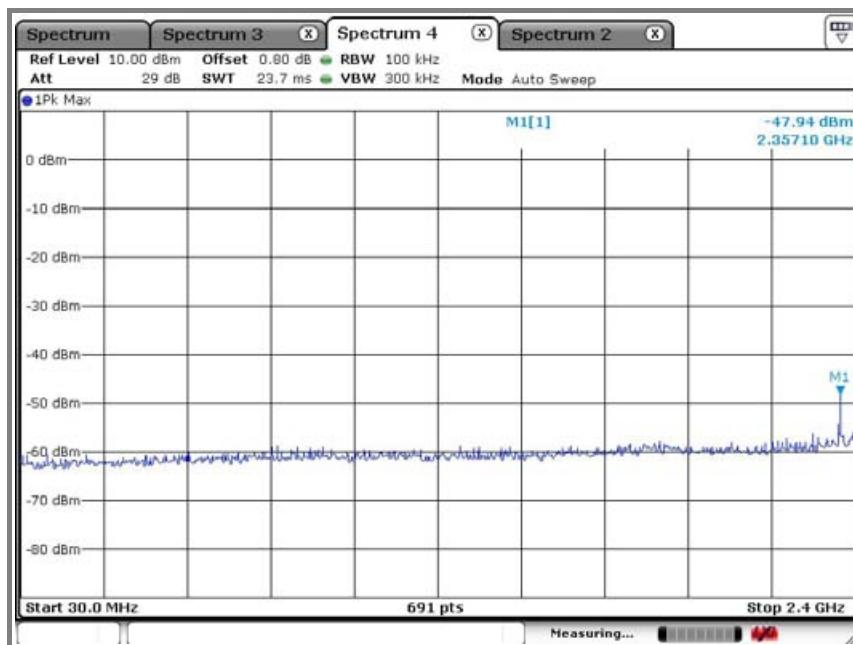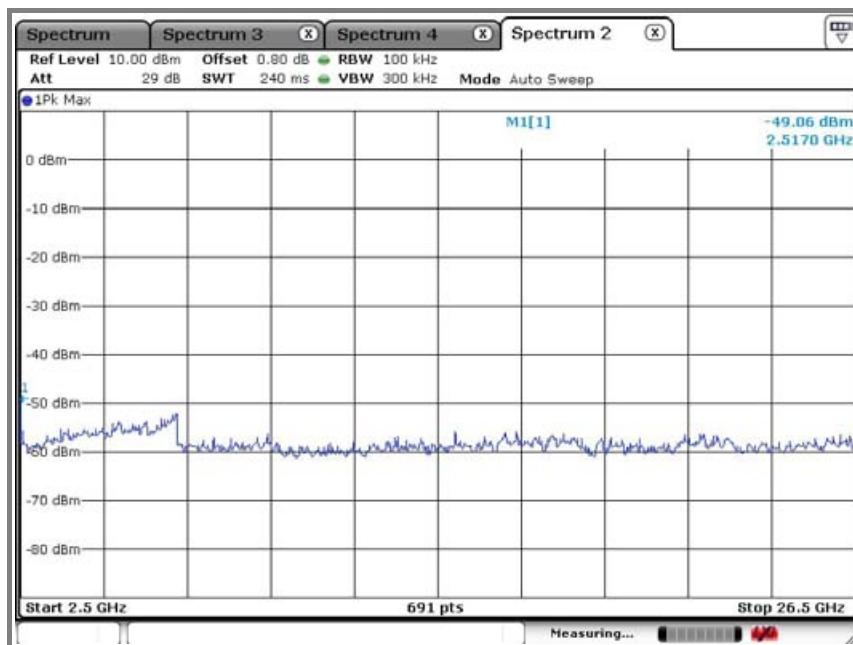
**Emission level measurement 1****Emission level measurement 2**

### C. High channel (2.462 MHz)


#### Reference level measurement

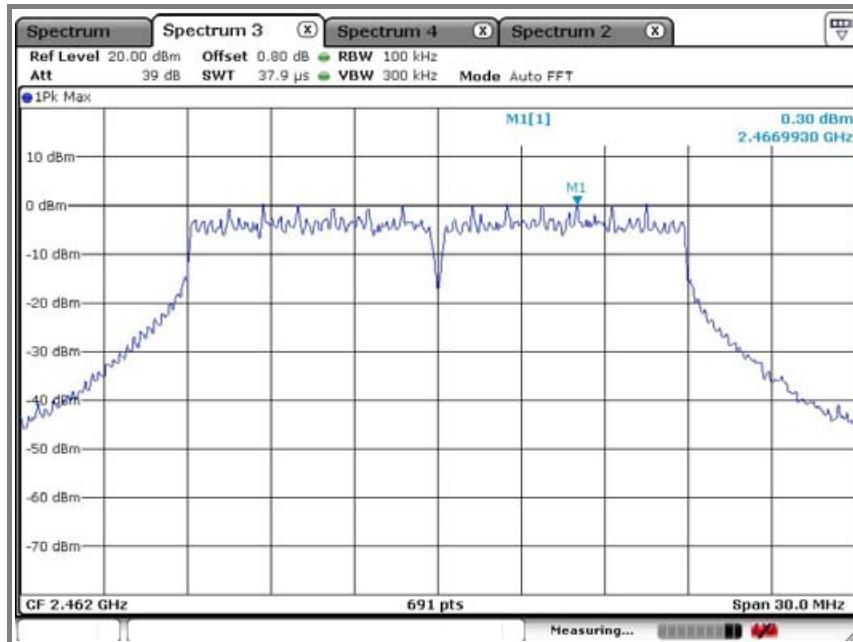

#### Emission level measurement 1

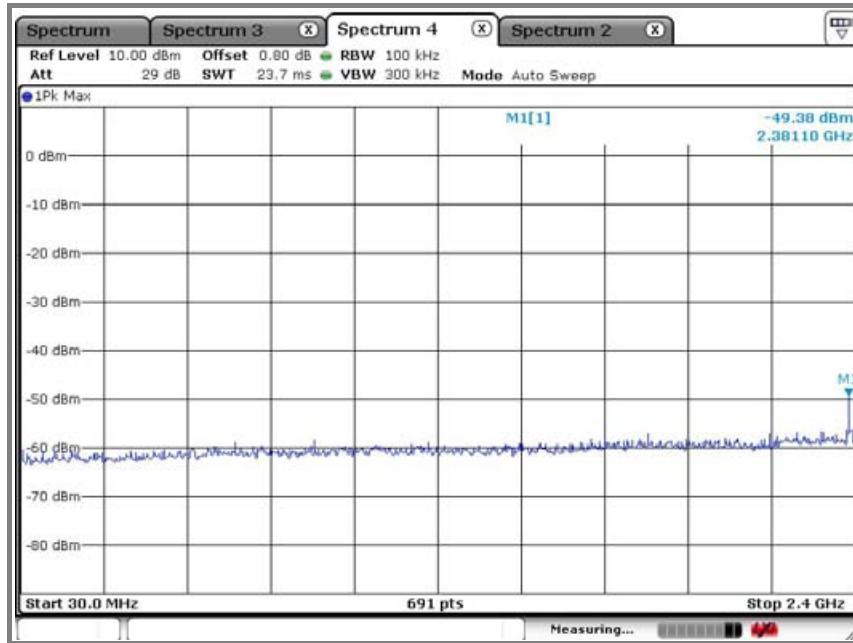


## Emission level measurement 2


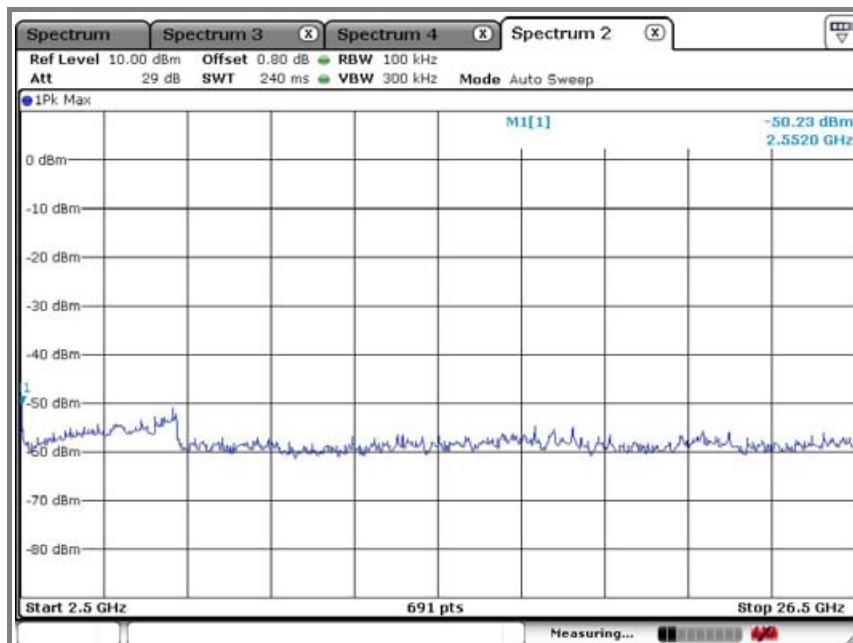


## Operation mode: 802.11n\_40 mode

### A. Low channel (2.422 MHz)


#### Reference level measurement

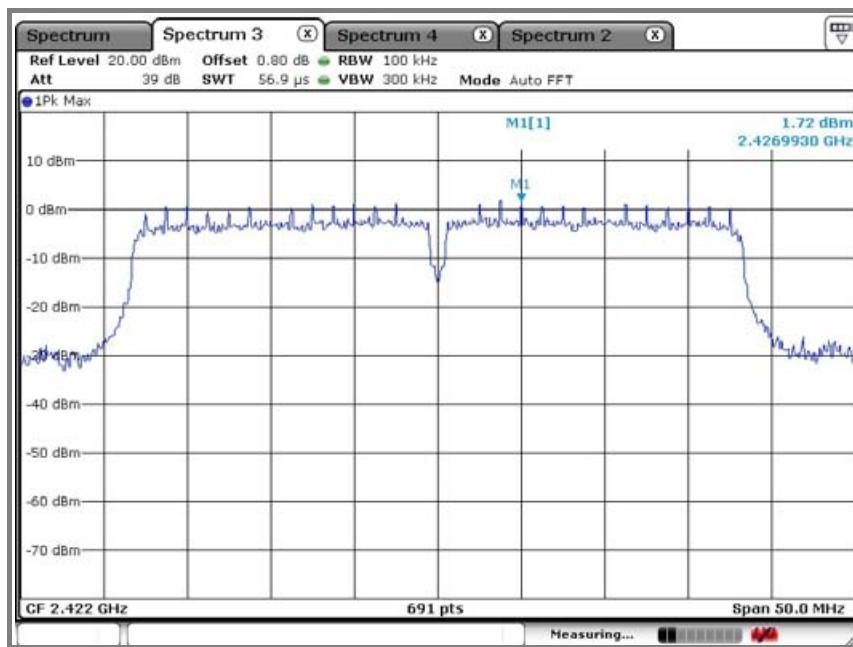

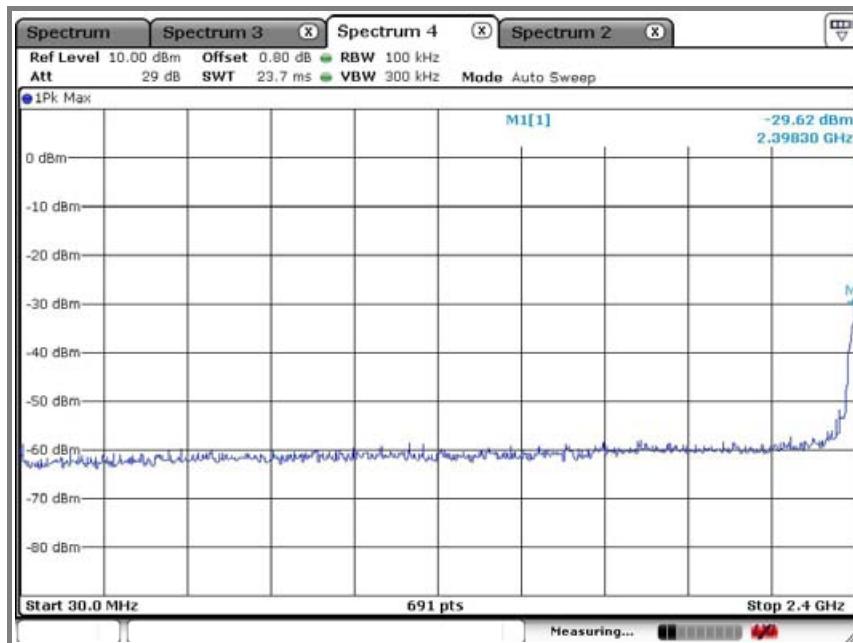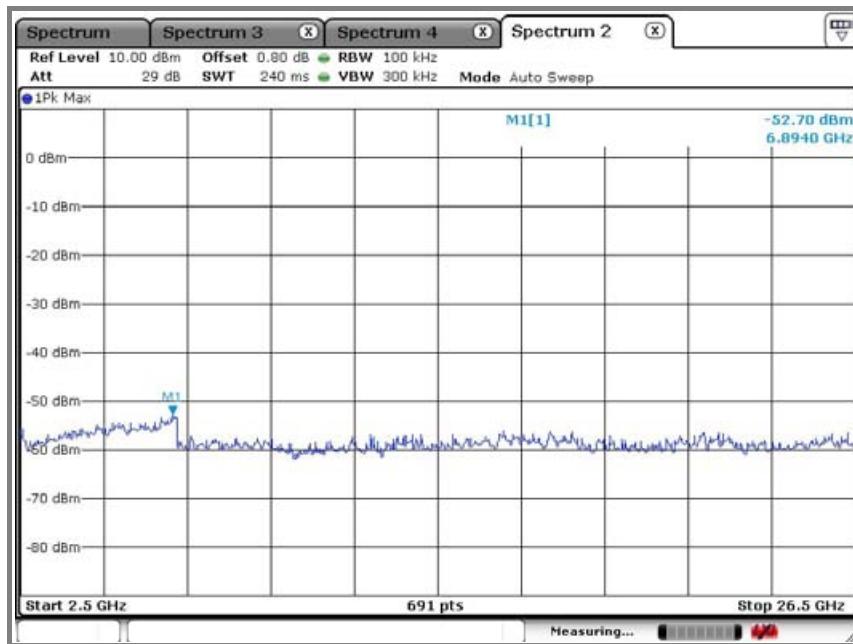
**Emission level measurement 1****Emission level measurement 2**

## B. Middle channel (2.437 GHz)


### Reference level measurement

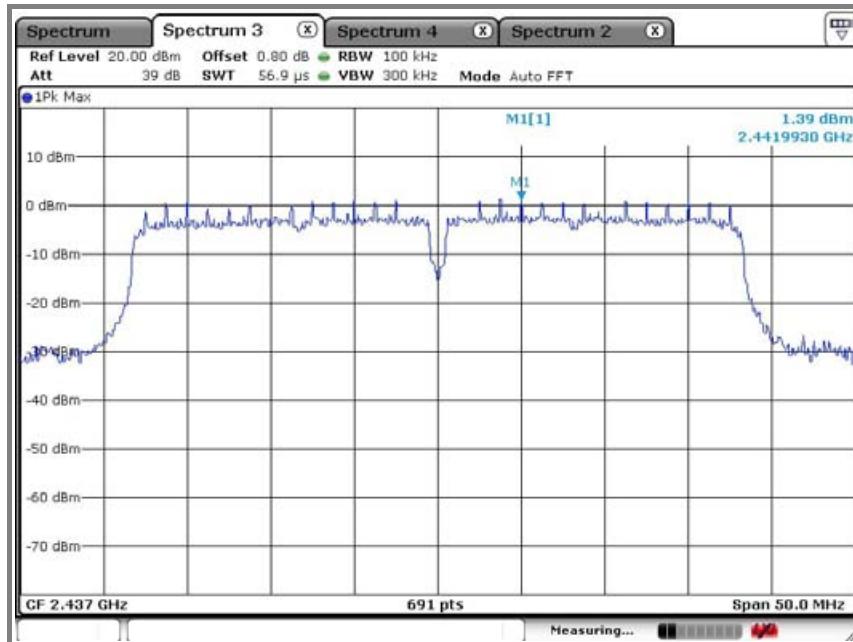

### Emission level measurement 1

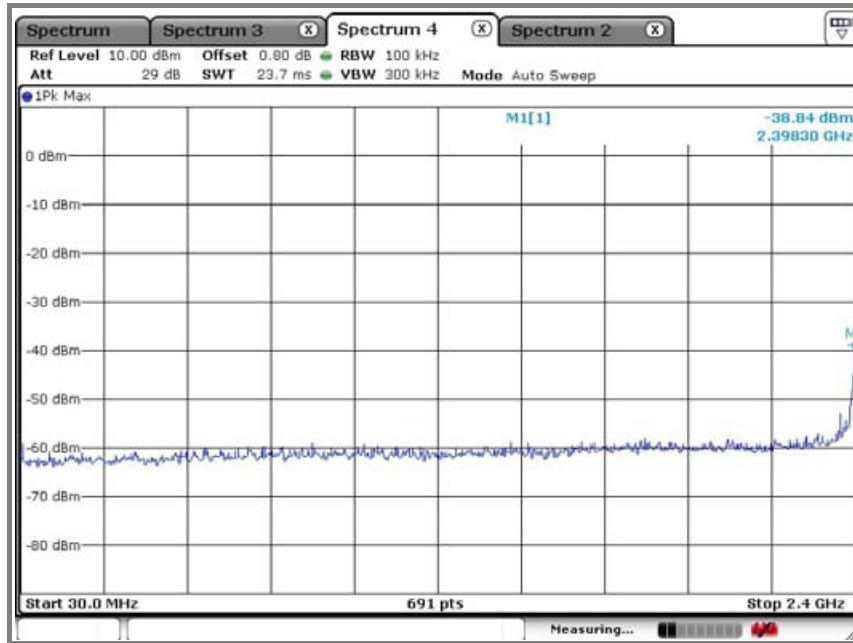




### Emission level measurement 2

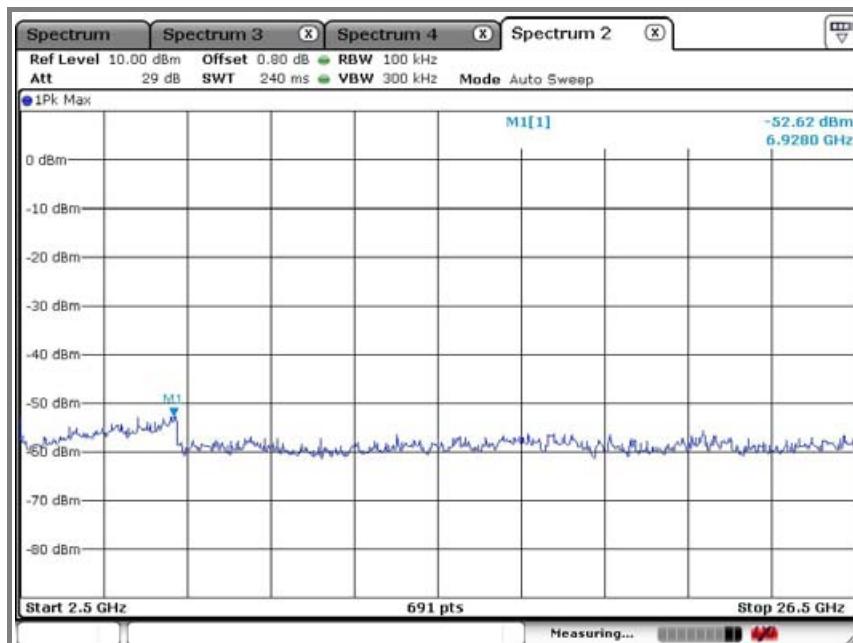

### C. High channel (2 452 MHz)


#### Reference level measurement

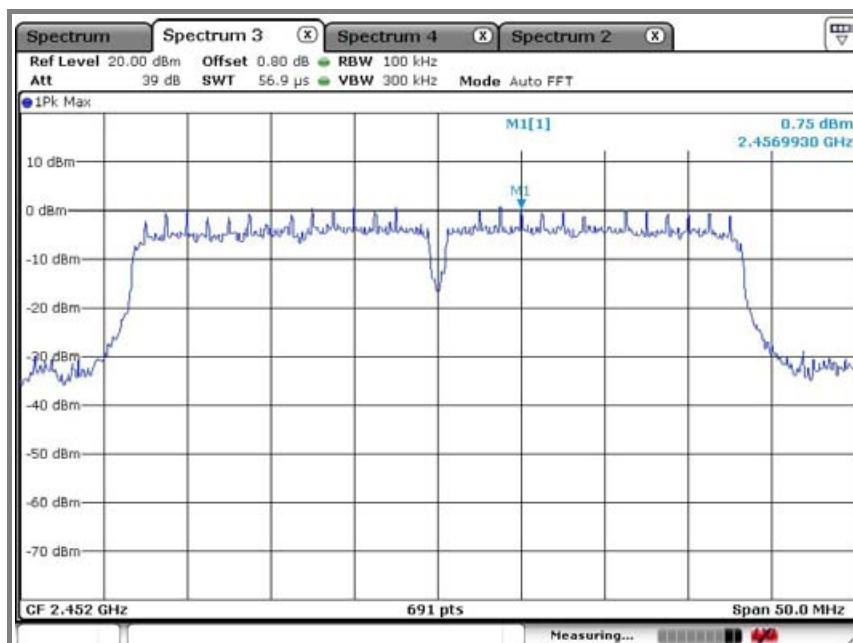

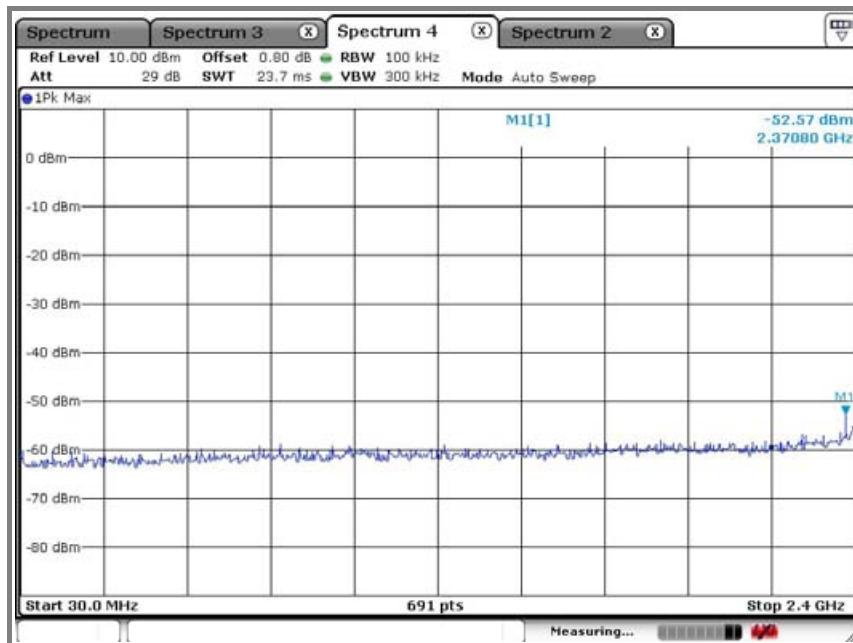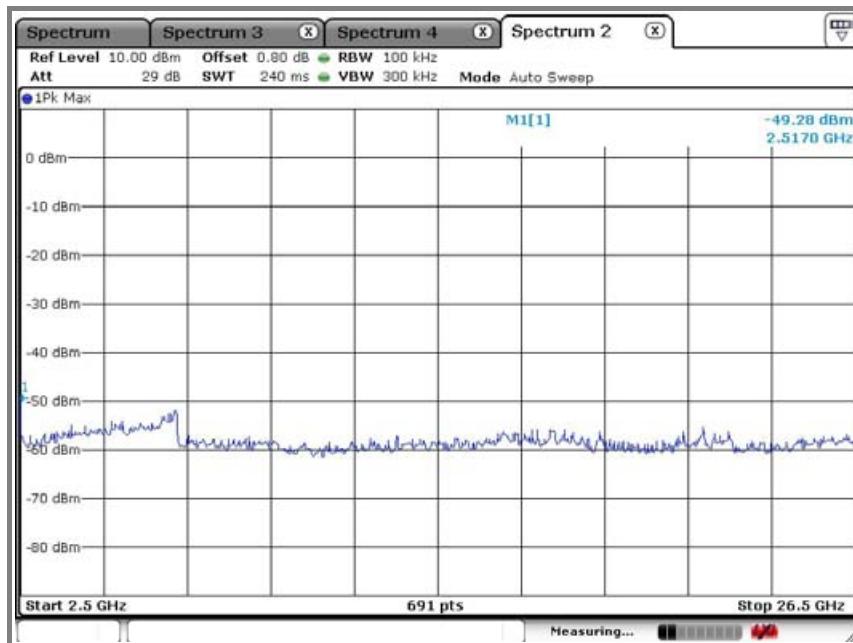
**Emission level measurement 1****Emission level measurement 2**

**Operation mode: Zigbee mode**  
**A. Low channel (2 405 MHz)**


**Reference level measurement**

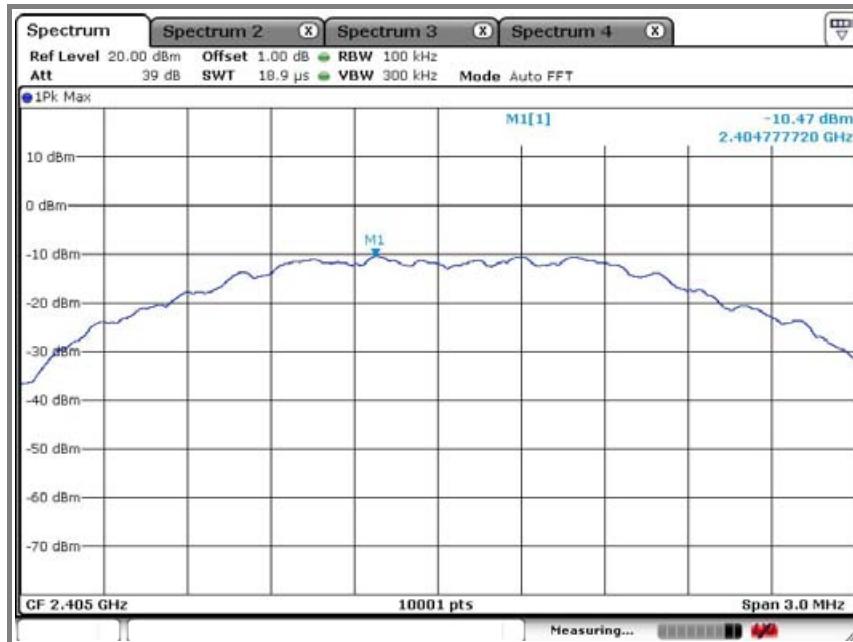


**Emission level measurement 1**

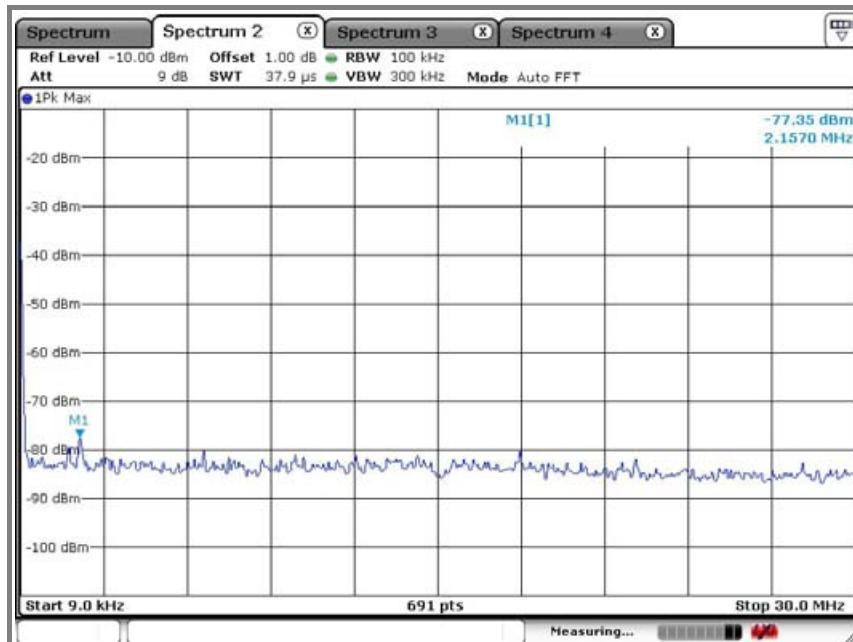

## Emission level measurement 2

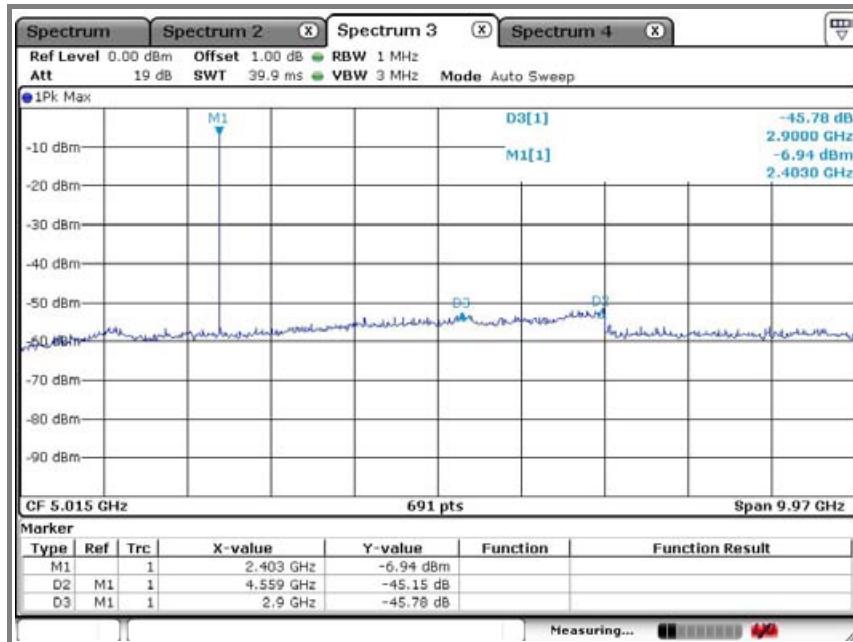


## Emission level measurement 3

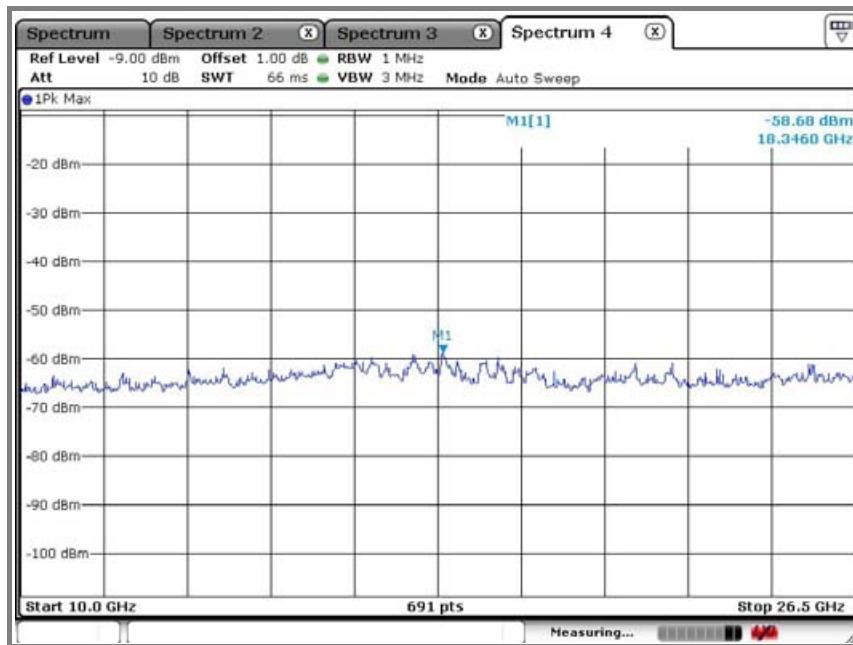


## B. Middle channel (2.440 MHz)


### Reference level measurement

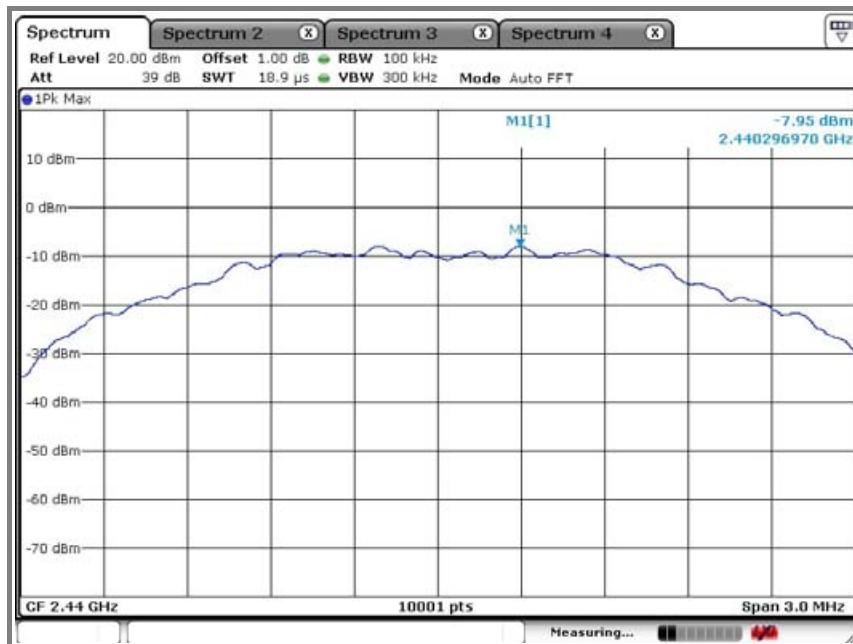


### Emission level measurement 1

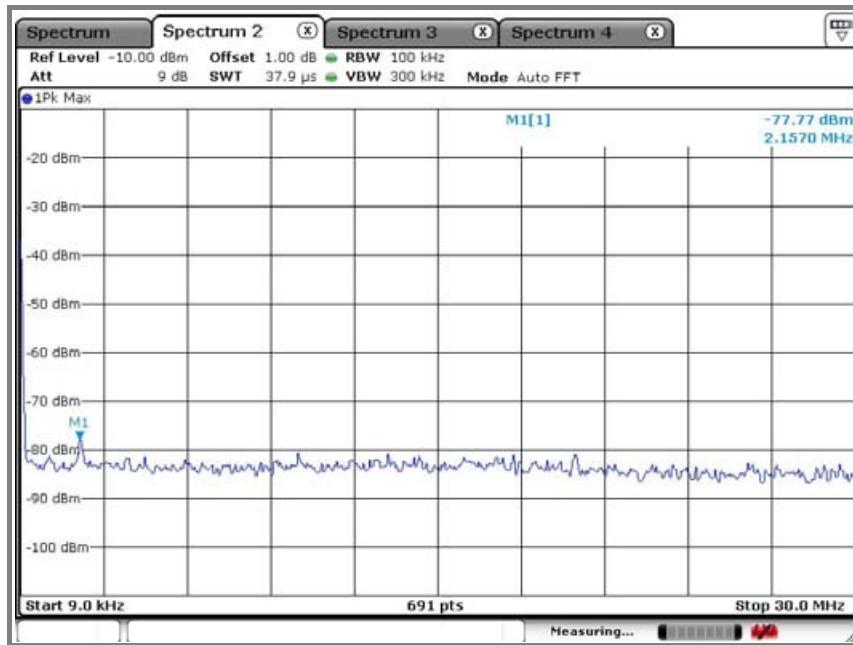

### Emission level measurement 2

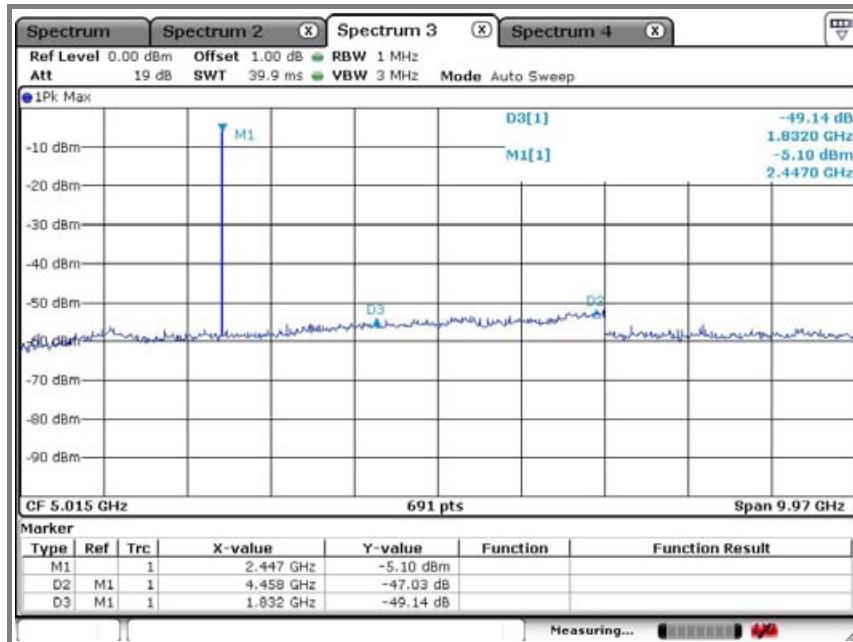


### Emission level measurement 3

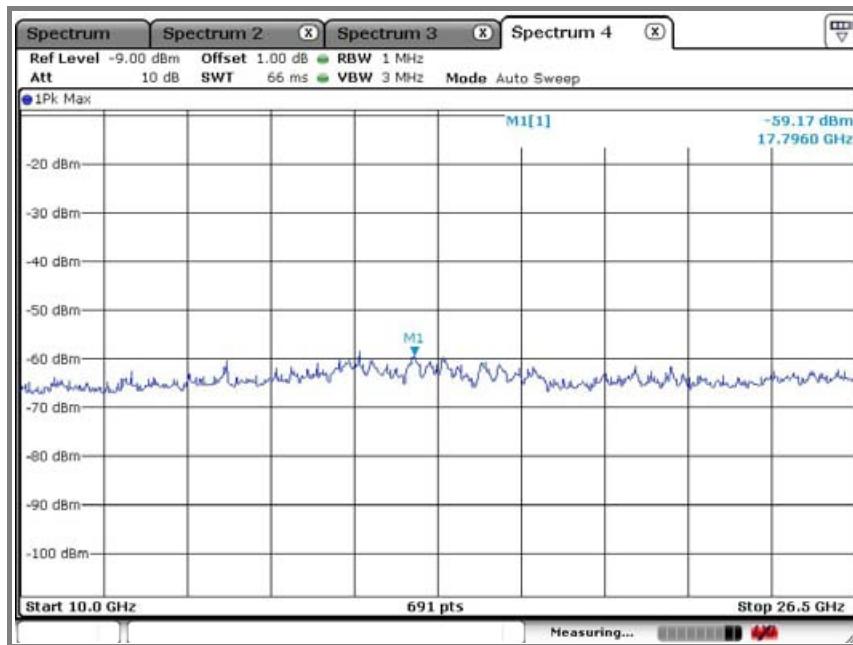


### C. High channel (2 480 MHz)


#### Reference level measurement

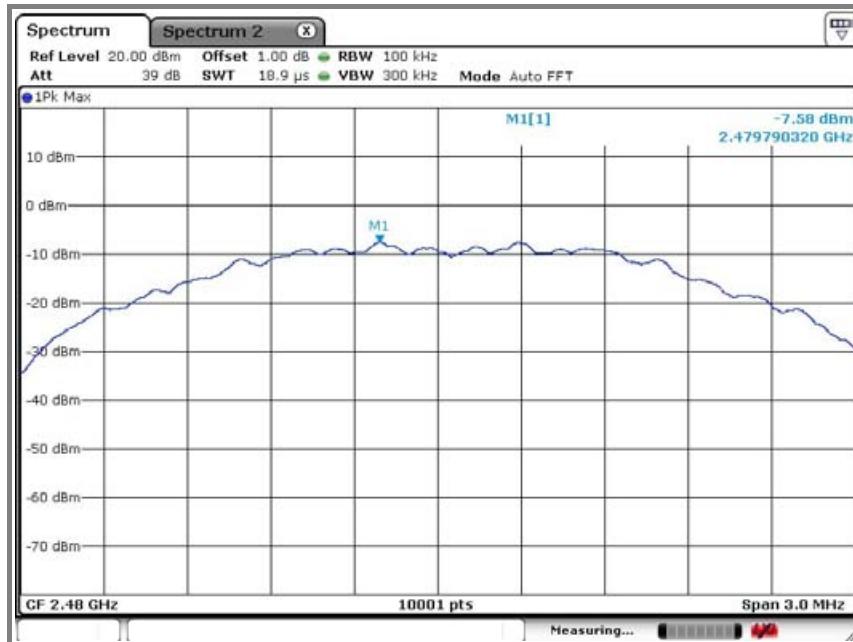


#### Emission level measurement 1

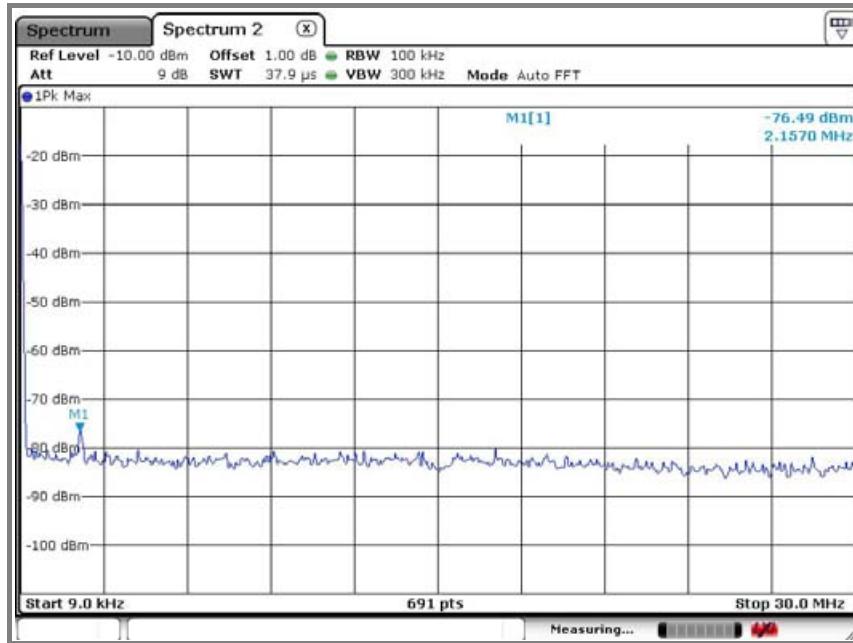

### Emission level measurement 2

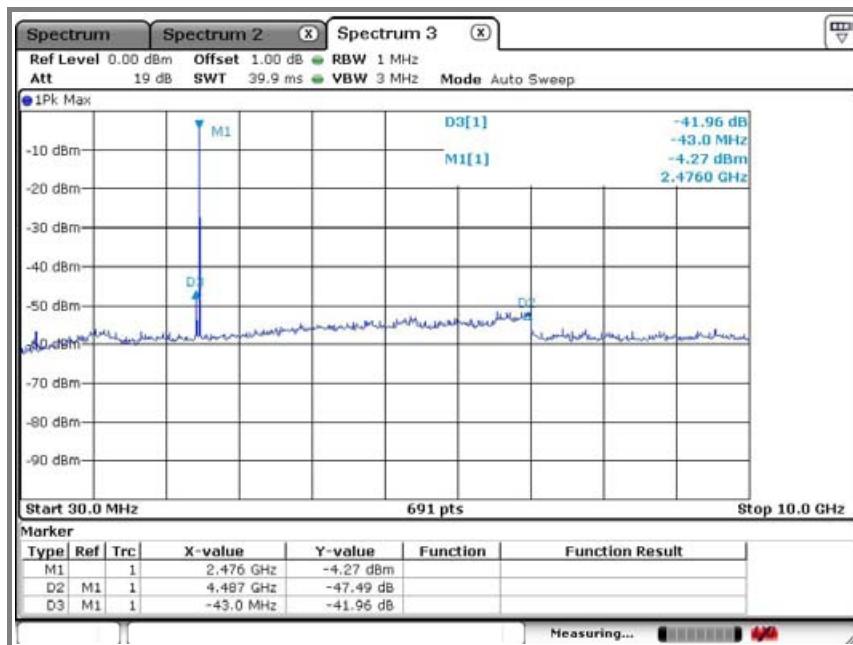


### Emission level measurement 3

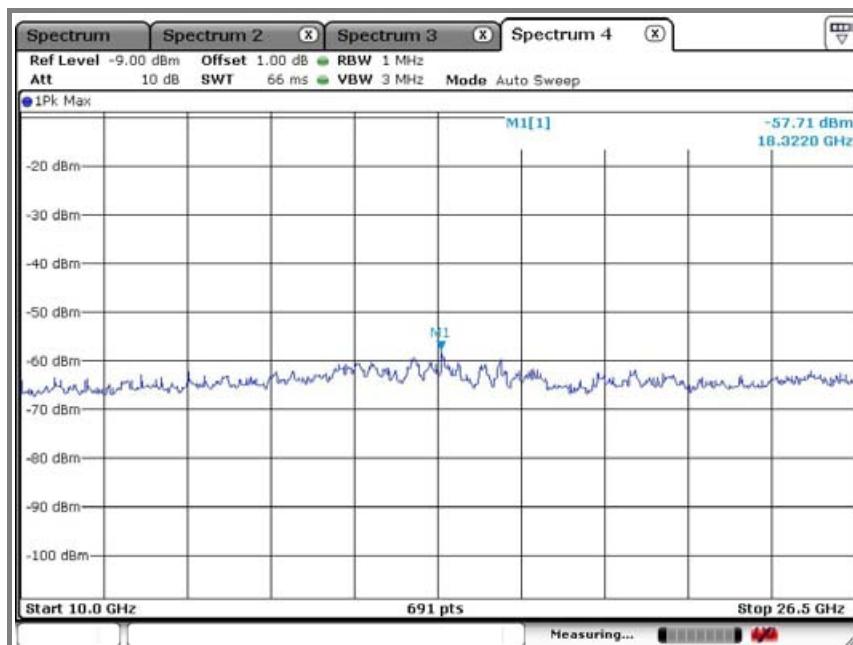

## 5. 6 dB bandwidth

### 5.1. Test setup



### 6.2. Limit

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902~928 MHz, 2 400~2 483.5 MHz, and 5 725~5 825 MHz bands. The minimum of 6 dB Bandwidth shall be at least 500 kHz

### 6.3. Test procedure

1. The 6 dB band width was measured with a spectrum analyzer connected to RF antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency. The analyzer center frequency was set to the EUT carrier frequency, using the analyzer. Display Line and Marker Delta functions, the 6 dB band width of the emission was determined.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using RBW = 100 kHz, VBW = 100 kHz, Span = 5 MHz.

### 6.4. Test results


Ambient temperature: 23 °C

Relative humidity: 51 % R.H.

Mode	Frequency(MHz)	6 dB bandwidth(MHz)
802.11b	2 412	9.421
	2 437	9.421
	2 462	9.899
802.11g	2 412	16.541
	2 437	16.498
	2 462	16.498
802.11n_20	2 412	17.713
	2 437	17.713
	2 462	17.713
802.11n_40	2 422	35.818
	2 437	35.890
	2 452	35.818
Zigbee	2 405	1.621
	2 440	1.621
	2 480	1.635

**Operation mode: 802.11b mode**


**A. Low channel (2.412 MHz)**

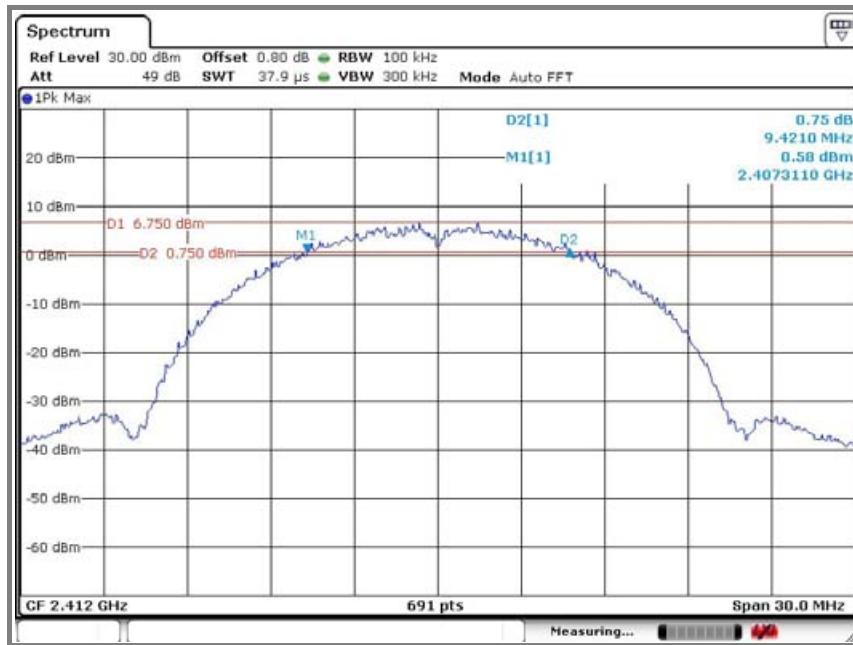

**B. Middle channel (2.437 MHz)**




**C. High channel (2 462 MHz)**

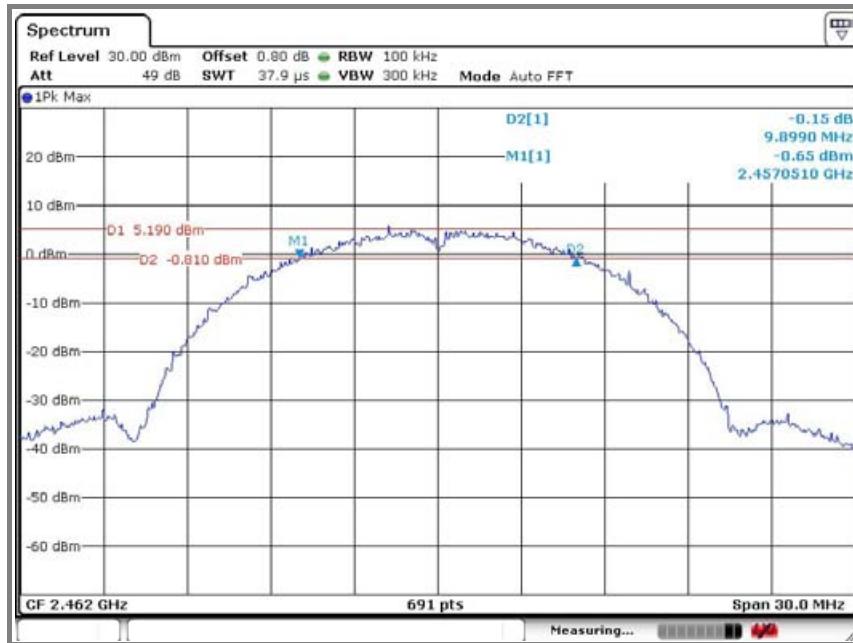


**Operation mode: 802.11g mode**


**A. Low channel (2 412 MHz)**

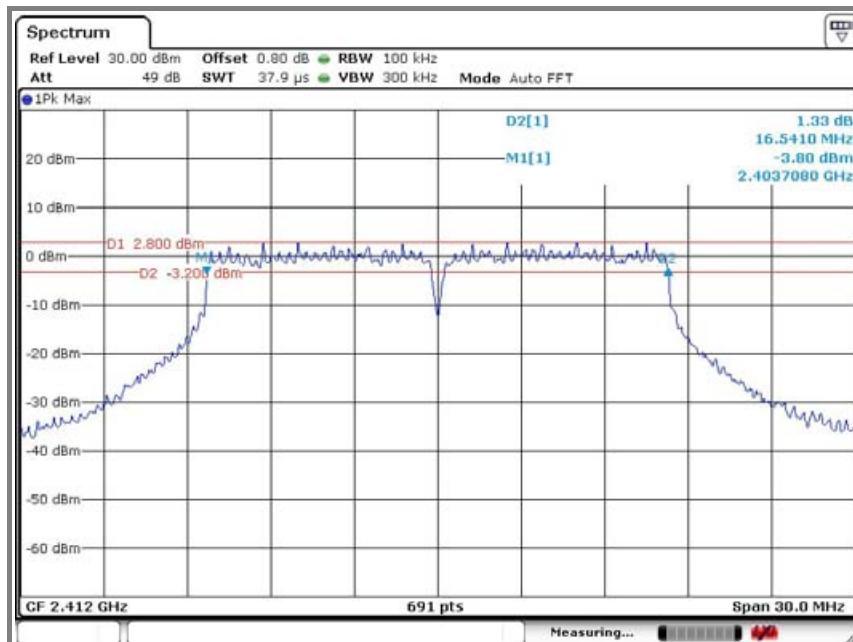

**B. Middle channel (2 437 MHz)**

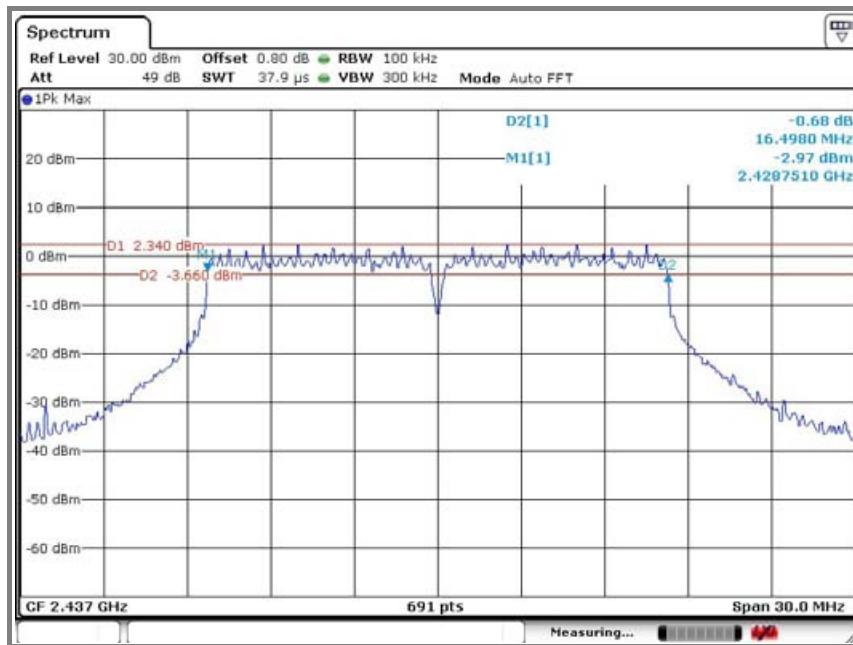


**C. High channel (2 462 MHz)**

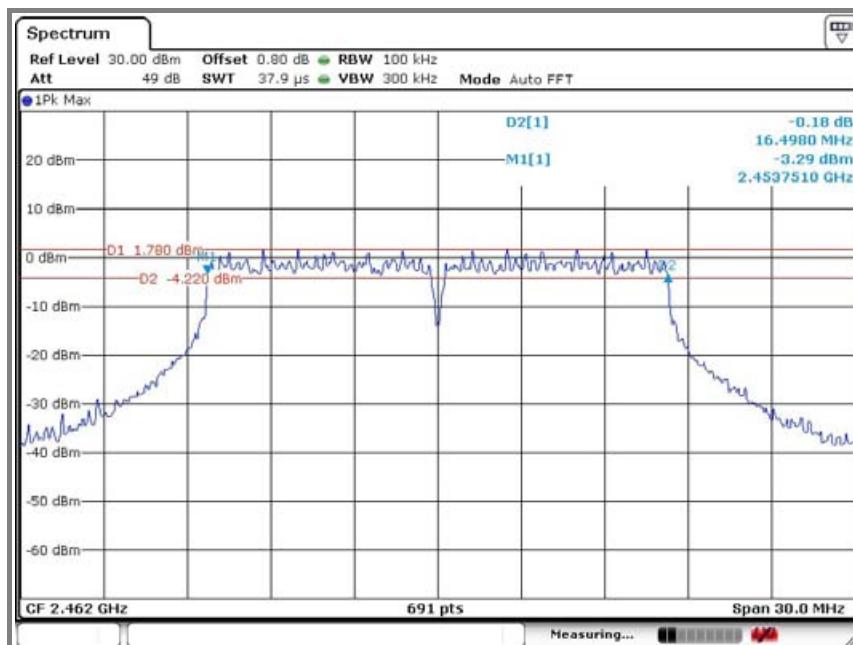


Operation mode: 802.11n\_20 mode


**A. Low channel (2.412 MHz)**

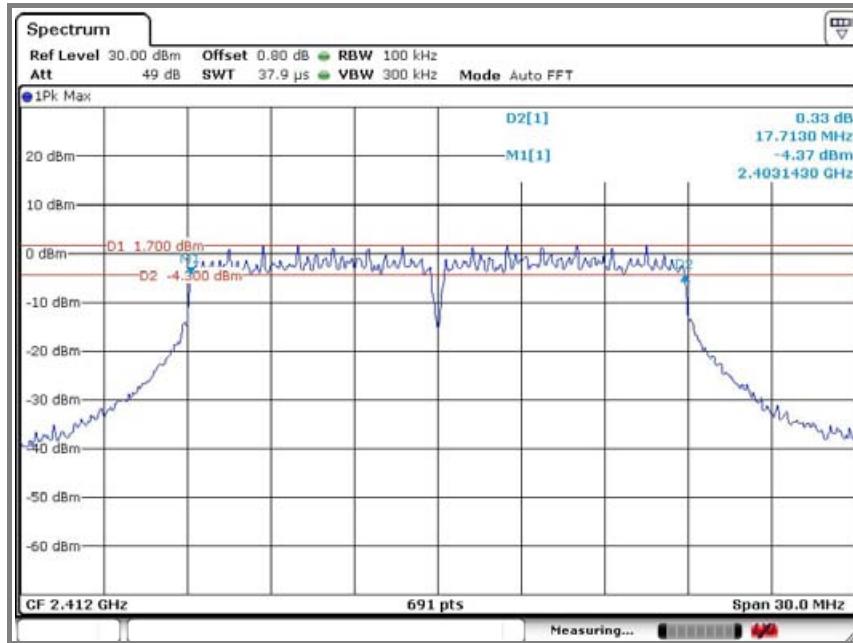

**B. Middle channel (2.437 MHz)**

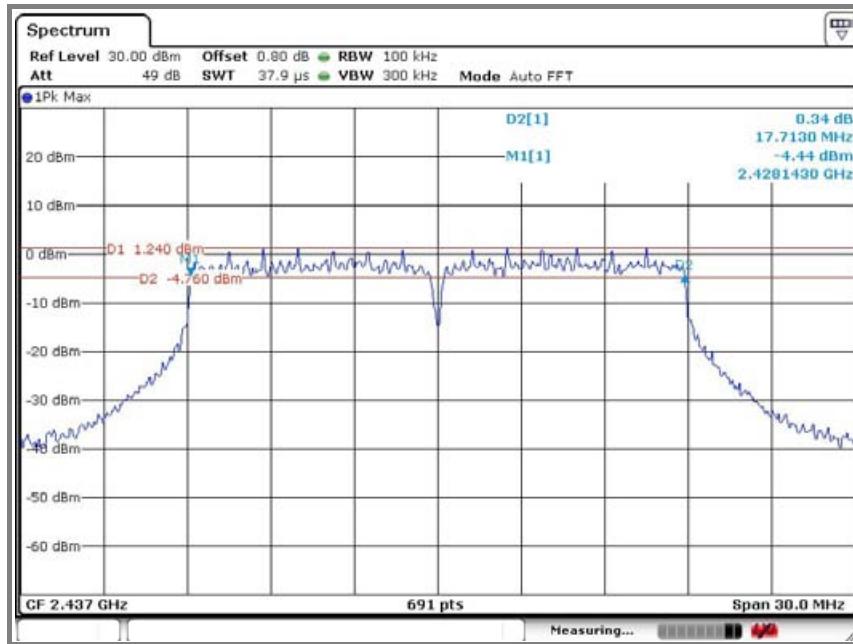


**C. High channel (2.462 MHz)**

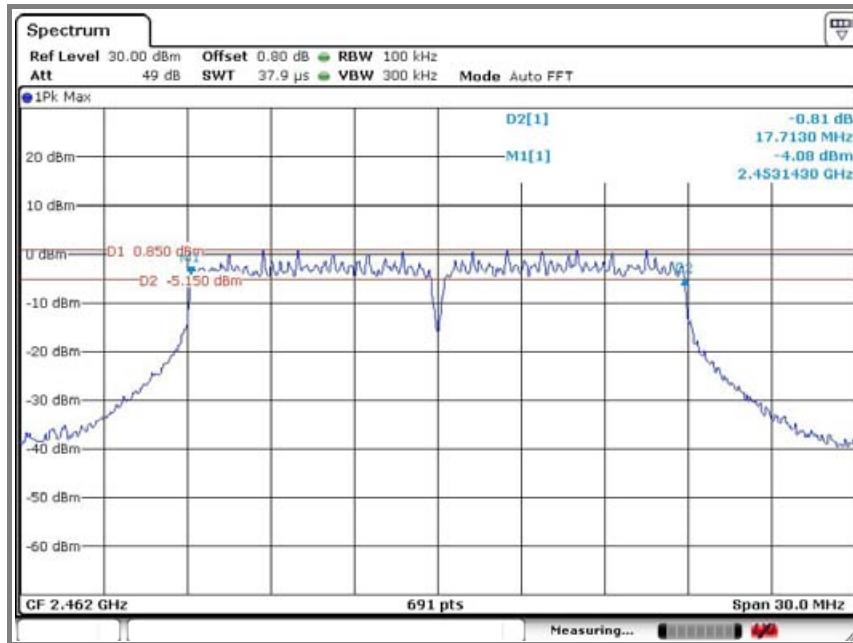


**Operation mode: 802.11n\_40 mode**


**A. Low channel (2.422 MHz)**

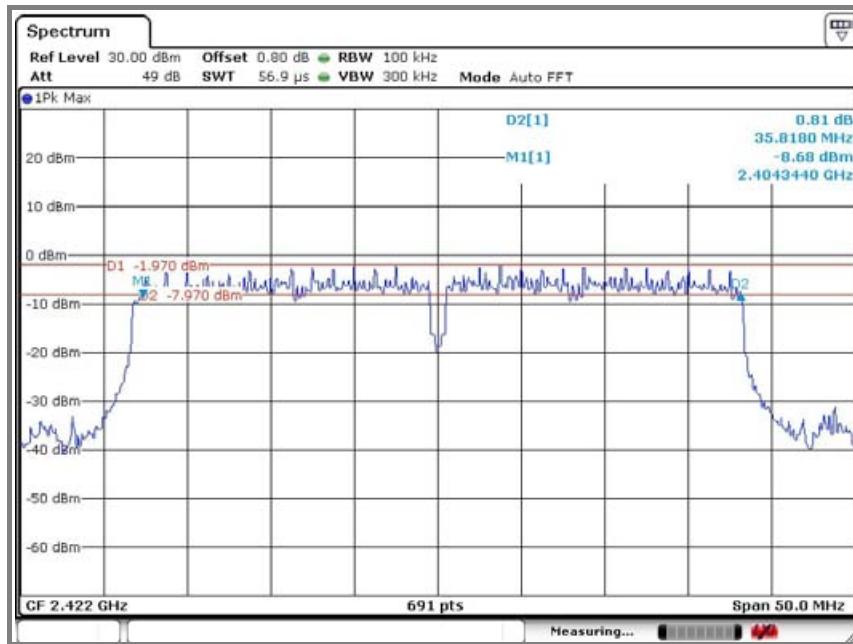

**B. Middle channel (2 437 MHz)**

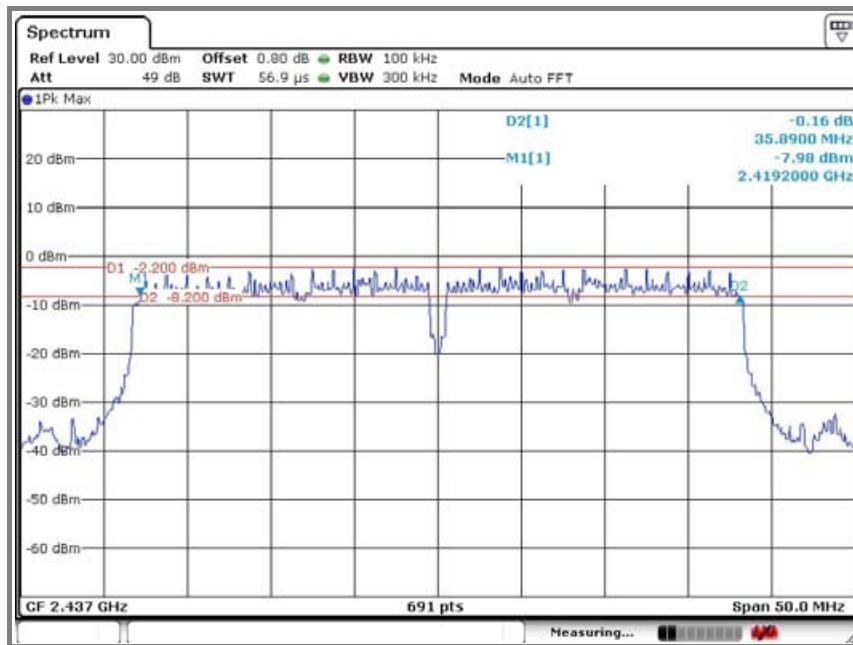


**C. High channel (2 452 MHz)**

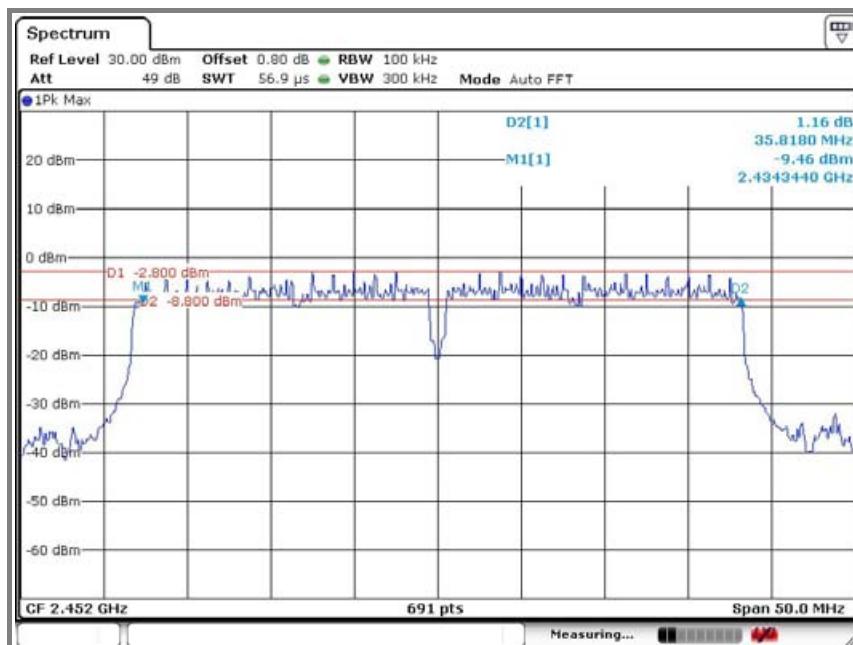



**Operation mode: Zigbee mode**

**A. Low channel (2.405 MHz)**

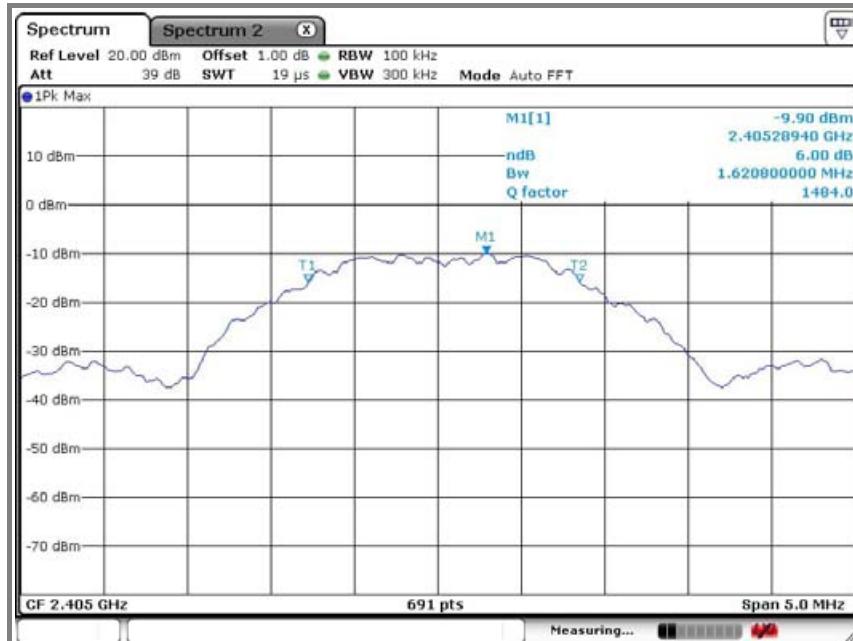


**B. Middle channel (2.440 MHz)**

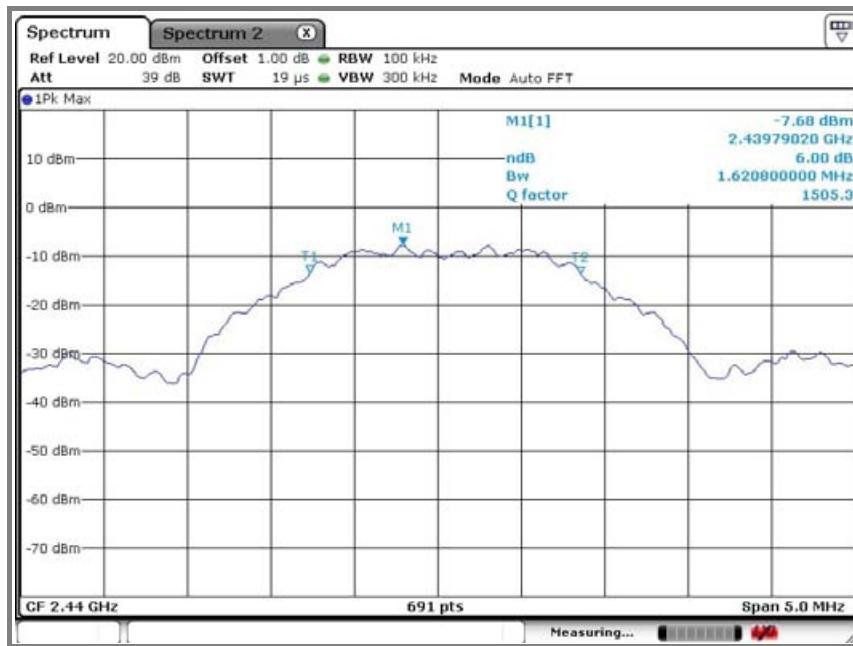

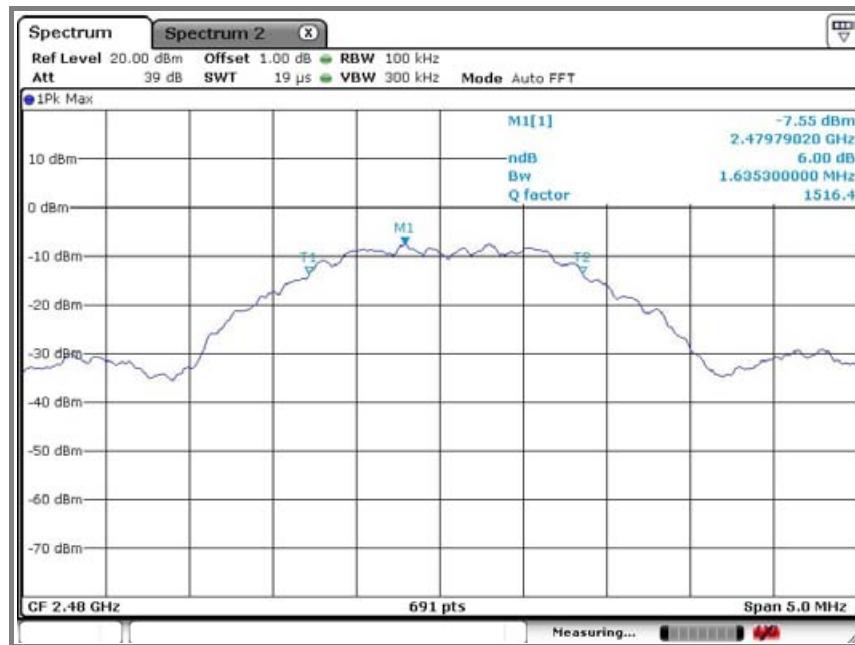
**C. High channel (2 480 MHz)**

## 6. Maximum Output Power Measurement

### 6.1. Test setup. (WLAN)



### Test Setup. (Zigbee)



### 6.2. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 6 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW
2. §15.247(b)(1), For frequency hopping systems operating in the 2 400 – 2 483.5 MHz employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5 725 – 5 805 MHz band: 1 Watt.

## 6.3 Test procedure

### 6.3.1 WLAN

1. Test procedures refer KDB 558074 D01 v03r02 section 9.2.3.2 Measurement using a power meter(PM).
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 6.3.2 Zigbee

Maximum Peak Conducted Output Power is measured using the following procedure (RBW  $\geq$  DTS bandwidth).

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set VBW  $\geq$  3 x RBW. / Set span  $\geq$  3 x RBW.
4. Sweep time = auto couple
5. Detector = peak
6. Trace mode = max hold
7. Allow trace to fully stabilize
8. Use peak marker function to determine the peak amplitude level.

## 6.4 Test results

Ambient temperature: 23 °C

Relative humidity: 51 % R.H.

Mode	Frequency (MHz)	Conducted power (dBm)	Limit (dBm)
802.11b	2 412	15.13	30
	2 437	14.60	
	2 462	14.34	
802.11g	2 412	8.20	30
	2 437	7.76	
	2 462	6.90	
802.11n_20	2 412	7.10	30
	2 437	6.44	
	2 462	5.43	
802.11n_40	2 422	3.83	30
	2 437	3.45	
	2 452	2.69	
Zigbee*	2 405	-6.56	30
	2 440	-4.65	
	2 480	-4.17	

\*note: Refer to next page (test plots)

**Operation mode: Zigbee mode**

**A. Low channel (2.405 MHz)**



**B. Middle channel (2.440 MHz)**



**C. High channel (2 480 MHz)**

## 7. Power Spectral Density Measurement

### 7.1. Test setup



### 7.2. Limit

< 8dBm @ 3kHz BW

### 7.3. Test procedure (PKPSD)

1. The RF power output was measured with a Spectrum analyzer connected to the RF Antenna connector(conducted measurement) while EUT was operating in transmit mode at the appropriate center frequency, A spectrum analyzer was used to record the shape of the transmit signal.
2. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using;  
 Span = 1.5 times the DTS bandwidth  
 $RBW = 3\text{kHz} \leq RBW \leq 100\text{kHz}$   
 $VBW \geq 3 \times RBW$ , Sweep = Auto couple  
 Detector function = peak, Trace = max hold

### 7.4. Test results


Ambient temperature: 23 °C

Relative humidity: 51 % R.H.


Operation mode	Frequency (MHz)	Peak output power(dBm)	Limit (dBm)
802.11b	2 412	-1.05	8
	2 437	-3.52	
	2 462	-3.96	
802.11g	2 412	-6.72	8
	2 437	-7.19	
	2 462	-6.89	
802.11n_20	2 412	-8.12	8
	2 437	-8.30	
	2 462	-8.68	
802.11n_40	2 422	-11.64	8
	2 437	-11.08	
	2 452	-12.47	
Zigbee	2 405	-10.29	8
	2 440	-7.66	
	2 480	-7.72	

Operation mode: 802.11b mode


**A. Low channel (2.412 MHz)**

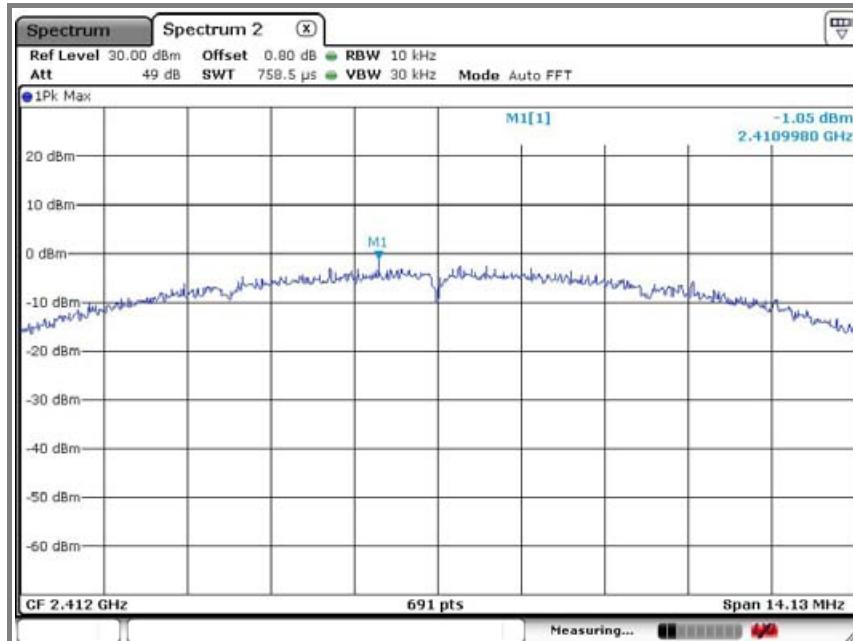

**B. Middle channel (2.437 MHz)**

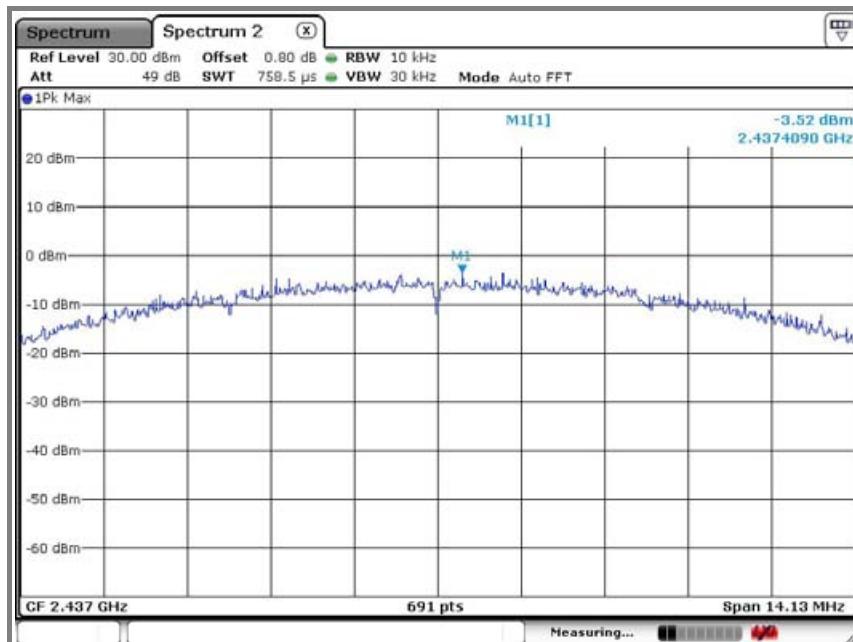


**C. High channel (2 462 MHz)**

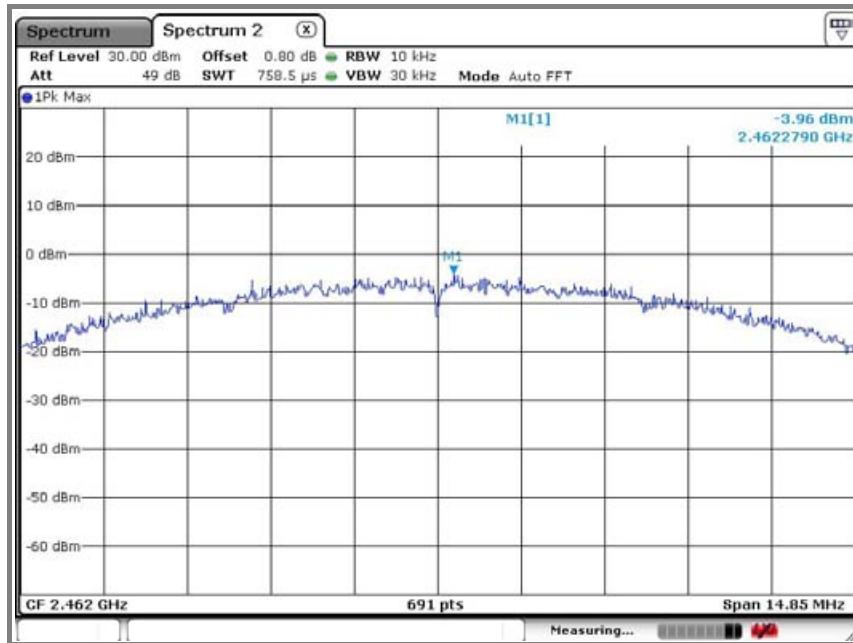


**Operation mode: 802.11g mode**


**A. Low channel (2 412 MHz)**

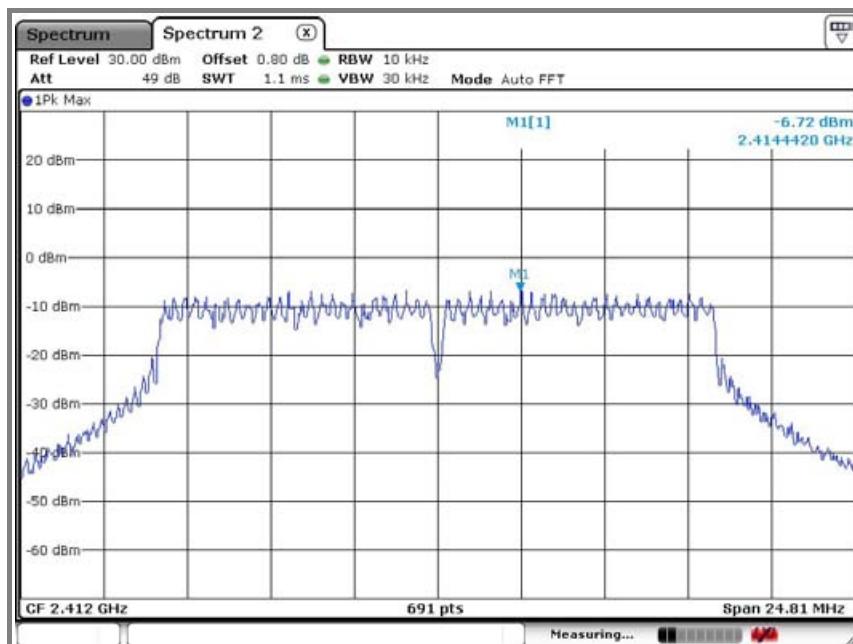

**B. Middle channel (2 437 MHz)**

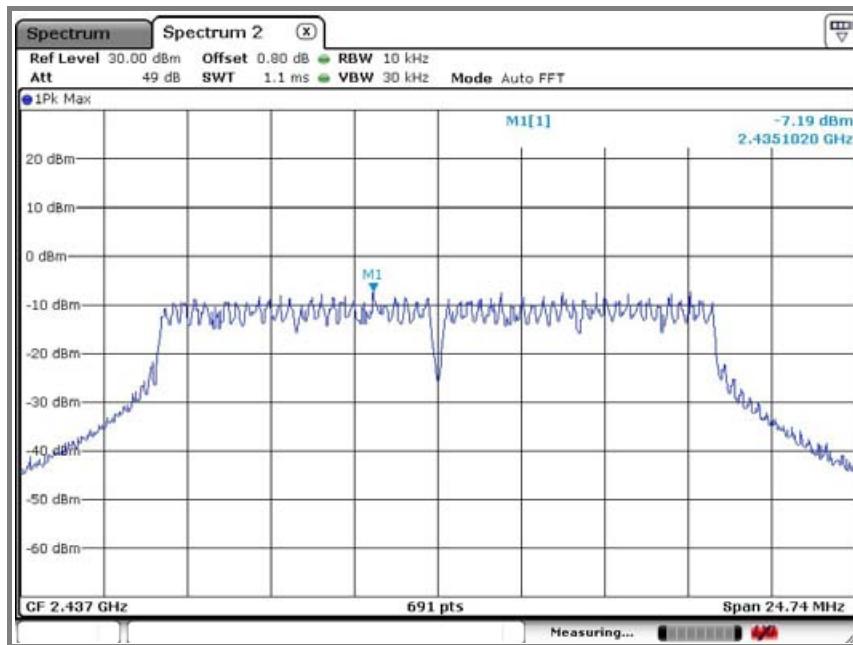


**C. High channel (2 462 MHz)**

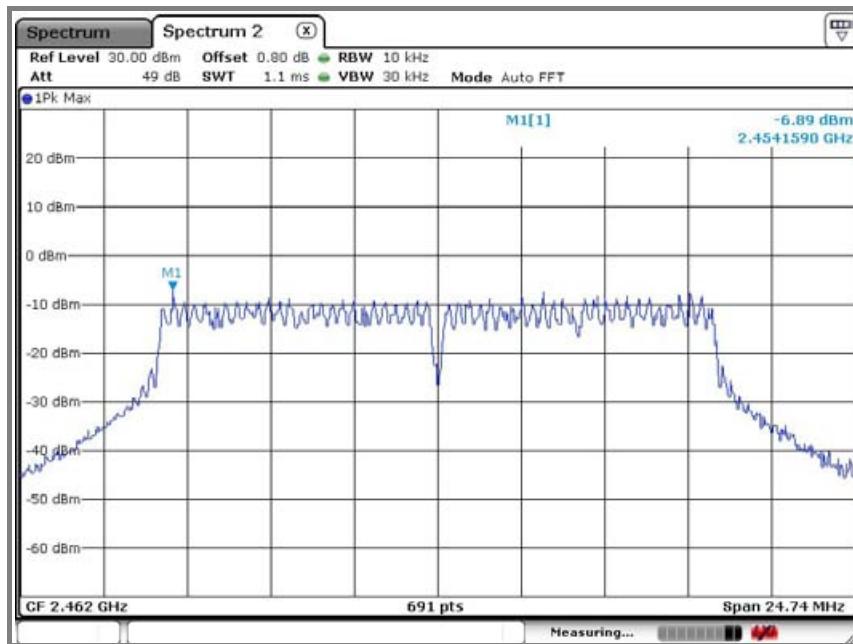


Operation mode: 802.11n\_20 mode


**A. Low channel (2.412 MHz)**

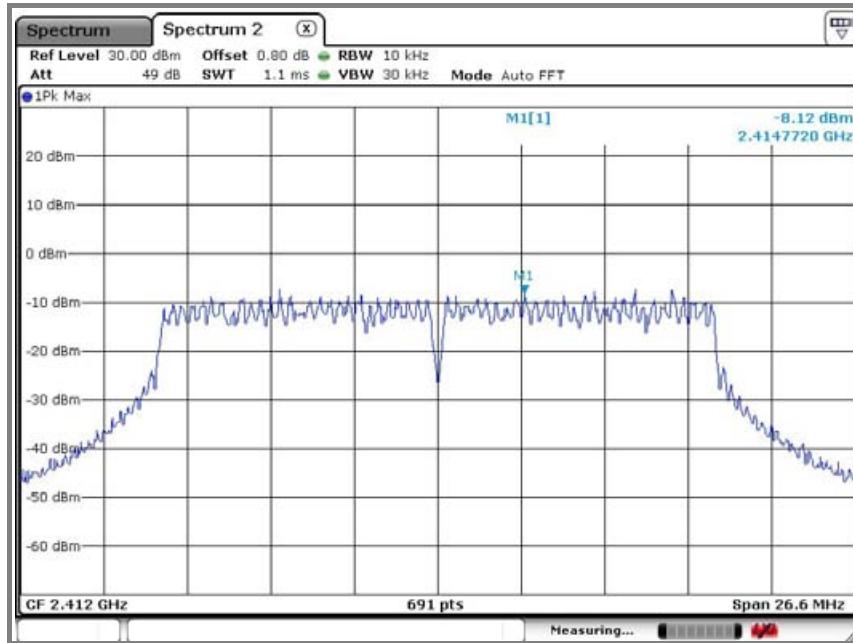

**B. Middle channel (2.437 MHz)**

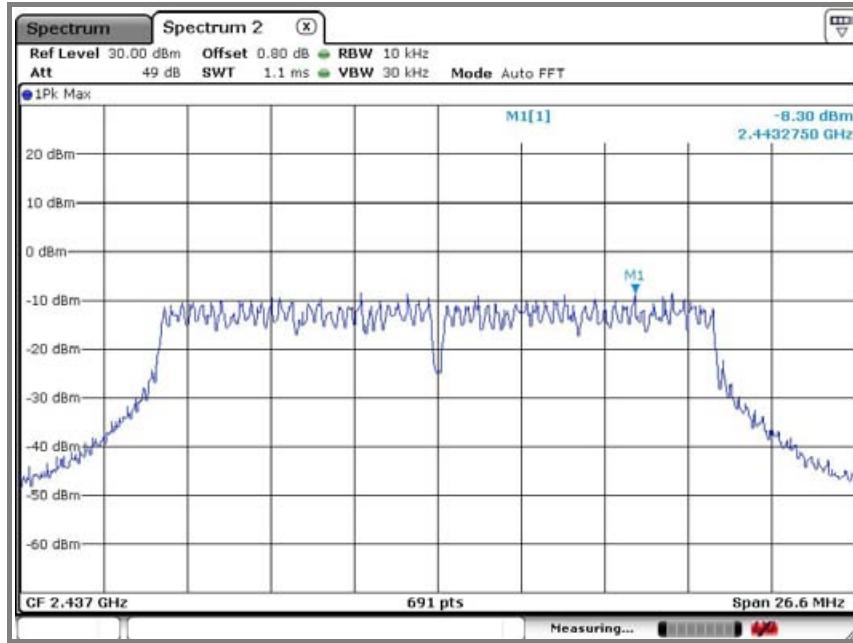




**C. High channel (2 462 MHz)**

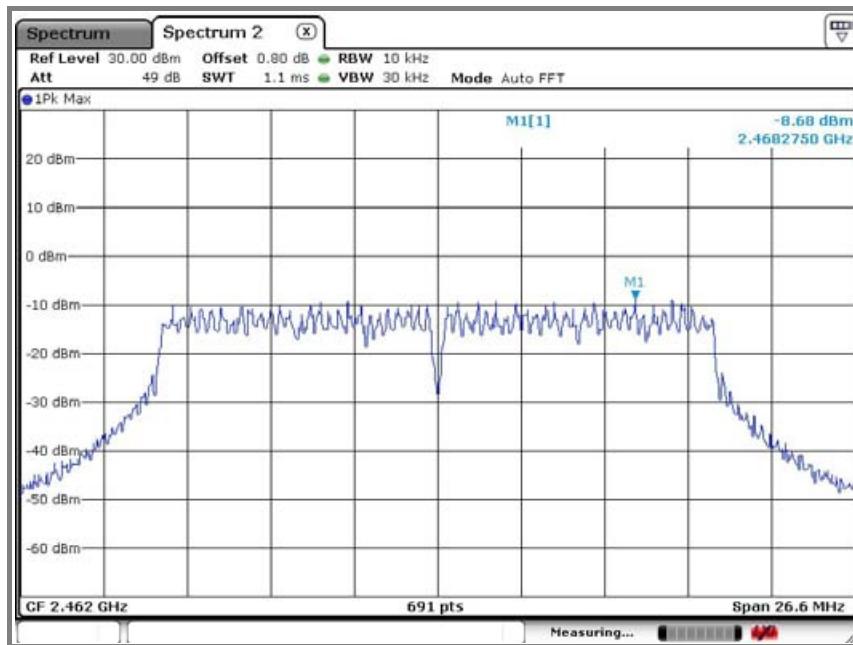

**Operation mode: 802.11n\_40 mode**


**A. Low channel (2 422 MHz)**

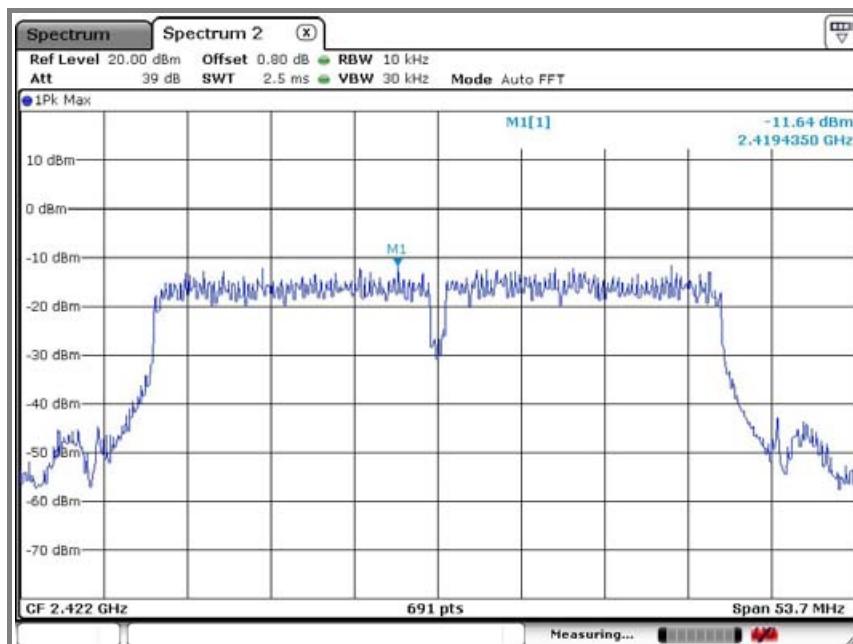

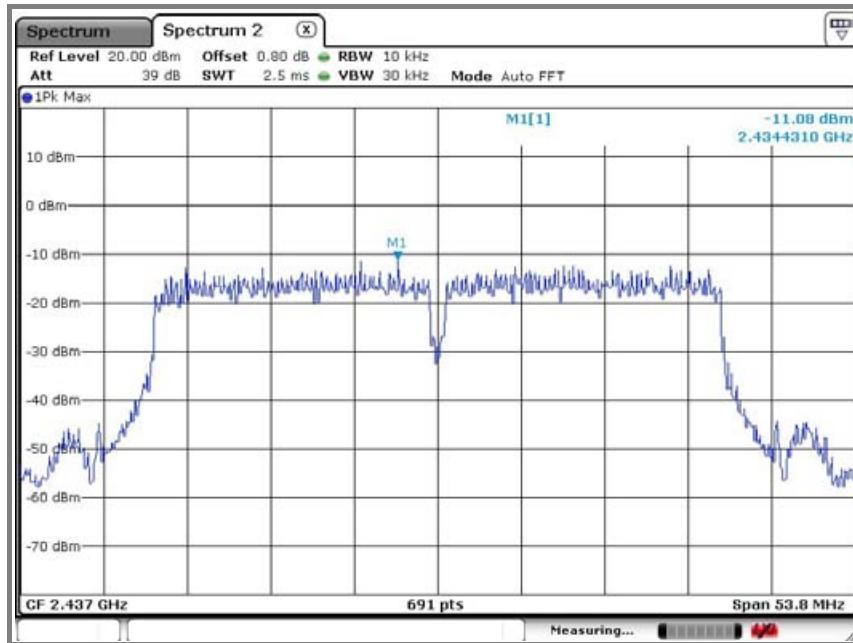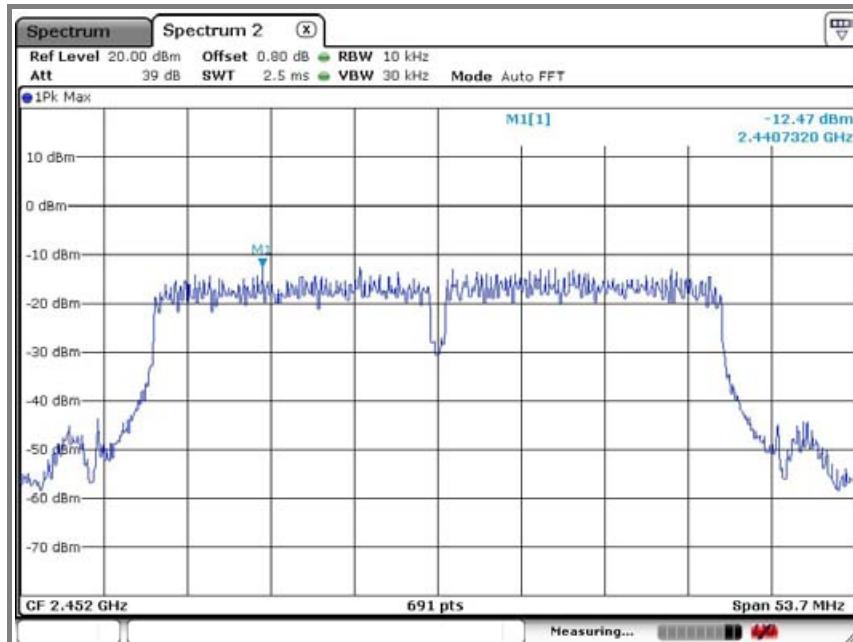
**B. Middle channel (2 437 MHz)****C. High channel (2 452 MHz)**


Operation mode: Zigbee mode

**A. Low channel (2.405 MHz)**

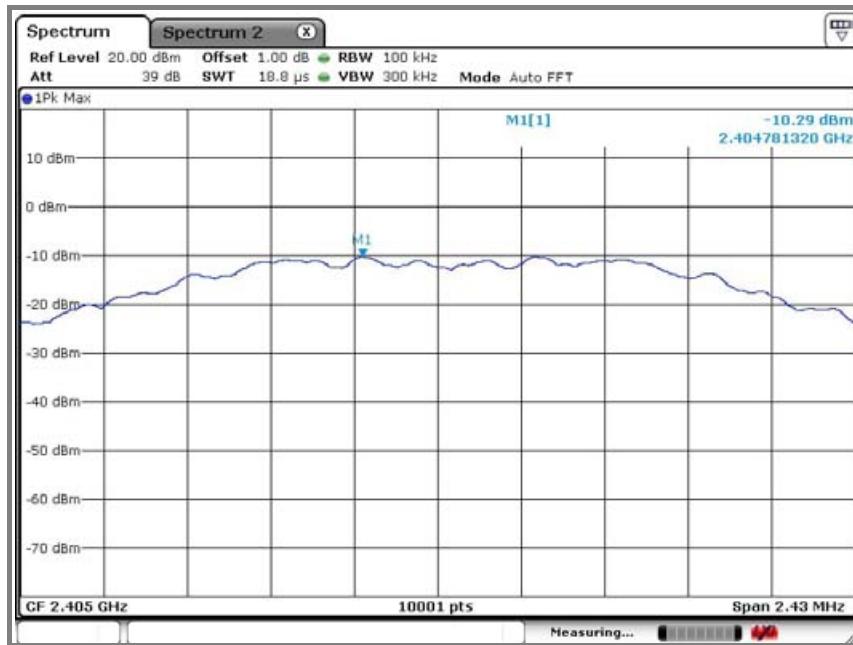

**B. Middle channel (2.440 MHz)**

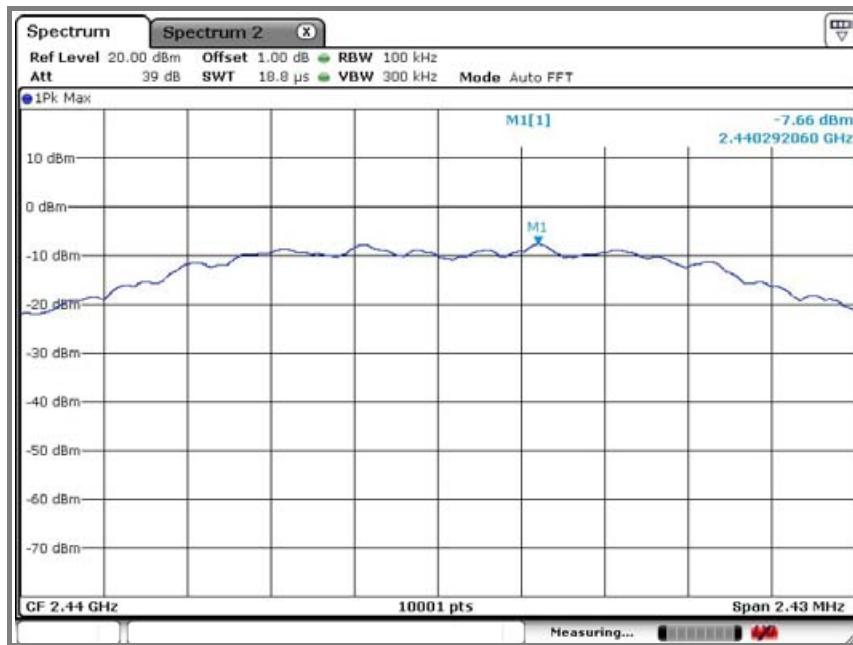

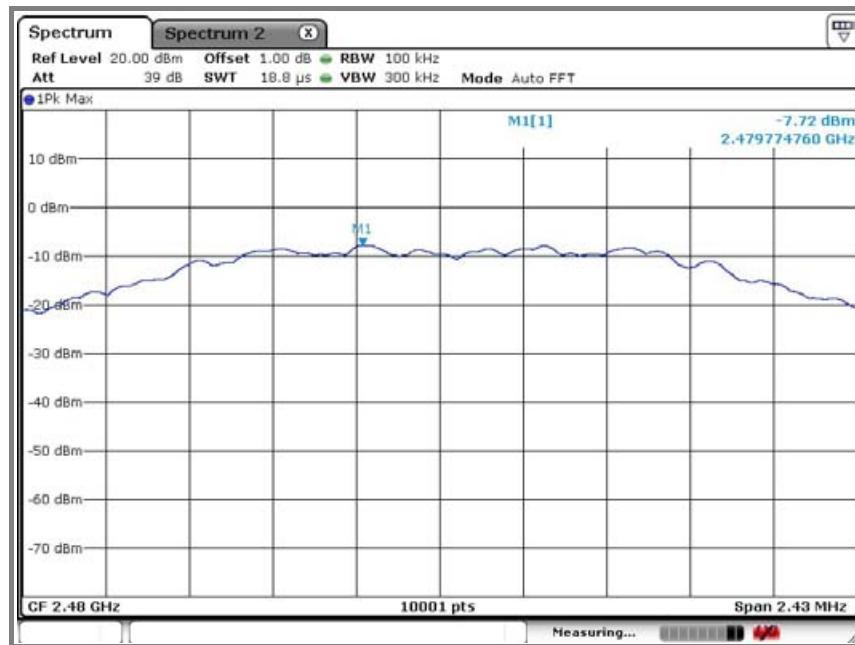**C. High channel (2 480 MHz)**

## 8. Antenna requirement

### 8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section §15.247 (b) if transmitting antennas of directional gain greater than 6 dB<sub>i</sub> are used.

### 8.2. Antenna Connected Construction

Antenna used in this product is PCB Pattern antenna (Zigbee), Chip Antenna (WLAN)  
Antenna gain is 5.3 dB<sub>i</sub> (Zigbee) / 0.6 dB<sub>i</sub> (WLAN)

## 9. RF exposure evaluation

### 9.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

According to §15.247(e)(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to KDB 447498 (2)(a)(i)

#### Limits for maximum permissible exposure (MPE)

Frequency range (MHz)	Electric field strength(V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Average time
(A) Limits for Occupational / Control exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population / Uncontrol Exposures				
300 – 1 500	--	--	F/1 500	6
<u>1 500 – 100 000</u>	--	--	<u>1</u>	<u>30</u>

### 9.2. Friis transmission formula : $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where

Pd= Power density in mW/cm<sup>2</sup>

Pout=output power to antenna in mW

G= Numeric gain of the antenna relative to isotropic antenna

Pi=3.1416

R= distance between observation point and center of the radiator in cm

Pd the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

### 9.3. Test result of RF exposure evaluation

Test Item : RF Exposure evaluation data

Test Mode : Normal operation

### 9.4. Output power into antenna & RF exposure evaluation distance

Antenna gain: 5.3 dBi (Zigbee) / 0.64 dBi (WLAN)

Mode	Frequency (MHz)	Output Peak power to antenna (dBm)	Antenna gain (dBi)	Antenna Gain (dBi) Numeric	Power density at 20 cm (mW/cm <sup>2</sup> )	Power density Limits (mW/cm <sup>2</sup> )
802.11b	2 412	15.13	0.64	1.16	0.007 5	1
	2 437	14.60	0.64	1.16	0.006 7	
	2 472	14.34	0.64	1.16	0.006 3	
802.11g	2 412	8.20	0.64	1.16	0.001 5	1
	2 437	7.76	0.64	1.16	0.001 4	
	2 472	6.90	0.64	1.16	0.001 1	
802.11 n_20	2 412	7.10	0.64	1.16	0.001 2	1
	2 437	6.44	0.64	1.16	0.001 0	
	2 472	5.43	0.64	1.16	0.000 8	
802.11 n_40	2 422	3.83	0.64	1.16	0.000 6	1
	2 437	3.45	0.64	1.16	0.000 5	
	2 462	2.69	0.64	1.16	0.000 4	
Zigbee	2 405	-6.56	5.30	3.39	0.000 1	1
	2 440	-4.65	5.30	3.39	0.000 2	
	2 480	-4.17	5.30	3.39	0.000 3	

#### \* Remark

The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup> .

**10. Test setup photo of EUT****Photo of radiated spurious emission at below 30 MHz****Photo of radiated spurious emission at 30 MHz ~ 1 000 MHz**

**Photo of radiated spurious emission at above 1 000 MHz**

**Photo of Conducted emission at below 30 MHz**