



# FCC&IC Radio Test Report

**FCC ID: VOB-P1640**

**IC: 7361A-P1640**

This report concerns (check one):  Original Grant  Class II Change

Issued Date : Aug. 15, 2013  
Project No. : 1307C222A  
Equipment : Tablet  
Model Name : P1640  
Applicant : NVIDIA CORPORATION  
Address : 2701 SAN TOMAS EXPRESSWAY,  
SANTA CLARA, CALIFORNIA 95050,  
UNITED STATES OF AMERICA

Tested by: Neutron Engineering Inc. EMC Laboratory  
Date of Receipt: Jul. 19, 2013  
Date of Test: Jul. 19, 2013 ~ Aug. 14, 2013

Testing Engineer : David Mao  
(David Mao)

Technical Manager : Leo Hung  
(Leo Hung)

Authorized Signatory : Steven Lu  
(Steven Lu)

## Neutron Engineering Inc.

No.3, Jinshagang 1st Road, ShiXia,  
Dalang Town, Dong Guan, China.

TEL: 0769-8318-3000

FAX: 0769-8319-6000



**Declaration**

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **CHINA**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron's** reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron's** authorized written approval.

**Neutron's** laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



<b>Table of Contents</b>	<b>Page</b>
<b>1 . CERTIFICATION</b>	<b>6</b>
<b>2 . SUMMARY OF TEST RESULTS</b>	<b>7</b>
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
<b>3 . GENERAL INFORMATION</b>	<b>9</b>
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	11
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	11
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
3.5 DESCRIPTION OF SUPPORT UNITS	13
<b>4 . EMC EMISSION TEST</b>	<b>14</b>
4.1 CONDUCTED EMISSION MEASUREMENT	14
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	14
4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING	14
4.1.3 TEST PROCEDURE	15
4.1.4 DEVIATION FROM TEST STANDARD	15
4.1.5 TEST SETUP	15
4.1.6 EUT OPERATING CONDITIONS	15
4.1.7 TEST RESULTS	16
4.2 RADIATED EMISSION MEASUREMENT	21
4.2.1 RADIATED EMISSION LIMITS	21
4.2.2 MEASUREMENT INSTRUMENTS LIST AND SETTING	22
4.2.3 TEST PROCEDURE	23
4.2.4 DEVIATION FROM TEST STANDARD	23
4.2.5 TEST SETUP	24
4.2.6 EUT OPERATING CONDITIONS	25
4.2.7 TEST RESULTS (BELOW 30MHZ)	26
4.2.8 TEST RESULTS: 30MHZ - 1000MHZ	27
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	40
<b>5 . NUMBER OF HOPPING CHANNEL</b>	<b>64</b>
5.1 APPLIED PROCEDURES / LIMIT	64
5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	64
5.1.2 TEST PROCEDURE	64
5.1.3 DEVIATION FROM STANDARD	64
5.1.4 TEST SETUP	64
5.1.5 EUT OPERATION CONDITIONS	64
5.1.6 TEST RESULTS	65



<b>Table of Contents</b>	<b>Page</b>
<b>6 . AVERAGE TIME OF OCCUPANCY</b>	<b>67</b>
<b>6.1 APPLIED PROCEDURES / LIMIT</b>	<b>67</b>
6.1.1 MEASUREMENT INSTRUMENTS LIST	67
6.1.2 TEST PROCEDURE	67
6.1.3 DEVIATION FROM STANDARD	67
6.1.4 TEST SETUP	68
6.1.5 EUT OPERATION CONDITIONS	68
6.1.6 TEST RESULTS	69
<b>7 . HOPPING CHANNEL SEPARATION MEASUREMENT</b>	<b>81</b>
<b>7.1 APPLIED PROCEDURES / LIMIT</b>	<b>81</b>
7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	81
7.1.2 TEST PROCEDURE	81
7.1.3 DEVIATION FROM STANDARD	81
7.1.4 TEST SETUP	81
7.1.5 EUT OPERATION CONDITIONS	81
7.1.6 TEST RESULTS	82
<b>8 . BANDWIDTH TEST</b>	<b>86</b>
<b>8.1 APPLIED PROCEDURES / LIMIT</b>	<b>86</b>
8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	86
8.1.2 TEST PROCEDURE	86
8.1.3 DEVIATION FROM STANDARD	86
8.1.4 TEST SETUP	86
8.1.5 EUT OPERATION CONDITIONS	86
8.1.6 TEST RESULTS	87
<b>9 . PEAKOUTPUT POWER TEST</b>	<b>91</b>
<b>9.1 APPLIED PROCEDURES / LIMIT</b>	<b>91</b>
9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	91
9.1.2 TEST PROCEDURE	91
9.1.3 DEVIATION FROM STANDARD	91
9.1.4 TEST SETUP	91
9.1.5 EUT OPERATION CONDITIONS	91
9.1.6 TEST RESULTS	92
<b>10 . ANTENNA CONDUCTED SPURIOUS EMISSION</b>	<b>96</b>
<b>10.1 APPLIED PROCEDURES / LIMIT</b>	<b>96</b>
10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING	96
10.1.2 TEST PROCEDURE	96
10.1.3 DEVIATION FROM STANDARD	96
10.1.4 TEST SETUP	97
10.1.5 EUT OPERATION CONDITIONS	97
10.1.6 TEST RESULTS	98



**Table of Contents**

**Page**

**11 . EUT TEST PHOTO**

**110**



## 1. CERTIFICATION

Equipment : Tablet  
Brand Name : NVIDIA  
Model Name : P1640  
Applicant : NVIDIA CORPORATION  
Manufacturer : NVIDIA CORPORATION  
Address : 2701 SAN TOMAS EXPRESSWAY, SANTA CLARA, CALIFORNIA 95050,  
UNITED STATES OF AMERICA  
Factory : Keen high technologies Ltd  
Address : Ze Da Li industrial Zone, Jian-An 1 Road, New-High Technologies area, Tang  
Wei, Fuyong, Bao-an, Shenzhen, China  
Date of Test : Jul. 19, 2013 ~ Aug. 14, 2013  
Test Item : ENGINEERING SAMPLE  
Standard(s) : FCC Part15, Subpart C(15.247) / ANSI C63.4 : 2009 /  
FCC Public Notice DA 00-705, March 30, 2000.  
Canada RSS-210:2010  
RSS-GEN Issue 3, Dec 2010

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-1-1307C222A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).



**2. SUMMARY OF TEST RESULTS**

Test procedures according to the technical standard(s):

<b>Applied Standard(s): 47 CFR Part 15, Subpart C; Canada RSS-210:2010; RSS-GEN Issue 3, Dec 2010</b>				
Standard(s) Section		Test Item	Judgment	Remark
<b>47 CFR Part 15</b>	<b>RSS-210/RSS-GEN</b>			
15.207	RSS-GEN Issue 3, Dec 2010 7.2.4	Conducted Emission	PASS	
15.247(d)	RSS-210, Issue 8, Annex 8, A8.5	Antenna conducted Spurious Emission	PASS	
15.247 (a)(1)	RSS-210, Issue 8, Annex 8, A8.1(b)	Hopping Channel Separation	PASS	
15.247 (b)(1)	RSS-210, Issue 8, Annex 8, A8.1(b)	Peak Output Power	PASS	
15.247(d) 15.209	RSS-210, Issue 8, Annex 8, Section 8.5	Radiated Spurious Emission	PASS	
15.247 (a)(1)(iii)	RSS-210, Issue 8, Annex 8, A8.1(d)	Number of Hopping Frequency	PASS	
15.247 (a)(1)(iii)	RSS-210, Issue 8, Annex 8, A8.1(d)	Dwell Time	PASS	
15.205	RSS-GEN Issue 3, Dec 2010 7.2.2	Restricted Bands	PASS	
15.203	-	Antenna Requirement	PASS	

Note:

- (1) "N/A" denotes test is not applicable in this test report
- (2) According to FCC Public Notice DA 00-705, March 30, 2000.



**2.1 TEST FACILITY**

The test facilities used to collect the test data in this report is **DG-C02/DG-CB03** at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dong Guan, China.523792

Neutron's test firm number for FCC: 319330

Neutron's test firm number for IC: 4428B-1

**2.2 MEASUREMENT UNCERTAINTY**

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	Note
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U , (dB)	Note
DG-CB03	CISPR	9KHz~30MHz	V	3.79	
		9KHz~30MHz	H	3.57	
		30MHz ~ 200MHz	V	3.82	
		30MHz ~ 200MHz	H	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	H	3.94	
		1GHz~18GHz	V	3.12	
		1GHz~18GHz	H	3.68	
		18GHz~40GHz	V	4.15	
		18GHz~40GHz	H	4.14	





**3. GENERAL INFORMATION**

**3.1 GENERAL DESCRIPTION OF EUT**

Equipment	Tablet	
Brand Name	NVIDIA	
Model Name	P1640	
Model Difference	N/A	
Product Description	Operation Frequency	2402~2480 MHz
	Modulation Technology	GFSK(1Mbps)
	Bit Rate of Transmitter	$\pi$ /4-DQPSK(2Mbps)
		8-DPSK(3Mbps)
	Number of Channel	79 CH, Please see note 2.(Page 10)
	Antenna Designation	Please see note 3.(Page 10)
	Antenna Gain(Peak)	
	Output Power (Max.)	3.32 dBm (1Mbps)
-0.14 dBm (3Mbps)		
More details of EUT technical specification, please refer to the User's Manual.		
Power Source	#1 DC voltage supplied from AC adapter. 1) Brand/ Model: PIE/ AD835321 2) Brand/ Model: Chicony/ W12-010N3A #2 Supplied from lithium-ion battery. 1) Brand/ Model: YOKU/ 32102102 2) Brand/ Model: YOKU/ 30102102 #3 Supplied from USB charging.	
Power Rating	#1 AC adapter 1) I/P: AC 100-240V~, 50/60Hz, 0.3A O/P: DC 5.0V, 2.0A 2) I/P: AC 100-240V~, 50/60Hz, 0.3A O/P: DC 5.35V, 2A #2 Lithium-ion battery 1) DC 3.7V 4100mAh 2) DC 3.7V 3200mAh #3 USB charging 1) DC 5V 2A	
Connecting I/O Port(s)	Please refer to the User's Manual	

**Note:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

3 Table for Filed Antenna

**Group 1**

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	INPAQ TECHNOLOGY CO., LTD.	WA-F-LAG1-02-001	IFA	N/A	3.5	TX/RX

**Group 2**

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	Shanghai Amphenol Airwave Communication Electronics Co., Ltd	NV4593-12-000-R	IFA	N/A	3.5	TX/RX

Note:

(1) Two groups of antenna used with the same type and same gain, only differ in manufacturer and model name, group 1 is tested and recorded as the worst case in this report.

(2) The antenna of EUT could be rotated, and the antenna polarity vertical is the worst.



**3.2 DESCRIPTION OF TEST MODES**

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode <b>Note (1)</b>
Mode 2	Bluetooth

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Emission	
Final Test Mode	Description
Mode 2	Bluetooth

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode <b>Note (1)</b>

**Note:**

- (1) The measurements are performed at the high, middle, low available channels.
- (2) The EUT was pre-tested on positioned of each 3 axis. The worst cas was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.
- (3) The EUT system operated in these modes (AC adapter and Lithium-ion battery) and AC adapter found to be the worst case during the pre-scanning test.

**3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING**


During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS

Test software version	N/A		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameters-1Mbps	5	5	5
Parameters-3Mbps	5	5	5



### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


**Conducted TX Mode:**

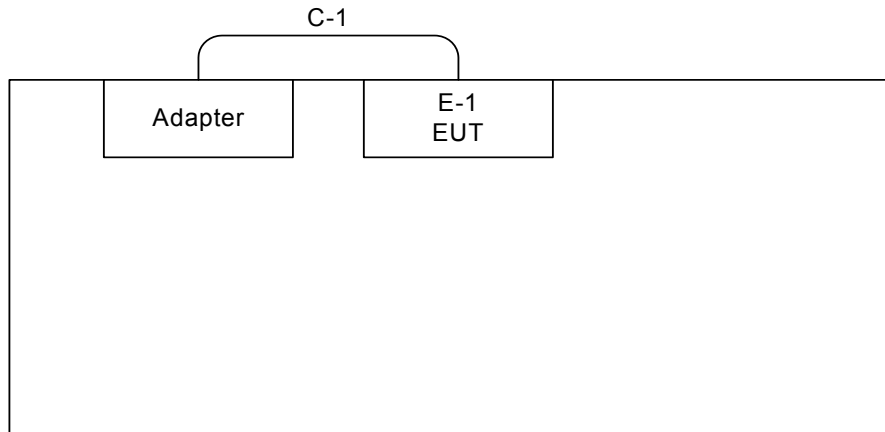

Control Room

C-1: USB Cable

**Radiated TX Mode:**

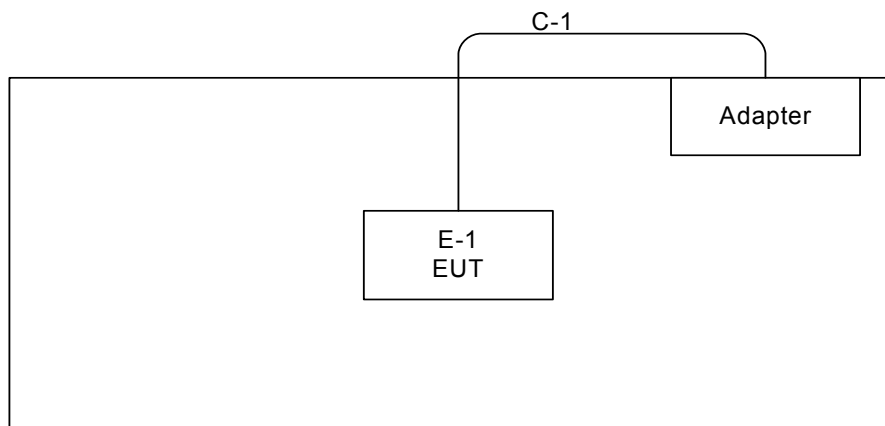

Control Room

C-1: USB Cable



### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
E-1	Tablet	NVIDIA	P1640	VOB-P1640/ 7361A-P1640	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	0.8m	USB Cable

Note:

- (1) For detachable type I/O cable should be specified the length in m in 『Length』 column.



**4. EMC EMISSION TEST**

**4.1 CONDUCTED EMISSION MEASUREMENT**

**4.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)**

Frequency (MHz)	Class A (dBuV)		Class B (dBuV)		Standard
	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

**4.1.2 MEASUREMENT INSTRUMENTS LIST AND SETTING**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014
2	LISN	R&S	ENV216	100087	Nov.16, 2013
3	Test Cable	N/A	C_17	N/A	Mar.15, 2014
4	EMI TEST RECEIVER	R&S	ESCS30	826547/022	Apr. 25, 2014
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


#### 4.1.3 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.1.5 TEST SETUP

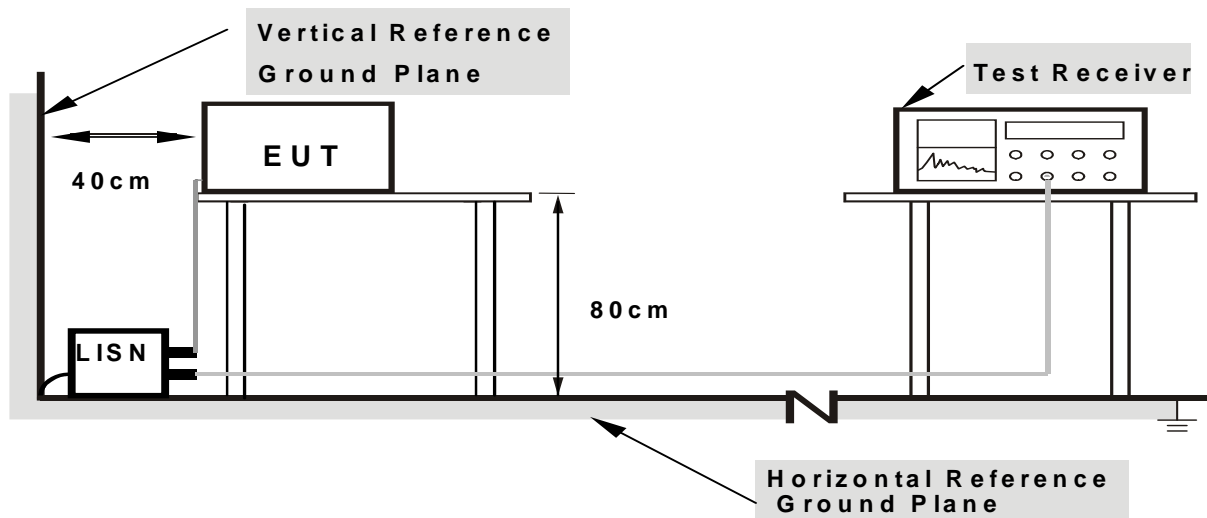

**Note: 1. Support units were connected to second LISN.**

**2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

#### 4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/receiving data or hopping on mode.



#### **4.1.7 TEST RESULTS**


**Remark:**

- (1) All readings are QP Mode value unless otherwise stated AVG in column of "Note". If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform in this case, a "\*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.






EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	55 %
Test Voltage:	AC 120V/60Hz	Phase:	Line
Test Mode:	Bluetooth (Adapter: AD835321)		

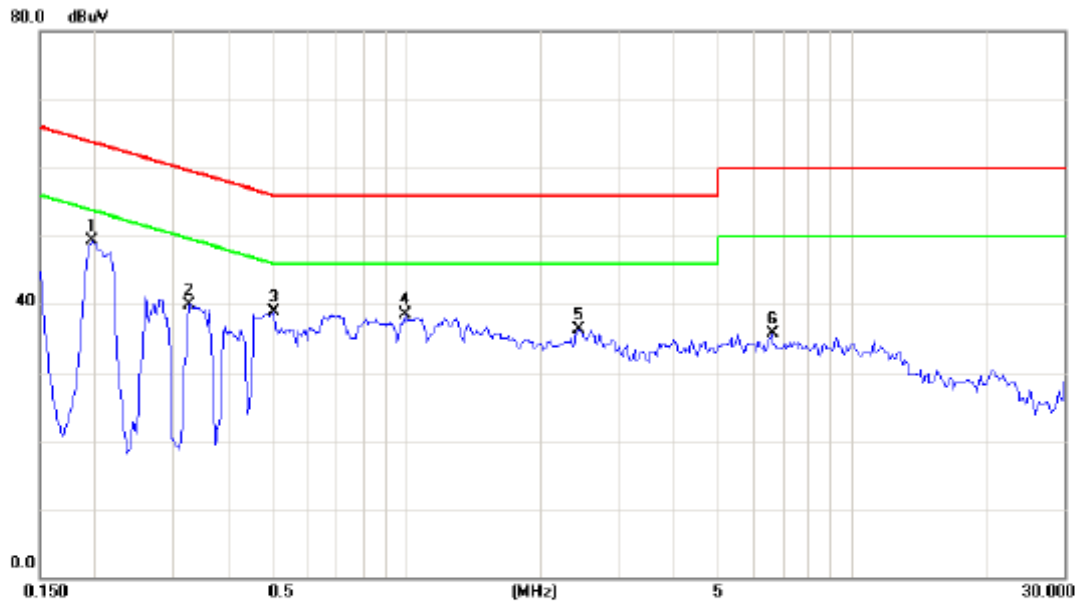

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1965	39.70	9.53	49.23	63.76	-14.53	peak	
2		0.3253	30.38	9.54	39.92	59.57	-19.65	peak	
3		0.5053	29.27	9.55	38.82	56.00	-17.18	peak	
4		0.9910	29.01	9.57	38.58	56.00	-17.42	peak	
5		2.4285	26.64	9.60	36.24	56.00	-19.76	peak	
6		6.6171	26.04	9.65	35.69	60.00	-24.31	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	55 %
Test Voltage:	AC 120V/60Hz	Phase:	Neutral
Test Mode:	Bluetooth (Adapter: AD835321)		

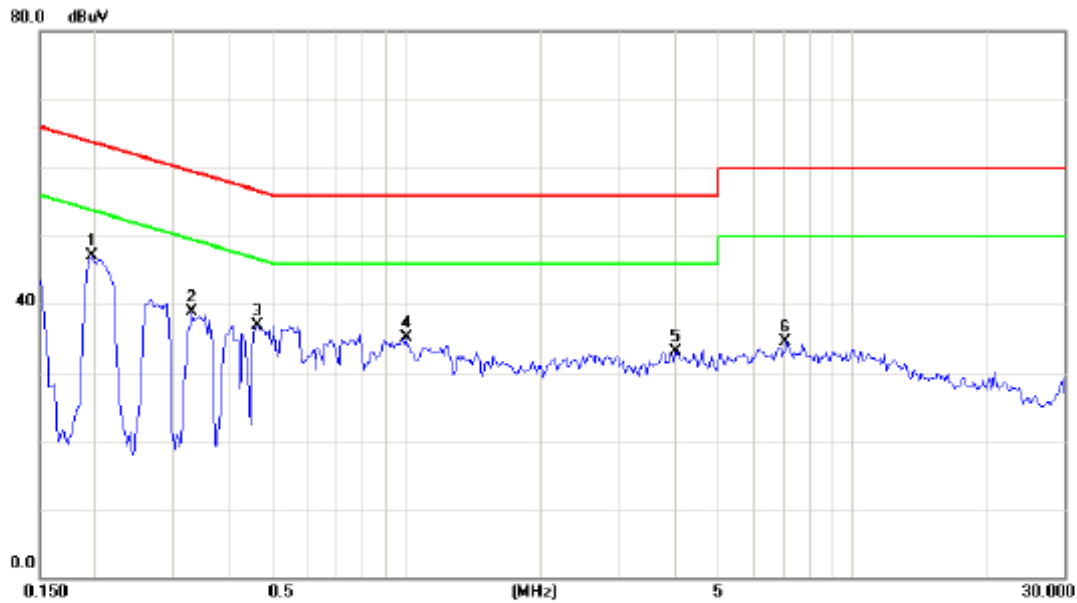

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1965	37.52	9.59	47.11	63.76	-16.65	peak	
2		0.3288	29.31	9.59	38.90	59.48	-20.58	peak	
3		0.4617	27.39	9.59	36.98	56.66	-19.68	peak	
4		0.9962	25.46	9.60	35.06	56.00	-20.94	peak	
5		4.0193	23.37	9.64	33.01	56.00	-22.99	peak	
6		7.0894	24.74	9.69	34.43	60.00	-25.57	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	55 %
Test Voltage:	AC 120V/60Hz	Phase:	Line
Test Mode:	Bluetooth (Adapter: W12-010N3A)		

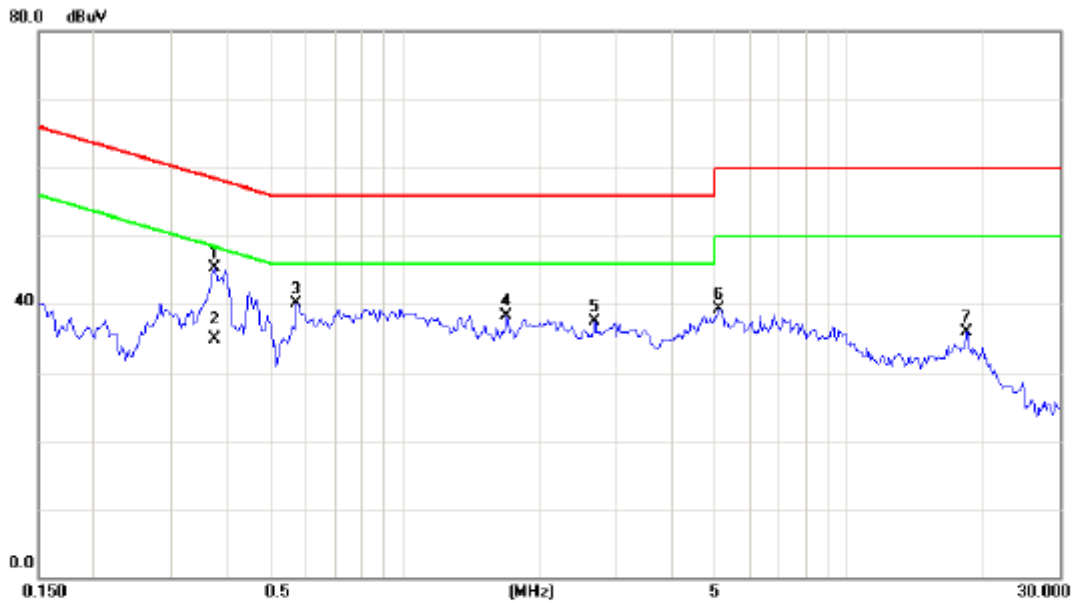

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.3754	35.85	9.54	45.39	58.38	-12.99	peak	
2		0.3766	25.32	9.54	34.86	48.35	-13.49	AVG	
3		0.5737	30.63	9.55	40.18	56.00	-15.82	peak	
4		1.7021	28.74	9.58	38.32	56.00	-17.68	peak	
5		2.6860	27.82	9.60	37.42	56.00	-18.58	peak	
6		5.1025	29.67	9.63	39.30	60.00	-20.70	peak	
7		18.5147	26.14	9.83	35.97	60.00	-24.03	peak	



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	55 %
Test Voltage:	AC 120V/60Hz	Phase:	Neutral
Test Mode:	Bluetooth (Adapter: W12-010N3A)		

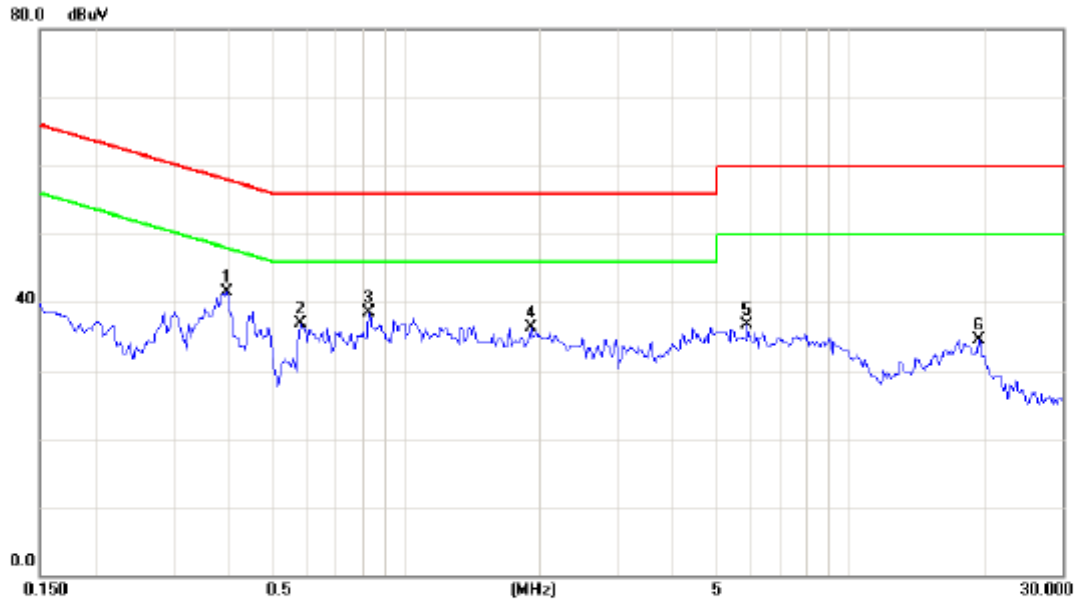

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.3960	31.84	9.59	41.43	57.94	-16.51	peak	
2		0.5800	27.24	9.59	36.83	56.00	-19.17	peak	
3		0.8274	28.90	9.59	38.49	56.00	-17.51	peak	
4		1.9128	26.65	9.61	36.26	56.00	-19.74	peak	
5		5.8571	27.12	9.67	36.79	60.00	-23.21	peak	
6		19.4200	24.45	9.97	34.42	60.00	-25.58	peak	



**4.2 RADIATED EMISSION MEASUREMENT**

**4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9KHz -1000MHz)**

20dB in any 100 KHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

**LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)**

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m) =20log Emission level (uV/m).

**FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)**

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



**4.2.2 MEASUREMENT INSTRUMENTS LIST AND SETTING**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014
5	Antenna	ETS	3115	00075789	Apr. 25, 2014
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014
7	Spectrum	Agilent	E4408B	US39240143	Nov. 16, 2013
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014
9	Controller	CT	SC100	N/A	N/A
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 23, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
 All calibration period of equipment list is one year.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz ~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz ~110KHz for QP detector
Start ~ Stop Frequency	110KHz ~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz ~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector



#### **4.2.3 TEST PROCEDURE**


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### **4.2.4 DEVIATION FROM TEST STANDARD**


No deviation

**4.2.5 TEST SETUP**

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

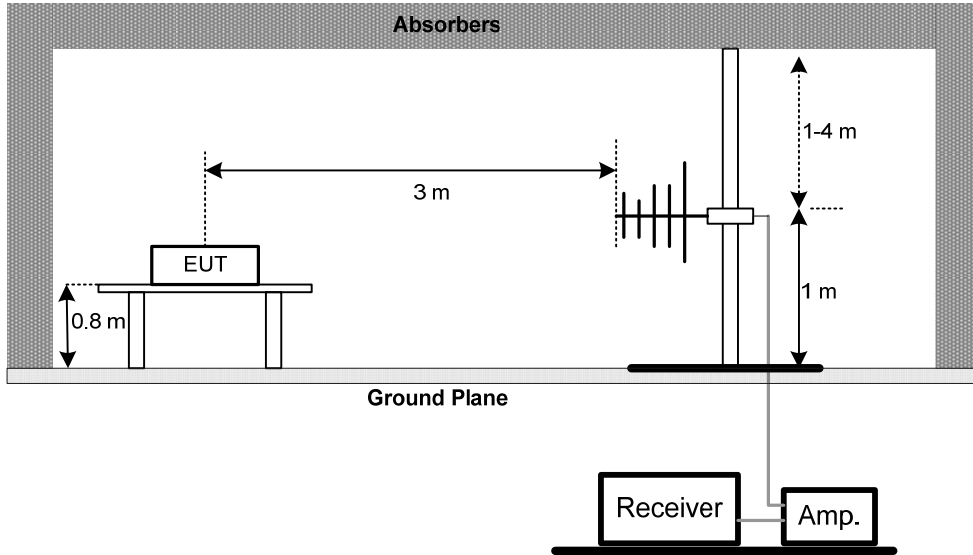


(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

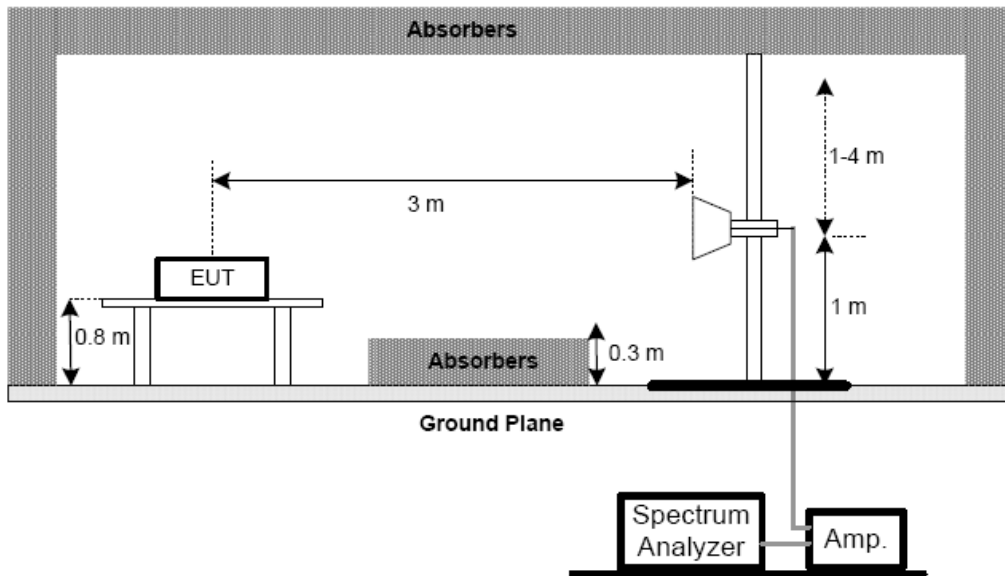



(C) For radiated emissions below 30MHz

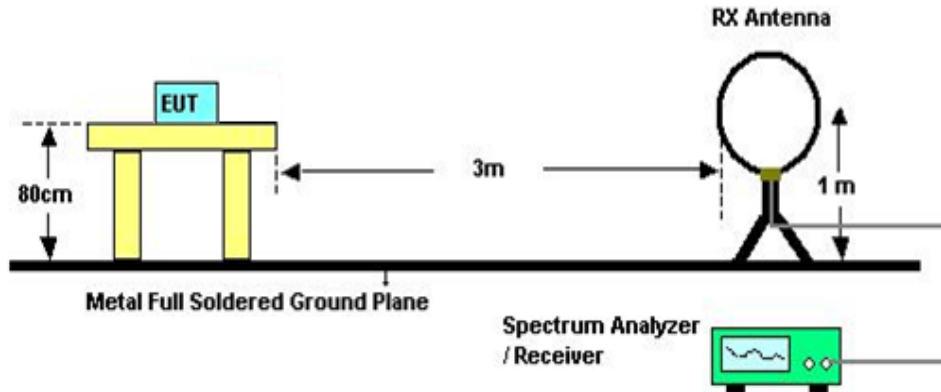

#### 4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



**4.2.7 TEST RESULTS (BELOW 30MHZ)**

EUT :	Tablet	Model Name :	P1640
Temperature :	24 °C	Relative Humidity:	54 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	TX Mode 2402MHz		

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0094	0°	17.63	24.30	41.93	128.19	-86.26	AV
0.0094	0°	19.54	24.30	43.84	148.19	-104.35	PK
0.0128	0°	18.05	24.30	42.35	125.49	-83.14	AV
0.0128	0°	19.87	24.30	44.17	145.49	-101.32	PK
0.0243	0°	17.23	24.03	41.26	119.89	-78.63	AV
0.0243	0°	20.15	24.03	44.18	139.89	-95.71	PK
0.0365	0°	17.32	23.26	40.58	116.37	-75.79	AV
0.0365	0°	19.88	23.26	43.14	136.37	-93.23	PK
0.4132	0°	17.32	20.01	37.33	95.28	-57.95	AVG
0.4132	0°	20.24	20.01	40.25	115.28	-75.03	PK
1.1245	0°	18.35	19.59	37.94	66.59	-28.65	QP

Freq. (MHz)	Ant. 0°/90°	Reading(RA) (dBuV)	Corr.Factor(CF) (dB)	Measured(FS) (dBuV/m)	Limits(QP) (dBuV/m)	Margin (dB)	Note
0.0095	90°	17.63	24.30	41.93	128.08	-86.15	AVG
0.0095	90°	20.34	24.30	44.64	148.08	-103.44	PK
0.0216	90°	17.50	24.20	41.70	120.92	-79.22	AVG
0.0216	90°	19.76	24.20	43.96	140.92	-96.96	PK
0.0375	90°	18.03	23.19	41.22	116.12	-74.90	AVG
0.0375	90°	20.26	23.19	43.45	136.12	-92.67	PK
0.0426	90°	17.75	22.87	40.62	115.02	-74.40	AVG
0.0426	90°	20.35	22.87	43.22	135.02	-91.80	PK
0.2548	90°	17.23	20.39	37.62	99.48	-61.86	AVG
0.2548	90°	20.45	20.39	40.84	119.48	-78.64	PK
1.2345	90°	18.33	19.58	37.91	65.77	-27.87	QP

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = 40 log (specific distance / test distance) (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.




#### **4.2.8 TEST RESULTS: 30MHZ - 1000MHZ**

**Remark:**

- (1) Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode or Peak Mode with Detector BW=120KHz ; SPA setting in RBW=120KHz, VBW =120KHz, Swp. Time = 0.3 sec./MHz.
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz.
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table.




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz:	Phase:	Vertical
Test Mode:	TX 2402MHz -CH00-1Mbps (Adapter: AD835321)		

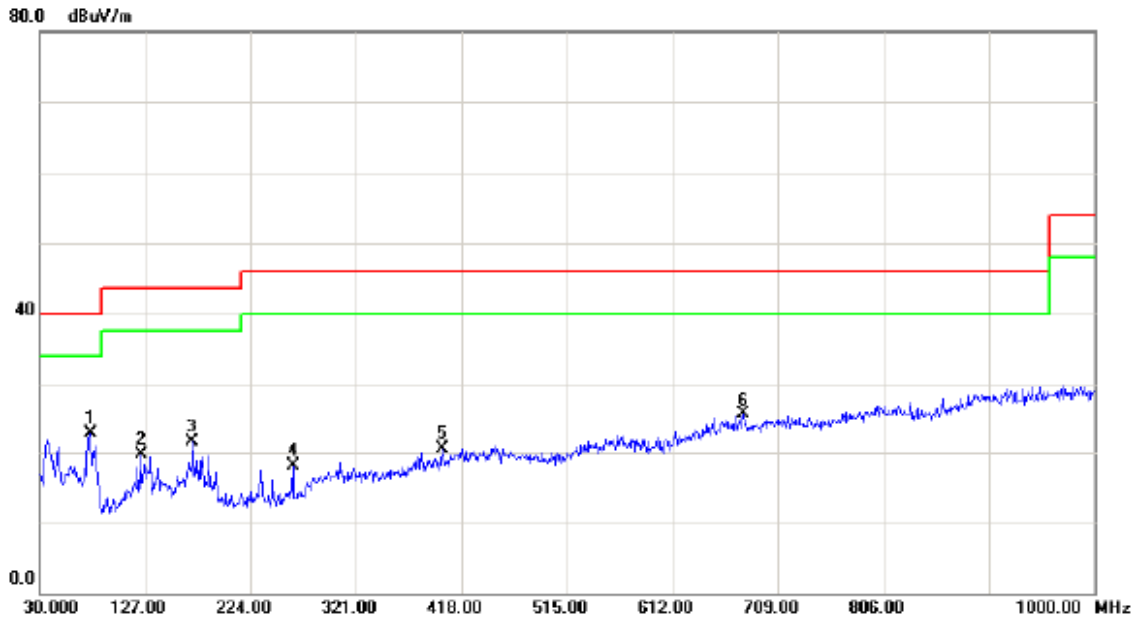

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	76.5600	39.76	-16.99	22.77	40.00	-17.23	peak	
2		123.1200	33.47	-13.72	19.75	43.50	-23.75	peak	
3		170.6500	34.15	-12.73	21.42	43.50	-22.08	peak	
4		262.8000	32.59	-14.52	18.07	46.00	-27.93	peak	
5		400.5400	30.32	-9.87	20.45	46.00	-25.55	peak	
6		676.9900	30.61	-5.16	25.45	46.00	-20.55	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX 2402MHz -CH00-1Mbps (Adapter: AD835321)		

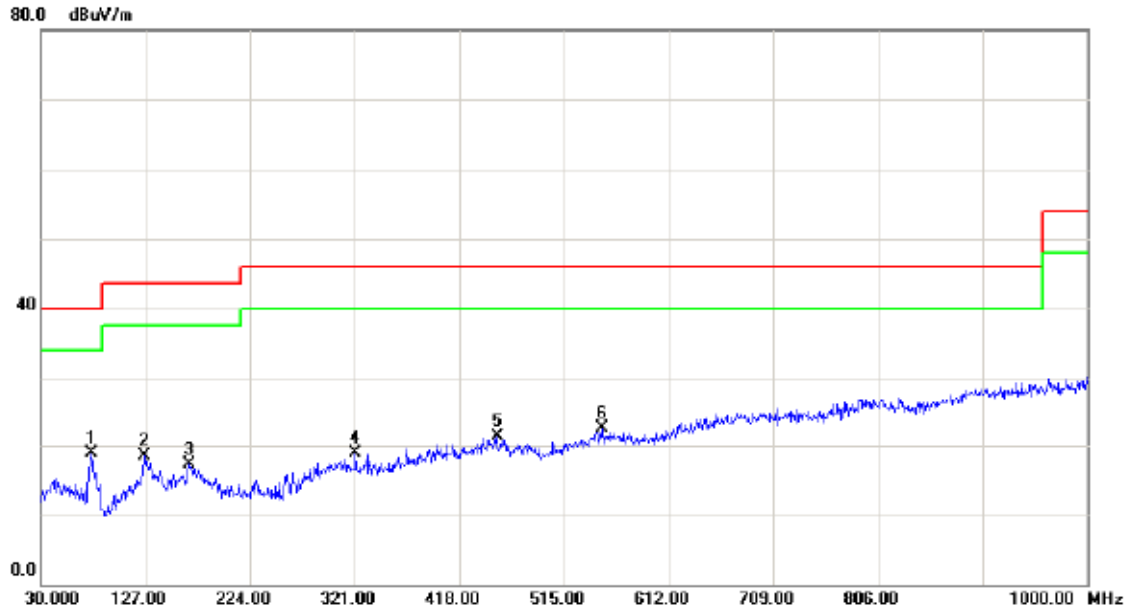

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	77.5300	36.09	-17.13	18.96	40.00	-21.04	peak	
2		126.0300	32.15	-13.56	18.59	43.50	-24.91	peak	
3		167.7400	30.17	-12.93	17.24	43.50	-26.26	peak	
4		321.9700	30.31	-11.34	18.97	46.00	-27.03	peak	
5		452.9200	30.29	-8.99	21.30	46.00	-24.70	peak	
6		549.9200	30.10	-7.65	22.45	46.00	-23.55	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz:	Phase:	Vertical
Test Mode:	TX 2441MHz –CH39-1Mbps (Adapter: AD835321)		

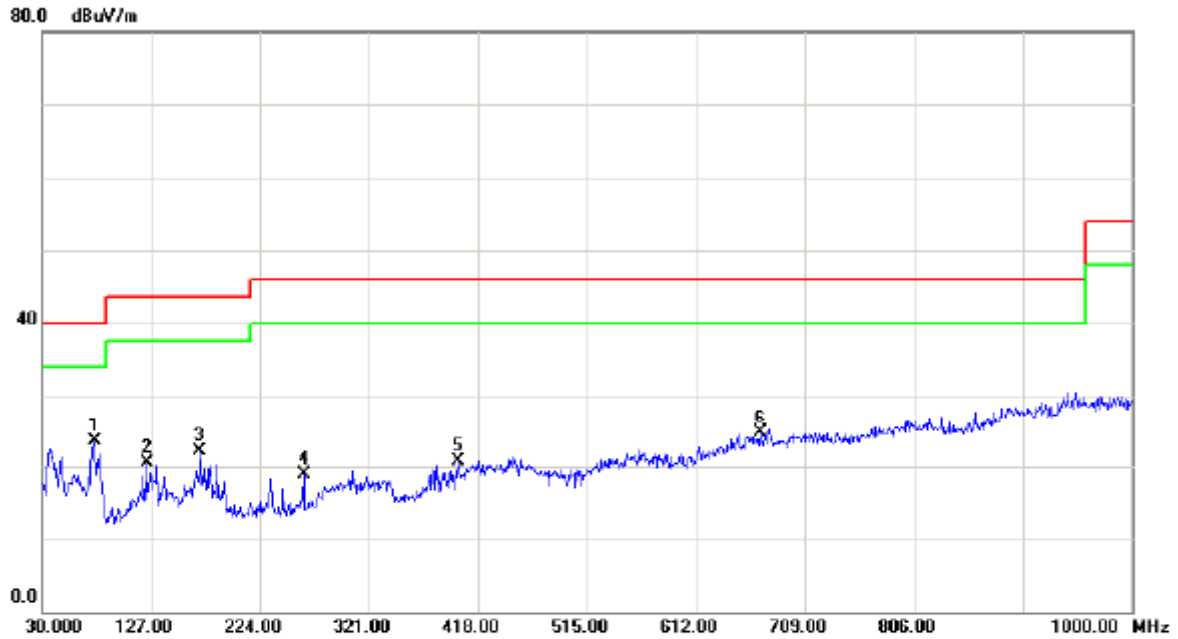

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	76.5600	40.50	-16.99	23.51	40.00	-16.49	peak	
2		123.1200	34.21	-13.72	20.49	43.50	-23.01	peak	
3		170.6500	34.89	-12.73	22.16	43.50	-21.34	peak	
4		262.8000	33.33	-14.52	18.81	46.00	-27.19	peak	
5		400.5400	30.56	-9.87	20.69	46.00	-25.31	peak	
6		669.2300	30.03	-5.28	24.75	46.00	-21.25	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX 2441MHz –CH39-1Mbps (Adapter: AD835321)		

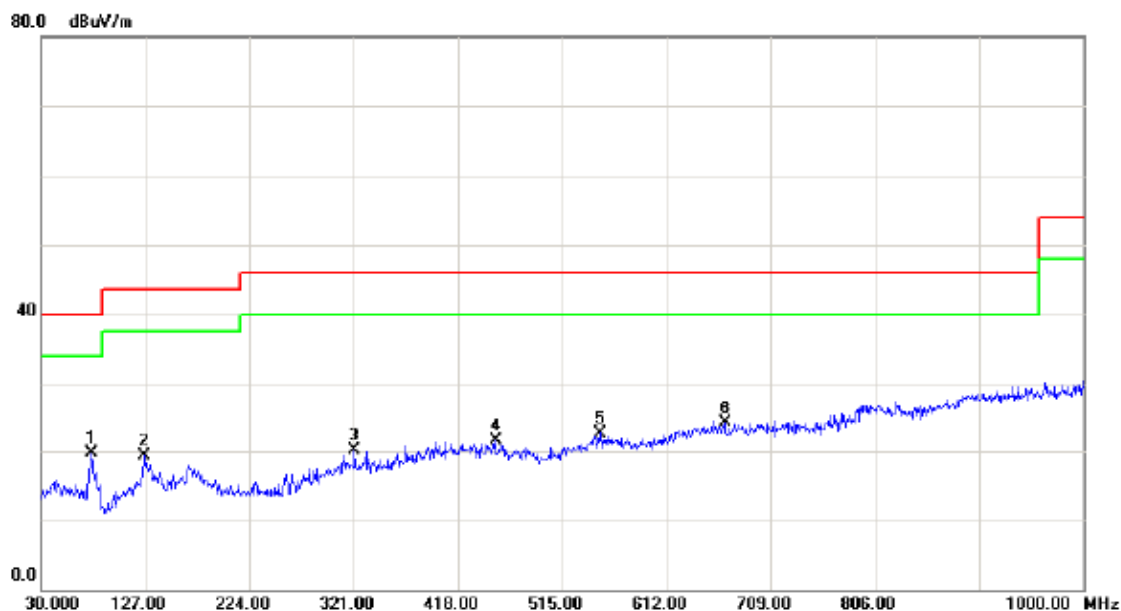

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	77.5300	36.74	-17.13	19.61	40.00	-20.39	peak	
2	126.0300	32.80	-13.56	19.24	43.50	-24.26	peak	
3	321.9700	31.46	-11.34	20.12	46.00	-25.88	peak	
4	452.9200	30.44	-8.99	21.45	46.00	-24.55	peak	
5	549.9200	30.25	-7.65	22.60	46.00	-23.40	peak	
6	666.3200	29.37	-5.32	24.05	46.00	-21.95	peak	



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz:	Phase:	Vertical
Test Mode:	TX 2480MHz –CH78-1Mbps (Adapter: AD835321)		

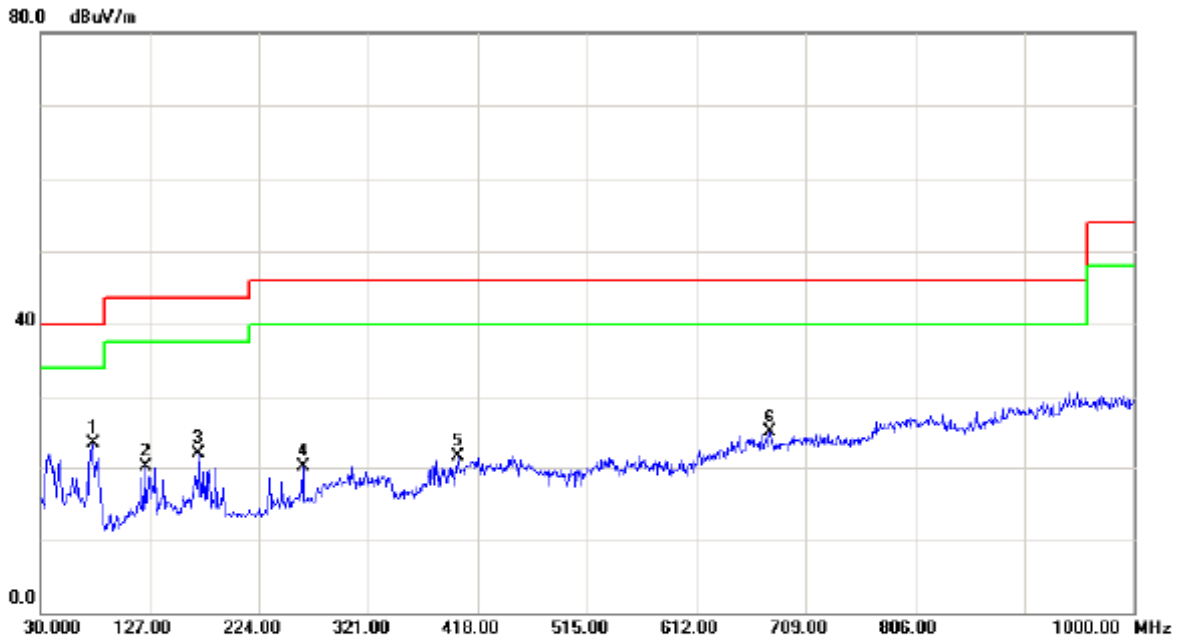


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	76.5600	40.21	-16.99	23.22	40.00	-16.78	peak	
2		123.1200	33.92	-13.72	20.20	43.50	-23.30	peak	
3		170.6500	34.60	-12.73	21.87	43.50	-21.63	peak	
4		262.8000	34.54	-14.52	20.02	46.00	-25.98	peak	
5		400.5400	31.28	-9.87	21.41	46.00	-24.59	peak	
6		676.9900	30.06	-5.16	24.90	46.00	-21.10	peak	





# Neutron Engineering Inc.


EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX 2480MHz -CH78-1Mbps (Adapter: AD835321)		

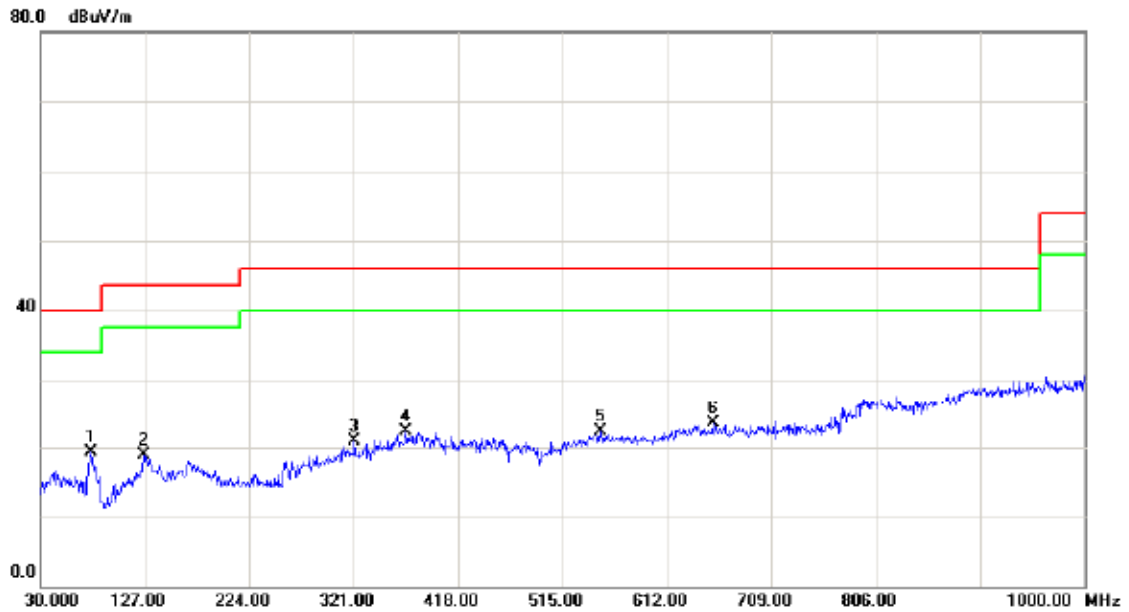

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	77.5300	36.48	-17.13	19.35	40.00	-20.65	peak	
2		126.0300	32.54	-13.56	18.98	43.50	-24.52	peak	
3		321.9700	32.20	-11.34	20.86	46.00	-25.14	peak	
4		369.5000	33.24	-10.85	22.39	46.00	-23.61	peak	
5		549.9200	29.99	-7.65	22.34	46.00	-23.66	peak	
6		654.6800	28.97	-5.49	23.48	46.00	-22.52	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz:	Phase:	Vertical
Test Mode:	TX 2402MHz –CH00-1Mbps (Adapter: W12-010N3A)		

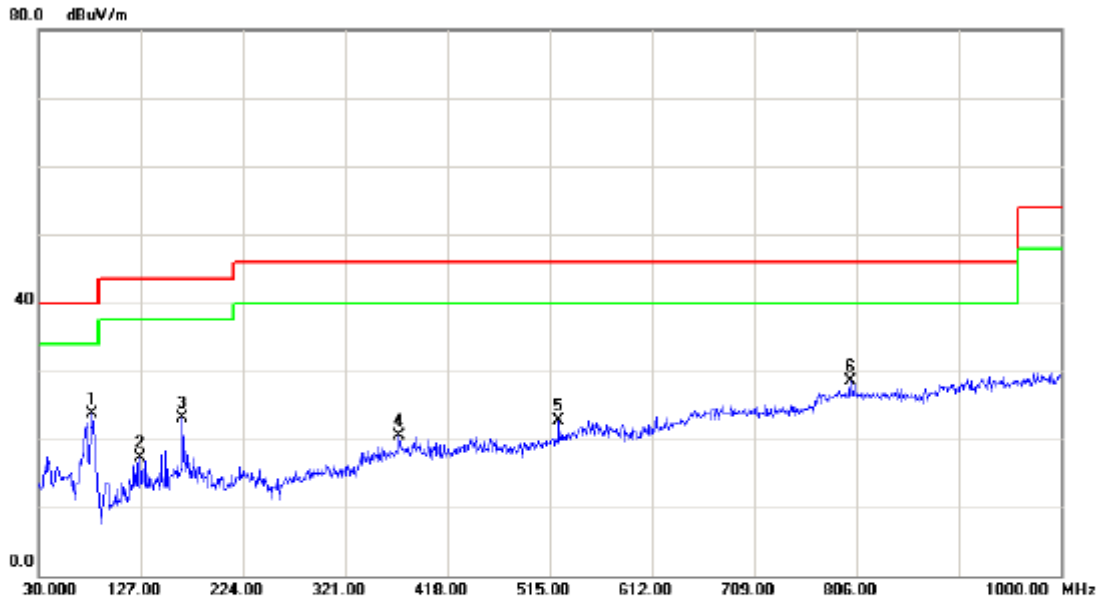

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	81.4100	41.21	-17.60	23.61	40.00	-16.39	peak	
2	126.0300	30.77	-13.56	17.21	43.50	-26.29	peak	
3	166.7700	36.10	-13.02	23.08	43.50	-20.42	peak	
4	372.4100	31.27	-10.75	20.52	46.00	-25.48	peak	
5	523.7300	31.67	-9.06	22.61	46.00	-23.39	peak	
6	800.1800	31.57	-3.11	28.46	46.00	-17.54	peak	



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX 2402MHz –CH00-1Mbps (Adapter: W12-010N3A)		

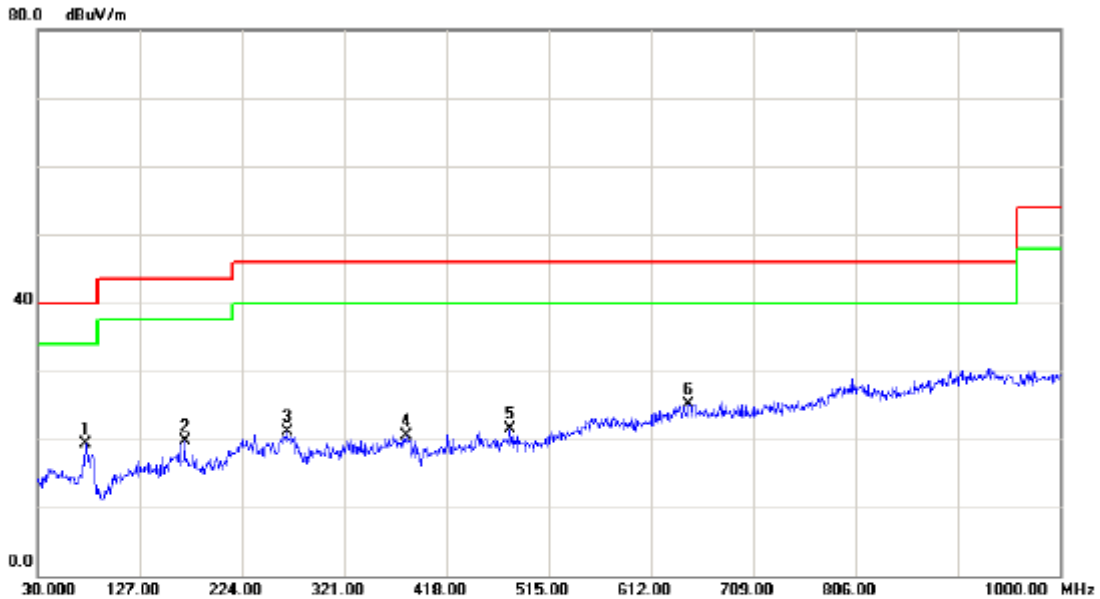

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	75.5900	36.25	-16.85	19.40	40.00	-20.60	peak	
2	169.6800	32.42	-12.76	19.66	43.50	-23.84	peak	
3	266.6800	35.36	-14.18	21.18	46.00	-24.82	peak	
4	379.2000	31.10	-10.54	20.56	46.00	-25.44	peak	
5	478.1400	31.13	-9.71	21.42	46.00	-24.58	peak	
6	647.8900	30.76	-5.67	25.09	46.00	-20.91	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz:	Phase:	Vertical
Test Mode:	TX 2441MHz -CH39-1Mbps (Adapter: W12-010N3A)		



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	81.4100	41.02	-17.60	23.42	40.00	-16.58	peak	
2		151.2500	30.79	-13.72	17.07	43.50	-26.43	peak	
3		166.7700	35.91	-13.02	22.89	43.50	-20.61	peak	
4		372.4100	32.08	-10.75	21.33	46.00	-24.67	peak	
5		523.7300	31.98	-9.06	22.92	46.00	-23.08	peak	
6		800.1800	31.38	-3.11	28.27	46.00	-17.73	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX 2441MHz –CH39-1Mbps (Adapter: W12-010N3A)		

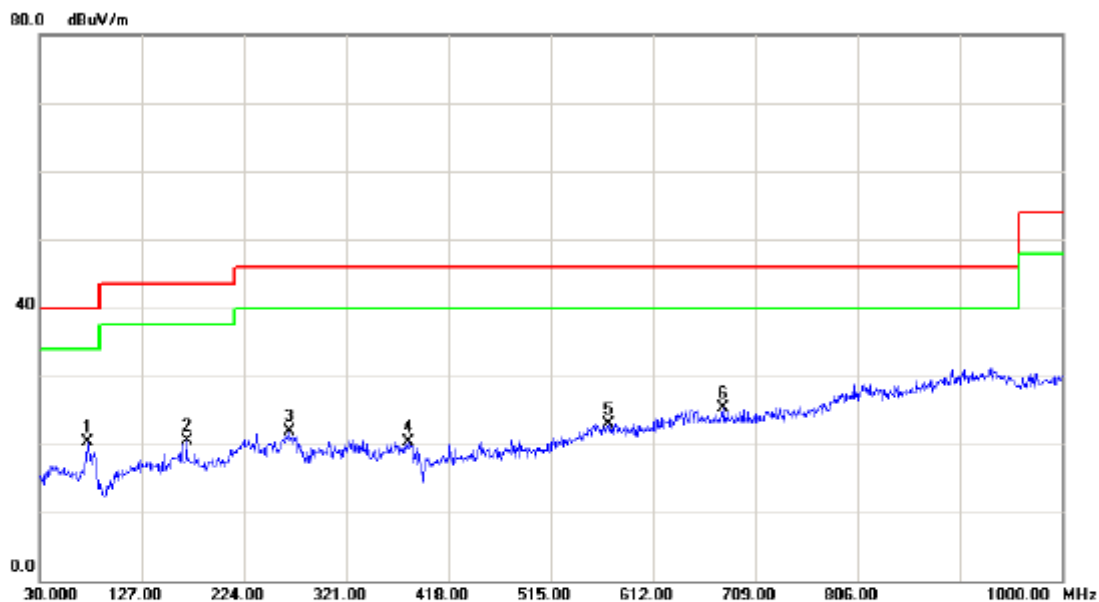

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1 *	75.5900	37.07	-16.85	20.22	40.00	-19.78	peak	
2	169.6800	33.24	-12.76	20.48	43.50	-23.02	peak	
3	266.6800	36.18	-14.18	22.00	46.00	-24.00	peak	
4	379.2000	30.92	-10.54	20.38	46.00	-25.62	peak	
5	570.2900	30.83	-7.83	23.00	46.00	-23.00	peak	
6	678.9300	30.35	-5.12	25.23	46.00	-20.77	peak	




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz:	Phase:	Vertical
Test Mode:	TX 2480MHz –CH78-1Mbps (Adapter: W12-010N3A)		

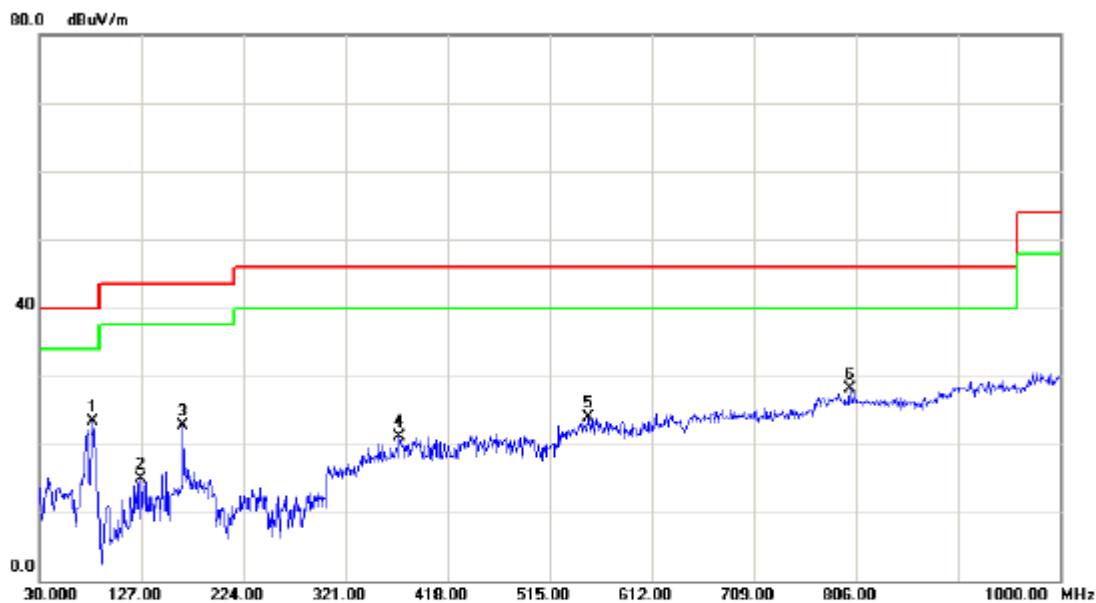

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	81.4100	40.89	-17.60	23.29	40.00	-16.71	peak	
2		126.0300	28.45	-13.56	14.89	43.50	-28.61	peak	
3		166.7700	35.78	-13.02	22.76	43.50	-20.74	peak	
4		372.4100	31.95	-10.75	21.20	46.00	-24.80	peak	
5		551.8600	31.54	-7.67	23.87	46.00	-22.13	peak	
6		800.1800	31.25	-3.11	28.14	46.00	-17.86	peak	



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz	Phase:	Horizontal
Test Mode:	TX 2480MHz –CH78-1Mbps (Adapter: W12-010N3A)		

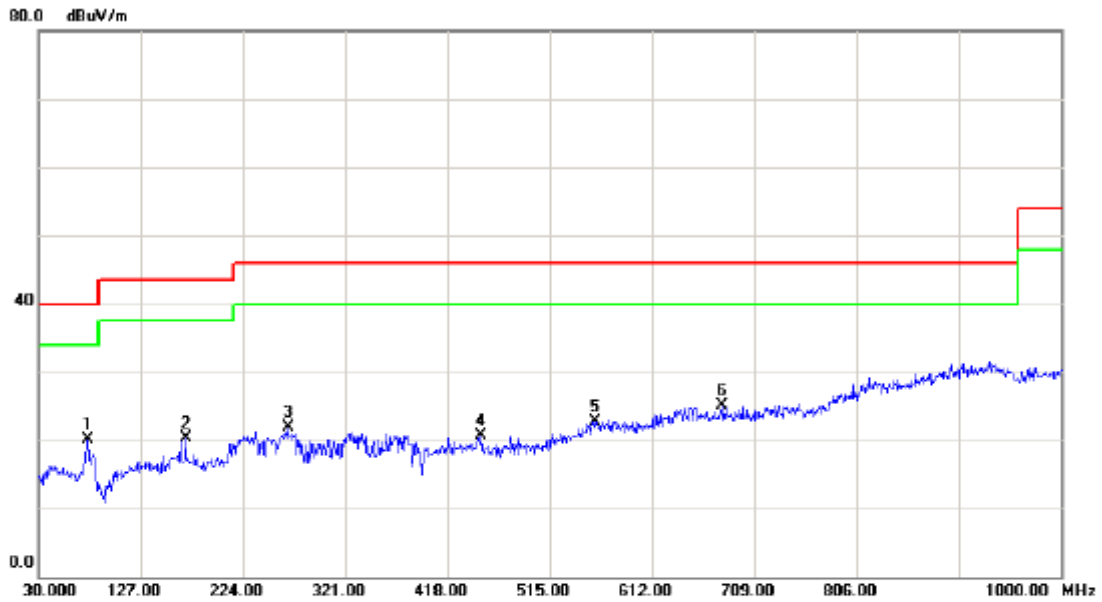

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	76.5600	37.08	-16.99	20.09	40.00	-19.91	peak	
2		169.6800	33.09	-12.76	20.33	43.50	-23.17	peak	
3		266.6800	36.03	-14.18	21.85	46.00	-24.15	peak	
4		450.0100	29.61	-8.91	20.70	46.00	-25.30	peak	
5		557.6800	30.37	-7.72	22.65	46.00	-23.35	peak	
6		678.9300	30.20	-5.12	25.08	46.00	-20.92	peak	



**4.2.9 TEST RESULTS (ABOVE 1000 MHZ)**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2402MHz – CH 00-1Mbps		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	21.66	12.37	34.09	55.75	46.46	74.00	54.00	X/E
<b>2402.00</b>	<b>V</b>	<b>66.06</b>	<b>56.93</b>	<b>34.12</b>	<b>100.18</b>	<b>91.05</b>			<b>X/F</b>
4804.06	V	42.02	30.90	6.38	48.40	37.28	74.00	54.00	X/H



Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna





TX CH00(Above 1000 MHz, Vertical)

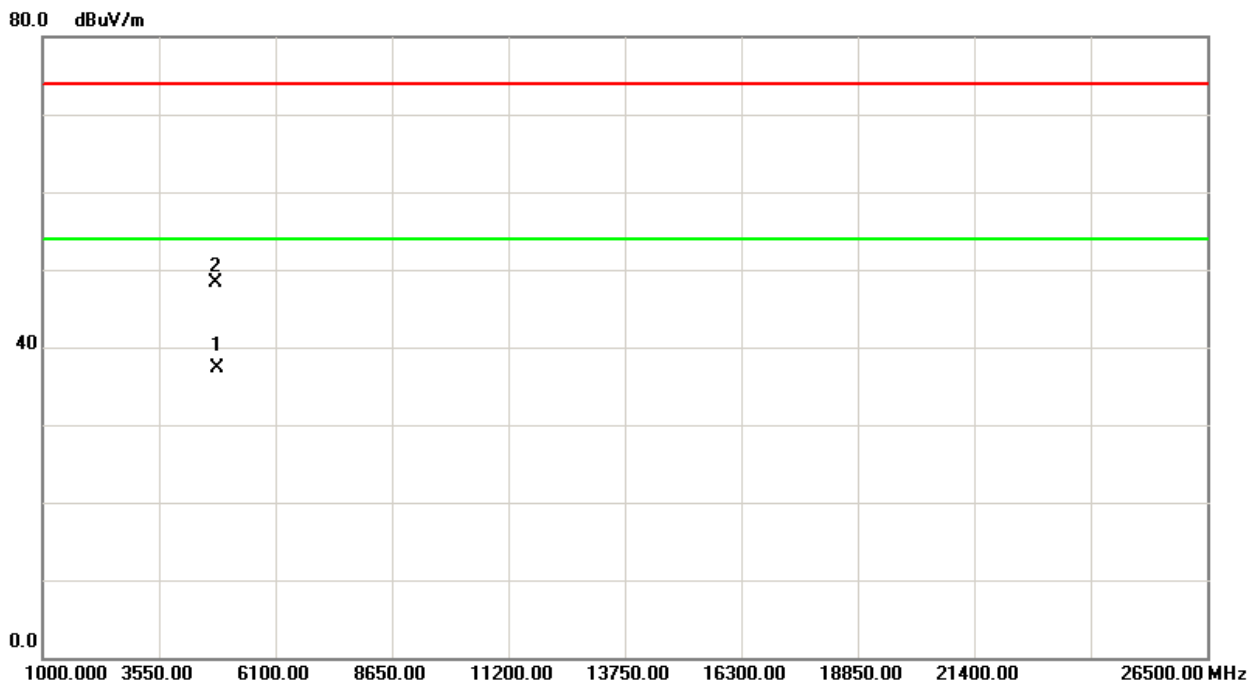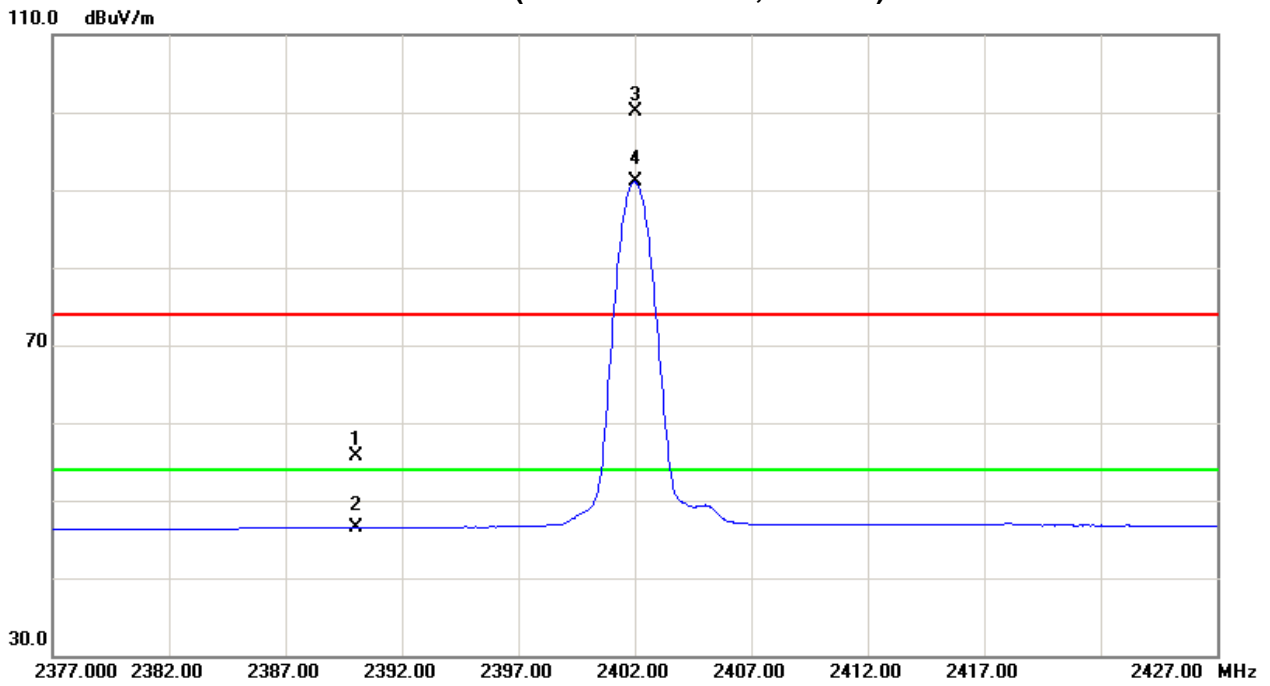



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2402MHz – CH 00-1Mbps		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	24.24	12.44	34.09	58.33	46.53	74.00	54.00	X/E
<b>2402.15</b>	<b>H</b>	<b>62.18</b>	<b>52.59</b>	<b>34.12</b>	<b>96.30</b>	<b>86.71</b>			<b>X/F</b>
4803.92	H	41.45	30.40	6.38	47.83	36.78	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH00(Above 1000 MHz, Horizontal)

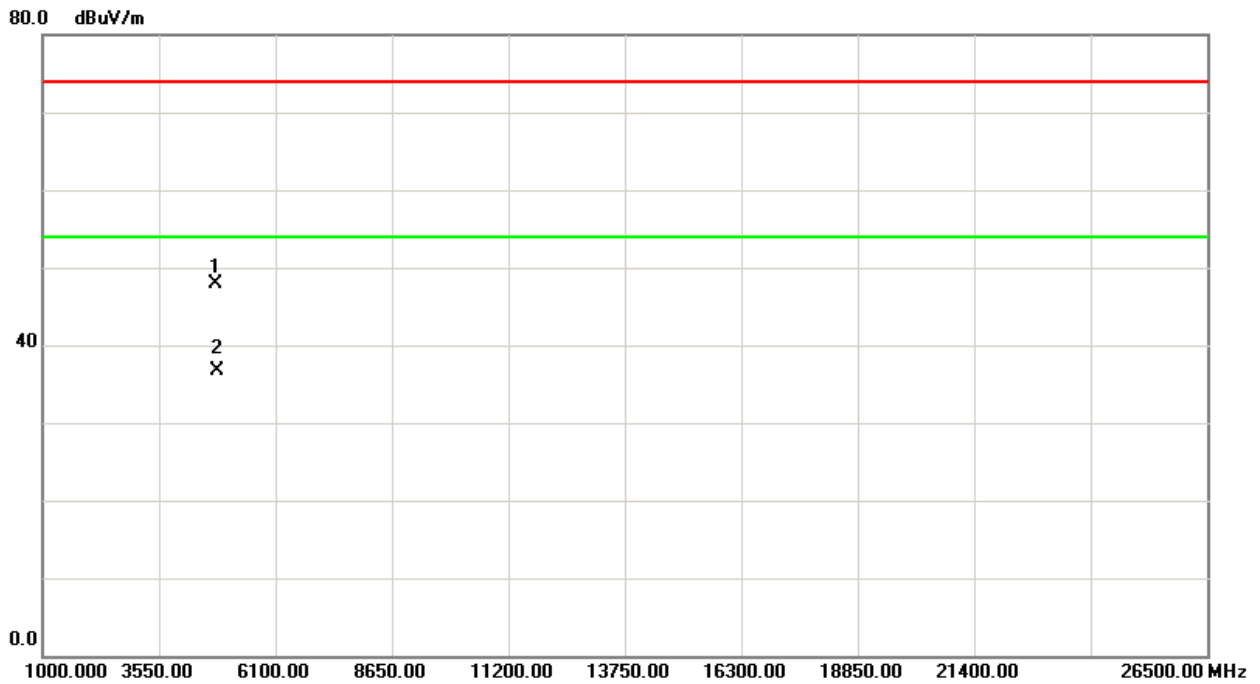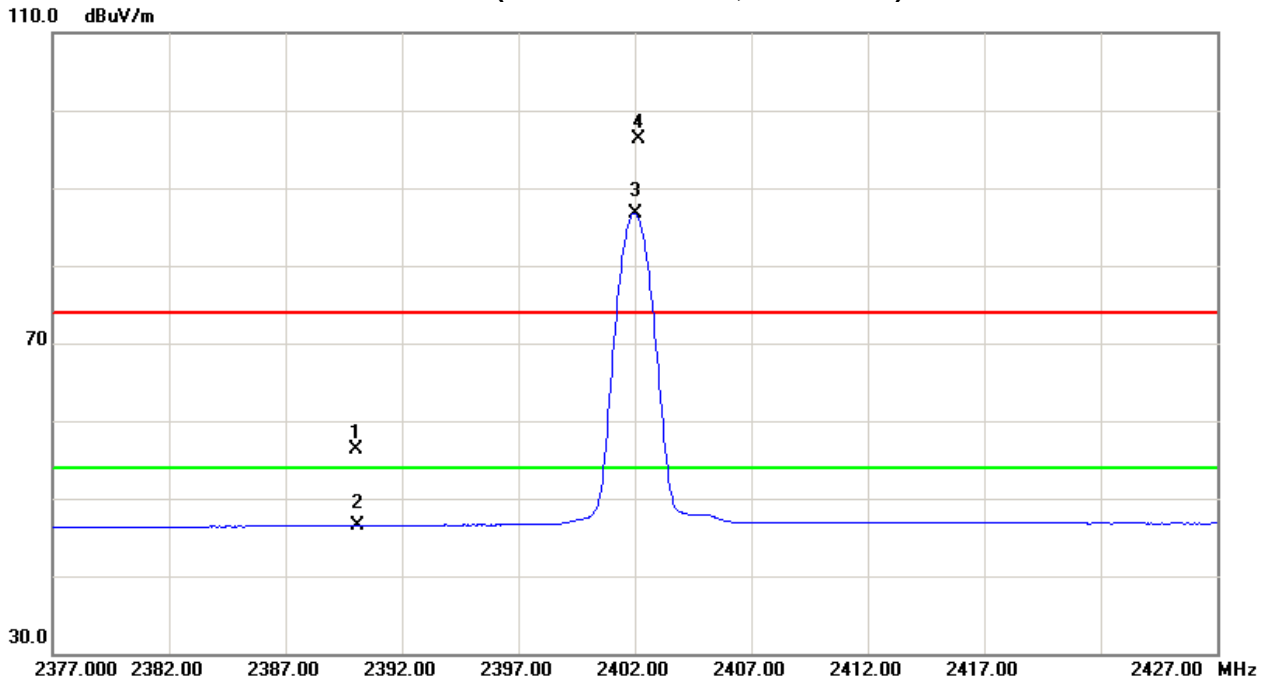



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2441MHz –CH39-1Mbps		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
<b>2441.15</b>	<b>V</b>	<b>66.22</b>	<b>57.59</b>	<b>34.25</b>	<b>100.47</b>	<b>91.84</b>			<b>X/F</b>
4882.07	V	41.94	30.59	6.61	48.55	37.20	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH39 (Above 1000 MHz, Vertical)

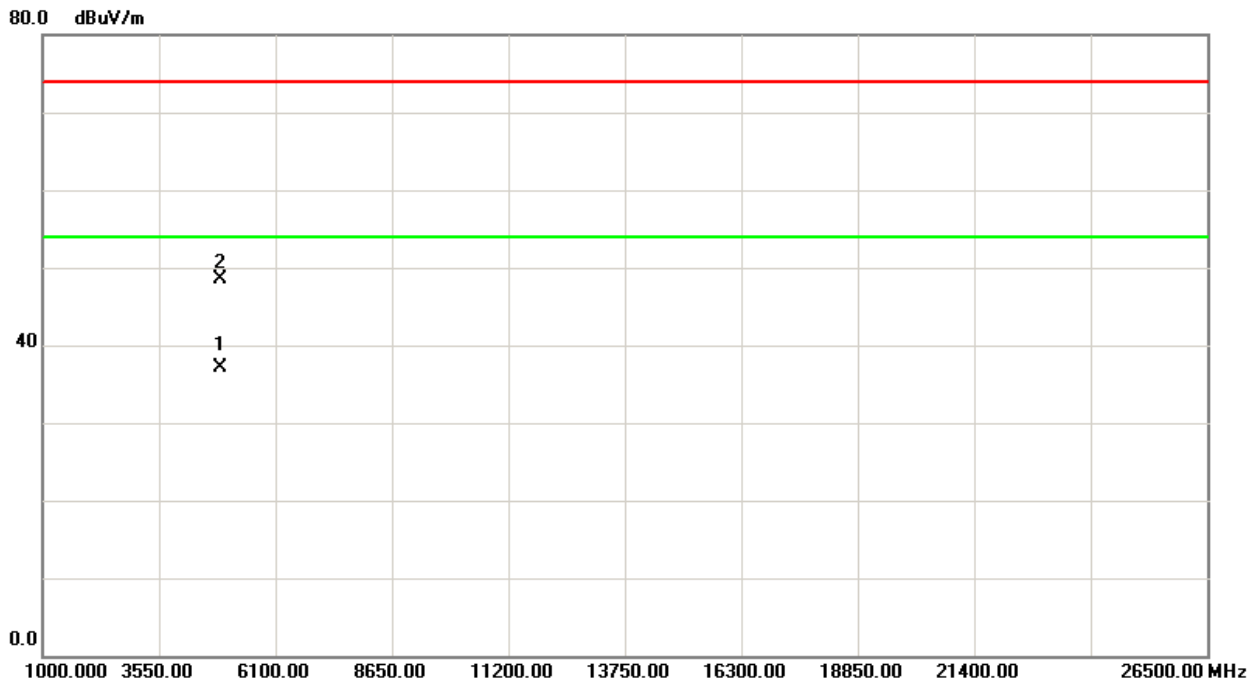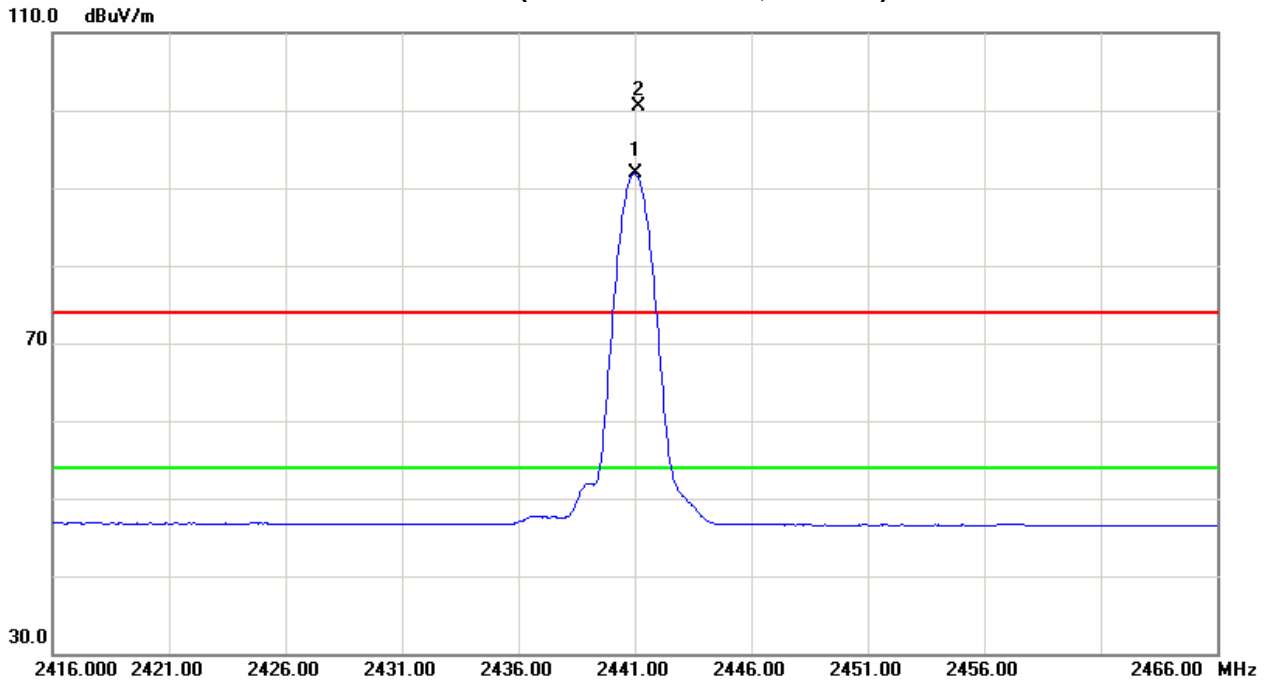



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2441MHz –CH39-1Mbps		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
<b>2440.80</b>	<b>H</b>	<b>59.68</b>	<b>49.93</b>	<b>34.25</b>	<b>93.93</b>	<b>84.18</b>			<b>X/F</b>
4881.94	H	41.19	30.08	6.61	47.80	36.69	74.00	54.00	X/H


Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna




TX CH39 (Above 1000 MHz, Horizontal)

110.0 dBuV/m

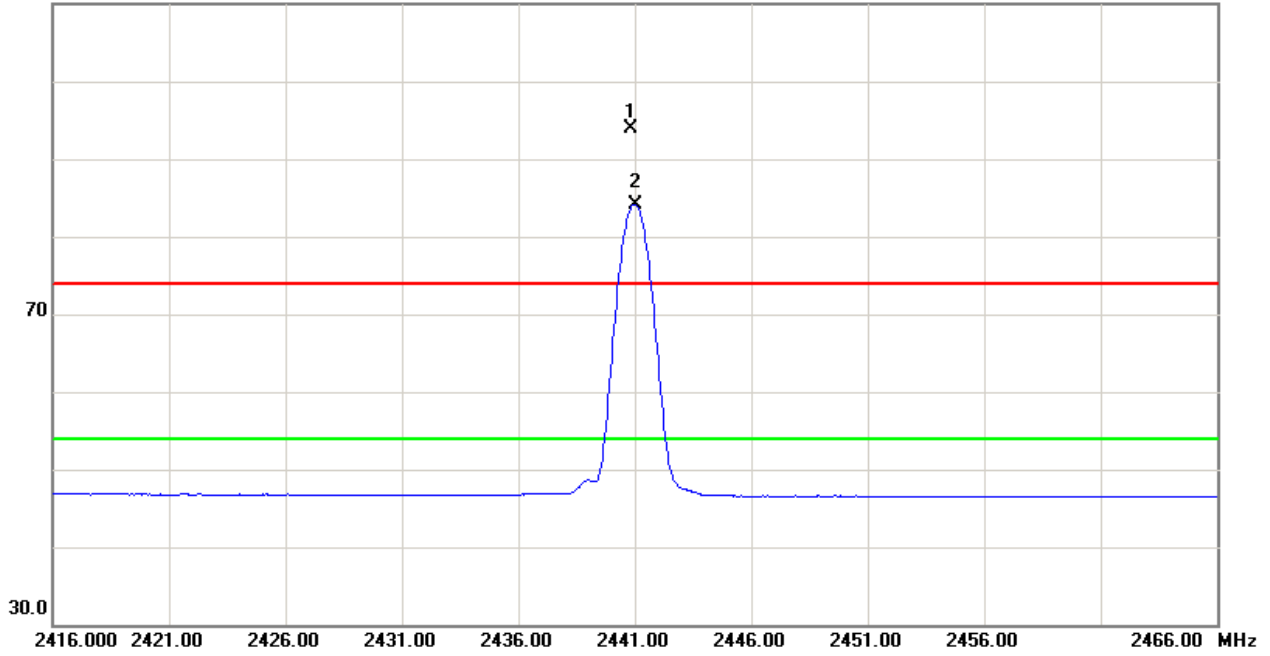

80.0 dBuV/m

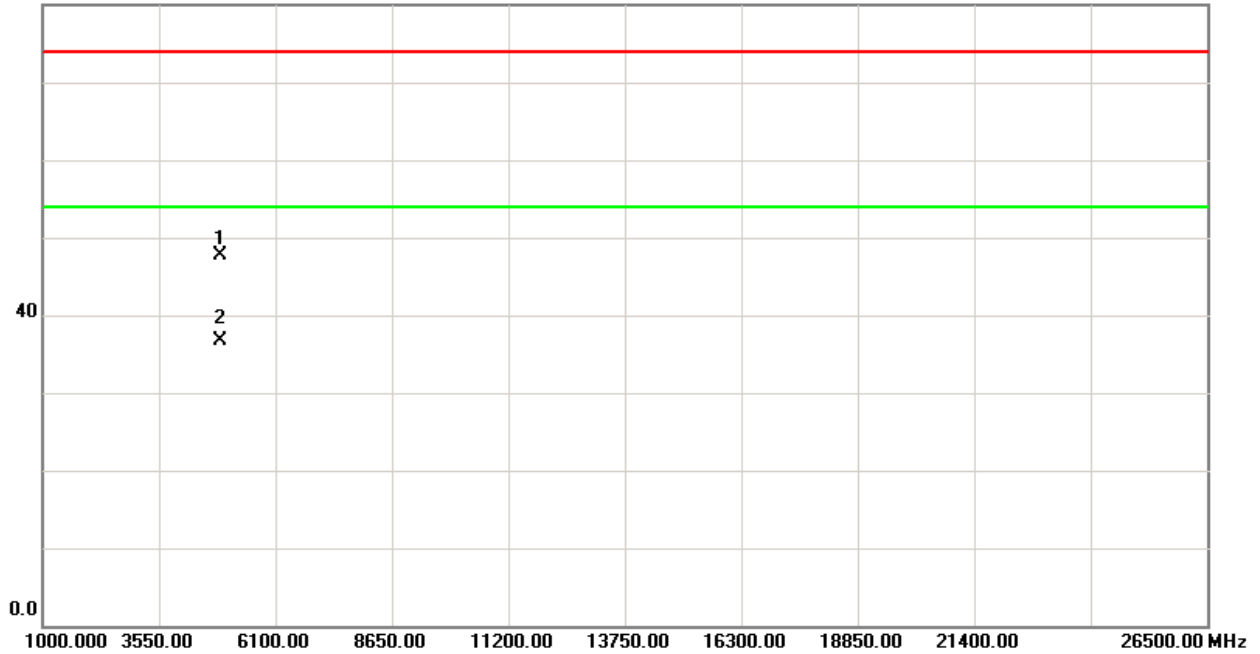



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2480MHz –CH78-1Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>2479.85</b>	<b>V</b>	<b>65.42</b>	<b>56.27</b>	<b>34.36</b>	<b>99.78</b>	<b>90.63</b>			<b>X/F</b>
2483.50	V	20.89	12.24	34.37	55.26	46.61	74.00	54.00	X/E
4960.07	V	41.87	30.40	6.83	48.70	37.23	74.00	54.00	X/H



**Remark:**

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna





TX CH78 (Above 1000 MHz, Vertical)

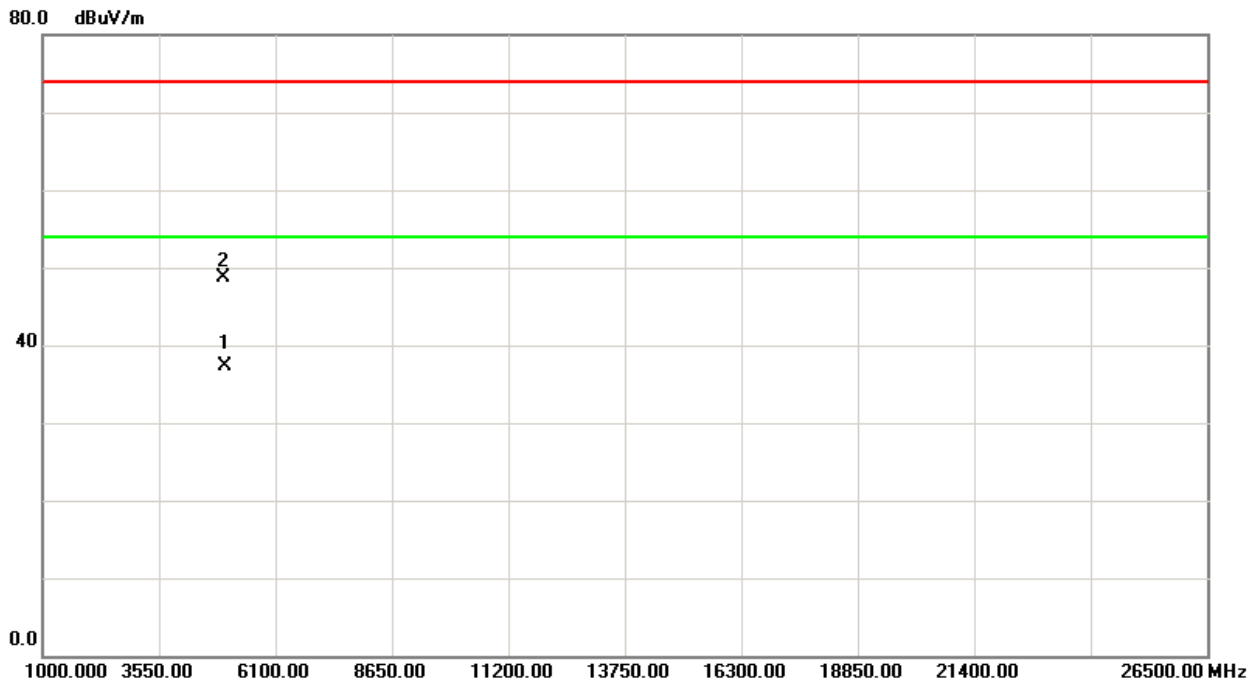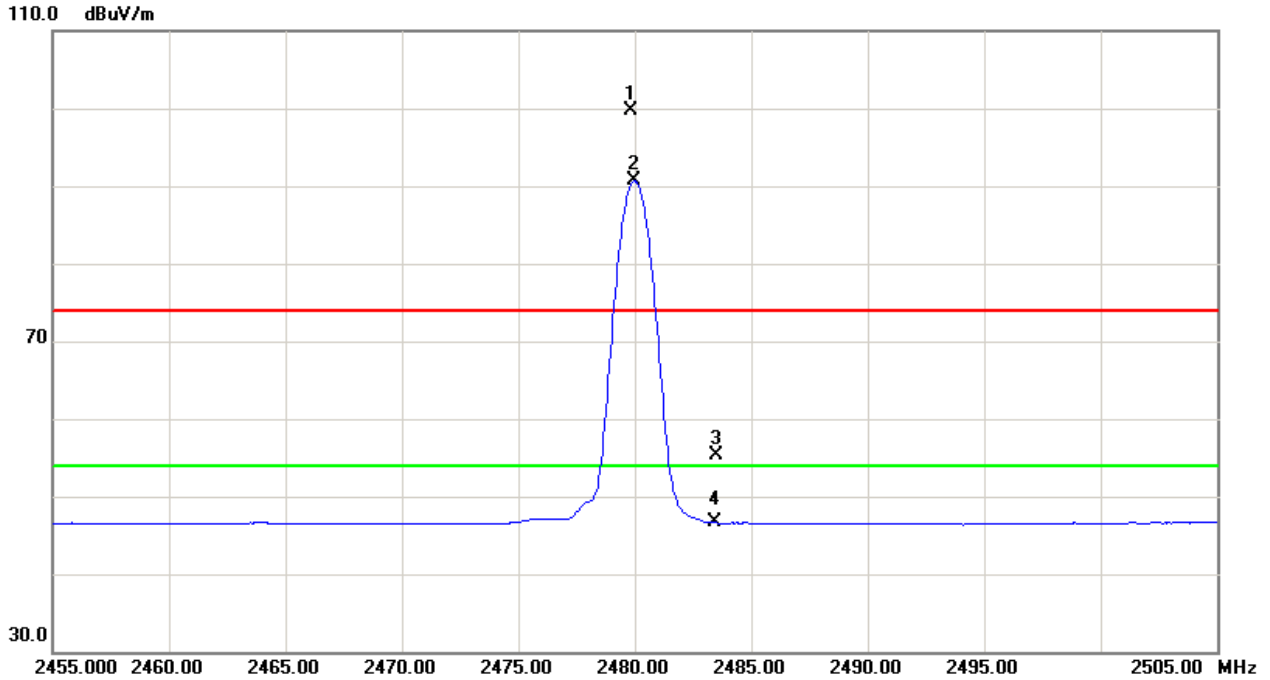



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2480MHz –CH78-1Mbps		



Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>2480.00</b>	<b>H</b>	<b>59.97</b>	<b>50.13</b>	<b>34.36</b>	<b>94.33</b>	<b>84.49</b>			<b>X/F</b>
2483.50	H	22.57	12.16	34.37	56.94	46.53	74.00	54.00	X/E
4959.95	H	41.10	30.07	6.83	47.93	36.90	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH78 (Above 1000 MHz, Horizontal)

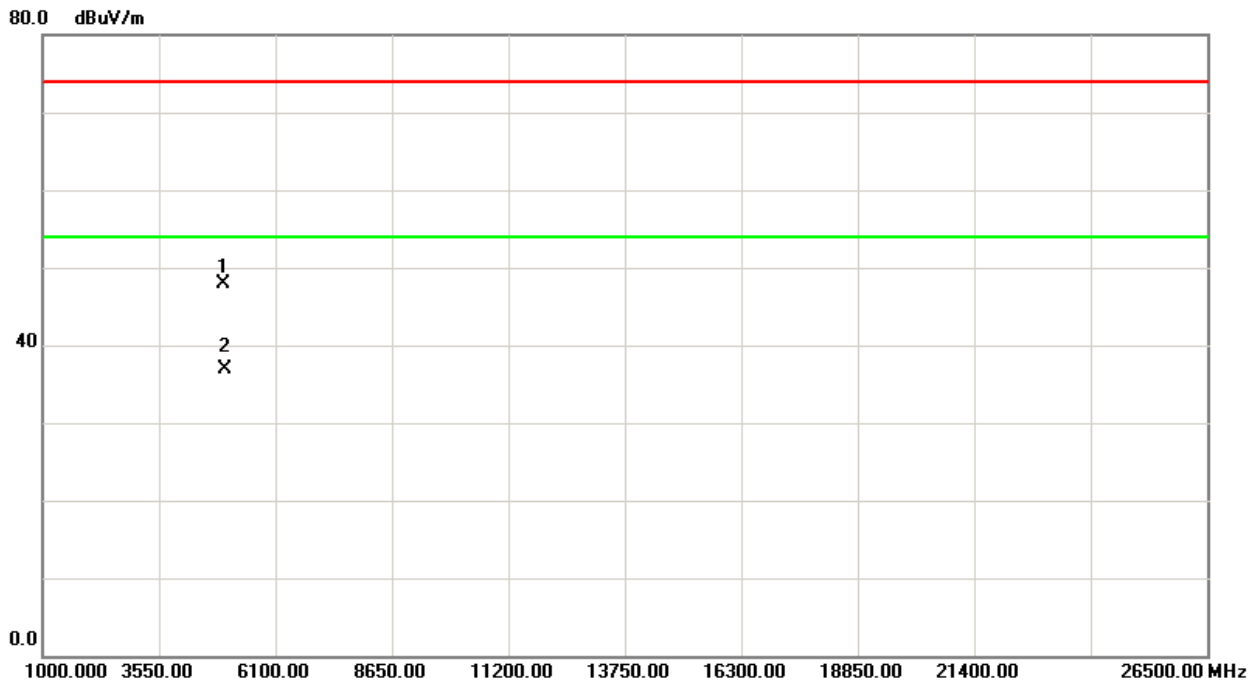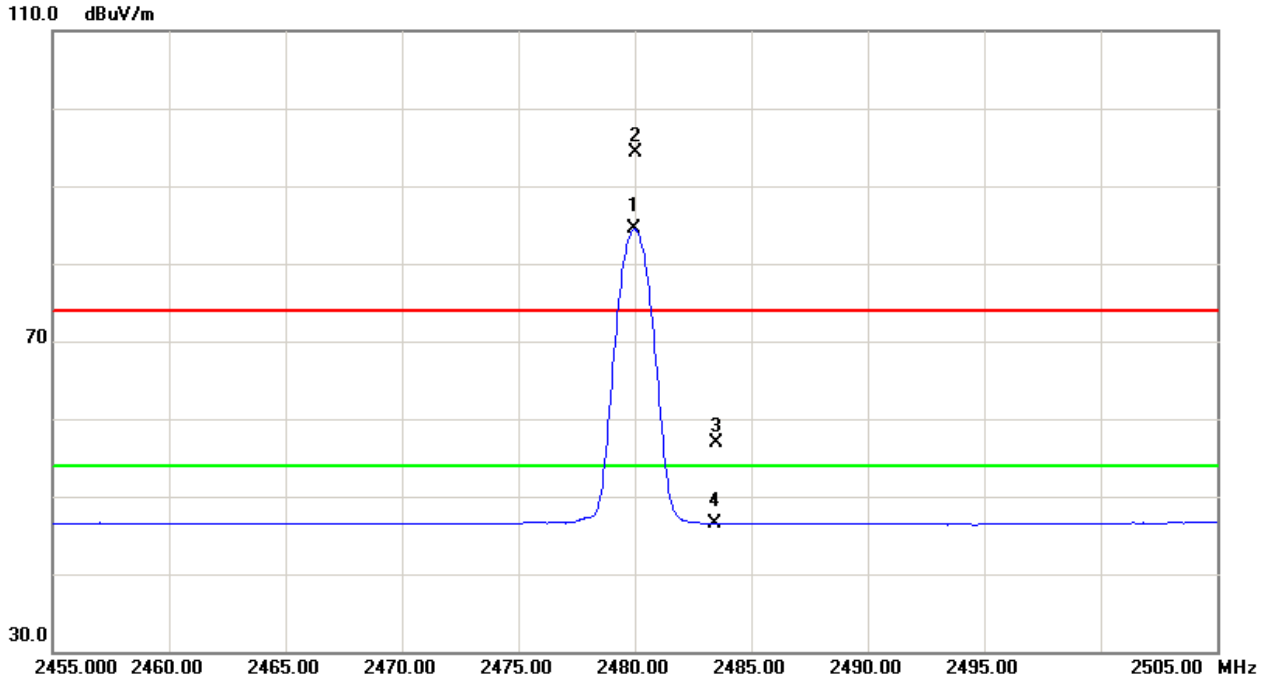



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2402MHz – CH 00-3Mbps		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	V	22.20	12.22	34.09	56.29	46.31	74.00	54.00	X/E
<b>2402.00</b>	<b>V</b>	<b>63.76</b>	<b>49.95</b>	<b>34.12</b>	<b>97.88</b>	<b>84.07</b>			<b>X/F</b>
4804.04	V	41.45	30.40	6.38	47.83	36.78	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH00(Above 1000 MHz, Vertical)

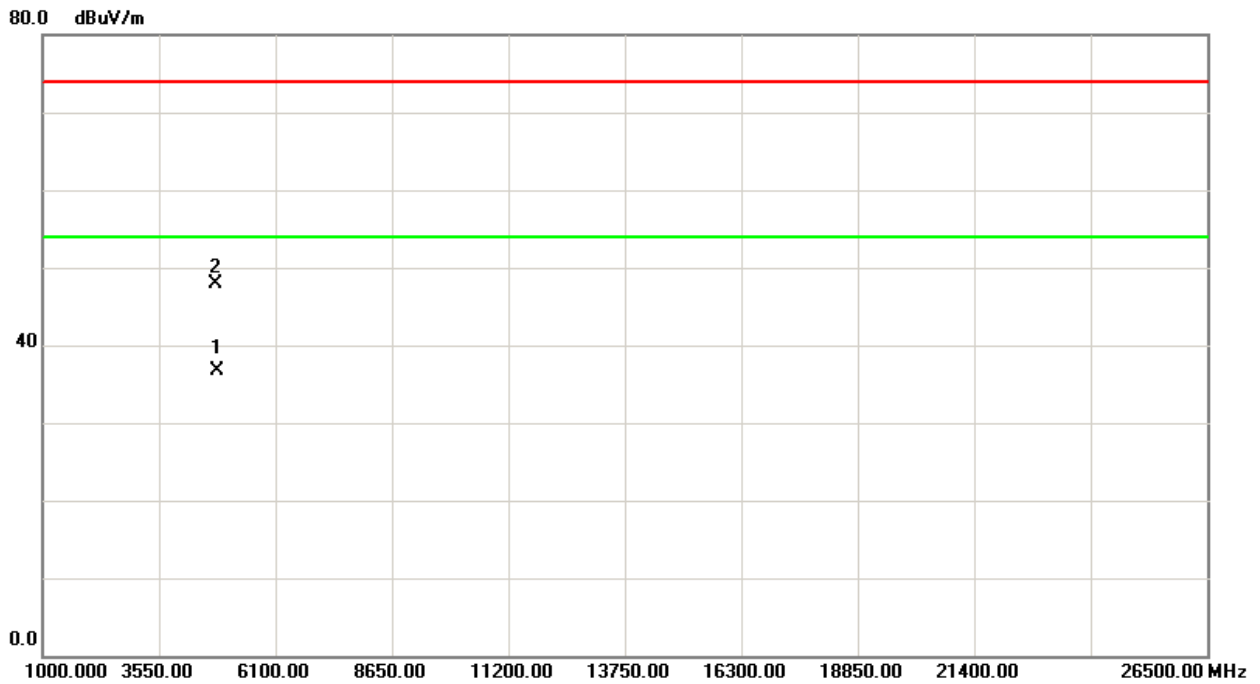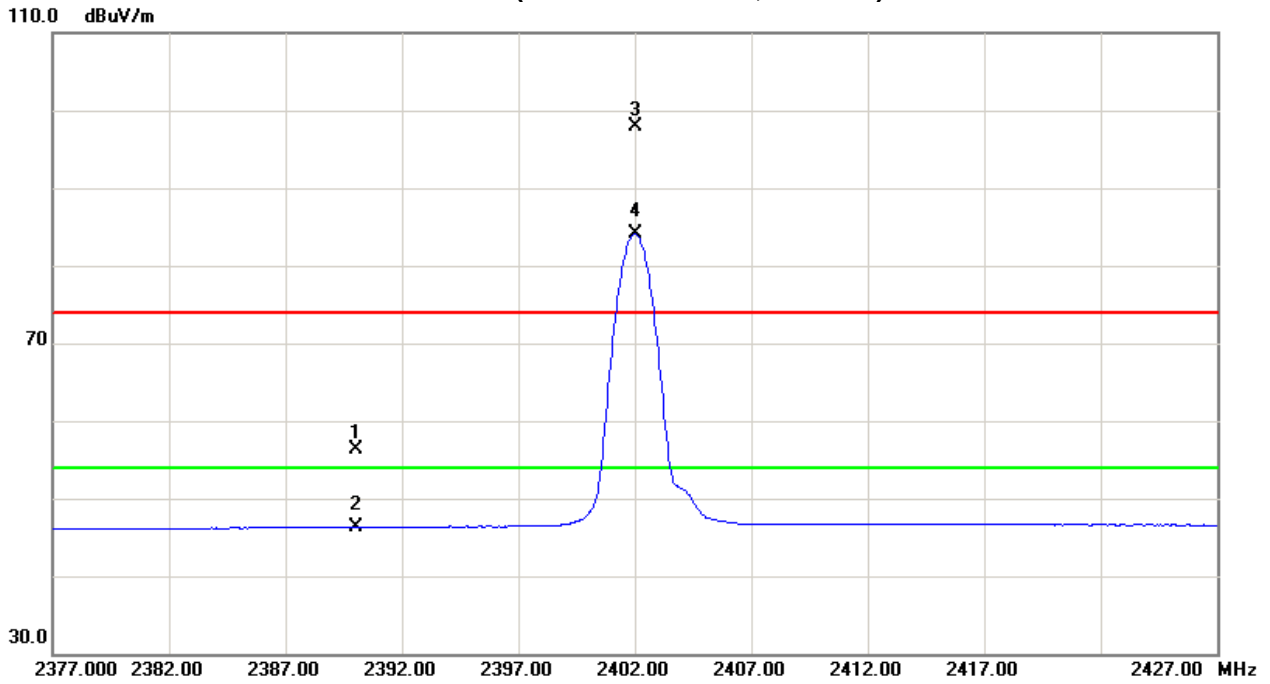



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2402MHz – CH 00-3Mbps		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
2390.00	H	20.82	12.16	34.09	54.91	46.25	74.00	54.00	X/E
<b>2402.15</b>	<b>H</b>	<b>61.57</b>	<b>50.77</b>	<b>34.12</b>	<b>95.69</b>	<b>84.89</b>			<b>X/F</b>
4804.08	H	41.04	29.87	6.38	47.42	36.25	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH00(Above 1000 MHz, Horizontal)

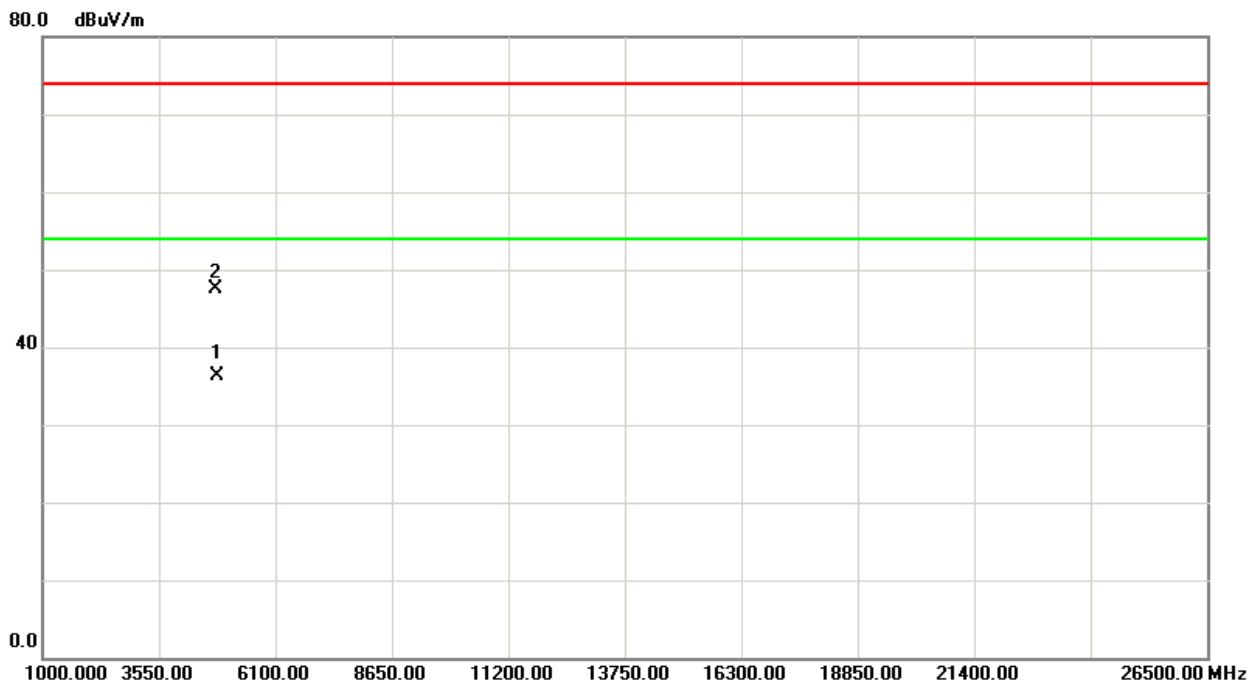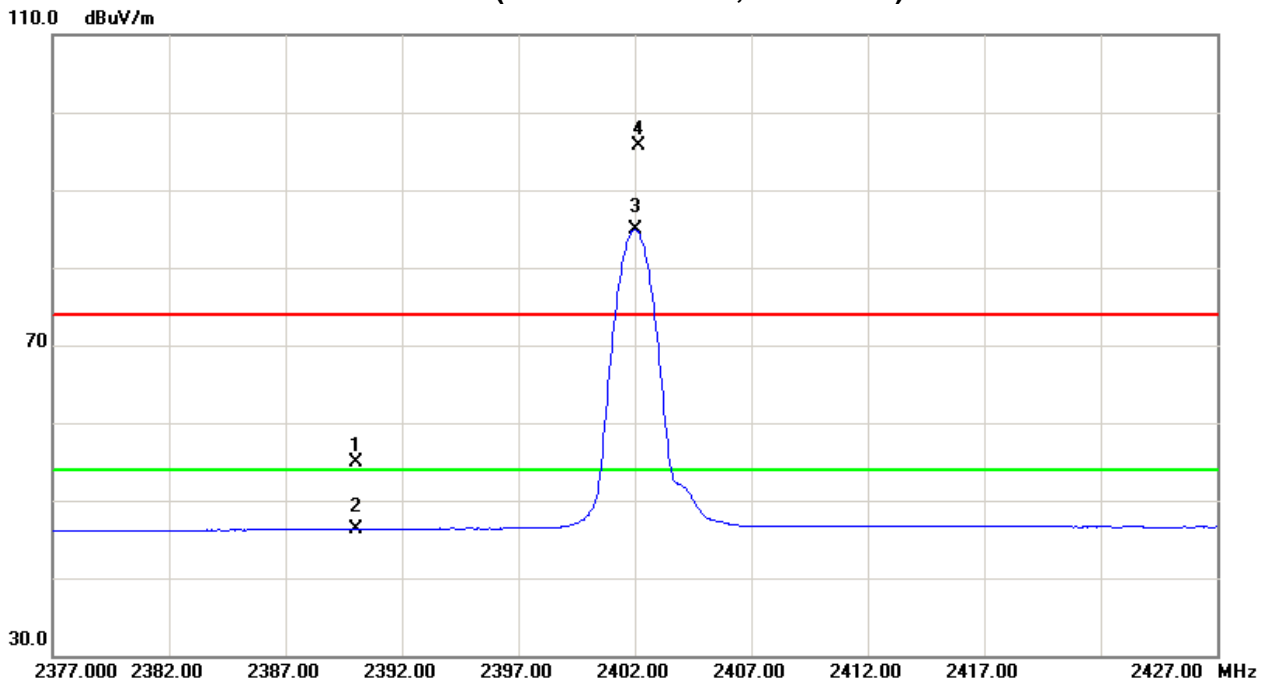



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2441MHz –CH39-3Mbps		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>2440.95</b>	<b>V</b>	<b>64.93</b>	<b>56.51</b>	<b>34.25</b>	<b>99.18</b>	<b>90.76</b>			<b>X/F</b>
4882.09	V	41.38	30.29	6.61	47.99	36.90	74.00	54.00	X/H



Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna





TX CH39 (Above 1000 MHz, Vertical)

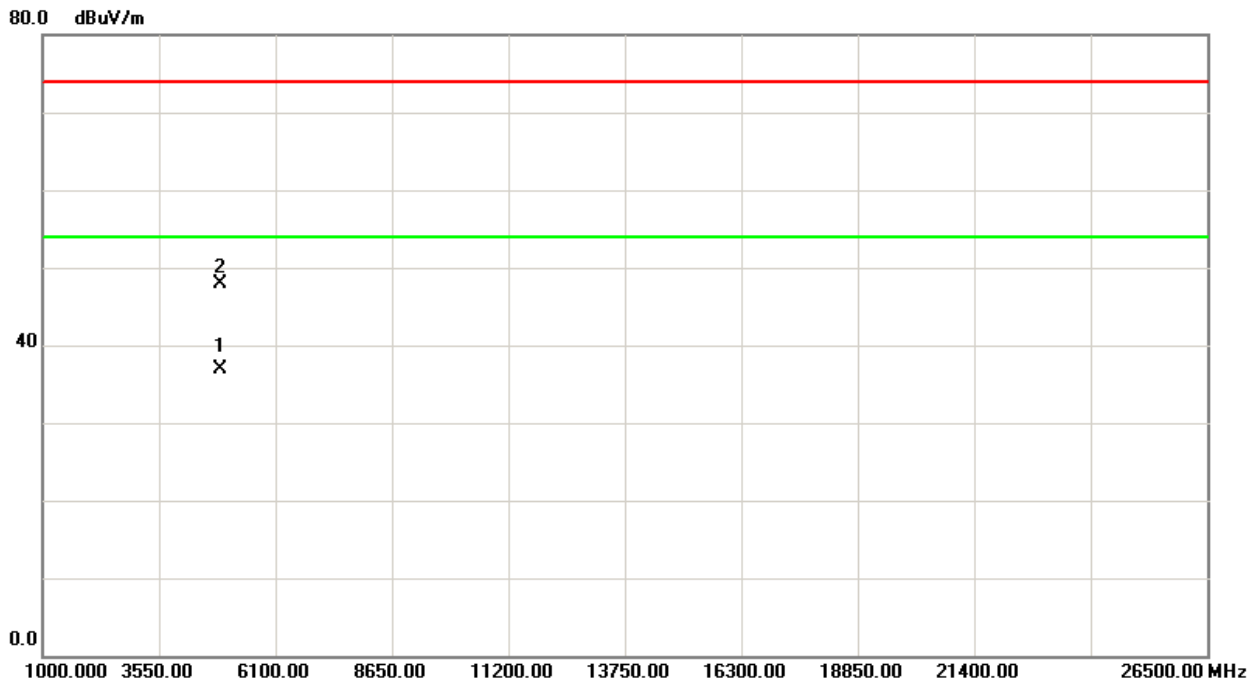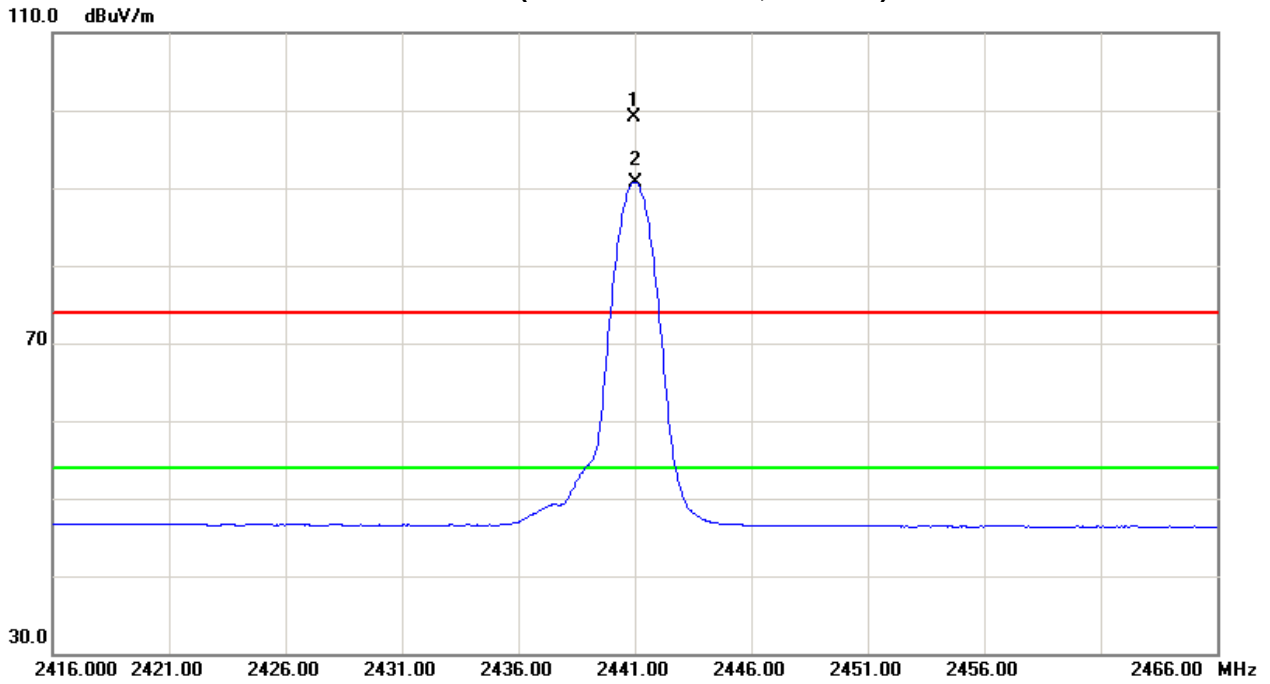



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2441MHz –CH39-3Mbps		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
<b>2440.85</b>	<b>H</b>	<b>59.48</b>	<b>48.65</b>	<b>34.25</b>	<b>93.73</b>	<b>82.90</b>			<b>X/F</b>
4882.02	H	29.68	41.12	6.61	36.29	47.73	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH39 (Above 1000 MHz, Horizontal)

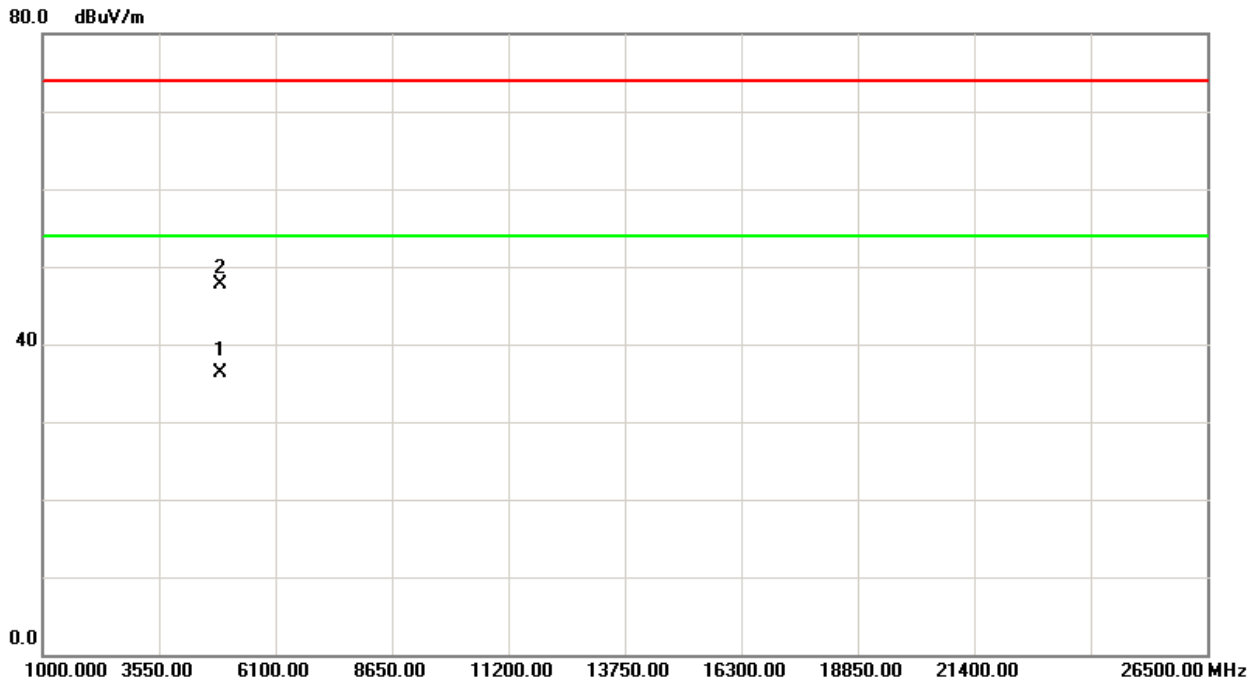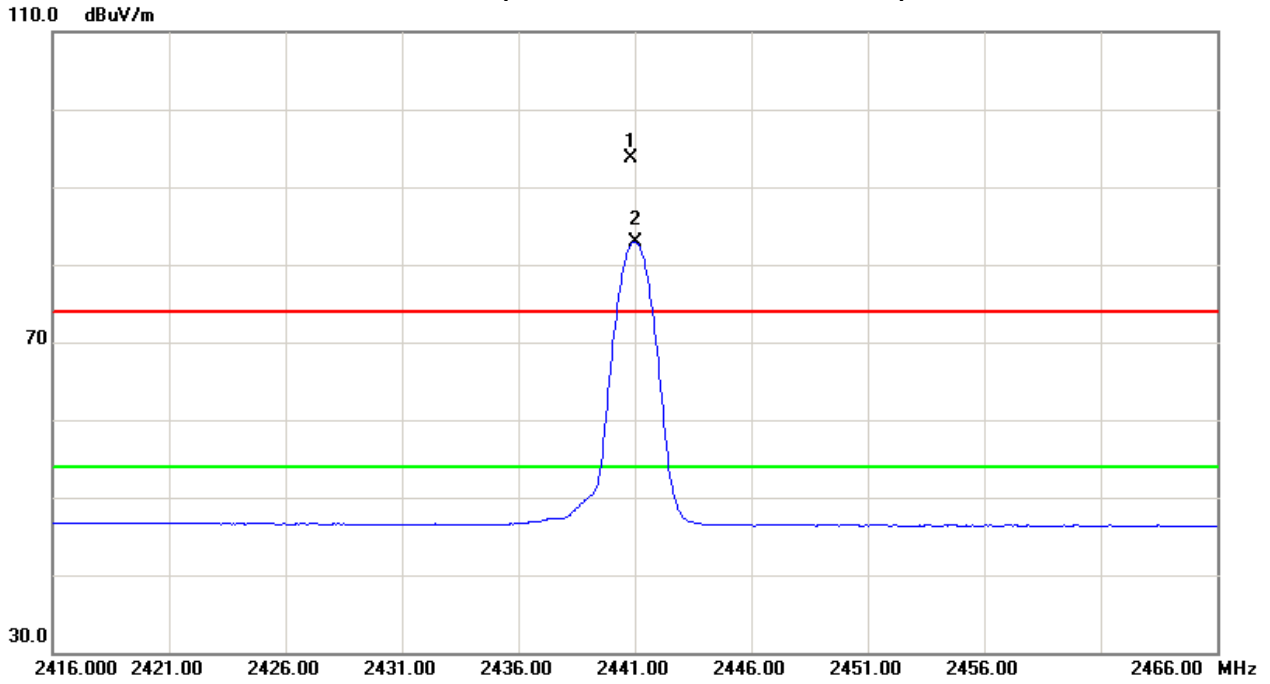



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2480MHz –CH78-3Mbps		



Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>2480.00</b>	<b>V</b>	<b>63.33</b>	<b>54.31</b>	<b>34.36</b>	<b>97.69</b>	<b>88.67</b>			<b>X/F</b>
2483.50	V	21.35	12.20	34.37	55.72	46.57	74.00	54.00	X/E
4960.07	V	41.19	30.05	6.83	48.02	36.88	74.00	54.00	X/H

Remark:

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH78 (Above 1000 MHz, Vertical)

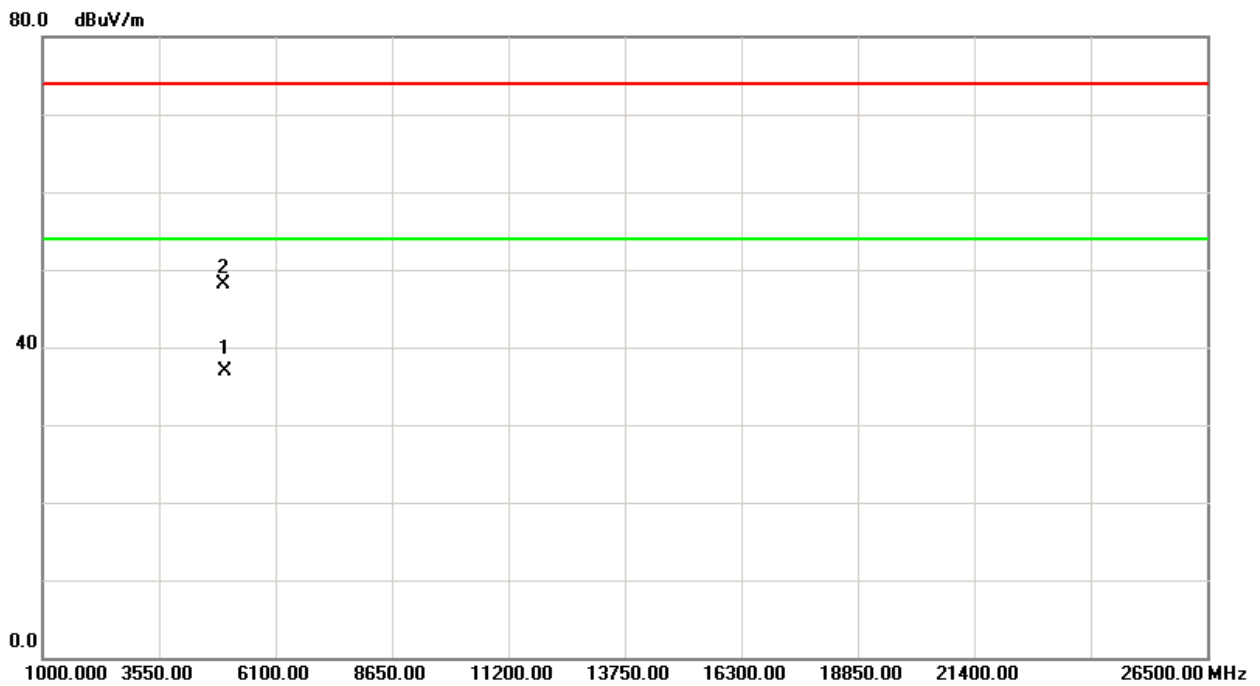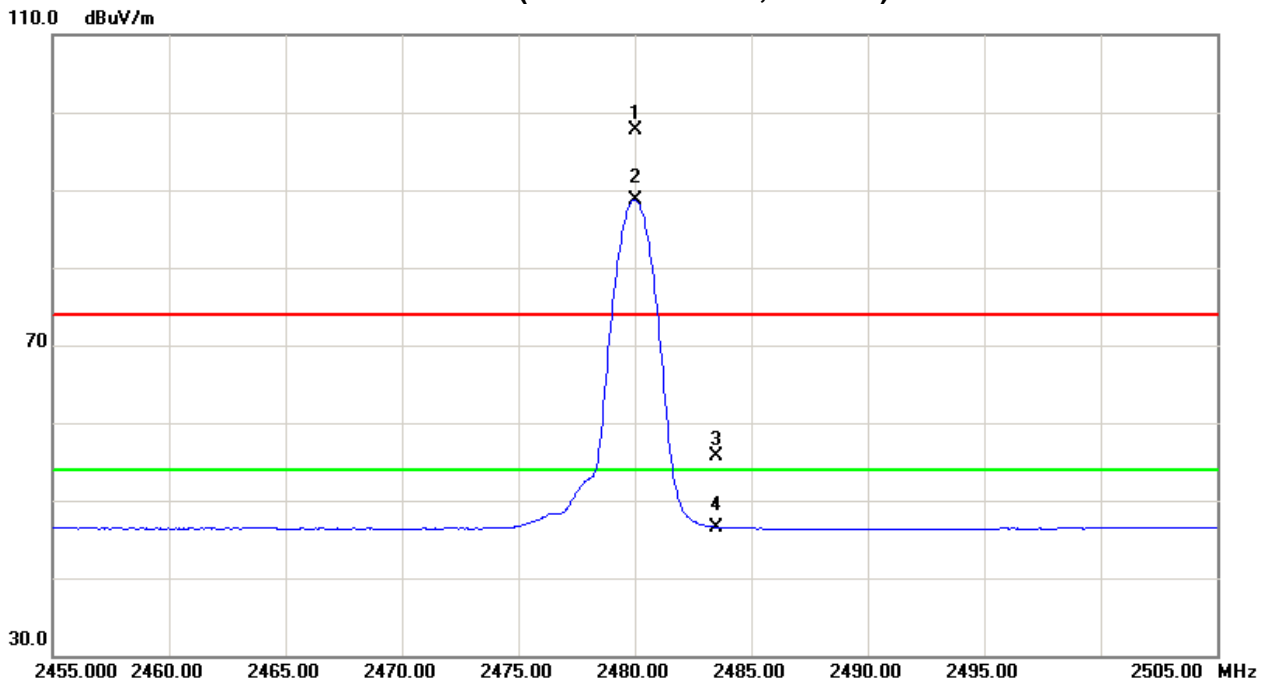



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	TX 2480MHz –CH78-3Mbps		



Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		Note
		Peak	AV		Peak	AV	Peak	AV	
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
<b>2480.00</b>	<b>H</b>	<b>59.35</b>	<b>48.53</b>	<b>34.36</b>	<b>93.71</b>	<b>82.89</b>			<b>X/F</b>
2483.50	H	21.72	12.02	34.37	56.09	46.39	74.00	54.00	X/E
4959.96	H	40.85	29.64	6.83	47.68	36.47	74.00	54.00	X/H

**Remark:**

- (1) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
- (2) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency;"H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (3) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (4) Data of measurement within this frequency range shown "\*" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (6) EUT Orthogonal Axis:  
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (7) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna



TX CH78 (Above 1000 MHz, Horizontal)

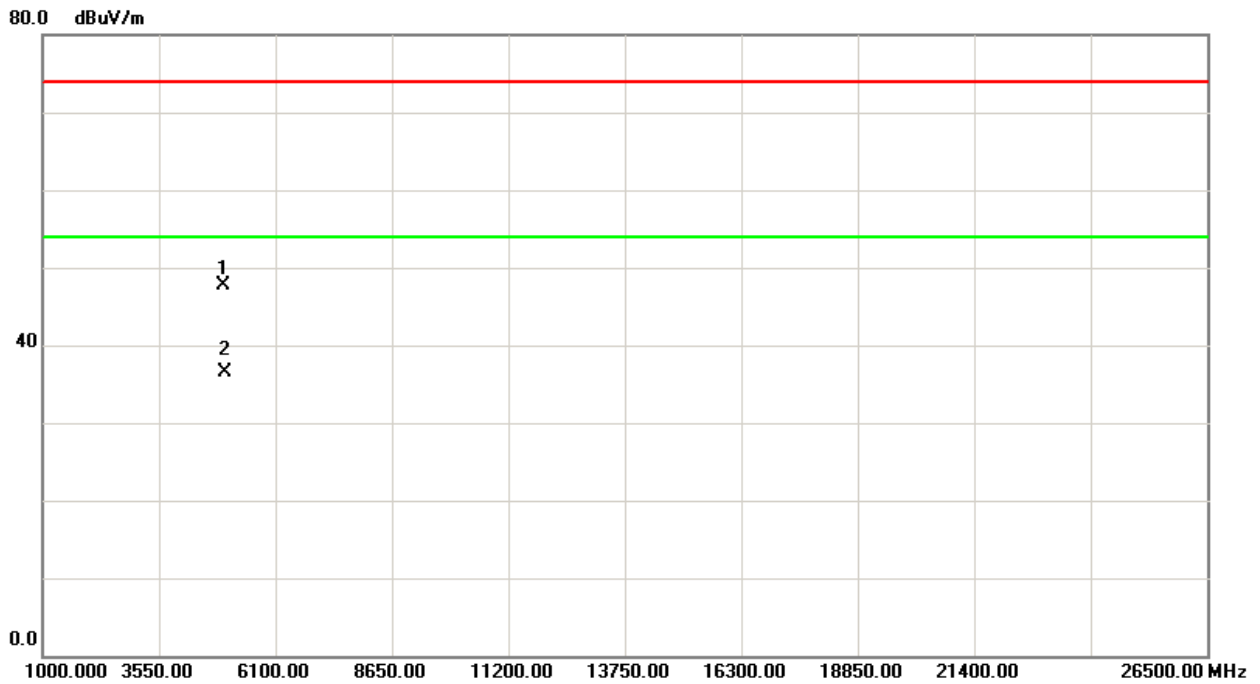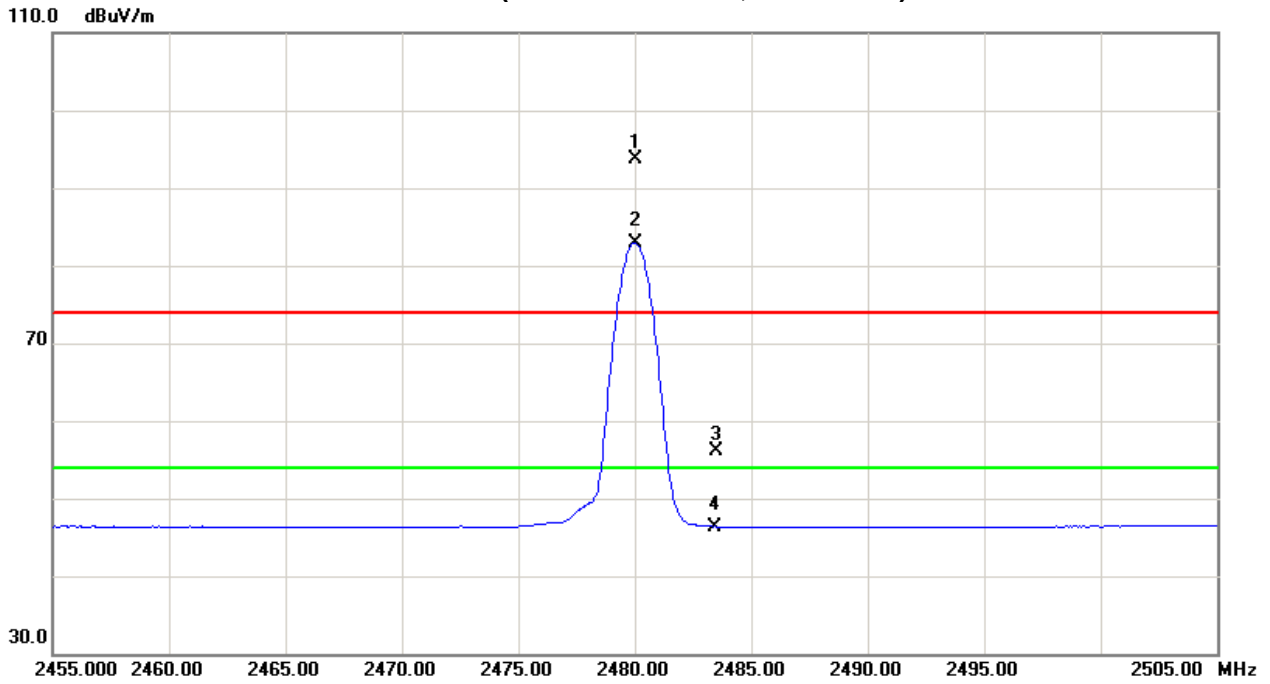



**5. NUMBER OF HOPPING CHANNEL**

**5.1 APPLIED PROCEDURES**

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210			
Section	Test Item	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-210, Issue 8, Annex 8, A8.1(d)	Number of Hopping Channel	2400-2483.5	PASS

**5.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RBW	100 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

**5.1.2 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=100KHz, VBW=100KHz, Sweep time = Auto.

**5.1.3 DEVIATION FROM STANDARD**

No deviation.

**5.1.4 TEST SETUP**



**5.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.






**5.1.6 TEST RESULTS**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Hopping Mode -1Mbps		


Number of Hopping Channel	79
---------------------------	----

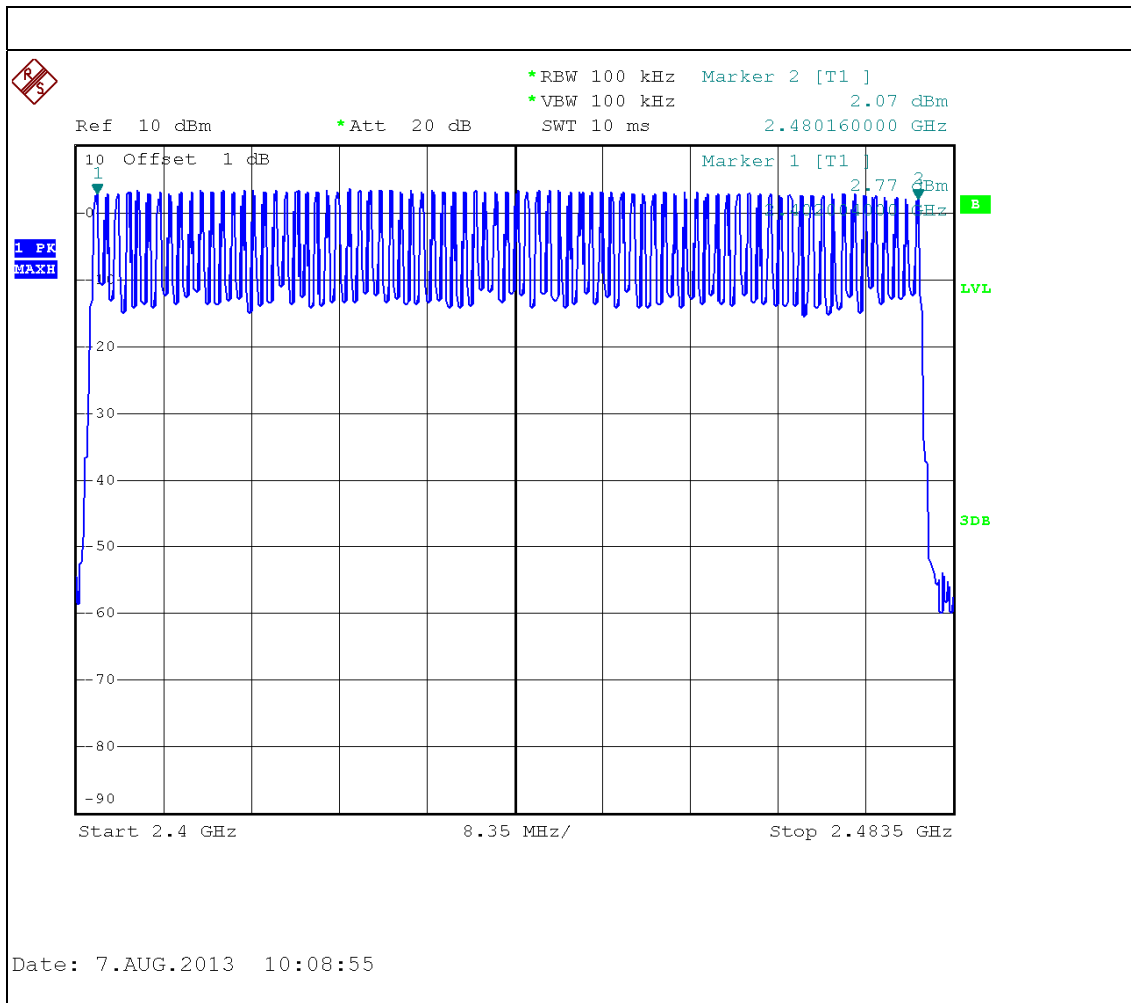



EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Hopping Mode -3Mbps		

Number of Hopping Channel	79
---------------------------	----

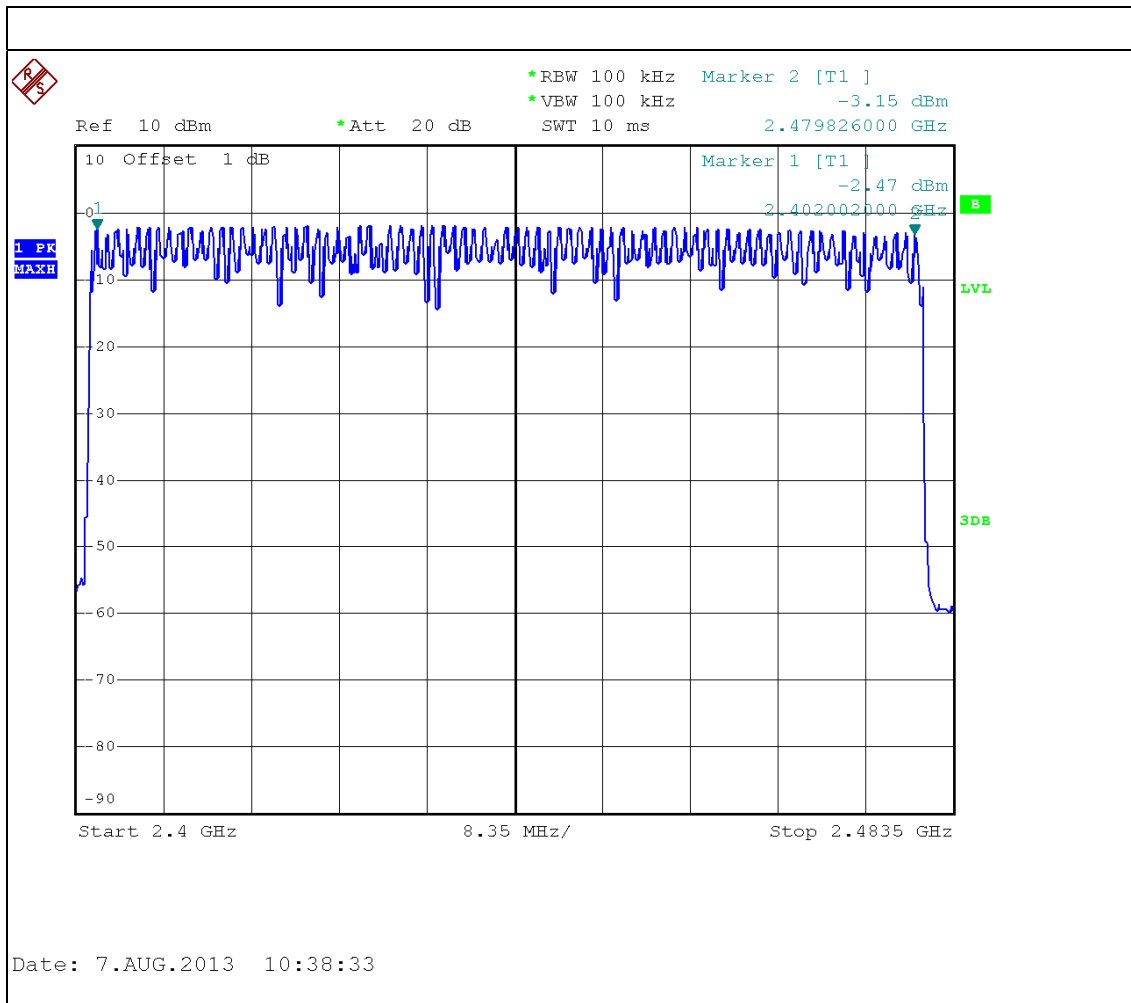



**6. AVERAGE TIME OF OCCUPANCY**

**6.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(1)(iii) RSS-210, Issue 8, Annex 8, A8.1(d)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

**6.1.1 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

**6.1.2 TEST PROCEDURE**


- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

**6.1.3 DEVIATION FROM STANDARD**

No deviation.



**6.1.4 TEST SETUP**

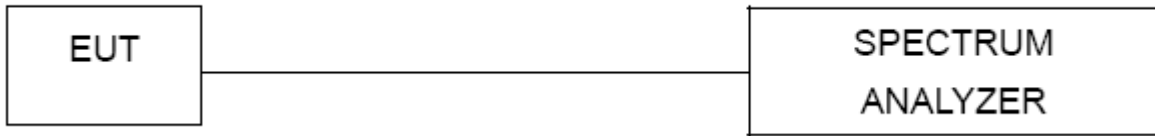

**6.1.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





**6.1.6 TEST RESULTS**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00-DH1/DH3/DH5 -1Mbps		

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)
DH5	2402	3.0000	0.3200	0.4000
DH3	2402	1.7200	0.2752	0.4000
DH1	2402	0.4400	0.1408	0.4000

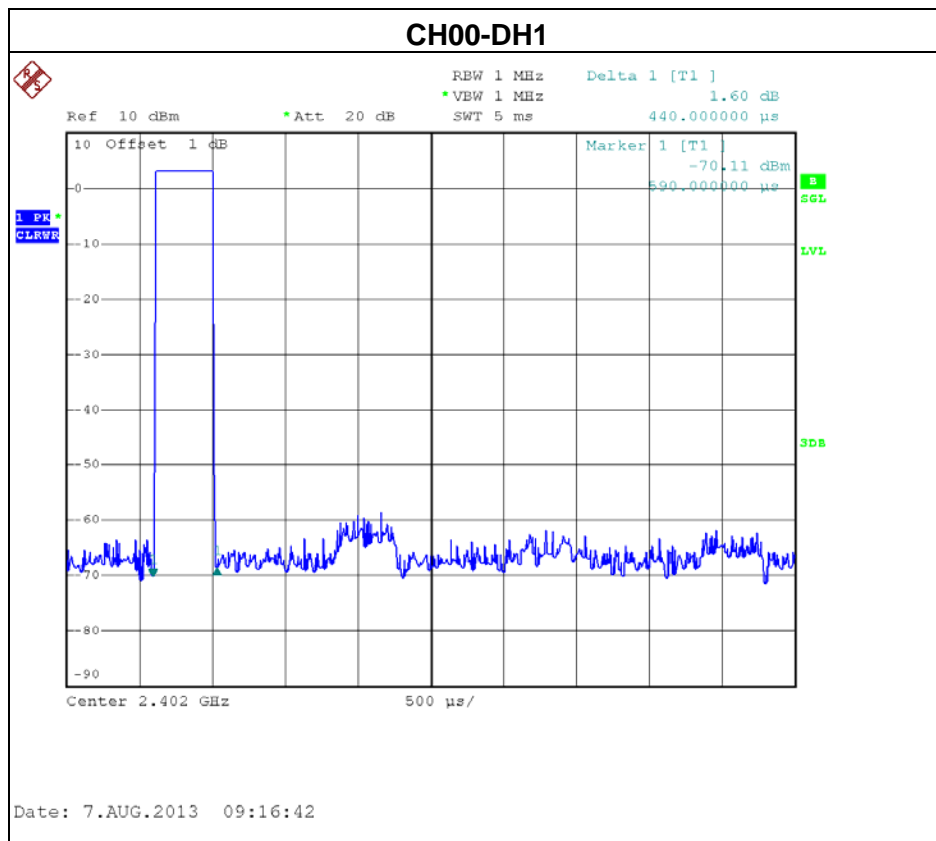


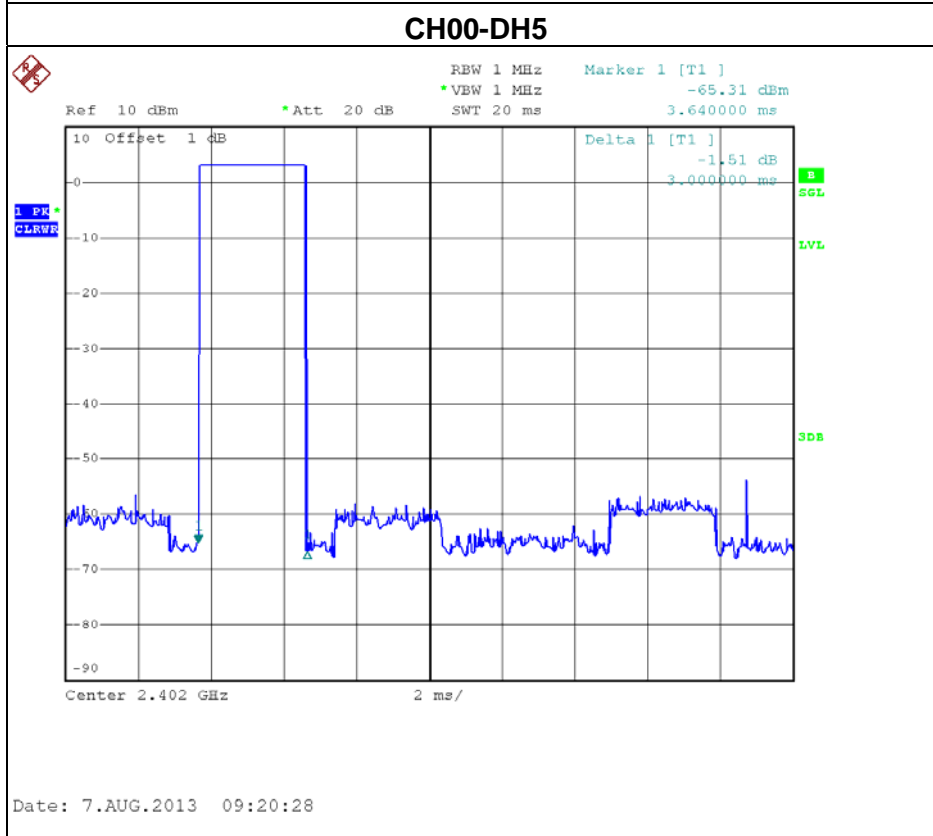
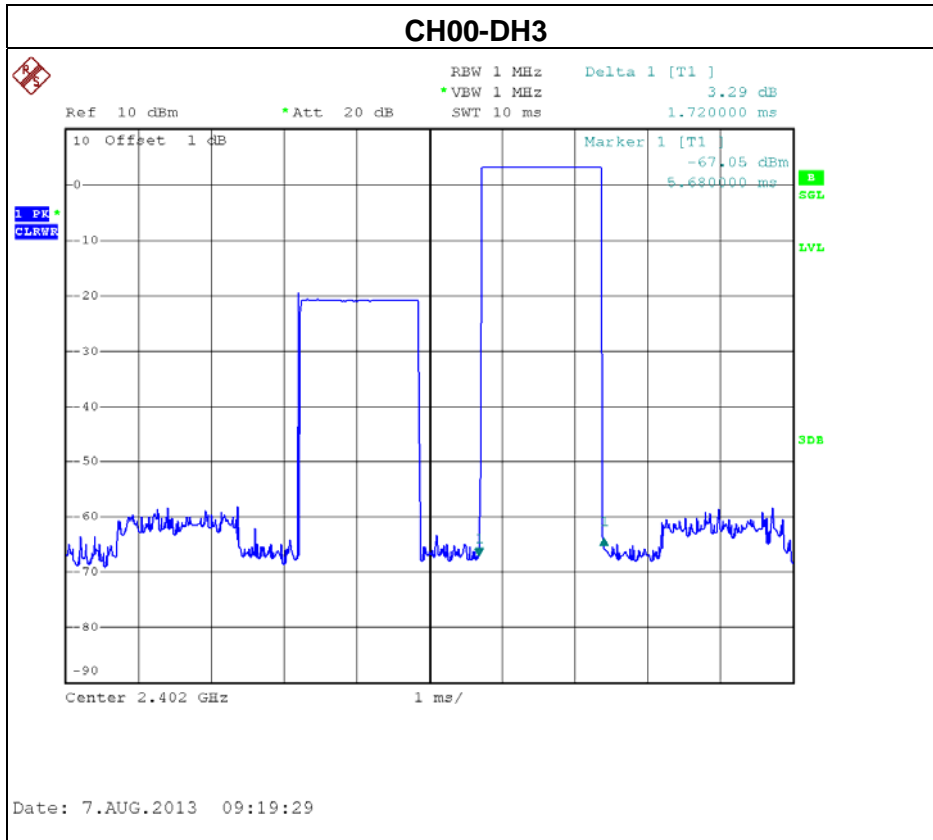




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH39 -DH1/DH3/DH5 -1Mbps		

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)
DH5	2441	3.0000	0.3200	0.4000
DH3	2441	1.7200	0.2752	0.4000
DH1	2441	0.4400	0.1408	0.4000

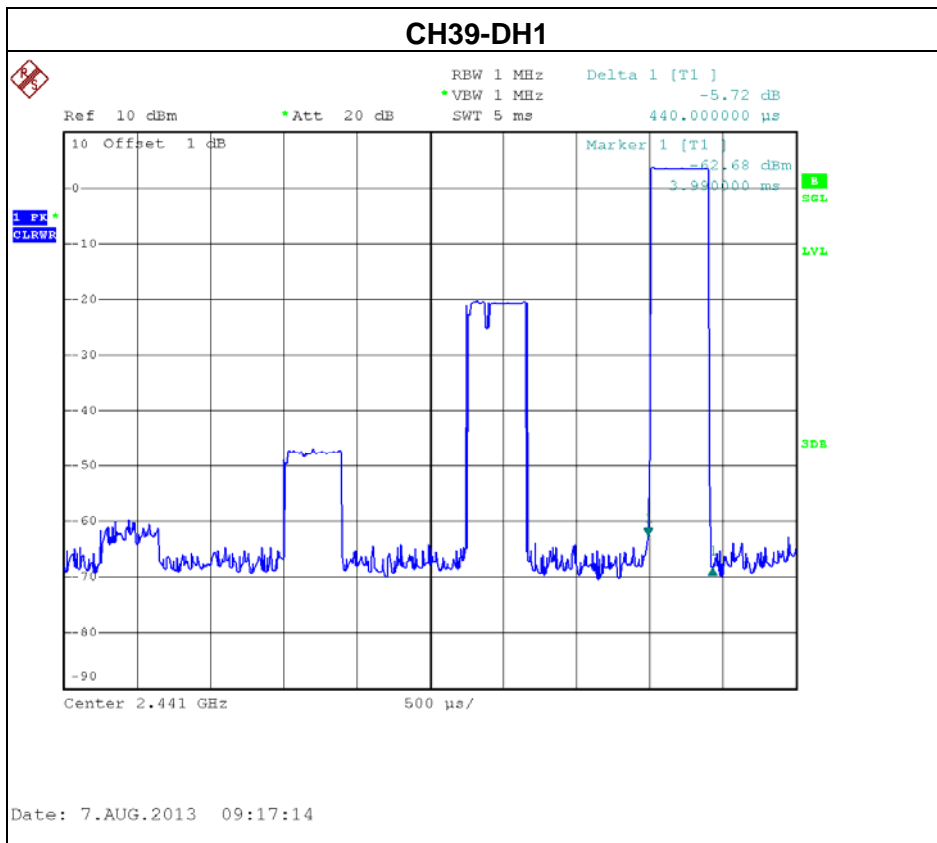

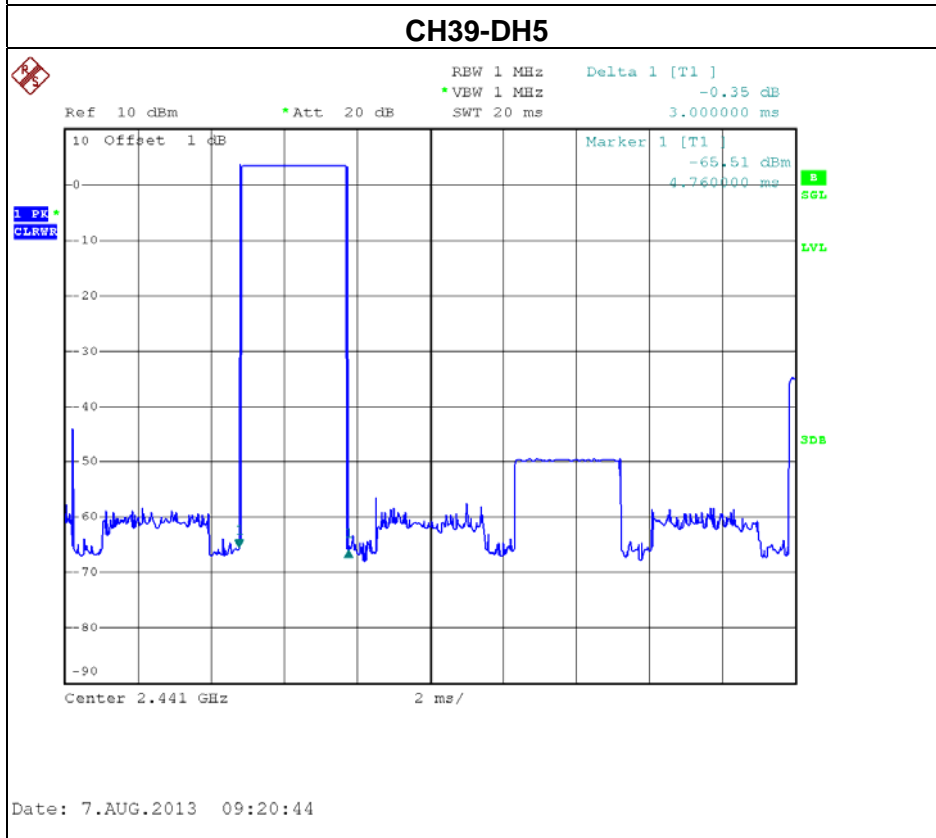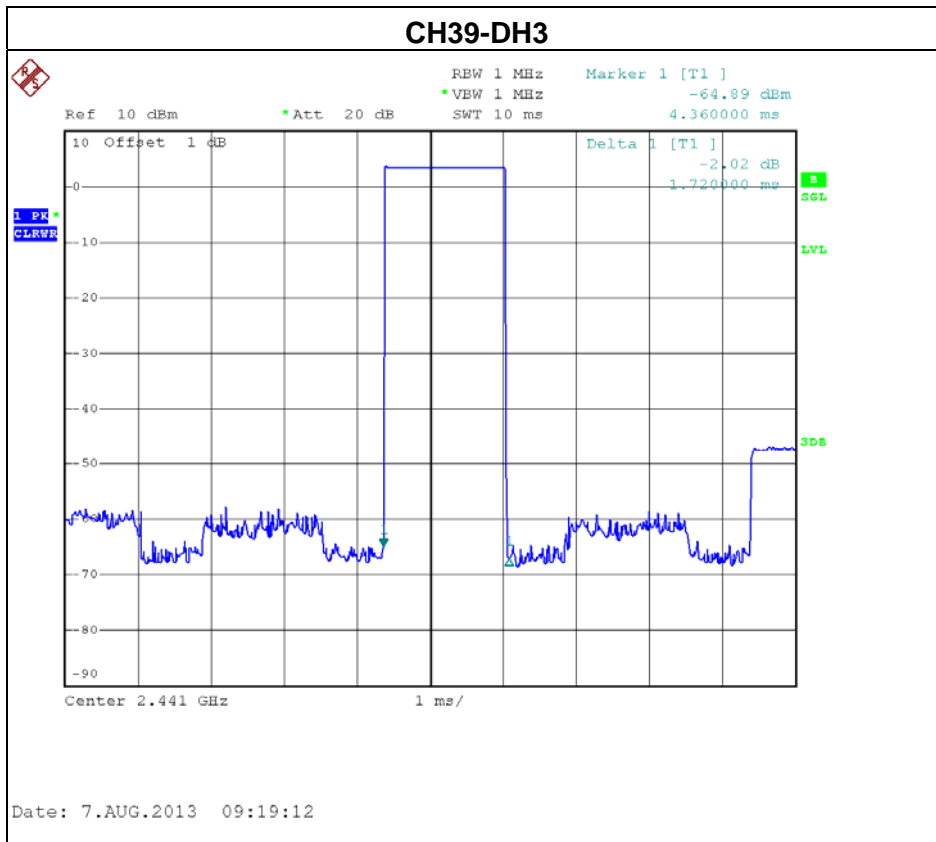






EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH78 -DH1/DH3/DH5-1Mbps		

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)
DH5	2480	3.0000	0.3200	0.4000
DH3	2480	1.7000	0.2720	0.4000
DH1	2480	0.4400	0.1408	0.4000

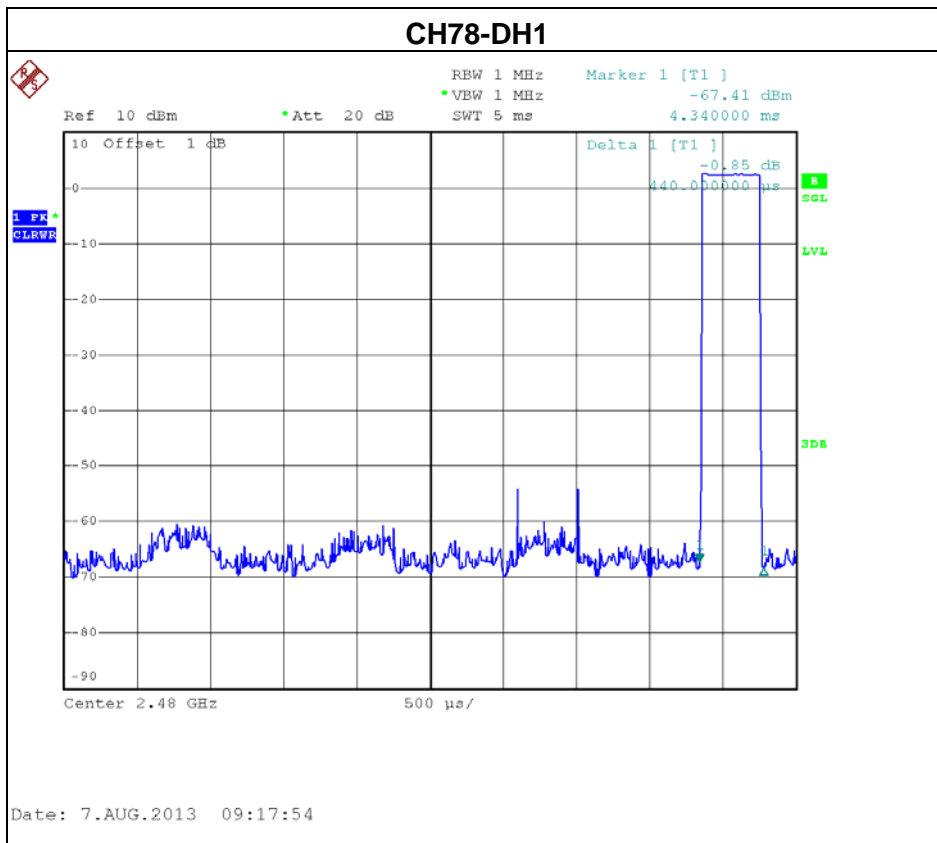








EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00-DH1/DH3/DH5-3Mbps		

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)
DH5	2402	3.0400	0.3243	0.4000
DH3	2402	1.7200	0.2752	0.4000
DH1	2402	0.4500	0.1440	0.4000

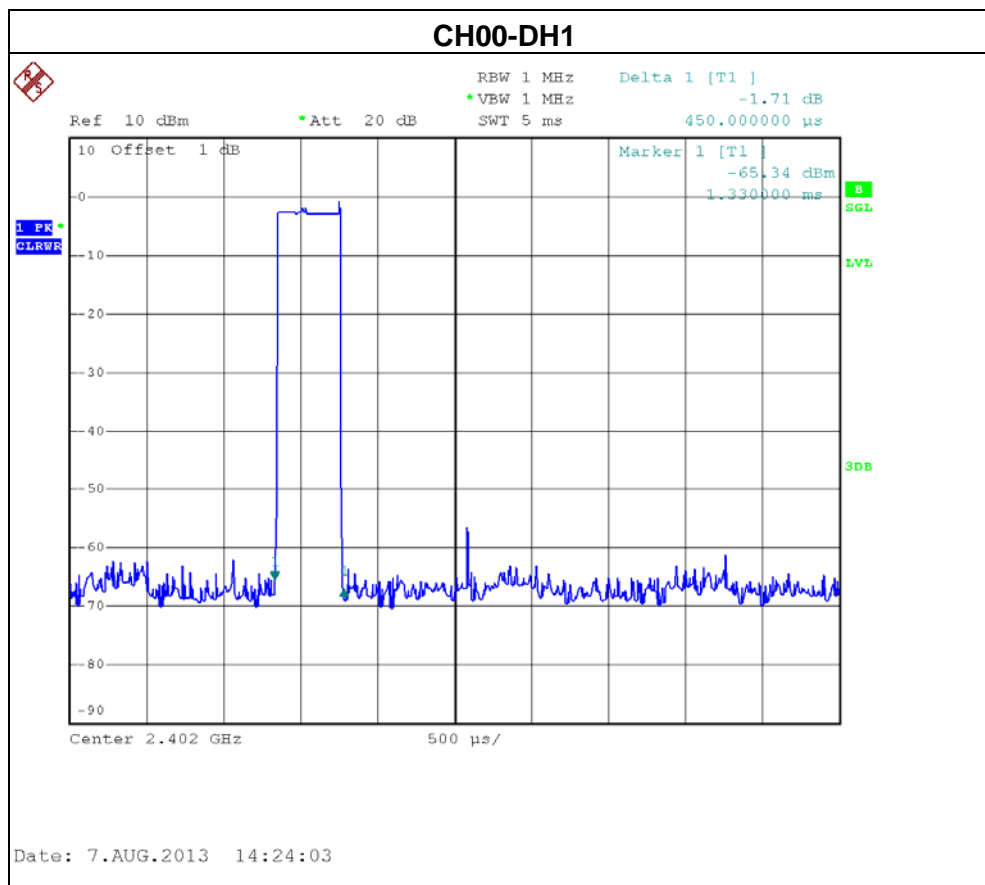


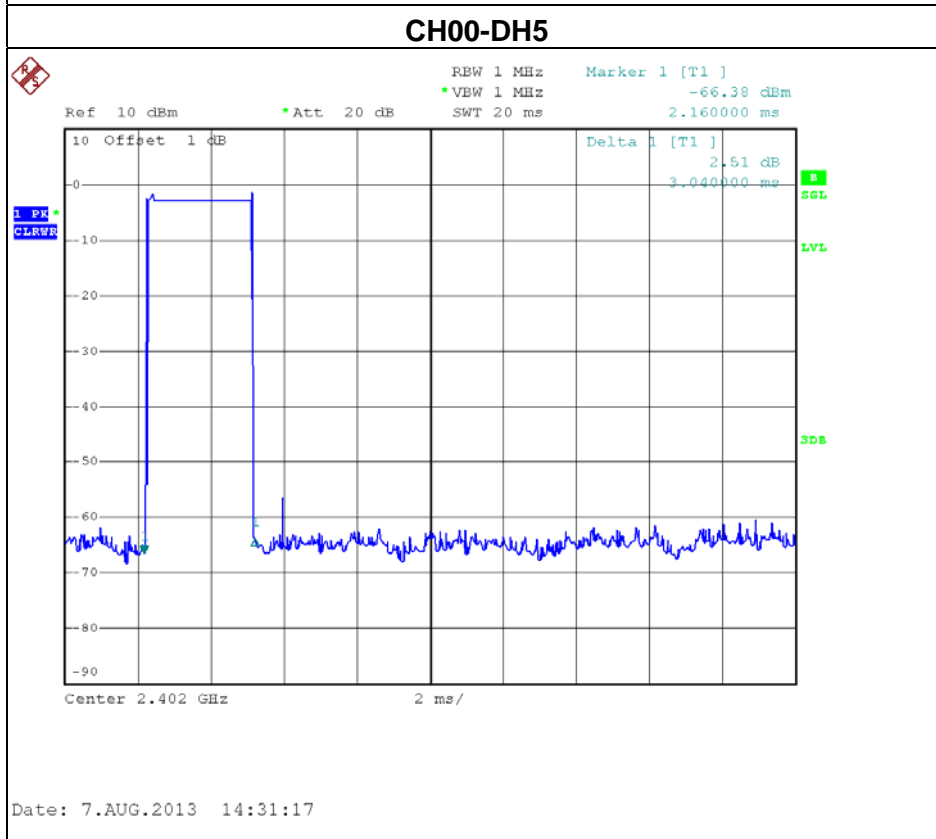
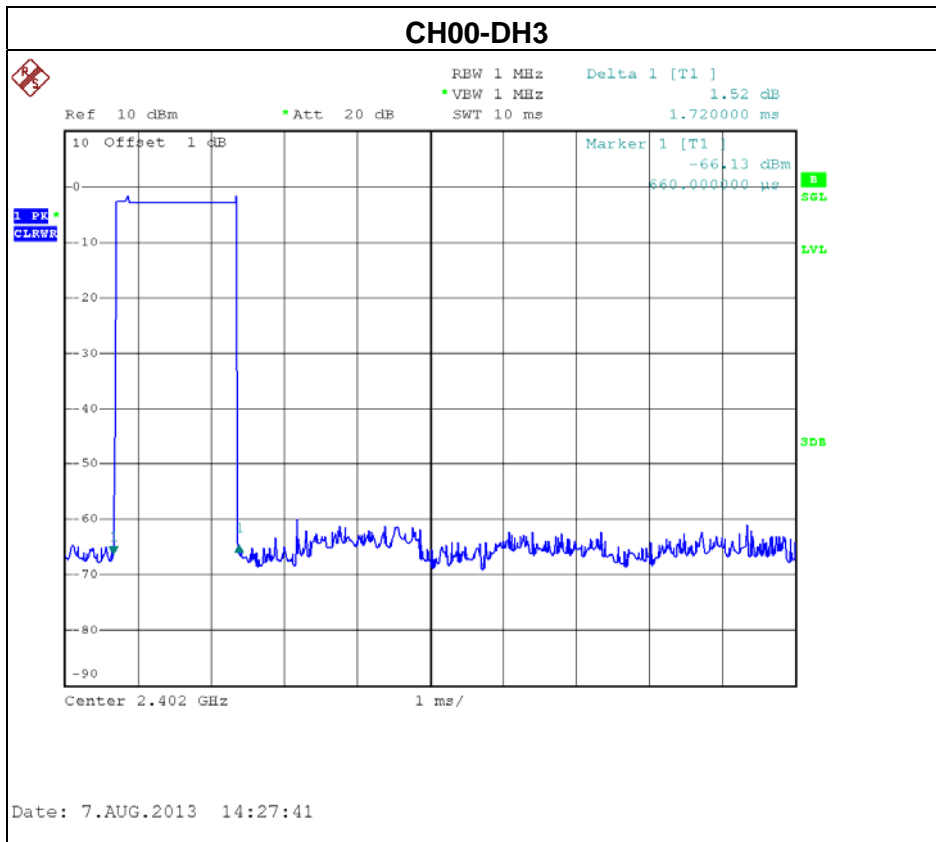






EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH39 -DH1/DH3/DH5-3Mbps		

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limit (s)
DH5	2441	3.0000	0.3200	0.4000
DH3	2441	1.7200	0.2752	0.4000
DH1	2441	0.4400	0.1408	0.4000

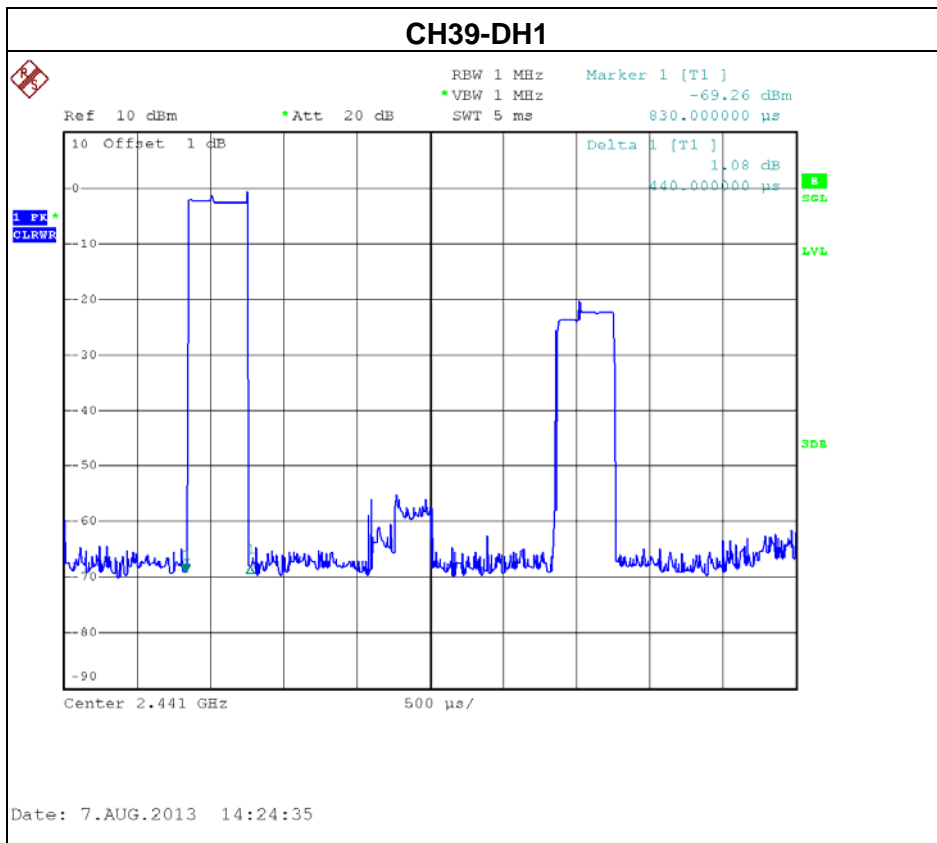

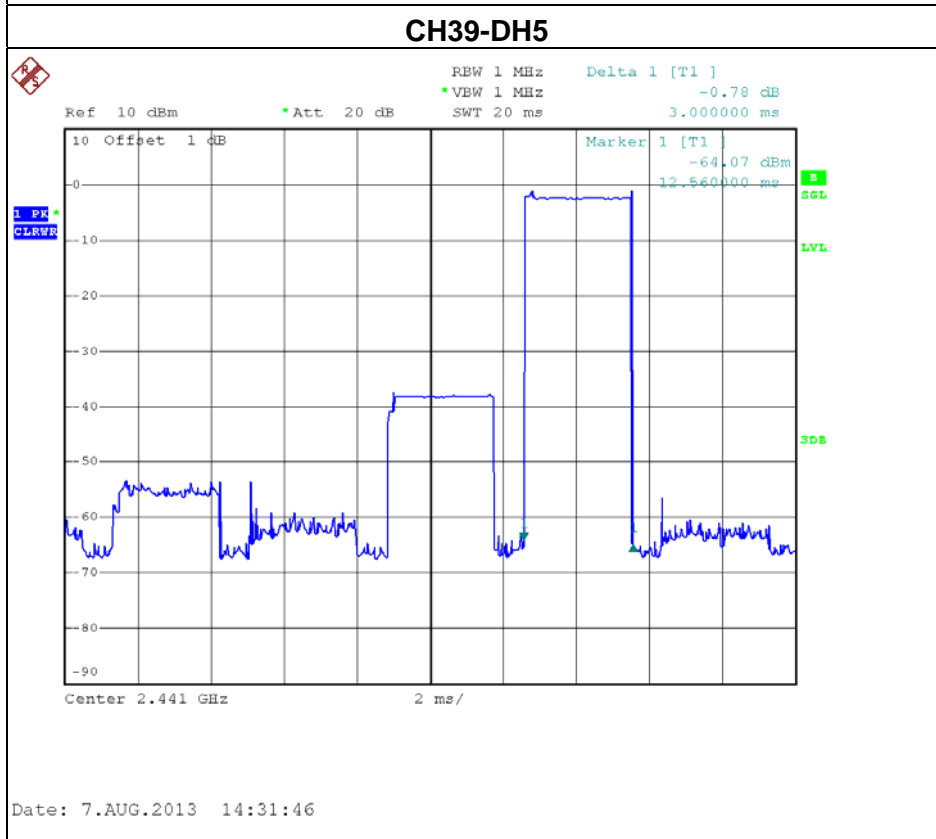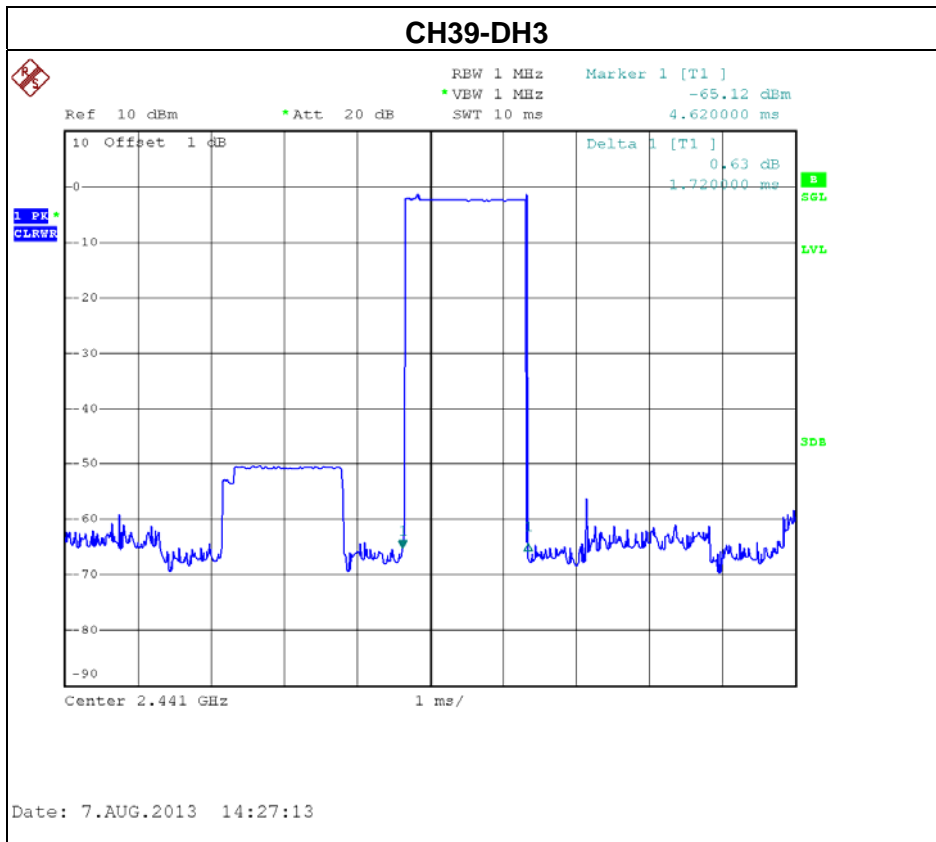



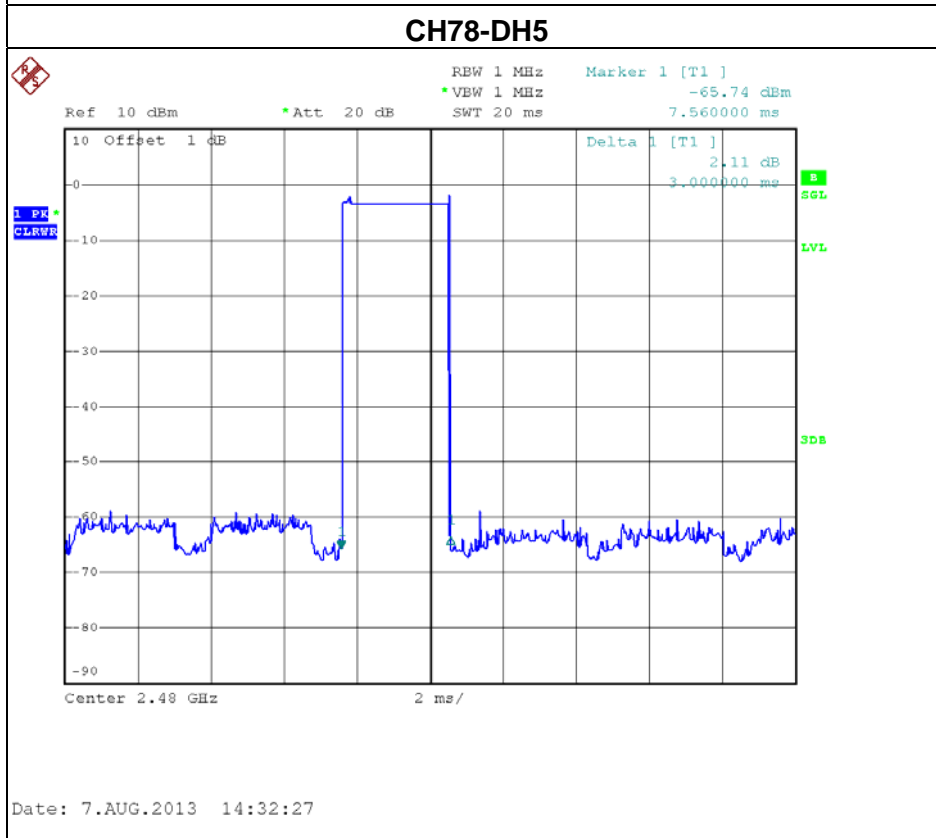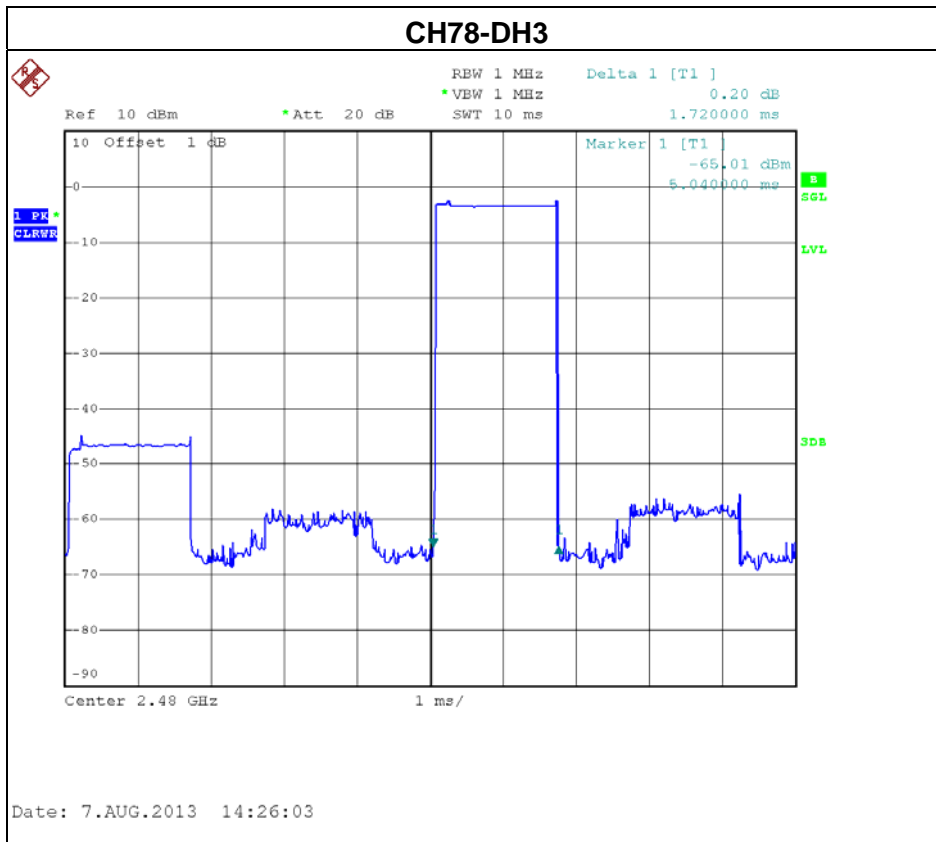



## 7. HOPPING CHANNEL SEPARATION MEASUREMENT

### 7.1 APPLIED PROCEDURES / LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 KHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

#### 7.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz
VBW	100 KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 7.1.2 TEST PROCEDURE

- a. The EUT must have its hopping function enabled
- b. Span = wide enough to capture the peaks of two adjacent channels  
 Resolution (or IF) Bandwidth (RBW)  $\geq$  1% of the span  
 Video (or Average) Bandwidth (VBW)  $\geq$  RBW  
 Sweep = Auto  
 Detector function = Peak  
 Trace = Max Hold

#### 7.1.3 DEVIATION FROM STANDARD

No deviation.

#### 7.1.4 TEST SETUP



Spectrum Analyzer

EUT

#### 7.1.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in hopping mode.






**7.1.6 TEST RESULTS**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Hopping on -CH00 / CH39 /CH78-1Mbps		



Frequency (MHz)	Ch. Separation (MHz)	2/3 of the 20 dB bandwidth (MHz)	Result
2402	1.002	0.693	<b>Complies</b>
2441	1.002	0.693	<b>Complies</b>
2480	1.002	0.693	<b>Complies</b>

**Ch. Separation Limit: >20dB bandwidth or >2/3 of the 20 dB bandwidth**

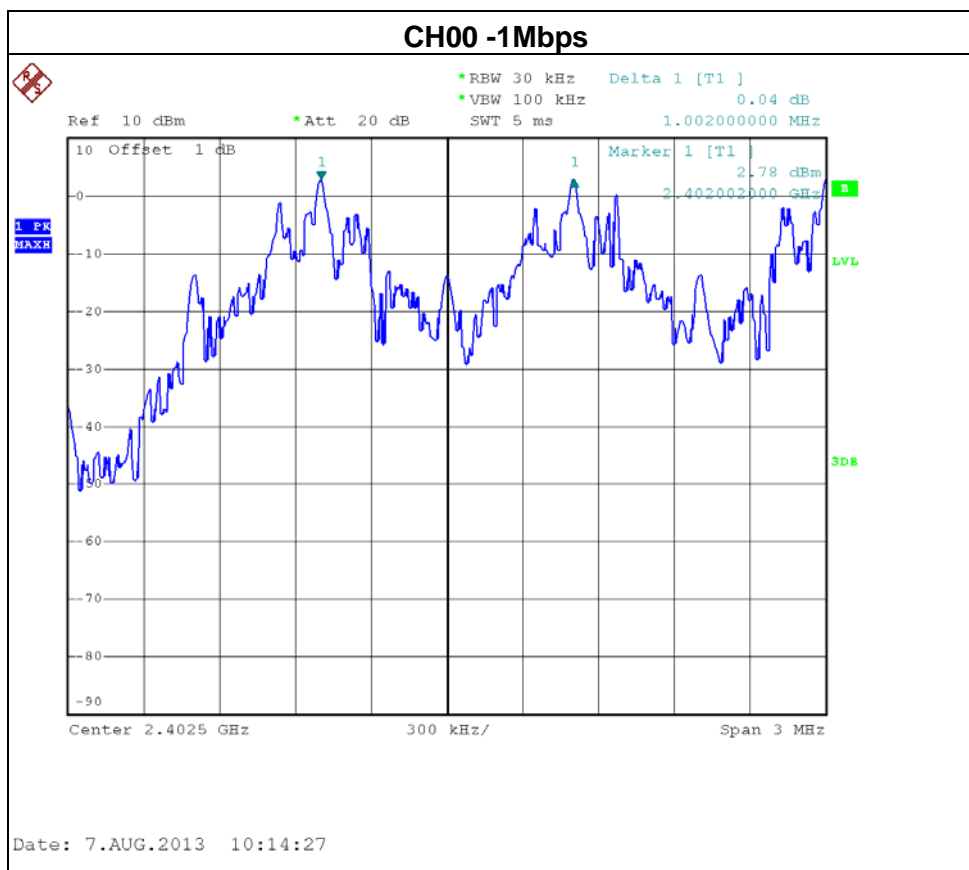

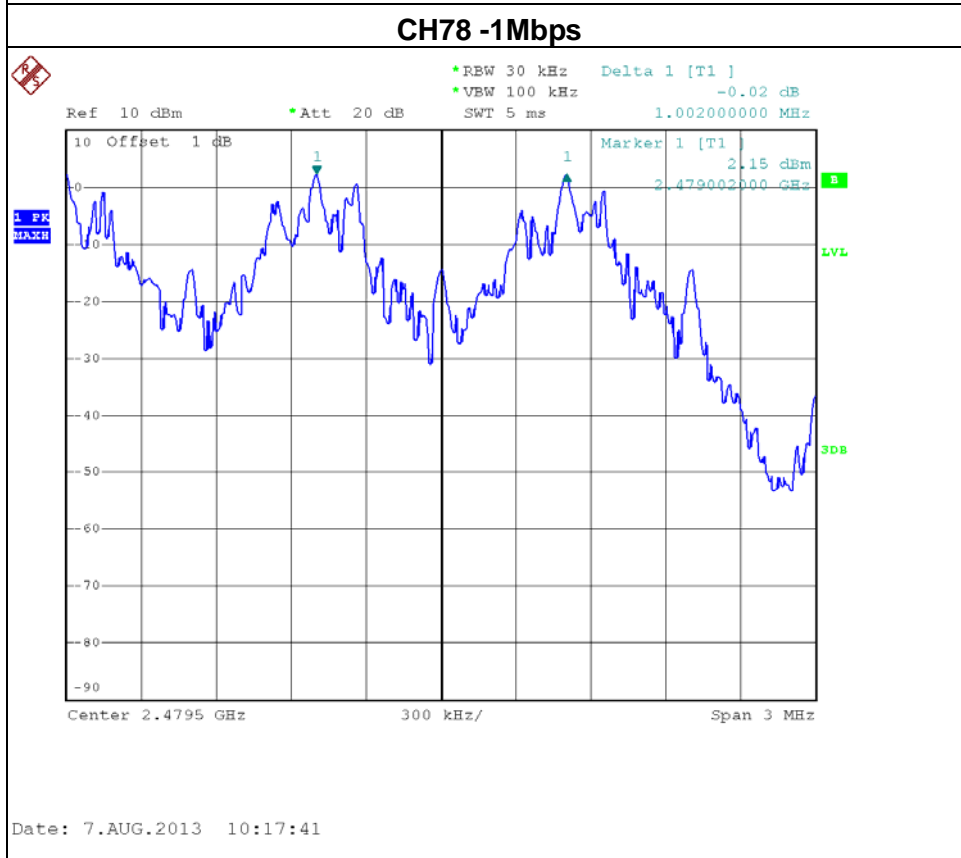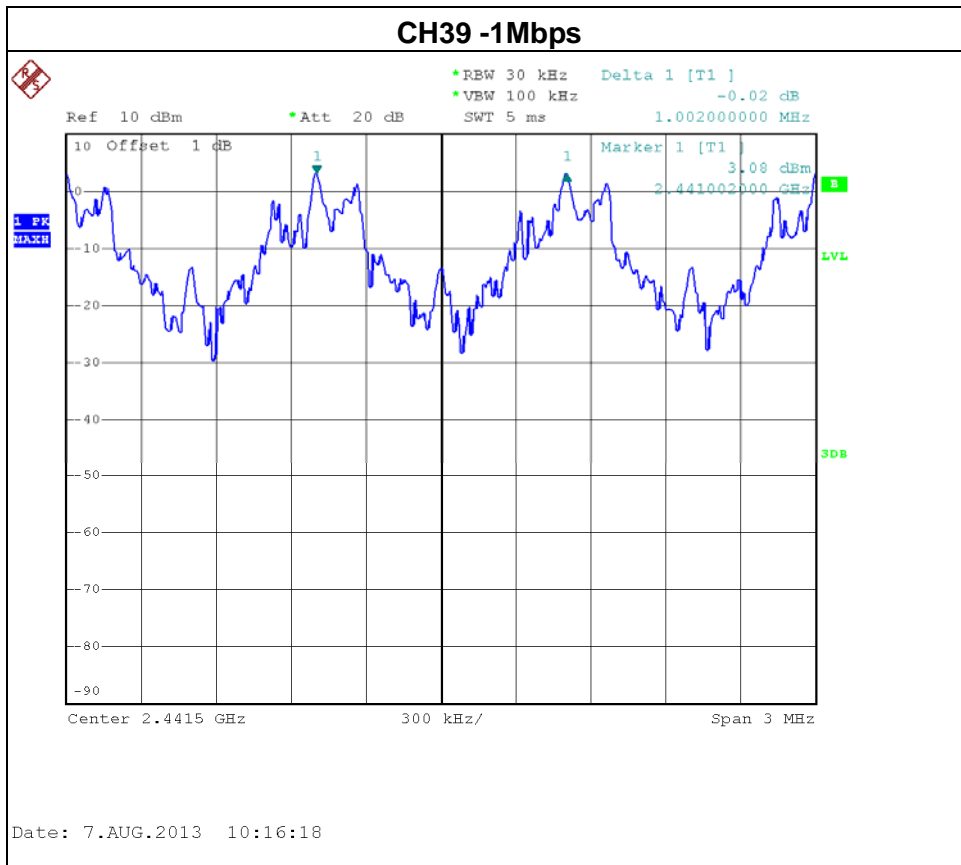



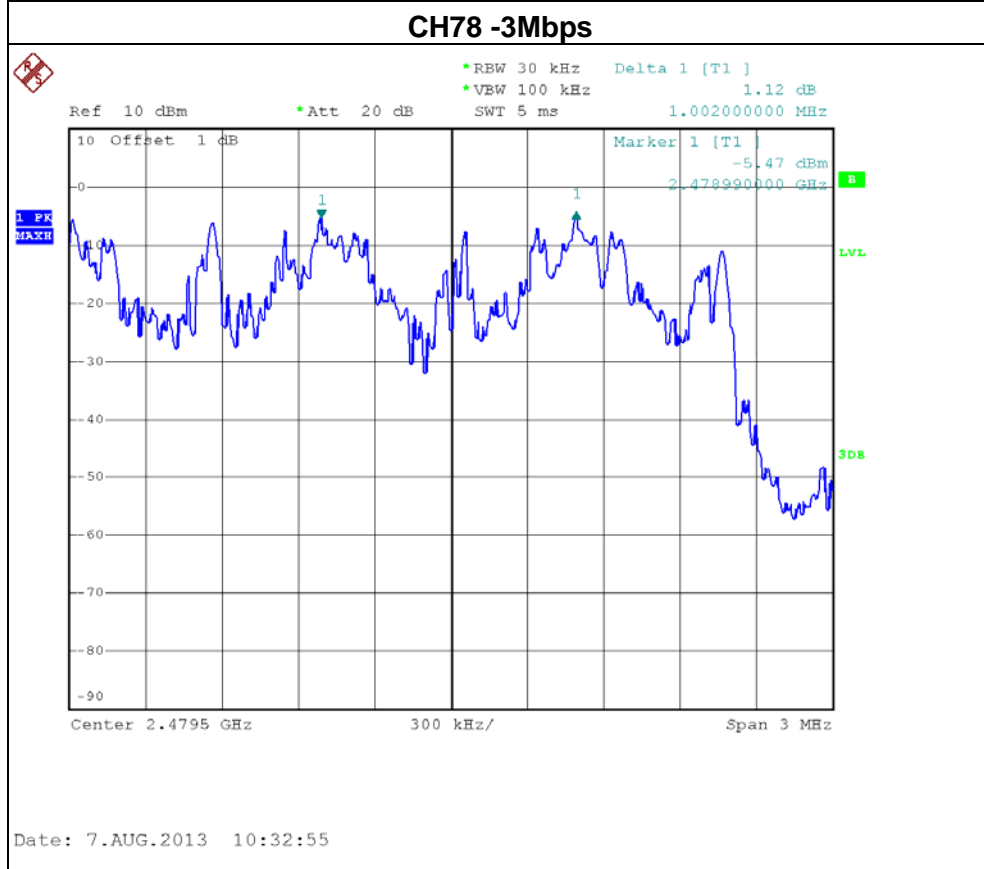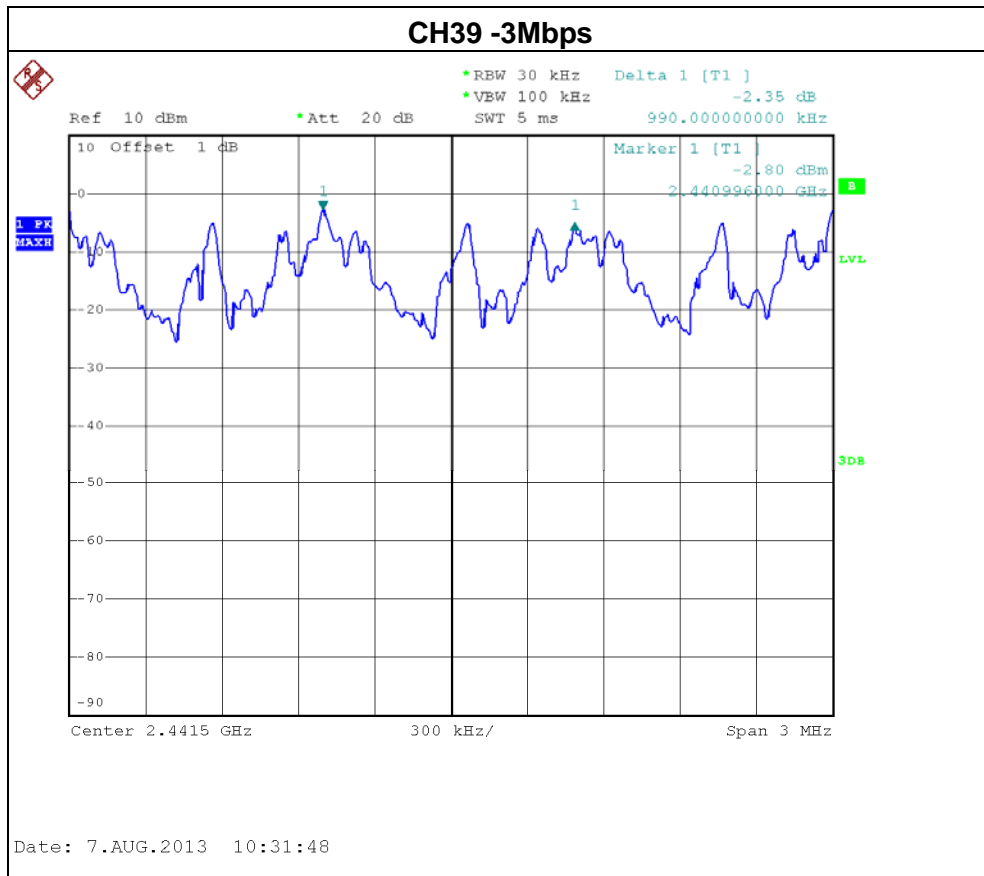



**8. BANDWIDTH TEST**

**8.1 APPLIED PROCEDURES**

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210		
Section	Test Item	Frequency Range (MHz)
15.247(a)(2) RSS-GEN section 4.6.1 RSS-210, Issue 8, Annex 8, A8.1(b)	Bandwidth	2400-2483.5

**8.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.  
All calibration period of equipment list is one year.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RBW	30 KHz (20dB Bandwidth) / 30 KHz (Channel Separation)
VBW	100 KHz (20dB Bandwidth) / 100 KHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


**8.1.2 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 30KHz, VBW=100KHz, Sweep time = Auto.

**8.1.3 DEVIATION FROM STANDARD**

No deviation.

**8.1.4 TEST SETUP**



**8.1.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





**8.1.6 TEST RESULTS**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00 / CH39 /CH78-1Mbps		

Test Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH00	2402	1.04	0.99	<b>PASS</b>
CH39	2441	1.04	0.99	<b>PASS</b>
CH78	2480	1.04	0.99	<b>PASS</b>

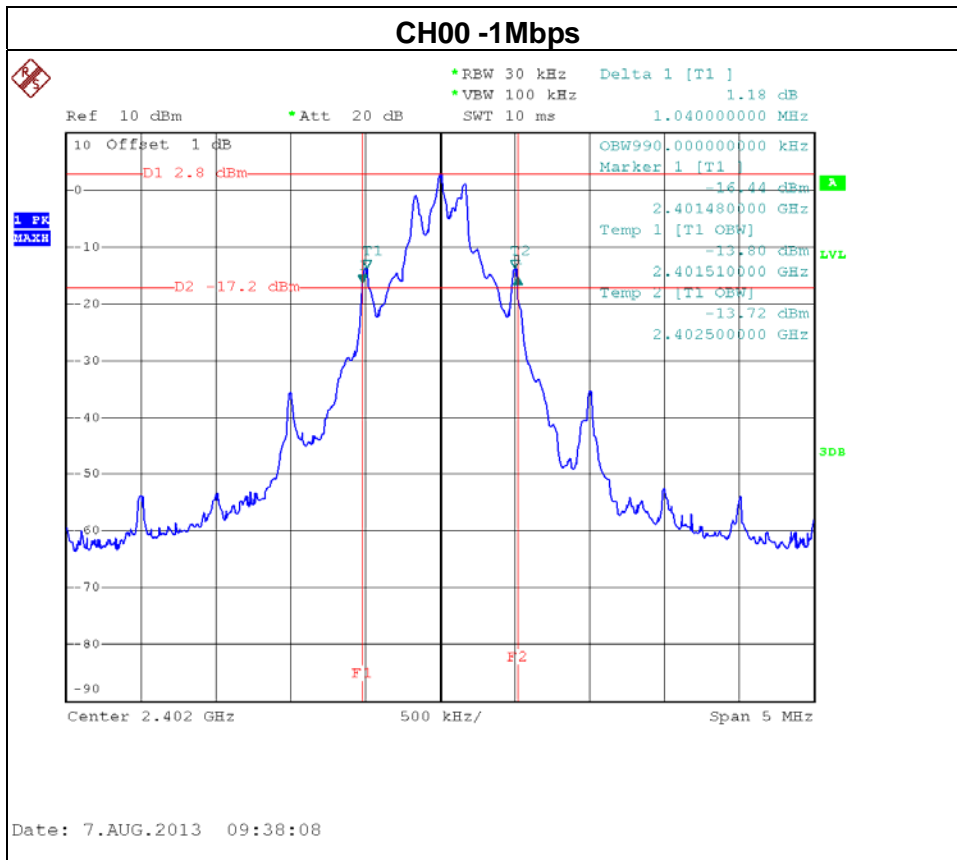

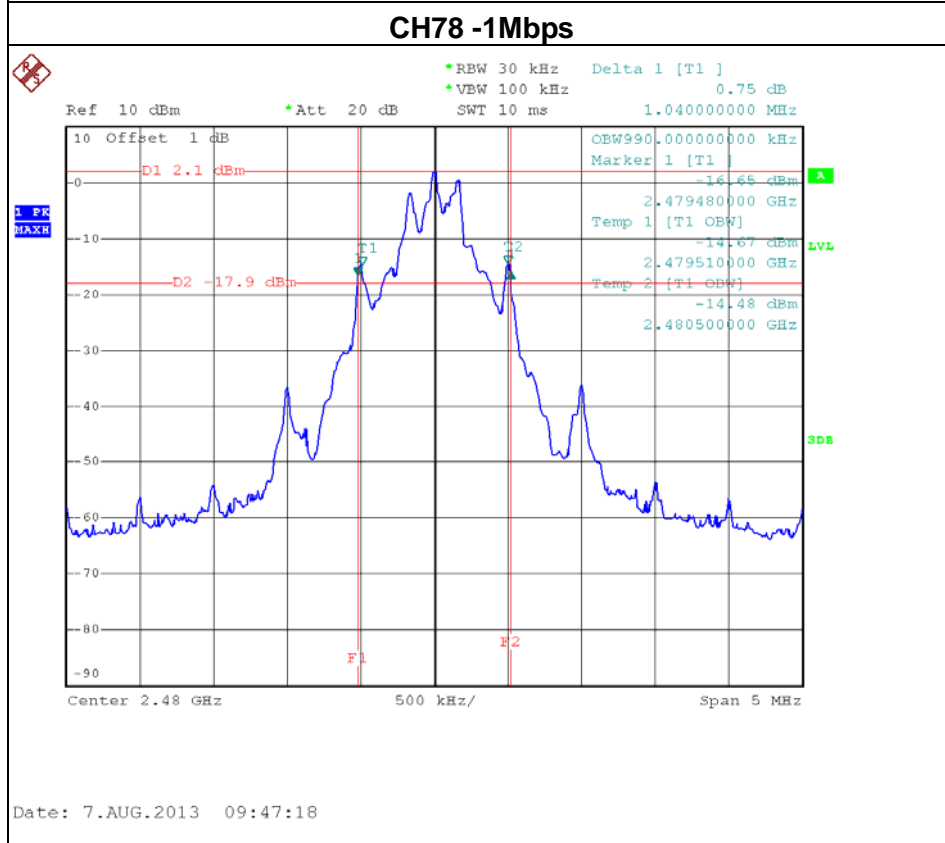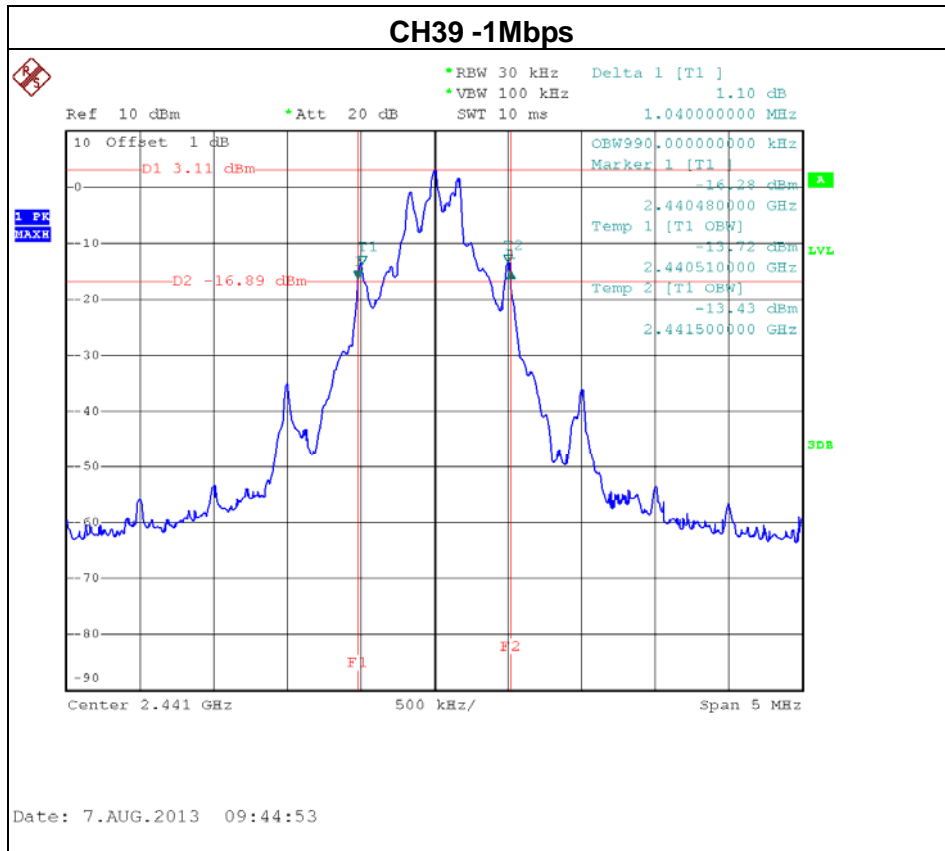








EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00 / CH39 /CH78-3Mbps		

Test Channel	Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
CH00	2402	1.17	1.12	PASS
CH39	2441	1.17	1.13	PASS
CH78	2480	1.16	1.13	PASS

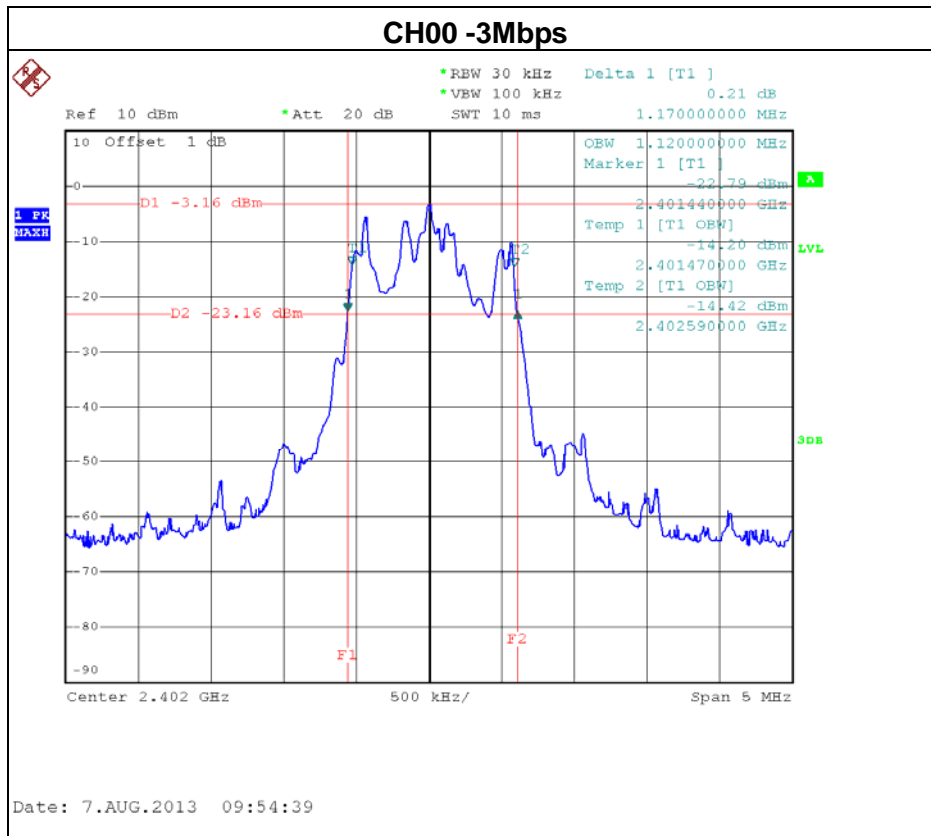

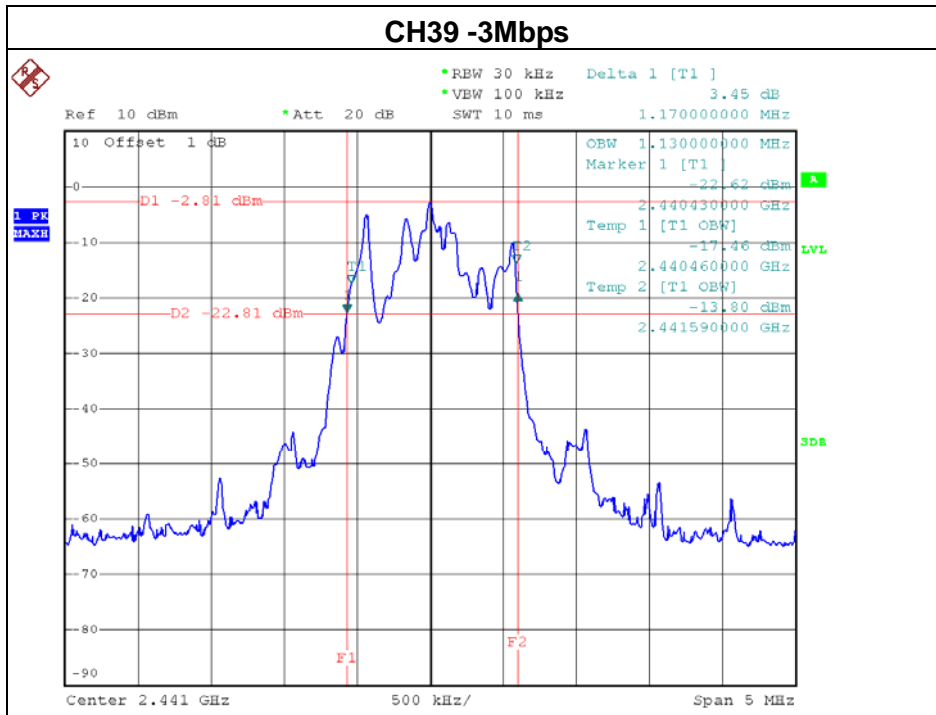

Date: 7.AUG.2013 10:02:02

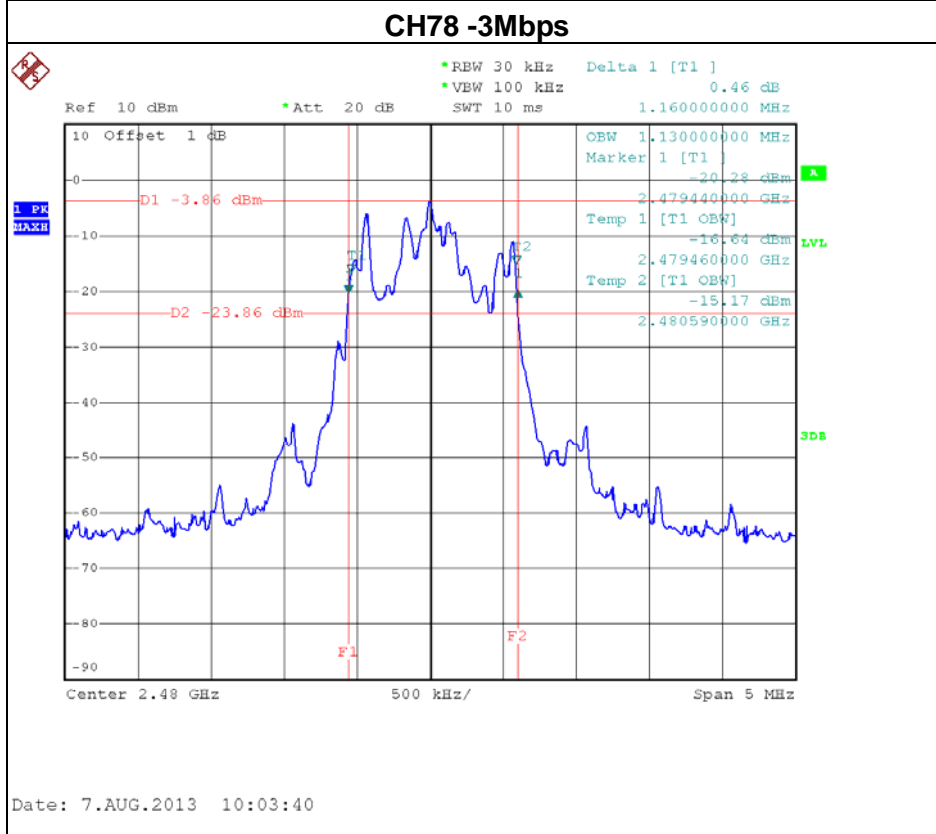

Date: 7.AUG.2013 10:03:40



**9. PEAKOUTPUT POWER TEST**

**9.1 APPLIED PROCEDURES / LIMIT**

FCC Part15 (15.247) , Subpart C/ RSS-GEN and RSS-210				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(1) RSS-GEN section 4.8 RSS-210, Issue 8, Annex 8, A8.1(b)	Peak Output Power	0.125 Watt or 21dBm	2400-2483.5	PASS

**9.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

**9.1.2 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 1MHz/3MHz, VBW= 1MHz/3MHz, Sweep time = Auto.

**9.1.3 DEVIATION FROM STANDARD**

No deviation.

**9.1.4 TEST SETUP**



**9.1.5 EUT OPERATION CONDITIONS**


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





**9.1.6 TEST RESULTS**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00/ CH39 /CH78 -1Mbps		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH00	2402	3.04	21	0.125
CH39	2441	3.32	21	0.125
CH78	2480	2.25	21	0.125

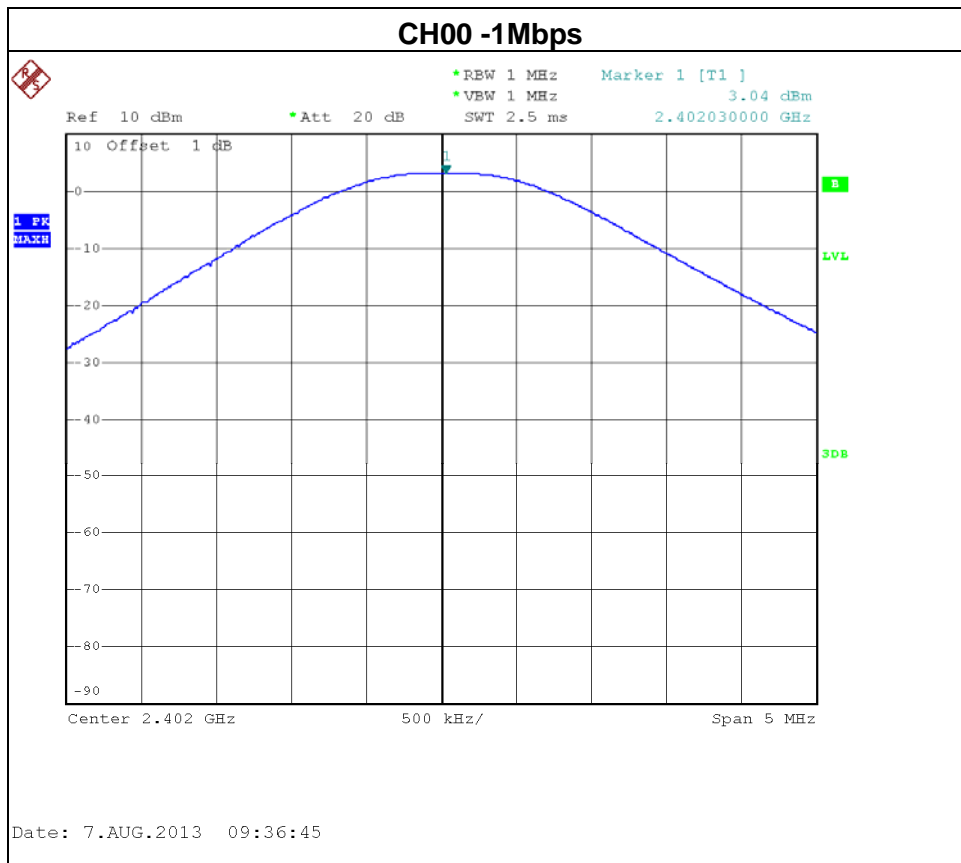


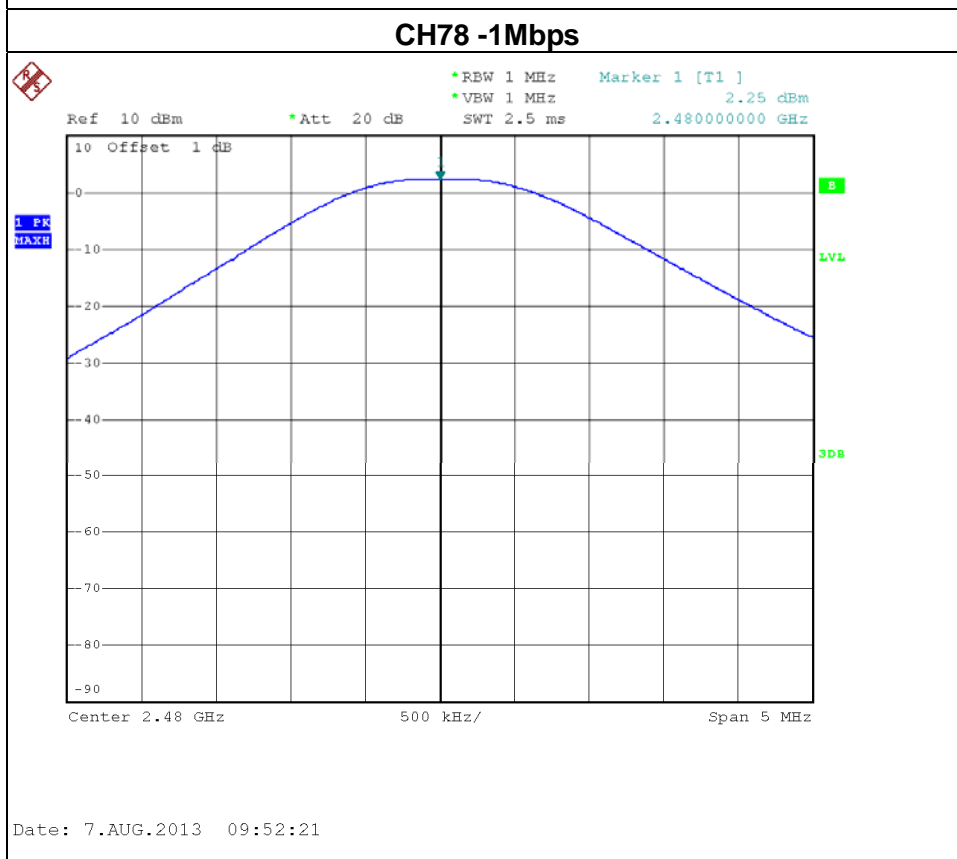
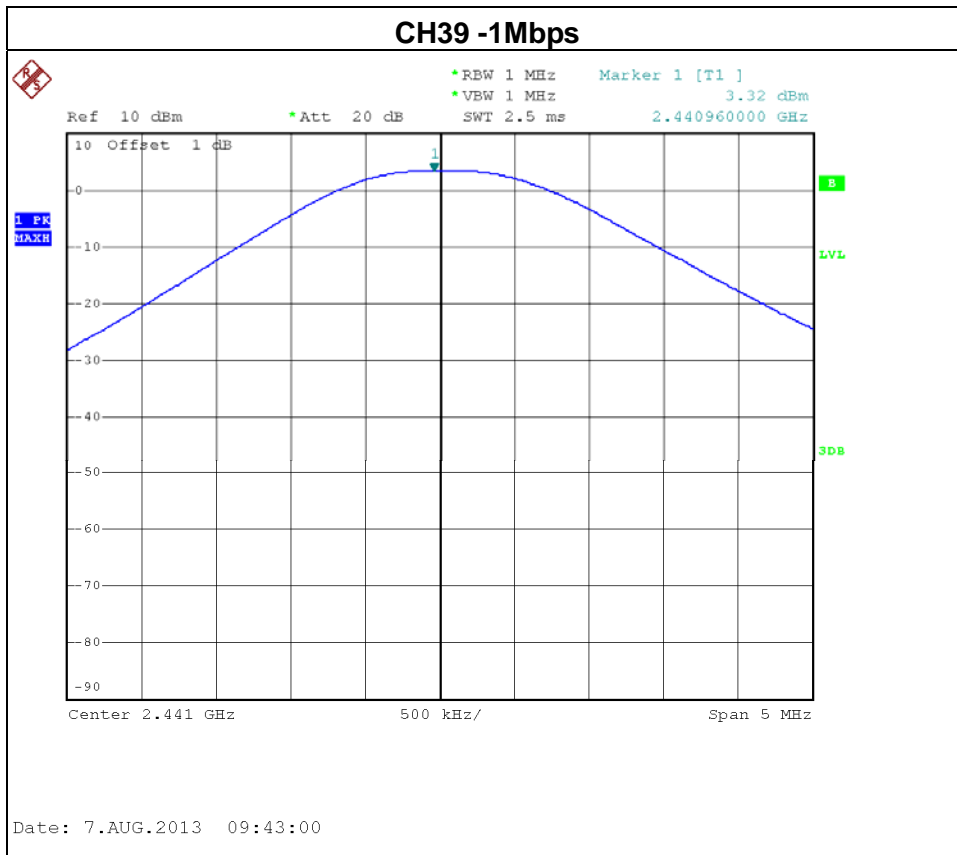




EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00/ CH39 /CH78 -3Mbps		

Test Channel	Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)	Limit (Watt)
CH00	2402	-0.14	21	0.125
CH39	2441	-0.16	21	0.125
CH78	2480	-1.11	21	0.125

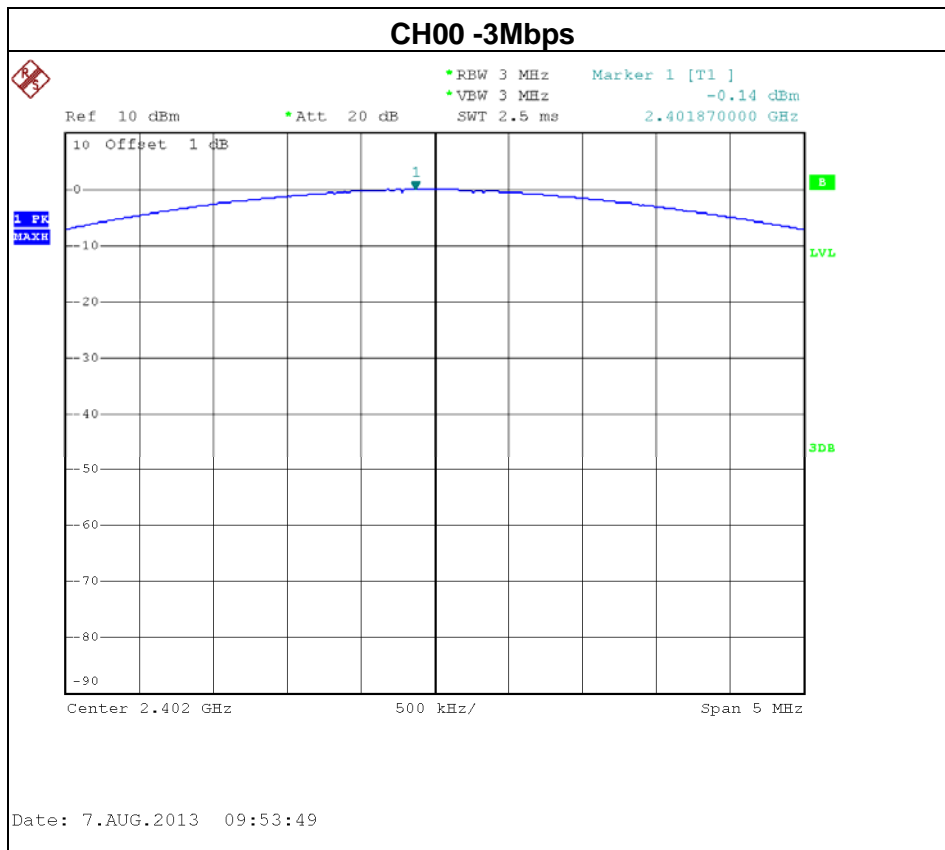

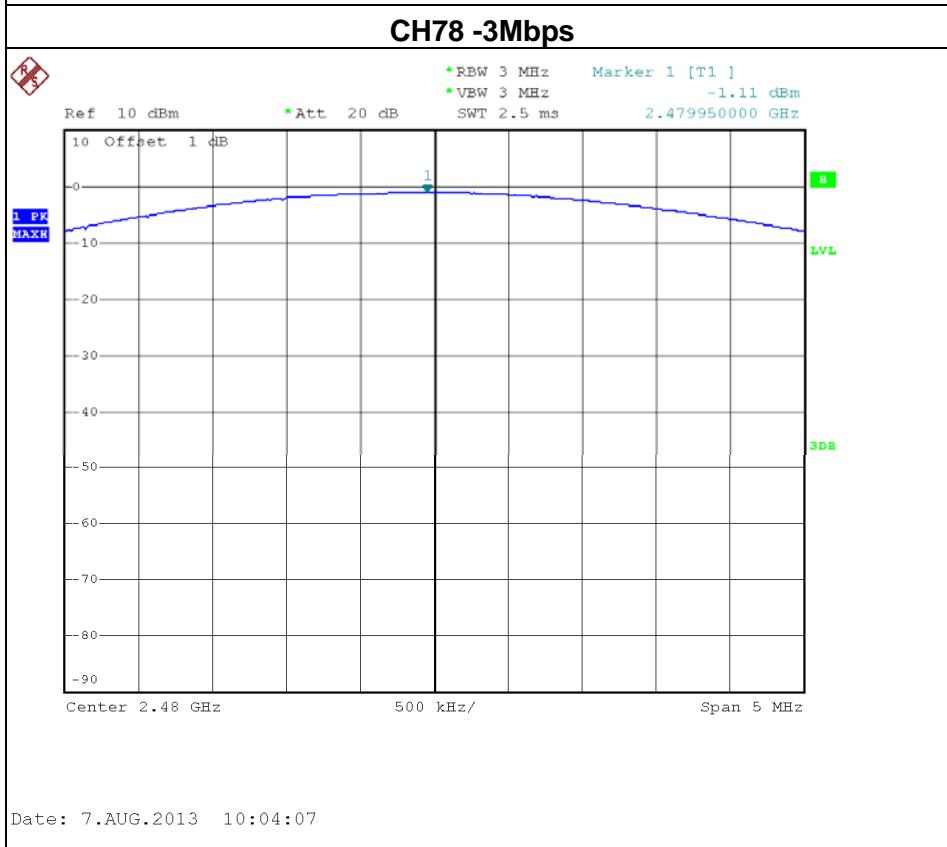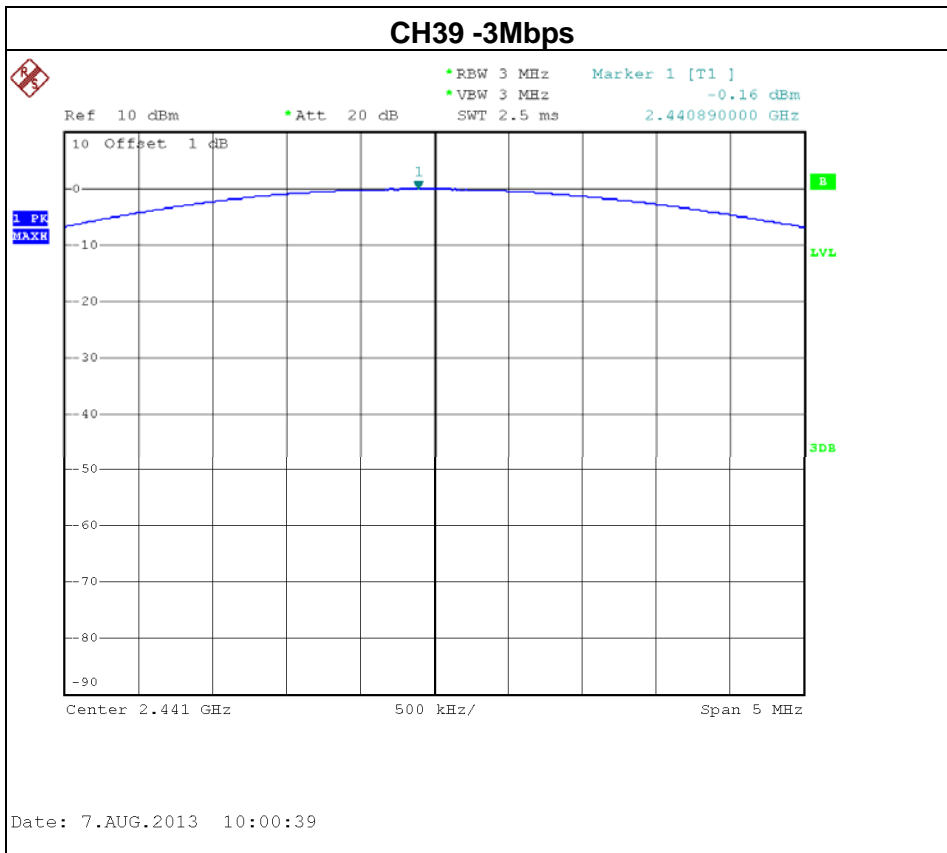



**10. ANTENNA CONDUCTED SPURIOUS EMISSION**

**10.1 APPLIED PROCEDURES / LIMIT**

20dB in any 100 KHz bandwidth outside the operating frequency band, In case the emission fall within the restricted band specified on 15.205(a) & RSS-210 section 2.2& Annex 8, A8.5, then the 15.209(a) & RSS-GEN limit in the table below has to be followed.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

**LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)**

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

**10.1.1 MEASUREMENT INSTRUMENTS LIST AND SETTING**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 16, 2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

**10.1.2 TEST PROCEDURE**

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.


**10.1.3 DEVIATION FROM STANDARD**

No deviation.





**10.1.4 TEST SETUP**

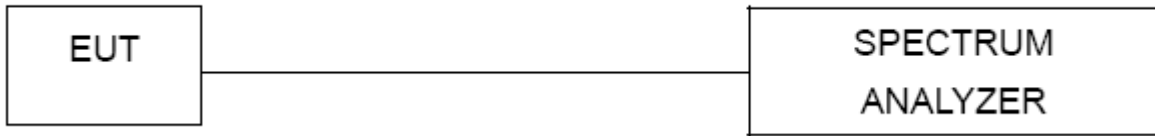

**10.1.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.





**10.1.6 TEST RESULTS**

EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00 / CH39/ CH78-1Mbps & Hopping on mode (1Mbps)		

The max. radio frequency power in any 100KHz bandwidth outside the frequency band		The max. radio frequency power in any 100 KHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2400.00	-54.56	2486.60	-49.75


**Result**

In any 100KHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.

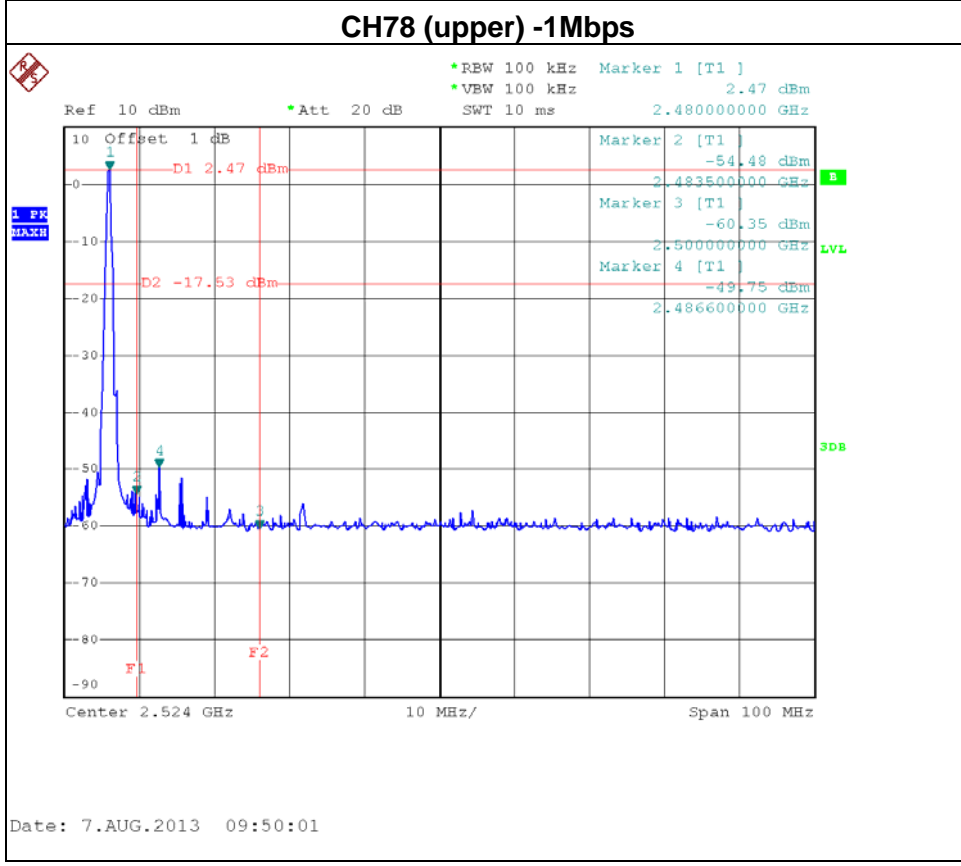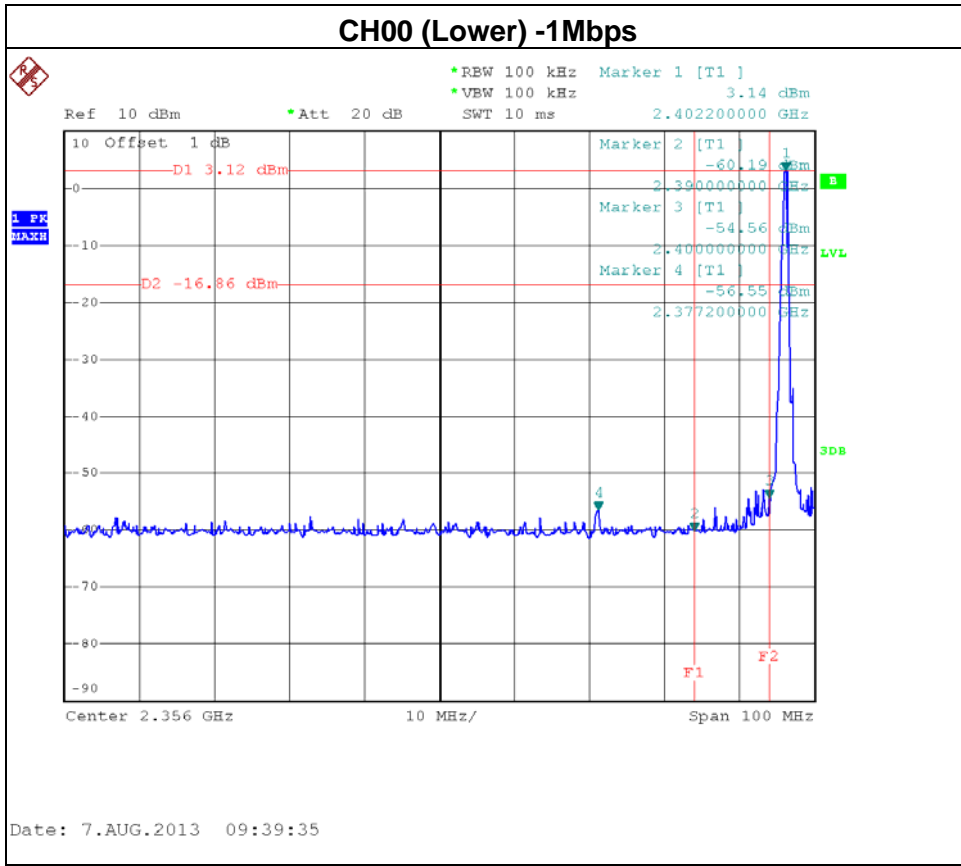




### Hopping on mode (1Mbps- Lower )


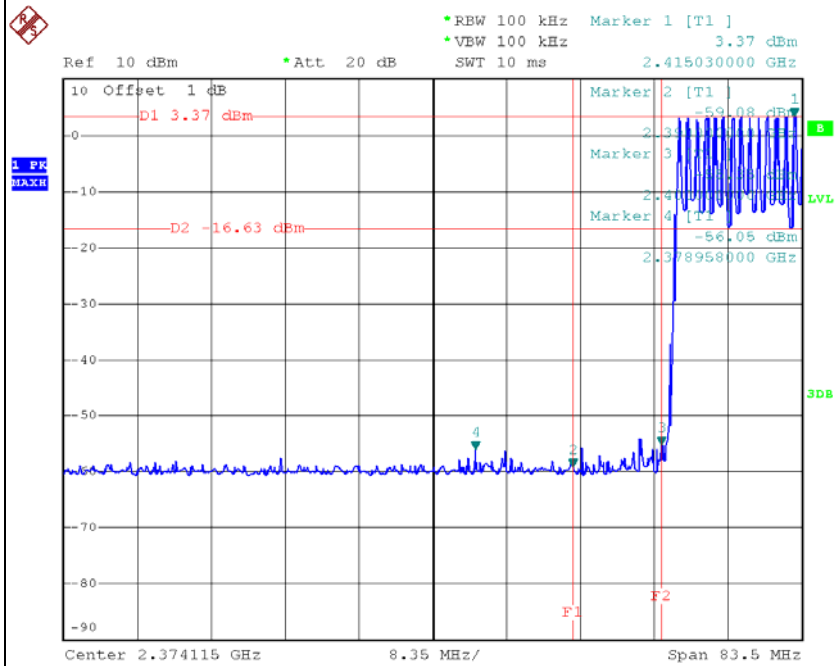




Date: 7.AUG.2013 10:10:41



### Hopping on mode (1Mbps- upper )

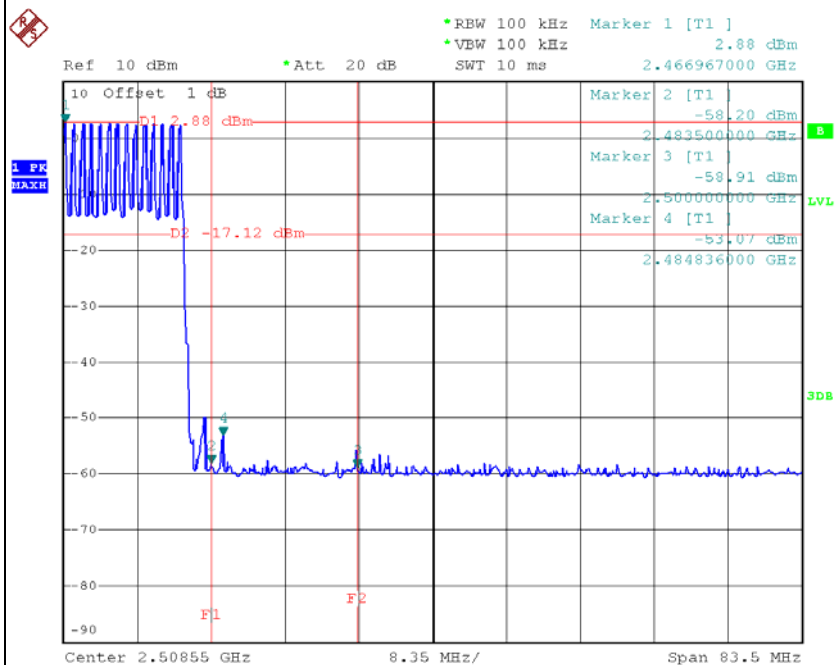

Date: 7.AUG.2013 10:12:45

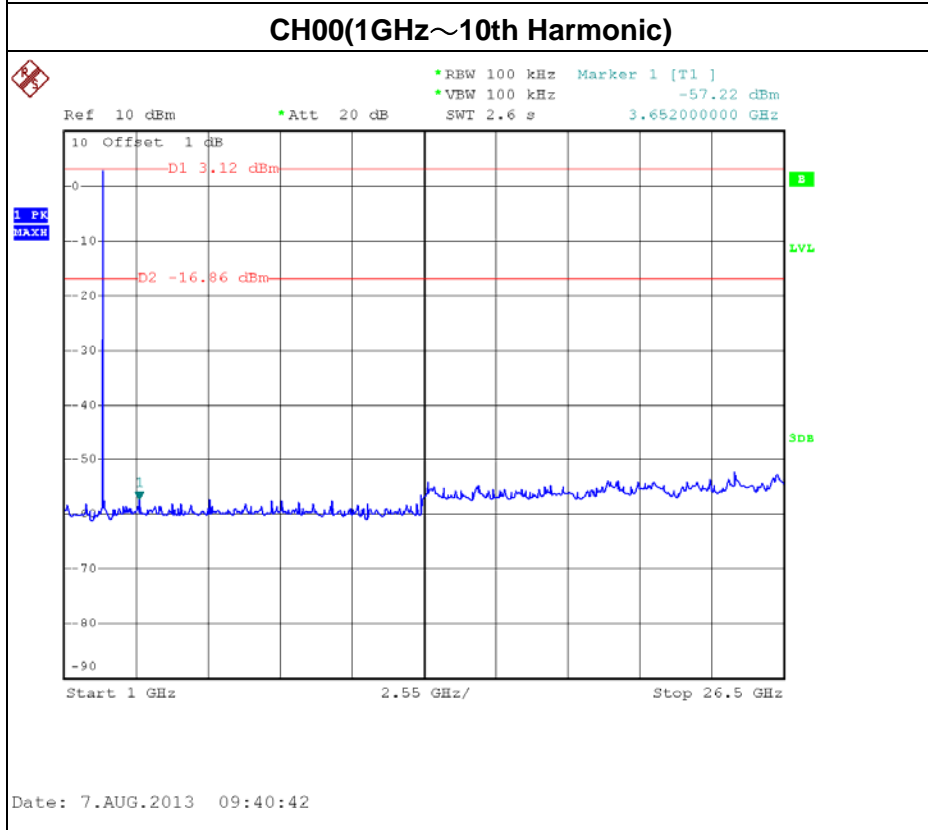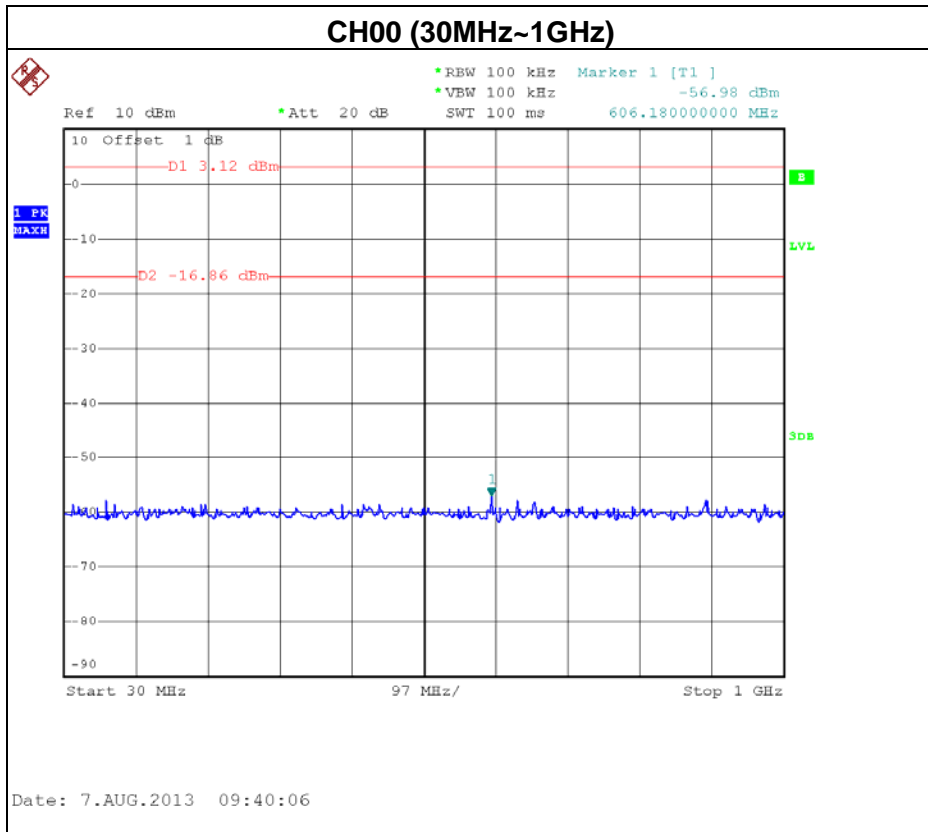

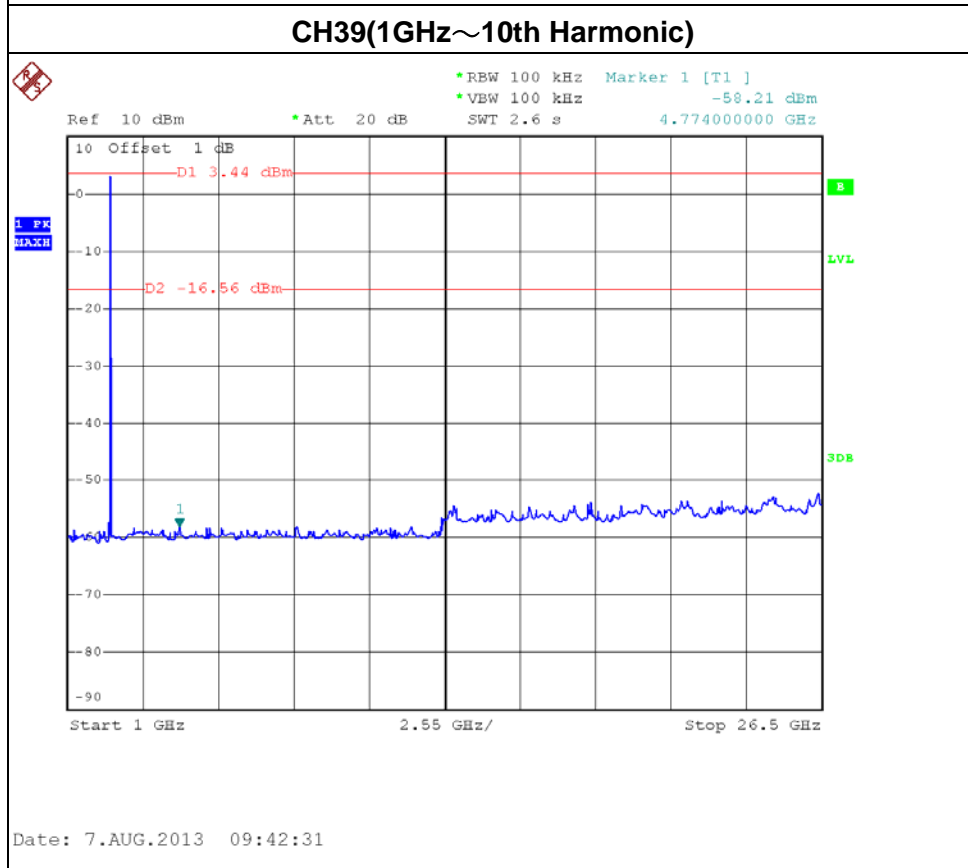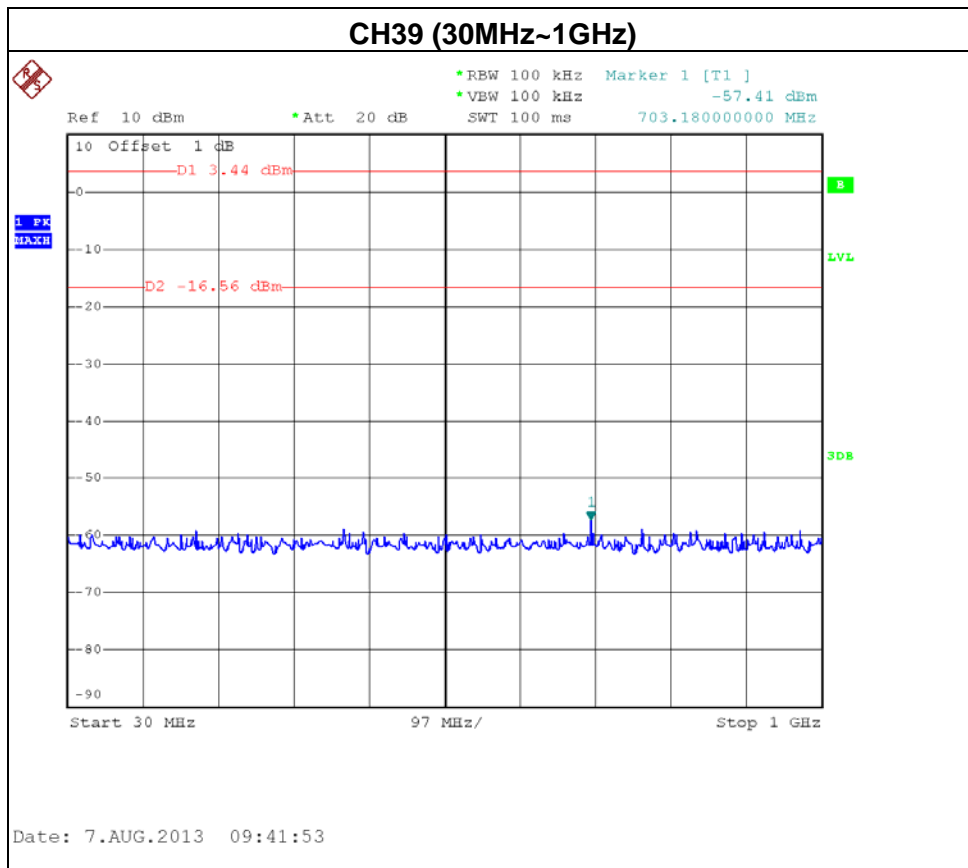

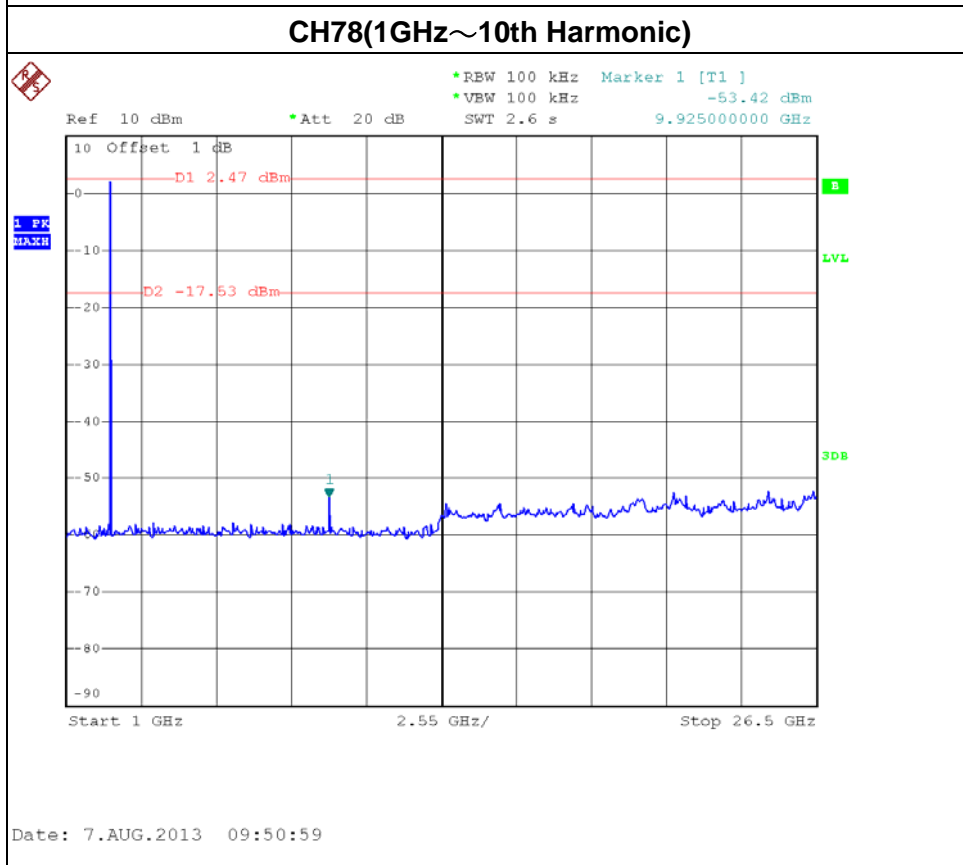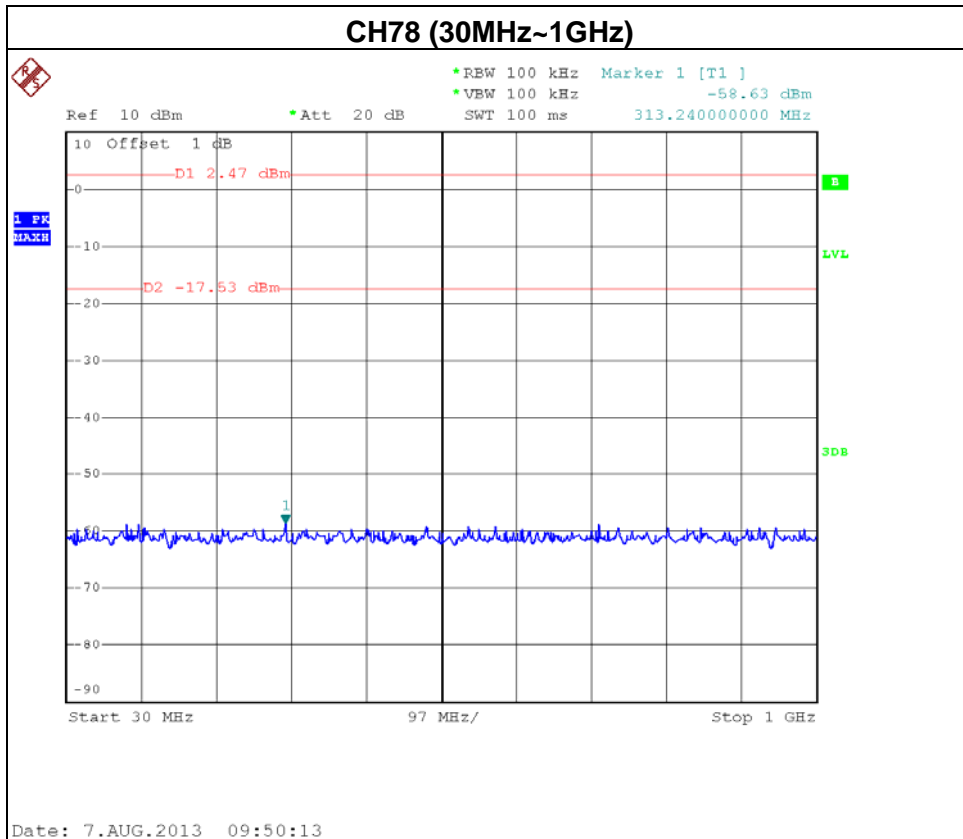





EUT:	Tablet	Model Name:	P1640
Temperature:	25 °C	Relative Humidity:	58 %
Pressure:	1009 hPa	Test Voltage:	AC 120V/60Hz
Test Mode:	CH00 / CH39/ CH78 -3Mbps & Hopping on mode (3Mbps)		



The max. radio frequency power in any 100KHz bandwidth outside the frequency band		The max. radio frequency power in any 100 KHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2377.60	-58.20	2489.60	-57.42



**Result**



In any 100KHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power.





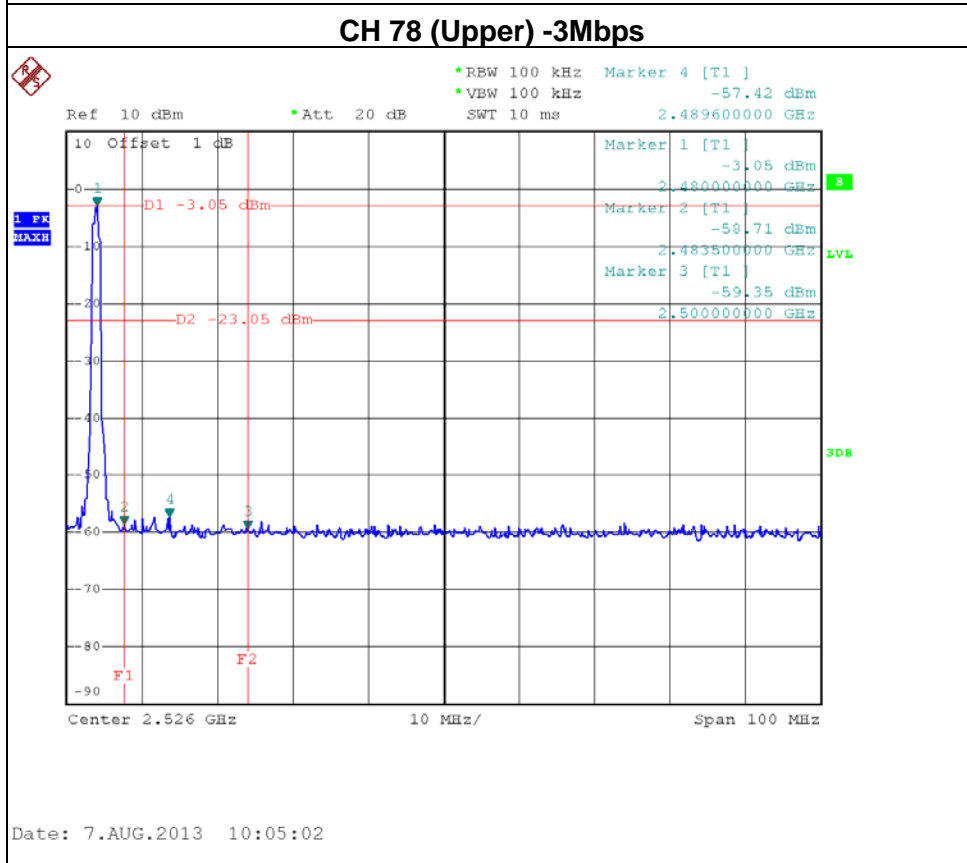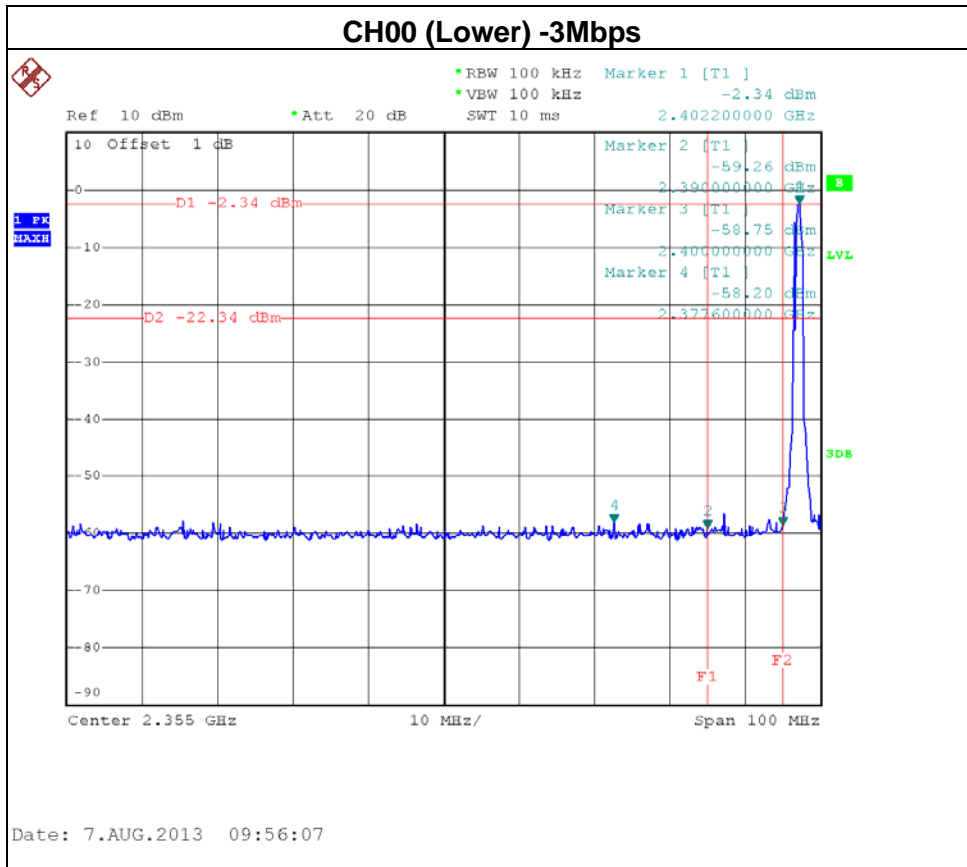

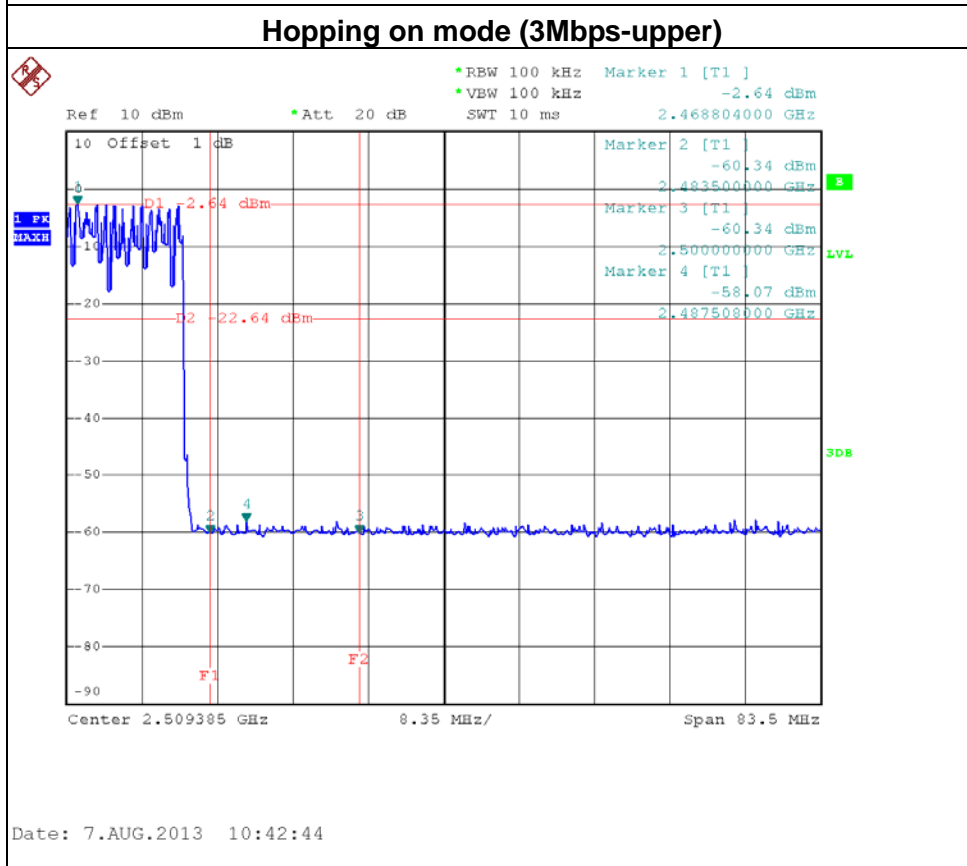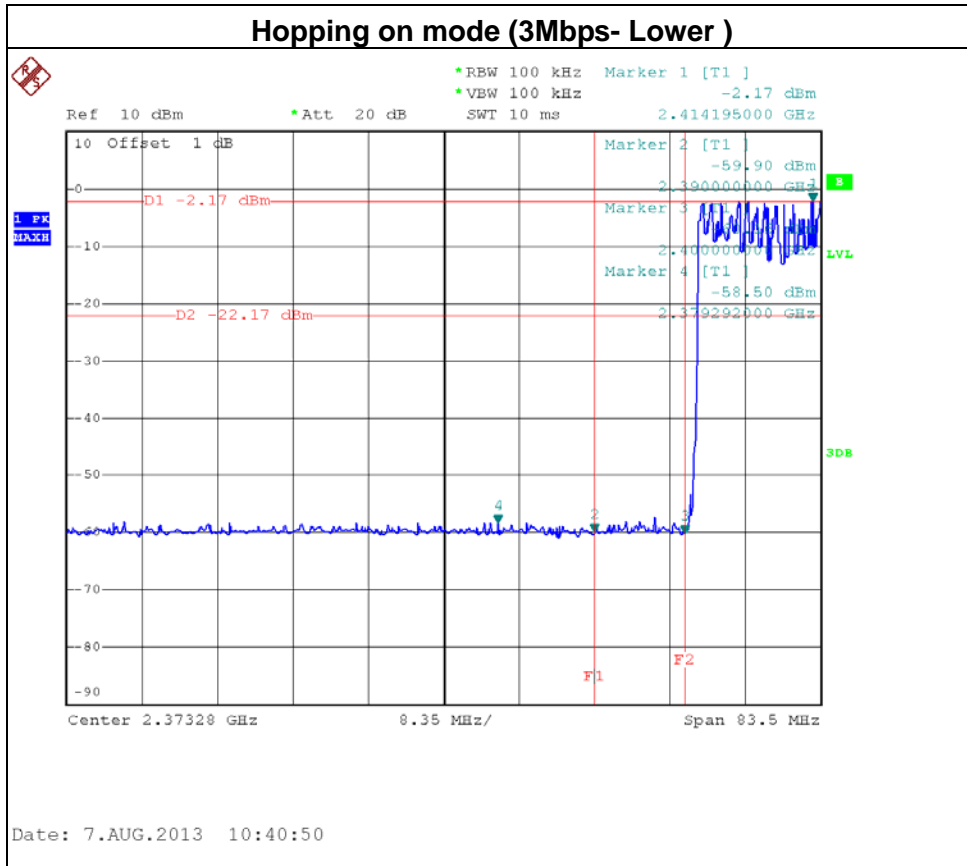

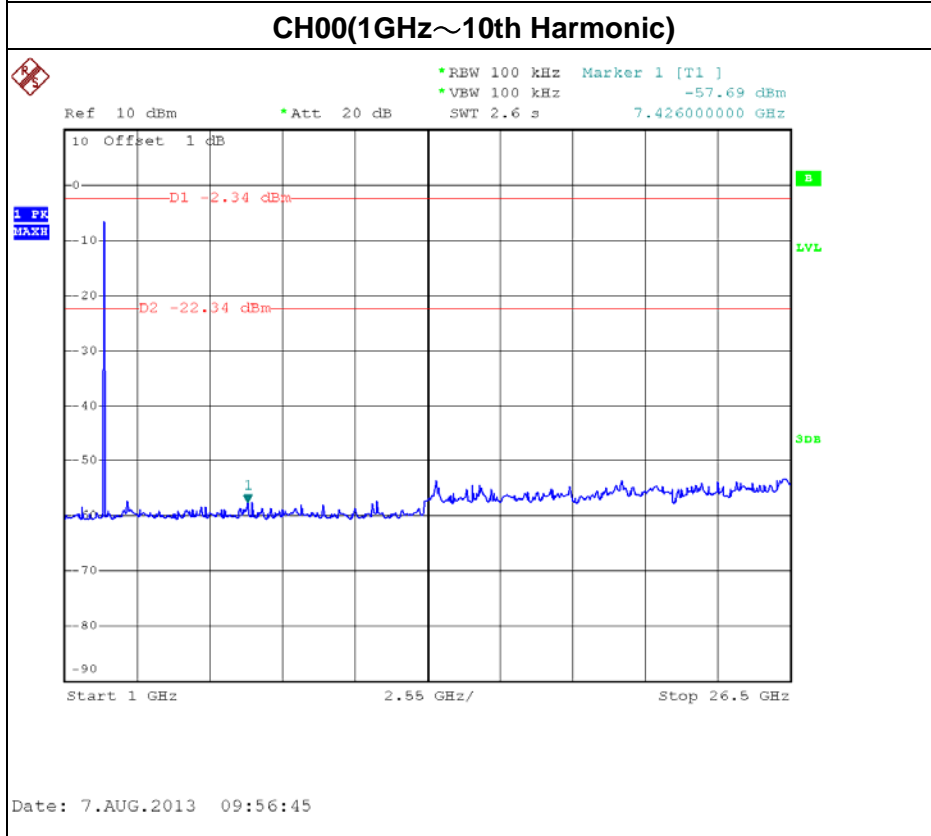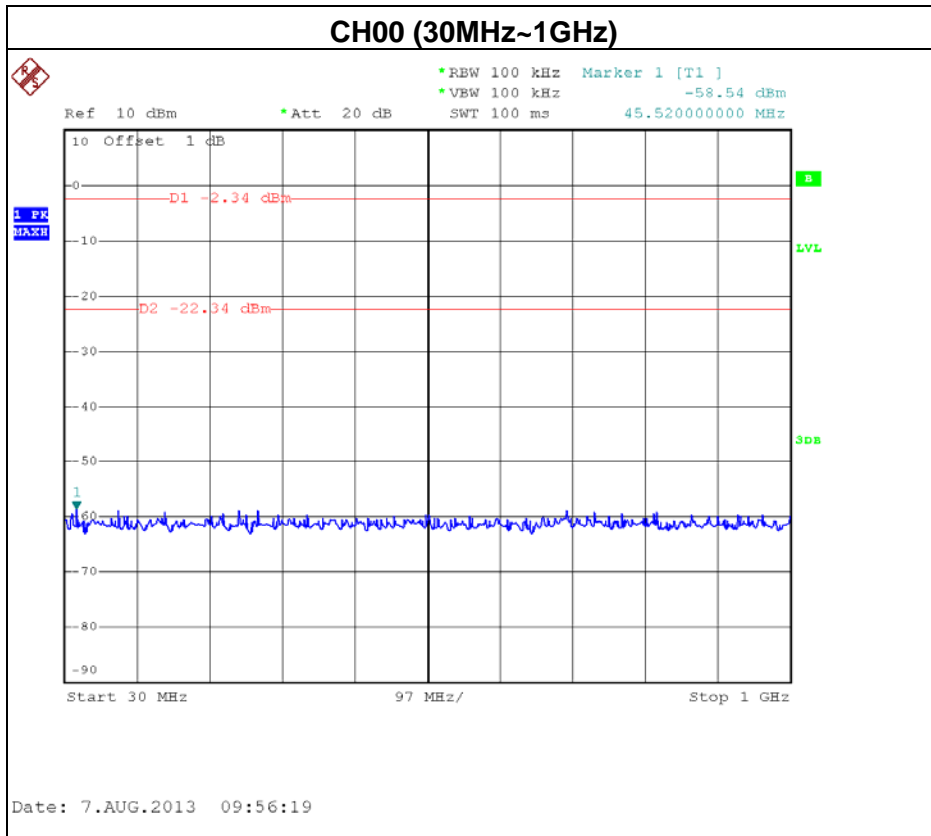

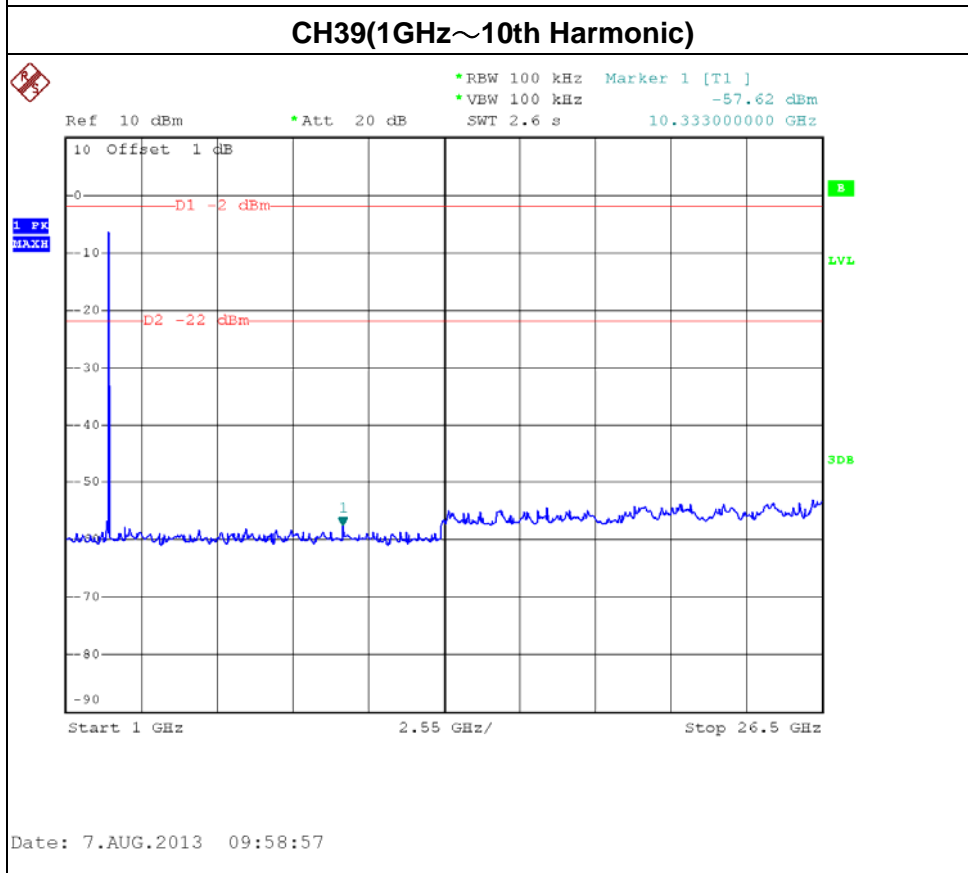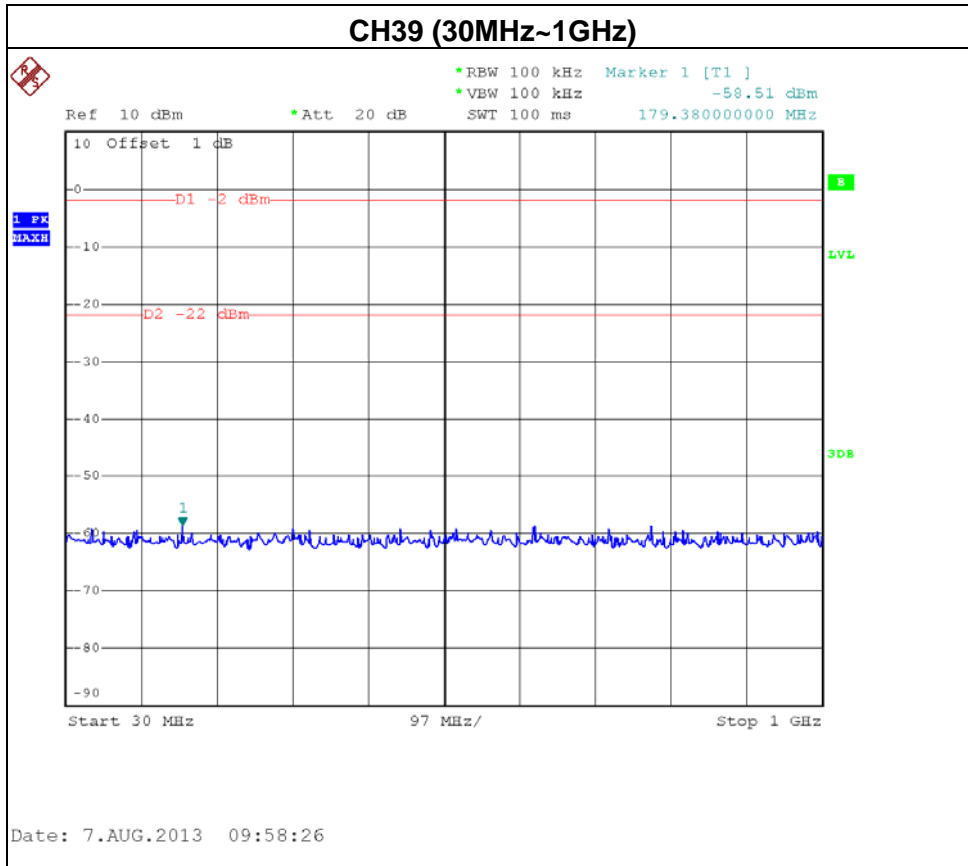

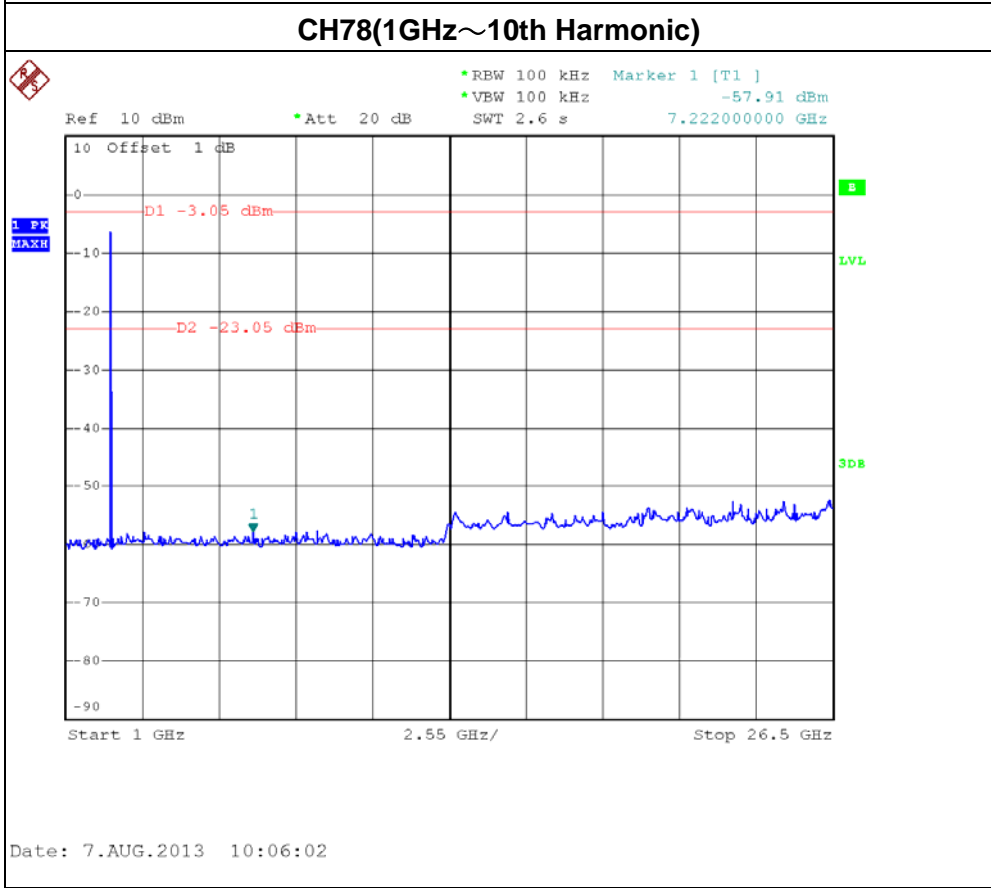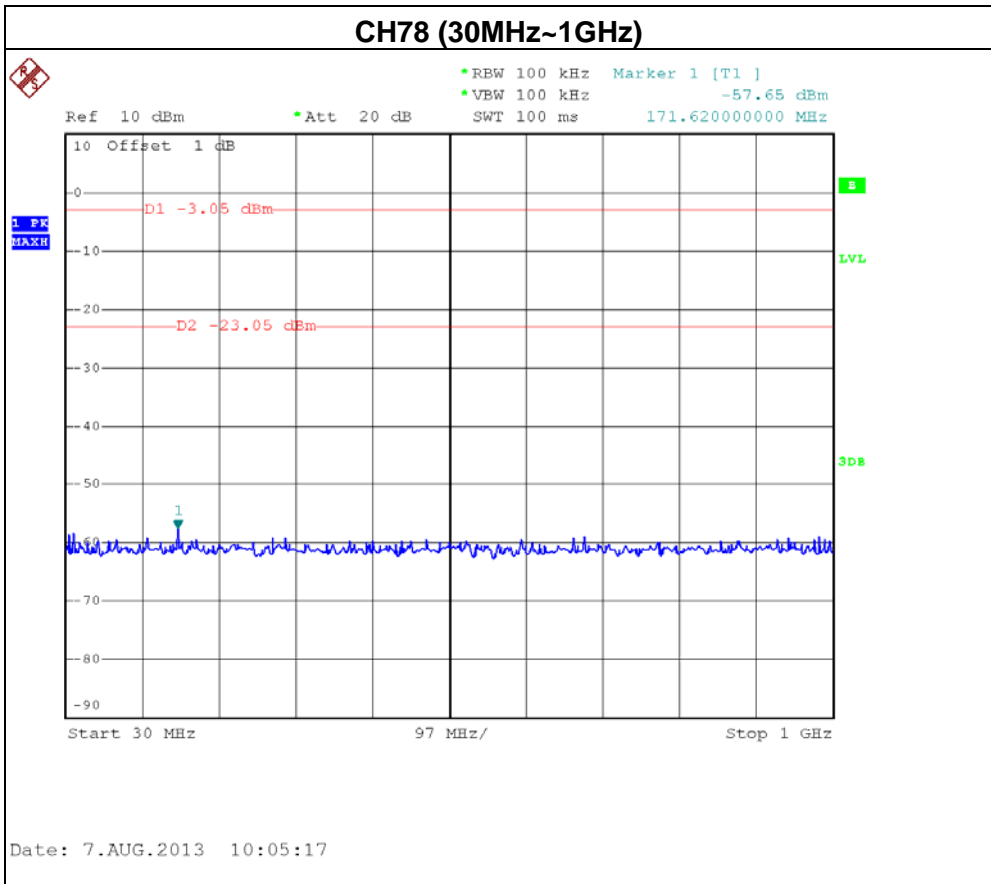



**11. EUT TEST PHOTO**

**Conducted Measurement Photos**

**Adapter: AD835321**







**Conducted Measurement Photos  
Adapter: W12-010N3A**









**Radiated Measurement Photos  
9K~30MHz**

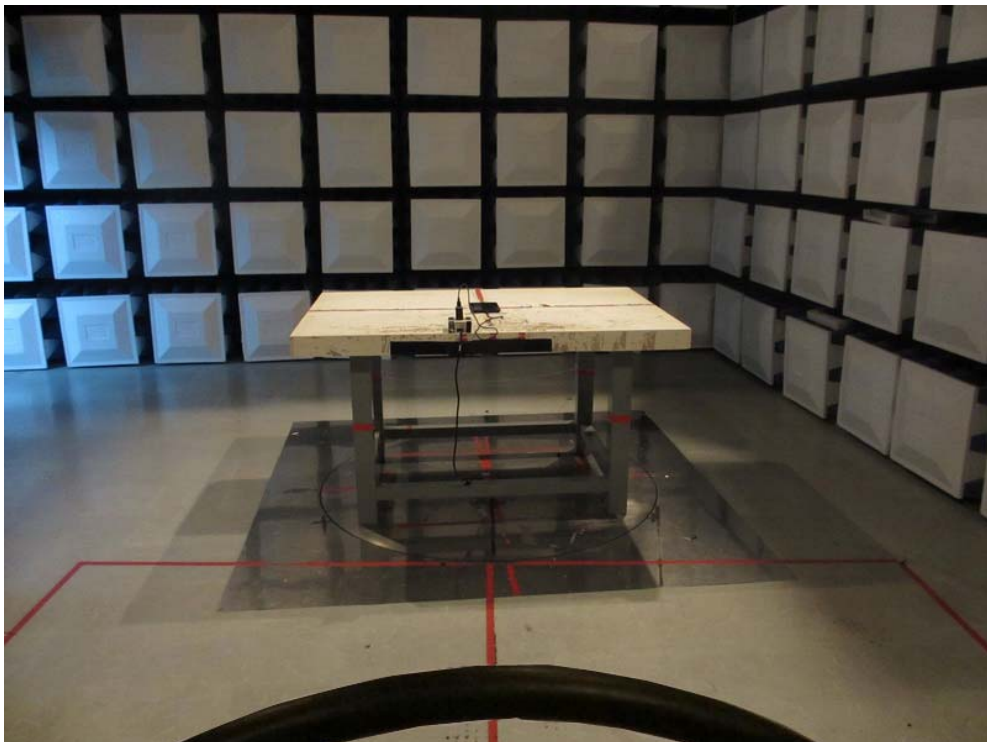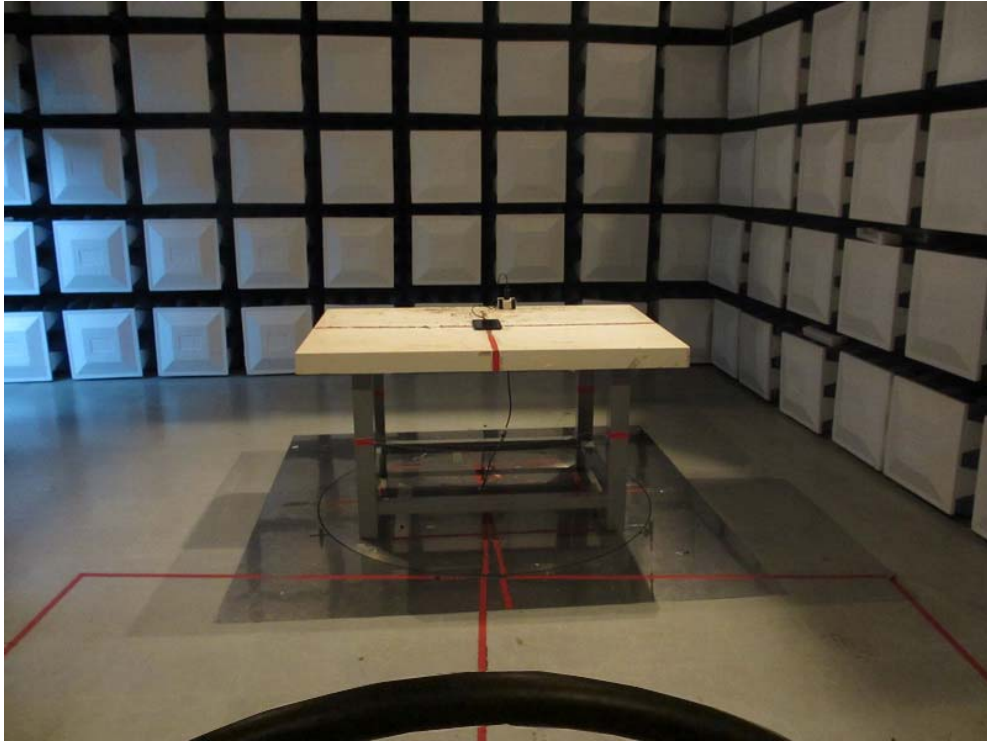



**Radiated Measurement Photos  
30~1000MHz**

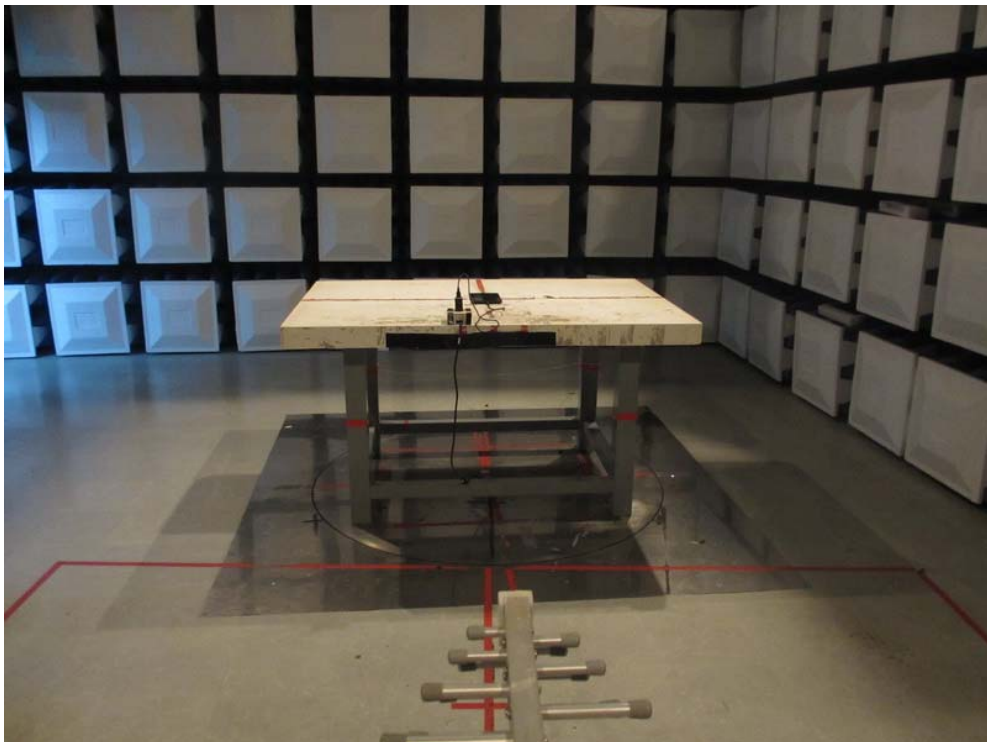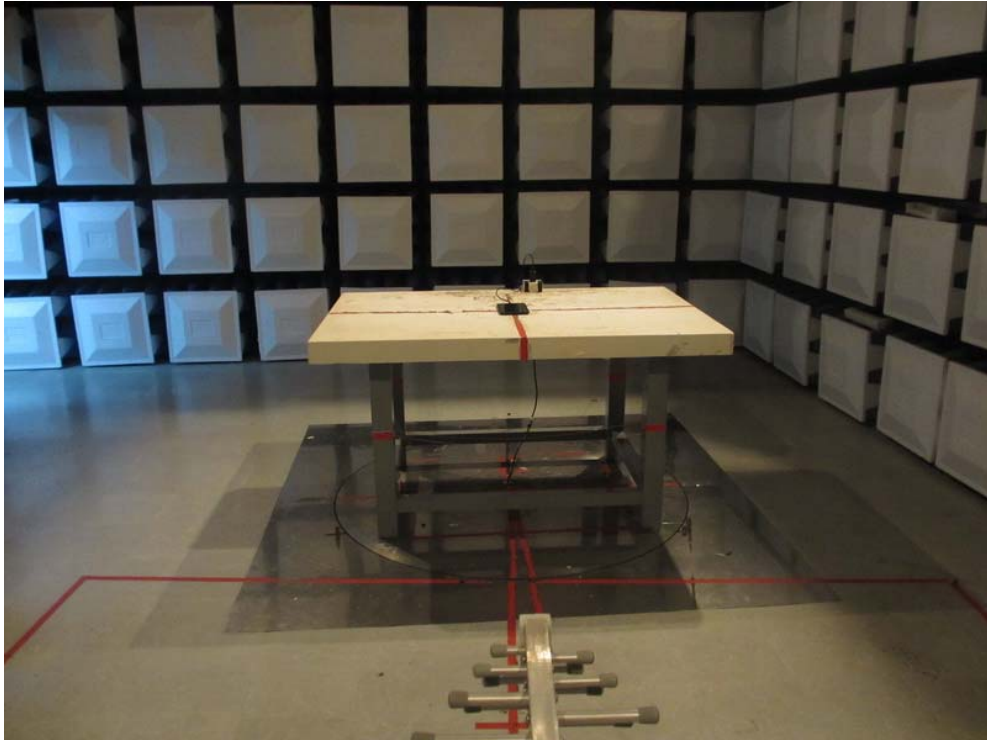

**Radiated Measurement Photos  
Above 1000MHz**

