

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C REQUIREMENT **CLASS II PC REPORT**

OF

Product Name:	Tablet		
Brand Name:	HP		
Model No.:	HSTNH-K12C		
Model Difference:	N/A		
FCC ID:	VOB-P1640		
Report No.:	E2/2014/30008		
Issue Date:	Apr. 01, 2014		
FCC Rule Part:	§15.247, Cat: DSS		
	NVIDIA CORPORATION		
Prepared for:	2701 San Tomas Expressway Santa Clara Cal- ifornia 95050 United States		
Prepared by:	SGS Taiwan Ltd. Electronics & Communication Laboratory		
	No.2, Keji 1st Rd., Guishan Township, Taoyuan County, Taiwan 333		
Taff Testing Laboratory 0513	<i>Note:</i> This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd. personnel only, and shall be noted in the revision section of the document.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for su days only. 除非另有我明,此根告结果僅對测试之樣品負責,同時此樣品僅保留例天。本報告未检公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-responses of this document is unautifue and differences may be proceeding to the fulle at text of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



VERIFICATION OF COMPLIANCE

Applicant:	NVIDIA CORPORATION 2701 San Tomas Expressway Santa Clara California 95050 United States
Product Name:	Tablet
Brand Name:	HP
Model No.:	HSTNH-K12C
Model Difference:	N/A
File Number:	E2/2014/30008
FCC ID:	VOB-P1640
Date of test:	Mar. 13, 2014 ~ Mar. 30, 2014
Date of EUT Received:	Mar. 13, 2014

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4:2009 the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Test By:	Jazz Huang	Date:	Apr. 01, 2014
Prepared By:	Jazz Huang / Sr. Engineer Tiffany Kao	Date:	Apr. 01, 2014
Approved By:	Tiffany Kao / Clerk Jim Chang	Date:	Apr. 01, 2014

Jim Chang / Supervisor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で解す方式説明、此報告結果僅對測試之様品員、同時此様品僅保留90.tr。本報告未經本公司書面許可、不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Version

Version No.	Date	Description
00	Apr. 01, 2014	Initial creation of document



Table of Contents

1.	GEN	ERAL INFORMATION	7
	1.1.	Product description	7
	1.2.	Related Submittal(s) / Grant (s)	
	1.3.	Test Methodology	
	1.4.	Test Facility	
	1.5.	Special Accessories	8
	1.6.	Equipment Modifications	8
2.	SYS	TEM TEST CONFIGURATION	9
	2.1.	EUT Configuration	9
	2.2.	EUT Exercise	9
	2.3.	Test Procedure	9
	2.4.	Configuration of Tested System	
3.	SUM	IMARY OF TEST RESULTS	
4.	DES	CRIPTION OF TEST MODES	
5.	MEA	ASUREMENT UNCERTAINTY	
6.	CON	NDUCTED EMISSION TEST	14
	6.1.	Standard Applicable	14
	6.2.	Measurement Equipment Used:	
	6.3.	EUT Setup	
	6.4.	Test SET-UP (Block Diagram of Configuration)	
	6.5.	Measurement Procedure	
	6.6.	Measurement Result	
7.	PEA	K OUTPUT POWER MEASUREMENT	
	7.1.	Standard Applicable	
	7.2.	Measurement Equipment Used	
	7.3.	Test Set-up:	
	7.4.	Measurement Procedure:	
	7.5.	Measurement Result	
8.	20dB	BANDWIDTH	
	8.1.	Standard Applicable	
	8.2.	Measurement Equipment Used	
	8.3.	Test Set-up	
	8.4.	Measurement Procedure:	



10. S	 9.1. 9.2. 9.3. 9.4. 9.5. 9.6. 	D EDGES EMISSION MEASUREMENT	26 26 27 27 27 28
10. S	9.2. 9.3. 9.4. 9.5. 9.6. SPUR	Measurement Equipment Used Test SET-UP: Measurement Procedure Field Strength Calculation Measurement Result -1 Out-Of-Band EMISSION:	26 27 27 27 28
10. S	9.3. 9.4. 9.5. 9.6. SPUR	Test SET-UP: Measurement Procedure. Field Strength Calculation. Measurement Result -1 Out-Of-Band EMISSION:	
10. S	9.4. 9.5. 9.6. SPUR	Measurement Procedure Field Strength Calculation Measurement Result -1 Out-Of-Band EMISSION:	
10. S	9.5. 9.6. SPUR	Field Strength Calculation Measurement Result -1 Out-Of-Band EMISSION:	
10. S	9.6. SPUR	Measurement Result -1 Out-Of-Band EMISSION:	
10. S	SPUR		
1 1 1 1 1		ριομς βλημλτέη εμιςςιών τέςτ	
1 1 1	10.1.	AUUS KADIATED ENIISSIUN TEST	
1		Standard Applicable	
1	10.2.	Measurement Equipment Used:	
1	10.3.	Test SET-UP:	
	10.4.	Measurement Procedure:	
	10.5.	Field Strength Calculation	
	10.6.	Measurement Result:	
11. F	FREQ	QUENCY SEPARATION	
1	11.1.	Standard Applicable	
1	11.2.	Measurement Equipment Used:	
1	11.3.	Test Set-up:	
1	11.4.	Measurement Procedure:	
1	11.5.	Measurement Result:	
12. N	NUM	BER OF HOPPING FREQUENCY	
1	12.1.	Standard Applicable	
1	12.2.	Measurement Equipment Used:	
1	12.3.	Test Set-up:	
1	12.4.	Measurement Procedure:	
1	12.5.	Measurement Result:	
13. T	TIME	E OF OCCUPANCY (DWELL TIME)	
1	13.1.	Standard Applicable	
1	13.2.	Measurement Equipment Used:	
1	13.3.	Test Set-up:	
1	12.4	Measurement Procedure:	A7
1	13.4.		



14.	ANTE	NNA REQUIREMENT	48
	14.1.	Standard Applicable	48
	14.2.	Antenna Connected Construction	48



GENERAL INFORMATION 1.

1.1. Product description

General:

Product Name:	Tablet		
Brand Name:	HP		
Model No.:	HSTNH-K1	2C	
Model difference:	N/A		
Hardware Version:	P1640 A04 066803e804000000		
Software Version:	flaxen-eng 4.4 KRT16M eng.ericz.20140107.105332 test-keys		
Class II Permissive change:	 The non-transmitter components/functions is being modified to improve the holistic performance relevant to un-intentional radiator part Bluetooth Low Energy Mode is being enabled via software/firmware update 		
	3.7Vdc from Li-ion battery or 5.0Vdc by AC/DC adapter		
Power Supply:	Battery:	Model:32102102, Supplier: YOKU ENERGY (ZHANGZHOU) CO., LTD	
	Adapter:	Model: W12-010N3A(US), Supplier: Chicony	

Bluetooth:

Diactootii.				
Bluetooth Version:	 □ V1.1 (GFSK) □ V1.2 (GFSK) □ V2.0 (GFSK) □ V2.0 + EDR (GFSK + /4DQPSK + 8DPSK) □ V2.1 + EDR (GFSK + /4DQPSK + 8DPSK) □ V3.0 + EDR 			
Frequency Range:	2402 – 2480MHz			
Channel number:	79 channels max.			
Rated Power:	1.89 dBm (Peak)			
Modulation type:	Frequency Hopping Spread Spectrum			
Dwell Time:	<=0.4s			
Antenna Designation:	PIFA Antenna, 3.45dBi			
The EVIT is a small super smith Direct of W2.0 + EDD (CESU + -/4DODSU + 0DDSU) store land				

The EUT is compliance with Bluetooth V3.0 + EDR (GFSK + $\pi/4DQPSK$ + 8DPSK) standard.

This test report applies for Bluetooth.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



1.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: <u>VOB-P1640</u> filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules. The composite system (digital device) is compliance with FCC part 15; Subpart B is authorized under the doc procedure.

1.3. Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4:2009. Radiated testing was performed at an antenna to EUT distance 3 meters. Tested in accordance with FCC Public Notice DA 00-705 – Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems

1.4. Test Facility

The measurement facilities used to collect the 3m Radiated Emission and AC power line conducted data are located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 2, Keji 1st Rd., Guishan Township, Taoyuan Country, 33383 which are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009. FCC Registration Number is: 990257. Canada Registration Number: 4620A-4.

The 10 m Open Area Test Sites located on the address of SGS Taiwan Ltd. Electronics & Communication Laboratory No. 29, Pau-Tou-Tsuo Valley Chia-Pau Tsuen, Linkou Hsiang, Taipei county, which is constructed and calibrated to meet the CISPR 22/EN 55022 requirements. SGS Site No. 1(3 &10 meters) and FCC Registration Number: 94644.

1.5. Special Accessories

There is no special accessory used while test was conducted.

1.6. Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2. SYSTEM TEST CONFIGURATION

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3. Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the general criterion in Section 7.1 of ANSI C63.4:2009.Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, and the measurement procedure 7.3 in ANSI 63.4:2009 is followed to carry out the test. The CISPR Quasi-Peak and Average detector mode is employed according to §15.107

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna according to the requirements in Section 8 and 13 and of ANSI C63.4:2009 and DA 00-705.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is frawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.4. Configuration of Tested System

Fig. 2-1 Radiated Emission & Conducted (Antenna Port) Configuration



Remote Side



Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	Bluetooth Test Set	Anritsu	MT8852B	1329002	Shield	Un-Shield
2.	Test Software	Android ADB Command	N/A	N/A	N/A	N/A
3.	Notebook	Lenovo	L430	R9-YYG88	Shield	Un-Shield

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



SUMMARY OF TEST RESULTS 3.

FCC Rules	Description Of Test	Result
§15.207(a)	AC Power Line Conducted Emission	N/A
§15.247(b)(1)	Peak Output Power	Compliant
§15.247(a)(1)	20dB Bandwidth	N/A
§15.247(d)	100 kHz Bandwidth Of Frequency Band Edges	N/A
\$15.247(d) \$15.209(a) (f)	Spurious Emission	Compliant
§15.247(a)(1)	Frequency Separation	N/A
§15.247(a)(1)(iii)	Number of hopping frequency	N/A
§15.247(a)(1)(iii)	Time of Occupancy	N/A
§15.203,	Antenna Requirement	N/A



4. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel Low, Mid and High with highest rated data rate were chosen as worst case for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth Transmitter for channel Low, Mid and High the worst case E2 position was reported.

Channel Low: channel 1 at 2402MHz Channel Mid: channel 39 at 2441MHz Channel High: channel 78 at 2480MHz

Data type being used to conduct the measurement: DH1/DH3/DH5 (GFSK) with 1Mbps 2DH1/2DH3/2DH5 (/4 DQPSK) with 2Mbps 3DH1/3DH3/3DH5 (8DPSK) with 3Mbps

The output power of all test mode, and all test default channel is re-measured to ensure output power of the emission remains identical to the original authorization, as per KDB178919.

Partial test of the Worst-Case channel of the worst case mode on radiated spurious emission is revisited, and re-measured. The test result reveals that there exists no occurrence of the degradation upon the change of non-transmitter components, and the product of the given application remains compliant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留⑪天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



MEASUREMENT UNCERTAINTY 5.

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Peak Output Power	+/- 1.55 dB
20dB Bandwidth	+/- 123.36 Hz
100 KHz Bandwidth Of Frequency Band Edges	+/- 1.55 dB
Frequency Separation	+/- 123.36 Hz
Number of hopping frequency	+/- 123.36 Hz
Time of Occupancy	+/- 123.36 Hz
Temperature	+/- 0.8 °C
Humidity	+/- 4.7 %
DC / AC Power Source	DC=+/-1%, AC=+/-0.2%

Radiated Spurious Emission:

Measurement uncertainty (Polarization : Vertical)	30MHz - 180MHz: +/- 3.37dB
	180MHz -417MHz: +/- 3.19dB
	0.417GHz-1GHz: +/- 3.19dB
	1GHz - 18GHz: +/- 4.04dB
	18GHz - 40GHz: +/- 4.04dB

	30MHz - 167MHz: +/- 4.22dB
Measurement uncertainty	167MHz -500MHz: +/- 3.44dB
(Polarization : Horizontal)	0.5GHz-1GHz: +/- 3.39dB
	1GHz - 18GHz: +/- 4.08dB
	18GHz - 40GHz: +/- 4.08dB

This uncertainty represents an expanded uncertainty expressed at approximately the

95% confidence level using a coverage factor of k=2.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaviated and defined mergins and the proposed of the formation contaited the fulle at tervent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



CONDUCTED EMISSION TEST 6.

6.1. Standard Applicable

According to §15.207, frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		
Note				
1. The lower limit shall apply at the tra	ansition frequencies			

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2. Measurement Equipment Used:

SGS Conducted Emission Test Site No.A							
Name of Equipment	Manufac-	Model	Serial Num-	Calibration	Calibration		
Name of Equipment	turer	Widdei	ber	Date	Due		
EMI Test Receiver	R&S	ESCI 3	101311	06/27/2013	06/26/2014		
Coaxial Cables	N/A	N30N30-1042-150 cm	N/A	02/07/2014	02/06/2015		
LISN	Schwarzbeck	NSLK 8127	8127-648	06/17/2013	06/16/2014		
LISN	Rolf-Heine	NNB-2/16Z	99012	08/18/2013	08/17/2014		


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cleart's environment of the provention of the provention of the company's findings at the time of the intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



6.3. EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.4:2009.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.
- 6.4. Test SET-UP (Block Diagram of Configuration)

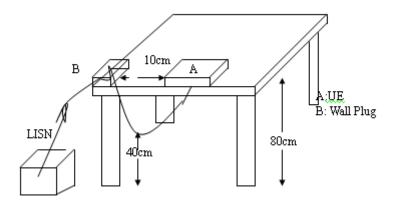

6.5. Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6. Measurement Result

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



PEAK OUTPUT POWER MEASUREMENT 7.

7.1. Standard Applicable

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 - 2483.5MHz band: The Limit: 0.125 Watts.

7.2. Measurement Equipment Used


SGS Conducted Room						
Name of Equip-	Manufacturer	Model	Serial Num-	Calibration	Calibration	
ment			ber	Date	Due	
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/26/2013	10/25/2014	
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014	
Power Sensor	Anritsu	MA2411B	1315048	06/28/2013	06/27/2014	
Power Sensor	Anritsu	MA2411B	1315049	06/28/2013	06/27/2014	
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-144	01/06/2014	01/05/2015	
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-145	01/06/2014	01/05/2015	
Coaxial Cable 80cm	WOKEN	00100A1F1A1 85C	HY-143	01/06/2014	01/05/2015	
DC Block	Mini-Circuits	BLK-18-S+	HY-146	01/06/2014	01/05/2015	
DC Block	PASTERNACK	PE8210	HY-147	01/06/2014	01/05/2015	
Splitter	RF-LAMBAD	RFLT2W1G1 8G	11-JSPF412-0 19	01/06/2014	01/05/2015	
Splitter	WOKEN	-	DOM35LW1 A2	01/06/2014	01/05/2015	
Attenuator	Mini-Circuits	BW-S10W2+	HY-148	01/06/2014	01/05/2015	
Attenuator	WOKEN	218FS-10	HY-149	01/06/2014	01/05/2015	
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014	
DC Power Supply	HOLA	DP-3003	D707003S	N.C.R.	N.C.R.	
DC Power Supply	DHA	DPS-3003	9411005787	N.C.R.	N.C.R.	
DC Power Supply	Agilent	E3640A	MY53140006	N.C.R.	N.C.R.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.3. Test Set-up:



7.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >= 20dB bandwidth)
- 3. Record the max. reading.
- 4. Repeat above procedures until all default test channel is completed.

NOTE: cable loss as 1dB that offsets in the spectrum

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



7.5. Measurement Result

BR mode (GFSK):

Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)
2402.00	1.20	0.00132	1
2441.00	1.89	0.00155	1
2480.00	1.21	0.00132	1

EDR mode (π /4DQPSK):

Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	
2402.00	-2.56	0.00055	0.125	
2441.00	-1.86	0.00065	0.125	
2480.00	-2.54	0.00056	0.125	


EDR mode (8DPSK):

Frequency (MHz)	Reading Power (dBm)	Output Power (W)	Limit (W)	
2402.00	-1.98	0.00063	0.125	
2441.00	-1.29	0.00074	0.125	
2480.00	-1.98	0.00063	0.125	

*Note: offset 3.98dB Note: Refer to next page for plots.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaviated and defined mergins and the proposed of the formation contaited the fulle at tervent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



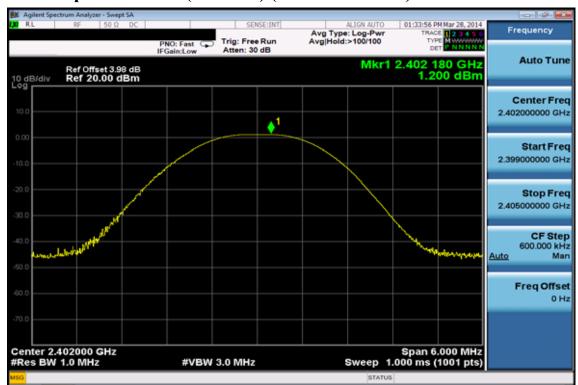

Peak Power Output Data Plot (CH Low) (BR mode GFSK)

Peak Power Output Data Plot (CH Mid) (BR mode GFSK)

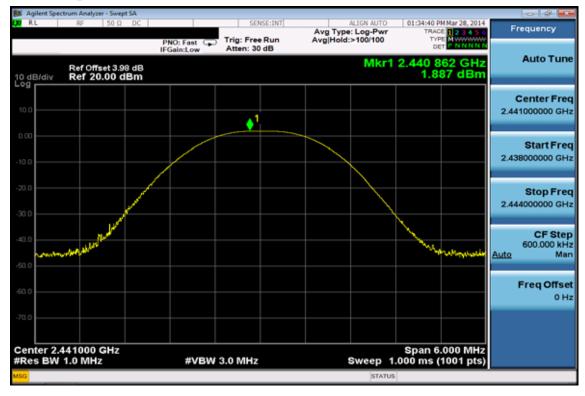


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH High) (BR mode GFSK)



Peak Power Output Data Plot (CH Low) (EDR mode $\pi/4DQPSK$)

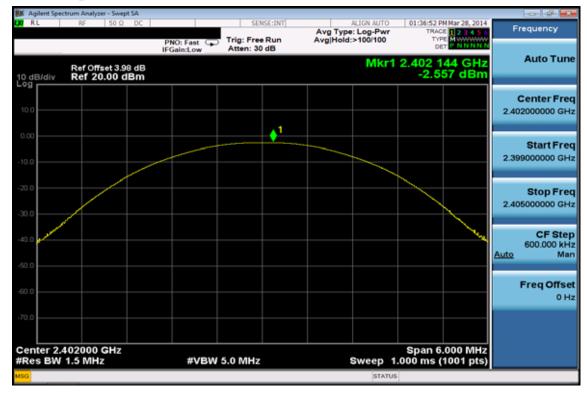


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH Mid) (EDR mode $\pi/4DQPSK$)



Peak Power Output Data Plot (CH High) (EDR mode $\pi/4DQPSK$)

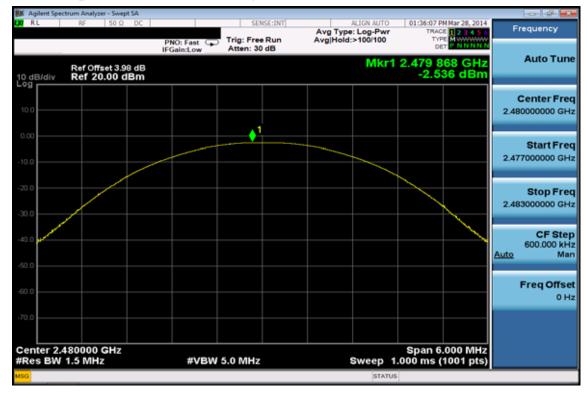


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH Low) (EDR mode 8DPSK)




Peak Power Output Data Plot (CH Mid) (EDR mode 8DPSK)

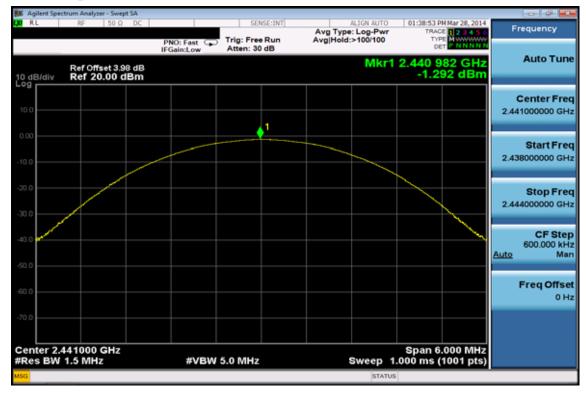

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Peak Power Output Data Plot (CH High) (EDR mode 8DPSK)

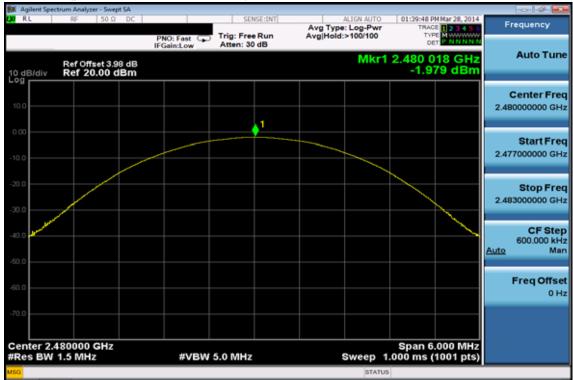

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cleart's environment of the provention of the provention of the company's findings at the time of the intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



8. 20dB BANDWIDTH

8.1. Standard Applicable

According to §15.247(a)(1), for frequency hopping systems operating in the 2400MHz-2483.5 MHz no limit for 20dB bandwidth.


8.2. Measurement Equipment Used

SGS Conducted Room							
Name of Equip-	Manufacturer	Model	Serial Num-	Calibration	Calibration		
ment	Wanulacturei	Widder	ber	Date	Due		
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/26/2013	10/25/2014		
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014		
Power Sensor	Anritsu	MA2411B	1315048	06/28/2013	06/27/2014		
Power Sensor	Anritsu	MA2411B	1315049	06/28/2013	06/27/2014		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-144	01/06/2014	01/05/2015		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-145	01/06/2014	01/05/2015		
Coaxial Cable 80cm	WOKEN	00100A1F1A1 85C	HY-143	01/06/2014	01/05/2015		
DC Block	Mini-Circuits	BLK-18-S+	HY-146	01/06/2014	01/05/2015		
DC Block	PASTERNACK	PE8210	HY-147	01/06/2014	01/05/2015		
Splitter	RF-LAMBAD	RFLT2W1G1 8G	11-JSPF412-0 19	01/06/2014	01/05/2015		
Splitter	WOKEN	-	DOM35LW1 A2	01/06/2014	01/05/2015		
Attenuator	Mini-Circuits	BW-S10W2+	HY-148	01/06/2014	01/05/2015		
Attenuator	WOKEN	218FS-10	HY-149	01/06/2014	01/05/2015		
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014		
DC Power Supply	HOLA	DP-3003	D707003S	N.C.R.	N.C.R.		
DC Power Supply	DHA	DPS-3003	9411005787	N.C.R.	N.C.R.		
DC Power Supply	Agilent	E3640A	MY53140006	N.C.R.	N.C.R.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



8.3. Test Set-up



8.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW=10 kHz (1 % of 20 dB Bandwidth.), VBW = 30 kHz, Span= 3MHz, Sweep=auto, Detector = Peak, and Max hold for 20dB Bandwidth test.
- 4. Mark the peak frequency and –20dB (upper and lower) frequency and Turn on the 99% bandwidth function, max reading.
- 5. Repeat above procedure for 99% Bandwidth, but set RBW to 1% of the span, and detector = peak.
- 6. Repeat above procedures until all test default channel is completed

NOTE: cable loss as 4.2dB that offsets in the spectrum

NOTE2: For the plot of bandwidth measurement, the marker of the 99% bandwidth is diamond-shape while the marker of the 20dB BW is arrow-mark

8.5. Measurement Result:

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9. BAND EDGES EMISSION MEASUREMENT

9.1. Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

9.2. Measurement Equipment Used

9.2.1. Conducted Emission at antenna port:

SGS Conducted Room						
Name of Equip-	Manufacturer	Model	Serial Num-	Calibration	Calibration	
ment	manufacturer	wiouei	ber	Date	Due	
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/26/2013	10/25/2014	
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014	
Power Sensor	Anritsu	MA2411B	1315048	06/28/2013	06/27/2014	
Power Sensor	Anritsu	MA2411B	1315049	06/28/2013	06/27/2014	
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-144	01/06/2014	01/05/2015	
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-145	01/06/2014	01/05/2015	
Coaxial Cable 80cm	WOKEN	00100A1F1A1 85C	HY-143	01/06/2014	01/05/2015	
DC Block	Mini-Circuits	BLK-18-S+	HY-146	01/06/2014	01/05/2015	
DC Block	PASTERNACK	PE8210	HY-147	01/06/2014	01/05/2015	
Splitter	RF-LAMBAD	RFLT2W1G1 8G	11-JSPF412-0 19	01/06/2014	01/05/2015	
Splitter	WOKEN	-	DOM35LW1 A2	01/06/2014	01/05/2015	
Attenuator	Mini-Circuits	BW-S10W2+	HY-148	01/06/2014	01/05/2015	
Attenuator	WOKEN	218FS-10	HY-149	01/06/2014	01/05/2015	
Temperature	TEDCIN	MILLY 1201 V	1020592	06/20/2013	06/19/2014	
Chamber	TERCHY	MHK-120LK	1020582	00/20/2013	00/17/2014	
DC Power Supply	HOLA	DP-3003	D707003S	N.C.R.	N.C.R.	
DC Power Supply	DHA	DPS-3003	9411005787	N.C.R.	N.C.R.	
DC Power Supply	Agilent	E3640A	MY53140006	N.C.R.	N.C.R.	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless other was stated are required in a result of the form in this result of the form of the form in the result of the form in the result of the form of the form in the result of the tronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號

www.tw.sgs.com



9.3. Test SET-UP:

9.3.1. Conducted Emission at antenna port:



9.4. Measurement Procedure

100 kHz BANDWIDTH OF BAND EDGES:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=300 kHz, Sweep = auto
- 5. Mark Peak, 2.390GHz and 2.4835GHz and record the max. level.
- 6. Repeat above procedures until all frequency measured were complete.

Out-Of-Band EMISSION

- 1. To connect Antenna Port of EUT to Spectrum.
- 2. Set RBW = 100K & VBW = 300K on Spectrum.
- 3. Sweep the frequency to determine spurious emission as seen on spectrum from span of 30MHz to 3G, 3G to 8G, 8G to 13G, 13G to 18G and 18G to 26.5GHz
- 4. Via Software, combine 5 spans of frequency range into two plots containing the range of 30MHz to 3GHz, and 3GHz to 26.5GHz.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



9.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

9.6. Measurement Result -1 Out-Of-Band EMISSION:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

NOTE: cable loss as 4.2dB that offsets in the spectrum

NOTE: the occurrence of the spike on the conducted emission is the signal of the fundamental emission.

9.7 Measurement Result -1 Conducted Spurious Emission Measurement Result

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10. SPURIOUS RADIATED EMISSION TEST

10.1. Standard Applicable

According to §15.247(d), Emission at antenna port:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Radiated Spurious Emission

Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.2. Measurement Equipment Used:

10.2.1. Radiated emission:

SGS SAC Chamber No.C						
Name of Equipment	Manufaatuuau	Madal	Serial Num-	Calibration	Calibration	
Name of Equipment	Manufacturer	Model	ber	Date	Due	
Signal Analyzer	R&S	FSV 40	101493	01/07/2014	01/06/2015	
EMI Test Receiver	R&S	ESCI 7	100950	01/11/2014	01/10/2015	
Broadband Antenna	TESEQ	CBL 6112D	35240	01/17/2014	01/16/2015	
Horn Antenna	ETS-Lindgren	3117	00143272	01/27/2014	01/26/2015	
Horn Antenna	ETS-Lindgren	3160-09	00117911	01/22/014	01/21/2015	
Horn Antenna	ETS-Lindgren	3160-10	00117783	01/22/2014	01/21/2015	
Pre-Amplifier	R&S	SCU-18	10203	04/29/2013	04/28/2014	
Pre-Amplifier	EM Electronics Corp.	EMC330	980096	01/24/2014	01/23/2015	
Pre-Amplifier	EM Electronics Corp.	EMC184045	980135	01/24/2014	01/23/2015	
Coaxial Cable	Huber+Suhner	SAC-C TX-30M-1GH z	TX1	04/22/2013	04/21/2014	
Coaxial Cable	Huber+Suhner	SAC-C TX-1-26.5GH z	TX2	04/22/2013	04/21/2014	
Coaxial Cable	Huber+Suhner	SAC-C RX-150k-30M Hz	RX1	04/22/2013	04/21/2014	
Coaxial Cable	Huber+Suhner	SAC-C RX-30M-1GH z	RX2	04/22/2013	04/21/2014	
Coaxial Cable	Huber+Suhner	SAC-C RX-1-26.5GH z	RX3	04/22/2013	04/21/2014	
Filter Bank	R&S	TS8996	SCIN.EMC.102 3.12	04/22/2013	04/21/2014	
Attenuator	WOKEN	218FS-10	HY-151	01/06/2014	01/05/2015	
Controller	Chance Most	886	N/A	N.C.R.	N.C.R.	
Antenna Master	Chance Most	N/A	N/A	N.C.R.	N.C.R.	
Turn Table	Chance Most	N/A	N/A	N.C.R.	N.C.R.	
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.	

NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is advised that information contaited extend of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-tervent is unaviated and defined mergins and the proposed of the formation contaited the fulle at tervent of the law. pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




10.3. Test SET-UP:

10.3.1. Radiated emission:

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

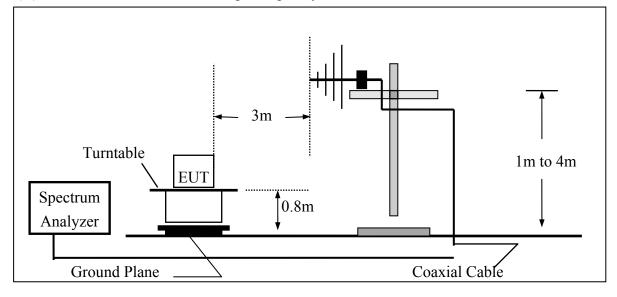

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

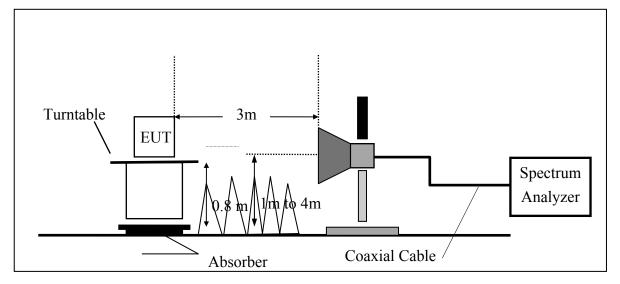

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

S Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



10.4. Measurement Procedure:

Radiated Emission:

- 1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 4. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all frequency of the interest measured were complete.

Auxiliary Procedure (Setting on Spectrum to capture the reading of emission level):

Span = wide enough to fully capture the emission being measured RBW = 1 MHz for $f \ge 1$ GHz, 100 kHz for f < 1 GHz VBW \ge RBW Sweep = auto Detector function = peak Trace = max hold

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



10.5. Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Remark.

- 1. The limit of the emission level is expressed in dBuV/m, which converts $20*\log(uV/m)$
- 2. Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) Pre Amplifier Gain(dB)

10.6. Measurement Result:

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.

Note: For the tabular table as presents below, "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. "E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

WeifS of all weights and the results and state the four result of the state of th Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.6.1 Radiated Emission – Band Edge: (Worst: BR mode) Non-Hopping mode									
Operation Band		:BR		Test Date		:2014-03-	:2014-03-30		
Fundamental	Frequency	:2402 MHz		Temp./Humi.		:21deg_C/	:21deg C/52RH		
Operation Mode		:Bandedge LOW		Engineer		:Vito	:Vito		
EUT Pol.		:E2 Plan		Measurement An	tenna Pol.	:VERTICA	:VERTICAL		
Freq. MHz	Detector Mode PK/QP/AV	Note F/H/E/S	Spectrum Reading Lev dBuV/m	Factor el dB	Actual FS dBuV/m	Limit @3m dBuV/m	Margin dB		
2390.00	Peak	E	47.65	3.14	50.79	74.00	-23.21		
2390.00	Average	Е	38.03	3.14	41.17	54.00	-12.83		

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:BR :2402 MHz :Bandedge LOW :E2 Plan		Test Date Temp./Humi. Engineer Measurement An	itenna Pol.	:2014-03-30 :21deg_C/52RH :Vito :HORIZONTAL	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Lev	el	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
2390.00	Peak	E	46.96	3.14	50.10	74.00	-23.90
2390.00	Average	Е	37.29	3.14	40.43	54.00	-13.57

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30008 Issue Date: Apr. 01, 2014 Page: 35 of 48

Operation Band Fundamental Frequency Operation Mode EUT Pol.		:BR :2480 MHz :Bandedge HIGH :E2 Plan		Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2014-03-30 :21deg_C/52RH :Vito :VERTICAL	
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Leve	el	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
2483.50	Peak	Е	54.40	3.35	57.76	74.00	-16.24
2483.50	Average	Е	45.56	3.35	48.91	54.00	-5.09
Operation Band Fundamental Frequency Operation Mode EUT Pol.		:BR :2480 MHz :Bandedge H :E2 Plan	IGH	Test Date Temp./Humi. Engineer Measurement An	tenna Pol.	:2014-03-3 :21deg_C/ :Vito :HORIZO	52RH
Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Leve	el	FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
2483.50	Peak	Е	56.19	3.35	59.54	74.00	-14.46

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

The trace on RE(radiation emission) plot is as colored blue, and the detection manner we've employed is peak detector.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



10.6.2 Radiated Spurious Emission Measurement Result (worst case BR mode) **Operation Band** ·RR Test Date ·2014-03-30

Operation Danu	.DK	Test Date	.2014-03-30
Fundamental Frequency	:2402 MHz	Temp./Humi.	:21deg_C/52RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
4804.00	Peak	Н	45.80	0.37	46.18	74.00	-27.82
4804.00	Average	Н	35.22	0.37	35.59	54.00	-18.41
7206.00	Н						
9608.00	Н						
12010.00	Н						
14412.00	Н						
16814.00	Н						
19216.00	Н						
21618.00	Н						
24020.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Report No.: E2/2014/30008 Issue Date: Apr. 01, 2014 Page: 37 of 48

Operation Band	:BR	Test Date	:2014-03-30
Fundamental Frequency	:2402 MHz	Temp./Humi.	:21deg_C/52RH
Operation Mode	:TX LOW	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
4804.00	Peak	Н	46.30	0.37	46.68	74.00	-27.32
4804.00	Average	Н	34.09	0.37	34.46	54.00	-19.54
7206.00	Н						
9608.00	Н						
12010.00	Н						
14412.00	Н						
16814.00	Н						
19216.00	Н						
21618.00	Н						
24020.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



Report No.: E2/2014/30008 Issue Date: Apr. 01, 2014 Page: 38 of 48

Operation Band	:BR	Test Date	:2014-03-30
Fundamental Frequency	:2441 MHz	Temp./Humi.	:21deg C/52RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plan		:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

 $Factor(dB) = Antenna Factor(dB\mu V/m) + Cable Loss(dB) - Pre Amplifier Gain(dB)$

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E": denotes Band Edge Frequency.; "S": denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
4882.00	Peak	Н	47.73	0.41	48.14	74.00	-25.86
4882.00	Average	Н	36.19	0.41	36.60	54.00	-17.40
7323.00	Н						
9764.00	Н						
12205.00	Н						
14646.00	Н						
17087.00	Н						
19528.00	Н						
21969.00	Н						
24410.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30008 Issue Date: Apr. 01, 2014 Page: 39 of 48

Operation Band	:BR	Test Date	:2014-03-30
Fundamental Frequency	:2441 MHz	Temp./Humi.	:21deg_C/52RH
Operation Mode	:TX MID	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
4882.00	Peak	Н	46.52	0.41	46.93	74.00	-27.07
4882.00	Average	Н	35.27	0.41	35.68	54.00	-18.32
7323.00	Н						
9764.00	Н						
12205.00	Н						
14646.00	Н						
17087.00	Н						
19528.00	Н						
21969.00	Н						
24410.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30008 Issue Date: Apr. 01, 2014 Page: 40 of 48

Operation Band	:BR	Test Date	:2014-03-30
Fundamental Frequency	:2480 MHz	Temp./Humi.	:21deg_C/52RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:VERTICAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note : "F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---": denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
4960.00	Peak	Н	50.14	0.61	50.75	74.00	-23.25
4960.00	Average	Н	38.89	0.61	39.50	54.00	-14.50
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: E2/2014/30008 Issue Date: Apr. 01, 2014 Page: 41 of 48

Operation Band	:BR	Test Date	:2014-03-30
Fundamental Frequency	:2480 MHz	Temp./Humi.	:21deg_C/52RH
Operation Mode	:TX HIGH	Engineer	:Vito
EUT Pol.	:E2 Plan	Measurement Antenna Pol.	:HORIZONTAL

Actual FS($dB\mu V/m$) = SPA. Reading level($dB\mu V$) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

"F" : denotes Fundamental Frequency. ; "H" : denotes Harmonic Frequency. Note :

"E" : denotes Band Edge Frequency. ; "S" : denotes Spurious Frequency.

"---" : denotes Noise Floor.

Freq.	Detector	Note	Spectrum	Factor	Actual	Limit	Margin
	Mode		Reading Level		FS	@3m	
MHz	PK/QP/AV	F/H/E/S	dBuV/m	dB	dBuV/m	dBuV/m	dB
4960.00	Peak	Н	48.89	0.61	49.50	74.00	-24.50
4960.00	Average	Н	37.60	0.61	38.21	54.00	-15.79
7440.00	Н						
9920.00	Н						
12400.00	Н						
14880.00	Н						
17360.00	Н						
19840.00	Н						
22320.00	Н						
24800.00	Н						

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134 號 SGS Taiwan Ltd.



11. FREQUENCY SEPARATION

11.1. Standard Applicable

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

11.2. Measurement Equipment Used:

SGS SAC Chamber No.C									
Name of Equipment	Manufacturer	Model	Serial Num- ber	Calibration Date	Calibration Due				
Signal Analyzer	R&S	FSV 40	101493	01/07/2014	01/06/2015				
EMI Test Receiver	R&S	ESCI 7	100950	01/11/2014	01/10/2015				
Broadband Antenna	TESEQ	CBL 6112D	35240	01/17/2014	01/16/2015				
Horn Antenna	ETS-Lindgren	3117	00143272	01/27/2014	01/26/2015				
Horn Antenna	ETS-Lindgren	3160-09	00117911	01/22/014	01/21/2015				
Horn Antenna	ETS-Lindgren	3160-10	00117783	01/22/2014	01/21/2015				
Pre-Amplifier	R&S	SCU-18	10203	04/29/2013	04/28/2014				
Pre-Amplifier	EM Electronics Corp.	EMC330	980096	01/24/2014	01/23/2015				
Pre-Amplifier	EM Electronics Corp.	EMC184045	980135	01/24/2014	01/23/2015				
Coaxial Cable	Huber+Suhner	SAC-C TX-30M-1GH z	TX1	04/22/2013	04/21/2014				
Coaxial Cable	Huber+Suhner	SAC-C TX-1-26.5GH z	TX2	04/22/2013	04/21/2014				

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Coaxial Cable	Huber+Suhner	SAC-C RX-150k-30M Hz	RX1	04/22/2013	04/21/2014
Coaxial Cable	Huber+Suhner	SAC-C RX-30M-1GH z	RX2	04/22/2013	04/21/2014
Coaxial Cable	Huber+Suhner	SAC-C RX-1-26.5GH z	RX3	04/22/2013	04/21/2014
Filter Bank	R&S	TS8996	SCIN.EMC.102 3.12	04/22/2013	04/21/2014
Attenuator	WOKEN	218FS-10	HY-151	01/06/2014	01/05/2015
Controller	Chance Most	886	N/A	N.C.R.	N.C.R.
Antenna Master	Chance Most	N/A	N/A	N.C.R.	N.C.R.
Turn Table	Chance Most	N/A	N/A	N.C.R.	N.C.R.
Test Software	World-Pallas	Dr. E	V 3.0 Lite	N.C.R.	N.C.R.

11.3. Test Set-up:

EUT	Attenuator
	SPA

11.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = middle of hopping channel.
- 4. Set the spectrum analyzer as RBW, VBW=100 kHz, Adjust Span to 5MHz, Sweep = auto.
- 5. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

11.5. Measurement Result:

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告结果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_ed-coument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



12. NUMBER OF HOPPING FREQUENCY

12.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.


12.2. Measurement Equipment Used:

SGS Conducted Room							
Name of Equip-	Manufacturer	Model	Serial Num-	Calibration	Calibration		
ment		WIUUCI	ber	Date	Due		
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/26/2013	10/25/2014		
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014		
Power Sensor	Anritsu	MA2411B	1315048	06/28/2013	06/27/2014		
Power Sensor	Anritsu	MA2411B	1315049	06/28/2013	06/27/2014		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-144	01/06/2014	01/05/2015		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-145	01/06/2014	01/05/2015		
Coaxial Cable 80cm	WOKEN	00100A1F1A1 85C	HY-143	01/06/2014	01/05/2015		
DC Block	Mini-Circuits	BLK-18-S+	HY-146	01/06/2014	01/05/2015		
DC Block	PASTERNACK	PE8210	HY-147	01/06/2014	01/05/2015		
Splitter	RF-LAMBAD	RFLT2W1G1 8G	11-JSPF412-0 19	01/06/2014	01/05/2015		
Splitter	WOKEN	-	DOM35LW1 A2	01/06/2014	01/05/2015		
Attenuator	Mini-Circuits	BW-S10W2+	HY-148	01/06/2014	01/05/2015		
Attenuator	WOKEN	218FS-10	HY-149	01/06/2014	01/05/2015		
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014		
DC Power Supply	HOLA	DP-3003	D707003S	N.C.R.	N.C.R.		
DC Power Supply	DHA	DPS-3003	9411005787	N.C.R.	N.C.R.		
DC Power Supply	Agilent	E3640A	MY53140006	N.C.R.	N.C.R.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



12.3. Test Set-up:



12.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 4. Set the spectrum analyzer as RBW=430 kHz, VBW=1.5MHz., Detector = Peak
- 5. Max hold, view and count how many channel in the band.

12.5. Measurement Result:

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

で解す另有说明、此報告結果僅對測試之様品負責、同時此様品僅保留的天。本報告未經本公司書面許可、不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

13. TIME OF OCCUPANCY (DWELL TIME)

13.1. Standard Applicable

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

Limit: 0.4s = 400ms


13.2. Measurement Equipment Used:

SGS Conducted Room							
Name of Equip-	Manufacturer	Model	Serial Num-	Calibration	Calibration		
ment			ber	Date	Due		
Spectrum Analyzer	Agilent	N9010A	MY53400256	10/26/2013	10/25/2014		
Power Meter	Anritsu	ML2496A	1326001	06/28/2013	06/27/2014		
Power Sensor	Anritsu	MA2411B	1315048	06/28/2013	06/27/2014		
Power Sensor	Anritsu	MA2411B	1315049	06/28/2013	06/27/2014		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-144	01/06/2014	01/05/2015		
Coaxial Cable 30cm	WOKEN	00100A1F1A1 95C	HY-145	01/06/2014	01/05/2015		
Coaxial Cable 80cm	WOKEN	00100A1F1A1 85C	HY-143	01/06/2014	01/05/2015		
DC Block	Mini-Circuits	BLK-18-S+	HY-146	01/06/2014	01/05/2015		
DC Block	PASTERNACK	PE8210	HY-147	01/06/2014	01/05/2015		
Splitter	RF-LAMBAD	RFLT2W1G1 8G	11-JSPF412-0 19	01/06/2014	01/05/2015		
Splitter	WOKEN	-	DOM35LW1 A2	01/06/2014	01/05/2015		
Attenuator	Mini-Circuits	BW-S10W2+	HY-148	01/06/2014	01/05/2015		
Attenuator	WOKEN	218FS-10	HY-149	01/06/2014	01/05/2015		
Temperature Chamber	TERCHY	MHK-120LK	1020582	06/20/2013	06/19/2014		
DC Power Supply	HOLA	DP-3003	D707003S	N.C.R.	N.C.R.		
DC Power Supply	DHA	DPS-3003	9411005787	N.C.R.	N.C.R.		
DC Power Supply	Agilent	E3640A	MY53140006	N.C.R.	N.C.R.		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留別天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



13.3. Test Set-up:



13.4. Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set center frequency of spectrum analyzer = operating frequency.
- 4. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = $2\sim7ms$.
- 5. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2

DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4

DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

13.5. Tabular Result of the Measurement:

N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

14. ANTENNA REQUIREMENT

14.1. Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

14.2. Antenna Connected Construction

The directional gains of antenna used for transmitting is 3.45dBi, and the antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

時非另有説明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90.tto 為報告未經本公司書面許可,不可能份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號