FCC&I	C Radio Test Report
F	CC ID: VOB-P1988
l	IC: 7631A-P1988
nis report concerns (check one) : 🚺 Original Grant 🗌 Class II Change
Project No. Equipment Brand Name Model Name Applicant Address	: NVIDIA
Date of Rece	eipt: Feb. 10, 2014 Feb. 10, 2014 ~ Mar. 18, 2014
Testing Engine	eer : David Mao (David Mao)
Technical Man	
Authorized Sig	(Leo Hung) gnatory : Steven Lu (Steven Lu)
N	eutron Engineering Inc. o.3,Jinshagang 1st Road, ShiXia, palang Town, Dong Guan, China. TEL: 0769-8318-3000 FAX: 0769-8319-6000



Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Neutron Engineering Inc.—

Table of Contents	Page
REPORT ISSUED HISTORY	6
1. CERTIFICATION	7
2. SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	9
	•
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 DESCRIPTION OF TEST MODES	11
3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTE	D 12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . TEST RESULT	13
4.1 RADIATED RF OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 MEASURING INSTRUMENTS AND SETTING	13
4.1.3 TEST PROCEDURE	13
4.1.4 TEST SETUP LAYOUT	14
4.1.5 TEST DEVIATION	14
4.1.6 EUT OPERATION DURING TEST	14
4.1.7 EUT TEST CONDITIONS	14
4.1.8 TEST RESULT OF RADIATED RF OUTPUT POWER	15
4.2 99% OCCUPIED BANDWIDTH MEASUREMENT	16
4.2.1 LIMIT	16
4.2.2 MEASURING INSTRUMENTS AND SETTING 4.2.3 TEST PROCEDURE	16 16
4.2.4 TEST SETUP LAYOUT	16
4.2.5 TEST DEVIATION	16
4.2.6 EUT OPERATION DURING TEST	16
4.2.7 EUT TEST CONDITIONS	16
4.2.8 TEST RESULT OF 99% OCCUPIED BANDWIDTH	17
4.3 SPURIOUS EMISSIONS AT ANTENNA TABLETS WEASUREMENT	21
4.3.1 LIMIT	21
4.3.2 MEASURING INSTRUMENTS AND SETTING	21
4.3.3 TEST PROCEDURES	21
4.3.4 TEST SETUP LAYOUT	21
4.3.5 TEST DEVIATION	21
4.3.6 EUT OPERATION DURING TEST	21
4.3.7 EUT TEST CONDITIONS	22

Neutron Engineering Inc._____

FUTRO	
Table of Contents	Page
4.3.8 TEST RESULT OF SPURIOUS EMISSIONS AT ANTENNA TABLETS	5 23
4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT	27
4.4.1 LIMIT	27
4.4.2 MEASURING INSTRUMENTS AND SETTING	27
4.4.3 TEST PROCEDURES	27
4.4.4 TEST SETUP LAYOUT	28
4.4.5 TEST DEVIATION	28
4.4.6 EUT OPERATION DURING TEST	28
4.4.7 EUT TEST CONDITIONS	28
4.4.8 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS BELOW 1GF 4.4.9 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS ABOVE 1GH	-
4.5 BAND EDGE MEASUREMENT	55
	55
4.5.2 MEASURING INSTRUMENTS AND SETTING	55 55
4.5.3 TEST PROCEDURES 4.5.4 TEST SETUP LAYOUT	55
4.5.5 TEST DEVIATION	55 55
4.5.6 EUT OPERATION DURING TEST	55
4.5.7 EUT TEST CONDITIONS	55
4.5.8 TEST RESULTS OF BAND EDGE	56
4.6 FREQUENCY STABILITY MEASUREMENT	58
4.6.1 LIMIT	58
4.6.2 MEASURING INSTRUMENTS AND SETTING	58
4.6.3 TEST PROCEDURES	58
4.6.4 TEST SETUP LAYOUT	58
4.6.5 TEST DEVIATION	58
4.6.6 EUT OPERATION DURING TEST	58
4.6.7 EUT TEST CONDITIONS	59
4.6.8 RESULTS OF FREQUENCY STABILITY	60
4.7 PEAK TO AVERAGE RADIO	62
4.7.1 LIMIT 4.7.2 TEST PROCEDURES	62 62
4.7.2 TEST PROCEDORES 4.7.3 TEST SETUP LAYOUT	62 62
4.7.4 TEST DEVIATION	62
4.7.5 EUT OPERATION DURING TEST	62
4.7.6 EUT TEST CONDITIONS	62
4.7.7 TEST RESULT OF PEAK TO AVERAGE RADIO	63
4.8 CONDUCTED EMISSION MEASUREMENT	67
4.8.1 POWER LINE CONDUCTED EMISSION LIMITS	67
4.8.2 TEST PROCEDURE	68
4.8.3 DEVIATION FROM TEST STANDARD	68
4.8.4 TEST SETUP	68
4.8.5 EUT OPERATING CONDITIONS	68

Neutron Engineering Inc.	
Table of Contents	Page
4.8.6 EUT TEST CONDITIONS	68
4.8.7 TEST RESULTS	69
5. LIST OF MEASUREMENT EQUIPMENTS	72
6. EUT TEST PHOTO	74



REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
NEI-FICP-5-1402C004A	Original Issue.	Mar. 19, 2014



1. CERTIFICATION

Equipment : Brand Name : Model Name : Applicant	NVIDIA
	NVIDIA CORPORATION
	2701 SAN TOMAS EXPRESSWAY, SANTA CLARA, CALIFORNIA 95050, UNITED STATES OF AMERICA
Factory :	HONGFUJIN PRECISION ELECTRONICS (TIANJIN) CO., LTD
	A01,NO.36, North Street, West Zone, Economic & Technological Development Area, Tianjin
Date of Test :	Feb. 10, 2014 ~ Mar. 18, 2014
Test Item :	ENGINEERING SAMPLE
Standard(s) :	47 CFR FCC Part 24 Subpart E & ANSI C63.4 : 2009 47 CFR FCC Part 2 & ANSI/TIA-603-C-2004 RSS-133 Issue 6 January 2013

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FICP-5-1402C004A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test result included in this report is only for the GSM1900 approval part of the product.

Neutron Engineering Inc.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 24 Subpart E & Part 2/ RSS-133 Issue 6					
	dard(s) ction	Test Item	Judgment	Remark	
FCC	IC				
2.1047(d)	6.2	Modulation Characteristics	PASS		
2.1046 24.232(c)	6.4	Radiated RF Output	PASS		
2.1049 24.238(a)	-	99% Occupied Bandwidth	PASS		
2.1051 24.238(a)	6.5	Spurious Emissions at Antenna Terminal	PASS		
2.1053 24.238(a)	6.5	Spurious Radiated Emissions	PASS		
24.238(a)	6.5	Band Edge	PASS		
2.1055 24.235	6.3	Frequency Stability	PASS		
24.232(d)	6.4	Peak to Average Radio	PASS		
15.207	15.207 6.5 Conducted Emission		PASS		

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

The test facilities used to collect the test data in this report is **DG-C02/ DG-CB02** at the location of No.3, Jinshagang 1st Road, ShiXia, Dalang Town, Dong Guan, China.523792 Neutron's test firm number for FCC: 319330 Neutron's test firm number for IC: 4428B-1

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of **k=2**, providing a level of confidence of approximately **95** % \circ

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
DG-C02	CISPR	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)	NOTE
		30MHz ~ 200MHz	V	3.82	
DG-CB02	CISPR	30MHz ~ 200MHz	Н	3.60	
		200MHz ~ 1,000MHz	V	3.86	
		200MHz ~ 1,000MHz	Н	3.94	

Neutron Engineering Inc.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet			
Brand Name	NVIDIA			
Model Name	P1988			
Model Difference	N/A			
Draduct Description	Operation Frequency:	TX:1850.2MHz~1909.8MHz RX:1930.2MHz~1989.8MHz		
Product Description	Modulation Type:	GMSK;8-PSK		
	EIRP Output Power	24.51dBm		
Channel List	Please refer to the Note 2.			
Power Source	 #1 DC voltage supplied from AC adapter. 1) Brand/ Model: NVIDIA / P2551 2) Brand/ Model: Chicony / W12-010N3A #2 Supplied from lithium-ion battery. 1) Brand/ Model: YOKU/ 32102102 #3 Supplied from USB charging. 			
Power Rating	 #1 AC adapter 1) I/P: AC 100-240V~, 50-60Hz, 0.3A O/P: DC 5.2V, 2.1A 2) I/P: AC 100-240V~, 50/60Hz, 0.3A O/P: DC 5.35V, 2A #2 Lithium-ion battery 1) DC 3.7V 4100mAh #3 USB charging 1) DC 5V 2A 			
Connecting I/O Port(s)	Please refer to the User's Manual			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

Band	Channel	Frequency (MHz)	
	512	Low	1850.20
1850.2MHz~1909.8MHz	661	Mid	1880.00
	810	High	1909.80

3.

Table for Filed Antenna @GSM1900

Ant. Brand		Model Name	Antenna Type	Connector	Gain (dBi)
1	SPEED	G-KW-0001	Monopole	N/A	5.31



3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Test Items	Worst TX Mode	Channel
Radiated RF Output	GSM	512/661/810
Spurious Radiated Emissions	GSM	512/661/810
Band Edge Emissions	GSM	512/661/810
Frequency Stability	GSM	661
99% Occupied Bandwidth	GSM	512/661/810
Spurious Emissions at Antenna Terminal	GSM	512/661/810

For Conducted Emission		
Final Test Mode	Description	
Mode 1	TX Mode	

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.

(2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on Z-plane. Therefore only the test data of this Z-plane was used for radiated emission measurement test.

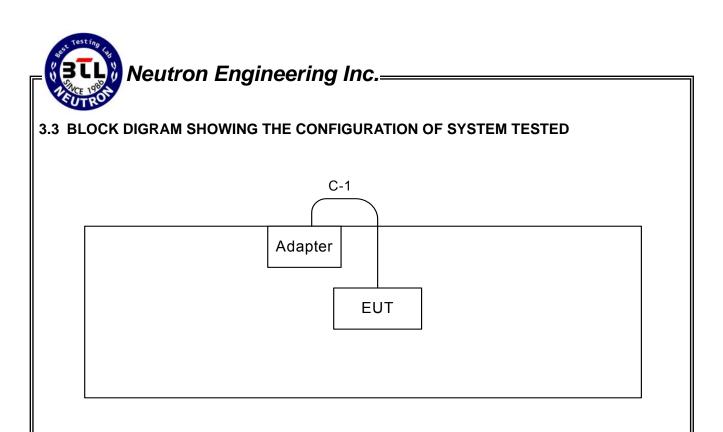

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID/IC	Series No.	Note
-	-	-	-	-	-	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	0.8m	USB Cable



4. TEST RESULT

4.1 RADIATED RF OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

The Radiated Peak Output Power shall be according to the specific rule Part 24.232(b)&RSS-133 section 6.4 that "Mobile/Portable station are limited to 2 watts e.i.r.p." and 24.232(c) &RSS-133 section 6.4 specifed that "Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.

4.1.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.


Spectrum Parameters	Setting
Attenuation	Auto
Center Frequency	Low / middle / high channels
Span Frequency	10MHz
RB / VB	3MHz / 3MHz for Peak

4.1.3 TEST PROCEDURE

- 1. The EUT was set up for the maximum peak power with GSM link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512, 661 and 810 (low, middle and high operational frequency range).
- 2. The conducted peak output power used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The path loss included the splitter loss, cable loss and 20dB pad loss. The spectrum set RB/VB 3MHz,then read peak power value and record to the test. (All transmitted path loss shall be considered in the test report data)
- 3. E.I.R.P peak power measurement. In the fully anechoic chamber, EUT placed on the 1.5m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- 4. The substitution horn antenna is substituted for EUT at the same position, and signal generator export the CW signal to the calibration antenna. Rotated the Turn Table to find the maximum radiation power. "Raw" is the spectrum reading value, "SG" is signal generator export power, "TX Gain" is calibration antenna isotropic gain value, "TX cable" is the transmitted cable loss between the calibration antenna and signal generator. The "Factor" means that the transmission path loss is equal to "SG" "TX cable" + "TX Gain" "Raw".
- 5. Actually the real E.I.R.P peak power is equal to "Read Value" + "Factor"

Neutron Engineering Inc.=

4.1.4 TEST SETUP LAYOUT

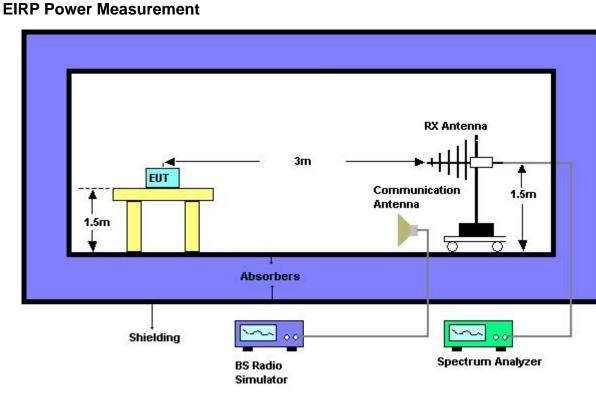

4.1.5 TEST DEVIATION

There is no deviation with the original standard.

4.1.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.1.7 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage:3.7V

Neutron Engineering Inc.=

4.1.8 TEST RESULT OF RADIATED RF OUTPUT POWER

Test Mode : TX CH

TX CH 512/661/810

		Radiated Power(dBm)			Max. Limit	
GS	GSM 1900		Channel 661	Channel 810	(dBm)	Result
GSM	V	20.22	19.84	20.05	33	Complies
GSIM	Н	23.49	24.01	24.49	33	Complies
EGPRS	V	20.72	20.34	20.34	33	Complies
EGPRS	Н	23.99	24.51	20.55	33	Complies

REMARKS:

- 1. Radiated Output Power(dBm)=Raw Value(dBm) + Correction Factor(dB) +Ant Gain(dBi)
- 2. Correction Factor(dB) = Power Splitter Loss(dB) + Cable Loss(dB)
- The EUT does employ a power control function by which the output power is controlled from +28dBm to +19dBm (nominal) by 2dB steps. Consequently the EUT meets the requirement of Part24.232(c).
- 4. The antenna gain is 5.31dBi



4.2 99% OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 LIMIT

According to FCC 24.238(a) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

4.2.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	30 kHz
VB	100 kHz
Trace	Max Hold

4.2.3 TEST PROCEDURE

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. Used measurement function of spectrum to measure the 99% occupied bandwidth..

4.2.4 TEST SETUP LAYOUT

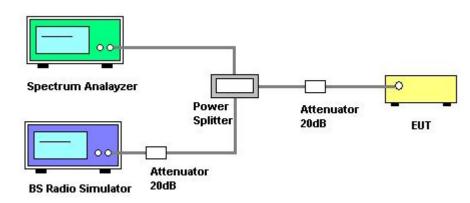

4.2.5 TEST DEVIATION

There is no deviation with the original standard.

4.2.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.


4.2.7 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: 3.7V


Neutron Engineering Inc.=

4.2.8 TEST RESULT OF 99% OCCUPIED BANDWIDTH

	Test Mode : TX Mode Configuration GSM				
Channel	Frequency	99% OBW (kHz)	-26dBc Bandwidth	Result	
512	1850.200MHz	246.00	326.00	Complies	
661	1880.00 MHz	246.00	326.00	Complies	
810	1909.80 MHz	246.00	324.00	Complies	

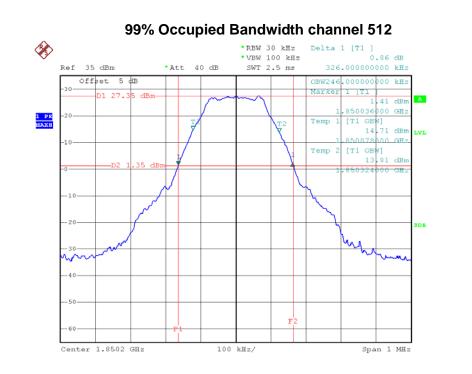


Date: 4.MAR.2014 04:20:48

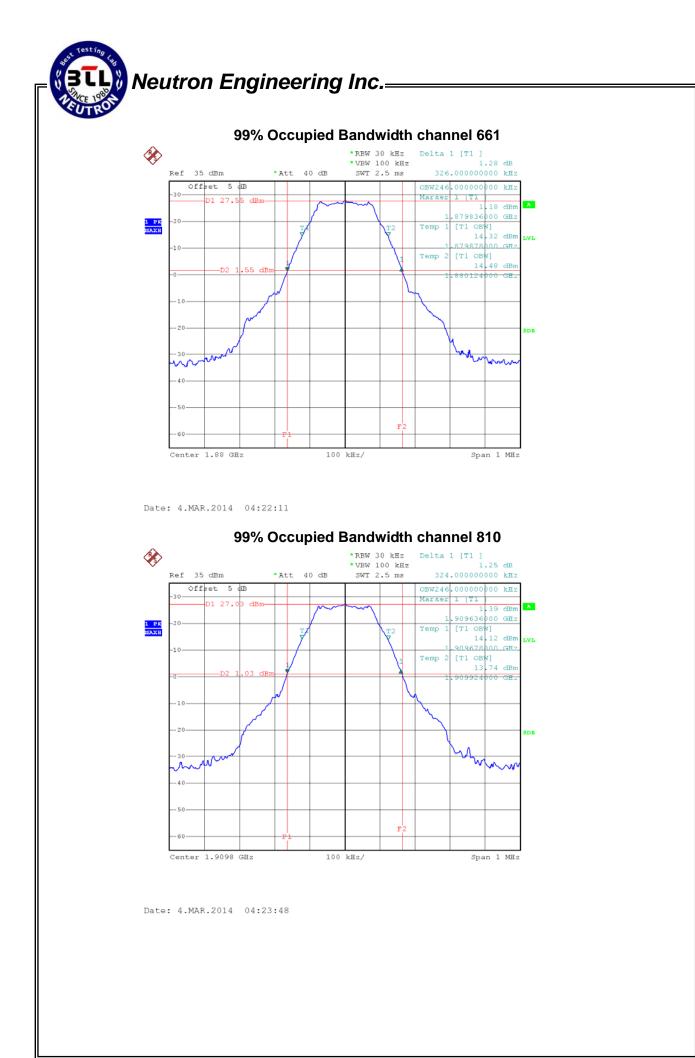


Neutron Engineering Inc.₌

	Test Mode	: TX Mode Config	juration EGPF	RS
Channel	Frequency	99% OBW (kHz)	-26dBc Bandwidth	Result
512	1850.20MHz	248.00	330.00	Complies
661	1880.00 MHz	248.00	336.00	Complies
810	1909.80 MHz	248.00	330.00	Complies

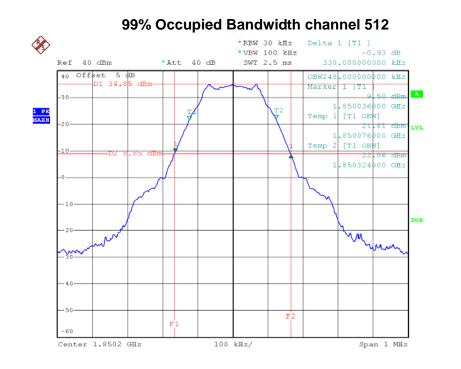

Date: 20.MAR.2014 20:16:36

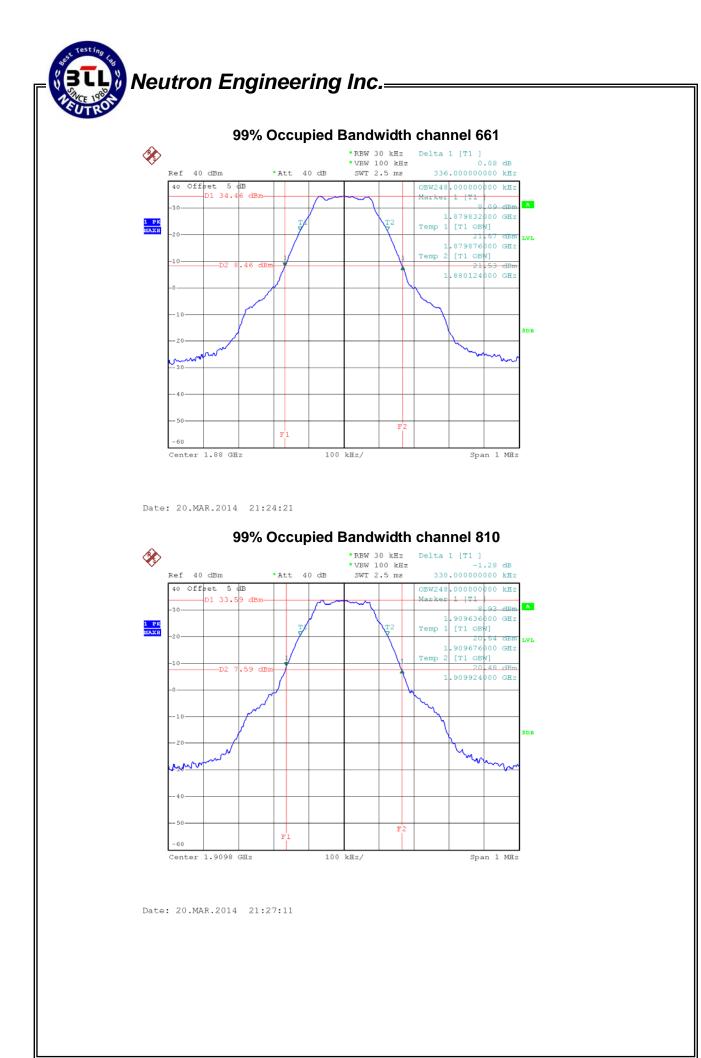

Neutron Engineering Inc.=

4.3 SPURIOUS EMISSIONS AT ANTENNA TABLETS WEASUREMENT

4.3.1 LIMIT

In the FCC 24.238(a)& &RSS-133 section 6.5, on any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm.

4.3.2 MEASURING INSTRUMENTS AND SETTING


Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30MHz
Stop Frequency	10th carrier harmonic
RB / VB	1 MHz / 1MHz for Peak

4.3.3 TEST PROCEDURES

- 1. The EUT was set up for the maximum peak power with GSM link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels, 512,661,810(low, middle and high operational frequency range.)
- 2. The conducted spurious emission used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. This splitter loss and cable loss are the worst loss 4.5dB in the transmitted path track.
- 3. When the spectrum scanned from 9kHz to 3GHz, it shall be connected to the band reject filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.
- 4. When the spectrum scanned from 3GHz to 10GHz, it shall be connected to the high pass filter attenuated the carried frequency. The spectrum set RB/VB 1MHz.

4.3.4 TEST SETUP LAYOUT

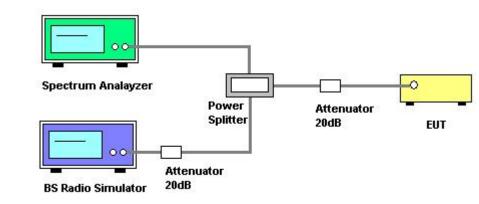

4.3.5 TEST DEVIATION

There is no deviation with the original standard.


4.3.6 EUT OPERATION DURING TEST


The BS simulator was used to set the TX channel and power level and modulate the TX signal.




4.3.7 EUT TEST CONDITIONS


Temperature: 25°C Relative Humidity: 55% Test Voltage:3.7V

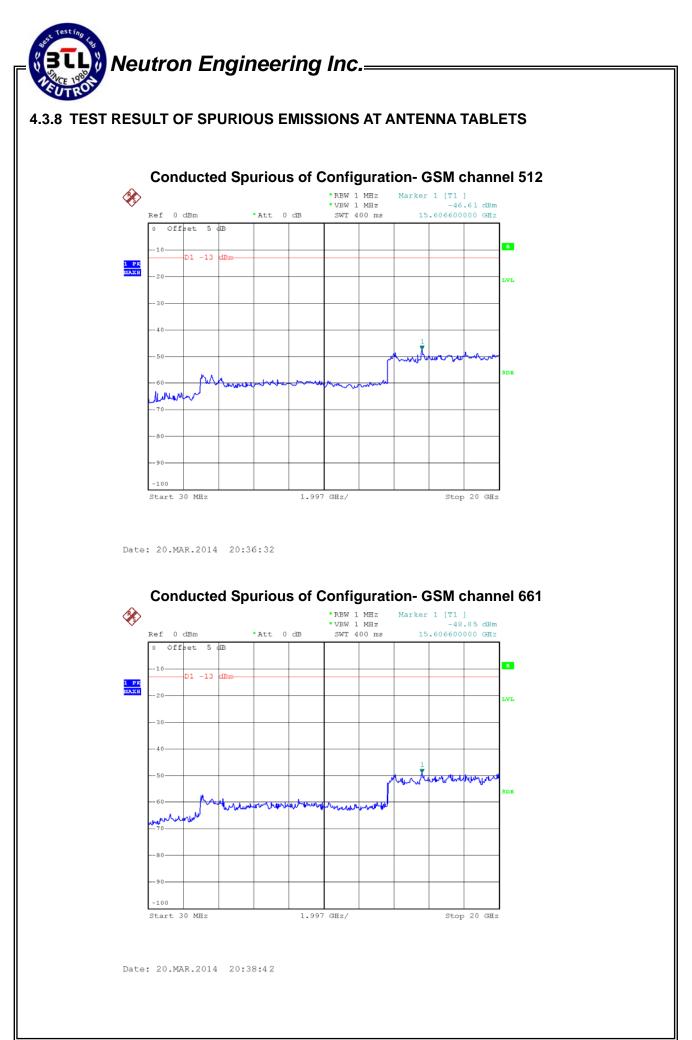

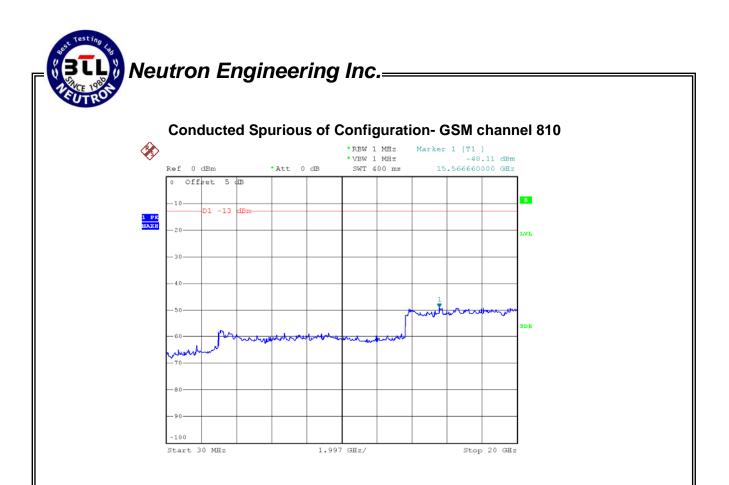

Date: 20.MAR.2014 20:40:52

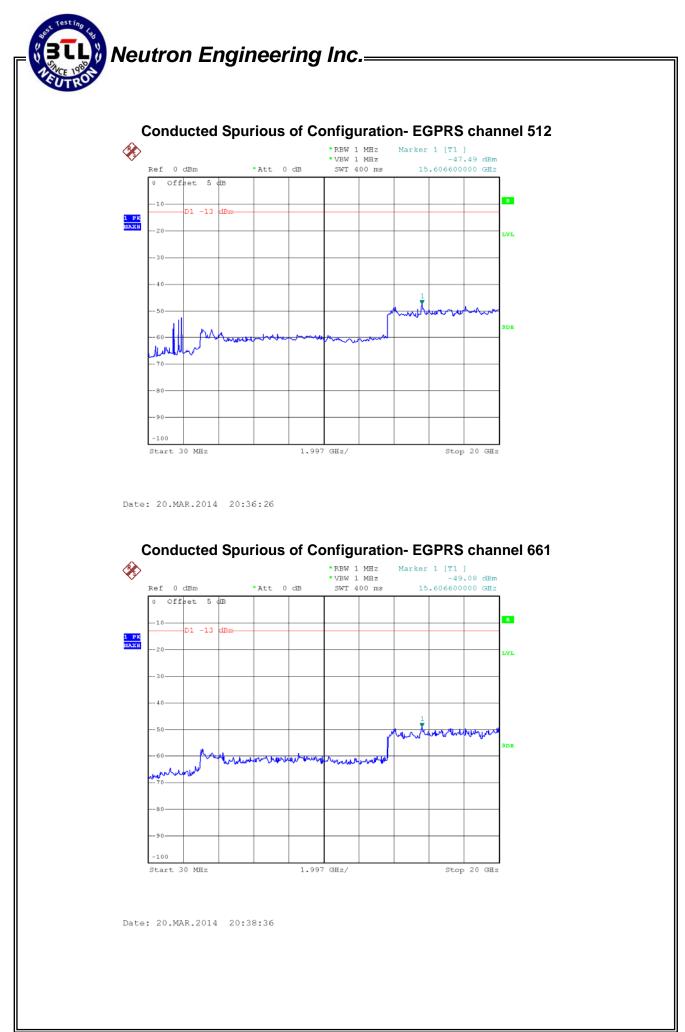

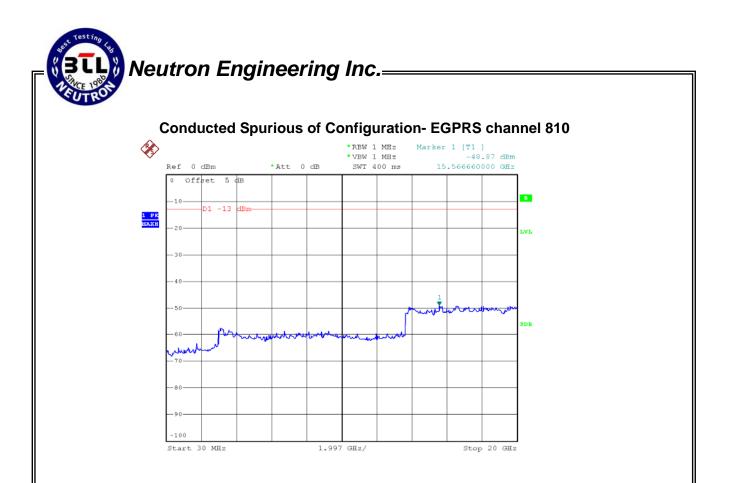

Date: 20.MAR.2014 20:40:42



4.4 SPURIOUS RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT

In the FCC 24.238(a) &RSS-133 section 6.5, On any frequency outside a licensee's frequency block within GSM spectrum, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log (P) dB. The limit translates in the relevant power range (1 to 0.001W). At 1W(Power Control Level 0) the specified minimum attenuation becomes 43dB and the limit of emission equal to -13dBm.At 0.001W(Power Control Level 15) the specified minimum attenuation becomes 13dB and the emission of limit equal to -13dBm.So the limit of emission is the same absolute specified line.

4.4.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Start Frequency	30 MHz
Stop Frequency	10th carrier harmonic
Detector	Positive Peak
Span	100 MHz
Sweep Time	1s
RB / VB	1 MHz / 1MHz
Attenuation	Positive Peak

4.4.3 TEST PROCEDURES

- 1. The EUT was placed on the top of the turntable in fully anechoic chamber.
- 2. The test shall be made in the transmitting mode. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. This measurement shall be repeated with the transmitter in standby mode where applicable.
- 4. For 30~1000MHz spurious emissions measurement, the broad band bi-log receiving antenna was placed 3 meters far away from the turntable. For 1~10th carrier harmonic measurement, the receiving Horn antenna was placed 1.5 meters far away from the turntable.
- 5. The broadband receiving antenna was fixed on the same height with the EUT to find each suspected emissions of both horizontal and vertical polarization. Each recorded suspected value is indicated as Read Level (Raw).
- 6. Replace the EUT by standard antenna and feed the RF port by signal generator.
- 7. Adjust the frequency of the signal generator to the suspected emission and slightly rotate the turntable to locate the position with maximum reading.
- 8. Adjust the power level of the signal generator to reach the same reading with Read Level (Raw).
- 9. The level of the spurious emission is the power level of (8) plus the gain of the standard antenna in dBi and minus the loss of the cable used between the signal generator and the standard antenna.



4.4.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.4.5 TEST DEVIATION

There is no deviation with the original standard.

4.4.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.4.7 EUT TEST CONDITIONS


Temperature: 25°C Relative Humidity: 55% Test Voltage: 3.7V





4.4.8 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS BELOW 1GHZ


Remark :


- (1) Reading in which marked as Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz \circ
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (3) Measuring frequency range from 30MHz to 1000MHz \circ
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table \circ

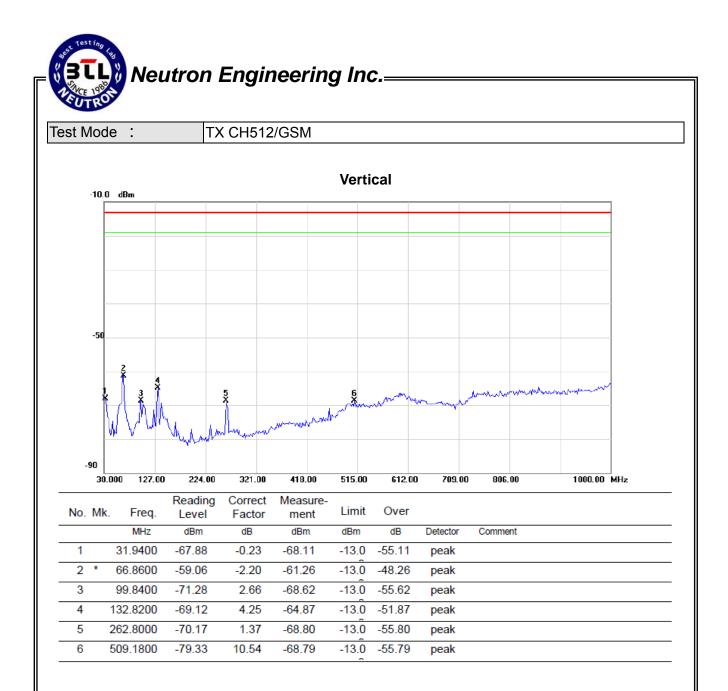


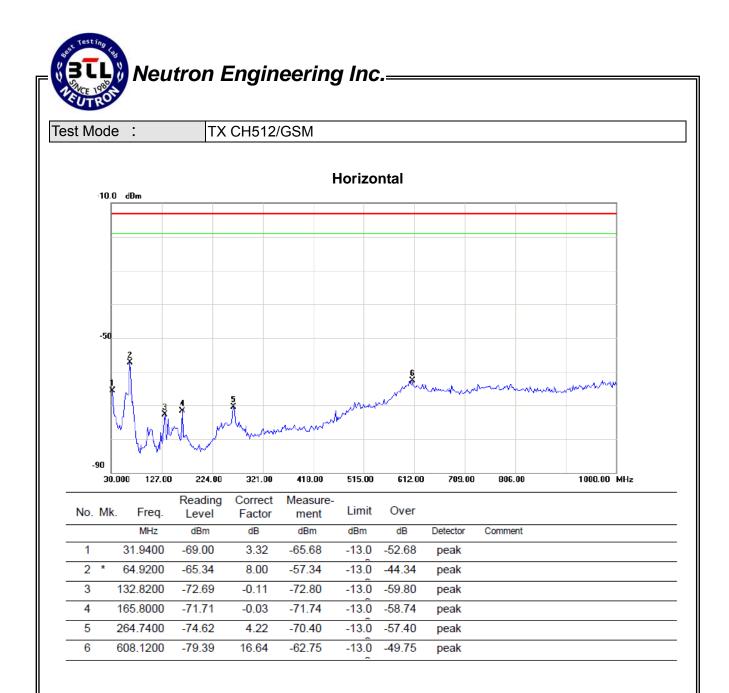


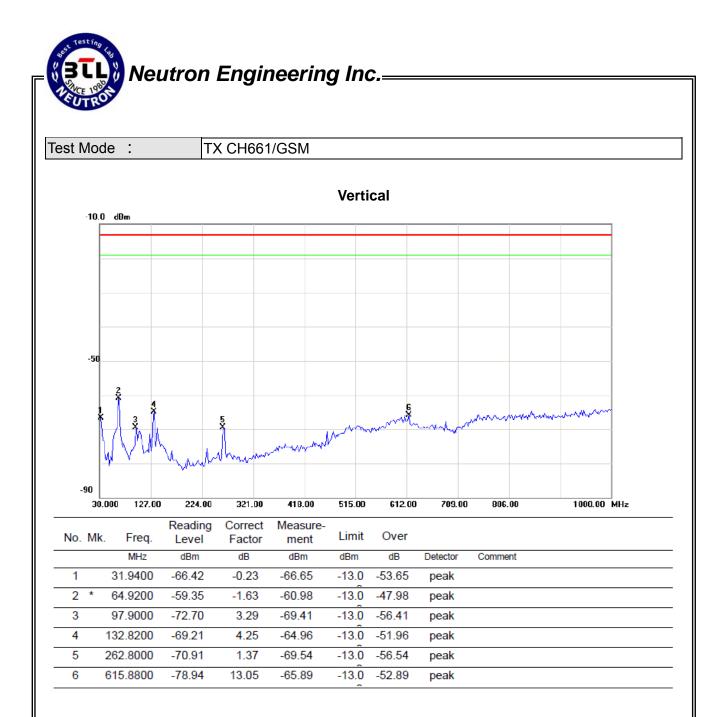


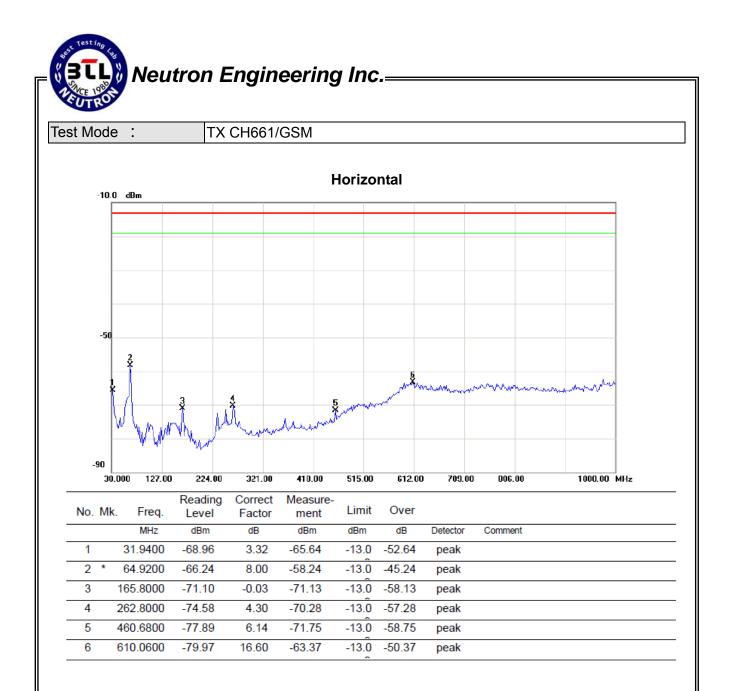


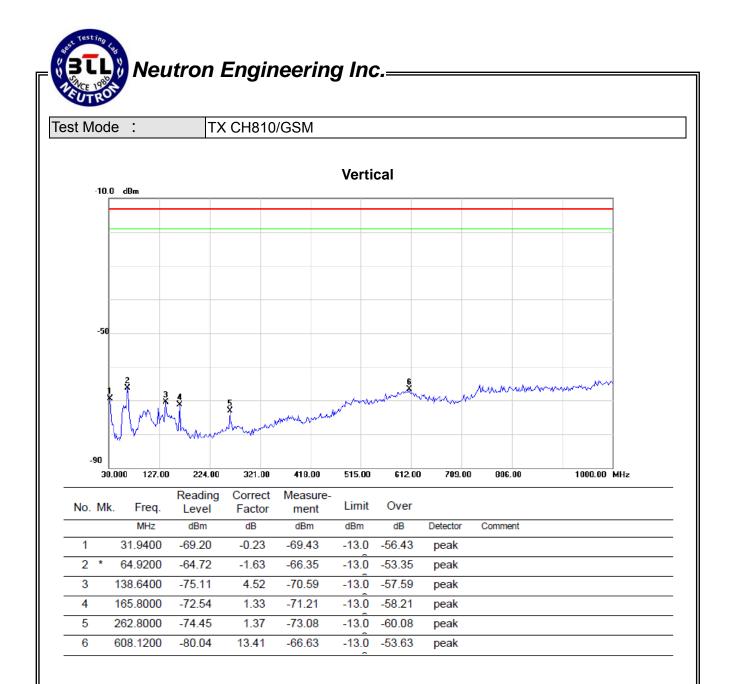


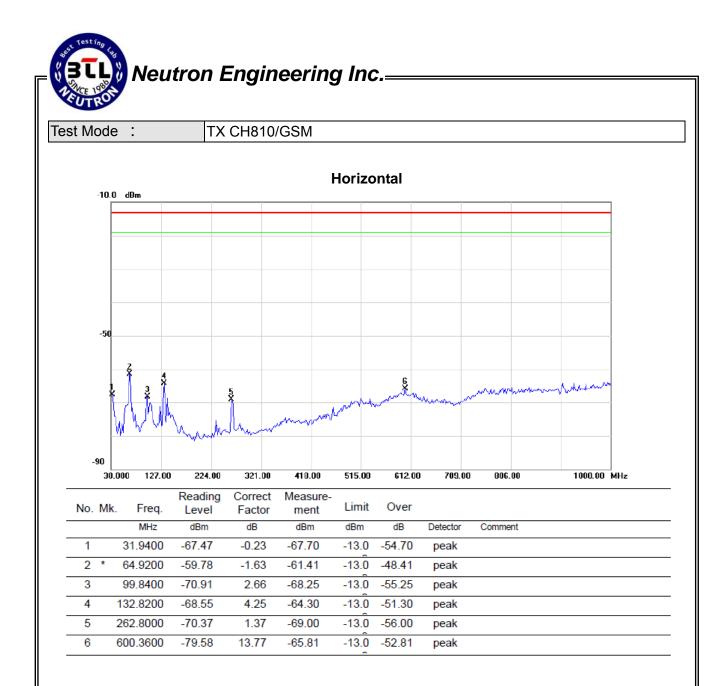


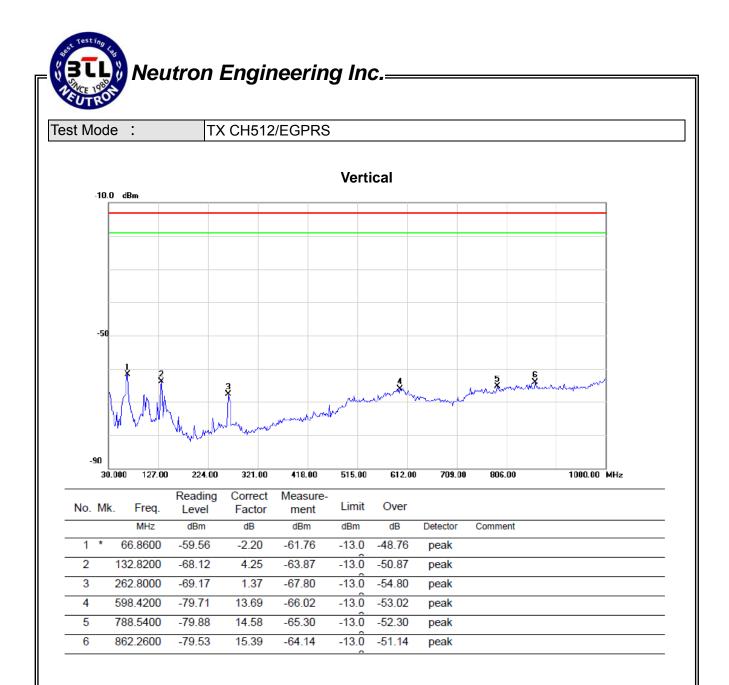


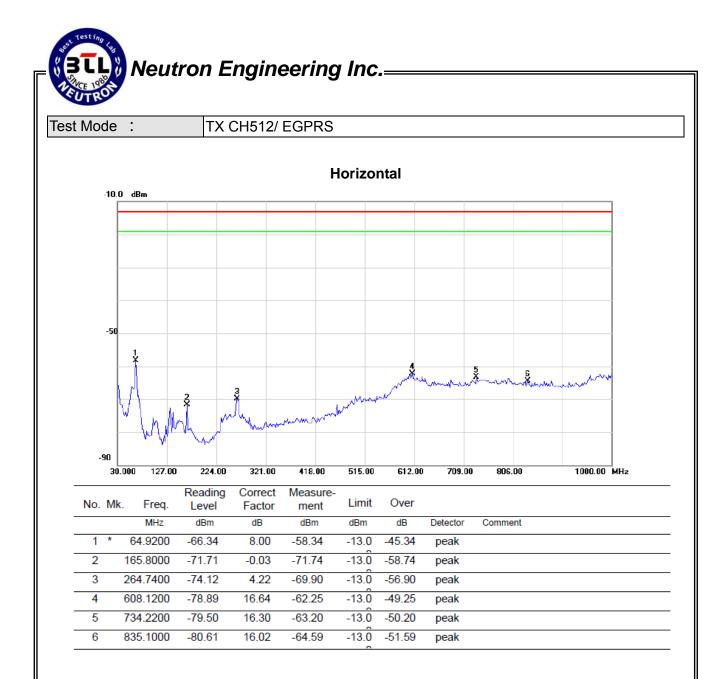

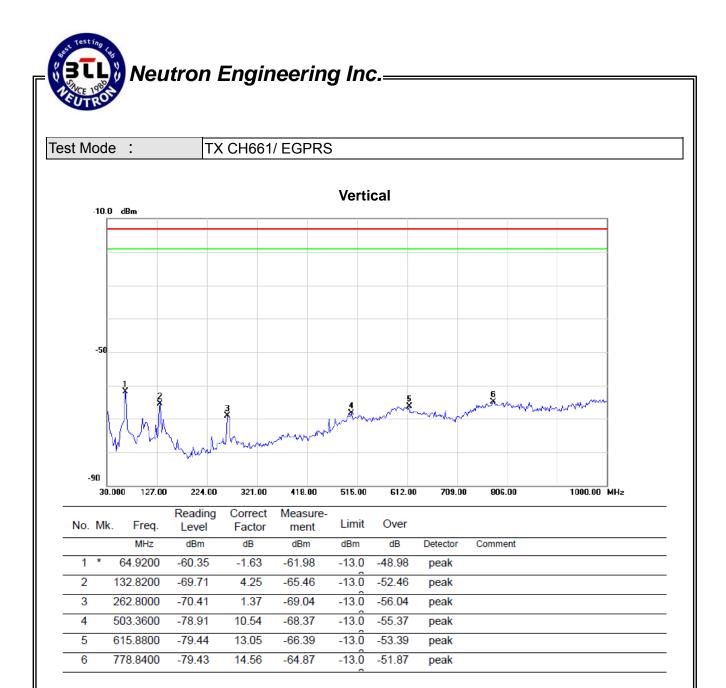

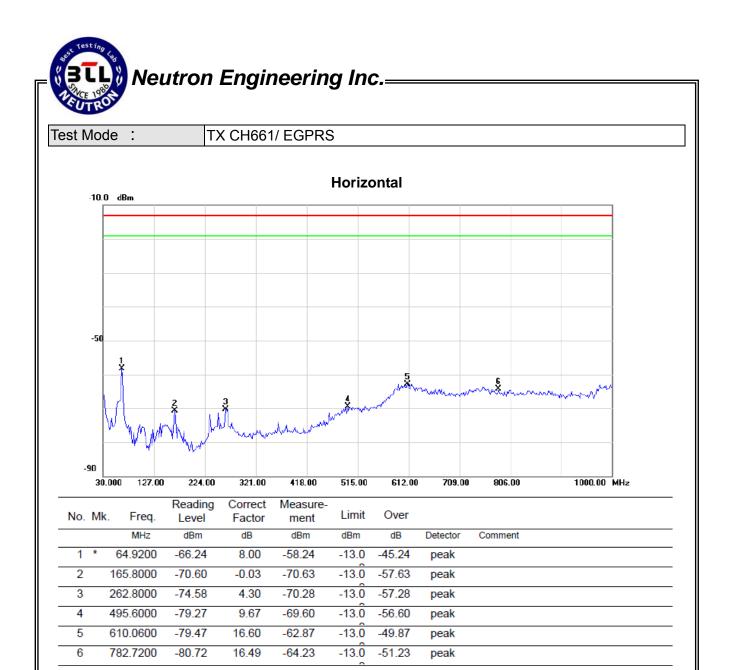

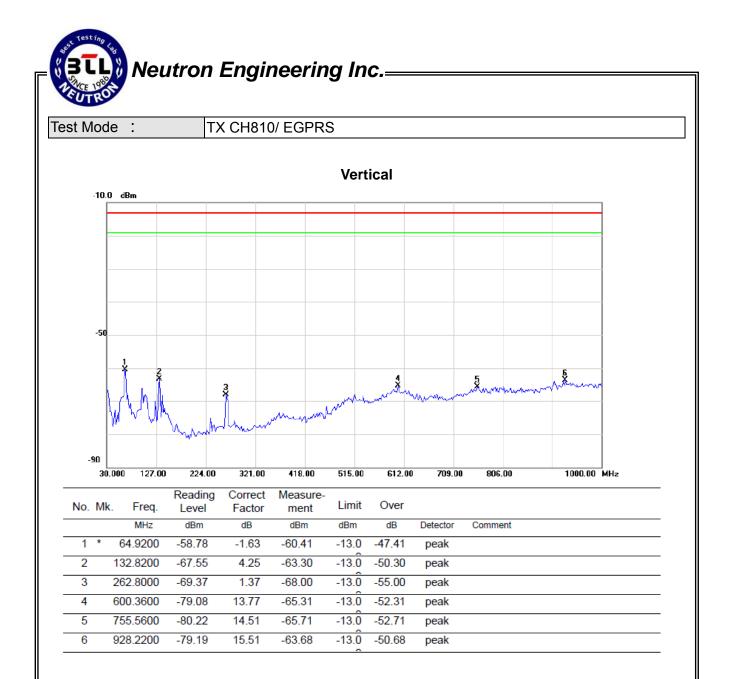

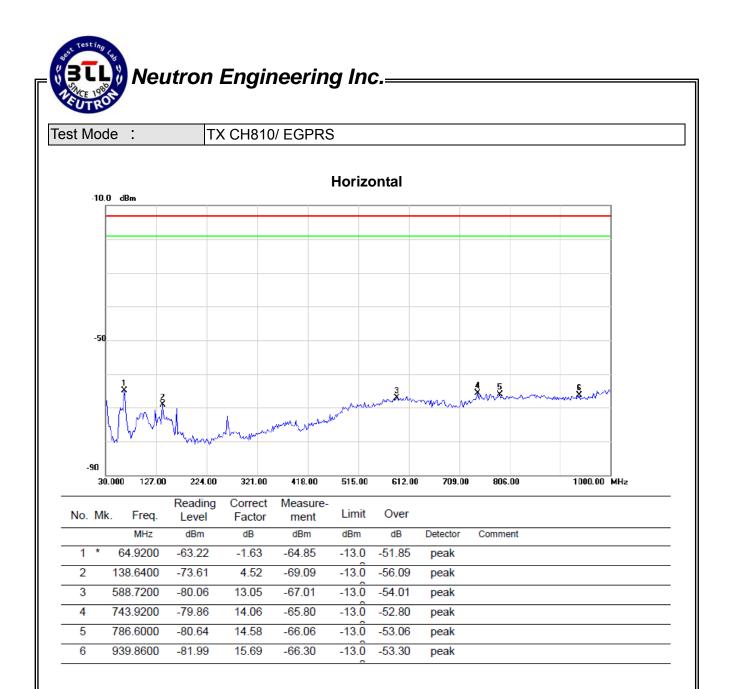






4.4.9 RESULTS OF TRANSMITTER SPURIOUS EMISSIONS ABOVE 1GHZ


Remark :


- (1) Reading in which marked as $\,$ Peak means measurements by using is Peak Mode with Detector SPA setting in RBW=1MHz, VBW =1MHz, Swp. Time = 0.3 sec./MHz $_{\circ}$
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform \circ
- (3) Measuring frequency range from 30MHz to 1000MHz \circ
- (4) If the peak scan value lower limit more than 20dB, then this signal data does not show in table \circ

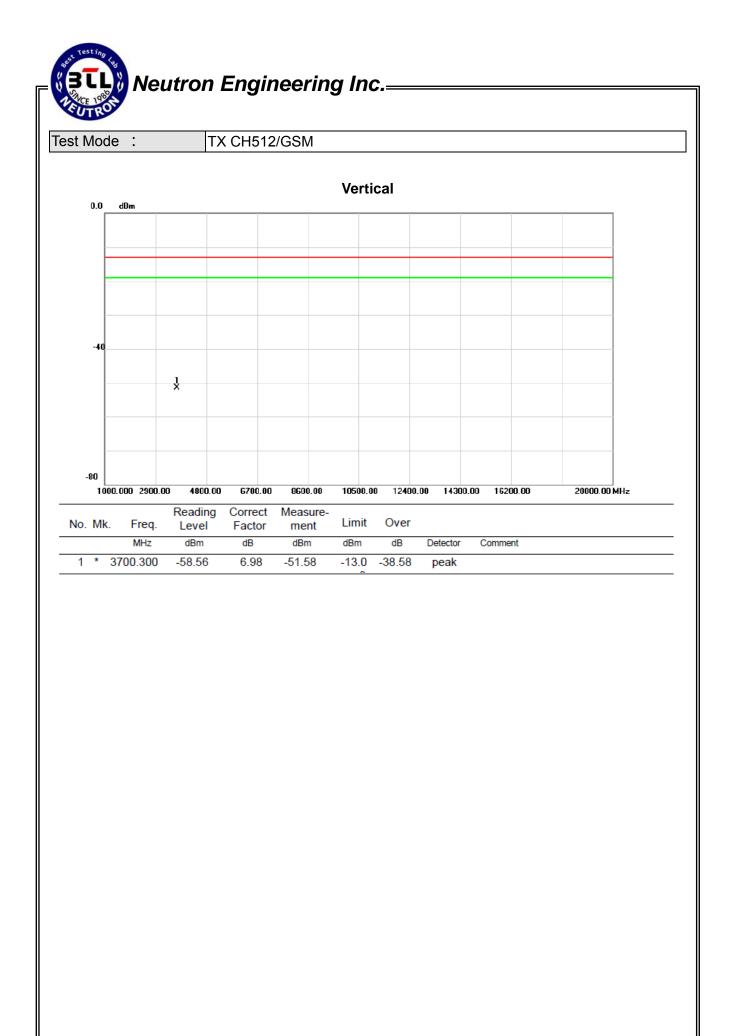


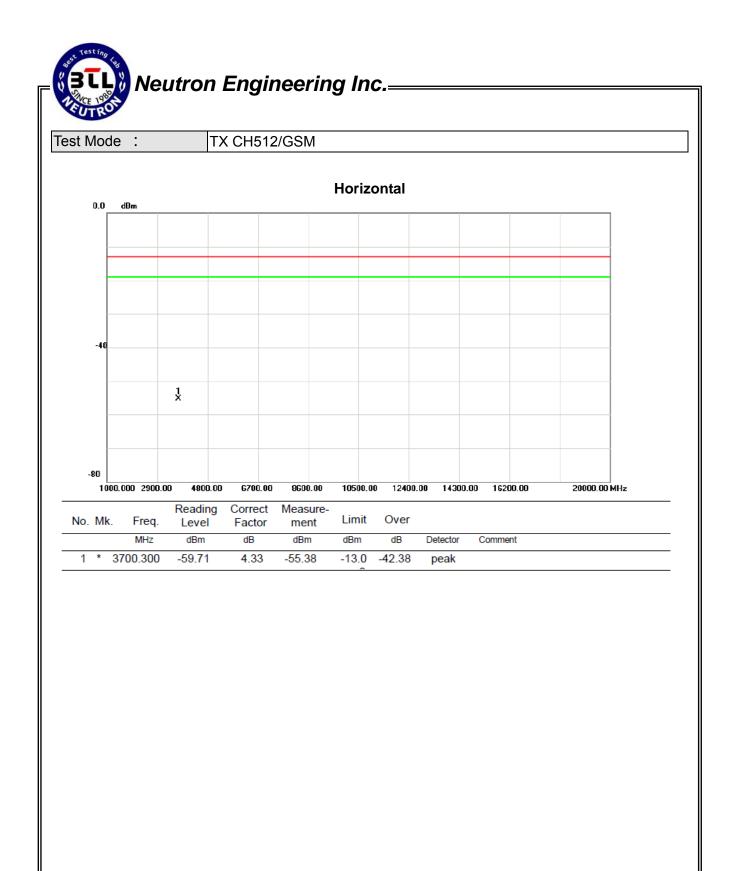


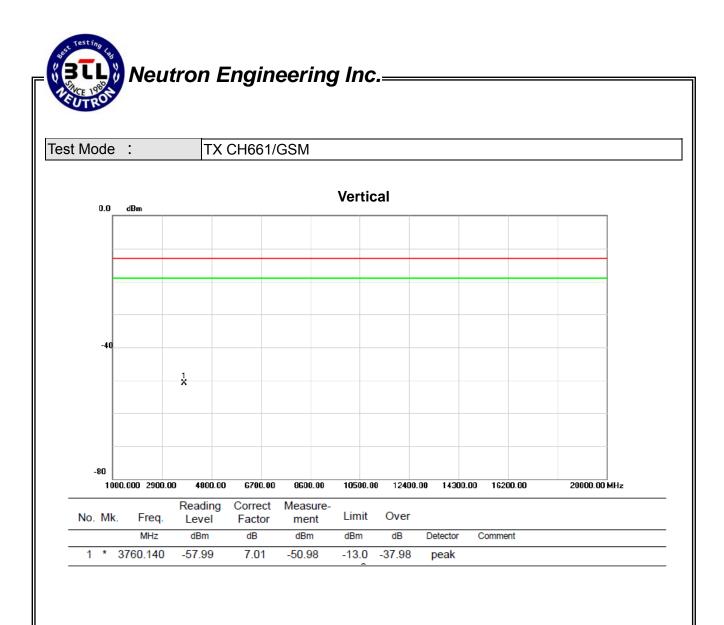


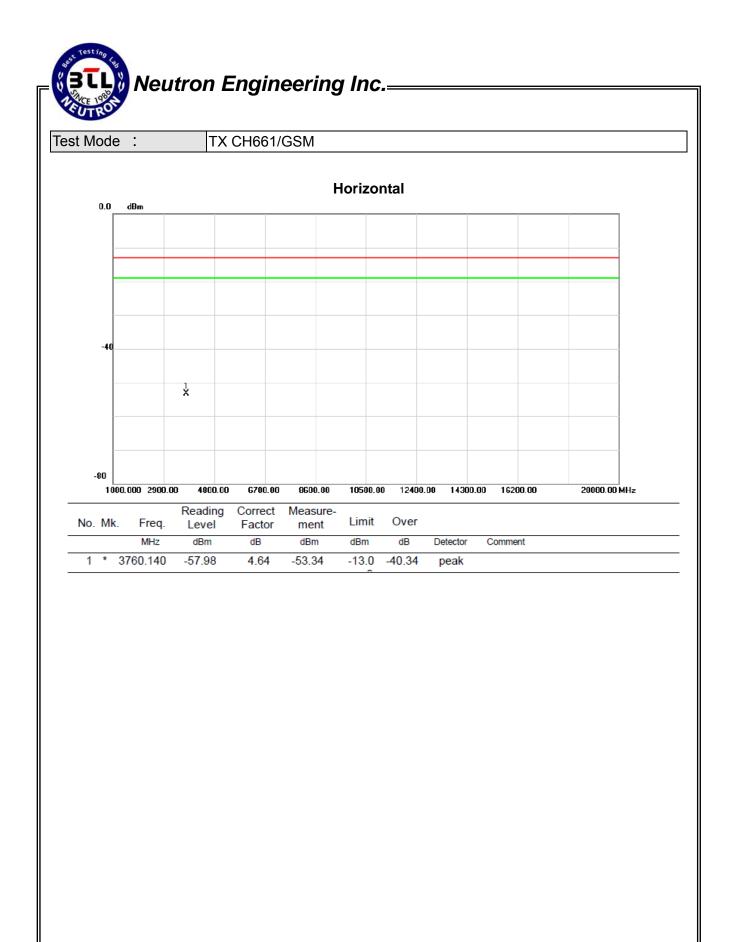


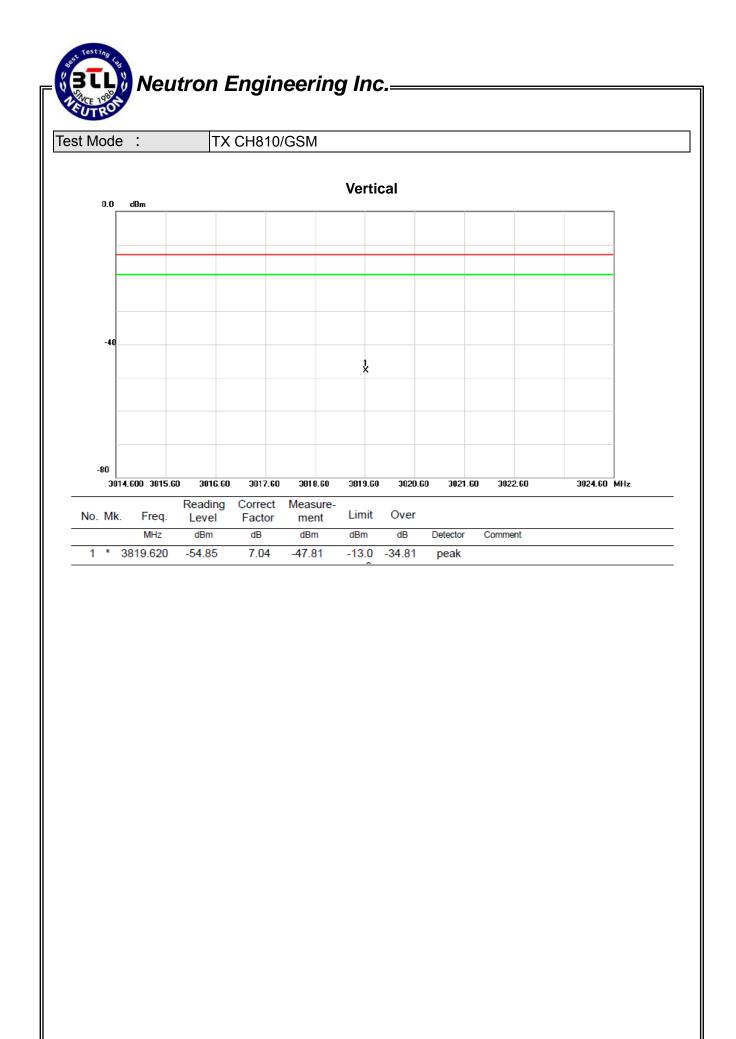


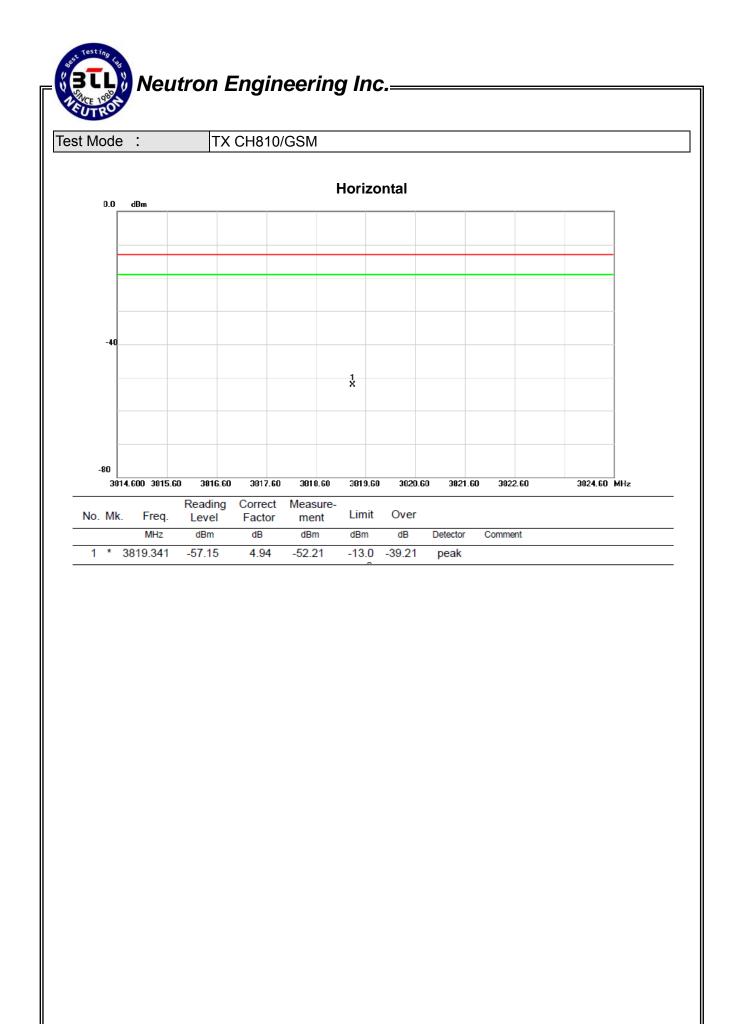


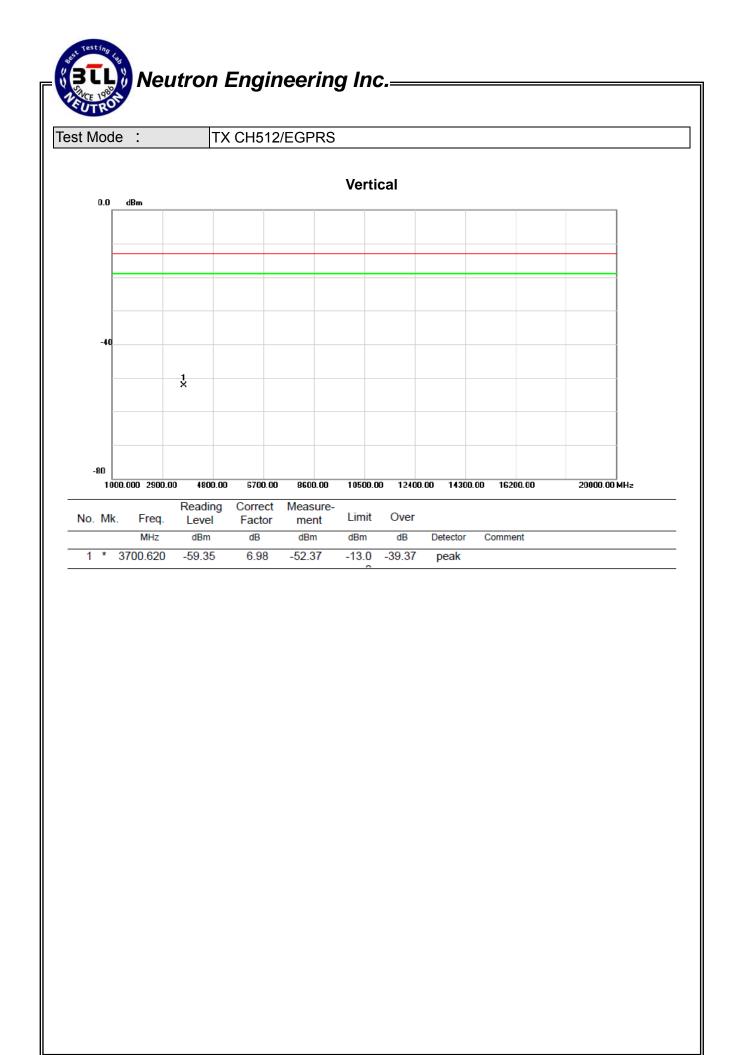


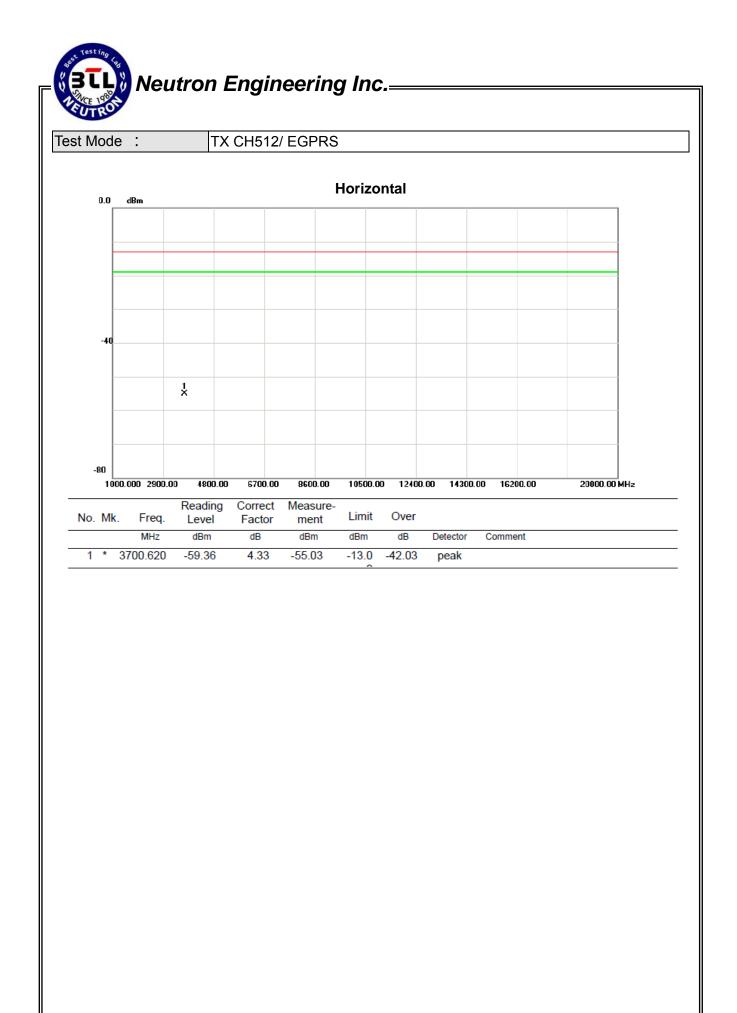

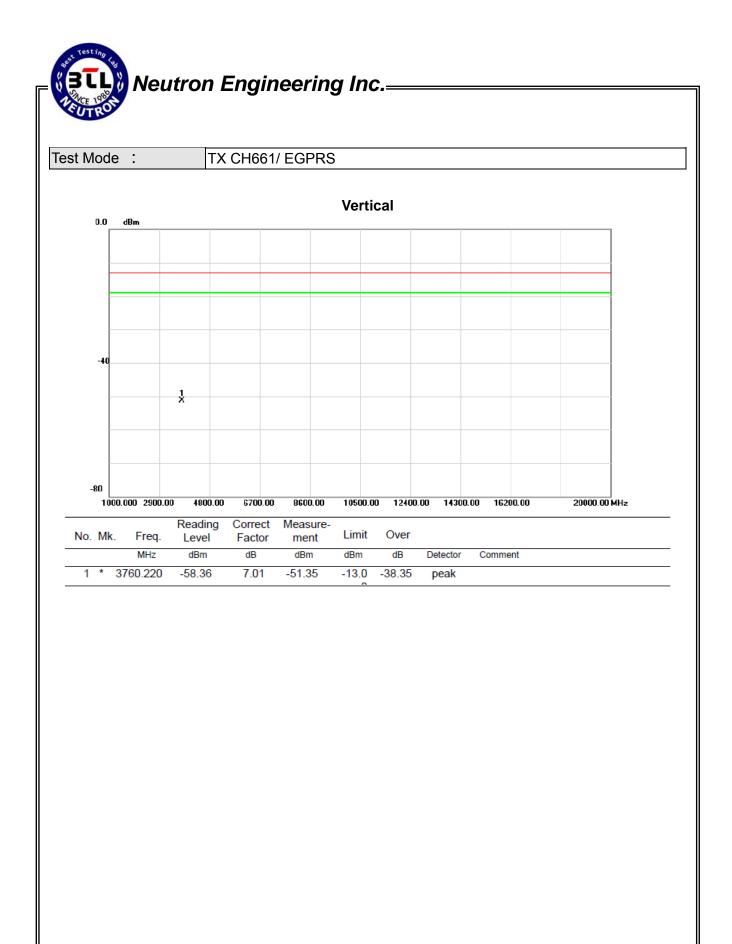

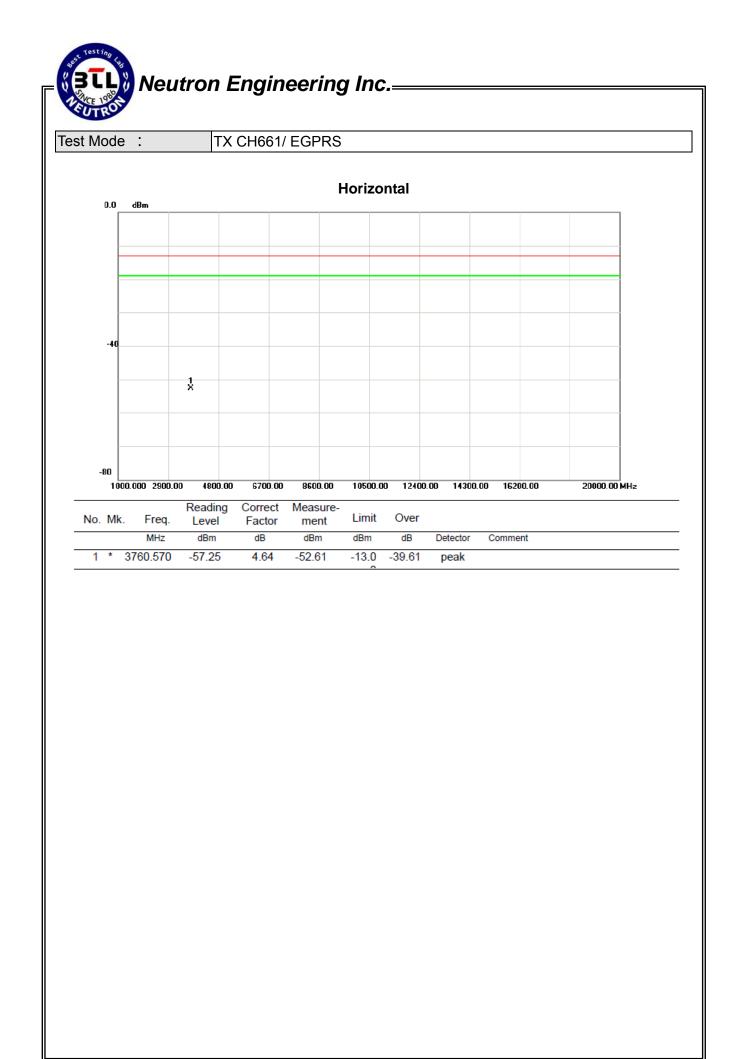

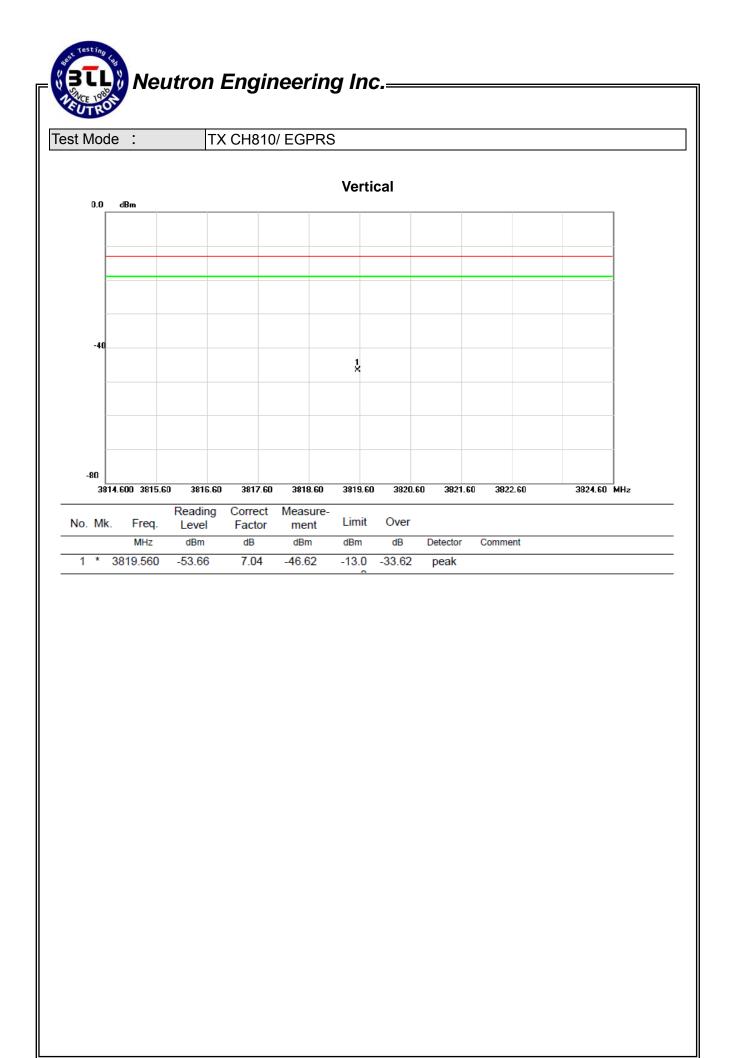

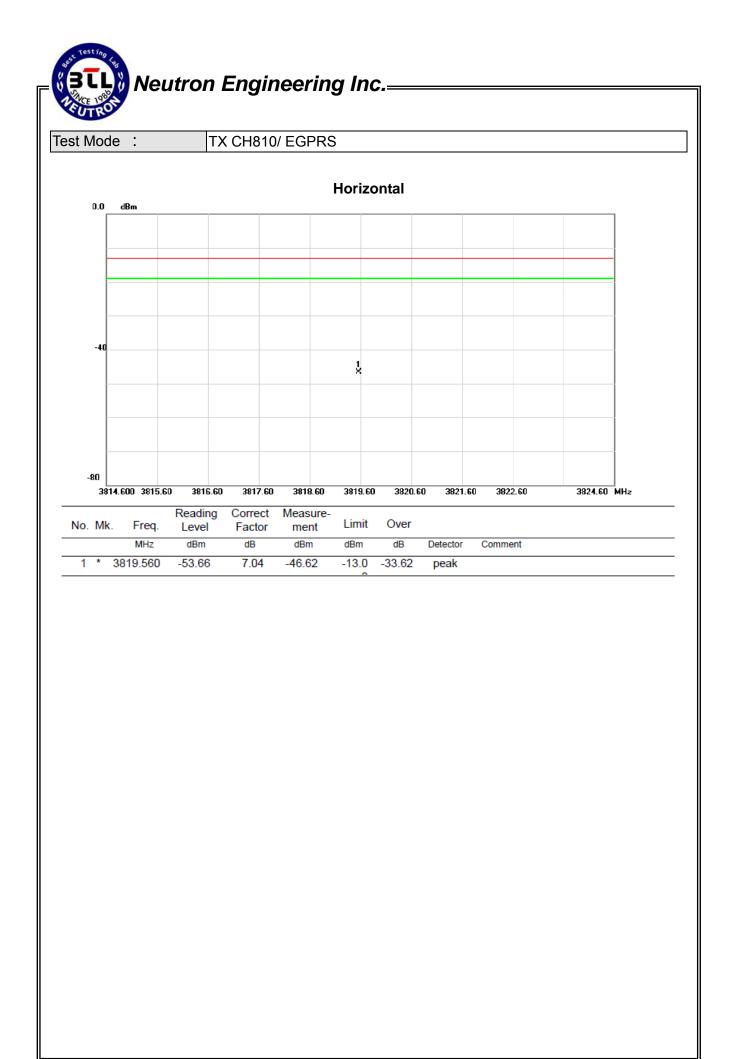



4.5 BAND EDGE MEASUREMENT

4.5.1 LIMIT

According to FCC 24.238(a) &RSS-133 section 6.5 specified that power of any emission outside of the authorized operating frequency rangesmust be attenuated below the transmitting power (P) by a factor of at least 43 +10 log(P) dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. Then we measure that the bandwidth is about 300kHz and the resolution bandwidth is 3kHz.

4.5.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the Spectrum Analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	5 MHz
RB / VB	10 kHz /30 kHz
Trace	Sample
Sweep Time	Auto

4.5.3 TEST PROCEDURES

- 1. The EUT was set up for the maximum peak power with GSM link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels, 512 and 810(low and high operational frequency range.)
- 2. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer. The splitter loss and cable loss are the worst loss 4dB in the transmitted path track.
- 3. The center frequency of spectrum is the band edge frequency and span is 5 MHz. RB of the spectrum is 10kHz and VB of the spectrum is 30KHz.
- 4. Record the Sample trace plot into the test report.

4.5.4 TEST SETUP LAYOUT

This test setup layout is the same as that shown in section 4.2.4.

4.5.5 TEST DEVIATION


There is no deviation with the original standard.


4.5.6 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.5.7 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: 3.7V

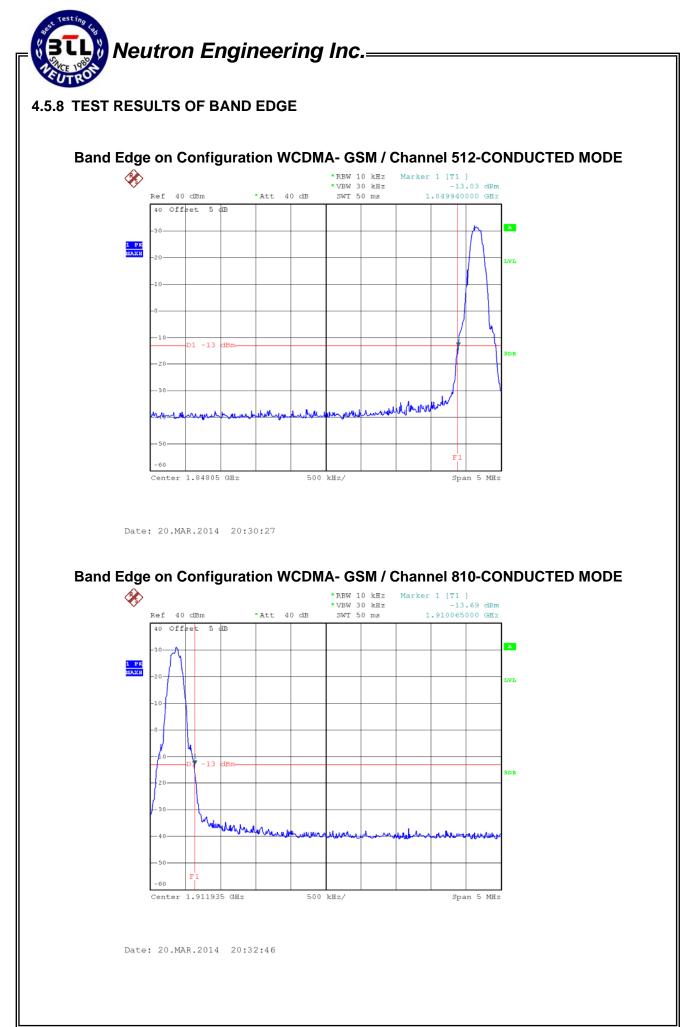

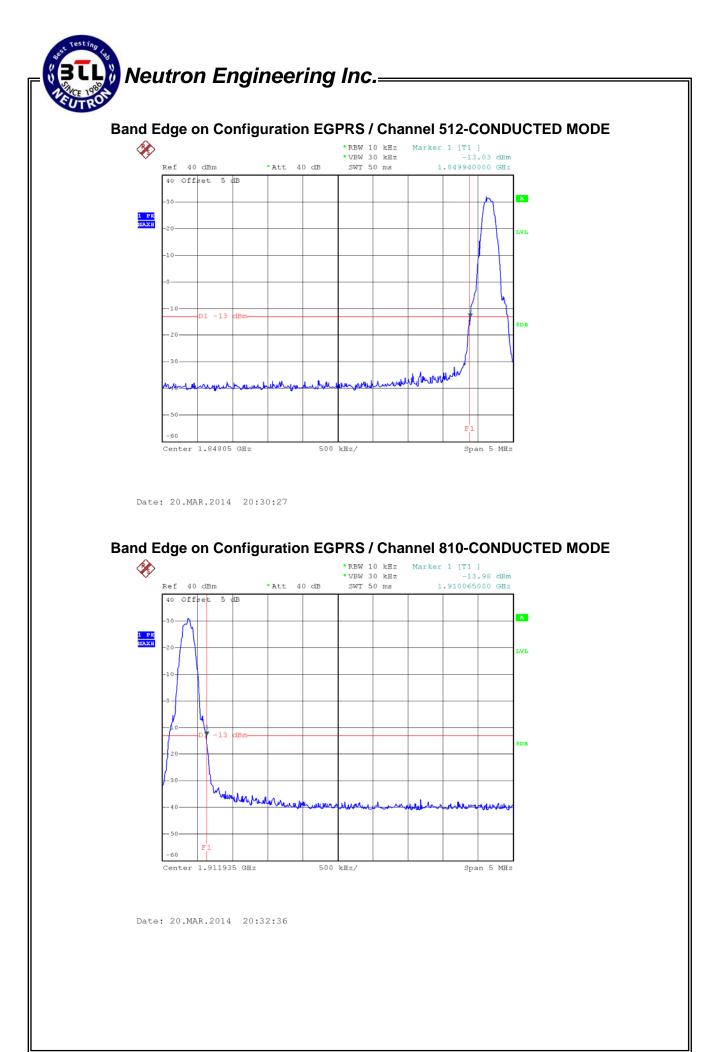



4.6 FREQUENCY STABILITY MEASUREMENT

4.6.1 LIMIT

According to the FCC part 24.235&RSS-133 section 6.3 shall be tested the frequency stability. The rule is defined that" The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block." The frequency error rate is according to the JTC standard that the frequency error rate shall be accurate to within 0.1 ppm of the received frequency from the base station. The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with the 2.1055(a)(1) –30°C~50°C.

4.6.2 MEASURING INSTRUMENTS AND SETTING

Please refer to section 5 in this report. The following table is the setting of the BS Simulator.

Spectrum Parameters	Setting
Frequency Error	The maximum of transmit frequency error


4.6.3 TEST PROCEDURES

- 1. The transmitter output (antenna port) was connected to the BS Simulator.
- 2. The BS simulator was used to set the TX channel and power level and modulate the TX signal with different bit patterns.
- 3. BS simulator used the frequency error function and measured the peak frequency error. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.

The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

- 4. EUT is connected the external power supply to control the DC input power. The various Volts from the minimum 3.1 Volts to 4.3 Volts. Each step shall be record the frequency error rate.
- 5. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- 6. Extreme temperature rule is $0^{\circ}C \sim 40^{\circ}C$.

4.6.4 TEST SETUP LAYOUT

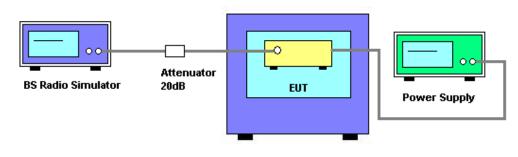

4.6.5 TEST DEVIATION

There is no deviation with the original standard.

4.6.6 EUT OPERATION DURING TEST

The EUT was programmed to be in continuously un-modulation transmitting mode.



4.6.7 EUT TEST CONDITIONS

Temperature: 25°C Relative Humidity: 55% Test Voltage: 3.7V

4.6.8 RESULTS OF FREQUENCY STABILITY

EUT:	Tablet	Model Name. :	P1988
Temperature :	23 ℃	Relative Humidity:	51 %
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	GSM CH512		

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.5	11	0.005641026	0.1
3.6	12	0.006153846	0.1
3.7	10	0.005128205	0.1
3.8	14	0.007179487	0.1
3.9	15	0.007692308	0.1
4	10	0.005128205	0.1
4.1	14	0.007179487	0.1
4.2	9	0.004615385	0.1
Max. Deviation (ppm)	15	0.007692308	0.1

Temperature vs. Frequency Stability

Temperature(℃)	Emperature(°C)Frequency Error (Hz)Frequency Error (ppm)		Limit(ppm)
40	17	0.008717949	0.1
30	16	0.008205128	0.1
20	17	0.008717949	0.1
10	11	0.005641026	0.1
0	18	0.009230769	0.1
Max. Deviation (ppm)	18	0.009230769	0.1



EUT :	Tablet	Model Name. :	P1988
Temperature :	23 ℃	Relative Humidity:	51 %
Pressure :	1010 hPa	Test Voltage :	DC 3.7V
Test Mode :	EGPRS CH512		

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.5	11	0.005641026	0.1
3.6	12	0.006153846	0.1
3.7	10	0.005128205	0.1
3.8	14	0.007179487	0.1
3.9	15	0.007692308	0.1
4.0	10	0.005128205	0.1
4.1	14	0.007179487	0.1
4.2	9	0.004615385	0.1
Max. Deviation (ppm)	15	0.007692308	0.1

Temperature vs. Frequency Stability

Temperature(℃)	ture(°C) Frequency Error (Hz) (ppm)		Limit(ppm)
40	17	0.008717949	0.1
30	16	0.008205128	0.1
20	17	0.008717949	0.1
10	11	0.005641026	0.1
0	18	0.009230769	0.1
Max. Deviation (ppm)	18	0.009230769	0.1



4.7 PEAK TO AVERAGE RADIO

4.7.1 LIMIT

In the FCC 24.232 (d) & &RSS-133 section 6.4

Peak transmit power shall be measured over any interval of continuous transmission using instrumen-tation calibrated in terms of rms-equivalent voltage.

The measurement results shall be properly adjusted for any instrument limitations, such as detector re-sponse times, limited resolution bandwidth capability when compared to the emission bandwidth, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

To measure transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission shall not exceed 13 dB.

4.7.2 TEST PROCEDURES

- 1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- 2. Set the number of counts to a value that stabilizes the measured CCDF curve;

4.7.3 TEST SETUP LAYOUT

Please refer to section 3.4 in this report.

4.7.4 TEST DEVIATION

There is no deviation with the original standard.


4.7.5 EUT OPERATION DURING TEST

The BS simulator was used to set the TX channel and power level and modulate the TX signal.

4.7.6 EUT TEST CONDITIONS


Temperature: 25°C Relative Humidity: 55% Test Voltage:3.7V


4.7.7 TEST RESULT OF PEAK TO AVERAGE RADIO

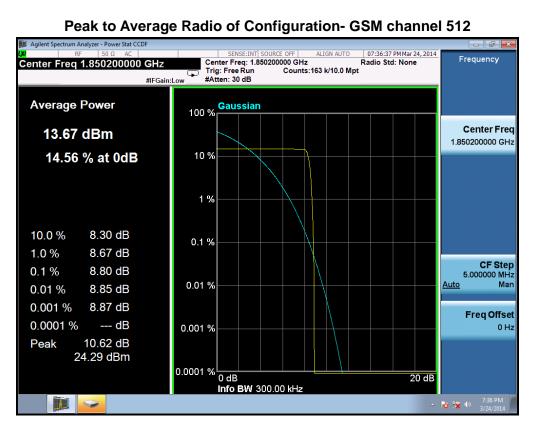

Peak to Average Radio of Configuration- GSM channel 661




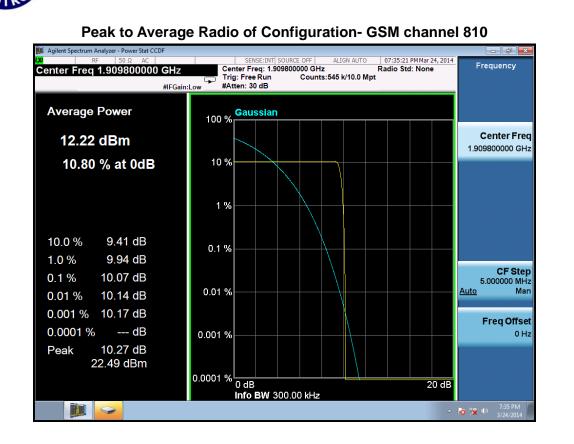

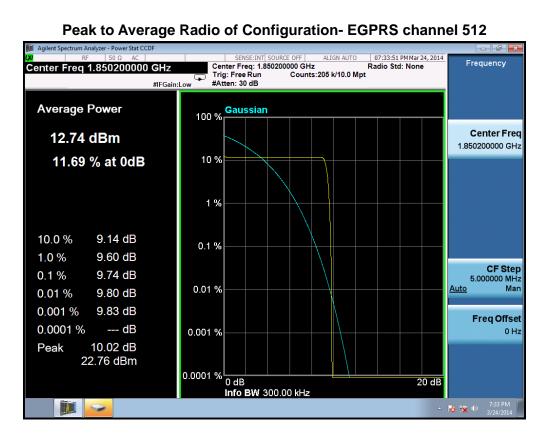

Peak to Average Radio of Configuration- EGPRS channel 661



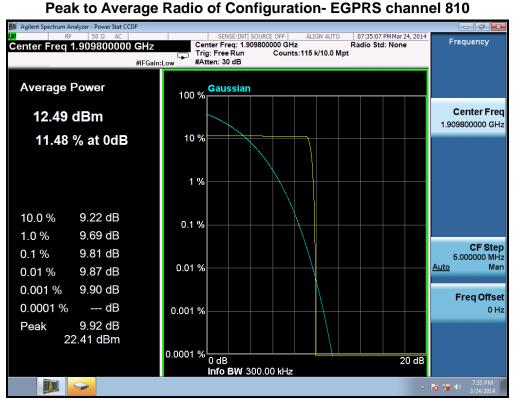

Peak to Average Radio of Configuration- EGPRS channel 810

4.8 CONDUCTED EMISSION MEASUREMENT

4.8.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)		Standard	
	Quasi-peak	Average	Quasi-peak	Average	Stanuaru	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	CISPR	
0.50 -5.0	73.00	60.00	56.00	46.00	CISPR	
5.0 -30.0	73.00	60.00	60.00	50.00	CISPR	

0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	73.00	60.00	56.00	46.00	FCC
5.0 -30.0	73.00	60.00	60.00	50.00	FCC
N1 /					

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




4.8.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.8.3 DEVIATION FROM TEST STANDARD

No deviation

4.8.4 TEST SETUP

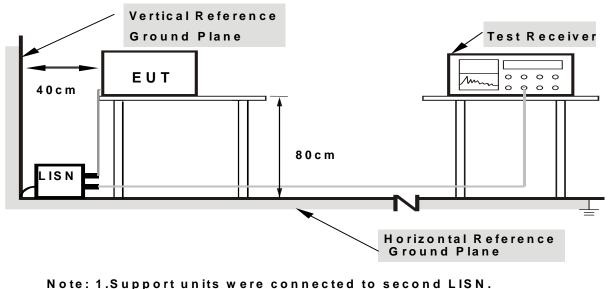

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80

from other units and other metal planes

4.8.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.8.6 EUT TEST CONDITIONS


Temperature: 25°C Relative Humidity: 55% Test Voltage: 120V/60Hz




4.8.7 TEST RESULTS

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of Note. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a "*" marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.

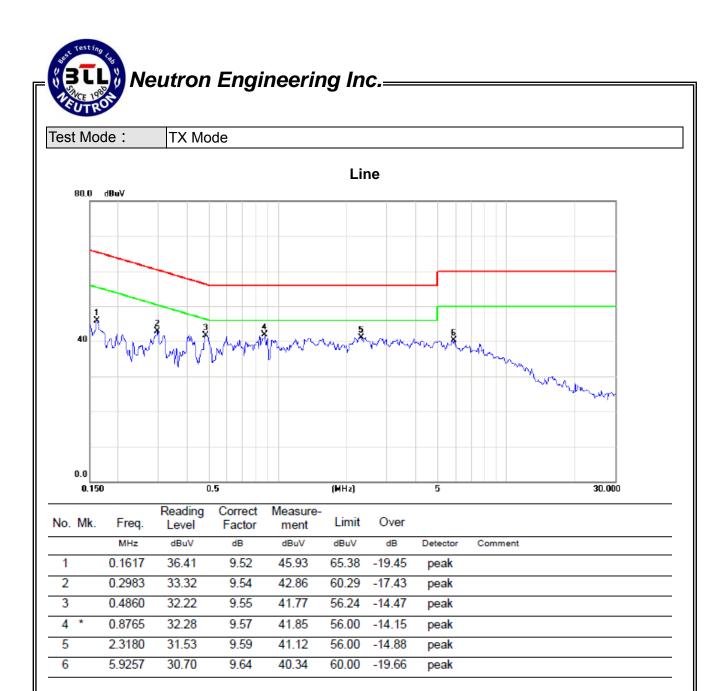

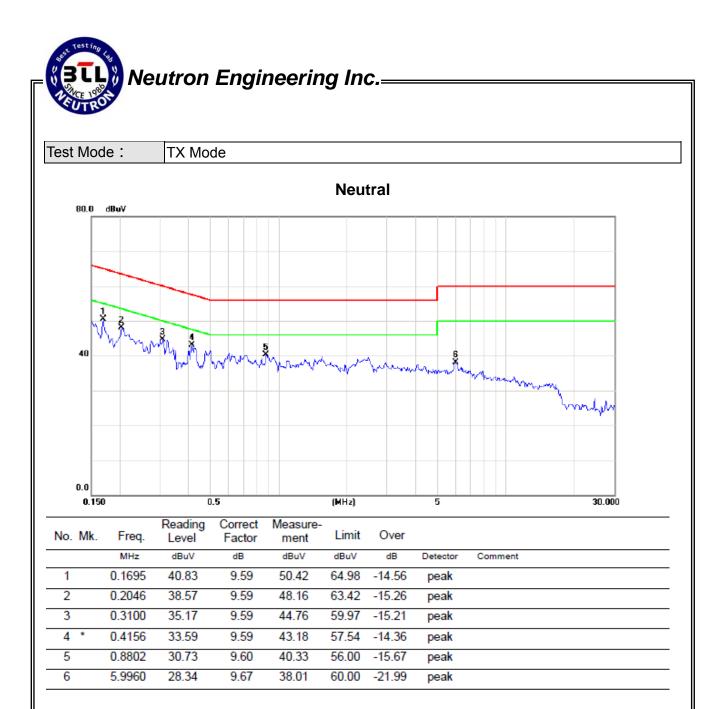

5. LIST OF MEASUREMENT EQUIPMENTS

	Conducted Emission Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until		
1	LISN	EMCO	3816/2	00052765	Apr. 25, 2014		
2	LISN	R&S	ENV216	100087	Nov. 11, 2014		
3	Test Cable	N/A	C_17	N/A	Mar. 14, 2015		
4	EMI TEST RECEIVER	R&S	ESCS30	833364/017	Nov. 11, 2014		
5	50Ω Terminator	SHX	TF2-3G-A	08122902	Apr. 25, 2014		

Radiated Emission Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Antenna	Schwarbeck	VULB9160	9160-3232	Apr. 25, 2014	
2	Amplifier	HP	8447D	2944A09673	Apr. 25, 2014	
3	Test Receiver	R&S	ESCI	100382	Apr. 25, 2014	
4	Test Cable	N/A	C-01_CB03	N/A	Jul. 02, 2014	
5	Antenna	ETS	3115	00075789	Apr. 25, 2014	
6	Amplifier	Agilent	8449B	3008A02274	Apr. 25, 2014	
7	Spectrum	Agilent	E4408B	US39240143	Nov. 11, 2014	
8	Test Cable	HUBER+SUHNER	C-45	N/A	Apr. 30, 2014	
9	Controller	СТ	SC100	N/A	N/A	
10	Horn Antenna	EMCO	3115	9605-4803	Apr. 25, 2014	
11	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Apr. 25, 2014	
12	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170319	Oct. 22, 2014	

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014

Band Edge Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until	
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014	

99% Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014



Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Nov. 11, 2014
2	Precision Oven Tester	HOLINK	H-T-1F-D	BA03101701	May. 25, 2014

Remark: "N/A" denotes no model name, serial no. or calibration specified. All calibration period of equipment list is one year.



6. EUT TEST PHOTO

Conducted Measurement Photos





