



CERTIFICATION TEST REPORT

Report Number. : 11526345-E3V2

Applicant : NVIDIA CORP.
2701 SAN TOMAS EXPY
SANTA CLARA, CA 95050

Model : P3310

FCC ID : VOB-P3310

IC : 7361A-P3310

EUT Description : WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

Test Standard(s) : FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS - 247 ISSUE 1
INDUSTRY CANADA RSS-GEN ISSUE 4

Date Of Issue:

January 14, 2017

Prepared by:

UL Verification Services Inc.
47173 Benicia Street
Fremont, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
V1	01/05/17	Initial Issue	D. Corona
V2	01/14/17	Updates Section 1, 2, 7 & correct antenna port name from Core to Chain	D. Corona

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. MEASURING INSTRUMENT CALIBRATION	6
4.2. SAMPLE CALCULATION	6
4.3. MEASUREMENT UNCERTAINTY	7
5. EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF EUT	8
5.2. MAXIMUM OUTPUT POWER	8
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	8
5.4. SOFTWARE AND FIRMWARE	8
5.5. WORST-CASE CONFIGURATION AND MODE	8
5.6. DESCRIPTION OF TEST SETUP	9
6. TEST AND MEASUREMENT EQUIPMENT	11
7. MEASUREMENT METHODS	12
8. SUMMARY TABLE	13
9. ON TIME AND DUTY CYCLE MEASUREMENT METHODS	14
11. ANTENNA PORT TEST RESULTS	17
11.1. 11b Chain 0 SISO MODE IN THE 2.4GHz BAND	17
11.1.1. 6 dB BANDWIDTH	17
11.1.2. 99% BANDWIDTH	21
11.1.3. OUTPUT POWER	25
11.1.4. POWER SPECTRAL DENSITY	27
11.1.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	31
11.2. 11b Chain 1 SISO MODE IN THE 2.4GHz BAND	36
11.2.1. 6 dB BANDWIDTH	36
11.2.2. 99% BANDWIDTH	40
11.2.3. OUTPUT POWER	44
11.2.4. POWER SPECTRAL DENSITY	46
11.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	50
11.3. 11g Chain 0 SISO MODE IN THE 2.4GHz BAND	55
11.3.1. 6 dB BANDWIDTH	55

11.3.2.	99% BANDWIDTH.....	59
11.3.3.	OUTPUT POWER	63
11.3.4.	POWER SPECTRAL DENSITY.....	65
11.3.5.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	69
11.4.	<i>11g Chain 1 SISO MODE IN THE 2.4GHz BAND</i>	<i>74</i>
11.4.1.	6 dB BANDWIDTH.....	74
11.4.2.	99% BANDWIDTH	78
11.4.3.	OUTPUT POWER	82
11.4.4.	POWER SPECTRAL DENSITY.....	84
11.4.5.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	88
11.5.	<i>11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND</i>	<i>93</i>
11.5.1.	6 dB BANDWIDTH.....	93
11.5.2.	99% BANDWIDTH	99
11.5.3.	OUTPUT POWER	105
11.5.4.	POWER SPECTRAL DENSITY.....	107
11.5.5.	CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS	113
12.	RADIATED TEST RESULTS.....	125
12.1.	<i>LIMITS AND PROCEDURE.....</i>	<i>125</i>
12.2.	<i>TRANSMITTER ABOVE 1 GHz.....</i>	<i>126</i>
12.2.1.	11b Chain 0 SISO MODE IN THE 2.4GHz BAND	126
12.2.2.	11b Chain 1 SISO MODE IN THE 2.4GHz BAND	140
12.2.3.	11g Chain 0 SISO MODE IN THE 2.4GHz BAND	154
12.2.4.	11g Chain 1 SISO MODE IN THE 2.4GHz BAND	168
12.2.5.	11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND	182
12.3.	<i>WORST-CASE BELOW 30 GHz</i>	<i>196</i>
12.1.	<i>WORST-CASE BELOW 1 GHz</i>	<i>198</i>
12.3.	<i>WORST-CASE 18 to 26 GHz</i>	<i>200</i>
13.	AC POWER LINE CONDUCTED EMISSIONS	202
13.1.	<i>EUT POWERED BY AC/DC ADAPTER VIA USB CABLE</i>	<i>203</i>
13.2.	<i>SETUP PHOTOS.....</i>	<i>205</i>

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: NVIDIA CORP.

EUT DESCRIPTION: WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

MODEL: P3310

SERIAL NUMBER: 0334916010248 (for Conducted)
0334916000053 (for Radiated)

DATE TESTED: DECEMBER 13 - 28, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-247 Issue 1	Pass
INDUSTRY CANADA RSS-GEN Issue 4	Pass

UL Verification Services Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Verification Services Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Verification Services Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Verification Services Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For
UL Verification Services Inc. By:

Tested By:



DAN CORONIA
WiSE Project Lead
UL VERIFICATION SERVICES INC.



JONATHAN HSU
WiSE Lab Engineer
UL VERIFICATION SERVICES INC.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 15, KDB 558074 D01 v03r05, KDB 662911 D01 Multiple Transmitter Output v02r01, ANSI C63.10-2013, RSS-GEN Issue 4, and RSS-247 Issue 1.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 and 47266 Benicia Street, Fremont, California, USA. Line conducted emissions are measured only at the 47173 address. The following table identifies which facilities were utilized for radiated emission measurements documented in this report. Specific facilities are also identified in the test results sections.

47173 Benicia Street		47266 Benicia Street	
<input type="checkbox"/>	Chamber A (IC:2324B-1)	<input type="checkbox"/>	Chamber D (IC:2324B-4)
<input checked="" type="checkbox"/>	Chamber B (IC:2324B-2)	<input type="checkbox"/>	Chamber E (IC:2324B-5)
<input checked="" type="checkbox"/>	Chamber C (IC:2324B-3)	<input type="checkbox"/>	Chamber F (IC:2324B-6)
		<input type="checkbox"/>	Chamber G (IC:2324B-7)
		<input type="checkbox"/>	Chamber H (IC:2324B-8)

The above test sites and facilities are covered under FCC Test Firm Registration # 208313.

UL Verification Services Inc. is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://ts.nist.gov/standards/scopes/2000650.htm>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Worst Case Conducted Disturbance, 9KHz to 0.15 MHz	3.84 dB
Worst Case Conducted Disturbance, 0.15 to 30 MHz	3.65 dB
Worst Case Radiated Disturbance, 9KHz to 30 MHz	3.15 dB
Worst Case Radiated Disturbance, 30 to 1000 MHz	5.36 dB
Worst Case Radiated Disturbance, 1000 to 18000 MHz	4.32 dB
Worst Case Radiated Disturbance, 18000 to 26000 MHz	4.45 dB
Worst Case Radiated Disturbance, 26000 to 40000 MHz	5.24 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a WLAN 2x2 MIMO 802.11a/b/g/n/ac with Bluetooth

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b 1TX	18.40	69.18
2412 - 2472	802.11g 1TX	18.44	69.82
2412 - 2472	802.11n HT20 2TX CDD	18.24	66.68

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The EUT utilizes a Dipole antenna with maximum gain of 2.86dBi across operation frequency 2.4GHz band.

5.4. SOFTWARE AND FIRMWARE

The software and firmware in the EUT during testing was C03A10019.0700.

5.5. WORST-CASE CONFIGURATION AND MODE

Radiated bandedge, harmonics, and spurious emissions from 1 GHz to 18GHz were performed. The EUT was set to transmit at the Low/Middle/High channels with designed (target) output powers.

Radiated emission below 1GHz, above 18GHz, and power line conducted emission were performed with the EUT was set to transmit at the channel with highest output power as worst-case scenario.

The fundamental of the EUT was investigated in three transmitting antenna degrees: 0, 45, and 90. It was determined that 90 degrees was the worst case antenna position; therefore all final radiated testing was performed with the antenna position at 90 degrees.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20mode: MCS0

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
EUT AC/DC Adapter	Mean Well Enterprises	GST90A19	EB68F90444	NA
Laptop	Lenovo	7659	L3-AL664 08/03	NA
Base Board	NVIDIA	P2597	0334916030630, 0334916030642	DoC


I/O CABLES (CONDUCTED & RADIATED TEST)

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	US115V	Unshielded	0.5	For EUT
2	DC	1	19 Vdc	Unshielded	1	For EUT
3	USB	1	USB	Shielded	1.5	

TEST SETUP

The EUT was connected to a host Laptop via USB cable adapter. Test software exercised the EUT.

SETUP DIAGRAM

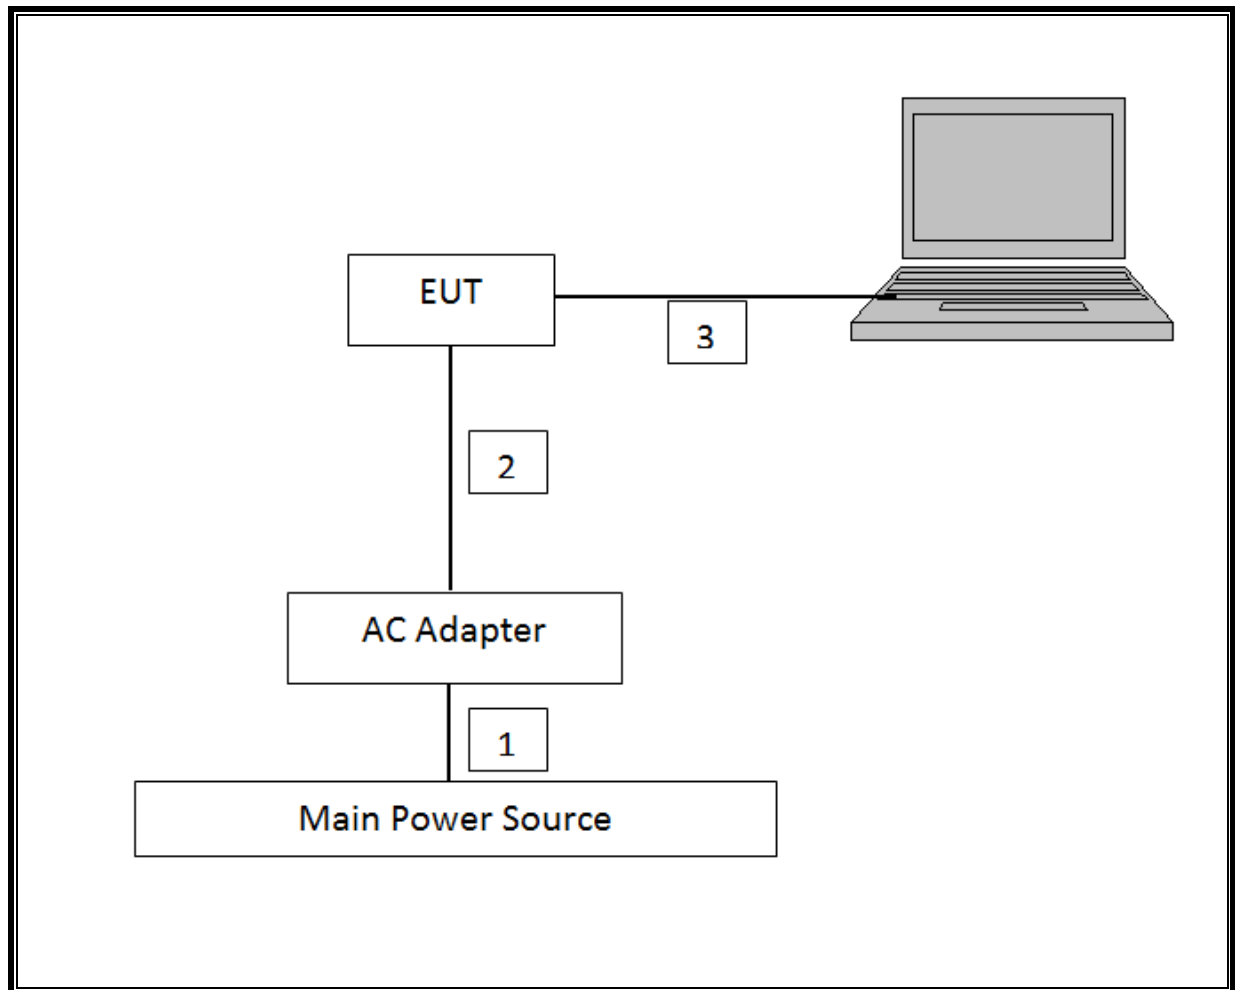

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment List					
Description	Manufacturer	Model	T Number	Cal Date	Cal Due
PSA Series Spectrum Analyzer, 3Hz - 44GHz	Agilent	E4446A	146	07/13/16	07/13/17
Spectrum Analyzer,	Agilent	8564E	106	09/07/16	09/07/17
Pre-Amp 1-26.5 GHz	Agilent	8449B	404	07/05/16	07/05/17
Amplifier, 1 to 18 GHz	Miteq	AFS43-00101800-25-S-42	493	03/09/16	03/09/17
Amplifier, 1 to 8 GHz	Miteq	AMF-4D-01000800-30-29P	1156	03/09/16	03/09/17
Amplifier, 10KHz to 1GHz, 32dB	Keysight	8447D	10	02/01/16	02/01/17
Antenna, Broadband Hybrid, 30MHz to 2000MHz	Sunol Sciences	JB1	477	06/22/16	06/22/17
Antenna, Horn 1-18GHz	ETS Lindgren	3117	345	03/07/16	03/07/17
18 - 26.5 GHz Horn Antenna	Seavey Division	MWH-1826/B	449	05/26/16	5/26/2017
Loop Antenna	EMCO	6502	35	03/24/16	03/24/17
P-Series Power Meter	Agilent	N1911A	229	07/28/16	07/28/17
EMI Receiver	Rohde & Schwarz	ESR-EMI	1436	12/19/16	12/19/17
LISN	FISCHER	FCC-LISN-50/250-25-2-01	1310	06/08/16	06/08/17

NOTE: *testing is completed before equipment calibration expiration date.

7. MEASUREMENT METHODS

On Time and Duty Cycle: KDB 558074 D01 v03r05, Section 6.

6 dB BW: KDB 558074 D01 v03r05, Section 8.1.

99% BW: ANSI C63.10-2013, Section 6.9.3.

Output Power: KDB 558074 D01 v03r05, Section 9.2.3.2.

Power Spectral Density: KDB 558074 D01 v03r05, Section 10.3.

Out-of-band emissions in non-restricted bands: KDB 558074 D01 v03r05, Section 11.0.

Out-of-band emissions in restricted bands: KDB 558074 D01 v03r05, Section 12.1.

Band-edge: KDB 558074 D01 v03r05, Section 12.1.

AC Power Line Conducted Emissions: ANSI C63.10-2013, Section 6.2.

8. SUMMARY TABLE

FCC Part Section	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result
15.247 (a)(2)	RSS-247 5.2.1	Occupied Band width (6dB)	>500KHz	Conducted	Pass
2.1051, 15.247 (d)	RSS-247 5.5	Band Edge / Conducted Spurious Emission	-30dBc		Pass
15.247	RSS-247 5.4.4	TX conducted output power	<30dBm		Pass
15.247	RSS-247 5.2.2	PSD	<8dBm		Pass
15.207 (a)	RSS-GEN 8.8	AC Power Line conducted emissions	Section 10	Radiated	Pass
15.205, 15.209, 15.247(d)	RSS-GEN 8.9/7	Radiated Spurious Emission	< 54dBuV/m		Pass

9. ON TIME AND DUTY CYCLE MEASUREMENT METHODS

LIMITS

None; for reporting purposes only.


PROCEDURE



KDB 558074 Zero-Span Spectrum Analyzer Method.

ON TIME AND DUTY CYCLE RESULTS

Mode	ON Time B (msec)	Period (msec)	Duty Cycle x (linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/B Minimum VBW (khz)
11b 1TX	8.580	8.685	0.987	0.987	0.00	0.01
11g 1TX	1.425	1.527	0.933	0.933	0.30	0.70
HT20 CDD	1.332	1.437	0.926	0.926	0.33	0.75

DUTY CYCLE PLOTS

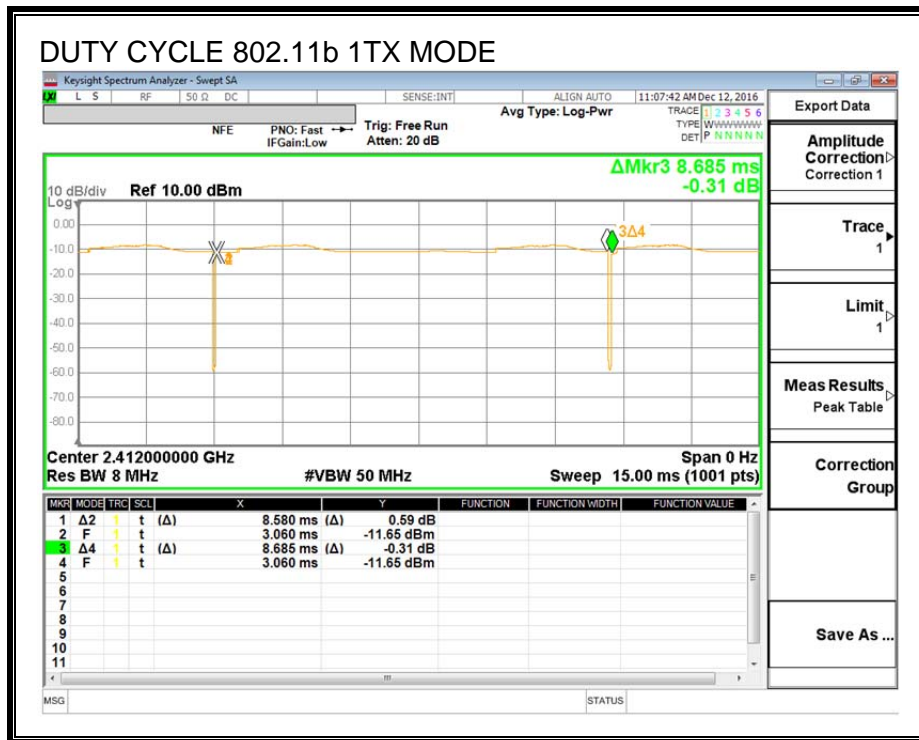

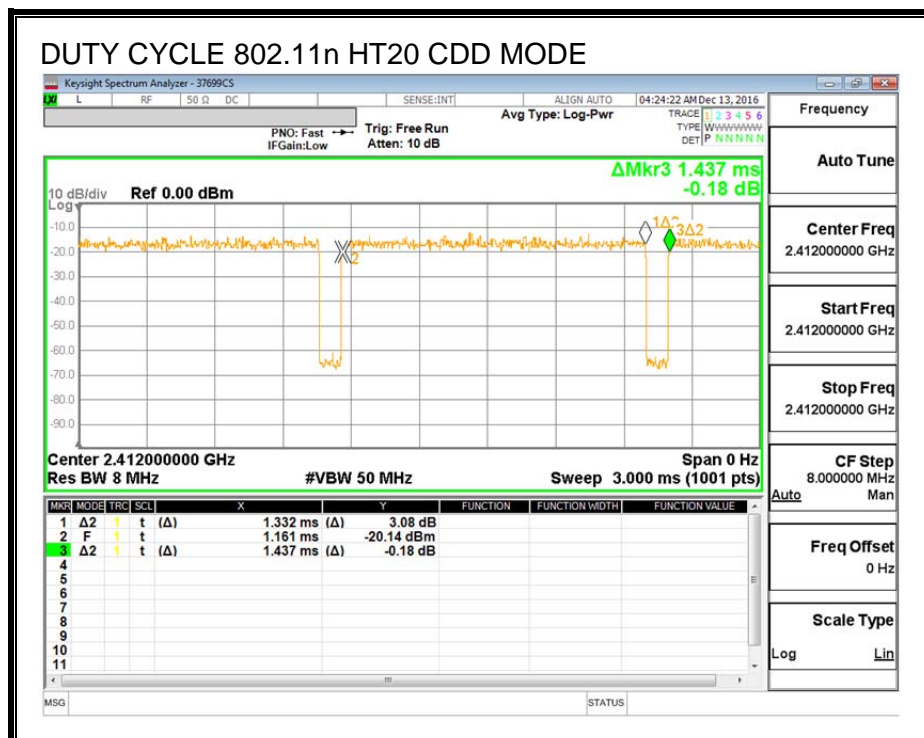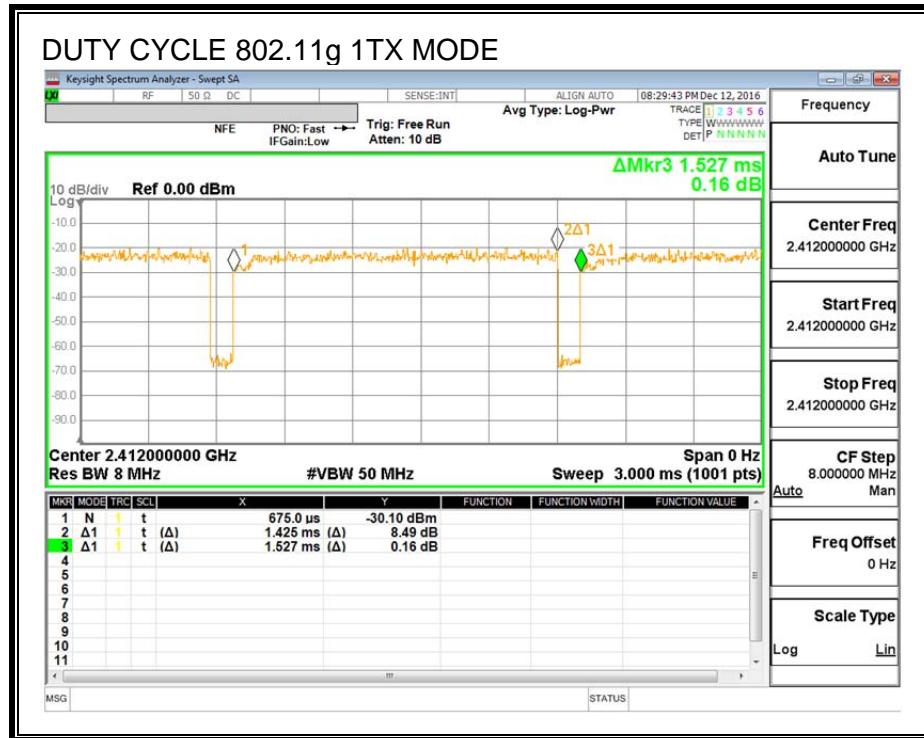

11. ANTENNA PORT TEST RESULTS

11.1. 11b Chain 0 SISO MODE IN THE 2.4GHz BAND

11.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	Minimum Limit (MHz)
Low_1	2412	9.0700	0.5
Middle_6	2437	8.5600	0.5
High_11	2462	8.5600	0.5
High_12	2467	9.0575	0.5
High_13	2472	7.5750	0.5

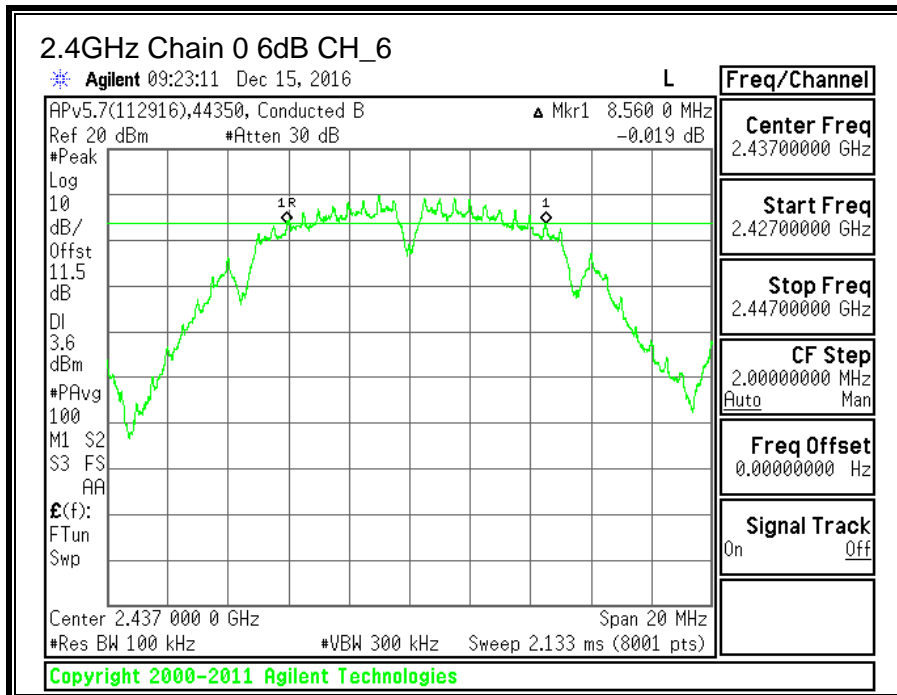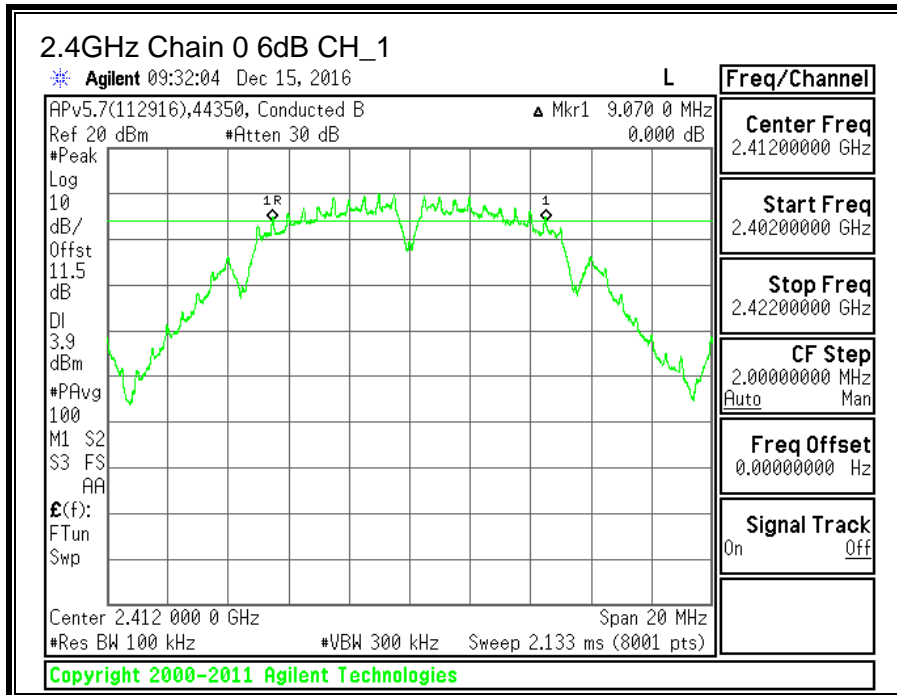

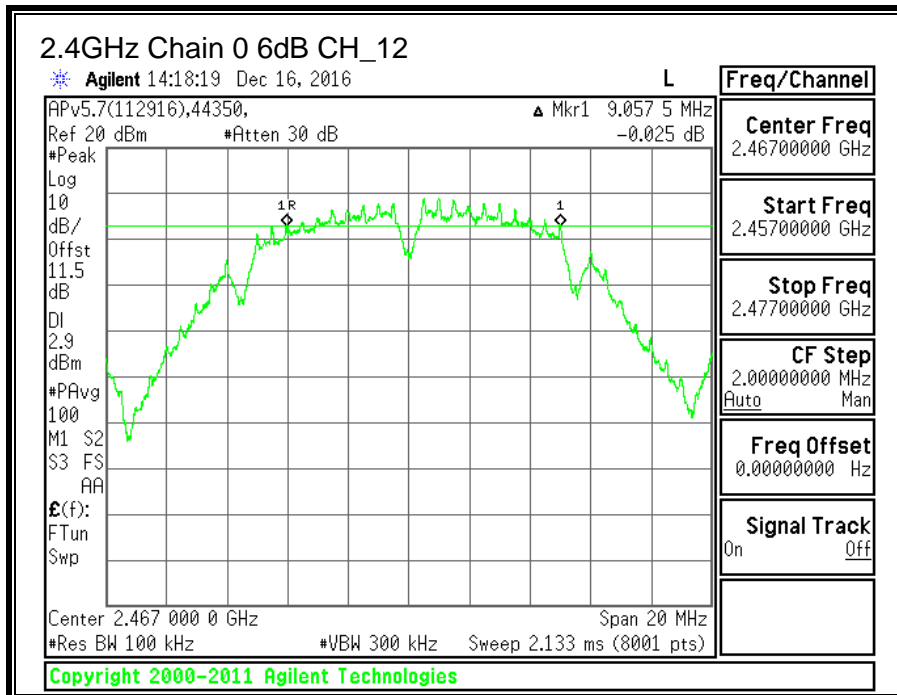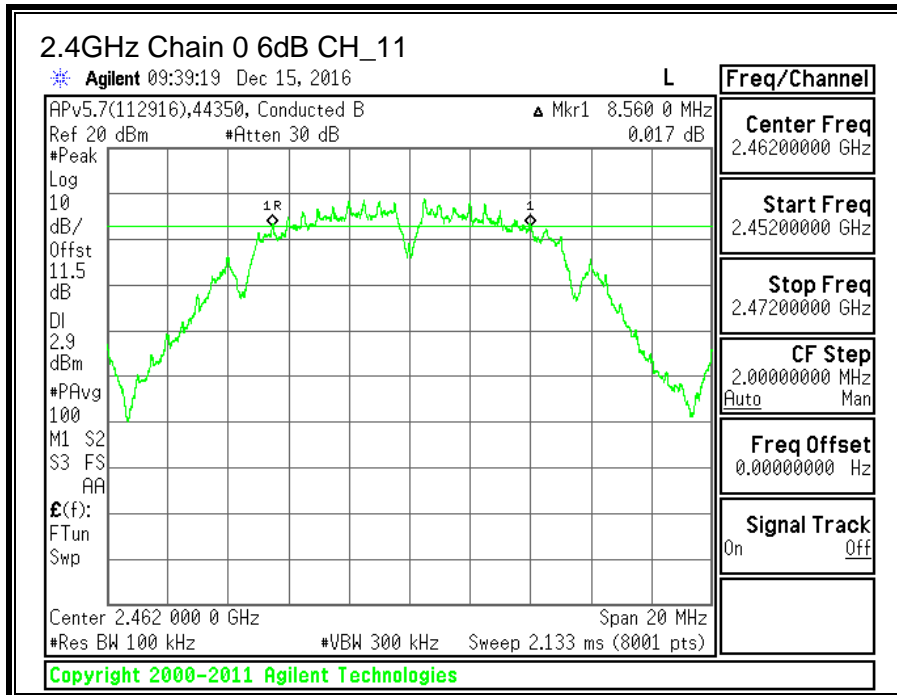

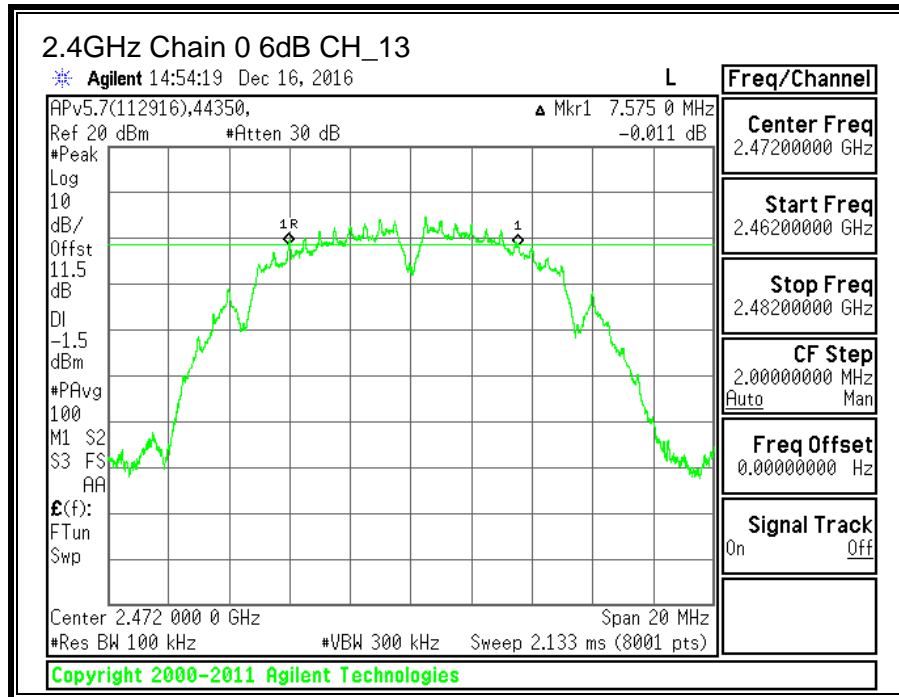

11.1.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)
Low_1	2412	11.9290
Middle_6	2437	11.6923
High_11	2462	11.8915
High_12	2467	11.8141
High_13	2472	10.2808

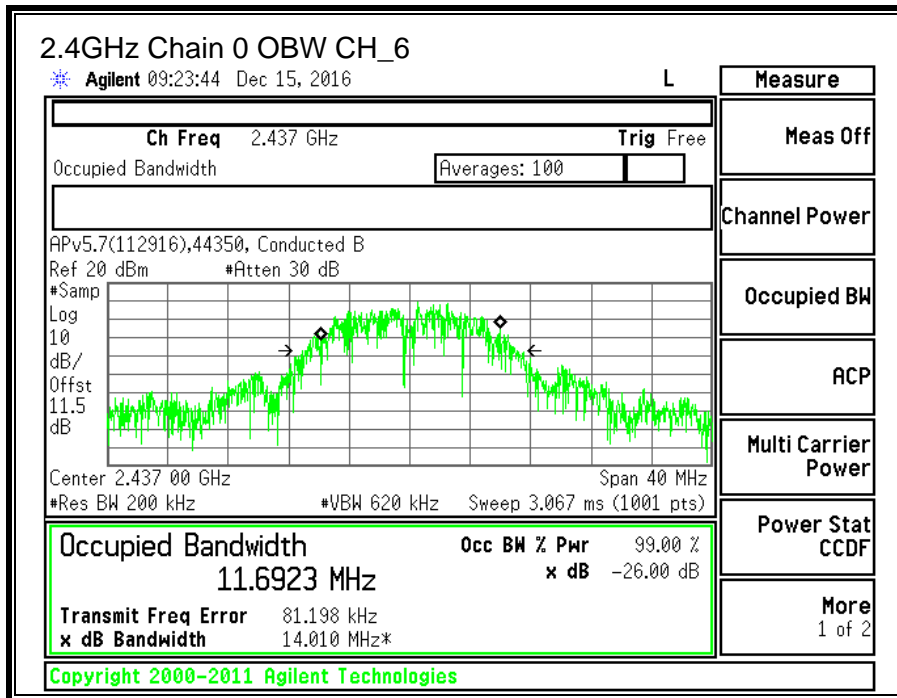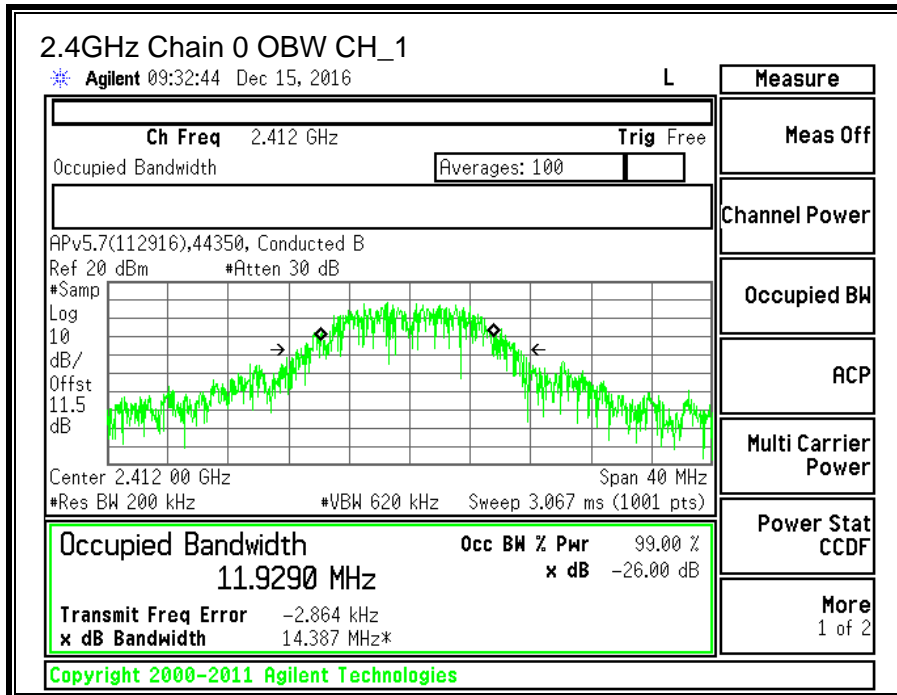

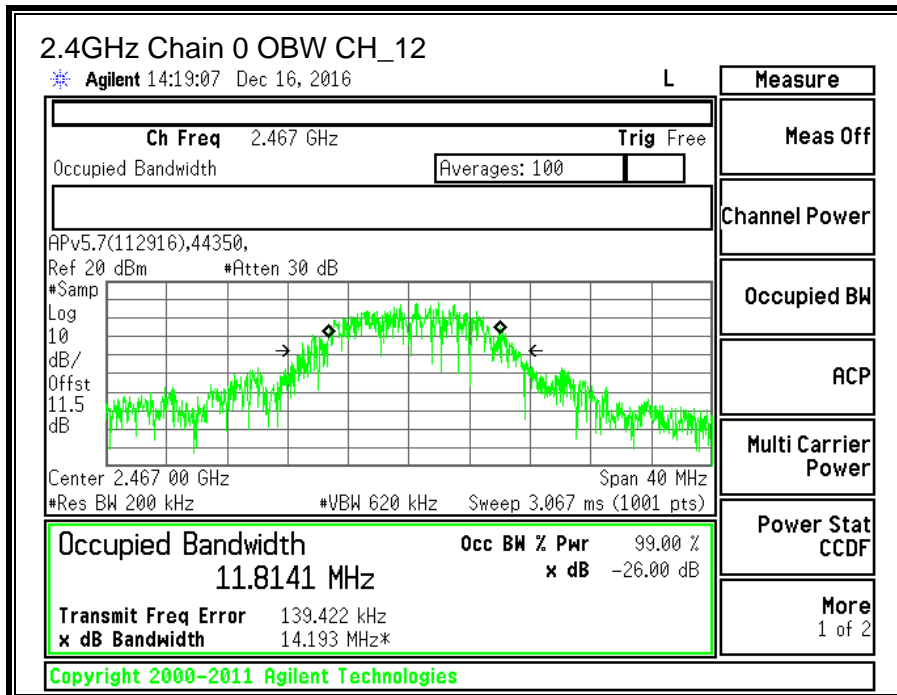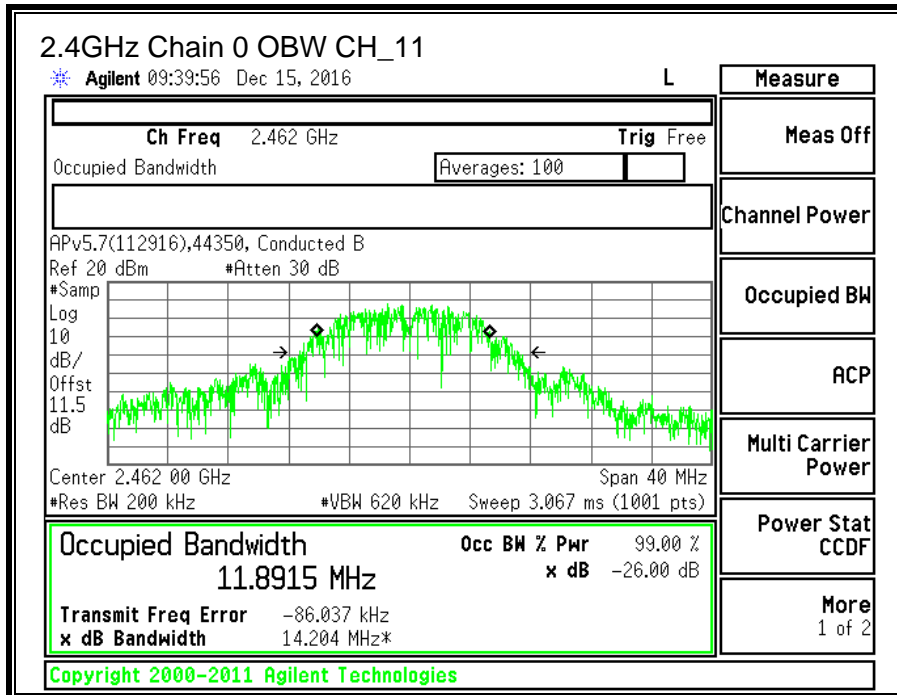

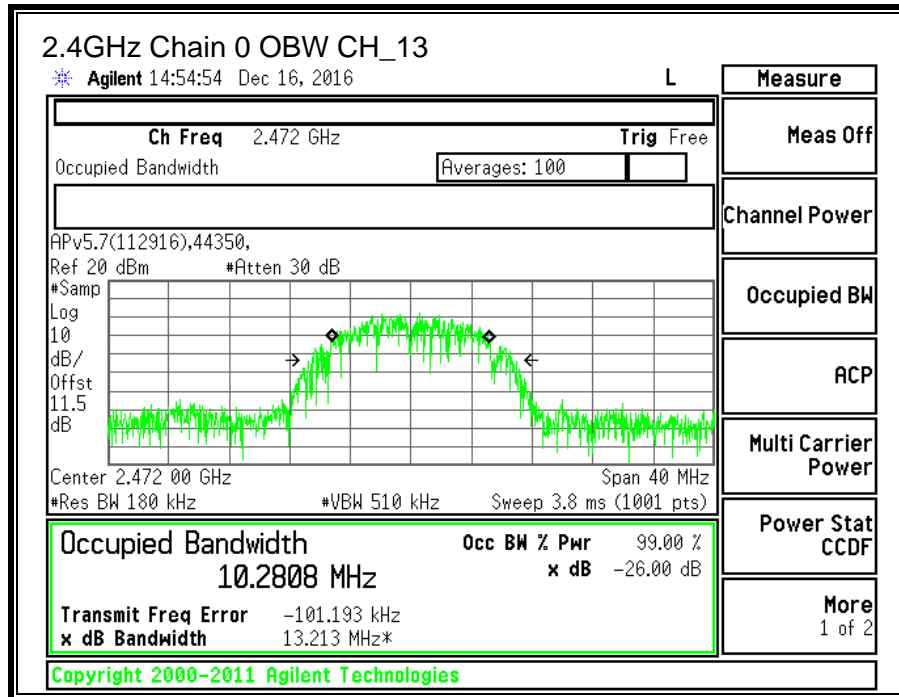

11.1.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

ID:	44350	Date:	12/19/2016
------------	-------	--------------	------------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	2.86	30.00	30	36	30.00
Mid_6	2437	2.86	30.00	30	36	30.00
High_11	2462	2.86	30.00	30	36	30.00
High_12	2467	2.86	30.00	30	36	30.00
High_13	2472	2.86	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Core 0 Meas Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	18.10	30.00	-11.90
Mid_6	2437	18.10	30.00	-11.90
High_11	2462	18.00	30.00	-12.00
High_12	2467	16.91	30.00	-13.09
High_13	2472	12.16	30.00	-17.84

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

11.1.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
---------------------------	------	---

PSD Results



Channel	Frequency (MHz)	Core 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-3.559	8.0	-11.6
Mid_6	2437	-4.215	8.0	-12.2
High_11	2462	-4.814	8.0	-12.8
High_12	2467	-5.049	8.0	-13.0
High_13	2472	-9.208	8.0	-17.2

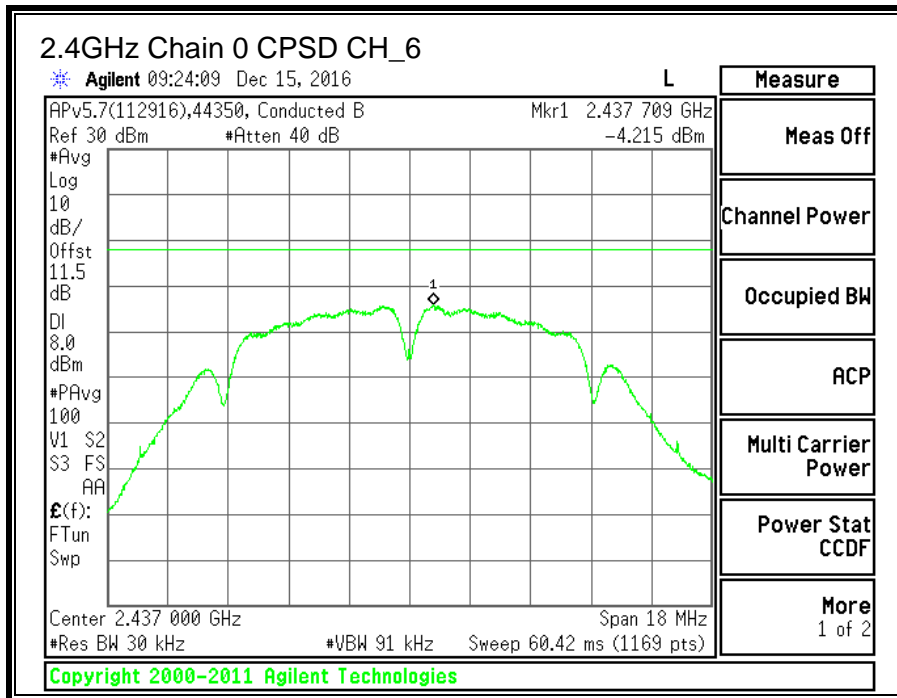
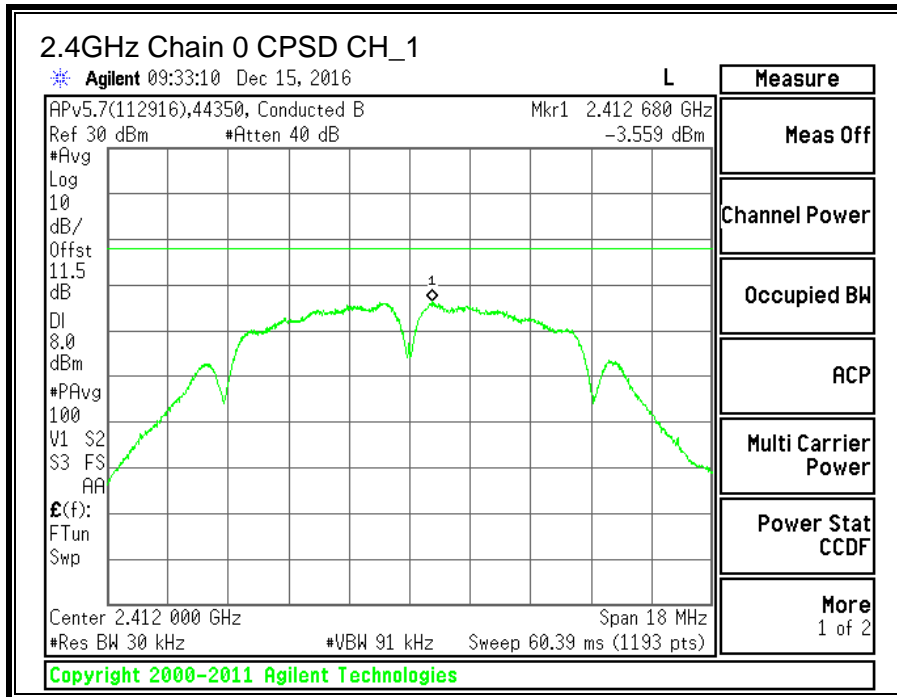


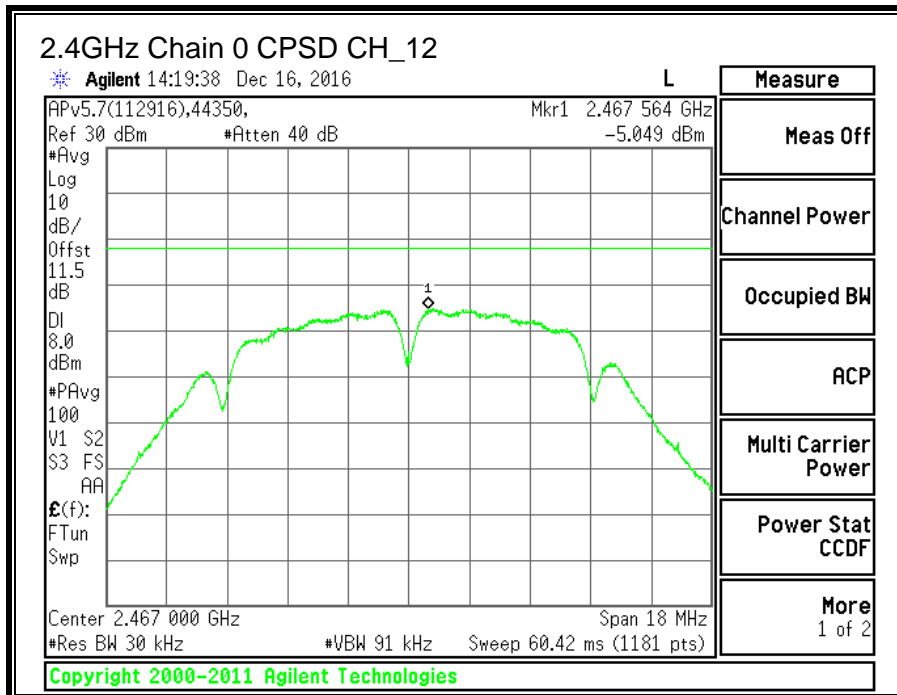
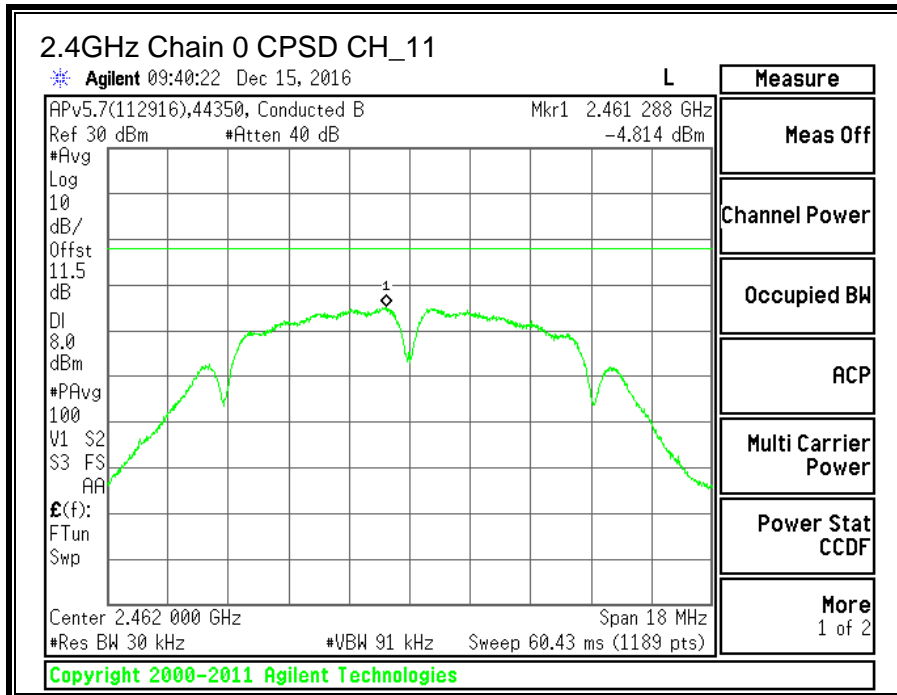



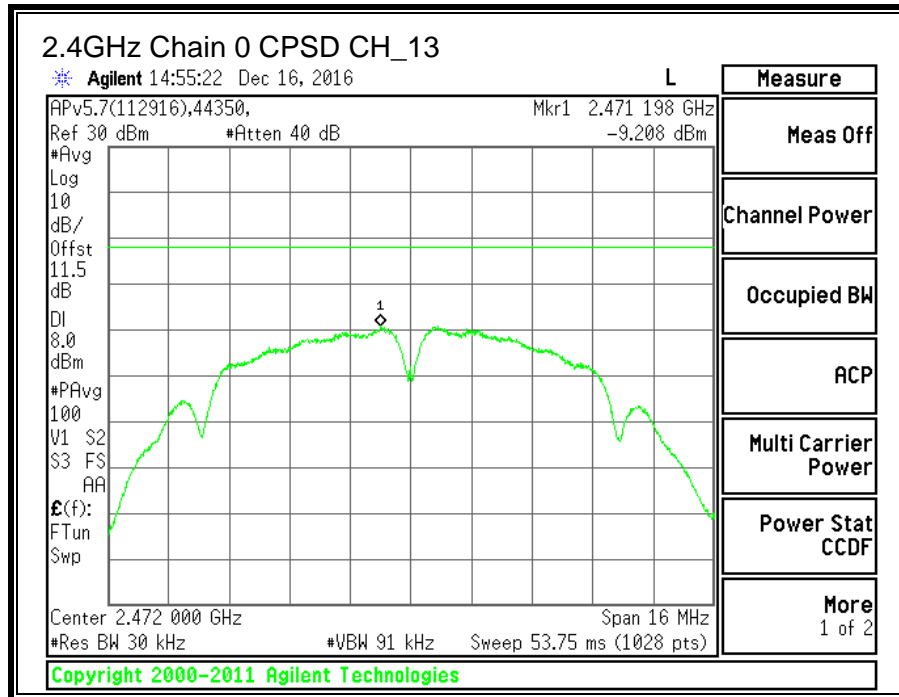




11.1.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

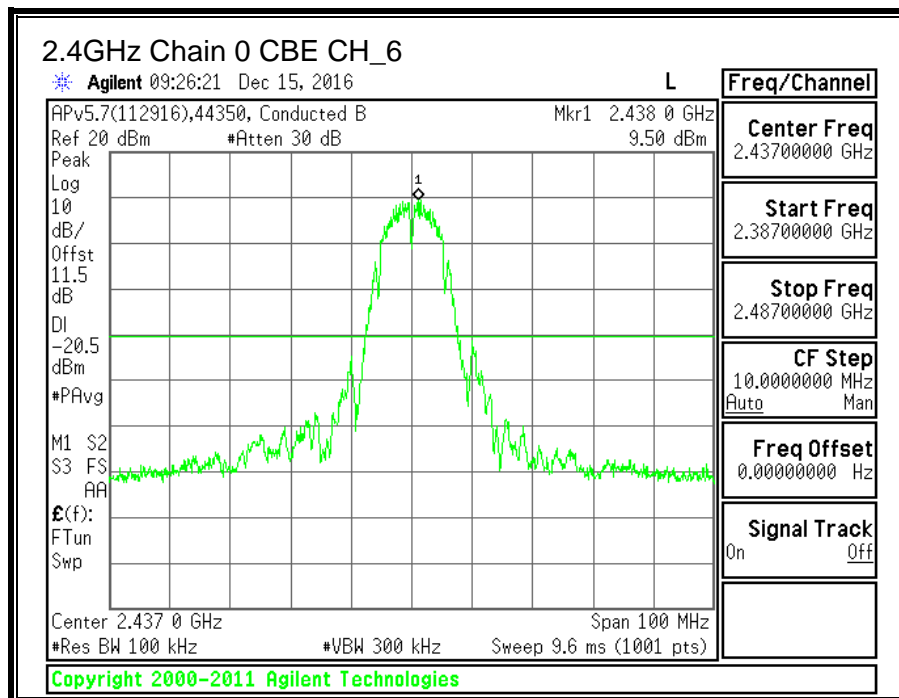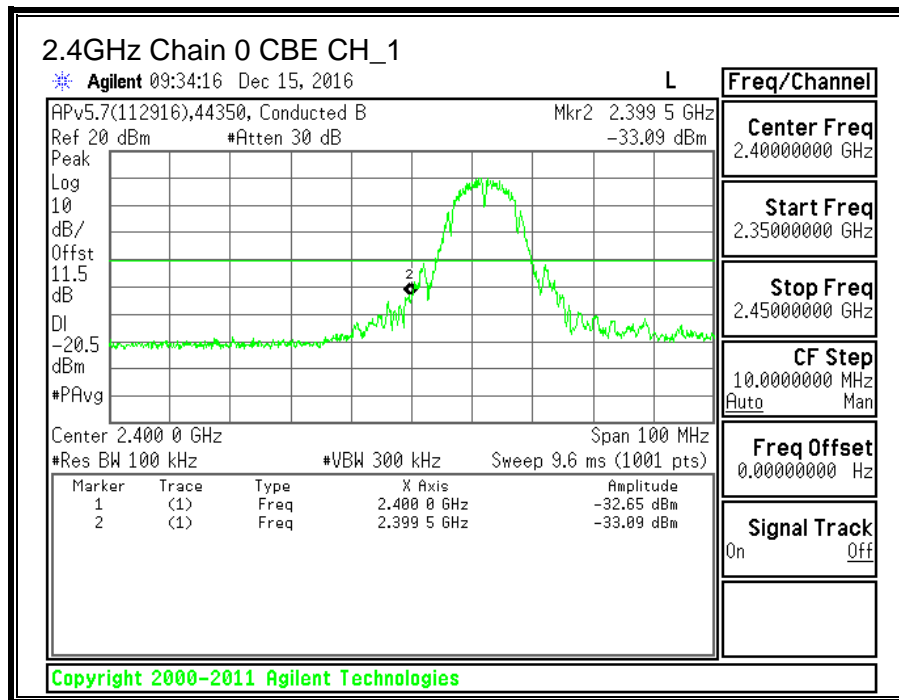

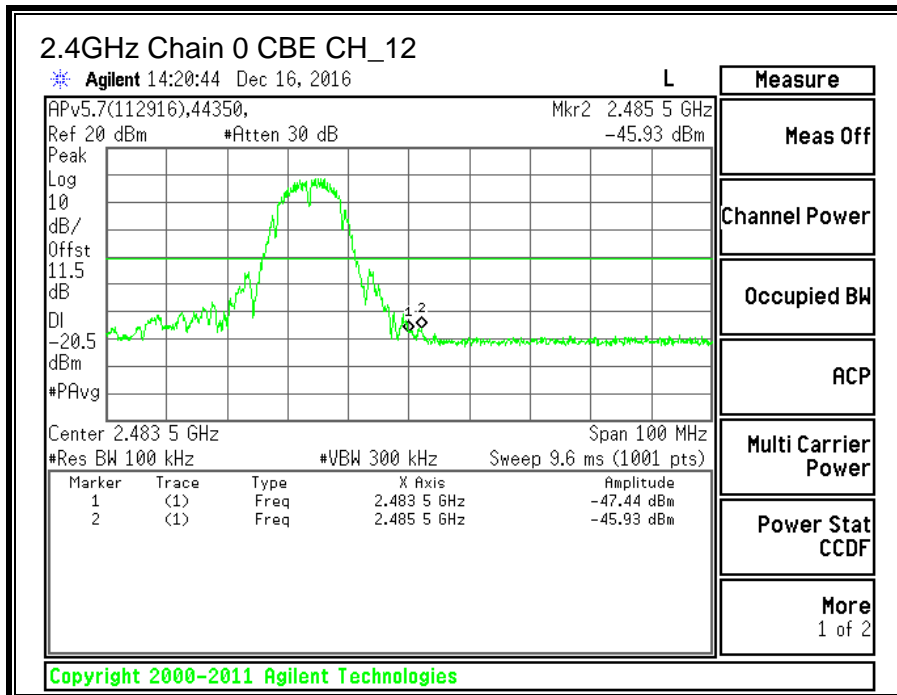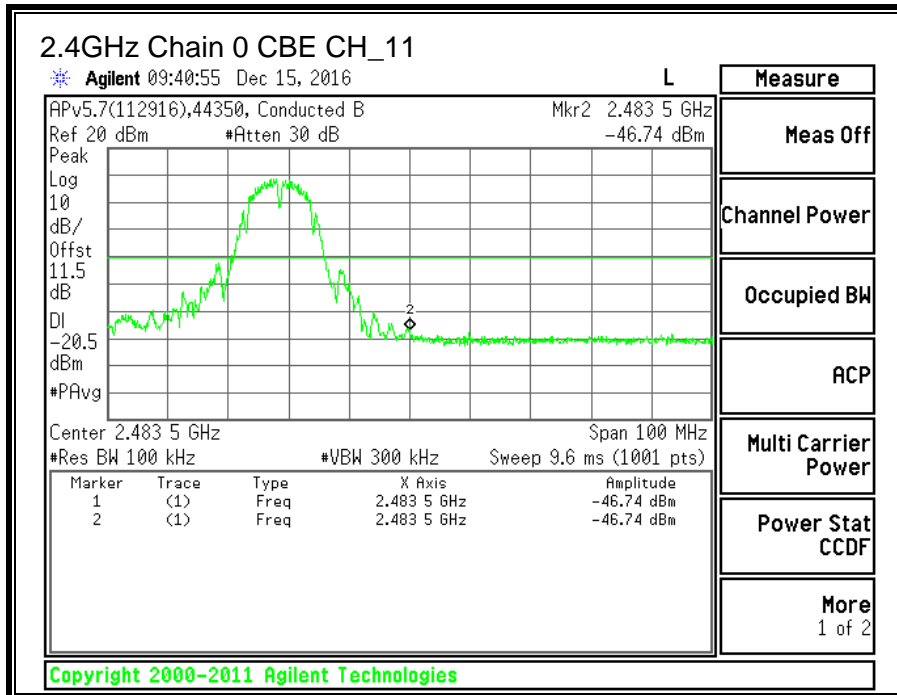

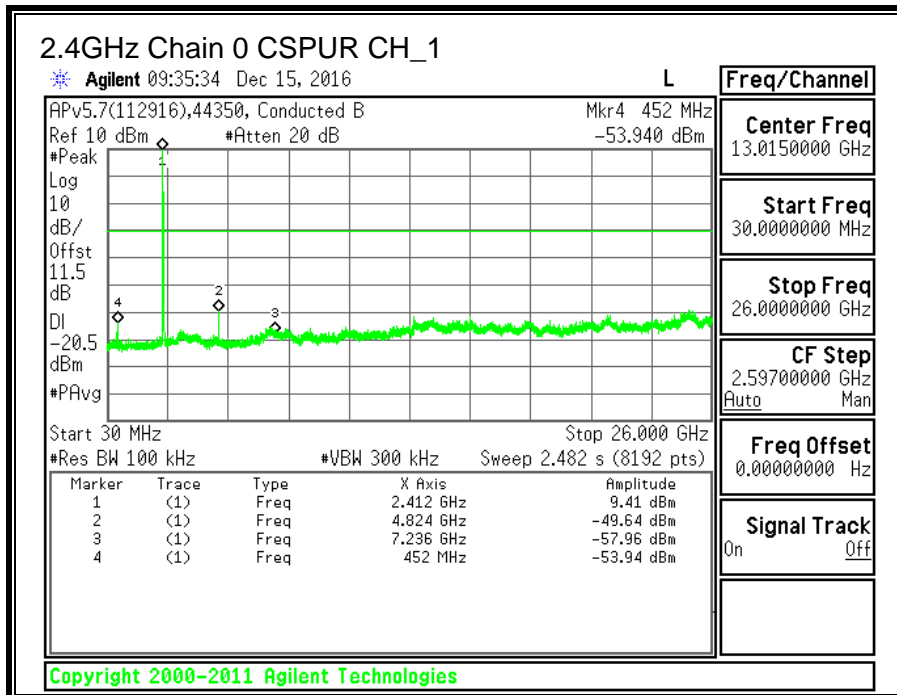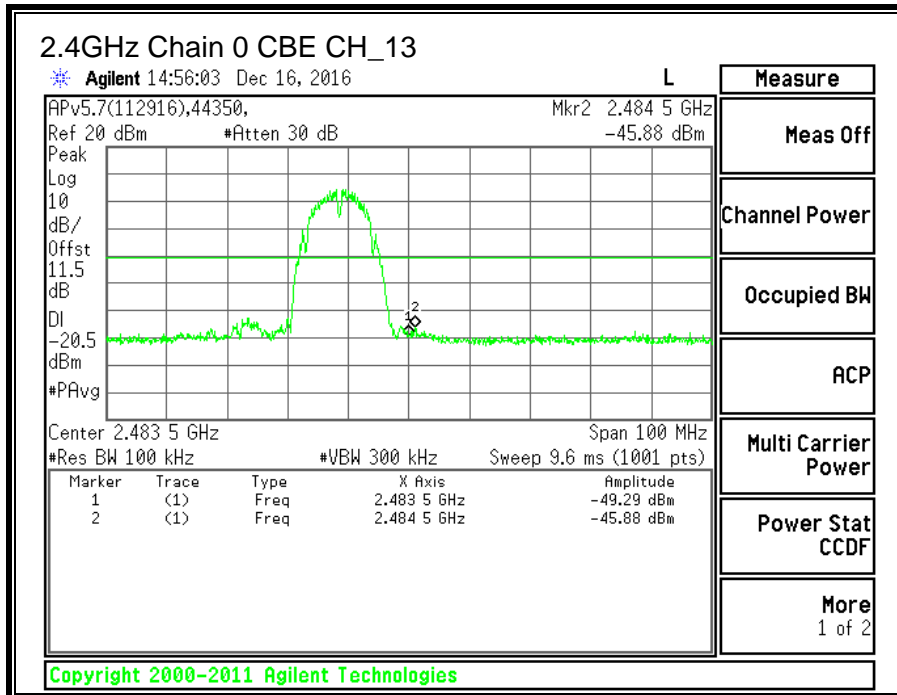

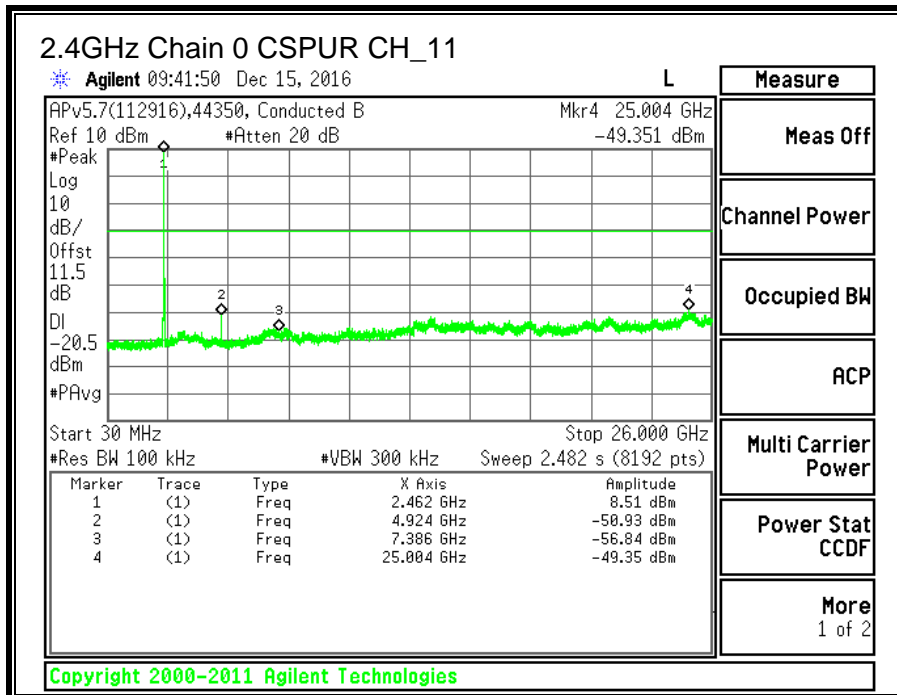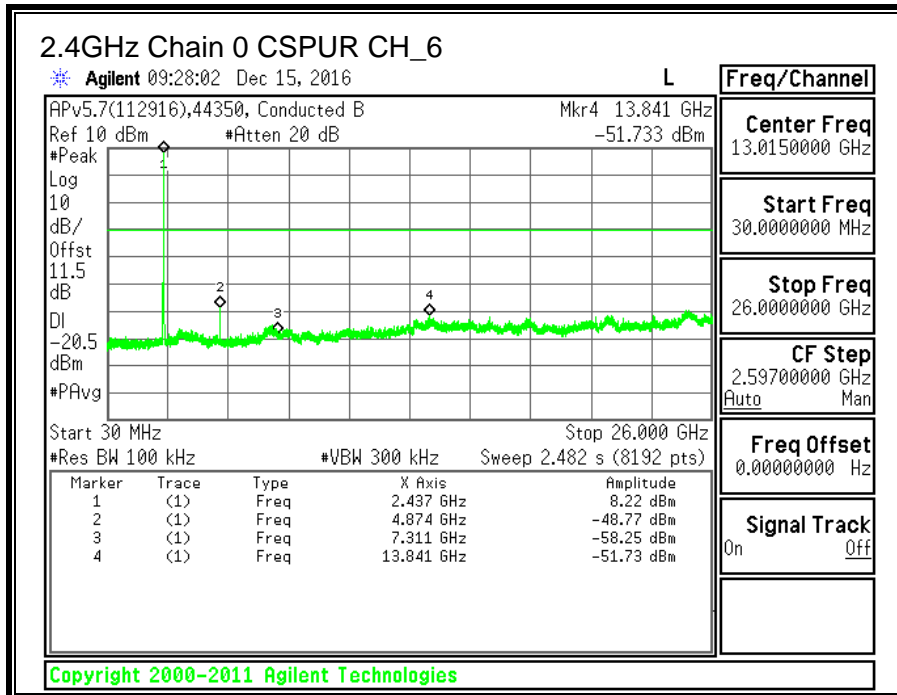

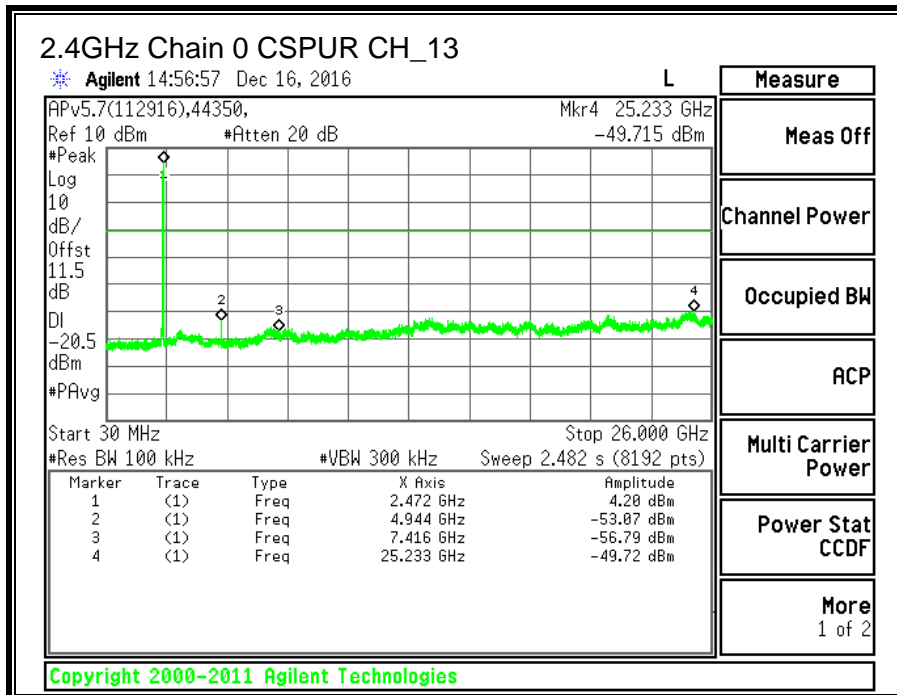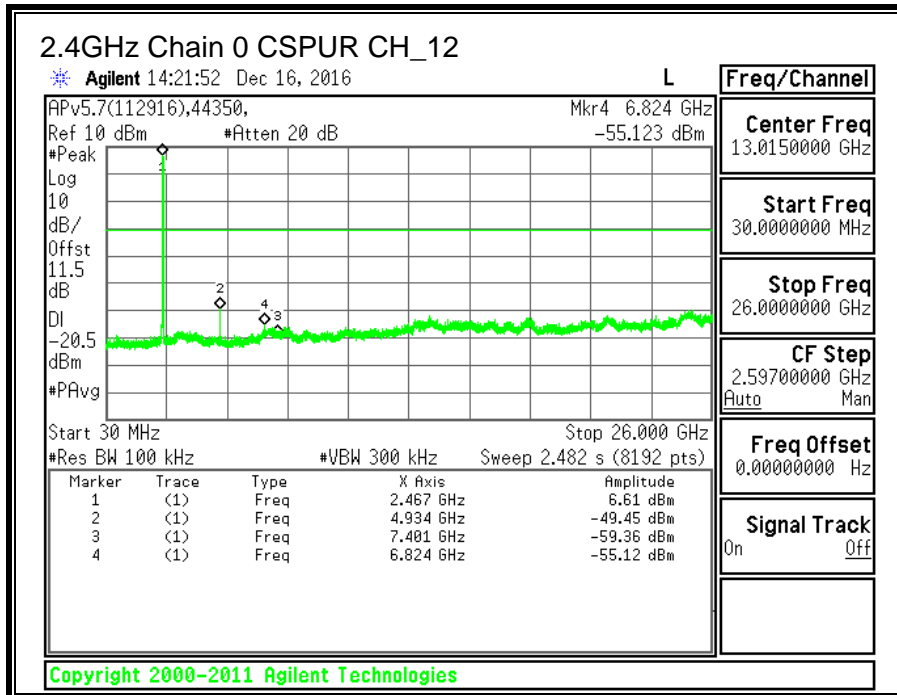

11.2. 11b Chain 1 SISO MODE IN THE 2.4GHz BAND

11.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	9.0700	0.5
Middle_6	2437	9.0625	0.5
High_11	2462	9.0975	0.5
High_12	2467	9.0775	0.5
High_13	2472	7.5725	0.5

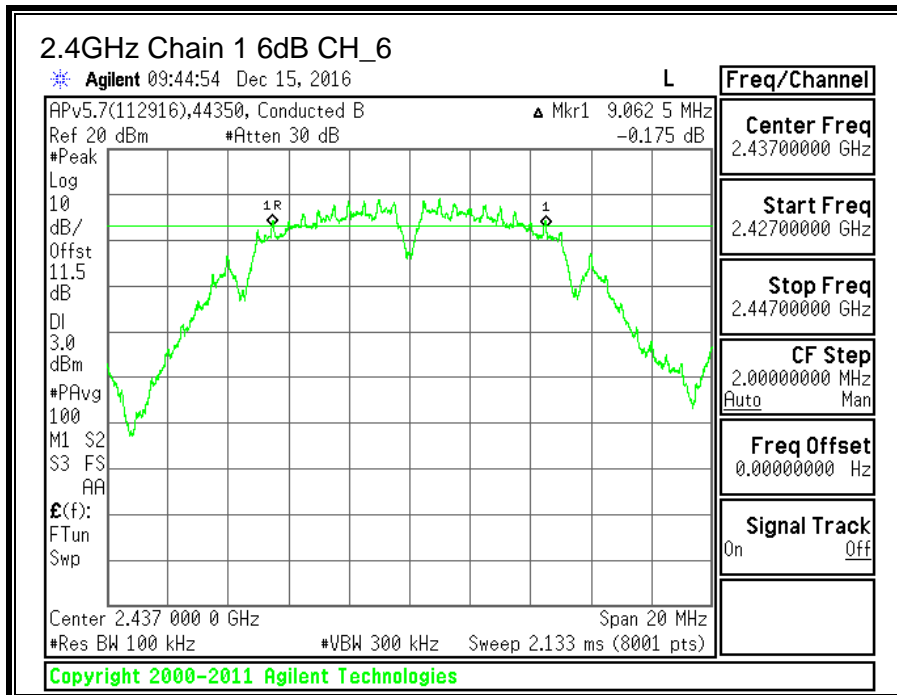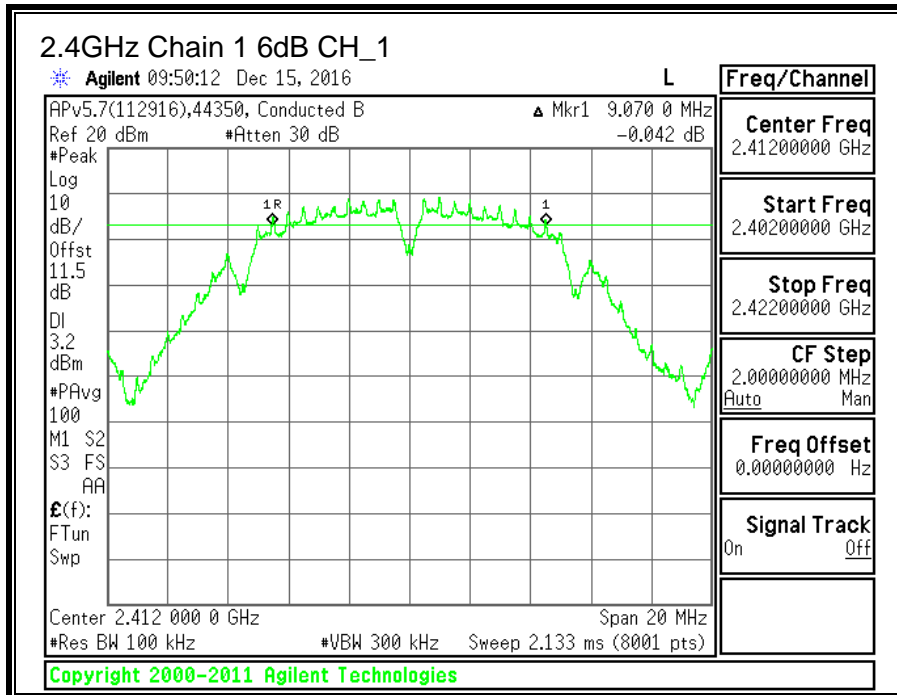

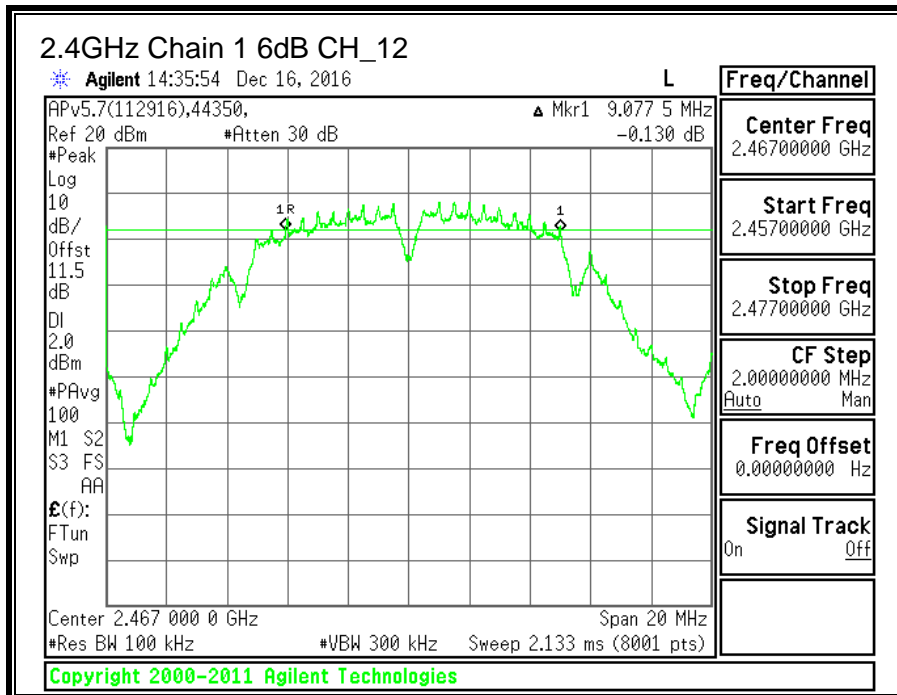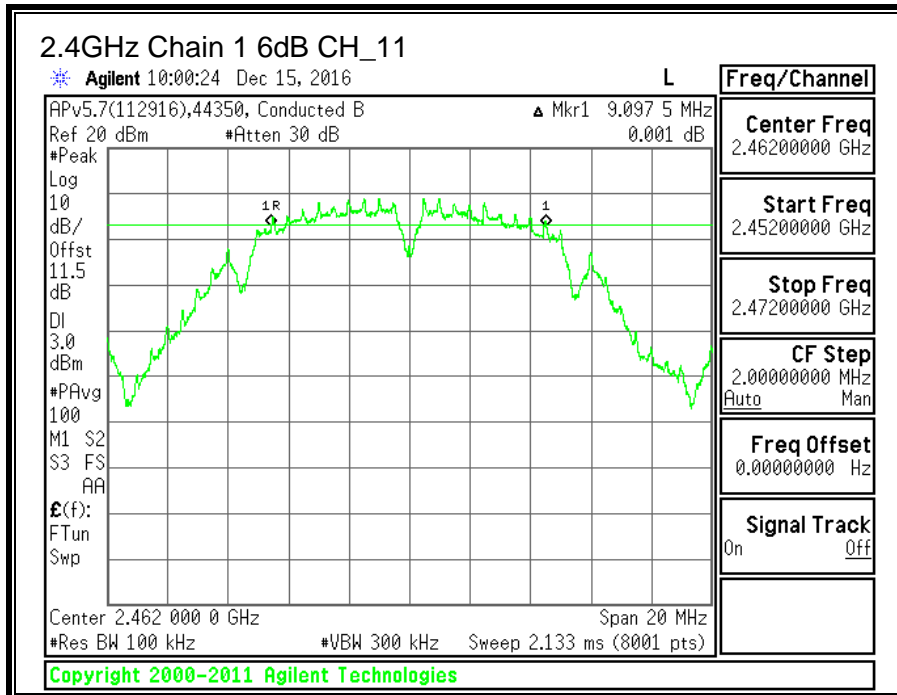

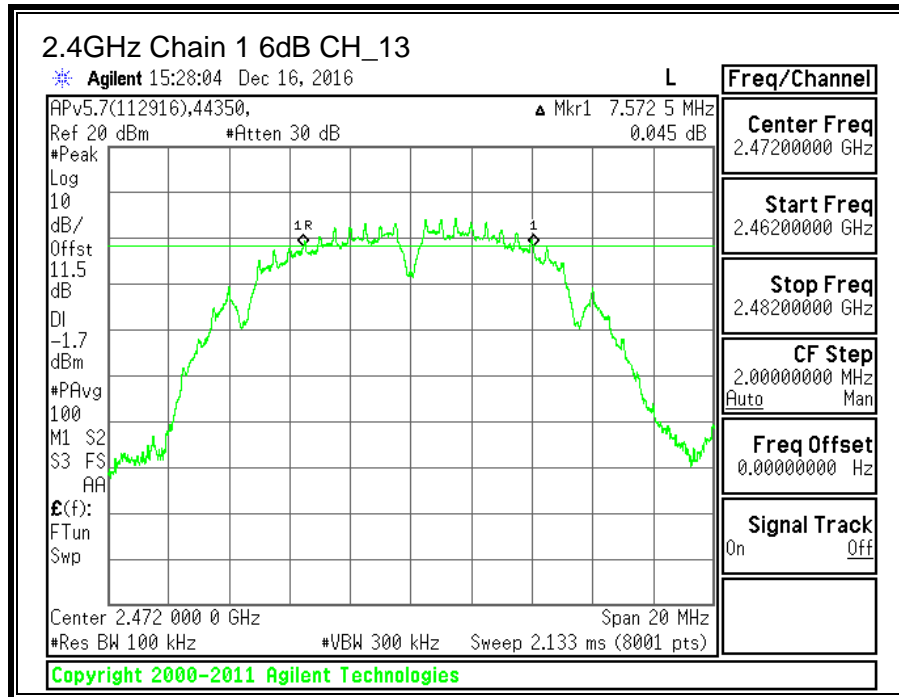

11.2.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Chain 1 (MHz)
Low_1	2412	11.8602
Middle_6	2437	11.8139
High_11	2462	11.9165
High_12	2467	11.9487
High_13	2472	10.6639

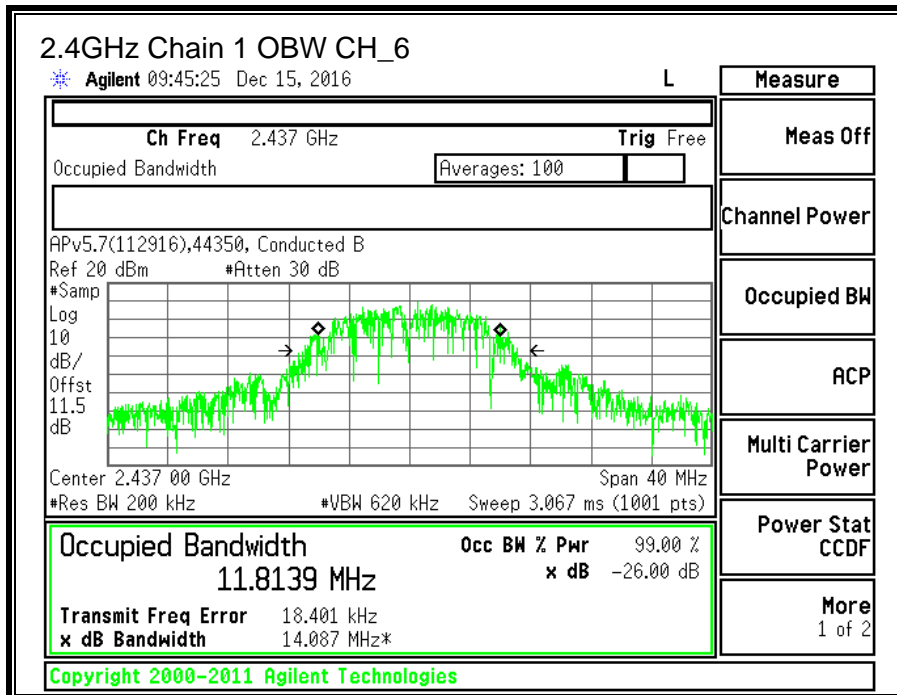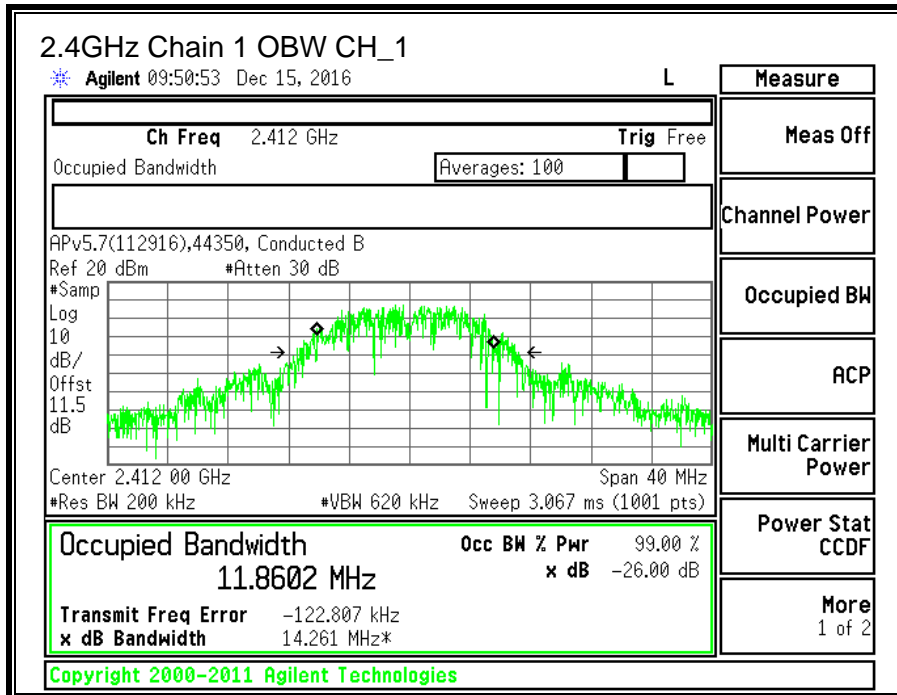

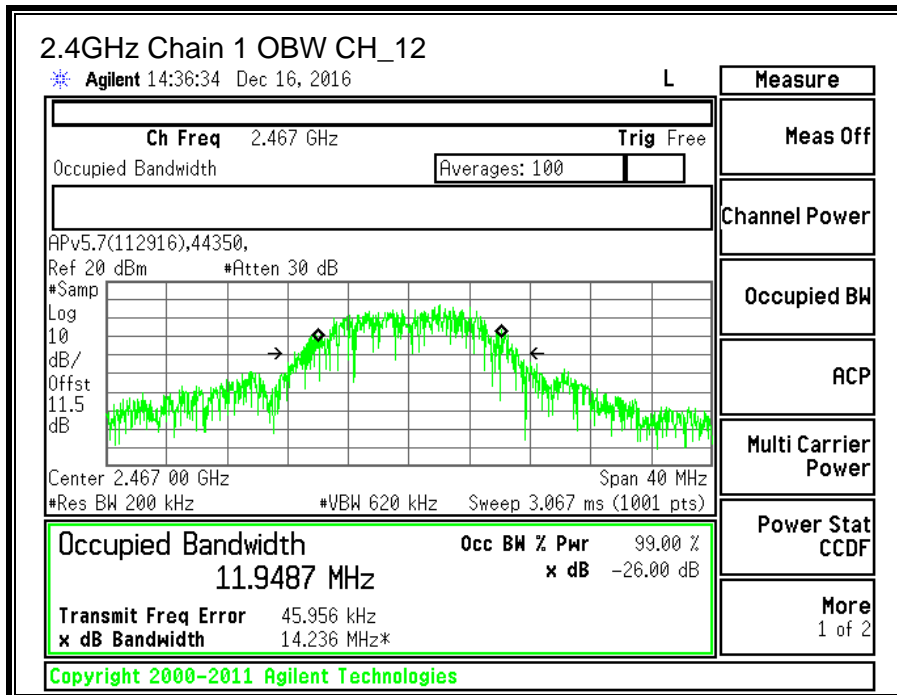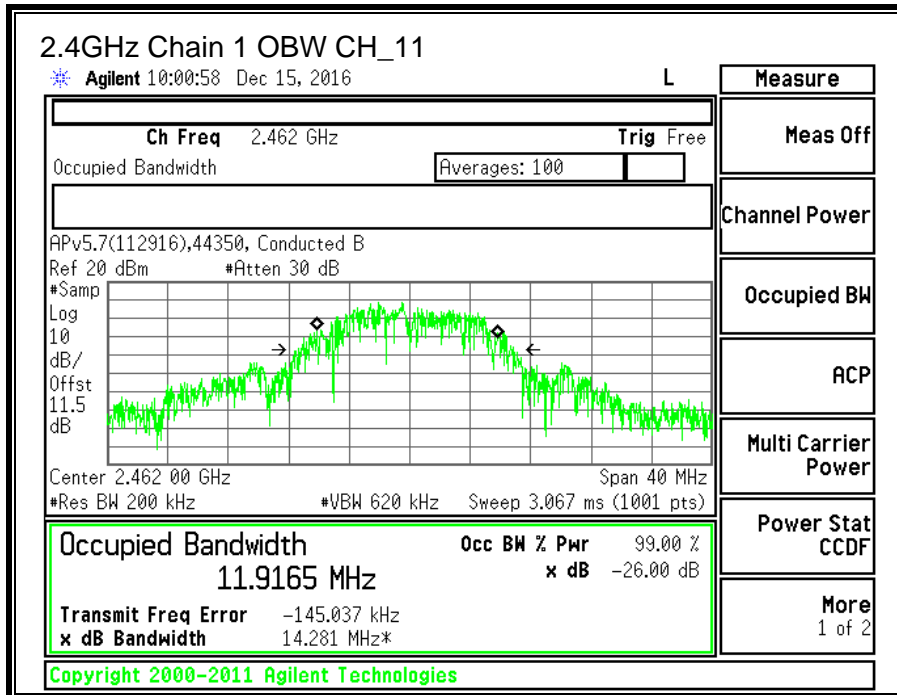

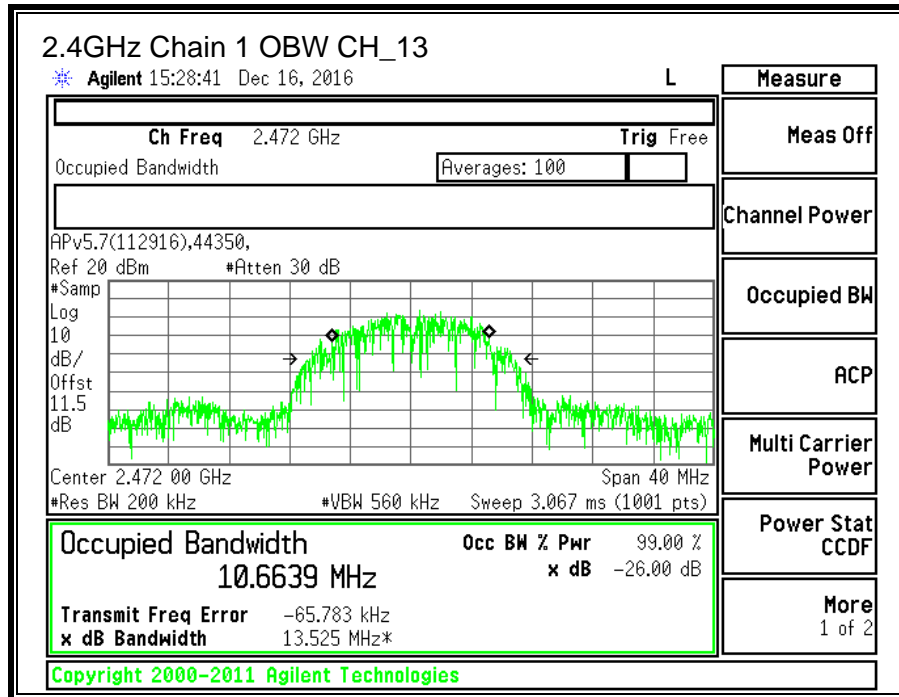

11.2.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

ID:	44350	Date:	12/19/2016
------------	-------	--------------	------------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	2.86	30.00	30	36	30.00
Mid_6	2437	2.86	30.00	30	36	30.00
High_11	2462	2.86	30.00	30	36	30.00
High_12	2467	2.86	30.00	30	36	30.00
High_13	2472	2.86	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Core 1 Meas Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	18.40	30.00	-11.60
Mid_6	2437	18.40	30.00	-11.60
High_11	2462	18.40	30.00	-11.60
High_12	2467	16.92	30.00	-13.08
High_13	2472	12.09	30.00	-17.91

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

11.2.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS


Duty Cycle CF (dB)	0.00	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results



Channel	Frequency (MHz)	Core 1 Meas (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-4.239	8.0	-12.2
Mid_6	2437	-4.480	8.0	-12.5
High_11	2462	-4.522	8.0	-12.5
High_12	2467	-5.350	8.0	-13.4
High_13	2472	-9.542	8.0	-17.5

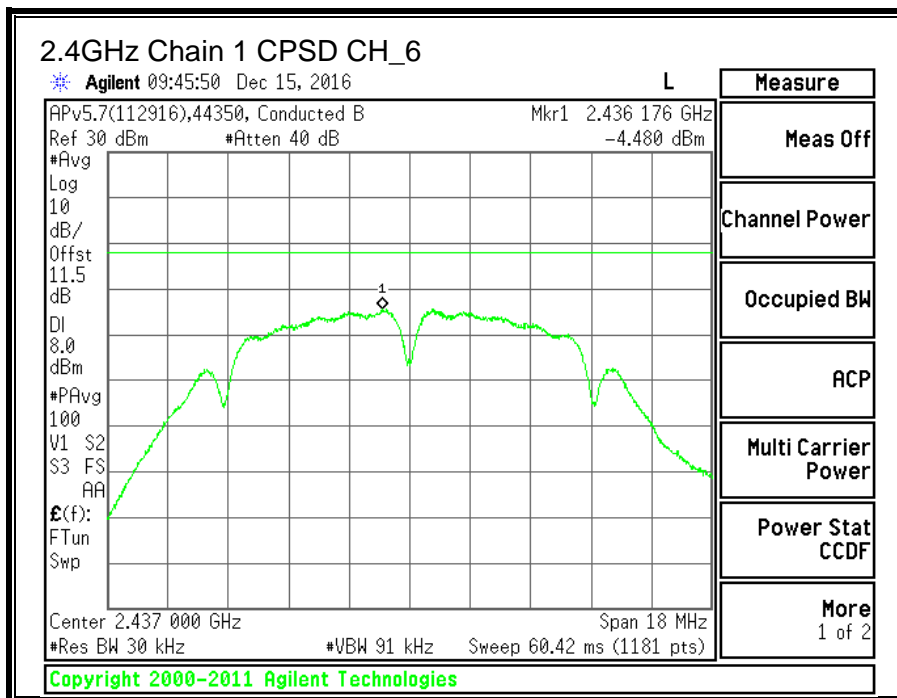
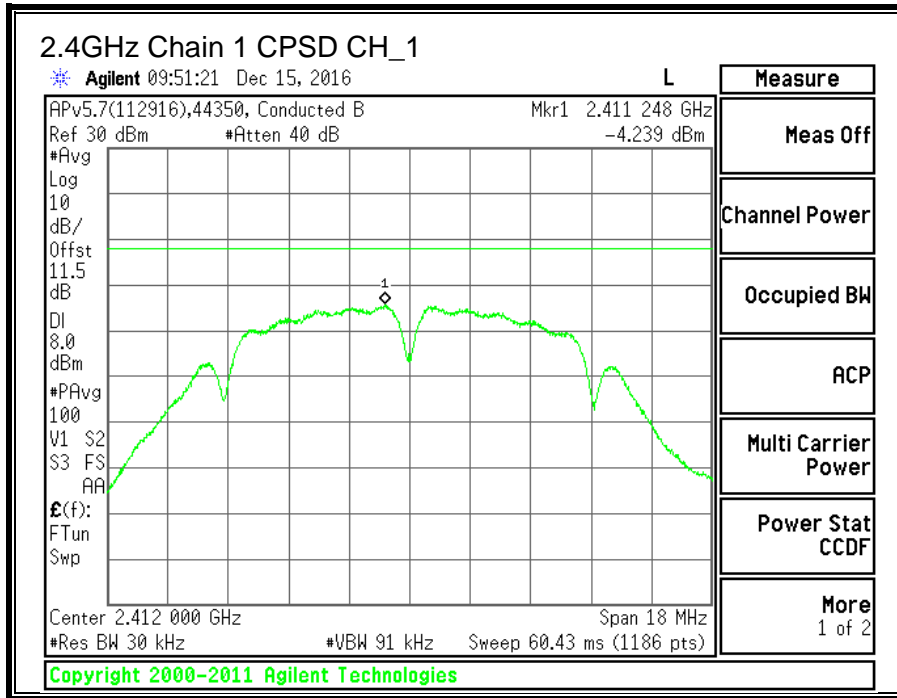


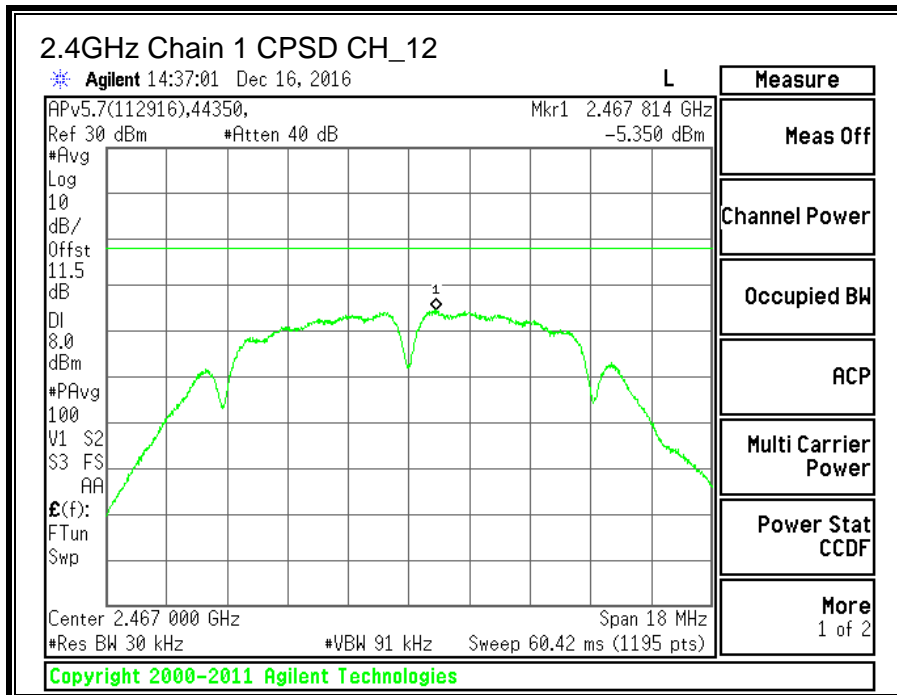
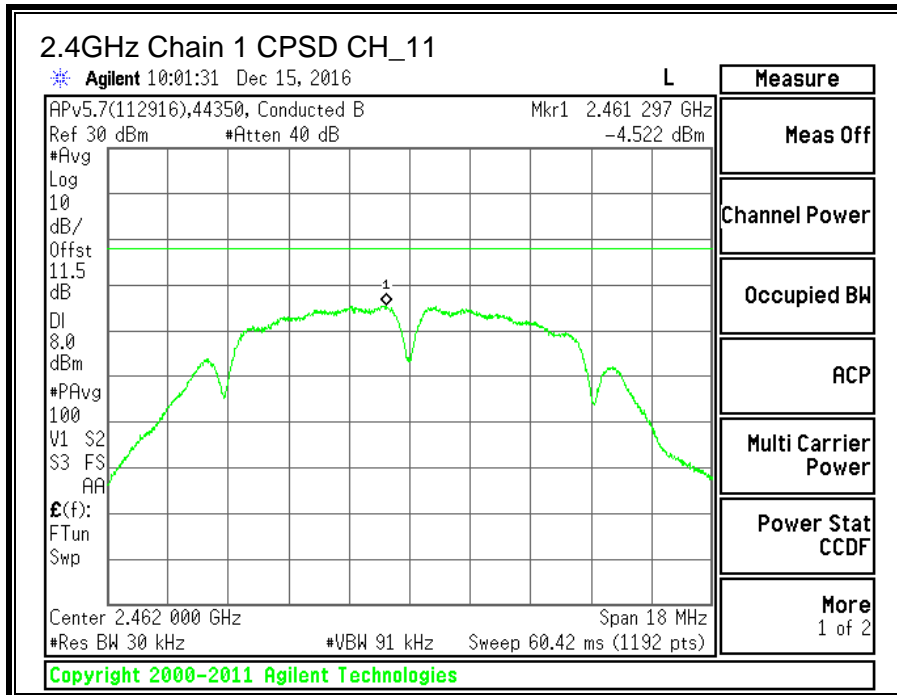



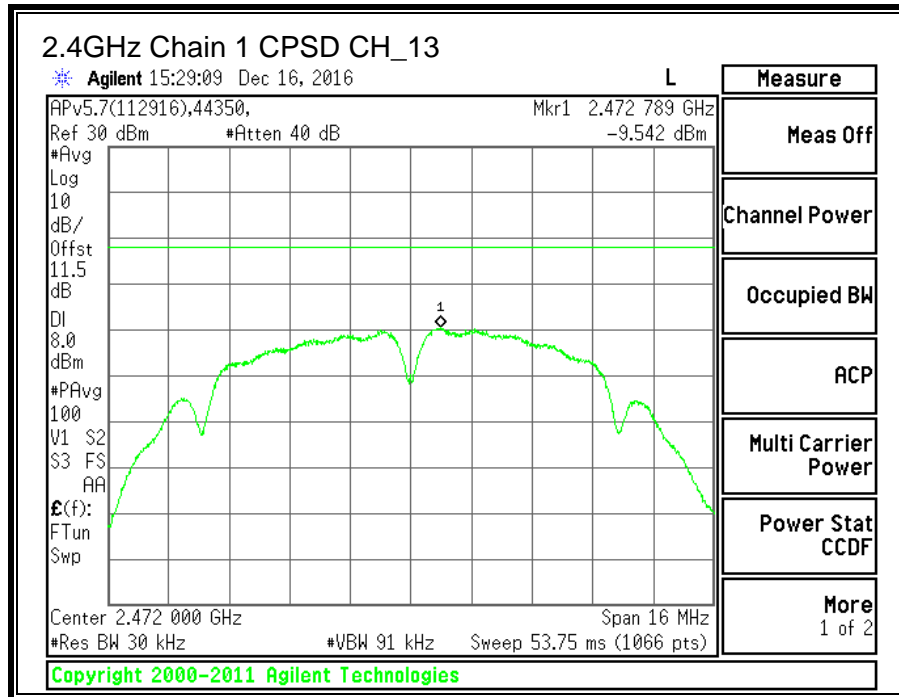




11.2.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

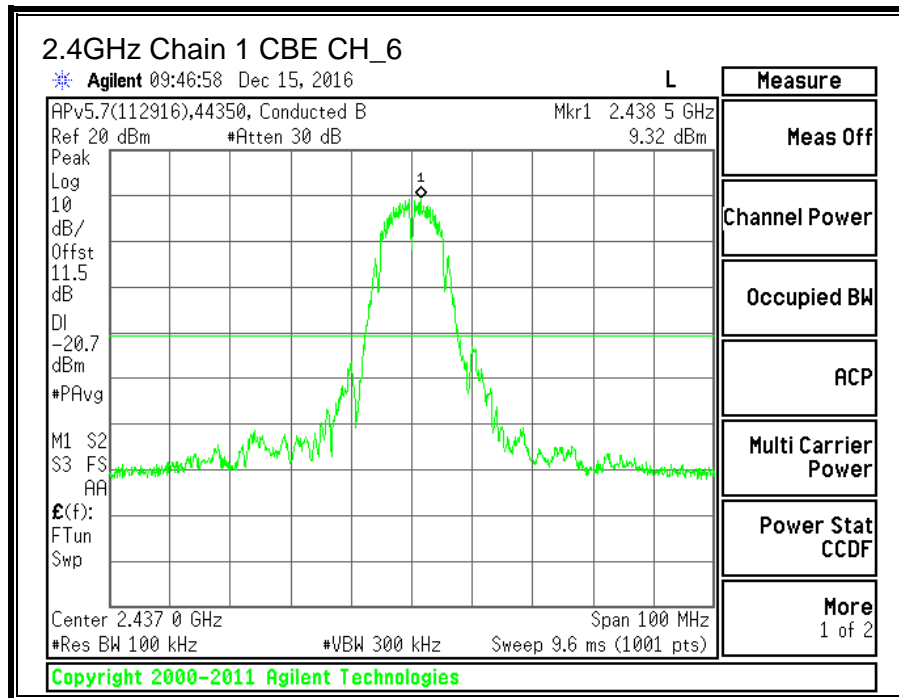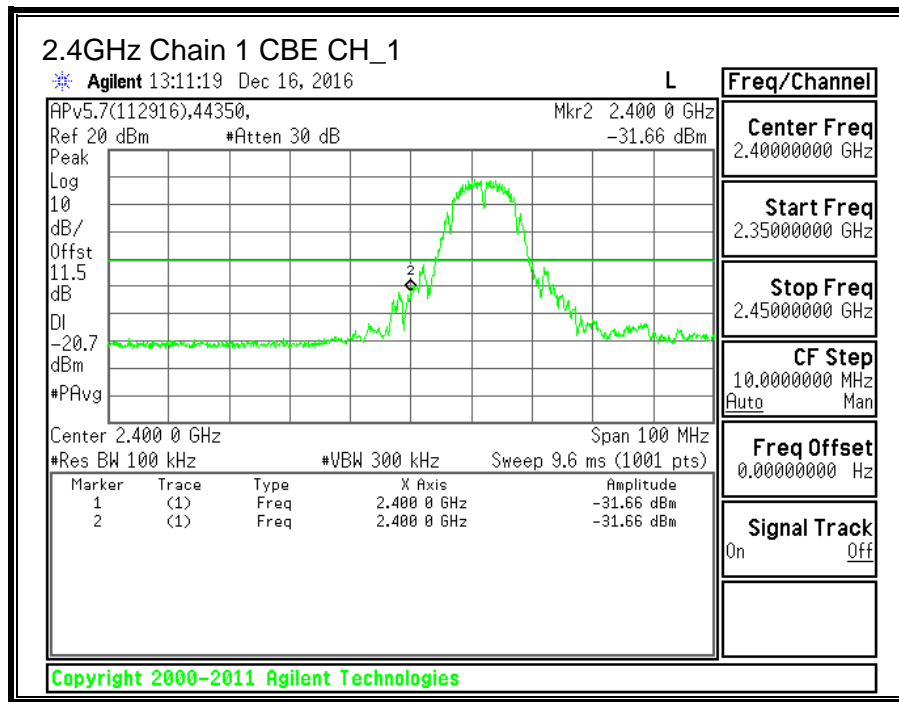

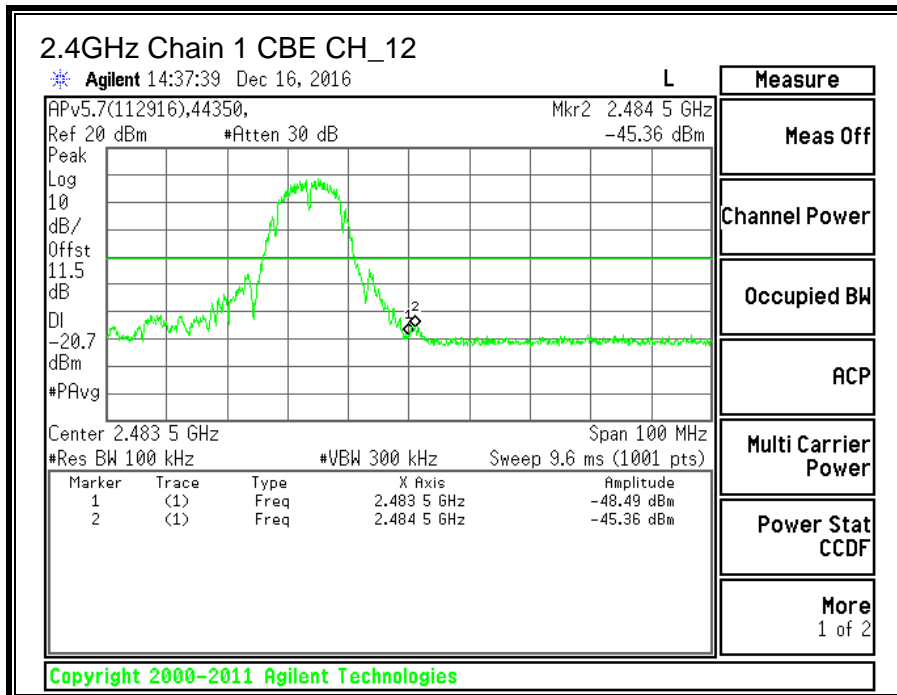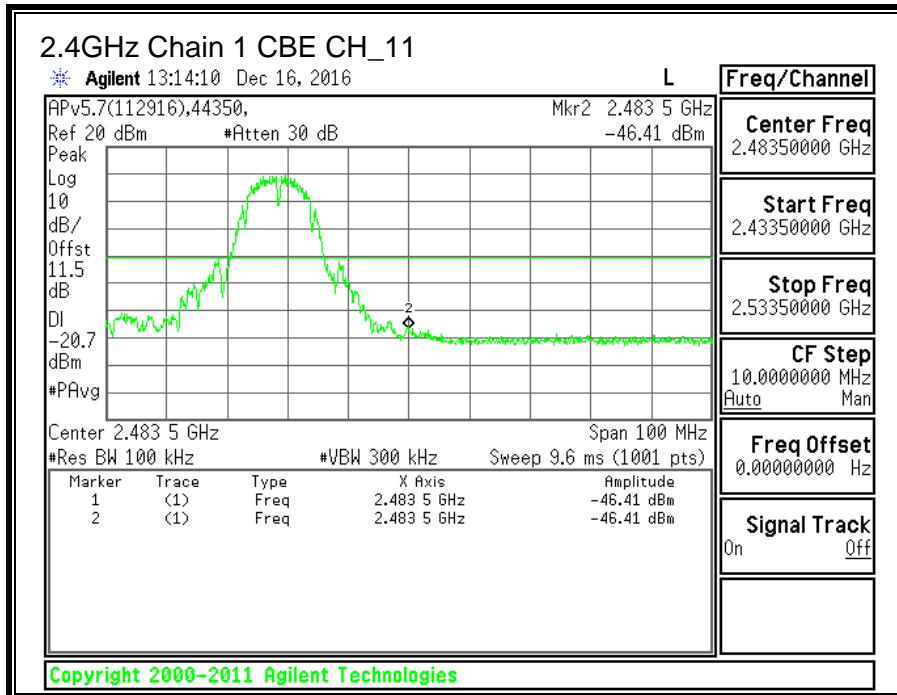

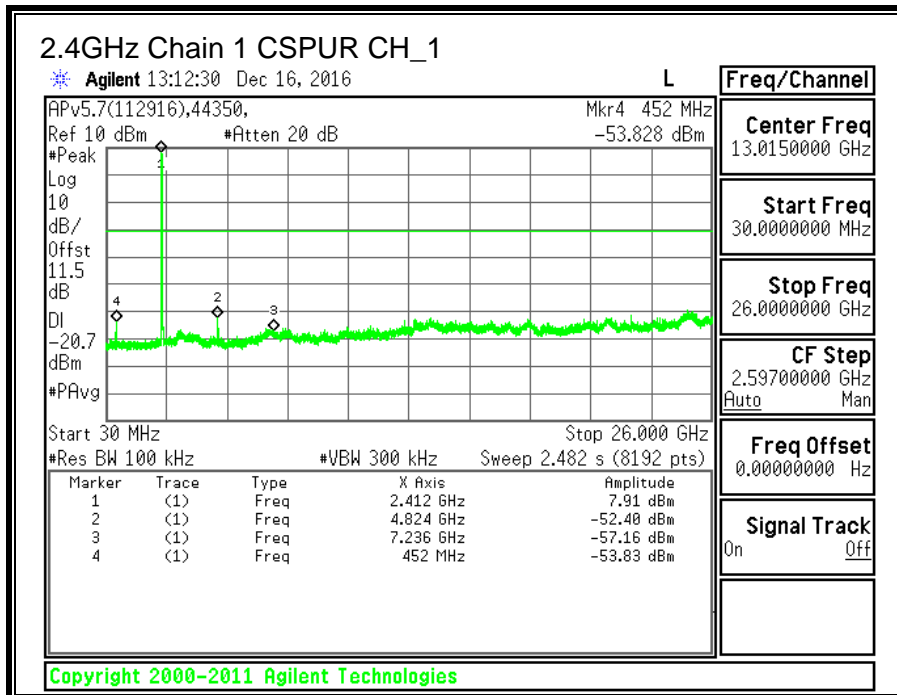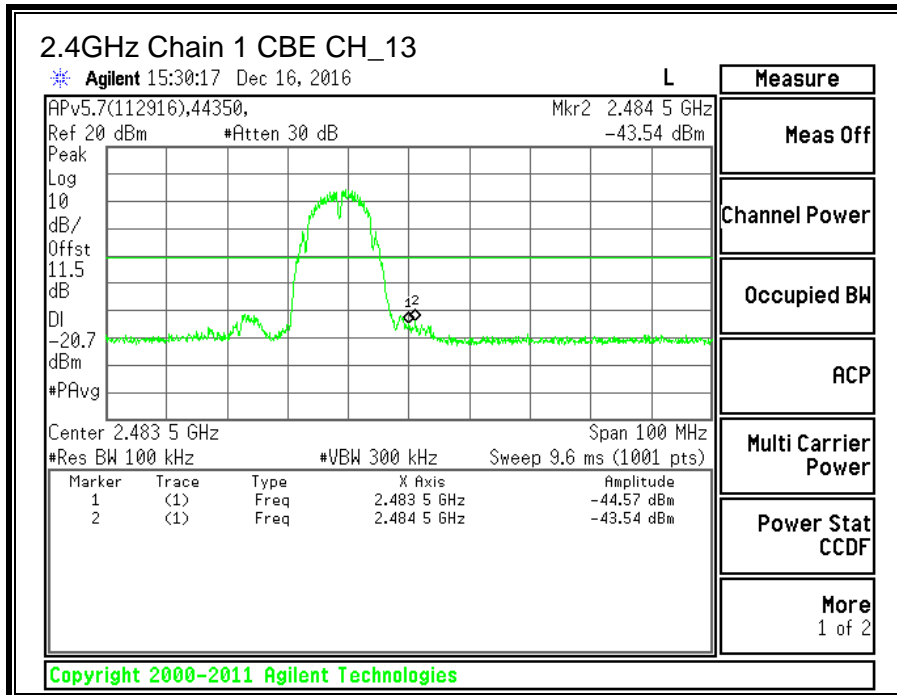

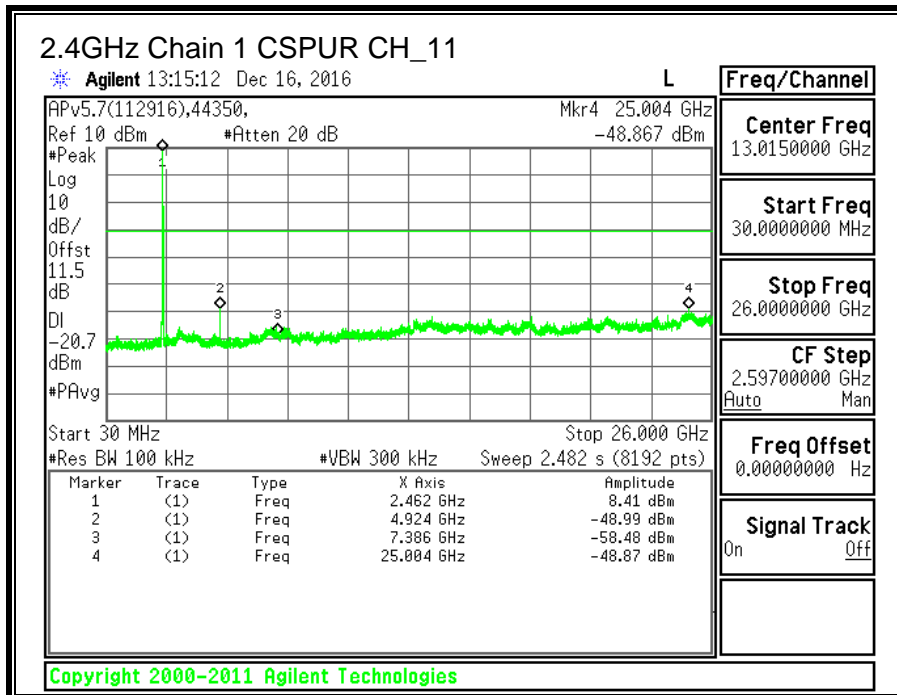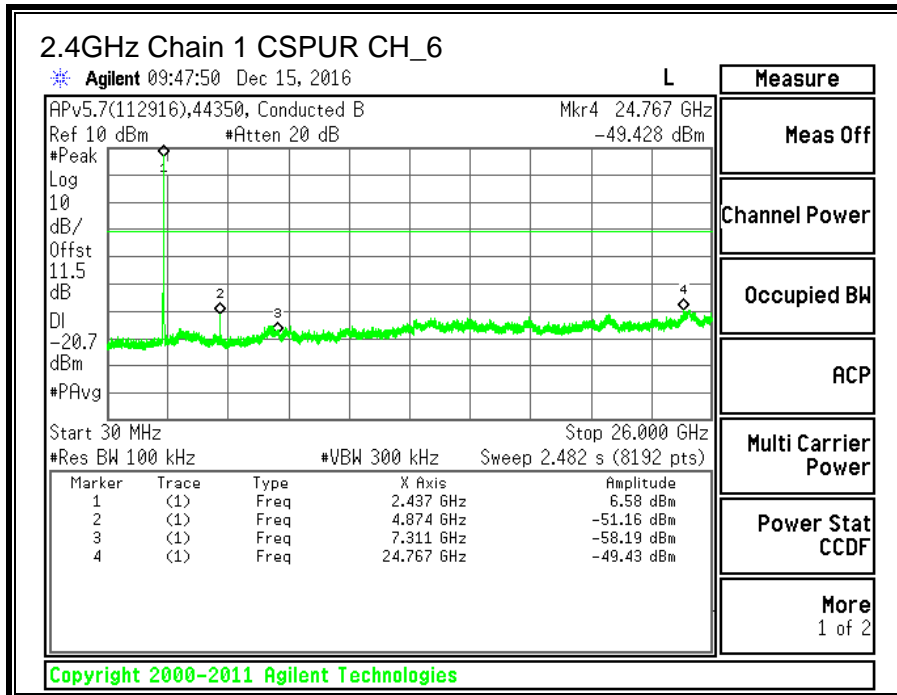

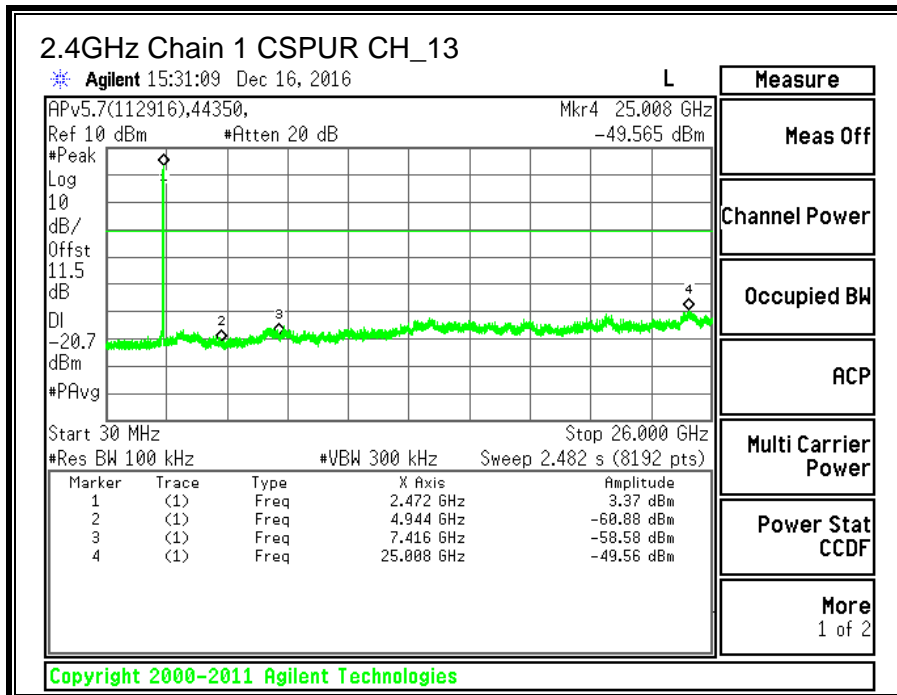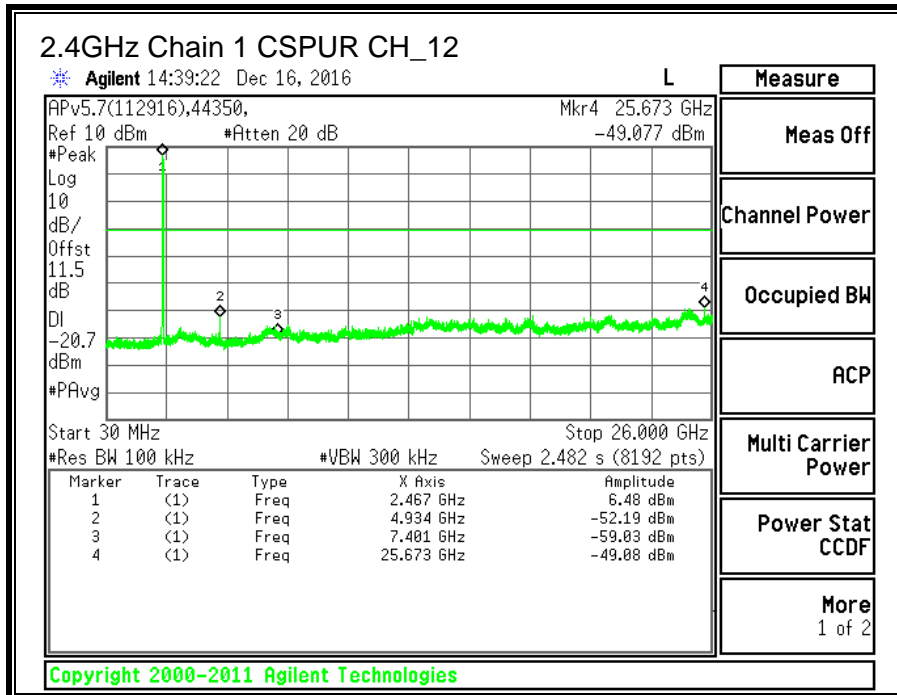

11.3. 11g Chain 0 SISO MODE IN THE 2.4GHz BAND

11.3.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 0 (MHz)	Minimum Limit (MHz)
Low_1	2412	16.340	0.5
Middle_6	2437	16.375	0.5
High_11	2462	16.375	0.5
High_12	2467	16.315	0.5
High_13	2472	15.455	0.5

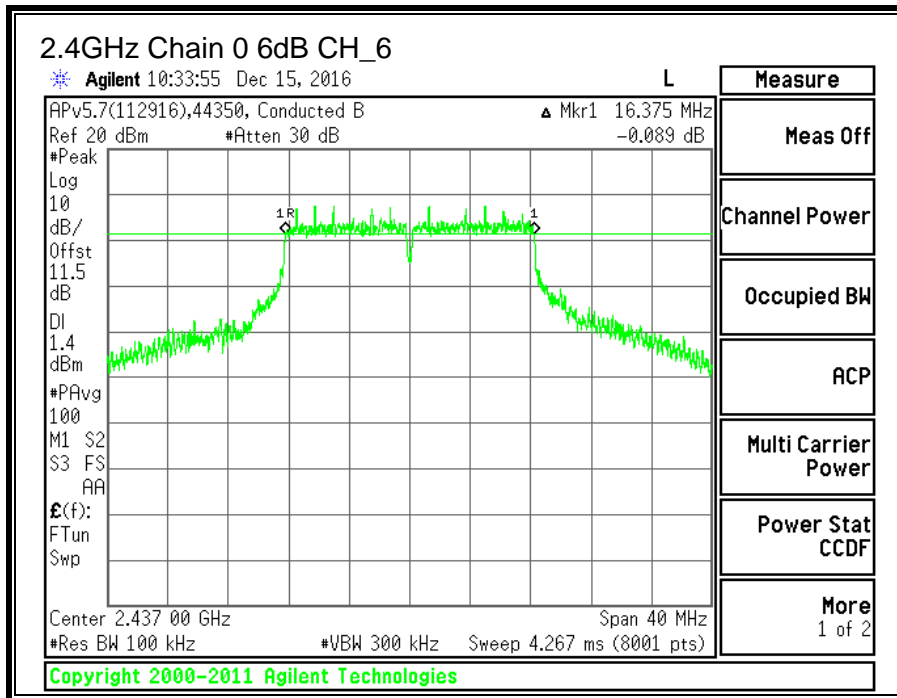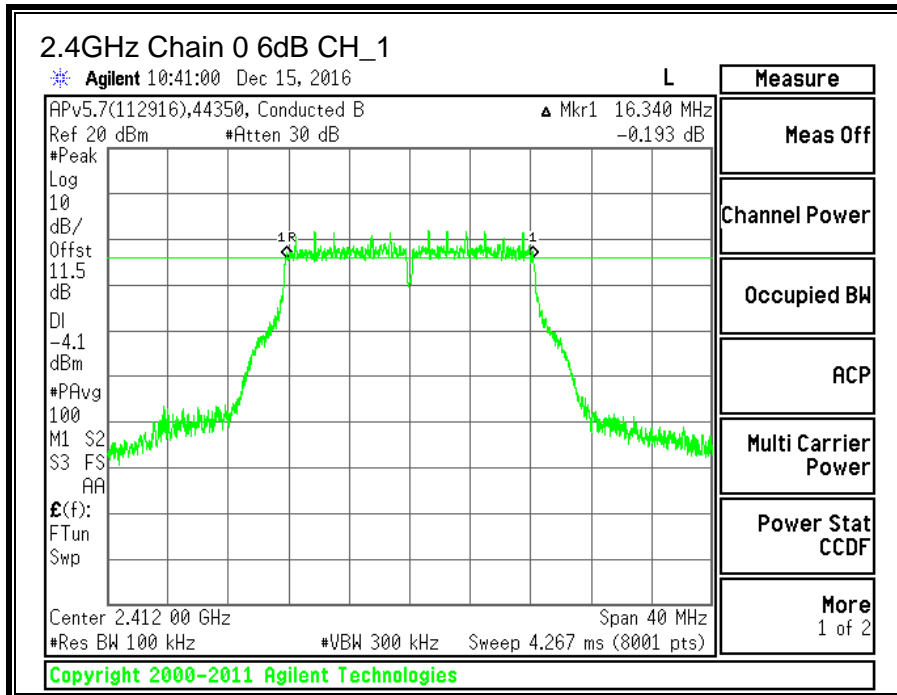

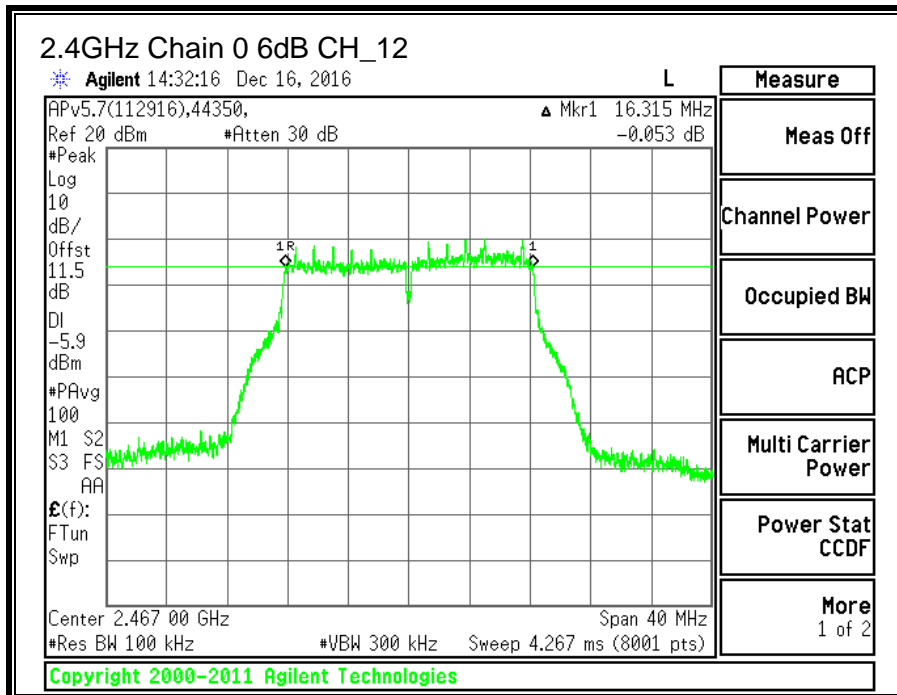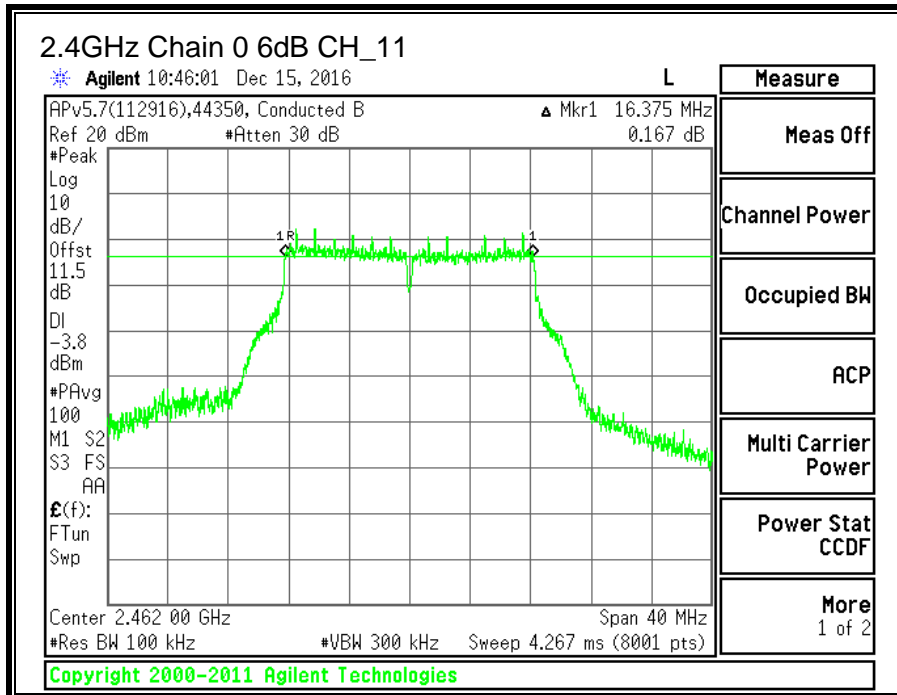

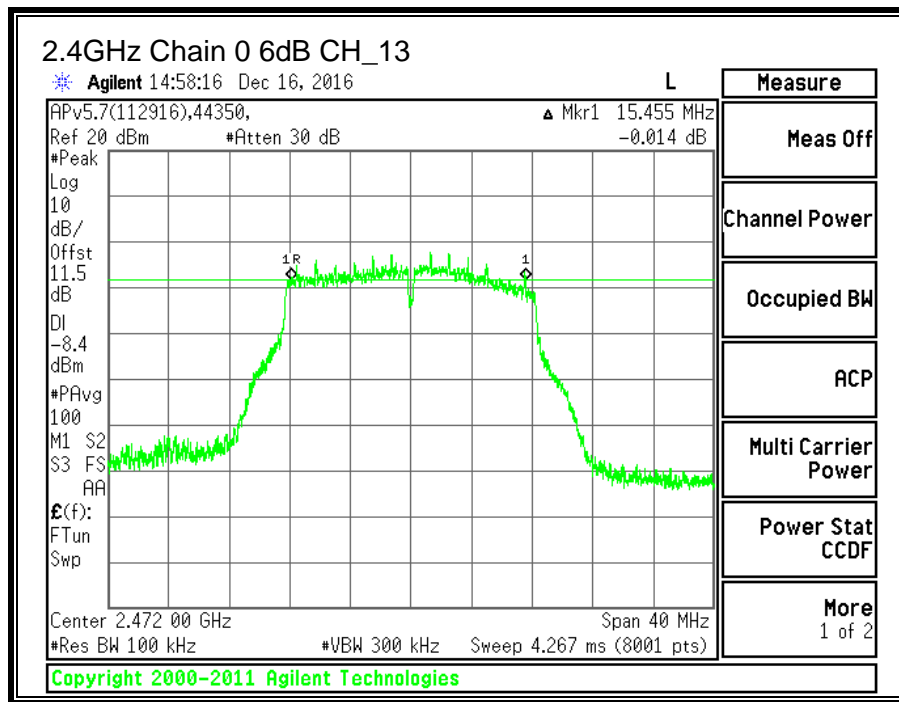

11.3.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)
Low_1	2412	16.3054
Middle_6	2437	16.5660
High_11	2462	16.4113
High_12	2467	16.3662
High_13	2472	16.1576

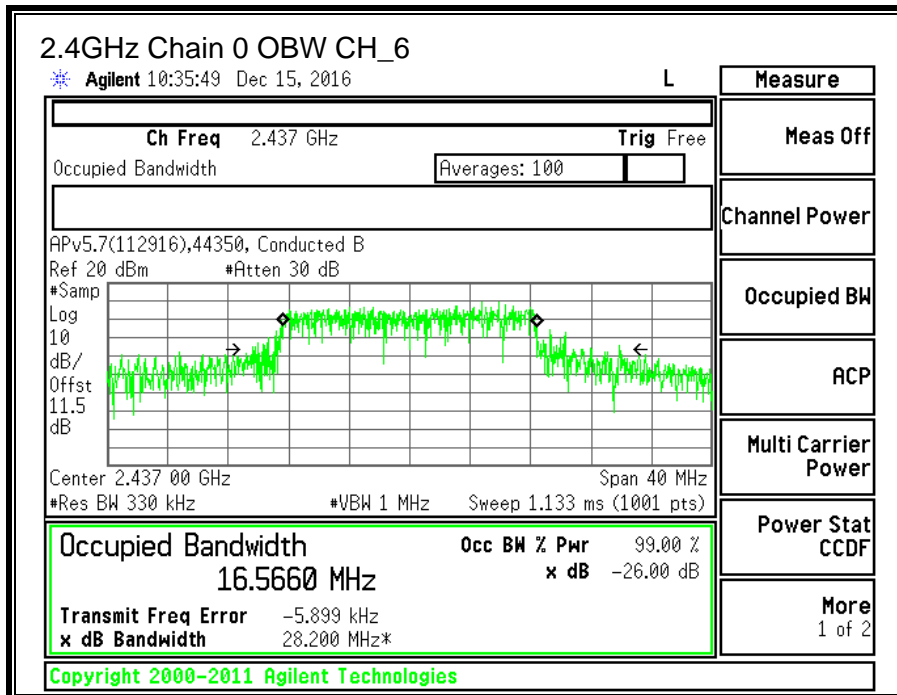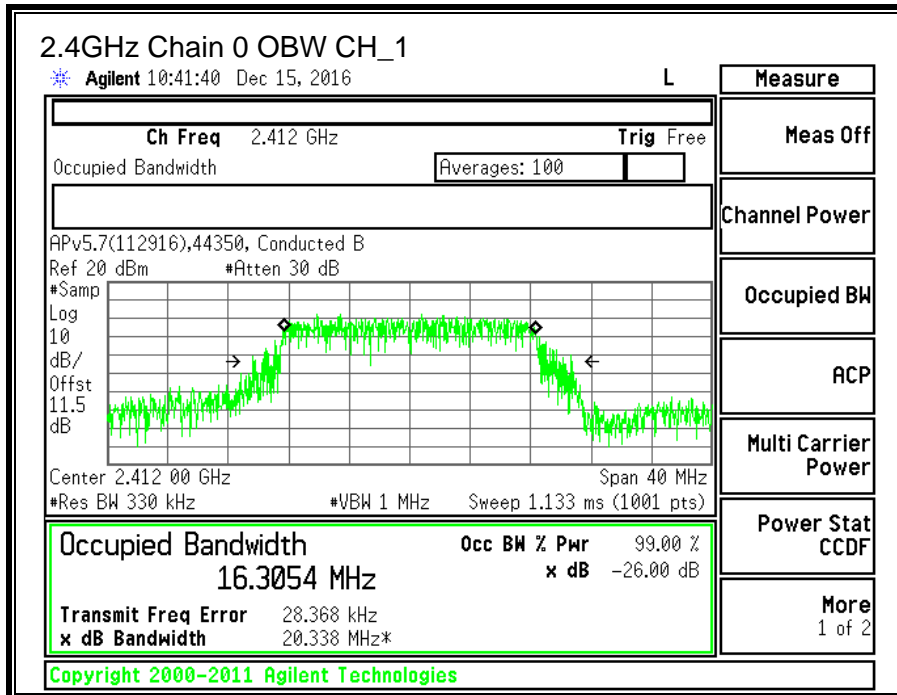

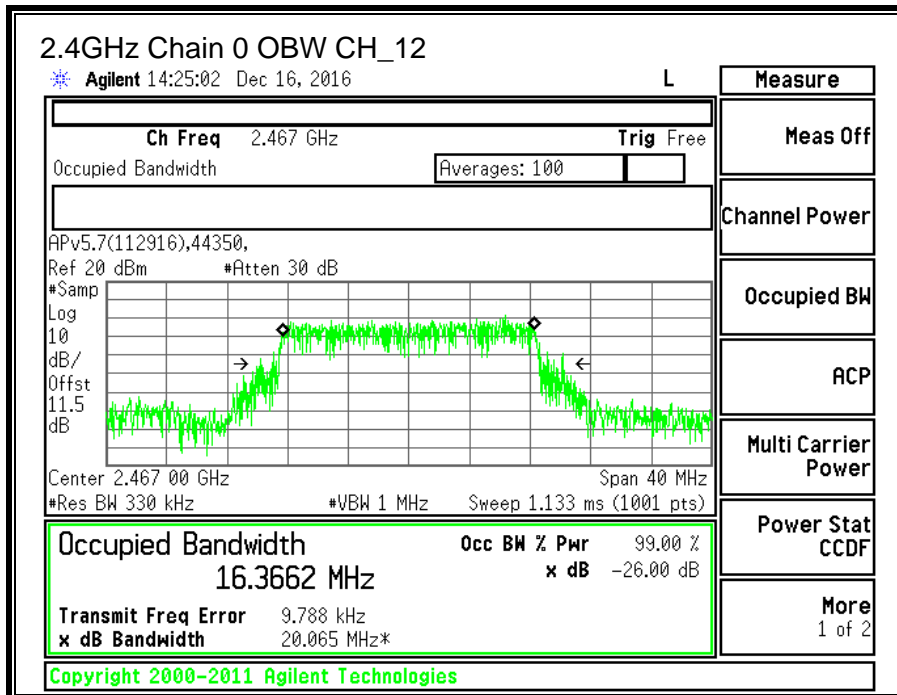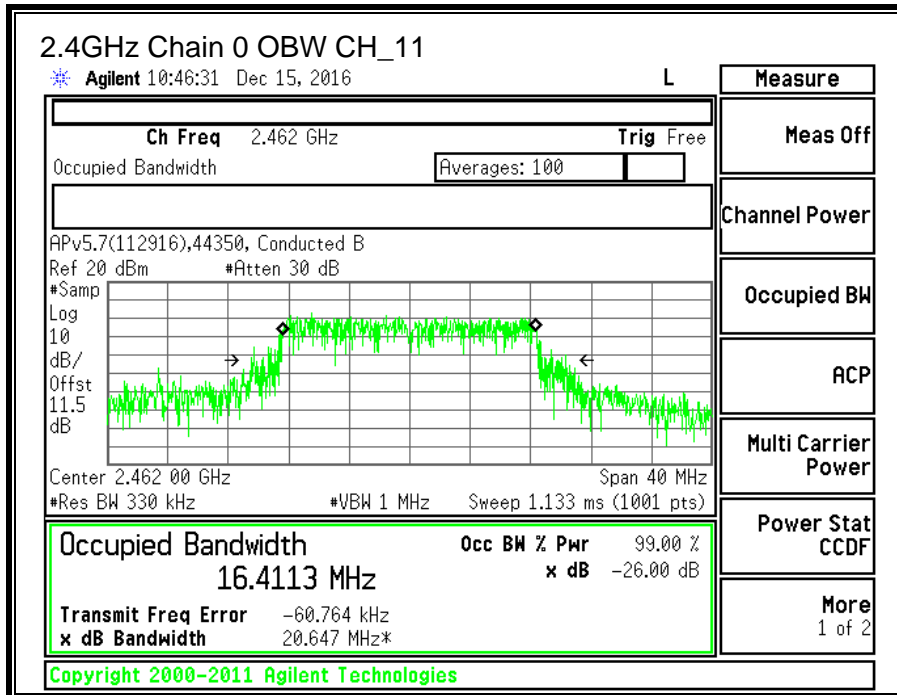

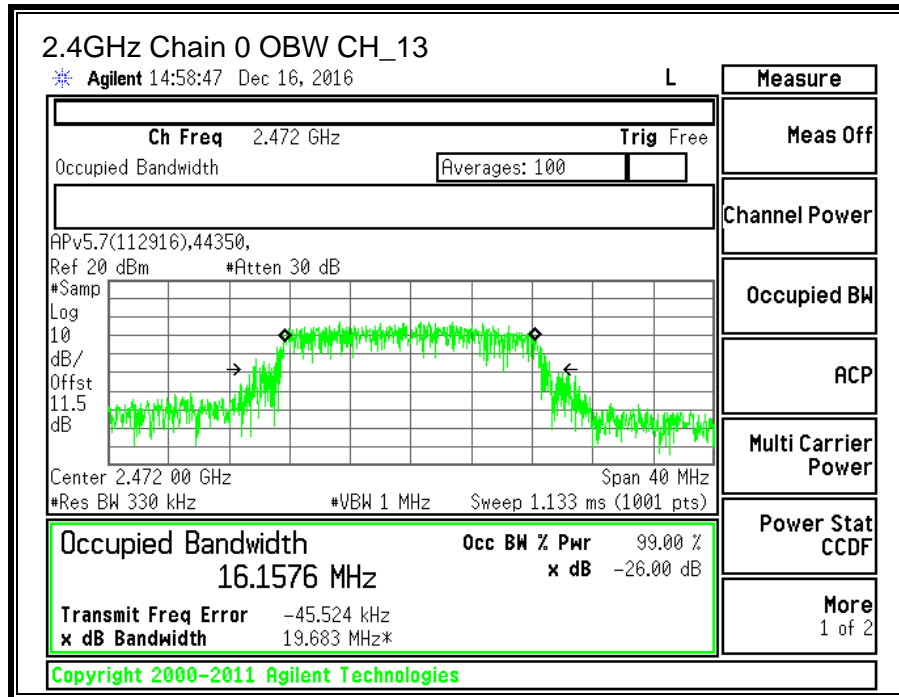

11.3.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

ID:	44350	Date:	12/19/2016
------------	-------	--------------	------------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	2.86	30.00	30	36	30.00
Mid_6	2437	2.86	30.00	30	36	30.00
High_11	2462	2.86	30.00	30	36	30.00
High_12	2467	2.86	30.00	30	36	30.00
High_13	2472	2.86	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Core 0 Meas Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	15.10	30.00	-14.90
Mid_6	2437	18.44	30.00	-11.56
High_11	2462	13.53	30.00	-16.47
High_12	2467	10.66	30.00	-19.34
High_13	2472	8.16	30.00	-21.84

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

11.3.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS


Duty Cycle CF (dB)	0.30	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results



Channel	Frequency (MHz)	Core 0 Meas (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-8.958	8.0	-17.0
Mid_6	2437	-5.727	8.0	-13.7
High_11	2462	-10.227	8.0	-18.2
High_12	2467	-12.622	8.0	-20.6
High_13	2472	-15.244	8.0	-23.2

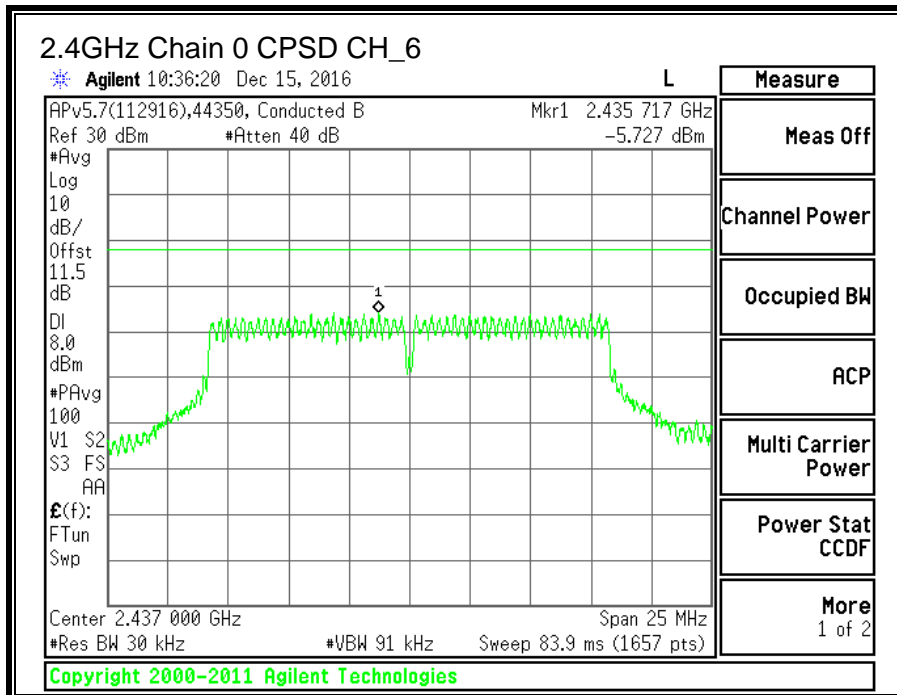
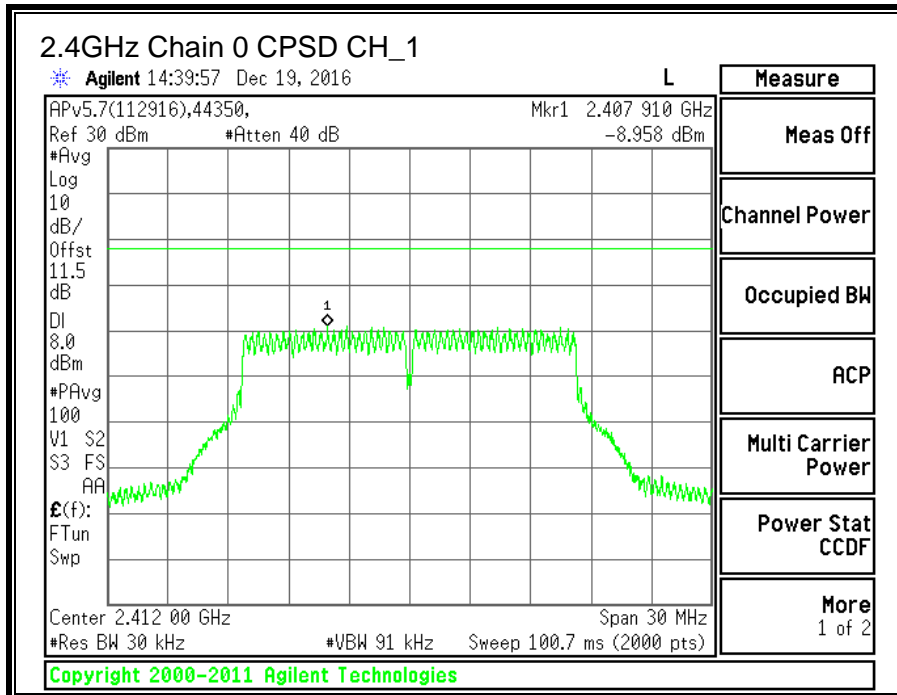


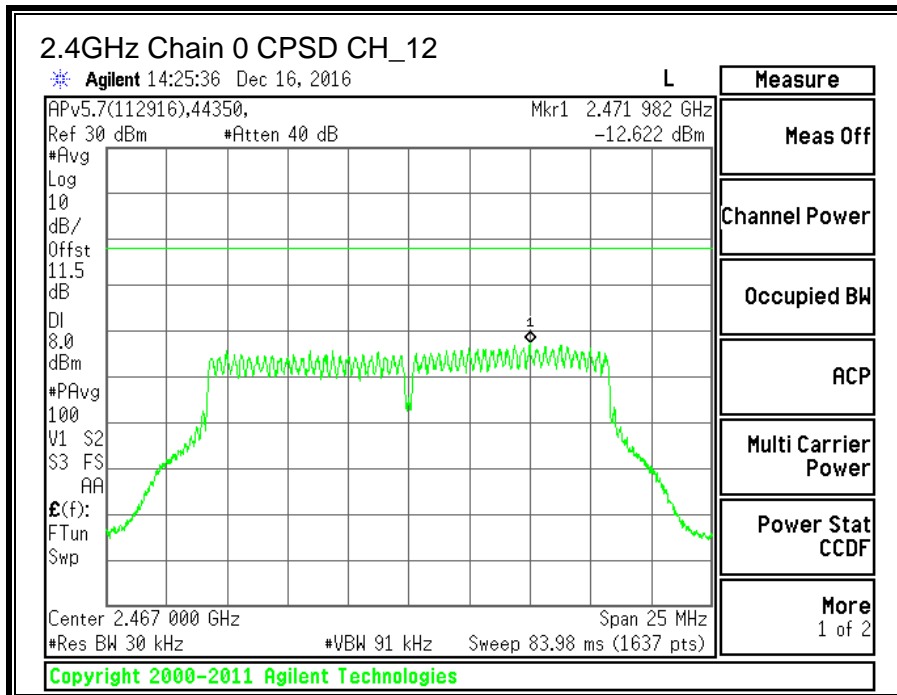
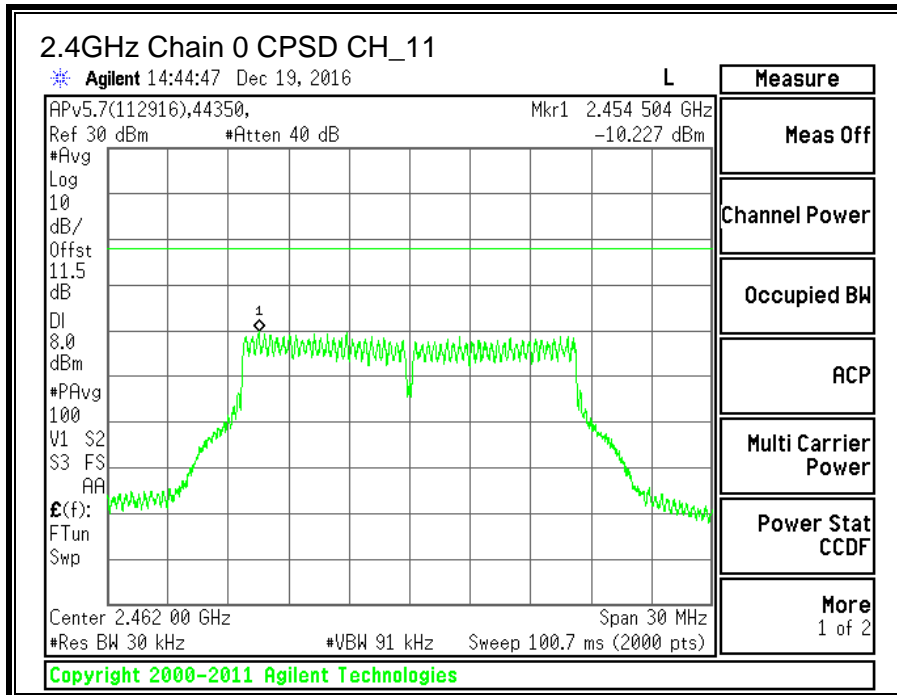



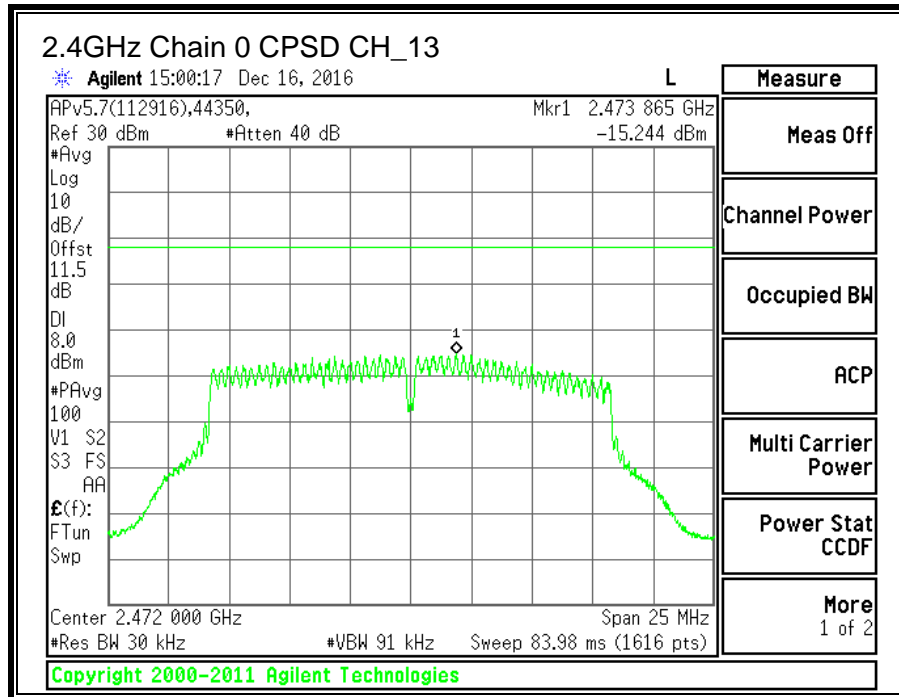




11.3.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

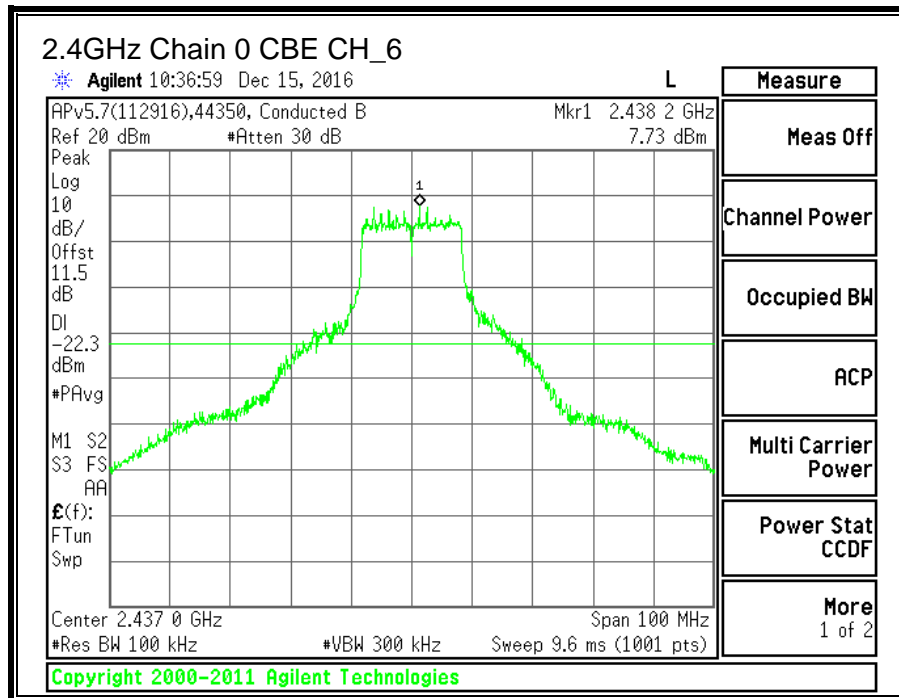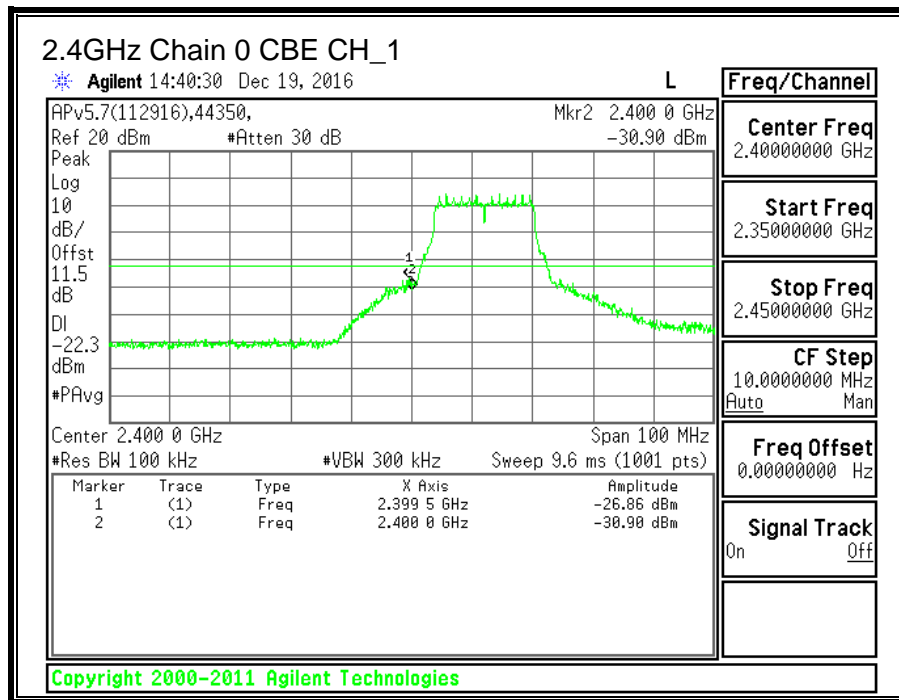

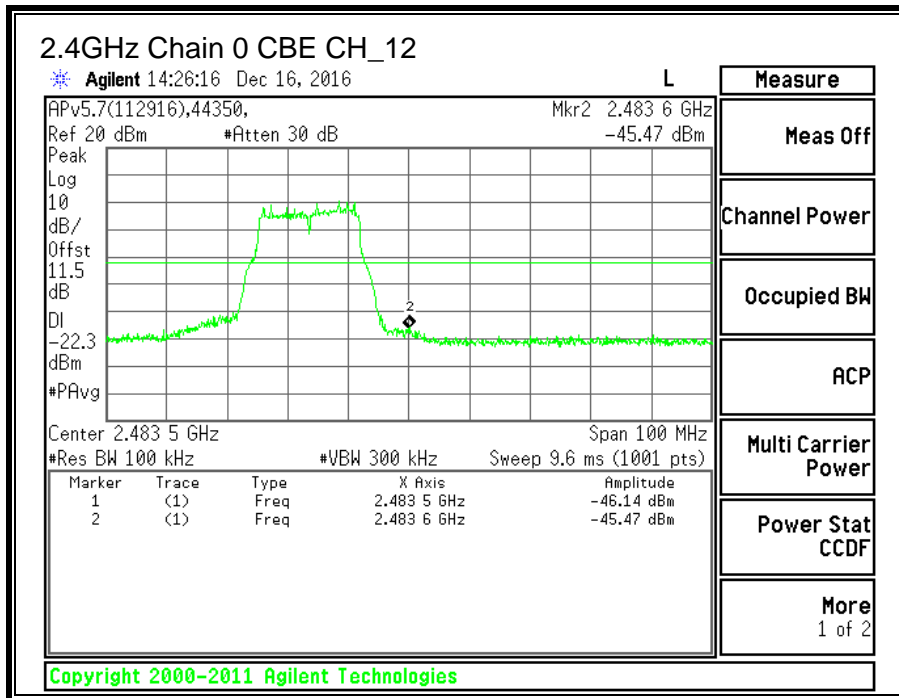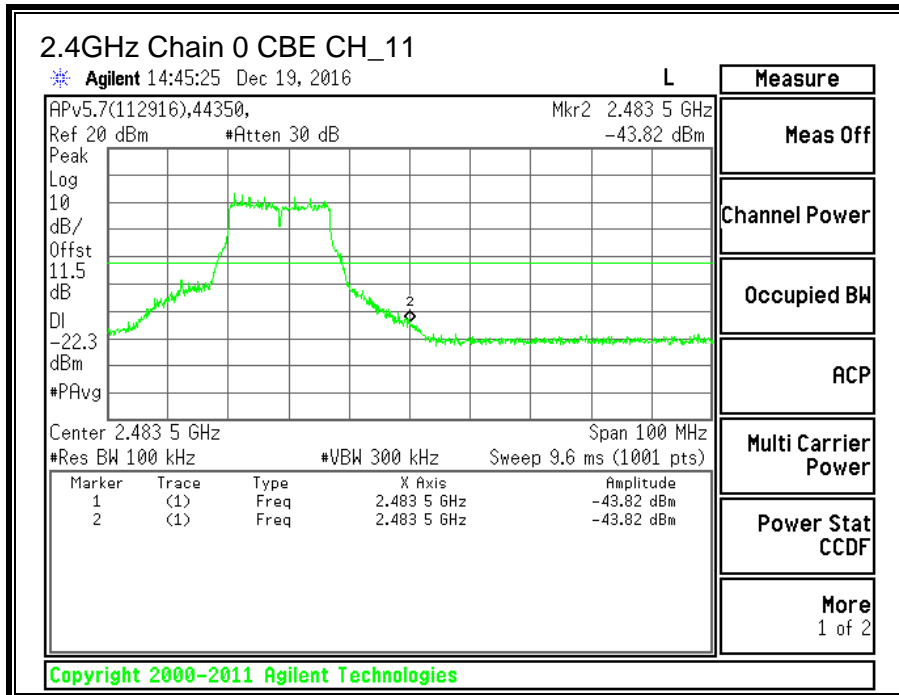

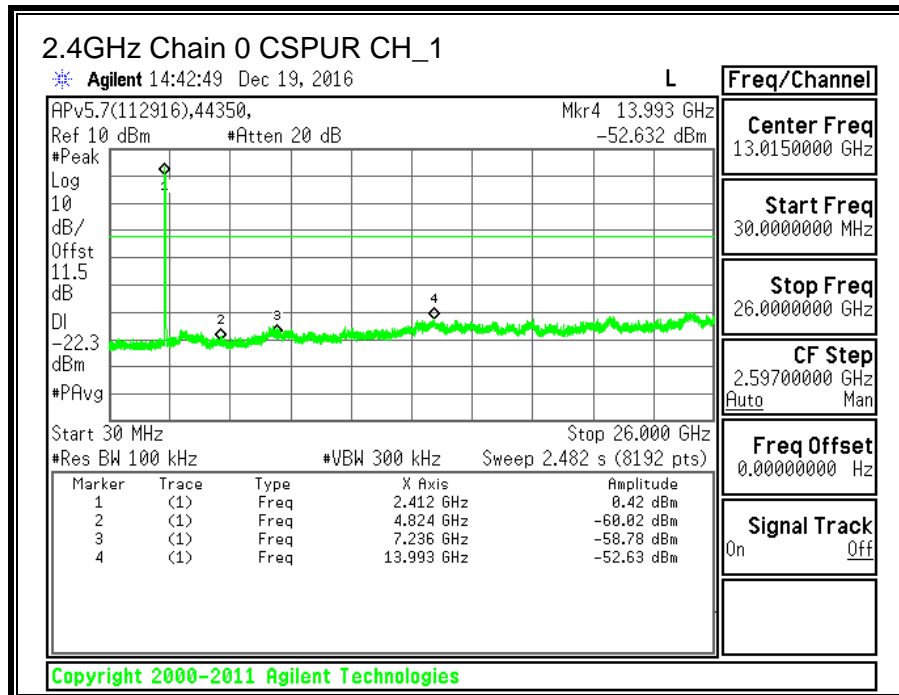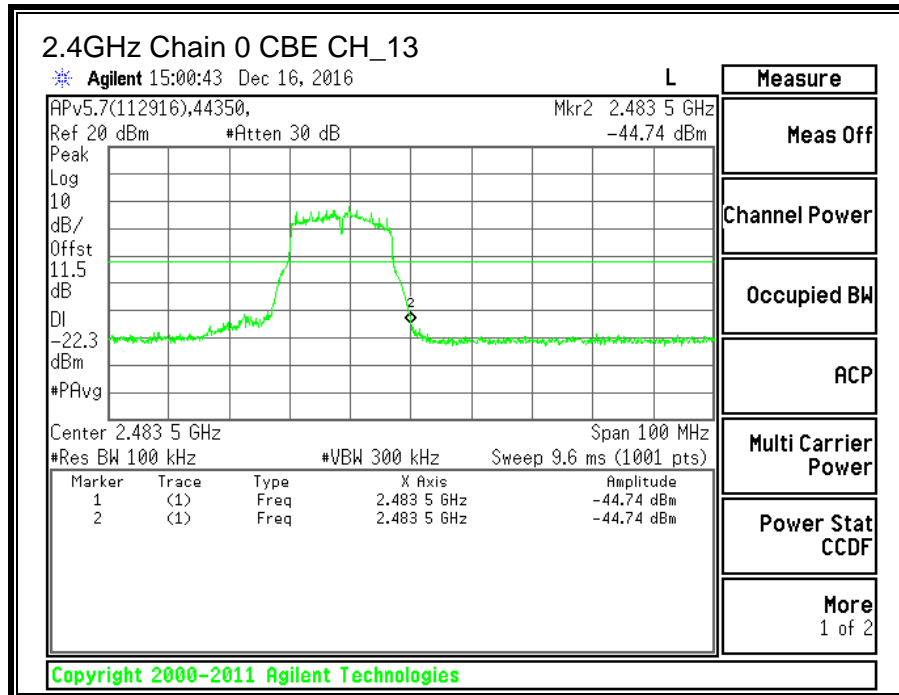

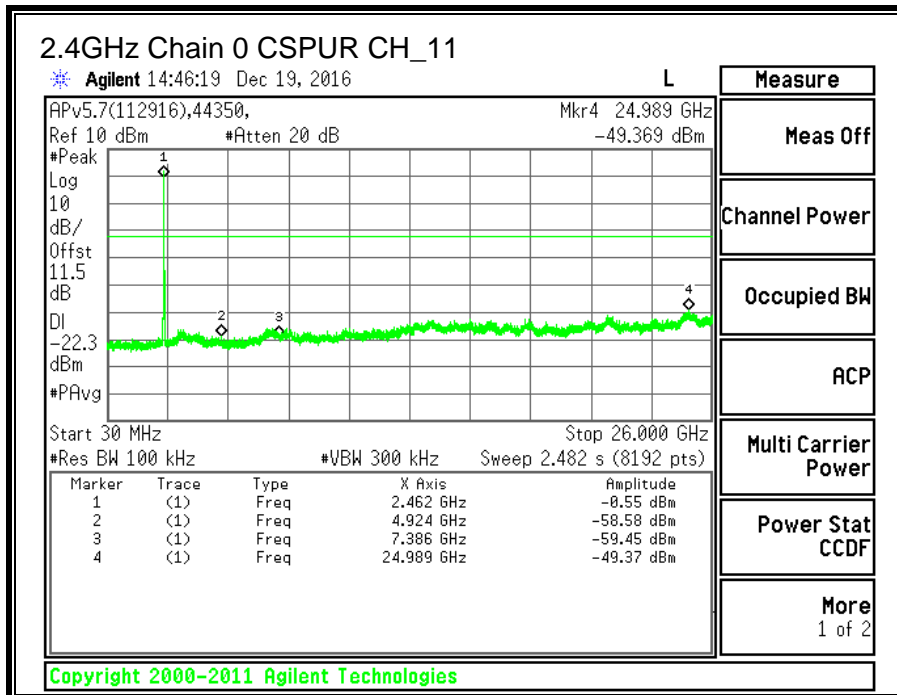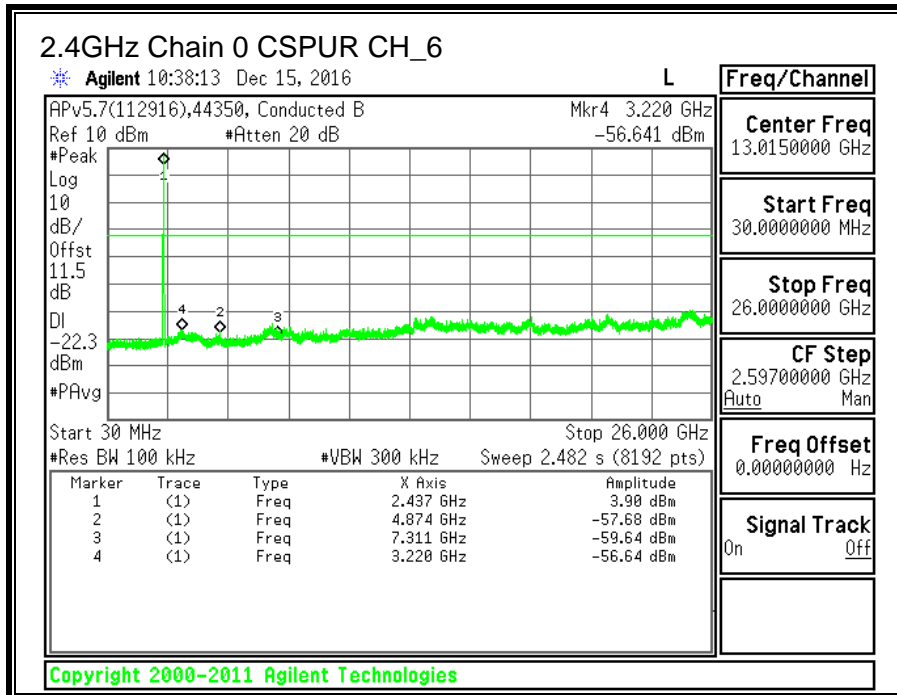

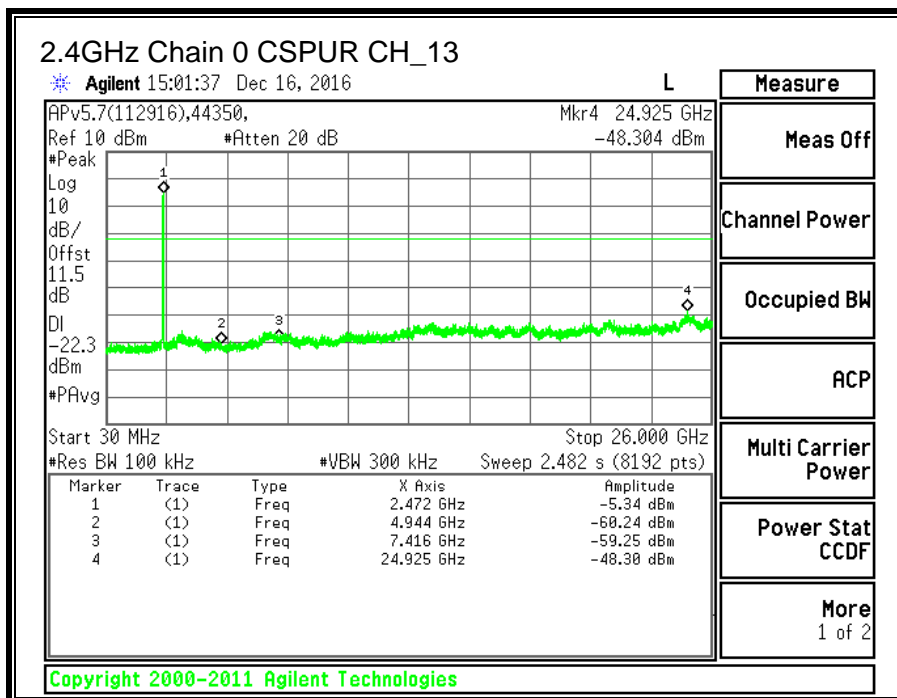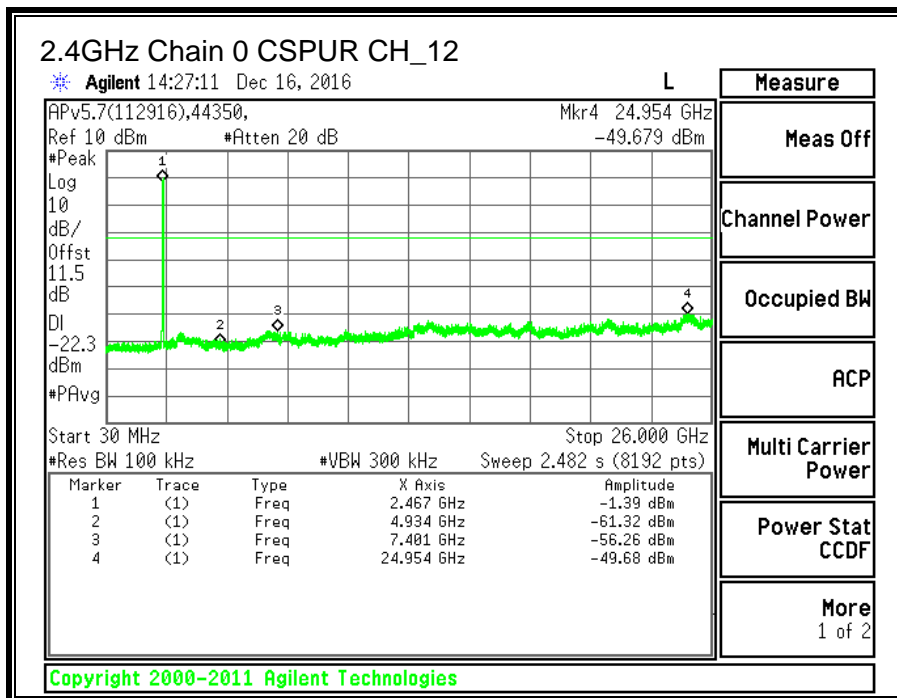

11.4. 11g Chain 1 SISO MODE IN THE 2.4GHz BAND

11.4.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


KDB 58074 D01 v03r05 Section 8.1

RESULTS

Channel	Frequency (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	16.355	0.5
Middle_6	2437	16.345	0.5
High_11	2462	16.390	0.5
High_12	2467	16.345	0.5
High_13	2472	15.710	0.5

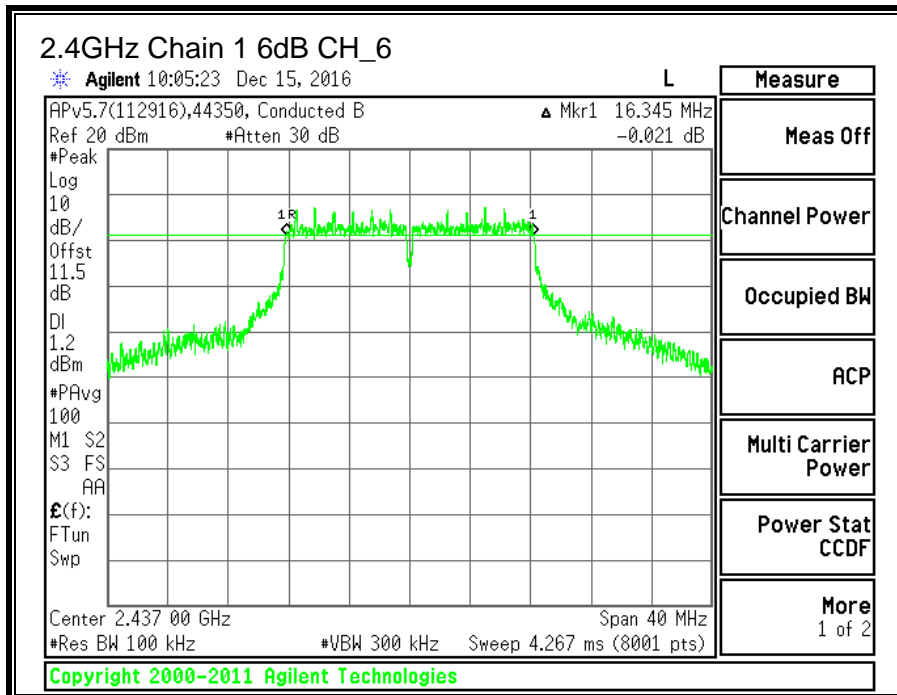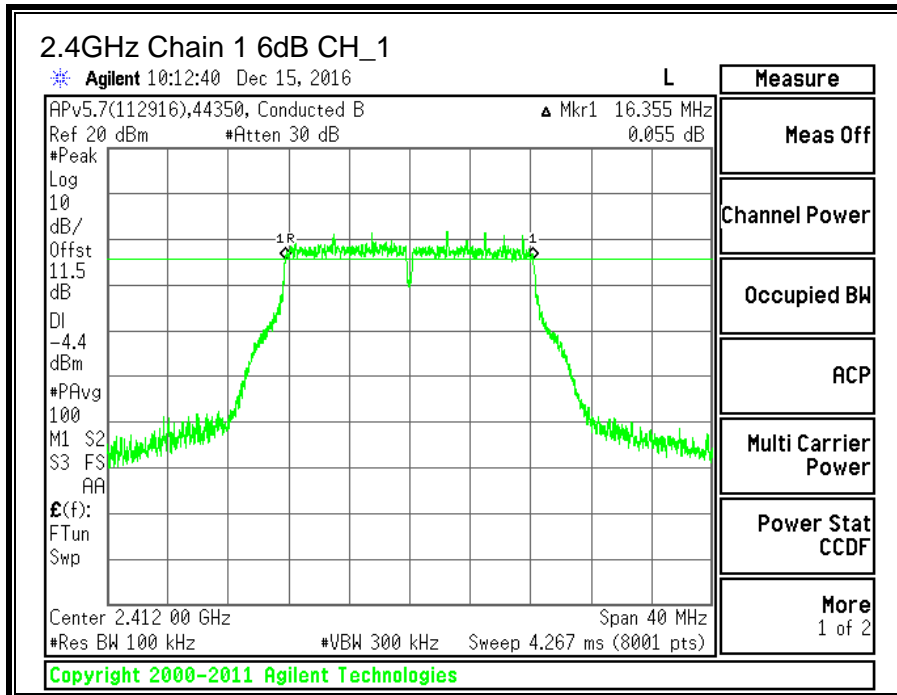

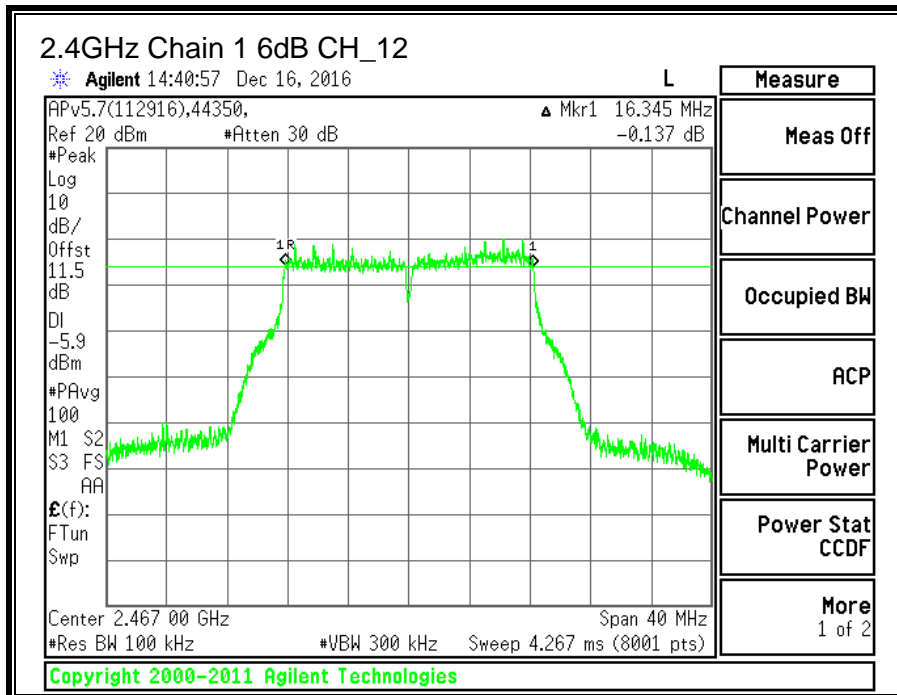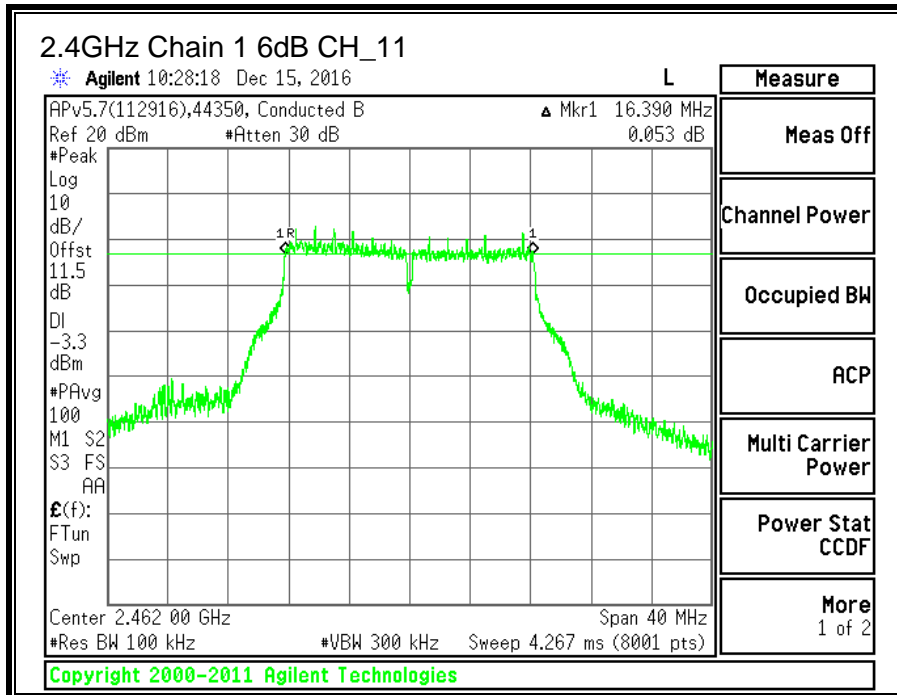

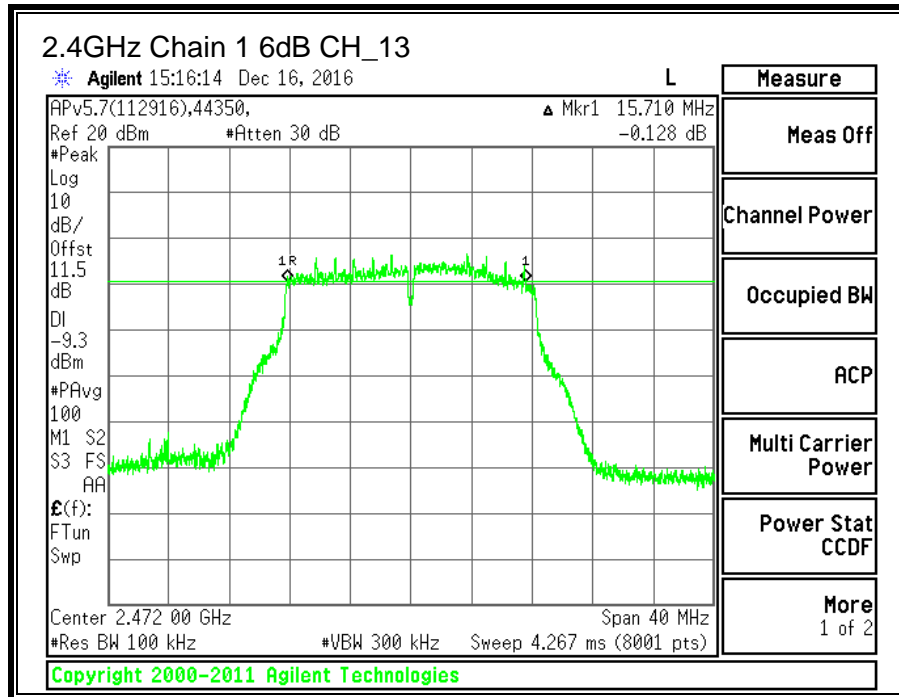

11.4.2. 99% BANDWIDTH

LIMITS



None; for reporting purposes only.



TEST PROCEDURE


ANSI C63.10: 2013 Section 6.9.3

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Chain 1 (MHz)
Low_1	2412	16.4091
Middle_6	2437	16.6500
High_11	2462	16.4727
High_12	2467	16.3440
High_13	2472	16.2457

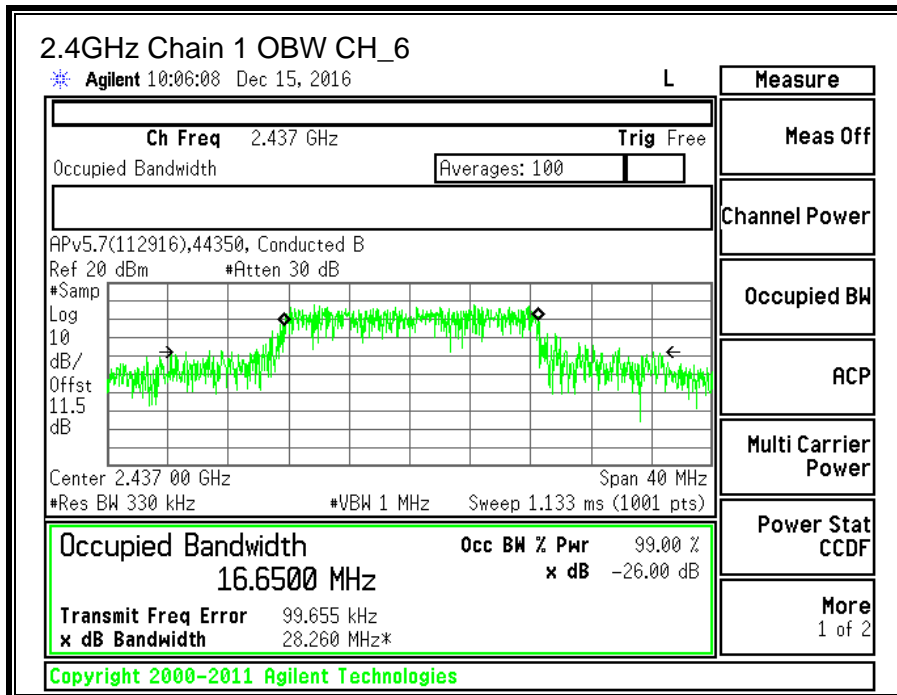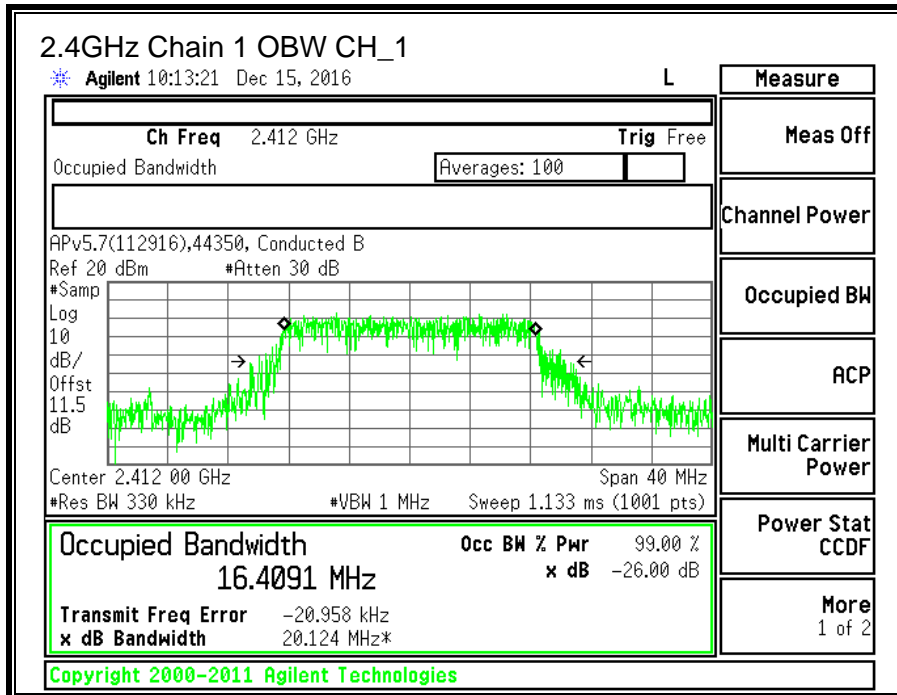

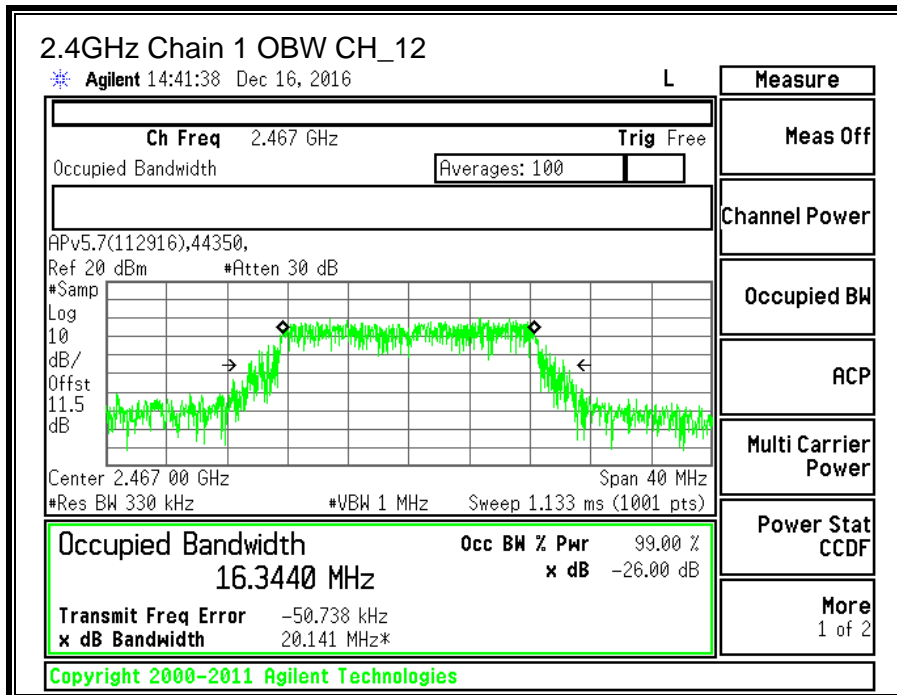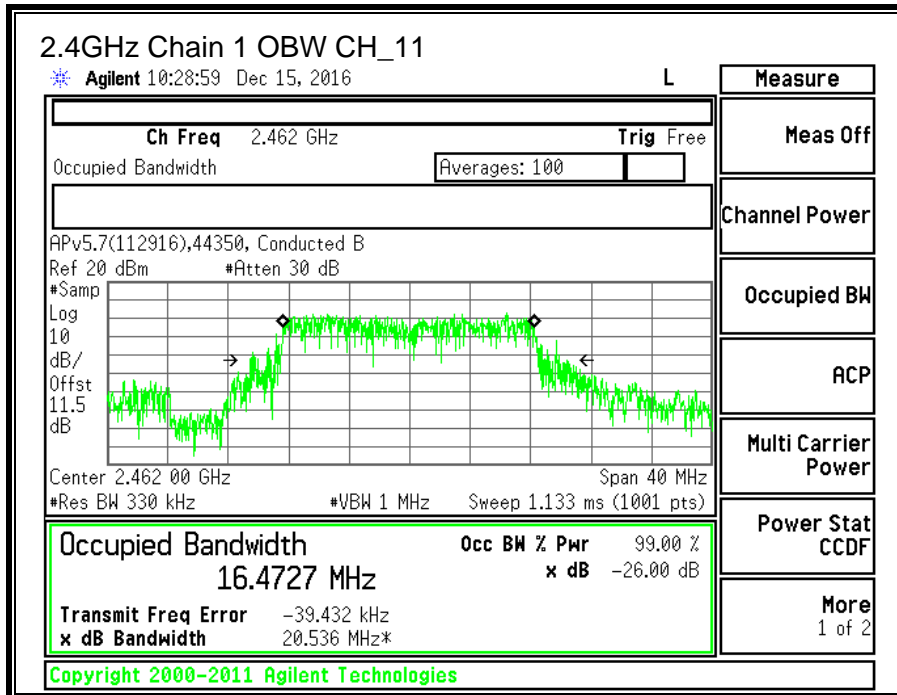

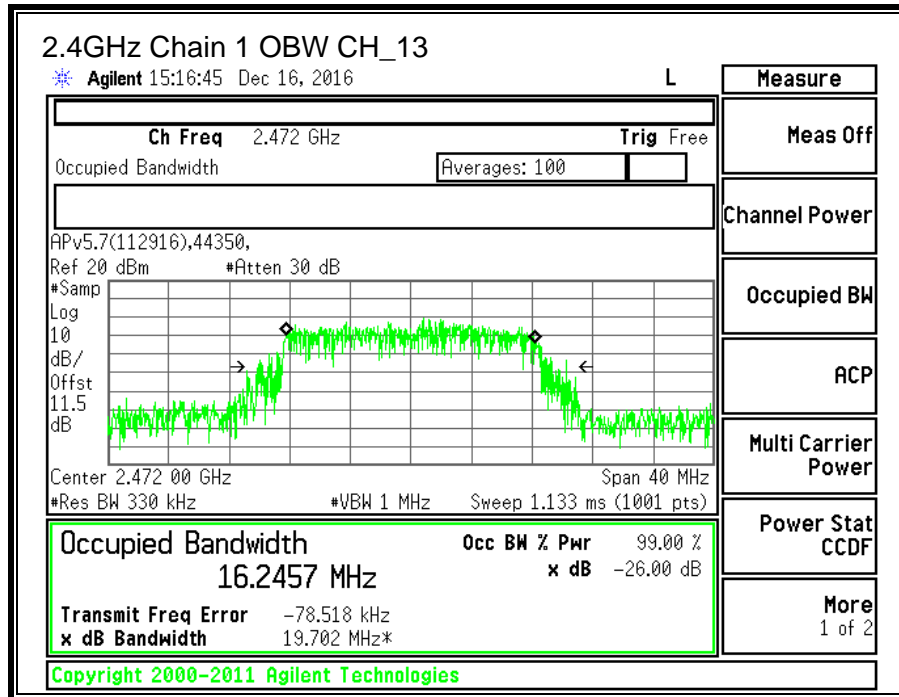

11.4.3. OUTPUT POWER

LIMITS

FCC §15.247

IC RSS-247 (5.4) (4)

For systems using digital modulation in the 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt, based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DIRECTIONAL ANTENNA GAIN

There is only one transmitter output therefore the directional gain is equal to the antenna gain.

TEST PROCEDURE

KDB 58074 D01 v03r05 Section 9.2.3.2

RESULTS

ID:	44350	Date:	12/19/2016
------------	-------	--------------	------------

Limits

Channel	Frequency (MHz)	Directional Gain (dBi)	FCC Power Limit (dBm)	IC Power Limit (dBm)	IC EIRP Limit (dBm)	Max Power (dBm)
Low_1	2412	2.86	30.00	30	36	30.00
Mid_6	2437	2.86	30.00	30	36	30.00
High_11	2462	2.86	30.00	30	36	30.00
High_12	2467	2.86	30.00	30	36	30.00
High_13	2472	2.86	30.00	30	36	30.00

Results

Channel	Frequency (MHz)	Core 1 Meas Power (dBm)	Power Limit (dBm)	Margin (dB)
Low_1	2412	15.27	30.00	-14.73
Mid_6	2437	18.33	30.00	-11.67
High_11	2462	14.17	30.00	-15.83
High_12	2467	11.02	30.00	-18.98
High_13	2472	8.29	30.00	-21.71

Note: the power readings above were measured with gated method, and the measurement was taken only during the ON time. No duty cycle correction was necessary.

11.4.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247

IC RSS-247 (5.2) (2)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 KHz band during any time interval of continuous transmissions.

TEST PROCEDURE



KDB 58074 D01 v03r05 Section 10.3



RESULTS


Duty Cycle CF (dB)	0.30	Included in Calculations of Corr'd PSD
--------------------	------	--

PSD Results



Channel	Frequency (MHz)	Core 1 Meas (dBm)	Limit (dBm)	Margin (dB)
Low_1	2412	-8.634	8.0	-16.6
Mid_6	2437	-5.482	8.0	-13.5
High_11	2462	-9.570	8.0	-17.6
High_12	2467	-12.568	8.0	-20.6
High_13	2472	-15.421	8.0	-23.4

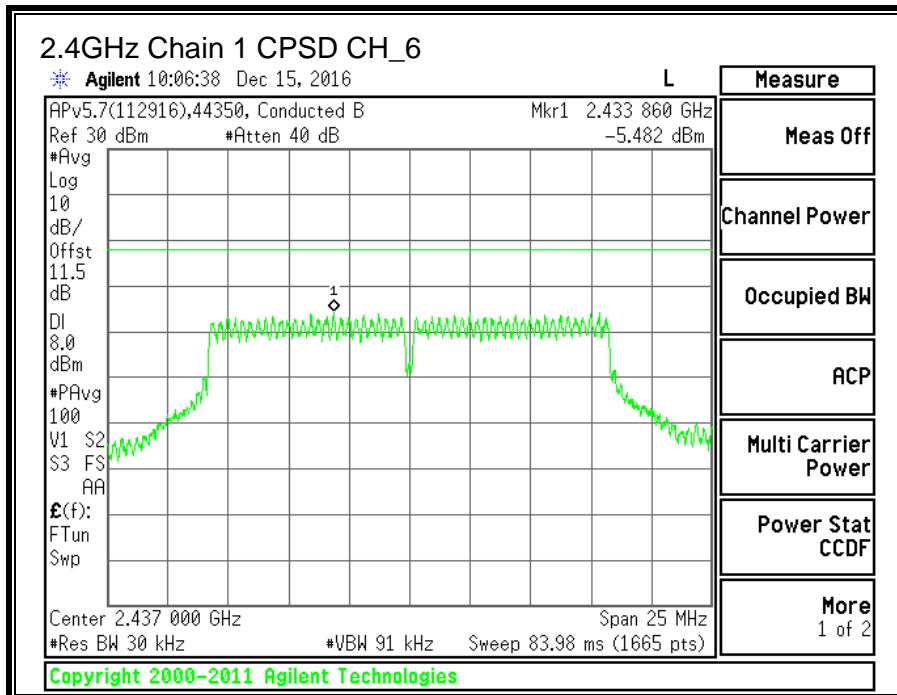
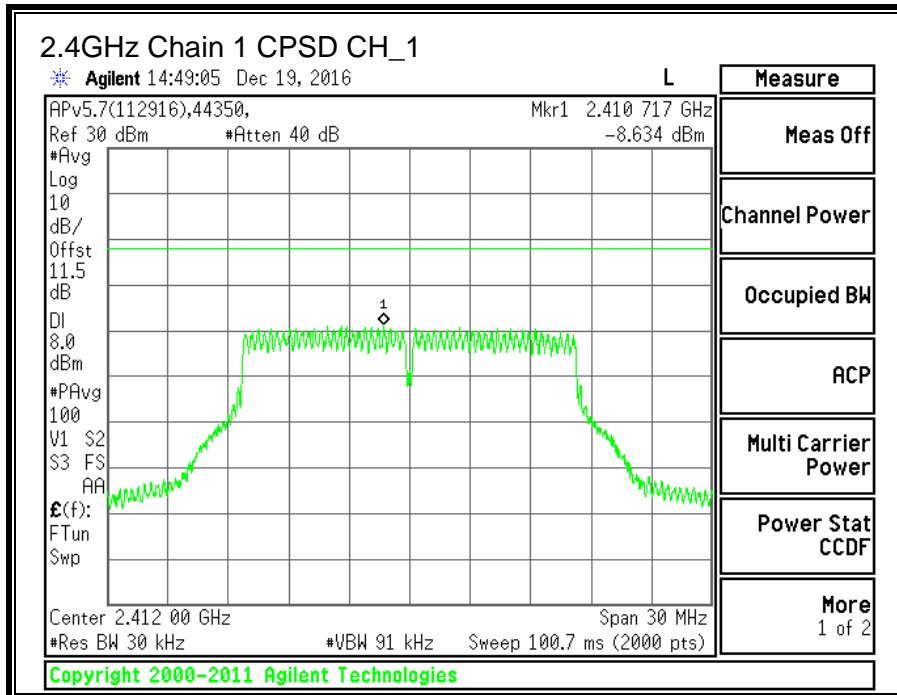


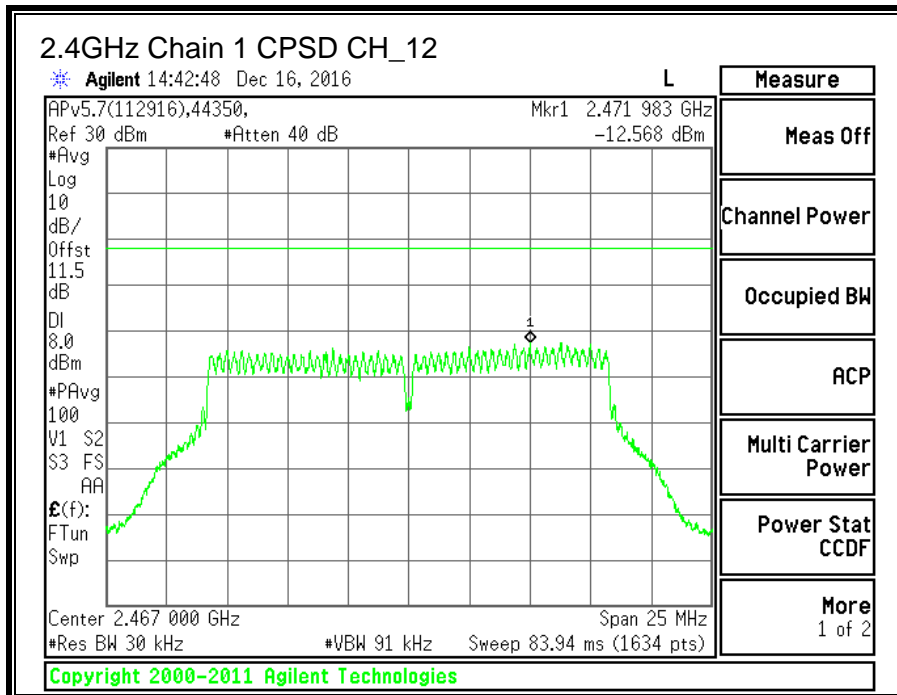
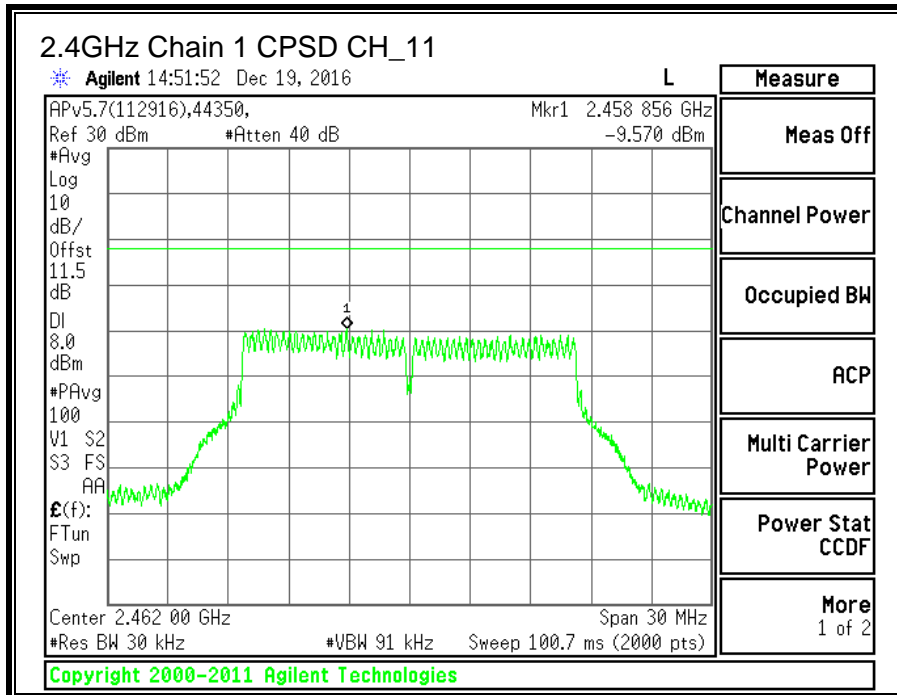



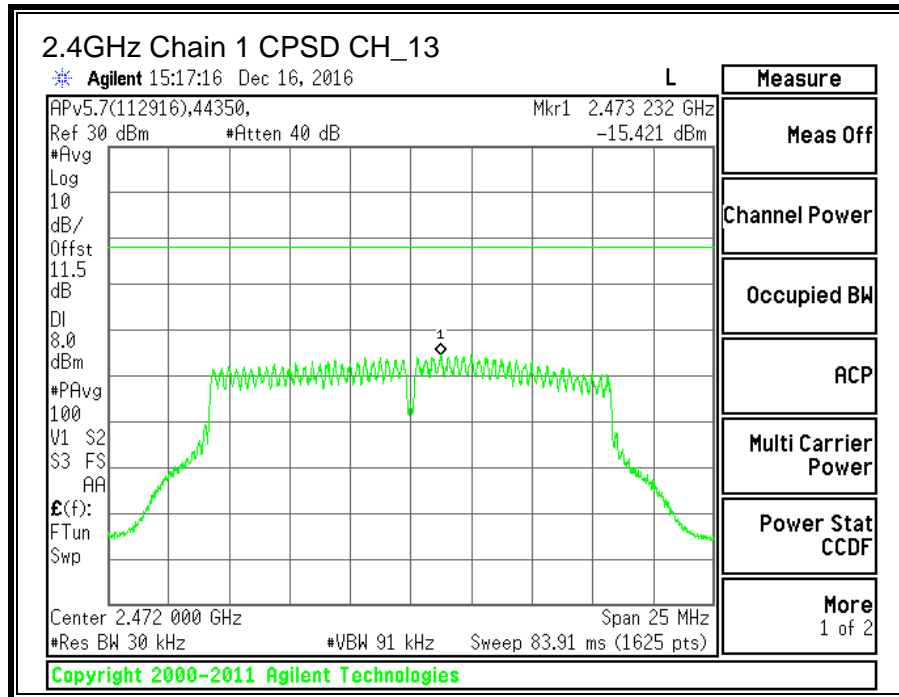




11.4.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

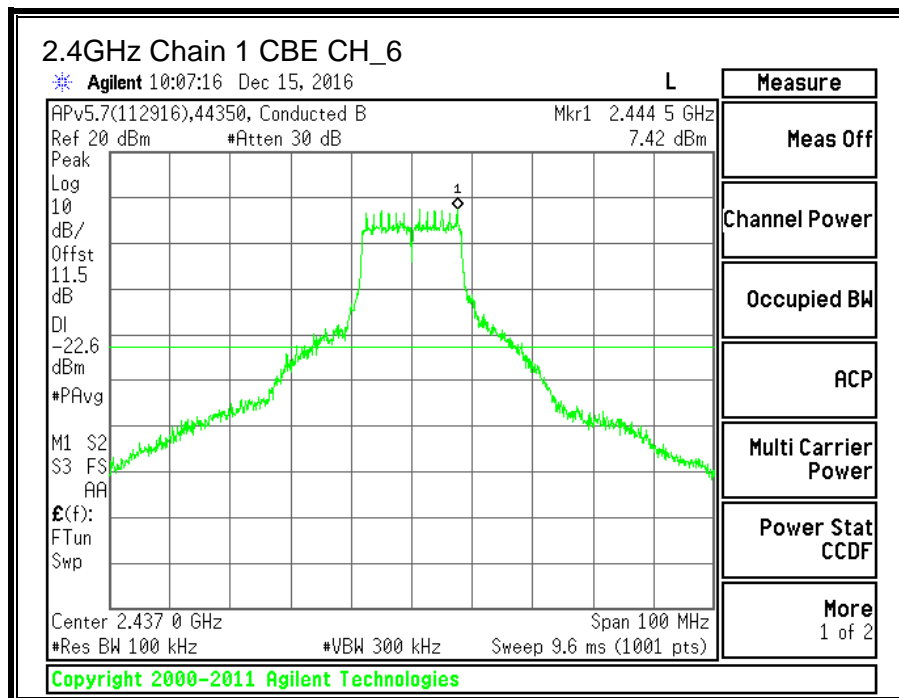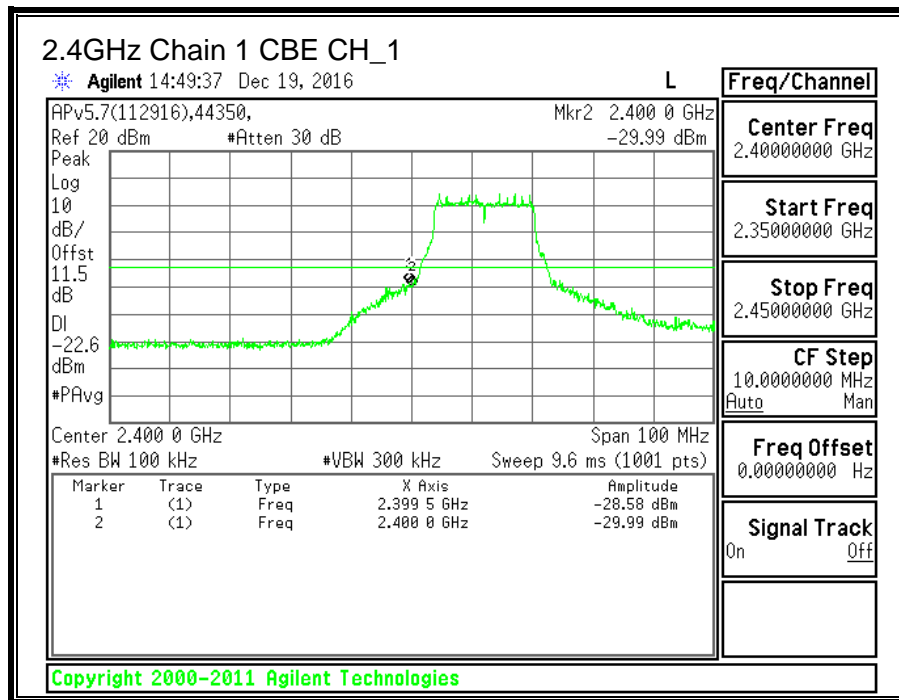

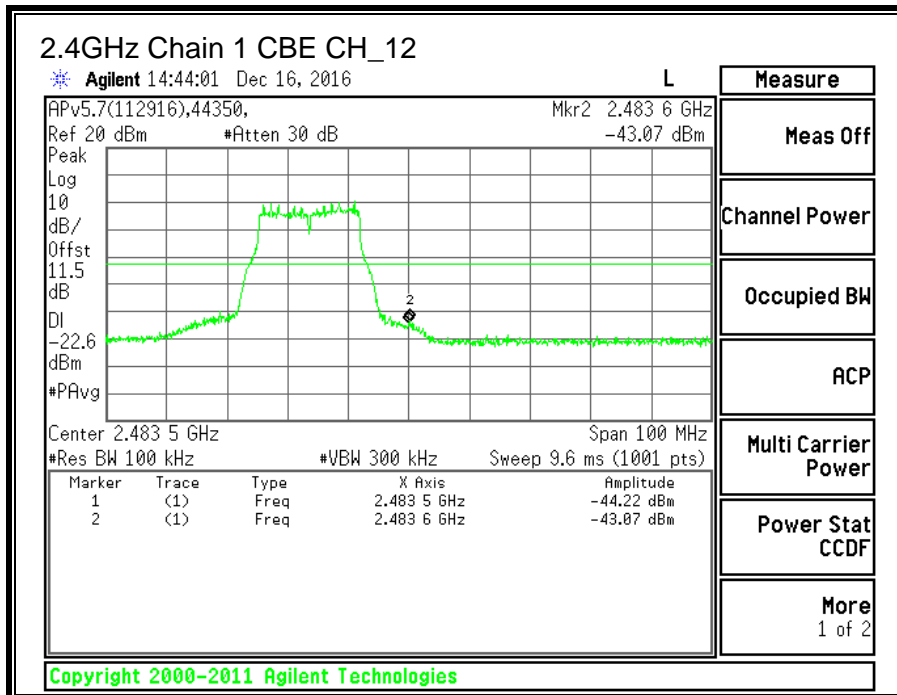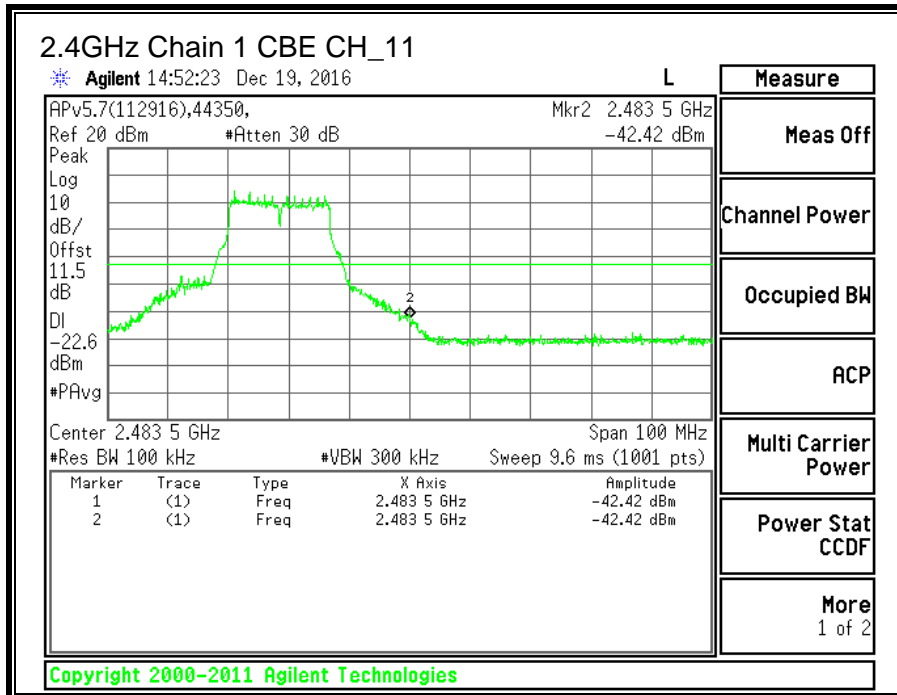

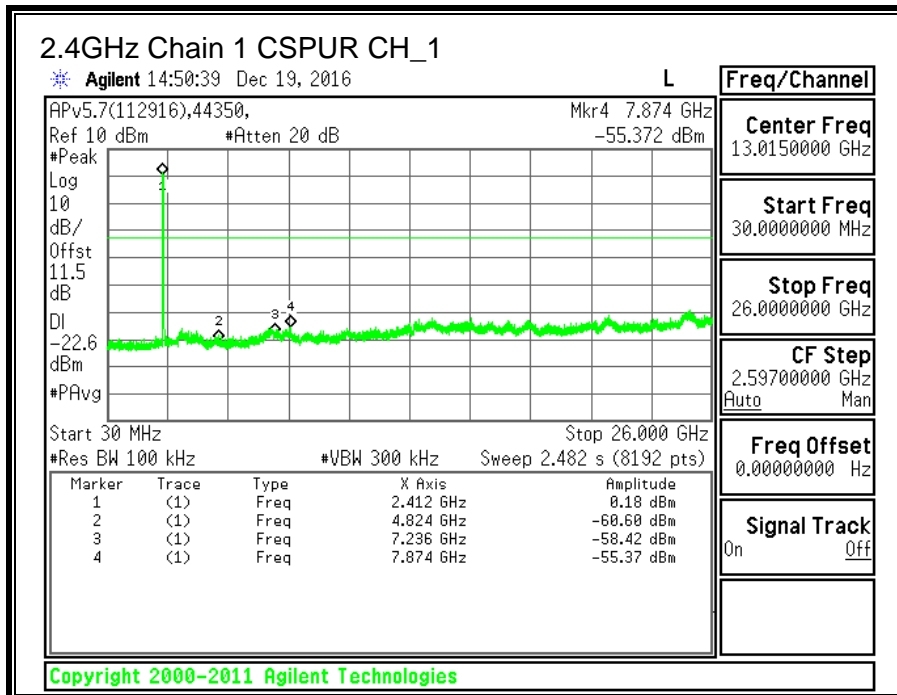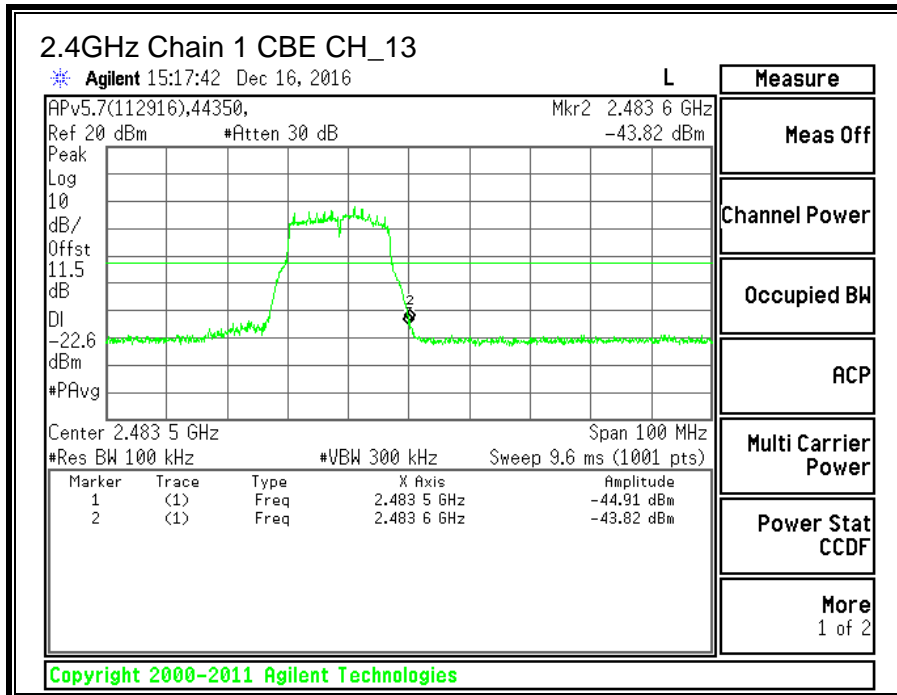

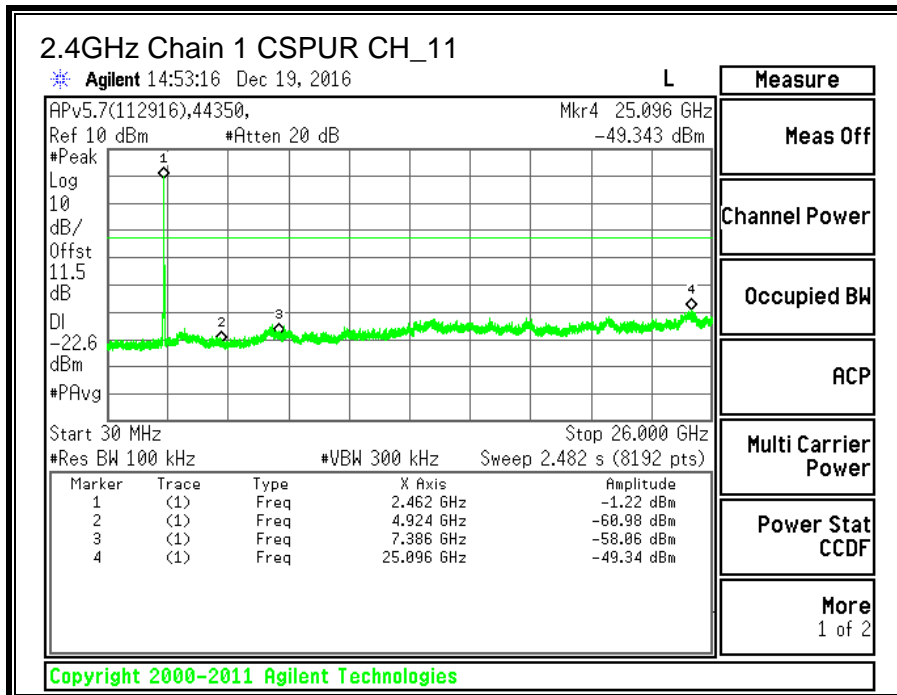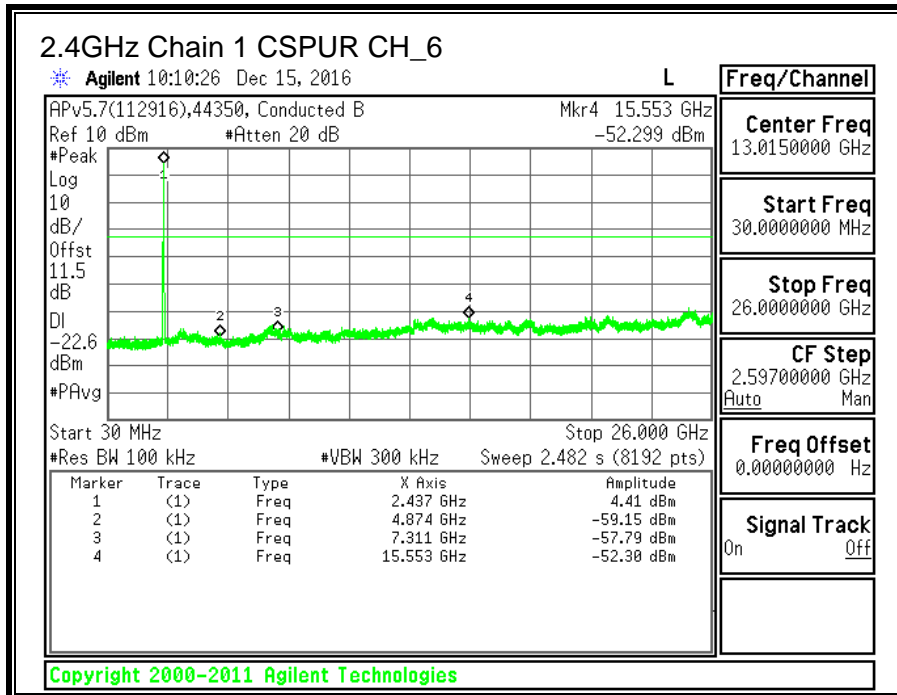

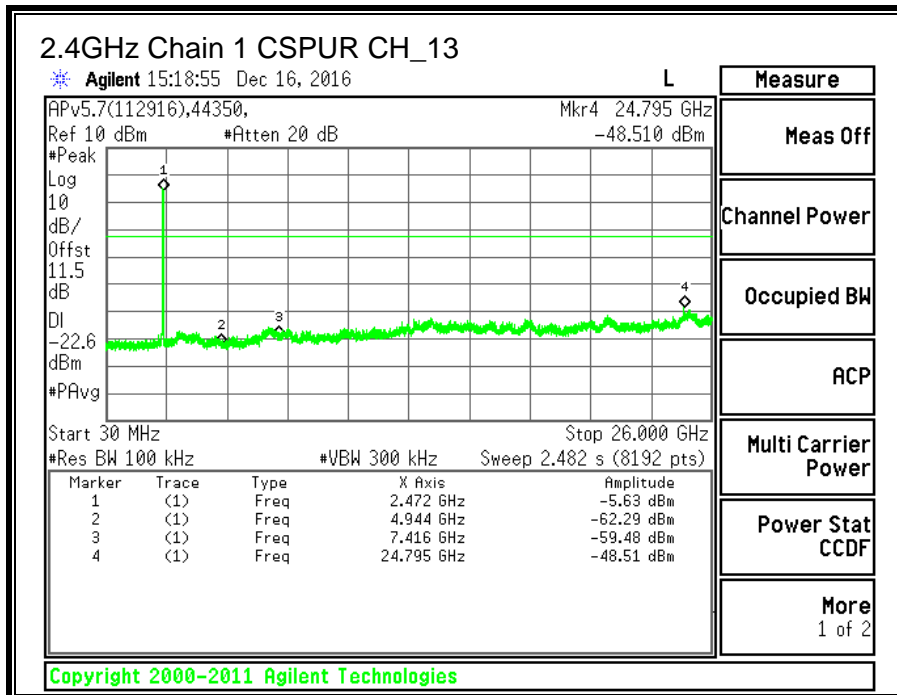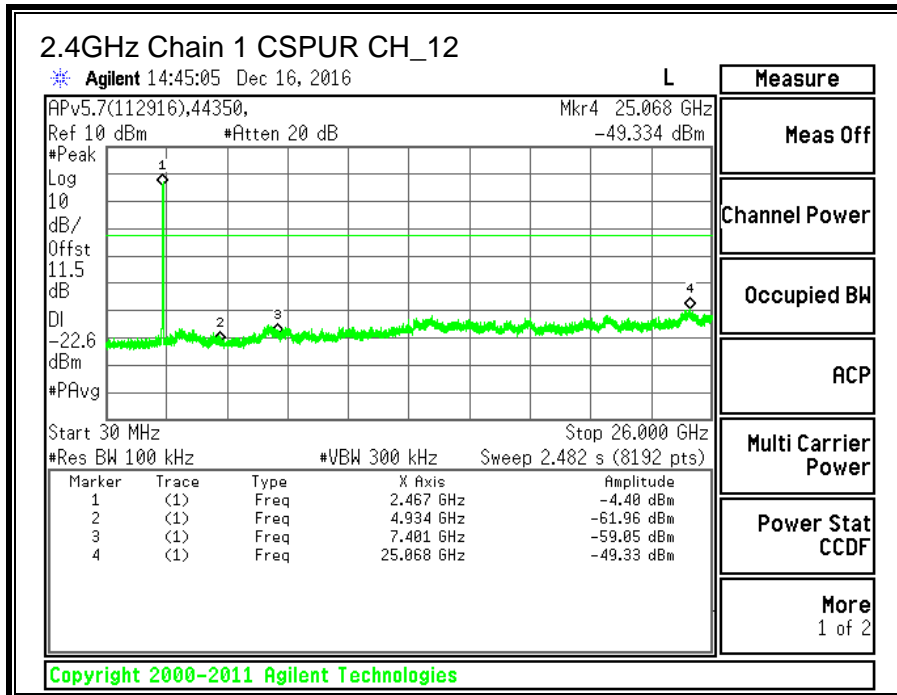

11.5. 11n HT20 2TX CDD MIMO MODE IN THE 2.4GHz BAND

11.5.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-247 (5.2) (1)



The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE



KDB 58074 D01 v03r05 Section 8.1



RESULTS



Channel	Frequency	6 dB BW Chain 0 (MHz)	6 dB BW Chain 1 (MHz)	Minimum Limit (MHz)
Low_1	2412	17.575	17.620	0.5
Middle_6	2437	17.605	17.605	0.5
High_11	2462	17.625	17.615	0.5
High_12	2467	17.590	17.575	0.5
High_13	2472	15.110	15.685	0.5

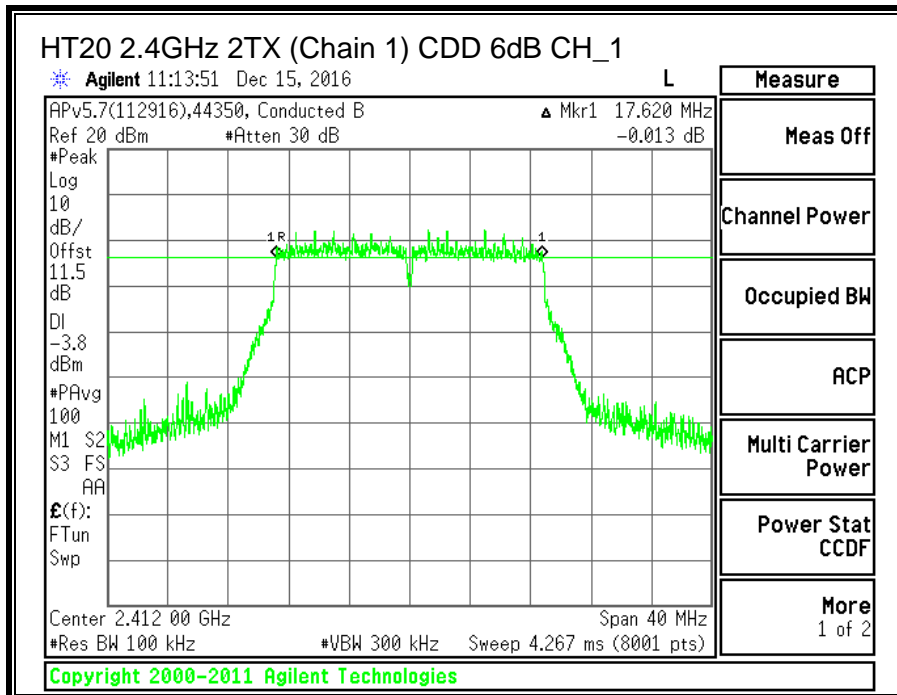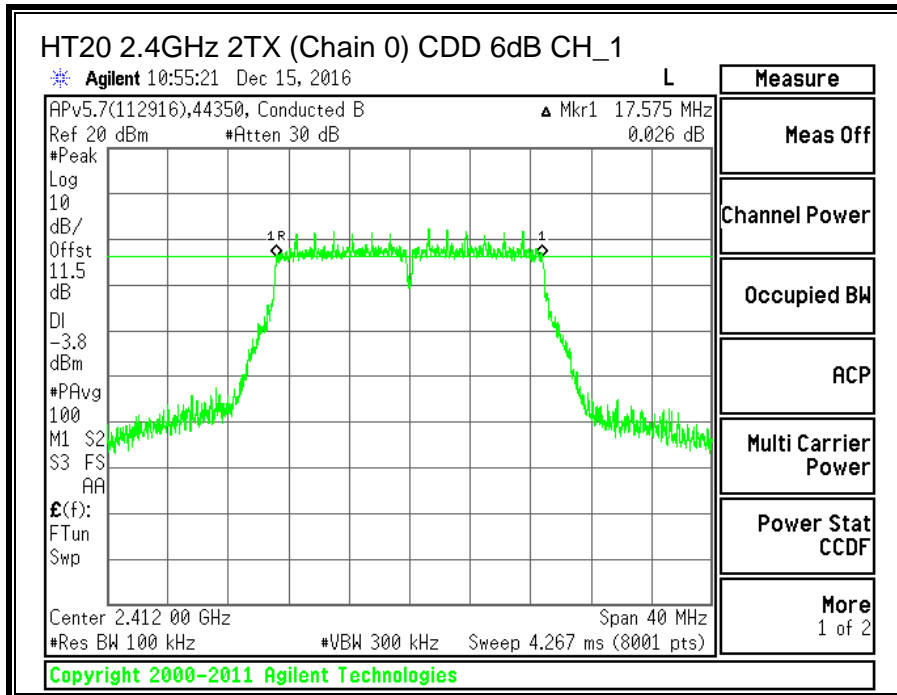

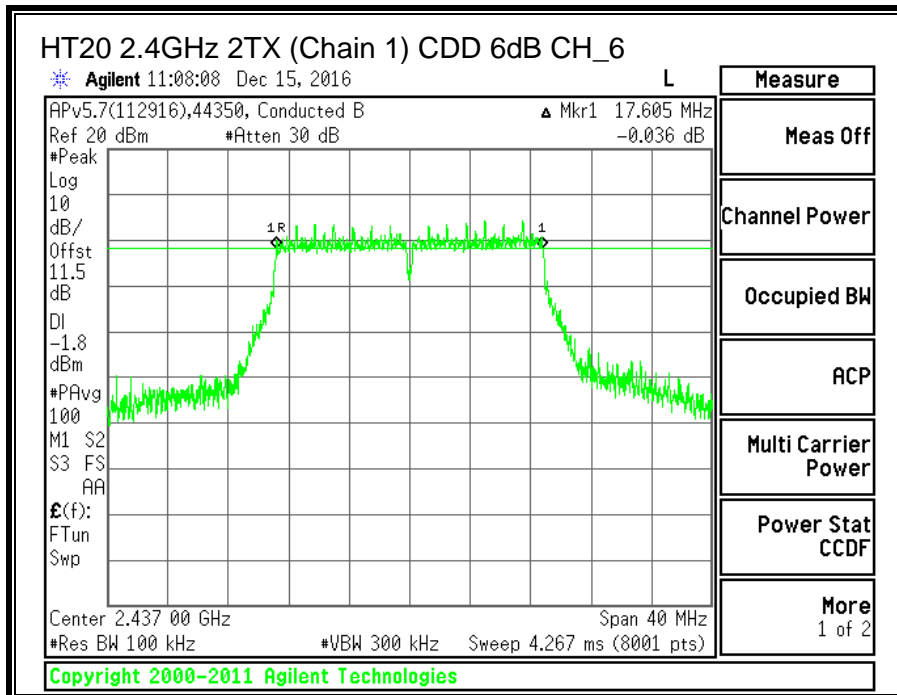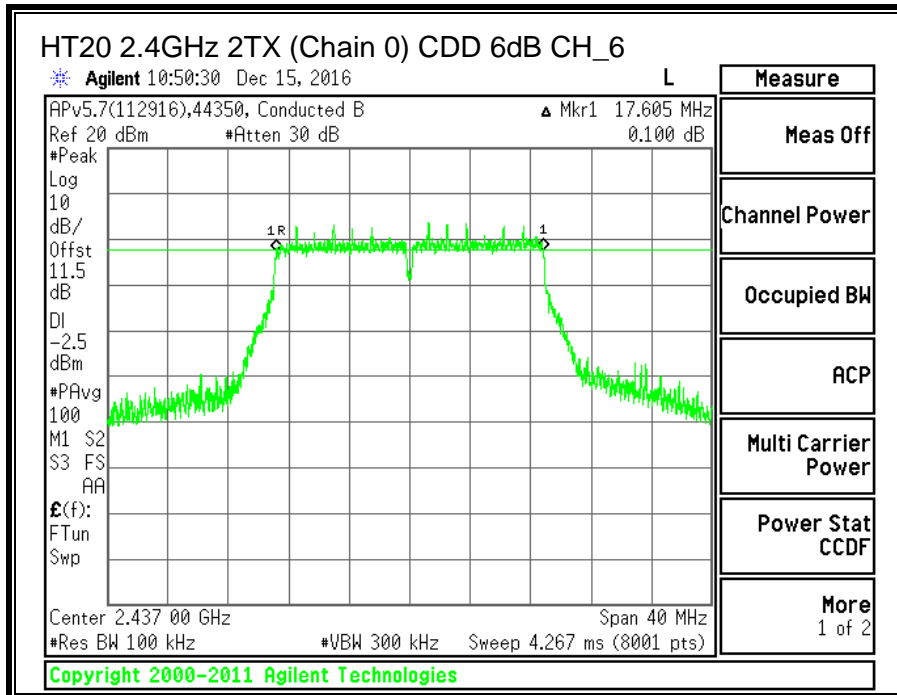

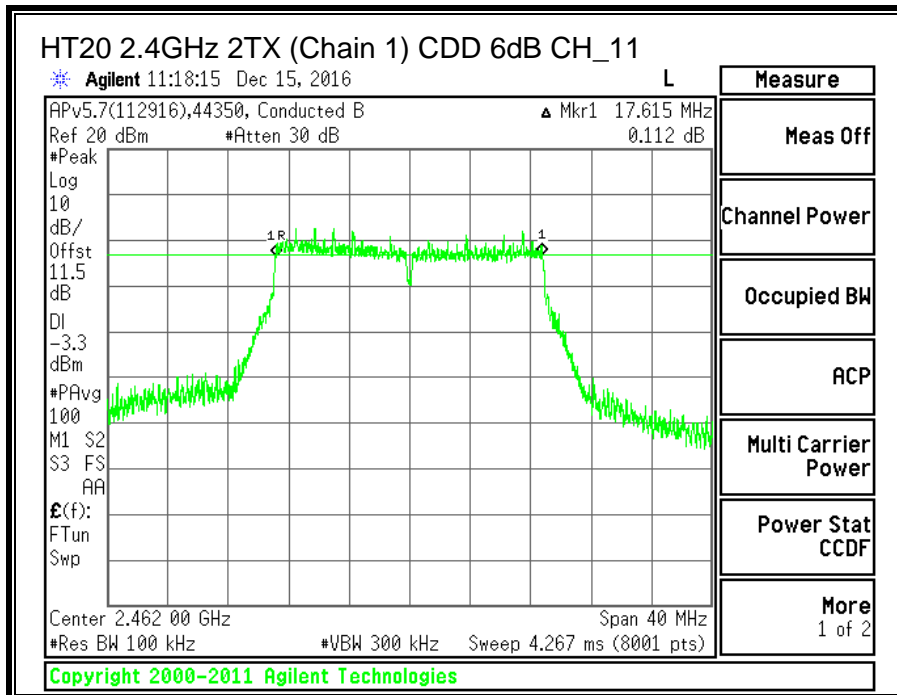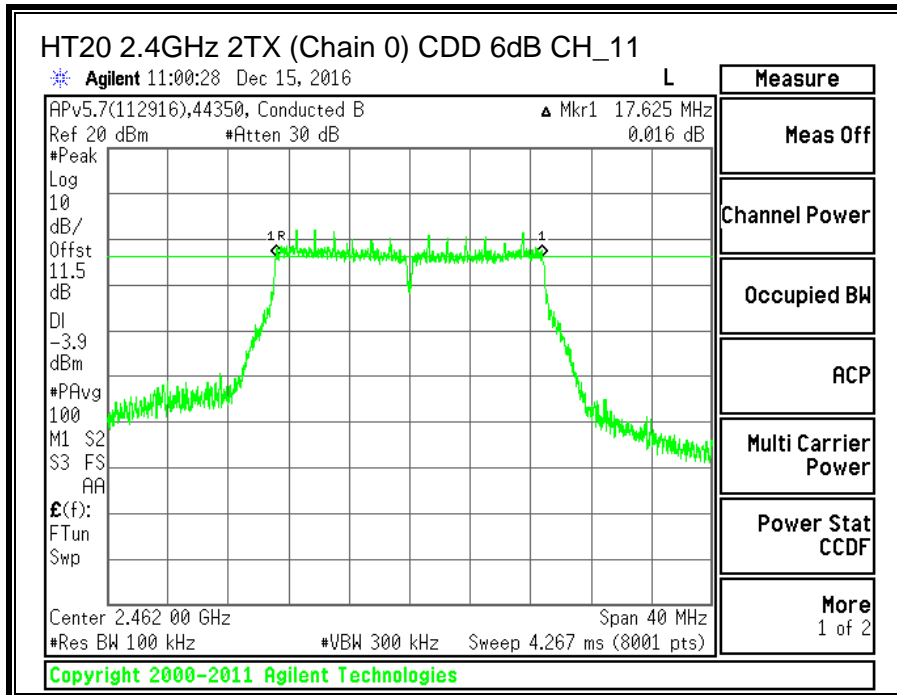

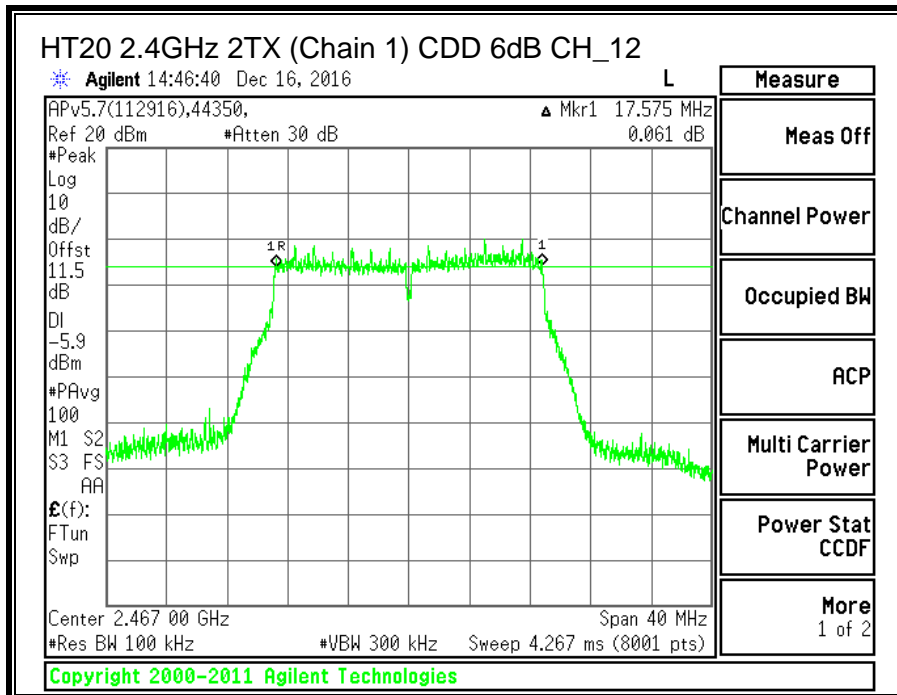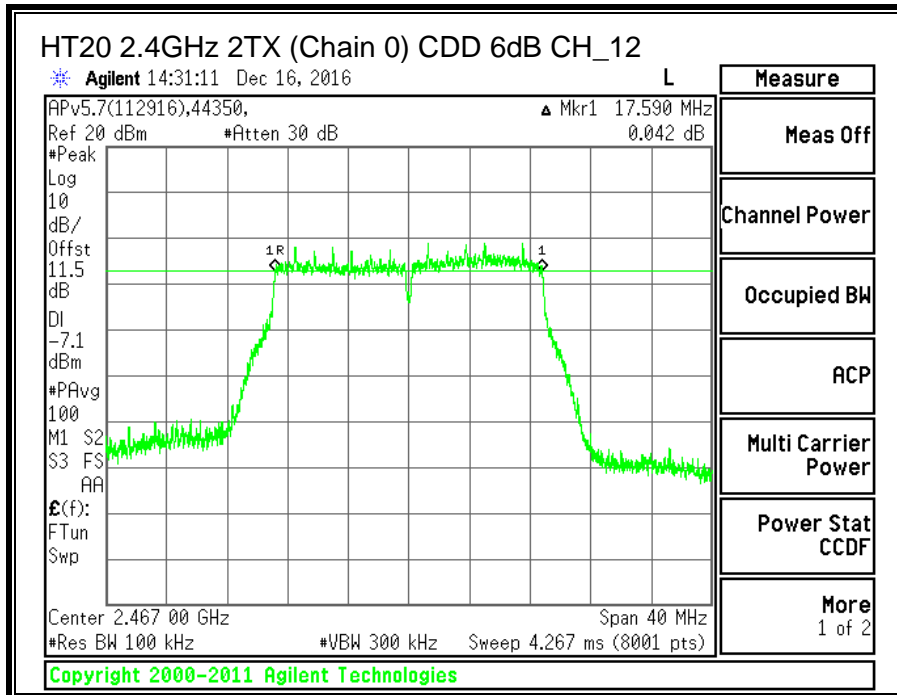

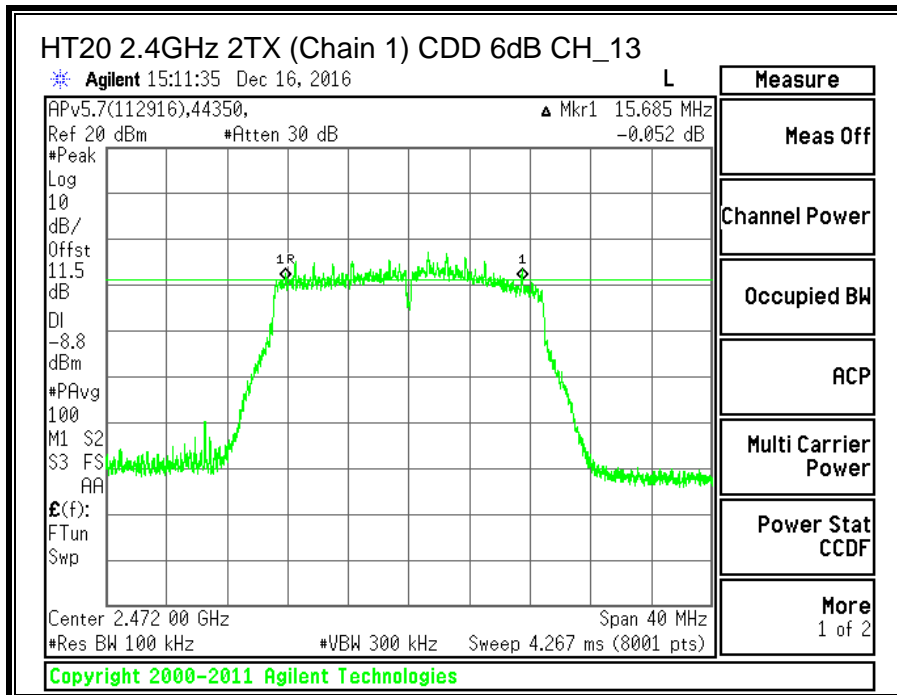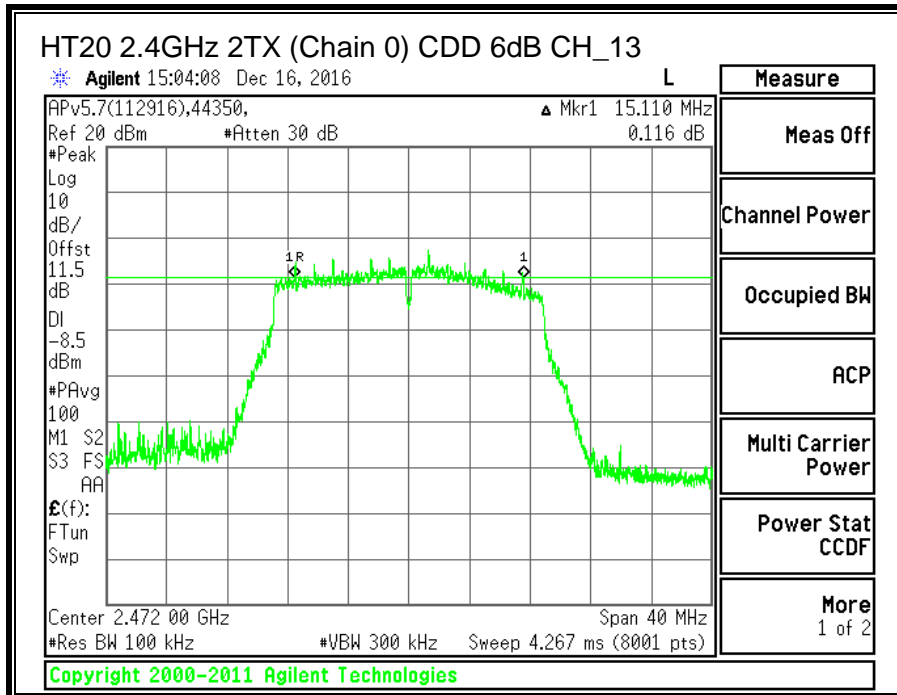

11.5.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

ANSI C63.10: 2013 Section 6.9.3

RESULTS

Channel	Frequency (MHz)	99% Bandwidth Chain 0 (MHz)	99% Bandwidth Chain 1 (MHz)
Low_1	2412	17.4112	17.5148
Middle_6	2437	17.4288	17.4933
High_11	2462	17.5817	17.4361
High_12	2467	17.3420	17.3680
High_13	2472	17.1676	17.2285

