

FCC CERTIFICATION  
On Behalf of  
**Shenzhen Audioland Digital Technology Co., Ltd.**

Wireless Headphone Transmitter  
Model No.: HM-900

FCC ID: VOFHM900TX

Prepared for : Shenzhen Audioland Digital Technology Co., Ltd.  
Address : 4/F, Building 7, Baoan 33 District, Shenzhen City, China  
Prepared by : ACCURATE TECHNOLOGY CO. LTD  
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.  
Science & Industry Park, Nanshan, Shenzhen, Guangdong  
P.R. China

Tel: (0755) 26503290  
Fax: (0755) 26503396

Report Number : ATE20072091  
Date of Test : September 10, 2007  
Date of Report : September 18, 2007

## TABLE OF CONTENTS

Description	Page
Test Report Certification	
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility .....	4
1.3. Measurement Uncertainty .....	4
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>5</b>
<b>3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C).....</b>	<b>6</b>
3.1. Block Diagram of Test Setup.....	6
3.2. The Emission Limit for section 15.239(c) .....	6
3.3. Configuration of EUT on Measurement .....	7
3.4. Operating Condition of EUT .....	7
3.5. Test Procedure .....	7
3.6. The Field Strength of Radiation Emission Measurement Results .....	8
<b>4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(B) .....</b>	<b>9</b>
4.1. Block Diagram of Test Setup.....	9
4.2. The Emission Limit For Section 15.239(b) .....	9
4.3. EUT Configuration on Measurement .....	10
4.4. Operating Condition of EUT .....	10
4.5. Test Procedure .....	10
4.6. The Emission Measurement Result .....	11
<b>5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION 15.239(A).....</b>	<b>12</b>
5.1. The Requirement For Section 15.239(a).....	12
5.2. EUT Configuration on Measurement .....	12
5.3. Operating Condition of EUT .....	12
5.4. Test Procedure .....	12
5.5. Test Result .....	13
<b>6. TUNING RANGE .....</b>	<b>14</b>
6.1. The Requirement For Section 15.239.....	14
6.2. EUT Configuration on Measurement .....	14
6.3. Operating Condition of EUT .....	14
6.4. Test Procedure .....	14
6.5. Test Result .....	15
APPENDIX I ( TEST CURVES) (3pages)	

## Test Report Certification

Applicant : Shenzhen Audioland Digital Technology Co., Ltd.  
 Manufacturer : Shenzhen Audioland Digital Technology Co., Ltd.  
 EUT Description : Wireless Headphone Transmitter  
     (A) MODEL NO.: HM-900  
     (B) SERIAL NO.: N/A  
     (C) POWER SUPPLY: DC 3.0V (AAA Battery ×2)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.239: 2006


The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.239 limits. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :


September 10, 2007

Prepared by :



(Engineer)

Reviewer :



(Quality Manager)

Approved & Authorized Signer :



(Manager)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT	:	Wireless Headphone Transmitter
Model Number	:	HM-900
Power Supply	:	DC 3.0V (AAA Battery ×2)
Operate Frequency	:	88.5MHz
Channel	:	1
iPod	:	Manufacturer: Apple M/N: A1136 S/N: JQ543GF9SZA
Applicant	:	Shenzhen Audioland Digital Technology Co., Ltd.
Address	:	4/F, Building 7, Baoan 33 District, Shenzhen City, China
Manufacturer	:	Shenzhen Audioland Digital Technology Co., Ltd.
Address	:	4/F, Building 7, Baoan 33 District, Shenzhen City, China
Date of sample received	:	September 04, 2007
Date of Test	:	September 10, 2007

### 1.2. Description of Test Facility

EMC Lab	:	Accredited by TUV Rheinland Shenzhen, May 10, 2004
		Accredited by FCC, May 10, 2004
		Renew by FCC, March 20, 2007
		The Certificate Registration Number is 253065
		Accredited by Industry Canada, May 18, 2004
		Renew by Industry Canada, May 03, 2007
		The Certificate Registration Number is IC 5077A-1
Name of Firm	:	ACCURATE TECHNOLOGY CO. LTD
Site Location	:	F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

### 1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty = 4.12dB, k=2

## 2. MEASURING DEVICE AND TEST EQUIPMENT


**Table 1: List of Test and Measurement Equipment**

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.31.2008
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.24.2008
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2008
Bilog Antenna	Chase	CBL6112B	2591	03.31.2008
Horn Antenna	Rohde&Schwarz	HF906	100013	01.24.2008
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.31.2008
Pre-Amplifier	Agilent	8447D	2944A10619	03.31.2008

### 3. RADIATED EMISSION FOR FCC PART 15 SECTION 15.239(C)


#### 3.1. Block Diagram of Test Setup

##### 3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Headphone Transmitter)

##### 3.1.2. Anechoic Chamber Test Setup Diagram

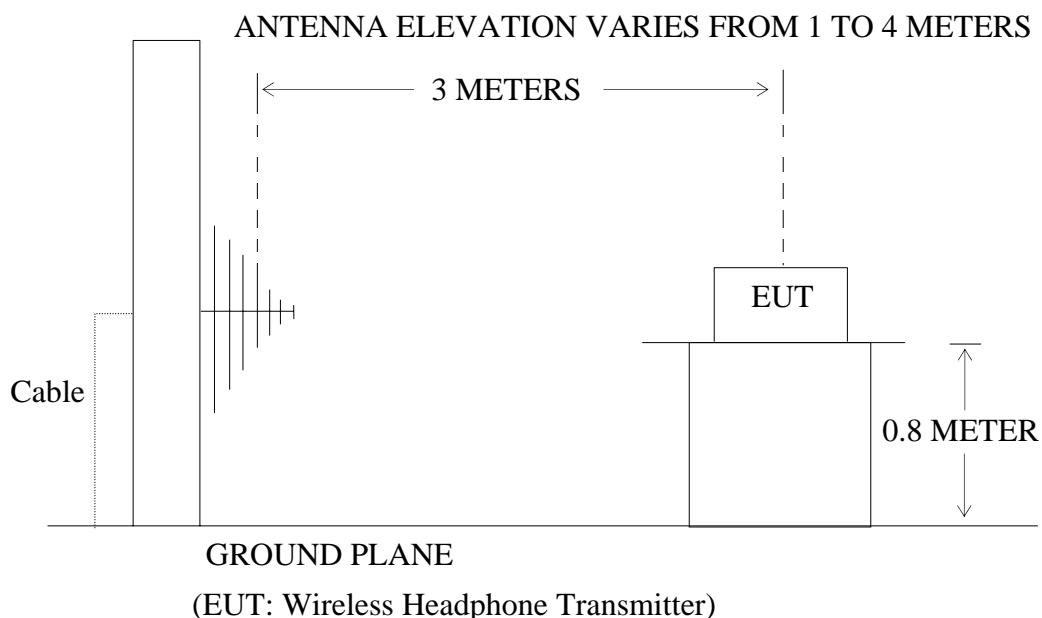

#### 3.2. The Emission Limit for section 15.239(c)

3.2.1 The field strength of any emissions radiated on any frequency outside of the specified 200kHz band shall not exceed the general radiated emission limits in section 15.209

##### Radiation Emission Measurement Limits According to Section 15.209

Frequency (MHz)	Limit,		
	Field Strength of Quasi-peak Value (microvolts/m)	Field Strength of Quasi-peak Value (dB $\mu$ V/m)	The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands
30 - 88	100	40	
88 - 216	150	43.5	

216 - 960	200	46	mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.
Above 960	500	54	

### 3.3.Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 3.3.1.Wireless Headphone Transmitter (EUT)

Model Number : HM-900  
 Serial Number : N/A  
 Manufacturer : Shenzhen Audioland Digital Technology Co., Ltd.

### 3.4.Operating Condition of EUT

3.4.1.Setup the EUT and simulator as shown as Section 3.1.

3.4.2.Turn on the power of all equipment.

Let the EUT work in TX modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

### 3.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

The bandwidth of test receiver (R&S ESCS30) is set at 120KHz in 30-1000MHz; Set at 1MHz in above 1000MHz.

The frequency range from 30MHz to 1000MHz is checked.

The final measurement in band 9-90kHz, 110-490kHz and above 1000MHz is performed with Average detector. Except those frequency bands mention above, the final measurement for frequencies below 1000MHz is performed with Quasi Peak detector.

### 3.6.The Field Strength of Radiation Emission Measurement Results

**PASS.**

The frequency range 30MHz to 1000MHz is investigated.

Date of Test:	September 10, 2007	Temperature:	25°C
EUT:	Wireless Headphone Transmitter	Humidity:	46%
Model No.:	HM-900	Power Supply:	DC 3.0V (AAA Battery ×2)
Test Mode:	TX	Test Engineer:	Andy

Polarization	Frequency (MHz)	Reading(dB $\mu$ V/m) QP	Factor Corr.( dB)	Result(dB $\mu$ V/m) QP	Limits(dB $\mu$ V/m) QP	Margin(dB $\mu$ V/m) QP
Horizontal	177.028	23.3	8.0	31.3	43.5	12.2
Horizontal	*265.591	26.3	10.9	37.2	46.0	8.8
Horizontal	354.055	24.9	14.0	38.9	46.0	7.1
Horizontal	442.618	21.2	15.9	37.1	46.0	8.9
Horizontal	531.083	16.1	17.5	33.6	46.0	12.4
Horizontal	619.747	15.3	18.8	34.1	46.0	11.9
Horizontal	708.713	13.3	20.0	33.3	46.0	12.7
Horizontal	796.677	14.8	21.0	35.8	46.0	10.2
Horizontal	884.642	10.9	22.0	32.9	46.0	13.1
Horizontal	*973.605	9.3	22.8	32.1	54.0	21.9
Vertical	177.027	19.9	8.5	28.4	43.5	15.1
Vertical	*265.592	29.0	9.9	38.8	46.0	7.2
Vertical	354.054	25.4	14.0	39.4	46.0	6.6
Vertical	442.616	16.1	16.4	32.5	46.0	13.5
Vertical	531.084	16.7	18.2	34.9	46.0	11.1
Vertical	619.746	16.1	19.9	36.0	46.0	10.0
Vertical	708.713	11.4	21.4	32.8	46.0	13.2
Vertical	796.676	11.4	22.6	34.0	46.0	12.0
Vertical	884.643	9.1	23.7	32.8	46.0	13.2
Vertical	*973.603	8.6	24.7	33.3	54.0	20.7

Note:

1. The spectral diagrams in appendix 1 display the measurement of peak values with corrected factors counted.
2. \*: Denotes restricted band of operation.
3. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

Result = Reading + Corrected Factor


Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

## 4. FUNDAMENTAL RADIATED EMISSION FOR FCC PART 15

### SECTION 15.239(B)


#### 4.1. Block Diagram of Test Setup

##### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Headphone Transmitter)

##### 4.1.2. Anechoic Chamber Test Setup Diagram

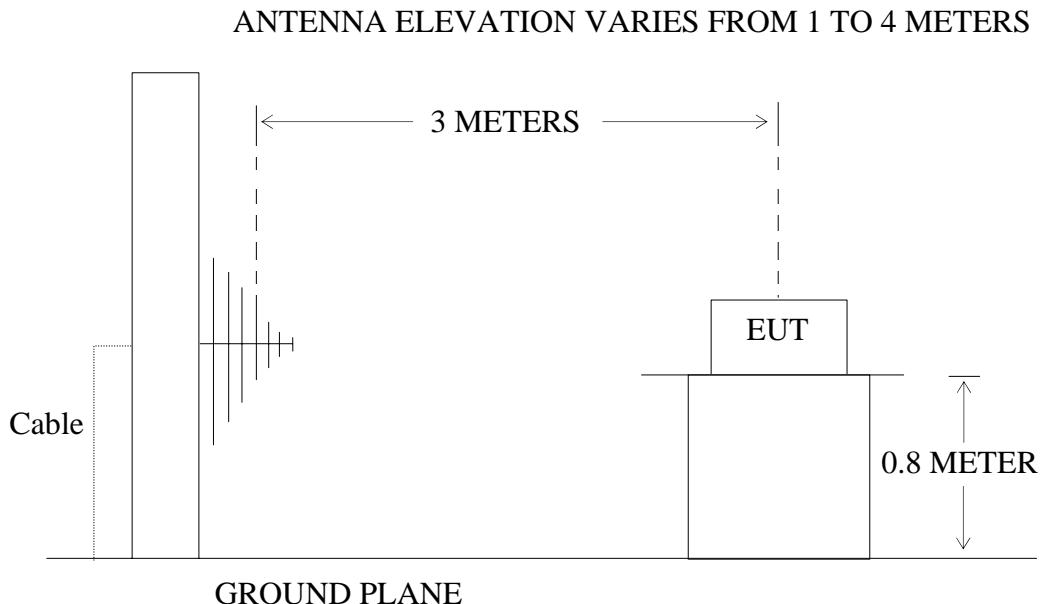

(EUT: Wireless Headphone Transmitter)

#### 4.2. The Emission Limit For Section 15.239(b)

4.2.1 The field strength of any emission within the permitted 200kHz band shall not exceed 250microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in section 15.35 for limiting peak emissions apply.

### 4.3.EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 4.3.1.Wireless Headphone Transmitter (EUT)

Model Number : HM-900  
 Serial Number : N/A  
 Manufacturer : Shenzhen Audioland Digital Technology Co., Ltd.

### 4.4.Operating Condition of EUT

4.4.1.Setup the EUT and simulator as shown as Section 4.1.

4.4.2.Turn on the power of all equipment.

Let the EUT work in TX modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

### 4.5.Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4: 2003 on radiated emission measurement.

## 4.6.The Emission Measurement Result

**PASS.**

Date of Test:	September 10, 2007	Temperature:	25°C
EUT:	Wireless Headphone Transmitter	Humidity:	46%
Model No.:	HM-900	Power Supply:	DC 3.0V (AAA Battery ×2)
Test Mode:	TX	Test Engineer:	Andy

### Fundamental Radiated Emissions

Frequency (MHz)	Reading(dB $\mu$ V/m)		Factor(dB) Corr.	Result(dB $\mu$ V/m)		Limit(dB $\mu$ V/m)		Margin(dB $\mu$ V/m)		Polarizati on
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
88.5	36.2	41.7	6.3	42.5	48.0	48	68	5.5	20.0	Vertical
88.5	31.4	36.7	8.6	40.0	45.3	48	68	8.0	22.7	Horizontal

The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

## 5. OCCUPIED BANDWIDTH FOR FCC PART 15 SECTION

### 15.239(A)

#### 5.1. The Requirement For Section 15.239(a)

5.1.1. Emission from the device shall be confined within a band 200kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

#### 5.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

##### 5.2.1. Wireless Headphone Transmitter (EUT)

Model Number : HM-900  
 Serial Number : N/A  
 Manufacturer : Shenzhen Audioland Digital Technology Co., Ltd.

#### 5.3. Operating Condition of EUT

5.3.1. Setup the EUT and simulator as shown as Section 4.1.

5.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes [Connect EUT audio cable to iPod headphone jack and iPod playing typical audio signal(music song) with maximum audio level] measure it.

Note: The EUT is connected to iPod by the base interface of iPod. The input signal of EUT is controlled by iPod. so the volume control of iPod was set to maximum during the test. It means that the test was performed with the maximum audio input.

#### 5.4. Test Procedure

5.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.

5.4.2. Set EUT as normal operation. Playing MP3.(the volume control of iPod was set to maximum.)

5.4.3. Set EMI test receiver Center Frequency = fundamental frequency,  
 RBW=3kHz, VBW= 10kHz, Span=250kHz.

5.4.4. Set EMI test receiver Max hold. Mark peak, -26dB.

## 5.5. Test Result

**The EUT does meet the FCC requirement.**

Input signal : play typical audio signal(music song)  
FM 88.5MHz  
-26dB bandwidth = 24.0kHz

## 6. TUNING RANGE

### 6.1. The Requirement For Section 15.239

88-108MHz

### 6.2. EUT Configuration on Measurement

The following equipment are installed on the emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

#### 6.2.1. Wireless Headphone Transmitter (EUT)

Model Number : HM-900  
 Serial Number : N/A  
 Manufacturer : Shenzhen Audioland Digital Technology Co., Ltd.

### 6.3. Operating Condition of EUT

6.3.1. Setup the EUT and simulator as shown as Section 4.1.

6.3.2. Turn on the power of all equipment.

Let the EUT work in TX modes

### 6.4. Test Procedure

- 6.4.1. The EUT was placed on a turn table which is 0.8m above ground plane.
- 6.4.2. Set the EUT working on the working frequency.
- 6.4.3. Set EMI test receiver center frequency = working frequency, RBW=3kHz, VBW= 10kHz, Span=250kHz.
- 6.4.4. Measuring the working frequency.
- 6.4.5. The working frequency should be inside 88-108MHz.


## 6.5. Test Result

**The EUT does meet the FCC requirement.**

Working Frequency= 88.480MHz

The working frequency can not to be displayed and adjusted on EUT.  
The EUT just one working frequency.


## APPENDIX I (Test Curves)

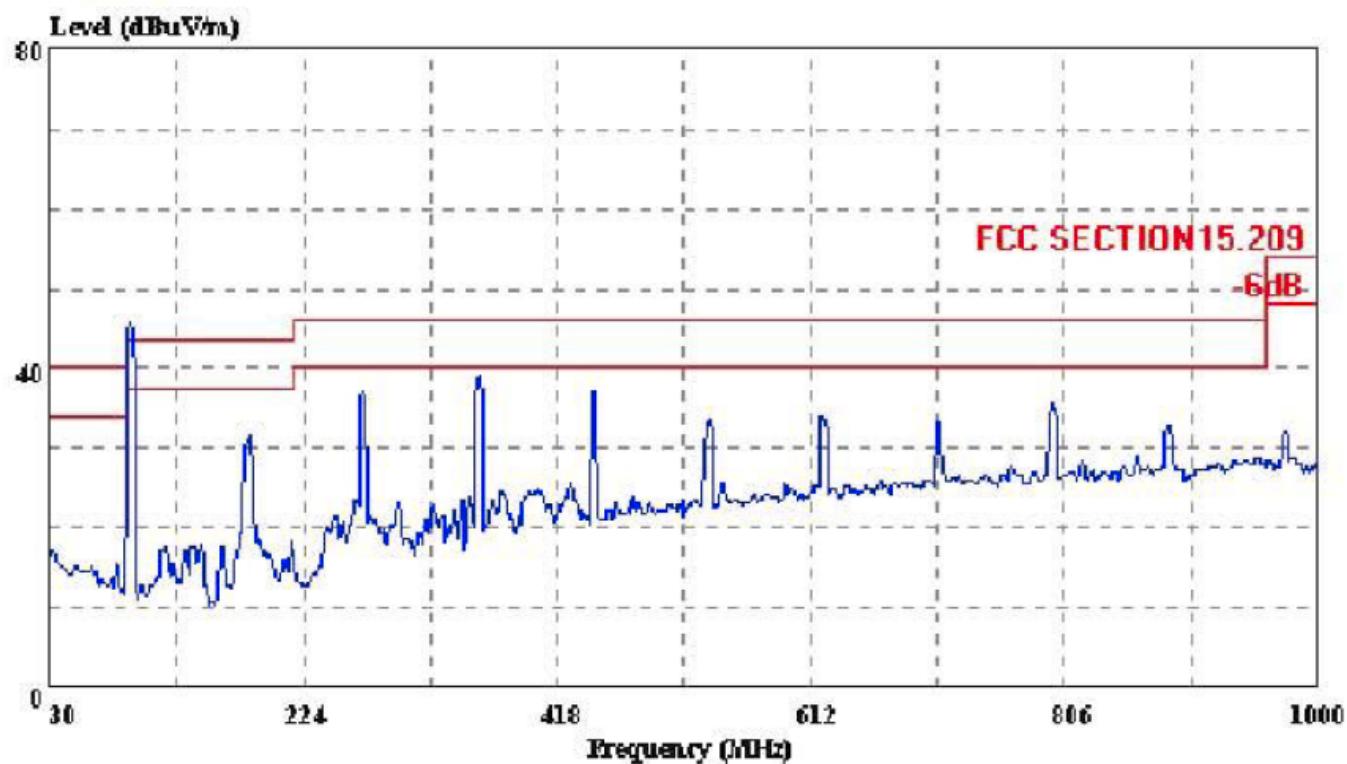

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA HORIZONTAL  
 eut : WIRELESS HEADPHONE M/N: HM-900  
 power : DC 3.0V  
 memo : TX  
 manuf : AUDIOLAND  
 sample no.: 074074  
 report no.: ATE20072091

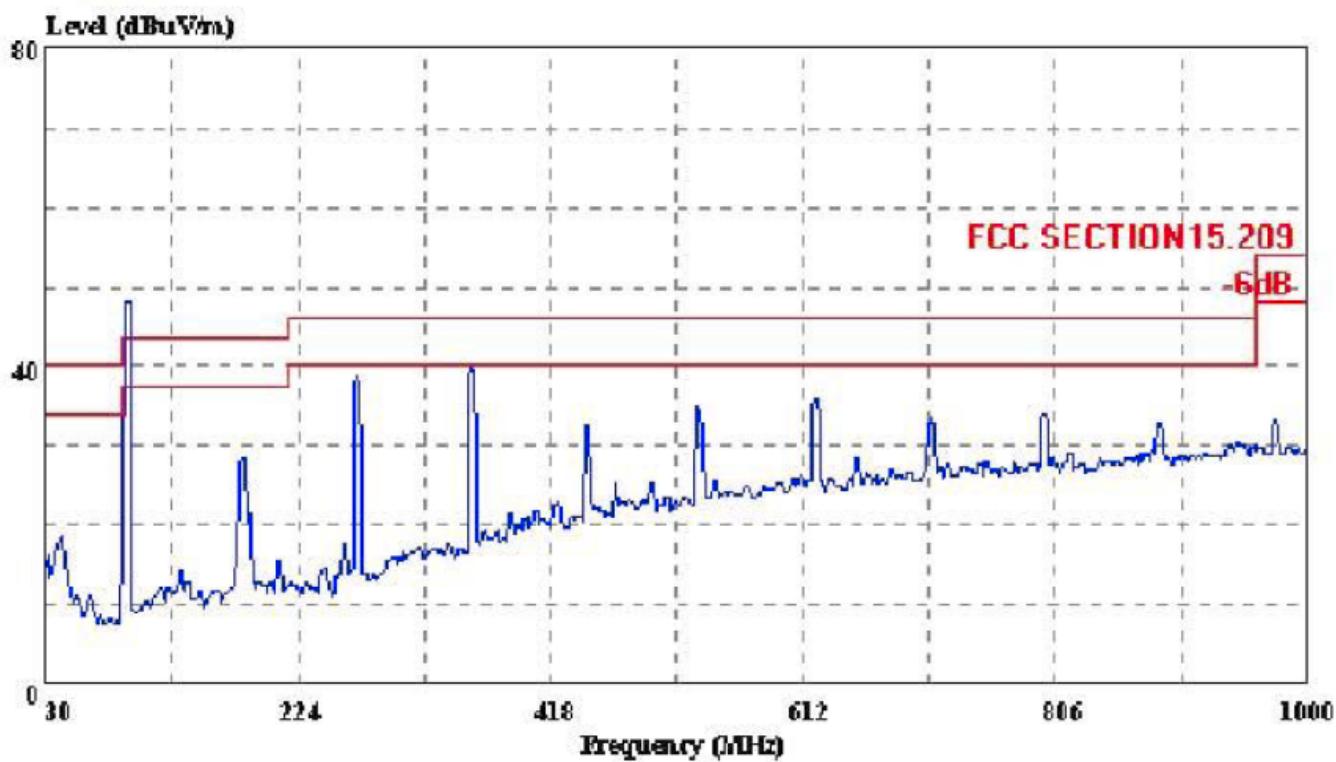

Trace:

Ref Trace:

Condition: FCC SECTION15.209 3m ATC FCC15C ANTENNA VERTICAL  
eut : WIRELESS HEADPHONE M/N:HM-900  
power : DC 3.0V  
memo : TX  
manuf : AUDIOLAND  
sample no.: 074074  
report no.: ATE20072091

